

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.098 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.091 A/m; Power Drift = 0.140 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.121 M4	Grid 2 0.087 M4	Grid 3 0.055 M4
Grid 4 0.125 M4	Grid 5 0.093 M4	Grid 6 0.062 M4
Grid 7 0.131 M4	Grid 8 0.098 M4	Grid 9 0.066 M4

Cursor:

Total = 0.131 A/m

H Category: M4

Location: 25, 16, 8.7 mm

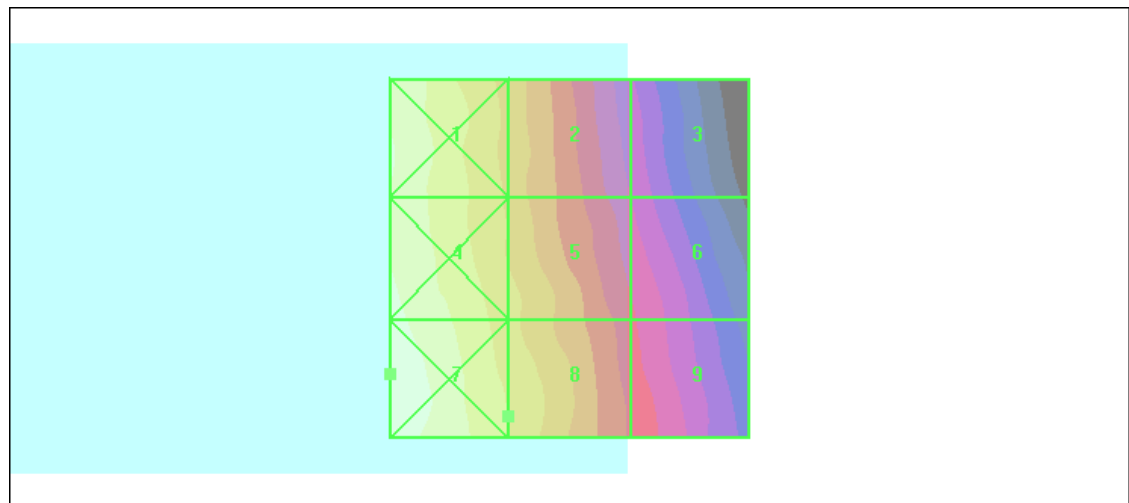

0 dB = 0.131A/m

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.108 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.103 A/m; Power Drift = -0.066 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.133 M4	Grid 2 0.098 M4	Grid 3 0.060 M4
Grid 4 0.133 M4	Grid 5 0.102 M4	Grid 6 0.070 M4
Grid 7 0.141 M4	Grid 8 0.108 M4	Grid 9 0.073 M4

Cursor:

Total = 0.141 A/m

H Category: M4

Location: 25, 22, 8.7 mm

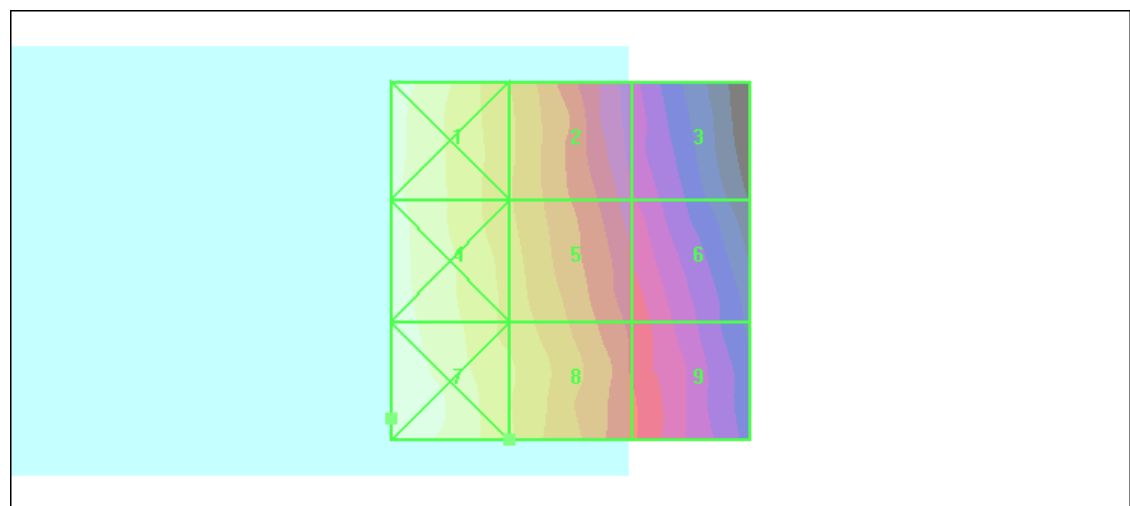

0 dB = 0.141 A/m

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.104 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.103 A/m; Power Drift = 0.053 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.135 M4	Grid 2 0.098 M4	Grid 3 0.062 M4
Grid 4 0.131 M4	Grid 5 0.102 M4	Grid 6 0.069 M4
Grid 7 0.136 M4	Grid 8 0.104 M4	Grid 9 0.072 M4

Cursor:

Total = 0.136 A/m

H Category: M4

Location: 25, 24.5, 8.7 mm

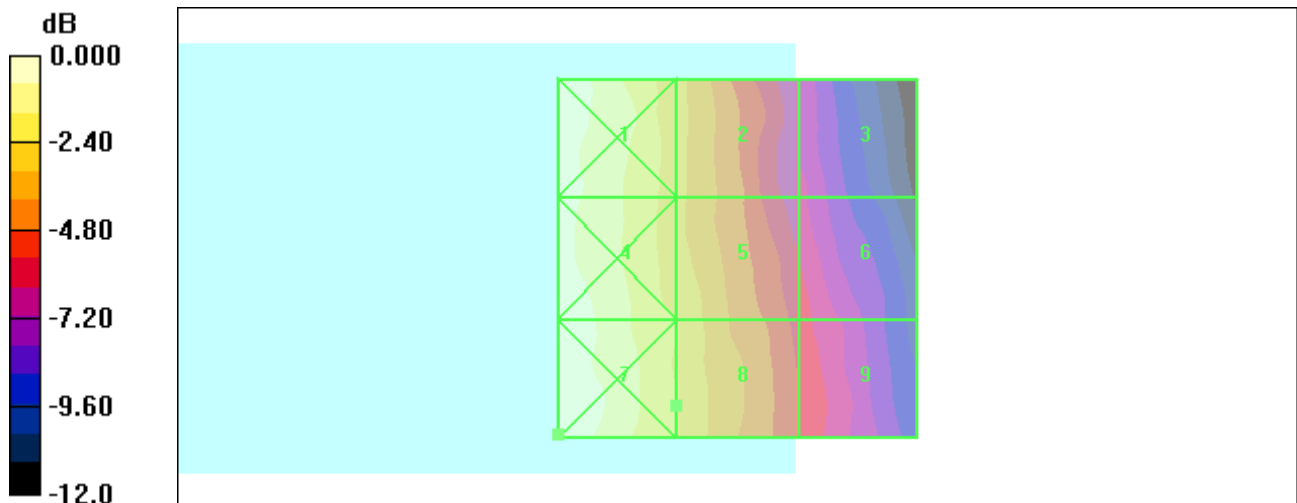

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.097 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.092 A/m; Power Drift = -0.156 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.130 M4	Grid 2 0.090 M4	Grid 3 0.054 M4
Grid 4 0.129 M4	Grid 5 0.094 M4	Grid 6 0.059 M4
Grid 7 0.133 M4	Grid 8 0.097 M4	Grid 9 0.063 M4

Cursor:

Total = 0.133 A/m

H Category: M4

Location: 25, 19.5, 8.7 mm

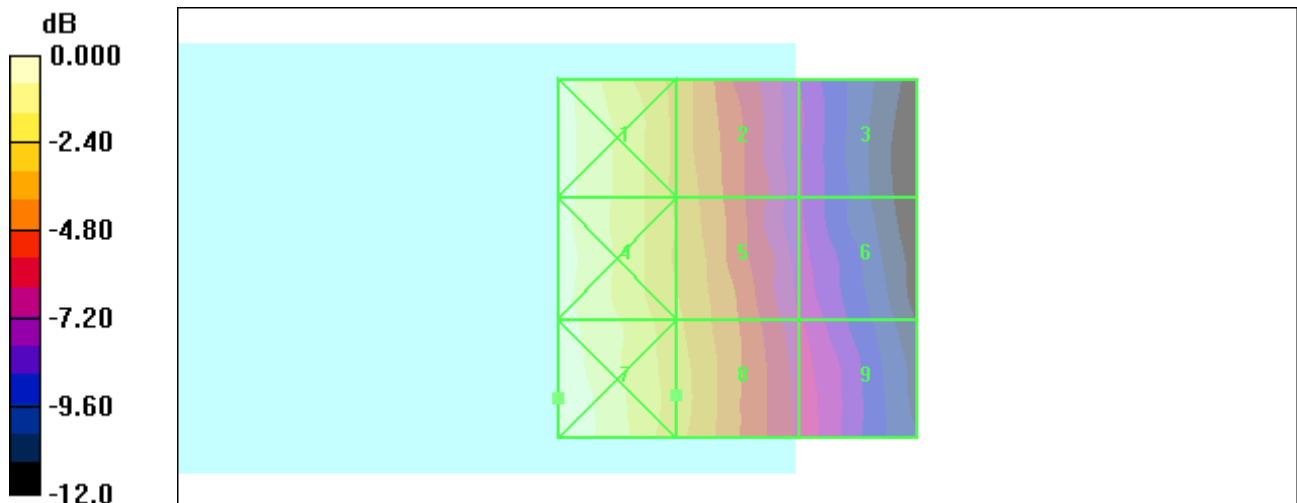

0 dB = 0.133A/m

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.098 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.092 A/m; Power Drift = 0.224 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.133 M4	Grid 2 0.095 M4	Grid 3 0.058 M4
Grid 4 0.133 M4	Grid 5 0.097 M4	Grid 6 0.060 M4
Grid 7 0.135 M4	Grid 8 0.098 M4	Grid 9 0.064 M4

Cursor:

Total = 0.135 A/m

H Category: M4

Location: 25, 12.5, 8.7 mm

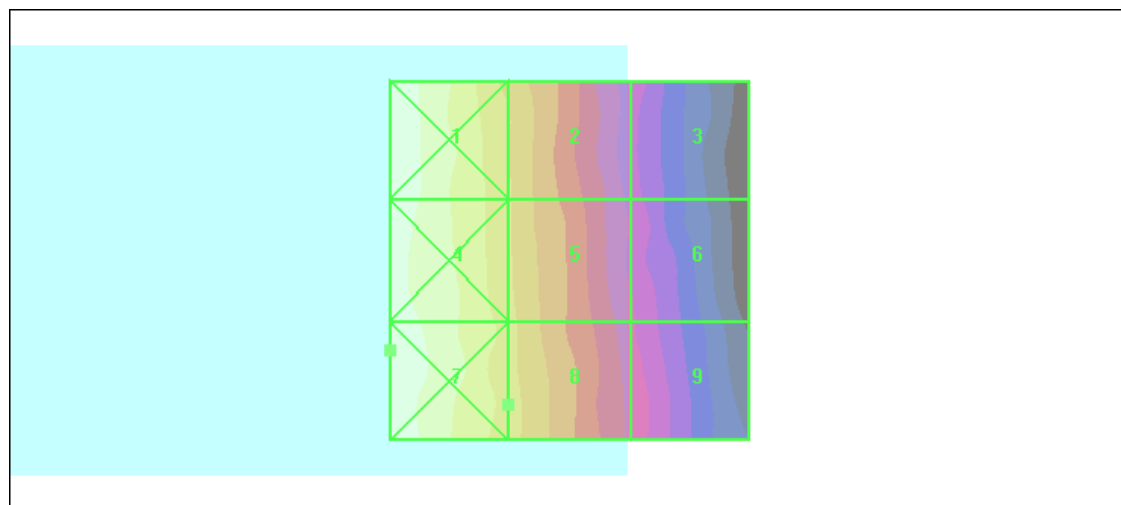

0 dB = 0.135A/m

Test Laboratory: Compliance Certification Services

Cell Band HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.103 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.098 A/m; Power Drift = 0.018 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.141 M4	Grid 2 0.098 M4	Grid 3 0.061 M4
Grid 4 0.139 M4	Grid 5 0.102 M4	Grid 6 0.063 M4
Grid 7 0.143 M4	Grid 8 0.103 M4	Grid 9 0.066 M4

Cursor:

Total = 0.143 A/m

H Category: M4

Location: 25, 15, 8.7 mm

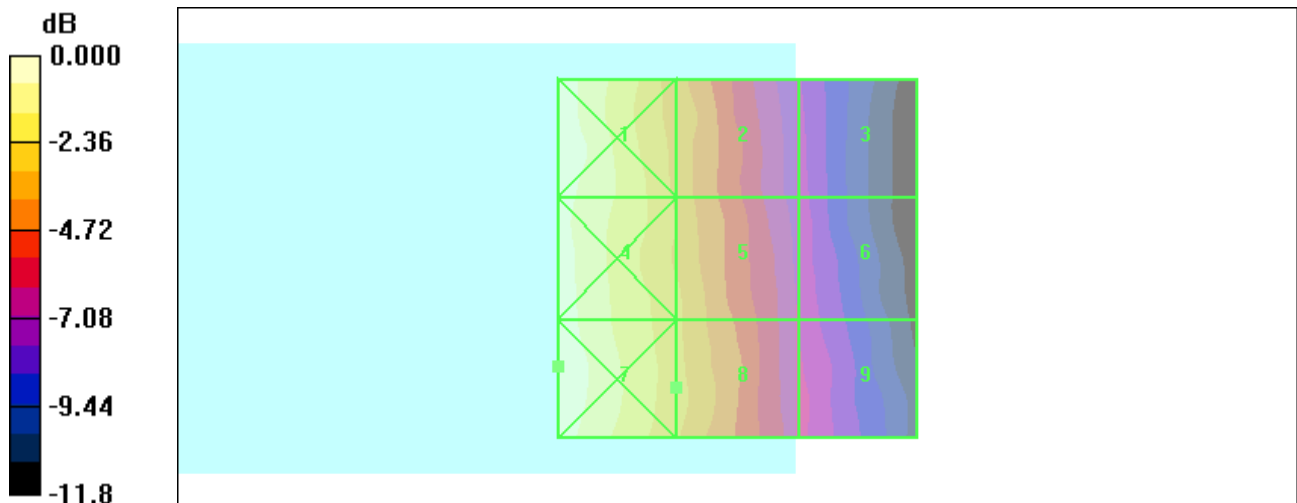

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.068 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.074 A/m; Power Drift = -0.131 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.068 M4	Grid 2 0.059 M4	Grid 3 0.044 M4
Grid 4 0.062 M4	Grid 5 0.062 M4	Grid 6 0.054 M4
Grid 7 0.083 M4	Grid 8 0.079 M4	Grid 9 0.062 M4

Cursor:

Total = 0.083 A/m

H Category: M4

Location: 21.5, 25, 8.7 mm

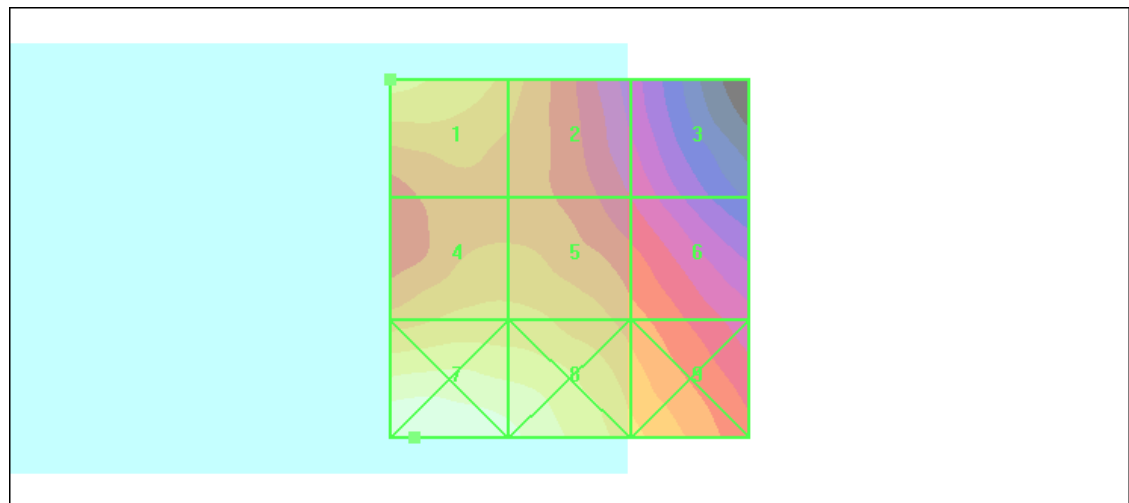

0 dB = 0.083A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.072 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.080 A/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.061 M4	Grid 2 0.059 M4	Grid 3 0.048 M4
Grid 4 0.072 M4	Grid 5 0.072 M4	Grid 6 0.059 M4
Grid 7 0.088 M4	Grid 8 0.087 M4	Grid 9 0.069 M4

Cursor:

Total = 0.088 A/m

H Category: M4

Location: 15, 25, 8.7 mm

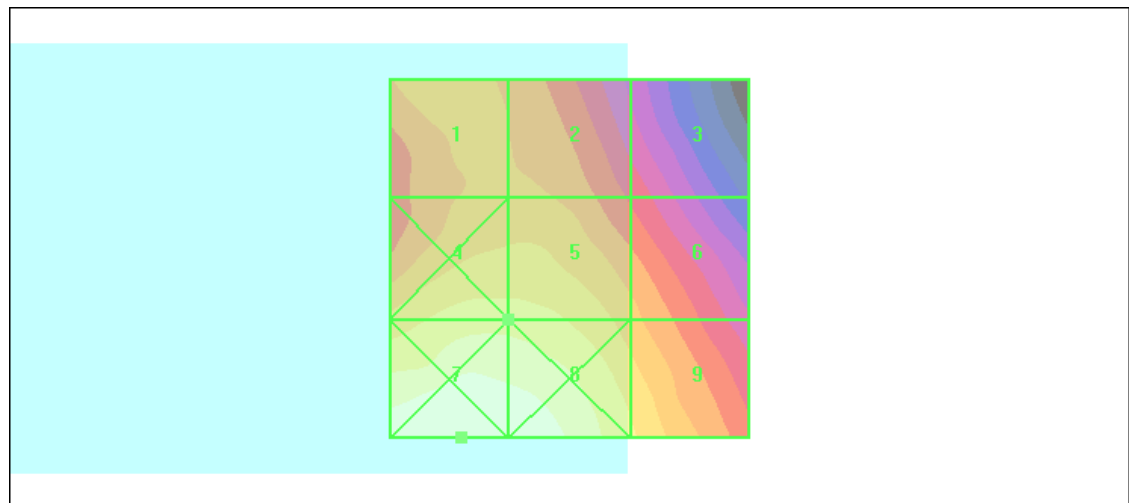

0 dB = 0.088 A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Closed

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.074 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.084 A/m; Power Drift = -0.064 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.064 M4	Grid 2 0.064 M4	Grid 3 0.053 M4
Grid 4 0.074 M4	Grid 5 0.074 M4	Grid 6 0.062 M4
Grid 7 0.088 M4	Grid 8 0.085 M4	Grid 9 0.069 M4

Cursor:

Total = 0.088 A/m

H Category: M4

Location: 19, 25, 8.7 mm

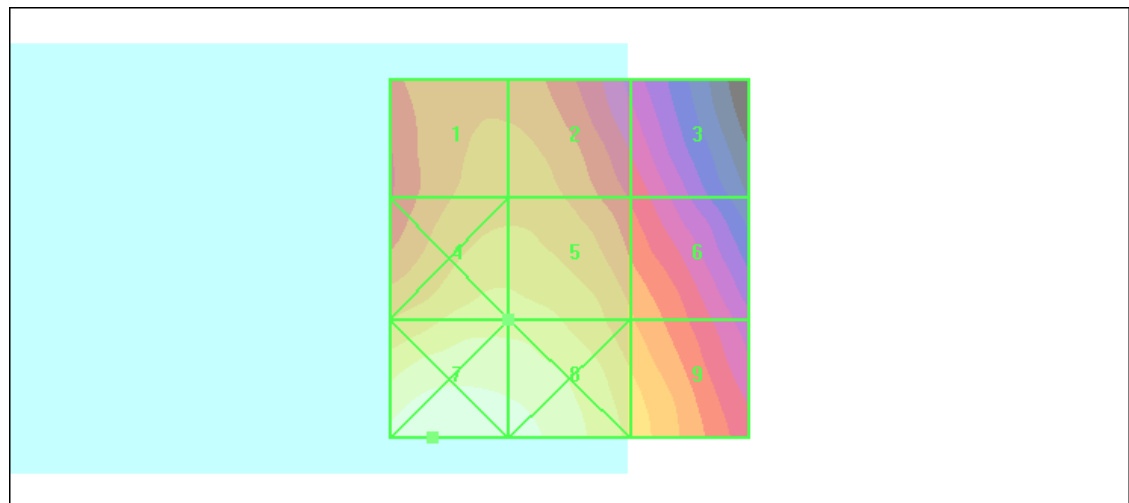

0 dB = 0.088 A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.118 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.131 A/m; Power Drift = 0.073 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.118 M4	Grid 2 0.107 M4	Grid 3 0.080 M4
Grid 4 0.123 M4	Grid 5 0.117 M4	Grid 6 0.098 M4
Grid 7 0.128 M4	Grid 8 0.122 M4	Grid 9 0.102 M4

Cursor:

Total = 0.128 A/m

H Category: M4

Location: 19, 22, 8.7 mm

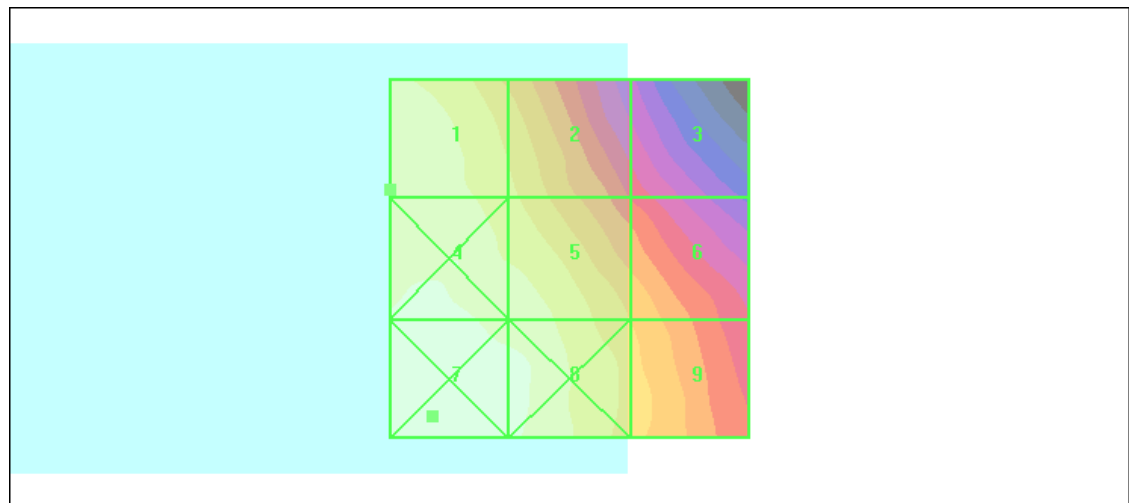

0 dB = 0.128 A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.115 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.124 A/m; Power Drift = 0.026 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.112 M4	Grid 2 0.103 M4	Grid 3 0.074 M4
Grid 4 0.121 M4	Grid 5 0.115 M4	Grid 6 0.091 M4
Grid 7 0.129 M4	Grid 8 0.121 M4	Grid 9 0.095 M4

Cursor:

Total = 0.129 A/m

H Category: M4

Location: 20, 23.5, 8.7 mm

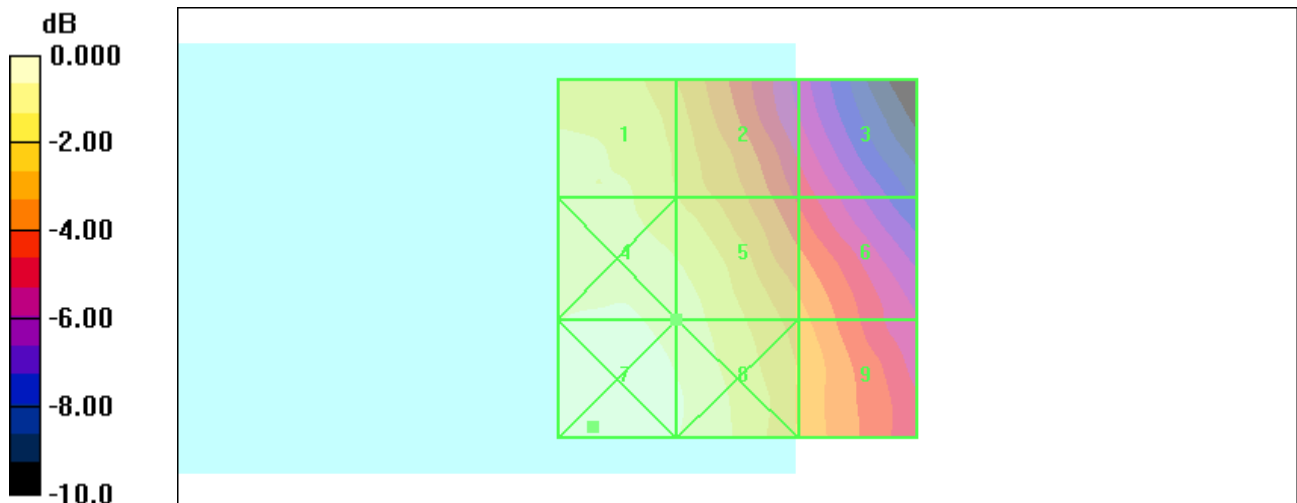

0 dB = 0.129 A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.107 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.113 A/m; Power Drift = -0.054 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.105 M4	Grid 2 0.098 M4	Grid 3 0.068 M4
Grid 4 0.111 M4	Grid 5 0.107 M4	Grid 6 0.083 M4
Grid 7 0.116 M4	Grid 8 0.112 M4	Grid 9 0.089 M4

Cursor:

Total = 0.116 A/m

H Category: M4

Location: 17.5, 21, 8.7 mm

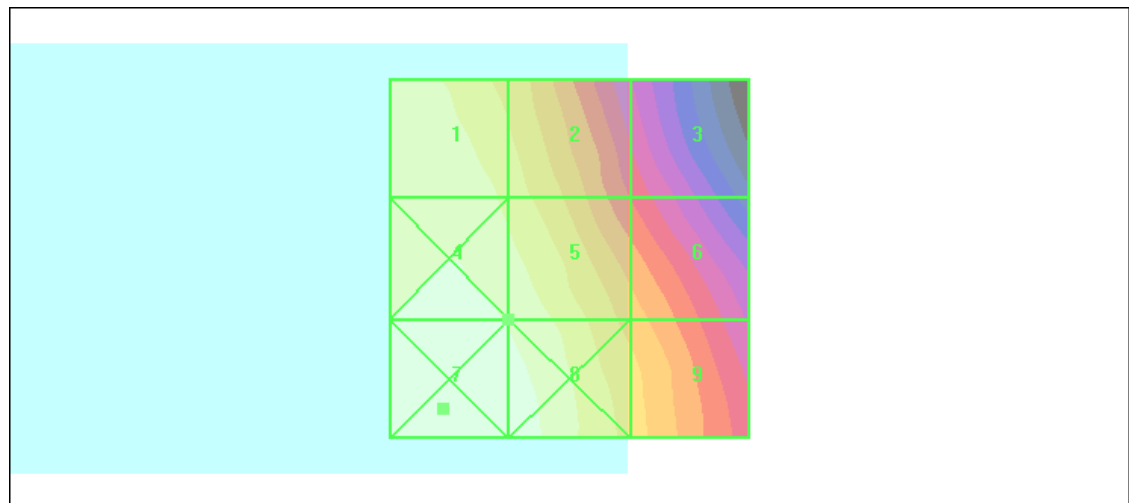

0 dB = 0.116 A/m