

Test Laboratory: Compliance Certification Services

HAC_ER_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - RC3 SO55 M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 44.7 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 56.3 V/m; Power Drift = -0.202 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 33.3 M4	Grid 2 42.4 M4	Grid 3 42.9 M4
Grid 4 33.1 M4	Grid 5 43.6 M4	Grid 6 43.2 M4
Grid 7 30.2 M4	Grid 8 42.5 M4	Grid 9 42.5 M4

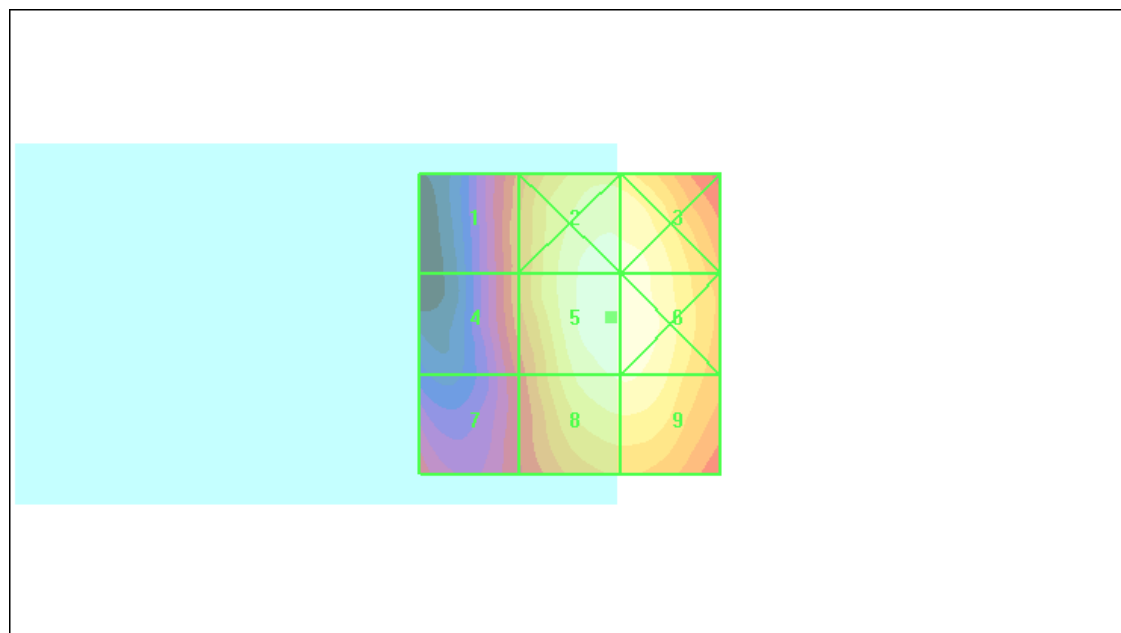

0 dB = 44.7V/m


Test Laboratory: Compliance Certification Services

HAC_ER_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

E Scan - RC3 SO55 M-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ±0.29 dB;

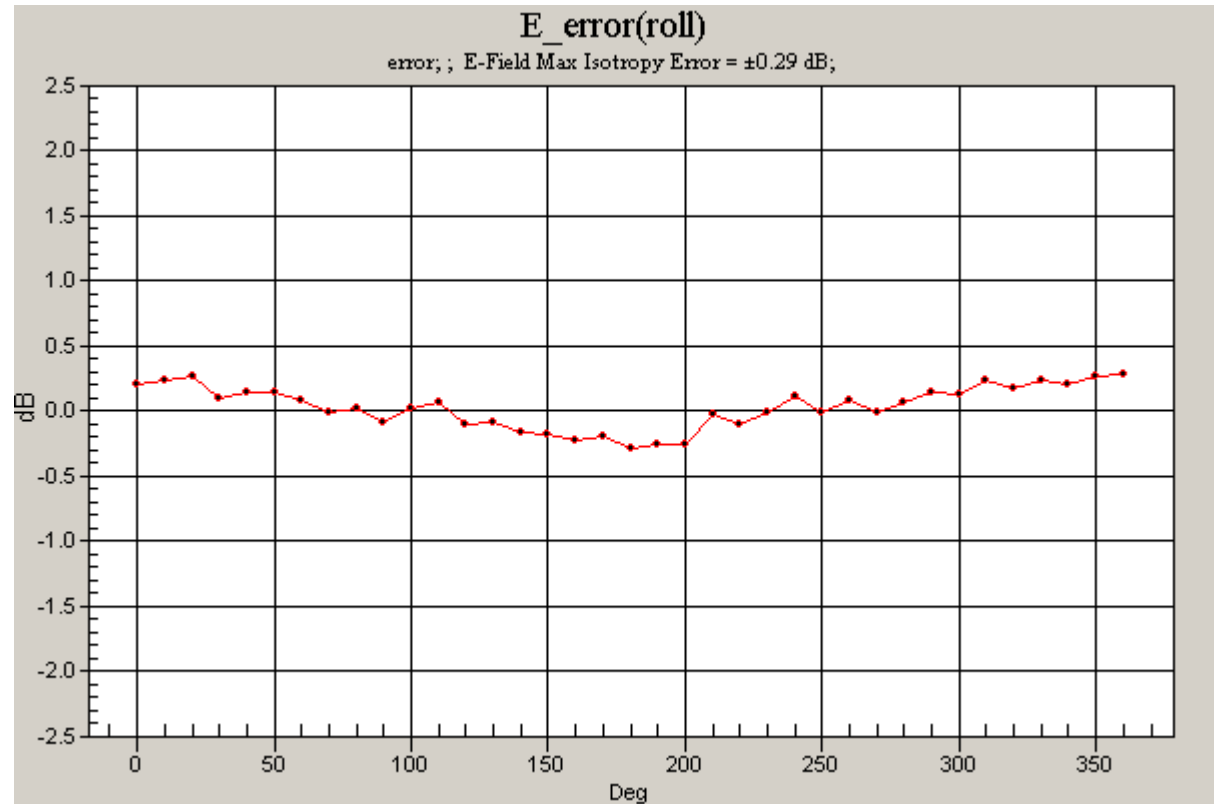

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - RC3 SO55 L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.123 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.131 A/m; Power Drift = 0.073 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.114 M4	Grid 2 0.102 M4	Grid 3 0.073 M4
Grid 4 0.118 M4	Grid 5 0.113 M4	Grid 6 0.092 M4
Grid 7 0.124 M4	Grid 8 0.118 M4	Grid 9 0.097 M4

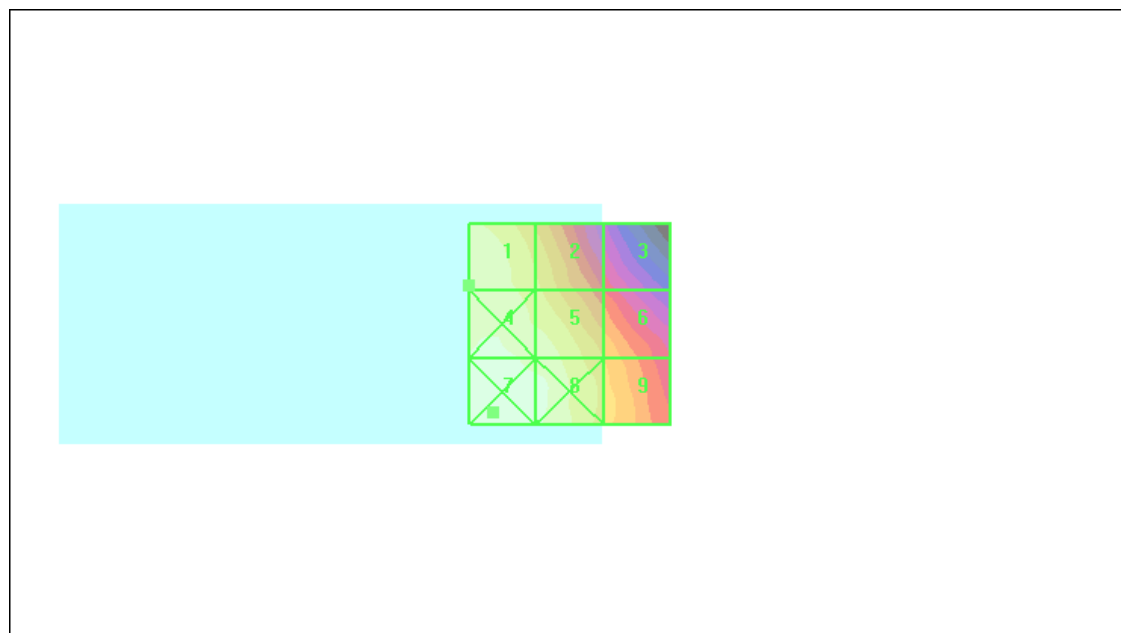

0 dB = 0.134A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Device_Open

DUT: Palm; Type: P100EWW; Serial: 7141

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

H Scan - RC3 SO55 L-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.51 dB;

