

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - M-ch/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.717 mW/g


Touch position - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.3 V/m; Power Drift = -0.234 dB

Peak SAR (extrapolated) = 0.889 W/kg

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.713 mW/g

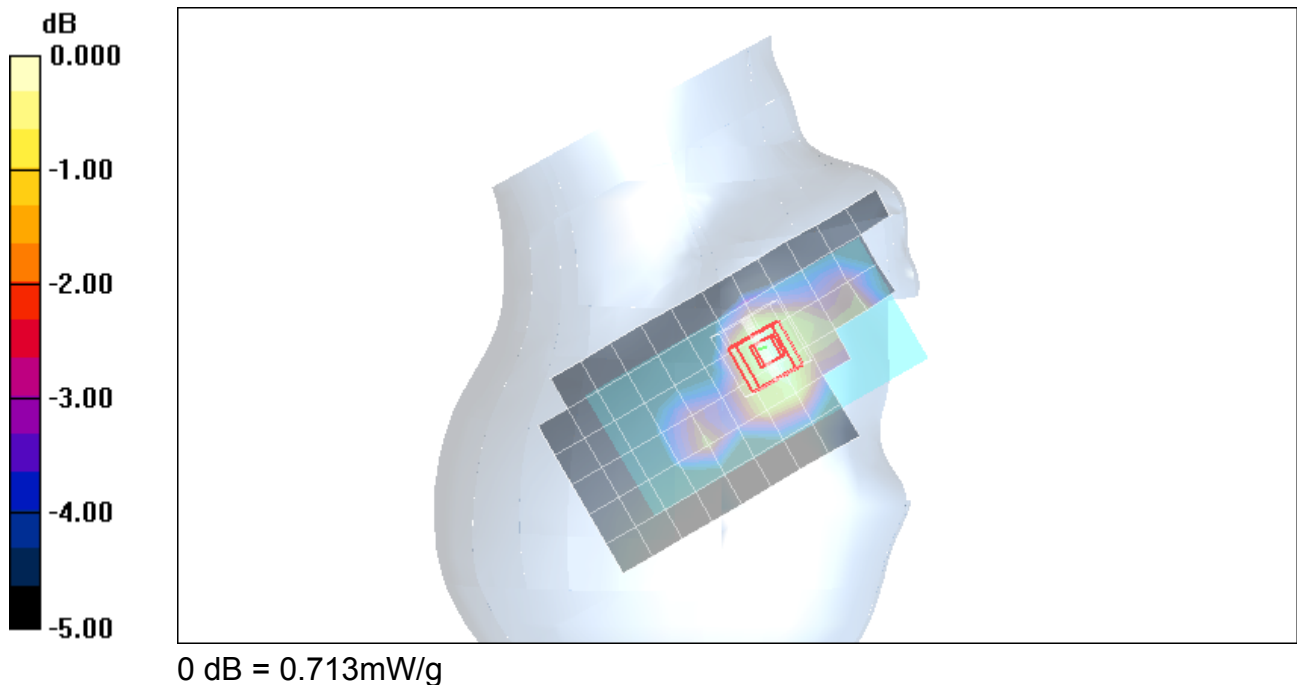


Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Touch position - M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.139 mW/g

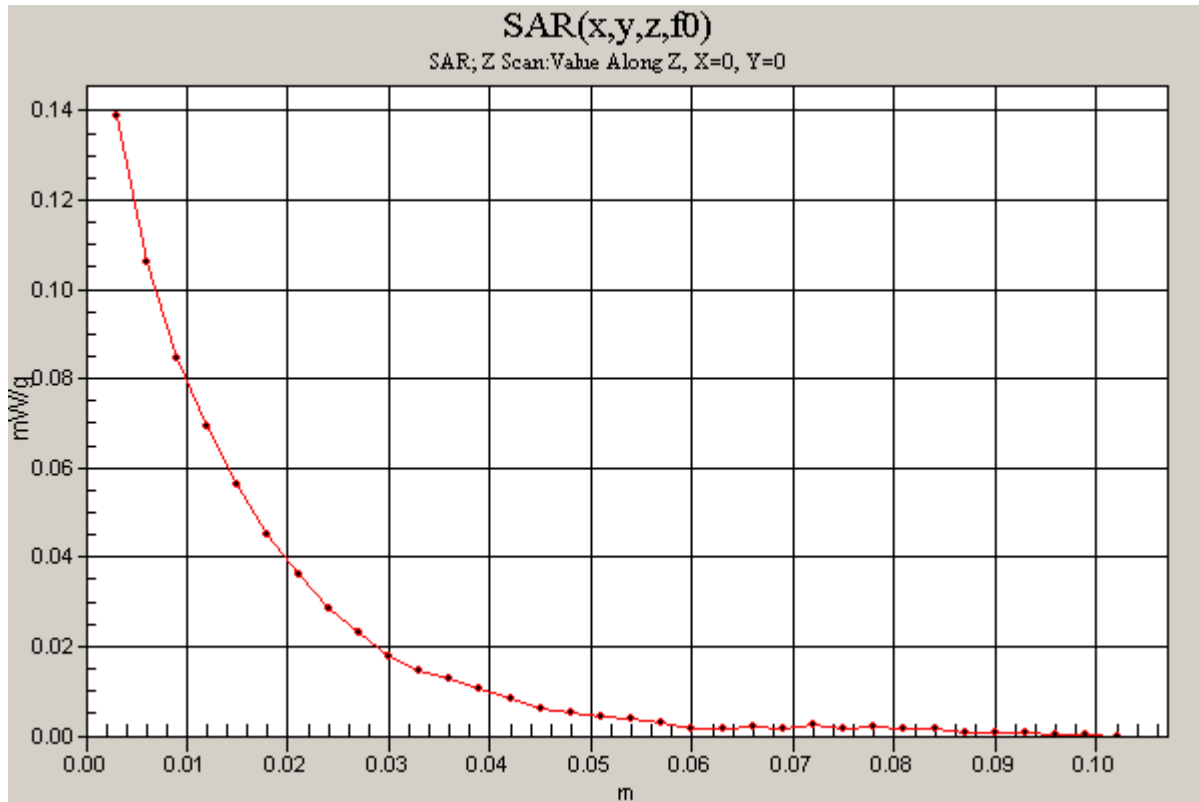

Test Laboratory: Compliance Certification Services

Body Worn PCS Band

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 1908.75$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face down - M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.835 mW/g


LCD Face down - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.38 V/m; Power Drift = 0.246 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.893 mW/g

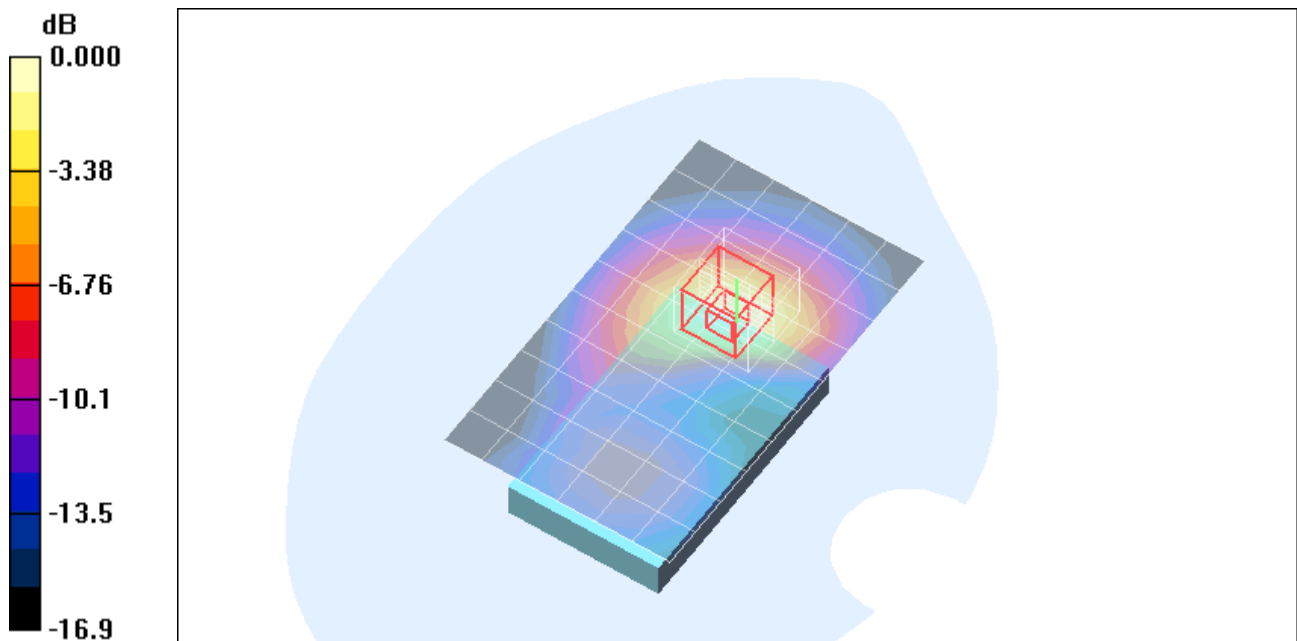

0 dB = 0.893mW/g

Test Laboratory: Compliance Certification Services


Body Worn PCS Band

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

LCD Face down - M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (measured) = 0.046 mW/g

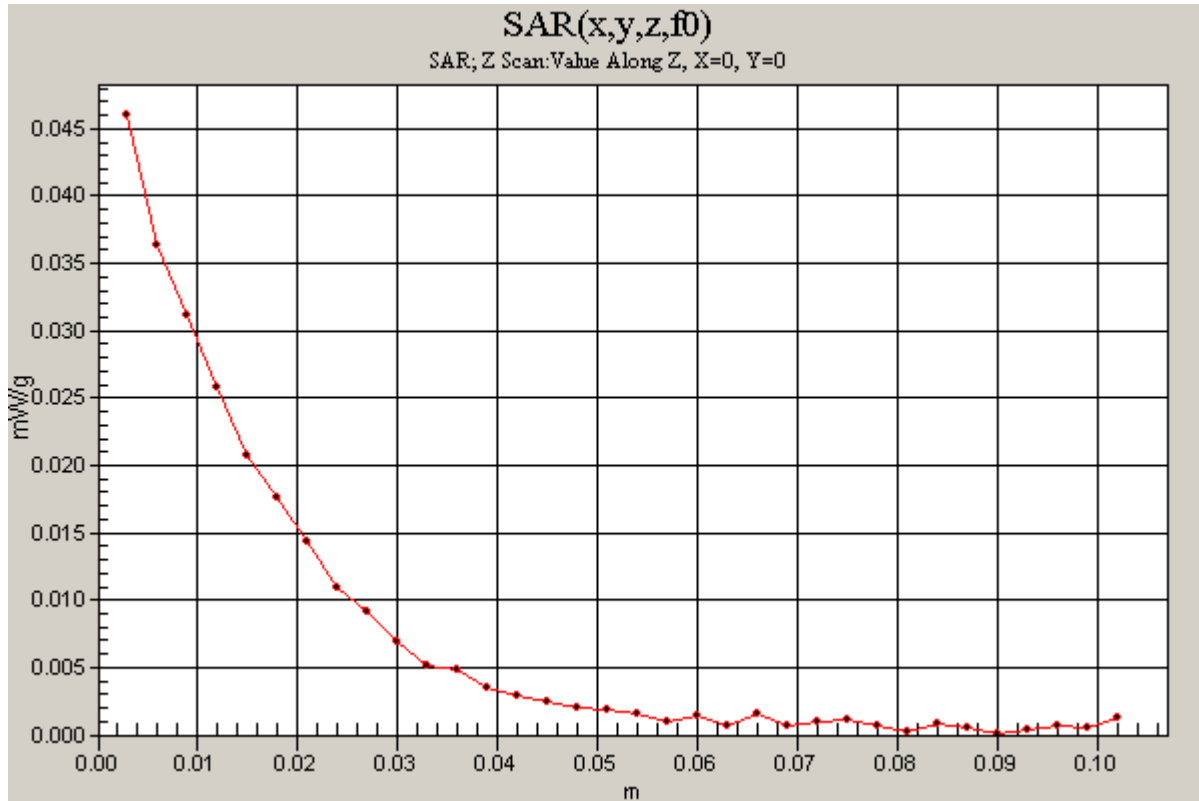

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.72, 8.72, 8.72); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

R-Touch - M-ch (closed)/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.825 mW/g


R-Touch - M-ch (closed)/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.8 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 1.10W/kg

SAR(1 g) = 0.785 mW/g; SAR(10 g) = 0.523 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

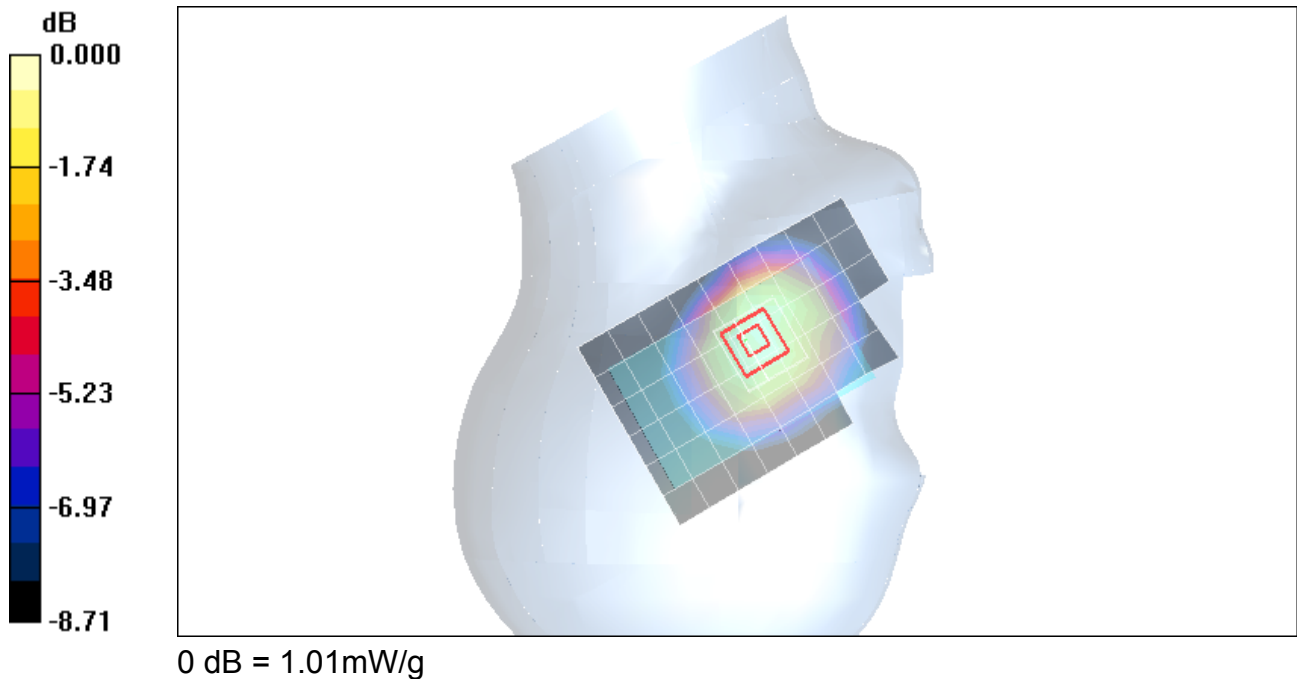

Test Laboratory: Compliance Certification Services


Right Hand Side

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

R-Touch - M-ch (closed)/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm

Maximum value of SAR (measured) = 1.72 mW/g

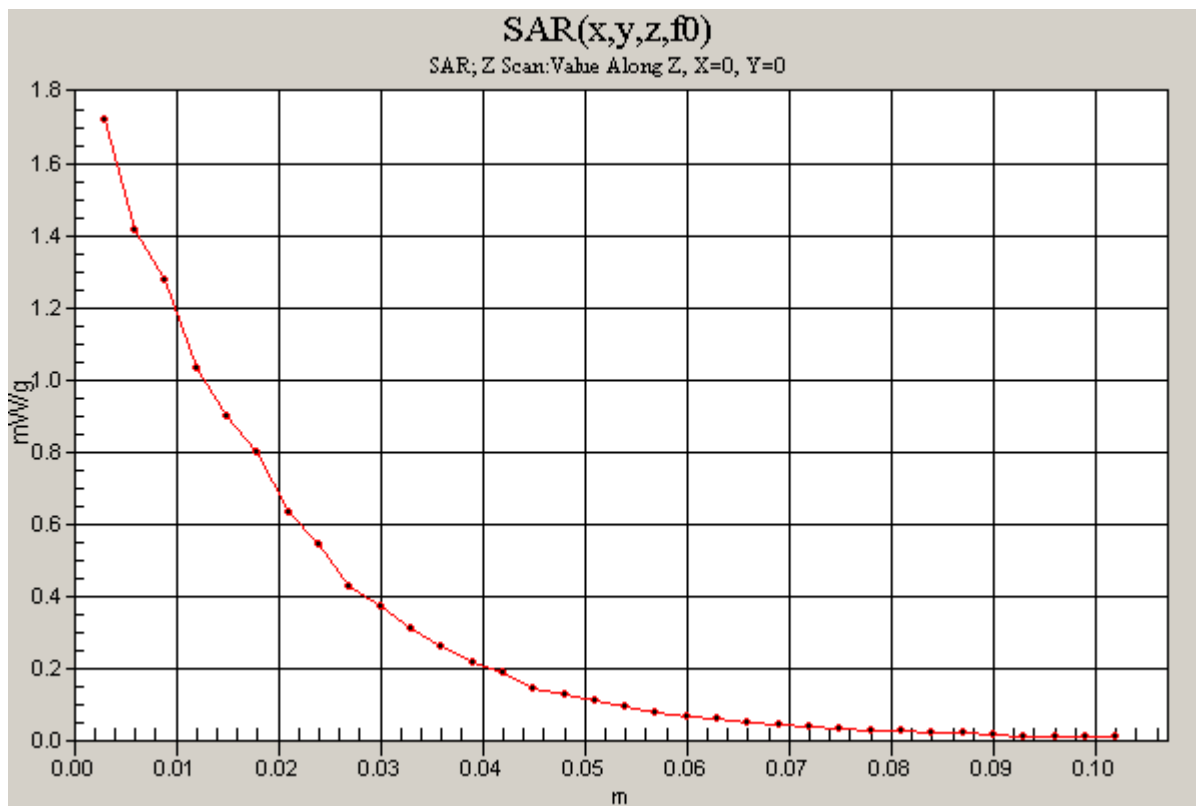

Test Laboratory: Compliance Certification Services

Left Hand Side

DUT: Palm; Type: N/A; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.81, 6.81, 6.81); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Mid-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.526 mW/g


Tilt position - Mid-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.6 V/m; Power Drift = -0.885 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.549 mW/g

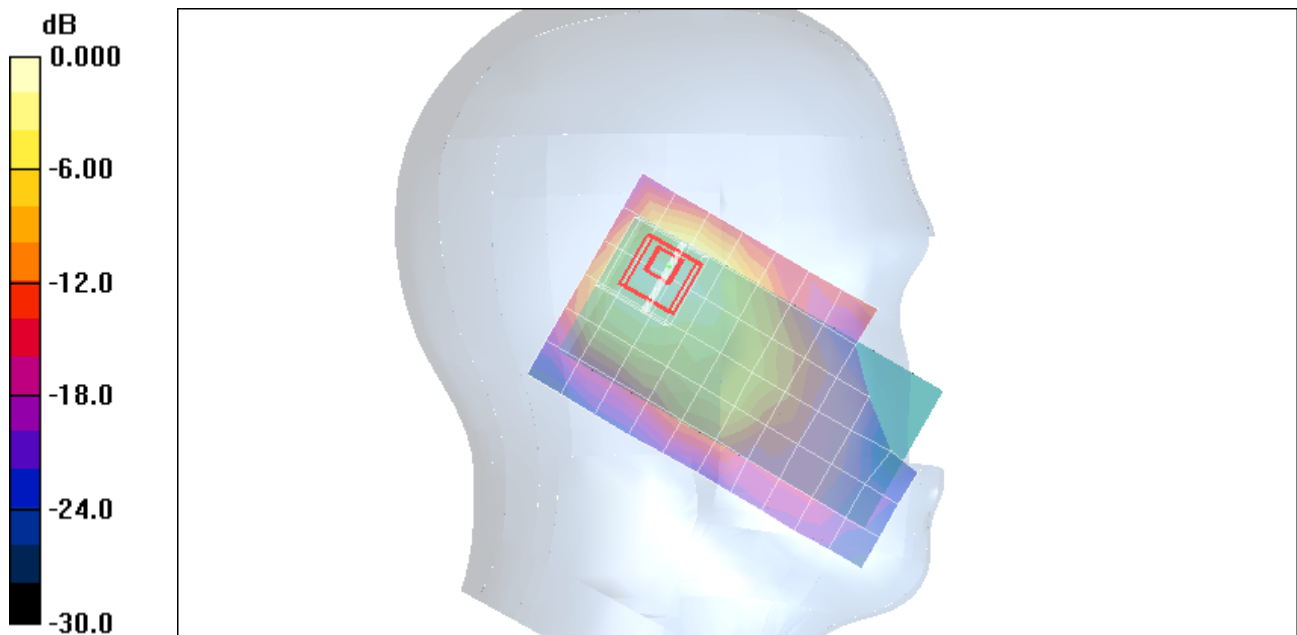

0 dB = 0.549mW/g

Test Laboratory: Compliance Certification Services

Left Hand Side

DUT: Palm; Type: N/A; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Tilt position - Mid-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.355 mW/g

