

FCC RF Test Report

APPLICANT : Palm, Inc.
EQUIPMENT : Phone
BRAND NAME : Palm
MODEL NAME : P101UEU
FCC ID : O8F-CASY
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Feb. 10, 2010 and completely tested on Mar. 12, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 6dB Bandwidth Measurement	10
3.2 Output Power Measurement	15
3.3 Band Edges Measurement	17
3.4 Spurious Emission Measurement	23
3.5 Power Spectral Density Measurement	30
3.6 AC Conducted Emission Measurement	35
3.7 Radiated Emission Measurement	39
3.8 Antenna Requirements	54
4 LIST OF MEASURING EQUIPMENT	55
5 UNCERTAINTY OF EVALUATION	56
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8O2323-09	Rev. 01	Initial issue of report	Mar. 12, 2010

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 5.3 dB at 0.510 MHz
3.7	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 12.99 dB at 30.00 MHz
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Palm, Inc.

950 W Maude Avenue, Sunnyvale, CA 94085

1.2 Manufacturer

Palm, Inc.

950 W Maude Avenue, Sunnyvale, CA 94085

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Phone
Brand Name	Palm
Model Name	P101UEU
FCC ID	O8F-CASY
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 16.17 dBm (41.40 mW) 802.11g : 18.05 dBm (63.83 mW)
Antenna Type	Stamped Metal Monopole Antenna with gain 0.38 dBi
Type of Antenna Connector	N/A
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ANSI C63.4-2003
- IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		At DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	14.77	14.67	14.73	15.69
CH 06	2437 MHz	12.56	13.78	12.53	13.85
CH 11	2462 MHz	16.13	16.14	15.82	16.17

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		At OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	17.36	17.51	17.47	17.44	17.38	17.59	17.05	17.64
CH 06	2437 MHz	16.29	17.08	16.18	16.92	16.37	17.31	17.17	16.23
CH 11	2462 MHz	18.02	18.01	17.97	17.79	18.00	17.99	18.02	18.05

Remark:

1. The data rates of WLAN 802.11b/g were set in 11Mbps for 802.11b and 54Mbps for 802.11g, for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases		
Test Item	802.11b	802.11g
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4 : 802.11g CH01_2412 MHz Mode 5 : 802.11g CH06_2437 MHz Mode 6 : 802.11g CH11_2462 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4 : 802.11g CH01_2412 MHz Mode 5 : 802.11g CH06_2437 MHz Mode 6 : 802.11g CH11_2462 MHz
AC Conducted Emission	Mode 1 : GSM850 Idle + GPS Rx + Bluetooth Link + WLAN Link + Earphone + Adapter	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

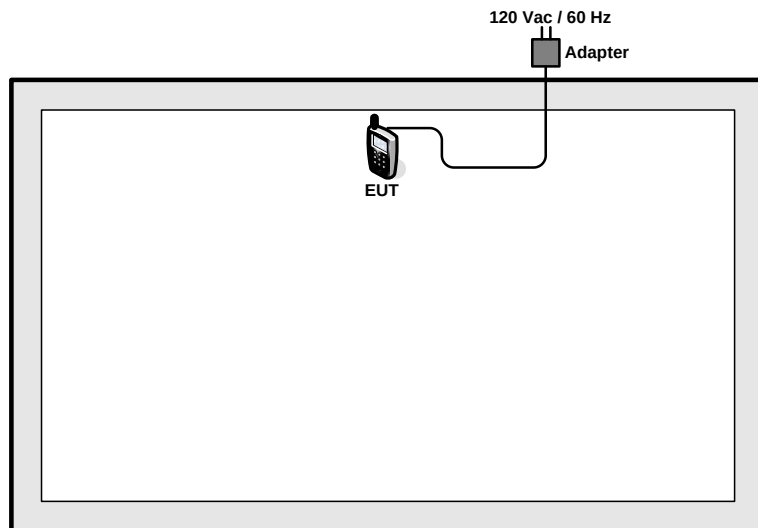

<EUT with Adapter Mode>

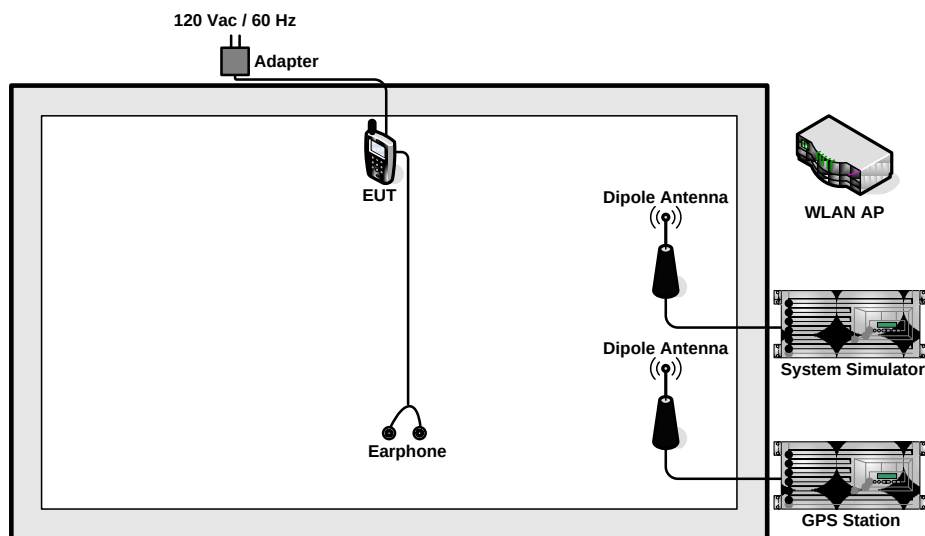

2.4 RF Utility

The programmed RF utility, "Compliance" is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

3.1.4 Test Setup

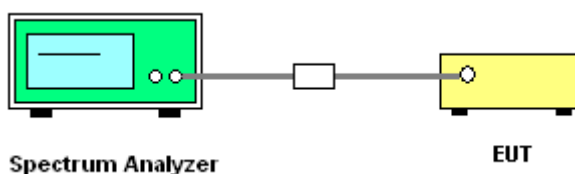


3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~25°C
Test Engineer :	Andy Yeh	Relative Humidity :	48~50%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	9.92	0.5	Pass
06	2437	9.52	0.5	Pass
11	2462	9.52	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

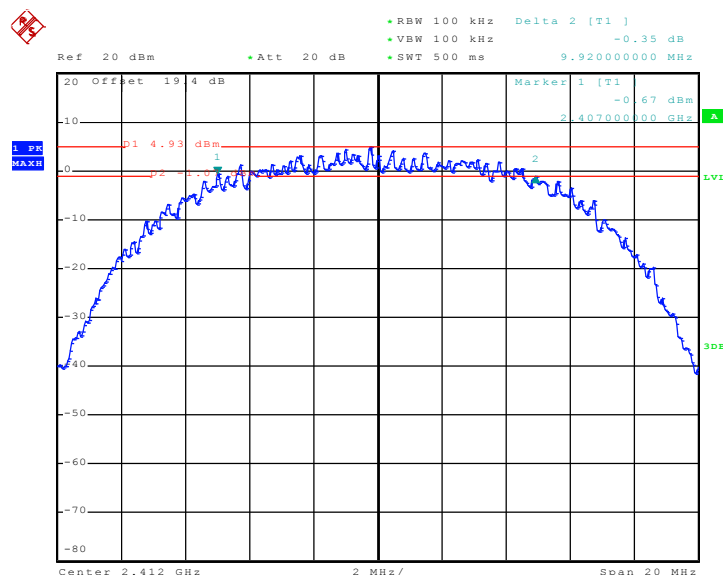

Date: 10.MAR.2010 02:21:49




Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

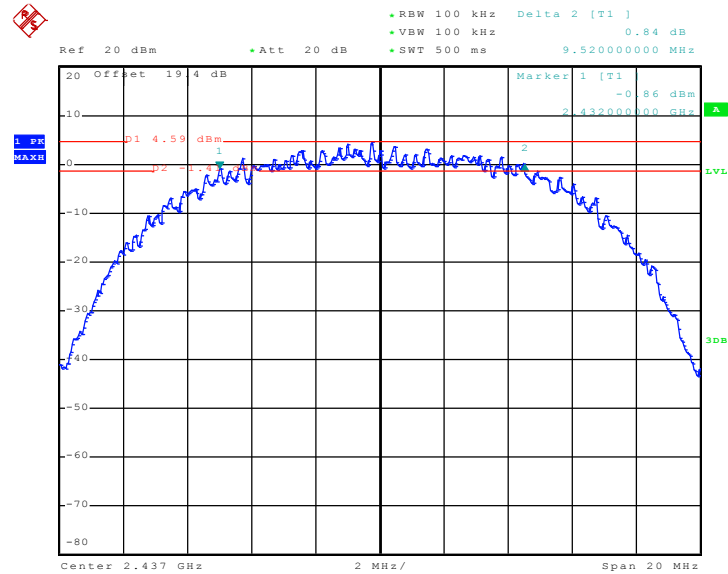

Date: 10.MAR.2010 02:20:20


Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

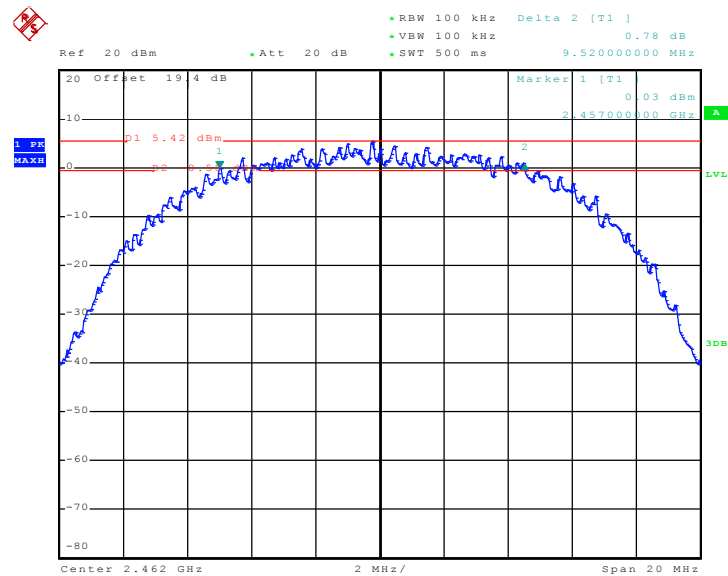

Date: 10.MAR.2010 02:18:24




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

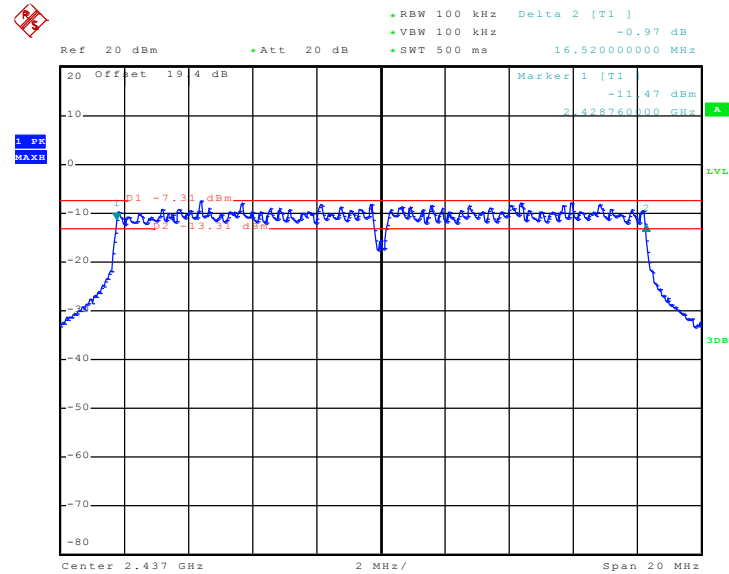

Date: 10.MAR.2010 22:58:57

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

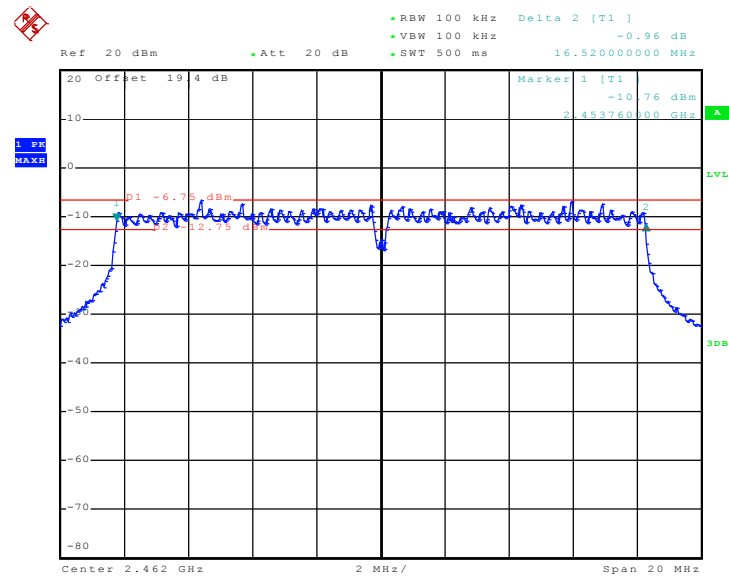

Date: 10.MAR.2010 22:56:31

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

3.2.4 Test Setup

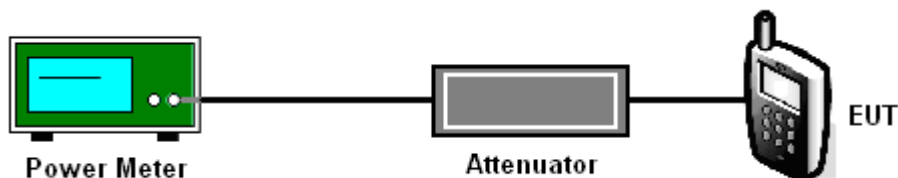

3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	23~25℃
Test Engineer :	Andy Yeh	Relative Humidity :	48~50%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	15.69	30	Pass
06	2437	13.85	30	Pass
11	2462	16.17	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	23~25℃
Test Engineer :	Andy Yeh	Relative Humidity :	48~50%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	17.64	30	Pass
06	2437	16.23	30	Pass
11	2462	18.05	30	Pass

3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.3.4 Test Setup

<Radiated Band Edges>

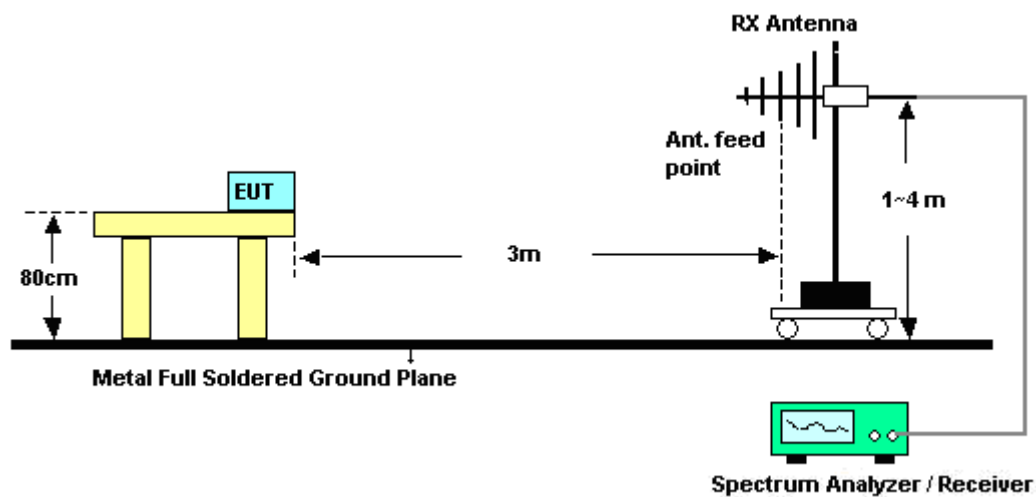

<Conducted Band Edges>

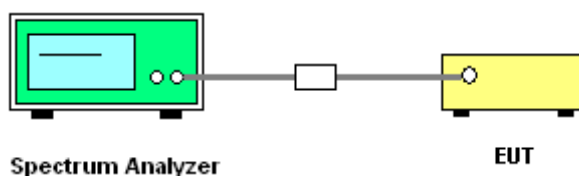

3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	22~23℃
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2368.33	44.86	-29.14	74	41.44	32.08	5.49	34.15	200	196	Peak
2368.33	33.05	-20.95	54	29.63	32.08	5.49	34.15	200	196	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.42	48.79	-25.21	74	45.35	32.13	5.46	34.15	100	319	Peak
2389.42	36.29	-17.71	54	32.85	32.13	5.46	34.15	100	319	Average

Test Mode :	Mode 3	Temperature :	22~23℃
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.13	47.22	-26.78	74	43.76	32.27	5.38	34.19	100	311	Peak
2486.13	35.01	-18.99	54	31.55	32.27	5.38	34.19	100	311	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.94	51.14	-22.86	74	47.68	32.27	5.38	34.19	103	50	Peak
2485.94	38.87	-15.13	54	35.41	32.27	5.38	34.19	103	50	Average

Test Mode :	Mode 4	Temperature :	22~23℃
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	53.27	-20.73	74	49.84	32.13	5.46	34.16	200	194	Peak
2389.99	36.34	-17.66	54	32.91	32.13	5.46	34.16	200	194	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	55.37	-18.63	74	51.94	32.13	5.46	34.16	100	61	Peak
2389.99	37.73	-16.27	54	34.3	32.13	5.46	34.16	100	61	Average

Test Mode :	Mode 6	Temperature :	22~23℃
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Mac Lin


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2488.41	52.74	-21.26	74	49.26	32.3	5.37	34.19	100	311	Peak
2488.41	38.53	-15.47	54	35.05	32.3	5.37	34.19	100	311	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	53.84	-20.16	74	50.38	32.27	5.38	34.19	104	57	Peak
2483.5	39.94	-14.06	54	36.48	32.27	5.38	34.19	104	57	Average

3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	23~25°C
Test Band :	802.11b	Relative Humidity :	48~50%
Test Channel :	01 and 11	Test Engineer :	Andy Yeh

Low Band Edge Plot on 802.11b Channel 01

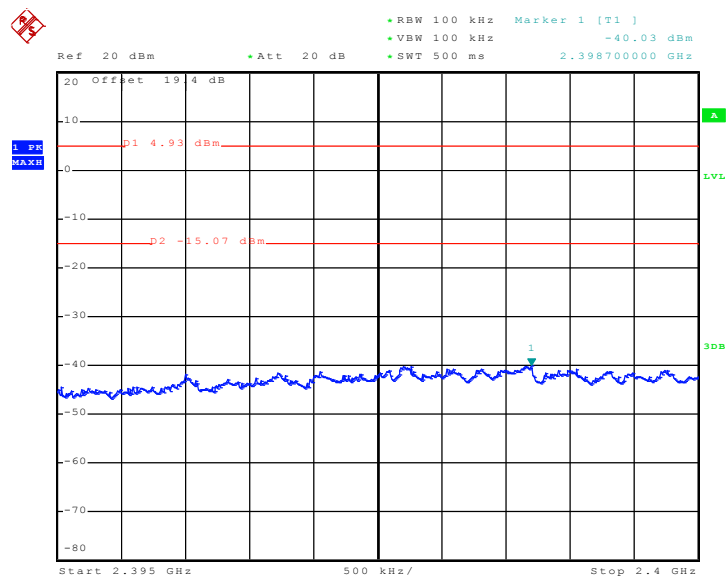


Date: 10.MAR.2010 02:23:19

High Band Edge Plot on 802.11b Channel 11

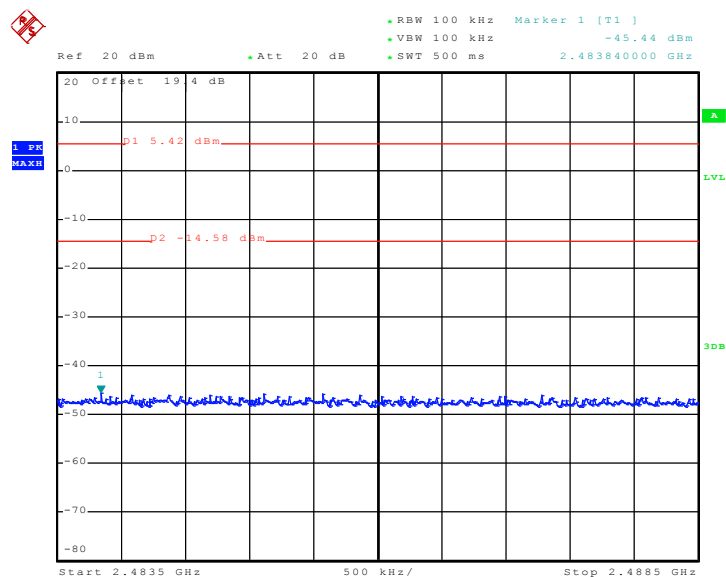


Date: 10.MAR.2010 02:26:54

Test Mode :	Mode 4 and 6	Temperature :	23~25°C
Test Band :	802.11g	Relative Humidity :	48~50%
Test Channel :	01 and 11	Test Engineer :	Andy Yeh

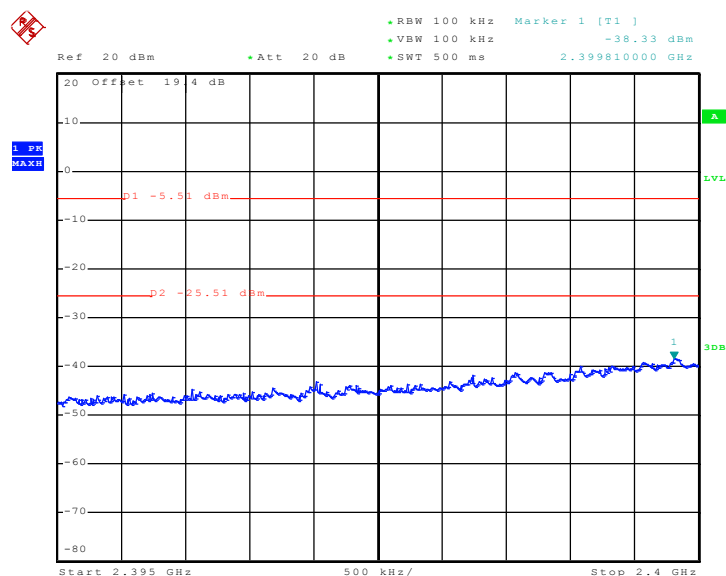Low Band Edge Plot on 802.11g Channel 01


Date: 10.MAR.2010 23:05:35

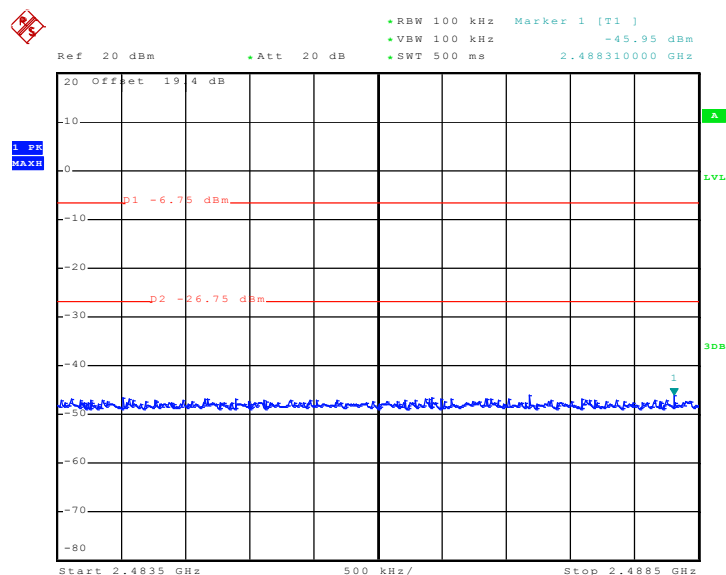High Band Edge Plot on 802.11g Channel 11


Date: 10.MAR.2010 23:14:23

3.4 Spurious Emission Measurement

3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.4.4 Test Setup

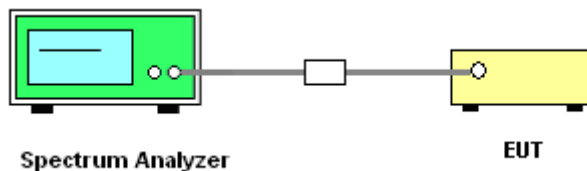


3.4.5 Test Plots of Spurious Emission

Test Mode :	Mode 1	Temperature :	23~25°C
Test Band :	802.11b	Relative Humidity :	48~50%
Test Channel :	01	Test Engineer :	Andy Yeh



Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

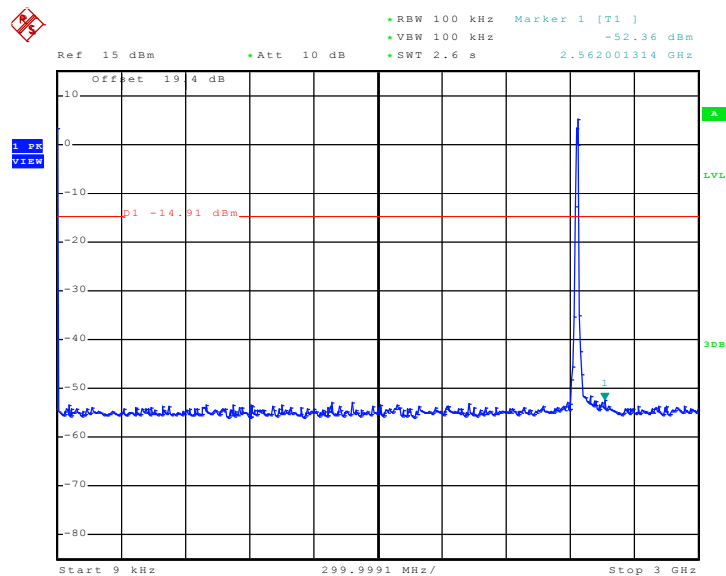



Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

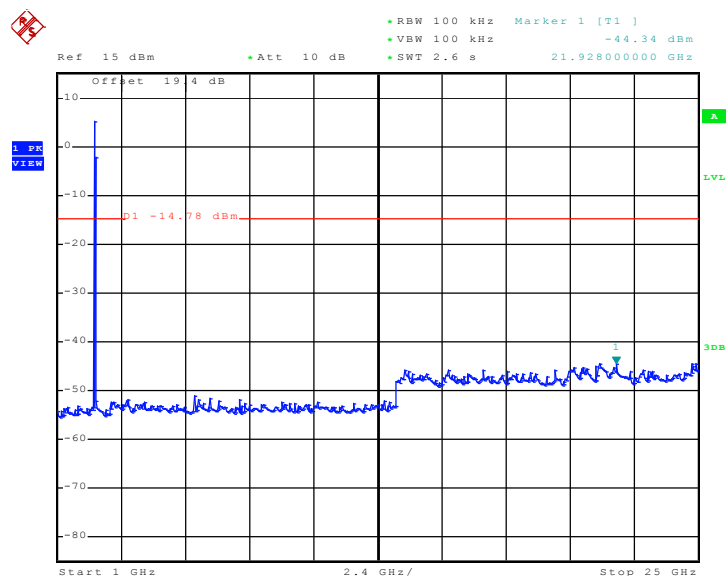

Test Mode :	Mode 2	Temperature :	23~25°C
Test Band :	802.11b	Relative Humidity :	48~50%
Test Channel :	06	Test Engineer :	Andy Yeh

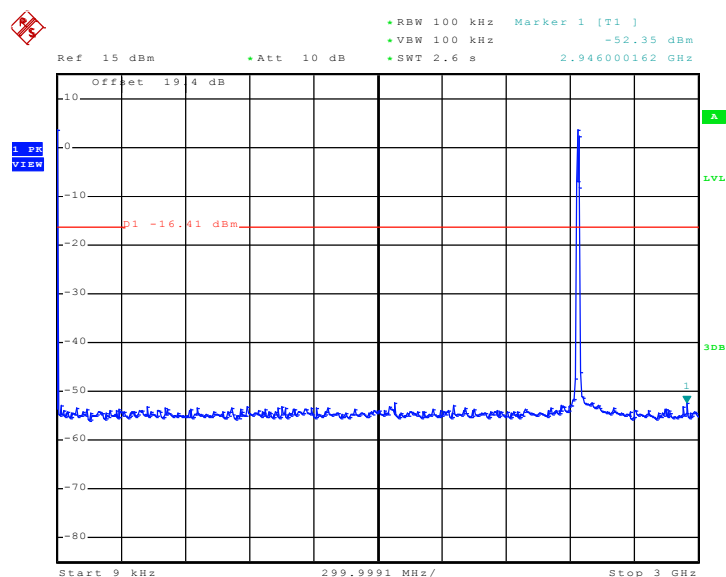
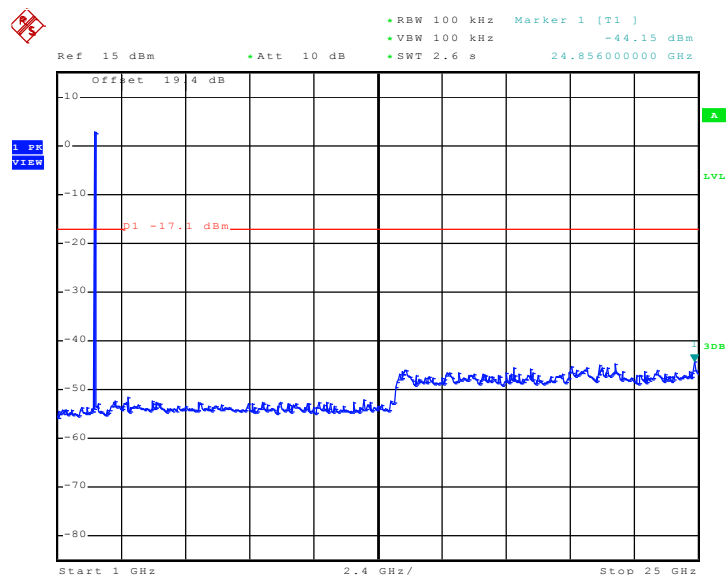
Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

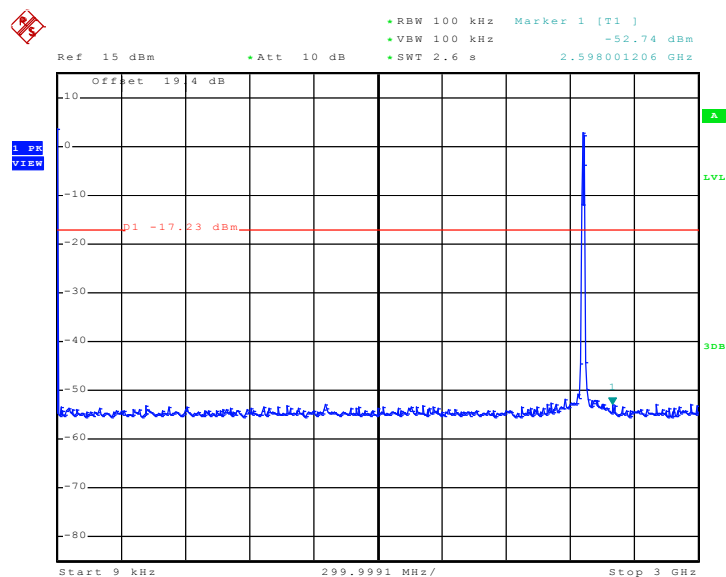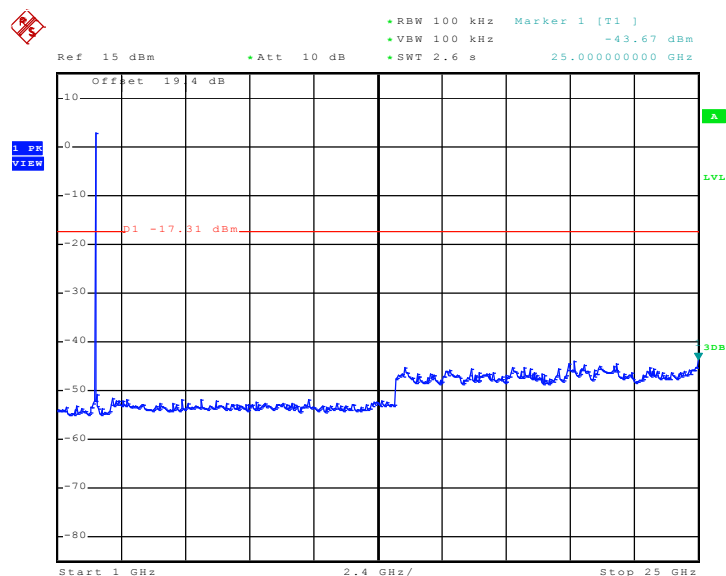
Test Mode :	Mode 3	Temperature :	23~25°C
Test Band :	802.11b	Relative Humidity :	48~50%
Test Channel :	11	Test Engineer :	Andy Yeh



Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

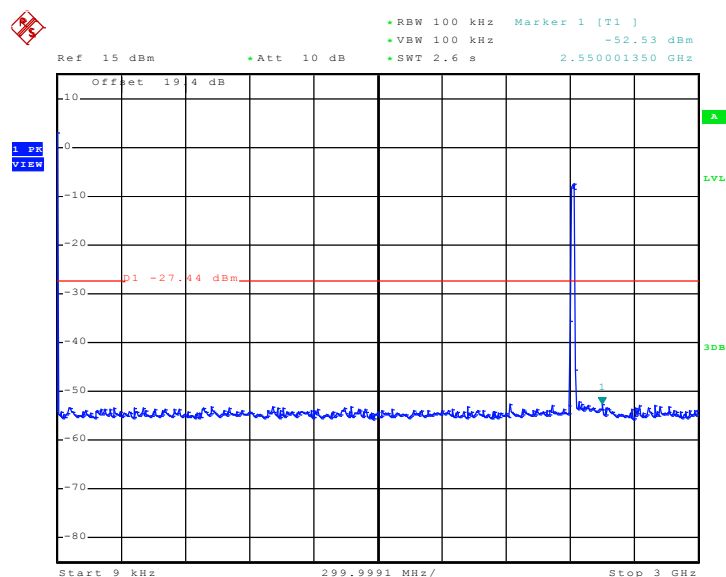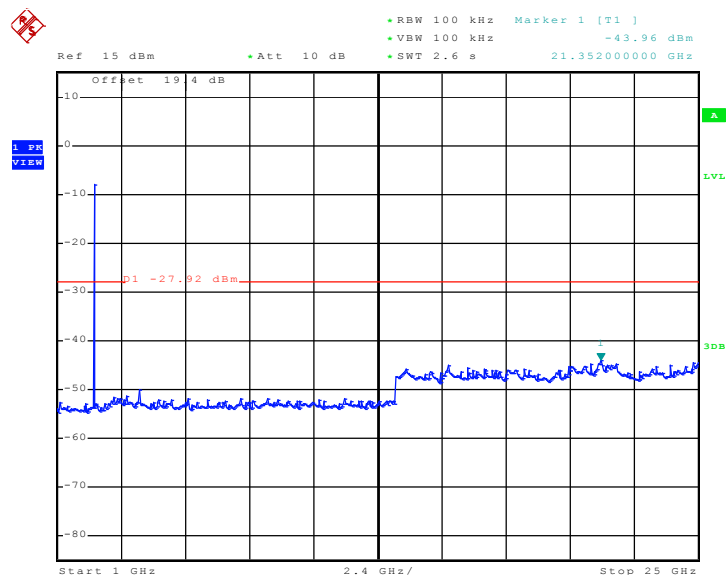
Date: 10.MAR.2010 05:28:20



Test Mode :	Mode 4	Temperature :	23~25°C
Test Band :	802.11g	Relative Humidity :	48~50%
Test Channel :	01	Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

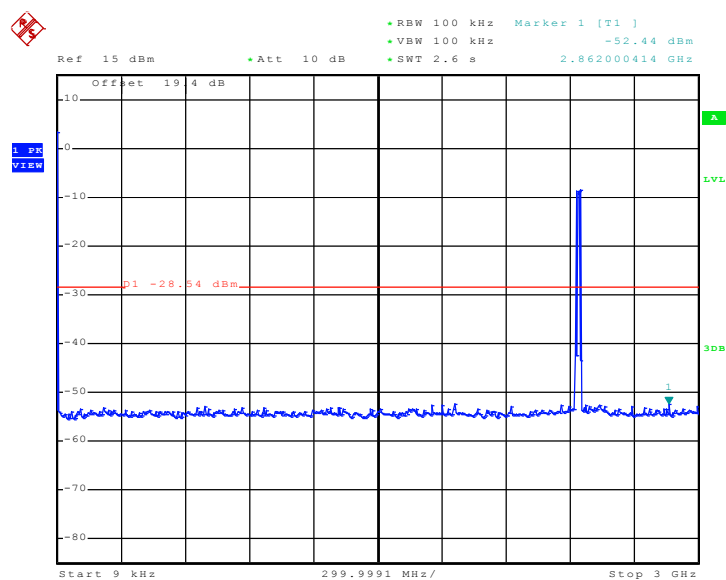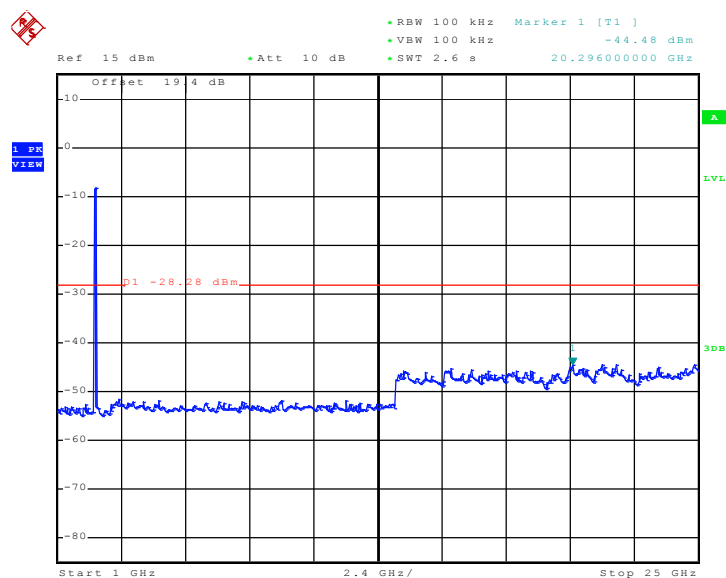Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz


Test Mode :	Mode 5	Temperature :	23~25°C
Test Band :	802.11g	Relative Humidity :	48~50%
Test Channel :	06	Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

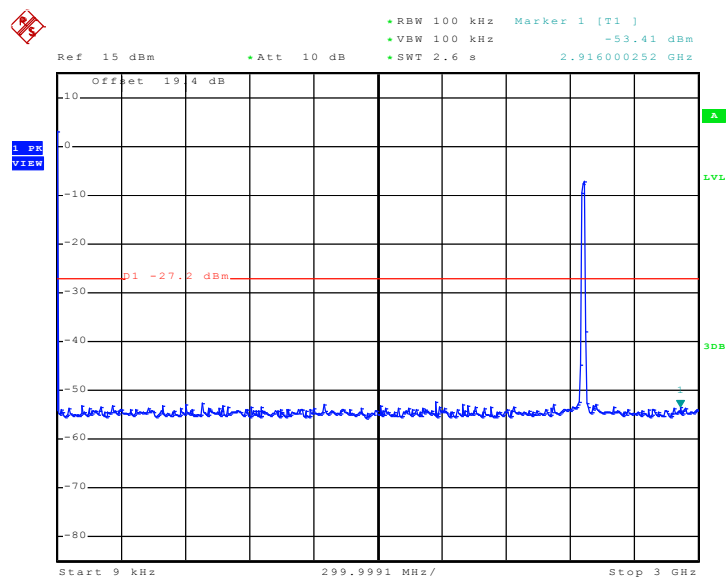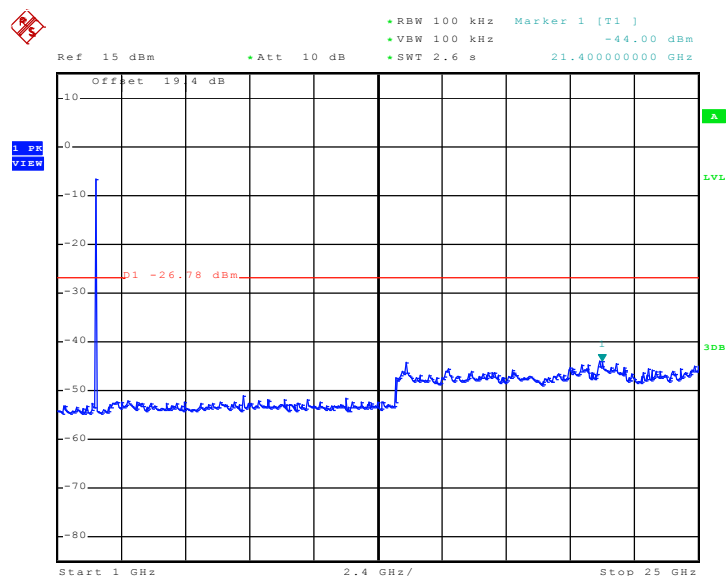Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz


Test Mode :	Mode 6	Temperature :	23~25°C
Test Band :	802.11g	Relative Humidity :	48~50%
Test Channel :	11	Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz


Date: 10.MAR.2010 23:31:29

3.5 Power Spectral Density Measurement

3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

3.5.4 Test Setup

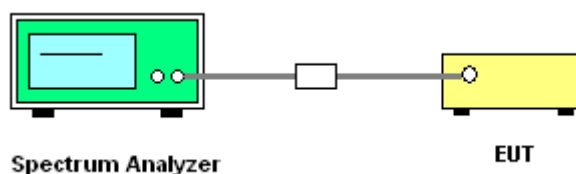


3.5.5 Test Result of Power Spectral Density

Test Mode :	Mode 1, 2, 3	Temperature :	23~25℃
Test Engineer :	Andy Yeh	Relative Humidity :	48~50%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-13.62	8	Pass
06	2437	-14.28	8	Pass
11	2462	-13.40	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

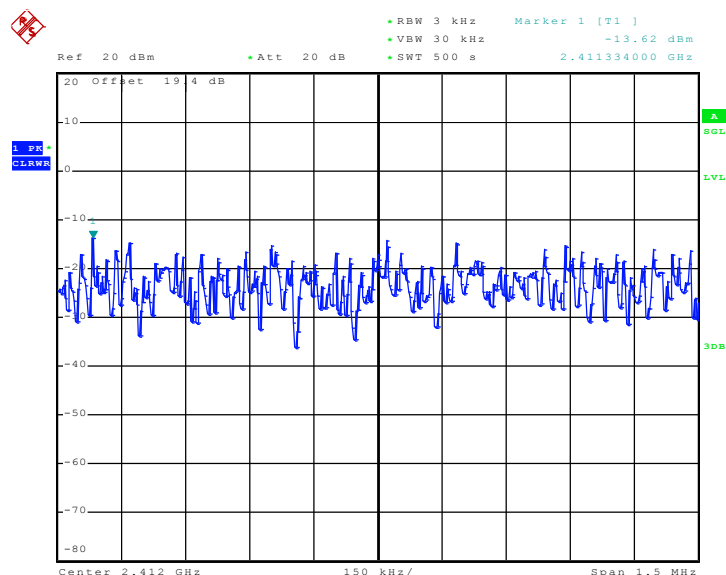

Date: 9.MAR.2010 23:47:41




Mode 2 : PSD Plot on 802.11b Channel 06

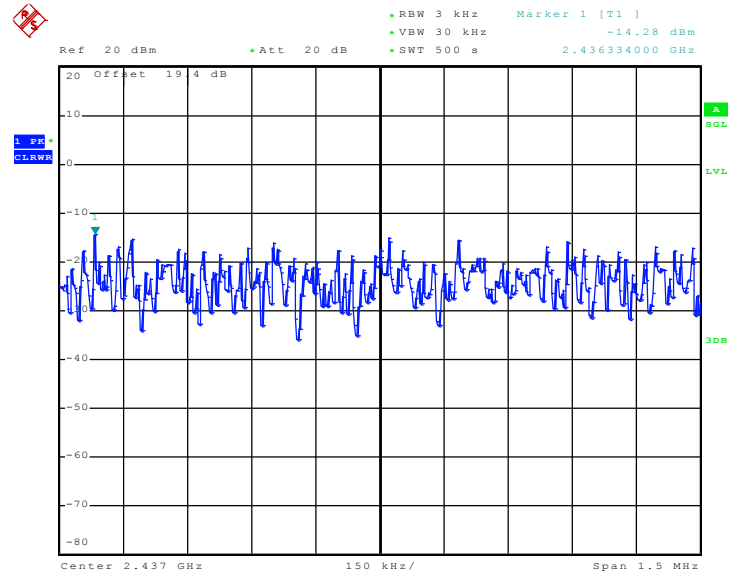

Date: 9.MAR.2010 23:27:00


Mode 3 : PSD Plot on 802.11b Channel 11

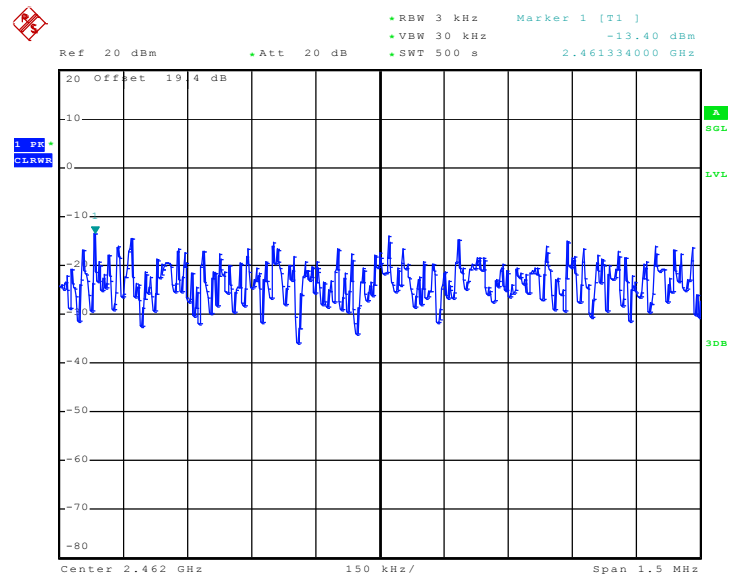

Date: 9.MAR.2010 23:09:00

Test Mode :	Mode 4, 5, 6	Temperature :	23~25℃
Test Engineer :	Andy Yeh	Relative Humidity :	48~50%


Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-18.79	8	Pass
06	2437	-21.01	8	Pass
11	2462	-20.62	8	Pass

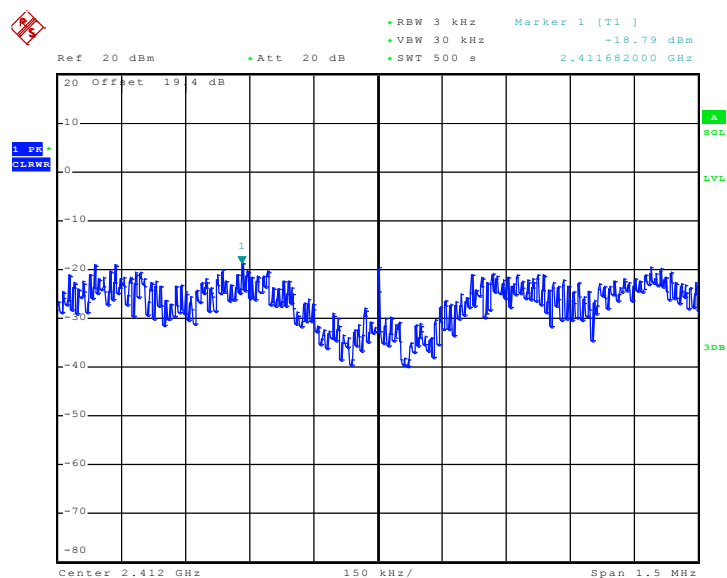Mode 4 : PSD Plot on 802.11g Channel 01


Date: 10.MAR.2010 22:05:23




Mode 5 : PSD Plot on 802.11g Channel 06

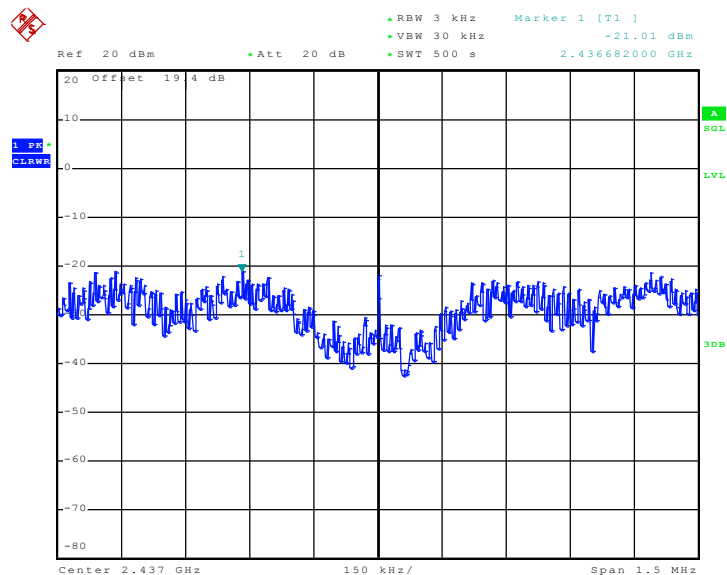

Date: 10.MAR.2010 22:27:02

Mode 6 : PSD Plot on 802.11g Channel 11

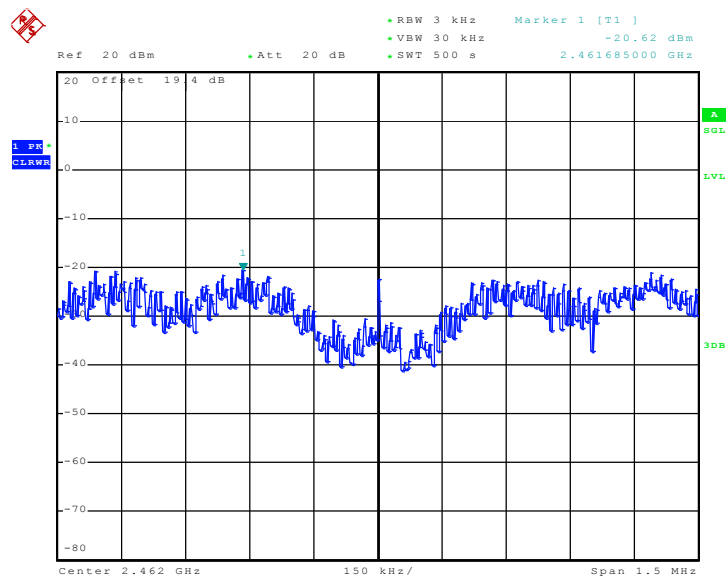

Date: 10.MAR.2010 22:46:06

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

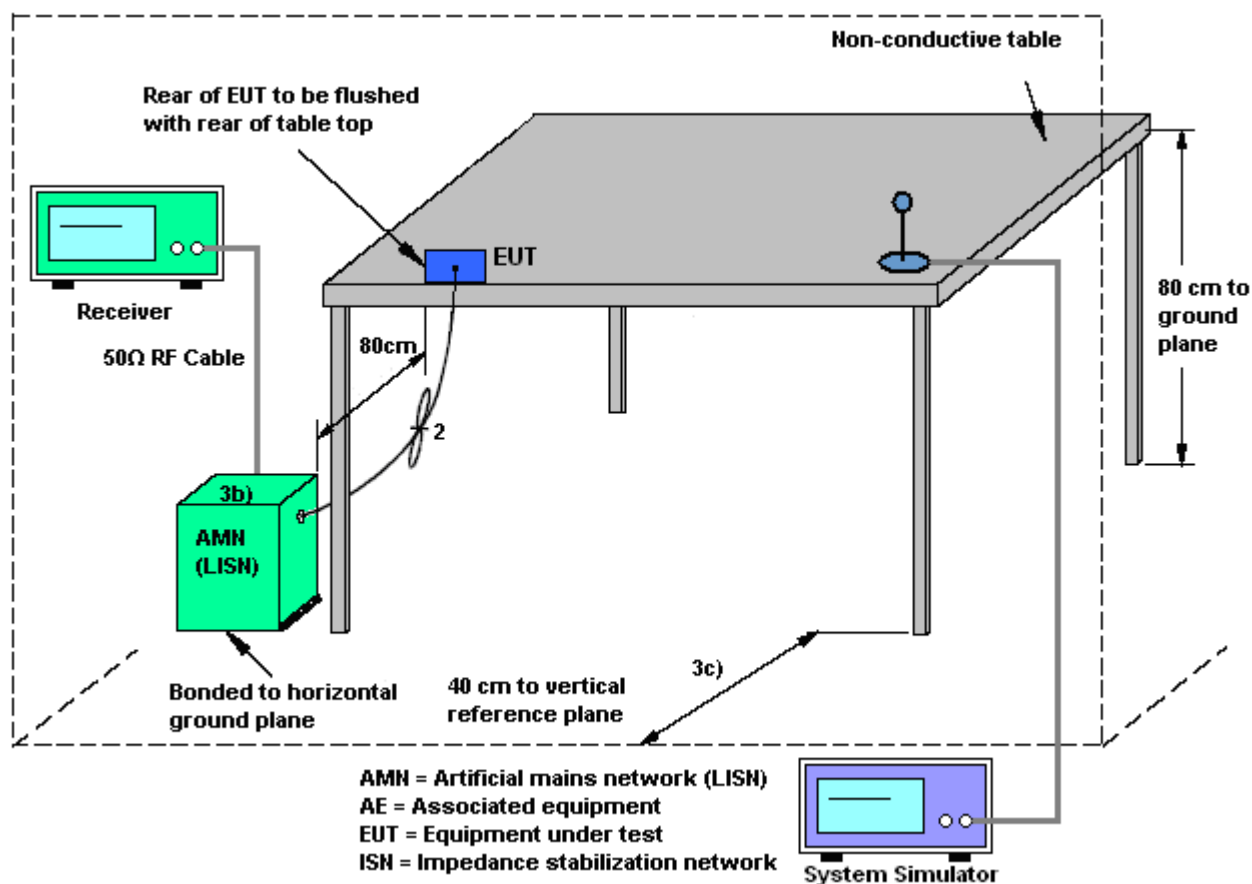

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	43~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + GPS Rx + Bluetooth Link + WLAN Link + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

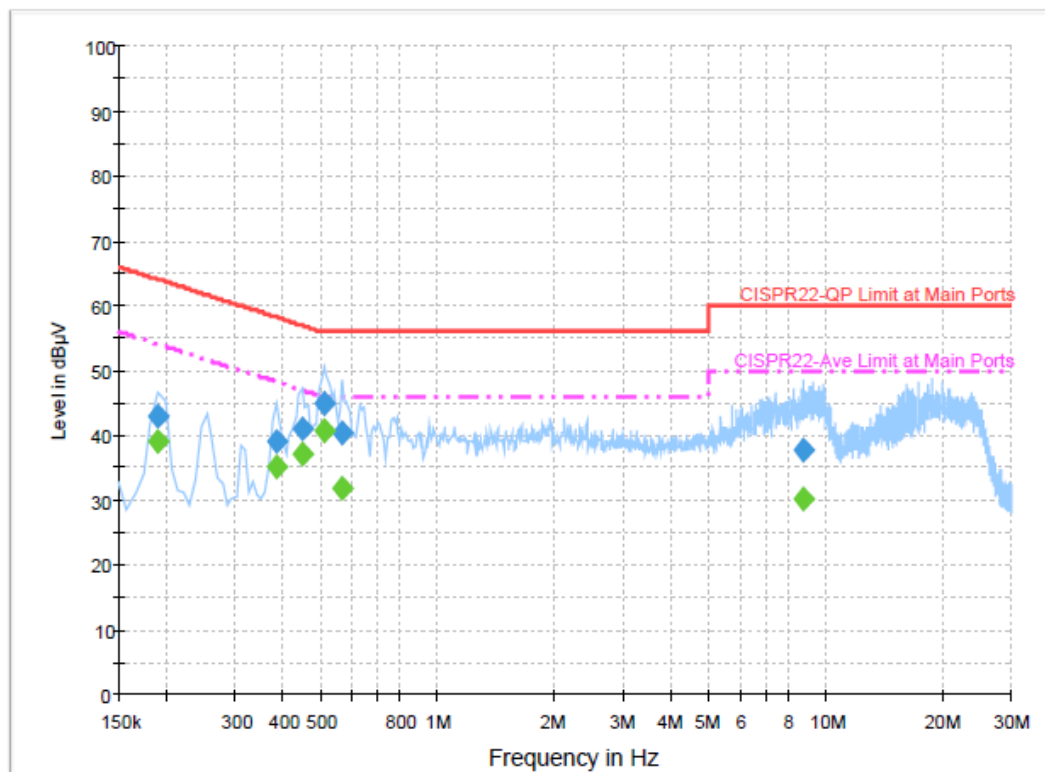


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	42.8	Off	L1	19.6	21.2	64.0
0.382000	39.1	Off	L1	19.5	19.1	58.2
0.446000	40.9	Off	L1	19.4	16.0	56.9
0.510000	44.8	Off	L1	19.4	11.2	56.0
0.566000	40.5	Off	L1	19.5	15.5	56.0
8.734000	37.7	Off	L1	19.6	22.3	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	39.1	Off	L1	19.6	14.9	54.0
0.382000	35.0	Off	L1	19.5	13.2	48.2
0.446000	37.0	Off	L1	19.4	9.9	46.9
0.510000	40.7	Off	L1	19.4	5.3	46.0
0.566000	31.8	Off	L1	19.5	14.2	46.0
8.734000	30.2	Off	L1	19.6	19.8	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	43~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + GPS Rx + Bluetooth Link + WLAN Link + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

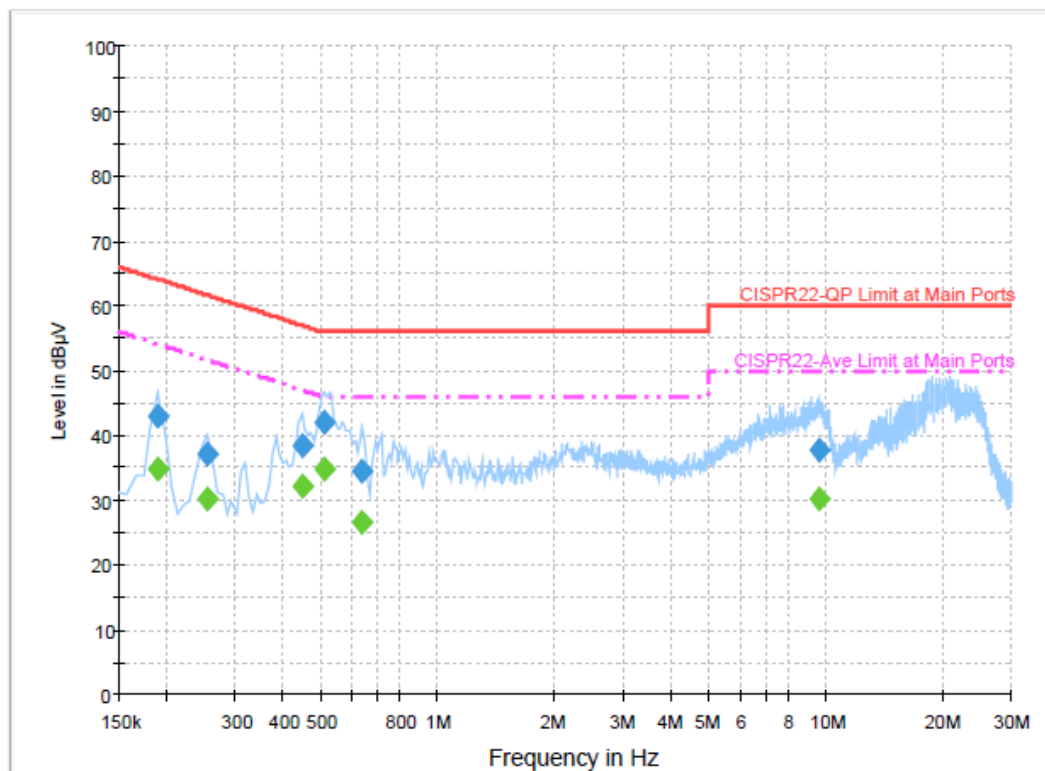
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	42.8	Off	N	19.5	21.2	64.0
0.254000	37.1	Off	N	19.4	24.5	61.6
0.446000	38.4	Off	N	19.4	18.5	56.9
0.510000	41.9	Off	N	19.4	14.1	56.0
0.638000	34.4	Off	N	19.5	21.6	56.0
9.550000	37.8	Off	N	19.6	22.2	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	34.7	Off	N	19.5	19.3	54.0
0.254000	30.0	Off	N	19.4	21.6	51.6
0.446000	32.2	Off	N	19.4	14.7	46.9
0.510000	34.9	Off	N	19.4	11.1	46.0
0.638000	26.6	Off	N	19.5	19.4	46.0
9.550000	30.0	Off	N	19.6	20.0	50.0

3.7 Radiated Emission Measurement

3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.7.4 Test Setup

For radiated emissions below 30MHz

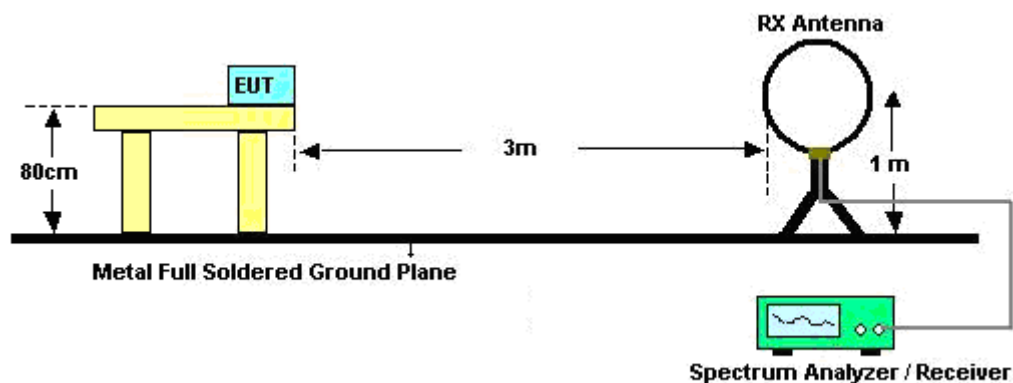

For radiated emissions above 30MHz

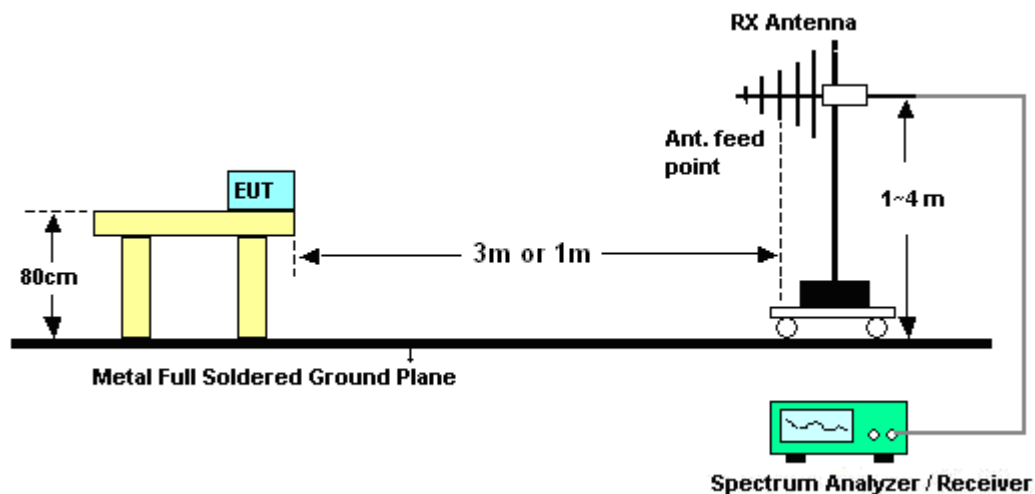

3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Mac Lin	Temperature :	22~23℃	
		Relative Humidity :	42~43%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	22~23℃
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
85.89	23.81	-16.19	40	46.08	8.36	1.07	31.7	100	227	Peak
95.61	22.66	-20.84	43.5	43.46	9.76	1.14	31.7	-	-	Peak
287.58	22.41	-23.59	46	38.46	13.3	2.07	31.42	-	-	Peak
397.3	28.87	-17.13	46	41.48	16.06	2.53	31.2	-	-	Peak
414.1	28.94	-17.06	46	41.09	16.41	2.63	31.19	-	-	Peak
842.5	25.96	-20.04	46	30.09	22.63	3.94	30.7	-	-	Peak
2368.33	33.05	-20.95	54	29.63	32.08	5.49	34.15	200	196	Average
2368.33	44.86	-29.14	74	41.44	32.08	5.49	34.15	200	196	Peak
2412	102.26	-	-	98.82	32.16	5.44	34.16	200	196	Peak
2412	93.38	-	-	89.94	32.16	5.44	34.16	200	196	Average
2494	32.52	-21.48	54	29.05	32.3	5.37	34.2	200	196	Average
2494	46.26	-27.74	74	42.79	32.3	5.37	34.2	200	196	Peak
8406	52.86	-21.14	74	41.84	36	10.12	35.1	100	105	Peak
8406	40.33	-13.67	54	29.31	36	10.12	35.1	100	105	Average

Test Mode :	Mode 1	Temperature :	22~23℃
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	26.96	-13.04	40	38.51	19.51	0.64	31.7	100	117	Peak
84.54	23.54	-16.46	40	46.11	8.09	1.04	31.7	-	-	Peak
255.45	22.41	-23.59	46	39.12	12.84	1.94	31.49	-	-	Peak
430.2	26.98	-19.02	46	38.67	16.75	2.73	31.17	-	-	Peak
461.7	26.75	-19.25	46	37.68	17.38	2.83	31.14	-	-	Peak
914.6	26.09	-19.91	46	29.19	23.4	4.19	30.69	-	-	Peak
2389.42	36.29	-17.71	54	32.85	32.13	5.46	34.15	100	319	Average
2389.42	48.79	-25.21	74	45.35	32.13	5.46	34.15	100	319	Peak
2412	105.03	-	-	101.59	32.16	5.44	34.16	100	319	Peak
2412	96.39	-	-	92.95	32.16	5.44	34.16	100	319	Average
2500	36.09	-17.91	54	32.62	32.3	5.37	34.2	100	319	Average
2500	48.44	-25.56	74	44.97	32.3	5.37	34.2	100	319	Peak
8385	52.79	-21.21	74	41.79	36	10.1	35.1	100	166	Peak
8385	40.17	-13.83	54	29.17	36	10.1	35.1	100	166	Average

Test Mode :	Mode 2	Temperature :	22~23℃
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
95.61	23.56	-19.94	43.5	44.36	9.76	1.14	31.7	-	-	Peak
196.86	20.75	-22.75	43.5	41.82	8.84	1.69	31.6	-	-	Peak
287.58	22.01	-23.99	46	38.06	13.3	2.07	31.42	-	-	Peak
414.1	29.25	-16.75	46	41.4	16.41	2.63	31.19	100	196	Peak
430.2	28.71	-17.29	46	40.4	16.75	2.73	31.17	-	-	Peak
856.5	26.16	-19.84	46	30.11	22.76	3.99	30.7	-	-	Peak
2390	44.17	-29.83	74	40.74	32.13	5.46	34.16	200	245	Peak
2390	32.06	-21.94	54	28.63	32.13	5.46	34.16	200	245	Average
2437	100.41	-	-	96.96	32.19	5.43	34.17	200	245	Peak
2437	92.15	-	-	88.69	32.22	5.41	34.17	200	245	Average
2484	33.47	-20.53	54	30.01	32.27	5.38	34.19	200	245	Average
2484	45.82	-28.18	74	42.36	32.27	5.38	34.19	200	245	Peak
8289	52.8	-21.2	74	41.86	36	10.04	35.1	100	337	Peak
8289	40.36	-13.64	54	29.42	36	10.04	35.1	100	337	Average

Test Mode :	Mode 2	Temperature :	22~23℃
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
35.13	25.25	-14.75	40	39.54	16.73	0.68	31.7	100	285	Peak
137.73	20.87	-22.63	43.5	39.43	11.71	1.39	31.66	-	-	Peak
255.18	22.27	-23.73	46	38.98	12.84	1.94	31.49	-	-	Peak
430.2	27.47	-18.53	46	39.16	16.75	2.73	31.17	-	-	Peak
589.8	25.86	-20.14	46	33.78	19.87	3.22	31.01	-	-	Peak
909	25.74	-20.26	46	28.94	23.31	4.18	30.69	-	-	Peak
2372	45.13	-28.87	74	41.7	32.11	5.47	34.15	100	200	Peak
2372	33.5	-20.5	54	30.07	32.11	5.47	34.15	100	200	Average
2437	103.37	-	-	99.92	32.19	5.43	34.17	100	200	Peak
2437	95.3	-	-	91.84	32.22	5.41	34.17	100	200	Average
2484	34.55	-19.45	54	31.09	32.27	5.38	34.19	100	200	Average
2484	47.74	-26.26	74	44.28	32.27	5.38	34.19	100	200	Peak
8385	52.55	-21.45	74	41.55	36	10.1	35.1	100	195	Peak
8385	40.44	-13.56	54	29.44	36	10.1	35.1	100	195	Average

Test Mode :	Mode 3	Temperature :	22~23℃
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	22.1	-17.9	40	33.65	19.51	0.64	31.7	-	-	Peak
95.61	22.65	-20.85	43.5	43.45	9.76	1.14	31.7	-	-	Peak
287.58	22.52	-23.48	46	38.57	13.3	2.07	31.42	-	-	Peak
414.1	29.62	-16.38	46	41.77	16.41	2.63	31.19	100	228	Peak
430.2	28.74	-17.26	46	40.43	16.75	2.73	31.17	-	-	Peak
943.3	25.2	-20.8	46	27.77	23.84	4.25	30.66	-	-	Peak
2372	44.91	-29.09	74	41.48	32.11	5.47	34.15	100	311	Peak
2372	33.59	-20.41	54	30.16	32.11	5.47	34.15	100	311	Average
2462	102.43	-	-	98.97	32.24	5.4	34.18	100	311	Peak
2462	93.78	-	-	90.32	32.24	5.4	34.18	100	311	Average
2486.13	47.22	-26.78	74	43.76	32.27	5.38	34.19	100	311	Peak
2486.13	35.01	-18.99	54	31.55	32.27	5.38	34.19	100	311	Average
8298	52.98	-21.02	74	42.04	36	10.04	35.1	100	117	Peak
8298	40.08	-13.92	54	29.14	36	10.04	35.1	100	117	Average

Test Mode :	Mode 3	Temperature :	22~23℃
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	25.44	-14.56	40	36.99	19.51	0.64	31.7	100	285	Peak
82.38	22.81	-17.19	40	45.66	7.83	1.02	31.7	-	-	Peak
118.29	16.8	-26.7	43.5	35.16	12.05	1.27	31.68	-	-	Peak
430.2	26.7	-19.3	46	38.39	16.75	2.73	31.17	-	-	Peak
461.7	26.38	-19.62	46	37.31	17.38	2.83	31.14	-	-	Peak
556.9	25.91	-20.09	46	34.6	19.24	3.11	31.04	-	-	Peak
2390	46.47	-27.53	74	43.04	32.13	5.46	34.16	103	50	Peak
2390	33.91	-20.09	54	30.48	32.13	5.46	34.16	103	50	Average
2462	107.72	-	-	104.26	32.24	5.4	34.18	103	50	Peak
2462	99.26	-	-	95.8	32.24	5.4	34.18	103	50	Average
2485.94	51.14	-22.86	74	47.68	32.27	5.38	34.19	103	50	Peak
2485.94	38.87	-15.13	54	35.41	32.27	5.38	34.19	103	50	Average
8298	52.82	-21.18	74	41.88	36	10.04	35.1	100	227	Peak
8298	40.05	-13.95	54	29.11	36	10.04	35.1	100	227	Average

Test Mode :	Mode 4	Temperature :	22~23℃
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	20.47	-19.53	40	33.67	17.84	0.66	31.7	-	-	Peak
95.61	22.99	-20.51	43.5	43.79	9.76	1.14	31.7	-	-	Peak
287.58	21.76	-24.24	46	37.81	13.3	2.07	31.42	-	-	Peak
397.3	29.03	-16.97	46	41.64	16.06	2.53	31.2	-	-	Peak
430.2	29.12	-16.88	46	40.81	16.75	2.73	31.17	100	133	Peak
858.6	25.62	-20.38	46	29.55	22.78	3.99	30.7	-	-	Peak
2389.99	36.34	-17.66	54	32.91	32.13	5.46	34.16	200	194	Average
2389.99	53.27	-20.73	74	49.84	32.13	5.46	34.16	200	194	Peak
2412	97.47	-	-	94.03	32.16	5.44	34.16	200	194	Peak
2412	87.37	-	-	83.93	32.16	5.44	34.16	200	194	Average
2486	32.32	-21.68	54	28.86	32.27	5.38	34.19	200	194	Average
2486	45.27	-28.73	74	41.81	32.27	5.38	34.19	200	194	Peak
8454	52.55	-21.45	74	41.51	36	10.14	35.1	100	27	Peak
8454	40.59	-13.41	54	29.55	36	10.14	35.1	100	27	Average

Test Mode :	Mode 4	Temperature :	22~23℃
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
35.94	25	-15	40	39.81	16.2	0.69	31.7	100	227	Peak
85.89	20.94	-19.06	40	43.21	8.36	1.07	31.7	-	-	Peak
255.18	22.16	-23.84	46	38.87	12.84	1.94	31.49	-	-	Peak
430.2	27.07	-18.93	46	38.76	16.75	2.73	31.17	-	-	Peak
461.7	27.11	-18.89	46	38.04	17.38	2.83	31.14	-	-	Peak
556.9	25.78	-20.22	46	34.47	19.24	3.11	31.04	-	-	Peak
2389.99	37.73	-16.27	54	34.3	32.13	5.46	34.16	100	61	Average
2389.99	55.37	-18.63	74	51.94	32.13	5.46	34.16	100	61	Peak
2412	99.02	-	-	95.58	32.16	5.44	34.16	100	61	Peak
2412	88.87	-	-	85.43	32.16	5.44	34.16	100	61	Average
2500	35.11	-18.89	54	31.64	32.3	5.37	34.2	100	61	Average
2500	47.11	-26.89	74	43.64	32.3	5.37	34.2	100	61	Peak
8406	53.08	-20.92	74	42.06	36	10.12	35.1	100	276	Peak
8406	40.68	-13.32	54	29.66	36	10.12	35.1	100	276	Average

Test Mode :	Mode 5	Temperature :	22~23℃
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	22.63	-17.37	40	34.18	19.51	0.64	31.7	100	227	Peak
95.61	22.37	-21.13	43.5	43.17	9.76	1.14	31.7	-	-	Peak
287.58	22.57	-23.43	46	38.62	13.3	2.07	31.42	-	-	Peak
397.3	28.32	-17.68	46	40.93	16.06	2.53	31.2	-	-	Peak
414.1	29.25	-16.75	46	41.4	16.41	2.63	31.19	-	-	Peak
430.2	27.42	-18.58	46	39.11	16.75	2.73	31.17	-	-	Peak
2364	43.83	-30.17	74	40.4	32.08	5.49	34.14	100	171	Peak
2364	32.23	-21.77	54	28.8	32.08	5.49	34.14	100	171	Average
2437	95.24	-	-	91.79	32.22	5.41	34.18	100	171	Peak
2437	87.71	-	-	84.25	32.22	5.41	34.17	100	171	Average
2484	33.27	-20.73	54	29.81	32.27	5.38	34.19	100	171	Average
2484	45.17	-28.83	74	41.71	32.27	5.38	34.19	100	171	Peak
8301	52.38	-21.62	74	41.44	36	10.04	35.1	100	111	Peak
8301	39.93	-14.07	54	28.99	36	10.04	35.1	100	111	Average

Test Mode :	Mode 5	Temperature :	22~23℃
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	26.58	-13.42	40	38.13	19.51	0.64	31.7	100	55	Peak
84.81	22.2	-17.8	40	44.61	8.23	1.06	31.7	-	-	Peak
206.85	23.09	-20.41	43.5	44.03	8.92	1.73	31.59	-	-	Peak
397.3	24.88	-21.12	46	37.49	16.06	2.53	31.2	-	-	Peak
430.2	27.04	-18.96	46	38.73	16.75	2.73	31.17	-	-	Peak
461.7	26.28	-19.72	46	37.21	17.38	2.83	31.14	-	-	Peak
2390	46.4	-27.6	74	42.97	32.13	5.46	34.16	100	36	Peak
2390	34.46	-19.54	54	31.03	32.13	5.46	34.16	100	36	Average
2437	99.25	-	-	95.8	32.22	5.41	34.18	100	36	Peak
2437	91.81	-	-	88.35	32.22	5.41	34.17	100	36	Average
2484	34.26	-19.74	54	30.8	32.27	5.38	34.19	100	36	Average
2484	48.35	-25.65	74	44.89	32.27	5.38	34.19	100	36	Peak
8073	53.17	-20.83	74	42.38	36	9.89	35.1	100	132	Peak
8073	40.43	-13.57	54	29.64	36	9.89	35.1	100	132	Average

Test Mode :	Mode 6	Temperature :	22~23℃
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	21.22	-18.78	40	32.77	19.51	0.64	31.7	-	-	Peak
95.61	22.41	-21.09	43.5	43.21	9.76	1.14	31.7	-	-	Peak
118.29	15.43	-28.07	43.5	33.79	12.05	1.27	31.68	-	-	Peak
414.1	29.86	-16.14	46	42.01	16.41	2.63	31.19	100	34	Peak
430.2	28.43	-17.57	46	40.12	16.75	2.73	31.17	-	-	Peak
917.4	26.46	-19.54	46	29.5	23.44	4.2	30.68	-	-	Peak
2390	46.56	-27.44	74	43.13	32.13	5.46	34.16	100	311	Peak
2390	35.05	-18.95	54	31.62	32.13	5.46	34.16	100	311	Average
2462	98.49	-	-	95.03	32.24	5.4	34.18	100	311	Peak
2462	91.39	-	-	87.93	32.24	5.4	34.18	100	311	Average
2488.41	38.53	-15.47	54	35.05	32.3	5.37	34.19	100	311	Average
2488.41	52.74	-21.26	74	49.26	32.3	5.37	34.19	100	311	Peak
8166	52.97	-21.03	74	42.11	36	9.96	35.1	100	162	Peak
8166	40.22	-13.78	54	29.36	36	9.96	35.1	100	162	Average

Test Mode :	Mode 6	Temperature :	22~23℃
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	27.01	-12.99	40	38.56	19.51	0.64	31.7	100	196	Peak
85.89	20.58	-19.42	40	42.85	8.36	1.07	31.7	-	-	Peak
157.17	21.21	-22.29	43.5	40.72	10.63	1.5	31.64	-	-	Peak
430.2	26.73	-19.27	46	38.42	16.75	2.73	31.17	-	-	Peak
461.7	26.32	-19.68	46	37.25	17.38	2.83	31.14	-	-	Peak
830.6	25.33	-20.67	46	29.6	22.51	3.92	30.7	-	-	Peak
2380	45.89	-28.11	74	42.46	32.11	5.47	34.15	104	57	Peak
2380	34.44	-19.56	54	31.01	32.11	5.47	34.15	104	57	Average
2462	92.31	-	-	88.85	32.24	5.4	34.18	104	57	Average
2462	97.99	-	-	94.53	32.24	5.4	34.18	104	57	Peak
2483.5	53.84	-20.16	74	50.38	32.27	5.38	34.19	104	57	Peak
2483.5	39.94	-14.06	54	36.48	32.27	5.38	34.19	104	57	Average
8430	52.27	-21.73	74	41.24	36	10.13	35.1	100	55	Peak
8430	40.69	-13.31	54	29.66	36	10.13	35.1	100	55	Average

3.8 Antenna Requirements

3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.8.2 Antenna Connected Construction

The antennas type used in this product is Stamped Metal Monopole Antenna without connector and it is considered to meet antenna requirement.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Aug. 05, 2009	Aug. 04, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz~ 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	-
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	-

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP8O2323-09 as below.