

Test Laboratory: Compliance Certification Services

HAC_E_CD1880V3

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1010

Communication System: System Check Signal - CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 134.9 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 134.6 V/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1 134.5 M2	Grid 2 134.9 M2	Grid 3 123.7 M2
Grid 4 82.4 M3	Grid 5 82.4 M3	Grid 6 74.2 M3
Grid 7 134.7 M2	Grid 8 134.7 M2	Grid 9 120.4 M2

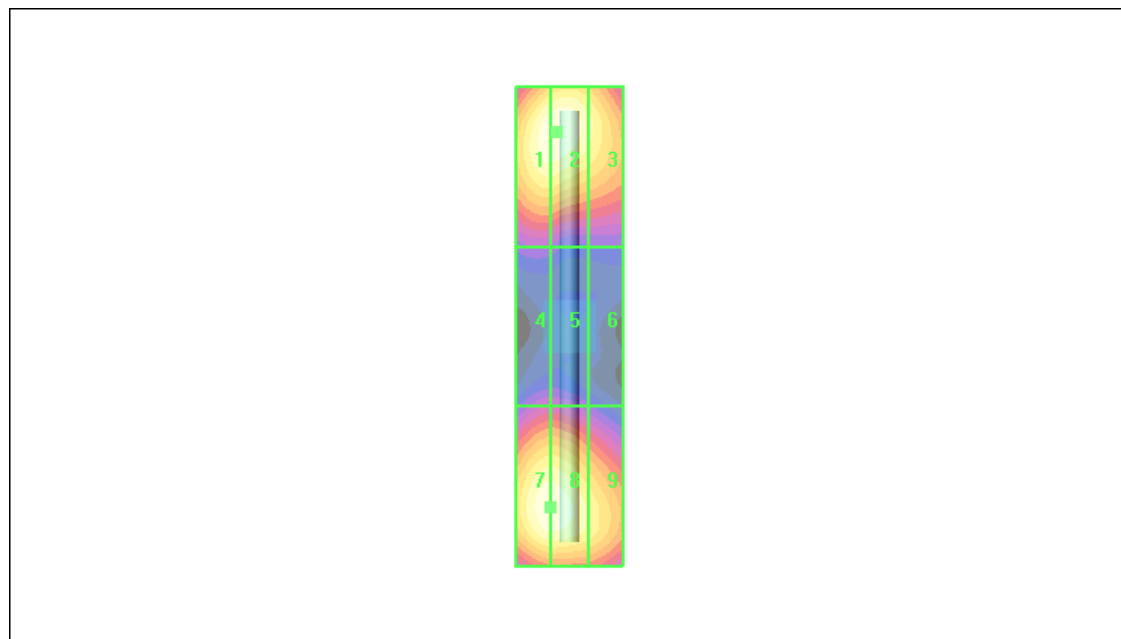

0 dB = 134.9V/m


Test Laboratory: Compliance Certification Services

HAC_E_CD1880V3

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1010

Communication System: System Check Signal - CW; Frequency: 1880 MHz; Duty Cycle: 1:1

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.64 dB;

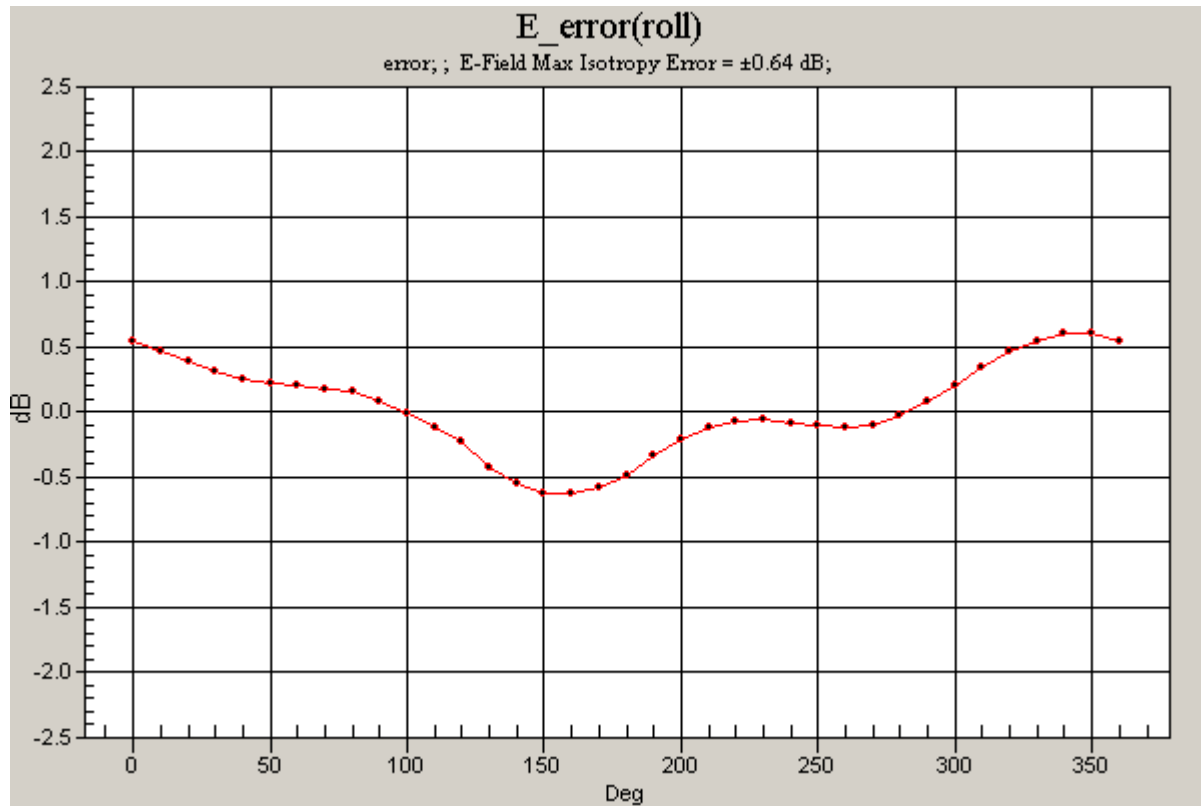

Test Laboratory: Compliance Certification Services

HAC_E_CD835V3

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1014

Communication System: System Check Signal - CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - measurement distance from the probe sensor center to CD835V3 = 10 mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 182.8 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 119.6 V/m; Power Drift = 0.009 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 176.7 M4	Grid 2 176.7 M4	Grid 3 158.1 M4
Grid 4 90.8 M4	Grid 5 90.8 M4	Grid 6 79.2 M4
Grid 7 182.8 M4	Grid 8 182.3 M4	Grid 9 159.4 M4

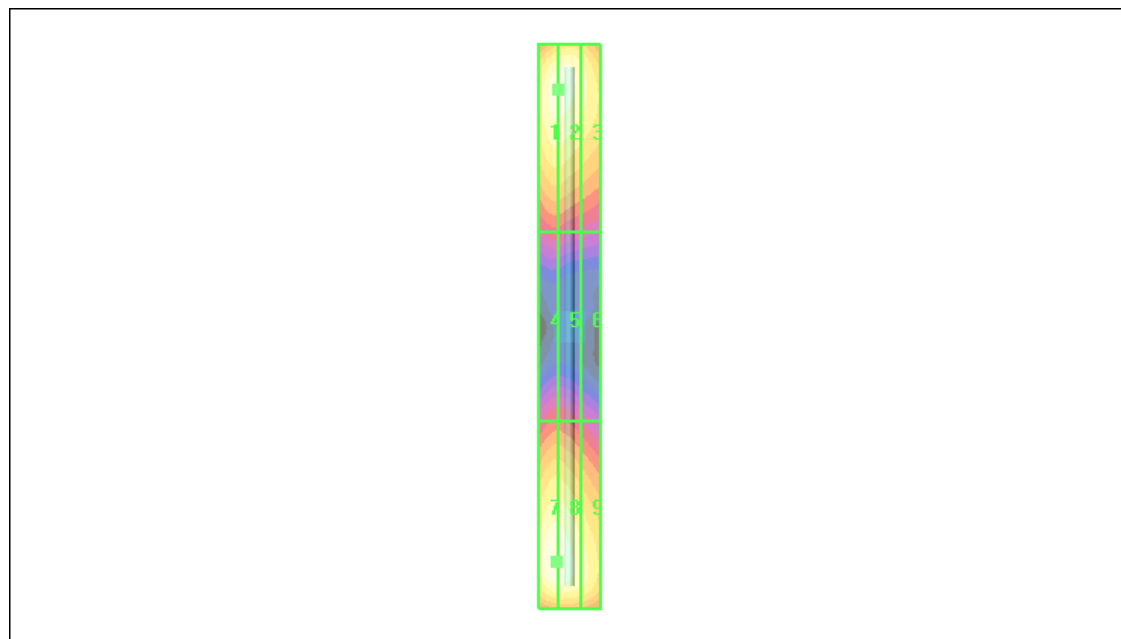

0 dB = 182.8V/m


Test Laboratory: Compliance Certification Services

HAC_E_CD835V3

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1014

Communication System: System Check Signal - CW; Frequency: 835 MHz; Duty Cycle: 1:1

E Scan - measurement distance from the probe sensor center to CD835V3 = 10 mm/Rotation (1D): 37 rotation steps;
E-Field Max Isotropy Error = ± 0.95 dB;

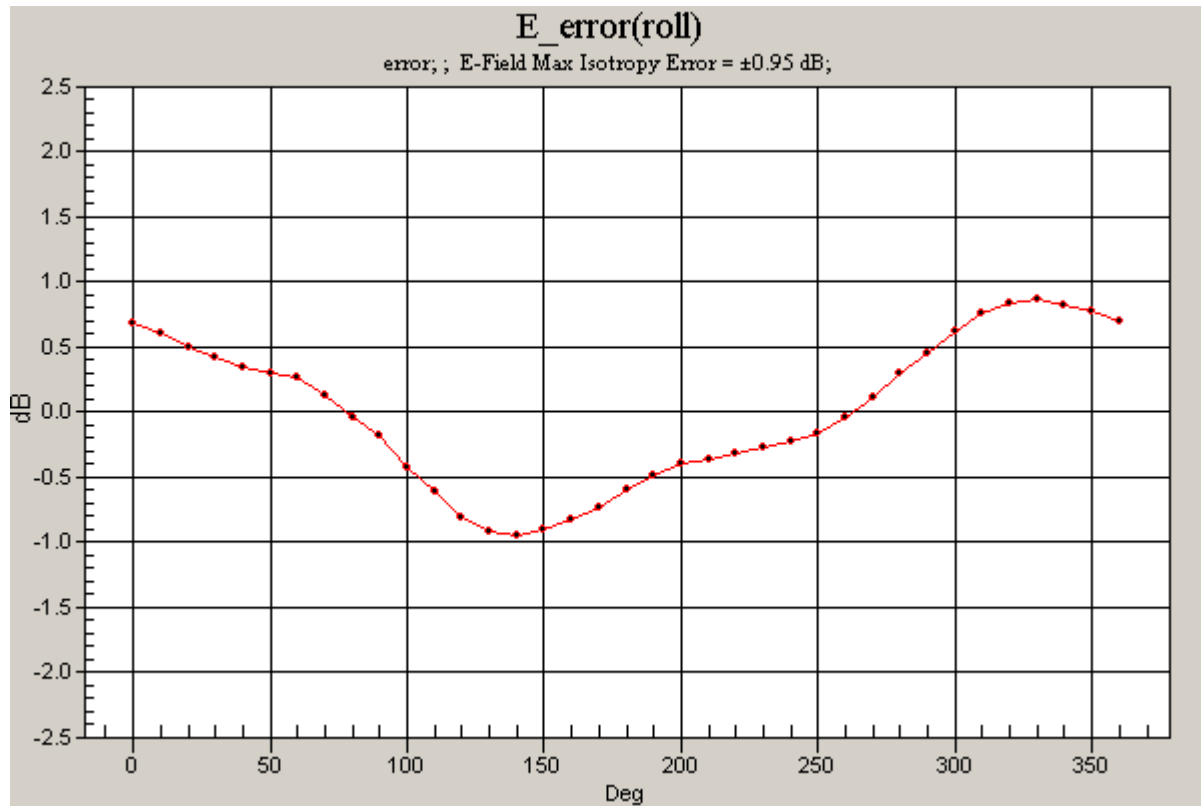

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Dipole CD1880V3

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1010

Communication System: System Check Signal - CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.460 A/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.488 A/m; Power Drift = -0.009 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.388 M2	Grid 2 0.420 M2	Grid 3 0.409 M2
Grid 4 0.430 M2	Grid 5 0.460 M2	Grid 6 0.446 M2
Grid 7 0.394 M2	Grid 8 0.422 M2	Grid 9 0.406 M2

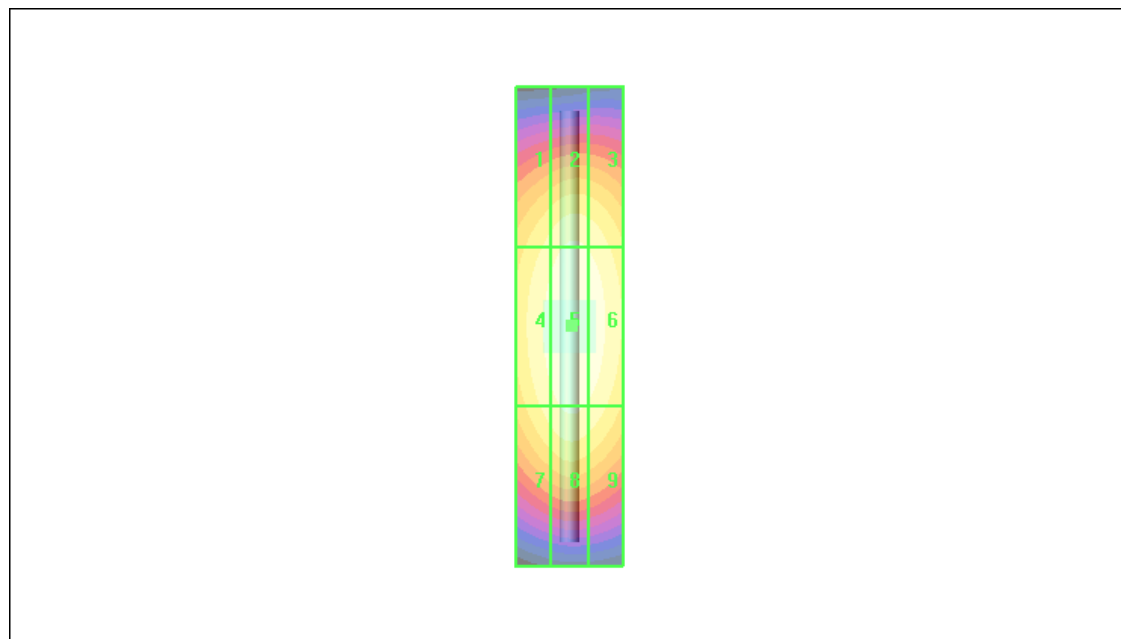

0 dB = 0.460A/m


Test Laboratory: Compliance Certification Services

HAC_H3DV6_Dipole CD1880V3

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1010

Communication System: System Check Signal - CW; Frequency: 1880 MHz; Duty Cycle: 1:1

H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.10 dB;

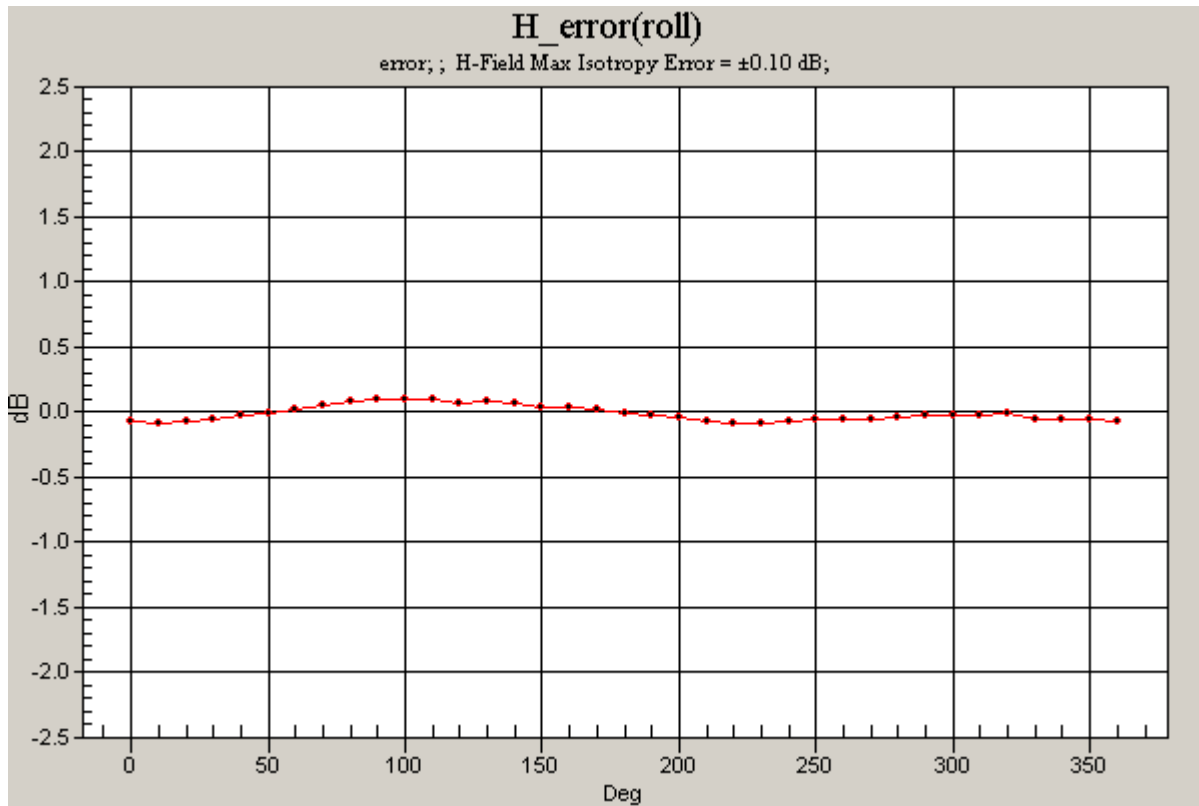

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Dipole CD835V3

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1014

Communication System: System Check Signal - CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.465 A/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.495 A/m; Power Drift = -0.011 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.384 M4	Grid 2 0.417 M4	Grid 3 0.403 M4
Grid 4 0.428 M4	Grid 5 0.465 M4	Grid 6 0.449 M4
Grid 7 0.381 M4	Grid 8 0.412 M4	Grid 9 0.396 M4

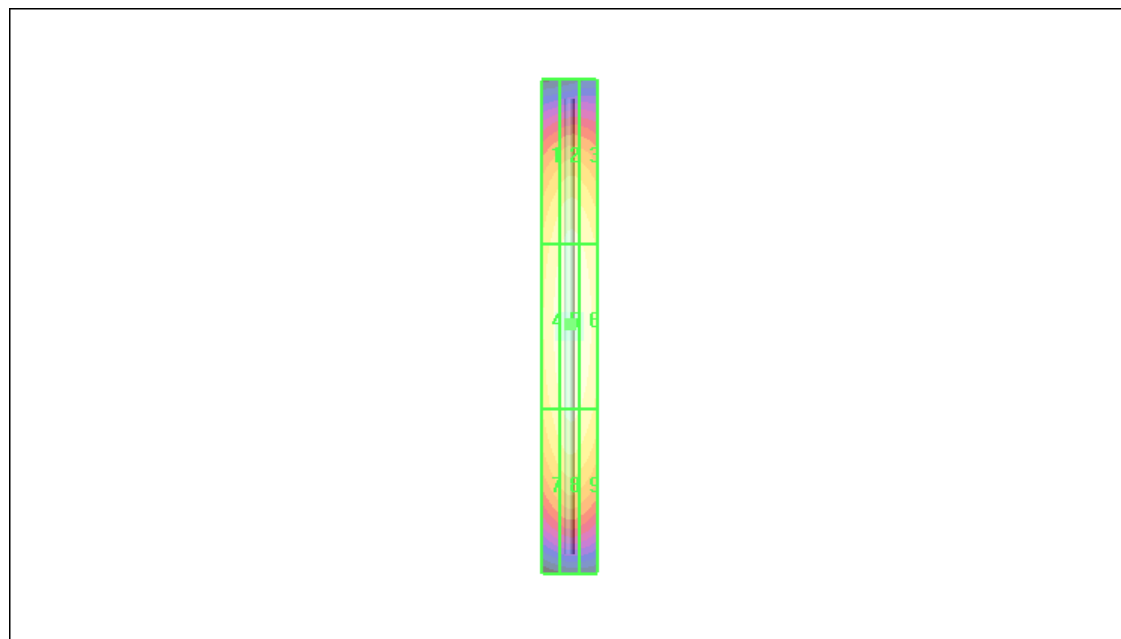

0 dB = 0.465A/m

Test Laboratory: Compliance Certification Services

HAC_H3DV6_Dipole CD835V3

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1014

Communication System: System Check Signal - CW; Frequency: 835 MHz; Duty Cycle: 1:1

H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.20 dB;

