

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 49.6 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 48.5 V/m; Power Drift = -0.436 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 48.8 M4	Grid 2 54.8 M4	Grid 3 53.8 M4
Grid 4 32.7 M4	Grid 5 49.6 M4	Grid 6 49.9 M4
Grid 7 28.8 M4	Grid 8 36.9 M4	Grid 9 39.2 M4

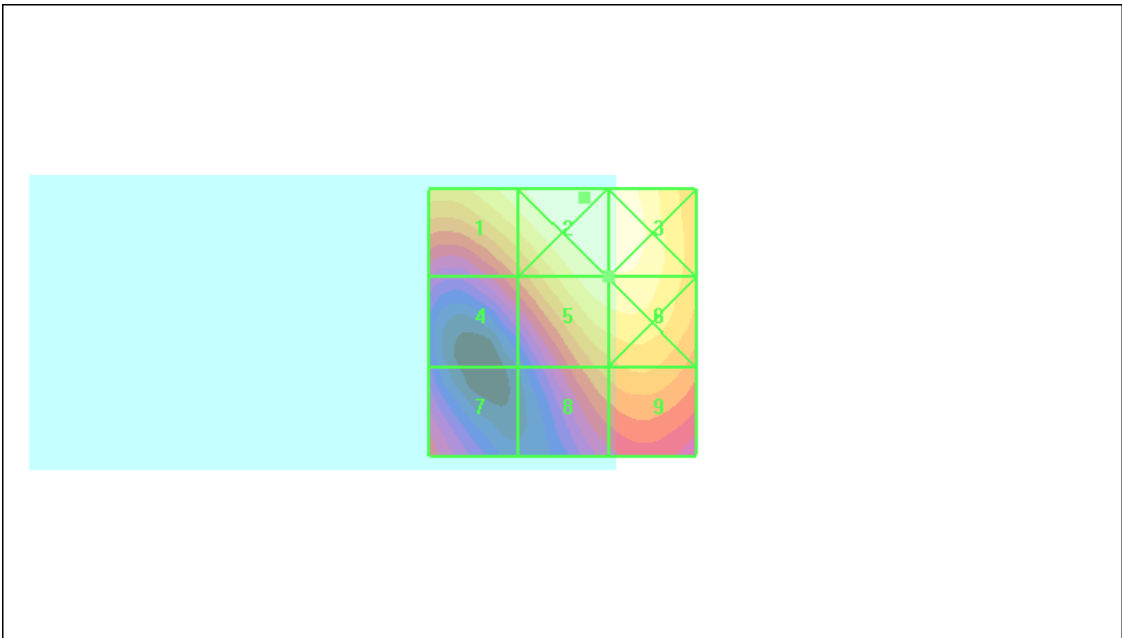

0 dB = 54.8V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

E Scan - L-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.23 dB;

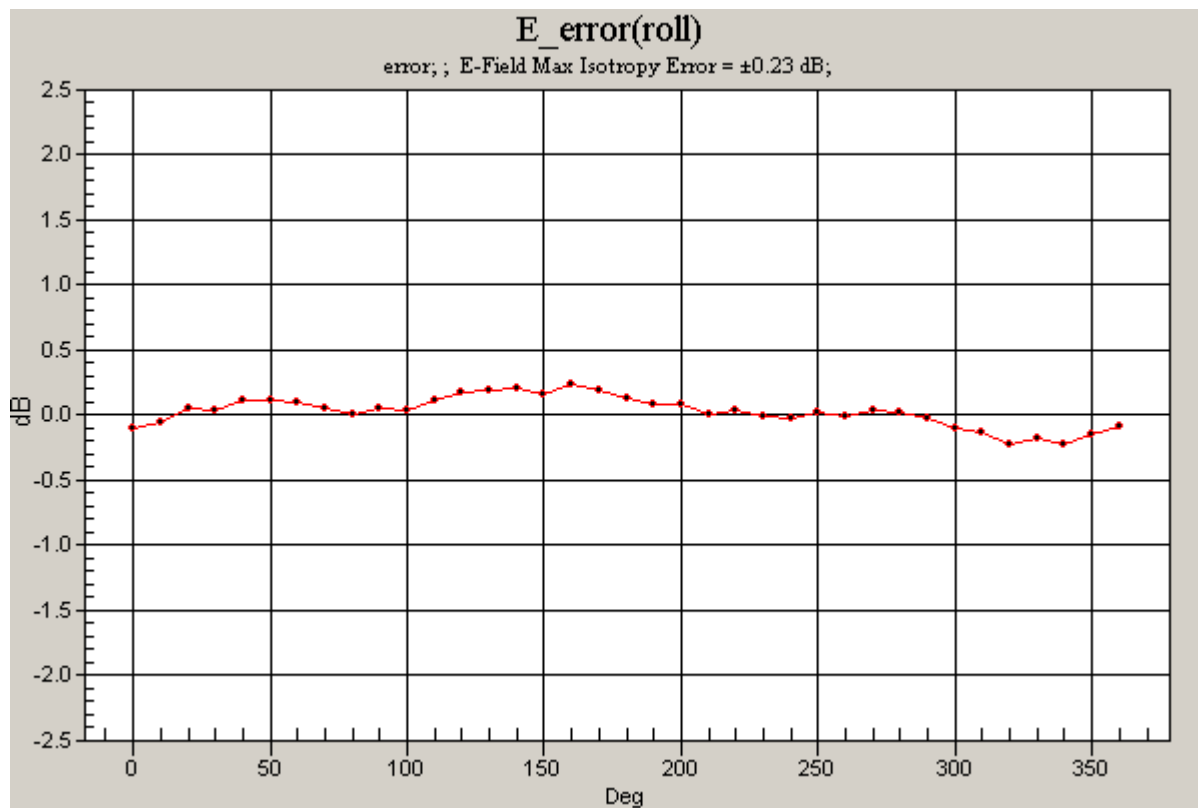

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 46.6 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 44.4 V/m; Power Drift = -0.313 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
45.4 M4	51.9 M4	51.1 M4
Grid 4	Grid 5	Grid 6
29.9 M4	46.6 M4	47.1 M4
Grid 7	Grid 8	Grid 9
29.4 M4	33.6 M4	35.5 M4

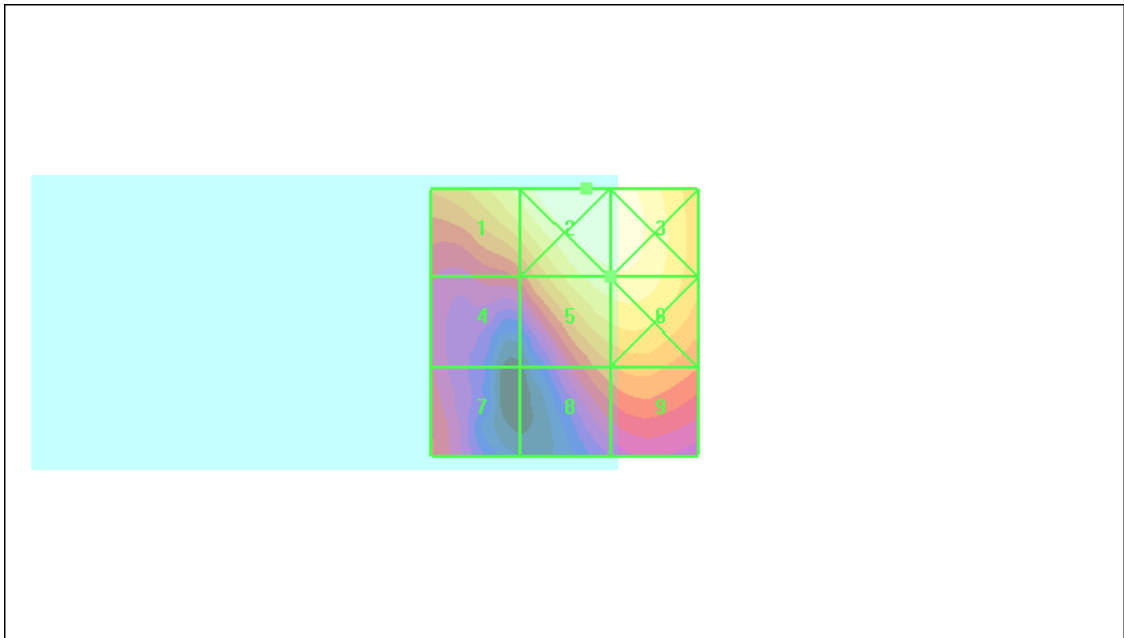

0 dB = 51.9V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

E Scan - M-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ±0.23 dB;

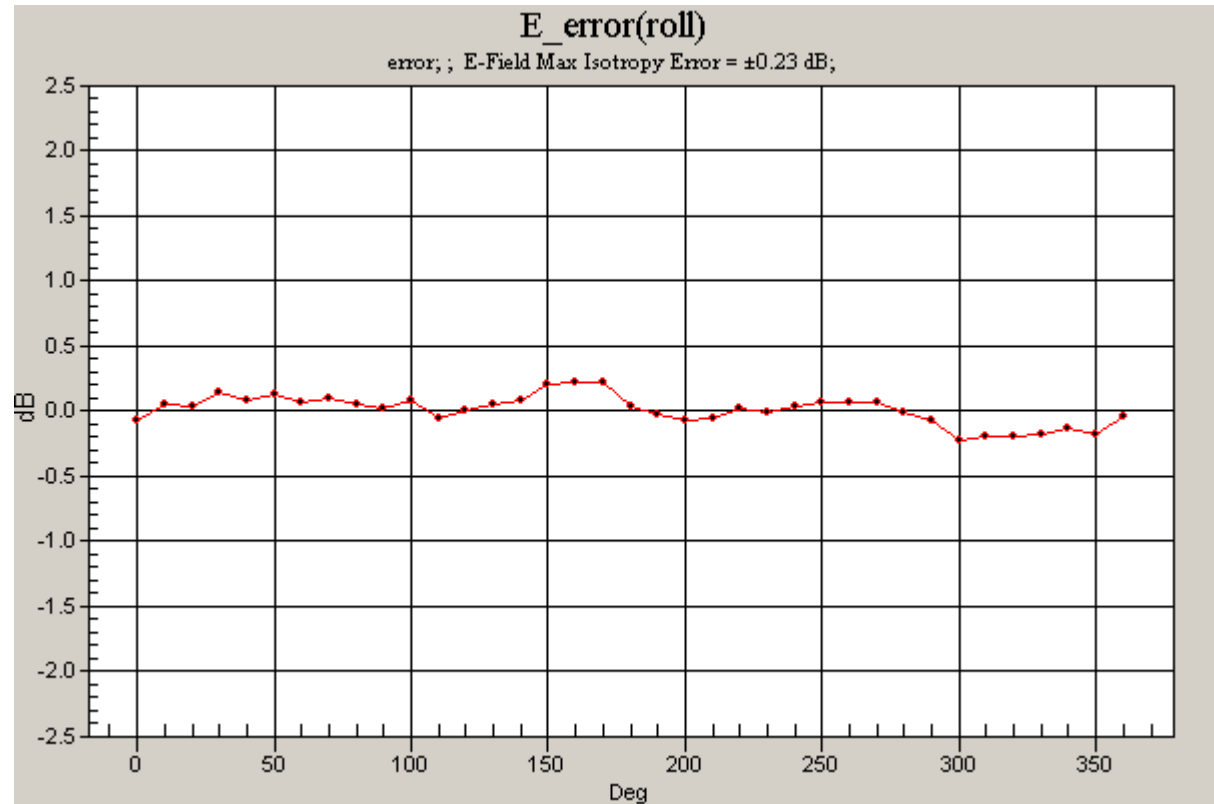

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 45.2 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 43.8 V/m; Power Drift = -0.571 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 44.3 M4	Grid 2 50.8 M4	Grid 3 50.1 M4
Grid 4 28.8 M4	Grid 5 45.2 M4	Grid 6 45.9 M4
Grid 7 29.5 M4	Grid 8 33.2 M4	Grid 9 35.8 M4

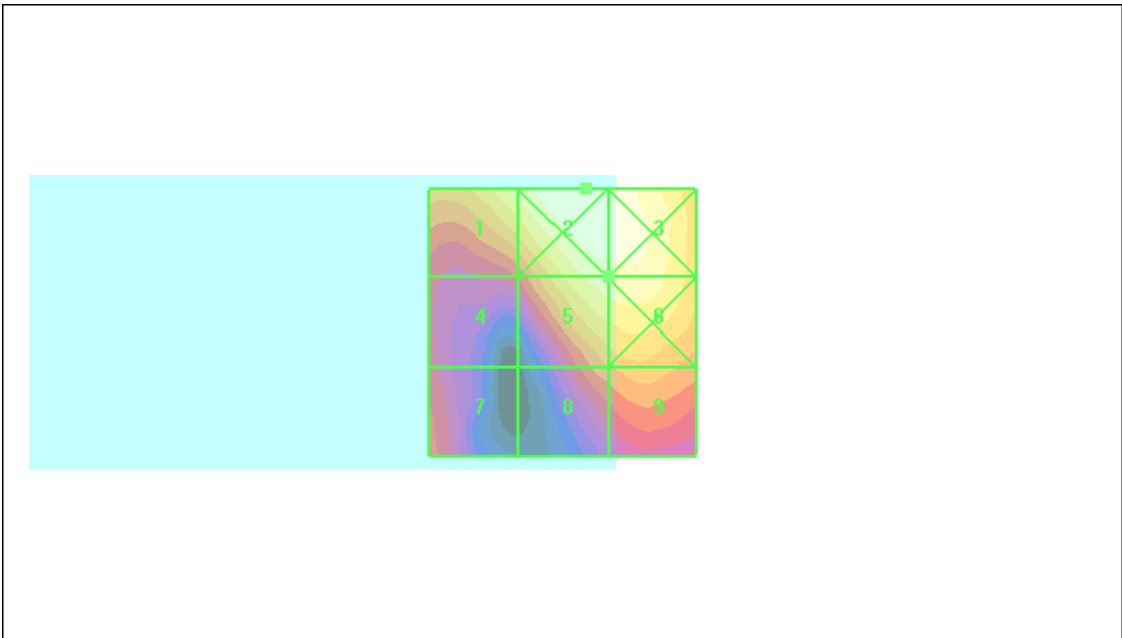

0 dB = 50.8V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz;Duty Cycle: 1:1

E Scan - H-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ±0.23 dB;

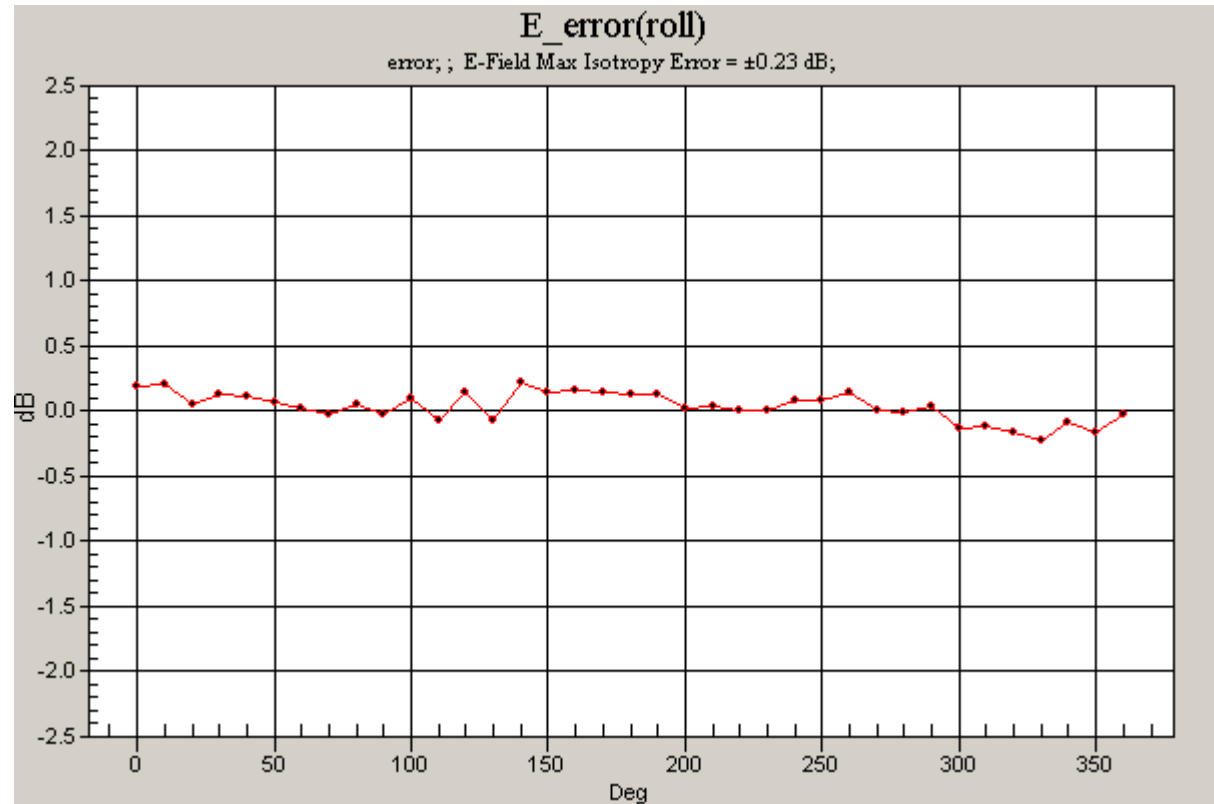

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 47.8 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 46.5 V/m; Power Drift = 0.031 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 45.5 M4	Grid 2 56.7 M4	Grid 3 54.3 M4
Grid 4 32.4 M4	Grid 5 47.8 M4	Grid 6 49.0 M4
Grid 7 28.2 M4	Grid 8 35.9 M4	Grid 9 37.3 M4

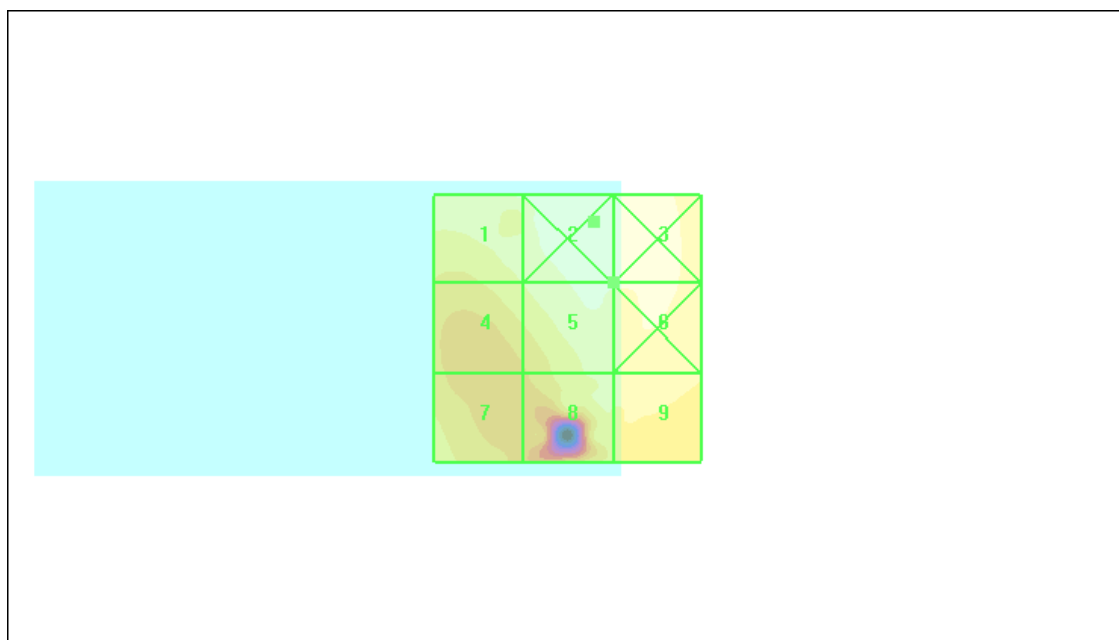

0 dB = 56.7V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

E Scan - L-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.22 dB;

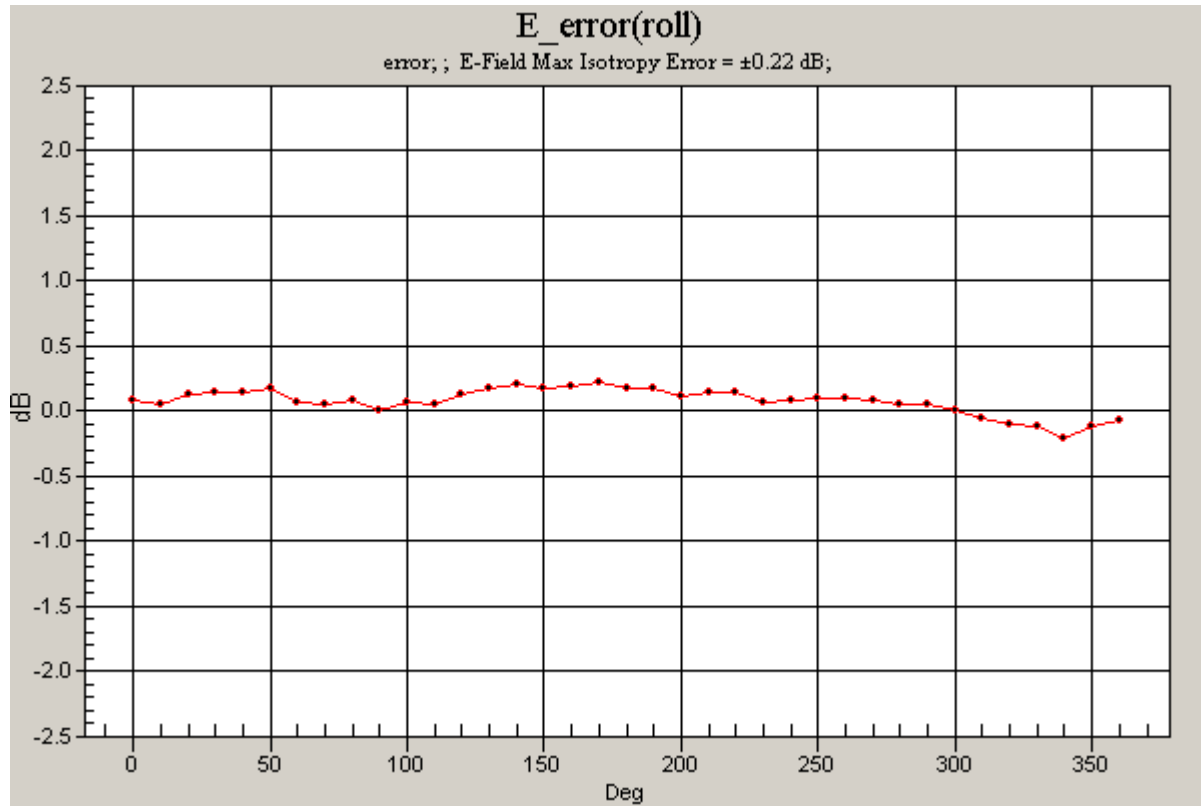

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 47.4 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 45.0 V/m; Power Drift = -0.153 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 45.9 M4	Grid 2 52.3 M4	Grid 3 51.5 M4
Grid 4 30.6 M4	Grid 5 47.4 M4	Grid 6 47.6 M4
Grid 7 30.0 M4	Grid 8 34.0 M4	Grid 9 35.9 M4

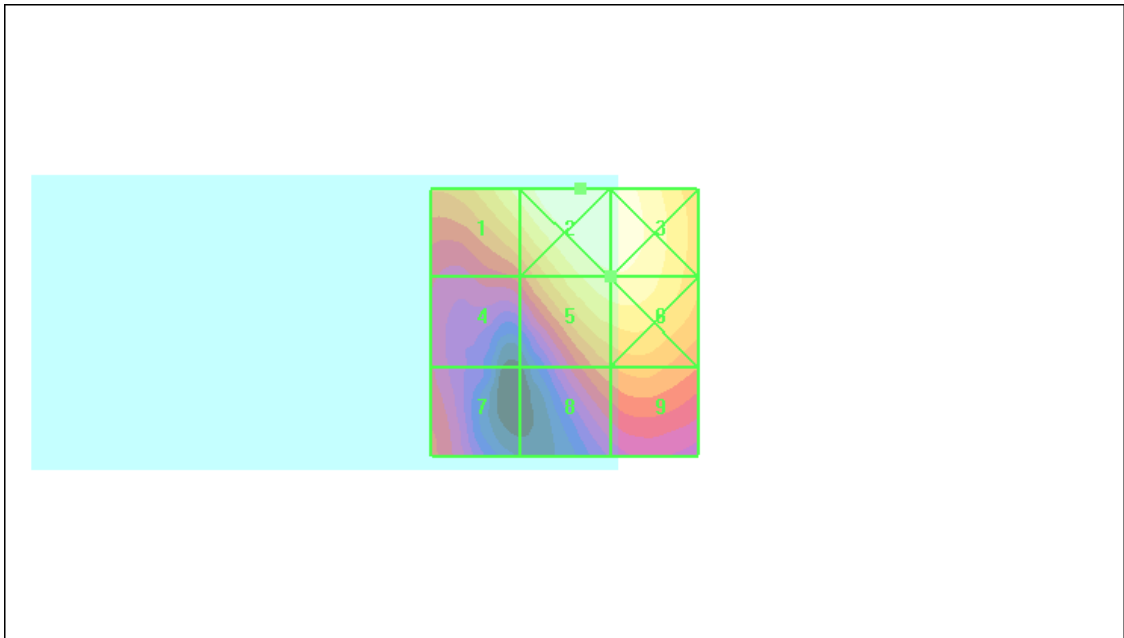

0 dB = 52.3V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

E Scan - M-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.19 dB;

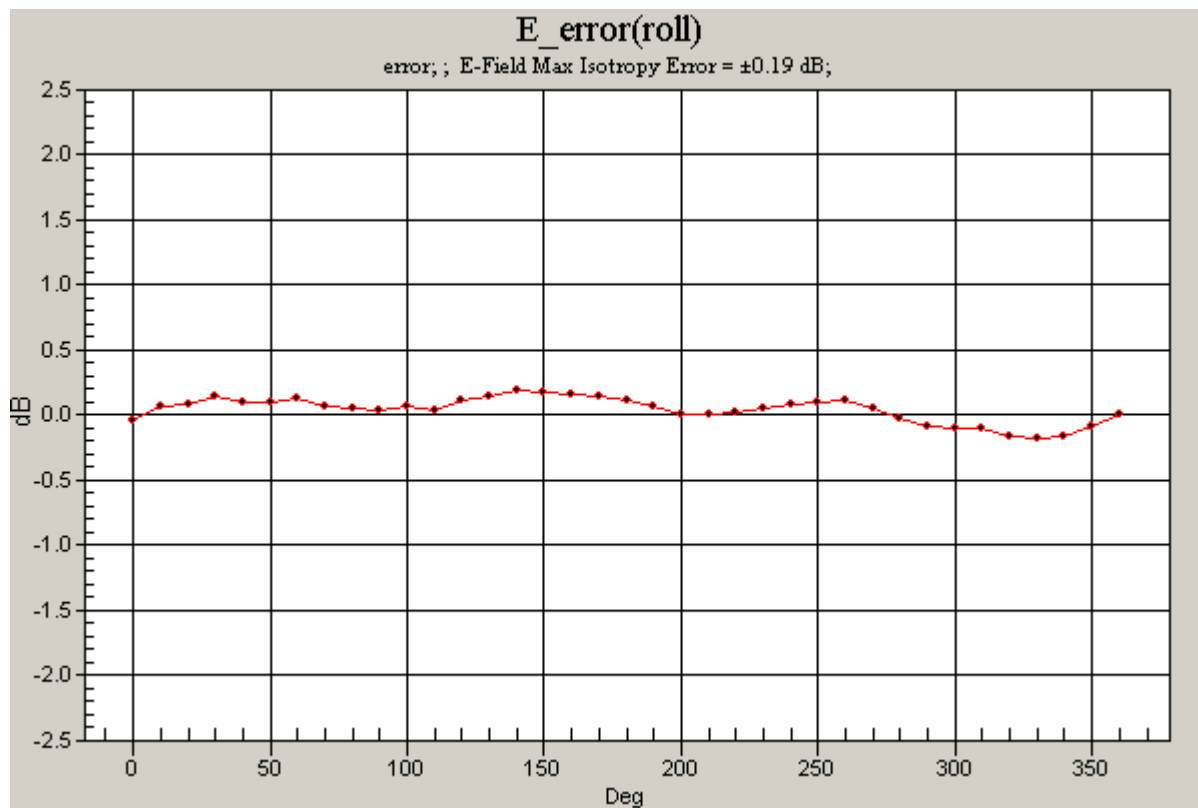

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 44.0 V/m

Probe Modulation Factor = 0.930



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 43.3 V/m; Power Drift = -0.502 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 41.3 M4	Grid 2 48.2 M4	Grid 3 47.9 M4
Grid 4 27.4 M4	Grid 5 44.0 M4	Grid 6 44.4 M4
Grid 7 28.1 M4	Grid 8 32.0 M4	Grid 9 33.7 M4

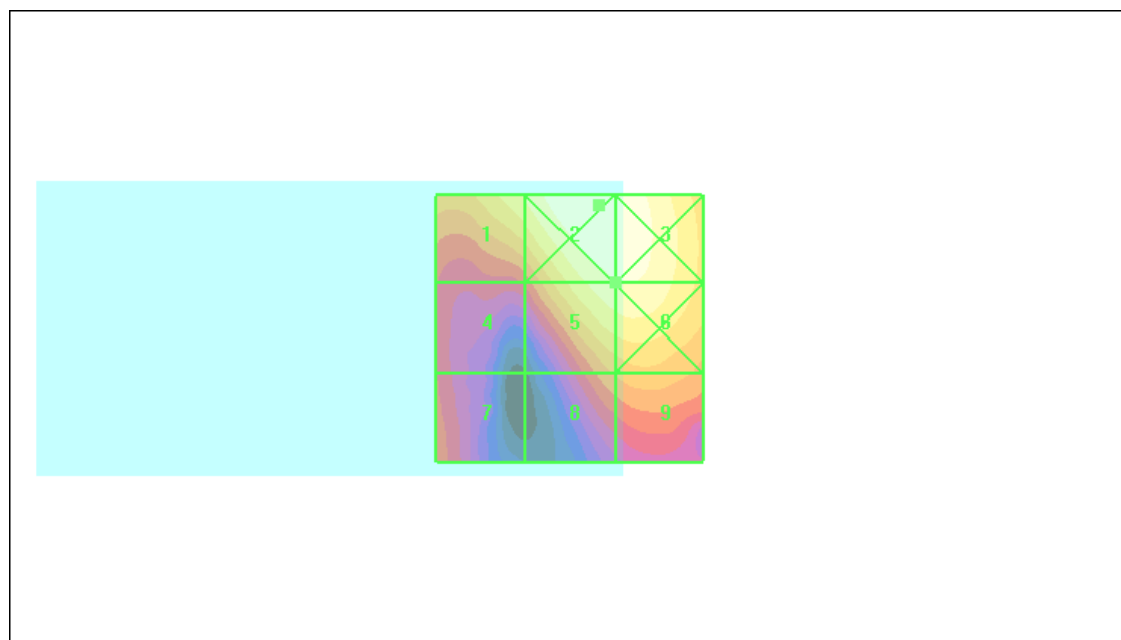

0 dB = 48.2V/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

E Scan - H-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.17 dB;

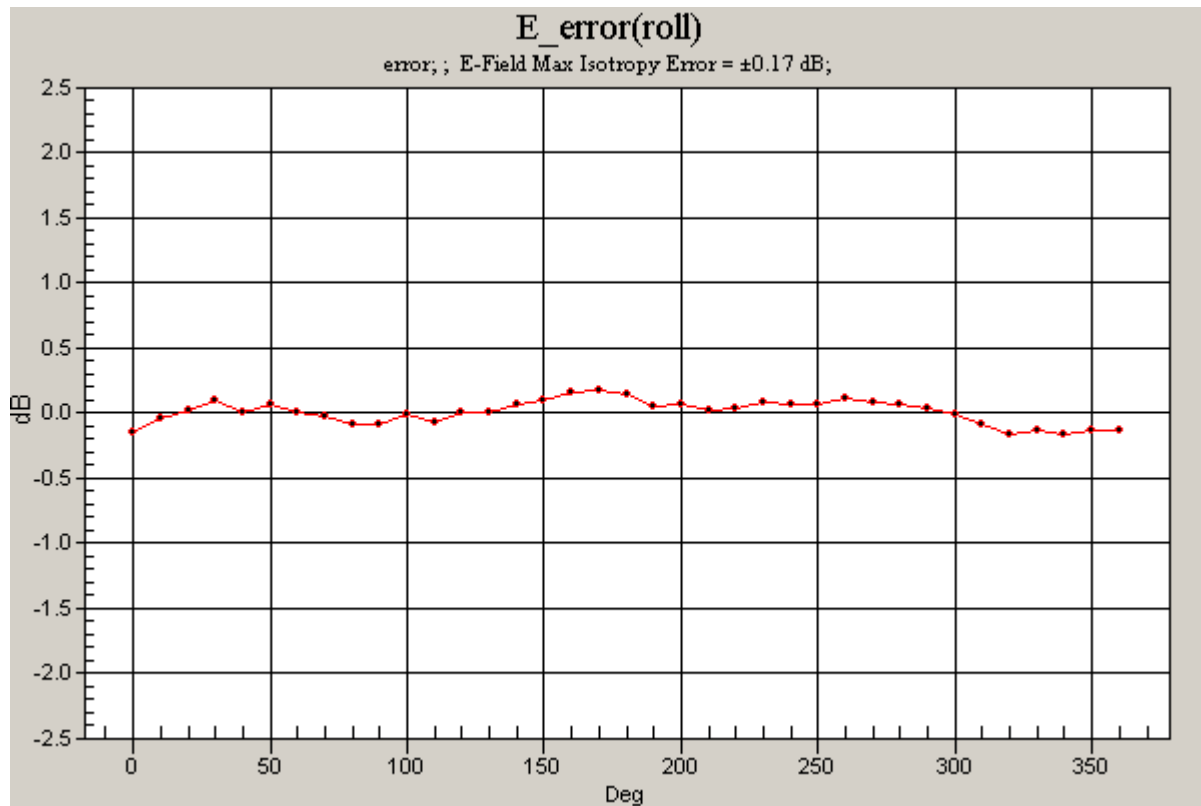

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.158 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.175 A/m; Power Drift = -0.130 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.191 M3	Grid 2 0.169 M4	Grid 3 0.128 M4
Grid 4 0.164 M4	Grid 5 0.158 M4	Grid 6 0.128 M4
Grid 7 0.134 M4	Grid 8 0.135 M4	Grid 9 0.120 M4

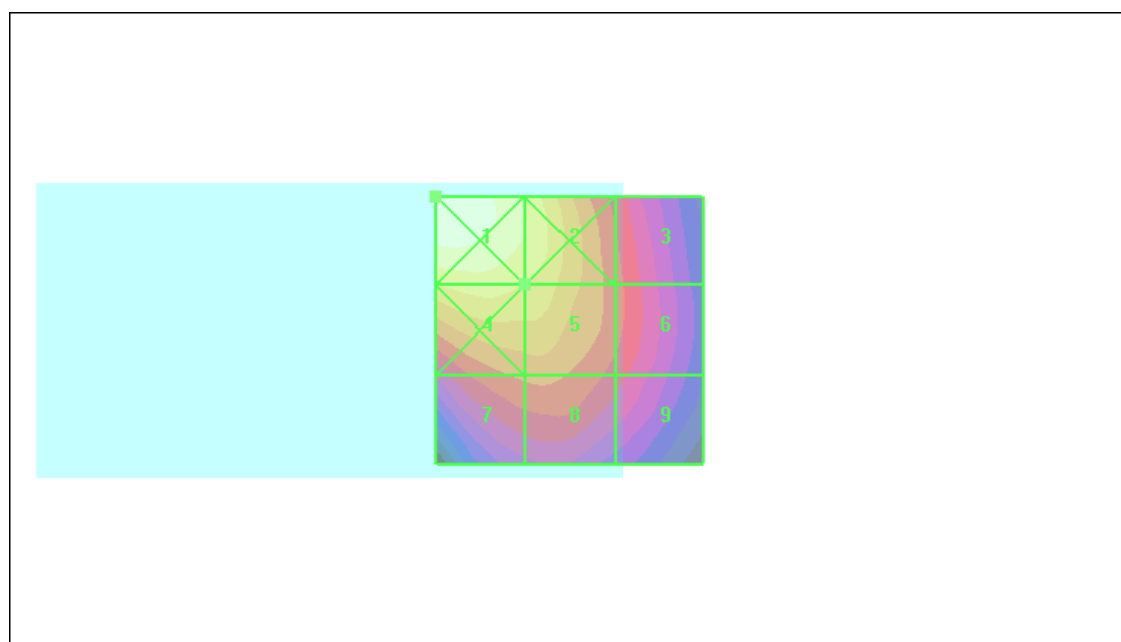

0 dB = 0.191 A/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

H Scan - L-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.28 dB;

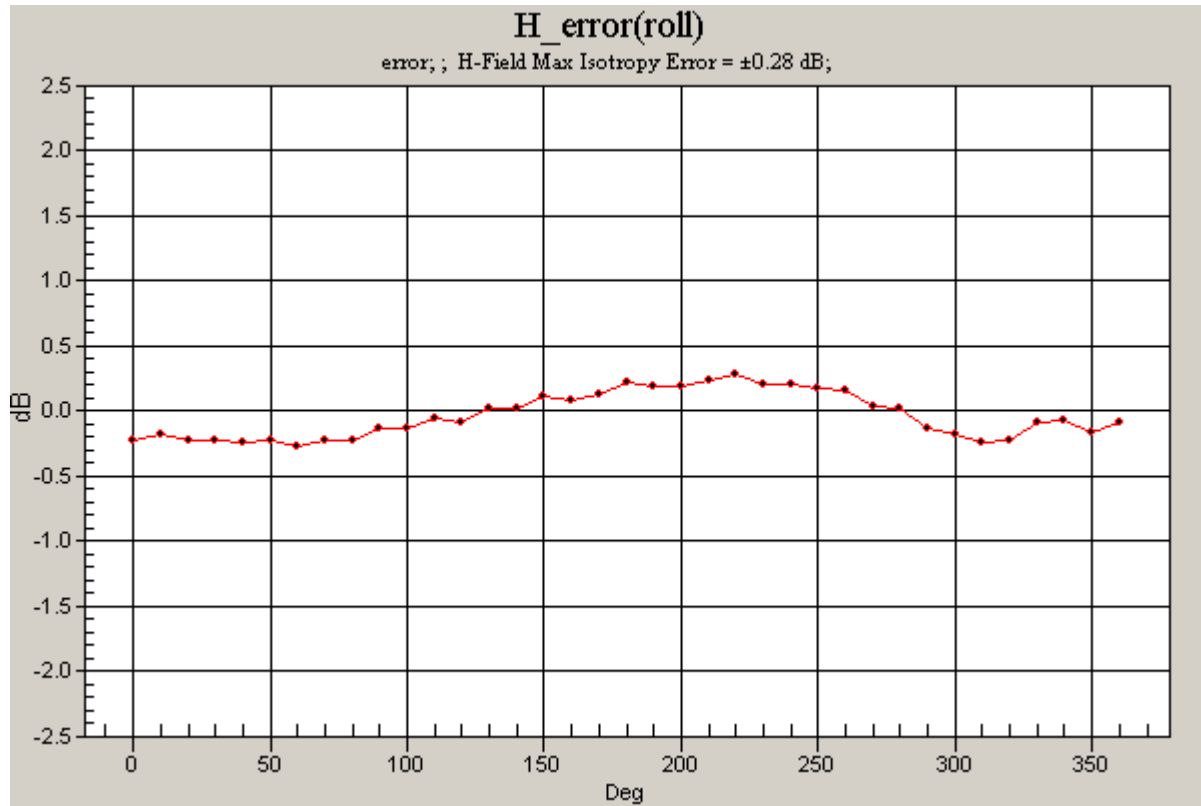

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.141 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.157 A/m; Power Drift = 0.061 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.171 M4	Grid 2 0.151 M4	Grid 3 0.117 M4
Grid 4 0.145 M4	Grid 5 0.141 M4	Grid 6 0.117 M4
Grid 7 0.118 M4	Grid 8 0.120 M4	Grid 9 0.112 M4

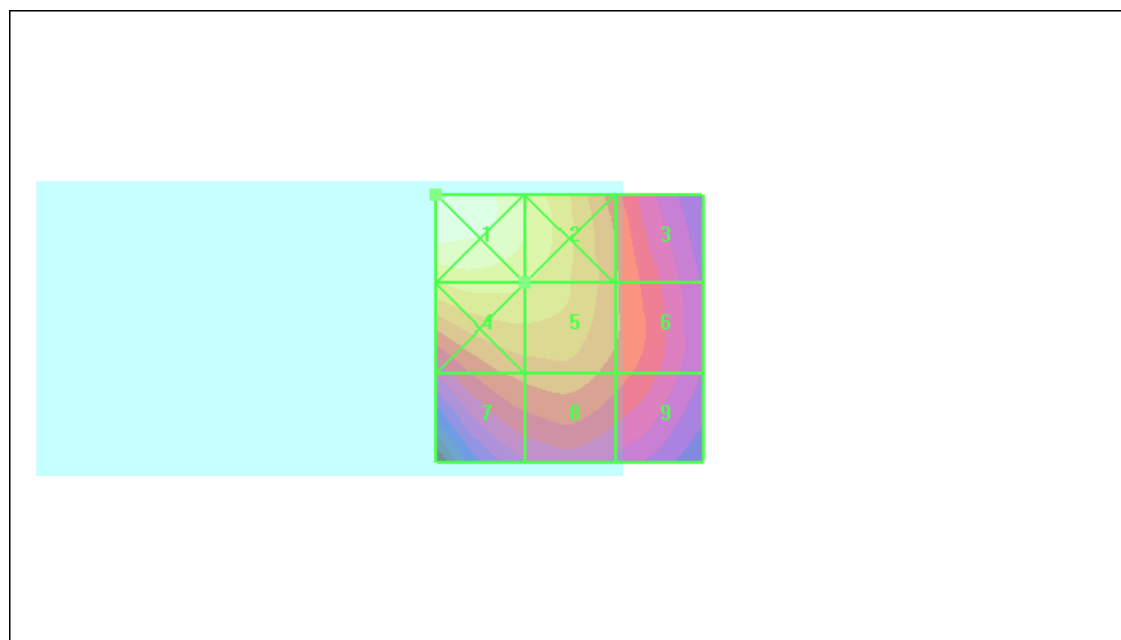

0 dB = 0.171 A/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

H Scan - M-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.32 dB;

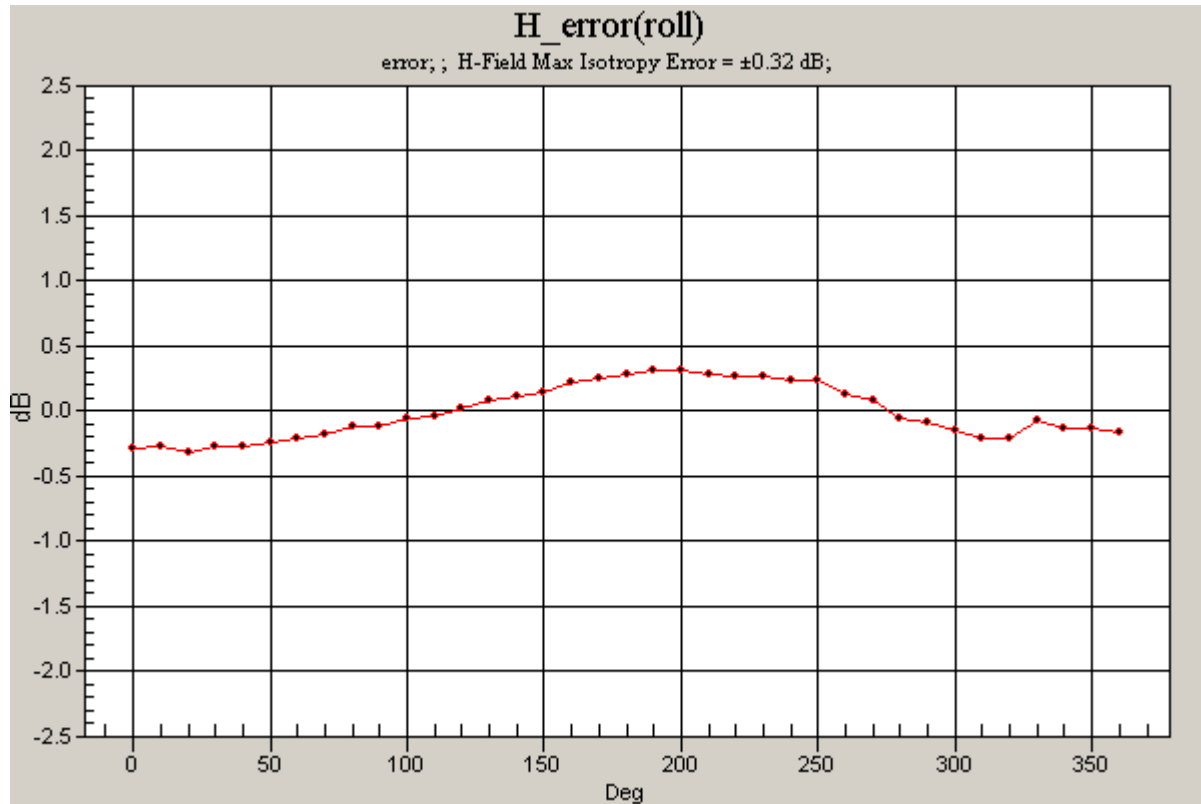

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.146 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.163 A/m; Power Drift = -0.149 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.173 M4	Grid 2 0.153 M4	Grid 3 0.120 M4
Grid 4 0.150 M4	Grid 5 0.146 M4	Grid 6 0.121 M4
Grid 7 0.123 M4	Grid 8 0.123 M4	Grid 9 0.115 M4

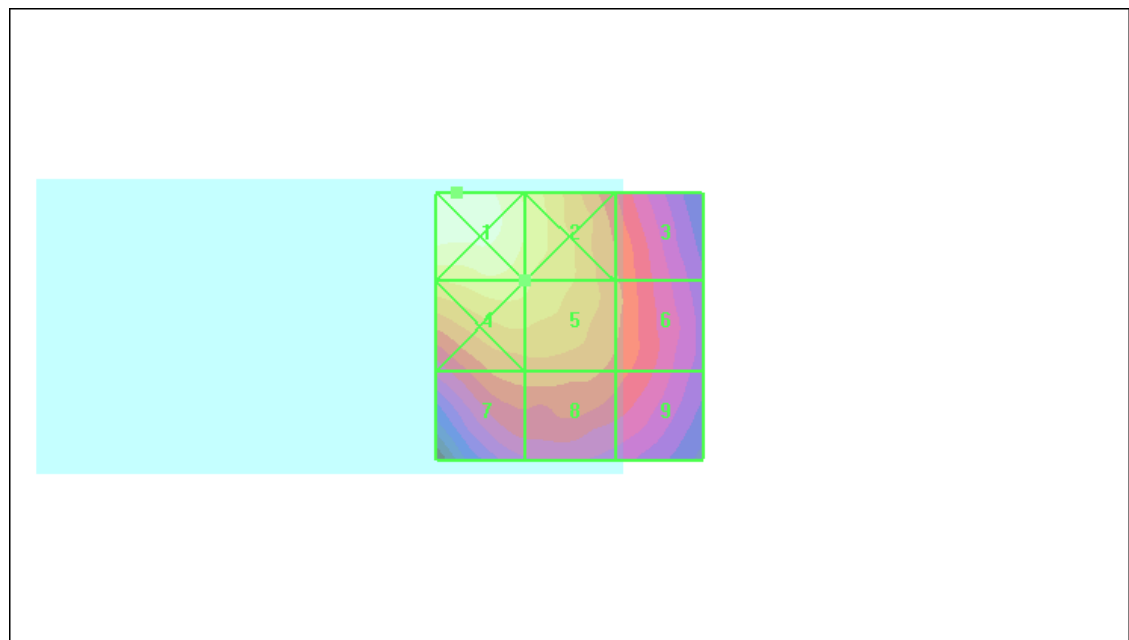

0 dB = 0.173A/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

H Scan - H-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.31 dB;

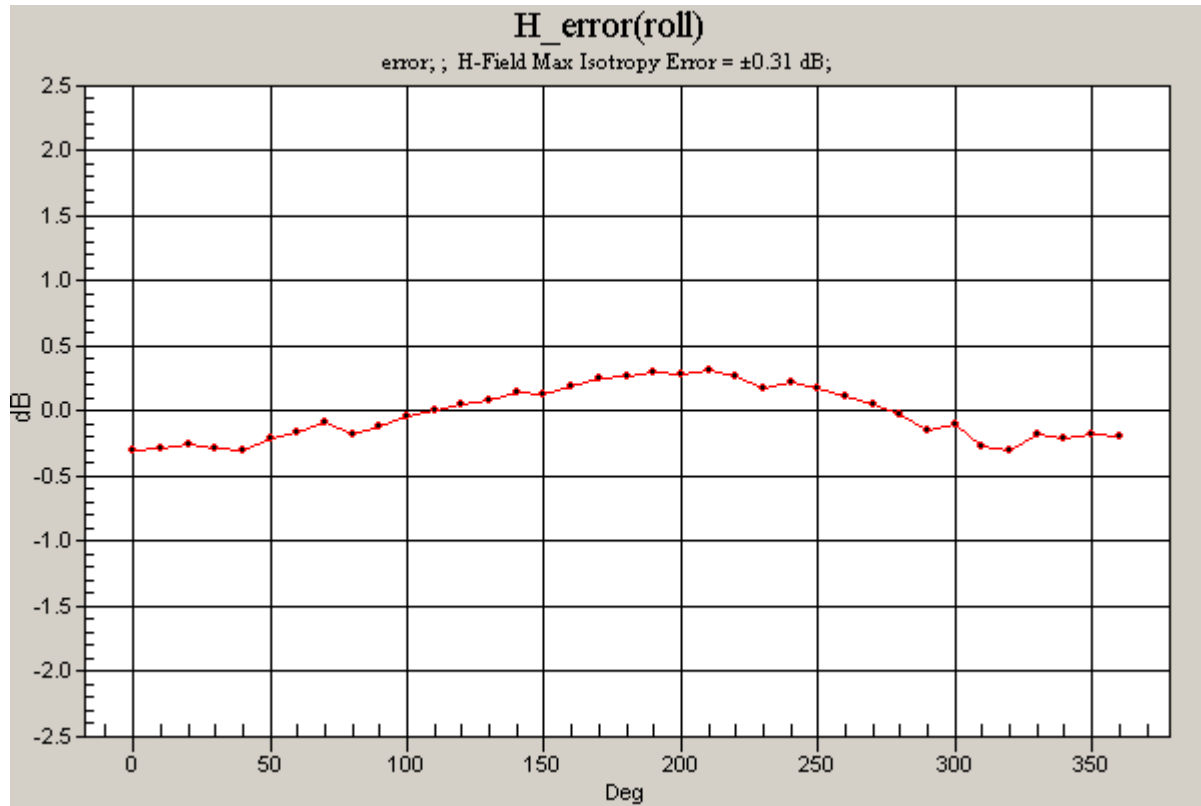

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.151 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.169 A/m; Power Drift = -0.128 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.181 M4	Grid 2 0.160 M4	Grid 3 0.124 M4
Grid 4 0.155 M4	Grid 5 0.151 M4	Grid 6 0.124 M4
Grid 7 0.129 M4	Grid 8 0.129 M4	Grid 9 0.118 M4

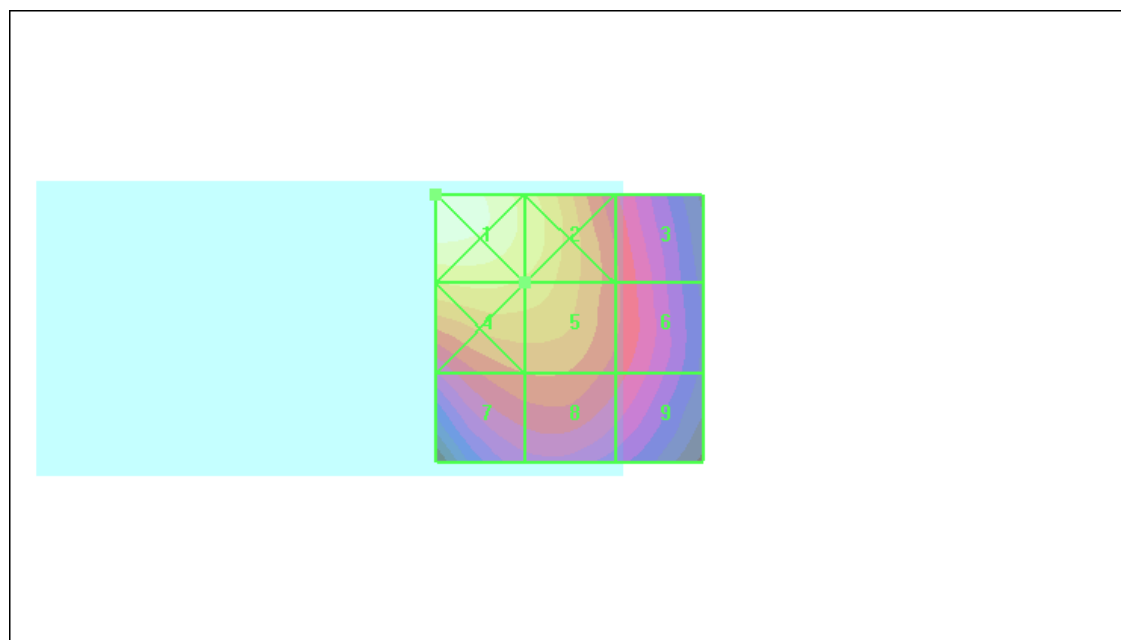

0 dB = 0.181 A/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

H Scan - L-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.28 dB;

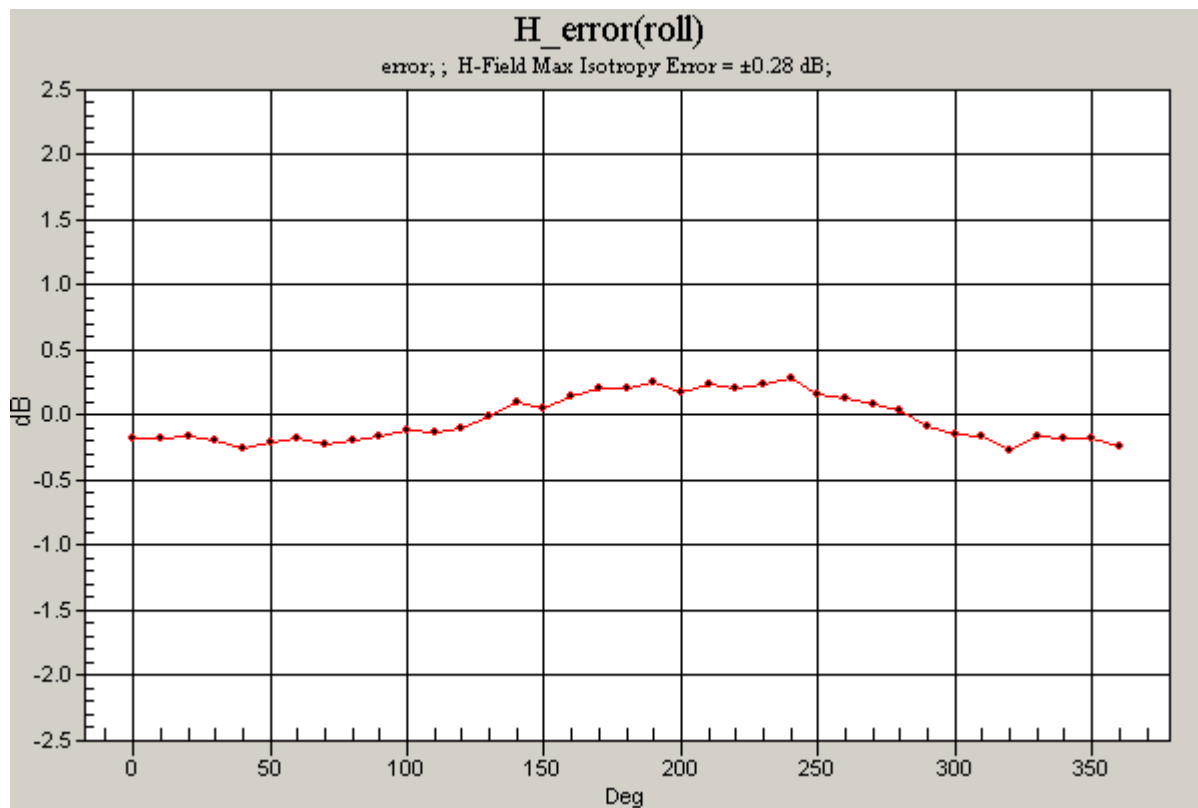

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.140 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.153 A/m; Power Drift = 0.068 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 0.165 M4	Grid 2 0.149 M4	Grid 3 0.116 M4
Grid 4 0.142 M4	Grid 5 0.140 M4	Grid 6 0.117 M4
Grid 7 0.118 M4	Grid 8 0.119 M4	Grid 9 0.112 M4

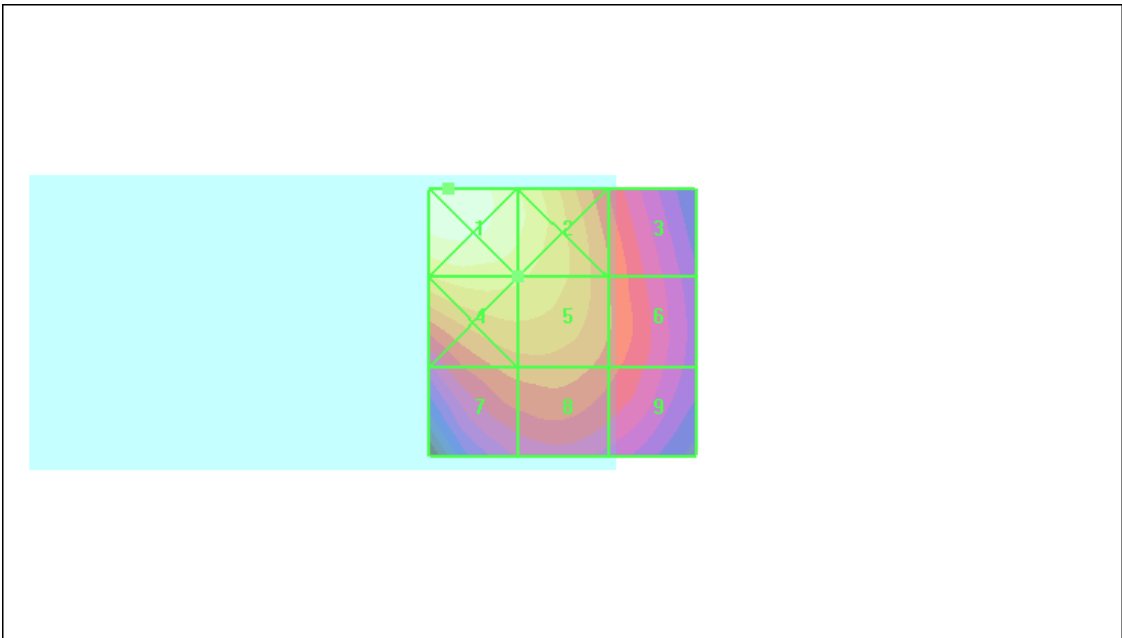

0 dB = 0.165A/m


Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

H Scan - M-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.37 dB;

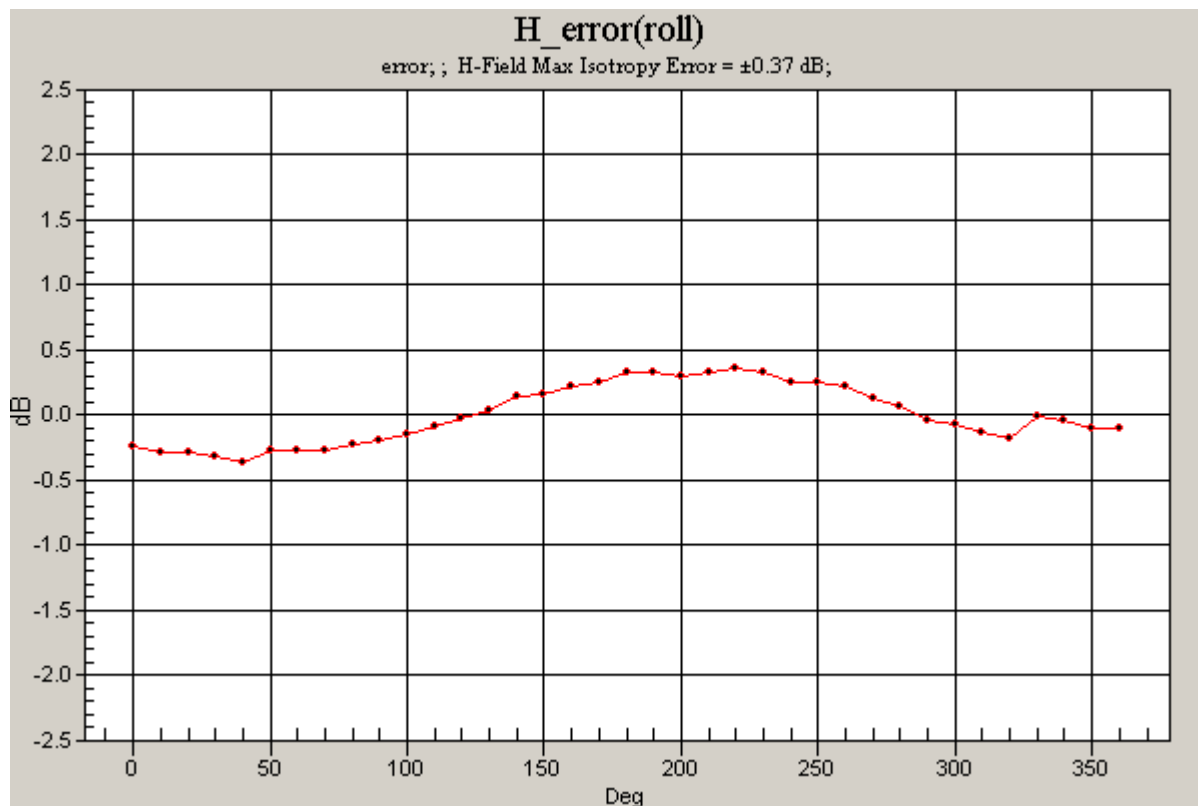

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.133 A/m

Probe Modulation Factor = 0.890



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.151 A/m; Power Drift = -0.179 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.155 M4	Grid 2 0.142 M4	Grid 3 0.112 M4
Grid 4 0.136 M4	Grid 5 0.133 M4	Grid 6 0.113 M4
Grid 7 0.113 M4	Grid 8 0.114 M4	Grid 9 0.107 M4

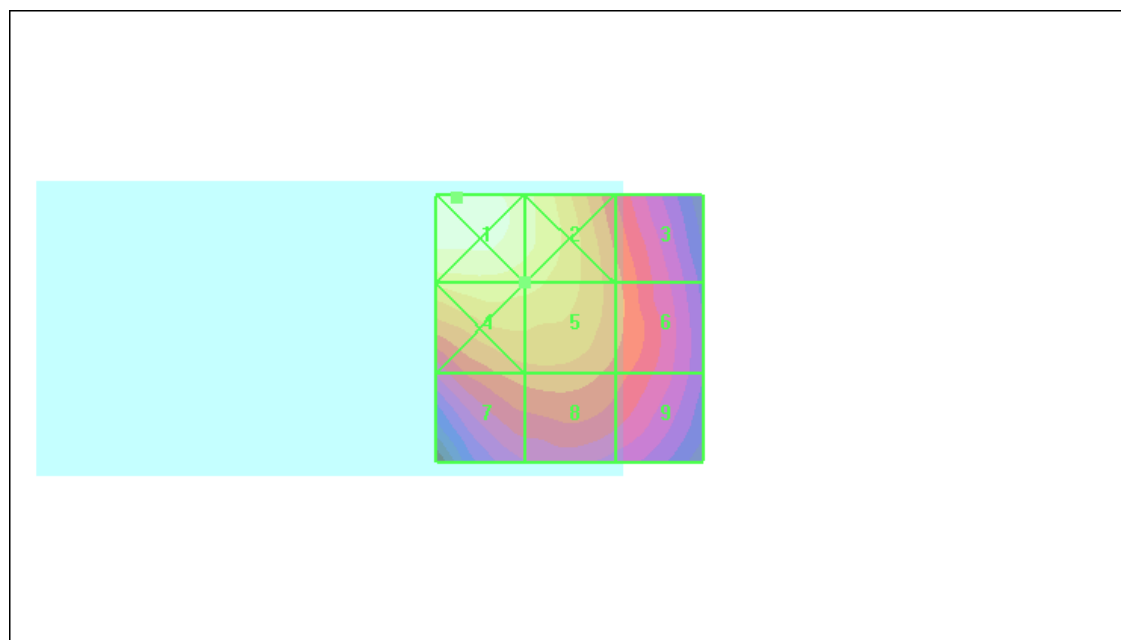

0 dB = 0.155A/m

Test Laboratory: Compliance Certification Services

CDMA1900 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 1908.75 MHz;Duty Cycle: 1:1

H Scan - H-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ±0.31 dB;

