

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 69.5 V/m

Probe Modulation Factor = 0.910



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 101.5 V/m; Power Drift = -0.220 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 63.6 M4	Grid 2 68.2 M4	Grid 3 67.0 M4
Grid 4 64.9 M4	Grid 5 69.5 M4	Grid 6 68.8 M4
Grid 7 63.4 M4	Grid 8 67.6 M4	Grid 9 66.5 M4

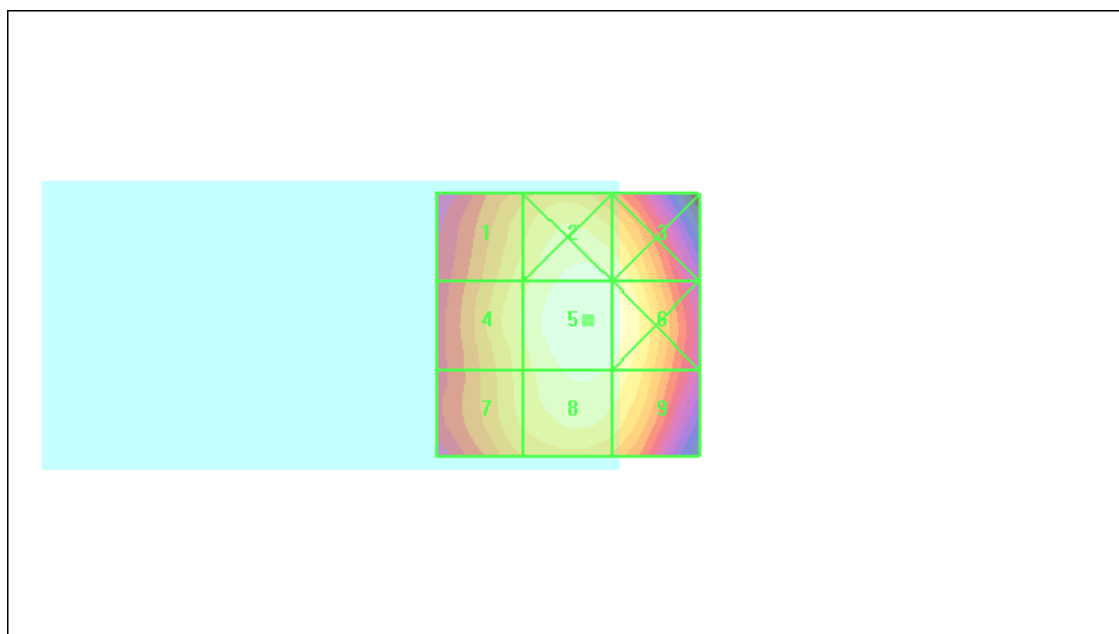

0 dB = 69.5V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

E Scan - L-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.27 dB;

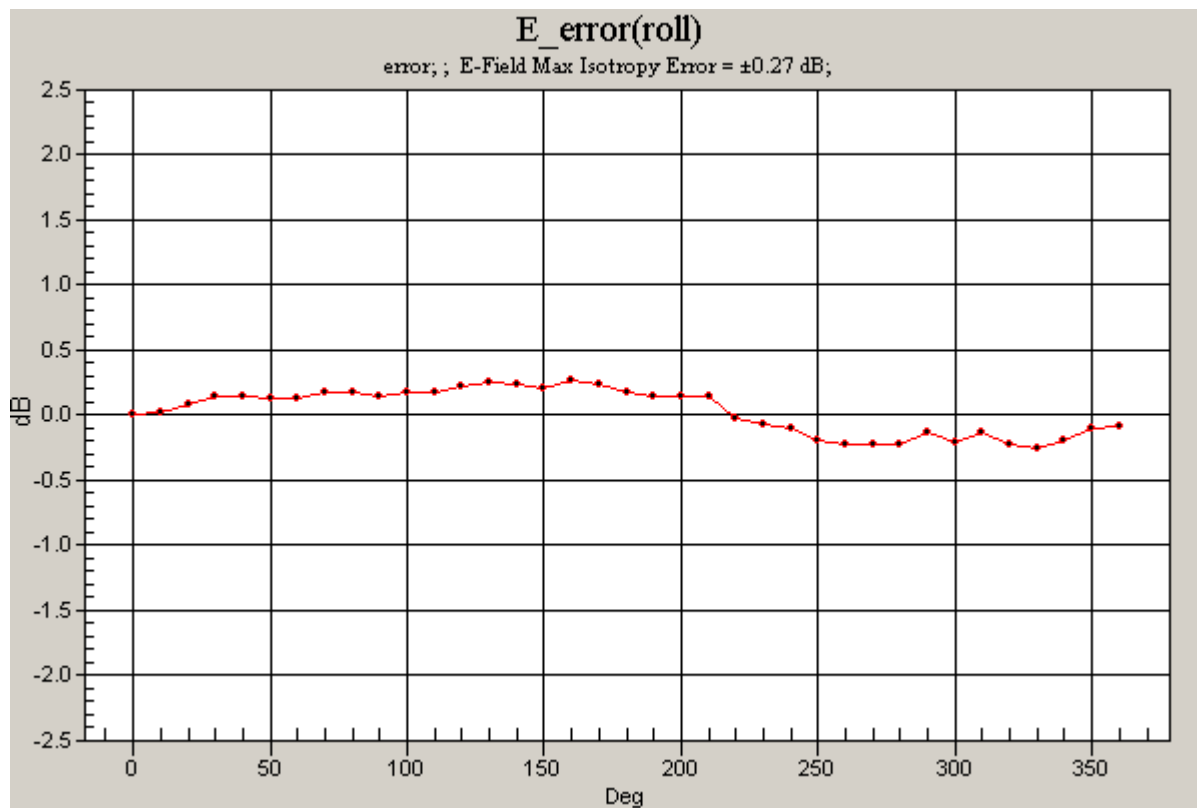

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 59.3 V/m

Probe Modulation Factor = 0.910



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 85.6 V/m; Power Drift = -0.006 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 53.8 M4	Grid 2 57.9 M4	Grid 3 56.5 M4
Grid 4 54.9 M4	Grid 5 59.3 M4	Grid 6 58.3 M4
Grid 7 53.9 M4	Grid 8 57.6 M4	Grid 9 56.6 M4

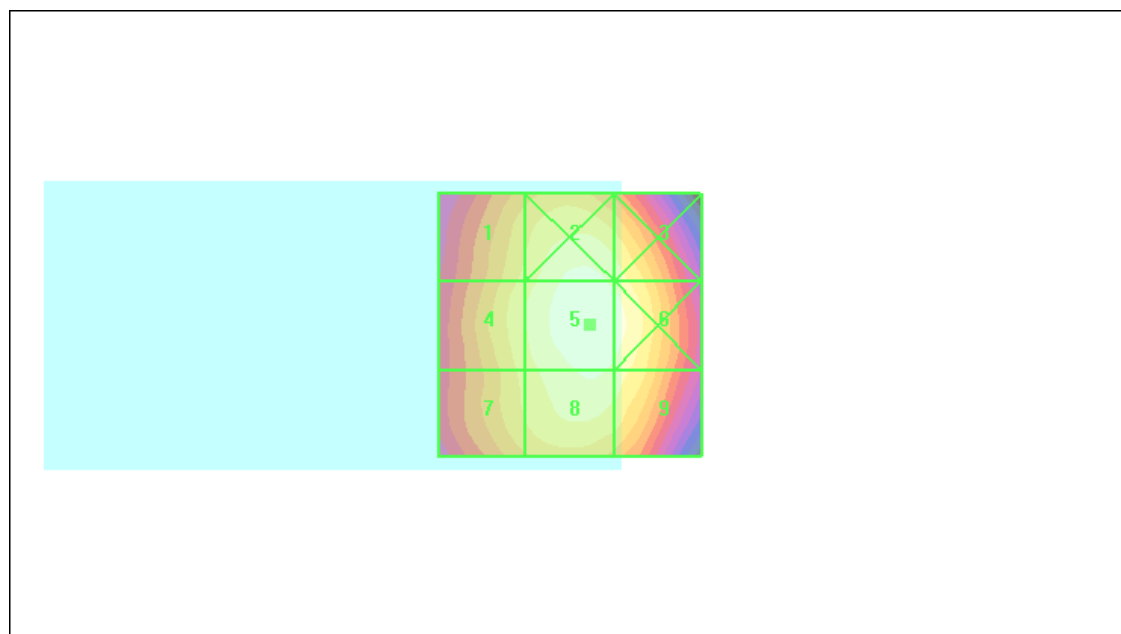

0 dB = 59.3V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

E Scan - M-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.17 dB;

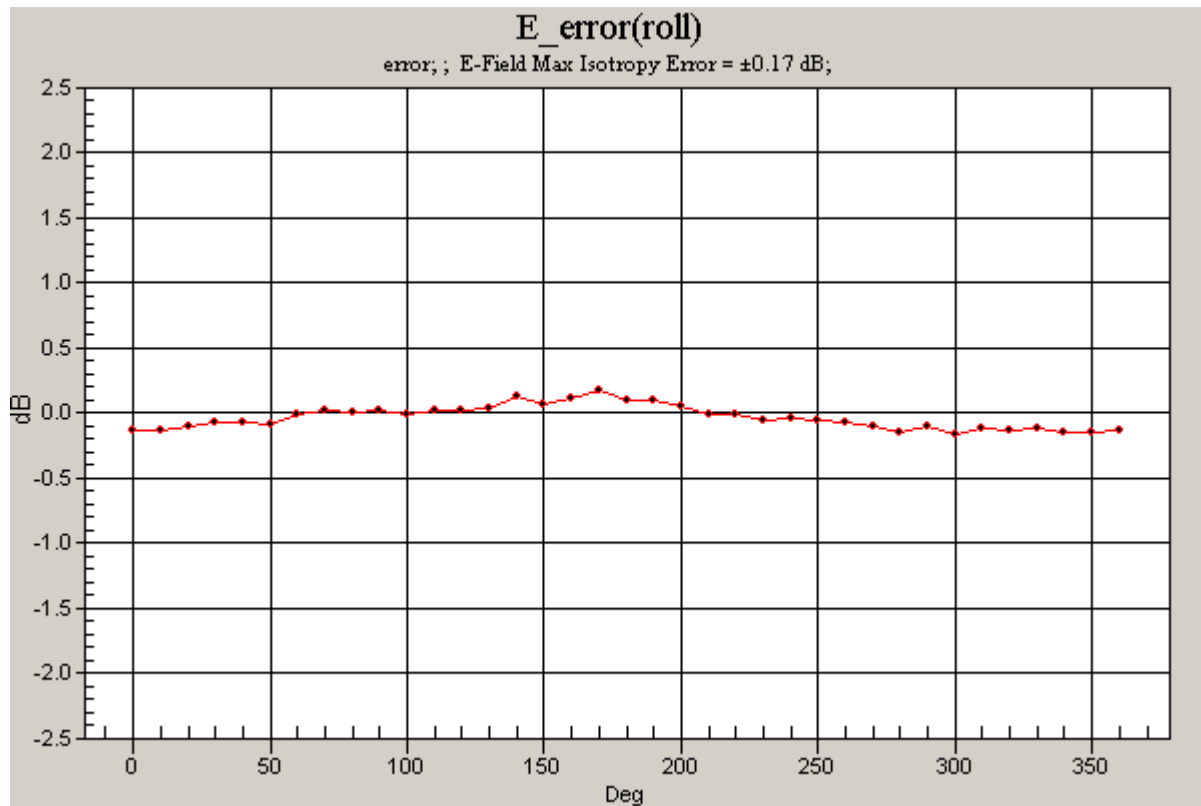

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.3 V/m

Probe Modulation Factor = 0.910


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 90.5 V/m; Power Drift = -0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 58.3 M4	Grid 2 60.9 M4	Grid 3 58.7 M4
Grid 4 59.8 M4	Grid 5 62.3 M4	Grid 6 60.4 M4
Grid 7 58.6 M4	Grid 8 60.9 M4	Grid 9 59.1 M4

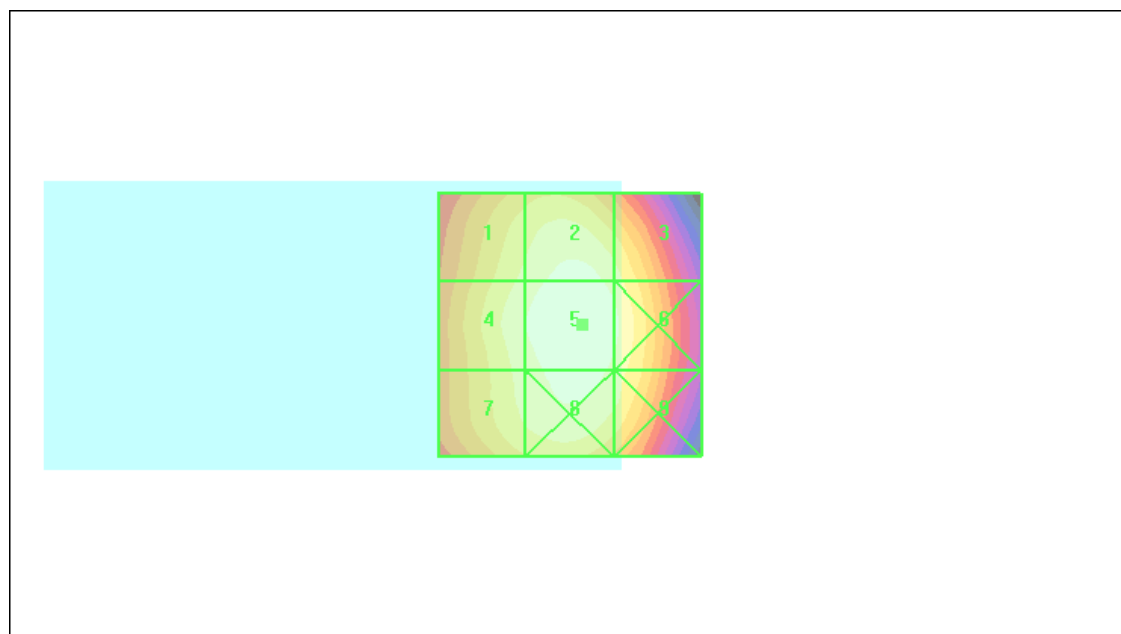

0 dB = 62.3V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

E Scan - H-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.21 dB;

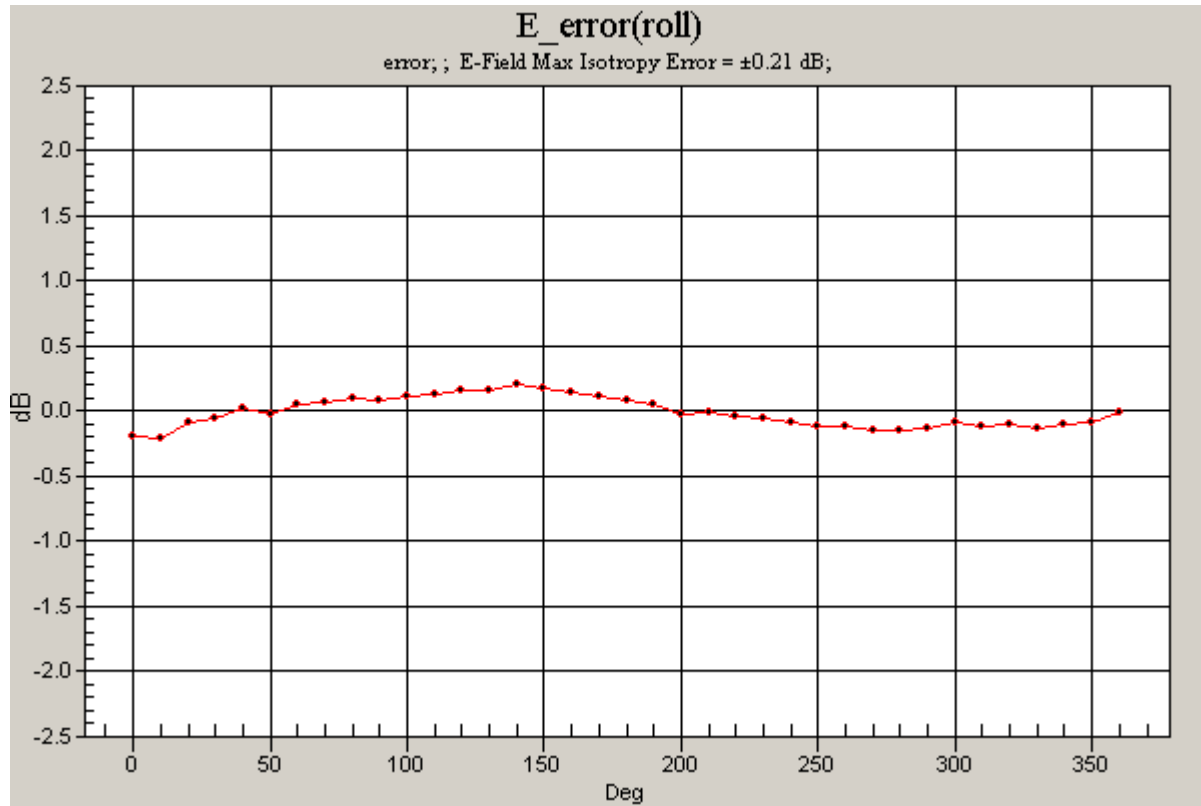

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 68.6 V/m

Probe Modulation Factor = 0.910



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 98.8 V/m; Power Drift = -0.134 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 61.7 M4	Grid 2 67.3 M4	Grid 3 66.3 M4
Grid 4 63.3 M4	Grid 5 68.6 M4	Grid 6 67.9 M4
Grid 7 61.7 M4	Grid 8 66.7 M4	Grid 9 65.7 M4

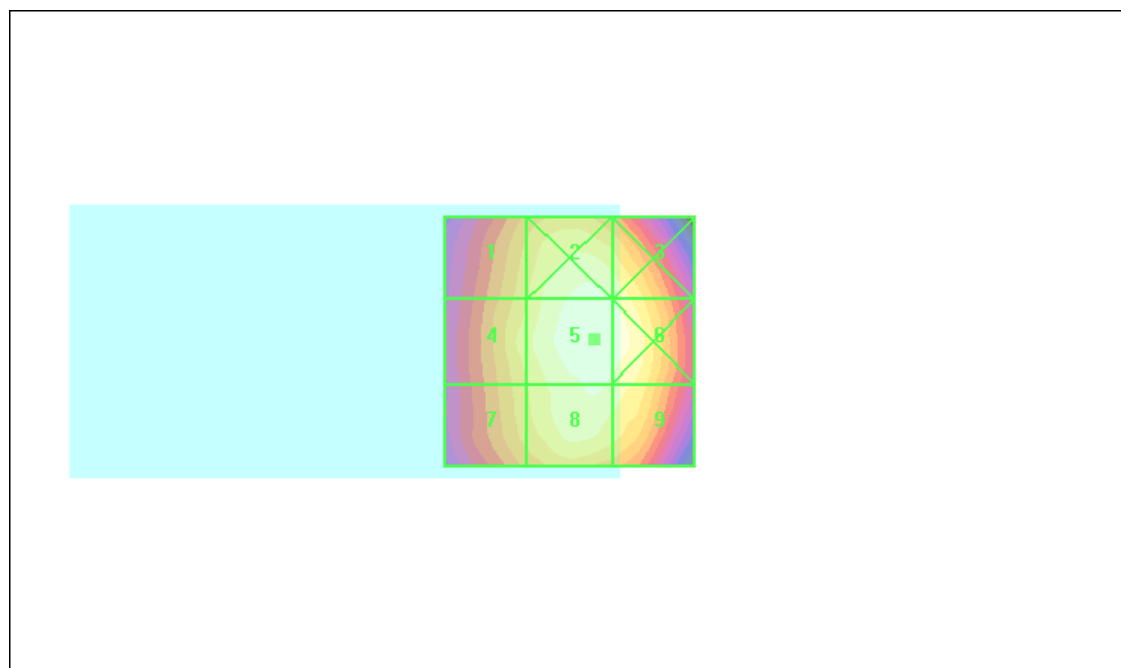

0 dB = 68.6V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

E Scan - L-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.14 dB;

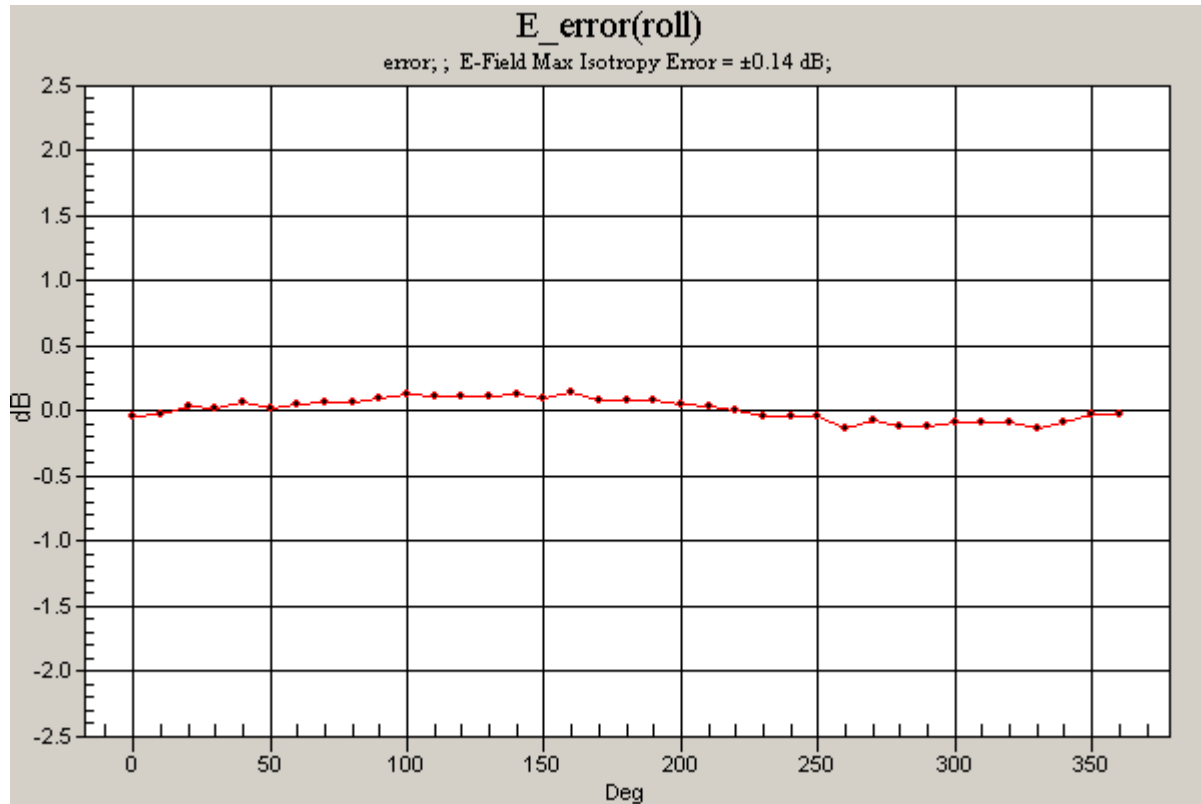

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn427; Calibrated: 10/20/2008

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 61.1 V/m

Probe Modulation Factor = 0.910



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 86.5 V/m; Power Drift = 0.023 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 54.5 M4	Grid 2 59.6 M4	Grid 3 59.2 M4
Grid 4 55.6 M4	Grid 5 61.1 M4	Grid 6 60.7 M4
Grid 7 54.3 M4	Grid 8 58.9 M4	Grid 9 58.5 M4

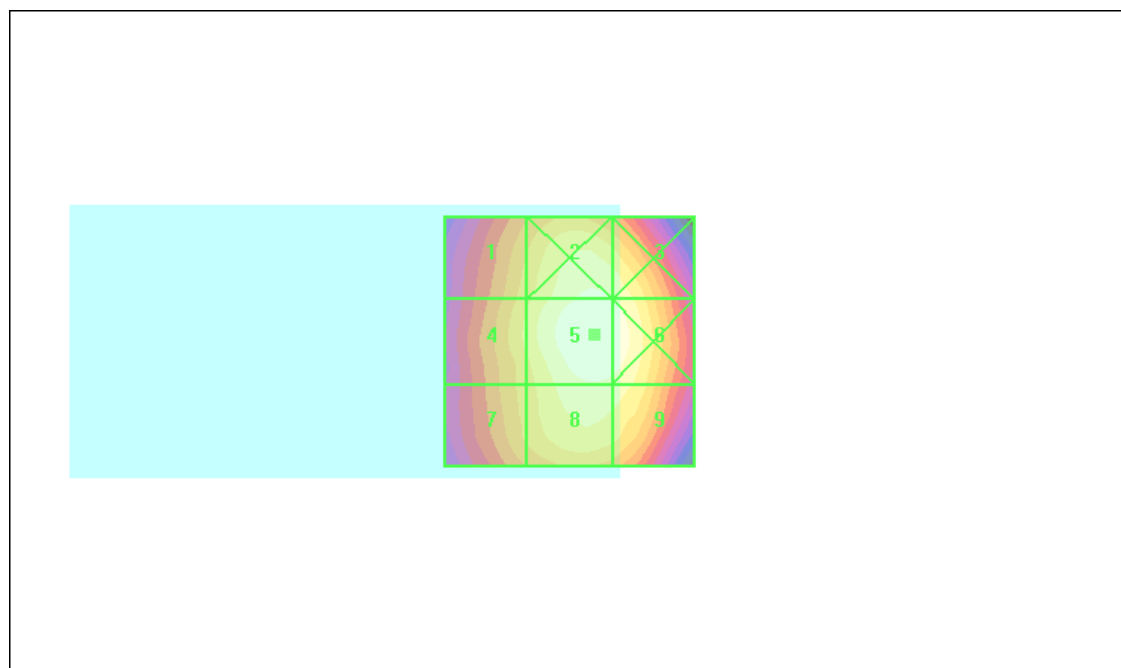

0 dB = 61.1V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

E Scan - M-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.14 dB;

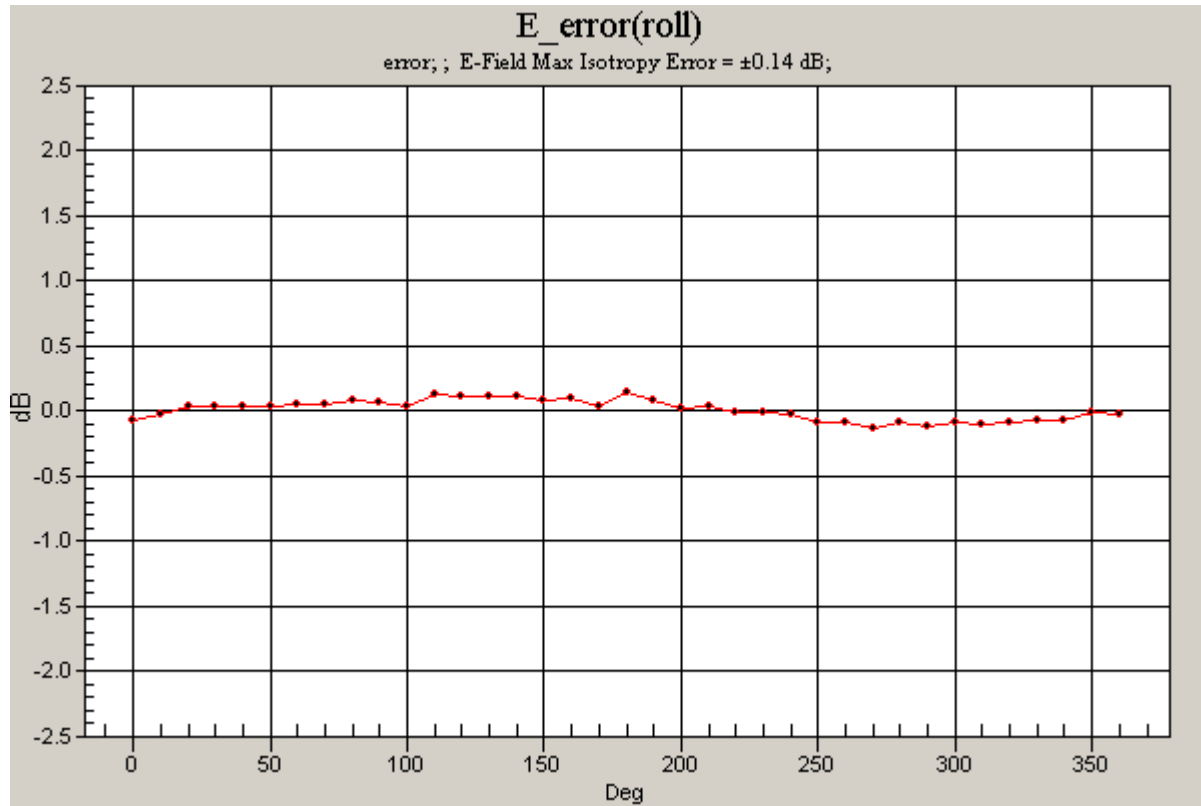

Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/9/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 64.8 V/m

Probe Modulation Factor = 0.910



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 93.1 V/m; Power Drift = 0.125 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 59.8 M4	Grid 2 63.4 M4	Grid 3 62.1 M4
Grid 4 61.1 M4	Grid 5 64.8 M4	Grid 6 63.8 M4
Grid 7 60.1 M4	Grid 8 63.5 M4	Grid 9 62.3 M4

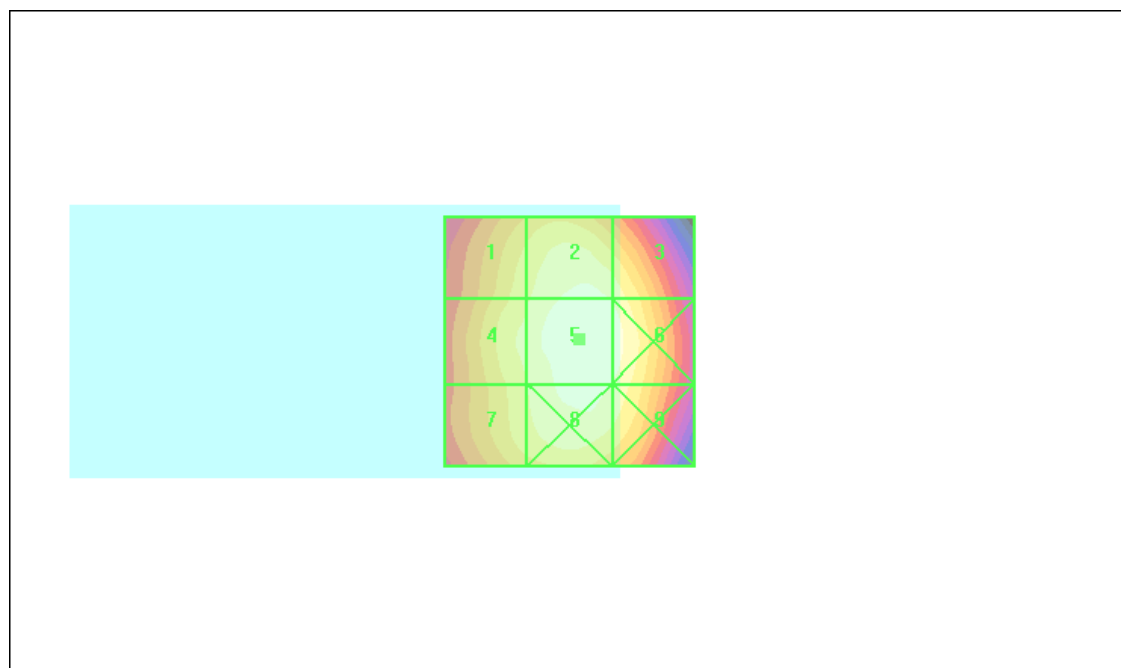

0 dB = 64.8V/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_ER_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

E Scan - H-ch/Rotation (1D): 37 rotation steps; E-Field Max Isotropy Error = ± 0.15 dB;

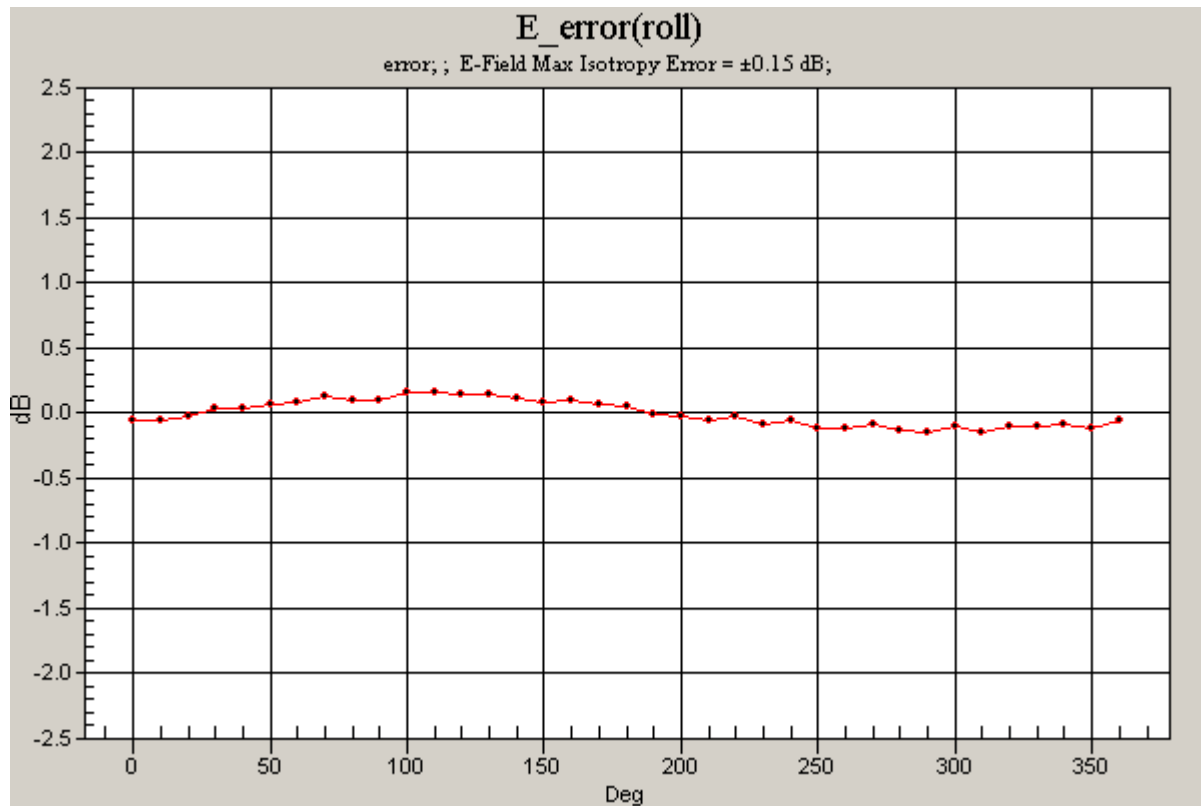

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.129 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.124 A/m; Power Drift = -0.292 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.169 M4	Grid 2 0.123 M4	Grid 3 0.078 M4
Grid 4 0.174 M4	Grid 5 0.126 M4	Grid 6 0.080 M4
Grid 7 0.182 M4	Grid 8 0.129 M4	Grid 9 0.081 M4

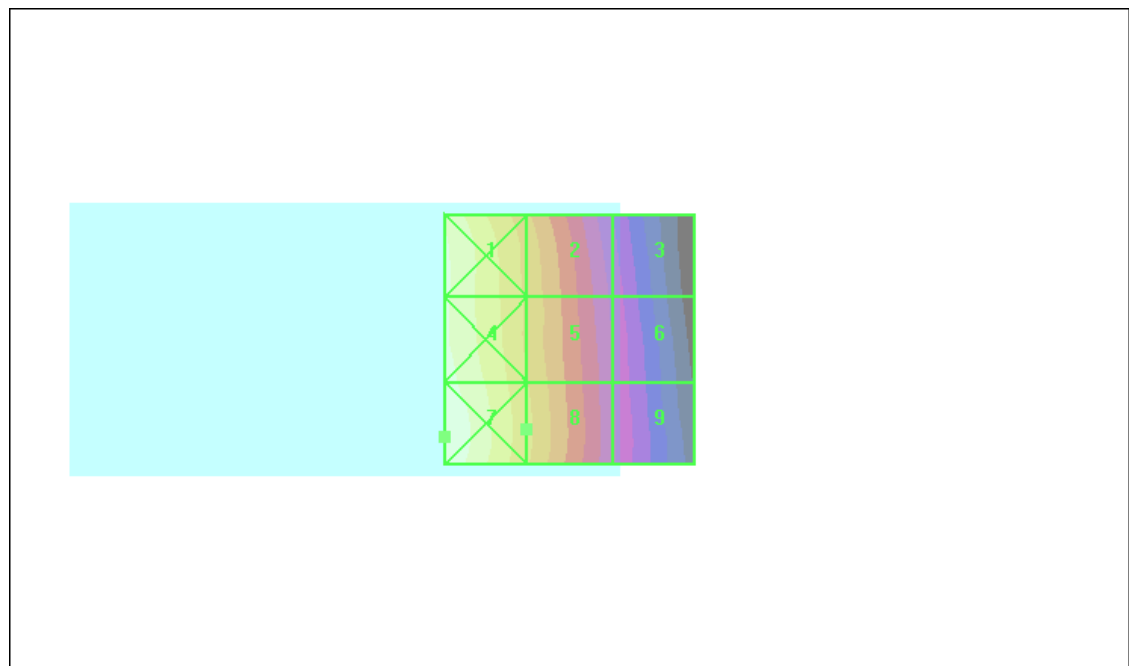

0 dB = 0.182 A/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

H Scan - L-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.44 dB;

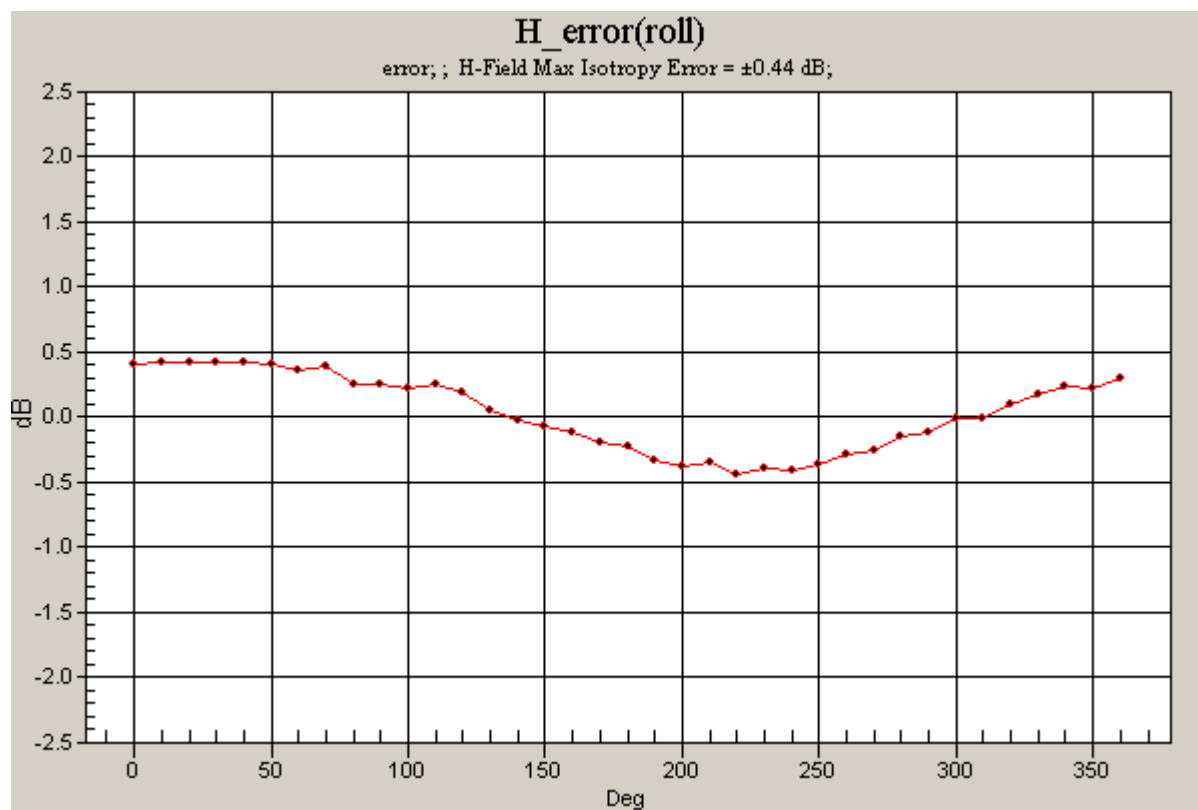

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.109 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.103 A/m; Power Drift = -0.115 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.143 M4	Grid 2 0.104 M4	Grid 3 0.065 M4
Grid 4 0.146 M4	Grid 5 0.106 M4	Grid 6 0.067 M4
Grid 7 0.151 M4	Grid 8 0.109 M4	Grid 9 0.068 M4

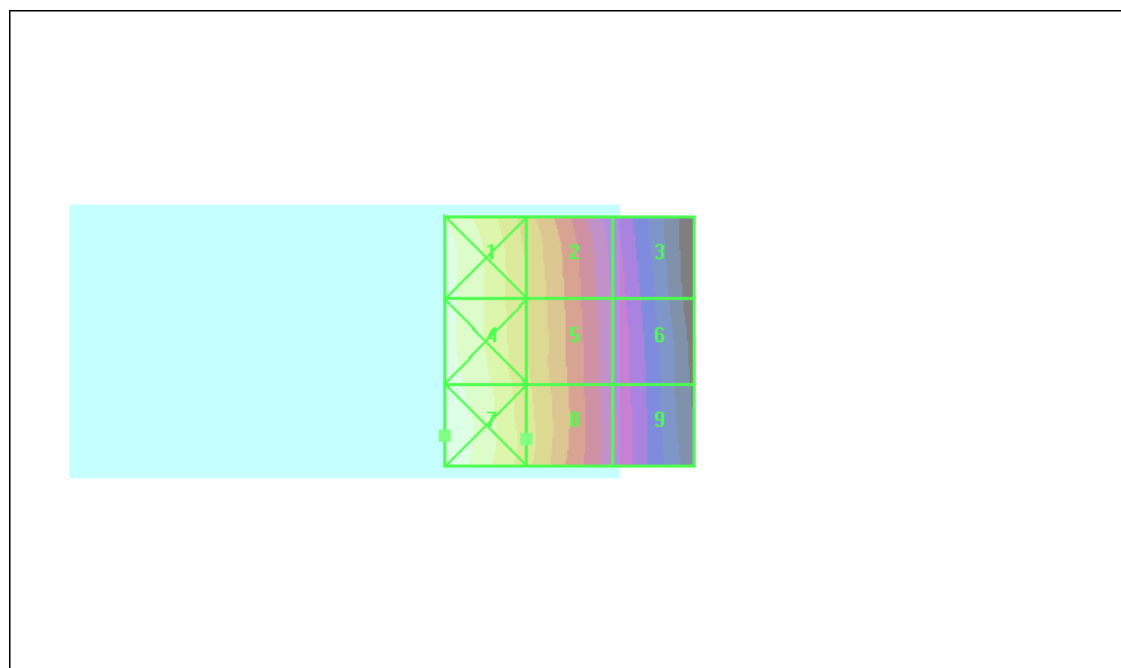

0 dB = 0.151 A/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

H Scan - M-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.42 dB;

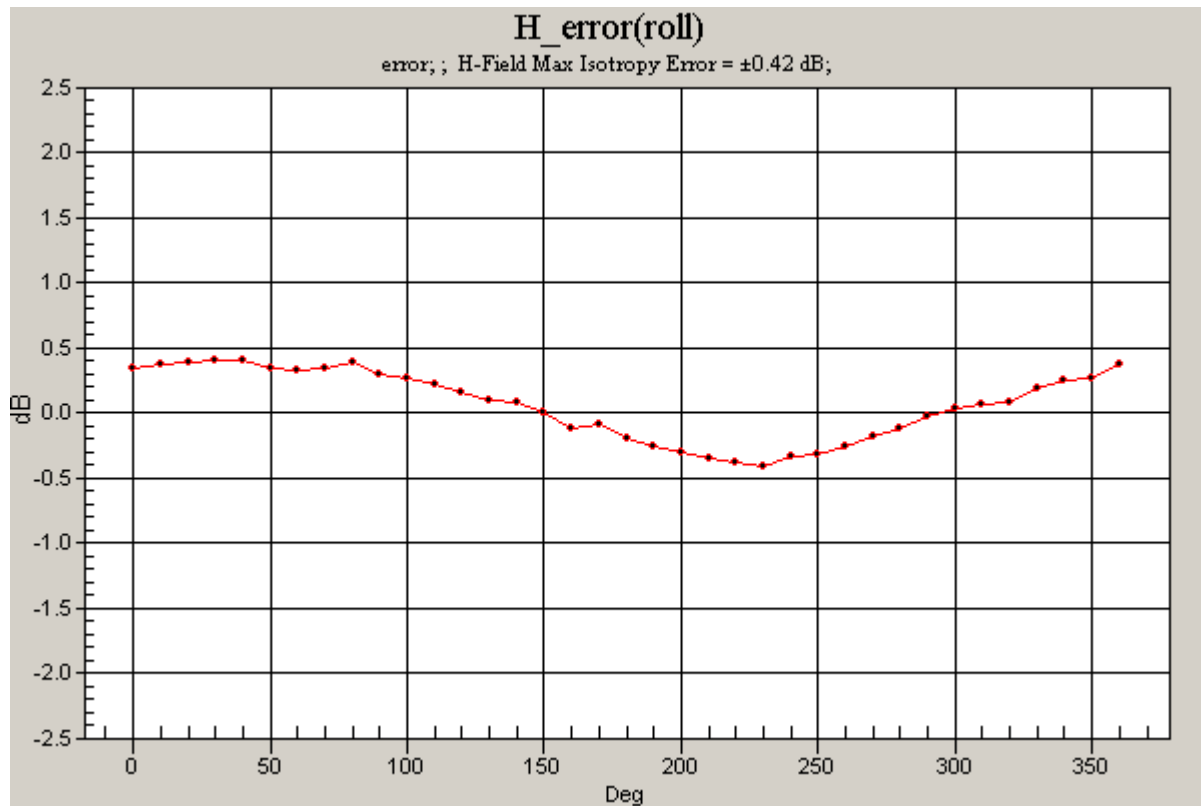

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.114 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.104 A/m; Power Drift = 0.109 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.150 M4	Grid 2 0.109 M4	Grid 3 0.067 M4
Grid 4 0.152 M4	Grid 5 0.112 M4	Grid 6 0.070 M4
Grid 7 0.157 M4	Grid 8 0.114 M4	Grid 9 0.071 M4

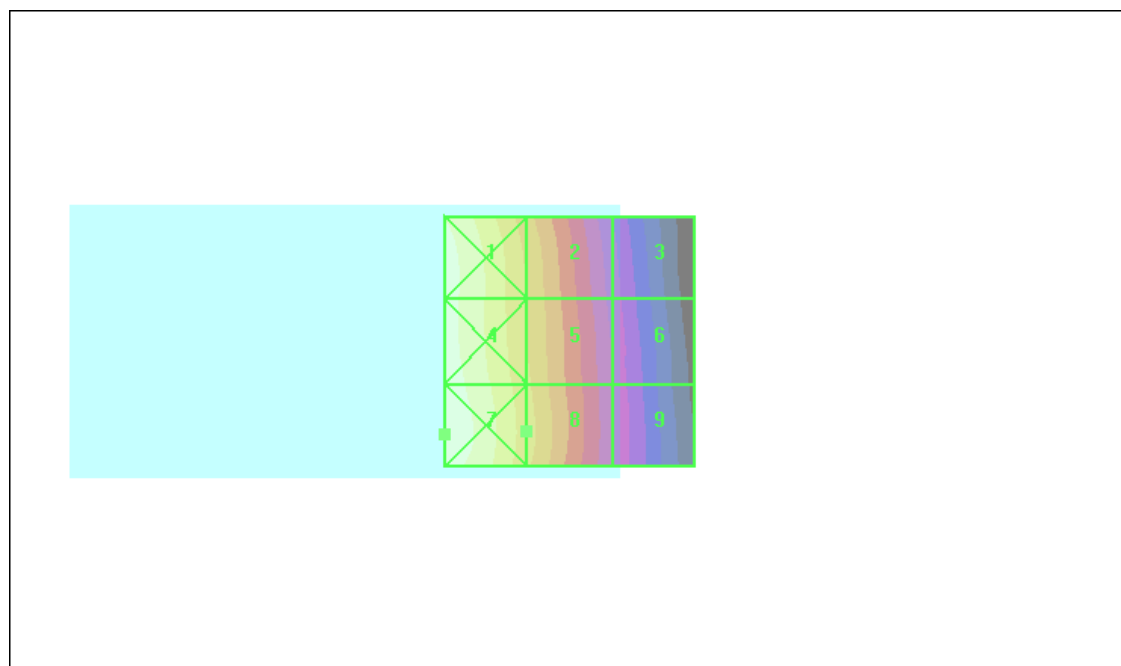

0 dB = 0.157 A/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz;Duty Cycle: 1:1

H Scan - H-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ±0.39 dB;

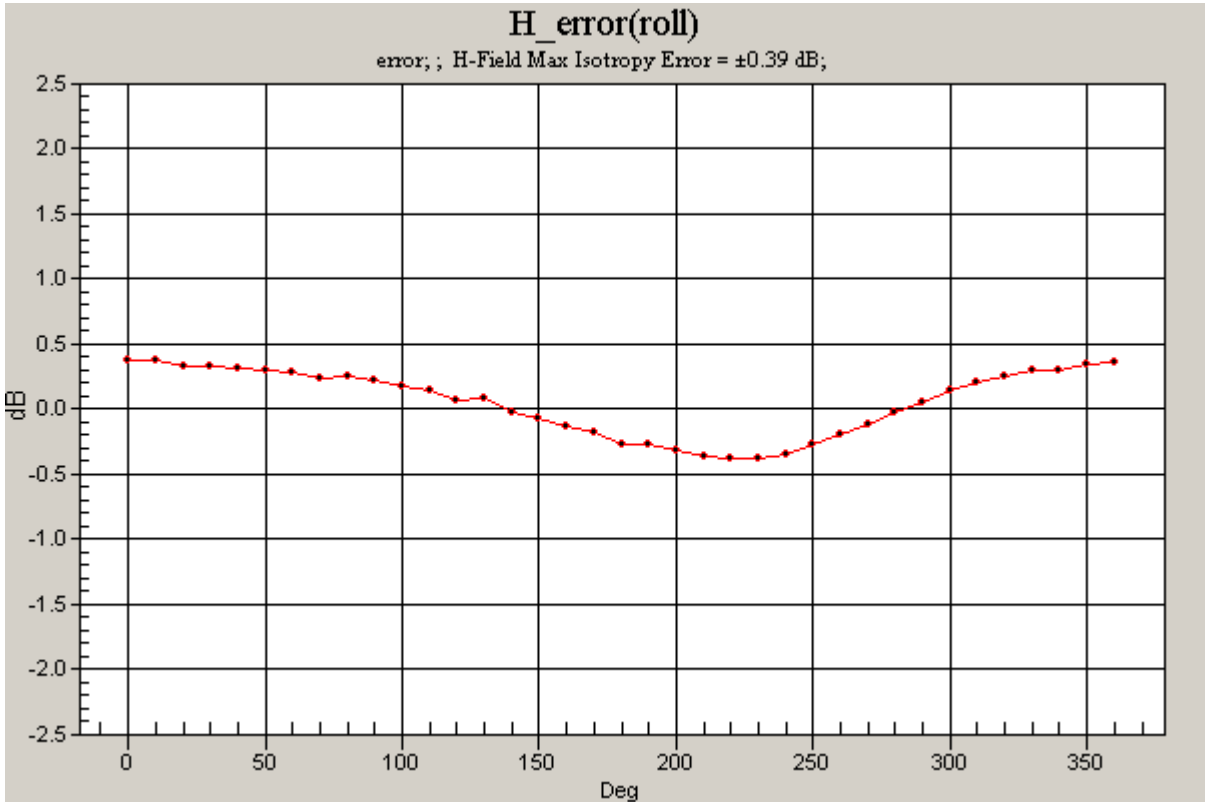

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.129 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.122 A/m; Power Drift = -0.290 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.168 M4	Grid 2 0.123 M4	Grid 3 0.076 M4
Grid 4 0.170 M4	Grid 5 0.126 M4	Grid 6 0.079 M4
Grid 7 0.177 M4	Grid 8 0.129 M4	Grid 9 0.080 M4

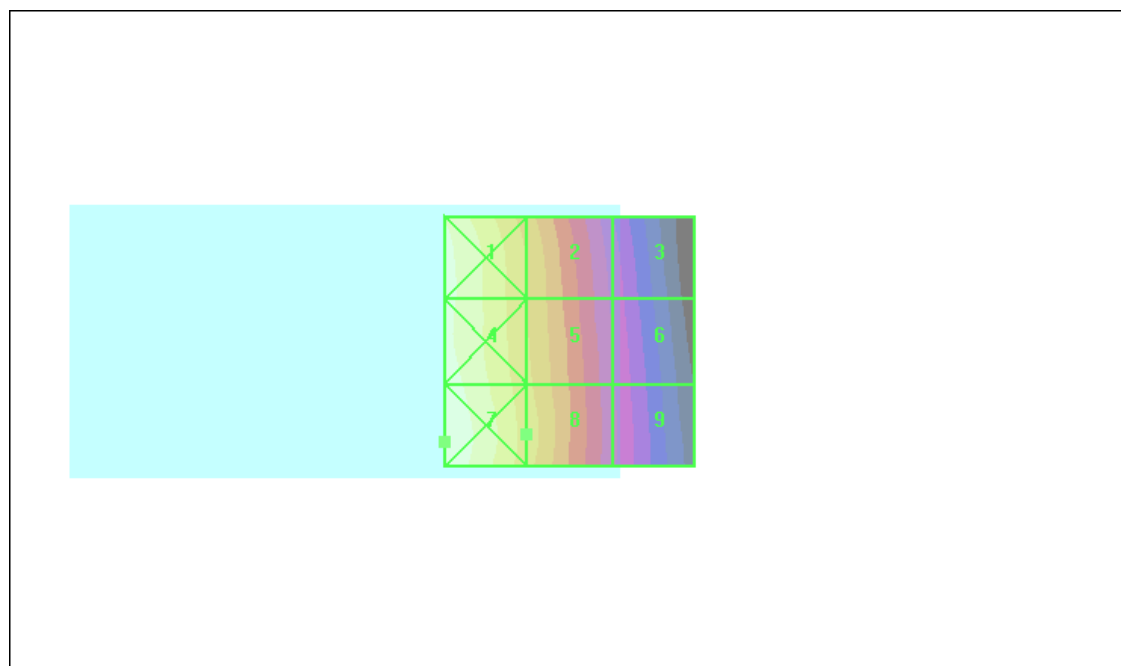

0 dB = 0.177A/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

H Scan - L-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.38 dB;

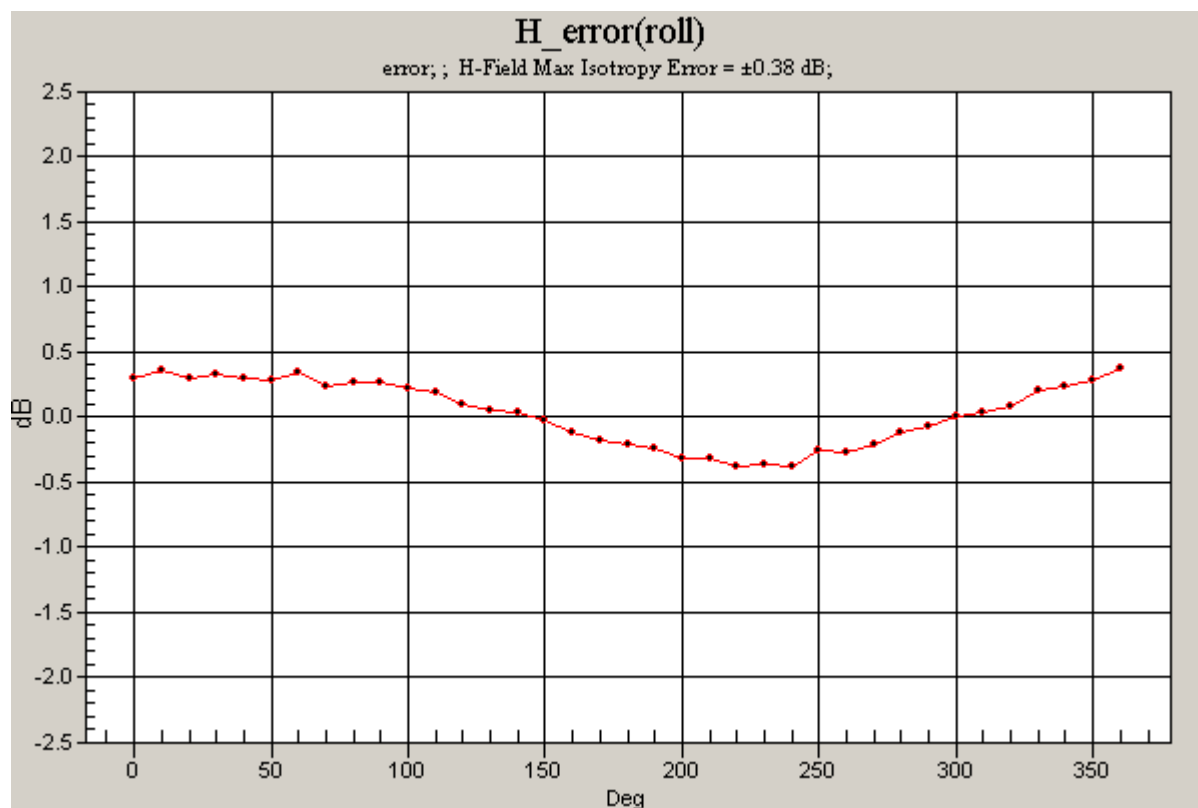

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.111 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.106 A/m; Power Drift = -0.111 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.146 M4	Grid 2 0.107 M4	Grid 3 0.067 M4
Grid 4 0.148 M4	Grid 5 0.109 M4	Grid 6 0.068 M4
Grid 7 0.153 M4	Grid 8 0.111 M4	Grid 9 0.069 M4

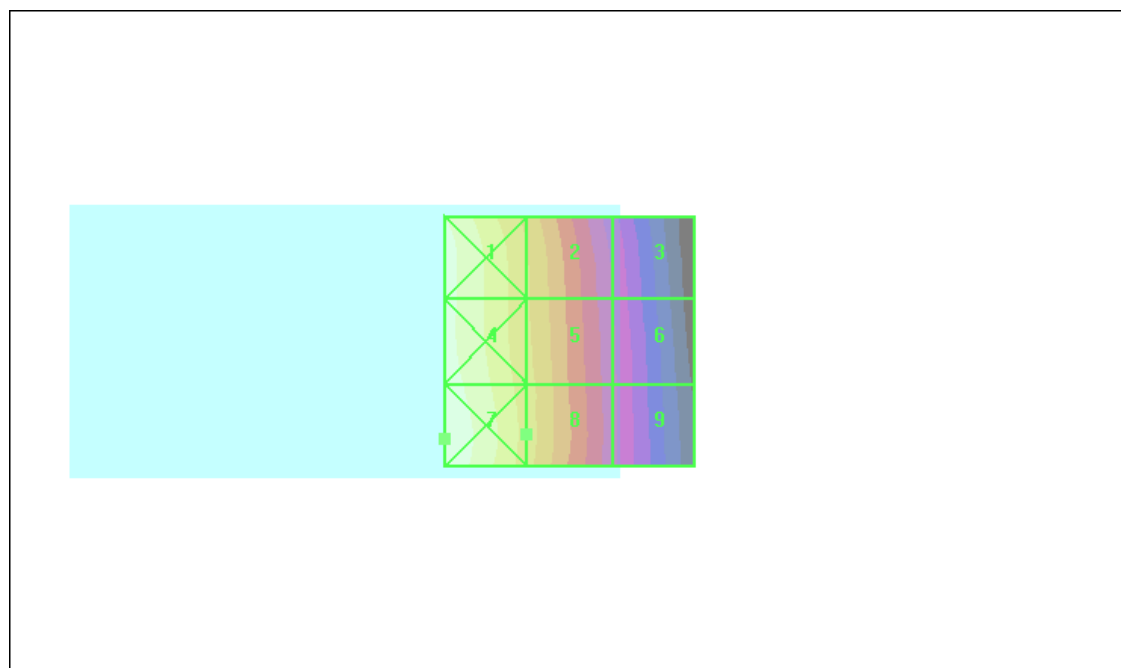

0 dB = 0.153A/m


Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

H Scan - M-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.41 dB;

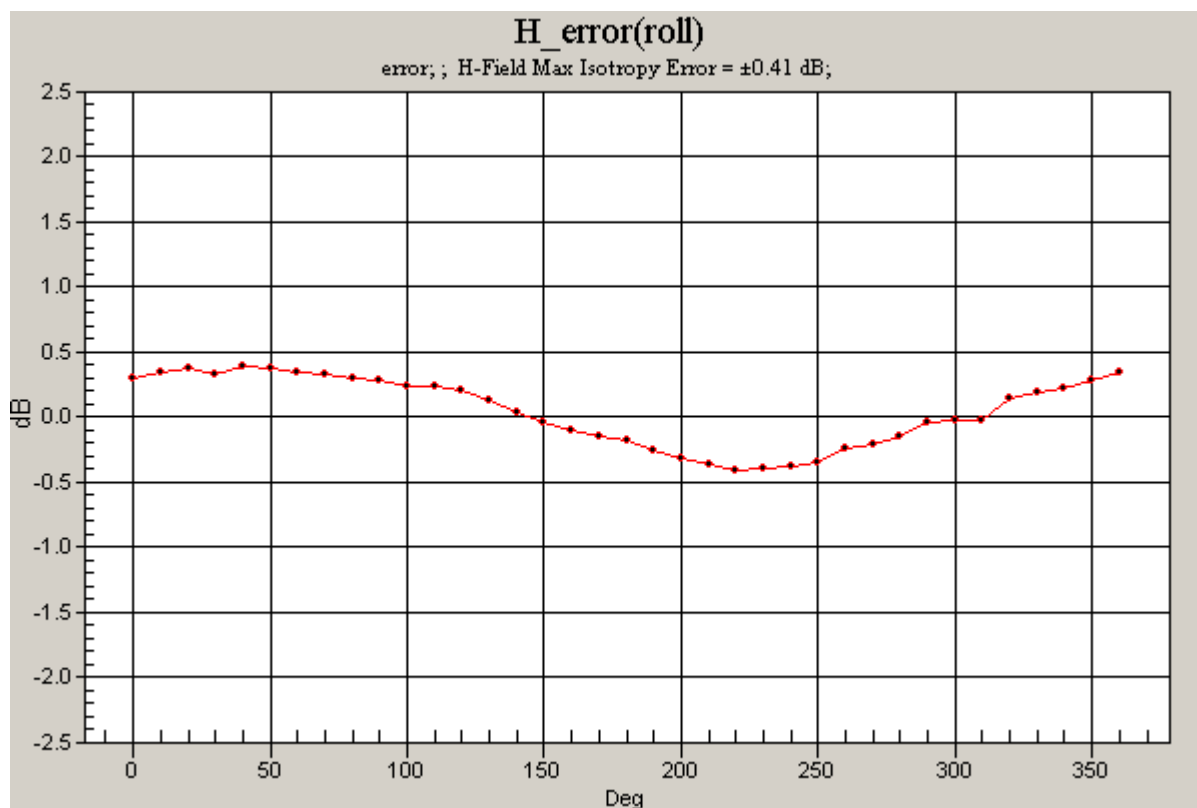

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/10/2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.116 A/m

Probe Modulation Factor = 0.880



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.106 A/m; Power Drift = 0.132 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.151 M4	Grid 2 0.110 M4	Grid 3 0.069 M4
Grid 4 0.153 M4	Grid 5 0.113 M4	Grid 6 0.071 M4
Grid 7 0.158 M4	Grid 8 0.116 M4	Grid 9 0.072 M4

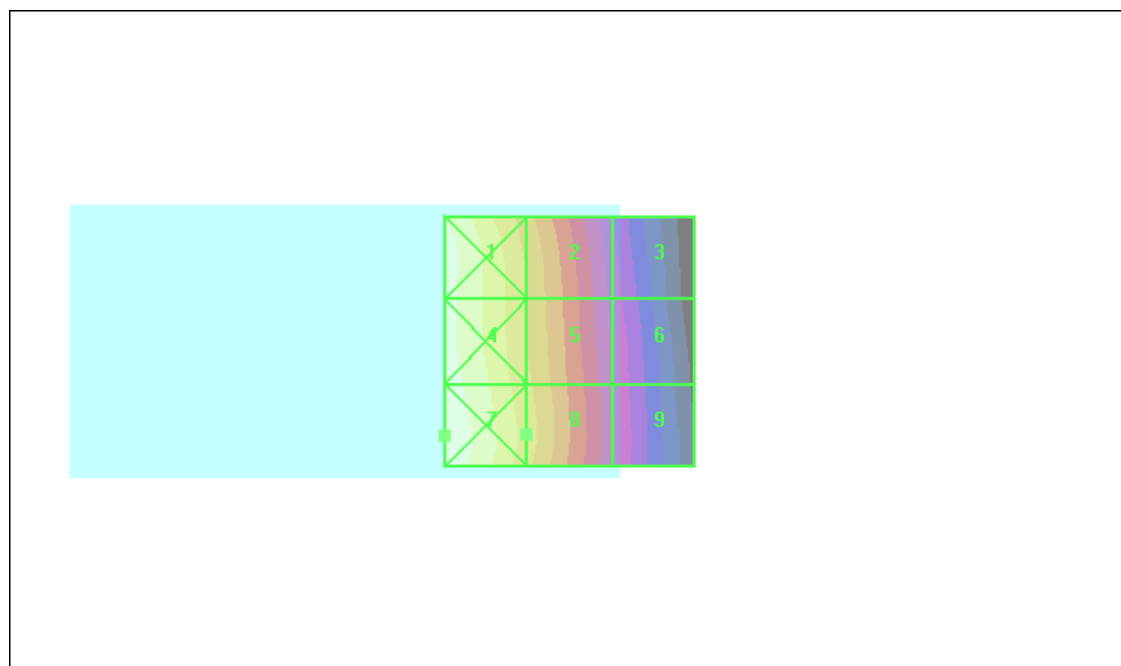

0 dB = 0.158 A/m

Test Laboratory: Compliance Certification Services

CDMA850 HAC_H3DV6_Device_inductive cover

DUT: Palm; Type: NA; Serial: NA

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

H Scan - H-ch/Rotation (1D): 37 rotation steps; H-Field Max Isotropy Error = ± 0.40 dB;

