


**Handspring Inc. FCC ID: O8FDK**

SAM Phantom; Flat Section; Position: (90°,270°)  
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0  
1900 MHz Muscle:  $\sigma = 1.56 \text{ mho/m}$   $\epsilon_r = 52.0$   $\rho = 1.00 \text{ g/cm}^3$   
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0  
Cube 5x5x7  
SAR (1g): 0.336 mW/g, SAR (10g): 0.219 mW/g

Body-worn SAR - Leather Side Case with Belt-Clip Accessory  
Front Keypad Side of EUT facing Planar Phantom  
Treo 600 Dual-Band GSM/GPRS Phone  
Lithium-ion Battery  
Fixed Stubby Antenna  
PCS GPRS Mode (2 Time Slots)  
Channel: 661 [1880.00 MHz]  
Conducted Power: 29.99 dBm  
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C  
Date Tested: June 27, 2003

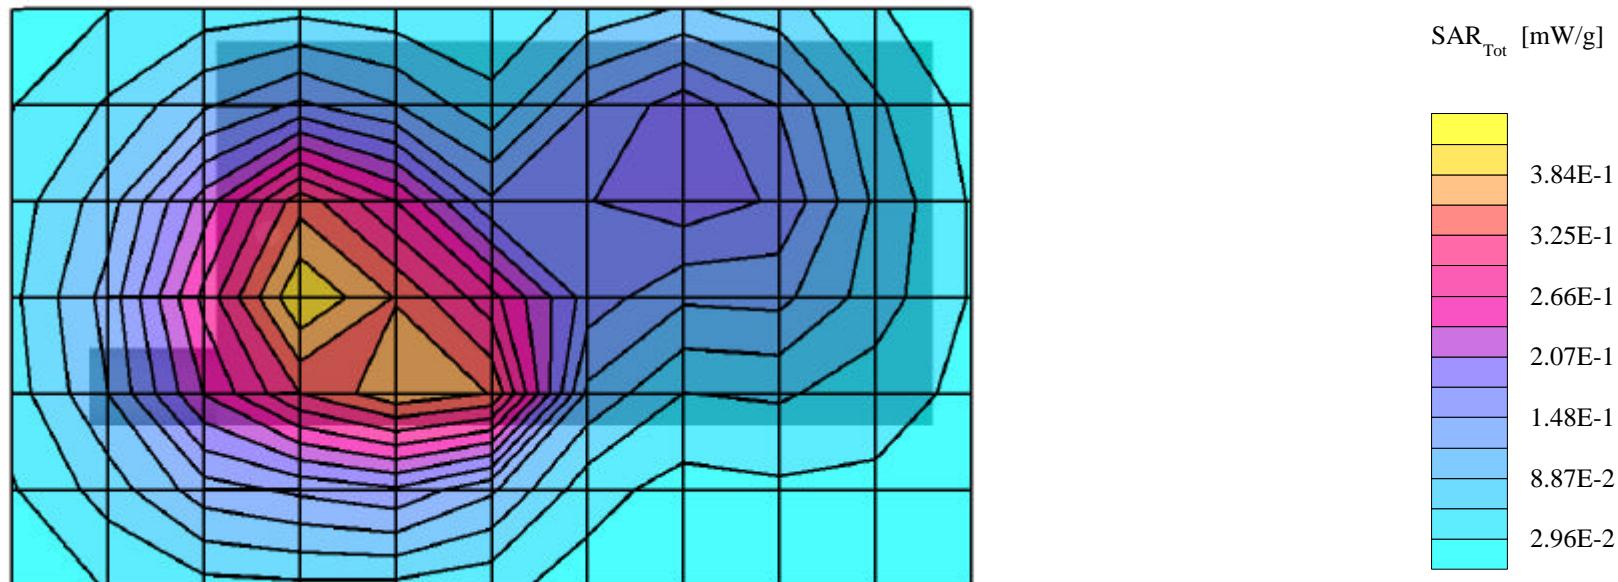


## Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section

Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0  
1900 MHz Muscle:  $\sigma = 1.56 \text{ mho/m}$   $\epsilon_r = 52.0$   $\rho = 1.00 \text{ g/cm}^3$ 

## Z-Axis Extrapolation at Peak SAR Location

Body-worn SAR - Leather Side Case with Belt-Clip Accessory  
Front Keypad Side of EUT facing Planar Phantom  
Treo 600 Dual-Band GSM/GPRS Phone  
Lithium-ion Battery  
Fixed Stubby Antenna  
PCS GPRS Mode (2 Time Slots)  
Channel: 661 [1880.00 MHz]  
Conducted Power: 29.99 dBm  
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C  
Date Tested: June 27, 2003

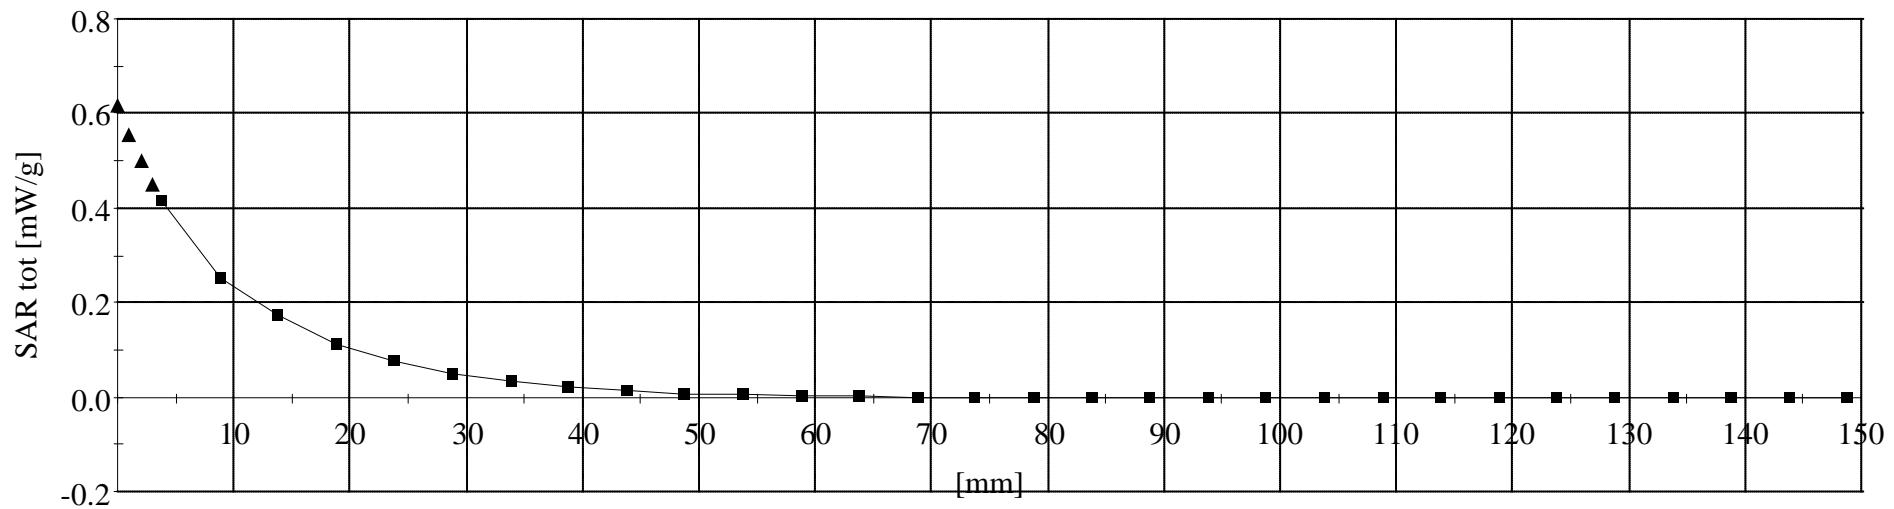

## Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (270°,90°)  
 Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0  
 1900 MHz Muscle:  $\sigma = 1.56 \text{ mho/m}$   $\epsilon_r = 52.0$   $\rho = 1.00 \text{ g/cm}^3$   
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0  
 Cube 5x5x7  
 SAR (1g): 0.0858 mW/g, SAR (10g): 0.0495 mW/g

Body-worn SAR - Fitted Leather Case with Removable Belt-Clip & Ear-Microphone

Back Side of EUT facing Planar Phantom

Treo 600 Dual-Band GSM/GPRS Phone

Lithium-ion Battery

Fixed Stubby Antenna


PCS GPRS Mode (2 Time Slots)

Channel: 661 [1880.00 MHz]

Conducted Power: 29.97 dBm

Ambient Temp. 25.2°C; Fluid Temp. 23.5°C


Date Tested: June 27, 2003

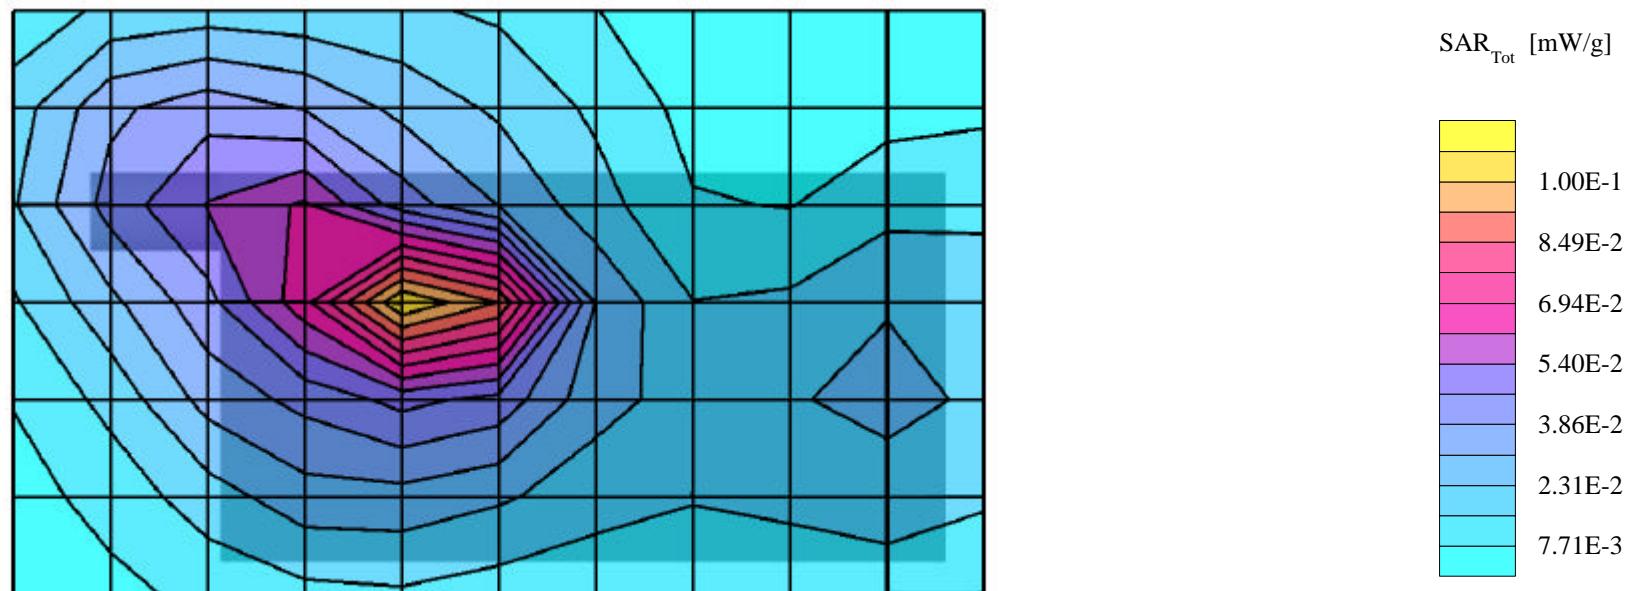

## Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (90°,270°)  
 Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0  
 1900 MHz Muscle:  $\sigma = 1.56 \text{ mho/m}$   $\epsilon_r = 52.0$   $\rho = 1.00 \text{ g/cm}^3$   
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0  
 Cube 5x5x7  
 SAR (1g): 0.296 mW/g, SAR (10g): 0.191 mW/g

Body-worn SAR - Front Keypad Side of EUT with Ear-Microphone Accessory  
 1.0 cm Air Spacing between Front Side of EUT and Planar Phantom  
 Treo 600 Dual-Band GSM/GPRS Phone  
 Lithium-ion Battery  
 Fixed Stubby Antenna  
 PCS GPRS Mode (2 Time Slots)  
 Channel: 661 [1880.00 MHz]  
 Conducted Power: 30.03 dBm  
 Ambient Temp. 25.2°C; Fluid Temp. 23.5°C  
 Date Tested: June 27, 2003

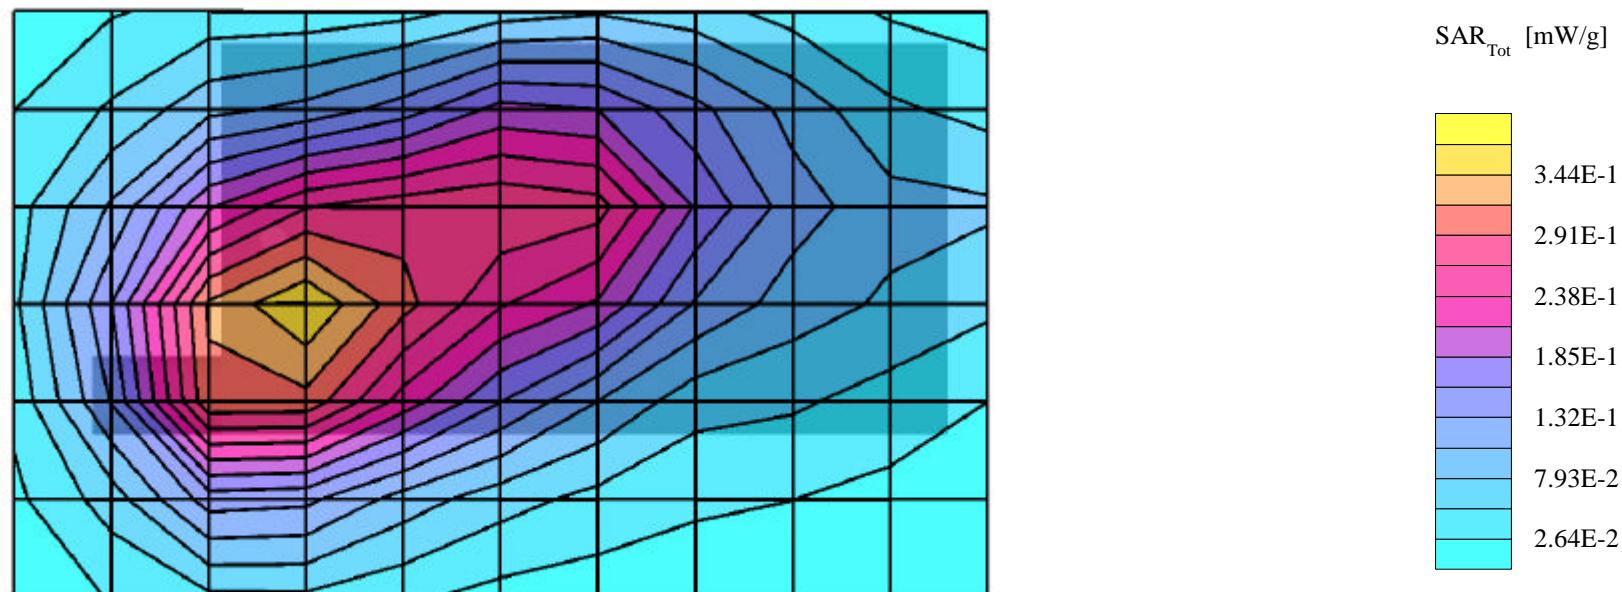

## Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (270°,90°)  
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0  
1900 MHz Muscle:  $\sigma = 1.56 \text{ mho/m}$   $\epsilon_r = 52.0$   $\rho = 1.00 \text{ g/cm}^3$   
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0  
Cube 5x5x7  
SAR (1g): 0.315 mW/g, SAR (10g): 0.182 mW/g

Body-worn SAR - Back Side of EUT with Ear-Microphone Accessory  
1.0 cm Air Spacing between Back Side of EUT and Planar Phantom  
Treo 600 Dual-Band GSM/GPRS Phone  
Lithium-ion Battery  
Fixed Stubby Antenna  
PCS GPRS Mode (2 Time Slots)  
Channel: 661 [1880.00 MHz]  
Conducted Power: 29.98 dBm  
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C  
Date Tested: June 27, 2003

