

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-02784
Page (1) / (18) Pages

1. Client

- Name : Shin Heung Precision Co., Ltd.
- Address : 53, Je3gongdan 3-gil, Seoun-myeon, Anseong-si, Gyeonggi-do, Korea
- Date of Receipt : 2018-06-16

2. Manufacturer

- Name : Shin Heung Precision Co., Ltd.
- Address : 53, Je3gongdan 3-gil, Seoun-myeon, Anseong-si, Gyeonggi-do, Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model: POS SYSTEM / SAP-630



5. Date of Test : 2018-07-11 to 2018-08-21

6. Test Standard(method) used : ANSI C63.10-2013

7. Testing Environment: Temp.: (23 ± 1) °C, Humidity: (48 ± 5) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Technical Manager
	Bong-seok Kim: (Signature) 	Young-taek Lee: (Signature) 

2018-09-04

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2018-02784
Page (2) / (18) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2018-09-04	Issued (CTK-2018-02784)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2018-02784
Page (3) / (18) Pages

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2. Facility and Accreditations.....	5
2.1 Test Facility.....	5
2.2 Laboratory Accreditations and Listings	5
2.3 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards.....	6
3.2 Mode of operation during the test.....	6
3.3 Maximum Measurement Uncertainty	7
4. Technical Characteristic Test.....	8
4.1 Radiated Emission	8
4.8 AC Power Line Conducted Emissions	15
APPENDIX A – Test Equipment Used For Tests	18



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2018-02784
Page (4) / (18) Pages

1. General Product Description

1.1 Client Information


Company	Shin Heung Precision Co., Ltd.
Contact Point	53, Je3gongdan 3-gil, Seoun-myeon, Anseong-si, Gyeonggi-do, Korea
Contact Person	Name : SUNG HO, PARK E-mail : sung.ho.park@shc.co.kr Tel : +82-2-2101-9864 Fax: +82-2-2101-9691

1.2 Product Information

FCC ID	O8HSAP-630
Product Description	POS SYSTEM
Basic Model name	SAP-630
Variant Model name	SAP-630FT (Keyboard type : Flat, Panel type: Touch) SAP-630RT (Keyboard type : Raised, Panel type : Touch) SAP-630XZ (The suffix 'X' denote keyboard type can be 'F' or 'R'; The suffix 'Z' denote panel type can be 'T' or 'N')
Operating Frequency	2402 MHz - 2480 MHz
RF Output Power	8.98 dBm (7.91 mW) (GFSK) 8.34 dBm (6.82 mW) ($\pi/4$ -DQPSK) 8.46 dBm (7.01 mW) (8DPSK)
Antenna Specification	Antenna type : Internal Antenna Gain : 2.5 dBi
Number of channels	79
Channel Spacing	1 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ -DQPSK, 8DPSK)
Data Rate	1 Mbps (GFSK) 2 Mbps ($\pi/4$ -DQPSK) 3 Mbps (8DPSK)
Power Source	Adapter (Input : 100 Vdc ~ 240 Vac, Output : 12 Vdc)
RF Power setting in Test SW	Initial value

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
-	-	-	-





 <p>CTK Co., Ltd. The Prime Leader of Global Regulatory Certification</p>	<p>CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501</p>	<p>Report No.: CTK-2018-02784 Page (5) / (18) Pages</p>	
---	--	---	--

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	IC	IC EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	NRRA	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



3. Test Specifications

3.1 Standards

FCC rule Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	Carrier Frequency Separation	NA(Note 3)	Conducted
15.247(a)	Number of Hopping Frequencies	NA(Note 3)	
15.247(a)	20 dB Bandwidth	NA(Note 3)	
15.247(a)	Time of occupancy (Dwell Time)	NA(Note 3)	
15.247(b)	Transmitter Output Power	NA(Note 3)	
15.247(d)	Unwanted Emission(Conducted)	NA(Note 3)	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emission	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The equipment contains an approved single module(FCC ID : TX2-RTL8723BE). The test result is the same as the single module.			
<i>Note 4:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
 The results are only attached worst cases.

Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 441 MHz	2 480 MHz

Test mode

Modulation	Data rate
GFSK	1 Mbps
$\pi/4$ -DQPSK	2 Mbps
8DPSK	3 Mbps



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2018-02784
Page (7) / (18) Pages

3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB
Occupied Bandwidth	0.1 MHz
Unwanted Emission(conducted)	3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	4.0 dB
Radiated Emissions ($f > 1$ GHz)	5.0 dB



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2018-02784
Page (8) / (18) Pages

4. Technical Characteristic Test

4.1 Radiated Emission

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-02784
 Page (9) / (18) Pages

Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.(Duty Cycle is > 98%,)
- 4) Duty Cycle is < 98%, VBW setting will need to > 1/T.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

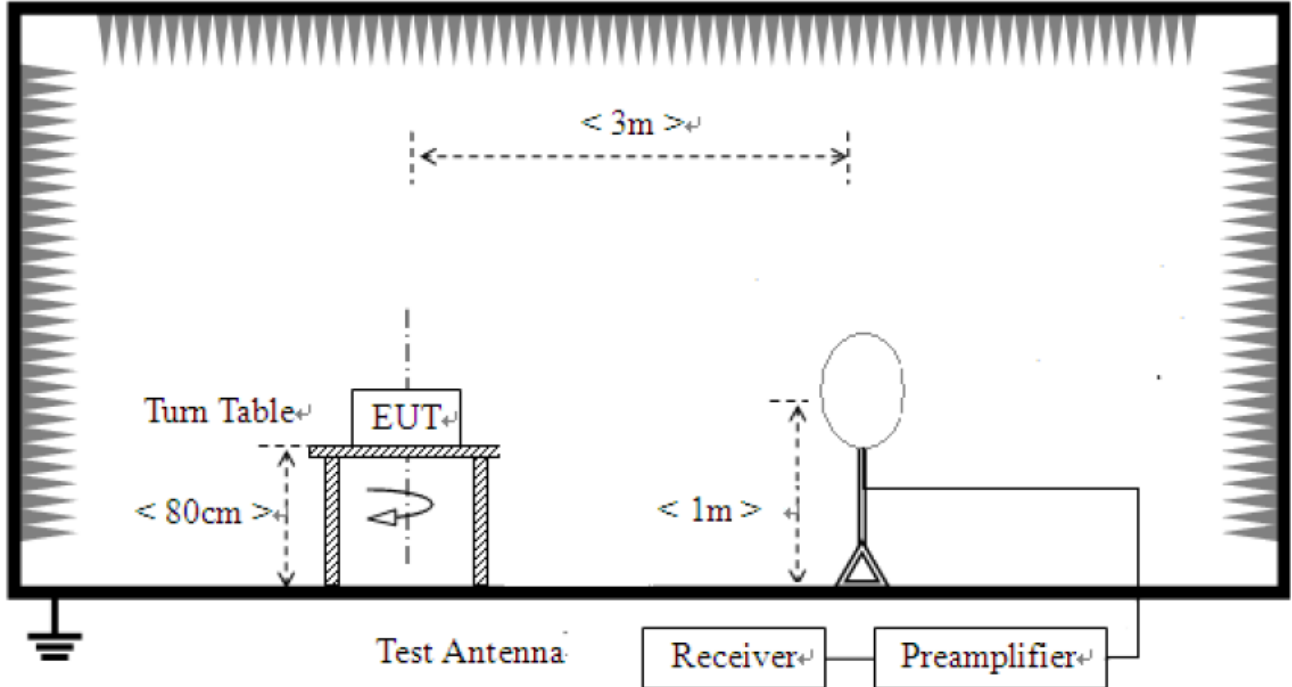

2) For field strength of emissions from 30 MHz to 1 GHz

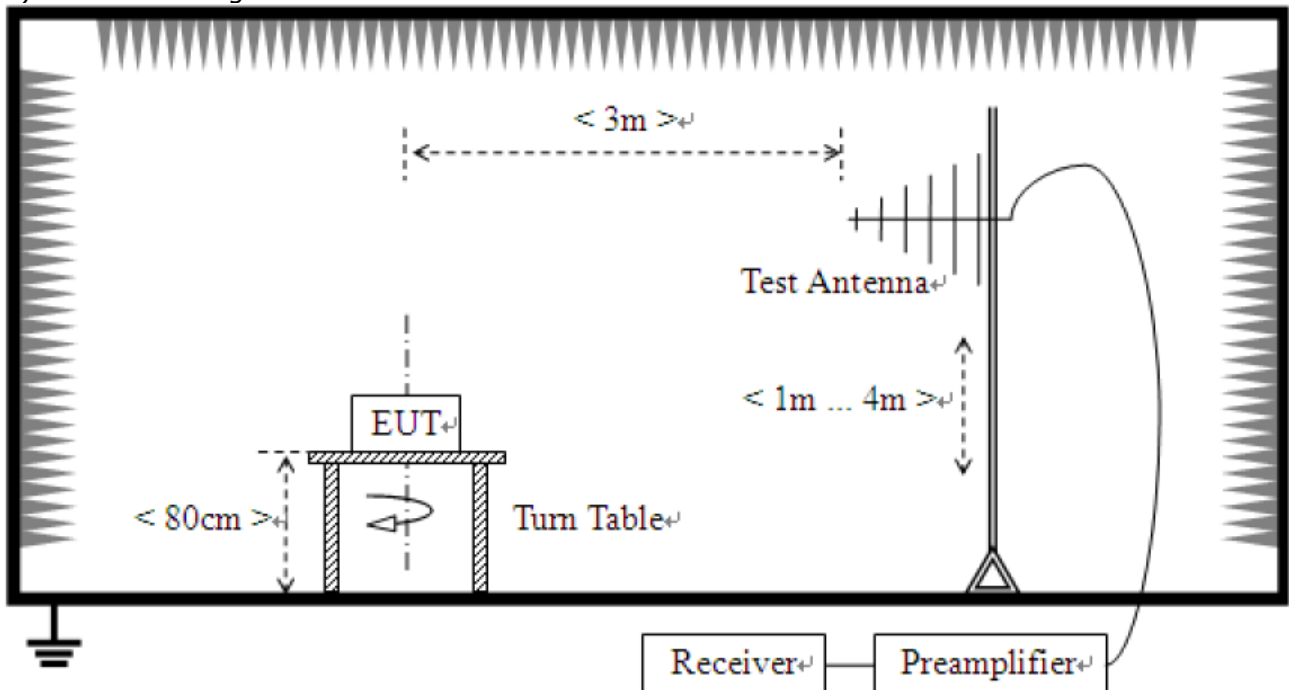

3) For field strength of emissions above 1 GHz

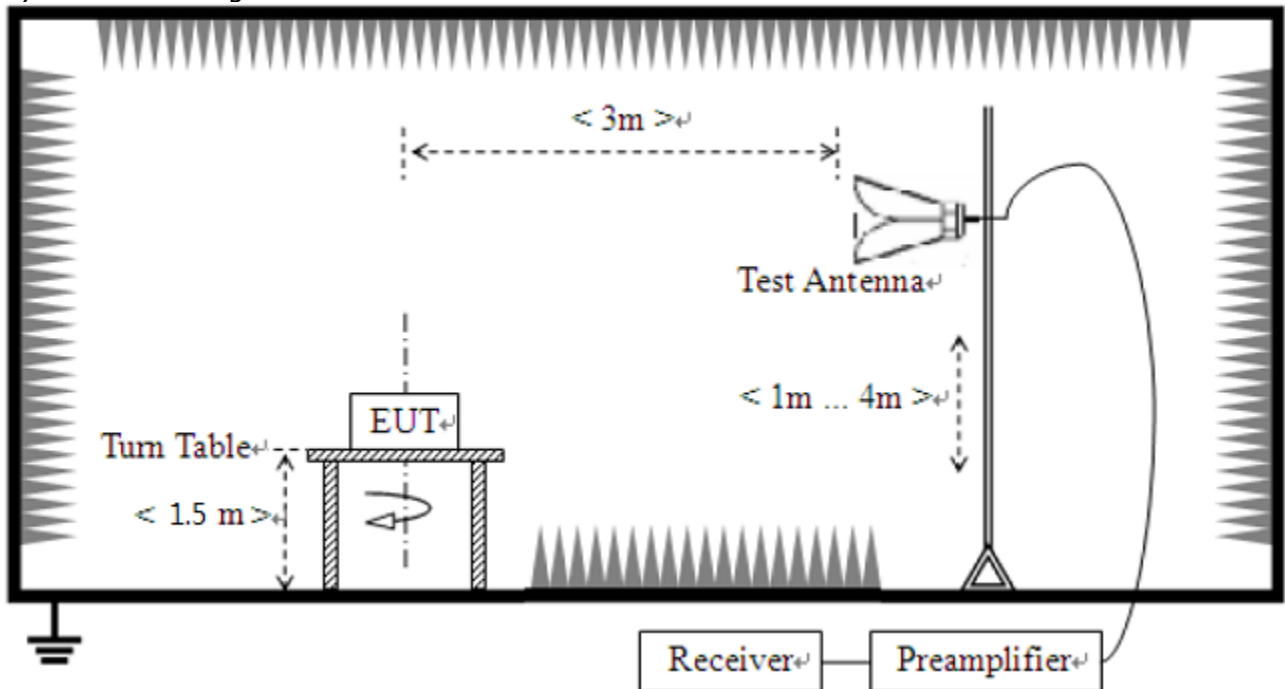

Test results

1) 9 kHz to 30 MHz

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



2) 30 MHz to 1 GHz

The requirements are:

Complies

Test Data

Test mode : GFSK, Hopping mode(Worst case)

Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
227.516	V	61.1	-12.4	48.7	78*	29.3	
585.083	V	48.5	-0.8	47.7	78*	30.3	
585.083	H	46.6	-0.8	45.8	78*	32.2	
617.456	H	44.9	-0.3	44.6	78*	33.4	
650.073	V	48.6	0.4	49.0	78*	29.0	
780.174	V	40.6	2.5	43.1	78*	34.9	

Remark :

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis)
 2. Result = Reading + c.f(Correction factor)
 3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator – Amp Gain
- * This limit value is 20 dB lower than the level of the fundamental frequency.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-02784
 Page (14) / (18) Pages

3) above 1 GHz

The requirements are:

Complies

Test Data

Test mode : GFSK

Channel	Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Low	1 201.8	V	63.7	-8.4	55.3	74	18.7	Peak
	1 201.8	V	43.4	-8.4	35.0	54	19.0	Average
	2 340.2	V	57.6	-3.8	53.8	74	20.2	Peak
	2 340.2	V	45.0	-3.8	41.2	54	12.8	Average
High	2 488.0	V	56.7	-3.7	53.0	74	21.0	Peak
	2 486.4	H	44.7	-3.7	41.0	54	13.0	Average
Middle	The emissions above 1 GHz were 20 dB lower than the limit.							

Test mode : 8DPSK

Channel	Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Low	1 201.8	V	62.9	-8.4	54.5	74	19.5	Peak
	1 201.8	V	42.5	-8.4	34.1	54	19.9	Average
	2 311.9	V	56.9	-3.8	53.1	74	20.9	Peak
	2 340.3	V	45.3	-3.8	41.5	54	12.5	Average
High	2 494.5	V	56.8	-3.7	53.1	74	20.9	Peak
	2 490.4	V	44.3	-3.7	40.6	54	13.4	Average
Middle	The emissions above 1 GHz were 20 dB lower than the limit.							

Remarks

1. The Unwanted emission was measured in the following position:
 EUT stand-up position(Z axis)
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

4.8 AC Power Line Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results


The requirements are:

Complies

Test Data

Test mode : GFSK, Hopping(Worst case)

Class B_L1

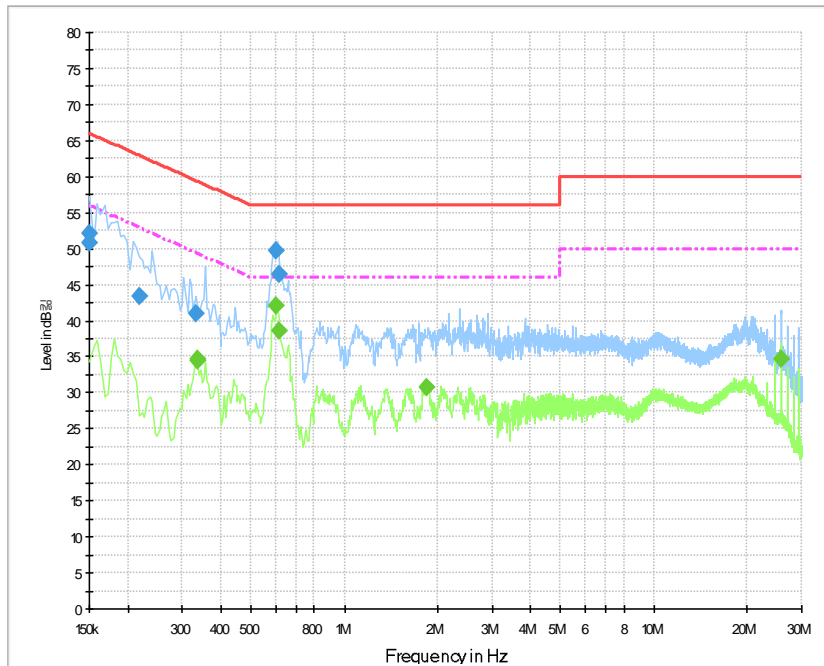


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	52.1	1000.0	9.000	On	L1	9.8	13.9	66.0
0.150000	50.7	1000.0	9.000	On	L1	9.8	15.3	66.0
0.217500	43.3	1000.0	9.000	On	L1	9.8	19.6	62.9
0.330000	40.9	1000.0	9.000	On	L1	9.9	18.5	59.5
0.604500	49.6	1000.0	9.000	On	L1	9.9	6.4	56.0
0.618000	46.4	1000.0	9.000	On	L1	9.9	9.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.334500	34.4	1000.0	9.000	On	L1	9.9	15.0	49.3
0.334500	34.6	1000.0	9.000	On	L1	9.9	14.7	49.3
0.604500	42.1	1000.0	9.000	On	L1	9.9	3.9	46.0
0.618000	38.7	1000.0	9.000	On	L1	9.9	7.3	46.0
1.837500	30.8	1000.0	9.000	On	L1	9.7	15.2	46.0
25.737000	34.7	1000.0	9.000	On	L1	10.0	15.3	50.0

Class B_N

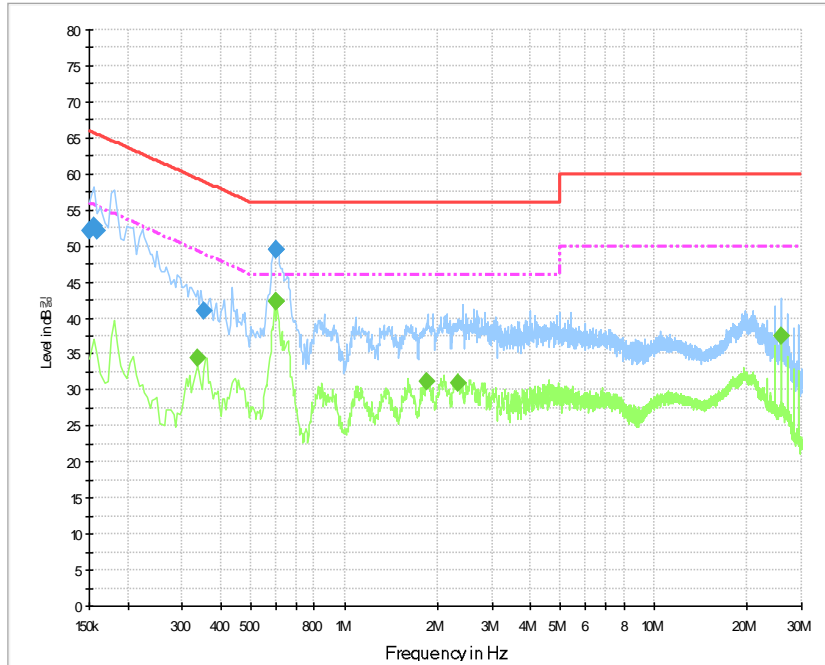

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	52.1	1000.0	9.000	On	N	9.8	13.9	66.0
0.154500	52.8	1000.0	9.000	On	N	9.8	12.9	65.8
0.159000	52.0	1000.0	9.000	On	N	9.8	13.5	65.5
0.352500	41.0	1000.0	9.000	On	N	9.9	17.9	58.9
0.600000	49.5	1000.0	9.000	On	N	9.9	6.5	56.0
0.604500	49.4	1000.0	9.000	On	N	9.9	6.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.334500	34.4	1000.0	9.000	On	N	9.9	14.9	49.3
0.604500	42.4	1000.0	9.000	On	N	9.9	3.6	46.0
0.604500	42.3	1000.0	9.000	On	N	9.9	3.7	46.0
1.851000	31.2	1000.0	9.000	On	N	9.7	14.8	46.0
2.332500	31.0	1000.0	9.000	On	N	9.8	15.0	46.0
25.710000	37.4	1000.0	9.000	On	N	10.1	12.6	50.0



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-02784
Page (18) / (18) Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
1	Signal Analyzer	Rohde & Schwarz	FSV30	100925	2018-01-26	2019-01-26
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2017-11-01	2018-11-01
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2017-10-25	2018-10-25
4	Bilog Antenna	Schaffner	CBL6111C	2551	2018-05-10	2020-05-10
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2018-05-27	2020-05-27
6	6dB Attenuator	R&S	DNF	272.4110.50-2	2017-10-25	2018-10-25
7	6dB Attenuator	R&S	DNF	272.4110.50-1	2018-03-09	2019-03-09
8	AMPLIFIER	SONOMA	310	291721	2018-02-02	2019-02-02
9	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2018-02-01	2019-02-01
10	Preamplifier	Agilent	8449B	3008A02011	2017-11-30	2018-11-30
11	Horn Antenna	ETS-Lindgren	3117	00154525	2017-09-14	2019-09-14
12	Horn Antenna	ETS-Lindgren	3116	00062916	2017-04-25	2019-04-25
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2018-01-26	2019-01-26