

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 subpart C, section 15.225

FOR:

Given Imaging Ltd.

Data Recorder with a connected Sensor Array

Data Recorder model: DR3

Sensor Array model: DR3-Colon

Mode: Recording

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Operating frequencies	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	In band radiated emissions	8
7.2	Out of band radiated emissions.....	14
7.3	Occupied bandwidth test.....	20
8	APPENDIX A Test equipment and ancillaries used for tests.....	23
9	APPENDIX B Measurement uncertainties.....	24
10	APPENDIX C Test laboratory description	25
11	APPENDIX D Specification references	25
12	APPENDIX E Test equipment correction factors.....	26
13	APPENDIX F Abbreviations and acronyms.....	31

1 Applicant information

Client name: Given Imaging Ltd.
Address: P.O.Box 258, Hermon Building, New Industrial Park, Yokneam, 20692, Israel
Telephone: +972 4909 7746
Fax: +972 4993 8060
E-mail: tuvi@givenimaging.com
Contact name: Mr. Tuvi Moalem

2 Equipment under test attributes

Product name: Data Recorder, model DR3, hardware version E, software release 0217 FPGA -300F, serial number 101056 with a connected Sensor Array, model DR3-Colon
Mode: Recording
Operating frequency: 434.1 MHz (Rx) / 13.56 MHz (Tx)
Condition of equipment: Revised model
Receipt date 3/28/2010

3 Manufacturer information

Manufacturer name: Given Imaging Ltd.
Address: P.O.Box 258, Hermon Building, New Industrial Park, Yokneam, 20692, Israel
Telephone: +972 4909 7746
Fax: +972 4993 8060
E-Mail: tuvi@givenimaging.com
Contact name: Mr. Tuvi Moalem

4 Test details

Project ID: 20655
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 3/25/2010
Test completed: 4/13/2010
Test specification(s): FCC CFR 47 PART 15 subpart C, section 15.225

5 Tests summary

Test	Status
Transmitter characteristics	
Sections 15.225(a) (b) (c), In band radiated emissions	Pass
Sections 15.225(d), Out of band radiated emissions	Pass
Section 15.225(e), Frequency stability	Pass*
Section 15.207(a), Conducted emission	Not required
Section 15.215(c), Occupied bandwidth	Pass
Section 15.203, Antenna requirements	Pass*

This test report is based on the test report "GIVRAD_FCC.19944_rev1" issued by Hermon Laboratories in August 2009. The purpose of partial retesting is to verify that the revised EUT with large antenna complies with the standard requirements.

* Refer to the test report "GIVRAD_FCC.19944_rev1".

The test results relate only to the items tested.

	Name and Title	Date	Signature
Tested by:	Mr. E. Plotnichenko, test engineer	April 13, 2010	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	April 27, 2010	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	May 5, 2010	

6 EUT description

6.1 General information

The EUT is a data recorder in combination with a sensor array. The EUT was tested in recording mode (receiving at 434.1 MHz and transmitting at 13.56 MHz). The data recorder is equipped with a 16GB SD card manufactured by SanDisk. The EUT is powered by internal 3.7 V battery.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length	Indoor / outdoor
RF / signal	Sensor Array connector	DR3	Sensor Array	1	Shielded	2.9 m*	Indoor
Signal	SD card	SD card	DR3	1	NA	NA	Indoor

* Always shorter than 3 m.

6.3 Operating frequencies


Source	Frequency, MHz			
Clock	27	24	64.1	NA
Internal generator	162	202	404	480
LO	846.6	NA	NA	NA
Tx	13.56	NA	NA	NA
Rx	434.1	NA	NA	NA

6.4 Changes made in the EUT

To withstand the standard requirements the following change was implemented in the EUT: a ferrite bead manufactured by Fair Rite, p/n 0444164281 was installed on the interface cable near DR-3.

It is manufacturer responsibility to implement the change in the production version of the EUT. In any case the test report applies to the tested item only.

6.5 Test configuration

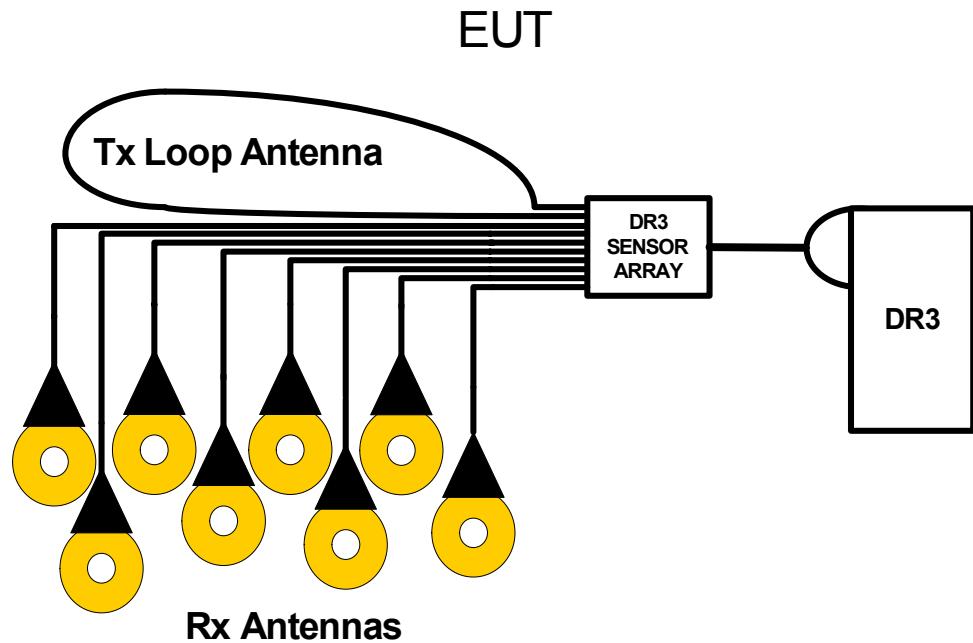

6.6 Transmitter characteristics

Type of equipment				
V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Intended use	Condition of use			
fixed	Always at a distance more than 2 m from all people			
mobile	Always at a distance more than 20 cm from all people			
V portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range	13.110-14.01 MHz			
Operating frequency	13.56 MHz			
Is transmitter output power variable?	V	No	continuous variable	
		Yes	stepped variable with stepsize	dB
			minimum RF power	dBm
			maximum RF power	dBm
Antenna connection				
V unique coupling	standard connector		integral	with temporary RF connector
				without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer		Model number	Gain
Loop	Given Imaging		1.9 m Downlink Loop Antenna, Version 1.0	2 dBd
Transmitter 99% power bandwidth	500 kHz			
Transmitter aggregate data rate/s	20.25 kbps			
Transmitter aggregate symbol (baud) rate/s	20.25 ksymbols per second			
Type of modulation	Linear CHIRP			
Maximum transmitter duty cycle in normal use	100%			
Transmitter duty cycle supplied for test	100%			
Transmitter power source				
V	Battery	Nominal rated voltage	3.7 VDC	Battery type
		Minimum rated voltage	3.0 VDC	Li-Ion
		Maximum rated voltage	4.2 VDC	
	DC	Nominal rated voltage		
	AC mains	Nominal rated voltage	VAC	Frequency Hz
Common power source for transmitter and receiver			yes	

Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/28/2010 9:22:56 AM	Relative Humidity:	45 %
Temperature: 24 °C	Air Pressure: 1013 hPa	Power Supply:	Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 In band radiated emissions

7.1.1 General

This test was performed to measure field strength of fundamental emission and modulation products from the EUT within the assigned band. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Radiated emission limits

Frequency, MHz	Field strength at 30 m distance*		Field strength at 3 m distance*	
	µV/m	dB(µV/m)	µV/m	dB(µV/m)**
13.110 – 13.410	106	40.5	10600	80.5
13.410 – 13.553	334	50.5	33400	90.5
13.553 – 13.567	15848	84.0	1584800	124.0
13.567 – 13.710	334	50.5	33400	90.5
13.710 – 14.010	106	40.5	10600	80.5

*- The limit is provided in quasi peak values.

**- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and the performance check was conducted.
- 7.1.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.
- 7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.




HERMON LABORATORIES

Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	3/28/2010 9:22:56 AM		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Figure 7.1.1 Setup for in band radiated emission measurements

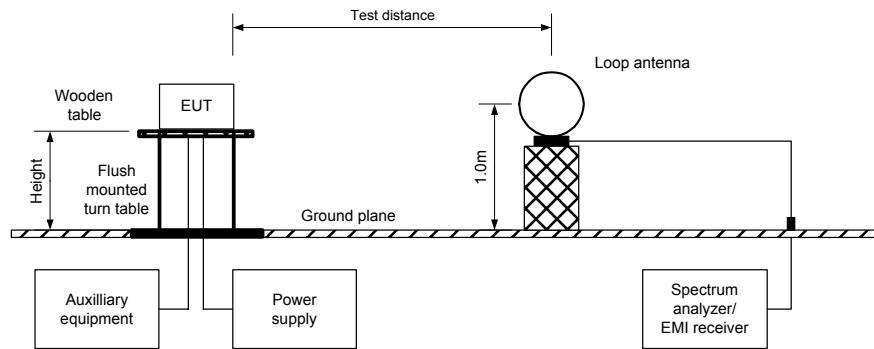

Photograph 7.1.1 Setup for in band radiated emission measurements





HERMON LABORATORIES

Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	3/28/2010 9:22:56 AM	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Table 7.1.2 In band radiated emission test results

TEST DISTANCE: 3 m
 EUT POSITION: 3 orthogonal (X / Y / Z)
 MODULATION: Linear CHIRP
 MODULATING SIGNAL (for the test purposes): PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 13.110 – 14.010 MHz
 RESOLUTION BANDWIDTH: 9.0 kHz
 VIDEO BANDWIDTH: 30.0 kHz

Carrier frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Azimuth**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*			
13.4550	89.07	NA	90.50	-1.43	Vertical	90	Pass

The recorded results were obtained in the EUT X-axis (typical vertical) position.

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0415	HL 0446	HL 0812	HL 1425				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	3/28/2010 9:22:56 AM	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 Fundamental emission test result

TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Peak hold
 ANT POSITION 0°

⌚ 18:45:39 MAR 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 13.460 MHz
 88.98 dB μ V/m

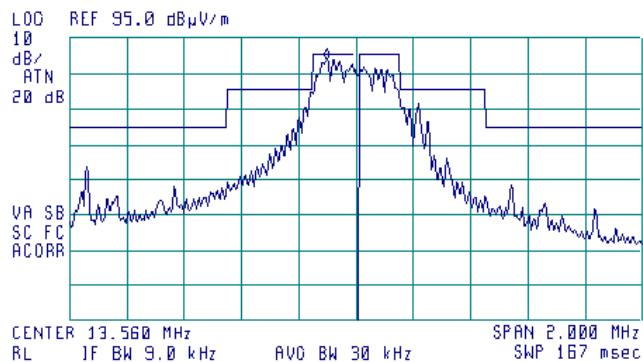**Plot 7.1.2 Fundamental emission test result, zoomed**



TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Peak hold
 ANT POSITION 0°

⌚ 18:24:28 MAR 21, 2010

⌚ 18:28:04 MAR 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 13.4550 MHz
 89.07 dB μ V/m

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 13.4000 MHz
 79.93 dB μ V/m

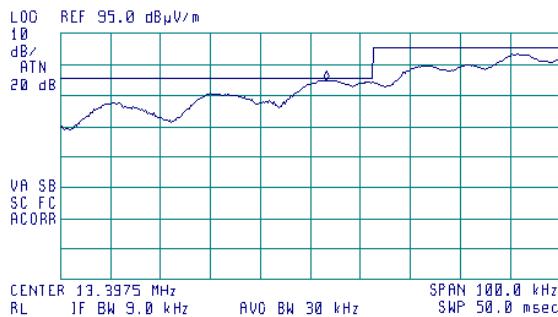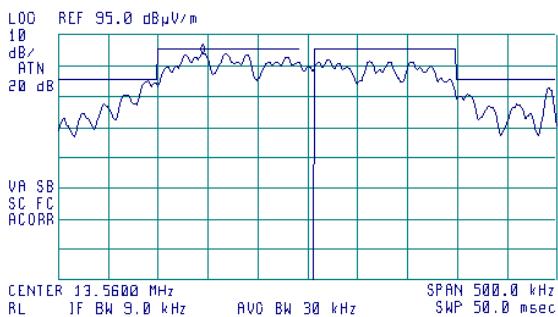



HERMON LABORATORIES


Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	3/28/2010 9:22:56 AM	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 Fundamental emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
DETECTOR: Peak hold
ANT POSITION 45°

⌚ 18:31:52 MAR 21, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 13.460 MHz
86.17 dB μ V/m

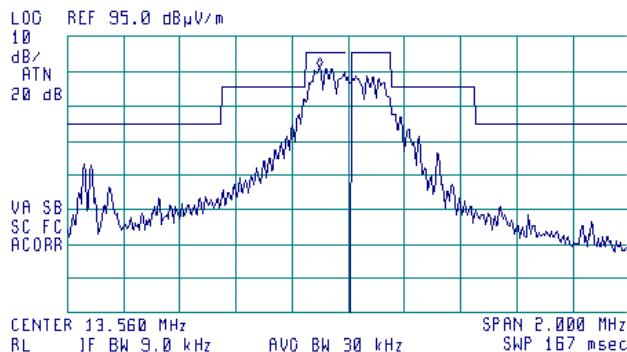


Plot 7.1.4 Fundamental emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
DETECTOR: Peak hold
ANT POSITION 90°

⌚ 18:35:21 MAR 21, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 13.460 MHz
80.14 dB μ V/m

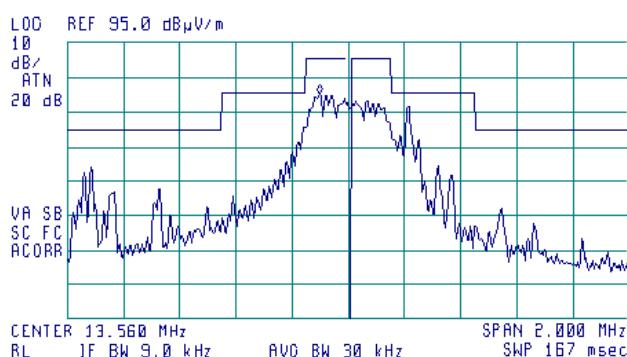




HERMON LABORATORIES

Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Sections 15.225(a) (b) (c), In band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	3/28/2010 9:22:56 AM		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 Fundamental emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
DETECTOR: Peak hold
ANT POSITION -45°

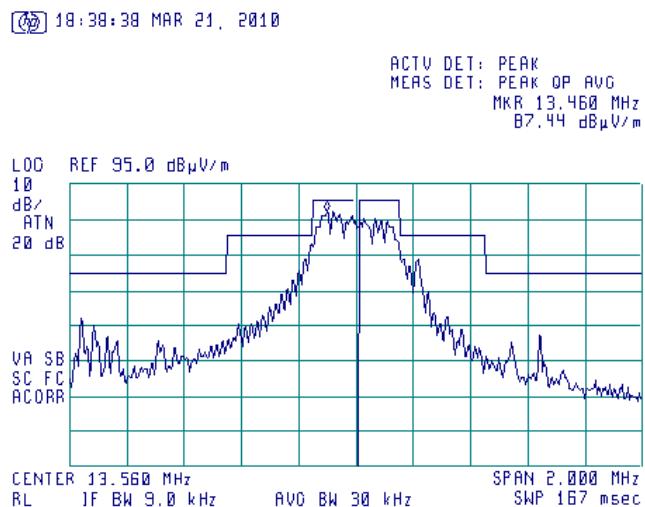



HERMON LABORATORIES

Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/13/2010 1:07:32 PM	Relative Humidity:	48 %
Temperature: 24.8 °C	Air Pressure: 1013 hPa	Power Supply:	Battery
Remarks:			

7.2 Out of band radiated emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated emission limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5**	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	

* - The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

** - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

*** - The limit decreases linearly with the logarithm of frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.




HERMON LABORATORIES


Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	4/13/2010 1:07:32 PM		
Temperature: 24.8 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: Battery
Remarks:			

Figure 7.2.1 Radiated emissions below 30 MHz test set up

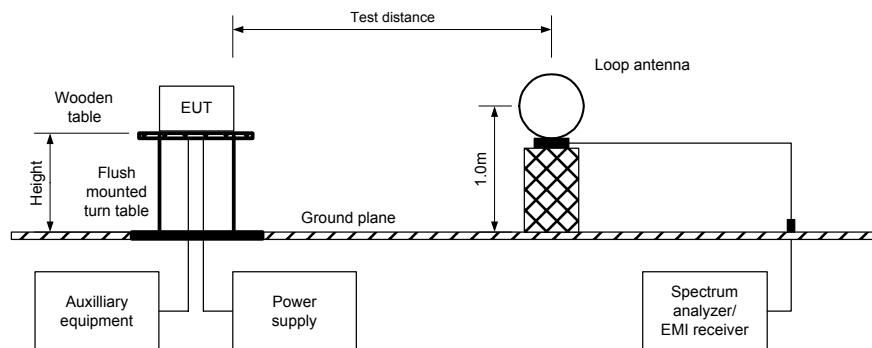

Photograph 7.2.1 Radiated emissions below 30 MHz test set up

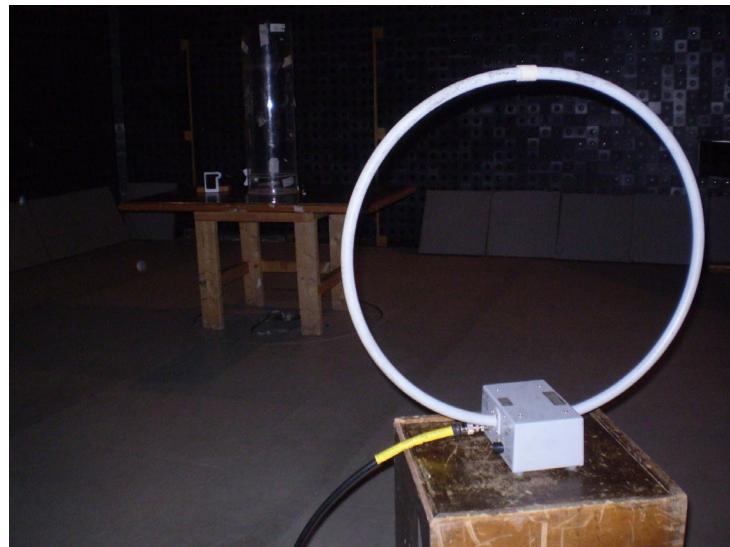




HERMON LABORATORIES


Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/13/2010 1:07:32 PM	Relative Humidity:	48 %
Temperature:	24.8 °C	Air Pressure:	1013 hPa
Power Supply:	Battery		
Remarks:			

Figure 7.2.2 Radiated emissions above 30 MHz test set up

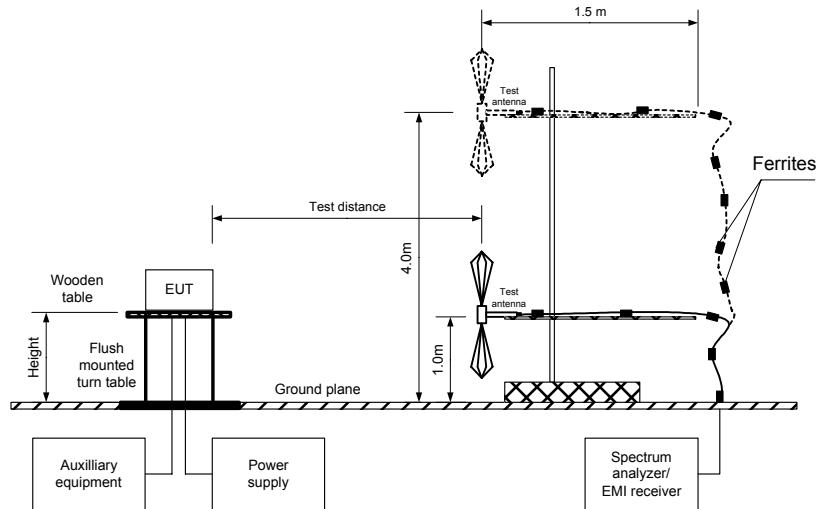

Photograph 7.2.2 Radiated emissions above 30 MHz test set up

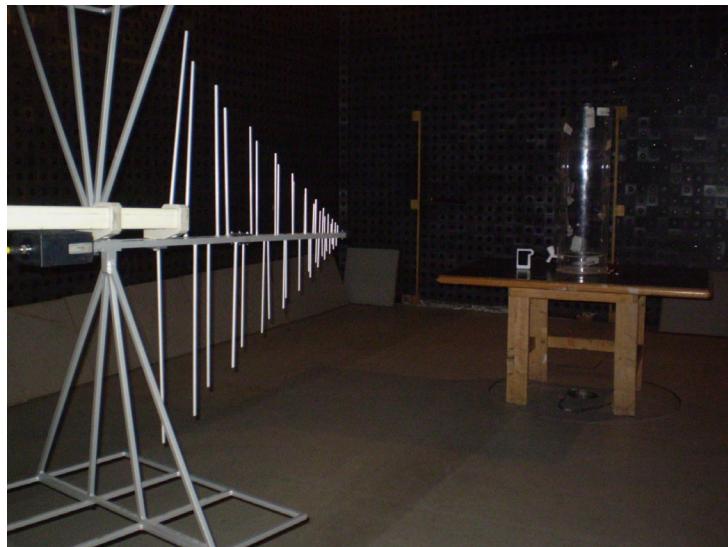



Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2010 1:07:32 PM	PASS	
Temperature: 24.8 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Out of band radiated emissions test results

TEST DISTANCE: 3 m
 EUT POSITION: X-axis
 MODULATION: Linear chirp
 TRANSMITTER OUTPUT POWER: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 VIDEO BANDWIDTH: 9.0 kHz (150 kHz – 30 MHz)
 TEST ANTENNA TYPE: 120 kHz (30 MHz – 1000 MHz)
 ≥ Resolution bandwidth
 Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
72.937500	27.24	24.99	40.50	-15.51	V	1.1	0	Pass
136.100000	33.84	30.49	40.50	-10.01	H	1.25	162	
148.850000	33.60	30.60	40.50	-9.90	H	1.2	151	
175.825000	33.37	29.71	40.50	-10.79	H	1.3	181	
486.025000	36.15	33.20	47.50	-14.30	V	1.1	157	
810.055000	46.66	41.42	47.50	-6.08	V	1.1	174	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 3616			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/13/2010 1:07:32 PM	Relative Humidity:	48 %
Temperature:	24.8 °C	Air Pressure:	1013 hPa
Remarks:			

Plot 7.2.1 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical & Horizontal
 DETECTOR: Peak hold

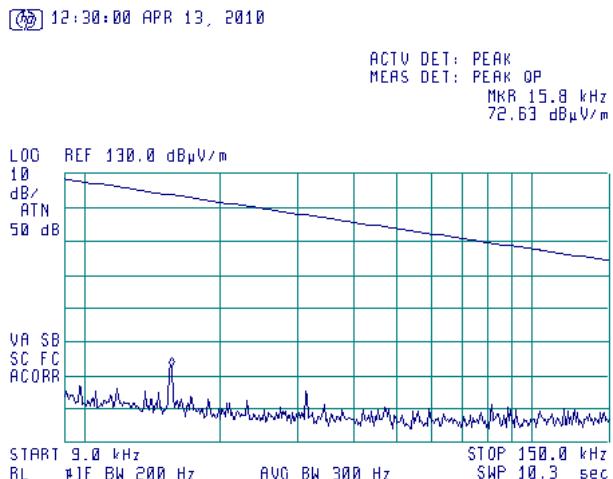**Plot 7.2.2 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical & Horizontal
 DETECTOR: Peak hold

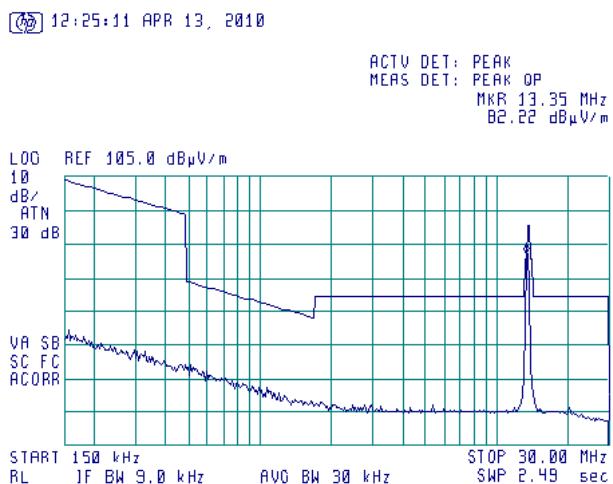



HERMON LABORATORIES

Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010


Test specification:	Sections 15.225(d), Out of band radiated emissions		
Test procedure:	ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/13/2010 1:07:32 PM	Relative Humidity:	48 %
Temperature:	24.8 °C	Air Pressure:	1013 hPa
Remarks:		Power Supply:	Battery

Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
DETECTOR: Peak hold

⌚ 11:37:12 APR 13, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP
MKR 881.1 MHz
37.61 dB μ V/m

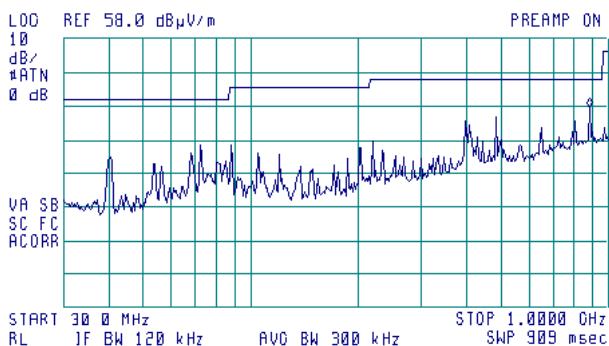


Plot 7.2.4 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
DETECTOR: Peak hold

⌚ 11:18:03 APR 13, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP
MKR 134.8 MHz
39.33 dB μ V/m

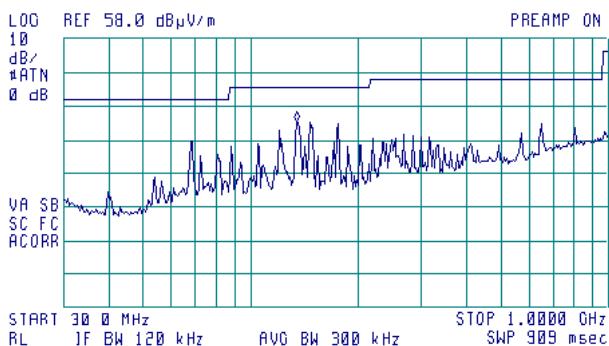



HERMON LABORATORIES

Test specification:	Section 15.215(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2010 2:30:57 PM	PASS	
Temperature: 24.8 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
13.110 – 13.410	
13.410 – 13.553	
13.553 – 13.567	20.0
13.567 – 13.710	
13.710 – 14.010	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.3.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and the associated plot.
- 7.3.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.3.1 Occupied bandwidth test setup





Test specification:	Section 15.215(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2010 2:30:57 PM	PASS	
Temperature: 24.8 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 13.11 – 14.01 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 9 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: Linear chirp
 MODULATING SIGNAL: Enable

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	13.338	0.45	0	13.33845	13.110	Pass
High	13.770	0	0.40	13.77040	14.010	Pass

Reference numbers of test equipment used

HL 0446	HL 0521	HL 2871	3616				
---------	---------	---------	------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Report ID: GIVRAD_FCC.20655.doc
Date of Issue: 4/27/2010

Test specification:	Section 15.215(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/13/2010 2:30:57 PM	Relative Humidity:	48 %
Temperature:	24.8 °C	Air Pressure:	1013 hPa
Power Supply:	Battery		
Remarks:			

Plot 7.3.1 Occupied bandwidth test result, low edge

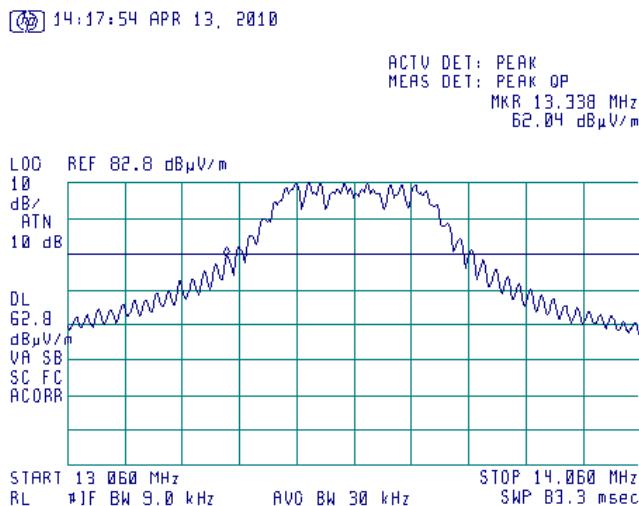

Plot 7.3.2 Occupied bandwidth test result, high edge

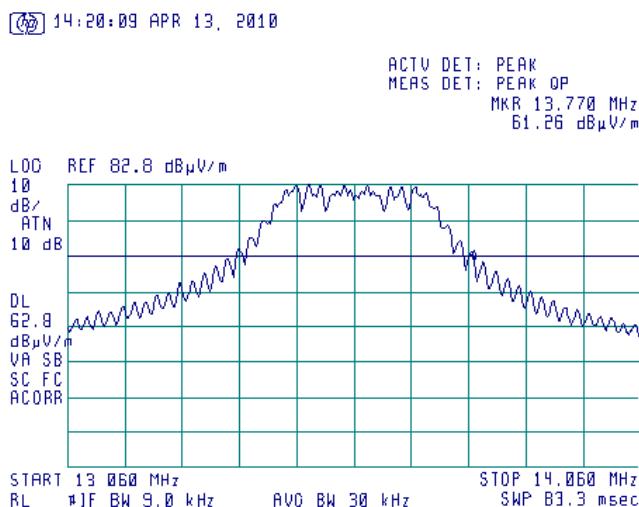

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0415	Cable, Coax, RF, RG-214	Hermon Laboratories	CC-3	056	01-Dec-09	01-Dec-10
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-09	29-Jun-10
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Aug-09	27-Aug-10
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	02-Dec-09	02-Dec-10
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	28-Aug-09	28-Aug-10
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	16-Sep-09	16-Sep-10
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	02-Dec-09	02-Dec-10

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

47CFR part 15: 2009	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Cable loss

**Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812**

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	20	0.73	± 0.12
2	30	0.91	
3	50	1.2	
4	80	1.56	
5	100	1.76	
6	200	2.59	
7	300	3.26	
8	400	3.93	
9	500	4.42	
10	600	4.92	
11	700	5.36	
12	800	5.88	
13	900	6.41	
14	1000	6.71	
15	1500	8.63	
16	2000	10.39	

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3616

Frequency, MHz	Cable loss, dB						
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PCB	printed circuit board
PM	pulse modulation
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere
WB	wideband

END OF DOCUMENT