



LCIE

# TEST REPORT

N°: 162778-740452-A (FILE#1028609)

Version : 02

<b>Subject</b>	Electromagnetic compatibility tests according to the standards: <b>FCC CFR 47 Part 15, Subpart C</b> <b>ANSI C63.10 (2013)</b> <b>RSS-210 Issue 10.0</b>
<b>Issued to</b>	<b>ASTEEL FLASH FRANCE</b>  43 chemin du Vieux Chêne 38240 - MEYLAN FRANCE
<b>Apparatus under test</b>	<b>Avalanche beacon</b> <b>ARVA</b> <b>ARVA</b> <b>NEO PRO</b> <b>E48839-1024</b> <b>O9BARVANEOPRO</b> <b>22008-ARVANEO</b>
<b>Conclusion</b>	See Test Program chapter §1
<b>Test date</b>	December 4, 2019
<b>Test location</b>	FONTENAY AUX ROSES
<b>IC Test site</b>	6230B-1
<b>Composition of document</b>	31 pages
<b>Document issued on</b>	April 14, 2020

**Written by :**


Gaetan DESCHAMPS

Tests operator

**Approved by :**

Anthony MERLIN

Technical manager



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

**LCIE**

Laboratoire Central des Industries Electriques  
Une société de Bureau Veritas

ZI Centr'Alp

170 rue de Chatagnon  
38430 Moirans FRANCE

Tél : +33 4 76 07 36 36

contact@lcie.fr  
www.lcie.fr



L C I E

## PUBLICATION HISTORY

Version	Date	Author	Modification
01	December 16, 2019	Gaetan DESCHAMPS	Creation of the document
02	April 14, 2020	Gaetan DESCHAMPS	Modification of model to FCC/IC Certification



L C I E

## SUMMARY

1. TEST PROGRAM .....	4
2. SYSTEM TEST CONFIGURATION .....	5
3. RADIATED EMISSION DATA (15.209) .....	7
4. OCCUPIED BANDWIDTH .....	18
5. FUNDAMENTAL FREQUENCY TOLERANCE (RSS) .....	20
6. RECEIVER SPURIOUS EMISSION.....	22
8. UNCERTAINTIES CHART.....	31



L C I E

## 1. TEST PROGRAM

- Standard:**
- FCC Part 15, Subpart C
  - ANSI C63.10 (2013)
  - RSS-210 Issue 10
  - RSS-Gen Issue 5

EMISSION TEST	LIMITS			RESULTS (Comments)
<b>Limits for conducted disturbance at mains ports</b> 150kHz-30MHz CFR 47 §15.207	<b>Frequency</b>	<b>Quasi-peak value (dB<math>\mu</math>V)</b>	<b>Average value (dB<math>\mu</math>V)</b>	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP
	150-500kHz	66 to 56	56 to 46	
	0.5-5MHz	56	46	
	5-30MHz	60	50	
<b>Radiated emissions</b> 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.225 RSS-Gen §4.9	<b>Measure at 300m</b> 9kHz-490kHz : 67.6dB $\mu$ V/m /F(kHz) <b>Measure at 30m</b> 490kHz-1.705MHz : 87.6dB $\mu$ V/m /F(kHz) 1.705MHz-30MHz : 29.5 dB $\mu$ V/m			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Radiated emissions</b> 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.225 RSS-Gen §4.9 <i>Highest frequency : (Declaration of provider)</i>	<b>Measure at 3m</b> 30MHz-88MHz : 40 dB $\mu$ V/m 88MHz-216MHz : 43.5 dB $\mu$ V/m 216MHz-960MHz : 46.0 dB $\mu$ V/m Above 960MHz : 54.0 dB $\mu$ V/m			
<b>Occupied bandwidth</b> RSS-Gen Issue 5 §6.7	<b>No limit</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Receiver Spurious Emission**</b> RSS-Gen Issue 5 §7.3	<b>See RSS-Gen §7.3</b> 30MHz-88MHz : 40 dB $\mu$ V/m 88MHz-216MHz : 43.5 dB $\mu$ V/m 216MHz-960MHz : 46.0 dB $\mu$ V/m Above 960MHz : 54.0 dB $\mu$ V/m			

\*§15.33: The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.
  - If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.
  - If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.
- If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.

\*\*Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.



L C I E

## 2. SYSTEM TEST CONFIGURATION

### 2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

#### Equipment under test (EUT):

NEO PRO

Serial Number: E48839-1024



#### Power supply:

During all the tests, EUT is supplied by  $V_{nom}$ : 3\*1,5VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	<input type="checkbox"/> AC <input type="checkbox"/> DC <input checked="" type="checkbox"/> Battery	3*1,5	-	-

#### Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	L460	-	-
AC source 1kW	KEYSIGHT	-	-



L C I E

**Equipment information:**

EQUIPMENT INFORMATION				
<b>RF module:</b>	Nc*			
<b>Frequency Carrier:</b>	[457 kHz]			
<b>Frequency band:</b>	[456.9-457.1kHz]			
<b>RF mode:</b>	<input checked="" type="checkbox"/> Transmitter	<input type="checkbox"/> Transceiver	<input checked="" type="checkbox"/> Receiver	<input type="checkbox"/> Standby
<b>Antenna type:</b>	<input type="checkbox"/> External:		<input checked="" type="checkbox"/> Internal: Coil	
<b>Antenna gain:</b>	0 dBi			
<b>Equipment location</b>	<input checked="" type="checkbox"/> Mobile station		<input type="checkbox"/> Fixed station	
<b>Extreme temperature range:</b>	<input checked="" type="checkbox"/> Category I (General) -20°C to +55°C		<input type="checkbox"/> Category II (Portable) -10°C to +55°C	<input type="checkbox"/> Category III (Indoor) +5°C to +35°C
<b>Extreme test source voltage:</b>	<input checked="" type="checkbox"/> ±10%:	<input type="checkbox"/> Other:	From XXVDC to XXVDC ( ask from provider)	
<b>Rmq:</b>				

Nc\*: Not Communicated

**2.2. EUT CONFIGURATION**

A special configuration of the EUT permits:

- Permanent emission of the carrier frequency with modulation
- Permanent RX mode

Inboard Firmware / Software version of EUT: V. Not communicated

**2.3. EQUIPMENT MODIFICATIONS** None       Modification:**2.4. FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where      FS = Field Strength  
              RA = Receiver Amplitude  
              AF = Antenna Factor  
              CF = Cable Factor  
              AG = Amplifier Gain

Assume a receiver reading of 52.5dB $\mu$ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB $\mu$ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m.}$$

**2.5. CALIBRATION DATE**

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period



L C I E

### 3. RADIATED EMISSION DATA (15.209)

#### 3.1. ENVIRONMENTAL CONDITIONS

Test performed by : Mounir Bouamara  
Date of test : December 12, 2019  
Relative humidity (%) : 40  
Ambient temperature (°C) : 24

#### 3.2. TEST SETUP

The installation of EUT is identical for pre-characterization measures in a 3 meters semi-anechoic chamber and for measures on the 10 meters Open site.



The EUT and auxiliaries are set:

- 80cm above the ground on the non-conducting table (Table-top equipment) - Below 1GHz
- 150cm above the ground on the non-conducting table (Table-top equipment) - Above 1GHz
- 10cm above the ground on isolating support (Floor standing equipment)

The EUT is powered by  $V_{nom}$ .



*Test setup on OATS*

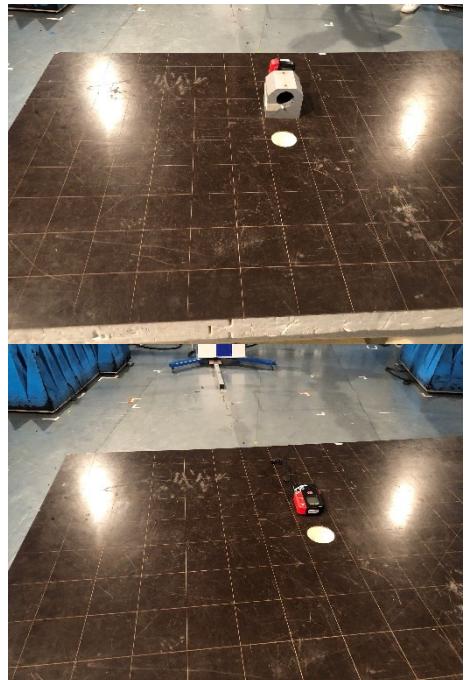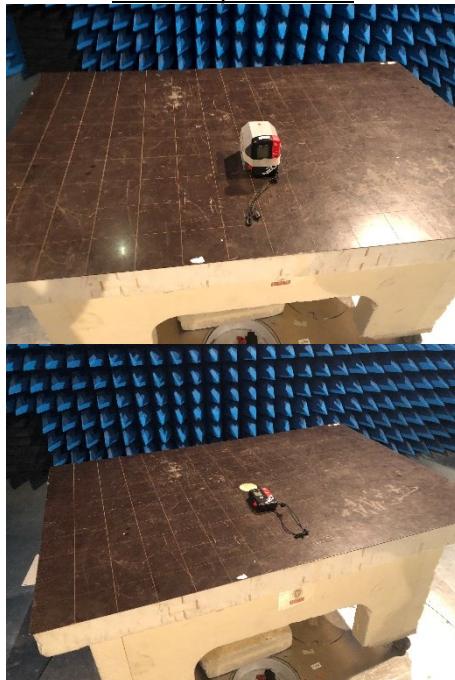

*Test setup in anechoic chamber*



L C I E

### 3.3. TEST METHOD

The product has been tested according to ANSI C63.10, FCC Part 15 Subpart C.

#### Pre-characterisation measurement: (9kHz – 1GHz)

A pre-scan of all the setup has been performed in a 3 meters semi-anechoic chamber for frequency from 30MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test for maximized the emission measurement. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration.

#### Characterization on 10 meters open site from 9kHz to 1GHz:

Radiated Emissions were measured on an open area test site. A description of the facility is on file with the FCC. The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC Part 15 Subpart C limits. Measurement bandwidth was 9kHz below 30MHz and 120kHz from 30 MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test for maximized the emission measurement. The height antenna is varied from 1m to 4m. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown.

Frequency list has been created with anechoic chamber pre-scan results.

### 3.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 100kHz - 18GHz	LCIE SUD EST	—	A7085027	07/19	07/20
Antenna Bi-log	AH System	SAS-521-7	C2040180	10/18	10/20
Antenna mast (Cage#1)	MATURO GmbH	AM 4.0	F2000407		
BAT EMC	NEXIO	v3.9.0.10	L1000115		
Cable 0.75m	SUCOFLEX	18GHz	A5329920	09/19	09/20
Emission Cable	MICRO-COAX	18GHz	A5329656	07/19	07/20
Emission Cable	SUCOFLEX	18GHz	A5329899	07/19	07/20
HF Radiated emission comb generator	LCIE SUD EST	—	A3169088		
Radiated emission comb generator	BARDET	—	A3169050		
Semi-Anechoic chamber #1 (BF)	SIEPEL	—	D3044016_BF	07/19	07/22
Semi-Anechoic chamber #1 (VSWR)	SIEPEL	—	D3044016_VSWR	07/19	07/22
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	03/18	03/20
Table C1/OATS	MATURO GmbH	—	F2000437		
Thermo-hygrometer (C1)	OREGON	WMR 80	B4206013	06/18	06/20
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20
Turntable chamber (Cage#1)	MATURO GmbH	TT 2.0 SI	F2000406		
Turntable controller (Cage#1)	MATURO GmbH	Control Unit	F2000408		

### 3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

Divergence:




L C I E

### 3.6. TEST RESULTS

#### 3.6.1. Pre-characterization at 3 meters [9kHz-30MHz]

See graph for 9kHz-30MHz band:

Graph identifier	Polarization	EUT position	Mode	Comments
Emr# 1	0°,90	Axis XY	TX	See annex 1
Emr# 2	180°	Axis XY	TX	See annex 1
Emr# 3	0°,90	Axis Z	TX	See annex 1
Emr# 4	180°	Axis Z	TX	See annex 1

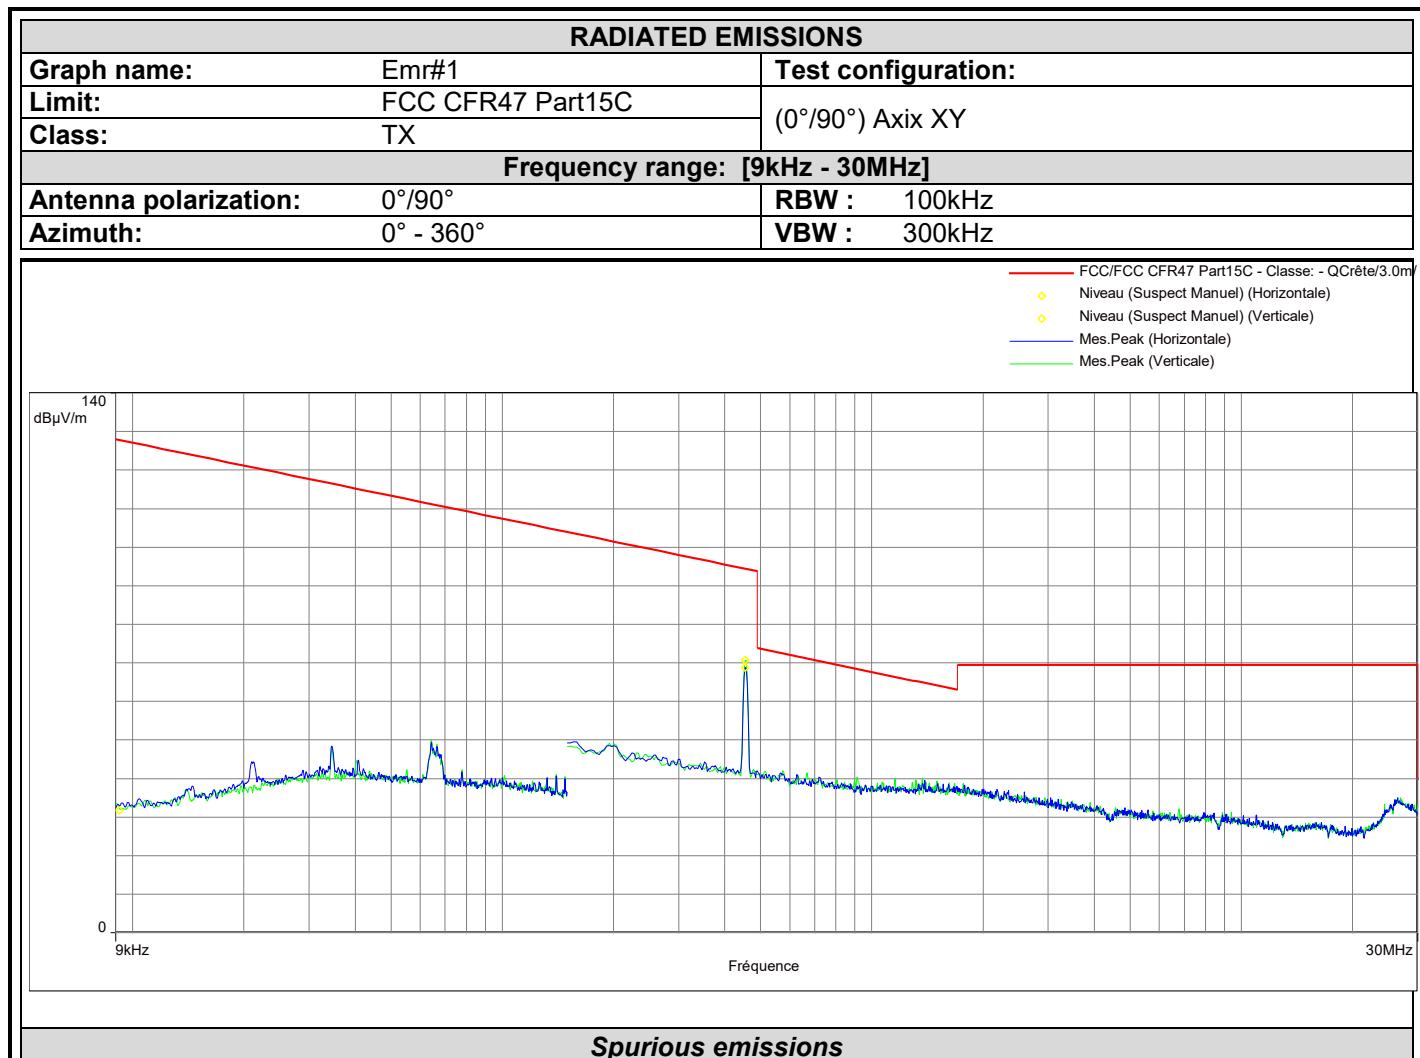


Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Hauteur (m)	Polarization
0.454*	68.8	1.6	0°
0.009	31.8	1.6	90°
0.454*	70.8	1.6	90°

\*Carrier frequency



L C I E

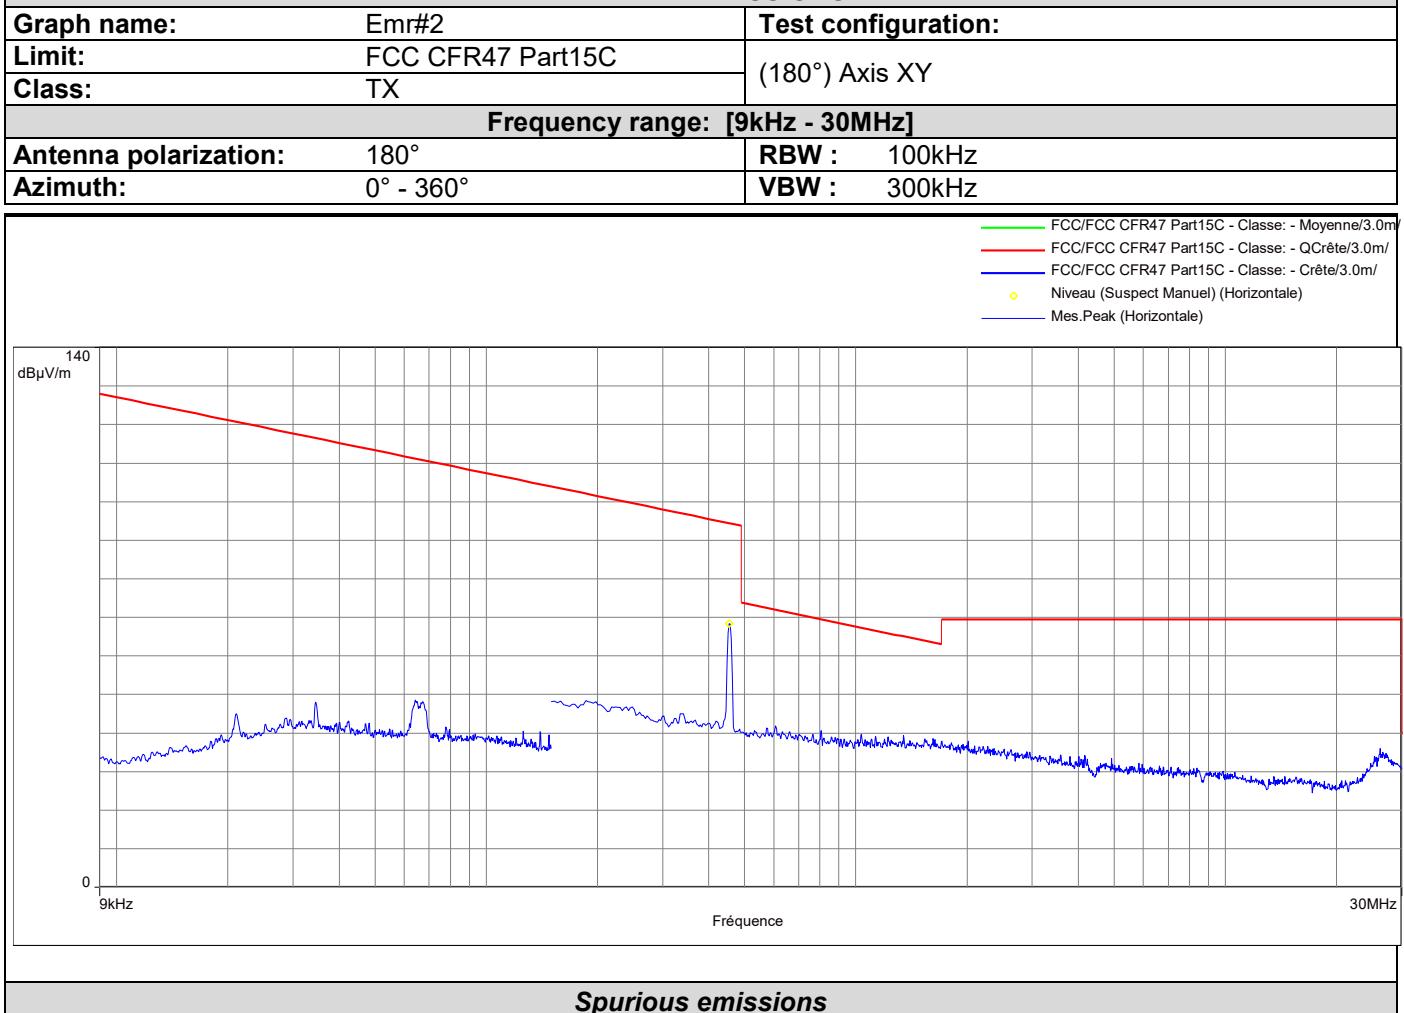
**RADIATED EMISSIONS**

Frequency (MHz)	Peak Level (dBµV/m)	Hauteur (m)	Polarization
0.454*	68.4	1.6	180°

\*Carrier frequency



L C I E

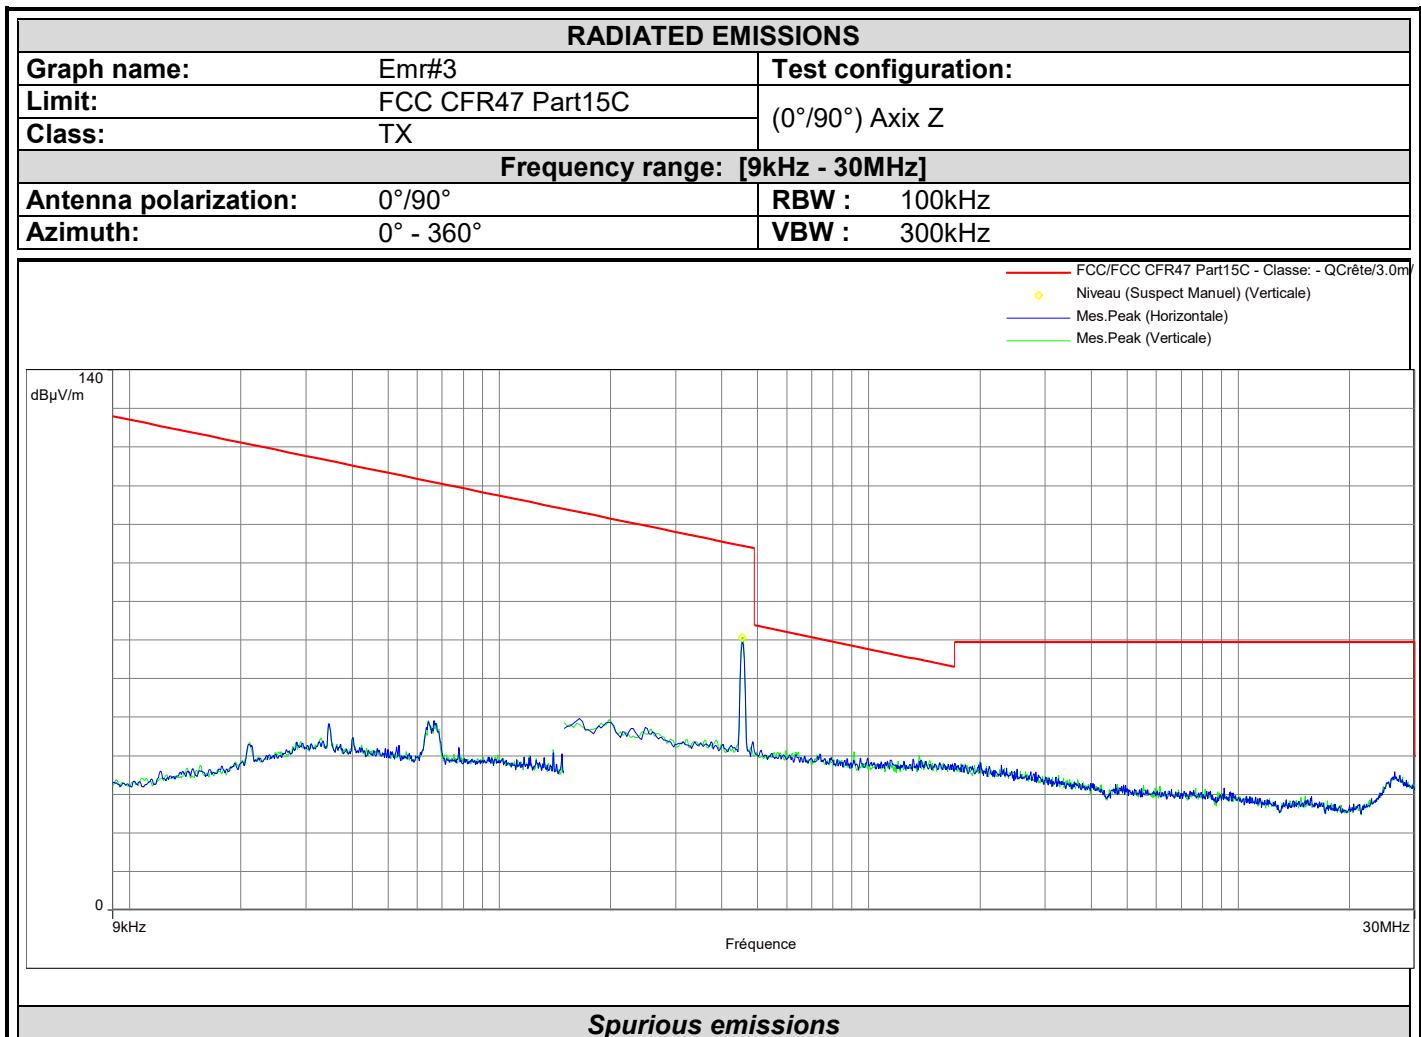


Frequency (MHz)	Peak Level (dBμV/m)	Hauteur (m)	Polarization
0.454*	70.8	1.6	90°

\*Carrier frequency



L C I E

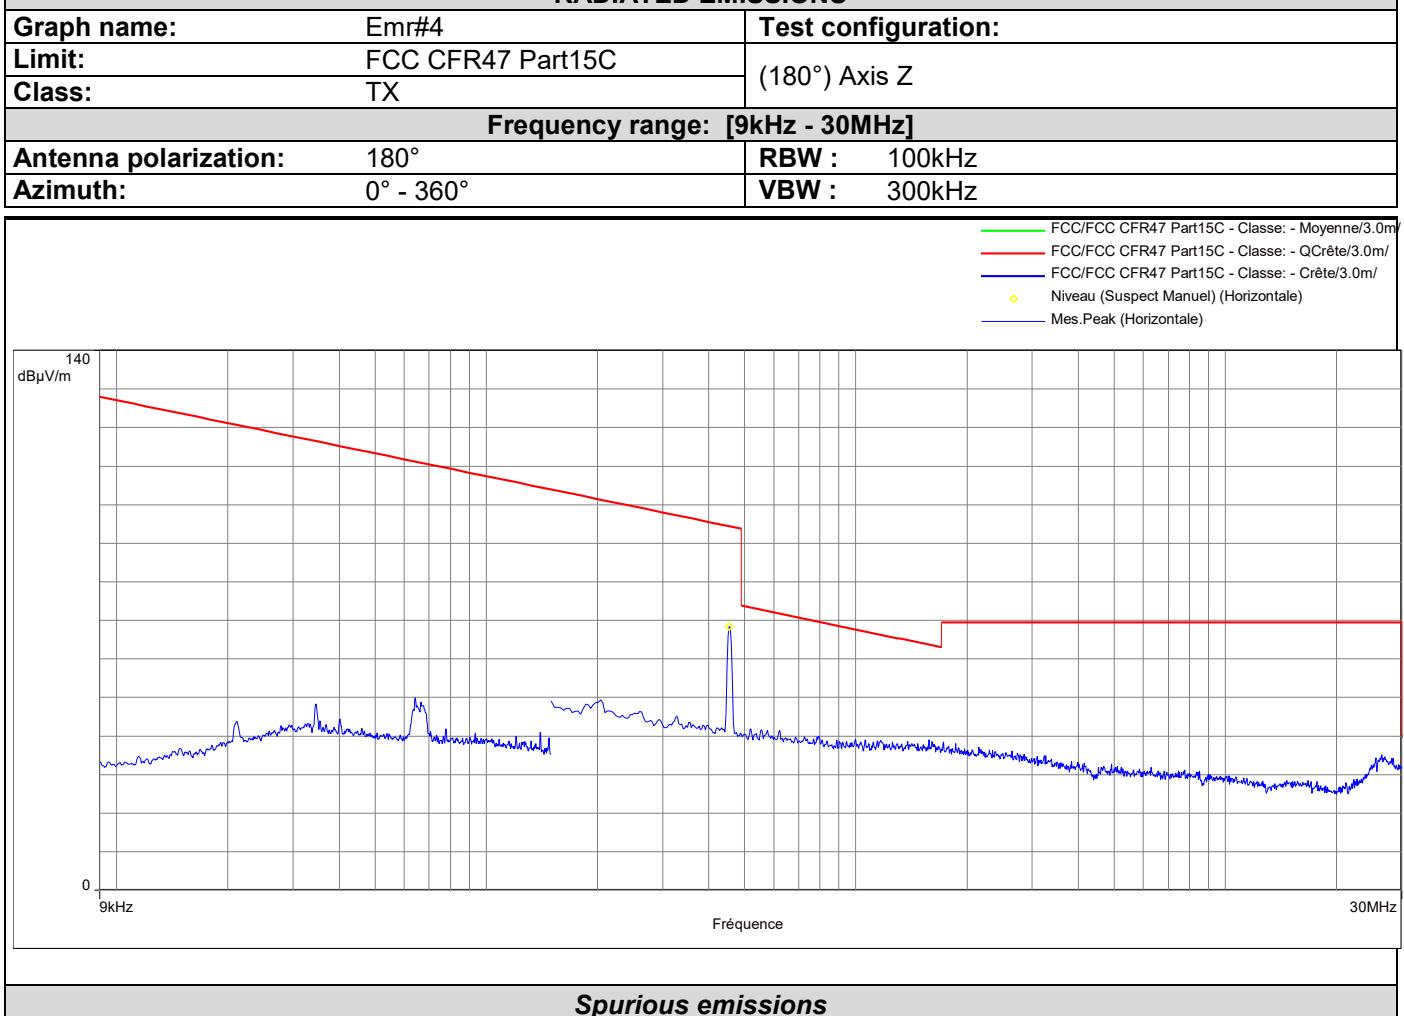**RADIATED EMISSIONS**

Frequency (MHz)	Peak Level (dBµV/m)	Hauteur (m)	Polarization
0.454*	68.4	1.6	180°

\*Carrier frequency




L C I E

### 3.6.2. Pre-characterization at 3 meters [30MHz-1GHz]

See graphs for 30MHz-1GHz:


Graph identifier	Polarization	EUT position	Mode	Comments
Emr# 5	H & V	Axis XY	TX	See annex 1
Emr# 6	H & V	Axis Z	TX	See annex 1
Emr# 7	H & V	Axis XY	RX	See annex 1
Emr# 8	H & V	Axis Z	RX	See annex 1

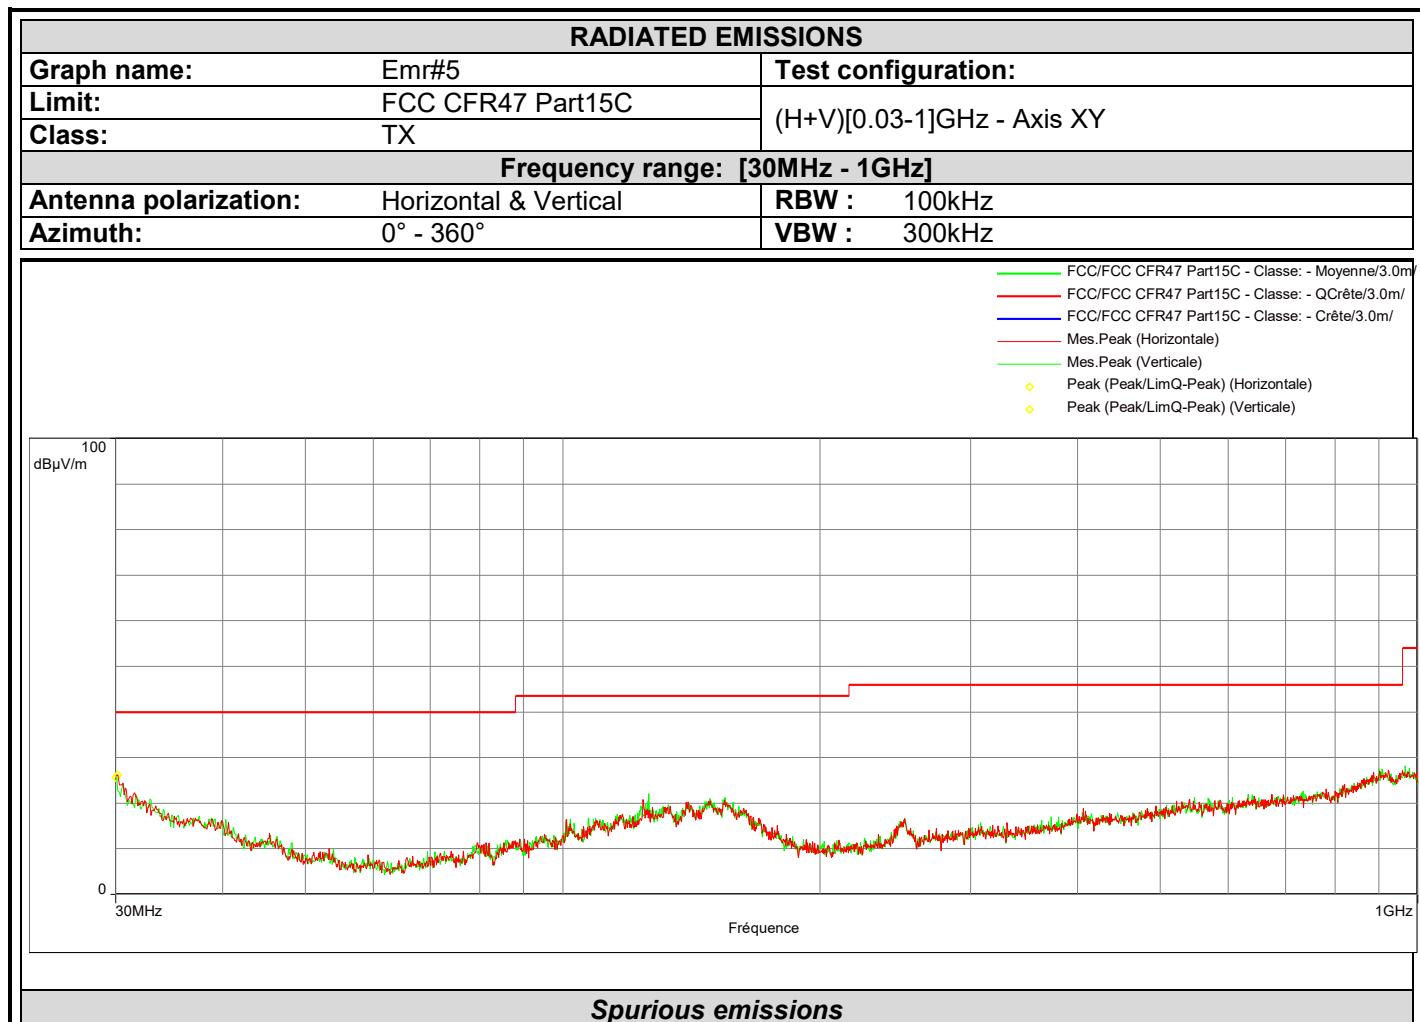

Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	26.2	40.0	-13.8	1.6	Horizontal	-6.9
30.000	25.6	40.0	-14.4	1.6	Vertical	-6.8




L C I E

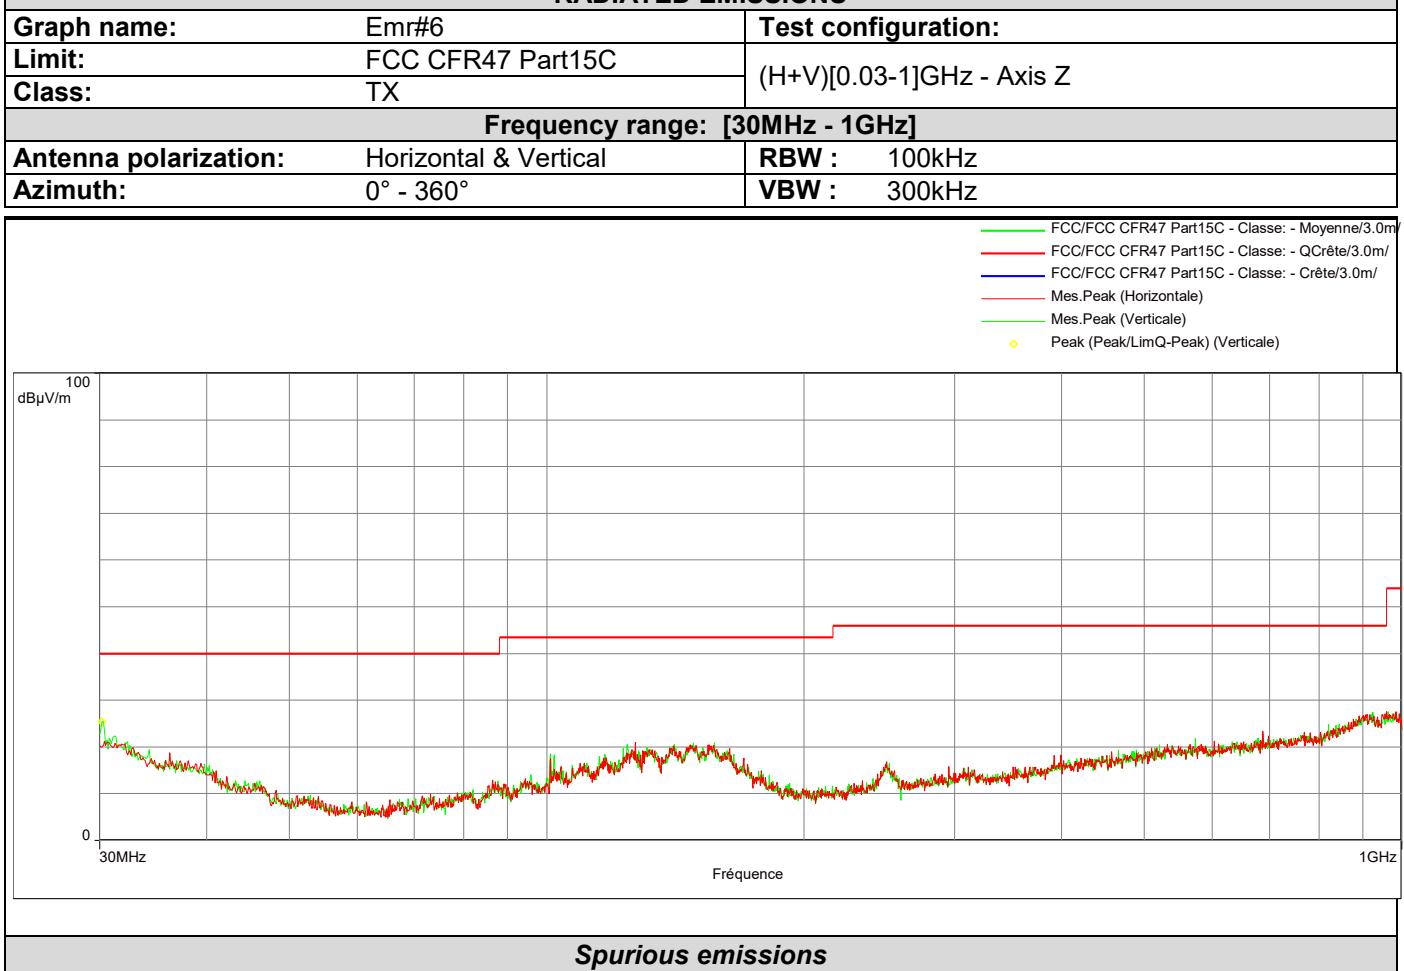**RADIATED EMISSIONS****Spurious emissions**

Frequency (MHz)	Peak (dBµV/m)	LimQP (dBµV/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	25.4	40.0	-14.6	1.6	Vertical	-6.9




L C I E

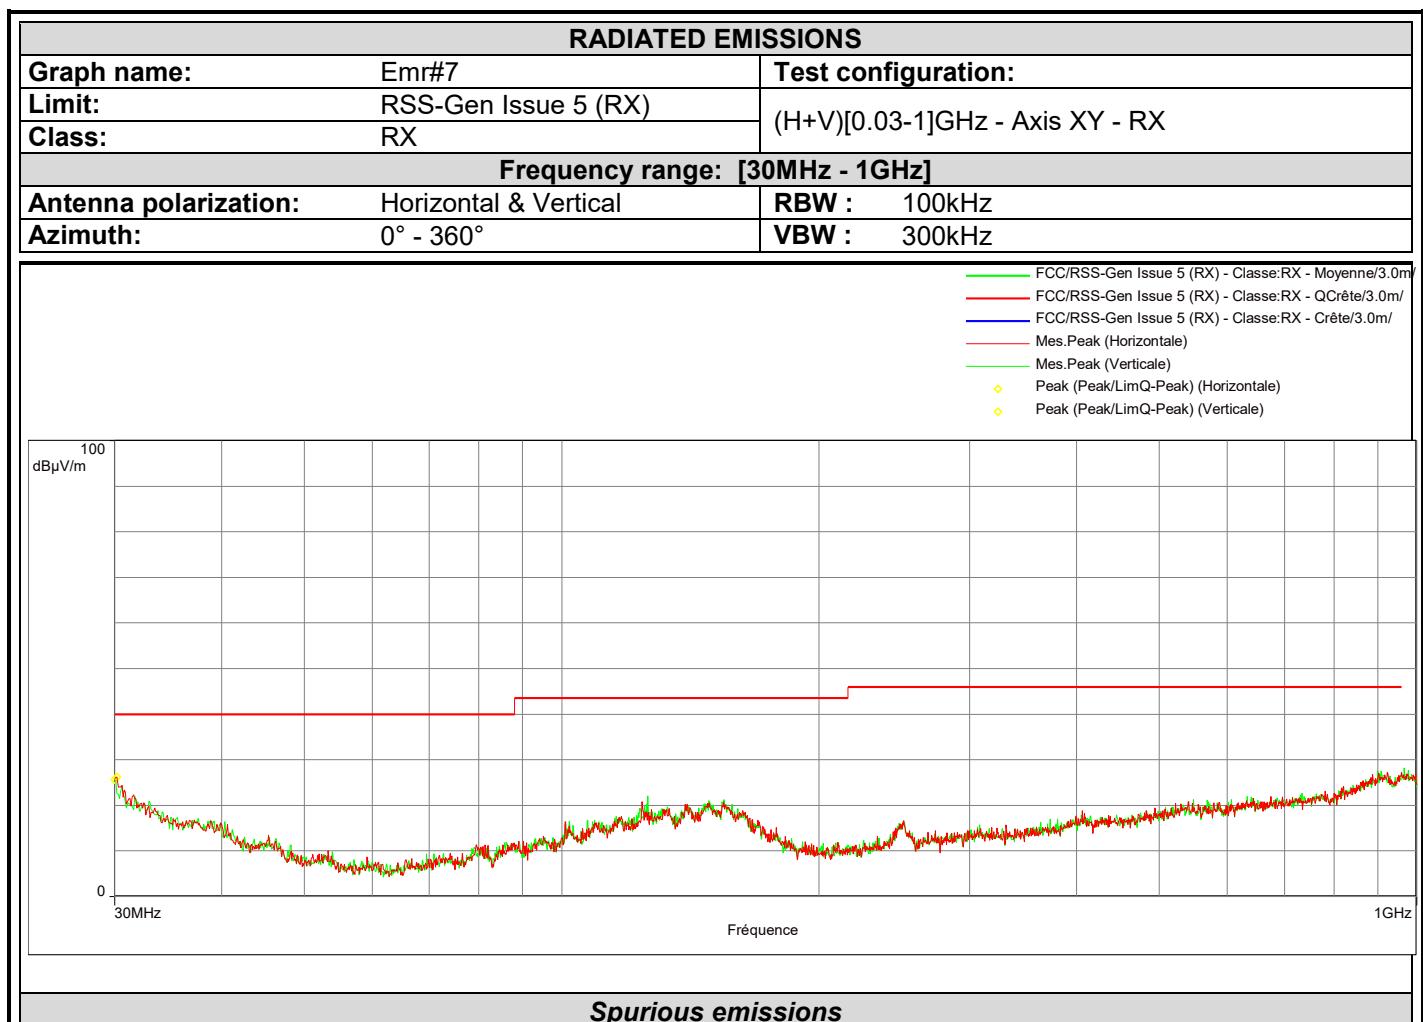

Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	26.2	40.0	-13.8	1.6	Horizontal	-6.9
30.000	25.6	40.0	-14.4	1.6	Vertical	-6.8



L C I E

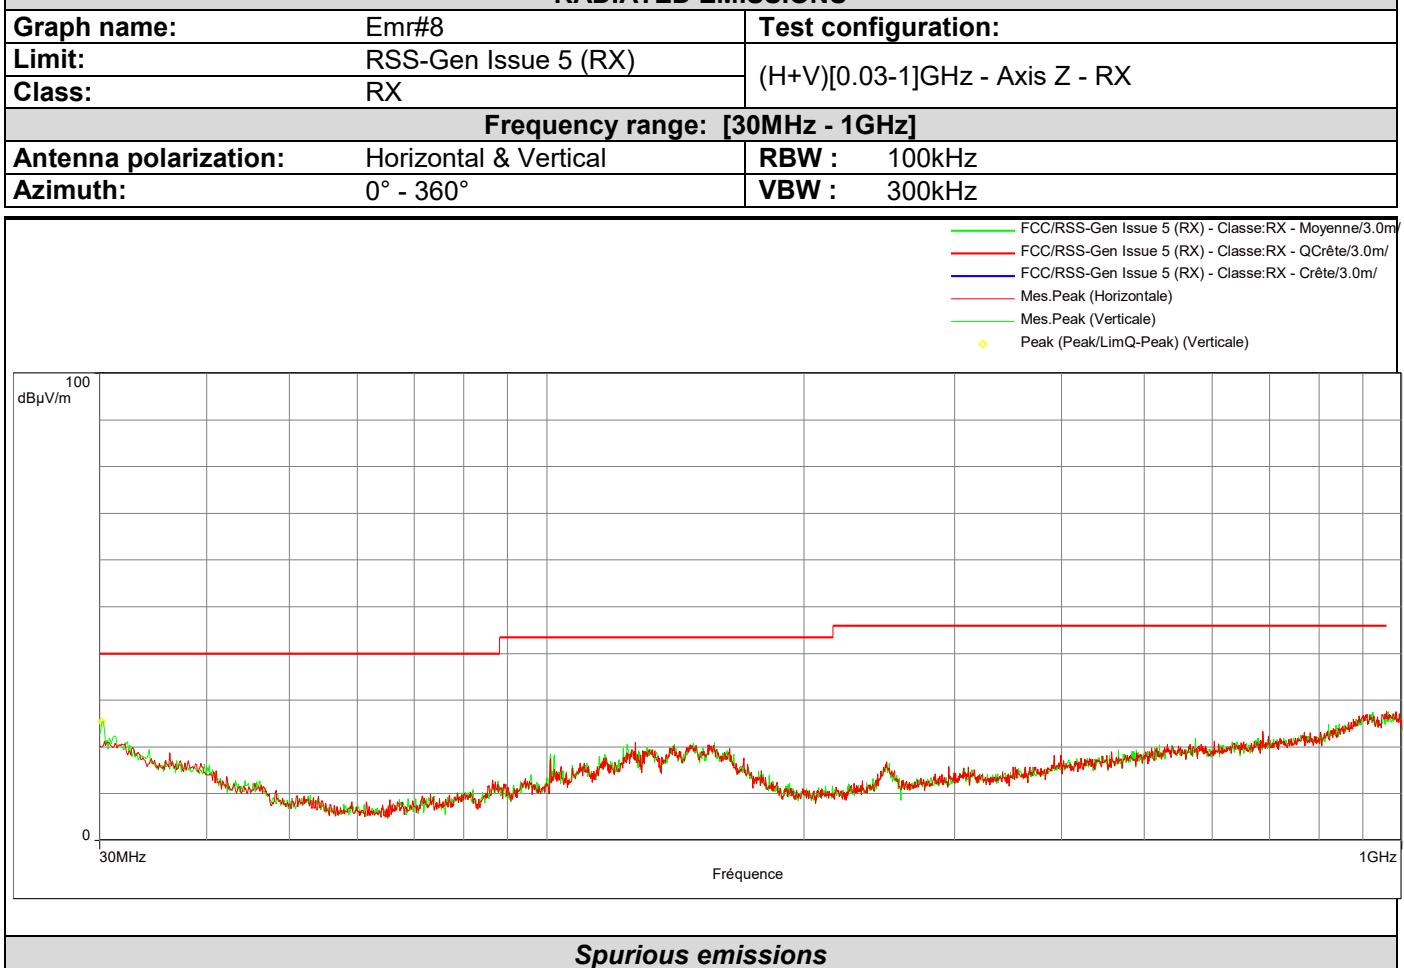**RADIATED EMISSIONS****Spurious emissions**

Frequency (MHz)	Peak (dBµV/m)	LimQP (dBµV/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	25.4	40.0	-14.6	1.6	Vertical	-6.9



L C I E

### 3.6.3. Characterization on 10 meters open site below 30 MHz

#### Worst case final data result:

Frequency list has been created with semi-anechoic chamber pre-scan results.

Measurements are performed using a QUASI-PEAK detection.

No	Frequency (MHz)	QPeak Limit (dB $\mu$ V/m) @ 10m	Qpeak (dB $\mu$ V/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. Factor (dB)	Comments
1	0.457	73.5	8.0	-65.5	-	V	-	-	-

\*: Measure have been done at 10m distance and corrected according to requirements of 15.209.e  
(M@300m = M@10m-59.1dB)

### 3.6.4. Characterization on 10 meters open site from 30MHz to 1GHz

#### Worst case final data result:

Frequency list has been created with semi-anechoic chamber pre-scan results.

Measurements are performed using a QUASI-PEAK detection.

Test Frequency (MHz)	Meter Reading dB( $\mu$ V)	Detector (Pk/QP/Av)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Transducer Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No frequency observed, margin >20dB in pre-characterization									

## 3.7. CONCLUSION

The sample of the equipment NEO PRO, Sn: E48839-1024, tested in the configuration presented in this test report satisfies to requirements of class B limits of the standard FCC Part 15 Subpart C, for radiated emissions.



L C I E

## 4. OCCUPIED BANDWIDTH

### 4.1. ENVIRONMENTAL CONDITIONS

Test performed by : Mounir Bouamara  
Date of test : December 12, 2019  
Relative humidity (%) : 40  
Ambient temperature (°C) : 24

### 4.1. SETUP

**Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

**Radiated measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

**Measurement Procedure:**

1. RBW used in the range of 1% to 5% of the anticipated emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = Max Hold.
5. Sweep = Auto couple.
6. Allow the trace to stabilize.
7. OBW 99% function of spectrum analyzer used

### 4.2. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	06/19	06/21
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	02/19	02/20
Multimeter - CEM	FLUKE	87	A1240251	11/18	11/20
SMA 1.5m	SUCOFLEX	18GHz	A5329864	11/18	11/19
Spectrum Analyzer 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020	06/18	06/20
Thermocouple K (radio)	FLUKE	Type K	B4045005	09/19	09/20
Thermocouple K (radio)	FLUKE	Type K	B4045004	09/19	09/20
Thermometer (radio)	FLUKE	52 II	B4043150	09/19	09/20

### 4.3. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None

Divergence:



L C I E

#### 4.4. TEST SEQUENCE AND RESULTS

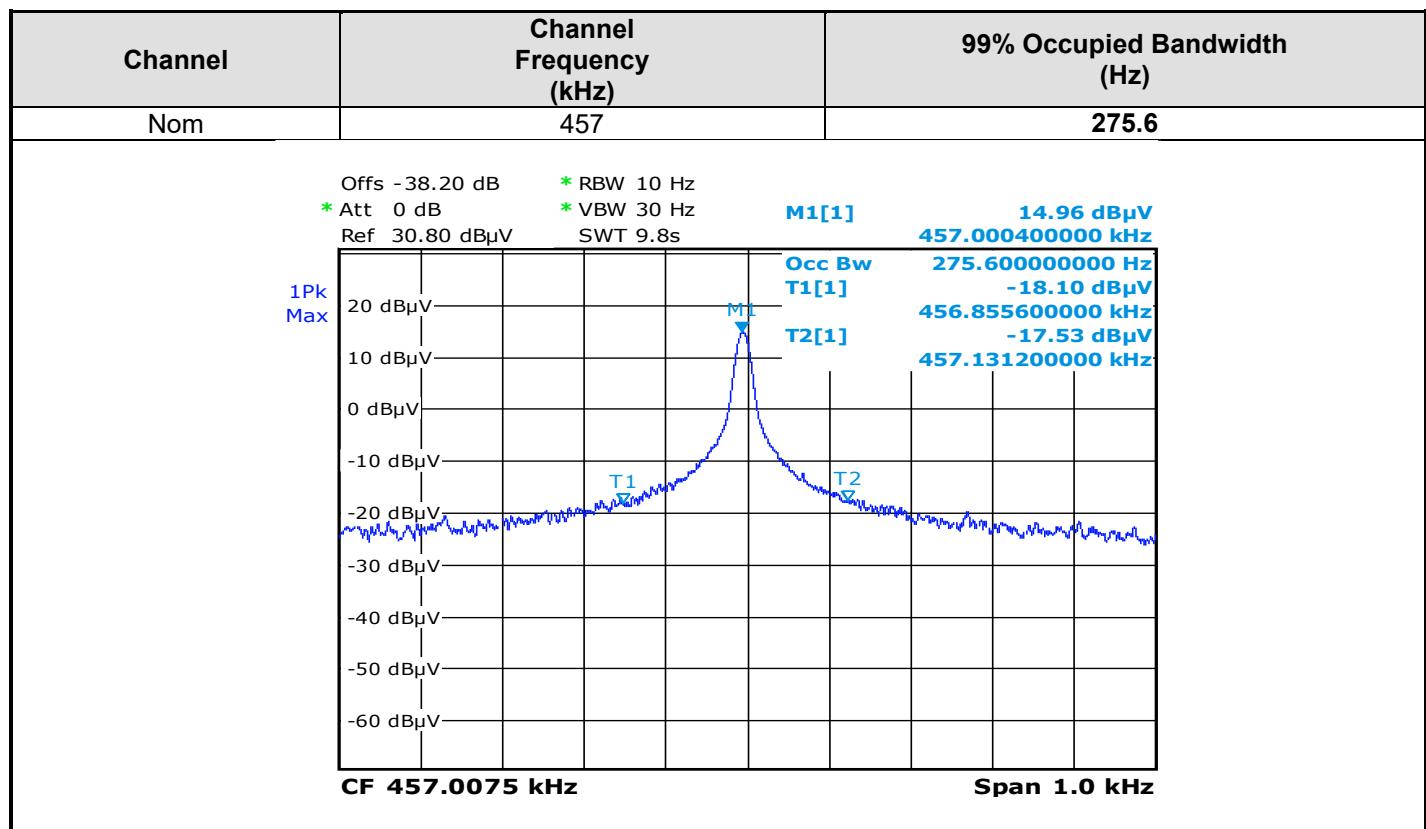



LCIE

## 5. FUNDAMENTAL FREQUENCY TOLERANCE (RSS)

### 5.1. ENVIRONMENTAL CONDITIONS

Test performed by : Mounir Bouamara  
Date of test : December 12, 2019  
Relative humidity (%) : 40  
Ambient temperature (°C) : 24

### 5.2. TEST SETUP

Frequency of carrier: 457kHz

The equipment (RF box) is set in a climatic chamber. Measure is performed on one channel of RF module.



Test setup

### 5.3. TEST METHOD

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency when the temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at the nominal power voltage and the primary power voltage is varied from battery's operating end-point voltage to nominal voltage at  $20^{\circ}\text{C}$ .



L C I E

#### 5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
AC source 1kW	KEYSIGHT	AC6802A	A7042305		
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	06/19	06/21
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	02/19	02/20
SMA 1.5m	SUCOFLEX	18GHz	A5329864	11/18	11/19
Spectrum Analyzer 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020	06/18	06/20
Thermocouple K (radio)	FLUKE	Type K	B4045005	09/19	09/20
Thermocouple K (radio)	FLUKE	Type K	B4045004	09/19	09/20
Thermometer (radio)	FLUKE	52 II	B4043150	09/19	09/20

#### 5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

 None Divergence:

#### 5.6. TEST RESULTS

Voltage \ Temperature	-30°C	20°C	+55°C
Mains voltage: 4,5V			
Frequency Drift (MHz)	- 0,000003	<b>0,457019</b>	- 0,000003
Carrier level (dBc)	+ 0,02	<b>8,330000</b>	+ 0,65
Mains voltage: 4,05V			
Frequency Drift (MHz)	- 0,000003	- 0,000003	- 0,000003
Carrier level (dBc)	- 0,15	- 0,08	+ 0,81
Mains voltage: 4,95V			
Frequency Drift (MHz)	-0,000003	-0,000018	-0,000003
Carrier level (dBc)	- 0,17	+ 0,12	+ 0,68

Frequency drift measured is **18Hz** when the temperature is varied from -30°C to +55°C and voltage is varied.

#### 5.7. CONCLUSION

The sample of the equipment NEO PRO, Sn: E48839-1024, tested in the configuration presented in this test report satisfies to requirements of the standard FCC Part 15 Subpart C, for fundamental frequency tolerance.



L C I E

## 6. RECEIVER SPURIOUS EMISSION

Test performed by : Mounir Bouamara  
Date of test : December 12, 2019  
Relative humidity (%) : 40  
Ambient temperature (°C) : 24

### 6.1. TEST SETUP

The installation of EUT is identical for pre-characterization measures in a 3 meters semi-anechoic chamber and for measures on the 10 meters Open site.


The EUT and auxiliaries are set:

- 80cm above the ground on the non-conducting table (Table-top equipment) - Below 1GHz
- 150cm above the ground on the non-conducting table (Table-top equipment) - Above 1GHz
- 10cm above the ground on isolating support (Floor standing equipment)

The EUT is powered by  $V_{nom}$ .



*Test setup on OATS*

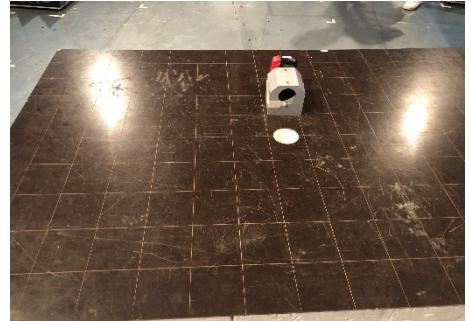

*Test setup in anechoic chamber*



## 6.2. TEST METHOD

The product has been tested according to RSS GEN.

### Pre-characterisation measurement: (9kHz – 1GHz)

A pre-scan of all the setup has been performed in a 3 meters semi-anechoic chamber for frequency from 30MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test for maximized the emission measurement. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration.

### Characterization on 10 meters open site from 9kHz to 1GHz:

Radiated Emissions were measured on an open area test site. A description of the facility is on file with the RSS GEN. The product has been tested at a distance of **10 meters** from the antenna and compared to the RSS GEN limits. Measurement bandwidth was 9kHz below 30MHz and 120kHz from 30 MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test for maximized the emission measurement. The height antenna is varied from 1m to 4m. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown.

Frequency list has been created with anechoic chamber pre-scan results.



LCIE

### 6.3. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 100kHz - 18GHz	LCIE SUD EST	—	A7085027	07/19	07/20
Antenna Bi-log	AH System	SAS-521-7	C2040180	10/18	10/20
Antenna mast (Cage#1)	MATURO GmbH	AM 4.0	F2000407		
BAT EMC	NEXIO	v3.9.0.10	L1000115		
Cable 0.75m	SUCOFLEX	18GHz	A5329920	09/19	09/20
Emission Cable	MICRO-COAX	18GHz	A5329656	07/19	07/20
Emission Cable	SUCOFLEX	18GHz	A5329899	07/19	07/20
HF Radiated emission comb generator	LCIE SUD EST	—	A3169088		
Radiated emission comb generator	BARDET	—	A3169050		
Semi-Anechoic chamber #1 (BF)	SIEPEL	—	D3044016_BF	07/19	07/22
Semi-Anechoic chamber #1 (VSWR)	SIEPEL	—	D3044016_VSWR	07/19	07/22
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	03/18	03/20
Table C1/OATS	MATURO GmbH	—	F2000437		
Thermo-hygrometer (C1)	OREGON	WMR 80	B4206013	06/18	06/20
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20
Turtable chamber (Cage#1)	MATURO GmbH	TT 2.0 SI	F2000406		
Turtable controller (Cage#1)	MATURO GmbH	Control Unit	F2000408		

### 6.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

 None Divergence:




L C I E

## 6.5. TEST RESULTS

### 6.5.1. Pre-characterization at 3 meters [9kHz-30MHz]

See graph for 9kHz-30MHz band:


Graph identifier	Polarization	EUT position	Mode	Comments
Emr# 1	0°,90	Axis XY	RX	See annex 1
Emr# 2	180°	Axis XY	RX	See annex 1
Emr# 3	0°,90	Axis Z	RX	See annex 1
Emr# 4	180°	Axis Z	RX	See annex 1

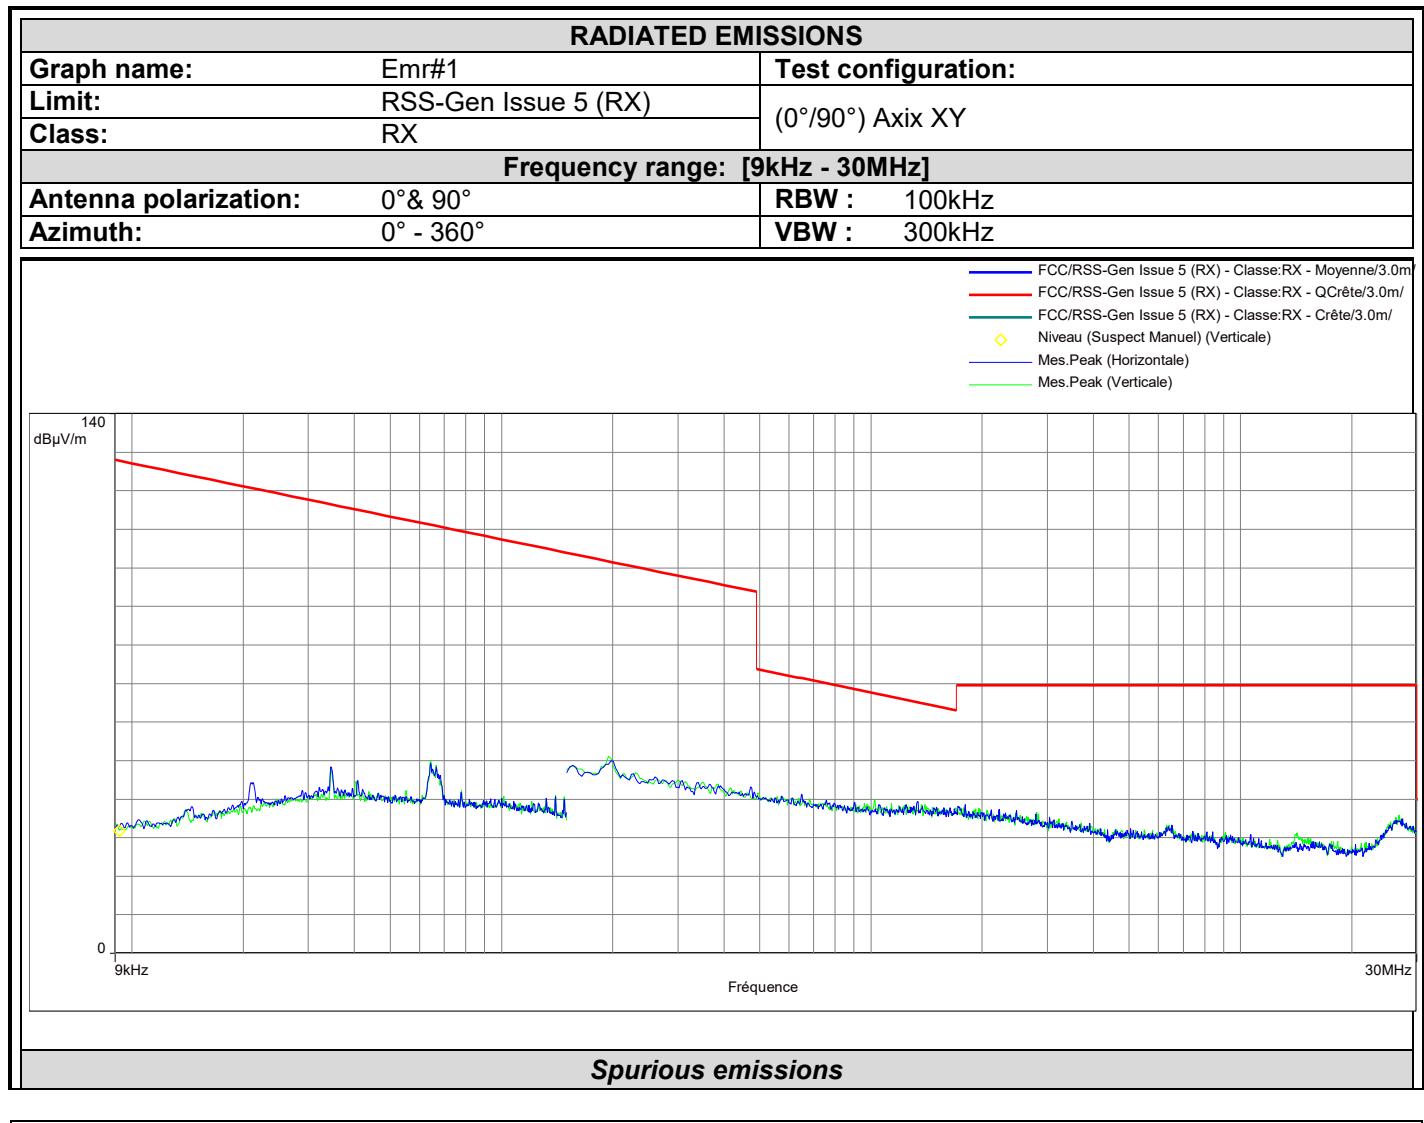



L C I E


### RADIATED EMISSIONS

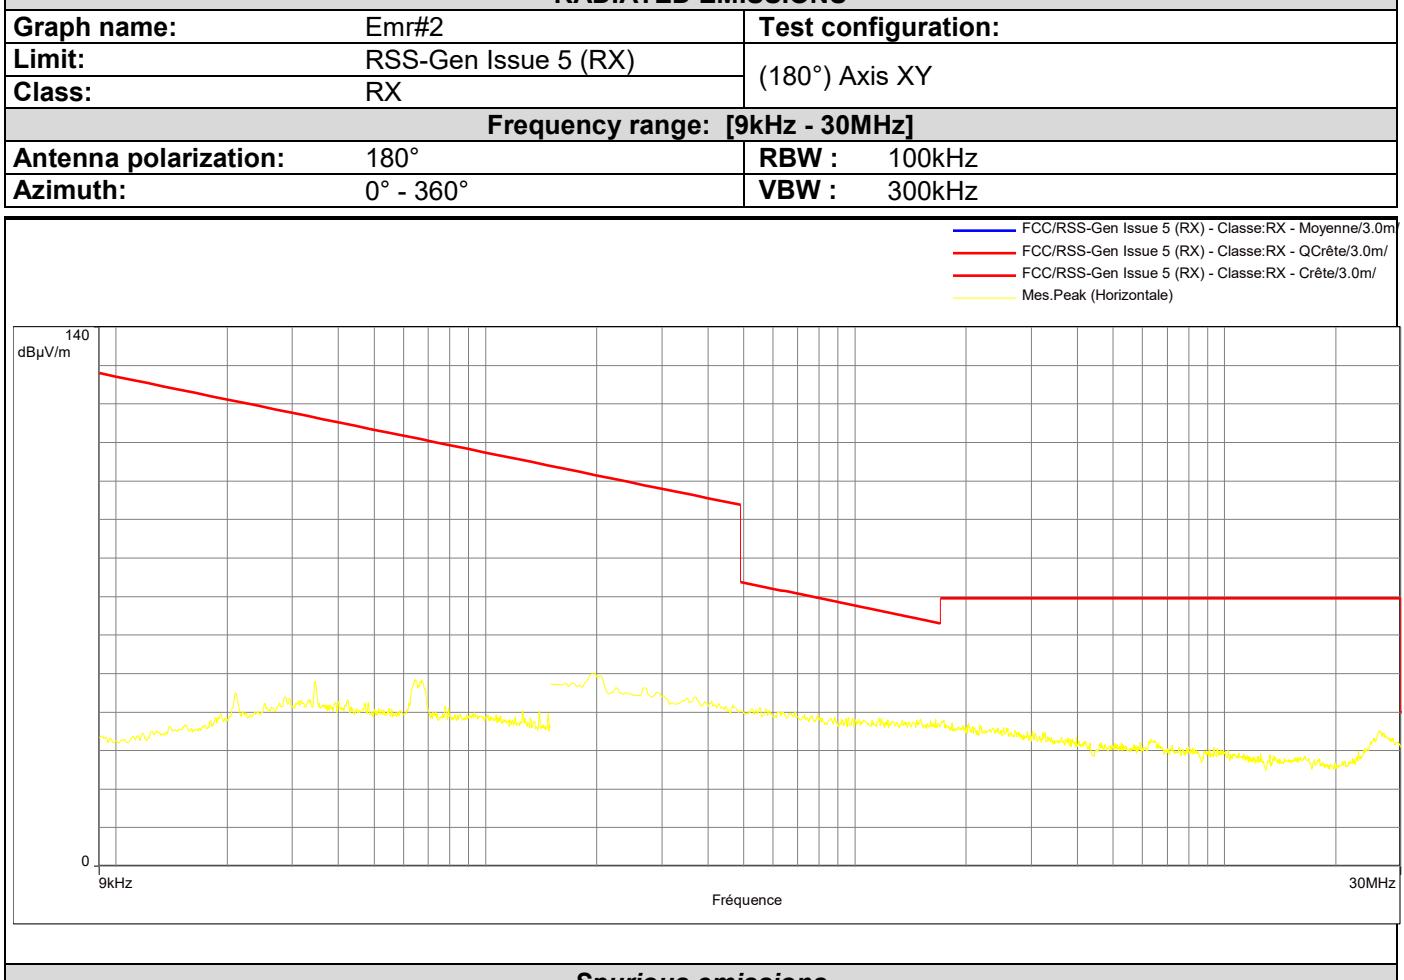

No significative frequency observed




L C I E

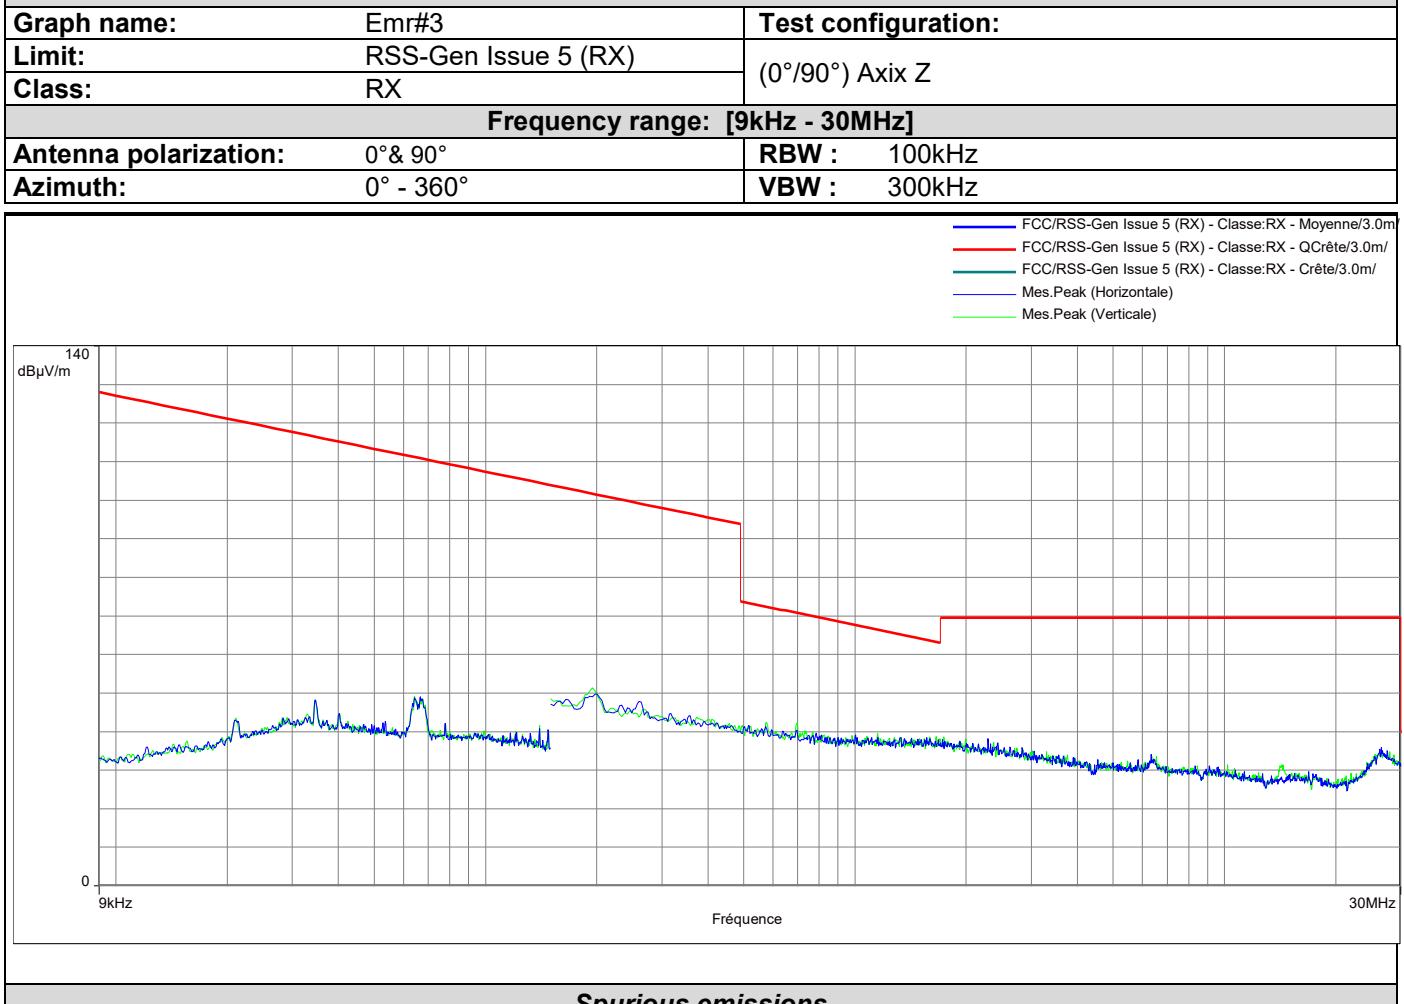**RADIATED EMISSIONS****Spurious emissions****No significative frequency observed**



L C I E

### RADIATED EMISSIONS

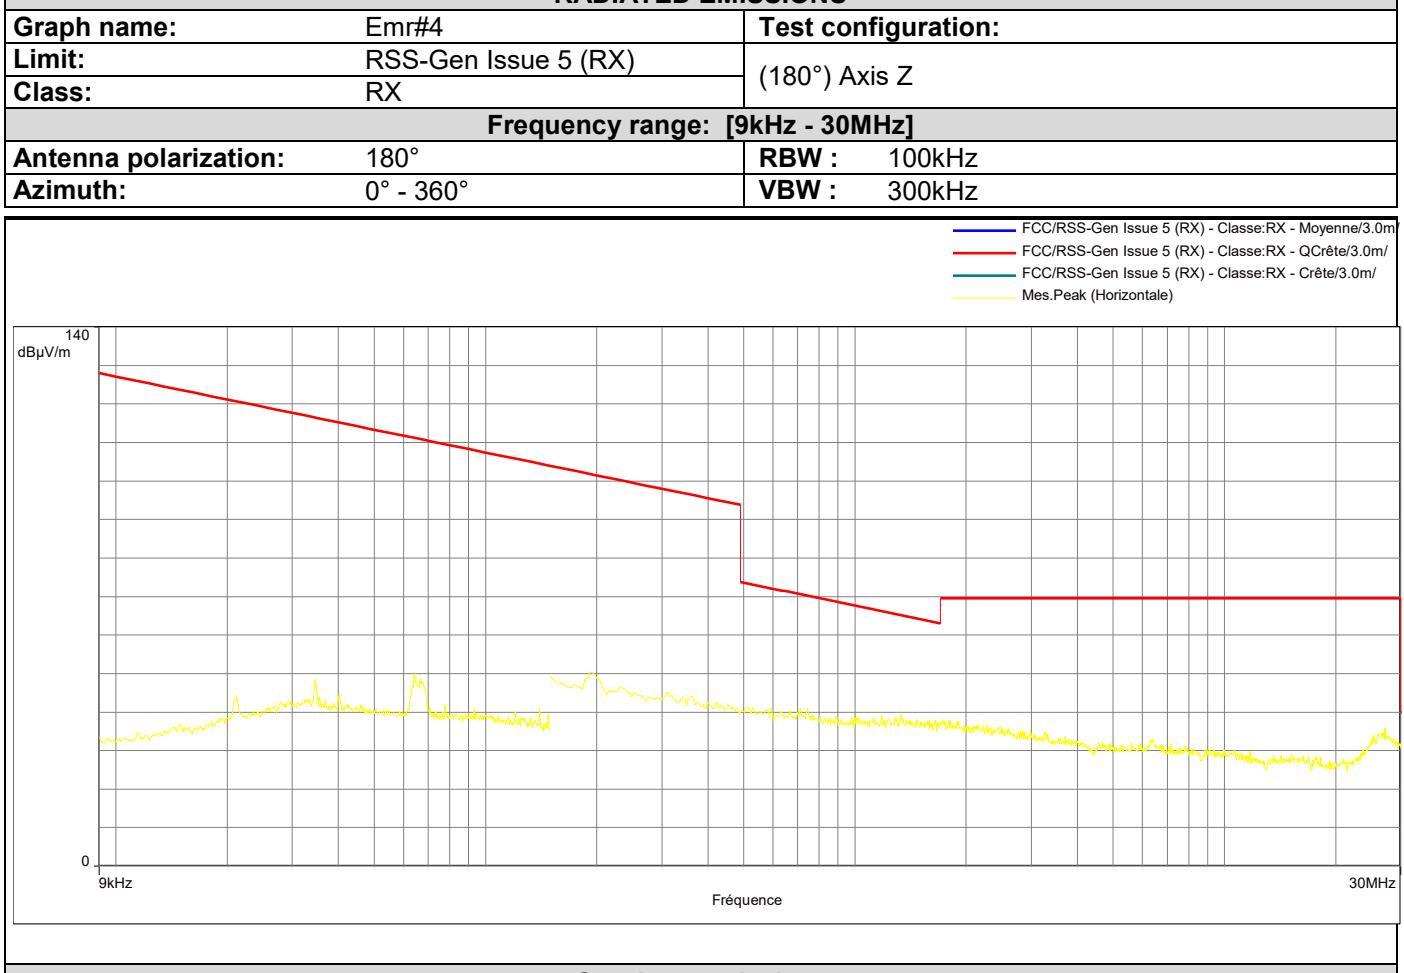

### Spurious emissions

No significative frequency observed




L C I E

### 6.5.1. Pre-characterization at 3 meters [30MHz-1GHz]

See graphs for 30MHz-1GHz:


Graph identifier	Polarization	EUT position	Mode	Comments
Emr# 5	H & V	Axis XY	RX	See annex 1
Emr# 6	H & V	Axis Z	RX	See annex 1

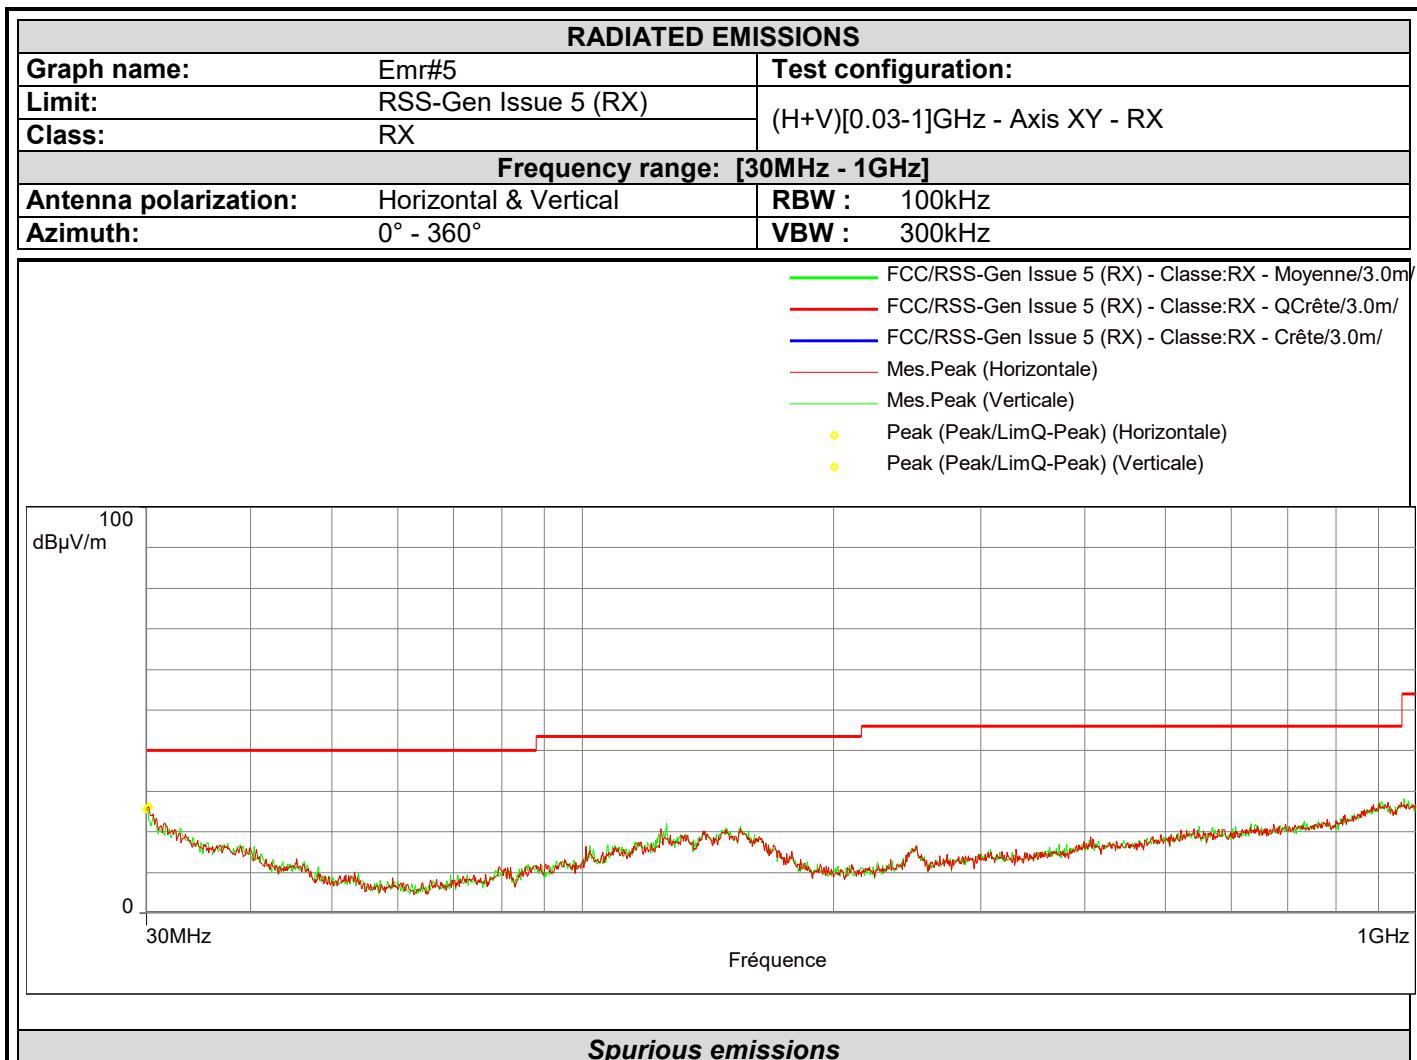

Frequency (MHz)	Peak (dBµV/m)	LimQP (dBµV/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	26.2	40.0	-13.8	1.6	Horizontal	-6.9
30.000	25.6	40.0	-14.4	1.6	Vertical	-6.8



L C I E

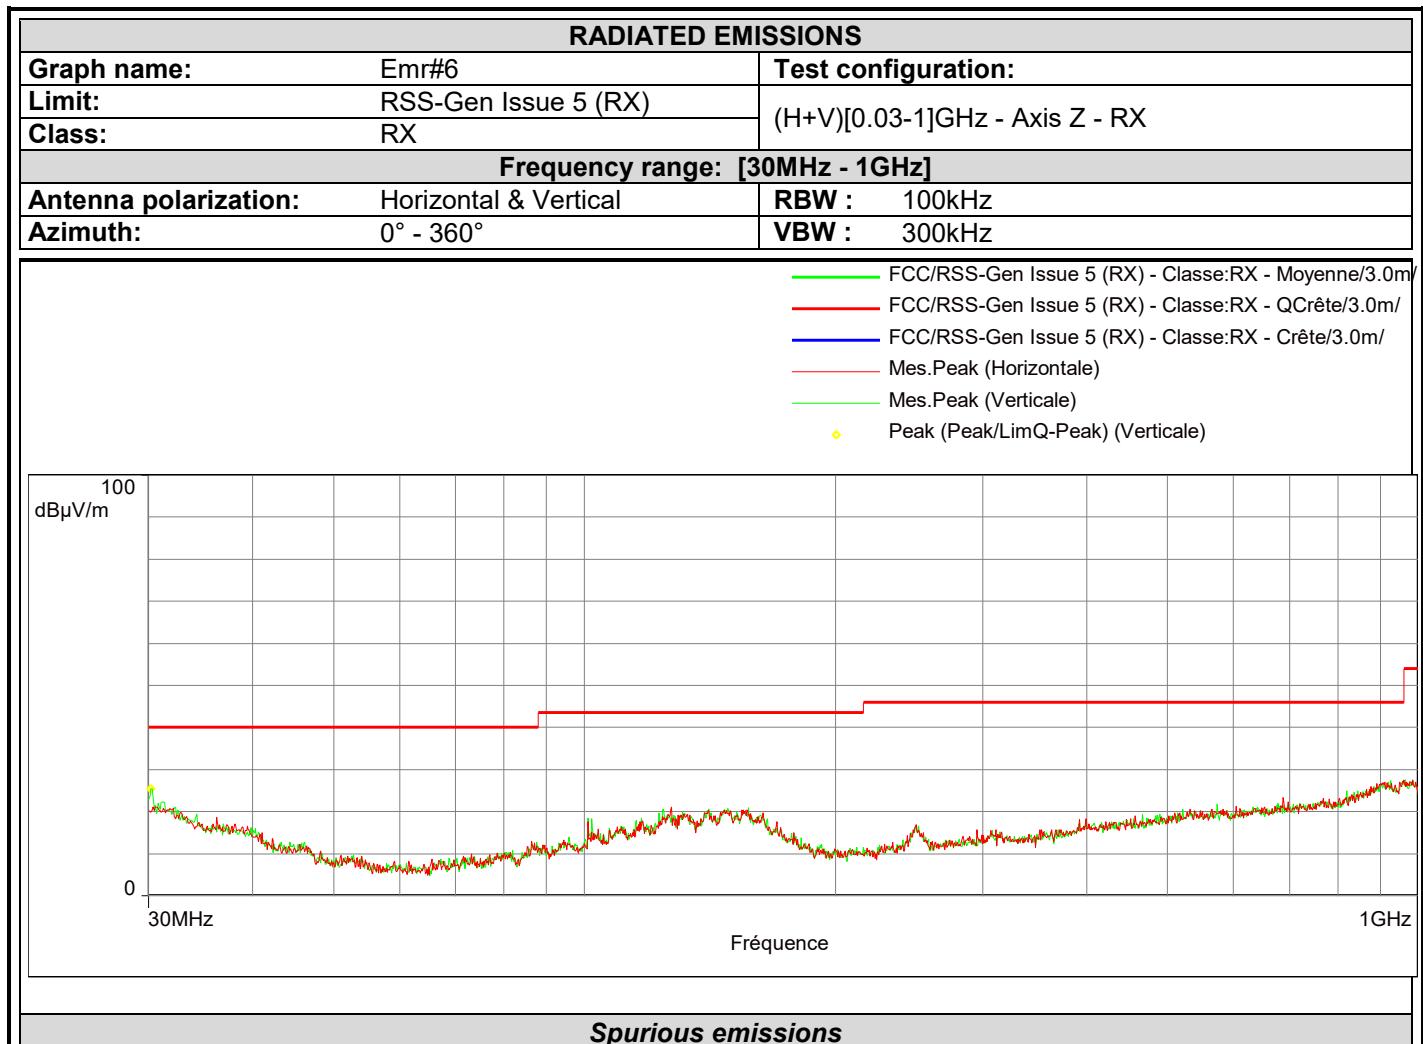

Frequency (MHz)	Peak (dBµV/m)	LimQP (dBµV/m)	Peak-LimQP (dB)	Hauteur (m)	Polarization	Correction (dB)
30.194	25.4	40.0	-14.6	1.6	Vertical	-6.9

## 6.6. CONCLUSION

The sample of the equipment NEO PRO, Sn: E48839-1024, tested in the configuration presented in this test report satisfies to requirements of the standard RSS GEN, for Receiver Spurious Emission.



L C I E

## 8. UNCERTAINTIES CHART

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory ( $k=2$ ) $\pm x$	Incertitude limite du CISPR / CISPR uncertainty limit $\pm y$
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.