



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	3Com Corporation
Applicant Address	350 Campus Drive, Marlborough , MA 01752-3064.U.S.A.
FCC ID	O9C-AP3950
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan, R.O.C.

Product Name	3Com WLAN Managed AP 3950
Brand Name	3Com
Model Name	AP3950
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Feb. 01, 2008
Final Test Date	Sep. 14, 2008
Submission Type	Class II Change
Multiple Listing	Please refer to section 3.7



Statement

Test result included is only for the Draft n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Multiple Listing & Existing Change	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	8
3.10. Test Configurations	10
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Powe Measurement	20
4.3. Power Spectral Density Measurement	42
4.4. 6dB Spectrum Bandwidth Measurement	51
4.5. Radiated Emissions Measurement	60
4.6. Radiated Band Edge Emissions Measurement	88
4.7. Antenna Requirements	96
5. LIST OF MEASURING EQUIPMENTS	97
6. TEST LOCATION.....	99
7. TAF CERTIFICATE OF ACCREDITATION	100
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A23
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MPE REPORT	C1 ~ C3
APPENDIX D. CO-LOCATION REPORT	D1 ~ D3



1. CERTIFICATE OF COMPLIANCE

Product Name : 3Com WLAN Managed AP 3950
Brand Name : 3Com
Model Name : AP3950
Applicant : 3Com Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 01, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Leo Huang 2008.9.26

Leo Huang / Manager

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	1.97 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	5.66 dB
4.3	15.247(e)	Power Spectral Density	Complies	2.70 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.18 dB
4.6	15.247(d)	Radiated Band Edge Emissions	Complies	0.08 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (1GHz~40GHz)	±1.9dB	Confidence levels of 95%
Radiated Band Edge Emissions (Carrier +/- 100MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN
Radio Type	Intentional Transceiver
Power Type	From Adapter
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz) : 17.62 MHz ; MCS8 (40MHz) : 36.28 MHz 11a MCS8 (20MHz) : 17.56 MHz ; 11a MCS8 (40MHz) : 36.21 MHz
Conducted Output Power	MCS8 (20MHz) : 24.34 dBm ; MCS8 (40MHz) : 18.55 dBm 11a MCS8 (20MHz) : 23.18 MHz ; 11a MCS8 (40MHz) : 22.36 MHz
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Three (TX)	
	20 MHz	40 MHz
Band width Mode		
Draft n	V	V
802.11a Draft n	V	V

Draft n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A


3.3. Table for Filed Antenna

For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
B1	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B2	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B3	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A1	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A2	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A3	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.

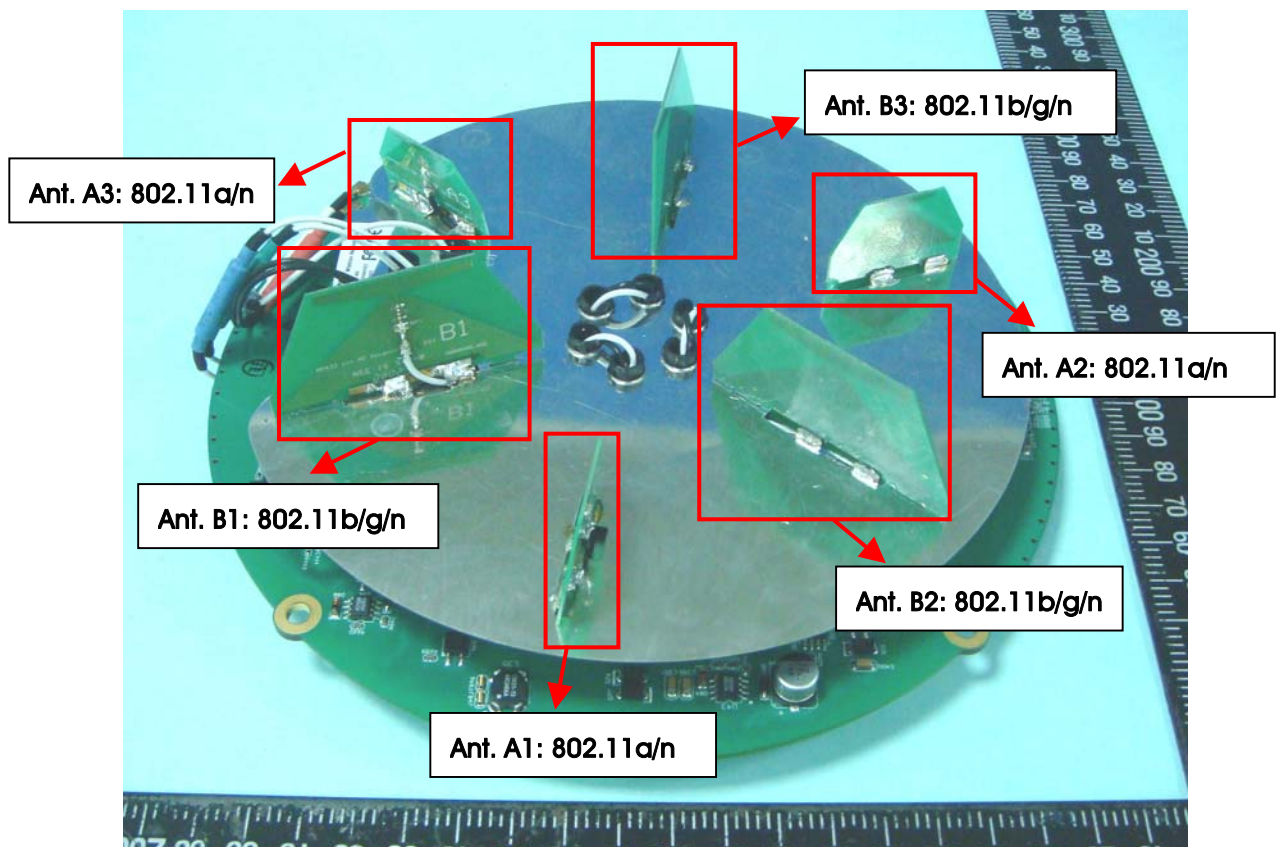

3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 149, 157, 165.

For both 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Mode 1, Mode 2	Auto	-	-
Maximum Peak Conducted Output Power	MCS8/20MHz	13 Mbps	1/6/11	B1, B2, B3, B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1, B2, B3, B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1, A2, A3, A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1, A2, A3, A1+A2+A3
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/20MHz	13 Mbps	1/6/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	-
Radiated Emissions 1GHz~10 th Harmonic	MCS8/20MHz	13 Mbps	1/6/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3
Radiated Band Edge Emissions	MCS8/20MHz	13 Mbps	1/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3

Test Mode:

Mode 1: EUT with POE 1 (Brand / Model: POWER DSINE / 7001G)

Mode 2: EUT with POE 2 (Brand / Model: POWER DSINE / 7012G)

Due to Mode 2 generated the worst test result, so it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Multiple Listing & Existing Change

This product is an extension of original one reported under Sporton project number: 820103-03

This modification is only concerned with layout and change two kinds of POE power supply.; neither circuit design nor main function has been changed.

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D520	E2KWM3945ABG
Notebook	DELL	D400	E2K24GBRL
SMARTBIT	TRAPEZE	MX200R	DOC
POE Load Fixture	TRAPEZE	IEEE 802.3af standard 150 Ohm PoE Loader	DOC
HIPOE	POWER DSINE	7001G	DOC
HIPOE	POWER DSINE	7012G	DOC

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n	12	19	15

Power Parameters of Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n	10	13	11

Power Parameters of 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
Draft n	18	18	18

Power Parameters of 11a Draft n MCS8 40MHz Ant. A1 +Ant. A2+Ant. A3

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
Draft n	17	17

During the test, the following programs under WIN XP were executed:


Executed "ART" to control the EUT continuously transmit RF signal. In sections 4.2, 4.3, 4.4 and 4.5, 4.7 and 4.8 while 4.1 and 4.6 using Trapeze MX controller to control the EUT continuous transmit RF signal.

3.10. Test Configurations


3.10.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz

Test Mode: Mode 2

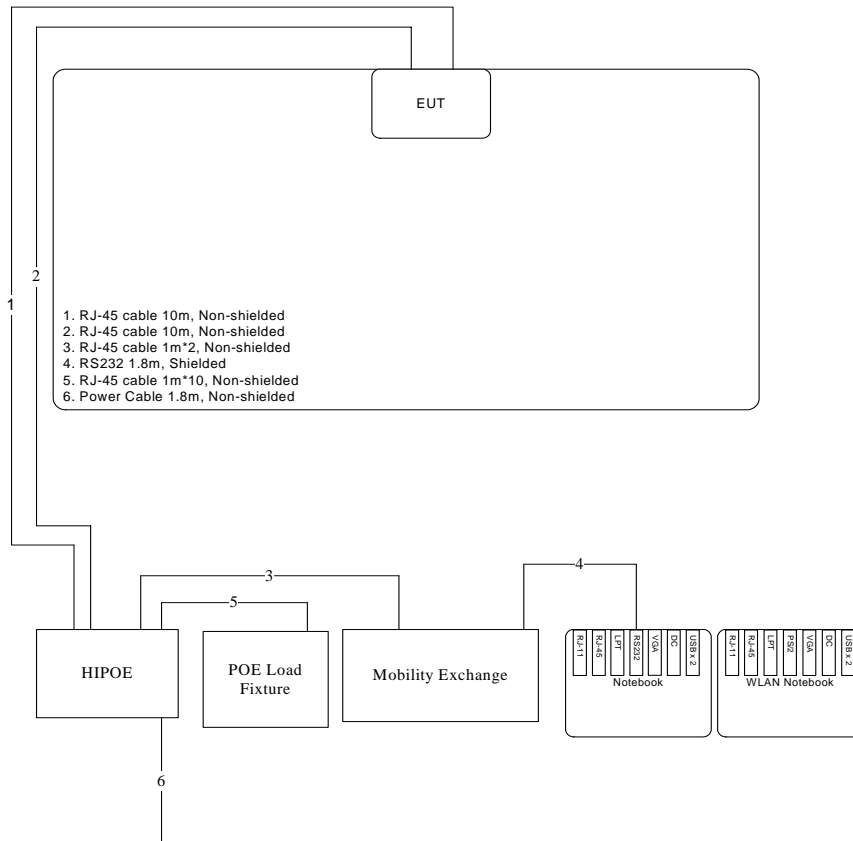


Test Configuration: above 1GHz

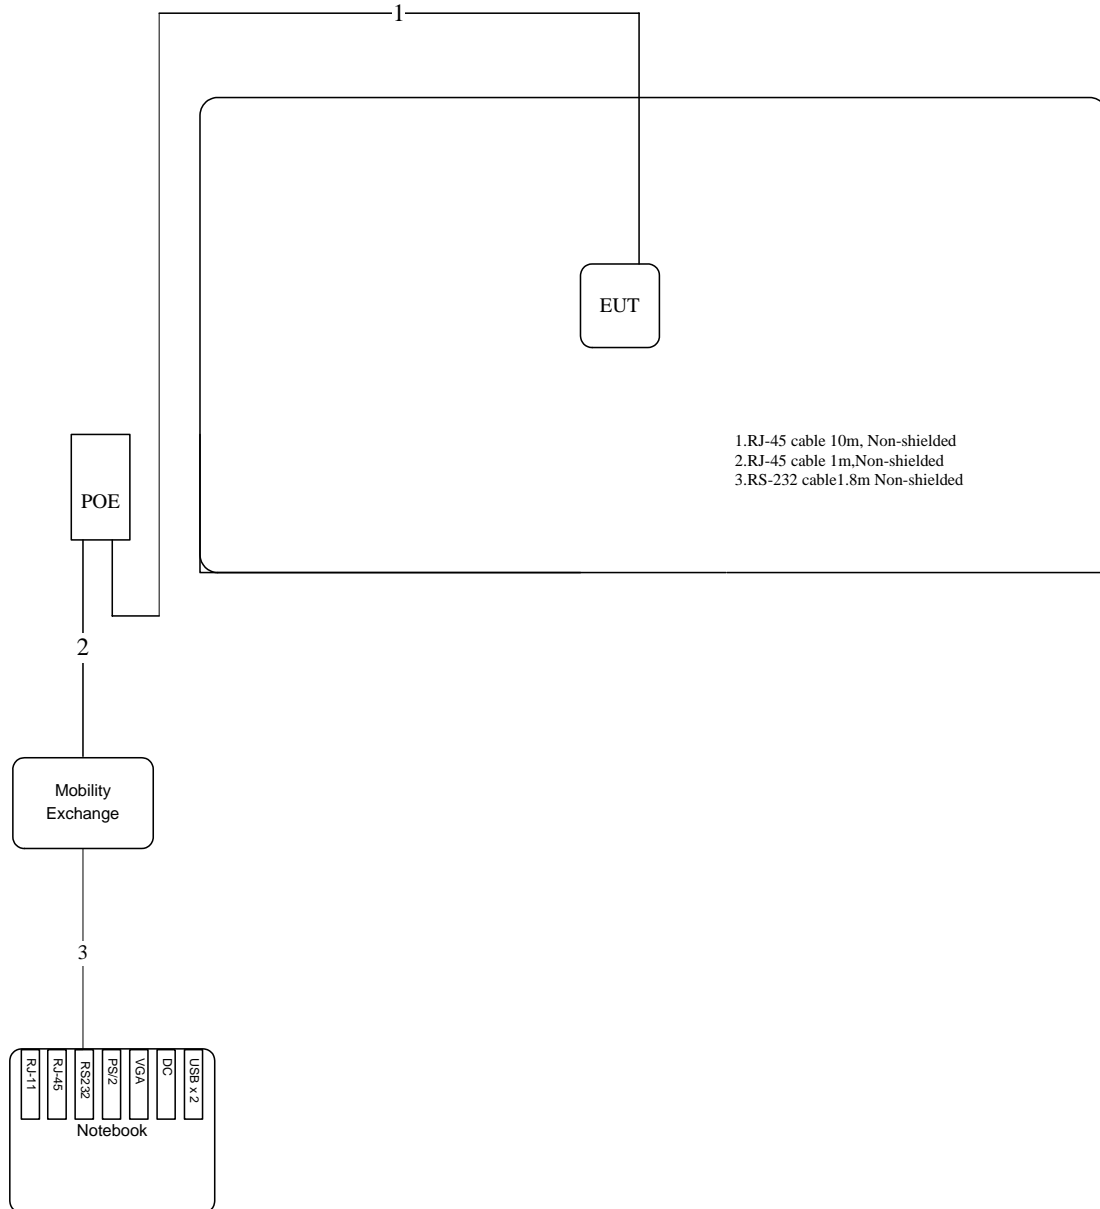


3.10.2. AC Power Line Conduction Emissions Test Configuration


Test Configuration: ART setup for conducted RF tests

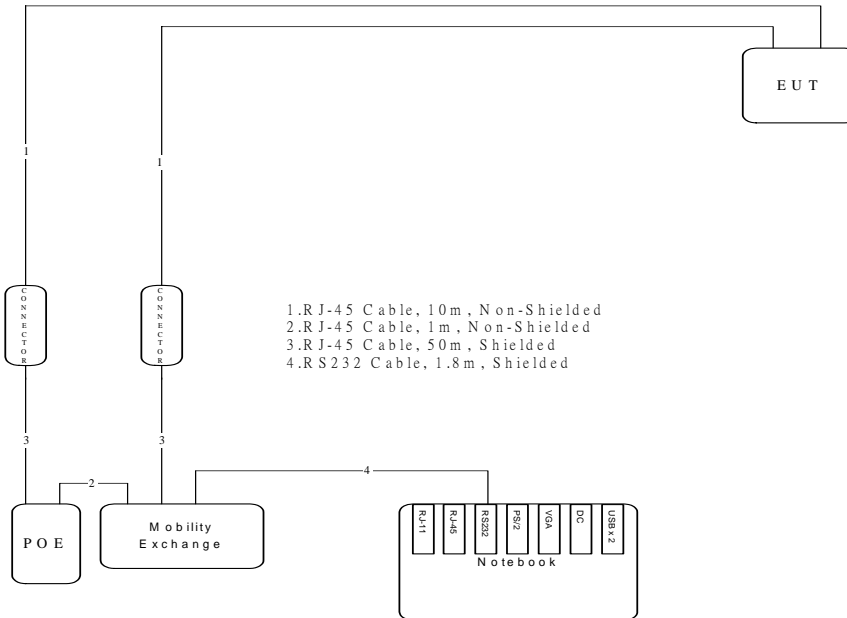

Test Mode: Mode 1

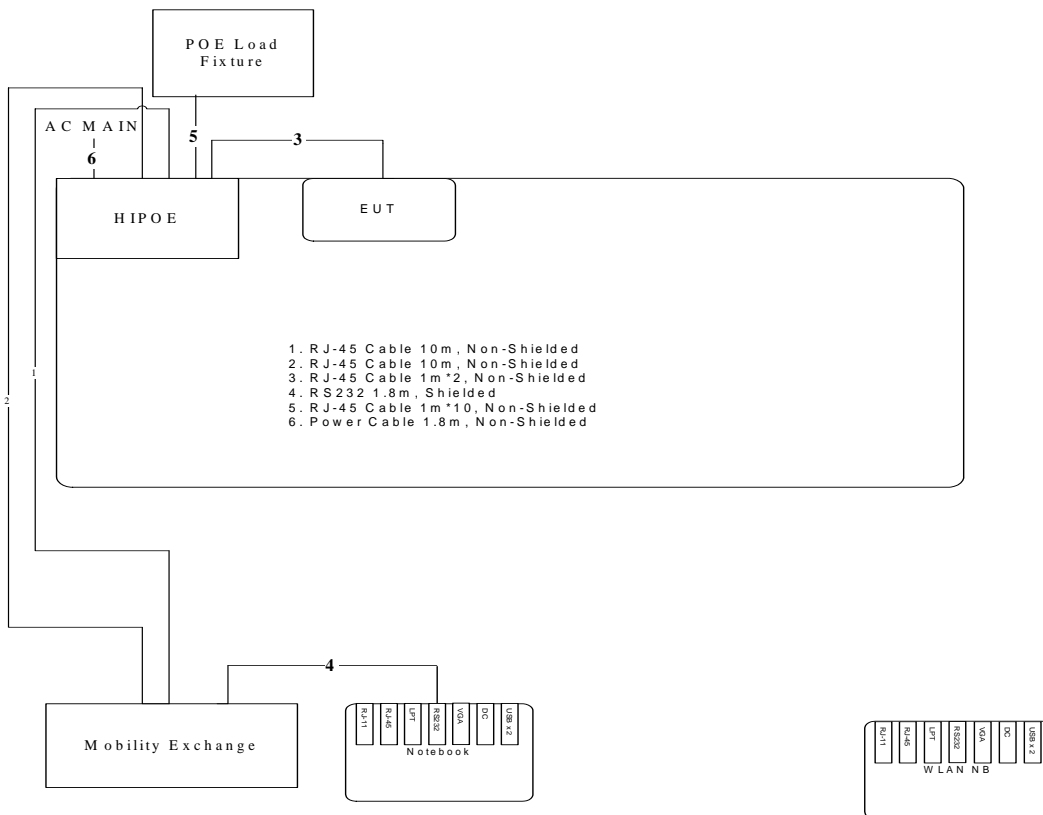

Test Mode: Mode 2

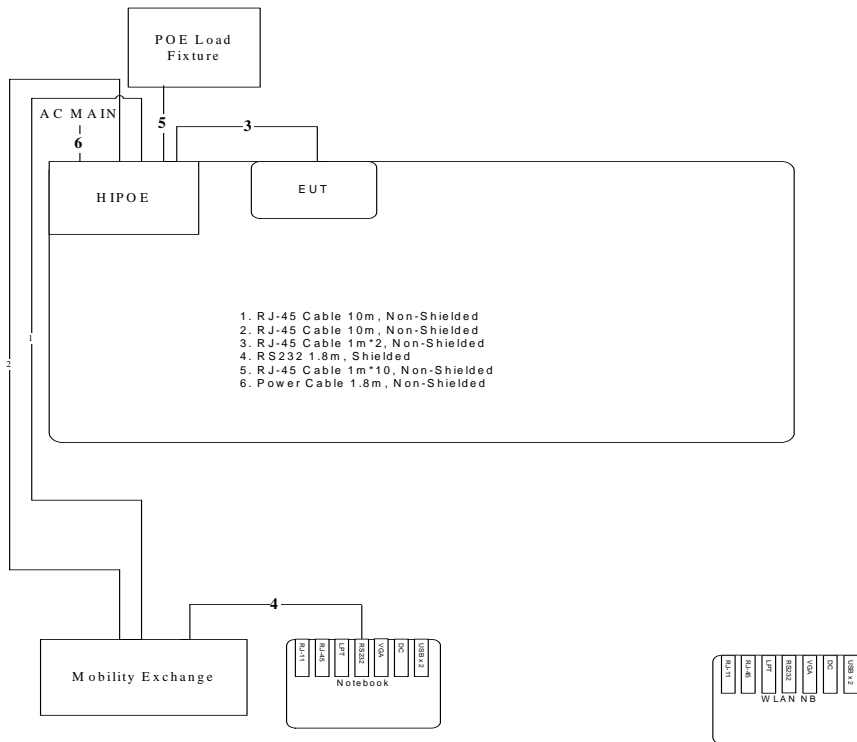

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	56%
Test Engineer	Aric Li	Phase	Line
Configuration	Mode 1 with ch.1 and 149 on continuous transmit RF signals		

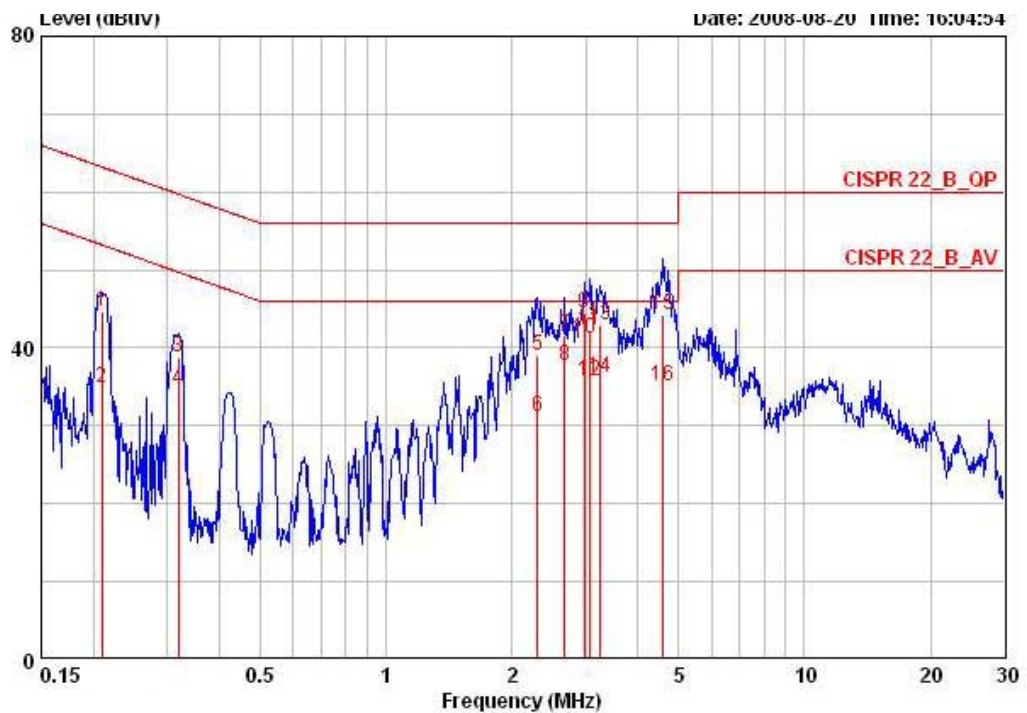

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.20944	44.73	-18.50	63.23	44.48	0.05	0.20	QP
2	0.20944	34.81	-18.42	53.23	34.56	0.05	0.20	AVERAGE
3	0.31830	38.82	-20.93	59.75	38.58	0.04	0.20	QP
4	0.31830	34.69	-15.06	49.75	34.45	0.04	0.20	AVERAGE
5	2.297	39.00	-17.00	56.00	38.74	0.06	0.20	QP
6	2.297	31.23	-14.77	46.00	30.97	0.06	0.20	AVERAGE
7	2.678	41.61	-14.39	56.00	41.34	0.07	0.20	QP
8	2.678	37.77	-8.23	46.00	37.50	0.07	0.20	AVERAGE
9	2.978	44.41	-11.59	56.00	44.13	0.08	0.20	QP
10	2.978	41.23	-4.77	46.00	40.95	0.08	0.20	AVERAGE
11	3.074	42.28	-13.72	56.00	41.98	0.08	0.22	QP
12	3.074	35.72	-10.28	46.00	35.42	0.08	0.22	AVERAGE
13	3.241	42.86	-13.14	56.00	42.53	0.08	0.25	QP
14	3.241	36.23	-9.77	46.00	35.90	0.08	0.25	AVERAGE
15	4.598	44.28	-11.72	56.00	43.84	0.14	0.30	QP
16	4.598	35.06	-10.94	46.00	34.62	0.14	0.30	AVERAGE

Temperature	24°C	Humidity	56%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Mode 1 with ch.1 and 149 on continuous transmit RF signals		

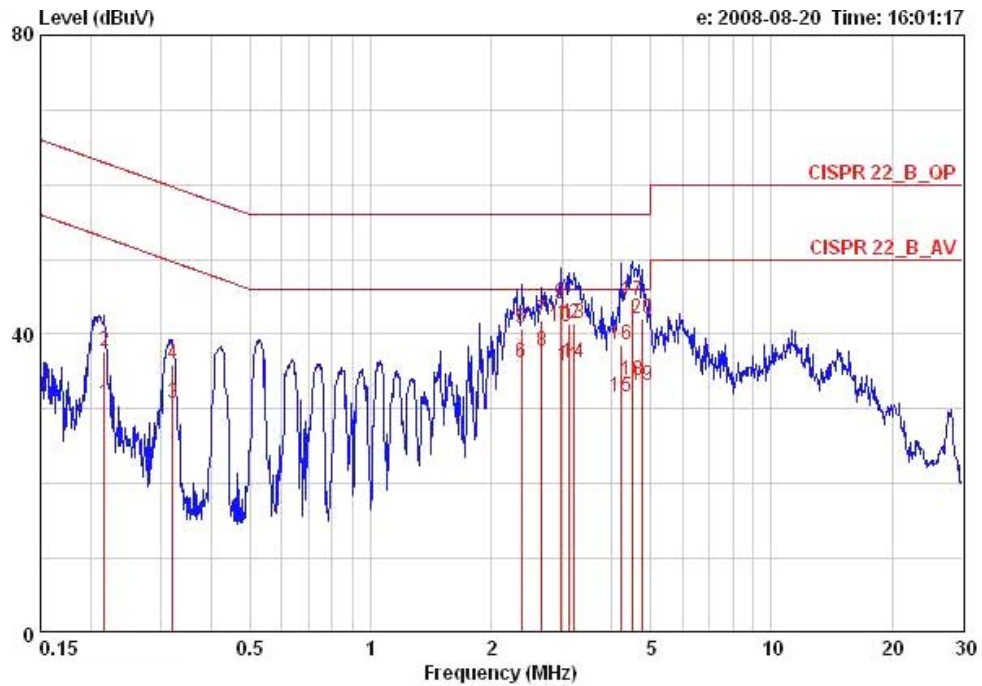


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.21620	30.66	-22.30	52.96	30.38	0.08	0.20	AVERAGE
2	0.21620	37.73	-25.23	62.96	37.45	0.08	0.20	QP
3	0.31999	30.66	-19.04	49.71	30.39	0.07	0.20	AVERAGE
4	0.31999	35.97	-23.73	59.71	35.70	0.07	0.20	QP
5	2.384	40.74	-15.26	56.00	40.44	0.10	0.20	QP
6	2.384	36.28	-9.72	46.00	35.98	0.10	0.20	AVERAGE
7	2.678	41.85	-14.15	56.00	41.54	0.11	0.20	QP
8	2.678	37.81	-8.19	46.00	37.50	0.11	0.20	AVERAGE
9	2.978	44.06	-11.94	56.00	43.74	0.12	0.20	QP
10	2.978	41.01	-4.99	46.00	40.69	0.12	0.20	AVERAGE
11	3.140	35.80	-10.20	46.00	35.45	0.12	0.23	AVERAGE
12	3.140	41.45	-14.55	56.00	41.10	0.12	0.23	QP
13	3.224	41.45	-14.55	56.00	41.08	0.12	0.25	QP
14	3.224	36.15	-9.85	46.00	35.78	0.12	0.25	AVERAGE
15	4.202	31.54	-14.46	46.00	31.09	0.15	0.30	AVERAGE
16	4.202	38.60	-17.40	56.00	38.15	0.15	0.30	QP
17	4.501	44.39	-11.61	56.00	43.92	0.17	0.30	QP
18	4.501	33.70	-12.30	46.00	33.23	0.17	0.30	AVERAGE
19	4.772	33.11	-12.89	46.00	32.62	0.19	0.30	AVERAGE
20	4.772	42.18	-13.82	56.00	41.69	0.19	0.30	QP

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	24°C	Humidity	56%
Test Engineer	Aric Li	Phase	Line
Configuration	Mode 2 with ch.1 and 149 on continuous transmit RF signals		

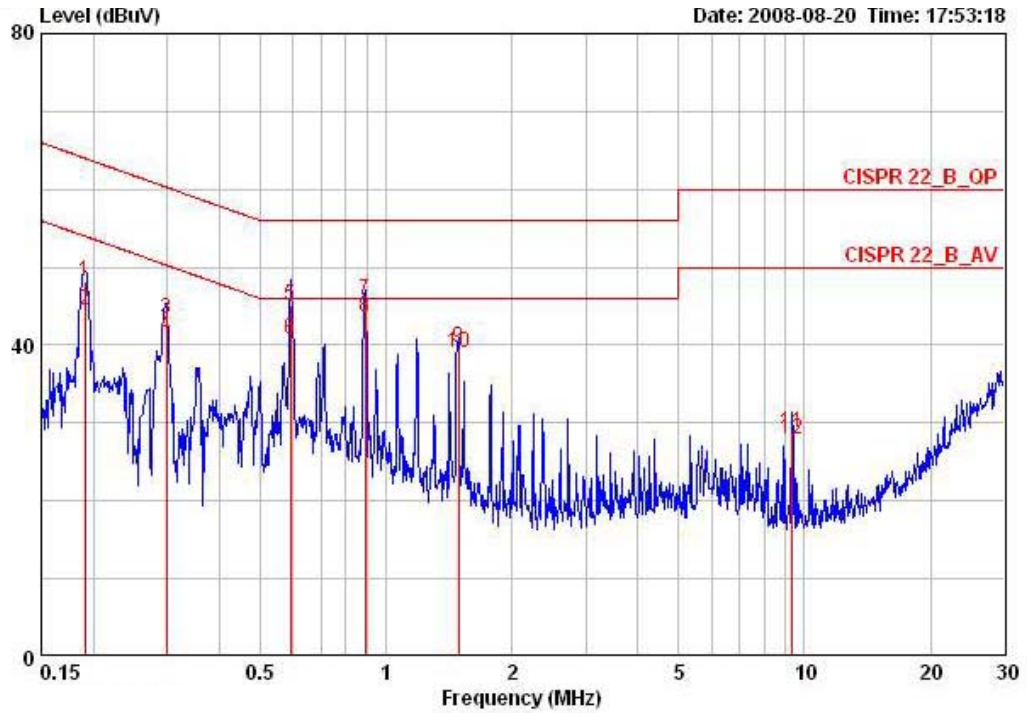

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.19039	48.11	-15.91	64.02	47.86	0.05	0.20	QP
2	0.19039	44.41	-9.61	54.02	44.16	0.05	0.20	AVERAGE
3	0.29869	43.43	-16.85	60.28	43.19	0.04	0.20	QP
4	0.29869	41.12	-9.16	50.28	40.88	0.04	0.20	AVERAGE
5	0.59164	45.18	-10.82	56.00	44.95	0.03	0.20	QP
6	0.59164	40.82	-5.18	46.00	40.59	0.03	0.20	AVERAGE
7	0.88969	45.73	-10.27	56.00	45.50	0.03	0.20	QP
8	0.88969	43.50	-2.50	46.00	43.27	0.03	0.20	AVERAGE
9	1.487	39.76	-16.24	56.00	39.62	0.04	0.10	QP
10	1.487	39.01	-6.99	46.00	38.87	0.04	0.10	AVERAGE
11	9.345	28.83	-31.17	60.00	28.20	0.33	0.30	QP
12	9.345	27.98	-22.02	50.00	27.35	0.33	0.30	AVERAGE

Temperature	24°C	Humidity	56%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Mode 2 with ch.1 and 149 on continuous transmit RF signals		

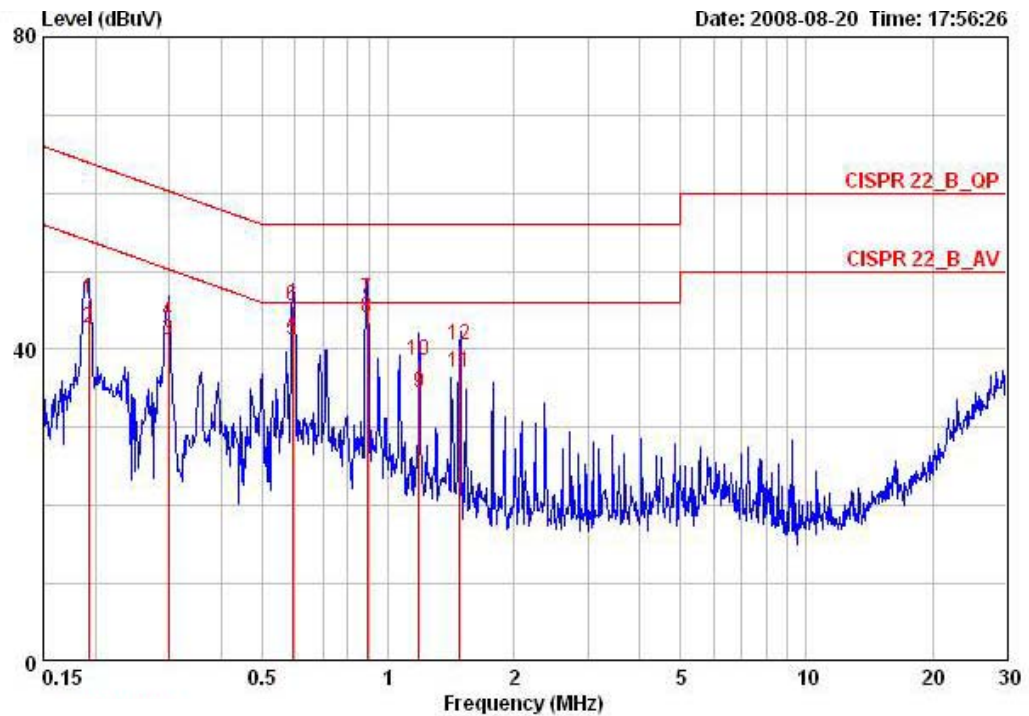

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19242	46.51	-17.42	63.93	46.23	0.08	0.20	QP
2	0.19242	42.73	-11.20	53.93	42.45	0.08	0.20	AVERAGE
3	0.29869	41.15	-9.12	50.28	40.88	0.07	0.20	AVERAGE
4	0.29869	43.50	-16.77	60.28	43.23	0.07	0.20	QP
5	0.59164	41.18	-4.82	46.00	40.91	0.07	0.20	AVERAGE
6	0.59164	45.51	-10.49	56.00	45.24	0.07	0.20	QP
7	0.89049	46.46	-9.54	56.00	46.19	0.07	0.20	QP
8	0.89049	44.03	-1.97	46.00	43.76	0.07	0.20	AVERAGE
9	1.184	34.52	-11.48	46.00	34.29	0.07	0.16	AVERAGE
10	1.184	38.61	-17.39	56.00	38.38	0.07	0.16	QP
11	1.483	37.13	-8.87	46.00	36.94	0.08	0.10	AVERAGE
12	1.483	40.58	-15.42	56.00	40.39	0.08	0.10	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	Draft n

Configuration Draft n MCS8 20MHz Ant. B1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.23	30.00	Complies
6	2437 MHz	18.86	30.00	Complies
11	2462 MHz	15.13	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. B2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	12.95	30.00	Complies
6	2437 MHz	19.93	30.00	Complies
11	2462 MHz	15.83	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	12.93	30.00	Complies
6	2437 MHz	19.84	30.00	Complies
11	2462 MHz	16.14	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.81	30.00	Complies
6	2437 MHz	24.34	30.00	Complies
11	2462 MHz	20.49	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	8.84	30.00	Complies
6	2437 MHz	13.37	30.00	Complies
9	2452 MHz	11.30	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	9.71	30.00	Complies
6	2437 MHz	13.98	30.00	Complies
9	2452 MHz	12.42	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	10.24	30.00	Complies
6	2437 MHz	13.96	30.00	Complies
9	2452 MHz	11.99	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.41	30.00	Complies
6	2437 MHz	18.55	30.00	Complies
9	2452 MHz	16.70	30.00	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	11a Draft n

Configuration 11a Draft n MCS8 20MHz Ant. A1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.01	30.00	Complies
157	5785 MHz	18.06	30.00	Complies
165	5825 MHz	17.76	30.00	Complies

Configuration 11a Draft n MCS8 20MHz Ant. A2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.85	30.00	Complies
157	5785 MHz	19.07	30.00	Complies
165	5825 MHz	18.82	30.00	Complies

Configuration 11a Draft n MCS8 20MHz Ant. A3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.98	30.00	Complies
157	5785 MHz	18.02	30.00	Complies
165	5825 MHz	17.36	30.00	Complies

Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	23.07	30.00	Complies
157	5785 MHz	23.18	30.00	Complies
165	5825 MHz	22.80	30.00	Complies

Configuration 11a Draft n MCS8 40MHz Ant. A1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	16.94	30.00	Complies
159	5795 MHz	17.33	30.00	Complies

Configuration 11a Draft n MCS8 40MHz Ant. A2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	18.13	30.00	Complies
159	5795 MHz	17.96	30.00	Complies


Configuration 11a Draft n MCS8 40MHz Ant. A3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.62	30.00	Complies
159	5795 MHz	17.38	30.00	Complies

Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	22.36	30.00	Complies
159	5795 MHz	22.34	30.00	Complies

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1 / 2412 MHz

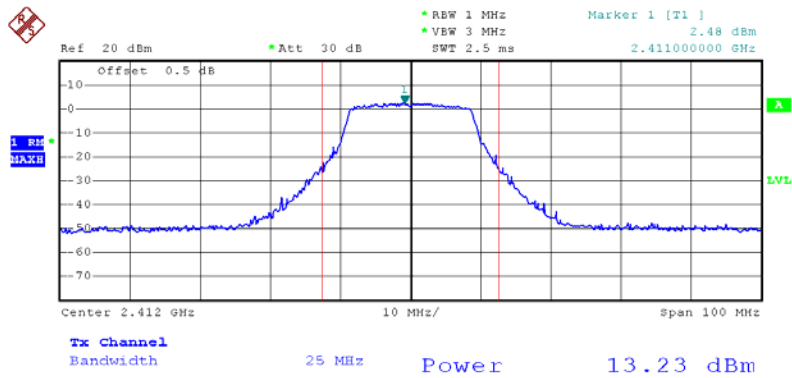


Date: 3.SEP.2008 18:02:11

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2 / 2412 MHz

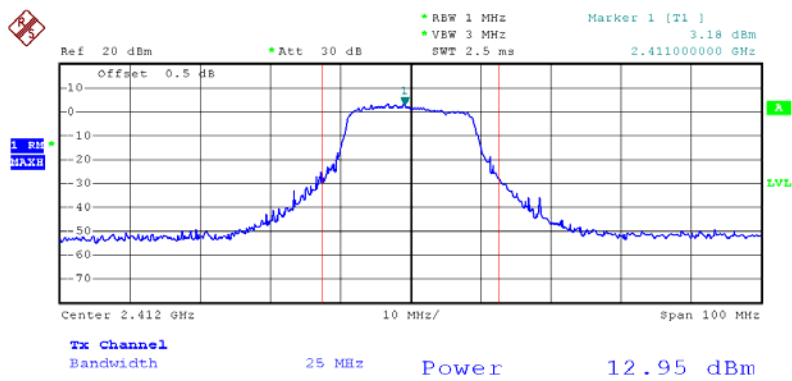


Date: 3.SEP.2008 18:02:35

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2412 MHz

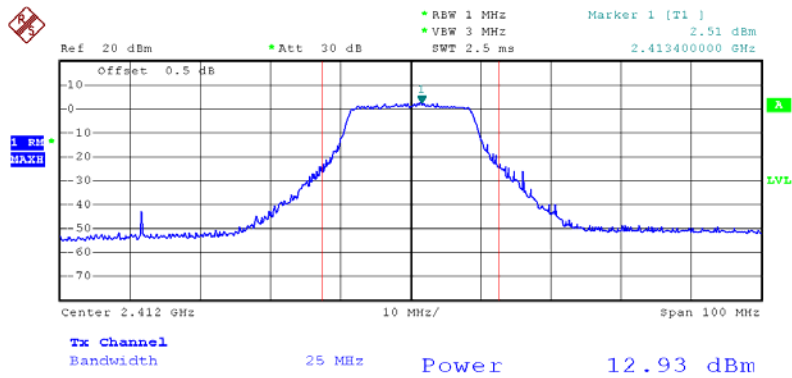


Date: 3.SEP.2008 18:04:37

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1/ 2437 MHz

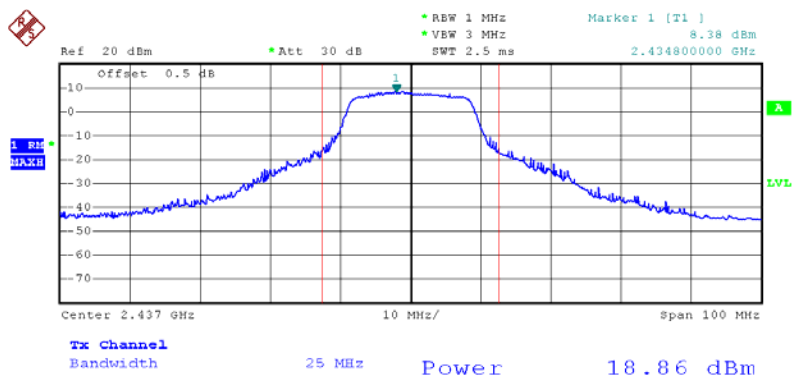


Date: 3.SEP.2008 18:06:30

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2/ 2437 MHz

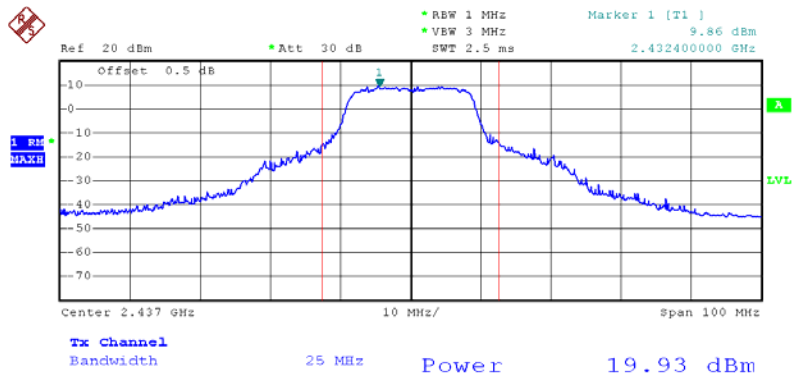


Date: 3.SEP.2008 18:06:59

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2437 MHz

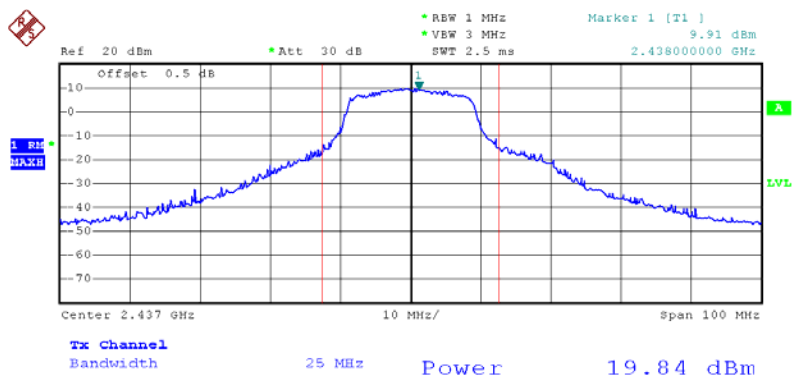


Date: 3.SEP.2008 18:09:51

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1/ 2462 MHz

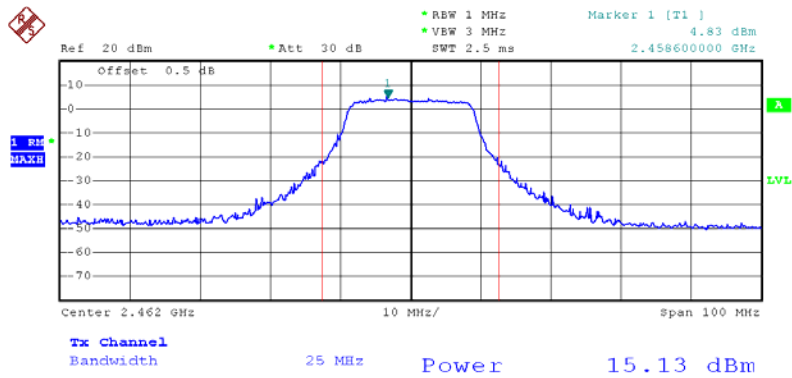


Date: 3.SEP.2008 18:10:30

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2/ 2462 MHz

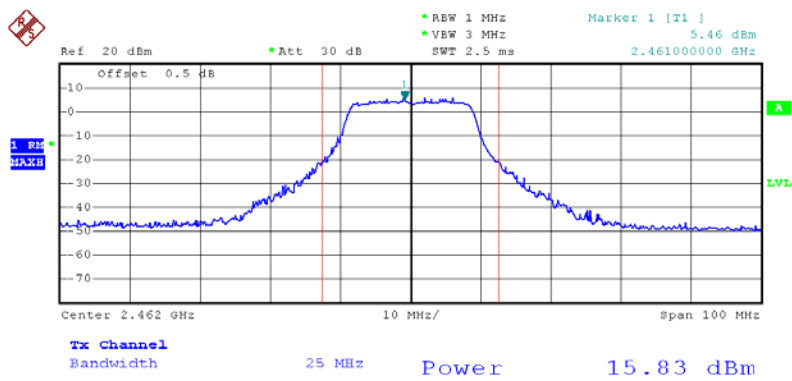


Date: 3.SEP.2008 18:11:16

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2462 MHz

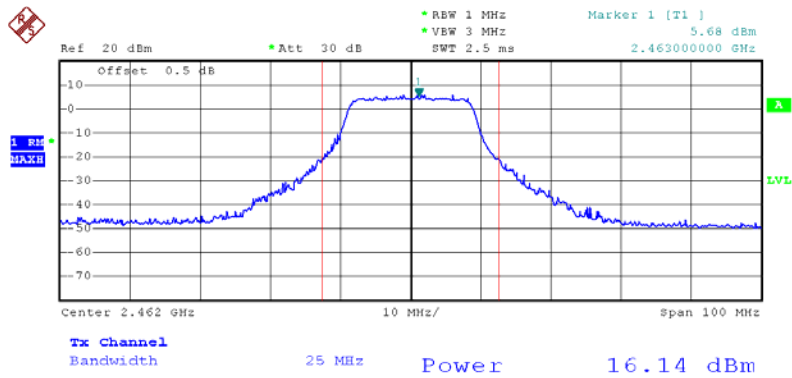


Date: 3.SEP.2008 18:11:28

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2422 MHz

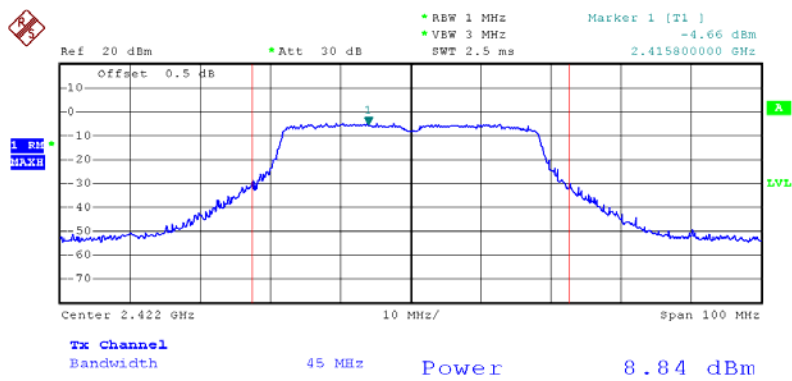


Date: 3.SEP.2008 18:14:31

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2422 MHz

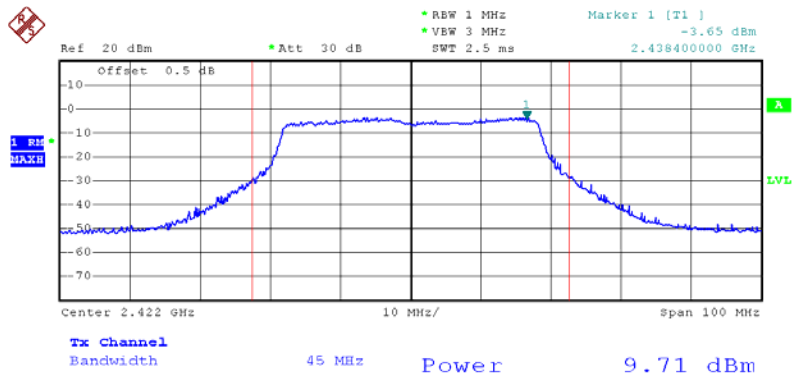


Date: 3.SEP.2008 18:15:25

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2422 MHz

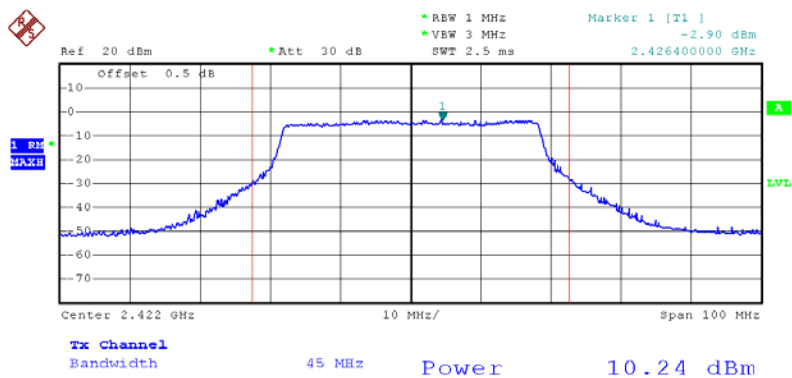


Date: 3.SEP.2008 18:15:46

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2437 MHz

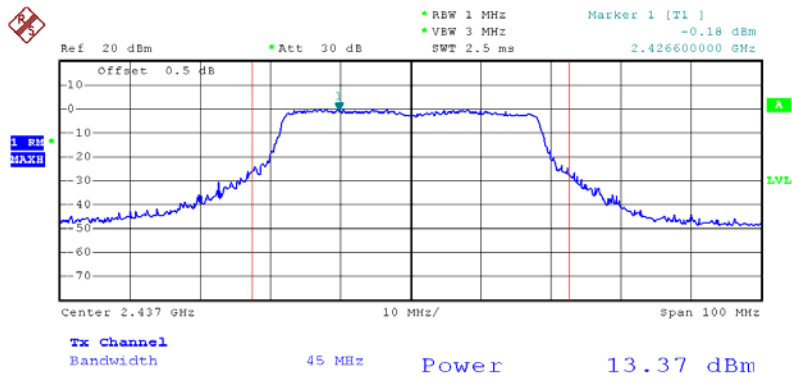


Date: 3.SEP.2008 18:17:04

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2437 MHz

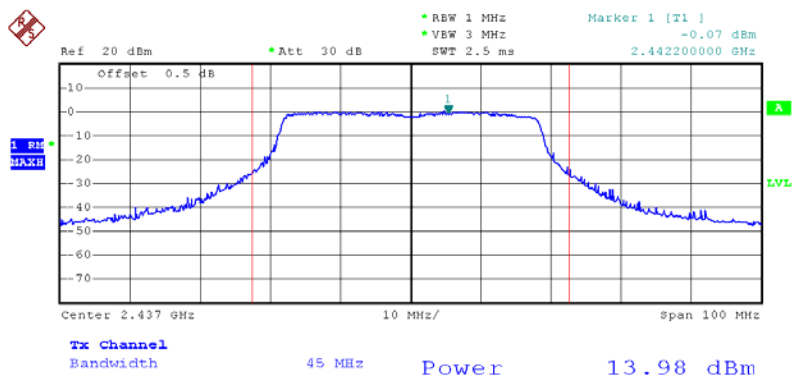


Date: 3.SEP.2008 18:18:46

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2437 MHz

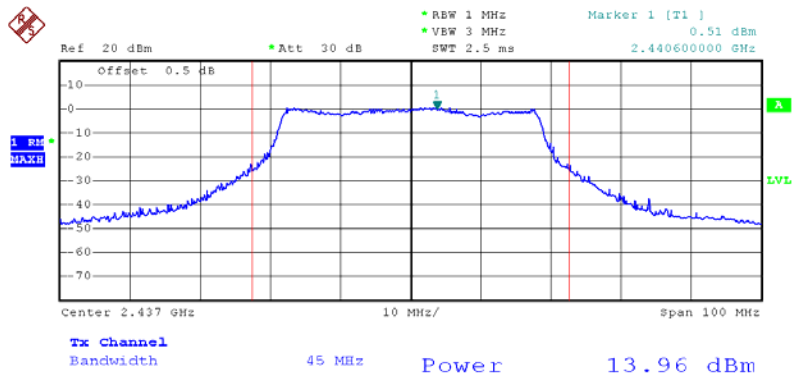


Date: 3.SEP.2008 18:19:48

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2452 MHz

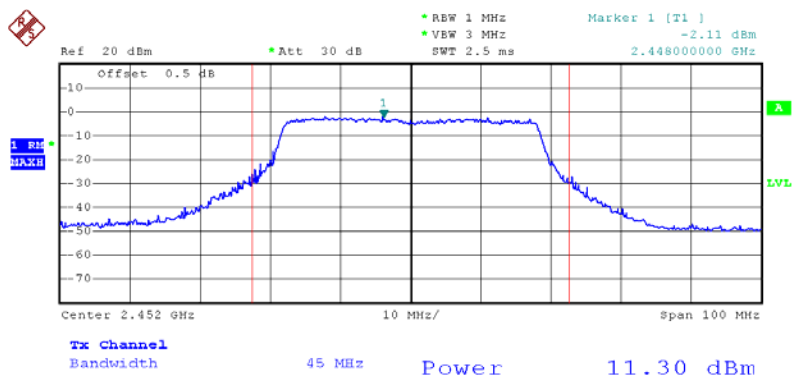


Date: 3.SEP.2008 18:20:54

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2452 MHz

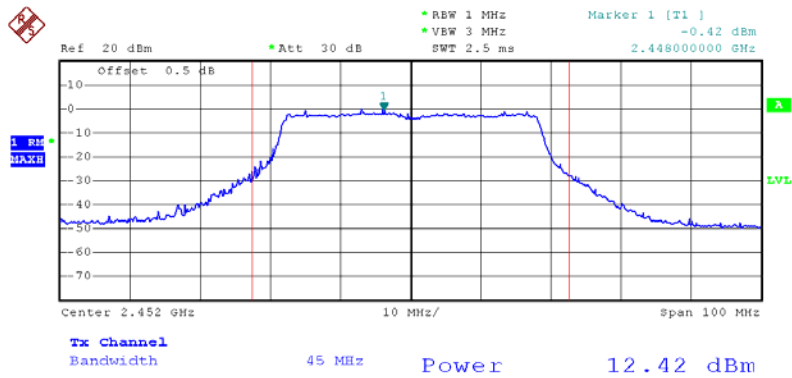


Date: 3.SEP.2008 18:21:13

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2452 MHz

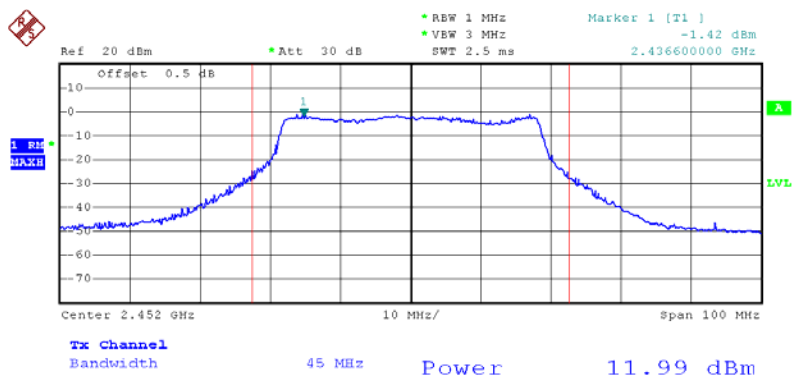


Date: 3.SEP.2008 18:21:52

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5745 MHz

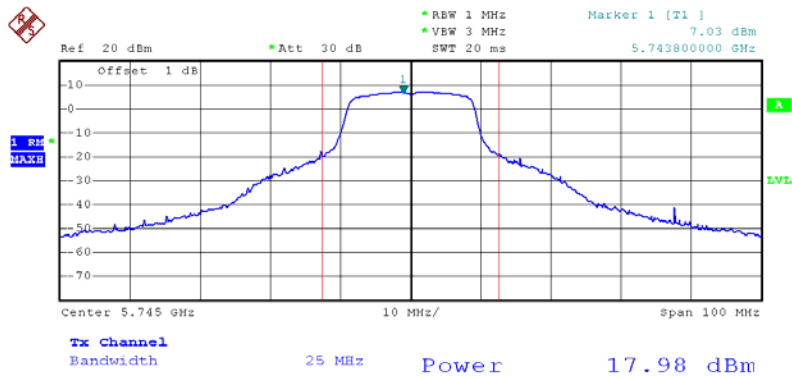


Date: 3.SEP.2008 19:58:57

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A1/ 5785 MHz

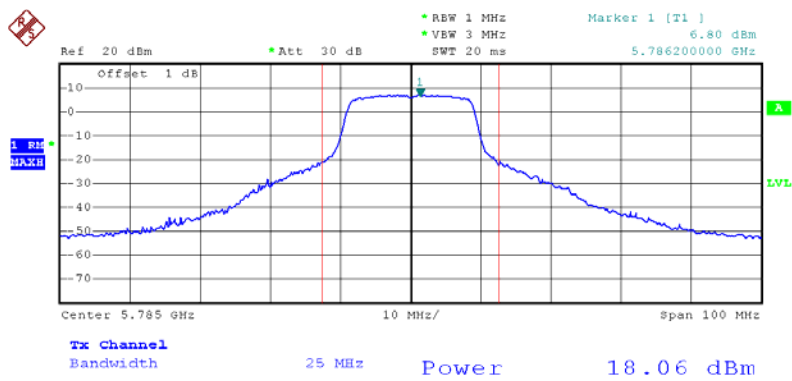


Date: 3.SEP.2008 19:59:54

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A2/ 5785 MHz

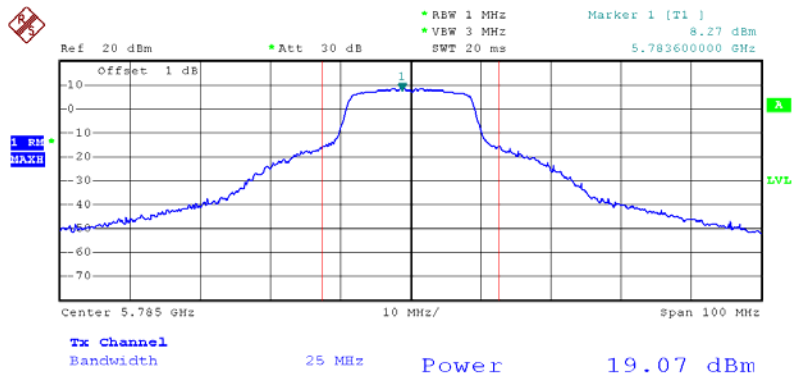


Date: 3.SEP.2008 20:00:25

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5785 MHz

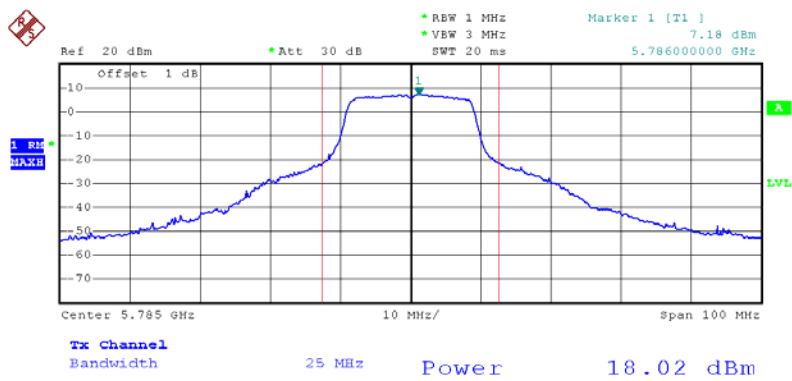


Date: 3.SEP.2008 20:02:31

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A1/ 5825 MHz

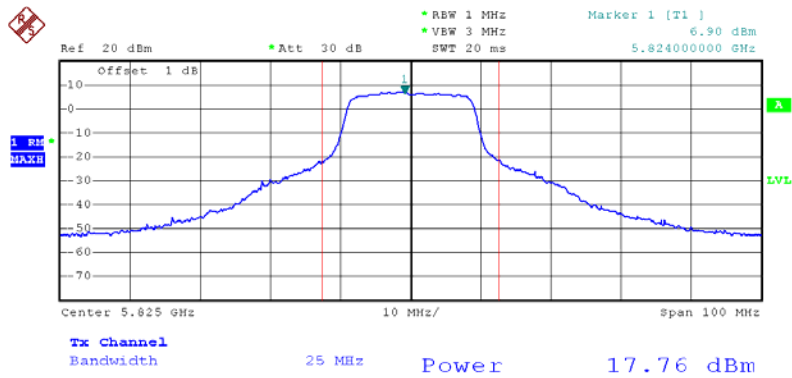


Date: 3.SEP.2008 20:05:31

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A2/ 5825 MHz

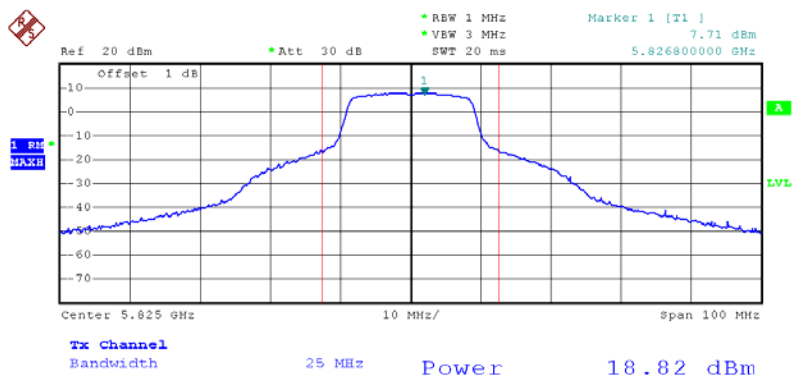


Date: 3.SEP.2008 20:07:19

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5825 MHz

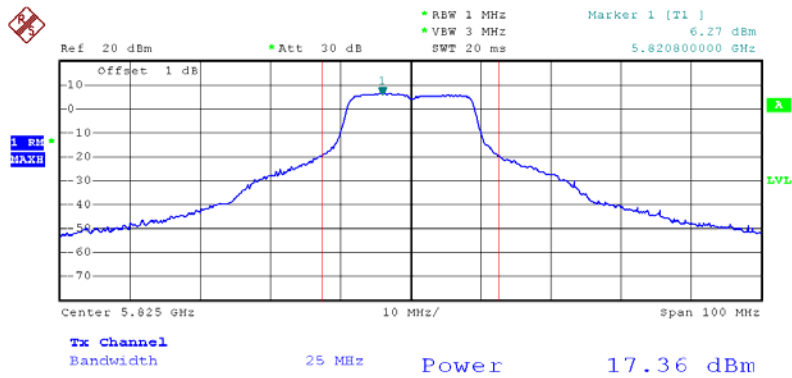


Date: 3.SEP.2008 20:08:10

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A1/ 5755 MHz

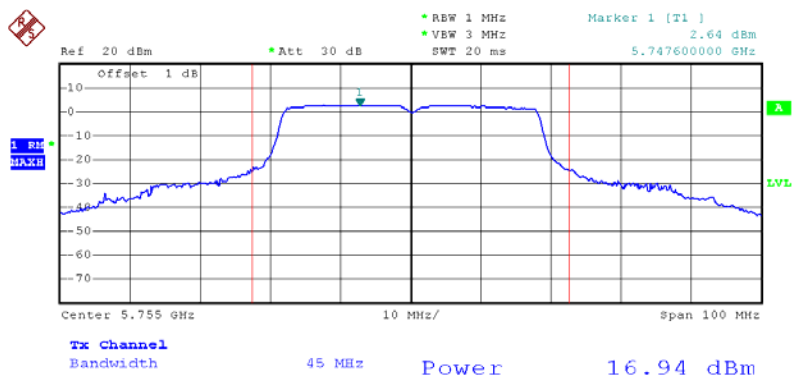


Date: 3.SEP.2008 20:11:50

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A2/ 5755 MHz

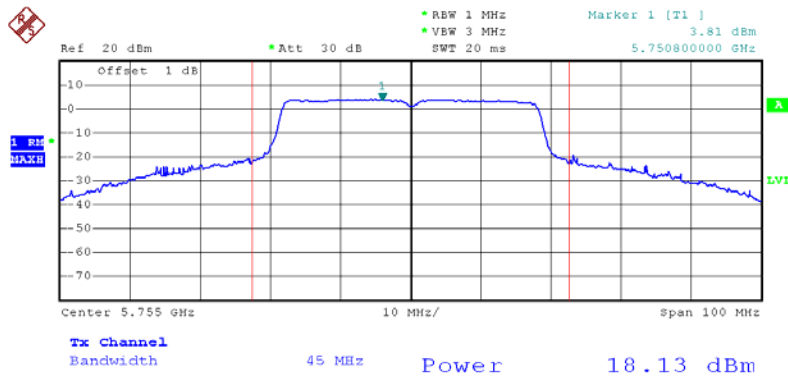


Date: 3.SEP.2008 20:12:14

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A3/ 5755 MHz

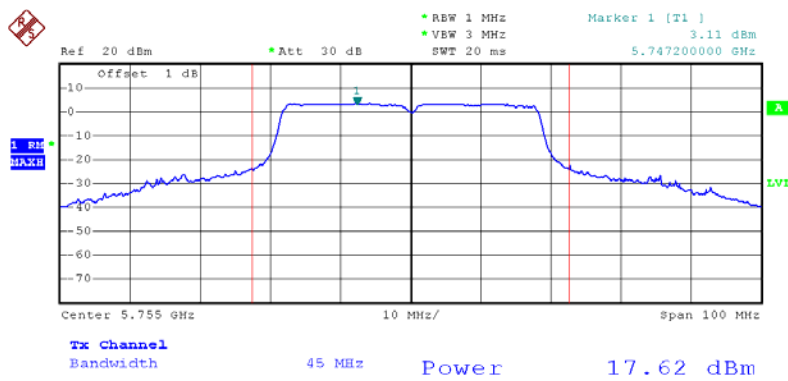


Date: 3.SEP.2008 20:12:47

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A1/ 5795 MHz

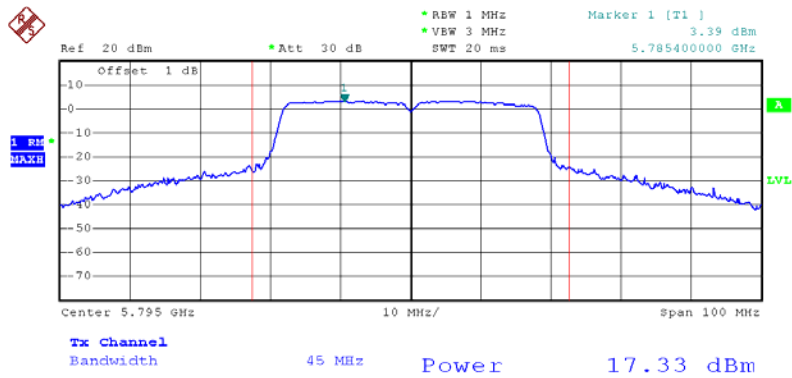

Date: 3.SEP.2008 20:13:31

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A2/ 5795 MHz

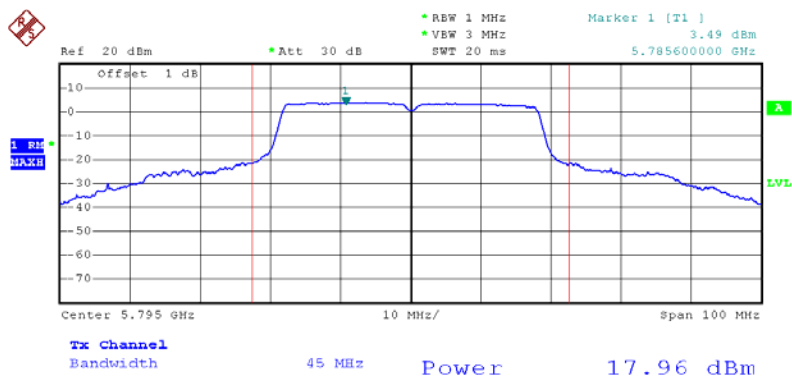

Date: 3.SEP.2008 20:14:43

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	100s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 100s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.3.4. Test Setup Layout

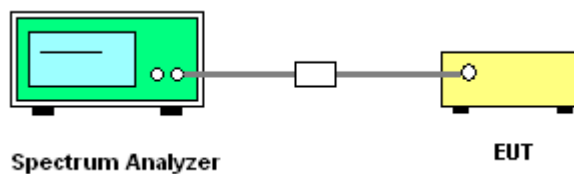

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	Draft n

Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-1.14	8.00	Complies
6	2437 MHz	5.30	8.00	Complies
11	2462 MHz	-0.07	8.00	Complies

Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-2.89	8.00	Complies
6	2437 MHz	1.58	8.00	Complies
9	2452 MHz	-1.11	8.00	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	11a Draft n


Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	2.51	8.00	Complies
157	5785 MHz	2.74	8.00	Complies
165	5827 MHz	1.75	8.00	Complies

Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	3.93	8.00	Complies
159	5795 MHz	5.09	8.00	Complies

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz

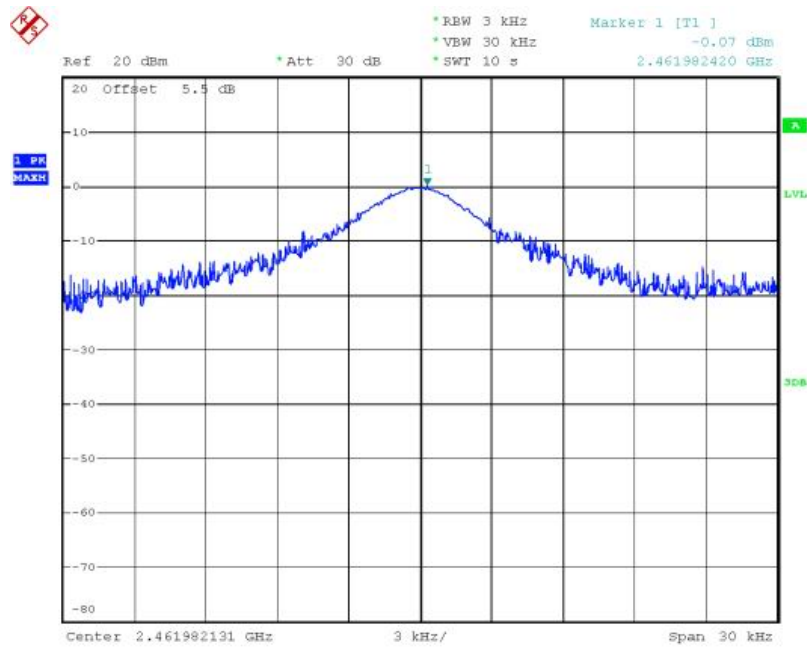


Date: 14.SEP.2008 16:40:08

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2422 MHz

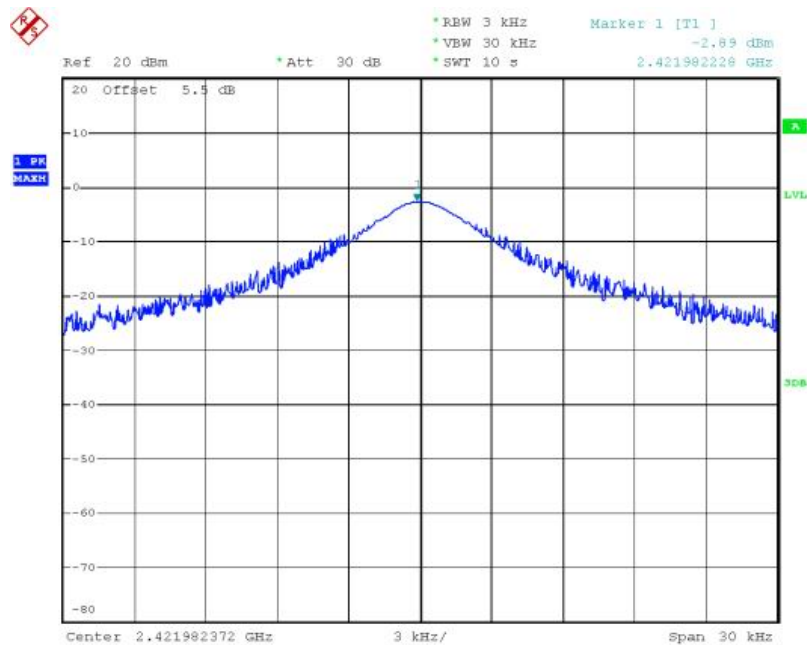


Date: 14.SEP.2008 16:41:16

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz

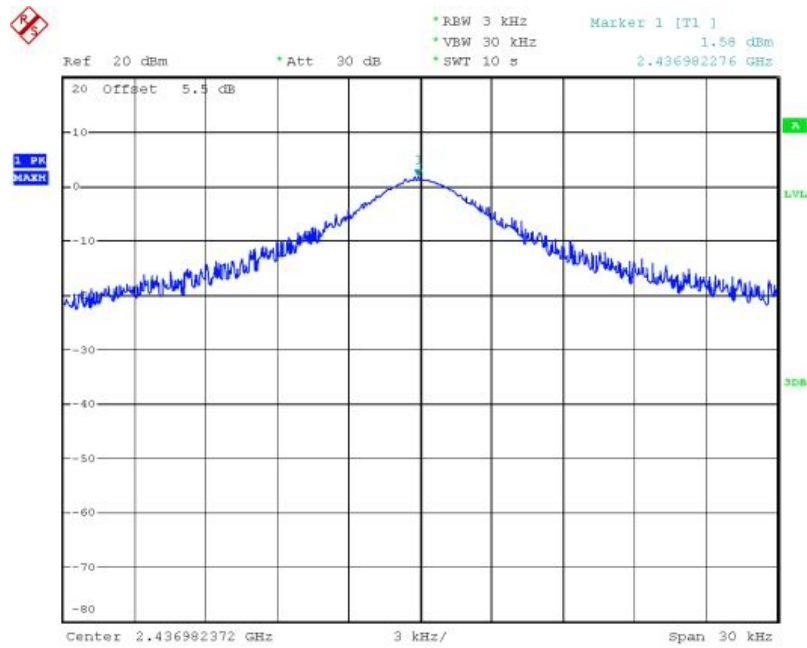


Date: 14.SEP.2008 16:42:43

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2452 MHz

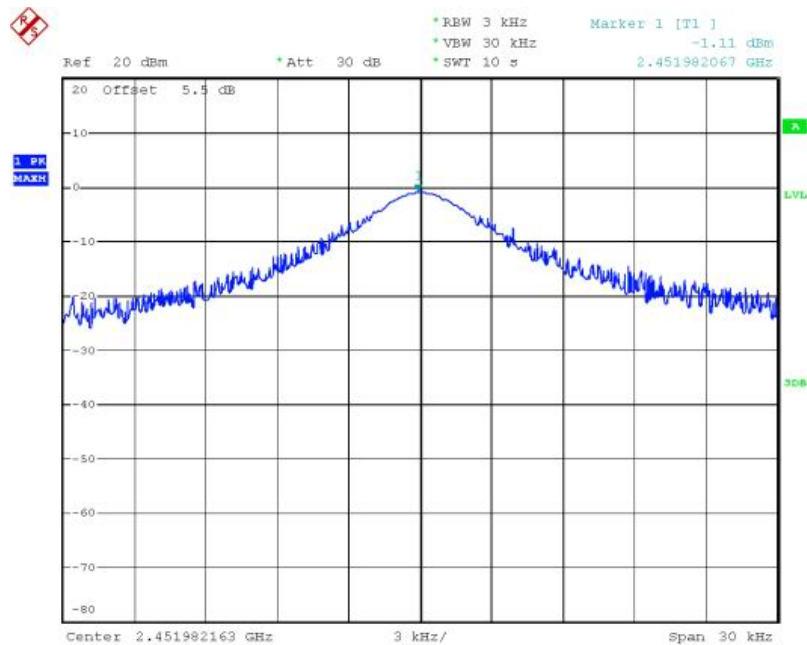


Date: 14.SEP.2008 16:43:59

Power Density Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3 / 5825 MHz

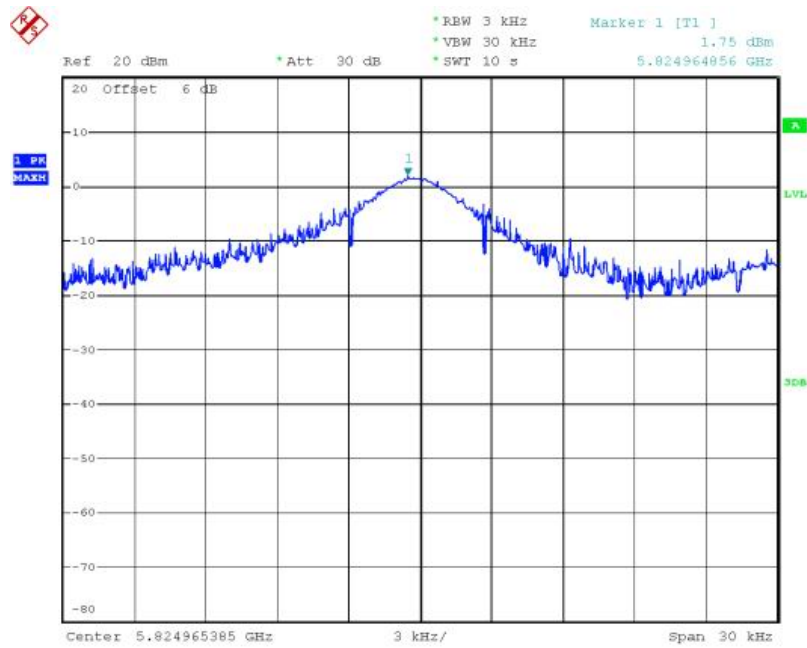


Date: 14.SEP.2008 16:17:08

Power Density Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3 / 5755MHz

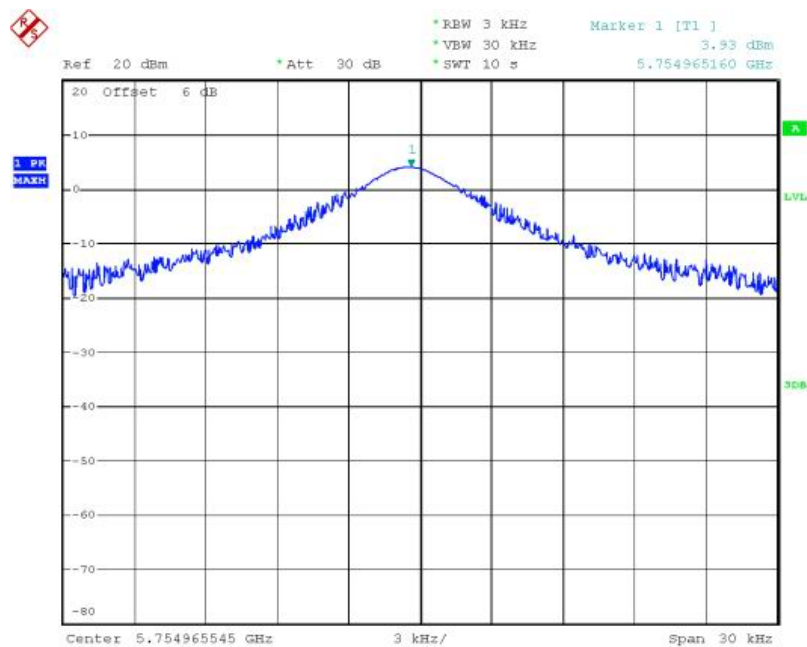

Date: 14.SEP.2008 16:11:27

Power Density Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3 / 5795 MHz

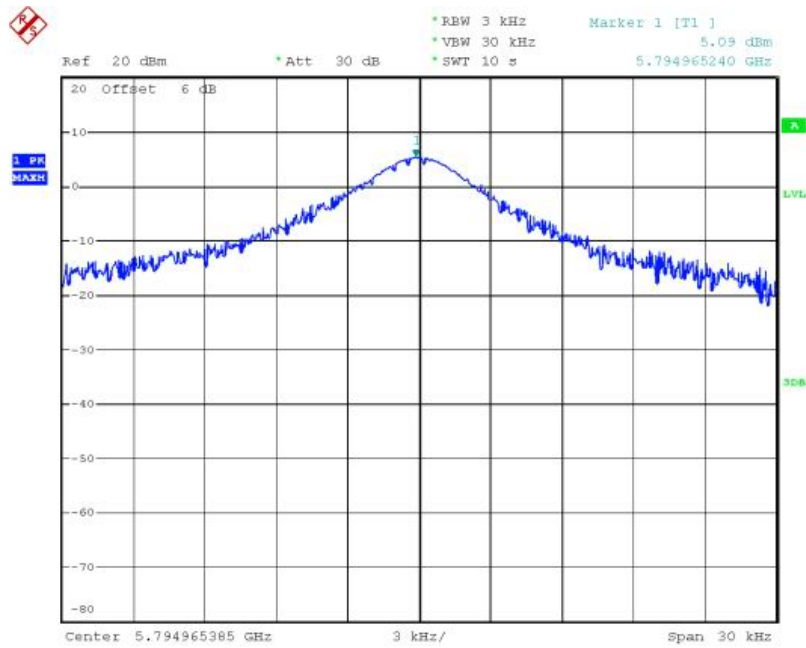

Date: 14.SEP.2008 16:08:55

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

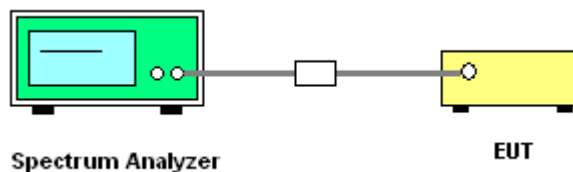

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	Draft n

Configuration Draft n MCS8 20MHz Ant. B1 + Ant. B2 + Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.14	17.62	500	Complies
6	2437 MHz	16.34	17.59	500	Complies
11	2462 MHz	16.69	17.59	500	Complies

Configuration Draft n MCS8 40MHz Ant. B1 + Ant. B2 + Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.08	36.15	500	Complies
6	2437 MHz	35.76	36.21	500	Complies
9	2452 MHz	35.25	36.28	500	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	11a Draft n


Configuration 11a Draft n MCS8 20MHz Ant. A1 + Ant. A2 + Ant. A3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.28	17.56	500	Complies
157	5785 MHz	16.79	17.56	500	Complies
165	5825 MHz	16.28	17.56	500	Complies

Configuration 11a Draft n MCS8 40MHz Ant. A1 + Ant. A2 + Ant. A3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.34	36.21	500	Complies
159	5795 MHz	35.44	36.21	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2412 MHz

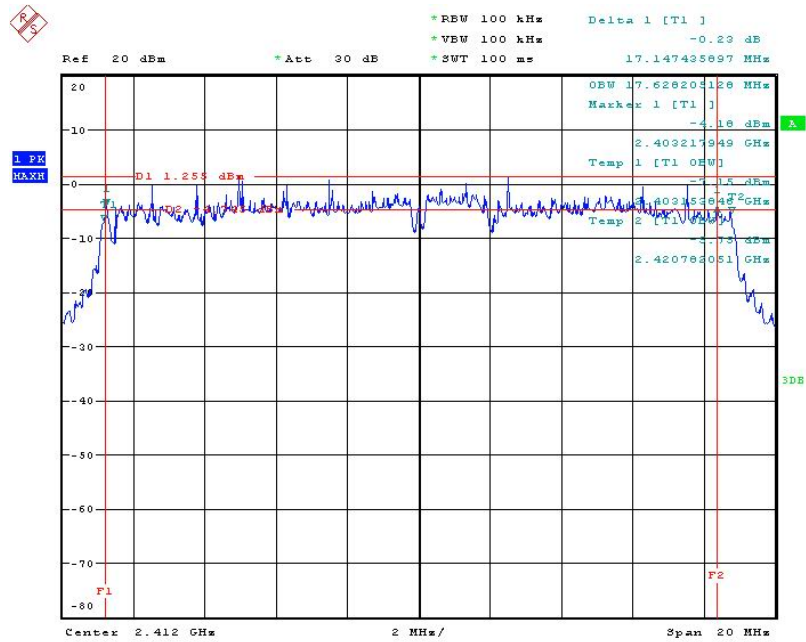


Date: 14.SEP.2008 15:23:41

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz

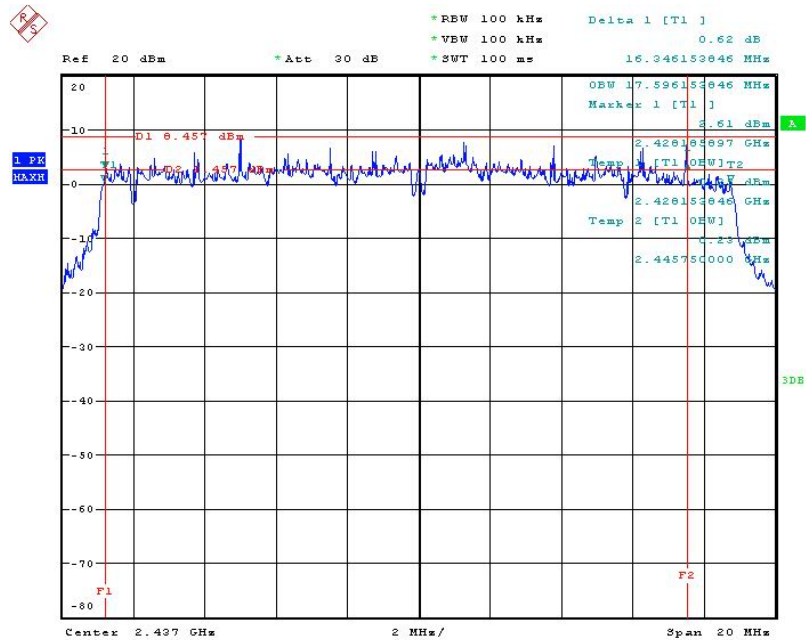


Date: 14.SEP.2008 15:24:36

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz

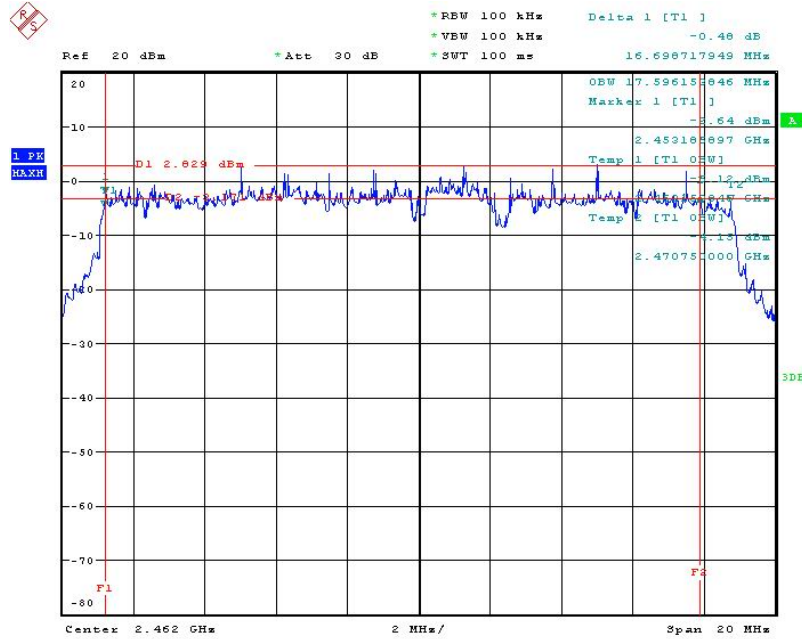


Date: 14.SEP.2008 15:25:26

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2422 MHz

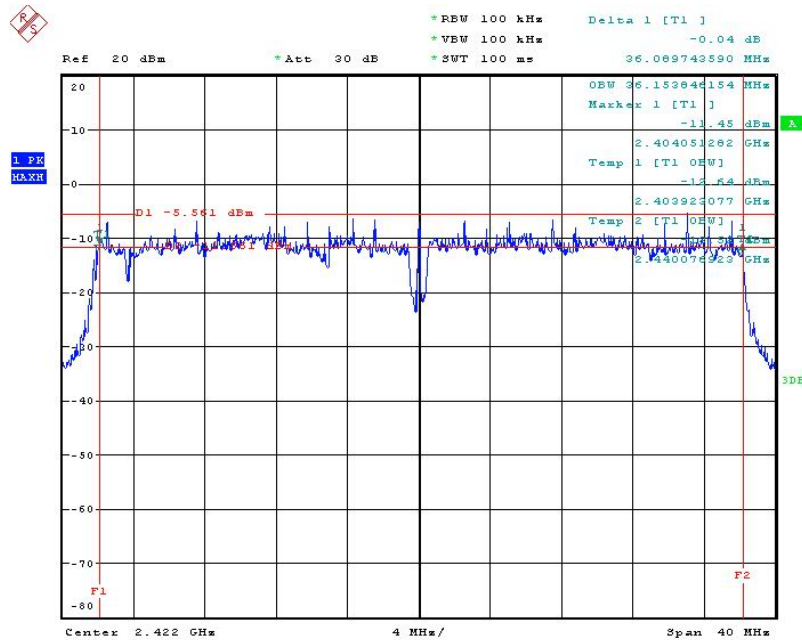


Date: 14.SEP.2008 15:26:21

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz

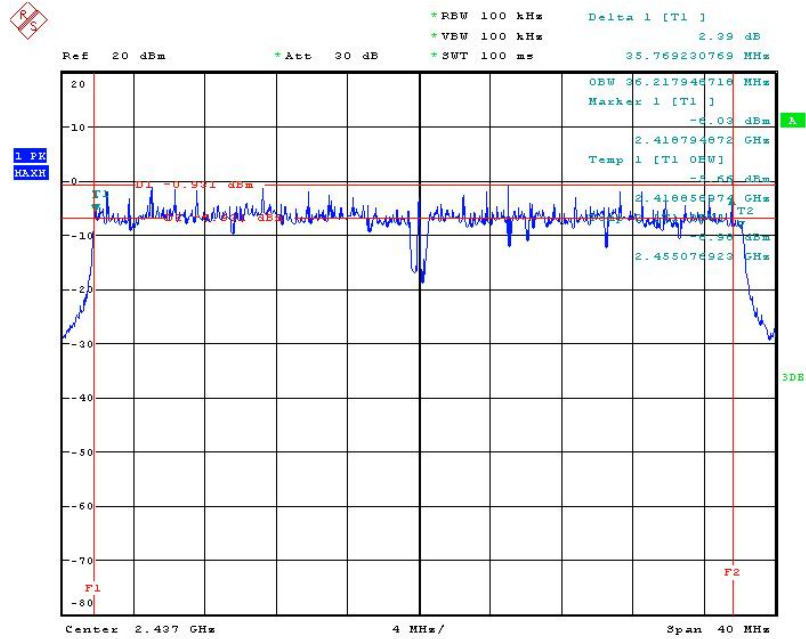


Date: 14.SEP.2008 15:27:23

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A1 + Ant. A2 + Ant. A3 / 2452 MHz

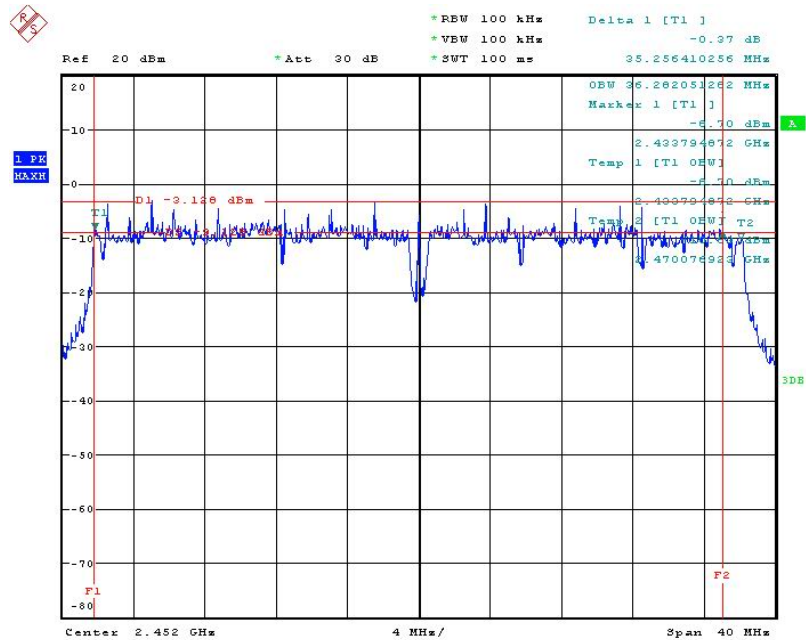


Date: 14.SEP.2008 15:27:58

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5745 MHz

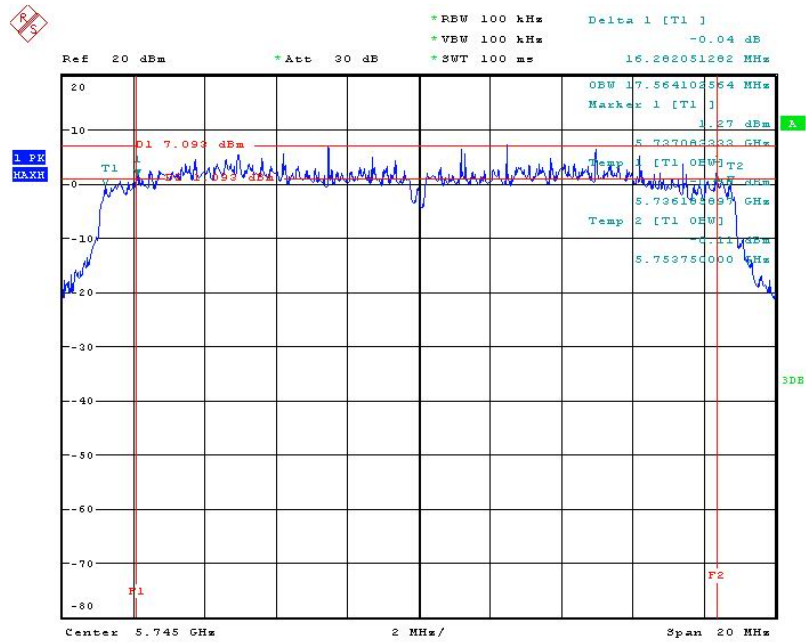


Date: 14.SEP.2008 15:39:27

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5785MHz

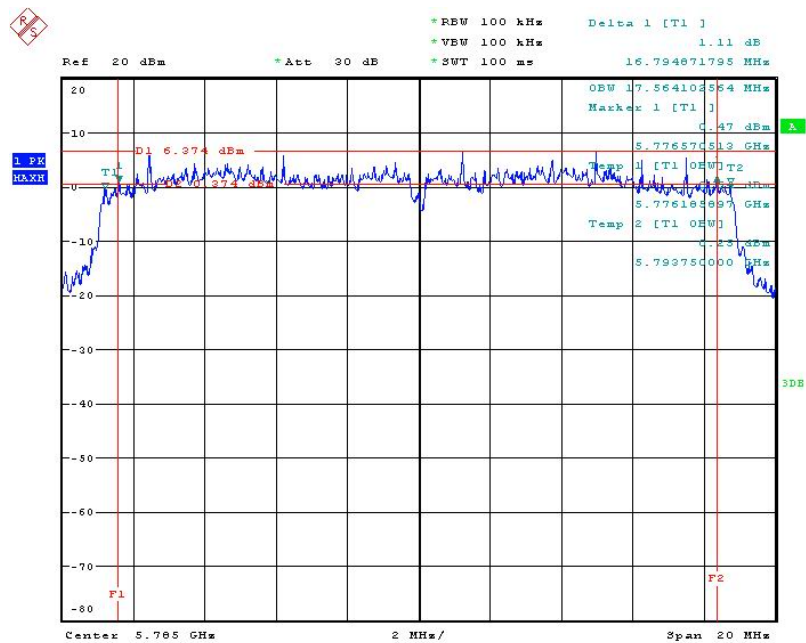


Date: 14.SEP.2008 15:40:08

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5825 MHz

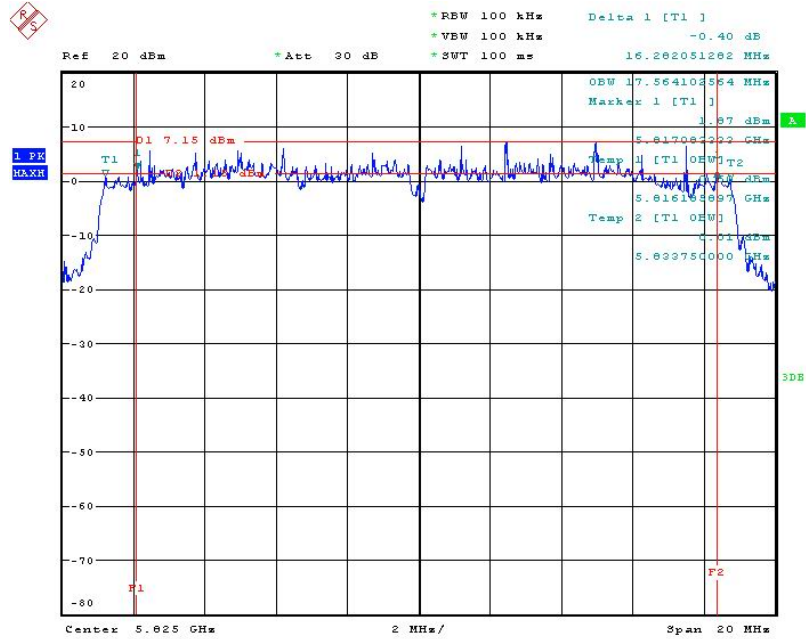


Date: 14.SEP.2008 15:40:36

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1 +Ant. A2+Ant. A3/ 5755MHz

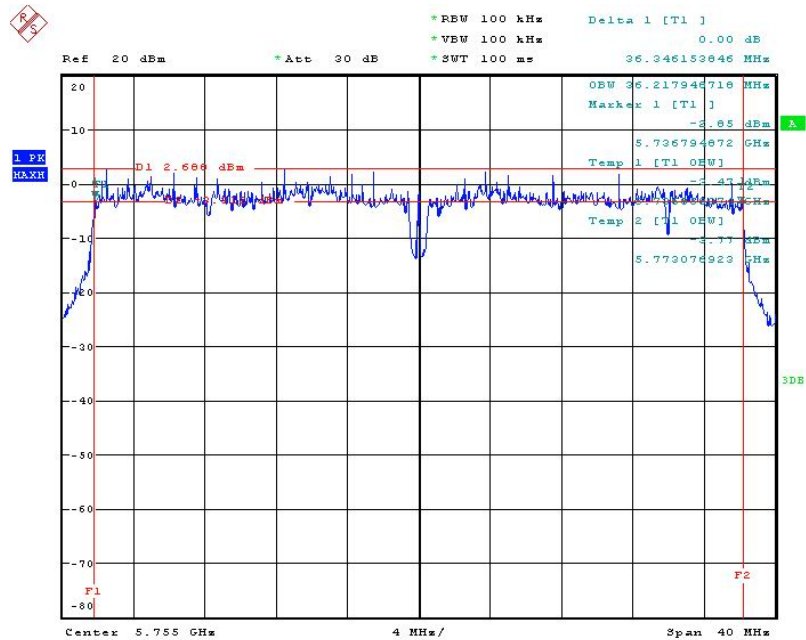

Date: 14.SEP.2008 15:43:47

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1 +Ant. A2+Ant. A3/ 5795 MHz

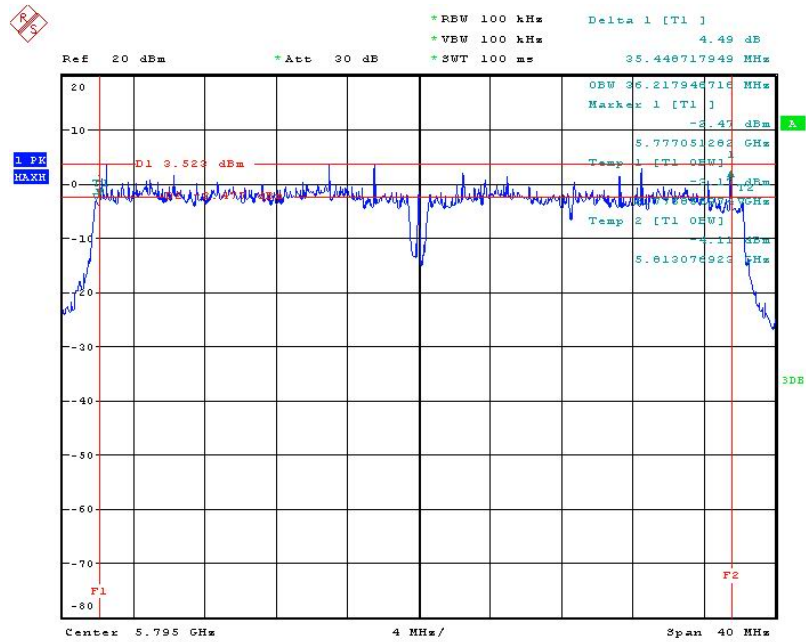

Date: 14.SEP.2008 15:44:35

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

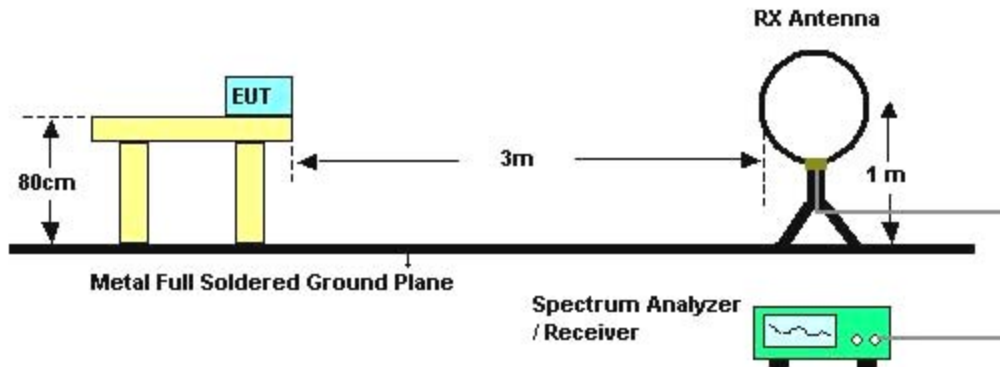

For radiated emissions above 30MHz

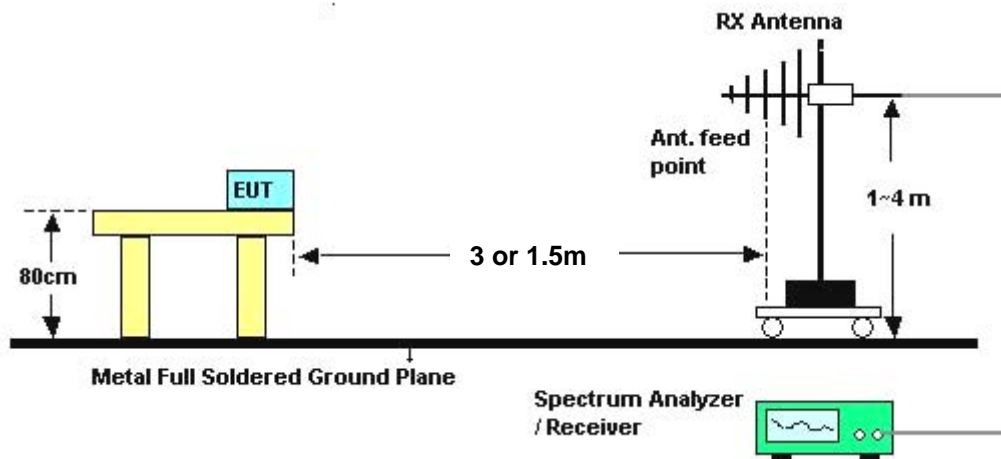

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Mode 2

Horizontal

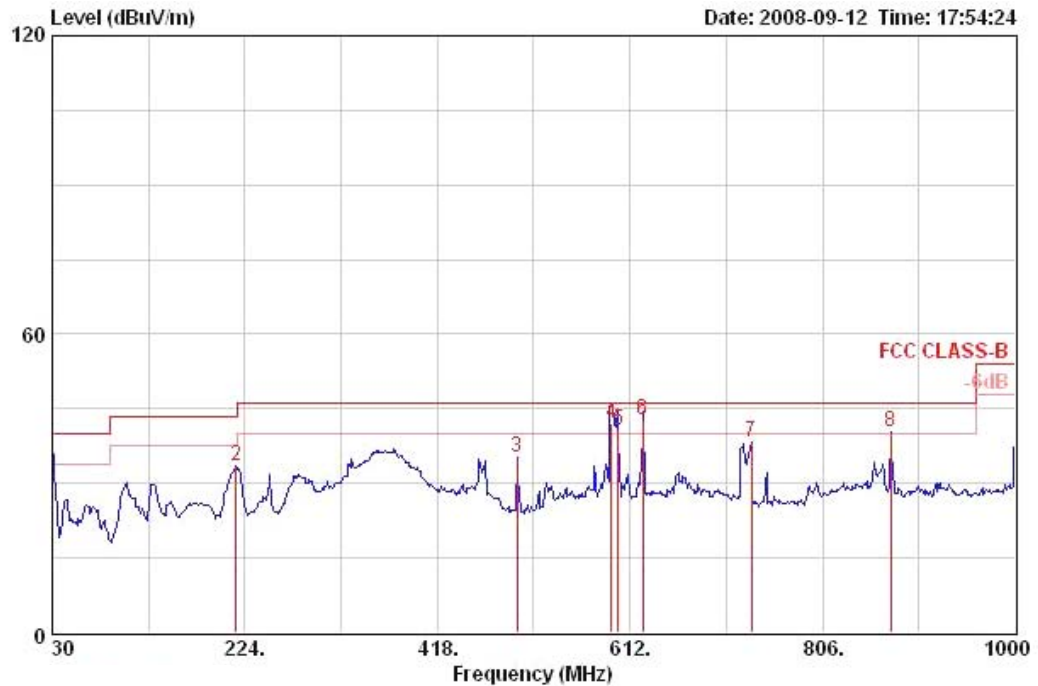

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	30.000	30.46	-9.54	40.00	39.00	18.76	27.80	0.50	QP	HORIZONTAL	0	100
2	215.270	33.37	-10.13	43.50	48.49	10.19	27.07	1.76	Peak	HORIZONTAL	0	100
3	498.510	35.06	-10.94	46.00	42.86	17.60	28.09	2.70	Peak	HORIZONTAL	0	100
4 !	593.360	42.18	-3.82	46.00	48.70	18.69	28.10	2.89	QP	HORIZONTAL	0	157
5 !	599.880	40.67	-5.33	46.00	47.10	18.77	28.10	2.90	QP	HORIZONTAL	12	165
6 Ⓢ	624.990	42.82	-3.18	46.00	49.00	18.85	28.07	3.05	QP	HORIZONTAL	163	141
7	734.220	38.12	-7.88	46.00	43.23	19.32	27.86	3.44	Peak	HORIZONTAL	0	100
8 !	874.870	40.48	-5.52	46.00	44.09	20.34	27.45	3.50	Peak	HORIZONTAL	0	100

Vertical

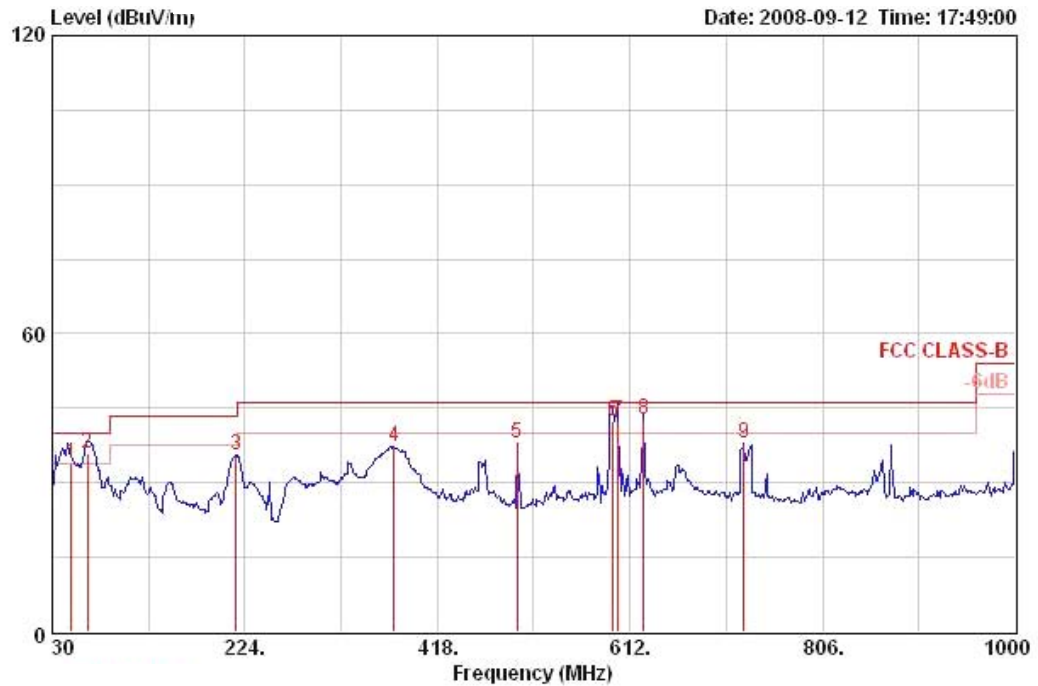

	MHz	dBuV/m	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	49.100	33.93	-6.07	40.00	52.20	8.83	27.80	0.70	QP	VERTICAL	346	100
2 !	65.740	35.93	-4.07	40.00	56.10	6.69	27.74	0.88	QP	VERTICAL	11	186
3	215.270	35.70	-7.80	43.50	50.81	10.19	27.07	1.76	Peak	VERTICAL	0	400
4	374.350	37.21	-8.79	46.00	47.00	15.38	27.42	2.25	Peak	VERTICAL	0	400
5	498.510	38.00	-8.00	46.00	45.79	17.60	28.09	2.70	Peak	VERTICAL	0	400
6 !	595.000	42.39	-3.61	46.00	48.90	18.70	28.10	2.89	QP	VERTICAL	56	100
7 !	600.200	42.47	-3.53	46.00	48.90	18.77	28.10	2.90	QP	VERTICAL	0	100
8 !	625.580	42.79	-3.21	46.00	48.96	18.85	28.07	3.05	QP	VERTICAL	0	400
9	726.460	37.92	-8.08	46.00	43.14	19.27	27.89	3.41	Peak	VERTICAL	0	400

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 1 Ant. B1 + Ant. B2+Ant. B3

Horizontal

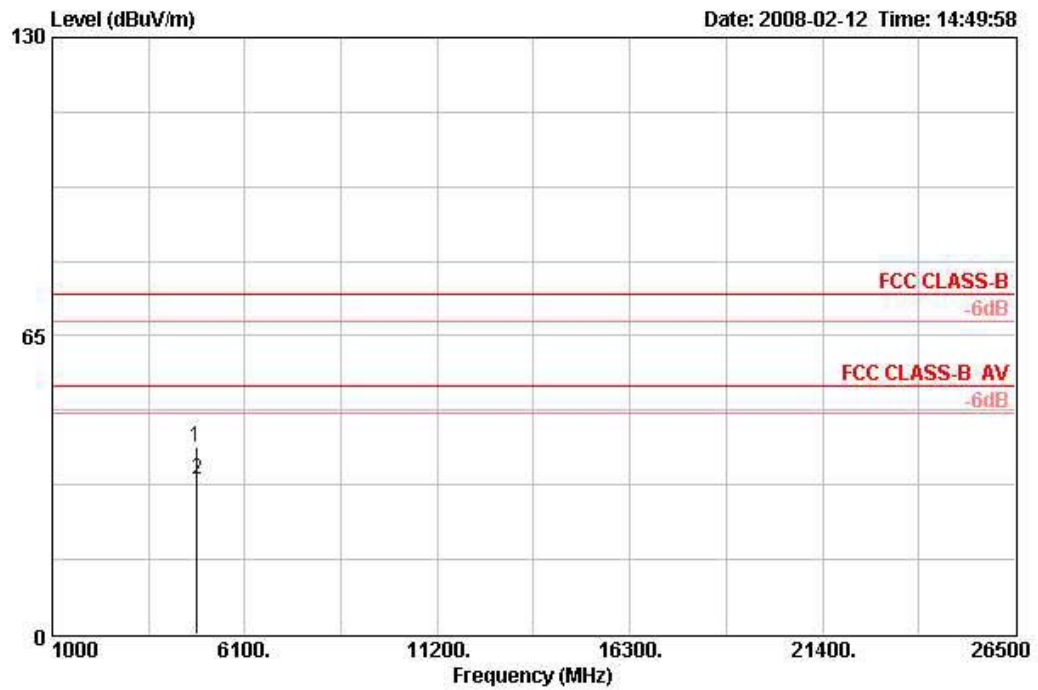

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.170	40.78	-33.22	74.00	36.49	33.06	6.40	35.16	PEAK	100	360	HORIZONTAL
2	4826.380	33.59	-20.41	54.00	29.30	33.06	6.40	35.16	AVERAGE	100	360	HORIZONTAL

Vertical

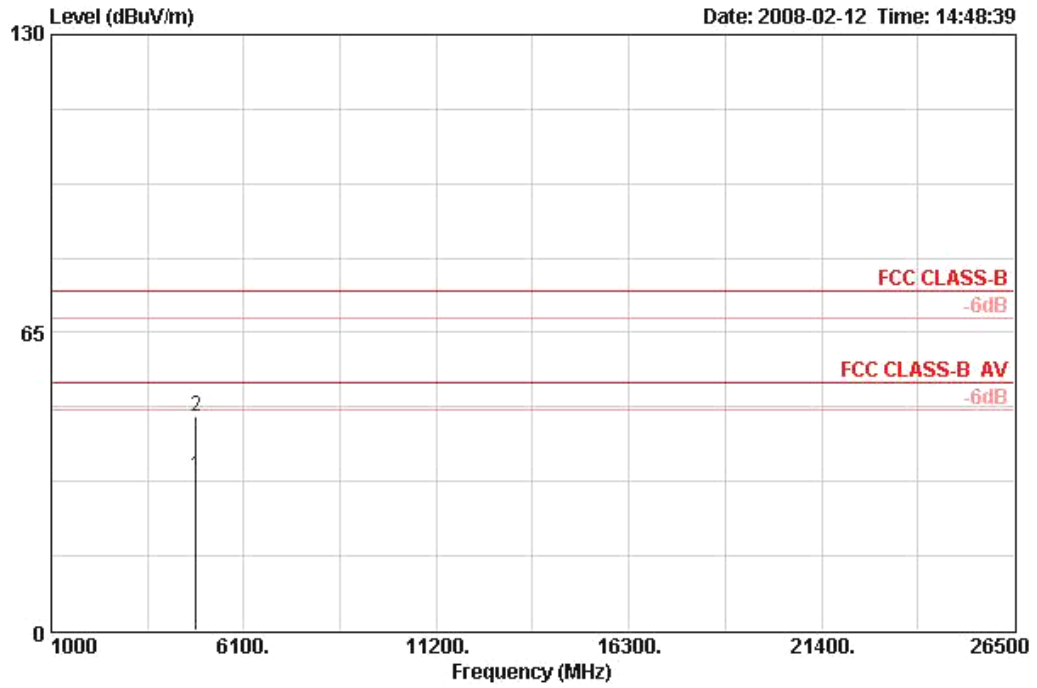

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.810	33.60	-20.40	54.00	29.32	33.06	6.40	35.16	AVERAGE	100	0	VERTICAL
2	4824.520	46.53	-27.47	74.00	42.24	33.06	6.40	35.16	PEAK	100	0	VERTICAL