



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	3Com Corporation
Applicant Address	350 Campus Drive, Marlborough , MA 01752-3064.U.S.A.
FCC ID	O9C-AP3950
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan, R.O.C.

Product Name	3Com WLAN Managed AP 3950
Brand Name	3Com
Model Name	AP3950
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Feb. 01, 2008
Final Test Date	Mar. 03, 2008
Submission Type	Original Equipment



### Statement

**Test result included is only for the Draft n part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	9
3.9. Test Configurations .....	11
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Powe Measurement .....	18
4.3. Power Spectral Density Measurement .....	40
4.4. 6dB Spectrum Bandwidth Measurement .....	49
4.5. Radiated Emissions Measurement .....	58
4.6. Band Edge Emissions Measurement .....	86
4.7. Antenna Requirements .....	94
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>95</b>
<b>6. TEST LOCATION.....</b>	<b>97</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>98</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT .....</b>	<b>A1 ~ A36</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MPE REPORT .....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. CO-LOCATION REPORT .....</b>	<b>D1 ~ D3</b>



### History of This Test Report

Original Issue Date: Jun. 18, 2008

Report No.: FR820103-03AC

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

## 1. CERTIFICATE OF COMPLIANCE

Product Name : 3Com WLAN Managed AP 3950  
Brand Name : 3Com  
Model Name : AP3950  
Applicant : 3Com Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 01, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.20 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	5.53 dB
4.3	15.247(e)	Power Spectral Density	Complies	2.06 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.44 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.08 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN
Radio Type	Intentional Transceiver
Power Type	From Adapter
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz) : 17.64 MHz ; MCS8 (40MHz) : 36.32 MHz 11a MCS8 (20MHz) : 17.68 MHz ; 11a MCS8 (40MHz) : 36.32 MHz
Conducted Output Power	MCS8 (20MHz) : 24.47 dBm ; MCS8 (40MHz) : 18.38 dBm 11a MCS8 (20MHz) : 23.05 MHz ; 11a MCS8 (40MHz) : 22.30 MHz
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### Antenna & Band width

Antenna	Three (TX)	
	20 MHz	40 MHz
Band width Mode	20 MHz	40 MHz
Draft n	V	V
802.11a Draft n	V	V

## Draft n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
					20MHz	40MHz	20MHz	40MHz	800nsGI	
									20MHz	40MHz
0	1	BPSK	$\frac{1}{2}$	1	52	108	26	54	6.5	13.5
1	1	QPSK	$\frac{1}{2}$	2	104	216	52	108	13.0	27.0
2	1	QPSK	$\frac{3}{4}$	2	104	216	78	162	19.5	40.5
3	1	16-QAM	$\frac{1}{2}$	4	208	432	104	216	26.0	54.0
4	1	16-QAM	$\frac{3}{4}$	4	208	432	156	324	39.0	81.0
5	1	64-QAM	$\frac{2}{3}$	6	312	648	208	432	52.0	108.0
6	1	64-QAM	$\frac{3}{4}$	6	312	648	234	486	58.5	121.5
7	1	64-QAM	$\frac{5}{6}$	6	312	648	260	540	65.0	135.0
8	2	BPSK	$\frac{1}{2}$	1	104	216	52	108	13.0	27.0
9	2	QPSK	$\frac{1}{2}$	2	208	432	104	216	26.0	54.0
10	2	QPSK	$\frac{3}{4}$	2	208	432	156	324	39.0	81.0
11	2	16-QAM	$\frac{1}{2}$	4	416	864	208	432	52.0	108.0
12	2	16-QAM	$\frac{3}{4}$	4	416	864	312	648	78.0	162.0
13	2	64-QAM	$\frac{2}{3}$	6	624	1296	416	864	104.0	216.0
14	2	64-QAM	$\frac{3}{4}$	6	624	1296	468	972	117.0	243.0
15	2	64-QAM	$\frac{5}{6}$	6	624	1296	520	1080	130.0	270.0
16	3	BPSK	$\frac{1}{2}$	1	156	324	78	162	19.5	40.5
17	3	QPSK	$\frac{1}{2}$	2	312	648	156	324	39	81
18	3	QPSK	$\frac{3}{4}$	2	312	648	234	486	58.5	121.5

19	3	16-QAM	$\frac{1}{2}$	4	624	1296	312	648	78	162
20	3	16-QAM	$\frac{3}{4}$	4	624	1296	468	972	117	243
21	3	64-QAM	$\frac{2}{3}$	6	936	1944	624	1296	156	324
22	3	64-QAM	$\frac{3}{4}$	6	936	1944	702	1458	175.5	364.5
23	3	64-QAM	$\frac{5}{6}$	6	936	1944	780	1620	195	4055

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna


#### For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
B1	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B2	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B3	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.

#### For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A1	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A2	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A3	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.



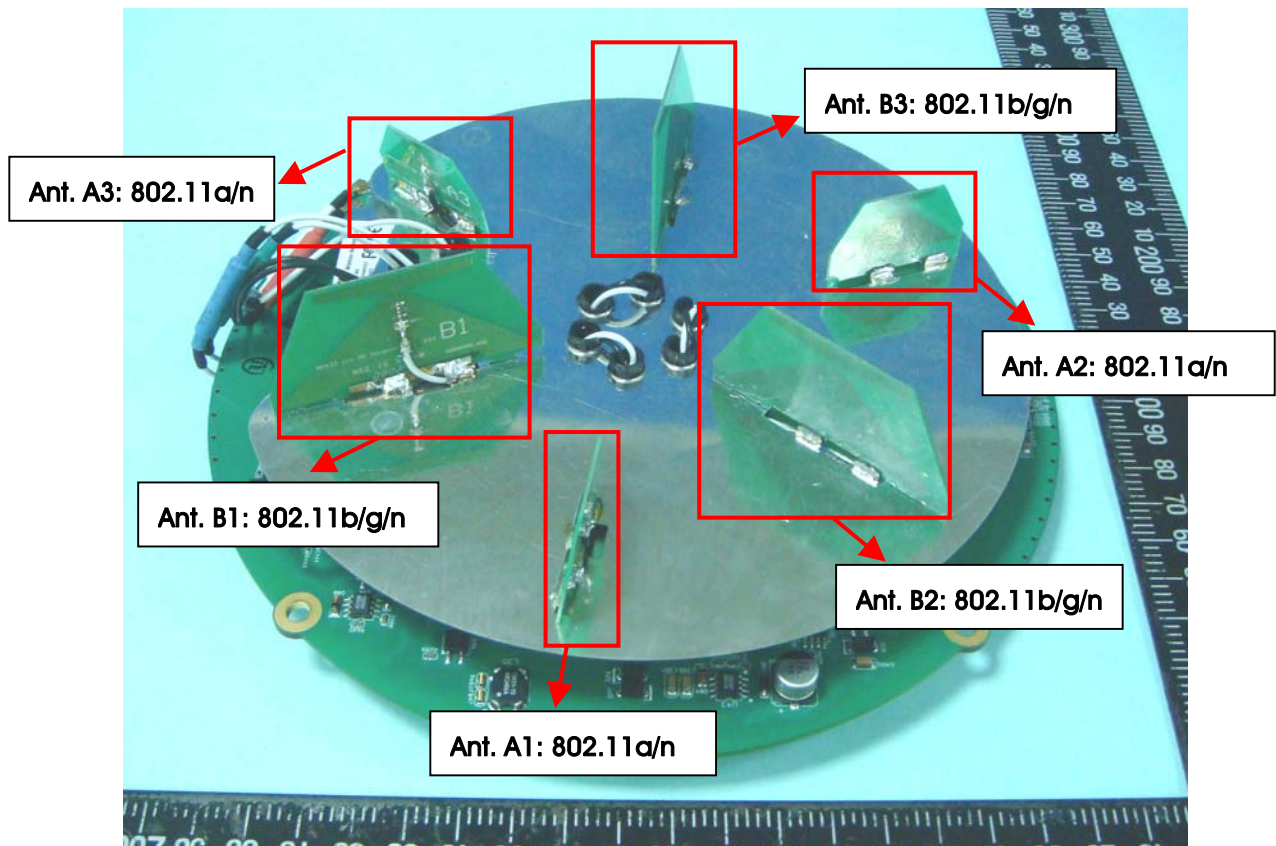

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 149, 157, 165.

For both 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Maximum Peak Conducted Output Power	MCS8/20MHz	13 Mbps	1/6/11	B1, B2, B3, B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1, B2, B3, B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1, A2, A3, A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1, A2, A3, A1+A2+A3
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/20MHz	13 Mbps	1/6/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS8/20MHz	13 Mbps	1/6/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/6/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/157/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3
Band Edge Emissions	MCS8/20MHz	13 Mbps	1/11	B1+B2+B3
	MCS8/40MHz	27 Mbps	3/9	B1+B2+B3
	MCS8/20MHz	13 Mbps	149/165	A1+A2+A3
	MCS8/40MHz	27 Mbps	151/159	A1+A2+A3

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D520	E2KWM3945ABG
Notebook	DELL	D400	E2K24GBRL
SMARTBIT	TRAPEZE	MX200R	DOC
POE	PHIHONG	POE30U-560(G)-VC-R	DOC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n	12	19	15

#### Power Parameters of Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n	10	13	11

#### Power Parameters of 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
Draft n	18	18	18

**Power Parameters of 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3**

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
Draft n	17	17

During the test, the following programs under WIN XP were executed:


Executed " HyperTerminal " to control the EUT continuously transmit RF signal.

Executed "ping.exe" to link with the remote workstation to receive and transmit signal by LAN and WLAN.


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

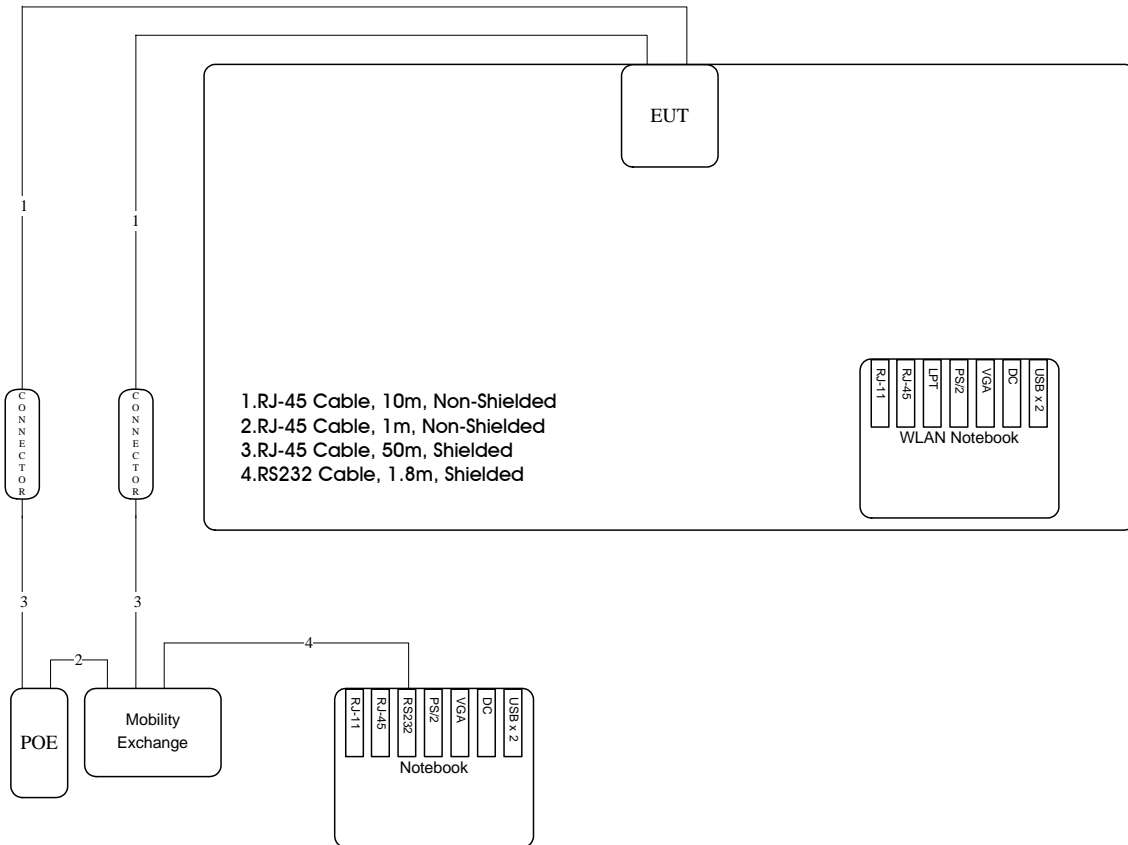

Test Configuration: above 1GHz

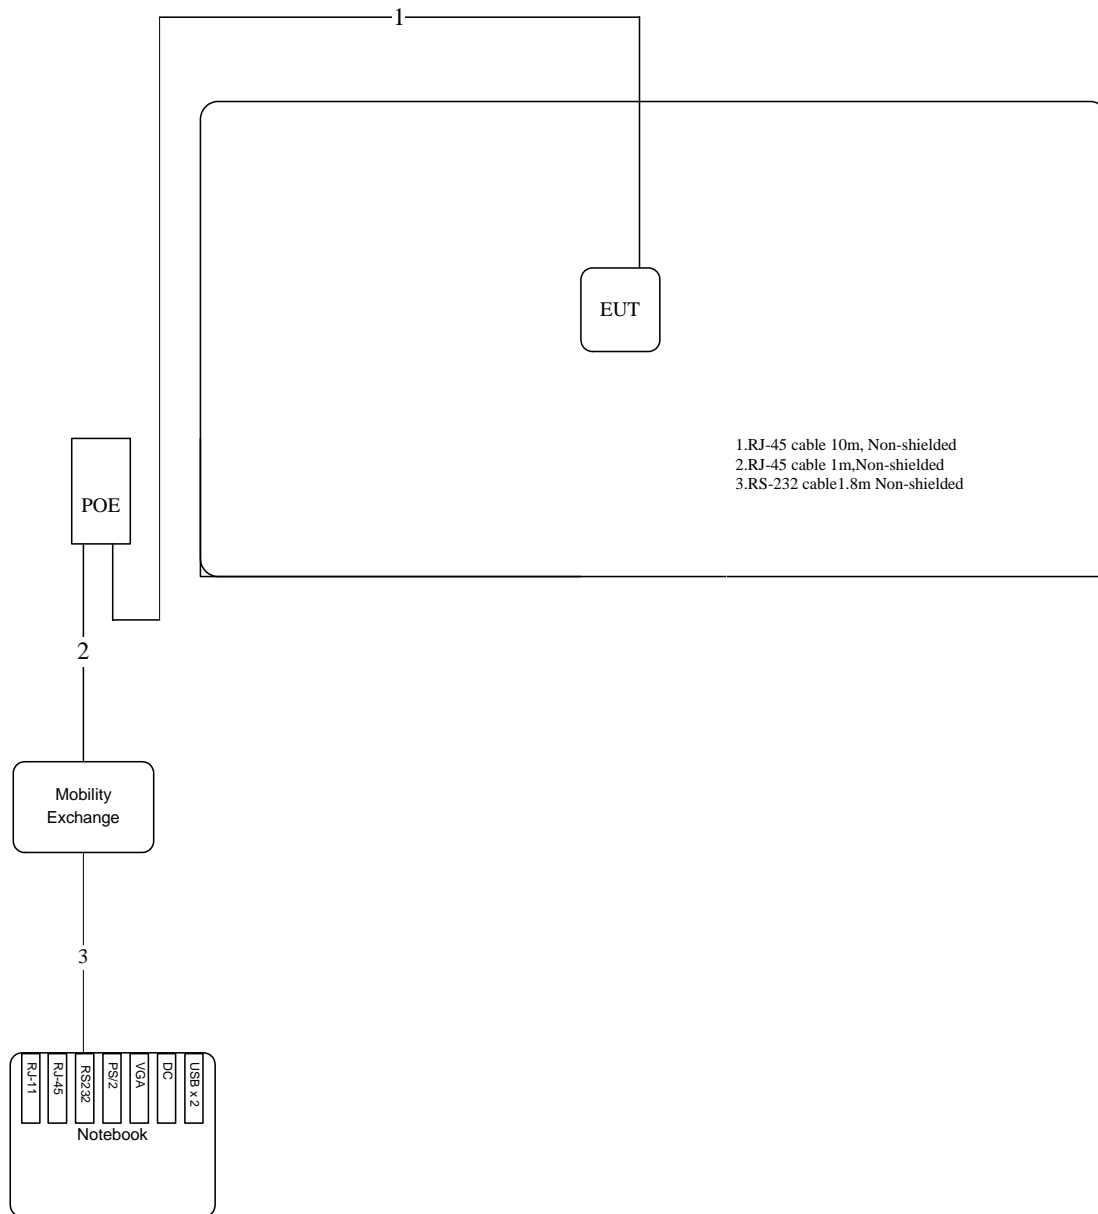

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

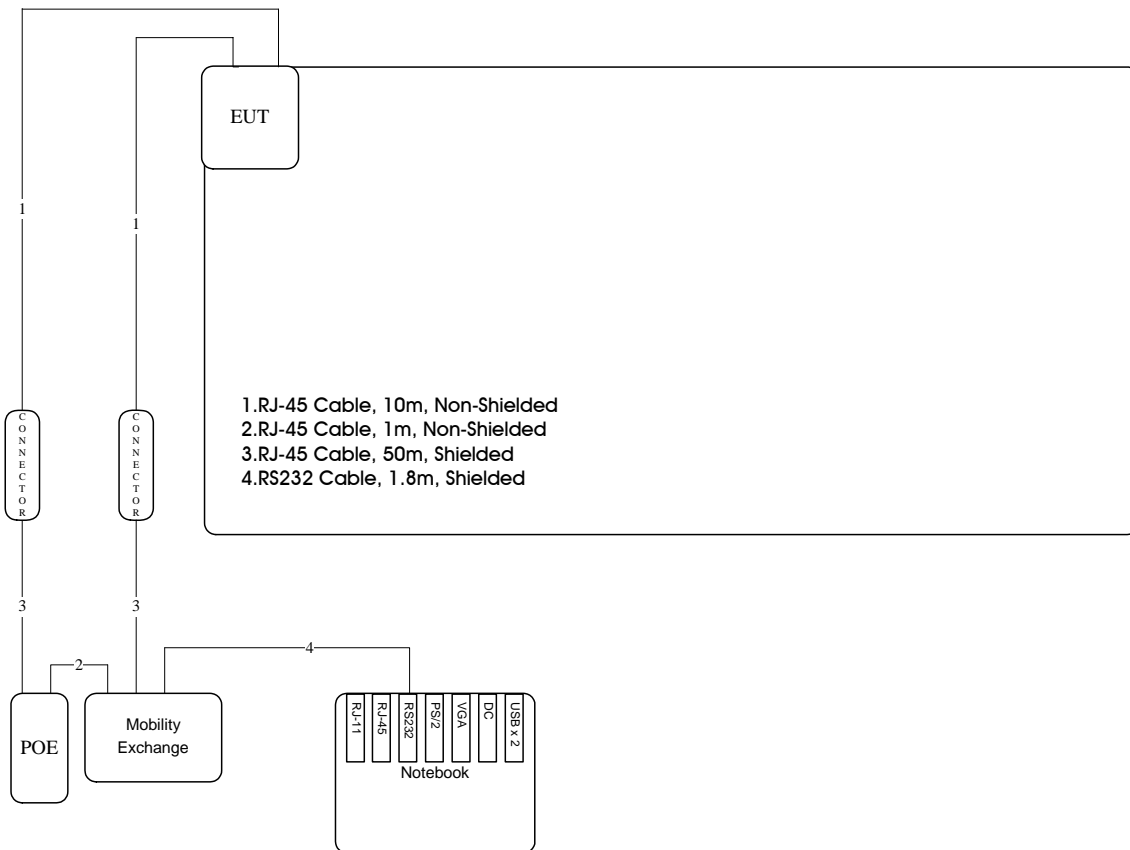



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

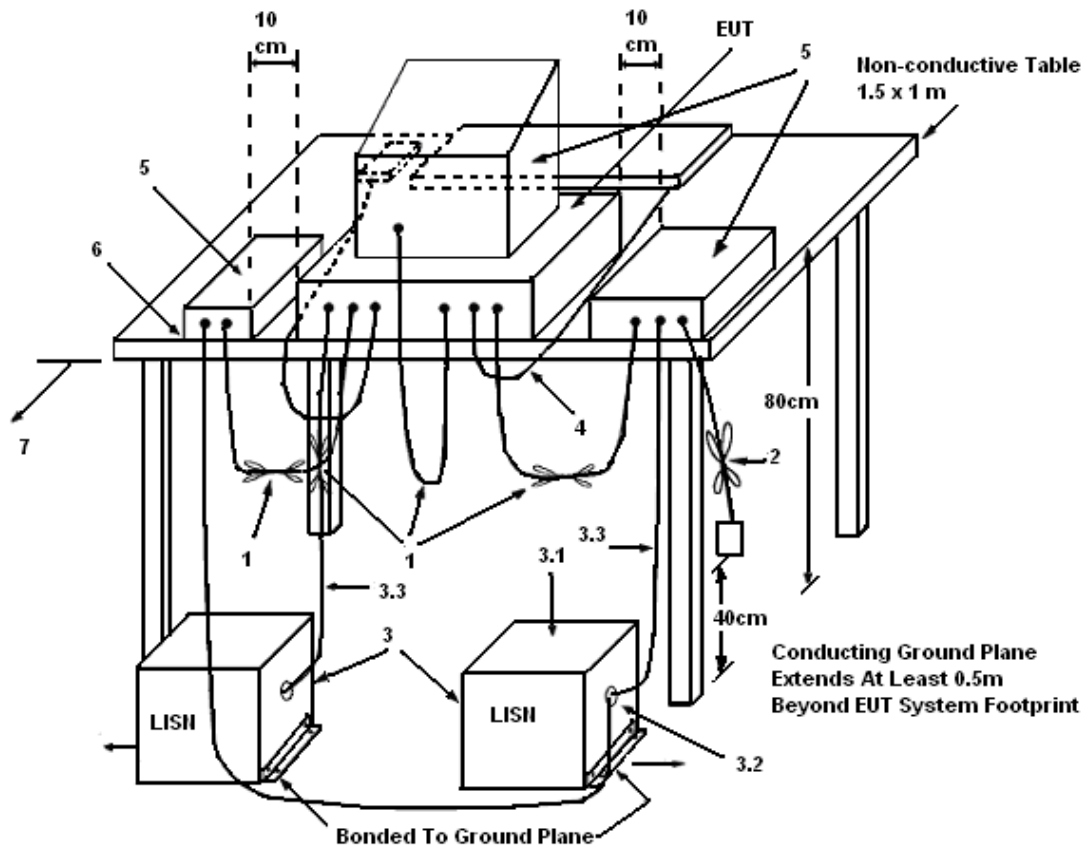

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link		

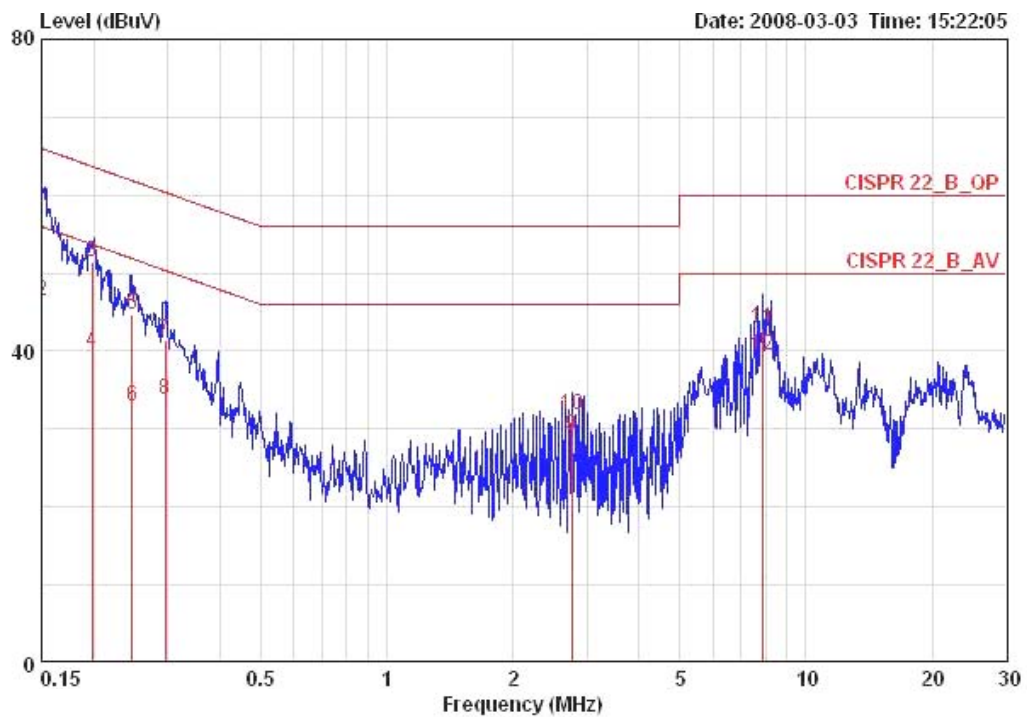

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	58.42	-7.58	66.00	58.02	0.20	0.20	QP	LINE
2	0.15000	46.52	-9.48	56.00	46.12	0.20	0.20	AVERAGE	LINE
3	0.19769	51.35	-12.36	63.71	51.05	0.10	0.20	QP	LINE
4	0.19769	39.93	-13.78	53.71	39.63	0.10	0.20	AVERAGE	LINE
5	0.24652	44.73	-17.14	61.87	44.43	0.10	0.20	QP	LINE
6	0.24652	33.02	-18.85	51.87	32.72	0.10	0.20	AVERAGE	LINE
7	0.29615	41.44	-18.91	60.35	41.14	0.10	0.20	QP	LINE
8	0.29615	33.88	-16.47	50.35	33.58	0.10	0.20	AVERAGE	LINE
9	2.765	29.17	-16.83	46.00	28.97	0.00	0.20	AVERAGE	LINE
10	2.765	31.85	-24.15	56.00	31.65	0.00	0.20	QP	LINE
11	7.899	42.90	-17.10	60.00	42.43	0.07	0.40	QP	LINE
12	7.899	39.37	-10.63	50.00	38.90	0.07	0.40	AVERAGE	LINE

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link		

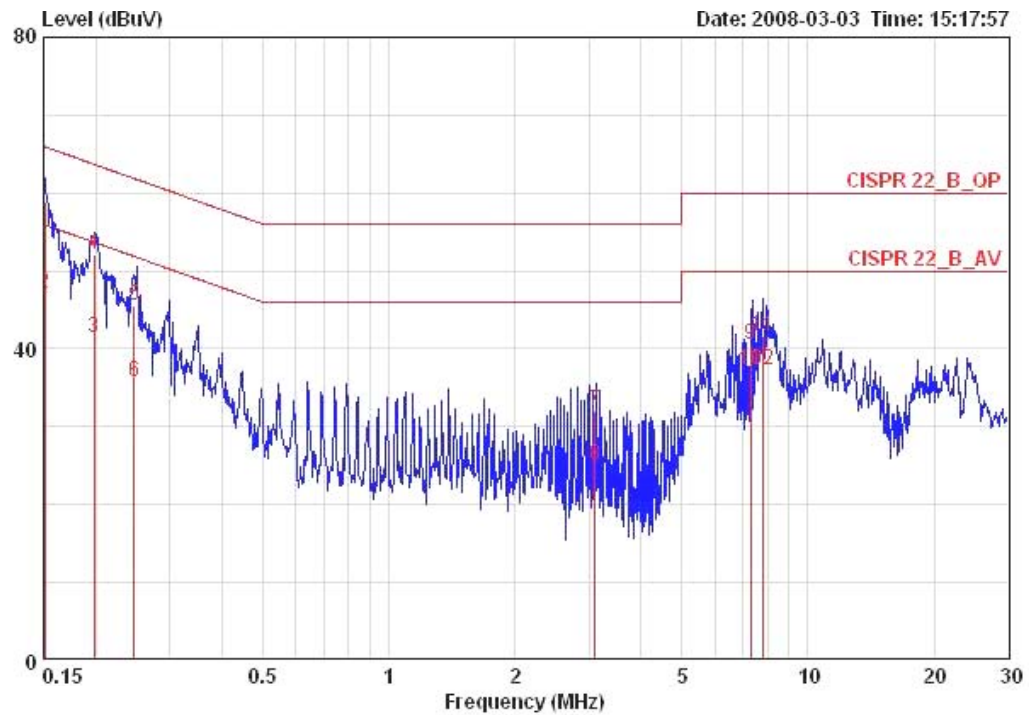

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15080	58.76	-7.20	65.96	58.26	0.30	0.20	QP	NEUTRAL
2	0.15080	47.09	-8.87	55.96	46.59	0.30	0.20	AVERAGE	NEUTRAL
3	0.19783	41.43	-12.27	53.70	41.03	0.20	0.20	AVERAGE	NEUTRAL
4	0.19783	52.18	-11.52	63.70	51.78	0.20	0.20	QP	NEUTRAL
5	0.24718	45.47	-16.38	61.85	45.09	0.18	0.20	QP	NEUTRAL
6	0.24718	35.82	-16.03	51.85	35.44	0.18	0.20	AVERAGE	NEUTRAL
7	3.110	32.14	-23.86	56.00	31.82	0.10	0.22	QP	NEUTRAL
8	3.110	25.02	-20.98	46.00	24.70	0.10	0.22	AVERAGE	NEUTRAL
9	7.307	40.45	-19.55	60.00	39.99	0.10	0.36	QP	NEUTRAL
10	7.307	37.18	-12.82	50.00	36.72	0.10	0.36	AVERAGE	NEUTRAL
11	7.806	41.59	-18.41	60.00	41.09	0.10	0.40	QP	NEUTRAL
12	7.806	37.38	-12.62	50.00	36.88	0.10	0.40	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Powe Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	PEAK
Trace	MAX HOLD
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.2.4. Test Setup Layout

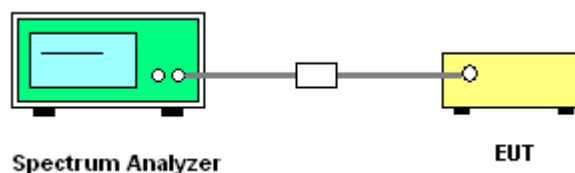

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. B1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.25	30.00	Complies
6	2437 MHz	19.10	30.00	Complies
11	2462 MHz	15.12	30.00	Complies

##### Configuration Draft n MCS8 20MHz Ant. B2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.07	30.00	Complies
6	2437 MHz	19.98	30.00	Complies
11	2462 MHz	15.89	30.00	Complies

##### Configuration Draft n MCS8 20MHz Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.31	30.00	Complies
6	2437 MHz	19.97	30.00	Complies
11	2462 MHz	15.99	30.00	Complies

##### Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.98	30.00	Complies
6	2437 MHz	24.47	30.00	Complies
11	2462 MHz	20.45	30.00	Complies

**Configuration Draft n MCS8 40MHz Ant. B1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	8.81	30.00	Complies
6	2437 MHz	13.15	30.00	Complies
9	2452 MHz	11.10	30.00	Complies

**Configuration Draft n MCS8 40MHz Ant. B2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	10.06	30.00	Complies
6	2437 MHz	13.80	30.00	Complies
9	2452 MHz	12.19	30.00	Complies

**Configuration Draft n MCS8 40MHz Ant. B3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	9.96	30.00	Complies
6	2437 MHz	13.83	30.00	Complies
9	2452 MHz	11.80	30.00	Complies

**Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.42	30.00	Complies
6	2437 MHz	18.38	30.00	Complies
9	2452 MHz	16.49	30.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	11a Draft n

**Configuration 11a Draft n MCS8 20MHz Ant. A1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.90	30.00	Complies
157	5785 MHz	17.82	30.00	Complies
165	5825 MHz	17.56	30.00	Complies

**Configuration 11a Draft n MCS8 20MHz Ant. A2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.72	30.00	Complies
157	5785 MHz	18.96	30.00	Complies
165	5825 MHz	19.11	30.00	Complies

**Configuration 11a Draft n MCS8 20MHz Ant. A3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.06	30.00	Complies
157	5785 MHz	17.95	30.00	Complies
165	5825 MHz	17.59	30.00	Complies

**Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	23.01	30.00	Complies
157	5785 MHz	23.05	30.00	Complies
165	5825 MHz	22.92	30.00	Complies



**Configuration 11a Draft n MCS8 40MHz Ant. A1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.08	30.00	Complies
159	5795 MHz	17.12	30.00	Complies

**Configuration 11a Draft n MCS8 40MHz Ant. A2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.96	30.00	Complies
159	5795 MHz	18.21	30.00	Complies


**Configuration 11a Draft n MCS8 40MHz Ant. A3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.31	30.00	Complies
159	5795 MHz	17.18	30.00	Complies

**Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3**


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	22.24	30.00	Complies
159	5795 MHz	22.30	30.00	Complies

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1 / 2412 MHz

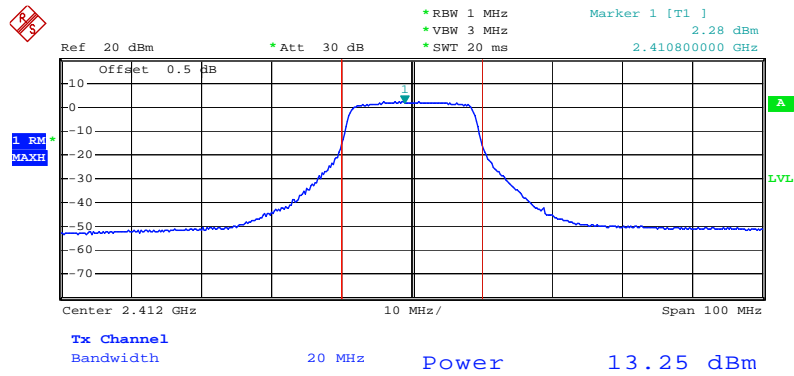


Date: 13.FEB.2008 07:40:44

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2 / 2412 MHz

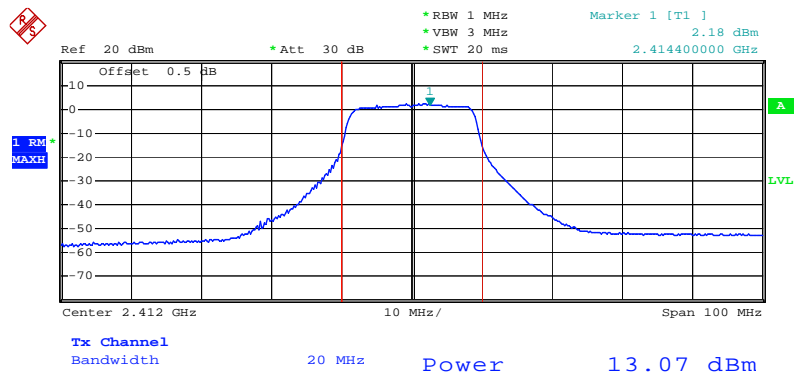


Date: 13.FEB.2008 07:41:04

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2412 MHz

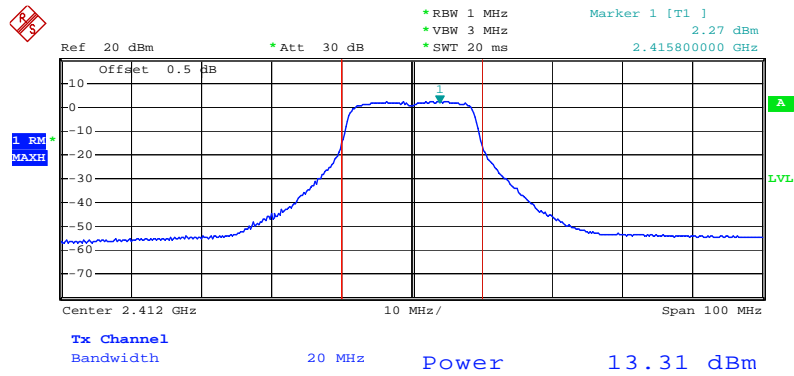


Date: 13.FEB.2008 07:41:30

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1/ 2437 MHz

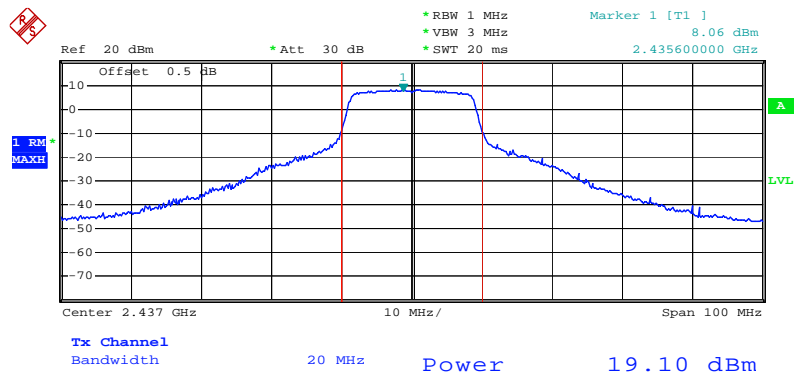


Date: 13.FEB.2008 07:40:06

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2/ 2437 MHz

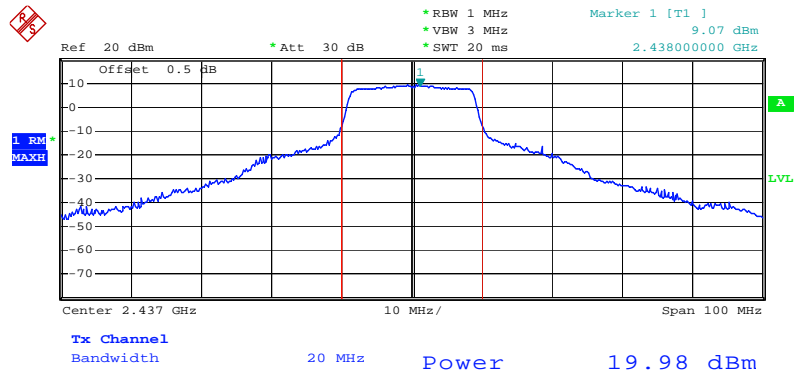


Date: 13.FEB.2008 07:39:43

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2437 MHz

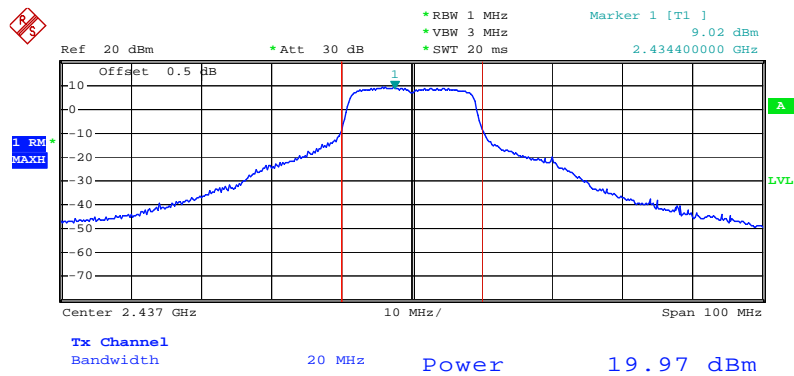


Date: 13.FEB.2008 07:39:18

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B1/ 2462 MHz

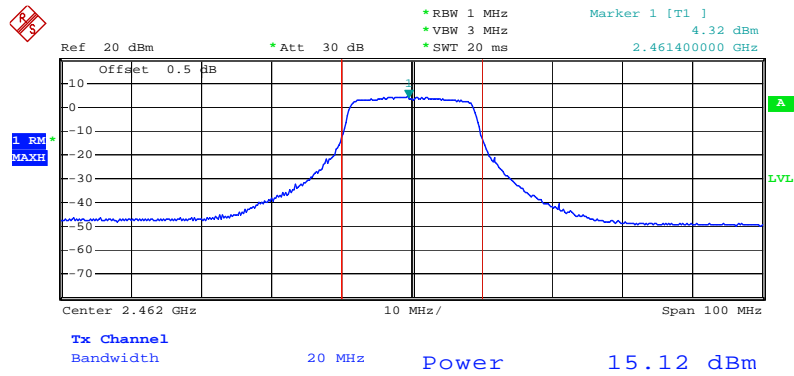


Date: 13.FEB.2008 07:35:10

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B2/ 2462 MHz

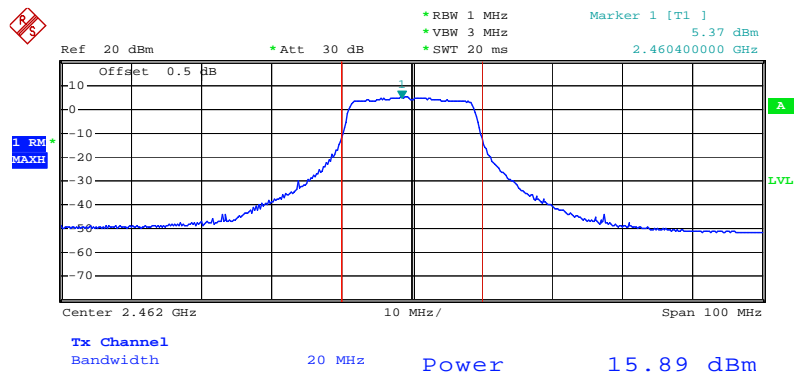


Date: 13.FEB.2008 07:35:40

**Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B3/ 2462 MHz**

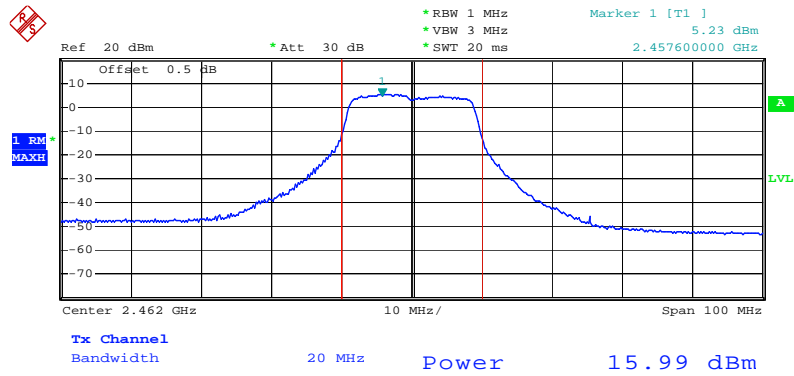


Date: 13.FEB.2008 07:38:28

**Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2422 MHz**

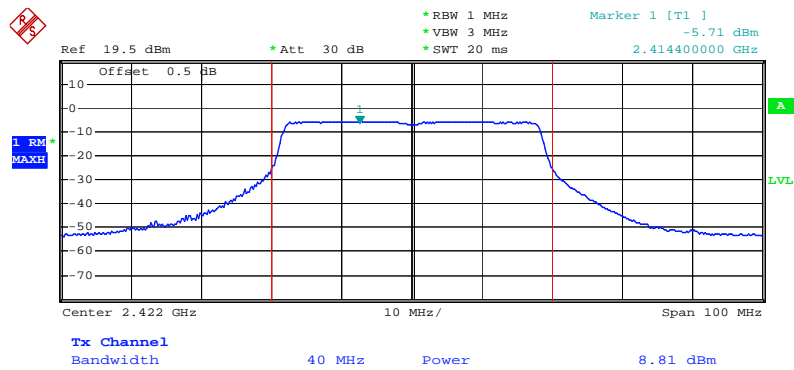


Date: 20.FEB.2008 13:00:49

### Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2422 MHz

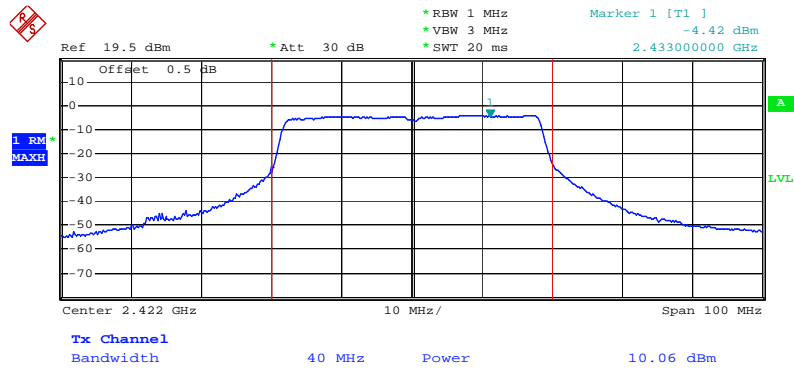


Date: 20.FEB.2008 13:01:37

### Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2422 MHz

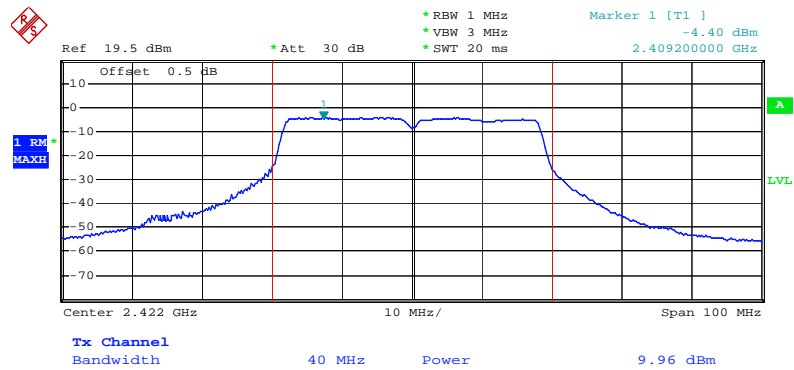


Date: 20.FEB.2008 13:02:31

**Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2437 MHz**

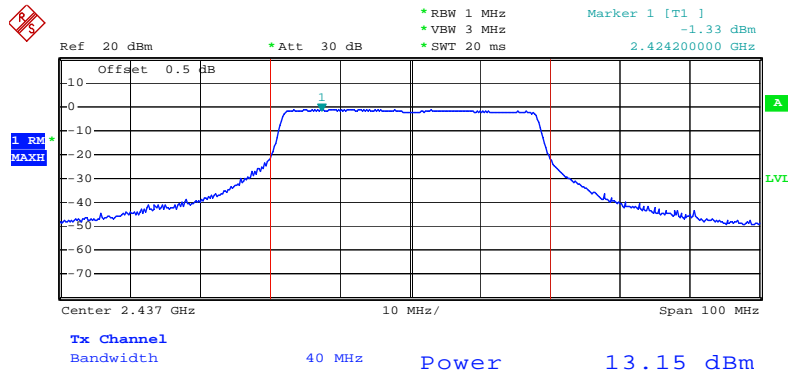

Date: 13.FEB.2008 07:46:04


**Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2437 MHz**

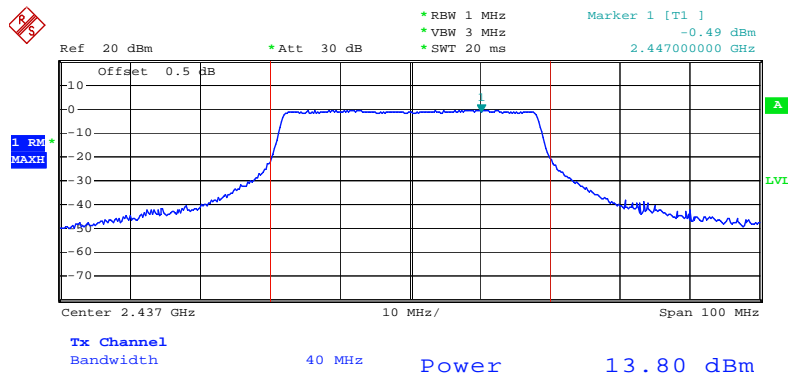

Date: 13.FEB.2008 07:46:22




Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2437 MHz

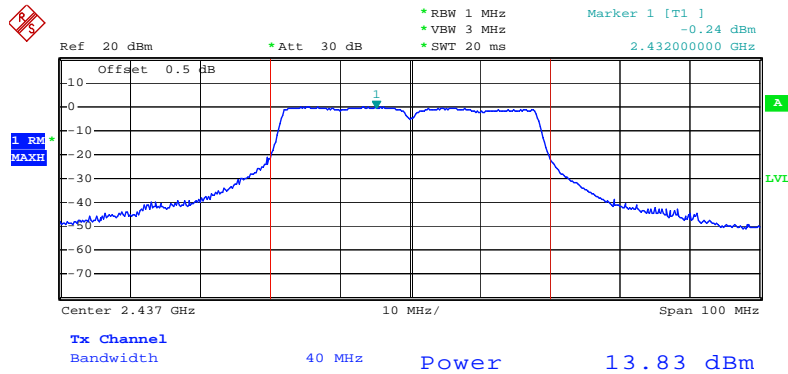


Date: 13.FEB.2008 07:46:40

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B1/ 2452 MHz

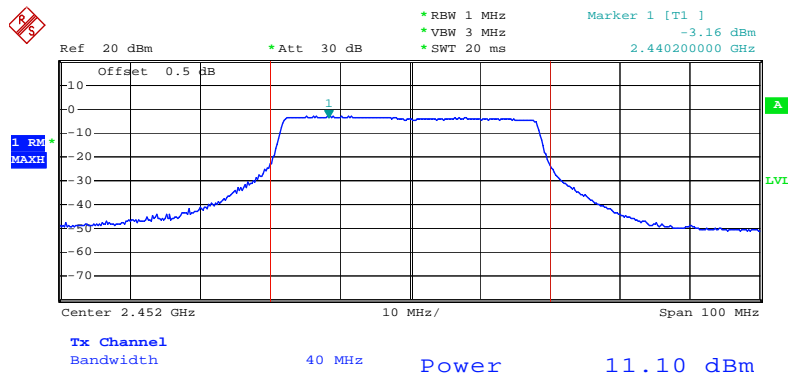


Date: 13.FEB.2008 07:48:02

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B2/ 2452 MHz

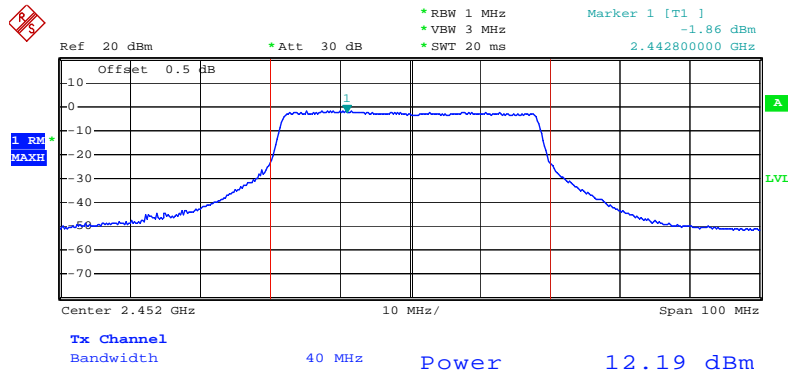


Date: 13.FEB.2008 07:47:33

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B3/ 2452 MHz

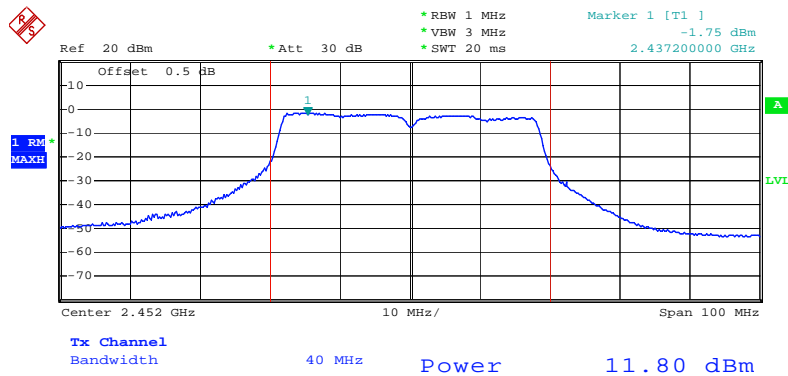


Date: 13.FEB.2008 07:47:17

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A1/ 5745 MHz

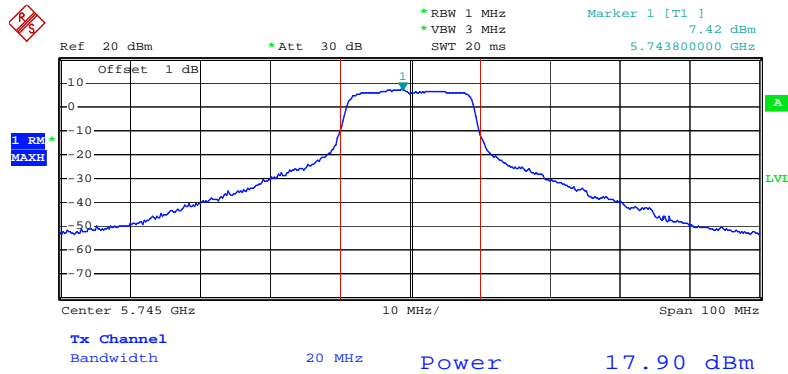


Date: 13.FEB.2008 09:00:49

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A2/ 5745 MHz

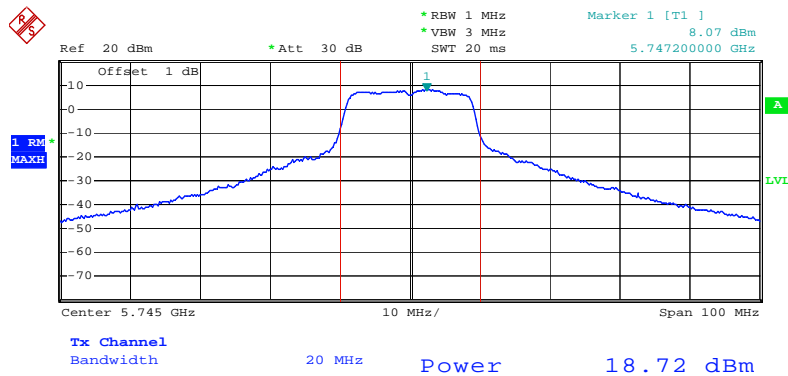


Date: 13.FEB.2008 09:01:05

**Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5745 MHz**

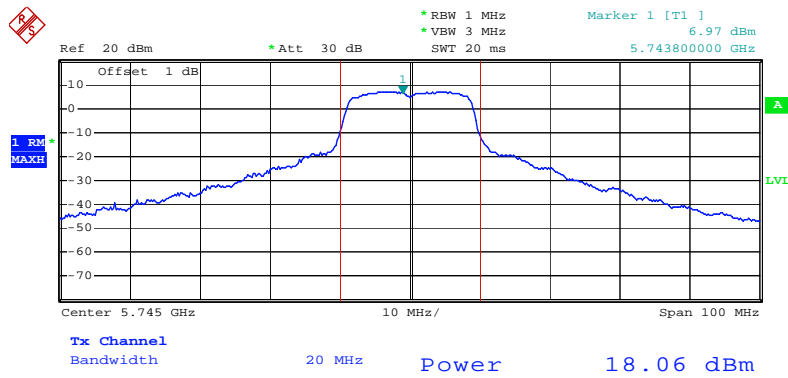


Date: 13.FEB.2008 09:01:18

**Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A1/ 5785 MHz**

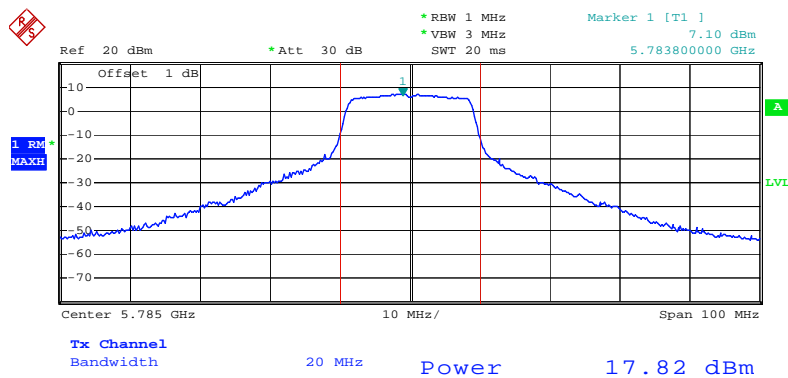


Date: 13.FEB.2008 09:02:22

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A2/ 5785 MHz

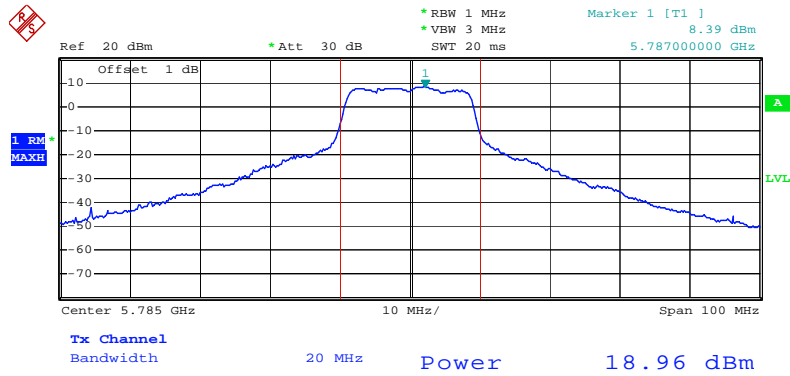


Date: 13.FEB.2008 09:02:07

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5785 MHz

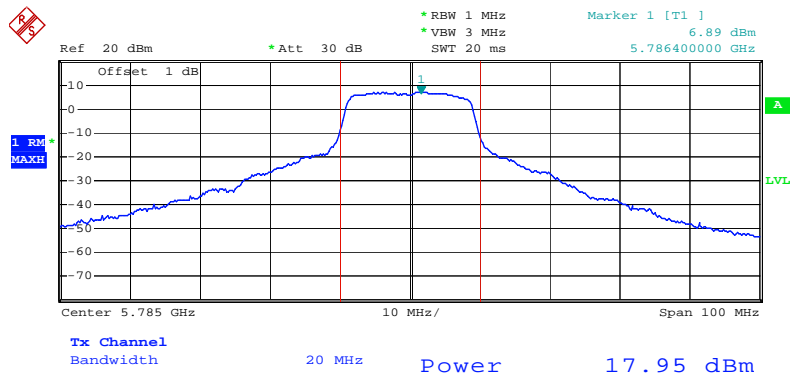


Date: 13.FEB.2008 09:01:47

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A1/ 5825 MHz

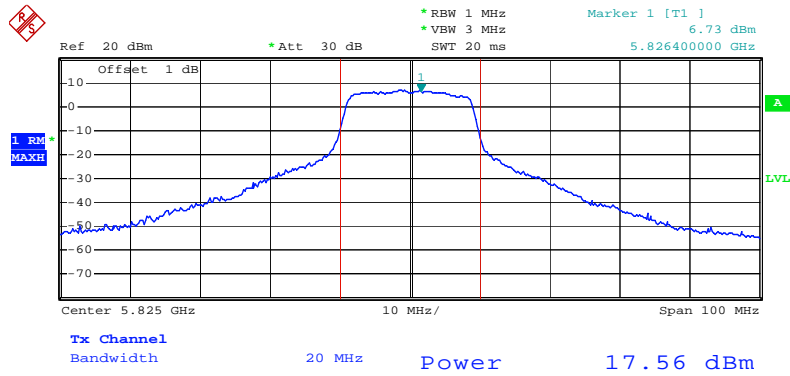


Date: 13.FEB.2008 09:02:52

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A2/ 5825 MHz

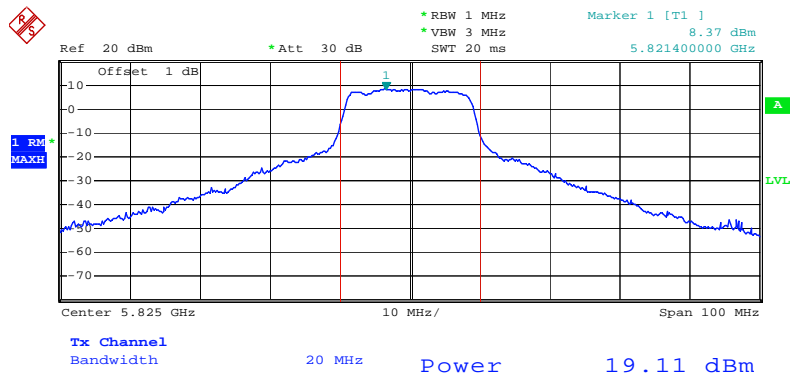


Date: 13.FEB.2008 09:03:10

### Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 20MHz Ant. A3/ 5825 MHz

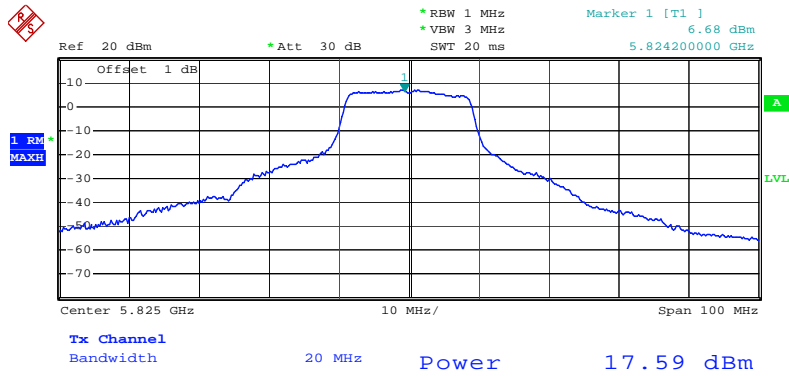


Date: 13.FEB.2008 09:03:25

### Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A1/ 5755 MHz

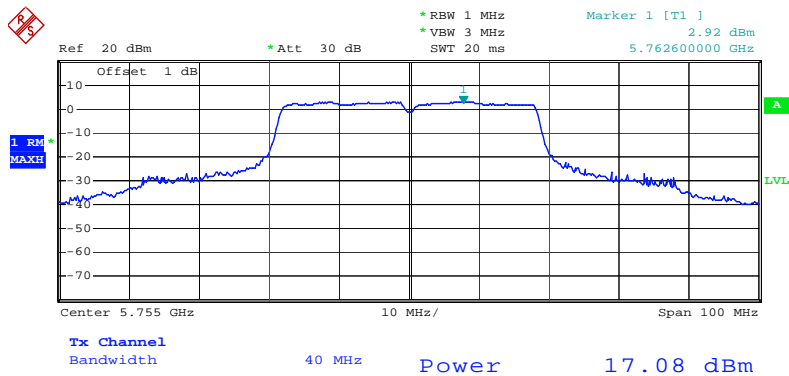


Date: 13.FEB.2008 09:04:54

**Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A2/ 5755 MHz**

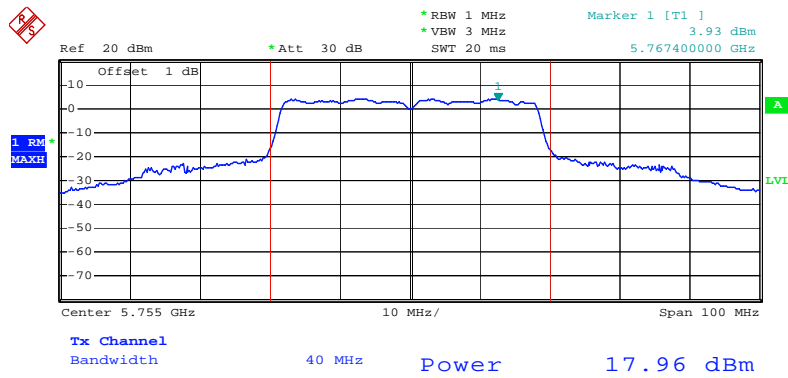

Date: 13.FEB.2008 09:05:10


**Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A3/ 5755 MHz**

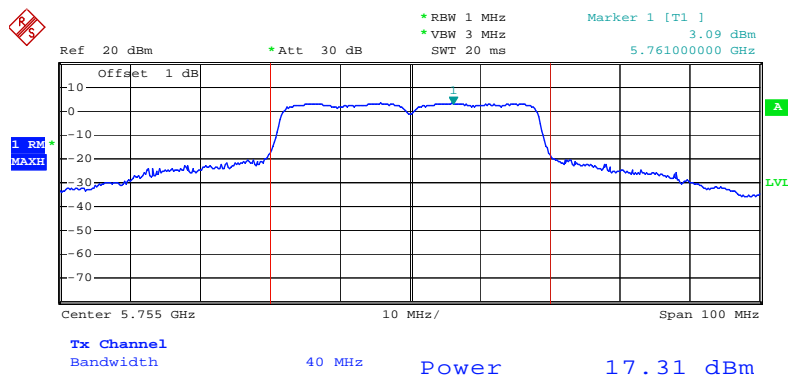

Date: 13.FEB.2008 09:05:23




Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A1/ 5795 MHz

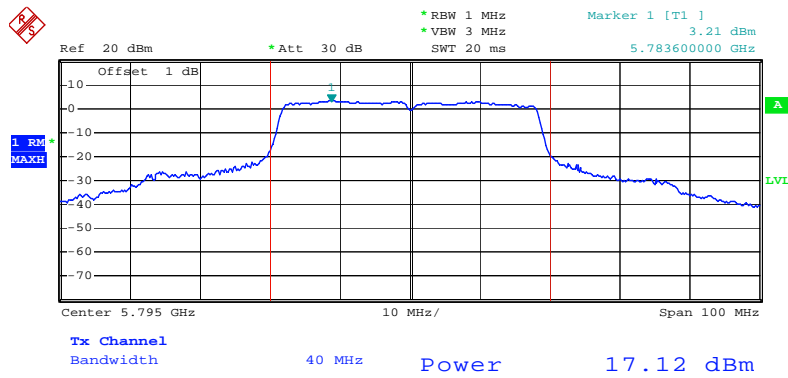


Date: 13.FEB.2008 09:07:52

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A2/ 5795 MHz

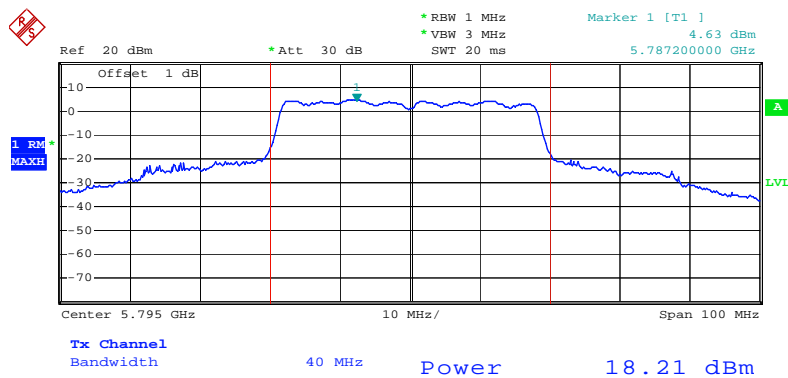

Date: 13.FEB.2008 09:06:52

Conducted Output Power Plot on Configuration 802.11a Draft n MCS8 40MHz Ant. A3/ 5795 MHz

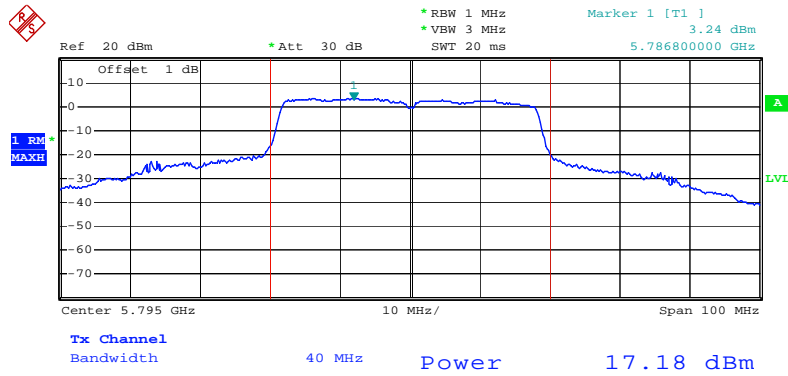

Date: 13.FEB.2008 09:06:36

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

#### 4.3.4. Test Setup Layout

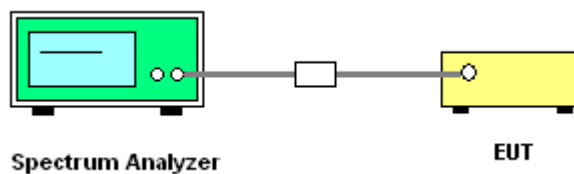

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-1.22	8.00	Complies
6	2437 MHz	5.94	8.00	Complies
11	2462 MHz	1.62	8.00	Complies

##### Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-2.76	8.00	Complies
6	2437 MHz	1.82	8.00	Complies
9	2452 MHz	-0.41	8.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	11a Draft n


**Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3**

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-5.28	8.00	Complies
157	5785 MHz	-5.32	8.00	Complies
165	5827 MHz	-9.62	8.00	Complies

**Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3**


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-2.76	8.00	Complies
159	5795 MHz	-5.99	8.00	Complies

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2412 MHz**

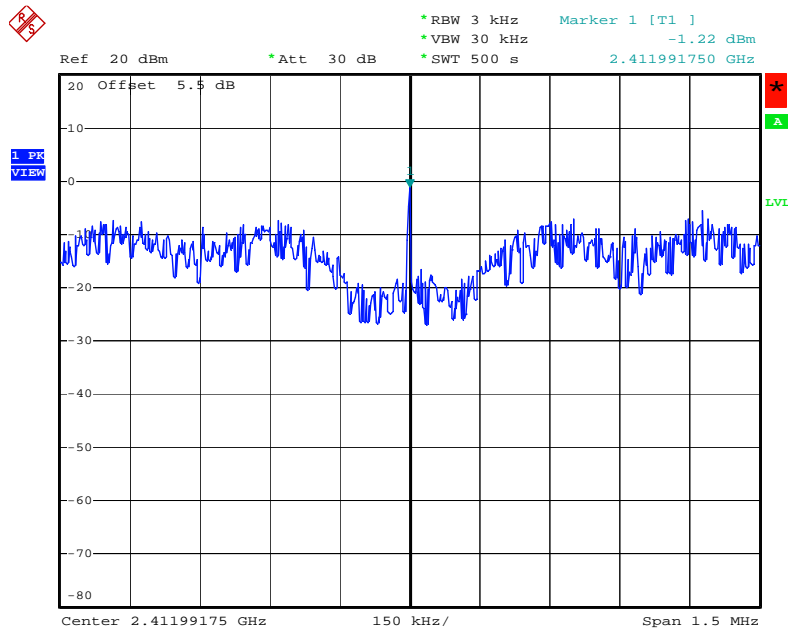


Date: 13.FEB.2008 08:00:01

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz**

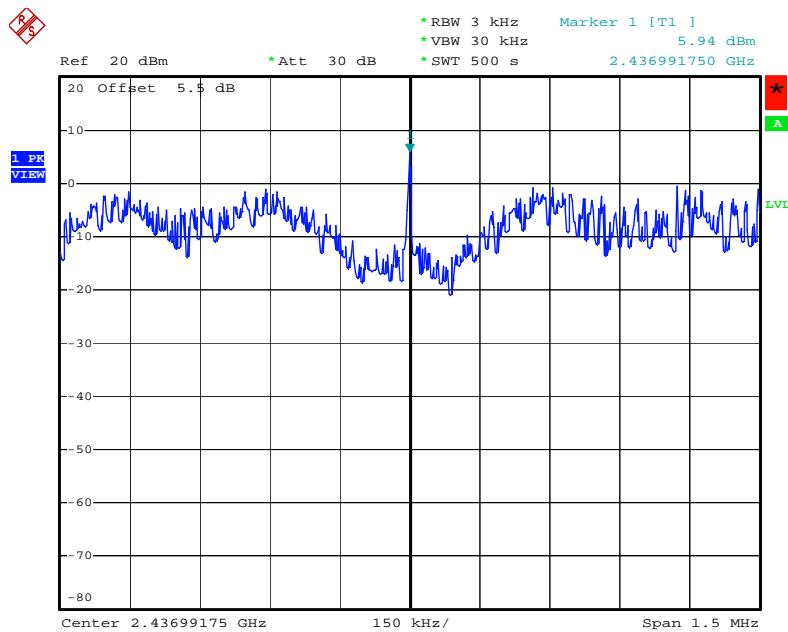


Date: 13.FEB.2008 07:58:52

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz**

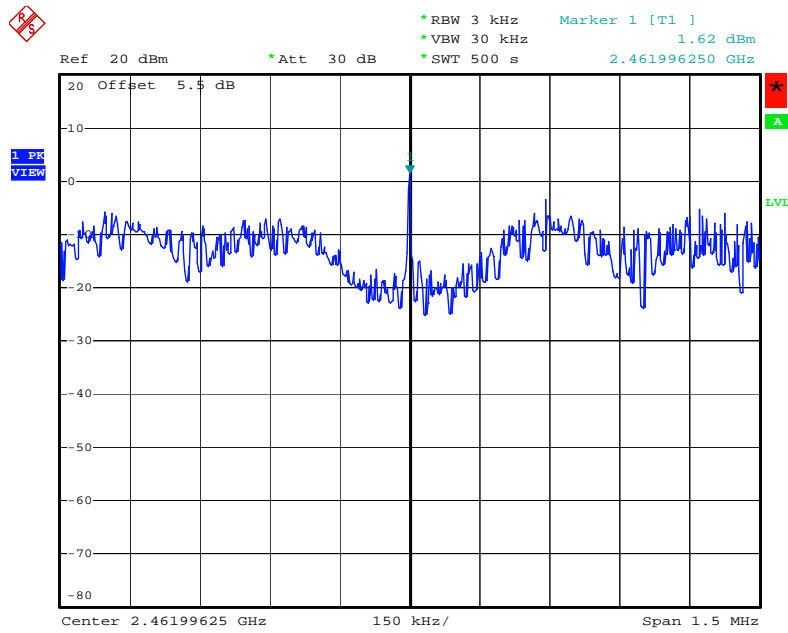


Date: 13.FEB.2008 10:36:49

**Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2422 MHz**

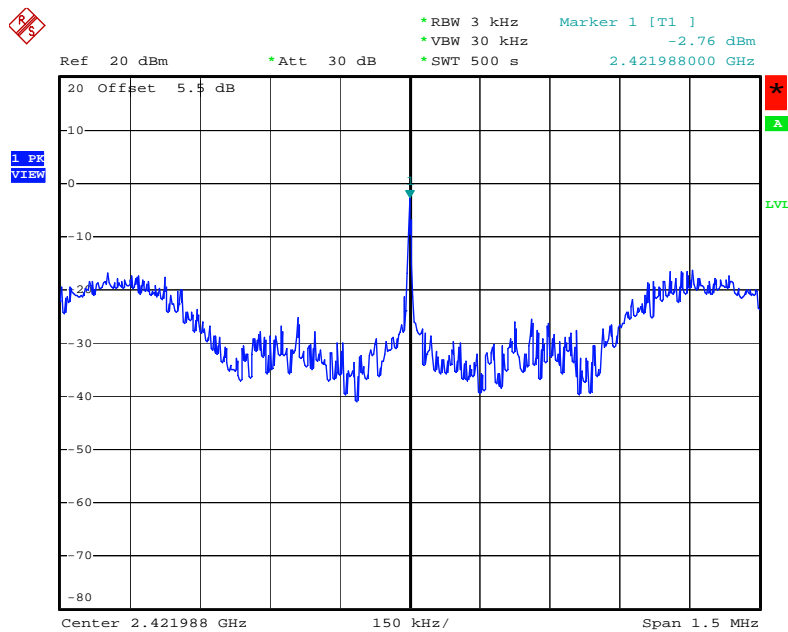


Date: 20.FEB.2008 13:07:33

**Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz**

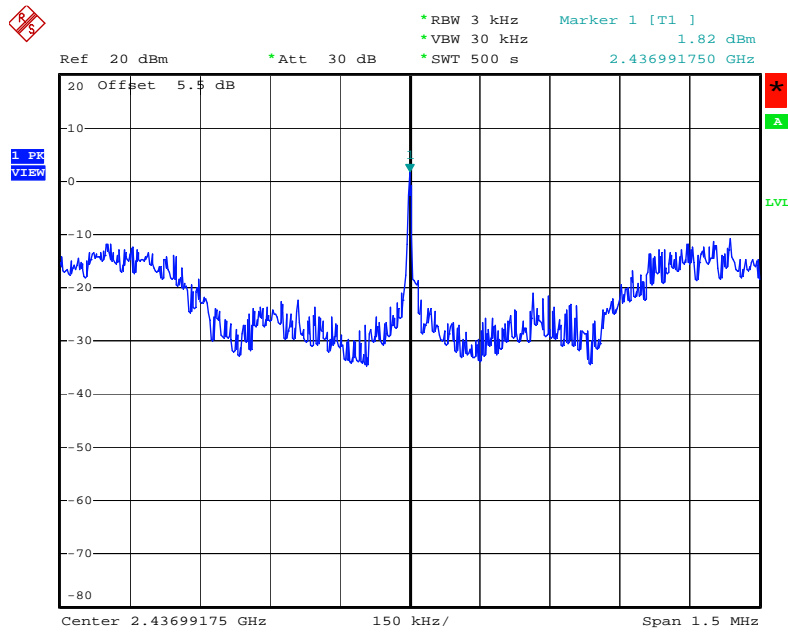

Date: 13.FEB.2008 07:54:55


**Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2452 MHz**

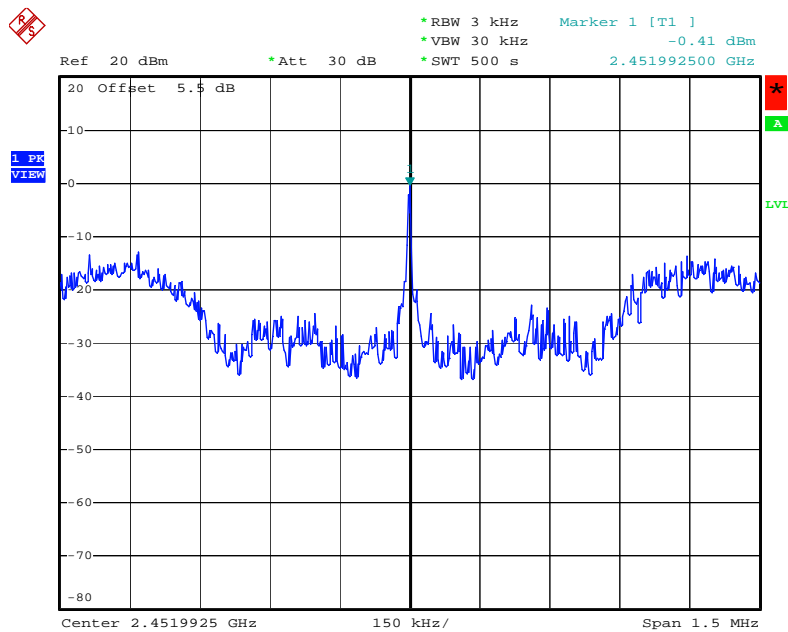

Date: 13.FEB.2008 07:52:36




**Power Density Plot on Configuration 11a Drafft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3 / 5745 MHz**

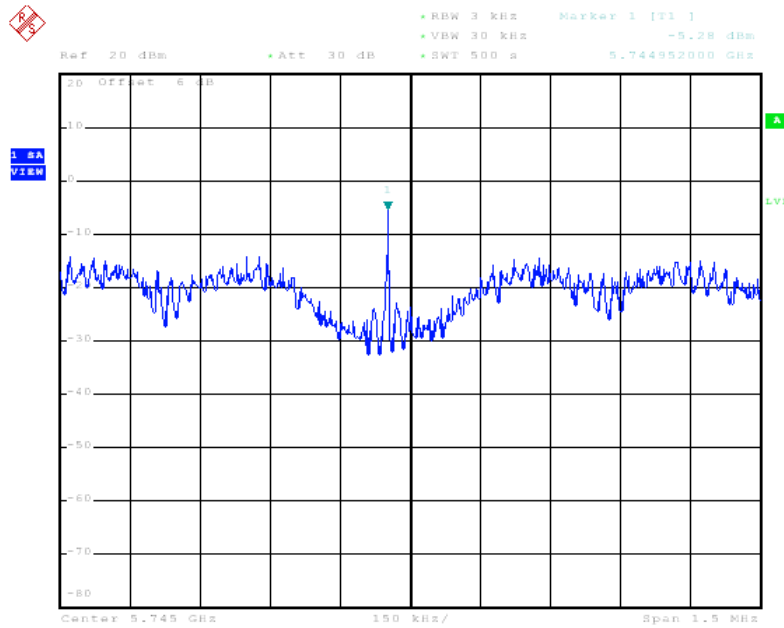


Date: 13.FEB.2008 09:30:10

**Power Density Plot on Configuration 11a Drafft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3/ 5785 MHz**

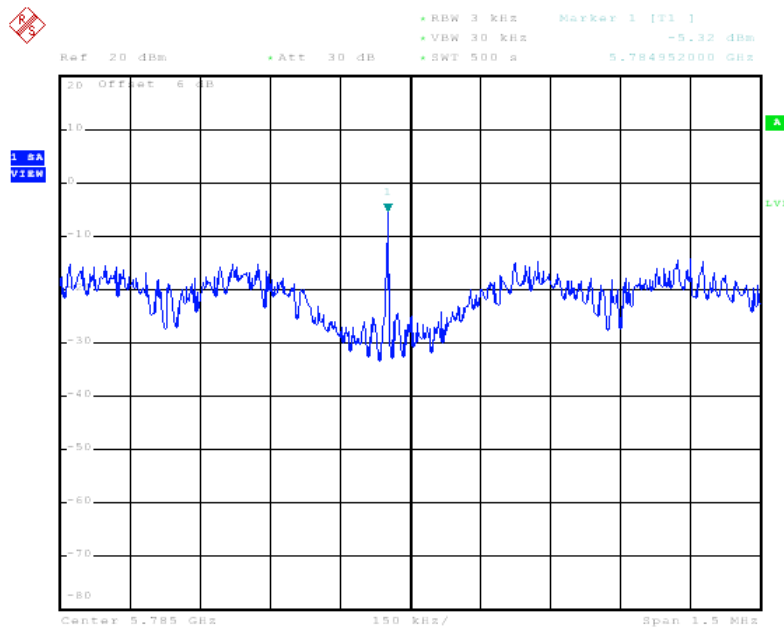


Date: 13.FEB.2008 09:35:19

**Power Density Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3 / 5825 MHz**

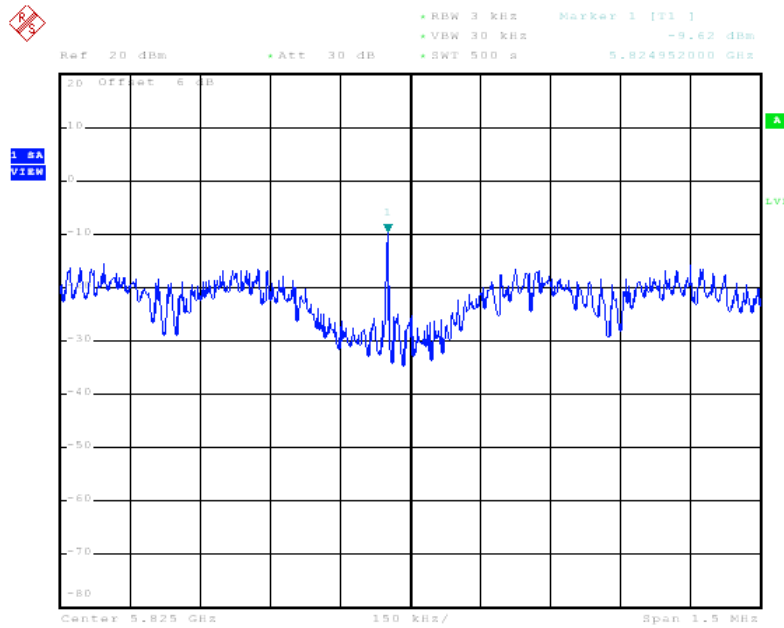


Date: 13.FEB.2008 11:22:47

**Power Density Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3 / 5755MHz**

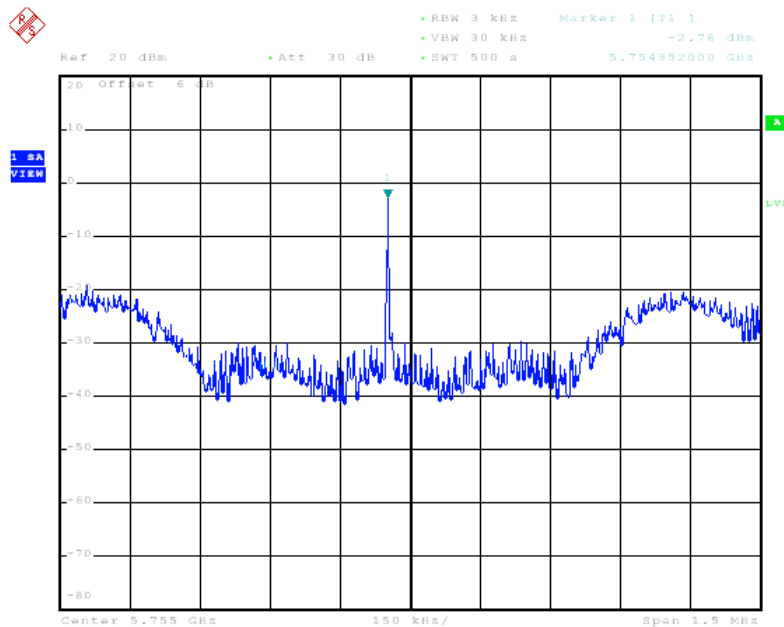

Date: 13.FEB.2008 09:24:34

Power Density Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3 / 5795 MHz

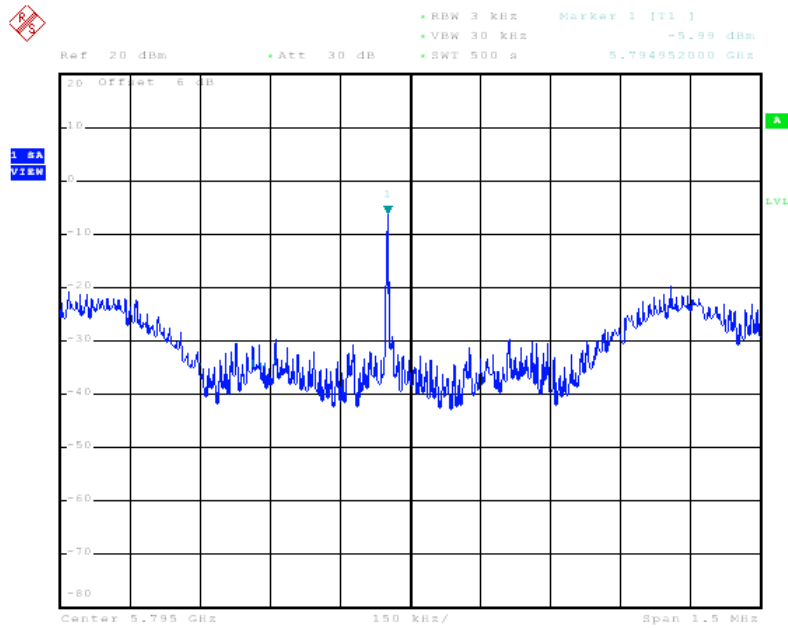

Date: 13.FEB.2008 09:14:39

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

##### 4.4.4. Test Setup Layout

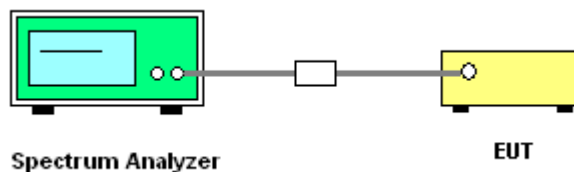

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. B1 + Ant. B2 + Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.20	17.64	500	Complies
6	2437 MHz	17.20	17.64	500	Complies
11	2462 MHz	16.92	17.64	500	Complies

##### Configuration Draft n MCS8 40MHz Ant. B1 + Ant. B2 + Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.12	36.16	500	Complies
6	2437 MHz	35.76	36.32	500	Complies
9	2452 MHz	35.76	36.32	500	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	11a Draft n


**Configuration 11a Draft n MCS8 20MHz Ant. A1 + Ant. A2 + Ant. A3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.56	17.68	500	Complies
157	5785 MHz	15.04	17.68	500	Complies
165	5825 MHz	17.20	17.68	500	Complies

**Configuration 11a Draft n MCS8 40MHz Ant. A1 + Ant. A2 + Ant. A3**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.00	36.32	500	Complies
159	5795 MHz	35.76	36.16	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2412 MHz

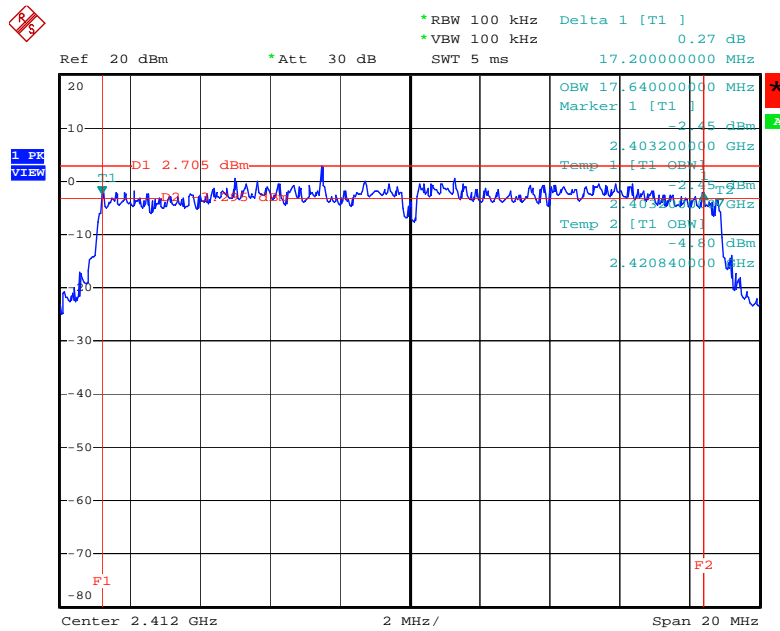


Date: 13.FEB.2008 07:59:36

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz

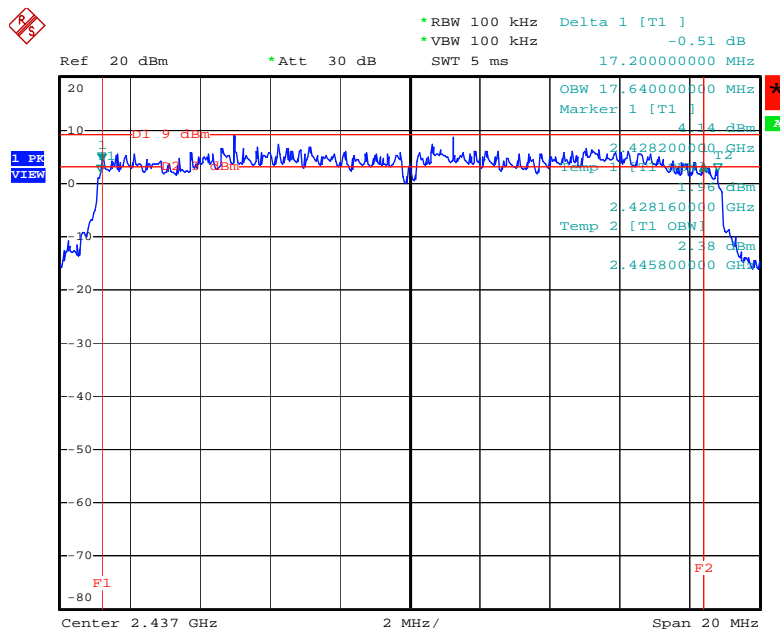


Date: 13.FEB.2008 07:58:36

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz

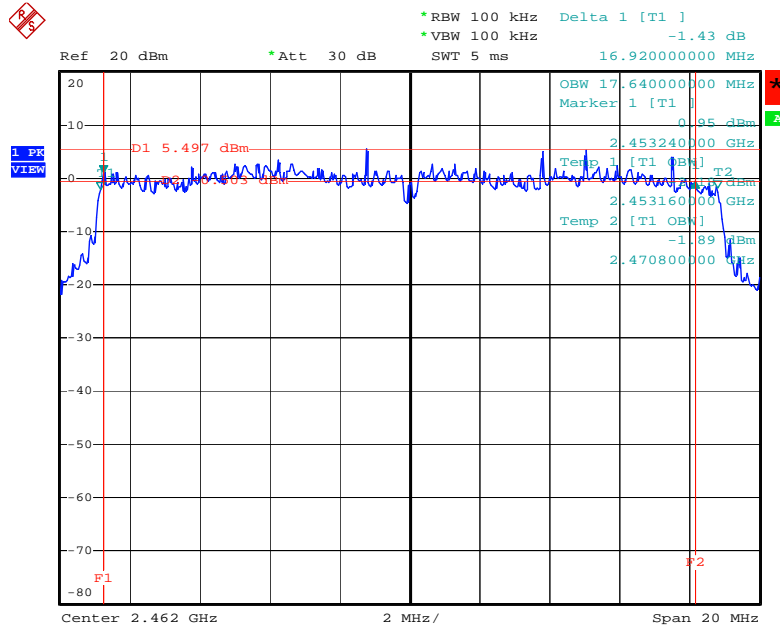

Date: 13.FEB.2008 10:36:34


6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2422 MHz

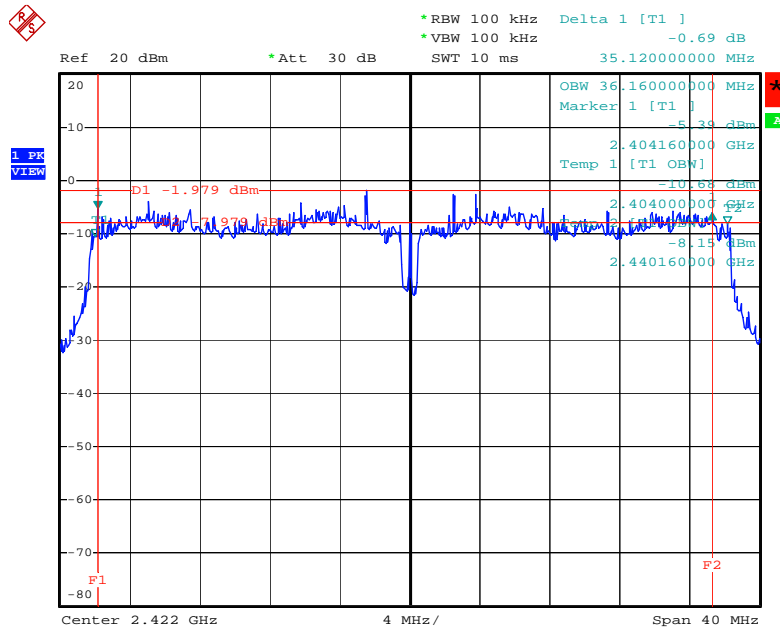

Date: 20.FEB.2008 13:07:07




6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz

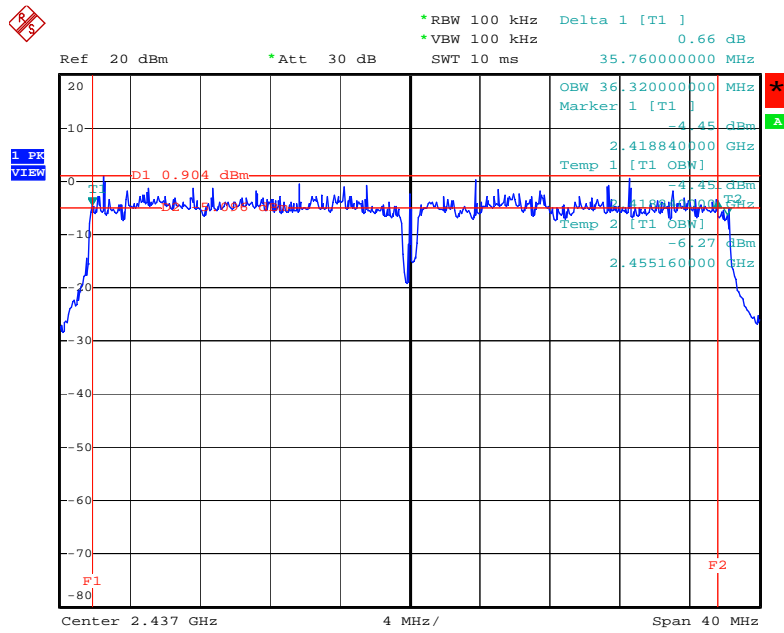


Date: 13.FEB.2008 07:54:30

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A1 + Ant. A2 + Ant. A3 / 2452 MHz

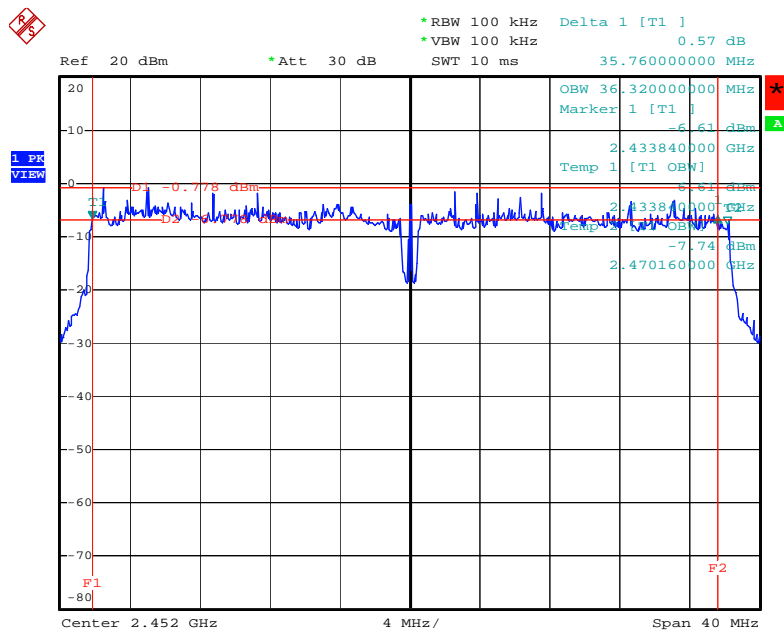


Date: 13.FEB.2008 07:52:10

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5745 MHz

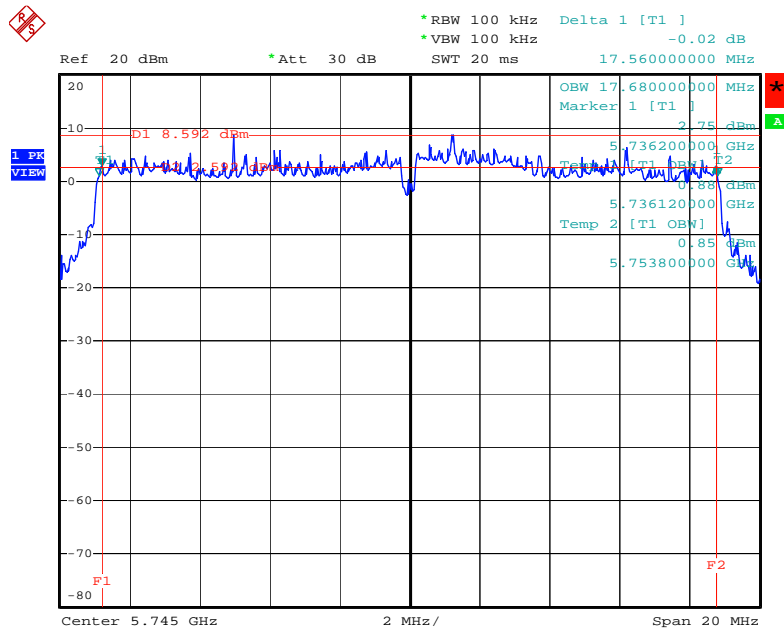


Date: 13.FEB.2008 09:26:20

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5785MHz

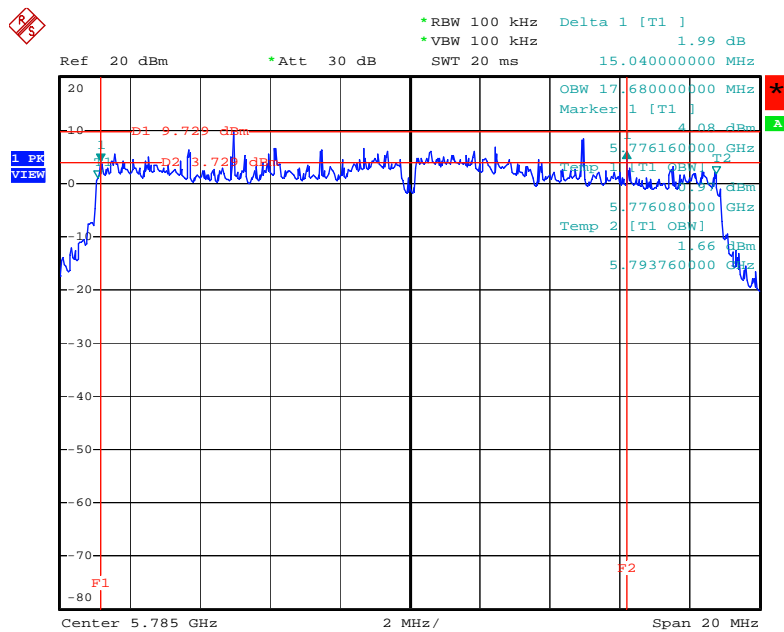


Date: 13.FEB.2008 09:31:29

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1 +Ant. A2+Ant. A3/ 5825 MHz

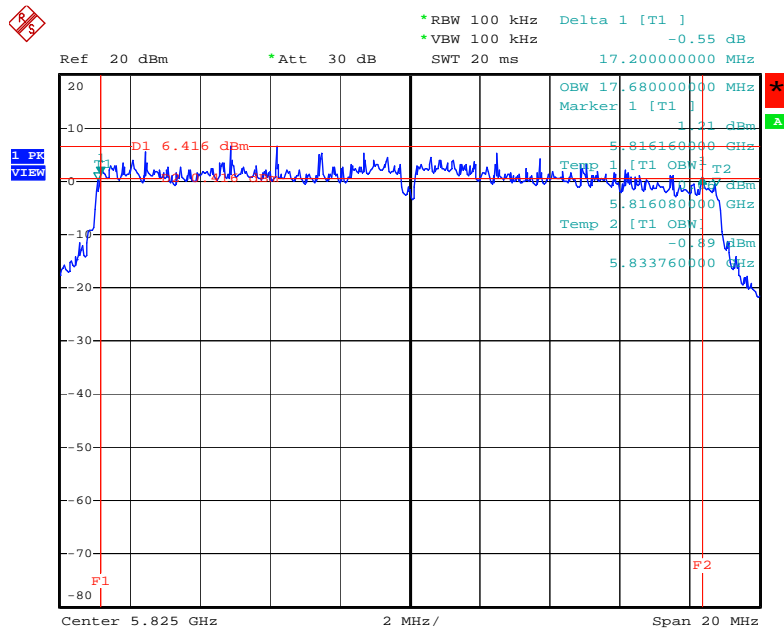


Date: 13.FEB.2008 11:18:57

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1 +Ant. A2+Ant. A3/ 5755MHz

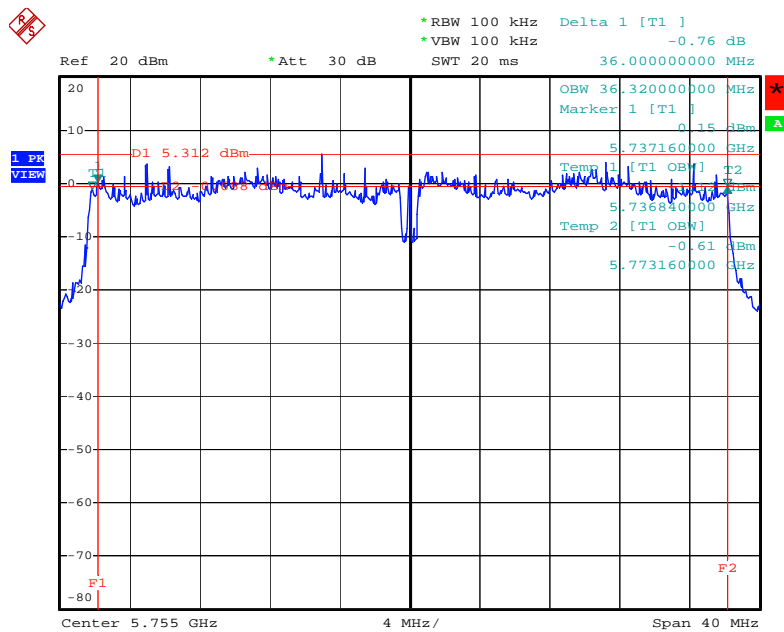

Date: 13.FEB.2008 09:20:44

6 dB Bandwidth Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1 +Ant. A2+Ant. A3/ 5795 MHz

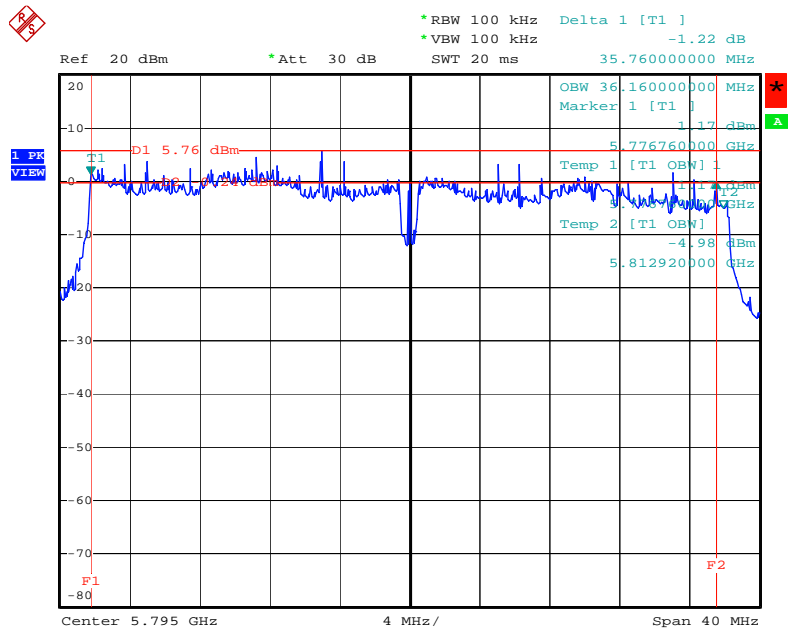

Date: 13.FEB.2008 09:10:49

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

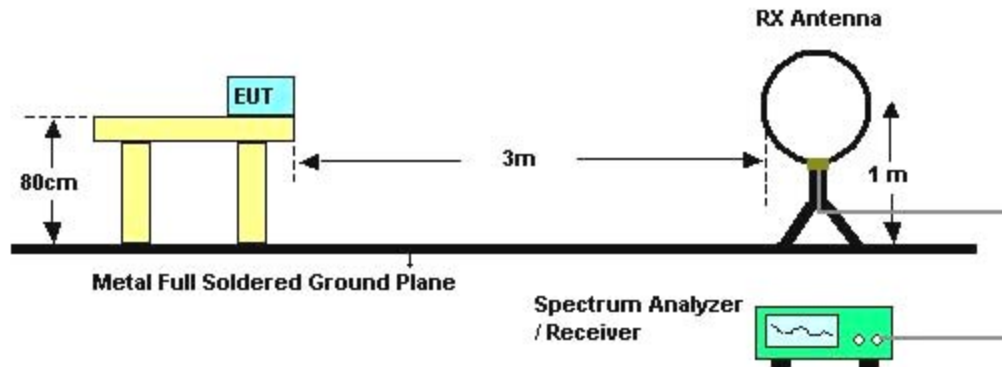

For radiated emissions above 30MHz

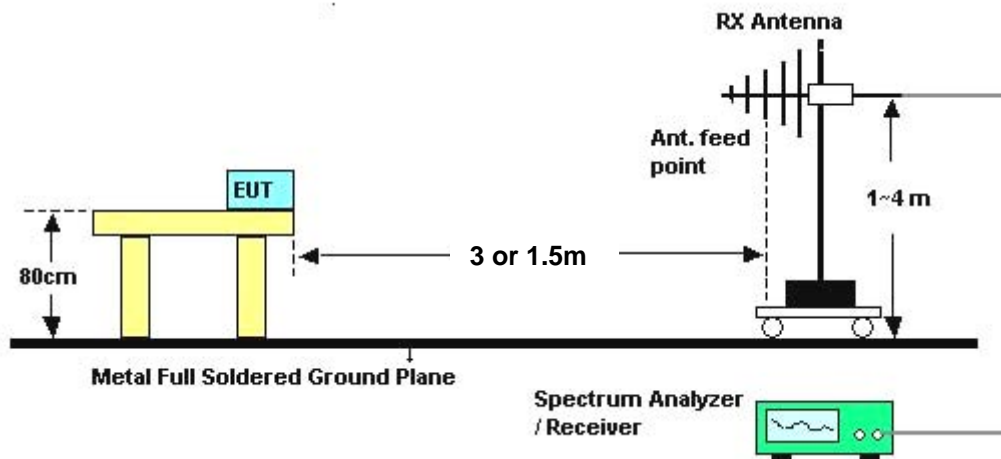

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Normal Link

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Jax Chen	Configurations	Normal Link

Horizontal

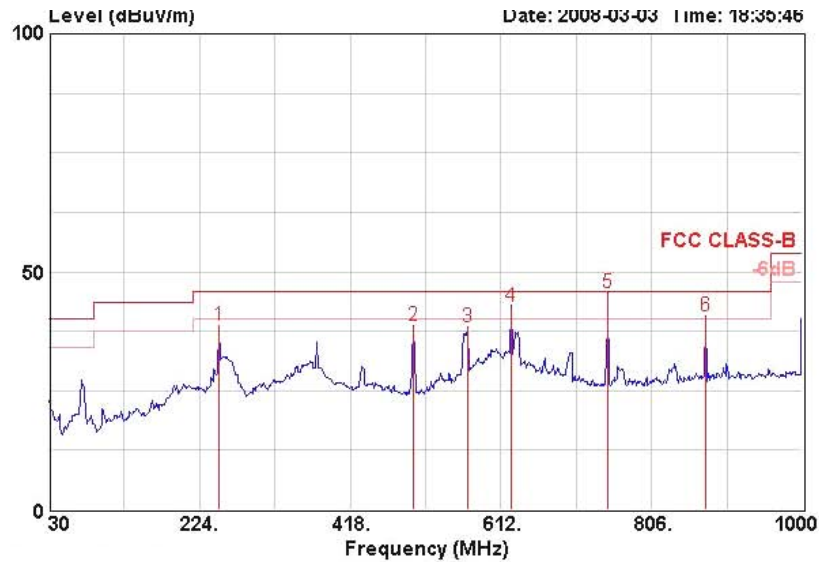

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Pha
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	249.220	38.77	-7.23	46.00	50.34	12.70	1.15	25.42	Peak	100	0	HORIZON
2	498.510	38.74	-7.26	46.00	45.68	17.60	1.80	26.33	Peak	100	0	HORIZON
3	568.350	38.37	-7.63	46.00	44.44	18.40	1.78	26.26	Peak	100	0	HORIZON
4 !	625.000	42.85	-3.15	46.00	48.10	18.85	2.11	26.22	QP	139	150	HORIZON
5 @	750.000	45.56	-0.44	46.00	48.70	19.43	2.48	25.05	QP	109	187	HORIZON
6 !	874.870	40.79	-5.21	46.00	42.89	20.34	2.62	25.05	Peak	100	0	HORIZON

**Vertical**

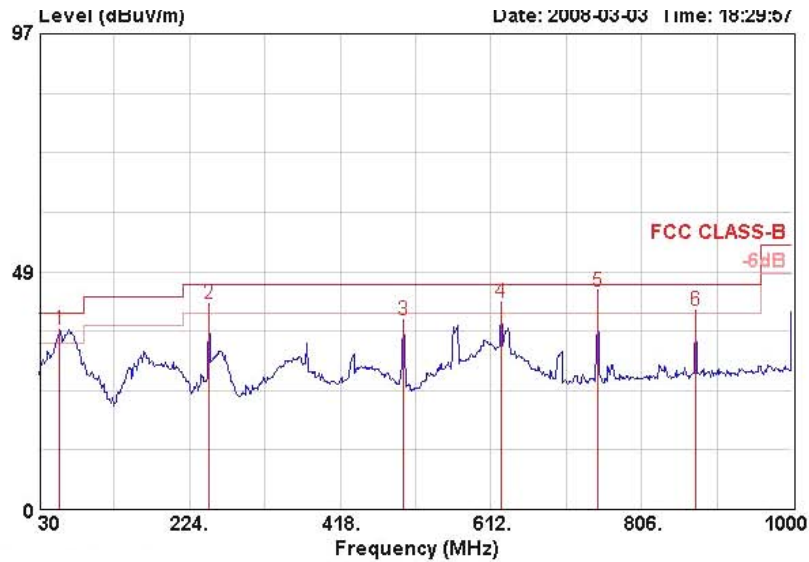

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp		Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	Pol/Pha
1 !	56.190	36.77	-3.23	40.00	55.14	7.47	0.45	26.28	400	0 VERTICA
2 !	249.220	42.11	-3.89	46.00	53.69	12.70	1.15	25.42	400	0 VERTICA
3	498.510	38.59	-7.41	46.00	45.53	17.60	1.80	26.33	400	0 VERTICA
4 !	625.580	42.13	-3.87	46.00	47.38	18.85	2.12	26.21	400	0 VERTICA
5 !	750.000	44.36	-1.64	46.00	47.50	19.43	2.48	25.05	100	234 VERTICA
6 !	874.870	40.64	-5.36	46.00	42.73	20.34	2.62	25.05	400	0 VERTICA

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 1 Ant. B1 + Ant. B2+Ant. B3

Horizontal

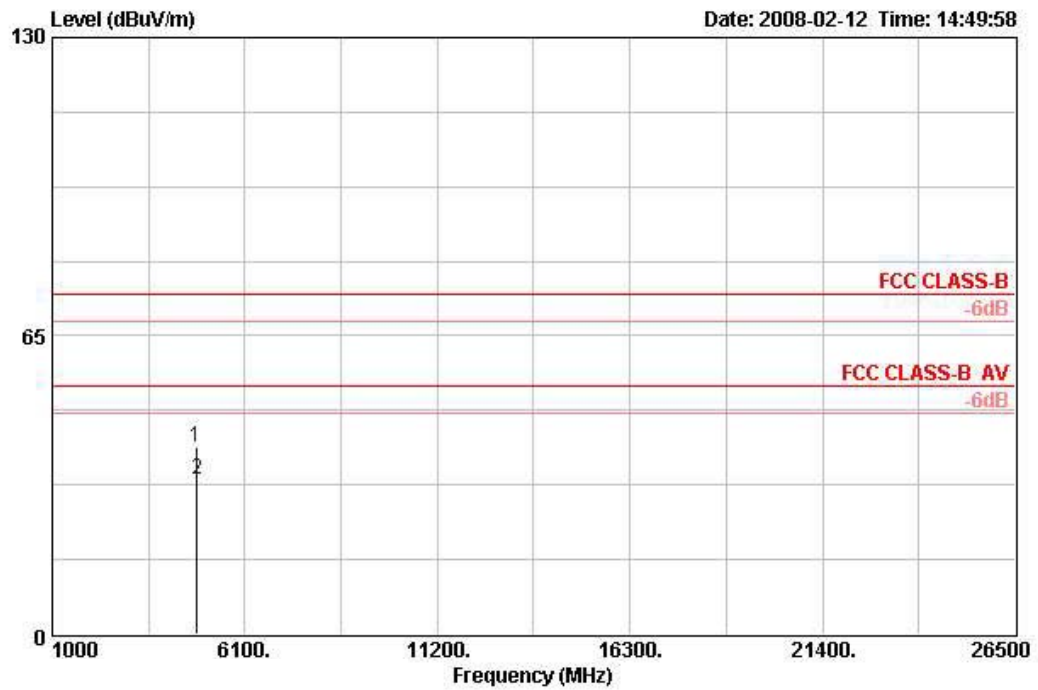

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.170	40.78	-33.22	74.00	36.49	33.06	6.40	35.16	PEAK	100	360	HORIZONTAL
2	4826.380	33.59	-20.41	54.00	29.30	33.06	6.40	35.16	AVERAGE	100	360	HORIZONTAL


**Vertical**

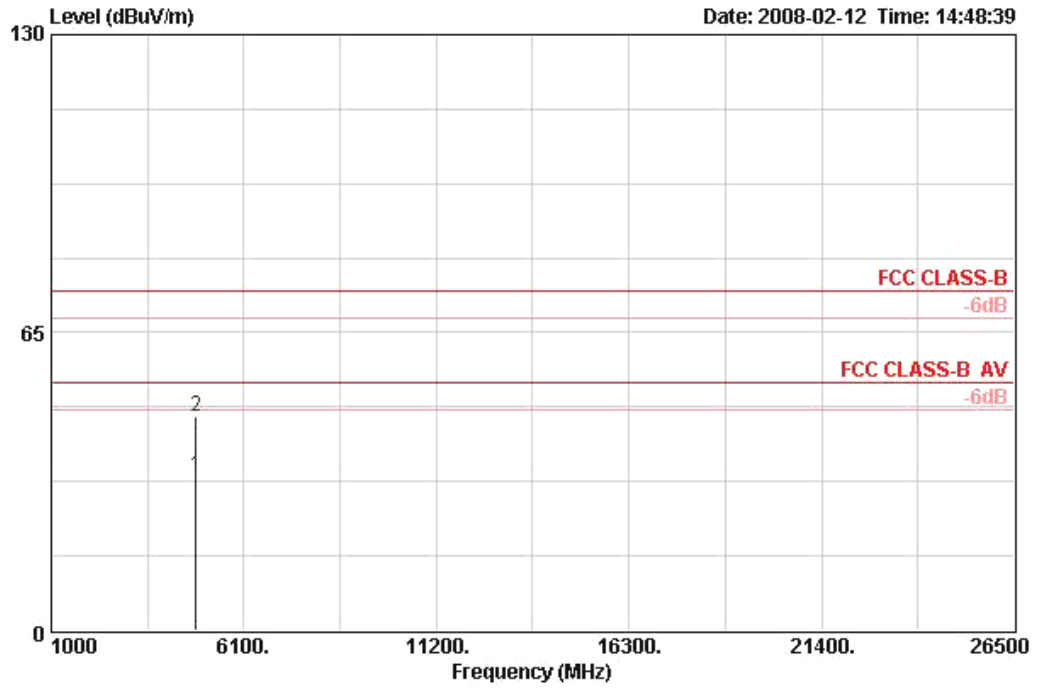

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.810	33.60	-20.40	54.00	29.32	33.06	6.40	35.16	AVERAGE	100	0	VERTICAL
2	4824.520	46.53	-27.47	74.00	42.24	33.06	6.40	35.16	PEAK	100	0	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Draft n MCS8 20MHz Ch 6 Ant. B1 + Ant. B2+Ant. B3

**Horizontal**

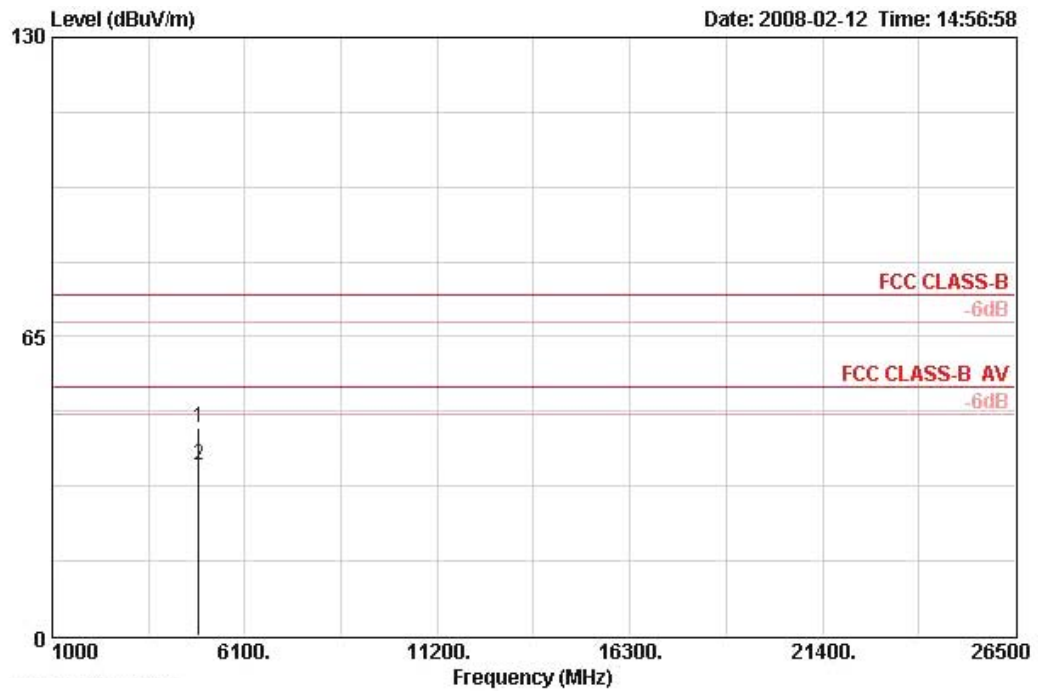

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4873.480	45.21	-28.79	74.00	40.79	33.16	6.42	35.15	PEAK	100	302	HORIZONTAL
2	4873.630	37.13	-16.87	54.00	32.70	33.16	6.42	35.15	AVERAGE	100	302	HORIZONTAL


**Vertical**

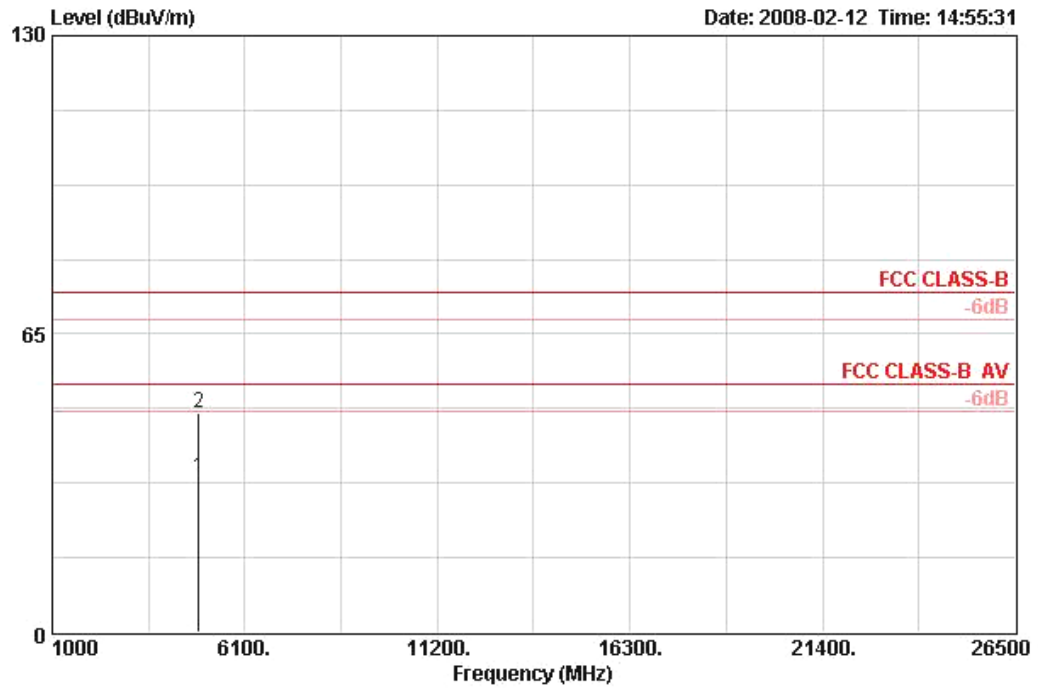

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4873.670	33.80	-20.20	54.00	29.38	33.16	6.42	35.15	AVERAGE	100	0	VERTICAL
2	4874.950	47.79	-26.21	74.00	43.37	33.16	6.42	35.15	PEAK	100	0	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Draft n MCS8 20MHz Ch11 Ant. B1 + Ant. B2+Ant. B3

**Horizontal**

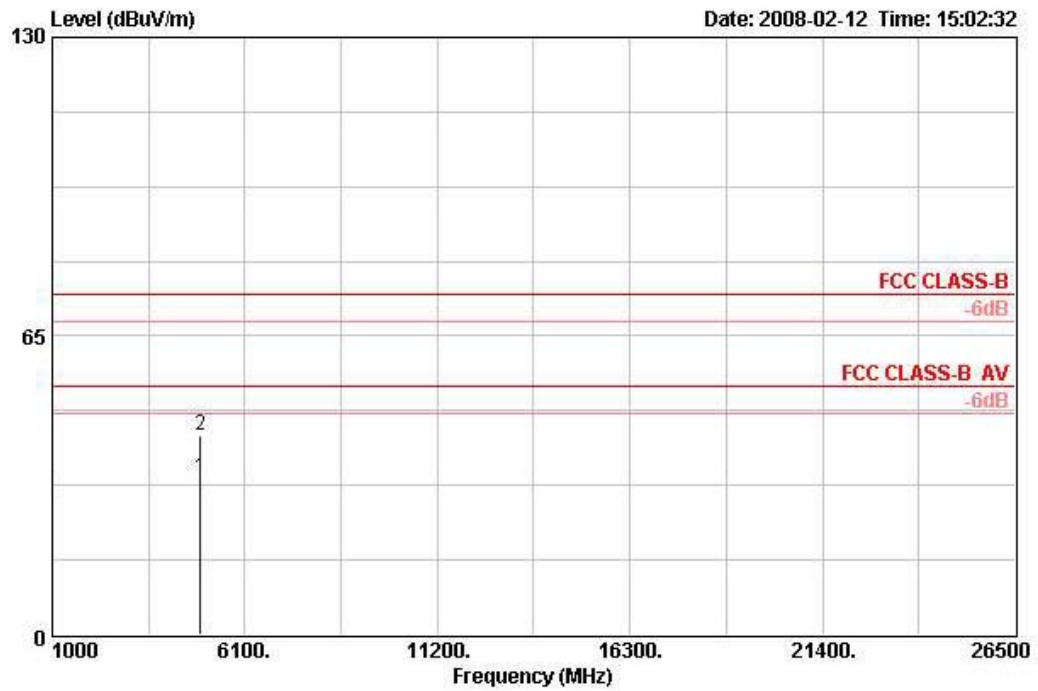

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.220	33.95	-20.05	54.00	29.39	33.26	6.44	35.14	AVERAGE	100	360	HORIZONTAL
2	4925.970	43.17	-30.83	74.00	38.61	33.26	6.44	35.14	PEAK	100	360	HORIZONTAL

**Vertical**

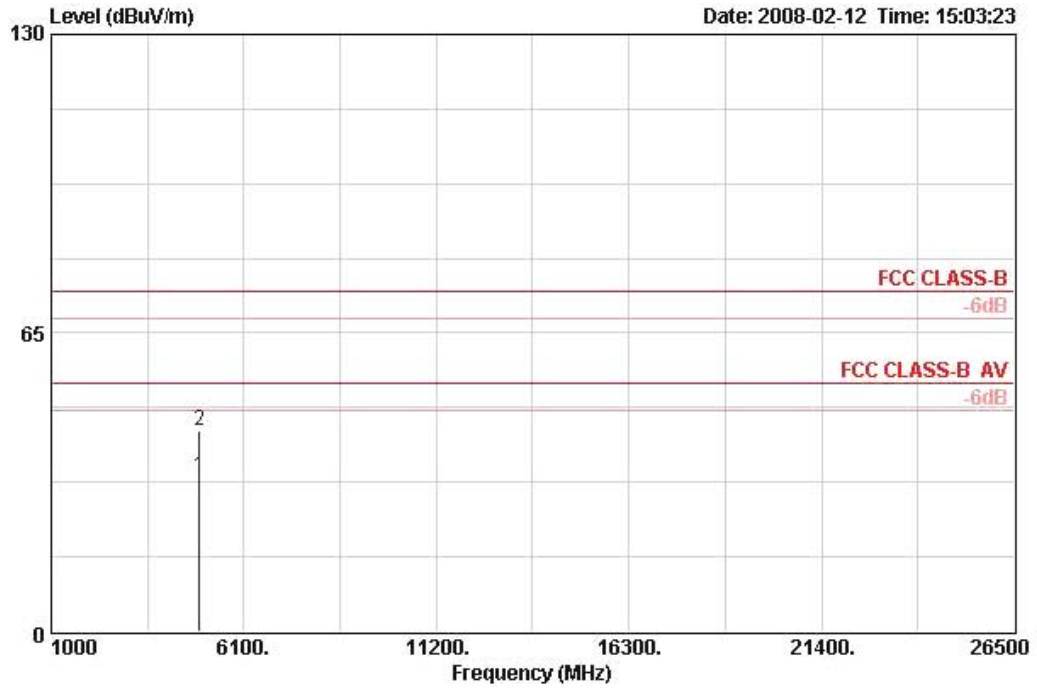


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4922.060	33.61	-20.39	54.00	29.05	33.26	6.44	35.14	AVERAGE	100	141	VERTICAL
2	4925.560	43.78	-30.22	74.00	39.22	33.26	6.44	35.14	PEAK	100	141	VERTICAL




Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 40MHz Ch 3 Ant. B1 + Ant. B2+Ant. B3

**Horizontal**

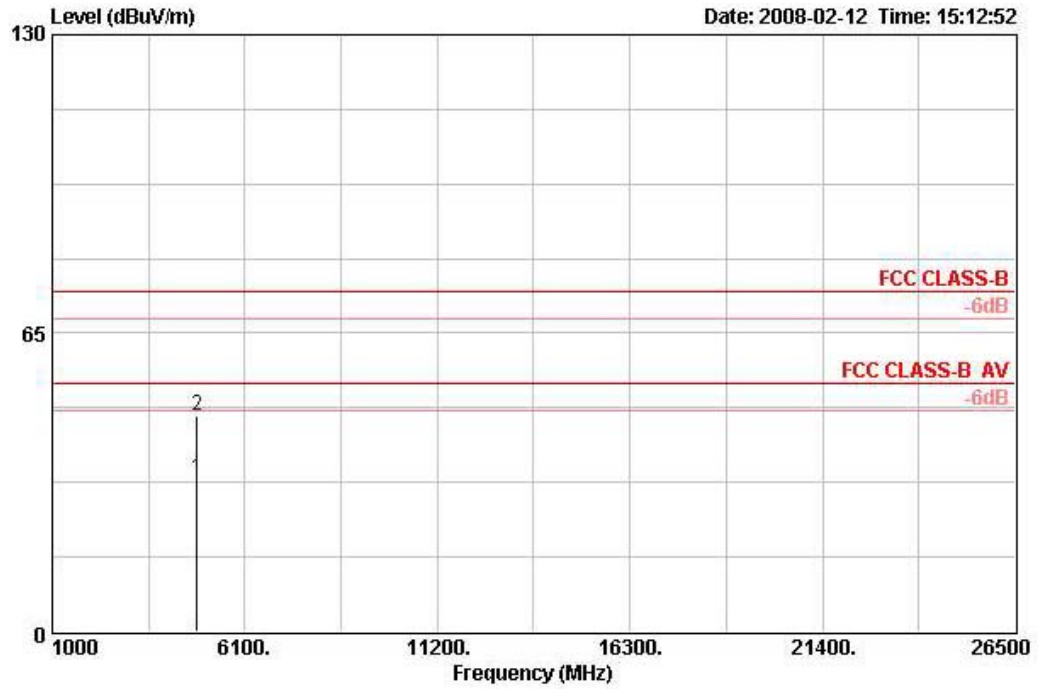

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4842.680	33.36	-20.64	54.00	29.02	33.09	6.41	35.16	AVERAGE	100	249	HORIZONTAL
2	4844.560	47.09	-26.91	74.00	42.75	33.09	6.41	35.16	PEAK	100	249	HORIZONTAL


**Vertical**

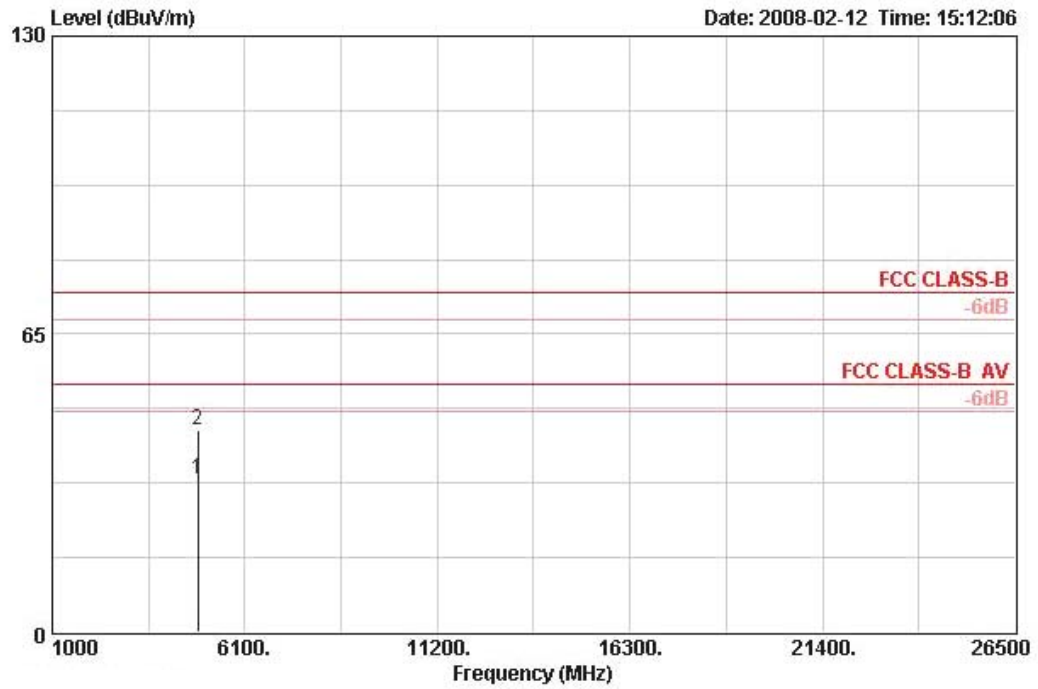

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4845.920	33.47	-20.53	54.00	29.13	33.09	6.41	35.16	AVERAGE	100	0	VERTICAL
2	4845.950	43.93	-30.07	74.00	39.60	33.09	6.41	35.16	PEAK	100	0	VERTICAL


Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 40MHz Ch 6 Ant. B1 + Ant. B2+Ant. B3

**Horizontal**

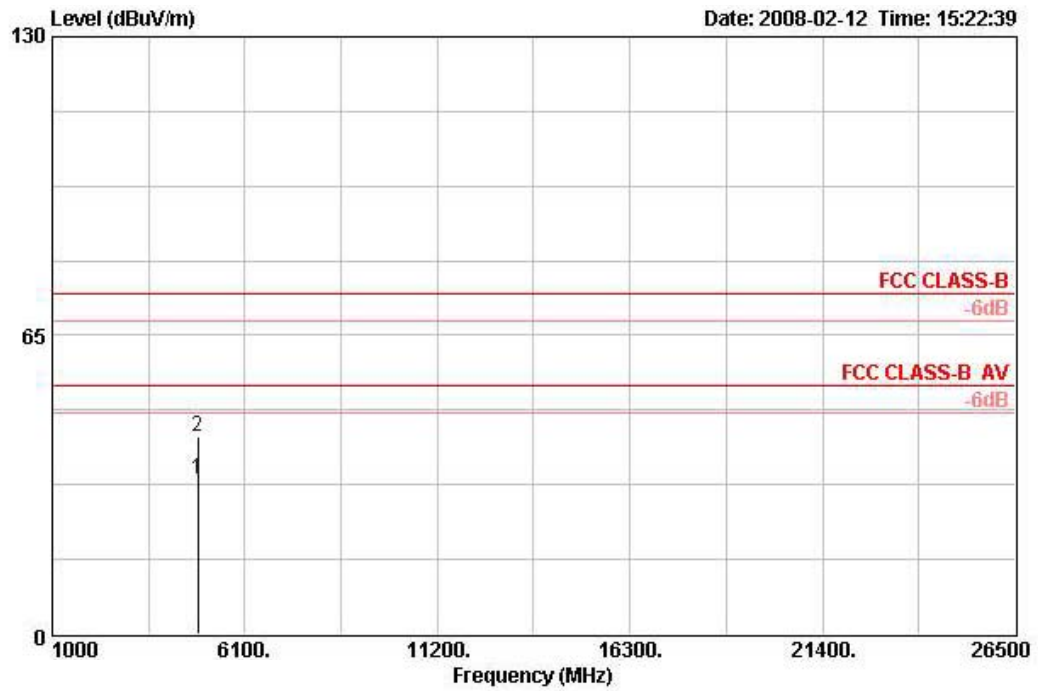

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4856.500	33.55	-20.45	54.00	29.18	33.12	6.41	35.16	AVERAGE	100	0	HORIZONTAL
2	4857.270	43.03	-30.97	74.00	38.65	33.12	6.41	35.16	PEAK	100	0	HORIZONTAL


**Vertical**

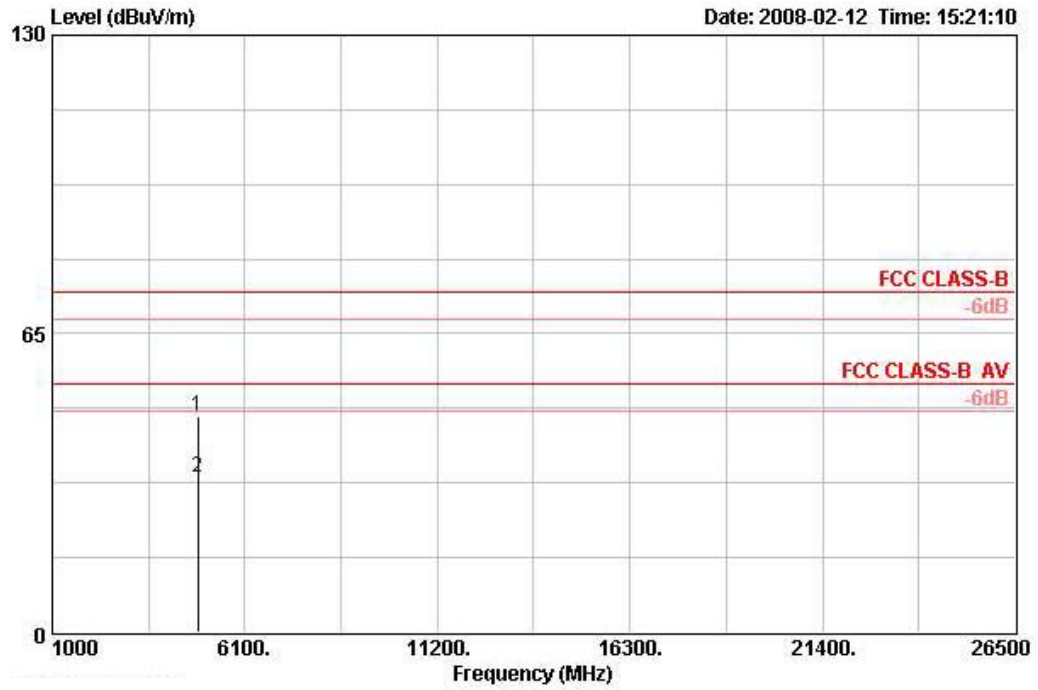

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4856.620	46.96	-27.04	74.00	42.59	33.12	6.41	35.16	PEAK	100	360	VERTICAL
2	4856.880	33.57	-20.43	54.00	29.20	33.12	6.41	35.16	AVERAGE	100	360	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Draft n MCS8 40MHz Ch 9 Ant. B1 + Ant. B2+Ant. B3

**Horizontal**

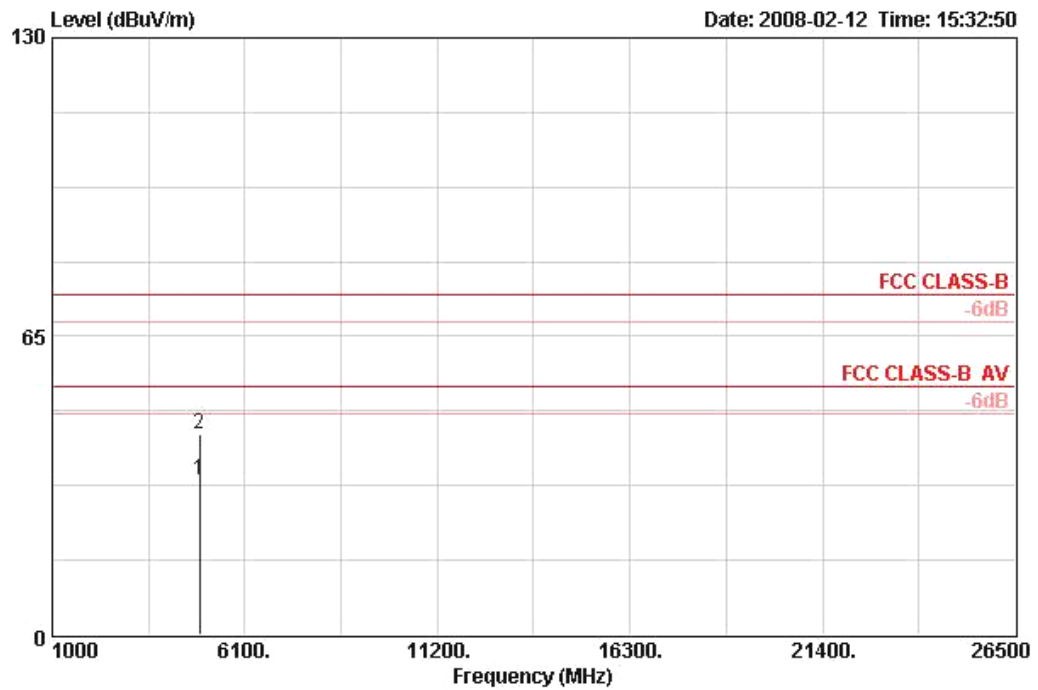

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4902.280	33.56	-20.44	54.00	29.05	33.23	6.43	35.15	AVERAGE	100	360	HORIZONTAL
2	4906.070	43.81	-30.19	74.00	39.31	33.23	6.43	35.15	PEAK	100	360	HORIZONTAL

**Vertical**

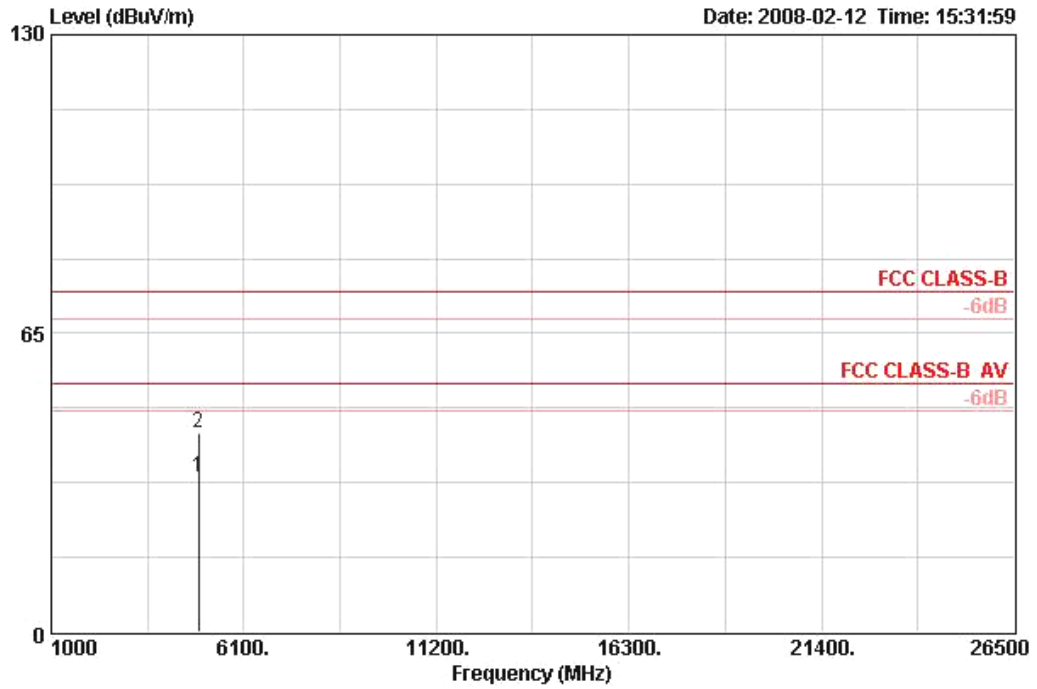

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4902.420	33.55	-20.45	54.00	29.04	33.23	6.43	35.15	AVERAGE	100	230	VERTICAL
2	4904.010	43.19	-30.81	74.00	38.68	33.23	6.43	35.15	PEAK	100	230	VERTICAL

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 20MHz CH 149 Ant. A1 +Ant. A2+Ant. A3

**Horizontal**

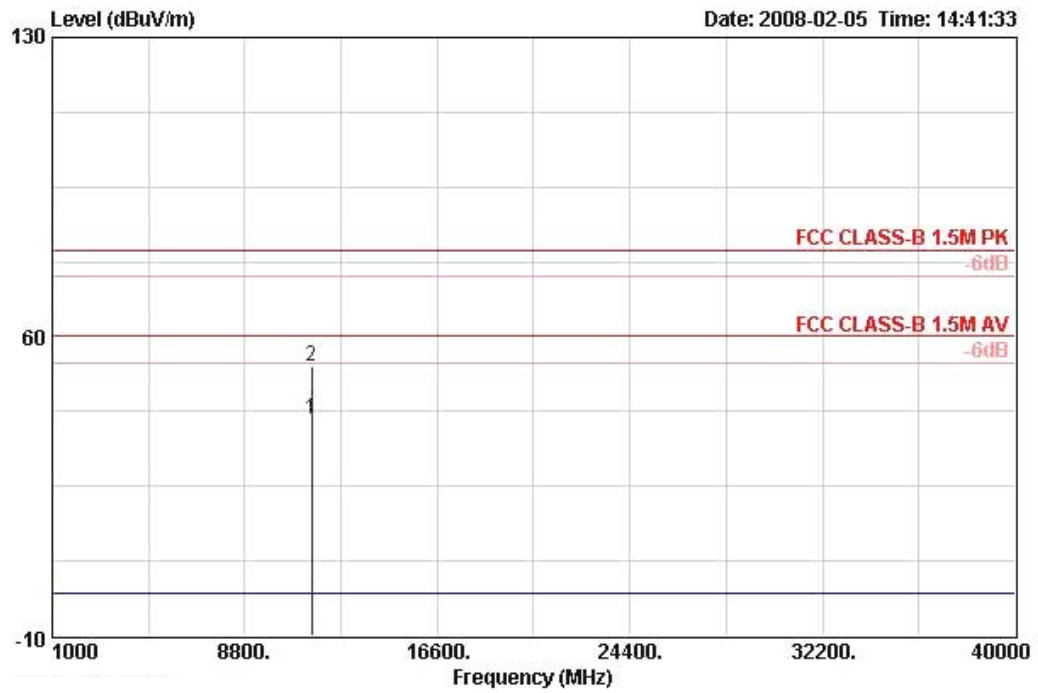

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	11491.550	40.63	-19.37	60.00	27.06	38.78	9.78	34.98	AVERAGE	109	144 HORIZONTAL
2	11492.170	52.99	-27.01	80.00	39.41	38.78	9.78	34.98	PEAK	109	144 HORIZONTAL

**Vertical**

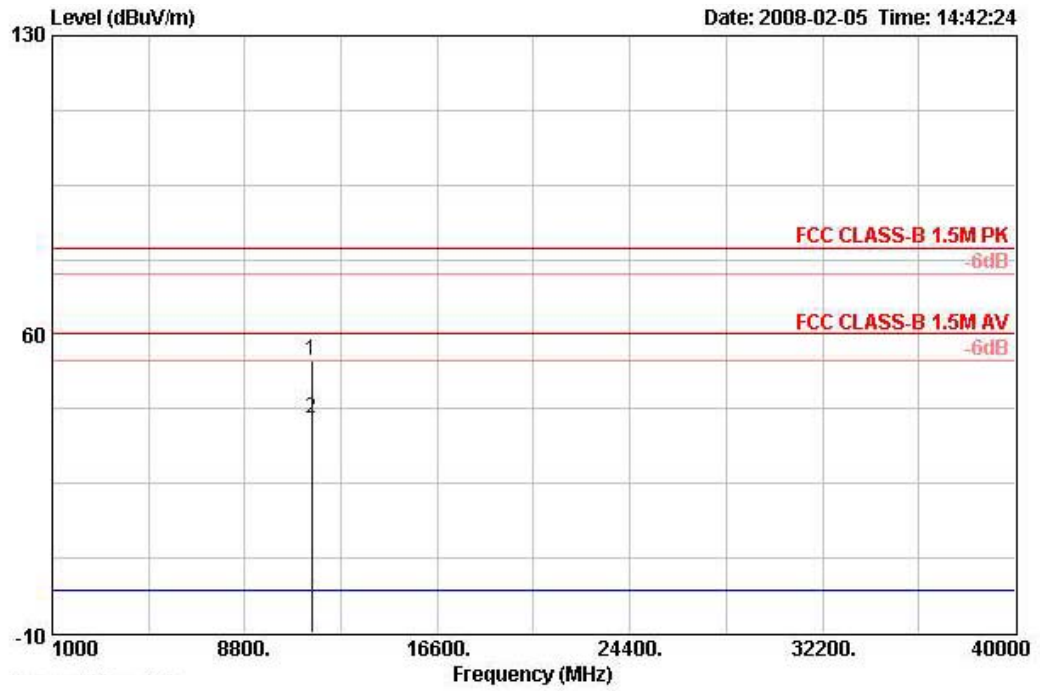


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11491.310	53.75	-26.25	80.00	40.17	38.78	9.78	34.98	PEAK	113	60	VERTICAL
2	11491.390	40.44	-19.56	60.00	26.86	38.78	9.78	34.98	AVERAGE	113	60	VERTICAL




<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 20MHz CH 157 Ant. A1 +Ant. A2+Ant. A3

**Horizontal**

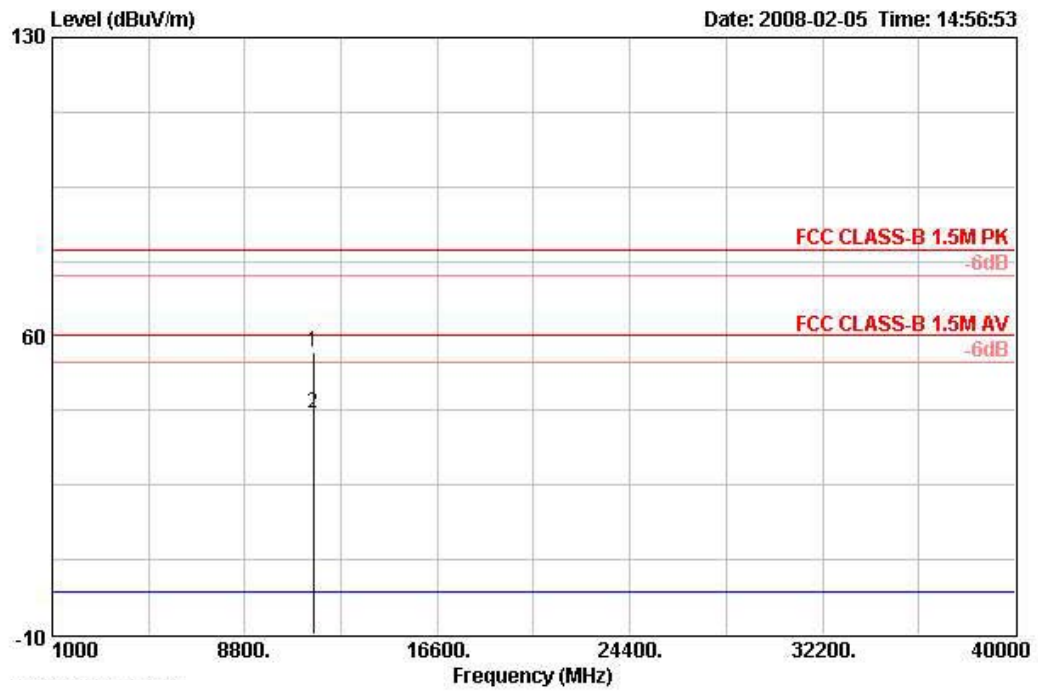

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11568.030	56.22	-23.78	80.00	42.60	38.83	9.79	35.00	PEAK	100	215	HORIZONTAL
2	11572.500	42.04	-17.96	60.00	28.41	38.83	9.80	35.00	AVERAGE	100	215	HORIZONTAL


Vertical

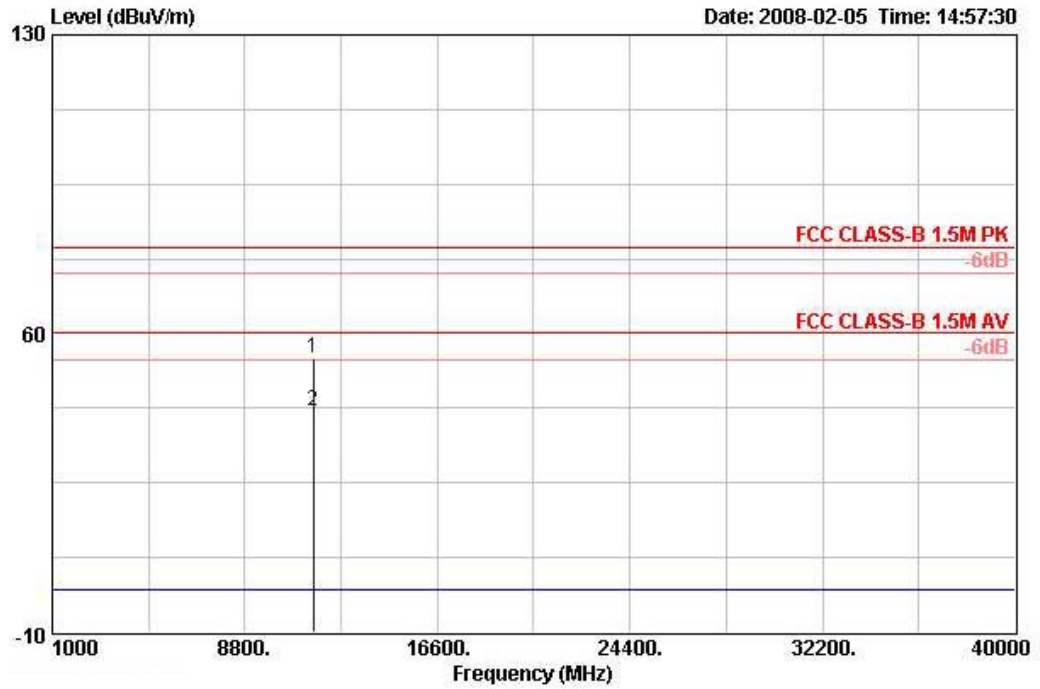

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11568.210	54.10	-25.90	80.00	40.48	38.83	9.79	35.00	PEAK	100	252	VERTICAL
2	11569.220	41.79	-18.21	60.00	28.17	38.83	9.79	35.00	AVERAGE	100	252	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 20MHz CH 165 Ant. A1+Ant. A2+Ant. A3

**Horizontal**

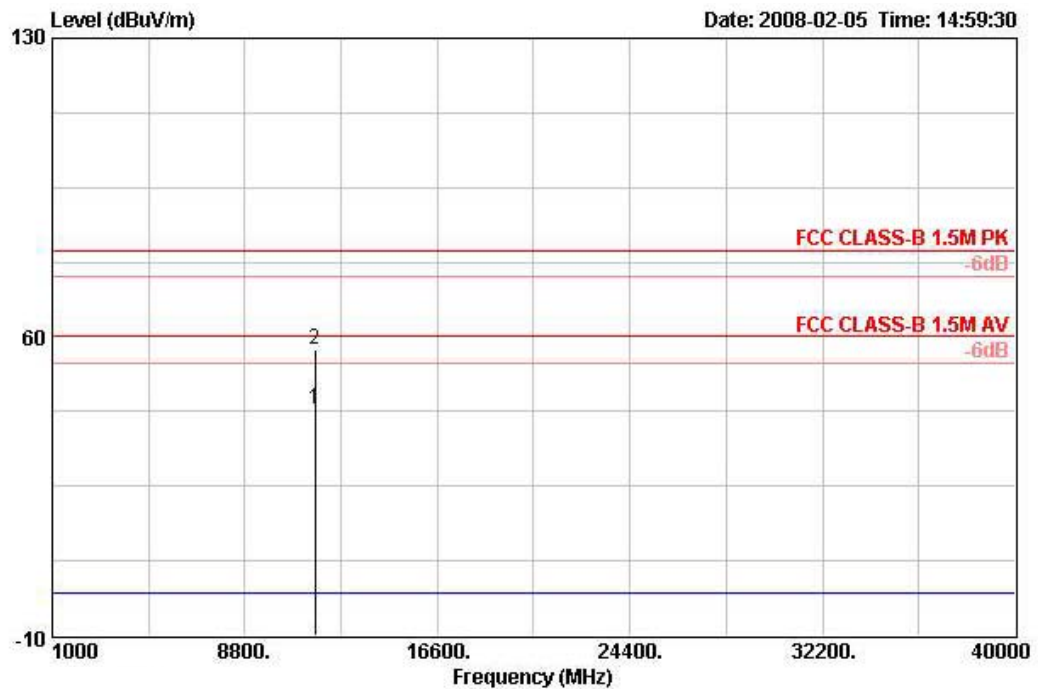

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11649.530	43.21	-16.79	60.00	29.54	38.86	9.82	35.01	AVERAGE	100	222	HORIZONTAL
2	11651.120	57.10	-22.90	80.00	43.43	38.86	9.82	35.01	PERK	100	222	HORIZONTAL


**Vertical**

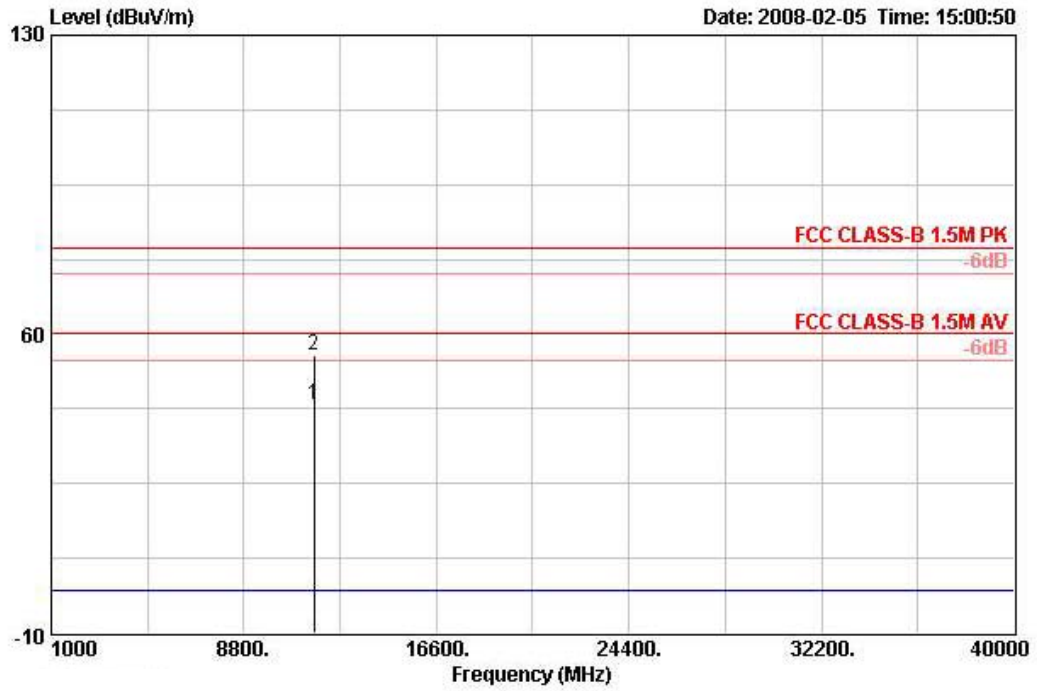

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11649.050	43.54	-16.46	60.00	29.88	38.86	9.82	35.01	AVERAGE	100	244	VERTICAL
2	11649.970	54.87	-25.13	80.00	41.20	38.86	9.82	35.01	PEAK	100	244	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 40MHz CH 151 Ant. A1+Ant. A2+Ant. A3

**Horizontal**

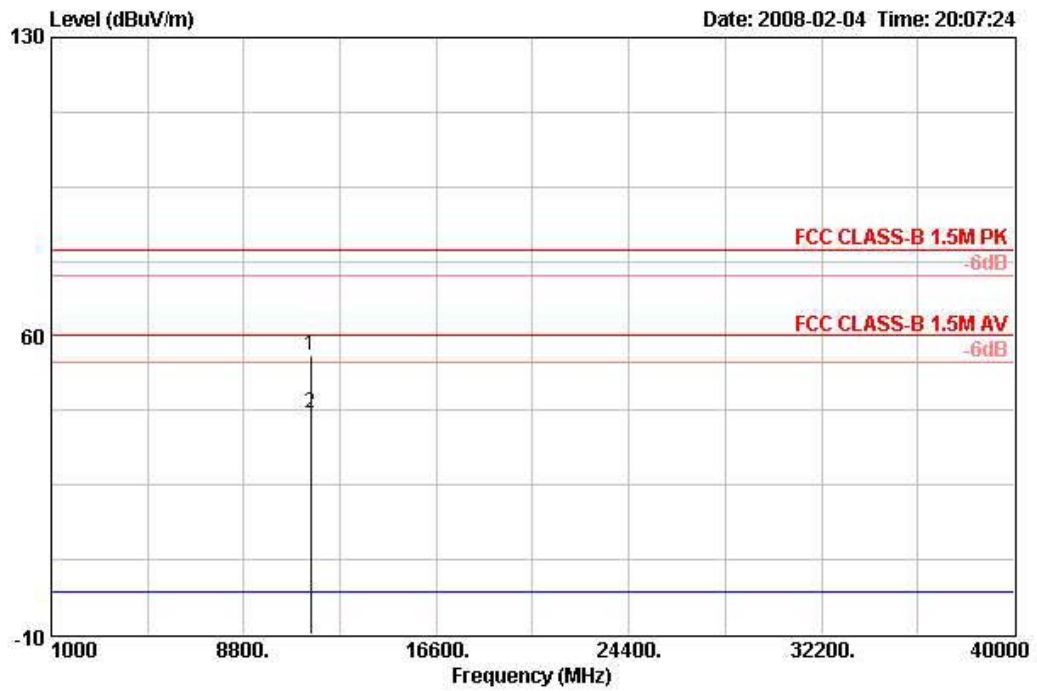

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11510.550	55.52	-24.48	80.00	41.94	38.80	9.78	35.00	PEAK	130	334	HORIZONTAL
2	11510.630	41.75	-18.25	60.00	28.17	38.80	9.78	35.00	AVERAGE	130	334	HORIZONTAL


**Vertical**

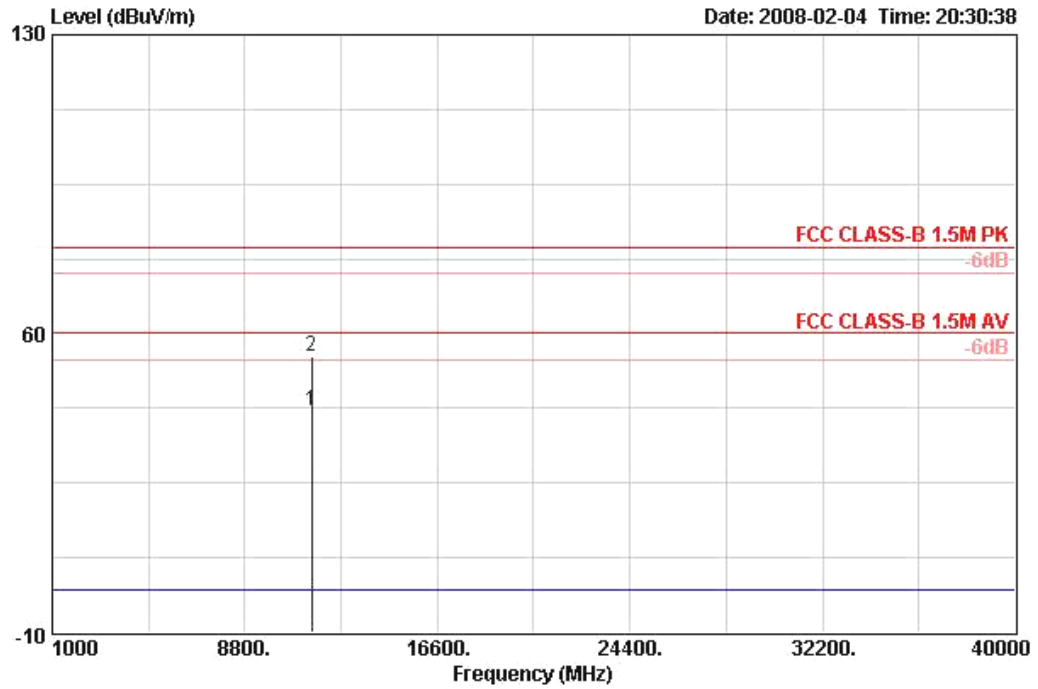

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11508.790	41.83	-18.17	60.00	28.25	38.80	9.78	35.00	AVERAGE	100	224	VERTICAL
2	11511.650	54.67	-25.33	80.00	41.09	38.80	9.78	35.00	PEAK	100	224	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 40MHz CH 159 Ant. A1 +Ant. A2+Ant. A3

**Horizontal**

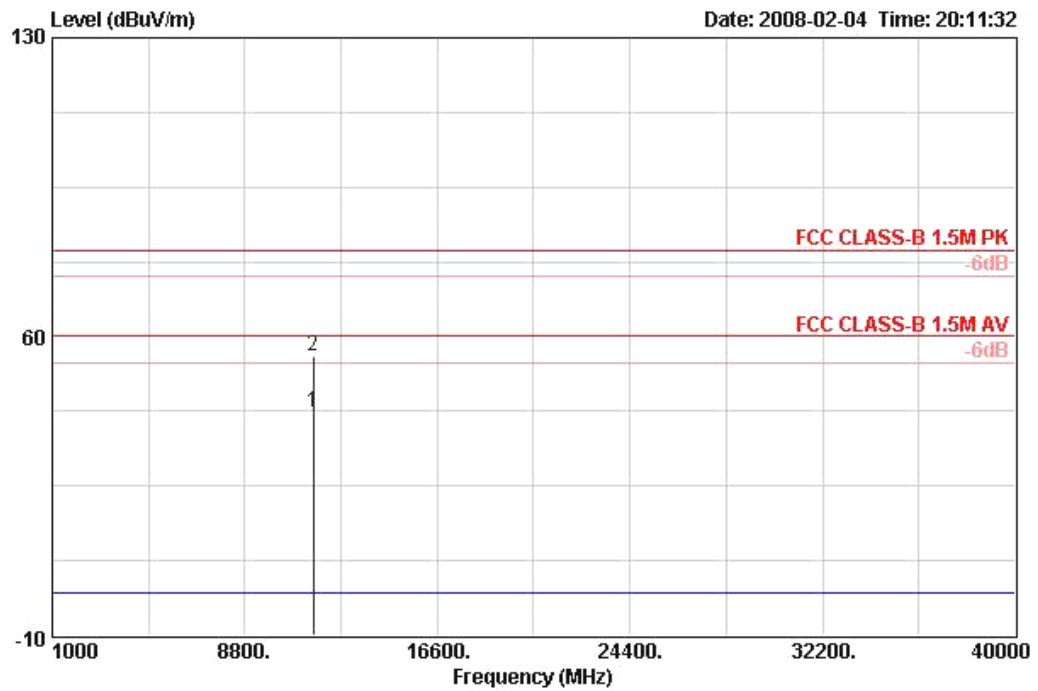

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	11591.290	42.19	-17.81	60.00	28.55	38.83	9.80	35.00	AVERAGE	100	107 HORIZONTAL
2	11591.690	55.35	-24.65	80.00	41.71	38.83	9.80	35.00	PEAK	100	107 HORIZONTAL

**Vertical**

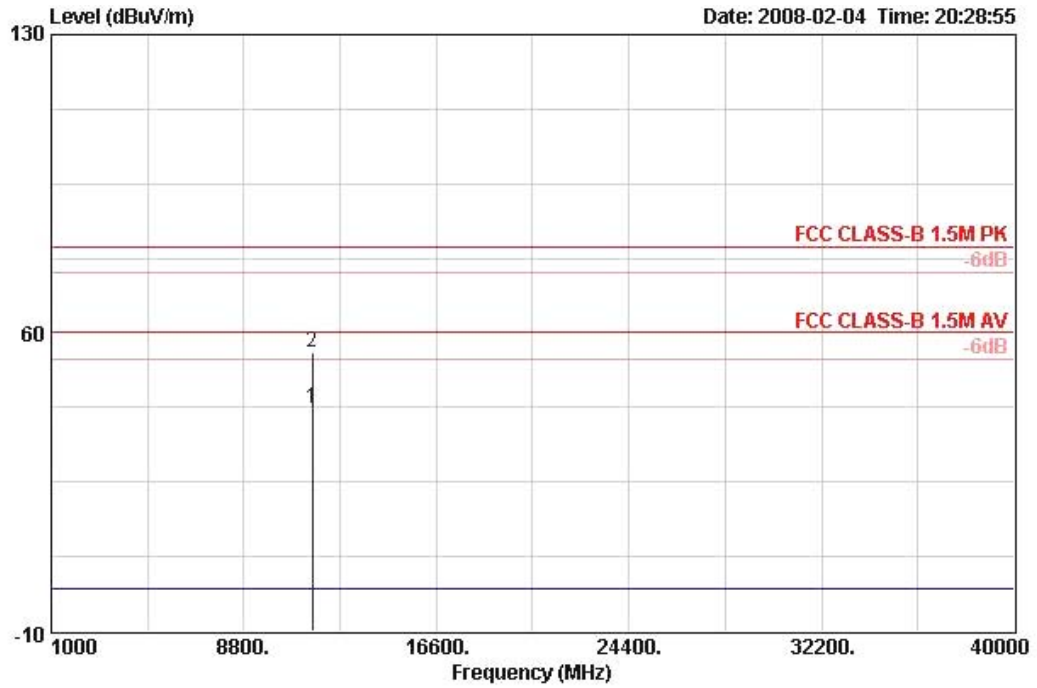

]  
 ]  
 ]  
 ]  
 ]  
 ]

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11590.550	42.17	-17.83	60.00	28.54	38.83	9.80	35.00	AVERAGE	100	230	VERTICAL
2	11590.580	55.28	-24.72	80.00	41.64	38.83	9.80	35.00	PEAK	100	230	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Draft n MCS8 20MHz Ch 1, 6, 11 Ant. B1 + Ant. B2+Ant. B3

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2389.930	73.64	-0.36	74.00	41.31	28.17	4.15	0.00	PEAK	153	150	HORIZONTAL
2 ☉	2389.930	52.40	-1.60	54.00	20.07	28.17	4.15	0.00	AVERAGE	153	150	HORIZONTAL
3 ☉	2413.600	115.73			83.37	28.21	4.15	0.00	PEAK	153	150	HORIZONTAL
4 ☉	2415.400	102.36			69.97	28.21	4.18	0.00	AVERAGE	153	150	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2389.840	72.93	-1.07	74.00	40.60	28.17	4.15	0.00	PEAK	153	149	HORIZONTAL
2 ☉	2390.000	53.57	-0.43	54.00	21.24	28.17	4.15	0.00	AVERAGE	153	149	HORIZONTAL
3 ☉	2435.000	109.11			76.68	28.25	4.18	0.00	AVERAGE	153	149	HORIZONTAL
4 ☉	2438.400	123.37			90.91	28.29	4.18	0.00	PEAK	153	149	HORIZONTAL
5 ☉	2483.500	53.31	-0.69	54.00	20.72	28.36	4.23	0.00	AVERAGE	153	149	HORIZONTAL
6 ☉	2483.500	72.39	-1.61	74.00	39.80	28.36	4.23	0.00	PEAK	153	149	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2463.400	102.29			69.77	28.32	4.20	0.00	AVERAGE	148	150	HORIZONTAL
2 ☉	2464.000	115.68			83.15	28.32	4.20	0.00	PEAK	148	150	HORIZONTAL
3 ☉	2483.500	52.75	-1.25	54.00	20.16	28.36	4.23	0.00	AVERAGE	148	150	HORIZONTAL
4 ☉	2483.540	70.01	-3.99	74.00	37.42	28.36	4.23	0.00	PEAK	148	150	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Draft n MCS8 40MHz Ch 3, 6, 9 Ant. B1 + Ant. B2+Ant. B3

**Channel 3**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☒	2389.960	71.36	-2.64	74.00	39.03	28.17	4.15	0.00	PEAK	156	150	HORIZONTAL
2 ☒	2390.000	53.92	-0.08	54.00	21.59	28.17	4.15	0.00	AVERAGE	156	150	HORIZONTAL
3 ☒	2416.400	95.76			63.37	28.21	4.18	0.00	AVERAGE	156	150	HORIZONTAL
4 ☒	2419.200	110.82			78.43	28.21	4.18	0.00	PEAK	156	150	HORIZONTAL
5	2483.500	62.33	-11.67	74.00	29.74	28.36	4.23	0.00	PEAK	156	150	HORIZONTAL
6 ☒	2483.500	49.70	-4.30	54.00	17.11	28.36	4.23	0.00	AVERAGE	156	150	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☒	2390.000	53.39	-0.61	54.00	21.06	28.17	4.15	0.00	AVERAGE	149	150	HORIZONTAL
2	2390.000	65.85	-8.15	74.00	33.52	28.17	4.15	0.00	PEAK	149	150	HORIZONTAL
3 ☒	2437.000	97.47			65.01	28.29	4.18	0.00	AVERAGE	149	150	HORIZONTAL
4 ☒	2438.800	112.63			80.17	28.29	4.18	0.00	PEAK	149	150	HORIZONTAL
5 ☒	2483.500	53.63	-0.37	54.00	21.04	28.36	4.23	0.00	AVERAGE	149	150	HORIZONTAL
6 ☒	2483.900	70.08	-3.92	74.00	37.49	28.36	4.23	0.00	PEAK	149	150	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2390.000	61.96	-12.04	74.00	29.63	28.17	4.15	0.00	Peak	149	150	HORIZONTAL
2	2390.000	50.80	-3.20	54.00	18.41	28.21	4.18	0.00	AVERAGE	149	150	HORIZONTAL
3 ☒	2436.800	95.56			63.10	28.29	4.18	0.00	AVERAGE	149	150	HORIZONTAL
4 ☒	2442.800	110.56			78.07	28.29	4.20	0.00	PEAK	149	150	HORIZONTAL
5 ☒	2483.500	53.31	-0.69	54.00	20.72	28.36	4.23	0.00	AVERAGE	149	150	HORIZONTAL
6 ☒	2483.600	72.22	-1.78	74.00	39.63	28.36	4.23	0.00	PEAK	149	150	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	11a Draft n MCS8 20MHz CH 149, 157, 165 Ant. A1+Ant. A2+Ant. A3

**Channel 149**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5742.200	105.06			63.87	34.35	6.84	0.00	AVERAGE	133	322	HORIZONTAL
2 ☺	5743.400	118.26			77.07	34.35	6.84	0.00	PEAK	133	322	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5786.000	105.92			64.70	34.36	6.86	0.00	AVERAGE	122	200	HORIZONTAL
2 ☺	5787.000	109.87			68.65	34.36	6.86	0.00	PEAK	122	200	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5822.400	107.39			66.15	34.37	6.88	0.00	AVERAGE	118	195	HORIZONTAL
2 ☺	5827.600	121.11			79.87	34.37	6.88	0.00	PEAK	118	195	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


**For Emission not in Restricted Band**

**Low Band Edge Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3/ 2412 MHz**

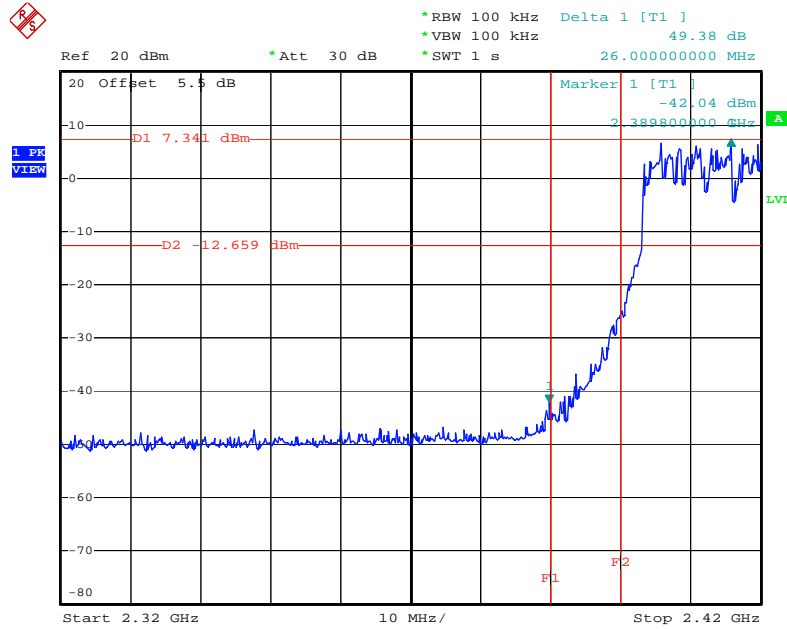


Date: 13.FEB.2008 08:00:09

**High Band Edge Plot on Configuration Drafft n MCS8 20MHz Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz**

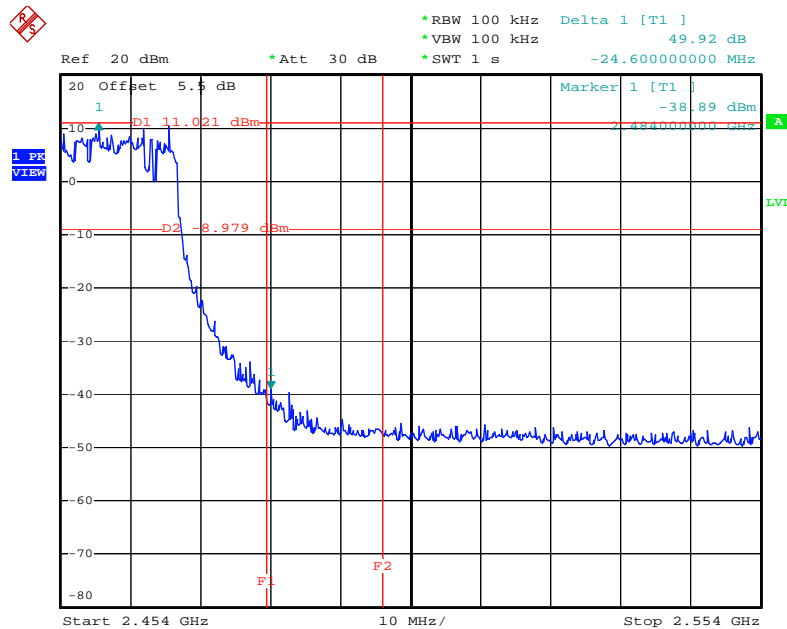


Date: 13.FEB.2008 10:36:58

**Low Band Edge Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3/ 2422 MHz**

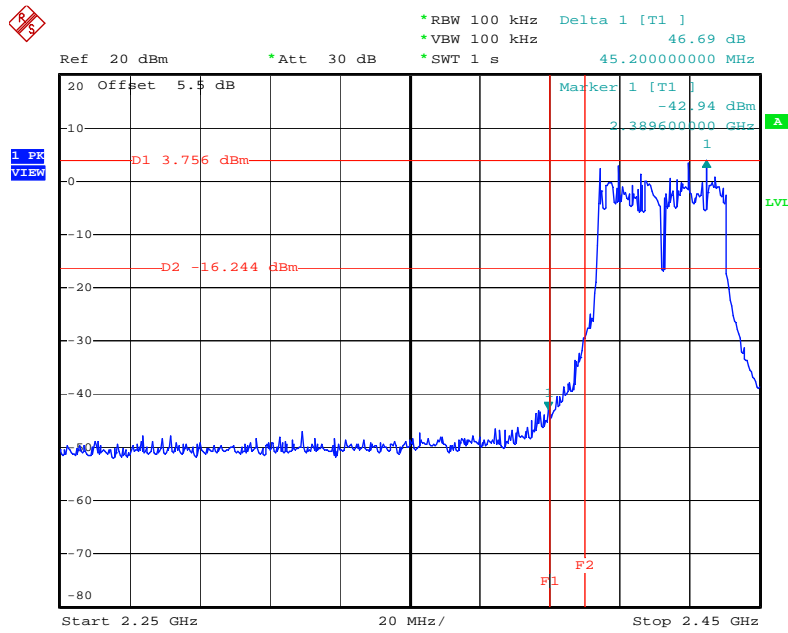


Date: 20.FEB.2008 13:07:42

**High Band Edge Plot on Configuration Drafft n MCS8 40MHz Ant. B1 +Ant. B2+Ant. B3/ 2452 MHz**

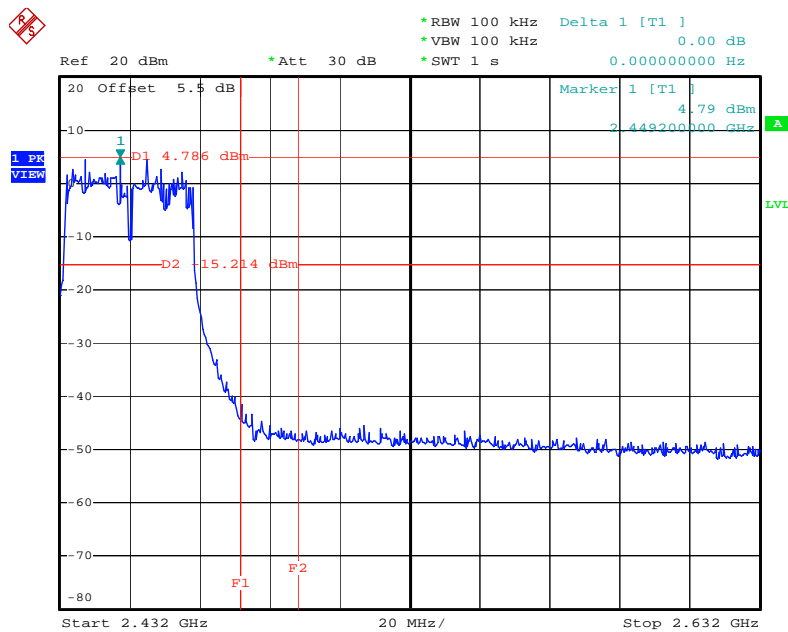


Date: 13.FEB.2008 07:52:44

**Low Band Edge Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3 / 5745 MHz**

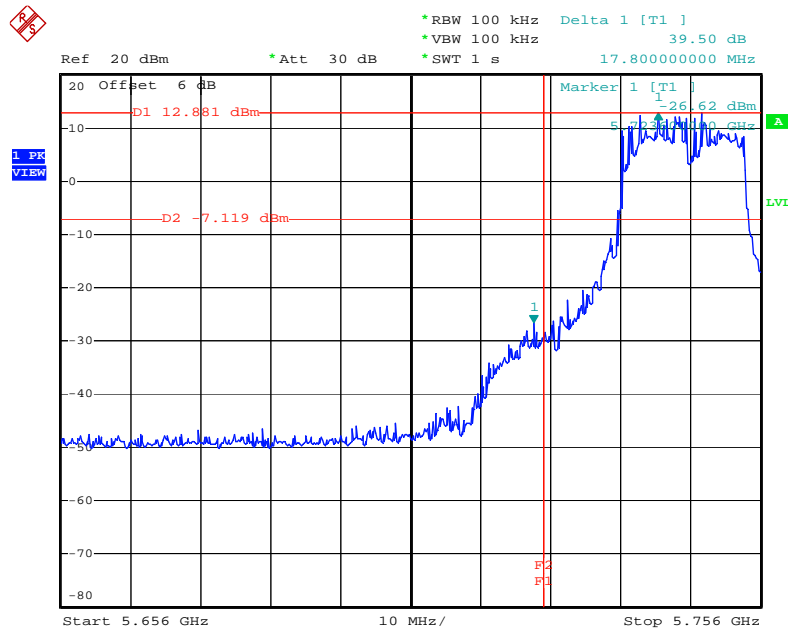


Date: 13.FEB.2008 09:30:19

**High Band Edge Plot on Configuration 11a Draft n MCS8 20MHz Ant. A1+Ant. A2+Ant. A3/ 5825 MHz**

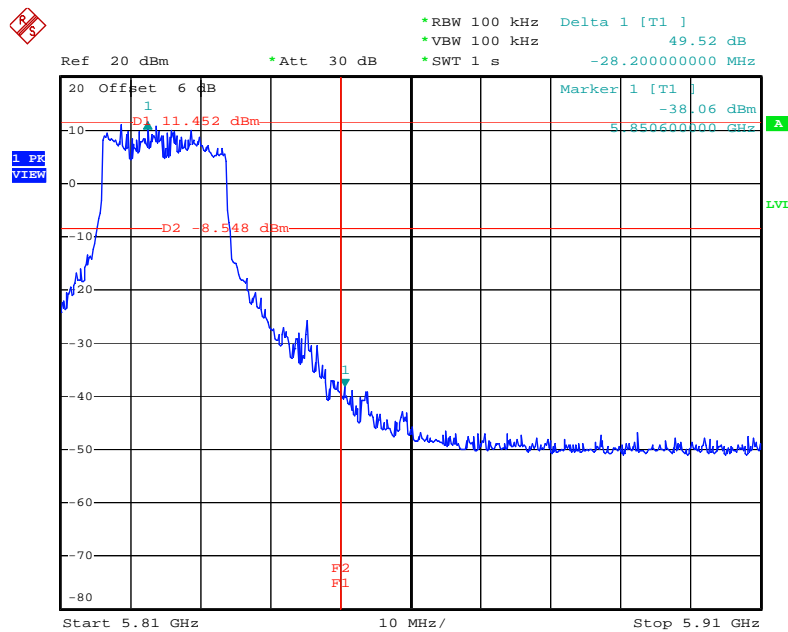


Date: 13.FEB.2008 11:22:56

**Low Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3 / 5755 MHz**

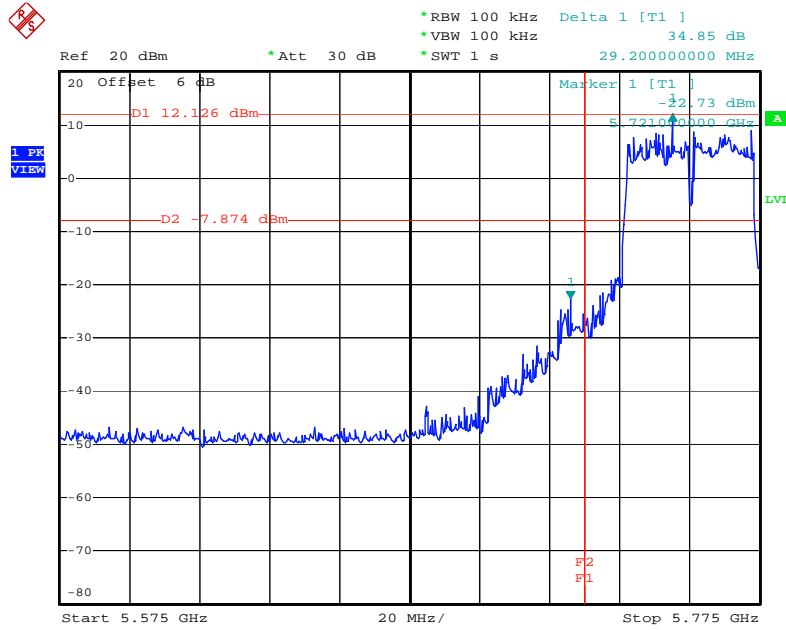

Date: 13.FEB.2008 09:24:42

**High Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. A1+Ant. A2+Ant. A3/ 5795 MHz**

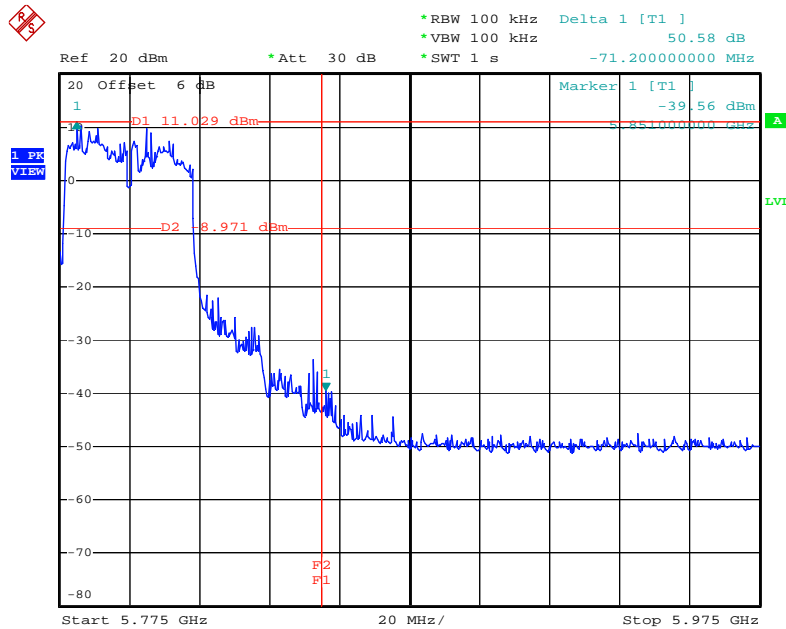

Date: 13.FEB.2008 09:14:47



## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 14, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz –30MHz	May 09, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2007	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

\* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.