


Site: AC1	Time: 2015/04/09 - 03:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz	

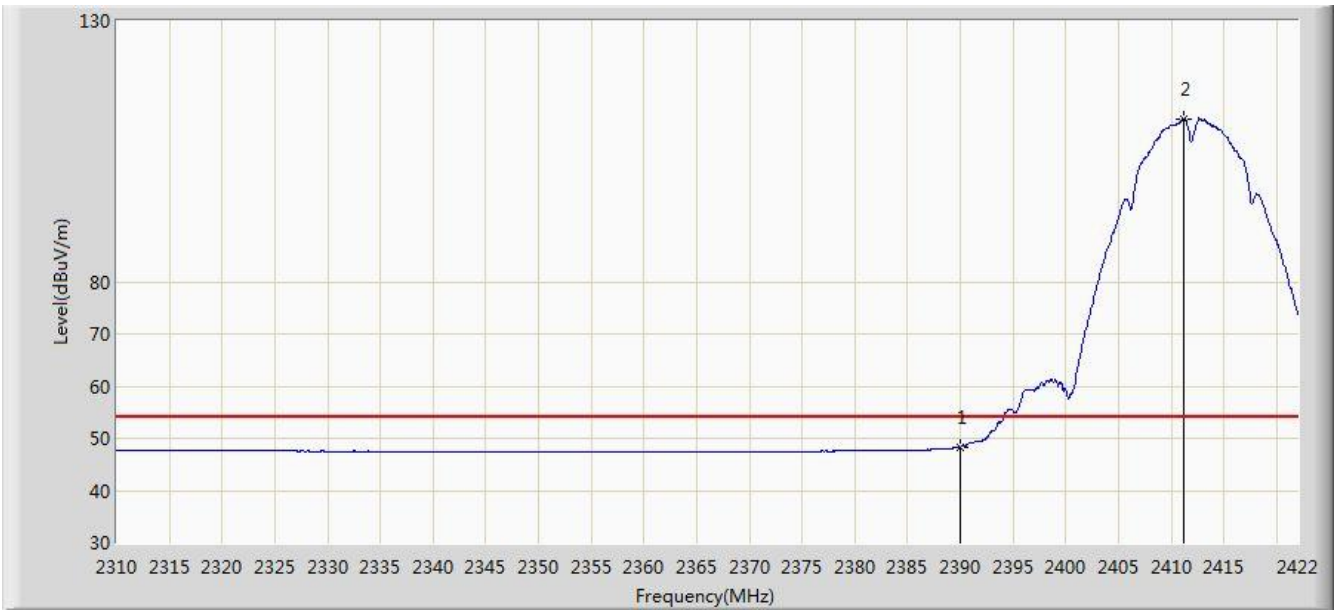


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	48.383	20.037	-5.617	54.000	28.346	AV
2	X	*	2411.192	111.225	82.922	N/A	N/A	28.303	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 03:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

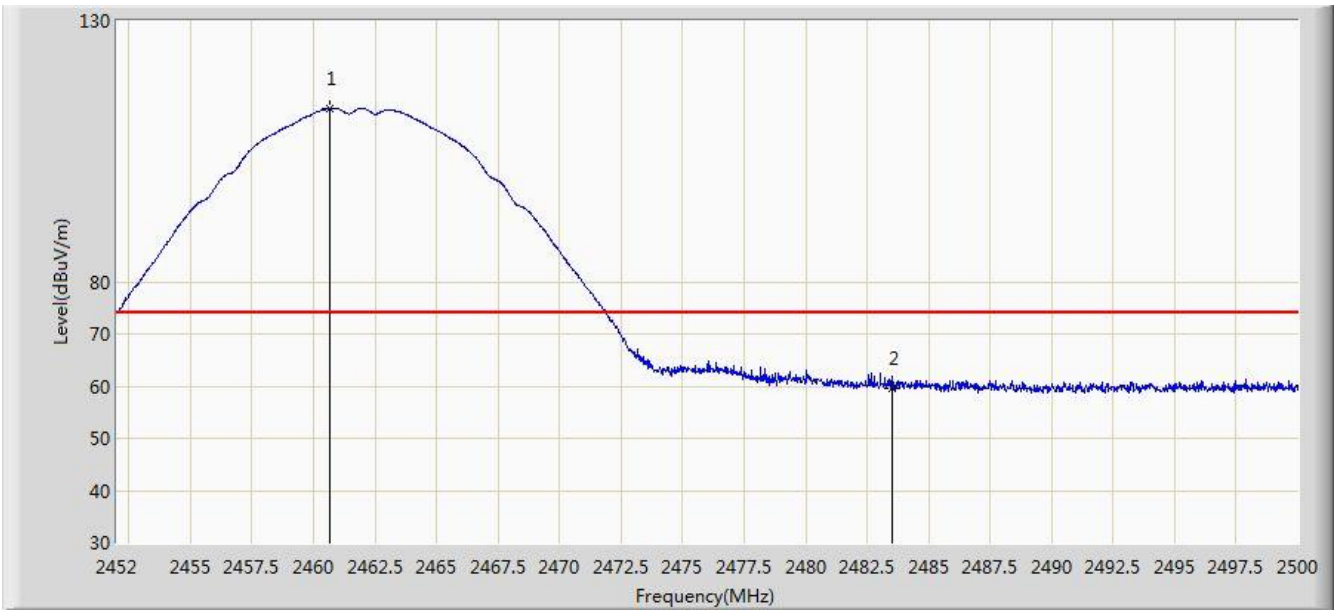

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2460.640	113.187	84.945	N/A	N/A	28.242	PK
2			2483.500	59.685	31.398	-14.315	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1	X	*	2461.312	109.399	81.156	N/A	N/A	28.243	AV
2			2483.500	47.852	19.565	-6.148	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 03:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

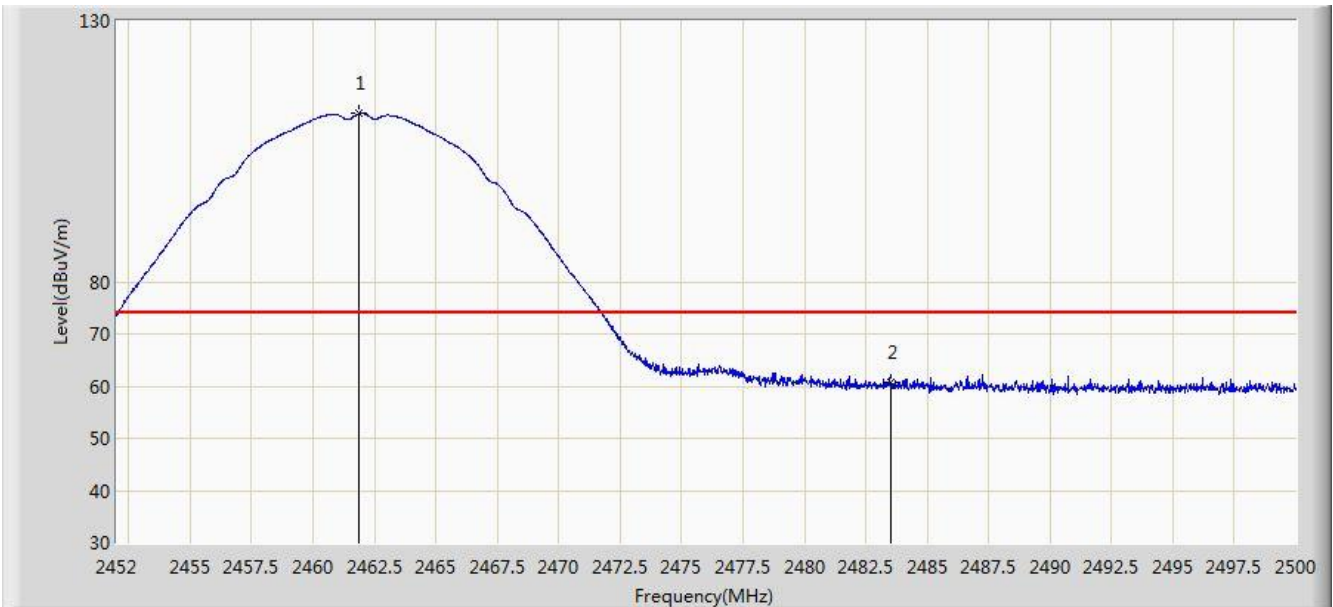

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2461.864	112.184	83.941	N/A	N/A	28.243	PK
2			2483.500	60.811	32.524	-13.189	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 03:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1	X	*	2461.240	108.763	80.520	N/A	N/A	28.243	AV
2			2483.500	47.900	19.613	-6.100	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 22:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

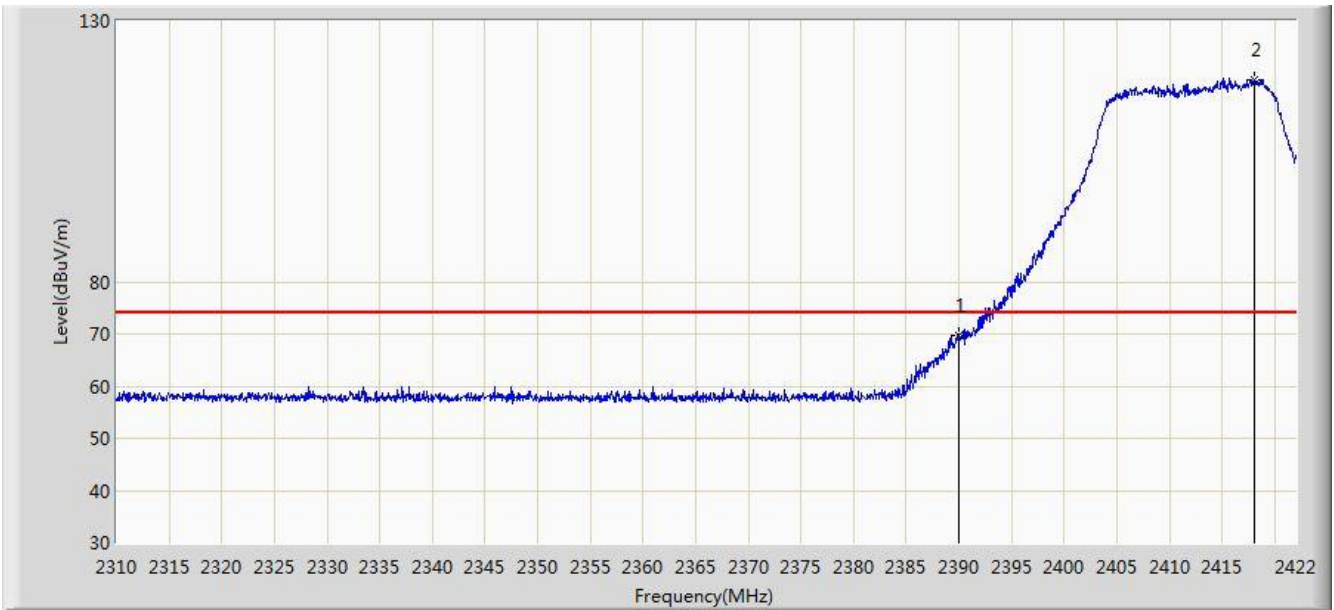


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	69.664	41.318	-4.336	74.000	28.346	PK
2		*	2418.024	118.772	90.481	N/A	N/A	28.291	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 22:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

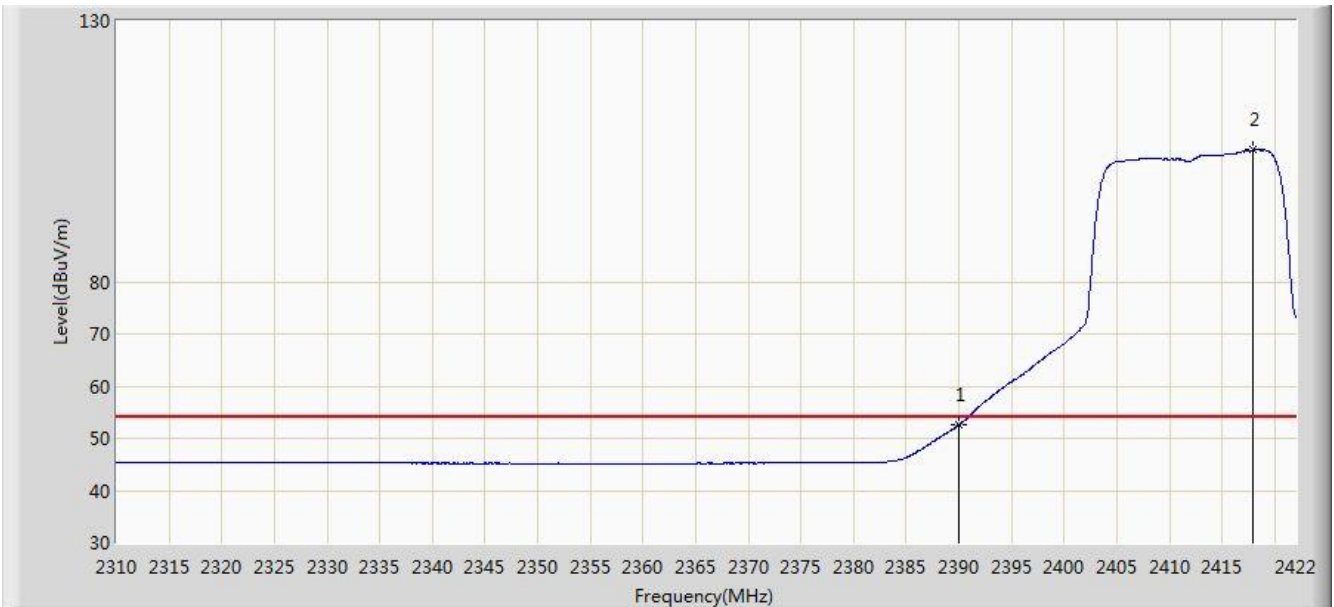


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	52.564	24.218	-1.436	54.000	28.346	AV
2		*	2417.968	105.318	77.027	N/A	N/A	28.291	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 22:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

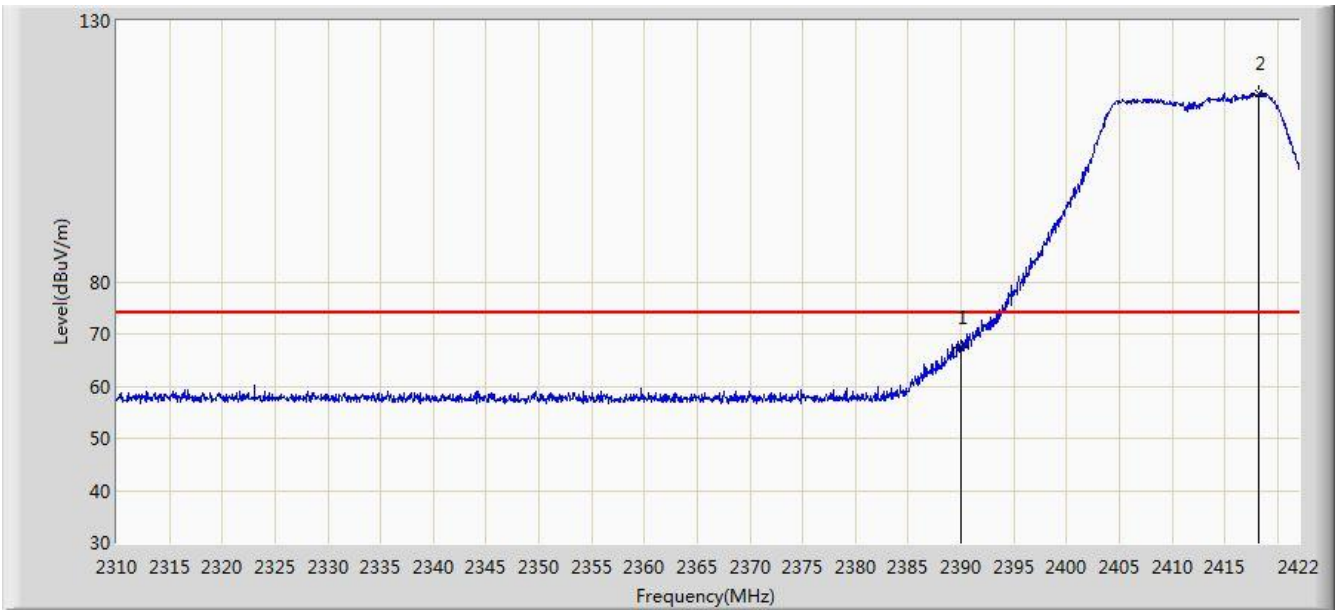


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	67.277	38.931	-6.723	74.000	28.346	PK
2		*	2418.192	116.231	87.941	N/A	N/A	28.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 22:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

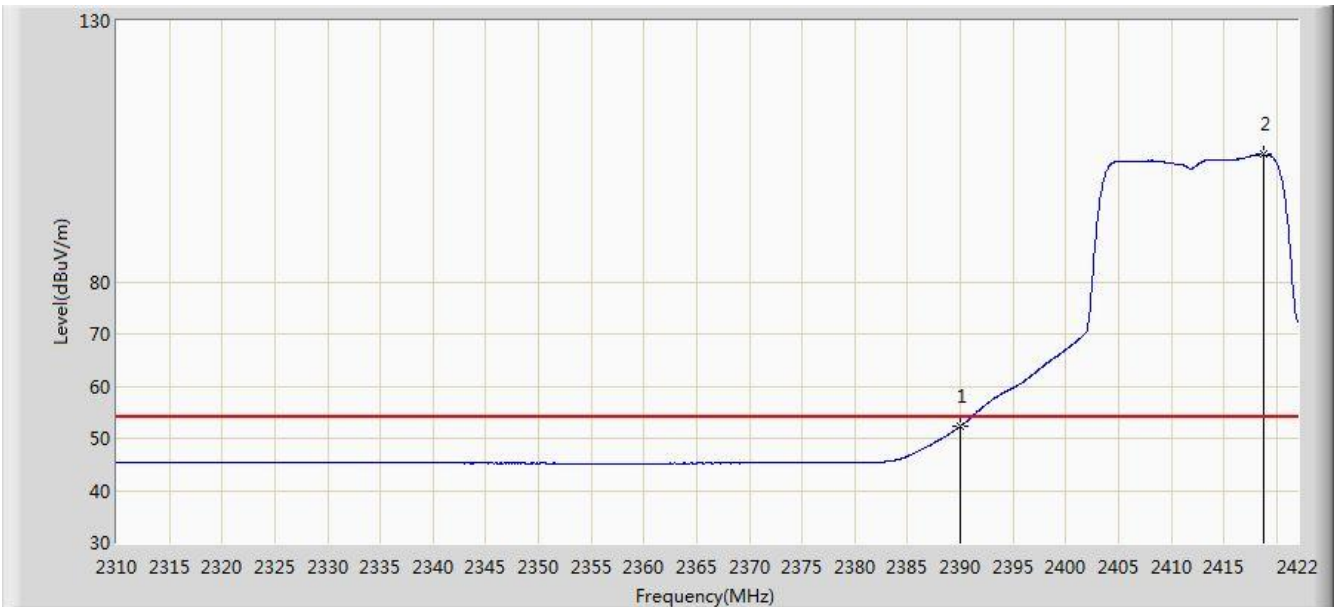


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	52.325	23.979	-1.675	54.000	28.346	AV
2		*	2418.808	104.361	76.072	N/A	N/A	28.290	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

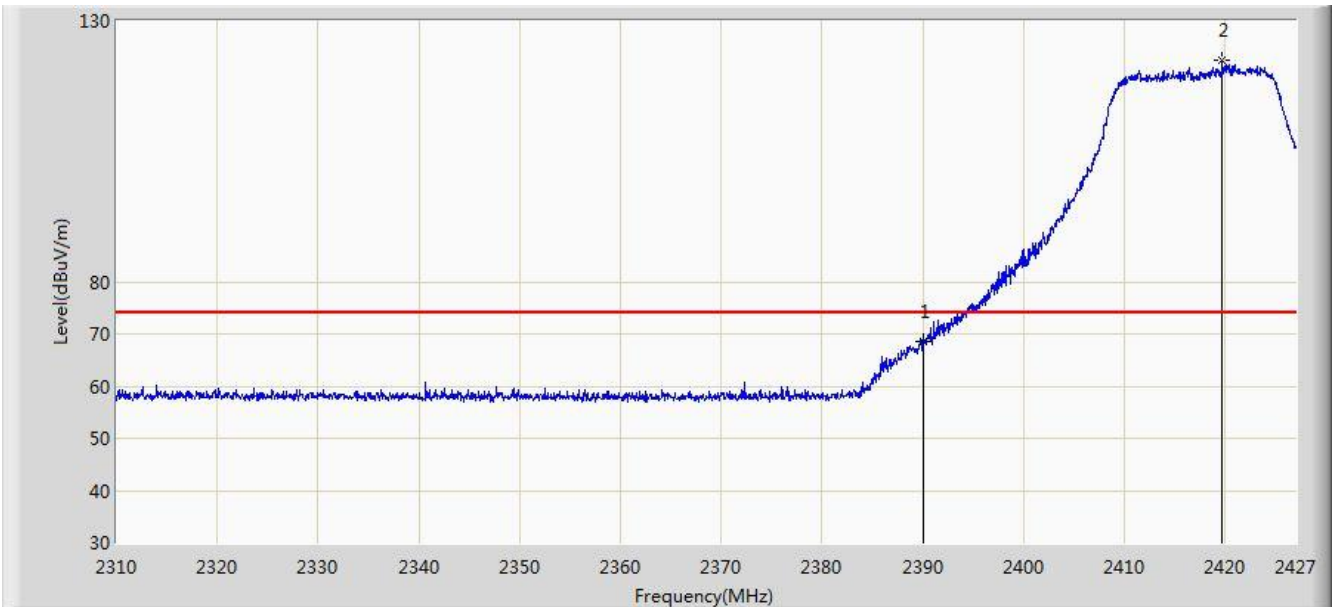


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	68.430	40.084	-5.570	74.000	28.346	PK
2		*	2419.687	122.338	94.050	N/A	N/A	28.288	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

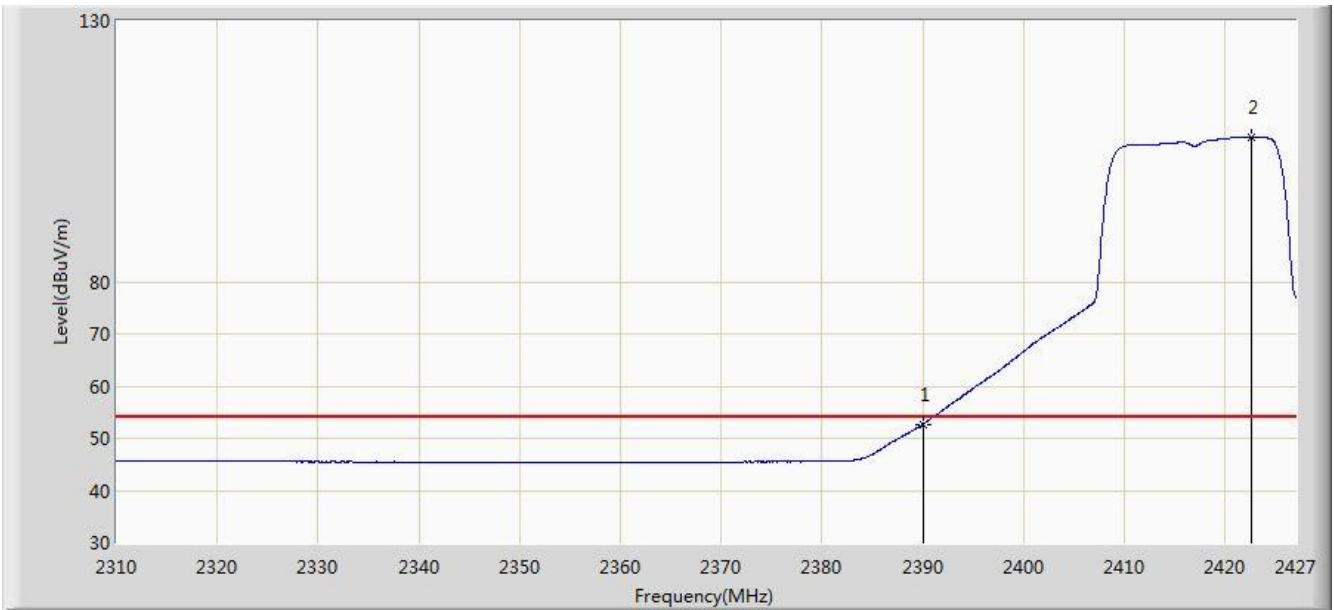


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	52.675	24.329	-1.325	54.000	28.346	AV
2		*	2422.554	107.686	79.403	N/A	N/A	28.283	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

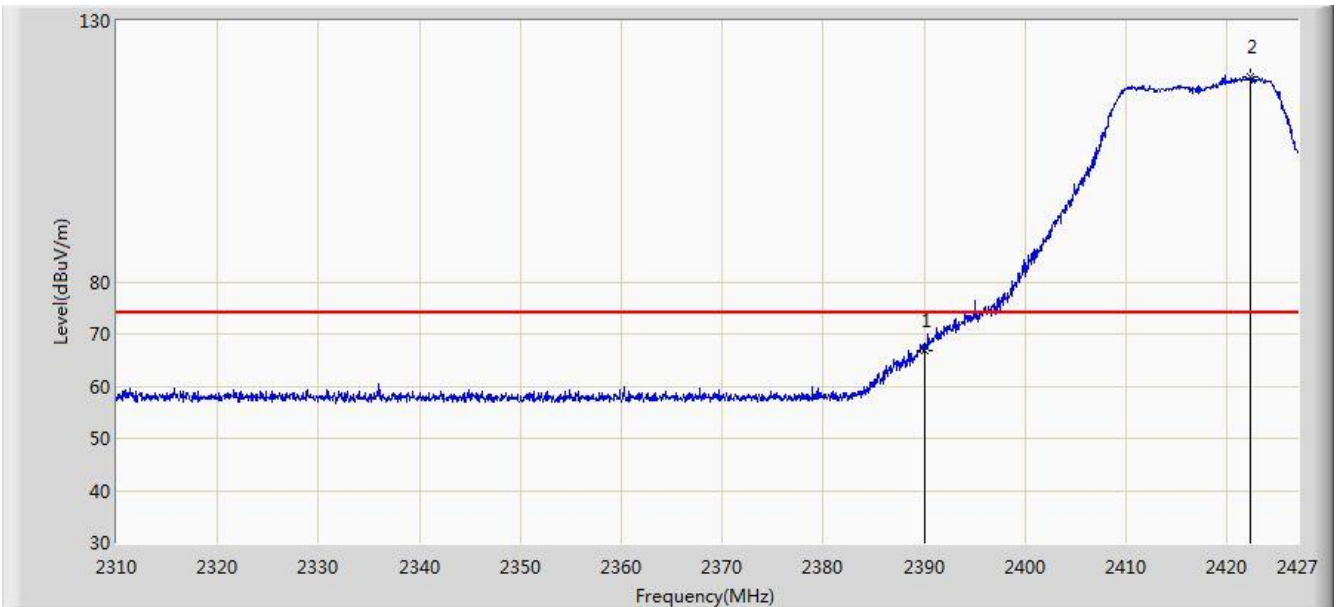


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	66.946	38.600	-7.054	74.000	28.346	PK
2		*	2422.261	119.374	91.091	N/A	N/A	28.284	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

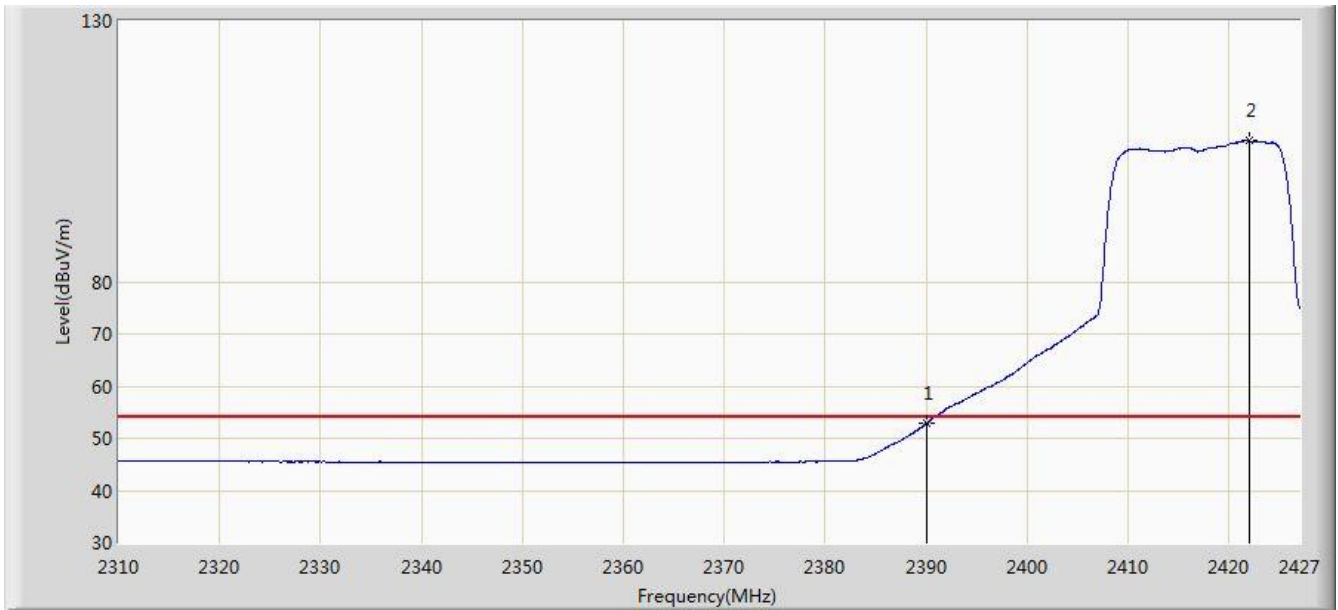


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	52.806	24.460	-1.194	54.000	28.346	AV
2		*	2422.028	106.969	78.685	N/A	N/A	28.283	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11g at channel 2437MHz	

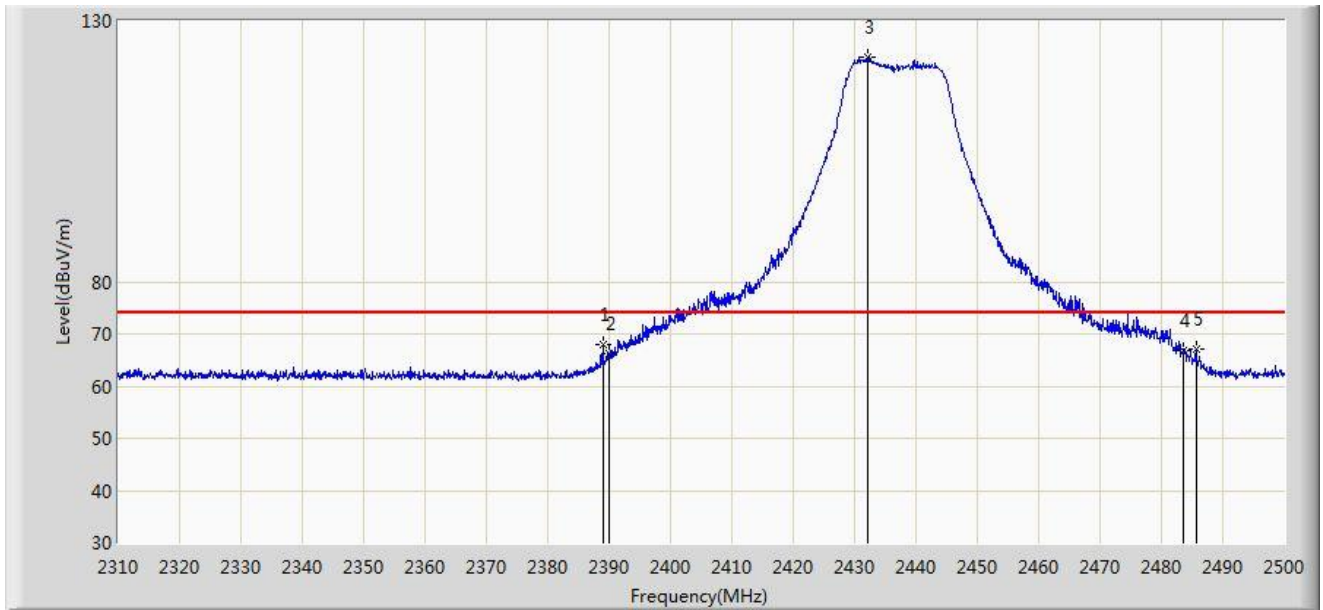


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.945	68.104	39.755	-5.896	74.000	28.349	PK
2			2390.000	66.100	37.754	-7.900	74.000	28.346	PK
3		*	2432.170	123.044	94.781	N/A	N/A	28.263	PK
4			2483.500	66.727	38.440	-7.273	74.000	28.287	PK
5			2485.655	67.044	38.753	-6.956	74.000	28.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11g at channel 2437MHz	

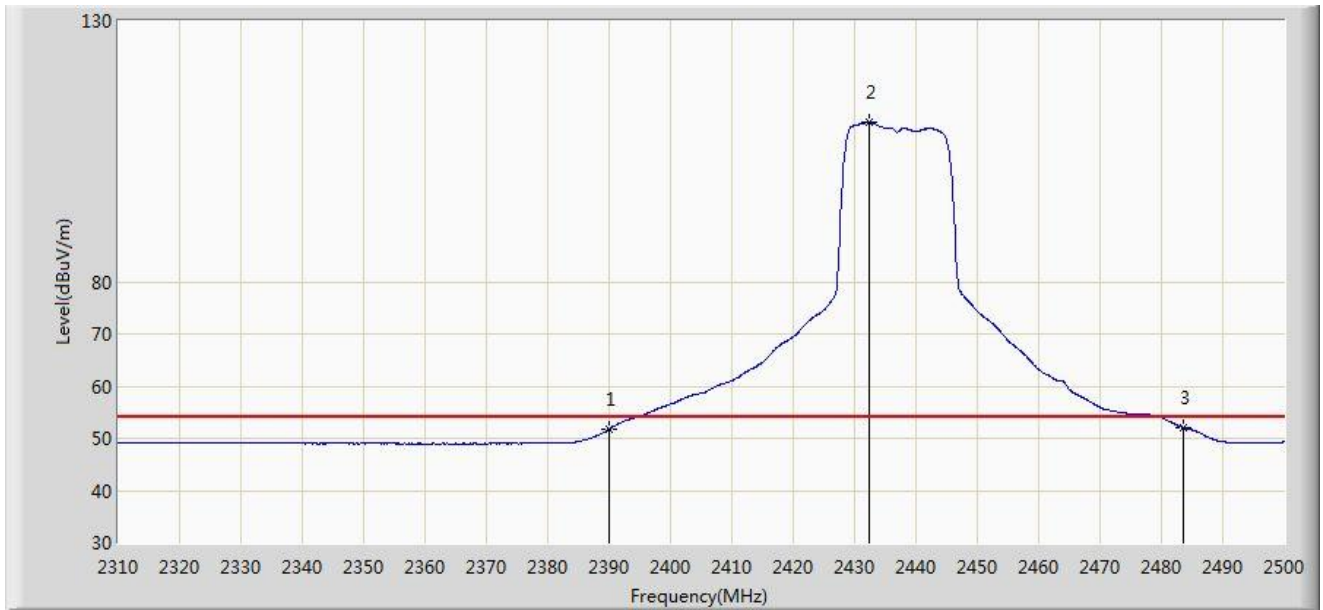


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.758	23.412	-2.242	54.000	28.346	AV
2	X	*	2432.265	110.453	82.190	N/A	N/A	28.263	AV
3			2483.500	52.087	23.800	-1.913	54.000	28.287	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11g at channel 2437MHz	

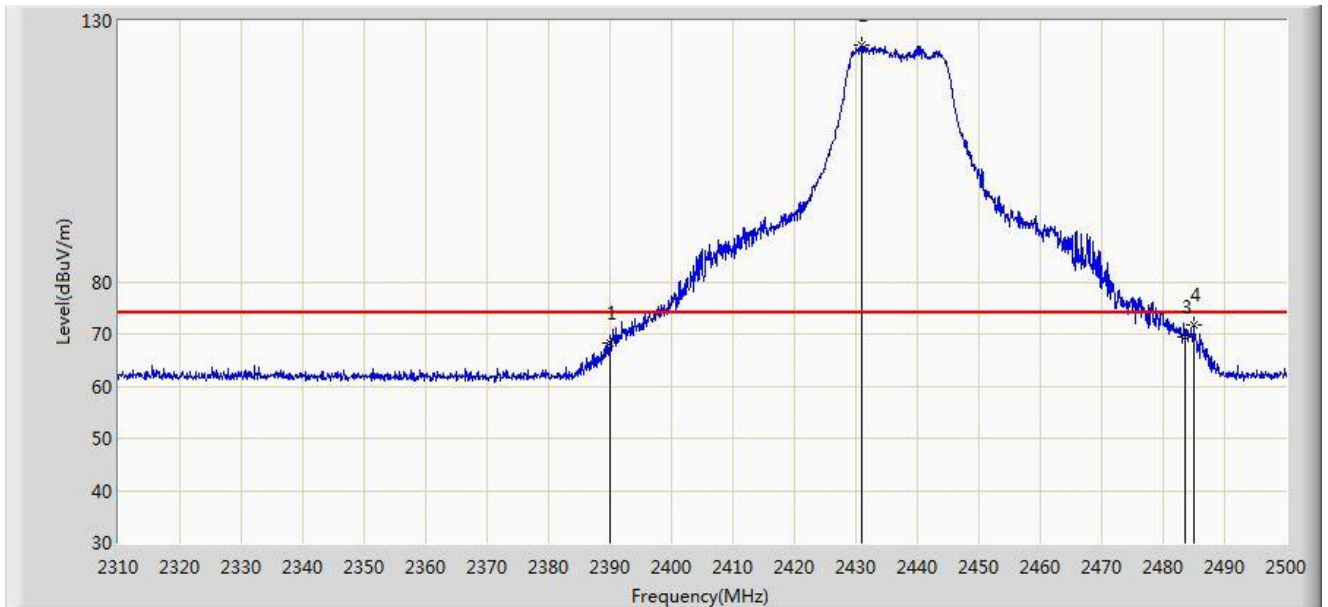


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.204	39.858	-5.796	74.000	28.346	PK
2		*	2431.030	125.370	97.104	N/A	N/A	28.266	PK
3			2483.500	69.495	41.208	-4.505	74.000	28.287	PK
4			2484.895	71.608	43.318	-2.392	74.000	28.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11g at channel 2437MHz	

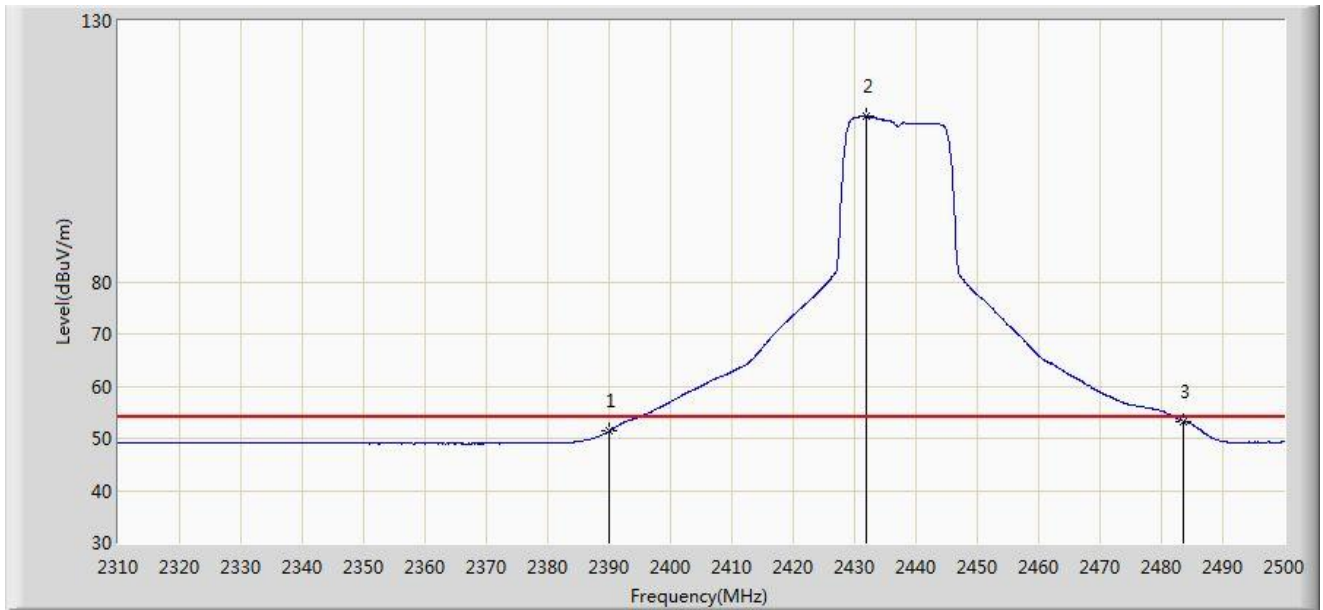


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.414	23.068	-2.586	54.000	28.346	AV
2	X	*	2431.980	111.606	83.343	N/A	N/A	28.263	AV
3			2483.500	53.277	24.990	-0.723	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

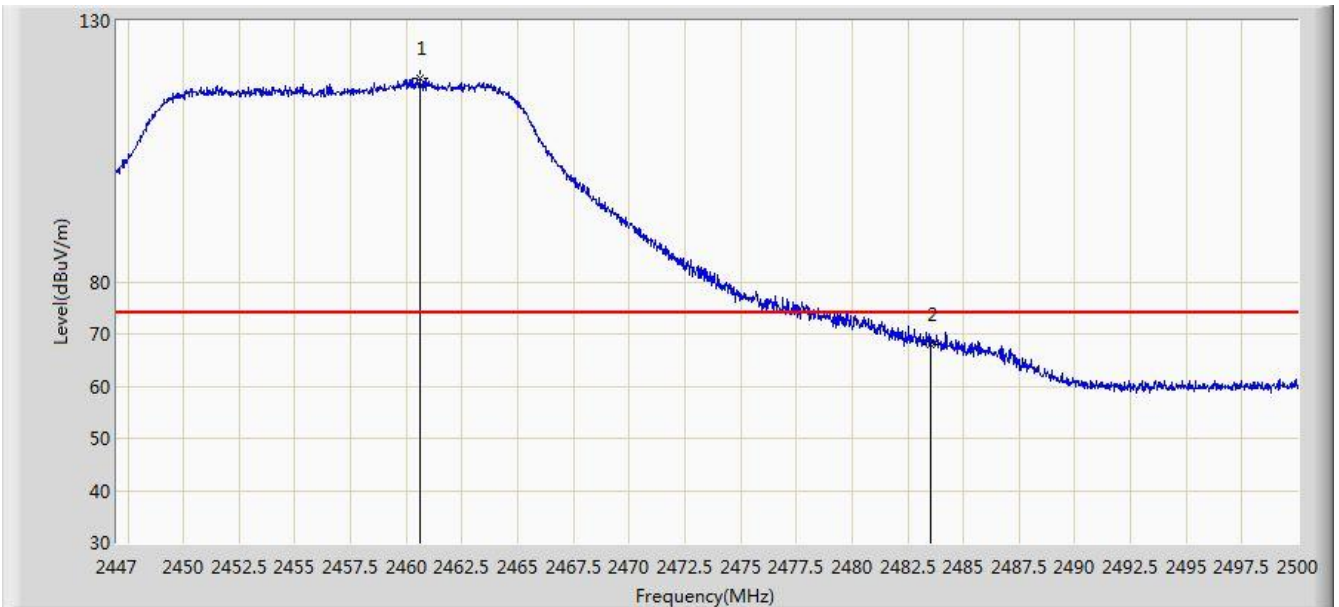


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2460.594	119.090	90.848	N/A	N/A	28.242	PK
2			2483.500	67.904	39.617	-6.096	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

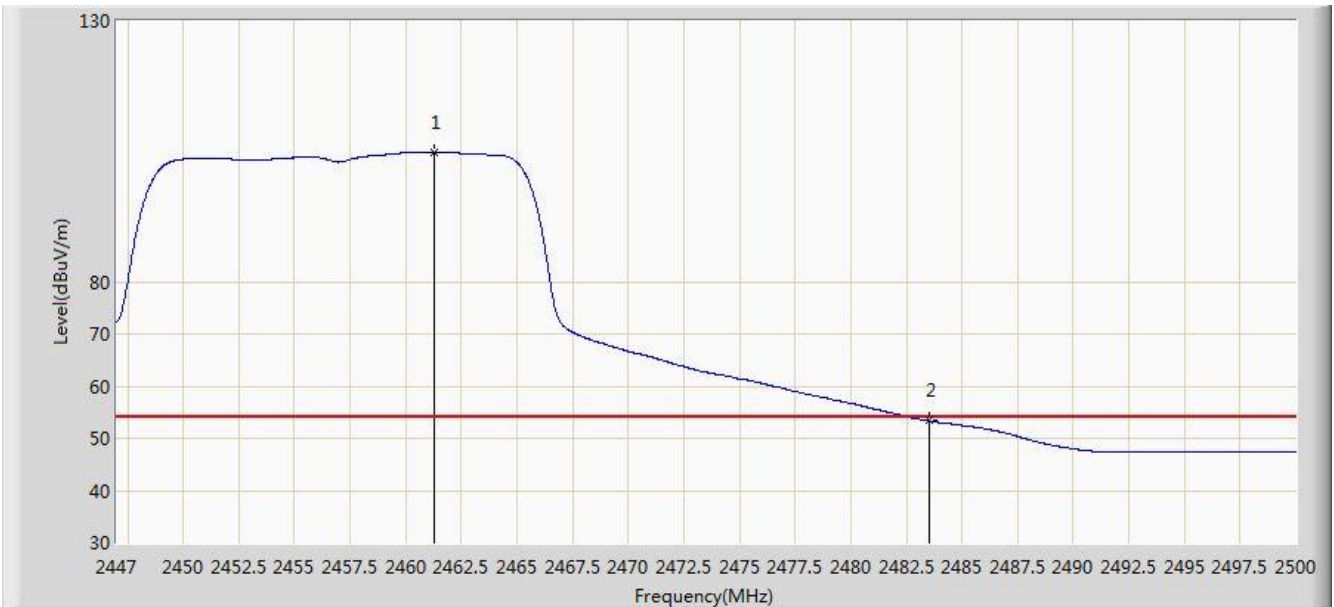


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2461.310	104.826	76.583	N/A	N/A	28.243	AV
2			2483.500	53.339	25.052	-0.661	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

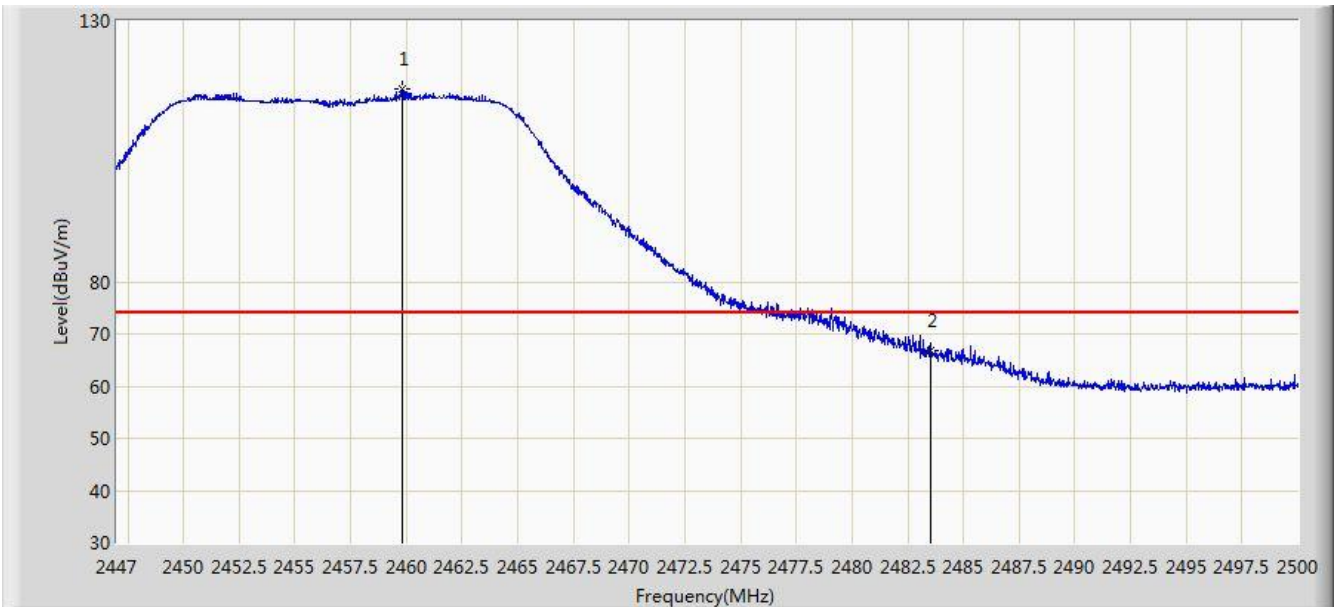


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2459.800	116.828	88.587	N/A	N/A	28.241	PK
2			2483.500	66.760	38.473	-7.240	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

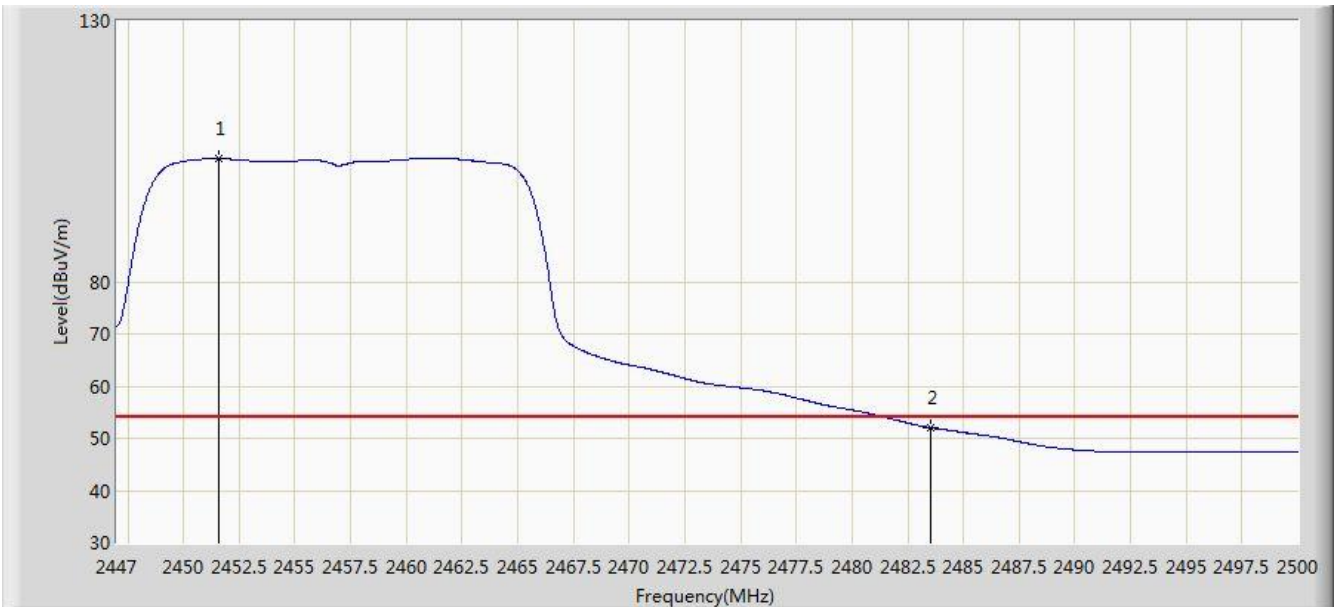


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2451.584	103.555	75.321	N/A	N/A	28.234	AV
2			2483.500	52.034	23.747	-1.966	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

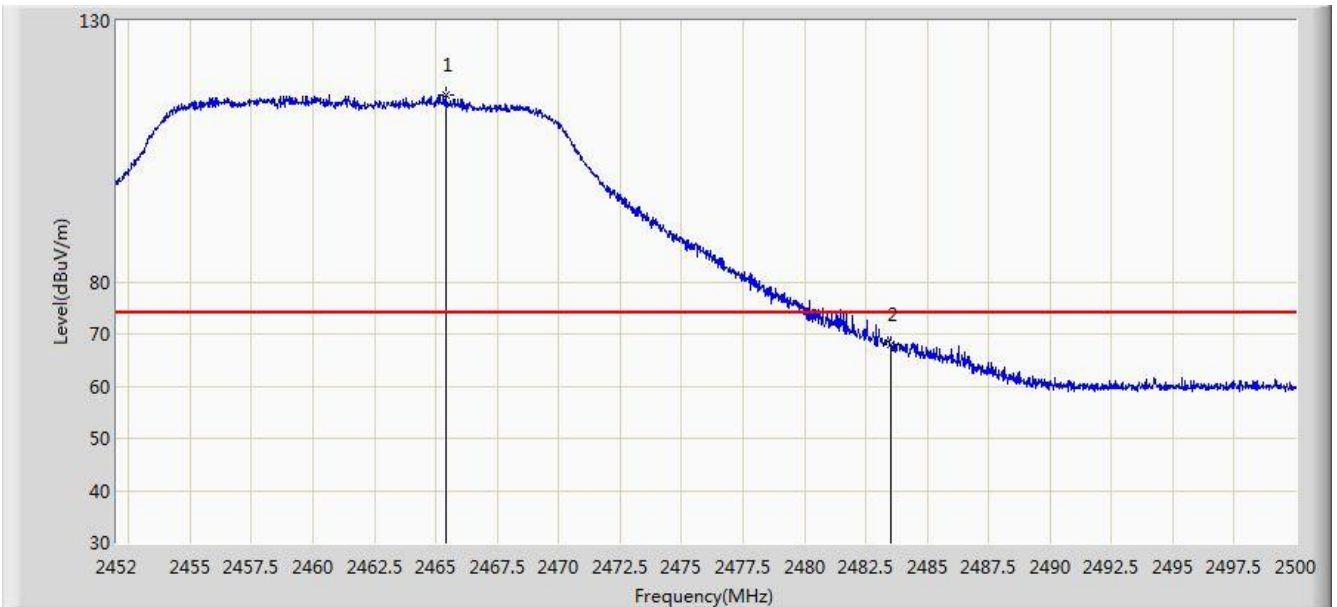


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2465.392	115.662	87.413	N/A	N/A	28.249	PK
2			2483.500	68.001	39.714	-5.999	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

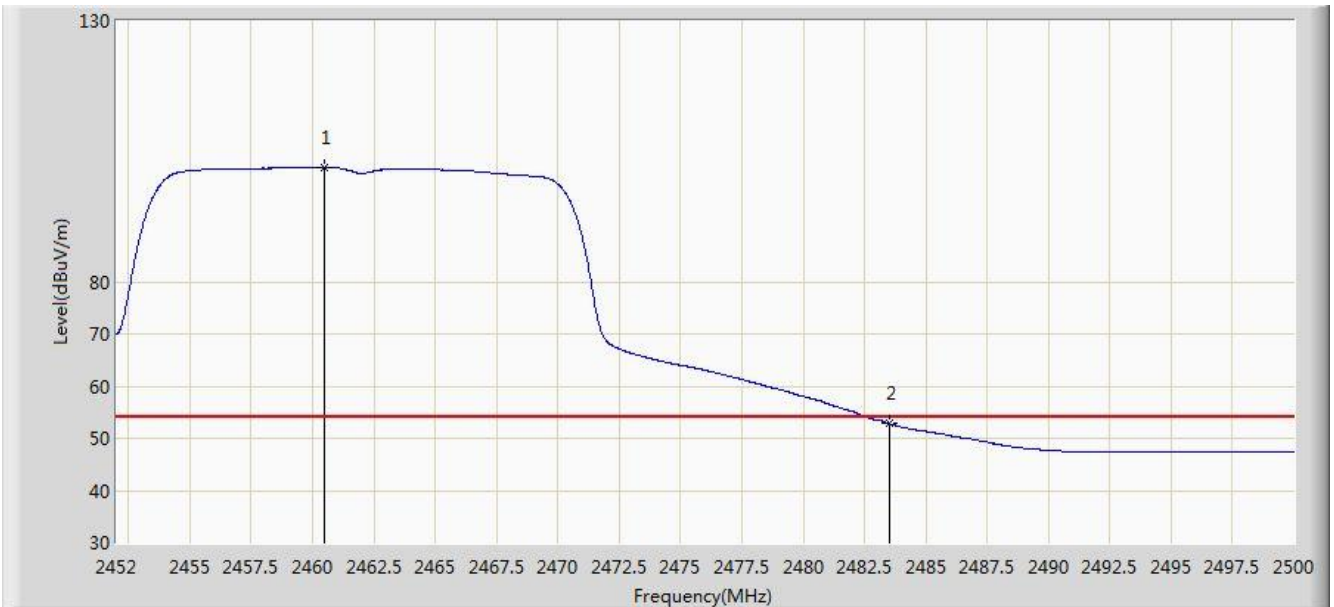


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2460.496	101.934	73.692	N/A	N/A	28.242	AV
2			2483.500	52.759	24.472	-1.241	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

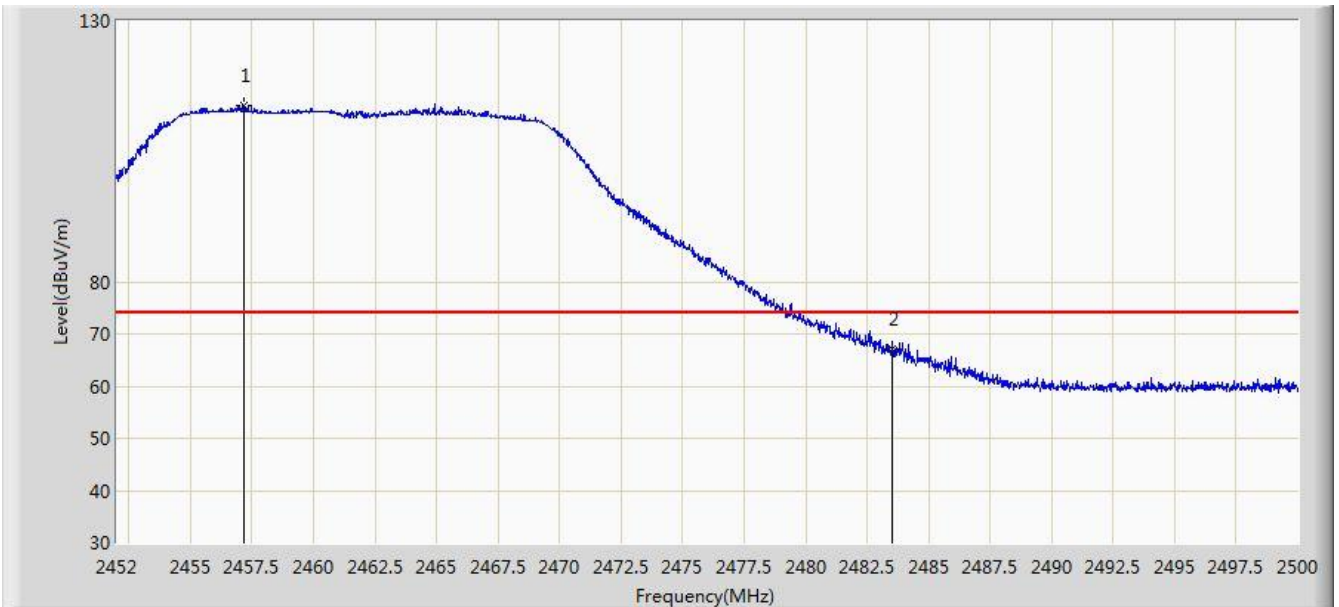


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2457.184	113.905	85.666	N/A	N/A	28.239	PK
2			2483.500	67.024	38.737	-6.976	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

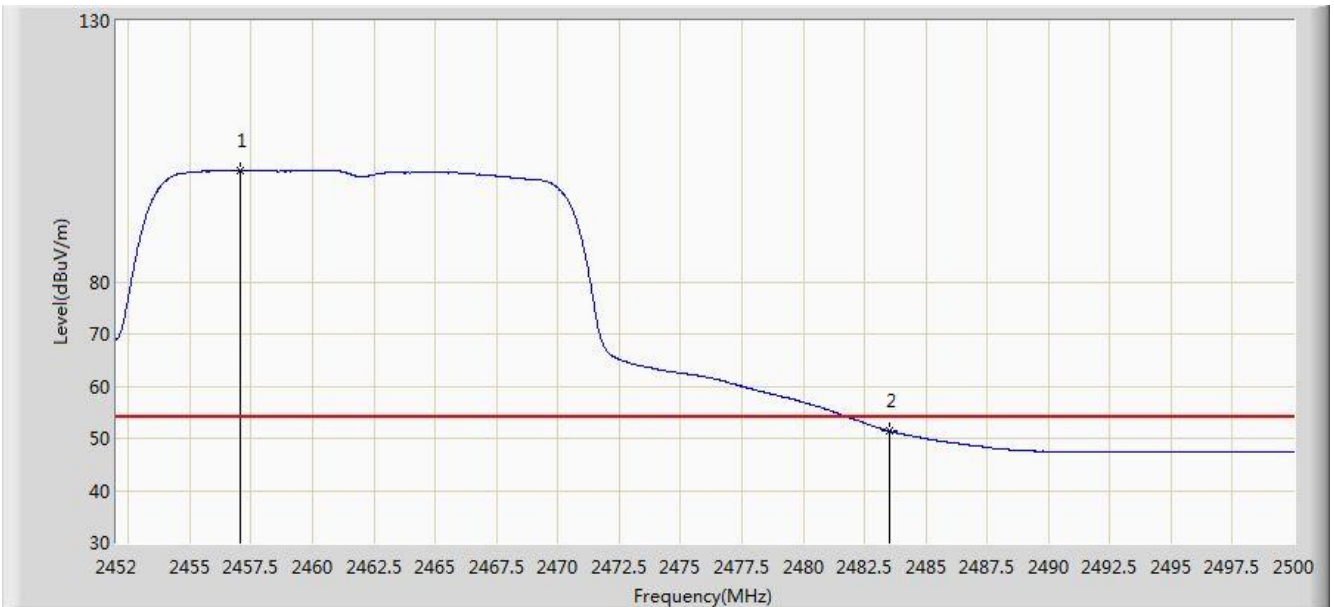


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2457.040	101.291	73.052	N/A	N/A	28.239	AV
2			2483.500	51.407	23.120	-2.593	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

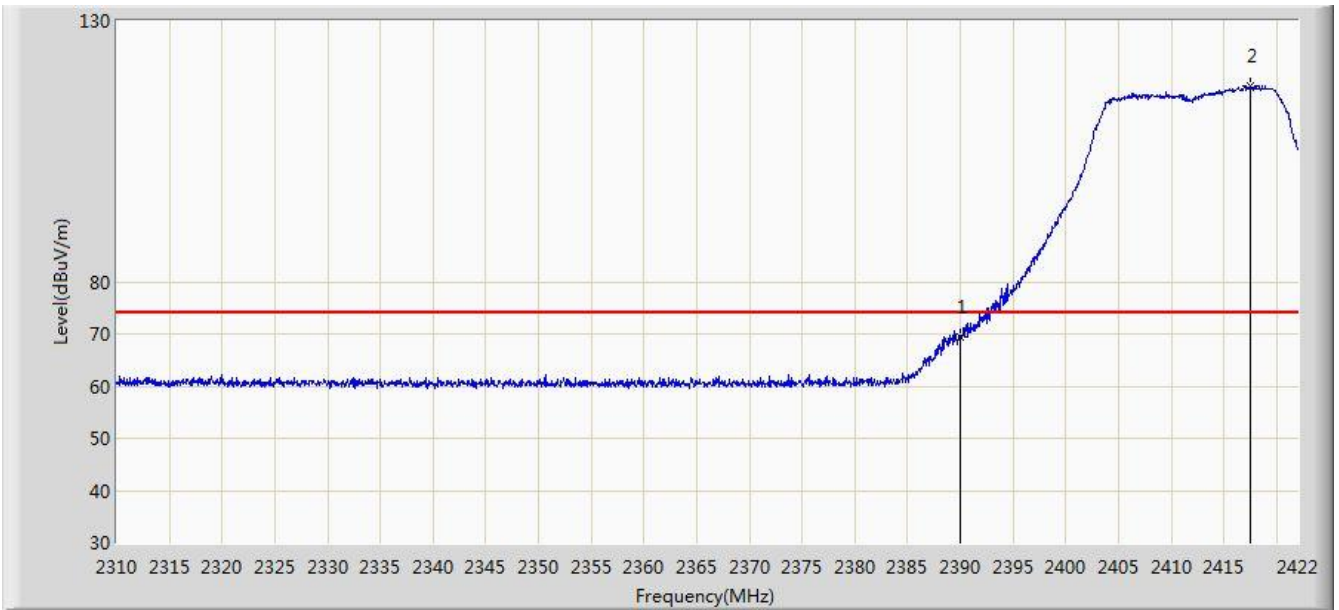

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	69.456	41.110	-4.544	74.000	28.346	PK
2		*	2417.576	117.576	89.284	N/A	N/A	28.292	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.437	25.091	-0.563	54.000	28.346	AV
2		*	2418.136	102.977	74.686	N/A	N/A	28.290	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

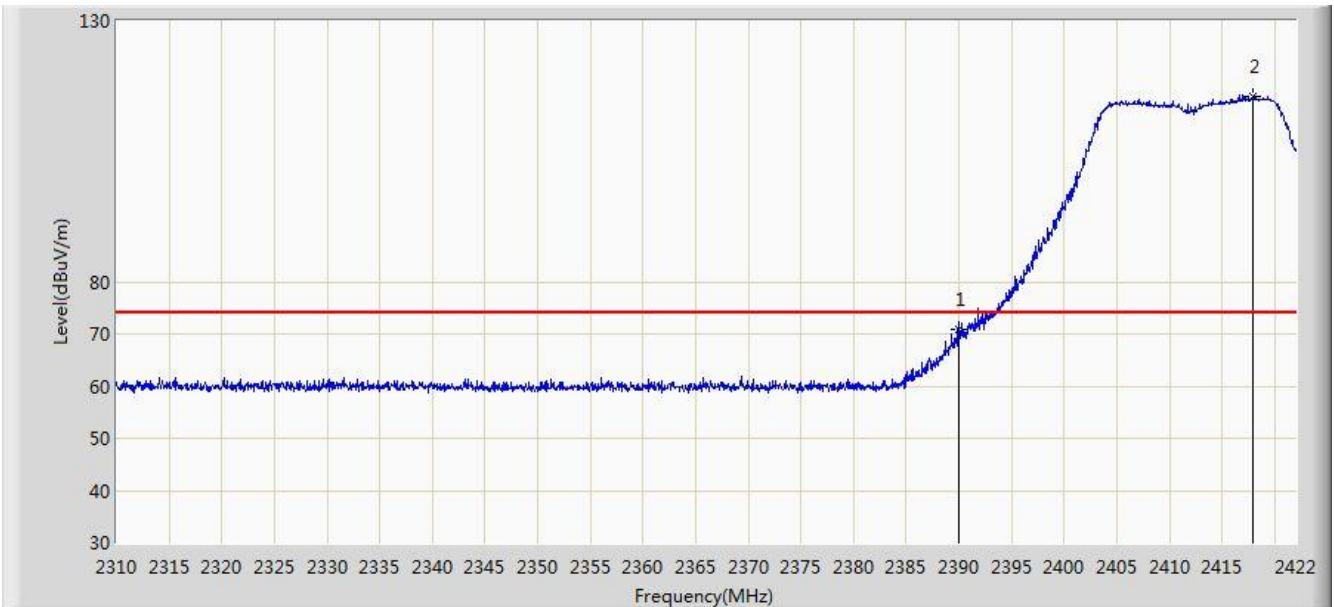


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	70.768	42.422	-3.232	74.000	28.346	PK
2		*	2417.968	115.591	87.300	N/A	N/A	28.291	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

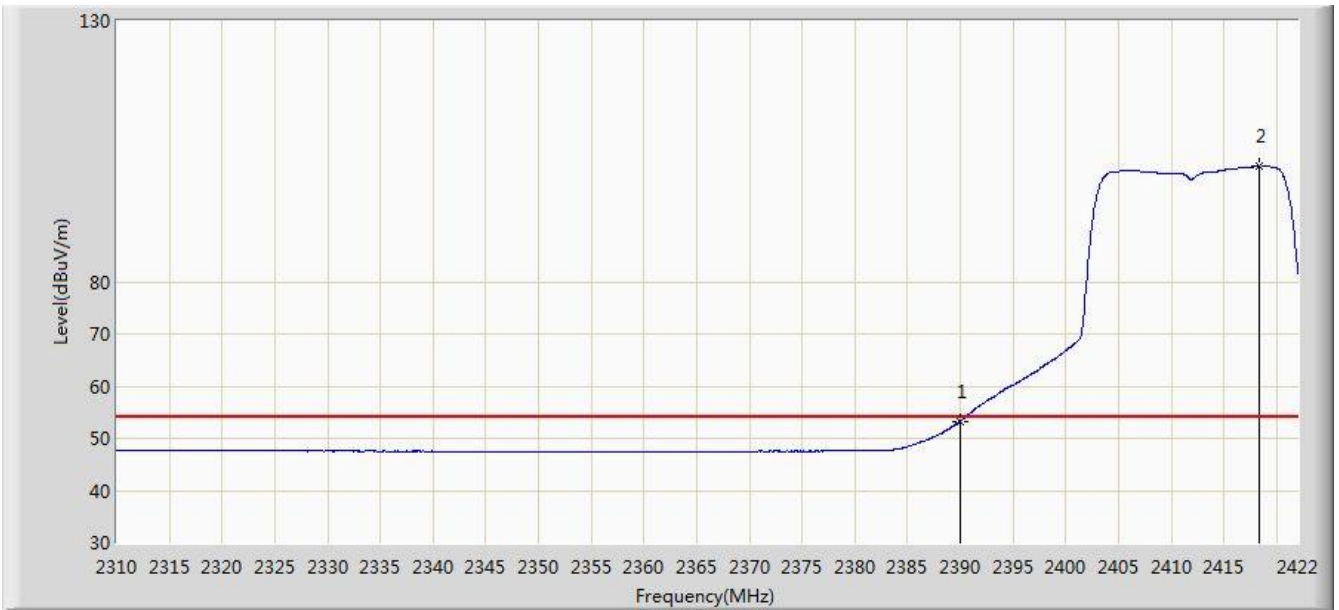


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.322	24.976	-0.678	54.000	28.346	AV
2		*	2418.304	102.045	73.755	N/A	N/A	28.290	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

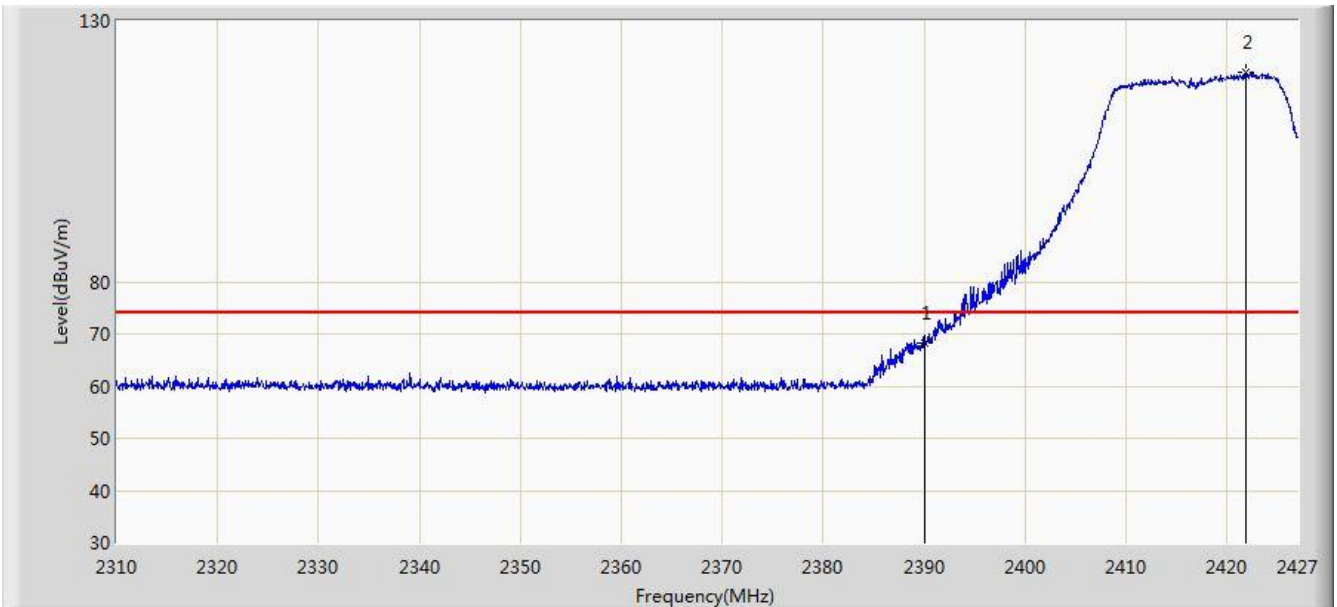


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	68.148	39.802	-5.852	74.000	28.346	PK
2		*	2421.910	120.252	91.968	N/A	N/A	28.283	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

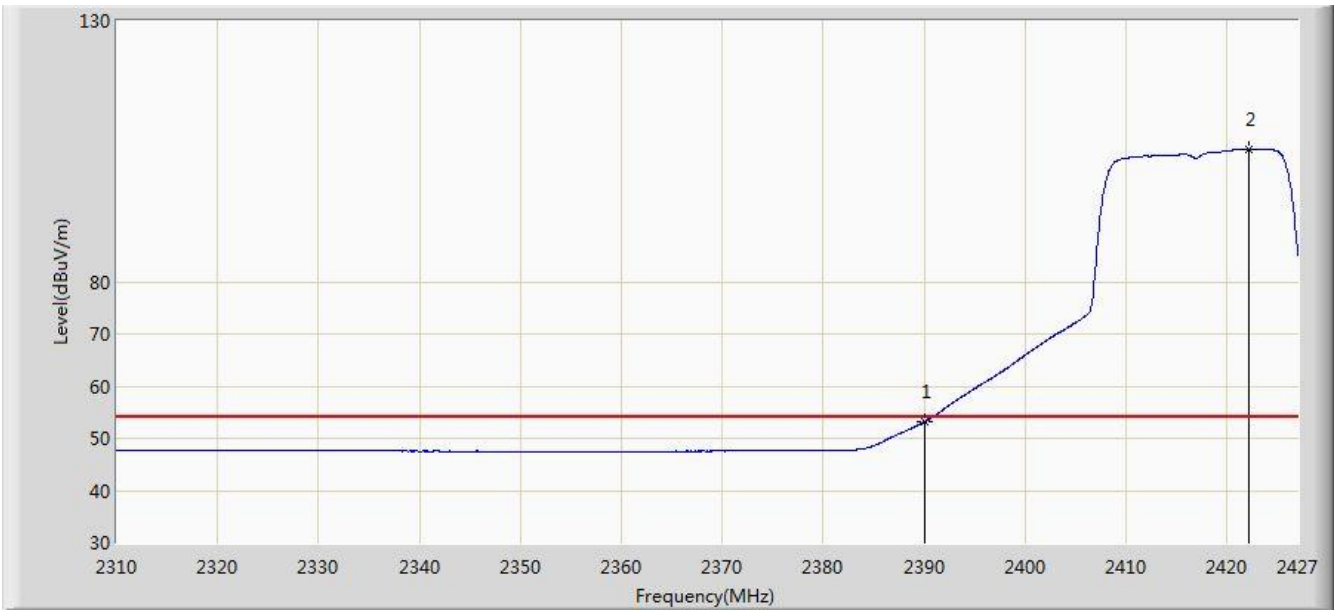


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.144	24.798	-0.856	54.000	28.346	AV
2		*	2422.203	105.382	77.099	N/A	N/A	28.284	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

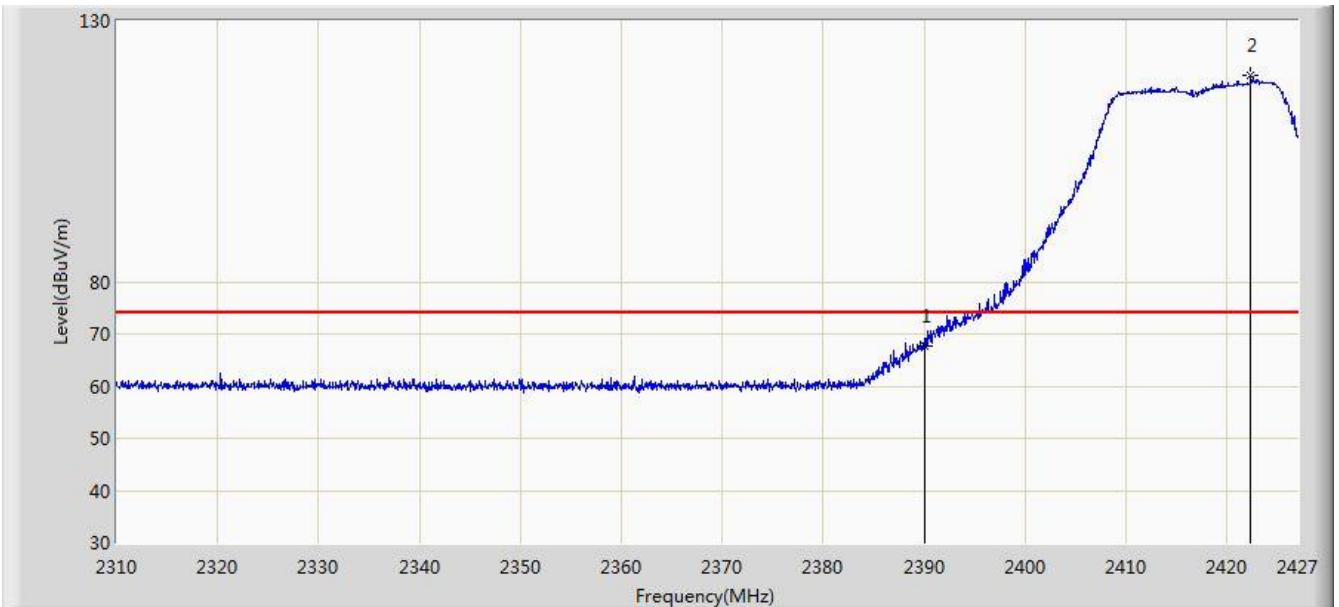


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	67.583	39.237	-6.417	74.000	28.346	PK
2		*	2422.378	119.448	91.165	N/A	N/A	28.283	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/08 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

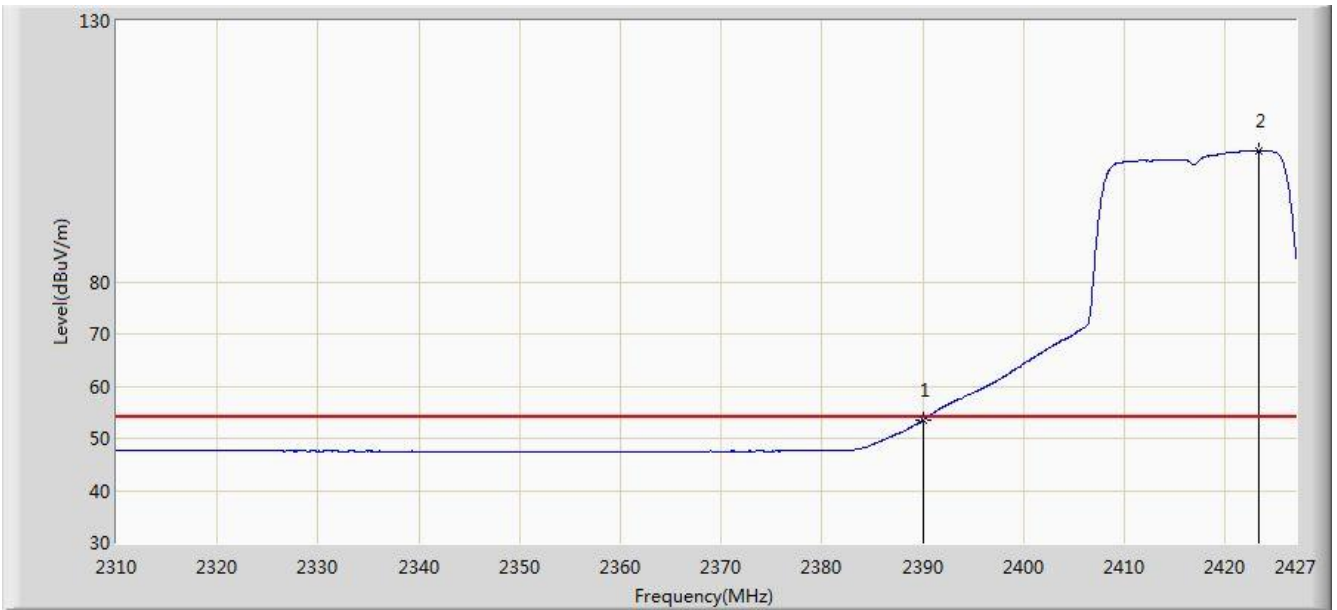


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.461	25.115	-0.539	54.000	28.346	AV
2		*	2423.314	105.028	76.747	N/A	N/A	28.281	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

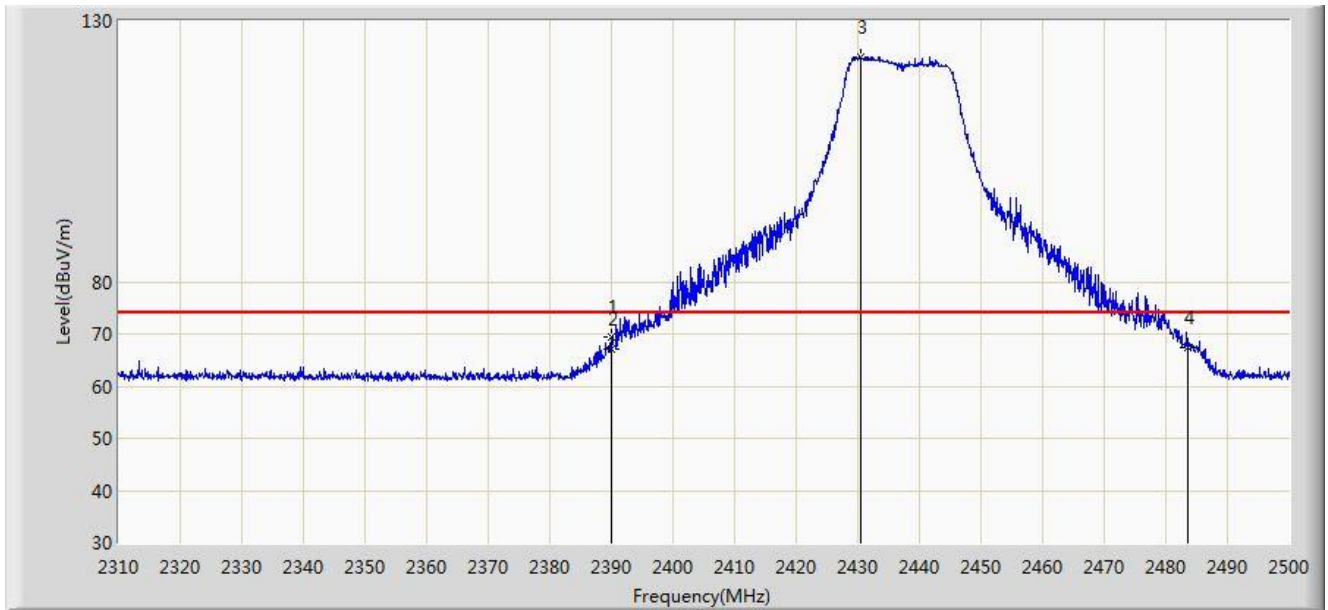


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	69.540	41.194	-4.460	74.000	28.346	PK
2			2390.000	67.211	38.865	-6.789	74.000	28.346	PK
3		*	2430.460	123.138	94.871	N/A	N/A	28.267	PK
4			2483.500	67.305	39.018	-6.695	74.000	28.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

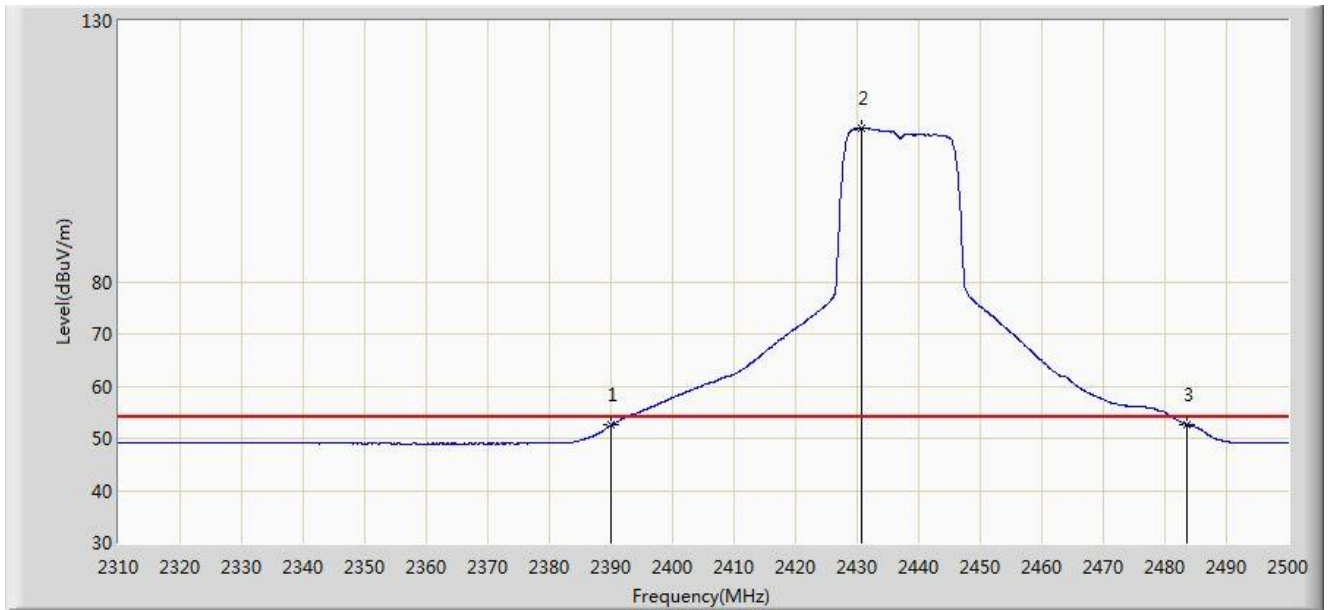


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.486	24.140	-1.514	54.000	28.346	AV
2	X	*	2430.745	109.379	81.113	N/A	N/A	28.266	AV
3			2483.500	52.660	24.373	-1.340	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

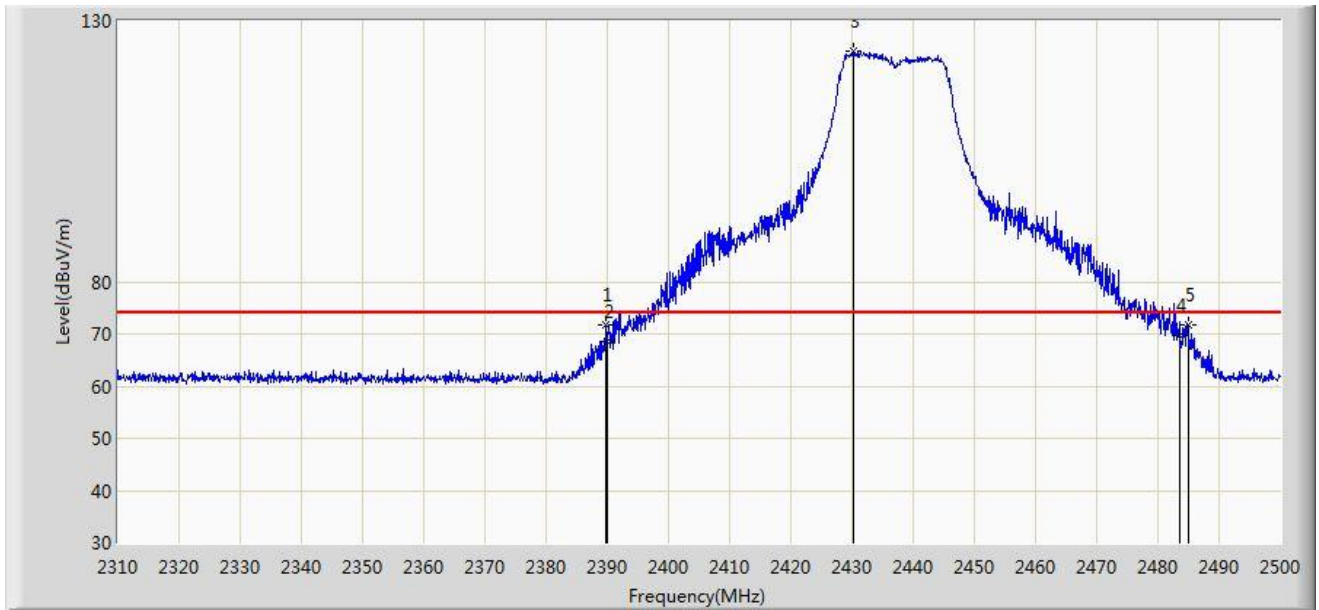


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	71.822	43.476	-2.178	74.000	28.346	PK
2			2390.000	68.462	40.116	-5.538	74.000	28.346	PK
3		*	2430.175	124.297	96.029	N/A	N/A	28.268	PK
4			2483.500	69.838	41.551	-4.162	74.000	28.287	PK
5			2484.990	71.727	43.437	-2.273	74.000	28.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

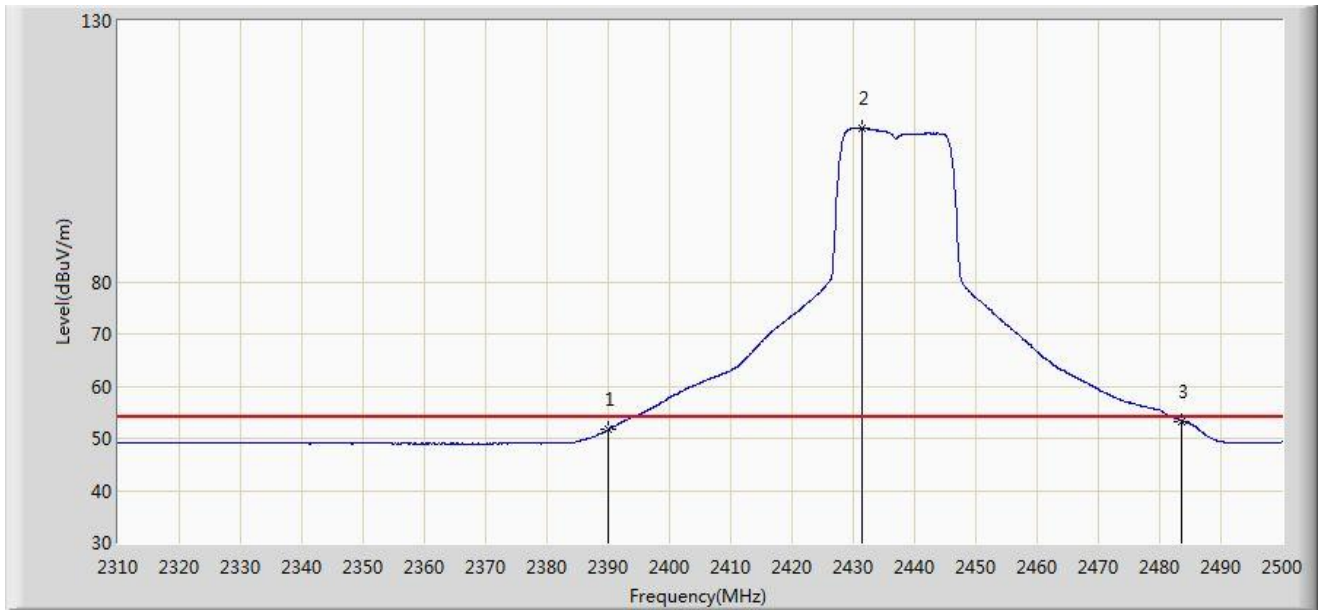


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.646	23.300	-2.354	54.000	28.346	AV
2	X	*	2431.315	109.449	81.184	N/A	N/A	28.265	AV
3			2483.500	53.330	25.043	-0.670	54.000	28.287	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

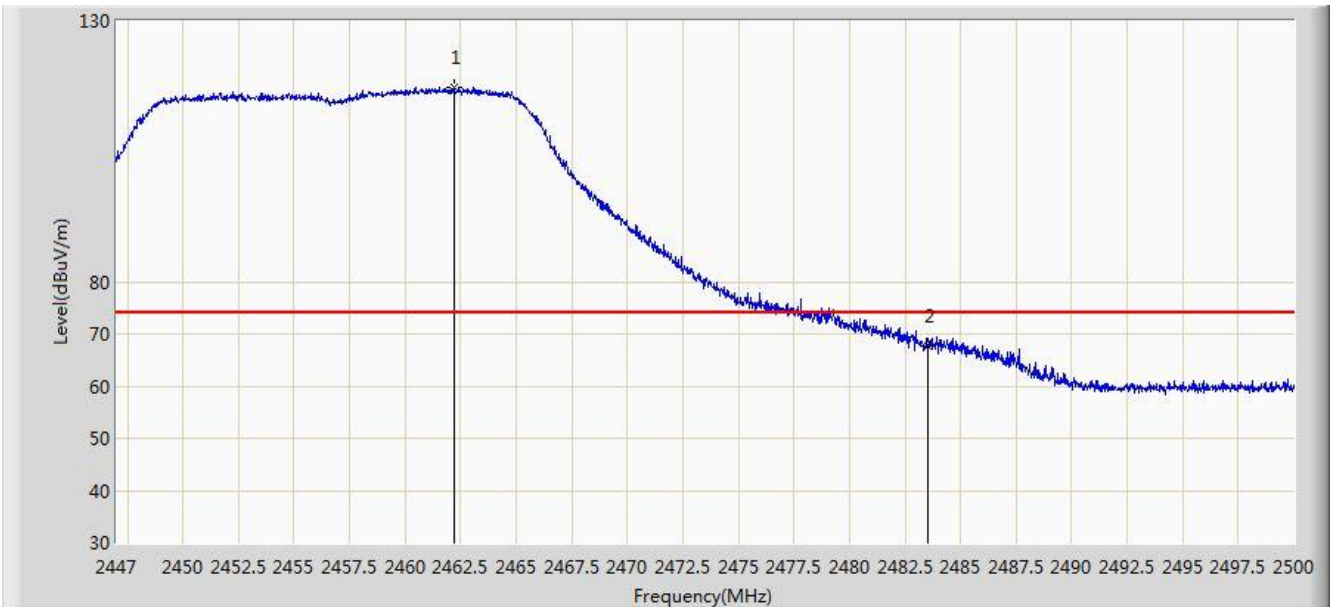


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2462.211	117.226	88.982	N/A	N/A	28.244	PK
2			2483.500	67.724	39.437	-6.276	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

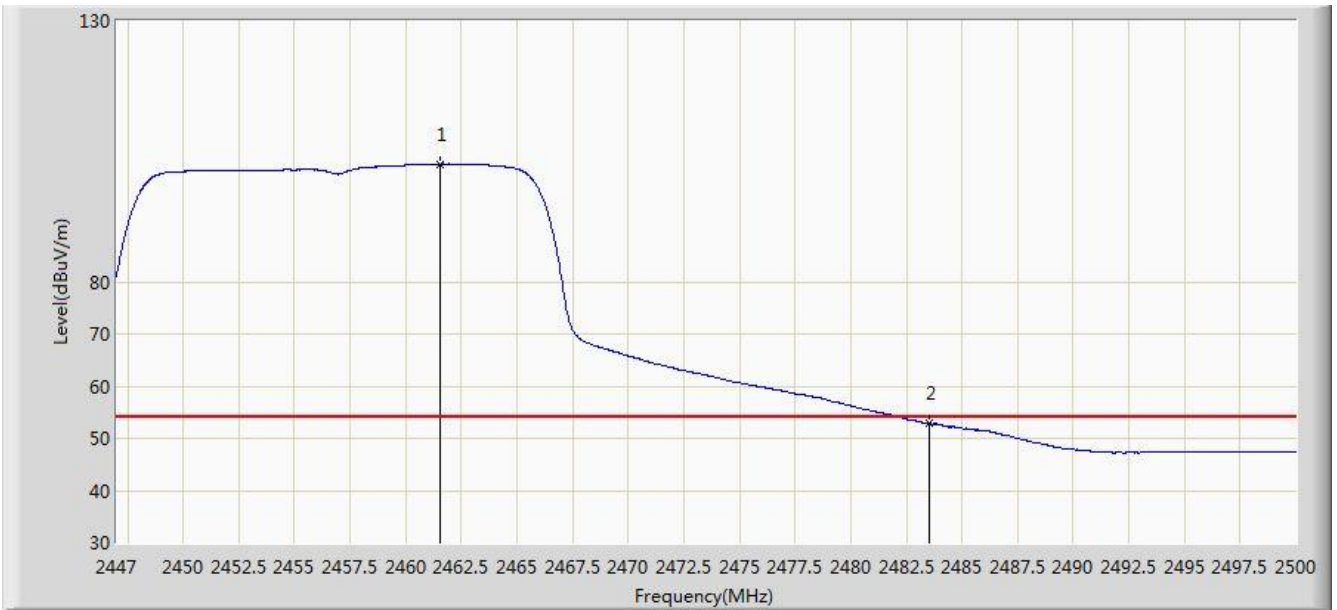


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2461.549	102.567	74.324	N/A	N/A	28.243	AV
2			2483.500	52.782	24.495	-1.218	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

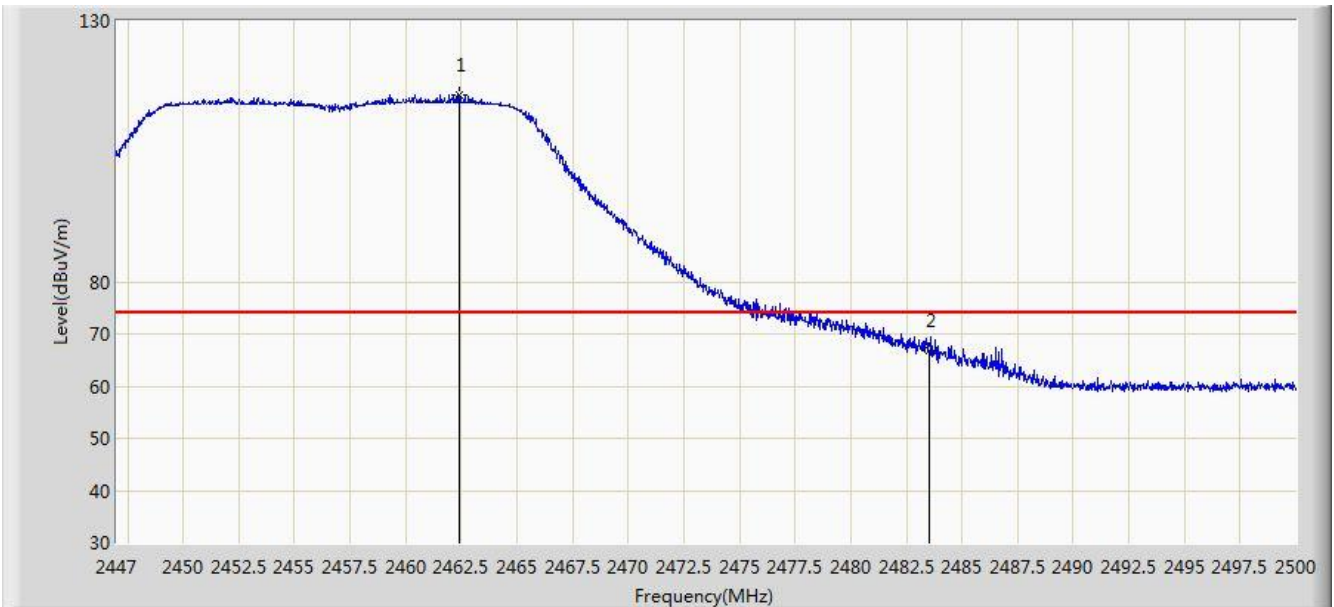


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2462.396	115.899	87.655	N/A	N/A	28.244	PK
2			2483.500	66.767	38.480	-7.233	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

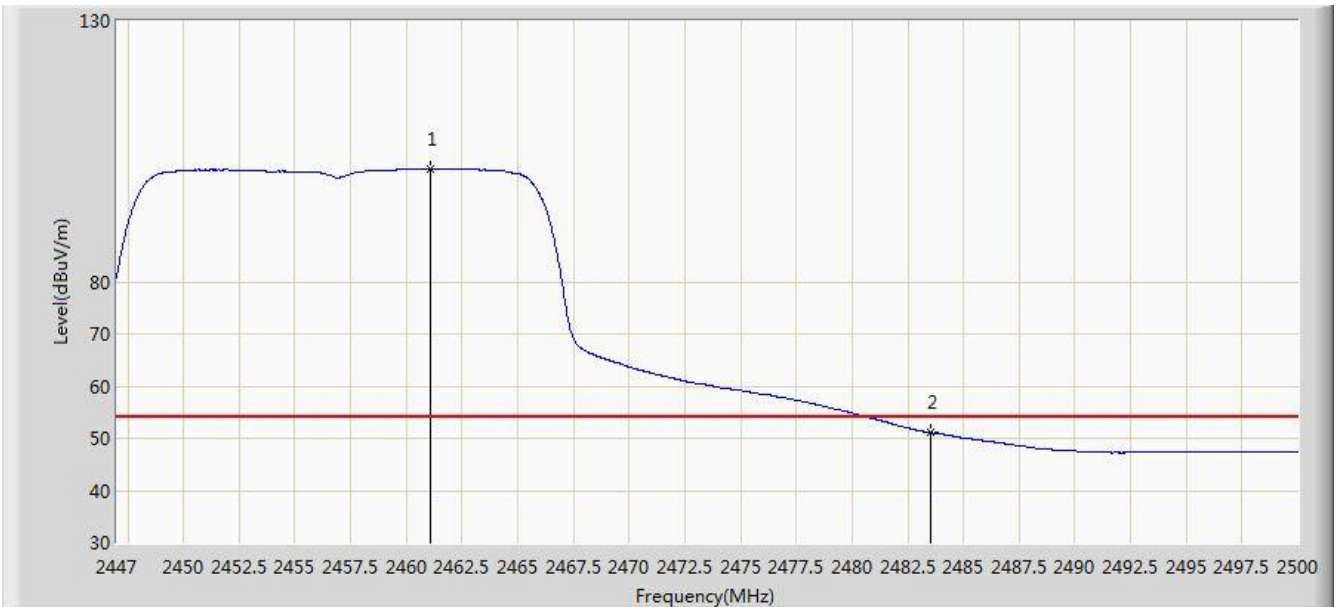


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2461.072	101.631	73.388	N/A	N/A	28.243	AV
2			2483.500	51.080	22.793	-2.920	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

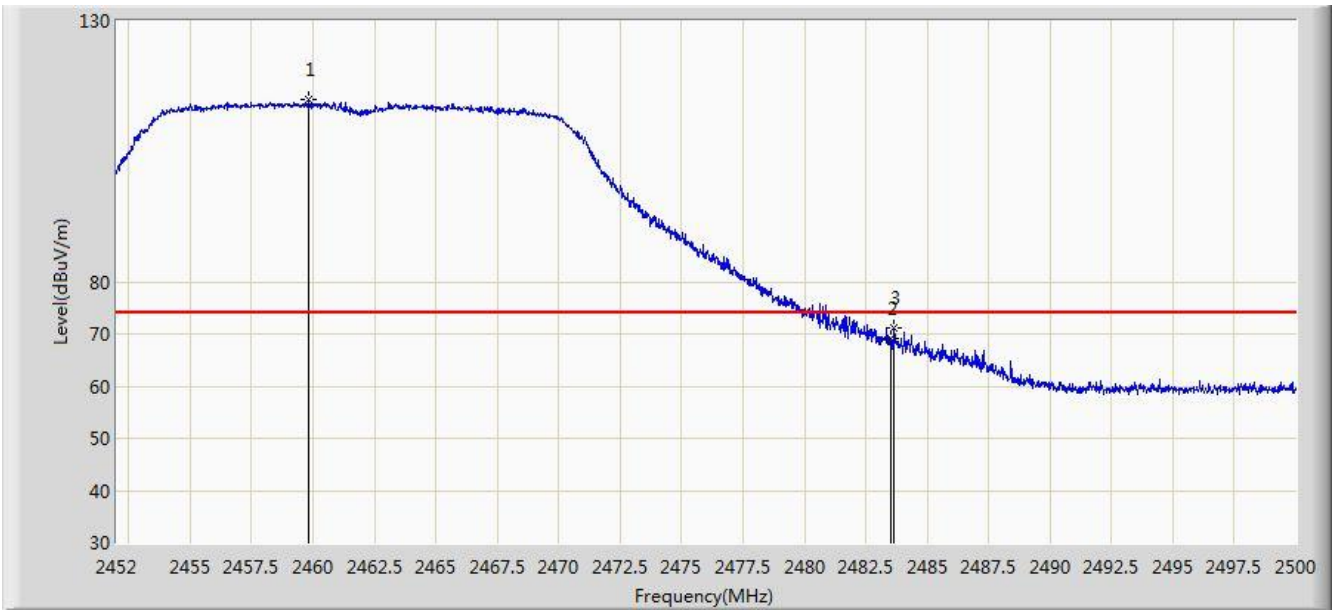


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2459.824	114.838	86.597	N/A	N/A	28.241	PK
2			2483.500	69.095	40.808	-4.905	74.000	28.287	PK
3			2483.656	71.260	42.973	-2.740	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

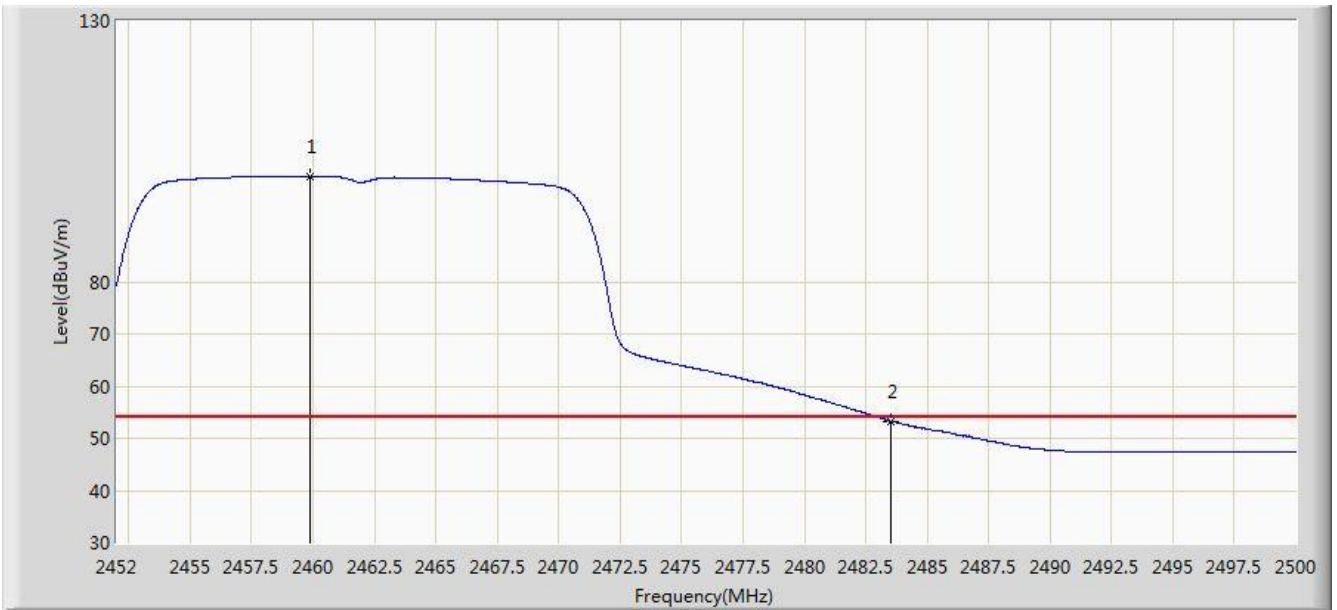


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2459.896	100.218	71.977	N/A	N/A	28.241	AV
2			2483.500	53.275	24.988	-0.725	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

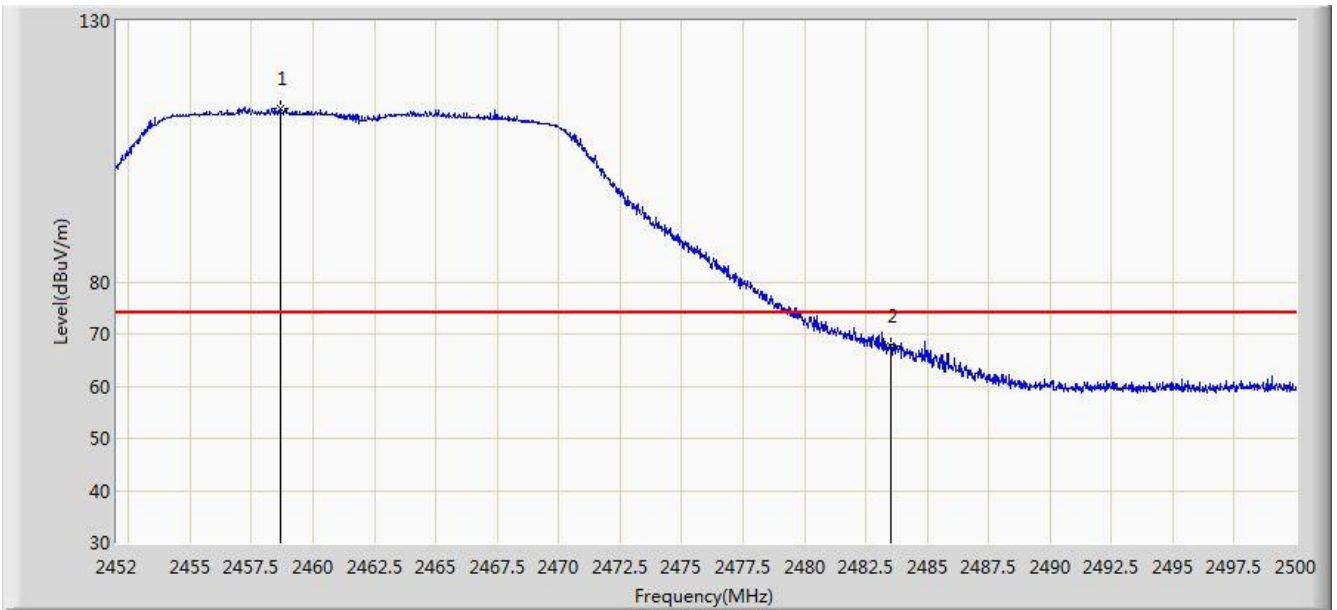


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2458.648	113.087	84.847	N/A	N/A	28.240	PK
2			2483.500	67.583	39.296	-6.417	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

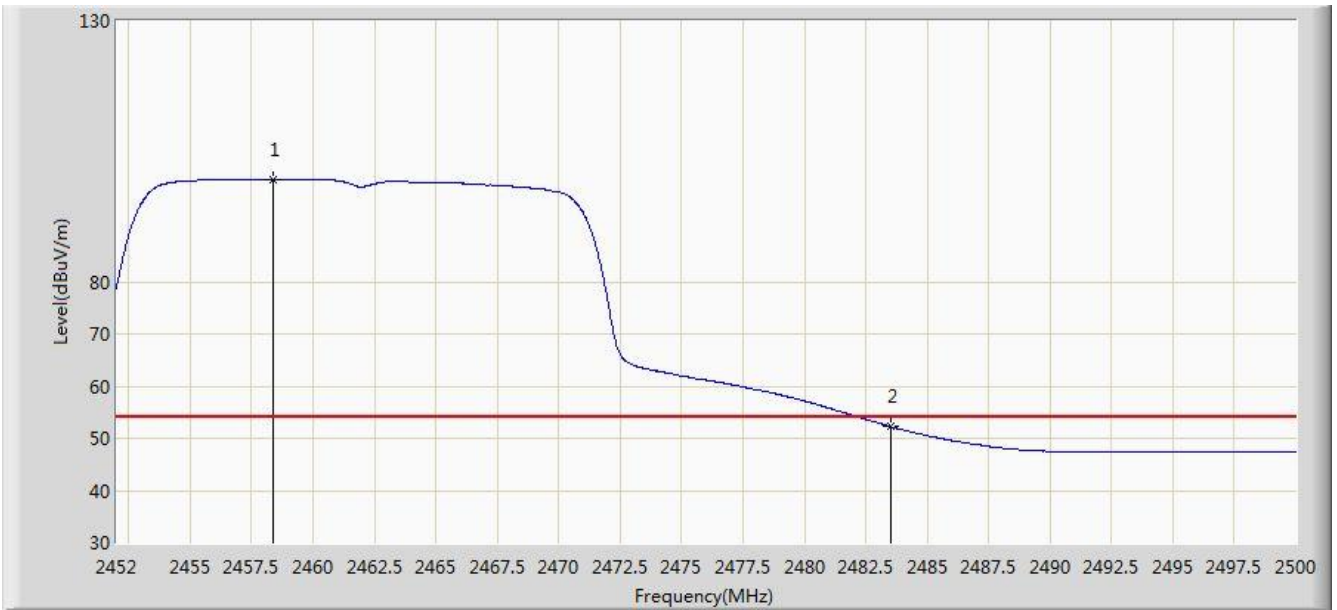


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2458.384	99.639	71.399	N/A	N/A	28.240	AV
2			2483.500	52.245	23.958	-1.755	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

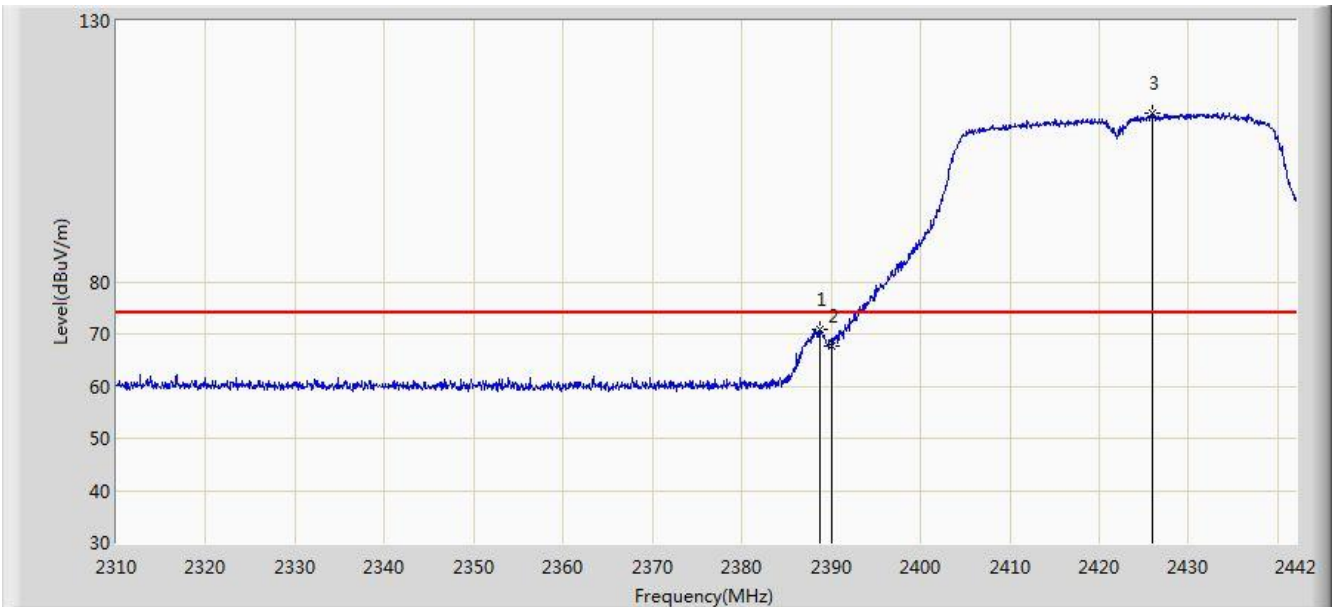


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2388.672	71.005	42.656	-2.995	74.000	28.349	PK
2			2390.000	67.816	39.470	-6.184	74.000	28.346	PK
3		*	2425.962	112.286	84.009	N/A	N/A	28.277	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

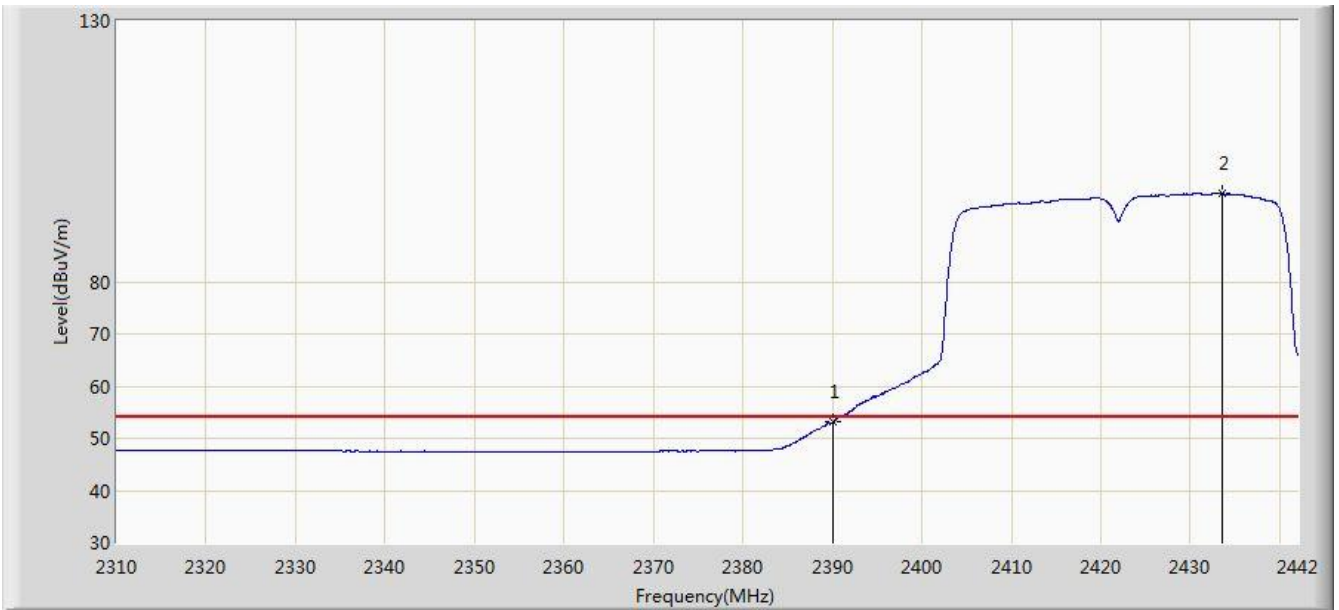


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.088	24.742	-0.912	54.000	28.346	AV
2		*	2433.486	96.927	68.667	N/A	N/A	28.260	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

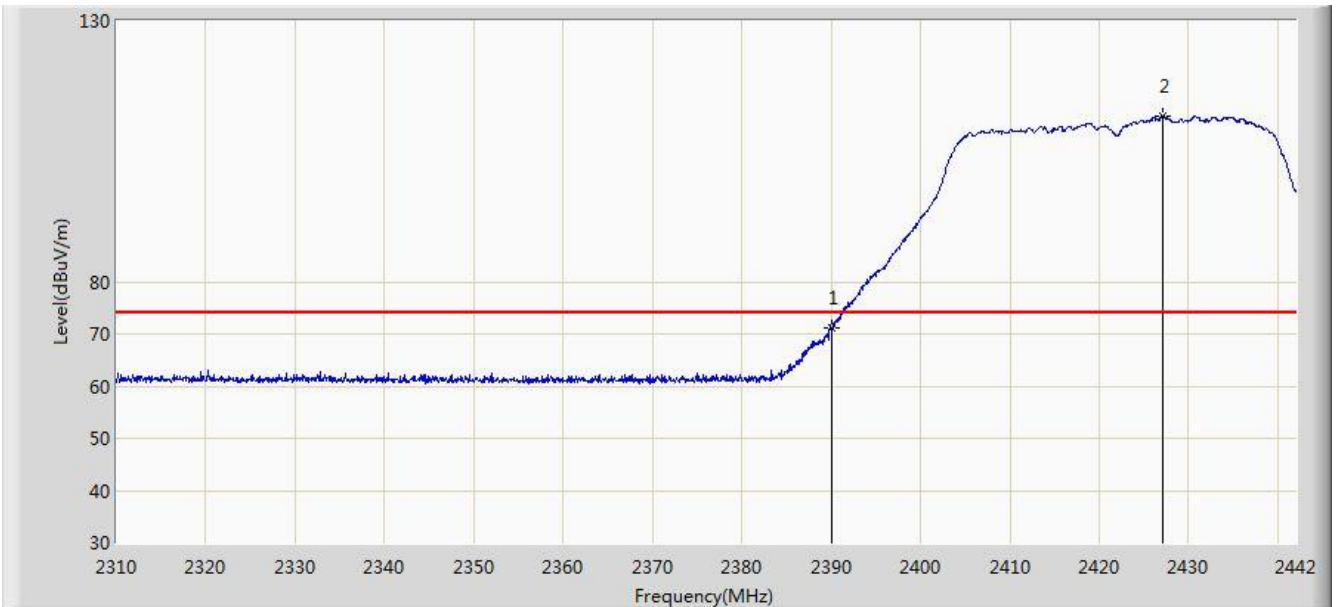


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	71.166	42.820	-2.834	74.000	28.346	PK
2		*	2427.150	111.717	83.443	N/A	N/A	28.275	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

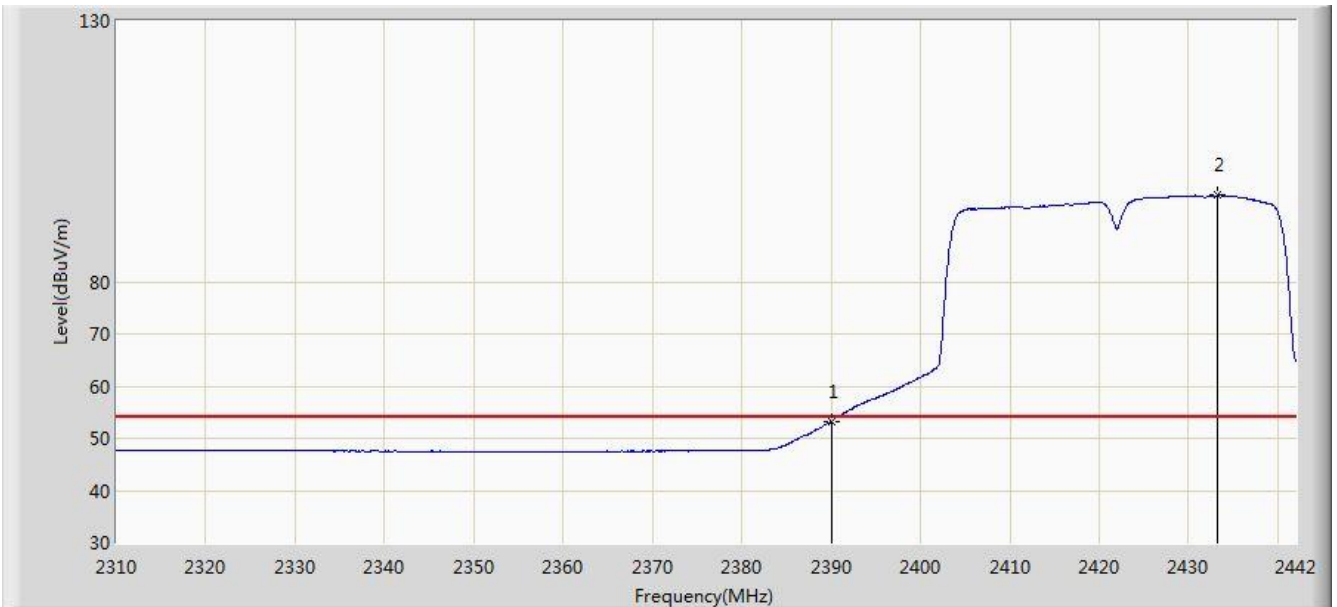


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.219	24.873	-0.781	54.000	28.346	AV
2		*	2433.288	96.573	68.313	N/A	N/A	28.260	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

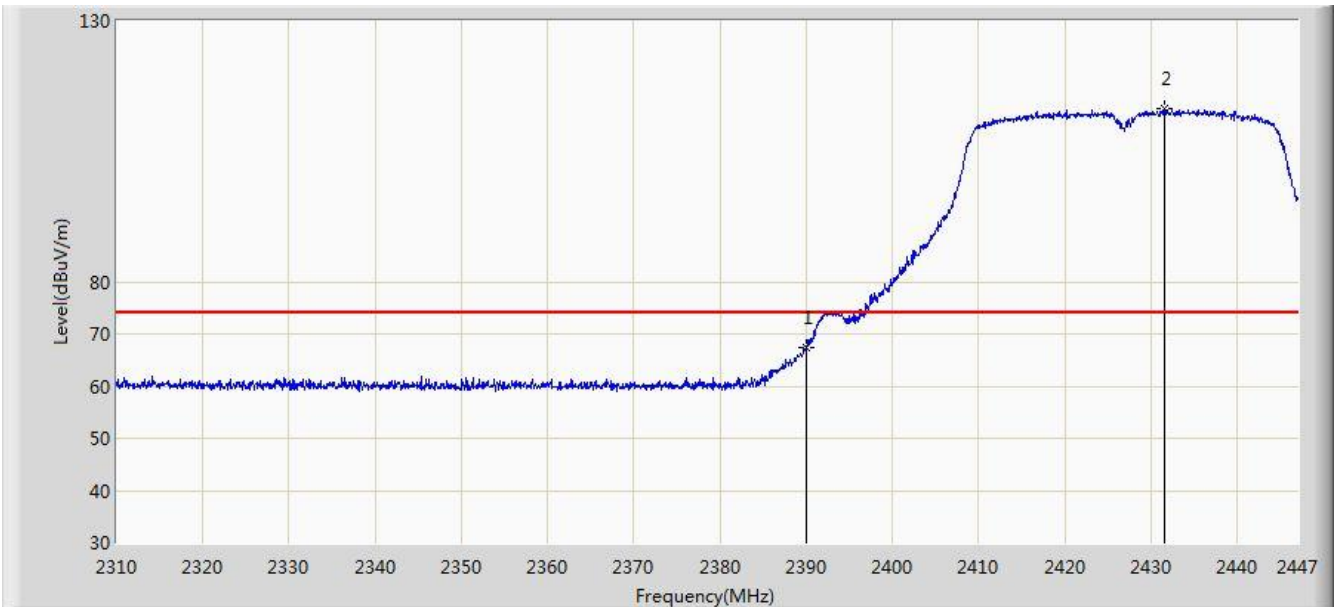


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	67.438	39.092	-6.562	74.000	28.346	PK
2		*	2431.519	113.105	84.841	N/A	N/A	28.264	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

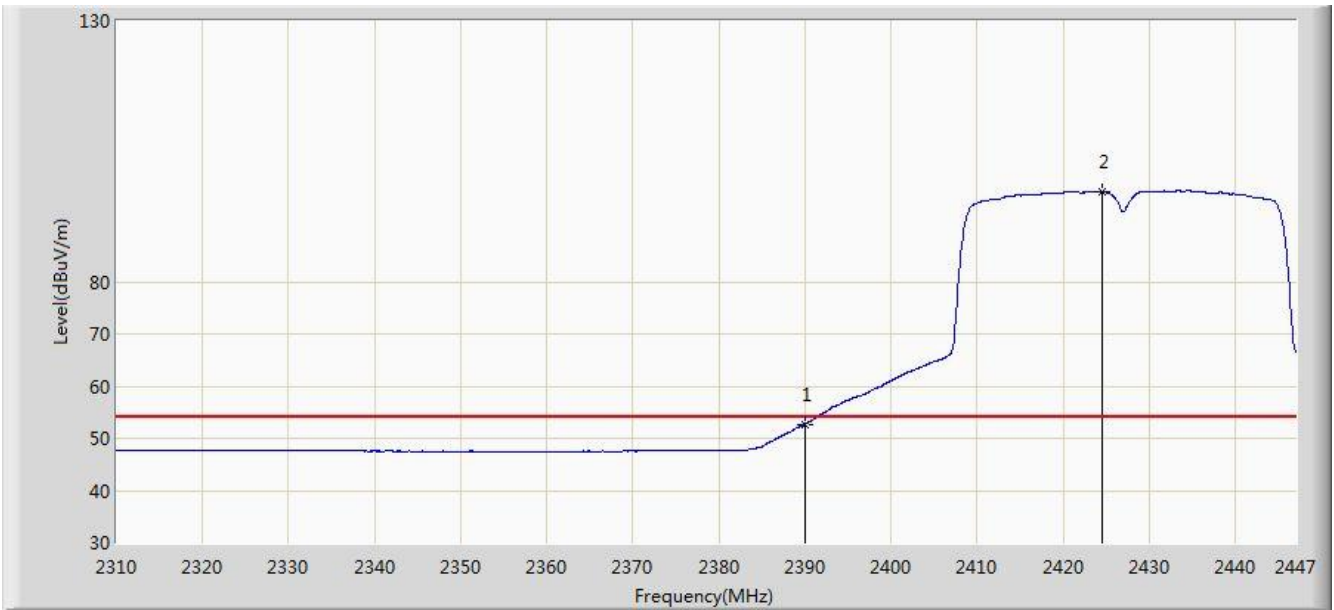


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	52.749	24.403	-1.251	54.000	28.346	AV
2		*	2424.532	97.267	68.988	N/A	N/A	28.279	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

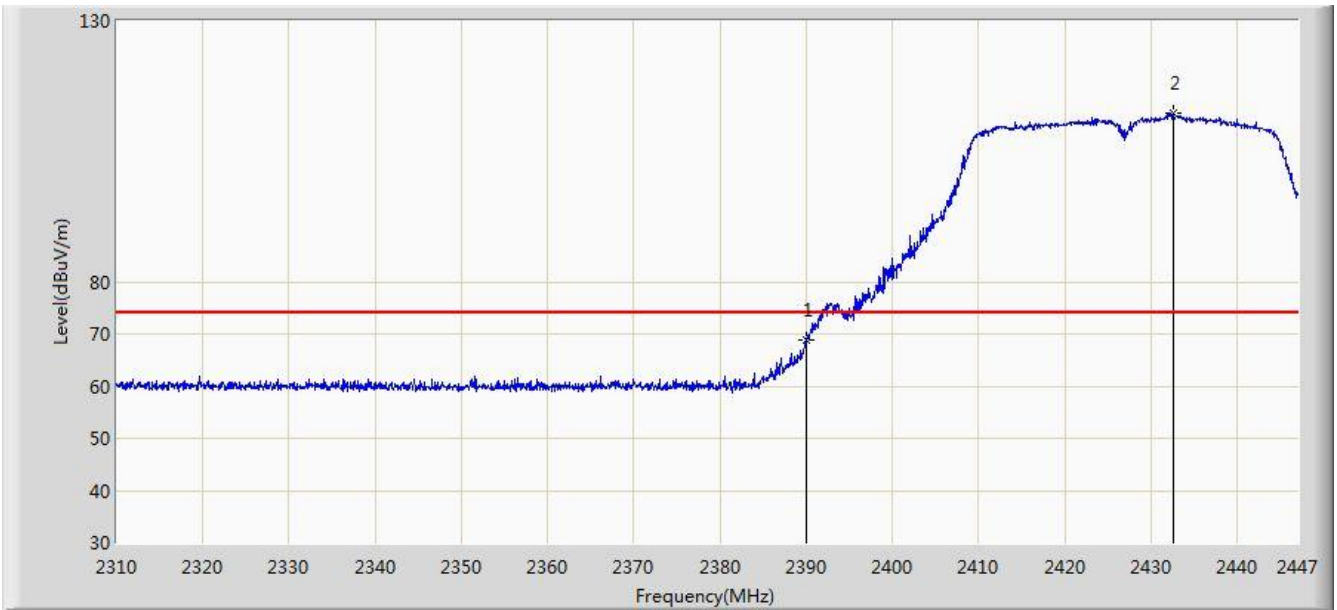


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	68.917	40.571	-5.083	74.000	28.346	PK
2		*	2432.546	112.282	84.020	N/A	N/A	28.262	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

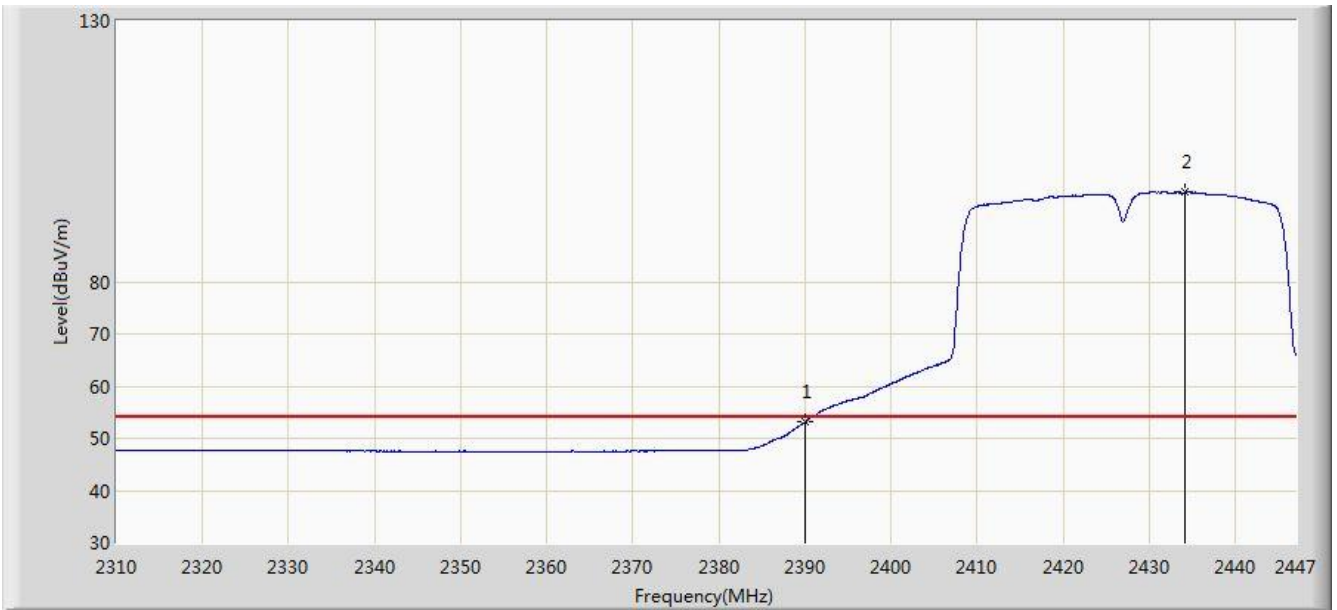


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			2390.000	53.118	24.772	-0.882	54.000	28.346	AV
2		*	2434.122	97.131	68.873	N/A	N/A	28.258	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

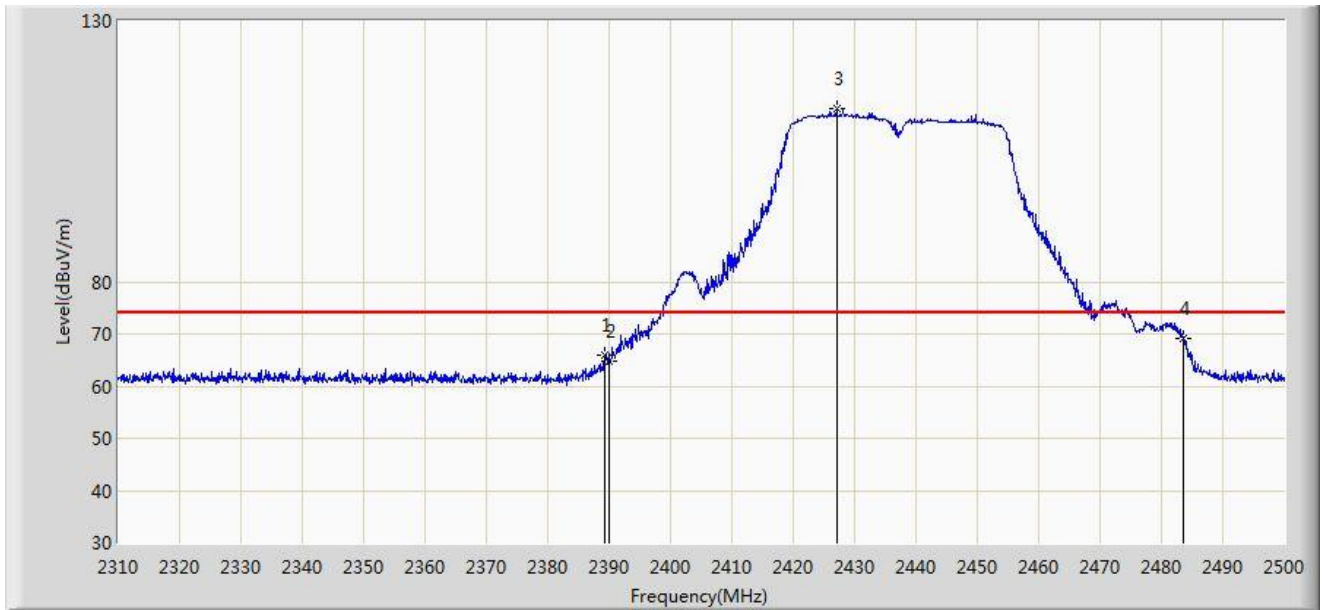


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	66.036	37.688	-7.964	74.000	28.348	PK
2			2390.000	64.920	36.574	-9.080	74.000	28.346	PK
3		*	2427.040	113.067	84.792	N/A	N/A	28.274	PK
4			2483.500	69.200	40.913	-4.800	74.000	28.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 17:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

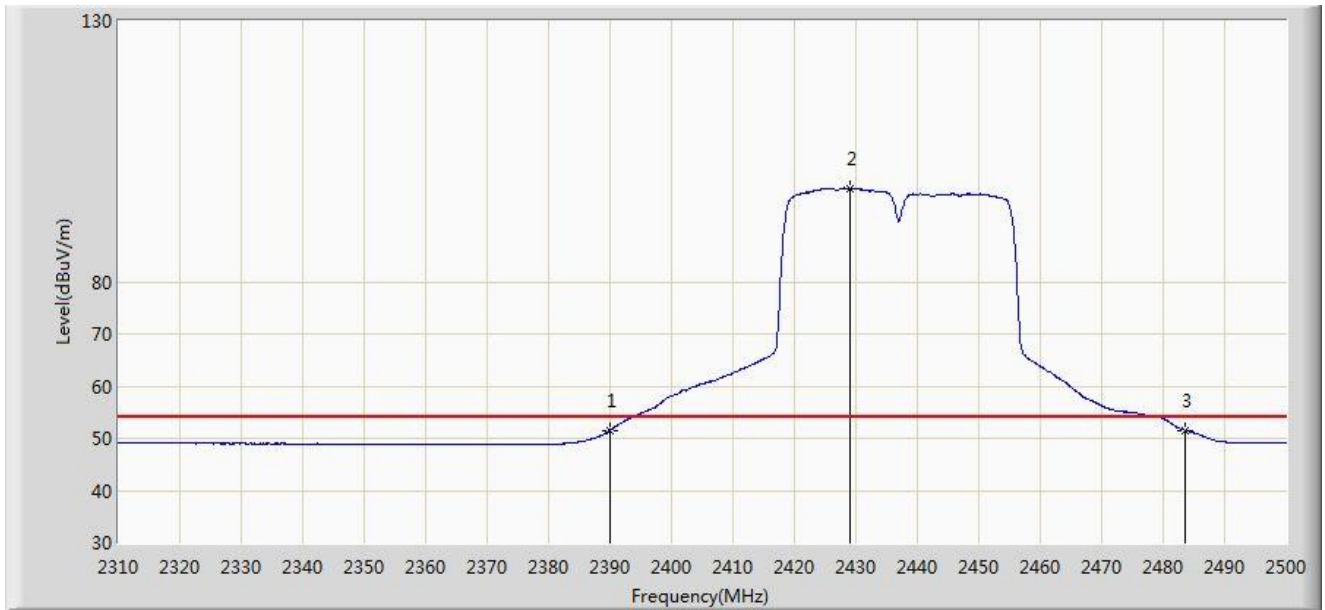


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.565	23.219	-2.435	54.000	28.346	AV
2		*	2428.940	97.918	69.647	N/A	N/A	28.271	AV
3			2483.500	51.555	23.268	-2.445	54.000	28.287	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

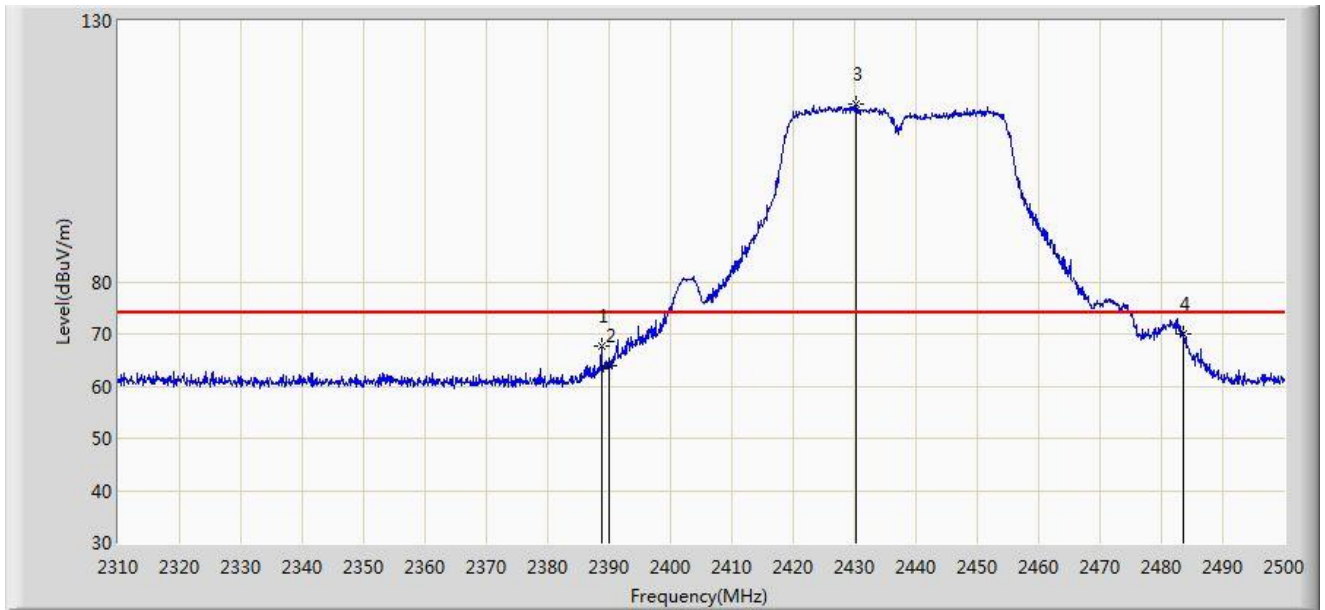


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.755	67.694	39.345	-6.306	74.000	28.349	PK
2			2390.000	63.955	35.609	-10.045	74.000	28.346	PK
3		*	2430.175	114.098	85.830	N/A	N/A	28.268	PK
4			2483.500	69.955	41.668	-4.045	74.000	28.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/26 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

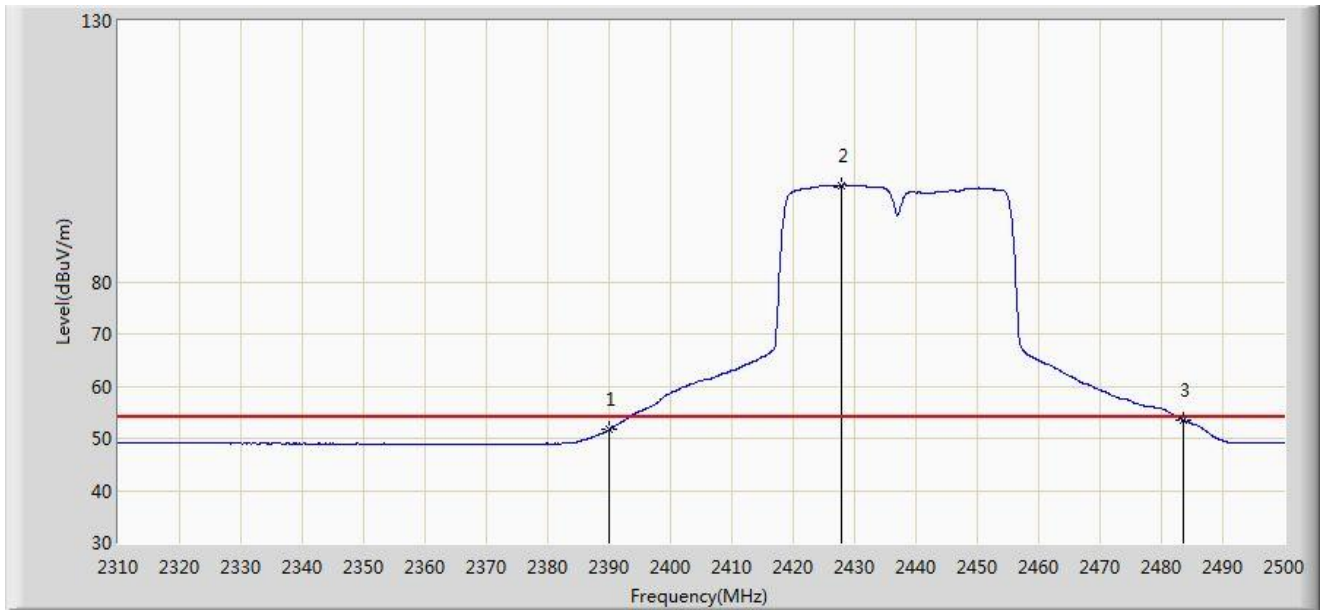


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.610	23.264	-2.390	54.000	28.346	AV
2		*	2427.895	98.484	70.211	N/A	N/A	28.273	AV
3			2483.500	53.505	25.218	-0.495	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

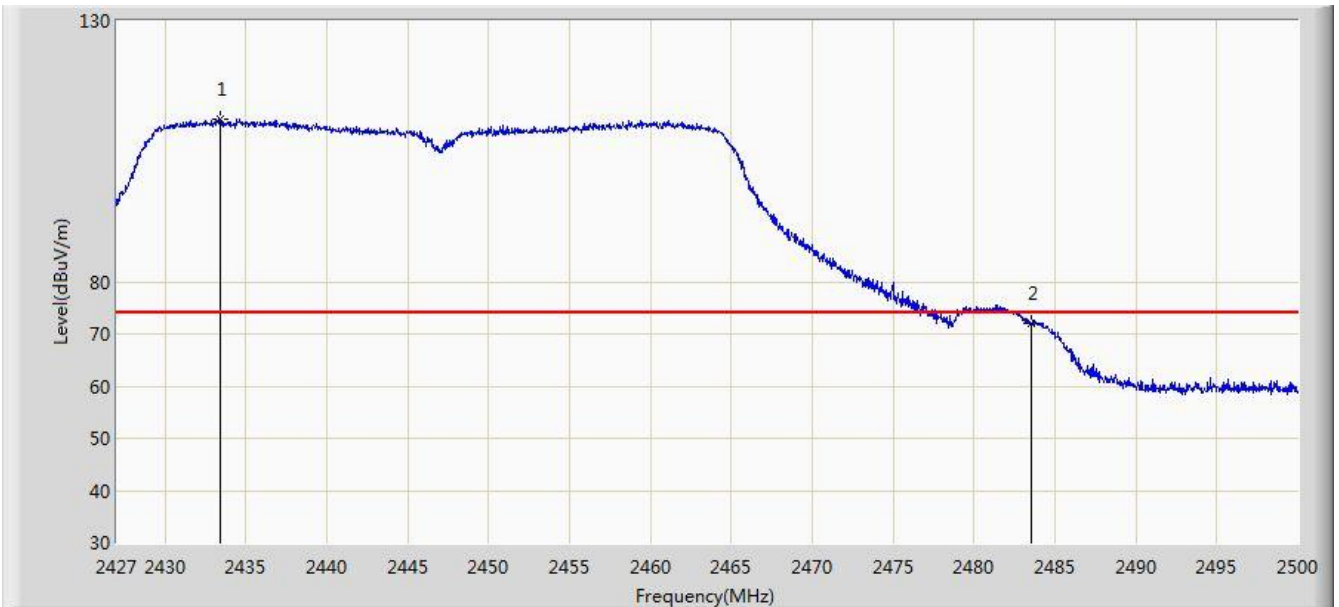


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2433.387	111.272	83.012	N/A	N/A	28.260	PK
2			2483.500	71.922	43.635	-2.078	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

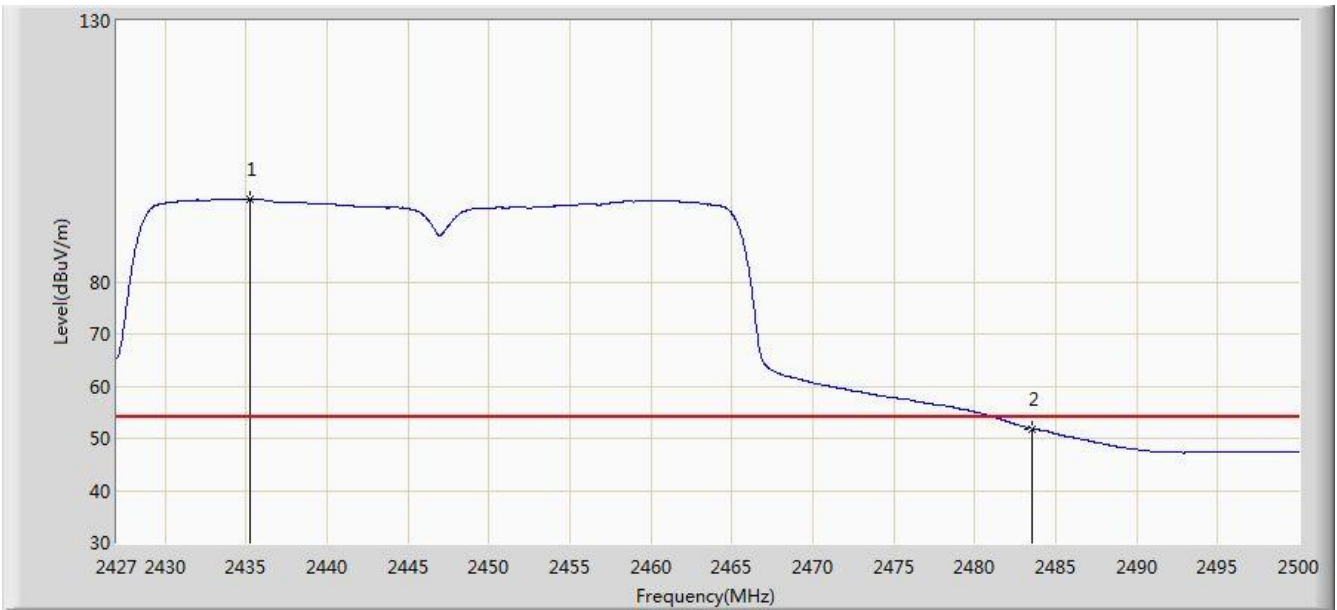


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2435.249	95.730	67.475	N/A	N/A	28.255	AV
2			2483.500	51.870	23.583	-2.130	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

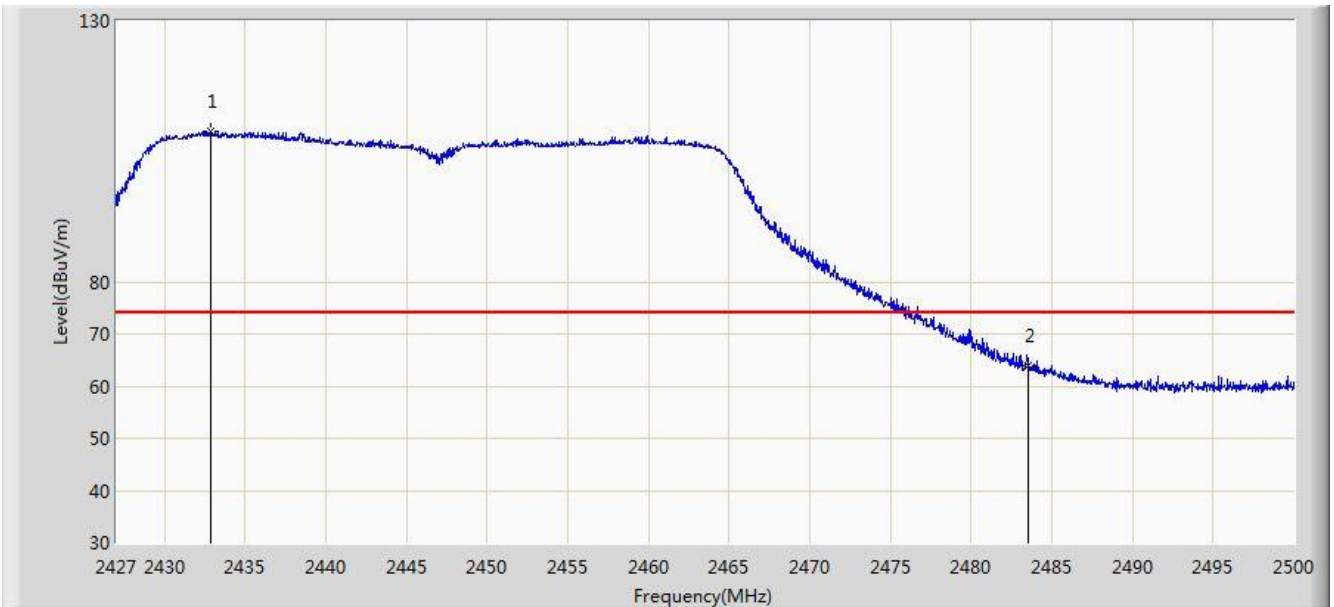


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2432.840	108.814	80.553	N/A	N/A	28.261	PK
2			2483.500	64.042	35.755	-9.958	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 00:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

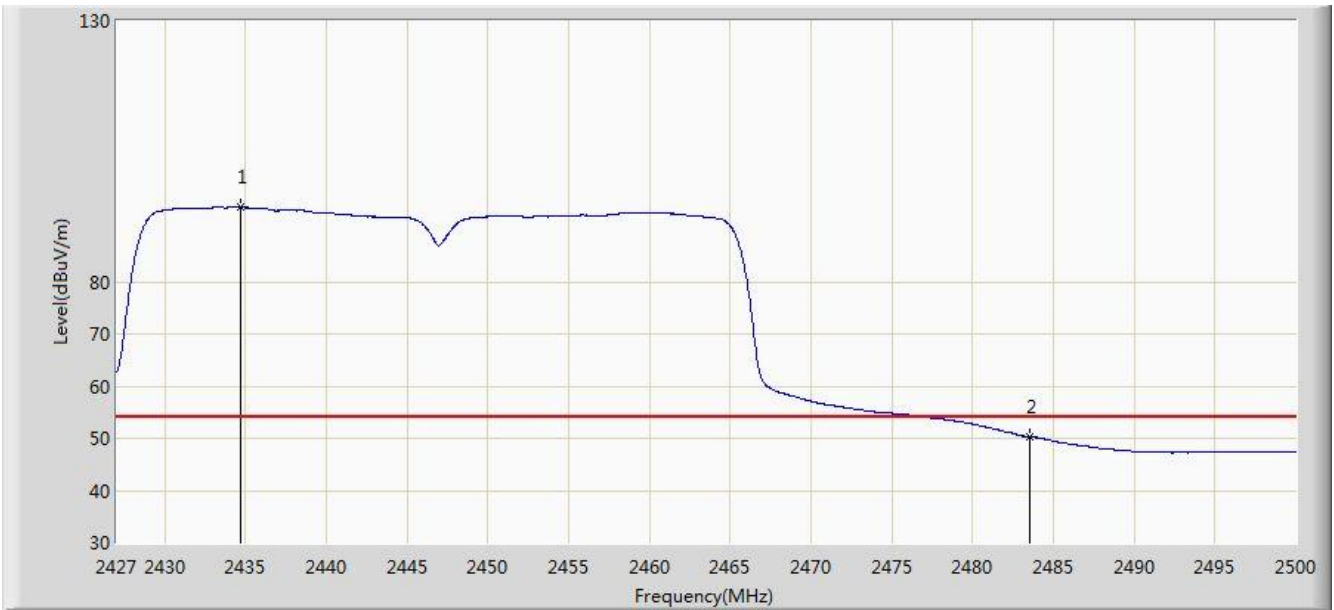


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2434.665	94.313	66.056	N/A	N/A	28.257	AV
2			2483.500	50.315	22.028	-3.685	54.000	28.287	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 01:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

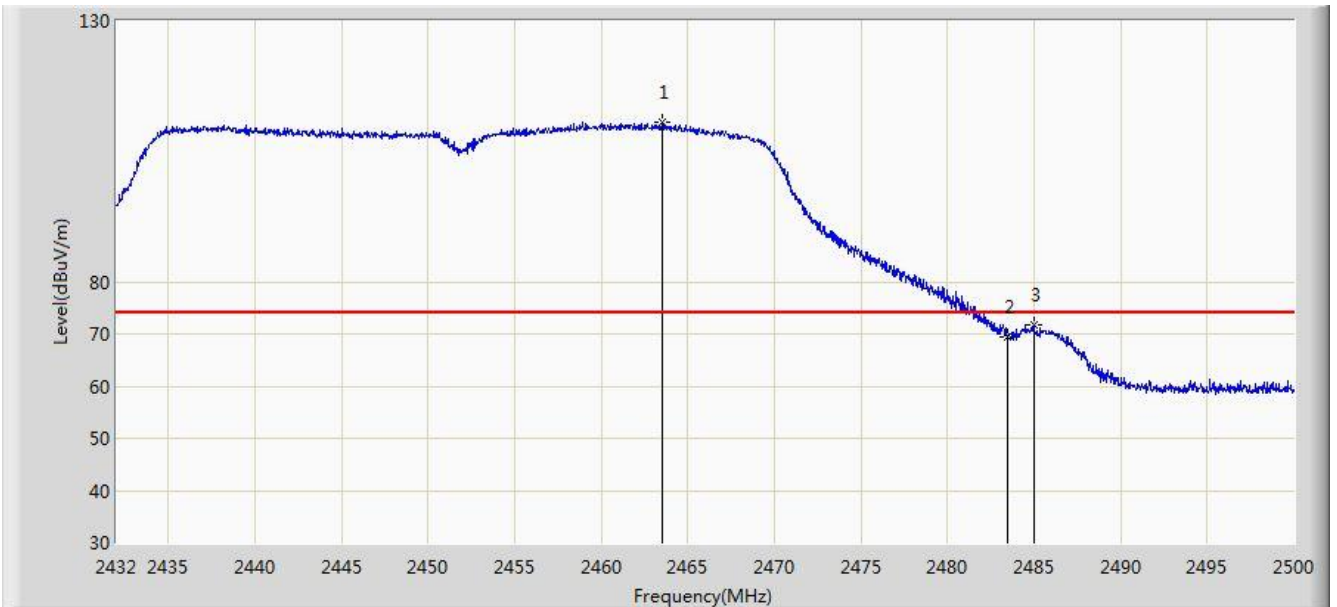


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2463.552	110.441	82.196	N/A	N/A	28.245	PK
2			2483.500	69.547	41.260	-4.453	74.000	28.287	PK
3			2484.972	71.624	43.334	-2.376	74.000	28.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

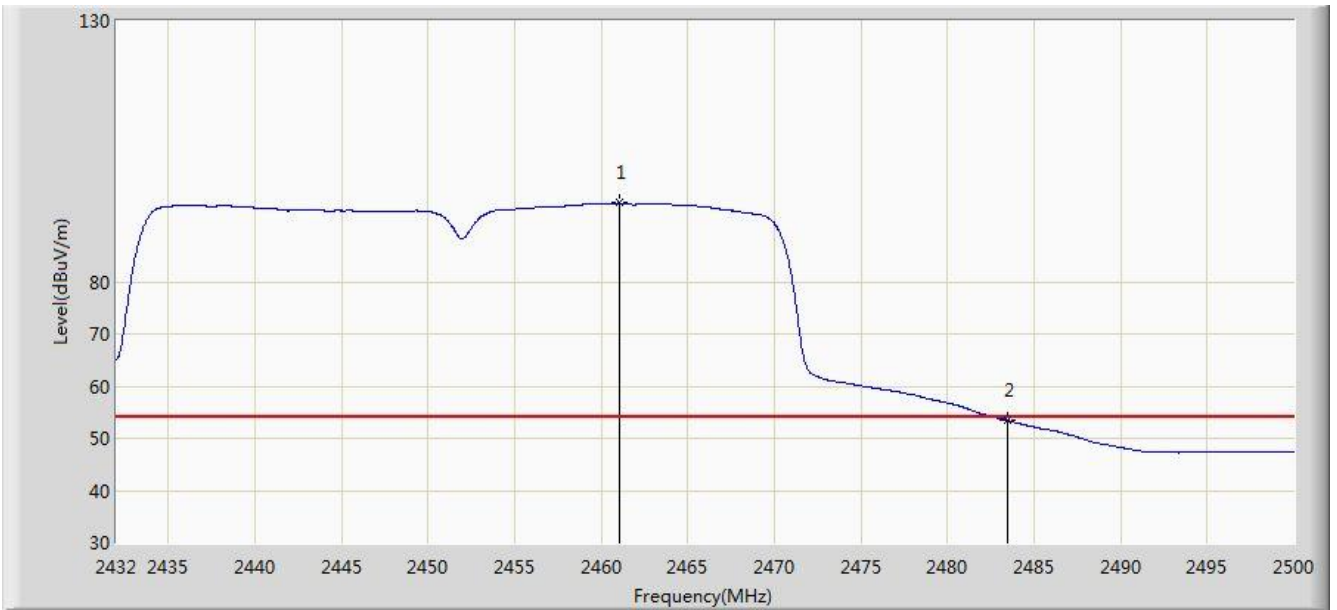


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2461.036	95.076	66.833	N/A	N/A	28.243	AV
2			2483.500	53.361	25.074	-0.639	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 01:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

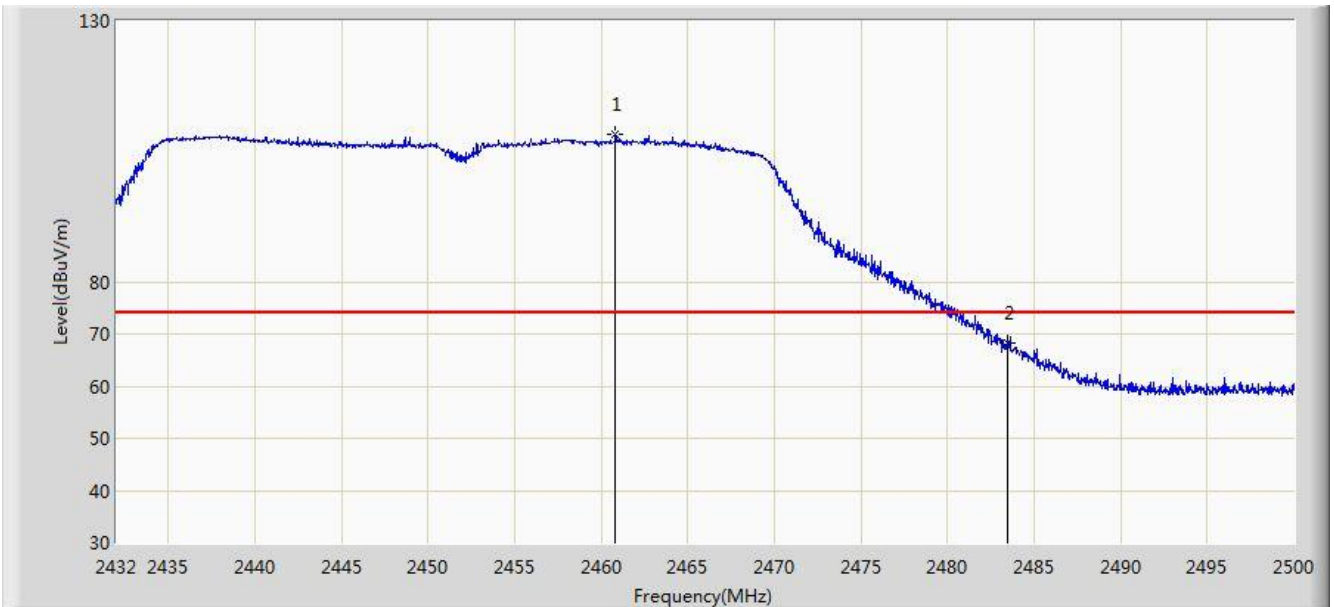


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2460.798	108.159	79.917	N/A	N/A	28.242	PK
2			2483.500	68.278	39.991	-5.722	74.000	28.287	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/09 - 01:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

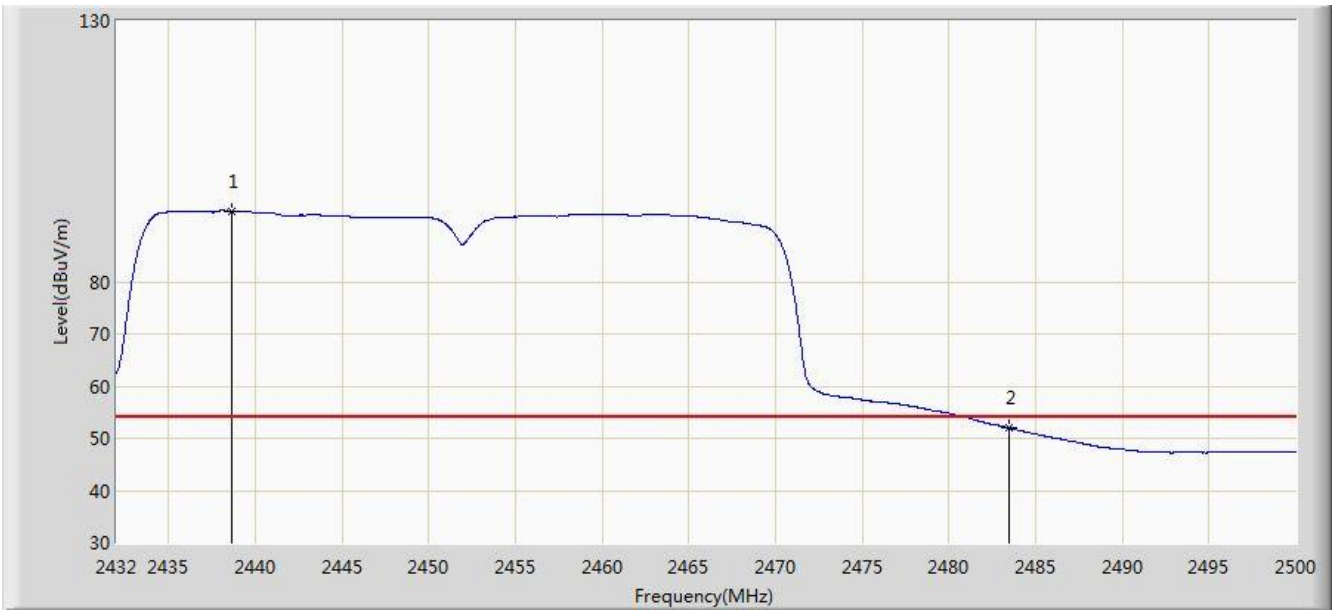

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor(dB)	Type
1		*	2438.630	93.579	65.332	N/A	N/A	28.247	AV
2			2483.500	51.976	23.689	-2.024	54.000	28.287	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

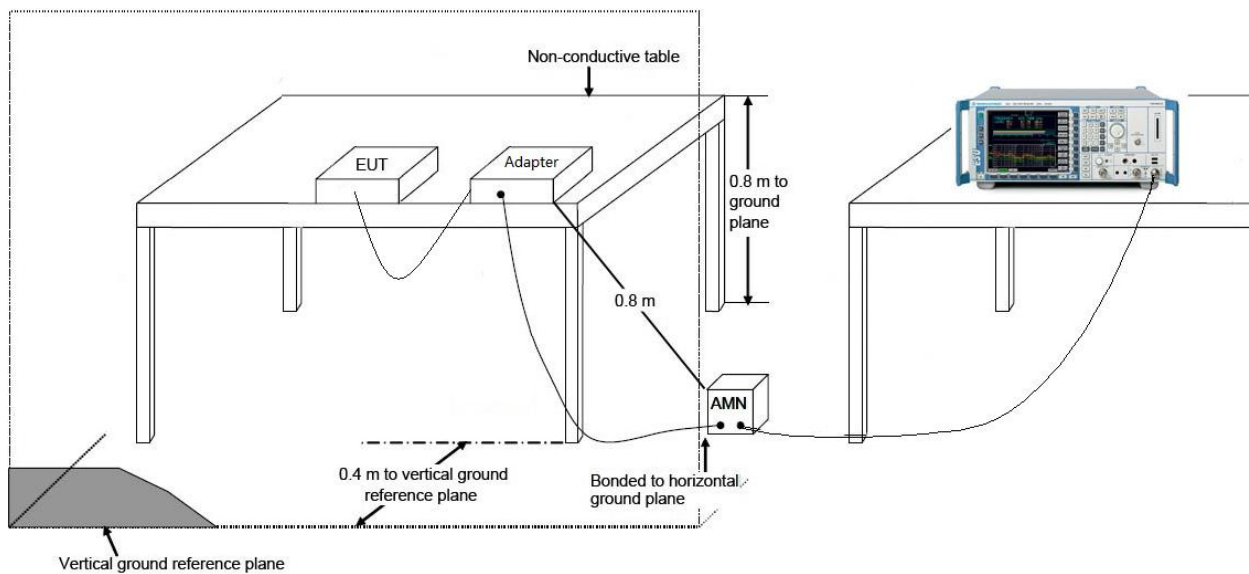

7.8.3. Test Result

Site: SR2	Time: 2015/04/15 - 10:02
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Mode1	

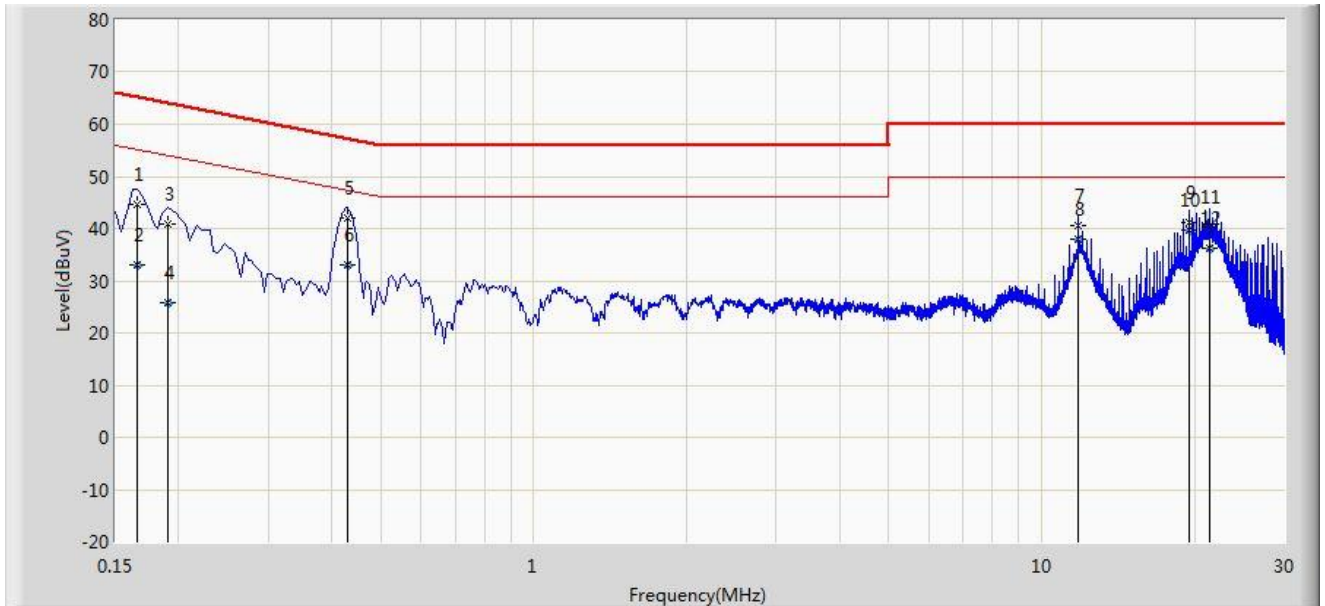


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.166	44.770	34.683	-20.388	65.158	10.087	QP
2			0.166	32.938	22.851	-22.220	55.158	10.087	AV
3			0.190	40.729	30.700	-23.308	64.037	10.029	QP
4			0.190	25.728	15.699	-28.309	54.037	10.029	AV
5			0.430	42.091	31.981	-15.162	57.253	10.110	QP
6			0.430	33.101	22.991	-14.152	47.253	10.110	AV
7			11.782	40.606	30.520	-19.394	60.000	10.087	QP
8			11.782	38.093	28.006	-11.907	50.000	10.087	AV
9			19.478	41.073	30.939	-18.927	60.000	10.133	QP
10		*	19.478	39.638	29.504	-10.362	50.000	10.133	AV
11			21.402	40.178	30.017	-19.822	60.000	10.161	QP
12			21.402	36.107	25.946	-13.893	50.000	10.161	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/04/15 - 10:07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Mode1	

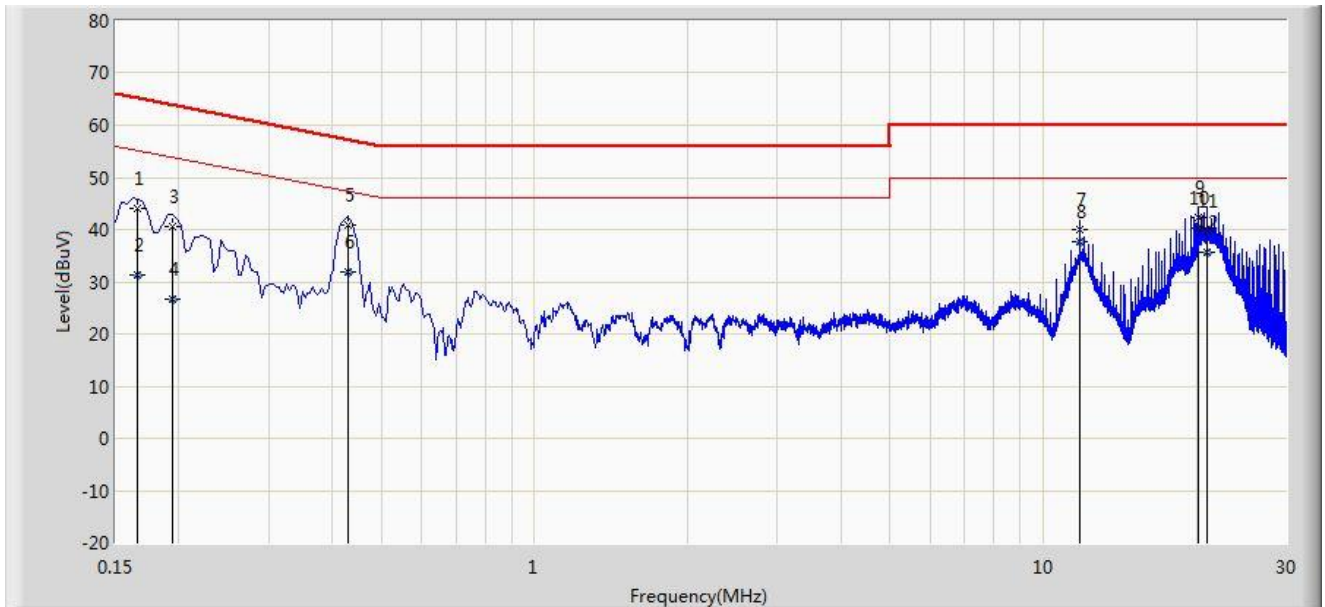

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.166	44.062	33.991	-21.096	65.158	10.071	QP
2			0.166	31.312	21.241	-23.846	55.158	10.071	AV
3			0.194	40.575	30.553	-23.289	63.864	10.021	QP
4			0.194	26.722	16.700	-27.142	53.864	10.021	AV
5			0.430	40.774	30.638	-16.479	57.253	10.135	QP
6			0.430	31.864	21.729	-15.389	47.253	10.135	AV
7			11.786	39.951	29.833	-20.049	60.000	10.118	QP
8			11.786	37.579	27.461	-12.421	50.000	10.118	AV
9			20.202	42.362	32.190	-17.638	60.000	10.172	QP
10		*	20.202	40.207	30.035	-9.793	50.000	10.172	AV
11			20.926	39.785	29.603	-20.215	60.000	10.182	QP
12			20.926	35.539	25.357	-14.461	50.000	10.182	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Wireless LAN Access Point FCC ID: O9C-BJNGAFB0008** is in compliance with Part 15C of the FCC Rules.

————— The End —————