


Site: AC1	Time: 2015/05/05 - 17:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5700MHz	

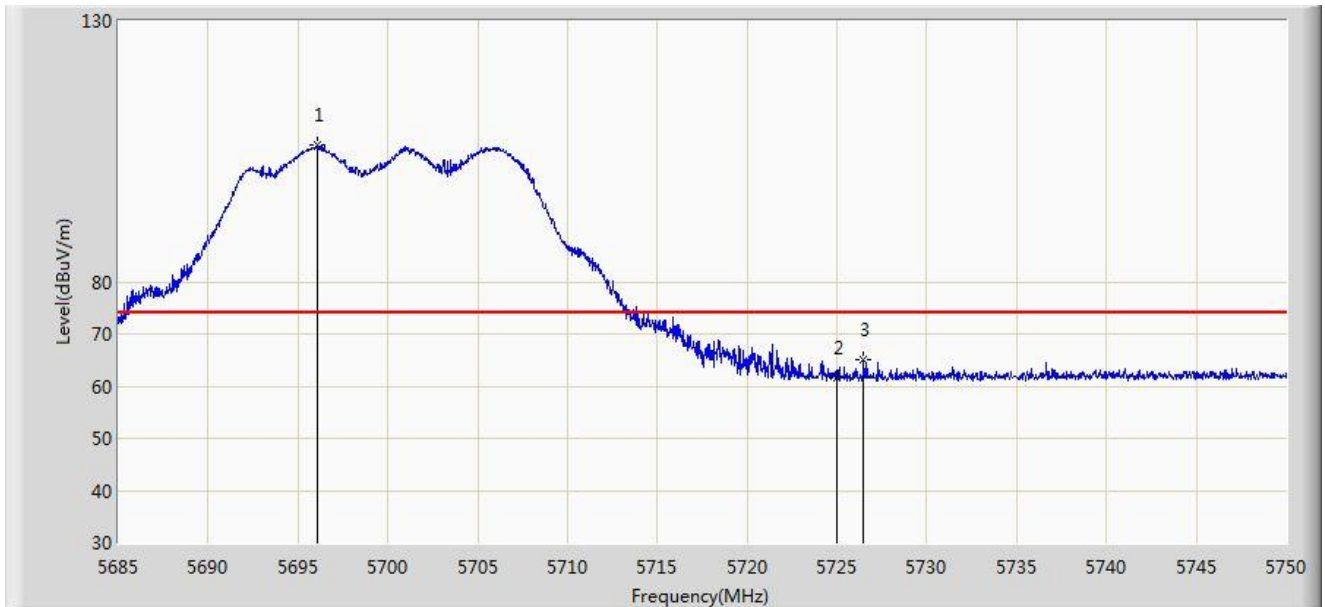


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.115	106.111	102.398	N/A	N/A	3.714	PK
2			5725.000	61.577	57.786	-12.423	74.000	3.791	PK
3			5726.470	65.063	61.268	-8.937	74.000	3.796	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5700MHz	

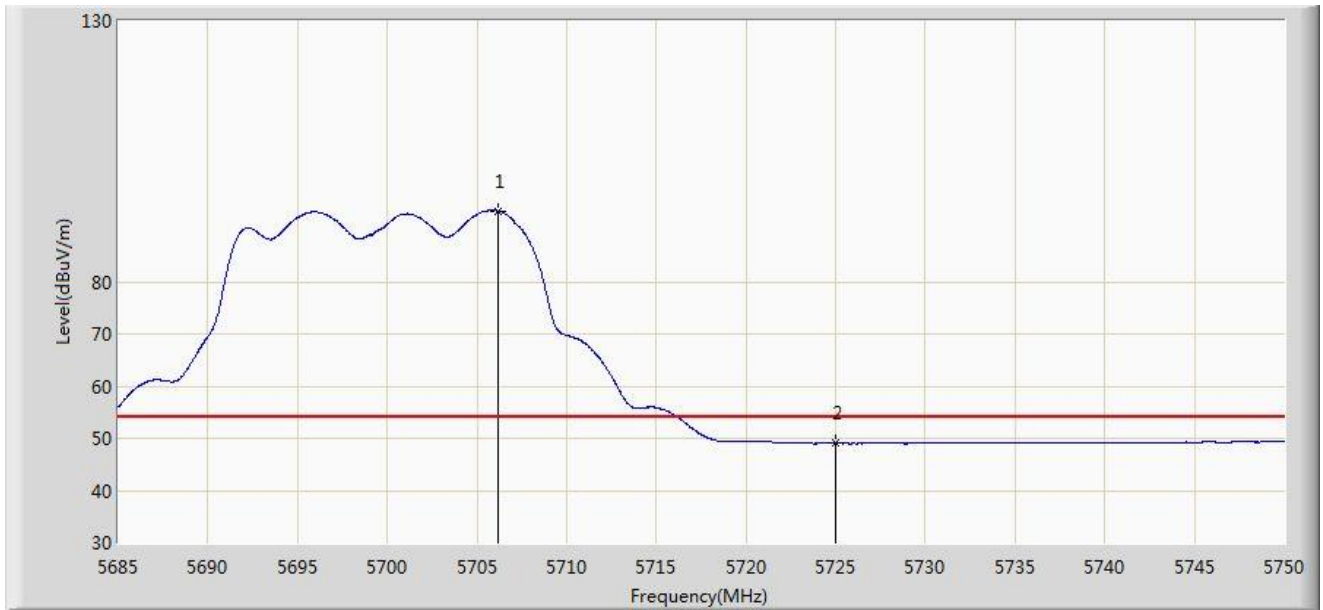


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.190	93.539	89.805	N/A	N/A	3.734	AV
2			5725.000	49.045	45.254	-4.955	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

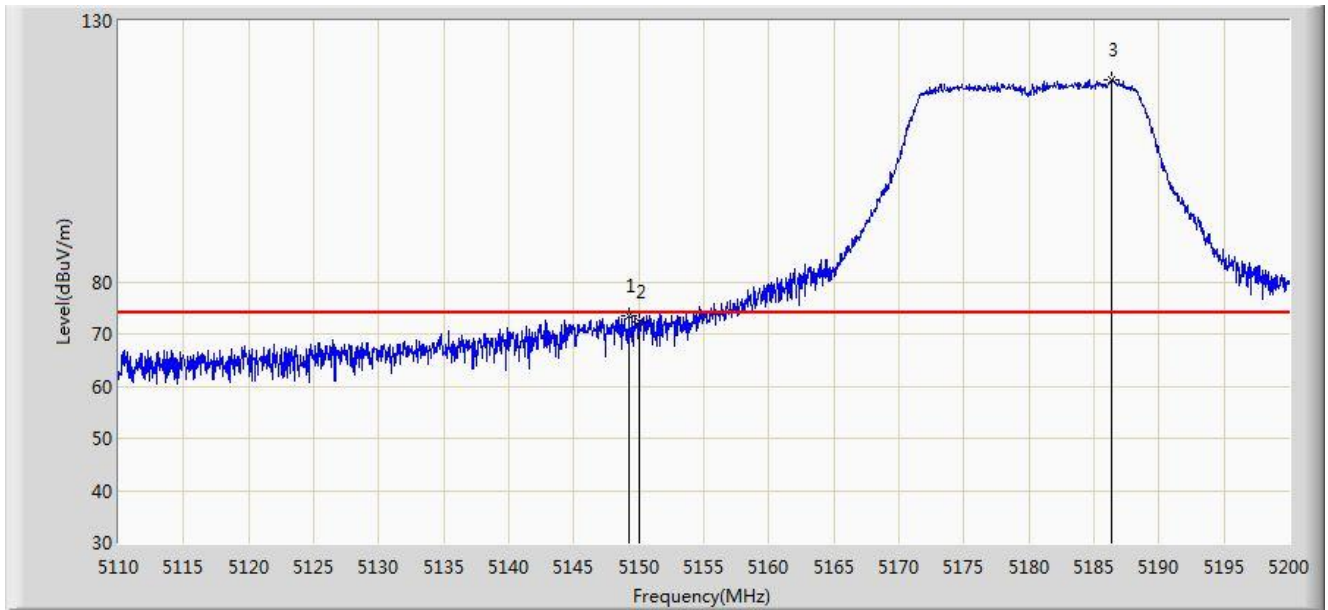

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.195	73.583	70.274	-0.417	74.000	3.309	PK
2			5150.000	72.353	69.044	-1.647	74.000	3.309	PK
3		*	5186.320	118.665	115.400	N/A	N/A	3.265	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.089	46.780	-3.911	54.000	3.309	AV
2		*	5185.690	103.320	100.054	N/A	N/A	3.266	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

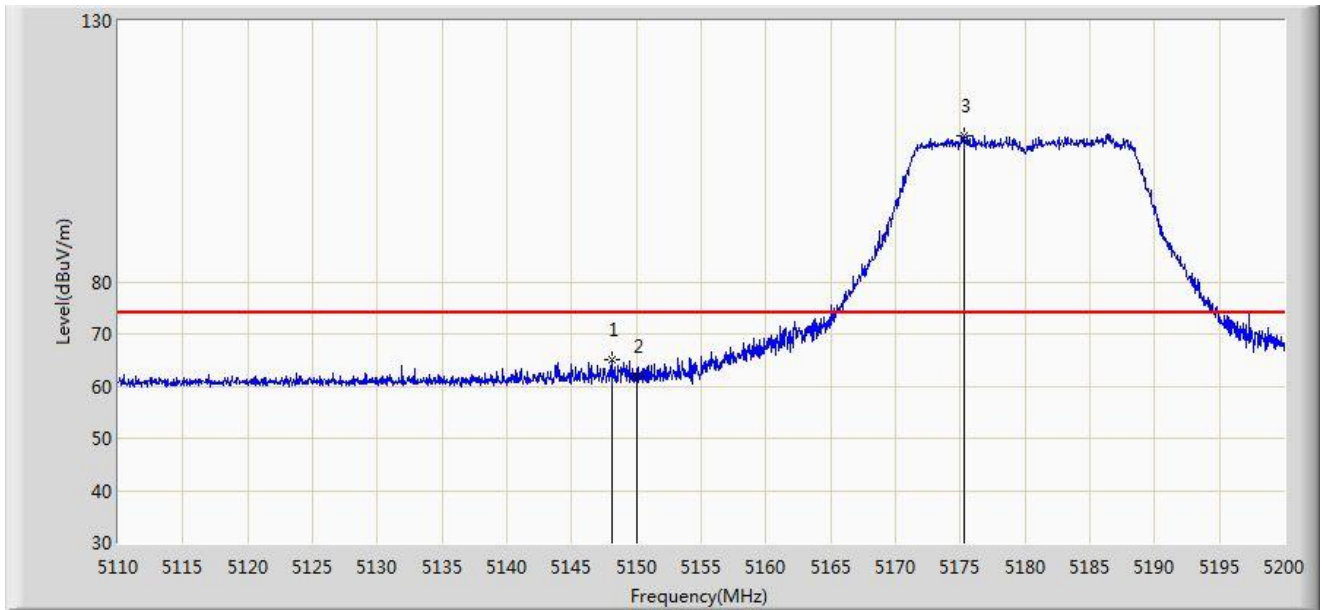


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.070	65.007	61.698	-8.993	74.000	3.309	PK
2			5150.000	61.818	58.509	-12.182	74.000	3.309	PK
3		*	5175.340	107.941	104.664	N/A	N/A	3.277	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

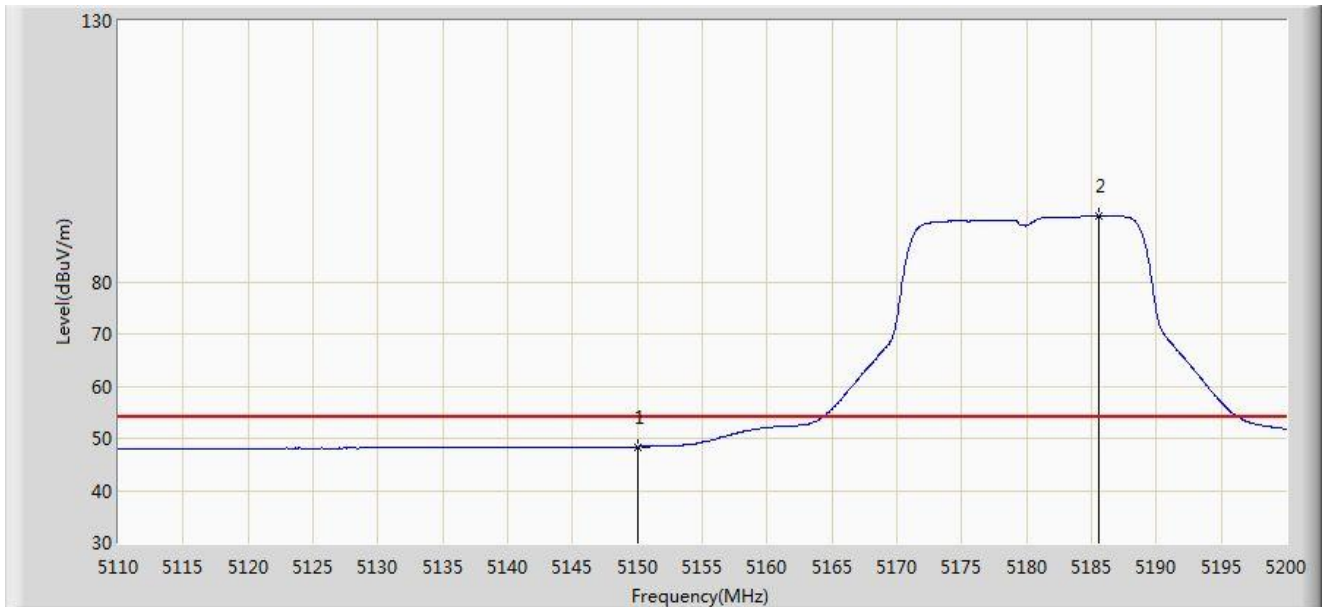


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.391	45.082	-5.609	54.000	3.309	AV
2		*	5185.555	92.635	89.369	N/A	N/A	3.266	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

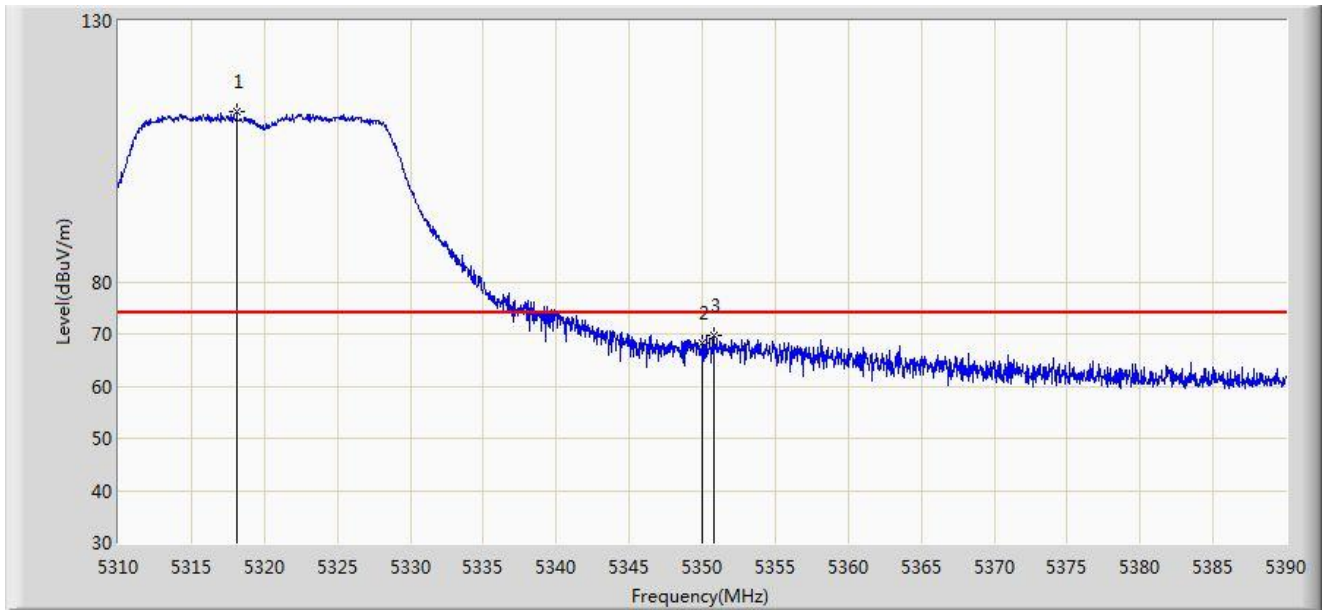


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.120	112.470	109.393	N/A	N/A	3.077	PK
2			5350.000	68.116	65.084	-5.884	74.000	3.032	PK
3			5350.760	69.737	66.706	-4.263	74.000	3.031	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

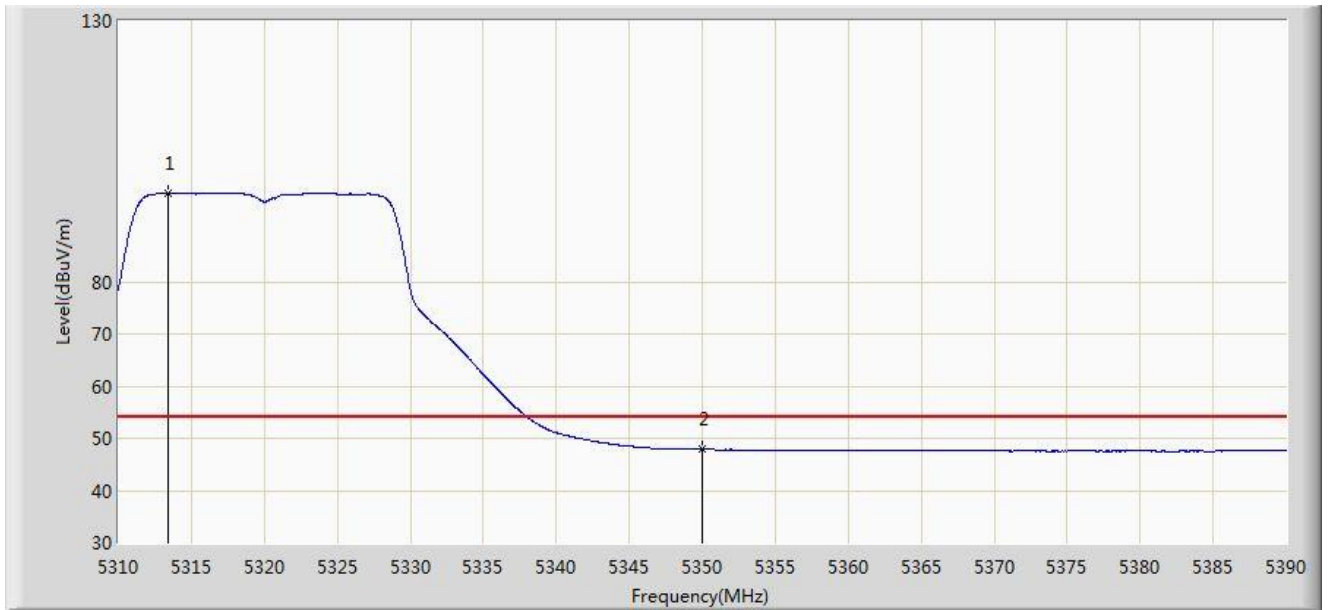


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.440	97.078	93.992	N/A	N/A	3.086	AV
2			5350.000	47.842	44.810	-6.158	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 17:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

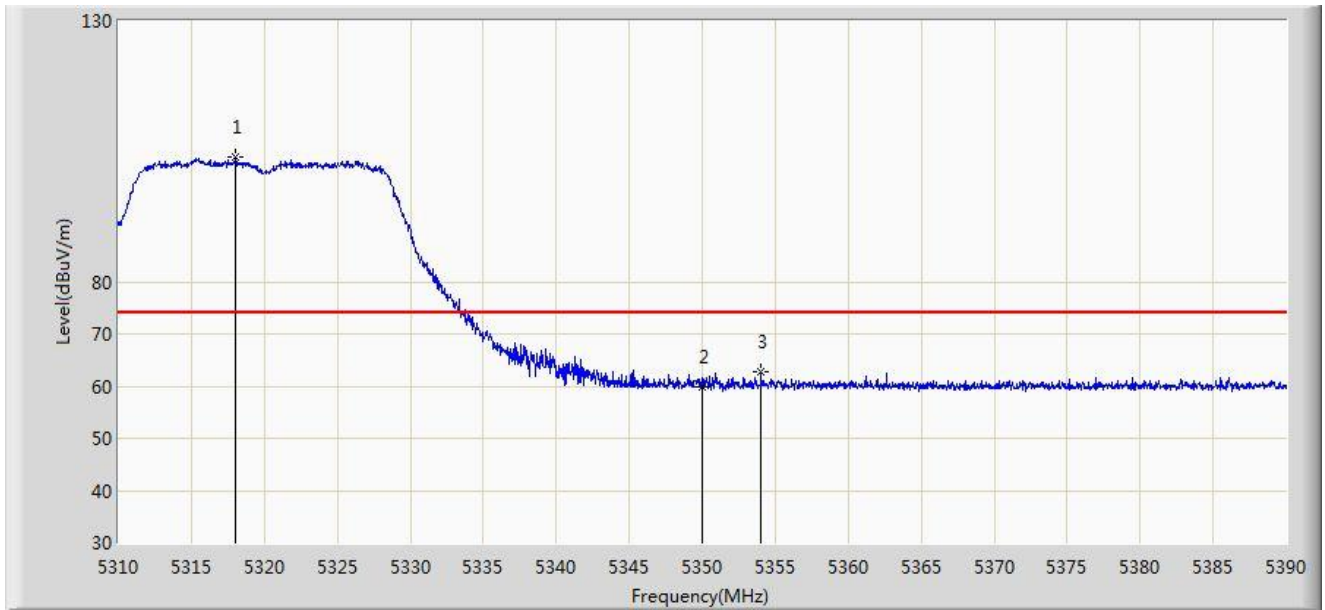


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.040	103.786	100.709	N/A	N/A	3.077	PK
2			5350.000	59.792	56.760	-14.208	74.000	3.032	PK
3			5354.000	62.810	59.782	-11.190	74.000	3.028	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

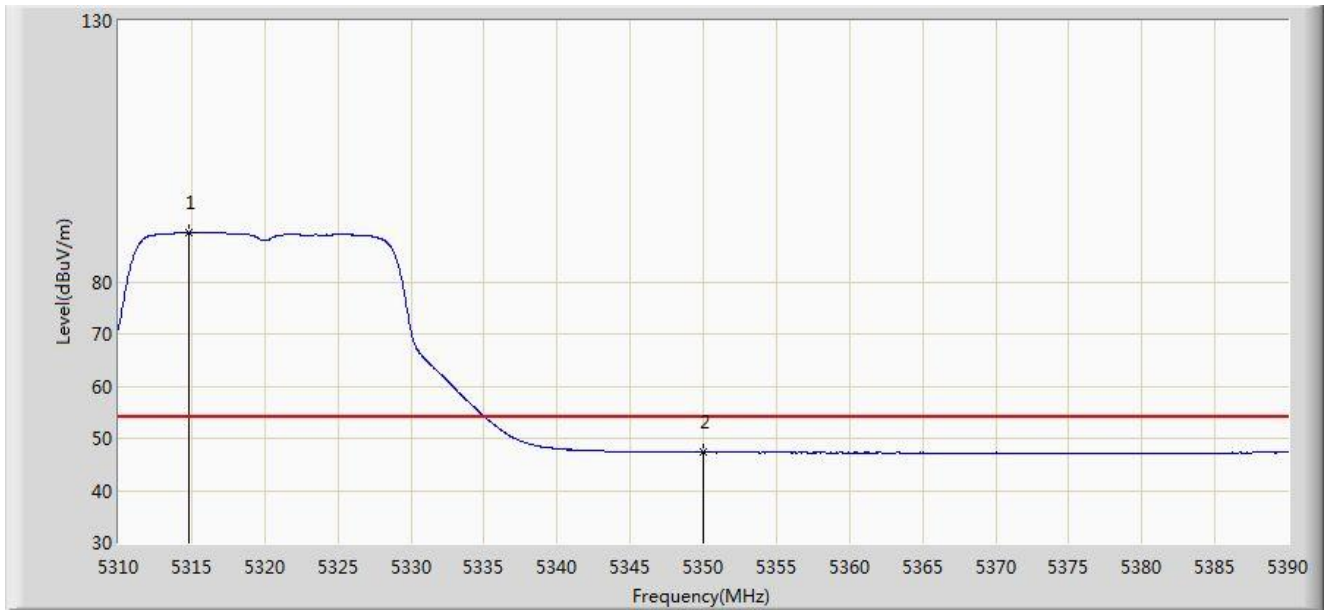


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	89.481	86.398	N/A	N/A	3.083	AV
2			5350.000	47.321	44.289	-6.679	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

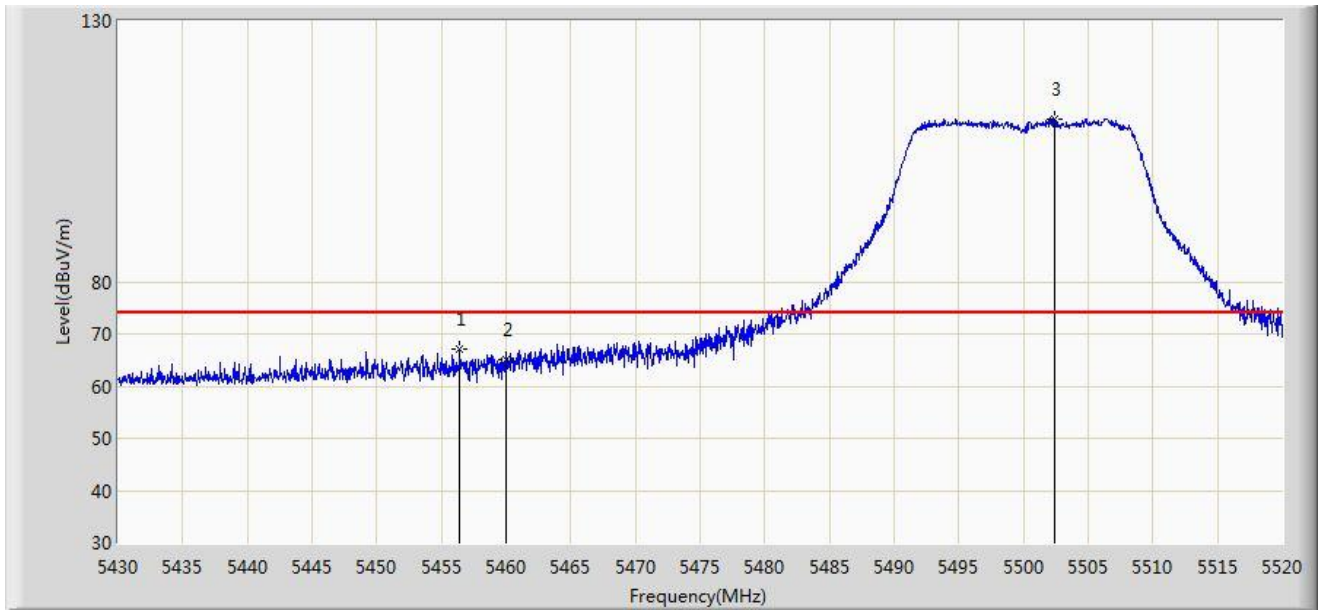


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.415	66.982	63.521	-7.018	74.000	3.461	PK
2			5460.000	64.971	61.489	-9.029	74.000	3.482	PK
3		*	5502.450	111.250	107.726	N/A	N/A	3.524	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

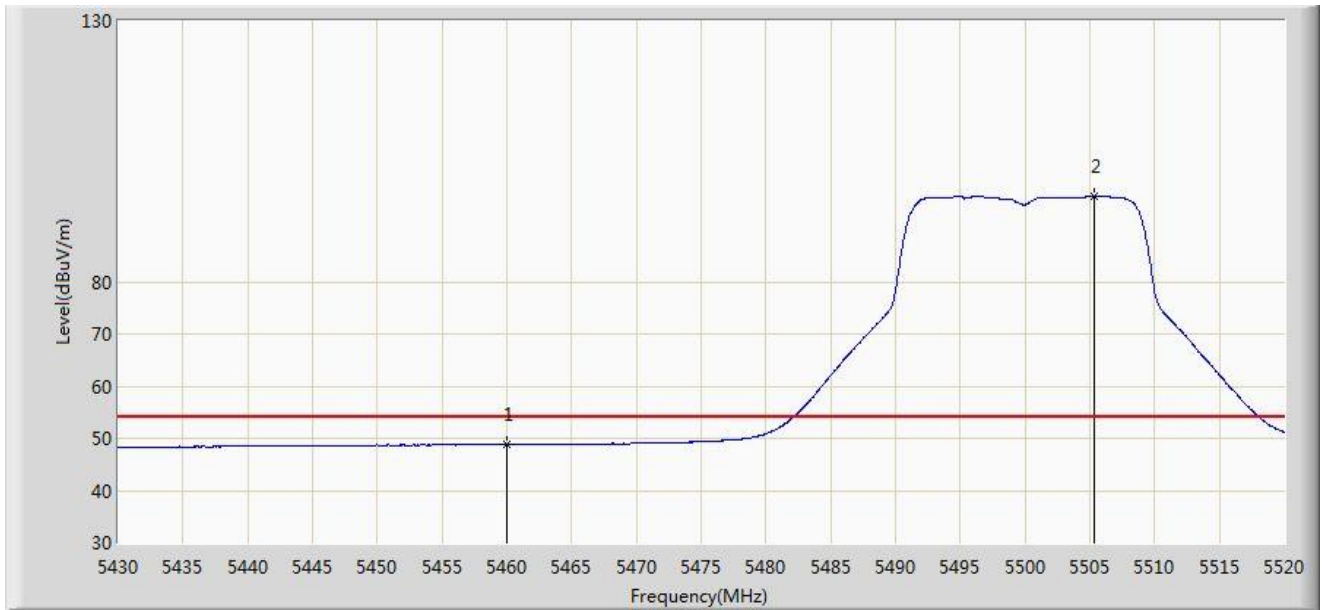


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.840	45.358	-5.160	54.000	3.482	AV
2		*	5505.375	96.328	92.808	N/A	N/A	3.520	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

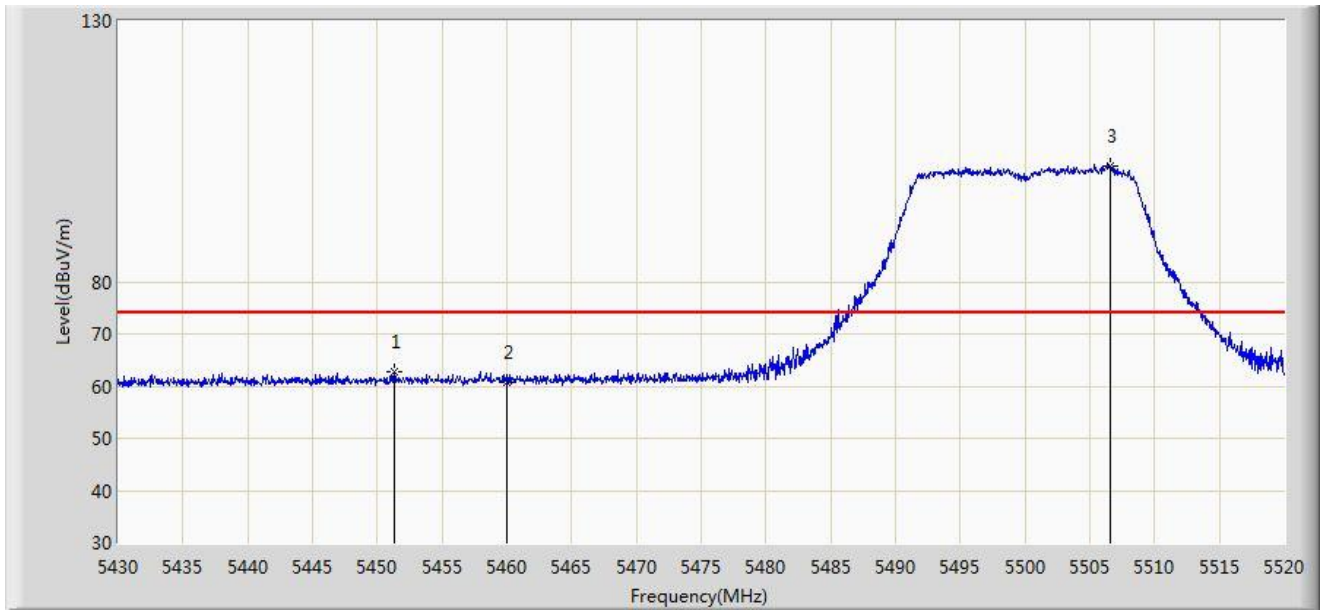


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.330	62.663	59.229	-11.337	74.000	3.435	PK
2			5460.000	60.842	57.360	-13.158	74.000	3.482	PK
3		*	5506.545	102.230	98.711	N/A	N/A	3.519	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

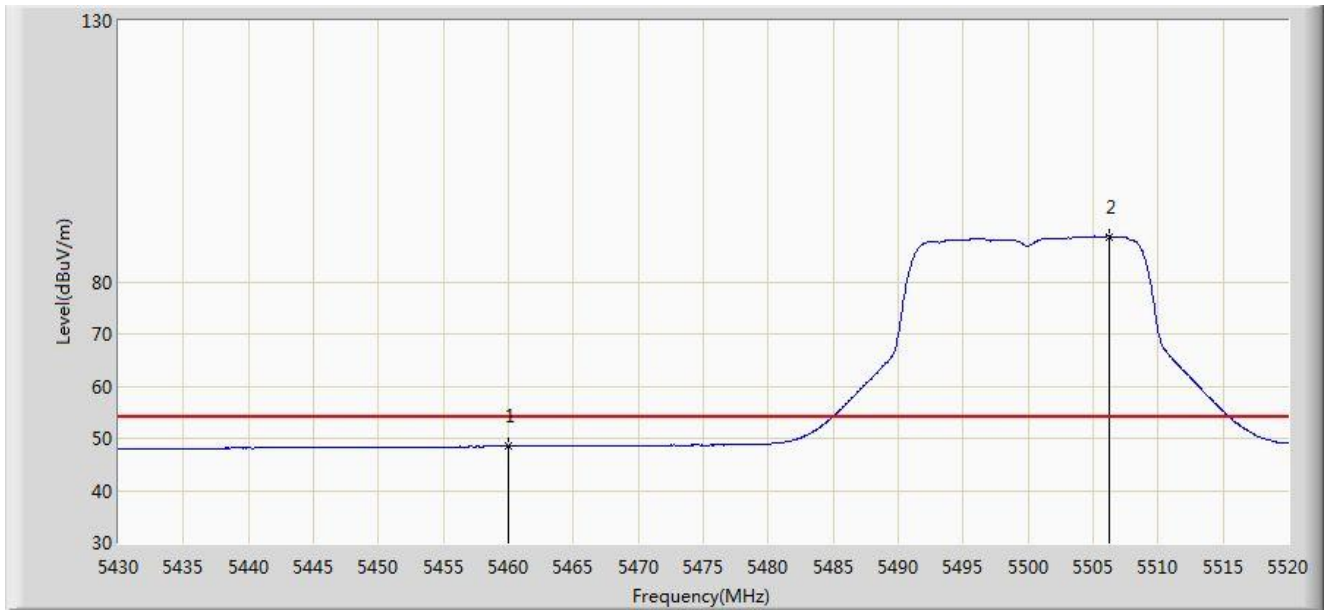


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.449	44.967	-5.551	54.000	3.482	AV
2		*	5506.230	88.653	85.134	N/A	N/A	3.519	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

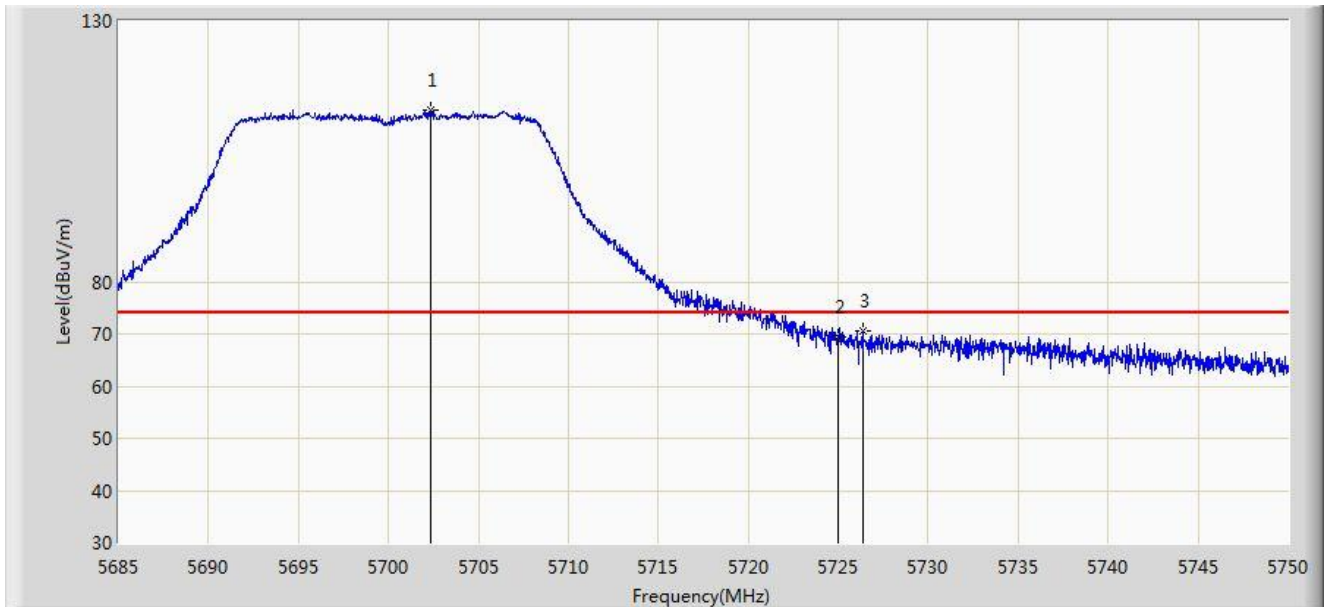


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.388	112.828	109.106	N/A	N/A	3.723	PK
2			5725.000	69.484	65.693	-4.516	74.000	3.791	PK
3			5726.373	70.723	66.928	-3.277	74.000	3.795	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

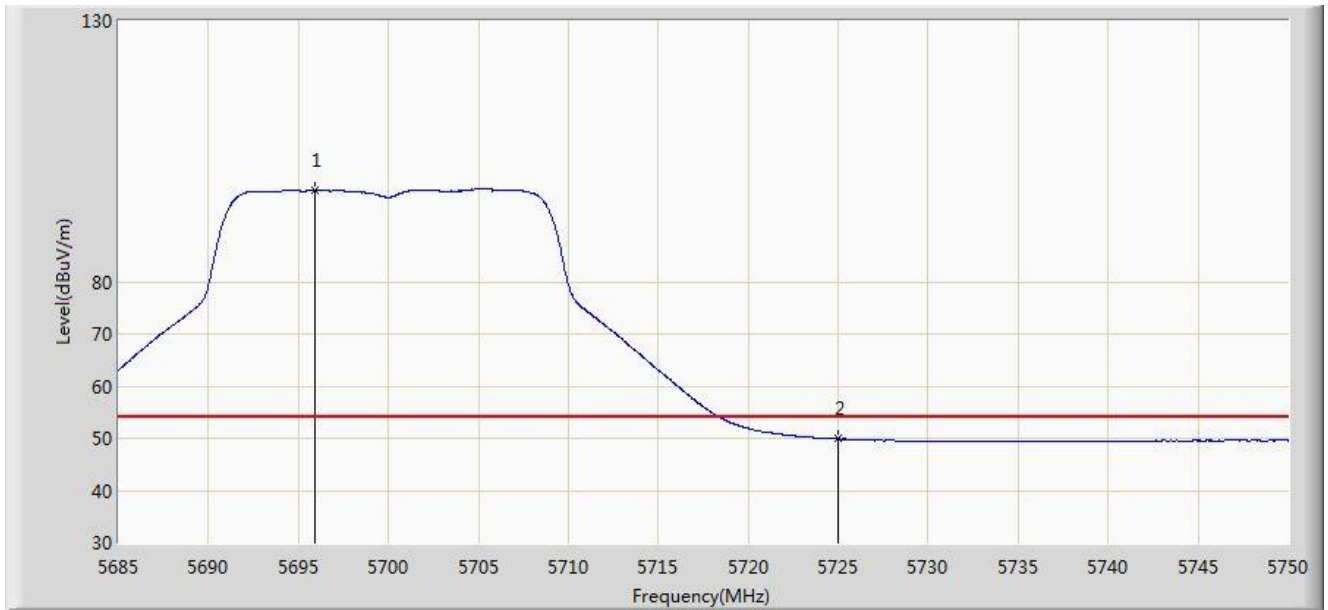


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.920	97.564	93.851	N/A	N/A	3.713	AV
2			5725.000	49.873	46.082	-4.127	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 17:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

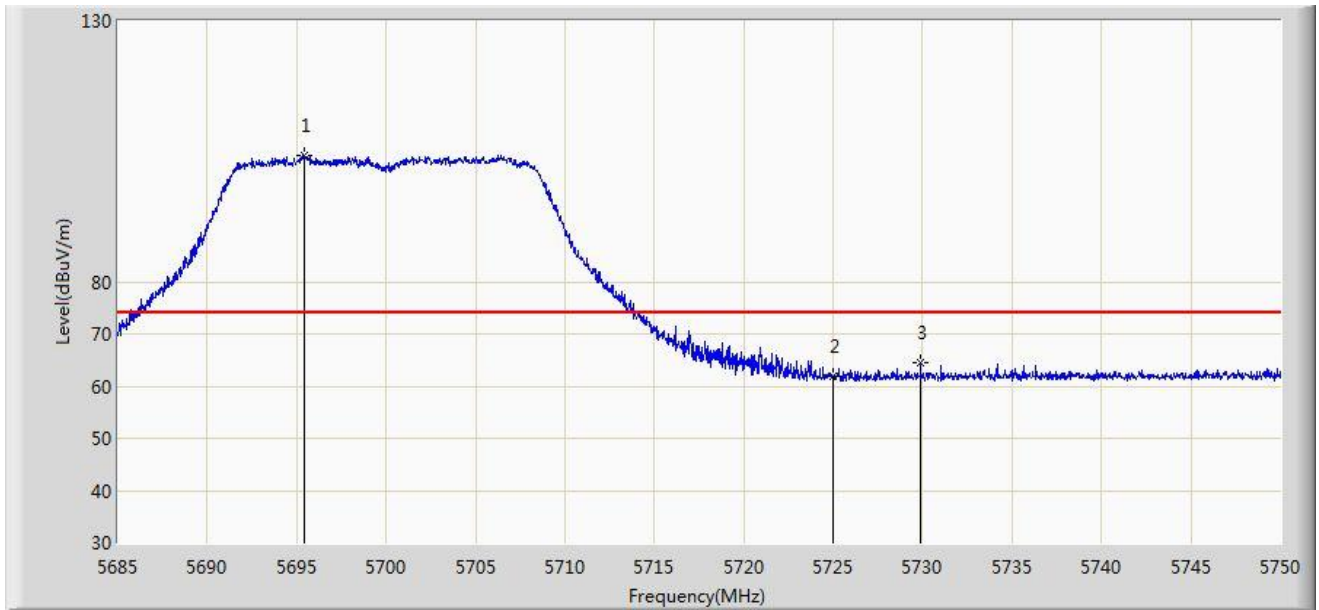


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.465	104.219	100.507	N/A	N/A	3.713	PK
2			5725.000	61.934	58.143	-12.066	74.000	3.791	PK
3			5729.882	64.466	60.660	-9.534	74.000	3.806	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

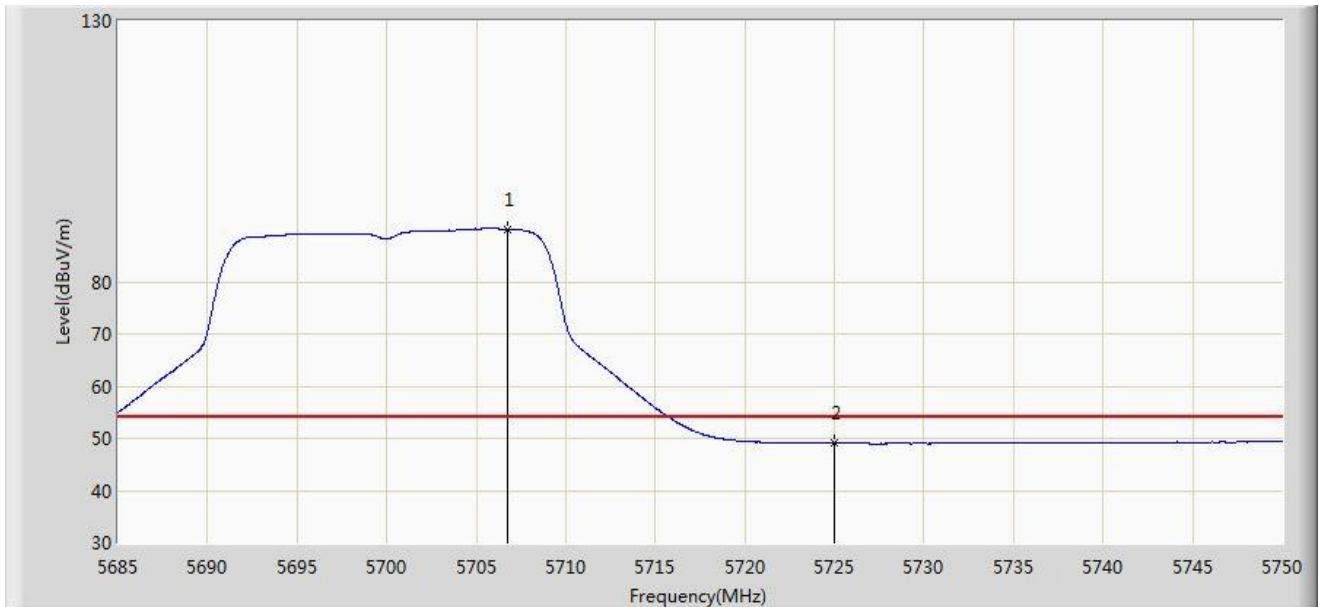


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.710	90.123	86.387	N/A	N/A	3.735	AV
2			5725.000	49.053	45.262	-4.947	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

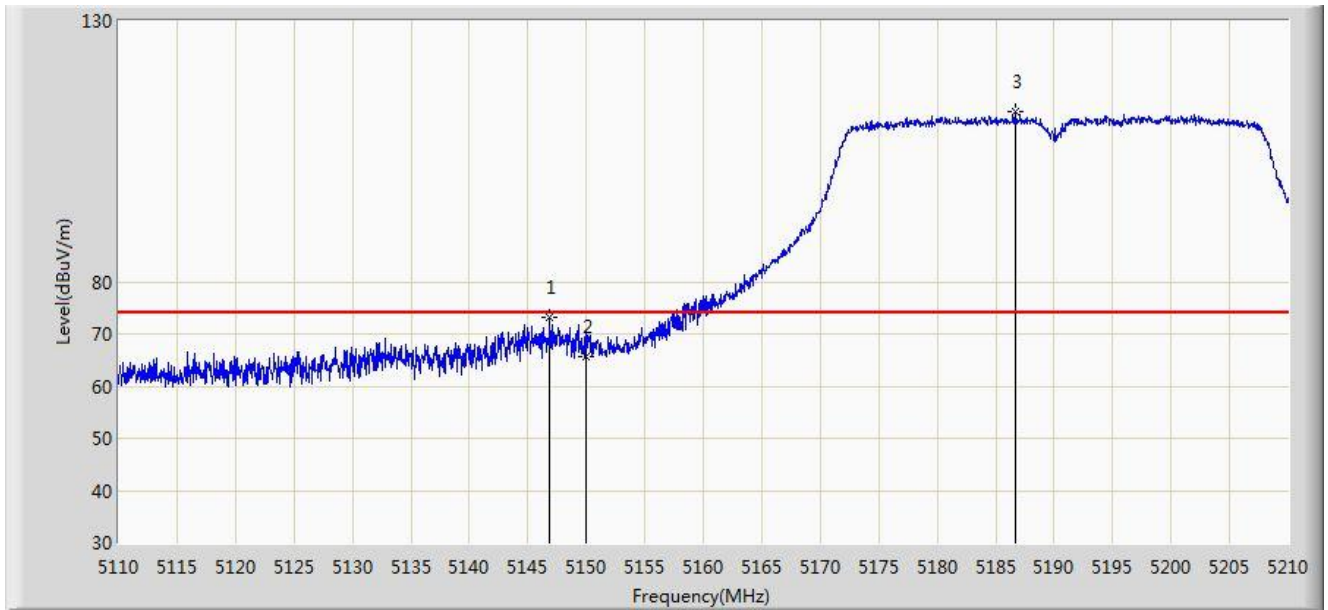


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.900	73.136	69.827	-0.864	74.000	3.308	PK
2			5150.000	65.786	62.477	-8.214	74.000	3.309	PK
3		*	5186.750	112.630	109.365	N/A	N/A	3.265	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

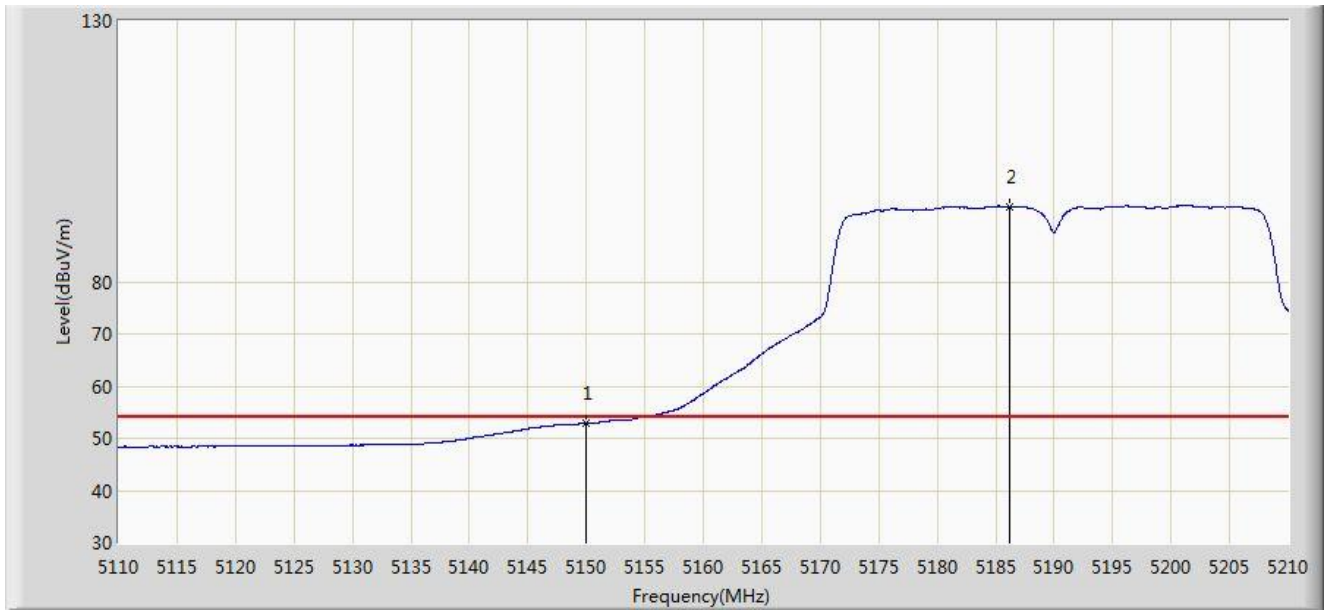


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.863	49.554	-1.137	54.000	3.309	AV
2		*	5186.150	94.454	91.188	N/A	N/A	3.266	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

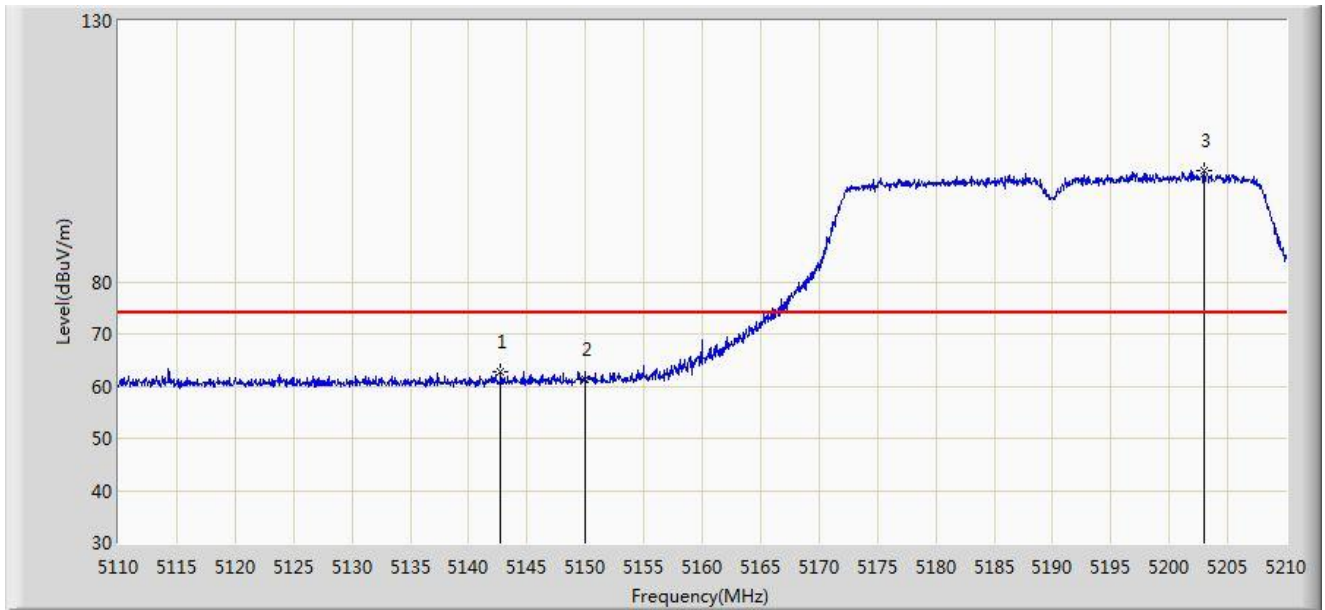


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.700	62.634	59.325	-11.366	74.000	3.309	PK
2			5150.000	61.214	57.905	-12.786	74.000	3.309	PK
3		*	5203.000	101.410	98.168	N/A	N/A	3.242	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 10:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

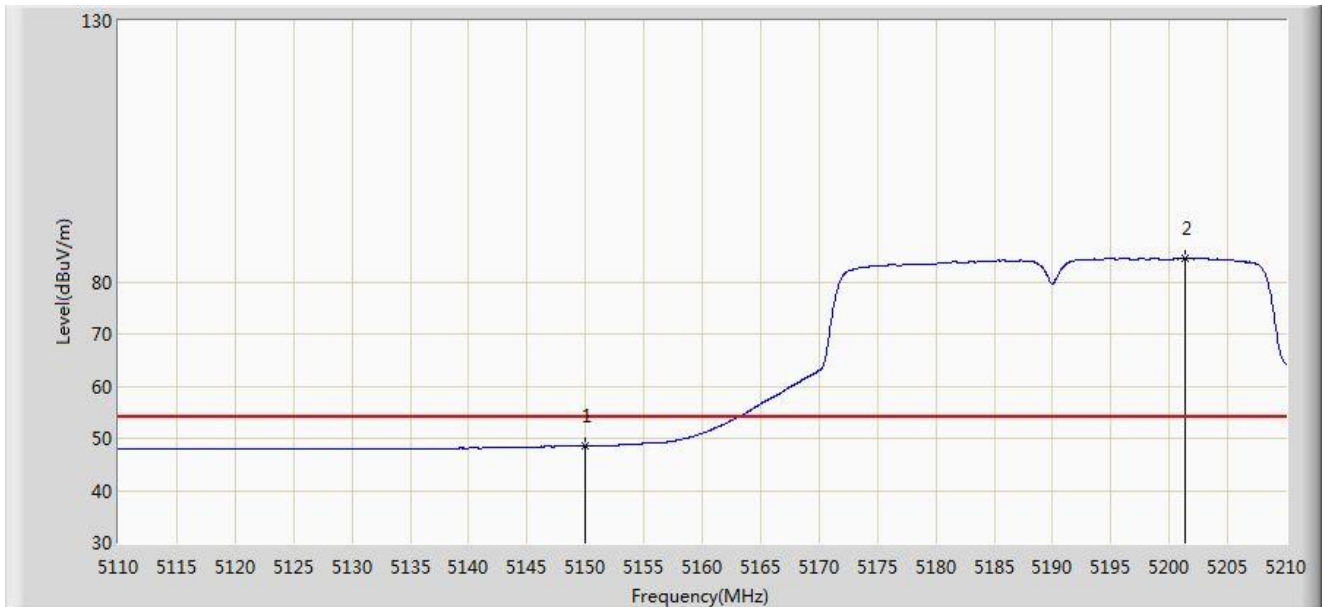


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.600	45.291	-5.400	54.000	3.309	AV
2		*	5201.300	84.519	81.273	N/A	N/A	3.245	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

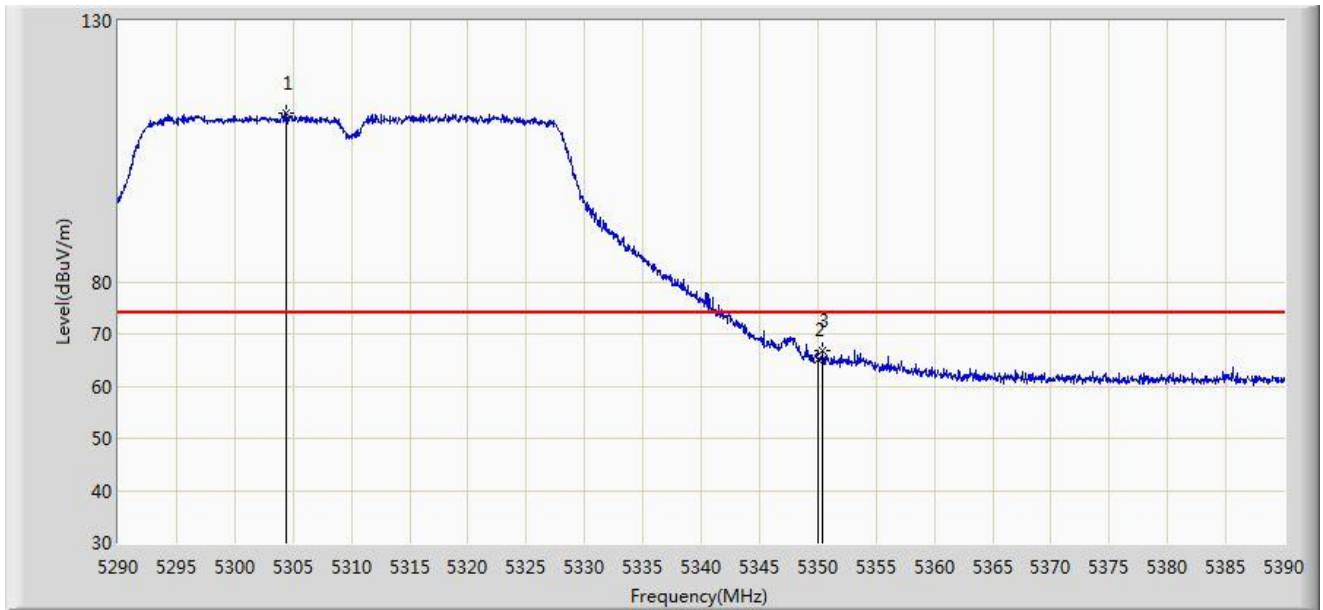


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.400	112.289	109.179	N/A	N/A	3.110	PK
2			5350.000	65.129	62.097	-8.871	74.000	3.032	PK
3			5350.400	66.832	63.800	-7.168	74.000	3.032	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

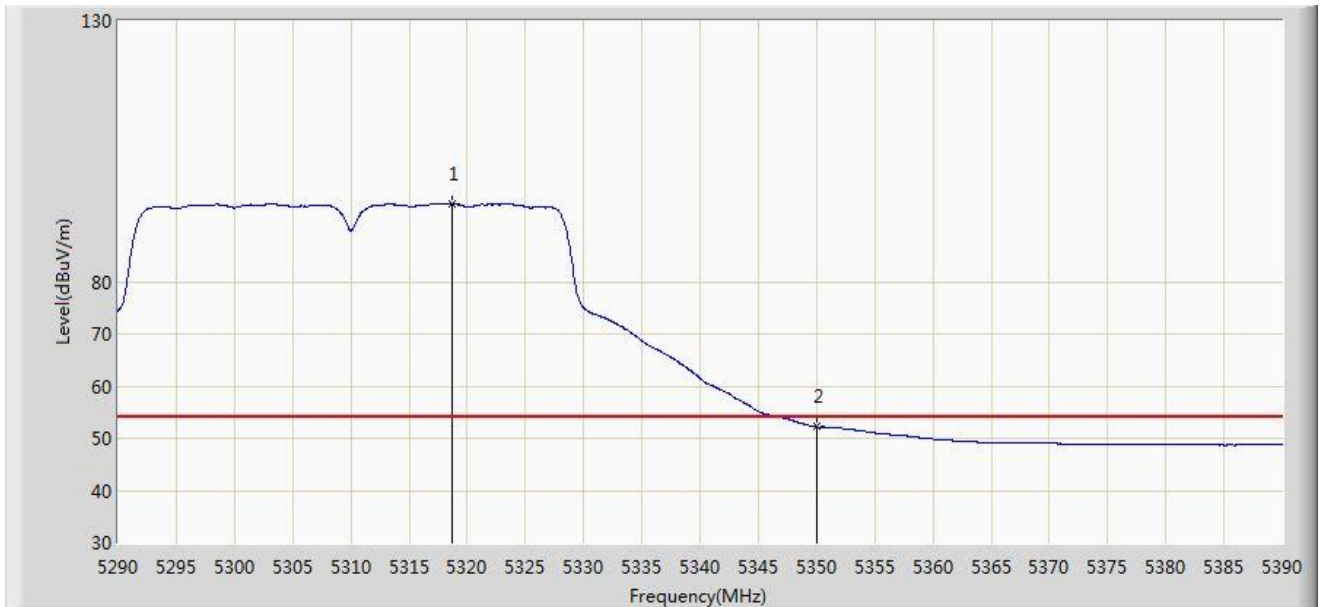


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.700	94.896	91.820	N/A	N/A	3.075	AV
2			5350.000	52.211	49.179	-1.789	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 17:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

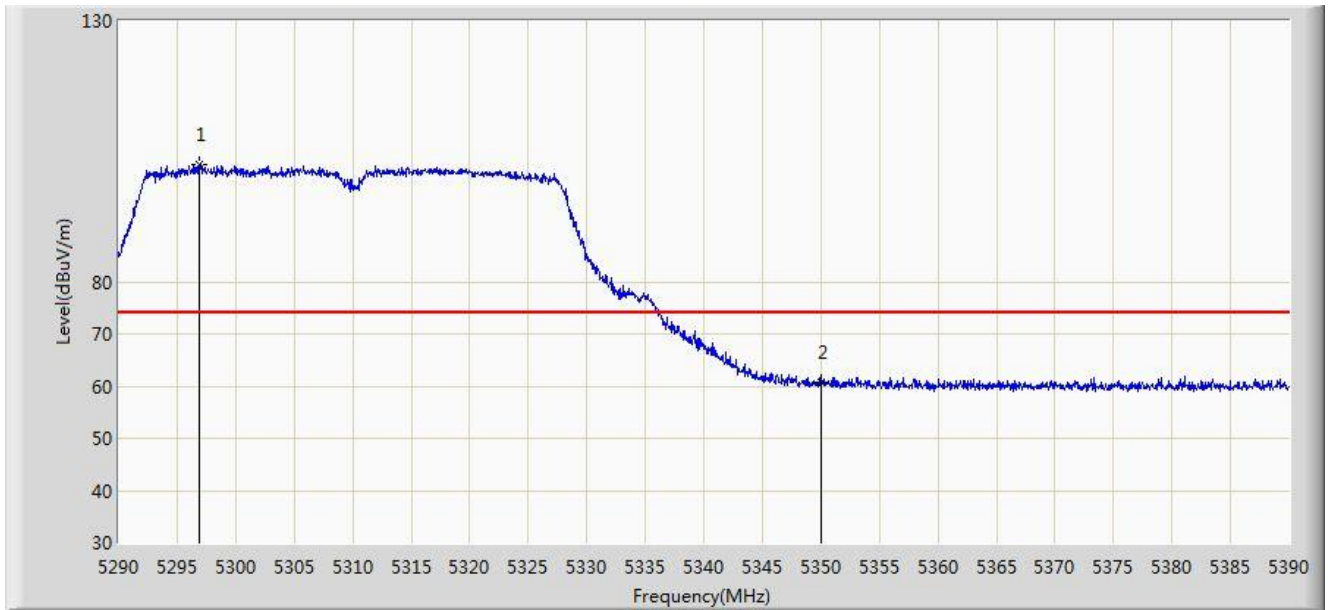


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.950	102.369	99.241	N/A	N/A	3.127	PK
2			5350.000	60.601	57.569	-13.399	74.000	3.032	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

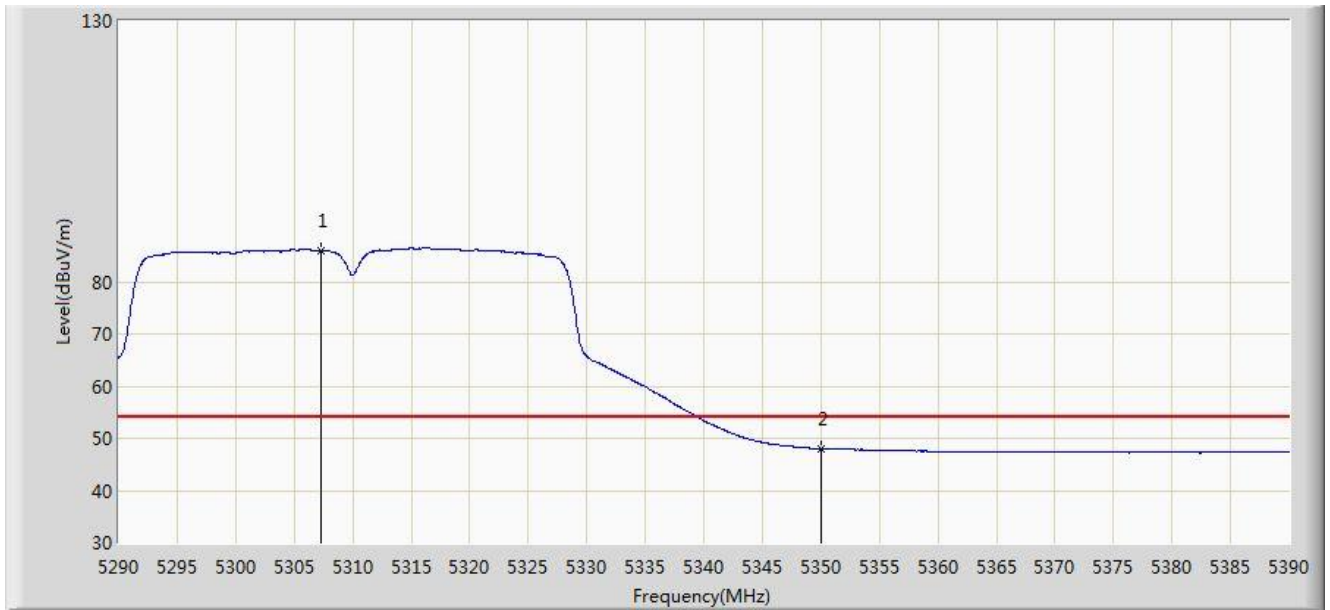


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.250	86.060	82.957	N/A	N/A	3.102	AV
2			5350.000	48.003	44.971	-5.997	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

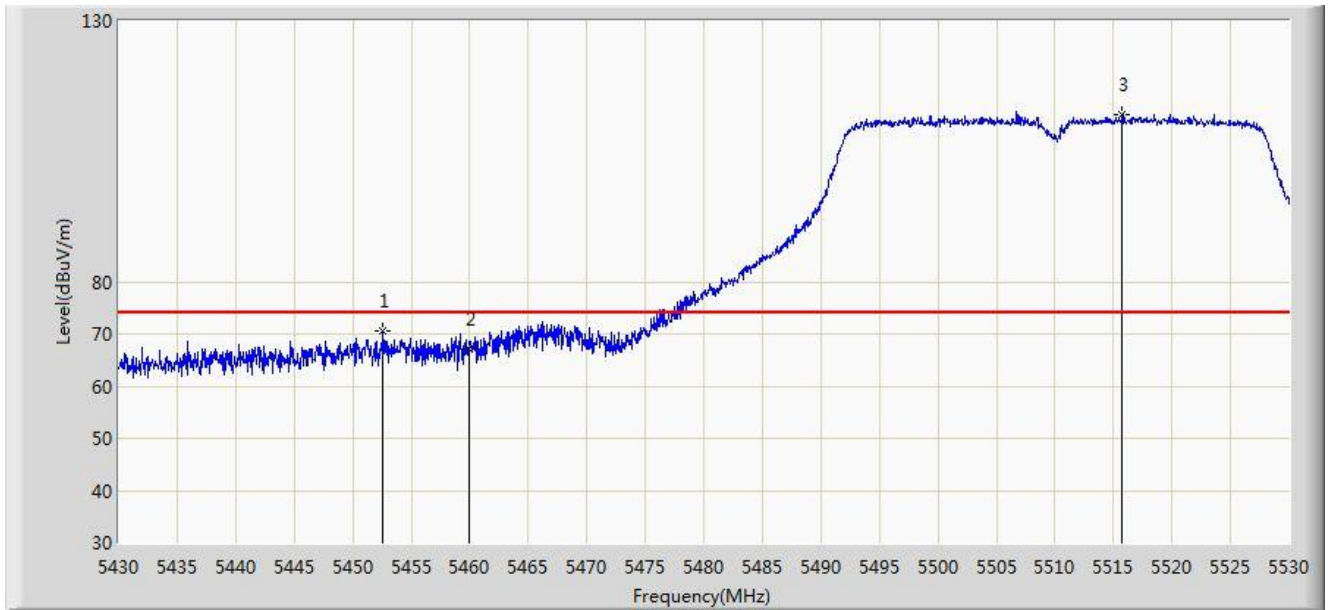


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.600	70.477	67.037	-3.523	74.000	3.440	PK
2			5460.000	67.009	63.527	-6.991	74.000	3.482	PK
3		*	5515.750	112.157	108.647	N/A	N/A	3.510	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

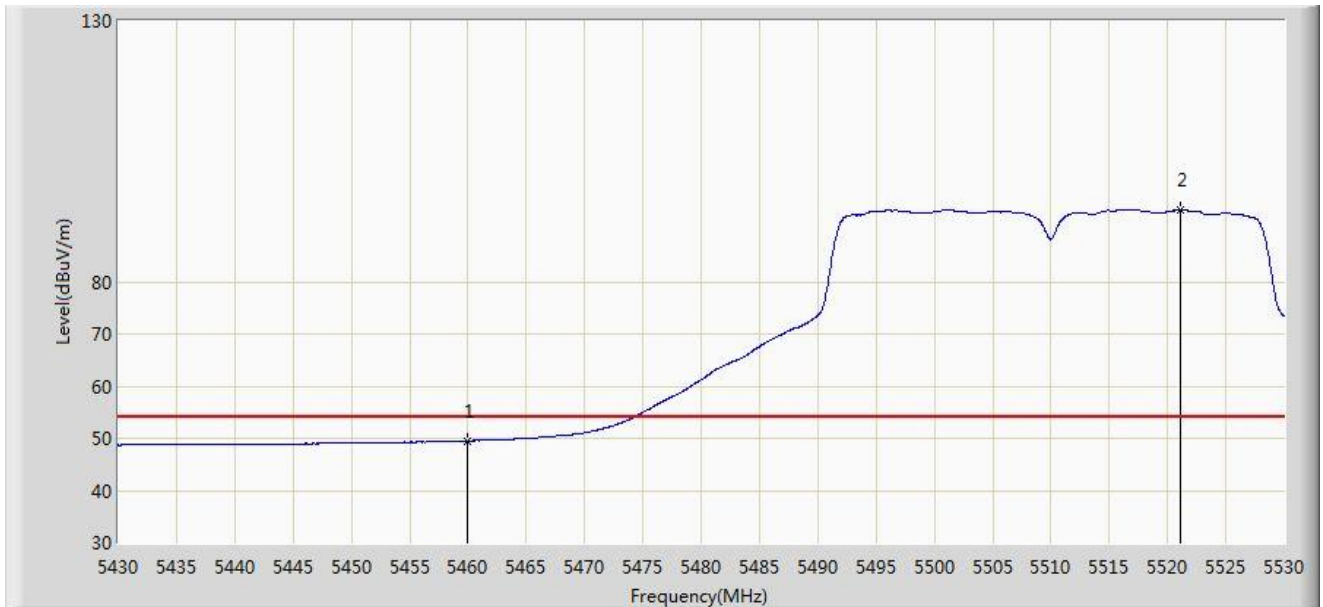


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.517	46.035	-4.483	54.000	3.482	AV
2		*	5521.150	93.847	90.343	N/A	N/A	3.504	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

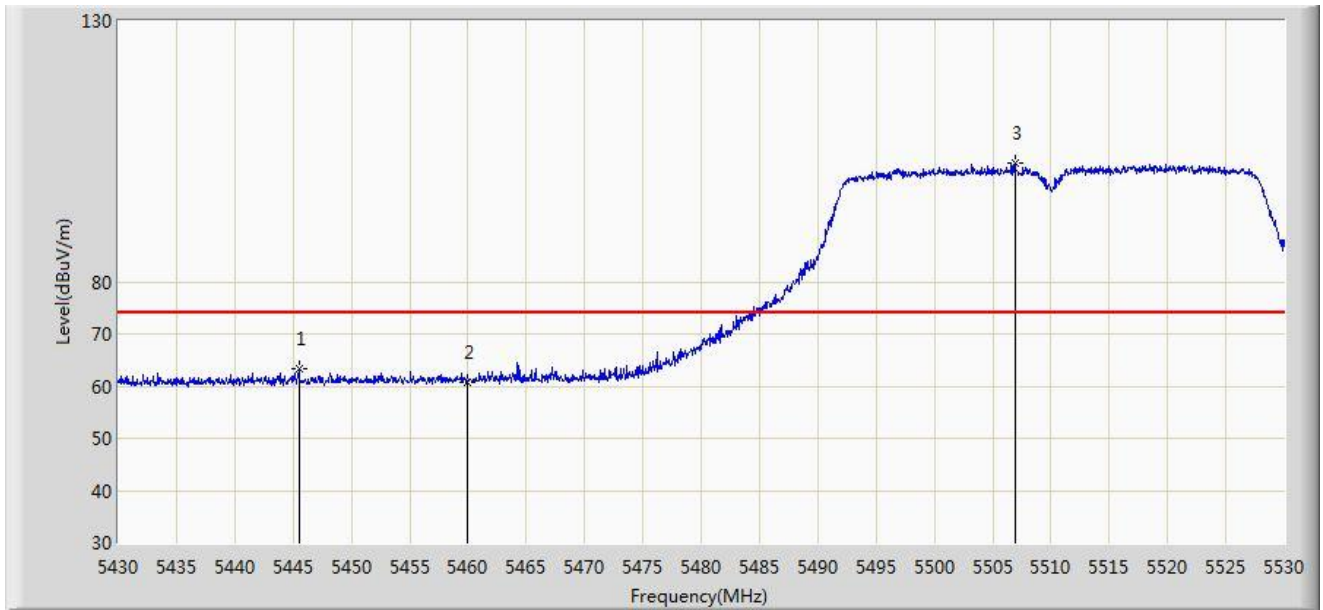


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.500	63.466	60.058	-10.534	74.000	3.408	PK
2			5460.000	60.802	57.320	-13.198	74.000	3.482	PK
3		*	5506.900	102.643	99.124	N/A	N/A	3.519	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

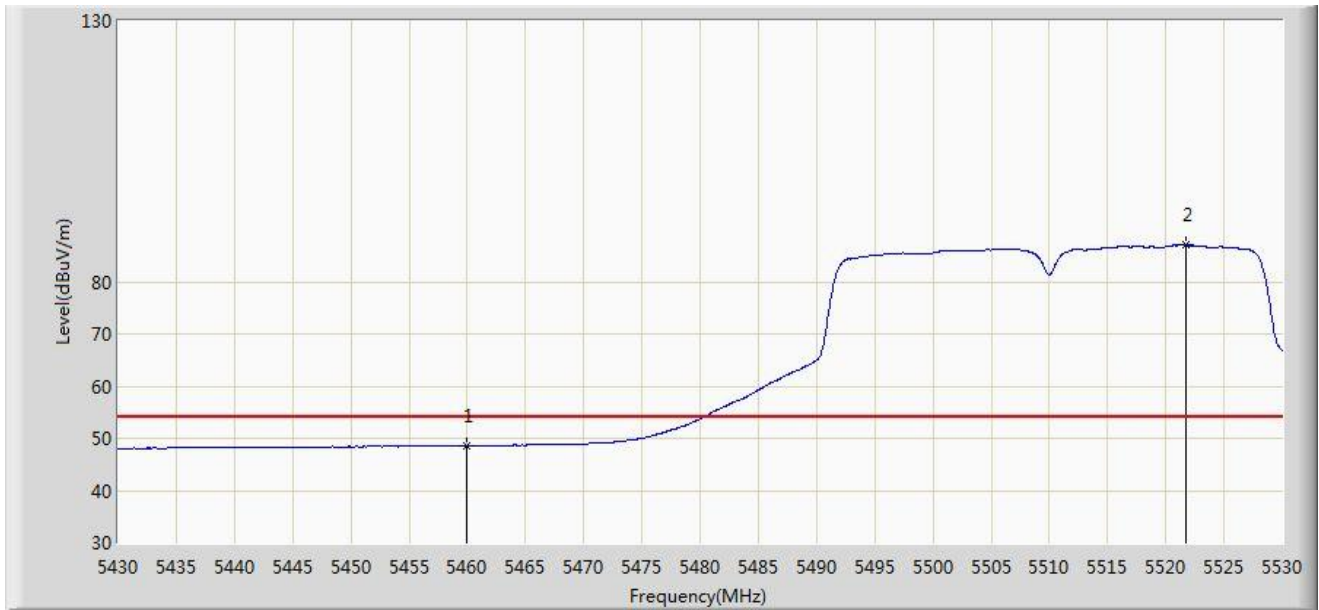


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.589	45.107	-5.411	54.000	3.482	AV
2		*	5521.700	87.073	83.570	N/A	N/A	3.504	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

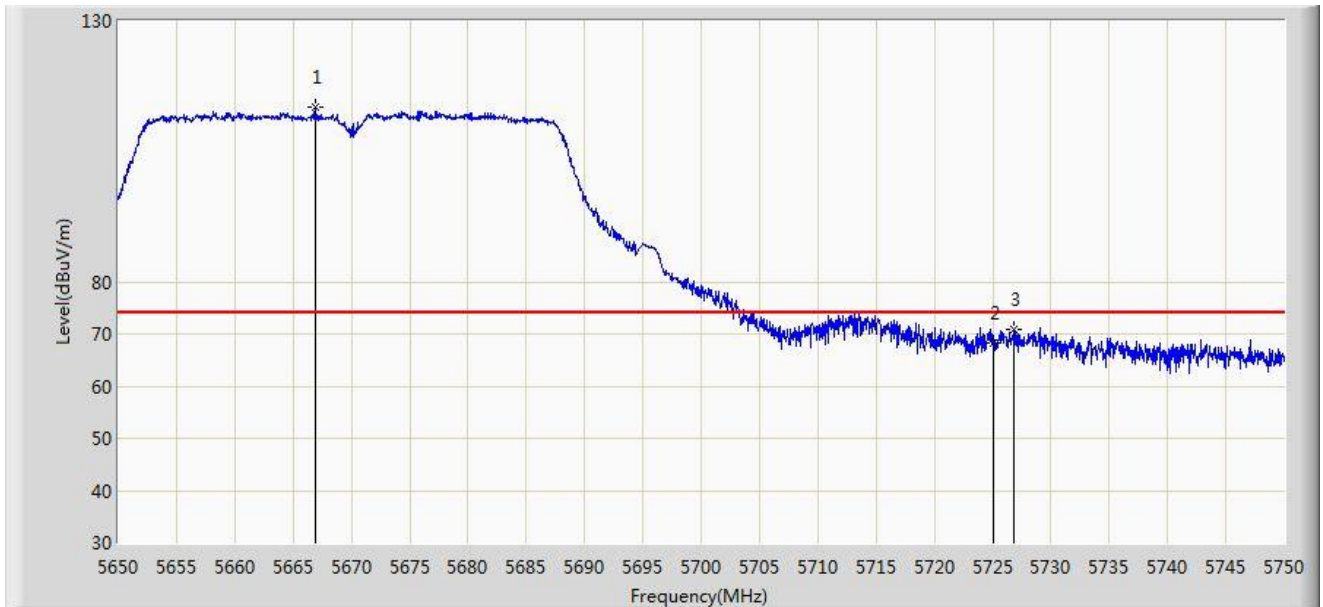


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.900	113.565	109.908	N/A	N/A	3.656	PK
2			5725.000	68.131	64.340	-5.869	74.000	3.791	PK
3			5726.850	70.968	67.172	-3.032	74.000	3.796	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

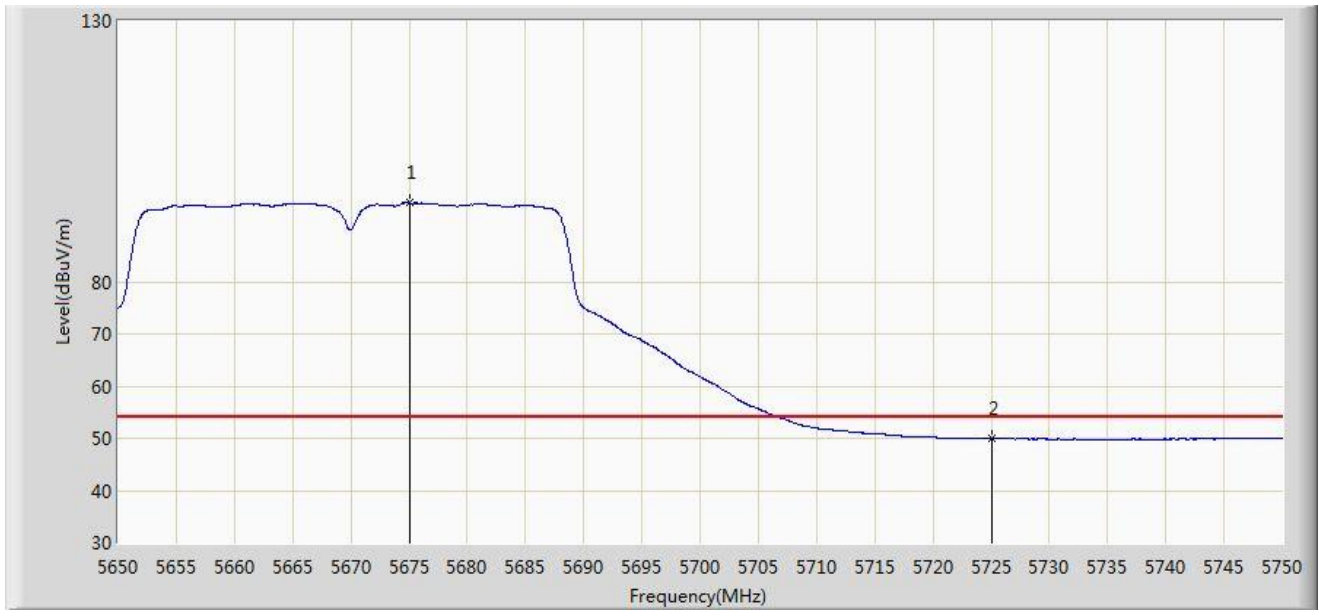


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.000	95.073	91.404	N/A	N/A	3.669	AV
2			5725.000	49.913	46.122	-4.087	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 17:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

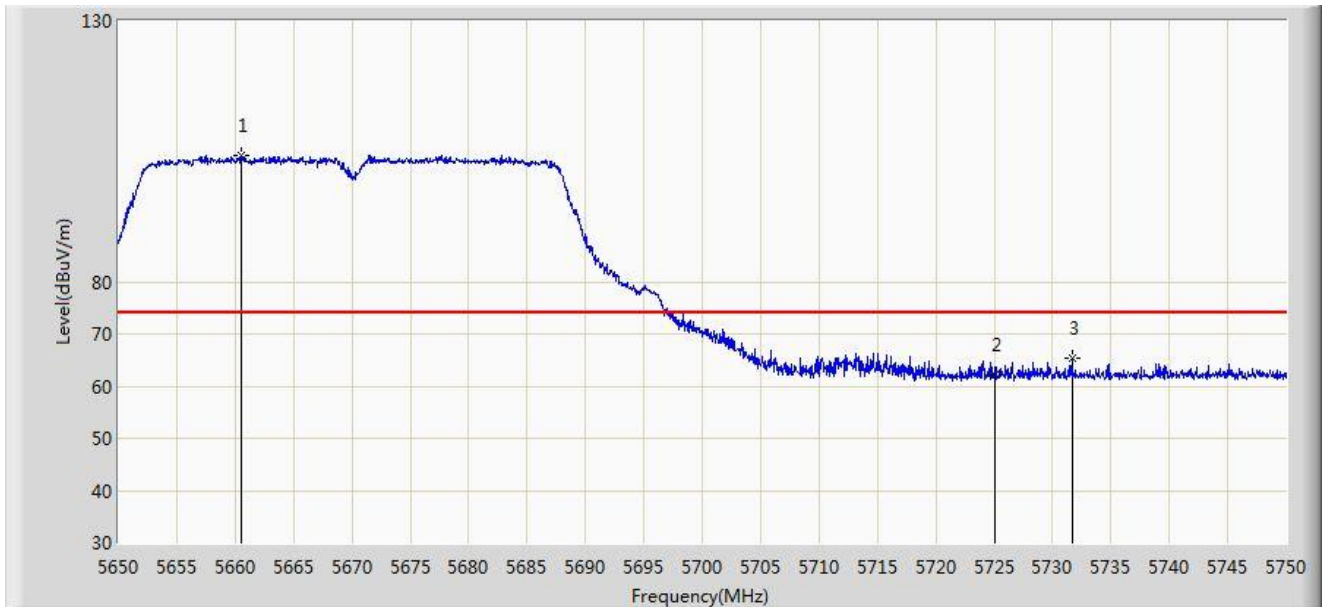


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.500	104.216	100.569	N/A	N/A	3.647	PK
2			5725.000	62.228	58.437	-11.772	74.000	3.791	PK
3			5731.650	65.309	61.498	-8.691	74.000	3.811	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

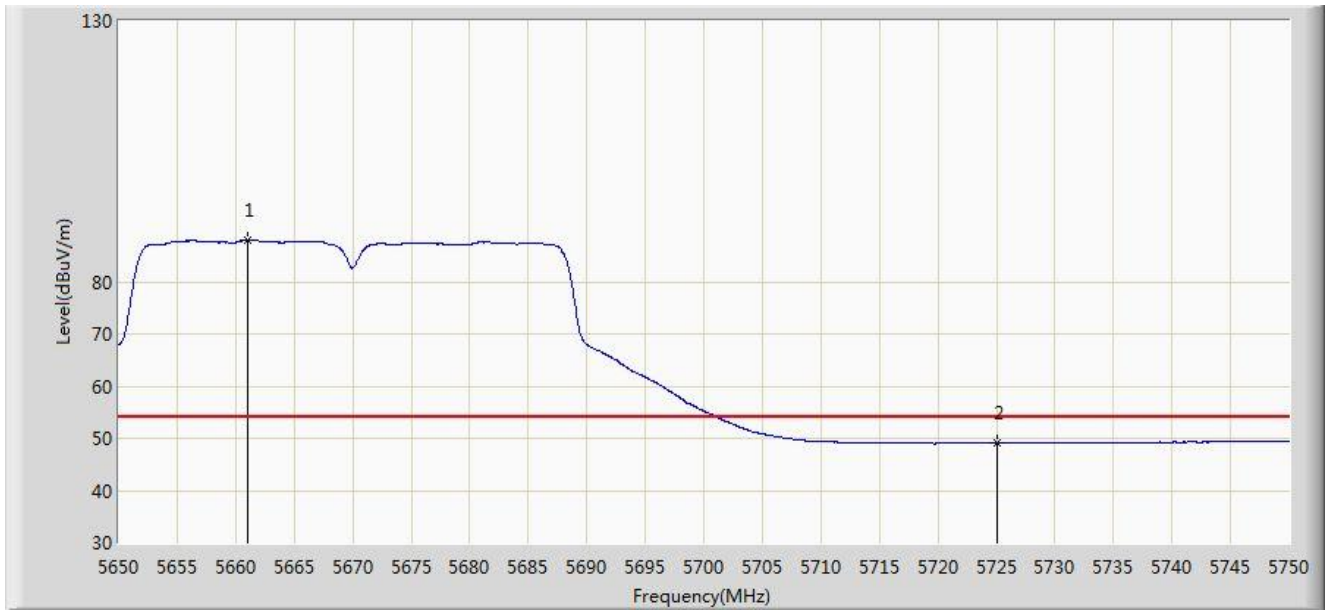


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.000	87.926	84.278	N/A	N/A	3.648	AV
2			5725.000	49.060	45.269	-4.940	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

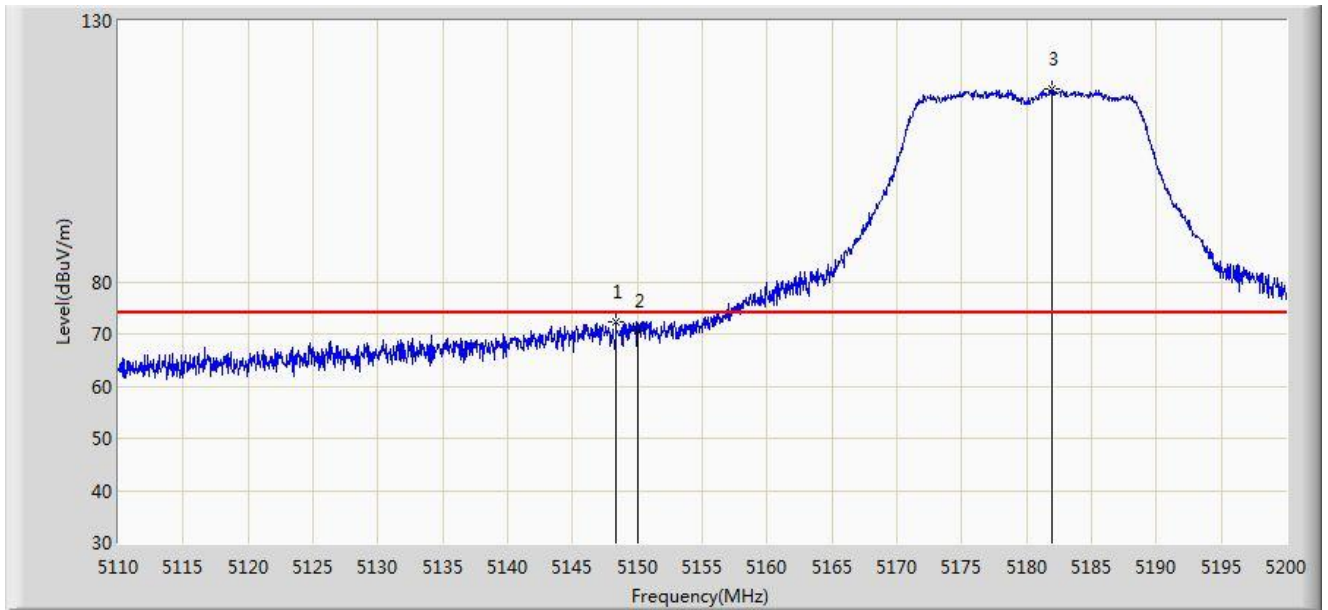


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.340	72.393	69.084	-1.607	74.000	3.308	PK
2			5150.000	70.629	67.320	-3.371	74.000	3.309	PK
3		*	5181.910	116.945	113.674	N/A	N/A	3.272	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

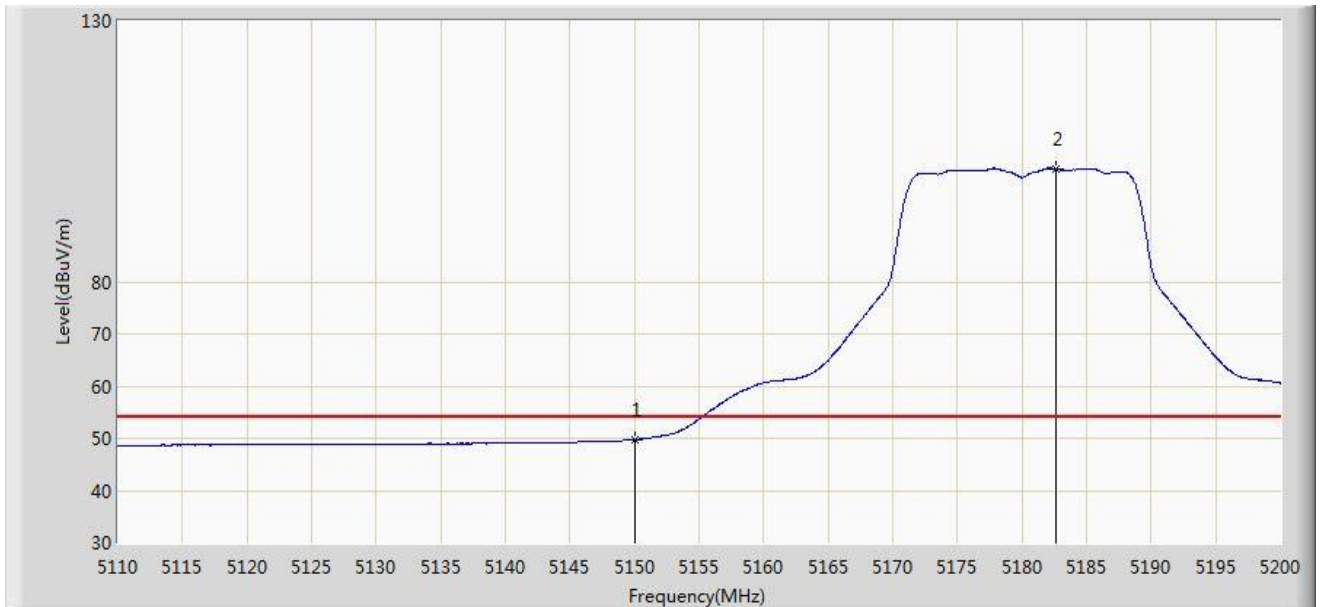


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.730	46.421	-4.270	54.000	3.309	AV
2		*	5182.585	101.626	98.356	N/A	N/A	3.271	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

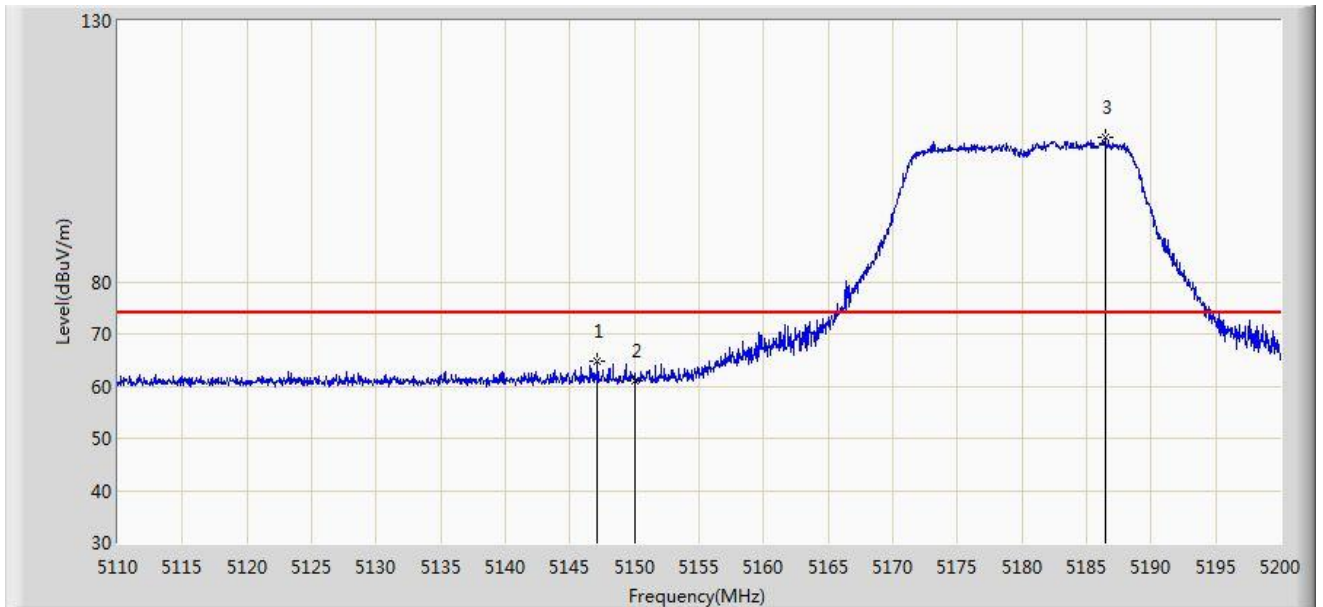


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.125	64.639	61.330	-9.361	74.000	3.309	PK
2			5150.000	61.154	57.845	-12.846	74.000	3.309	PK
3		*	5186.410	107.551	104.286	N/A	N/A	3.265	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

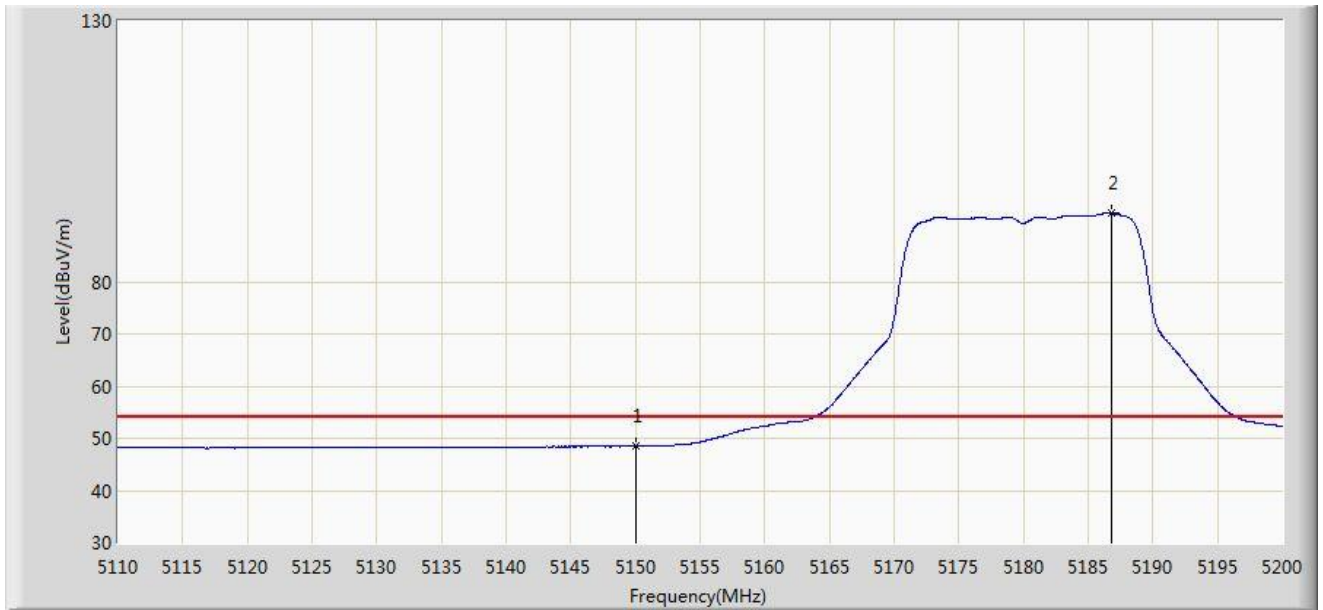


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.499	45.190	-5.501	54.000	3.309	AV
2		*	5186.815	93.244	89.979	N/A	N/A	3.265	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

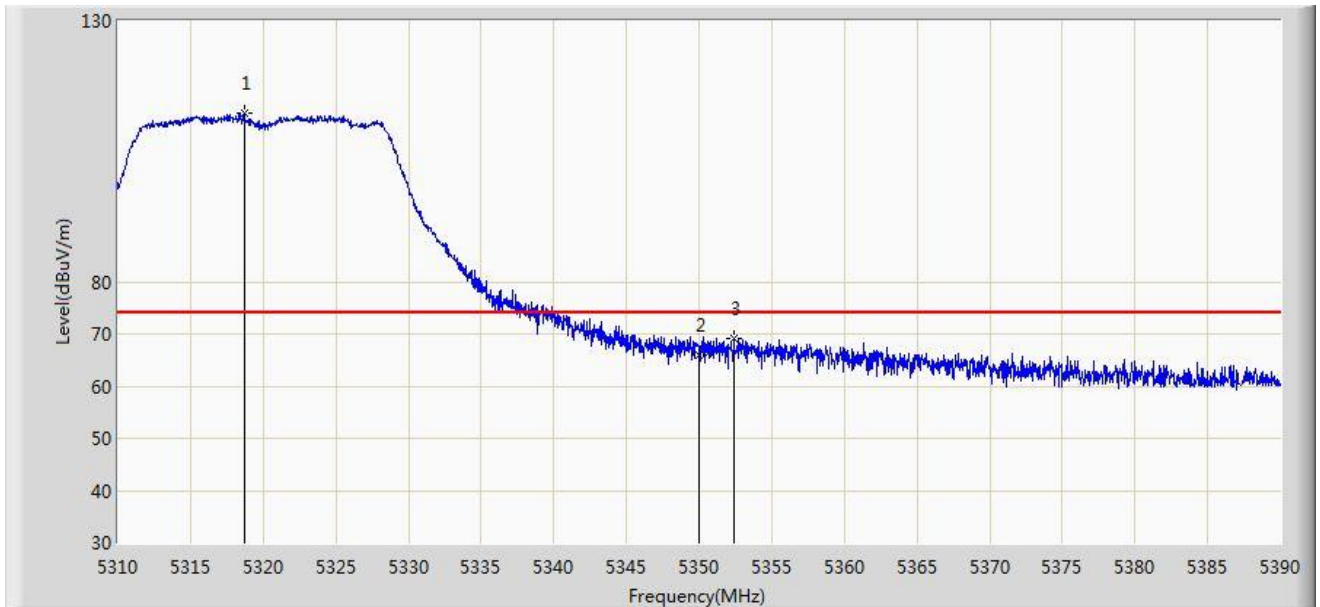


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.680	112.233	109.157	N/A	N/A	3.075	PK
2			5350.000	66.086	63.054	-7.914	74.000	3.032	PK
3			5352.400	69.157	66.127	-4.843	74.000	3.029	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 17:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

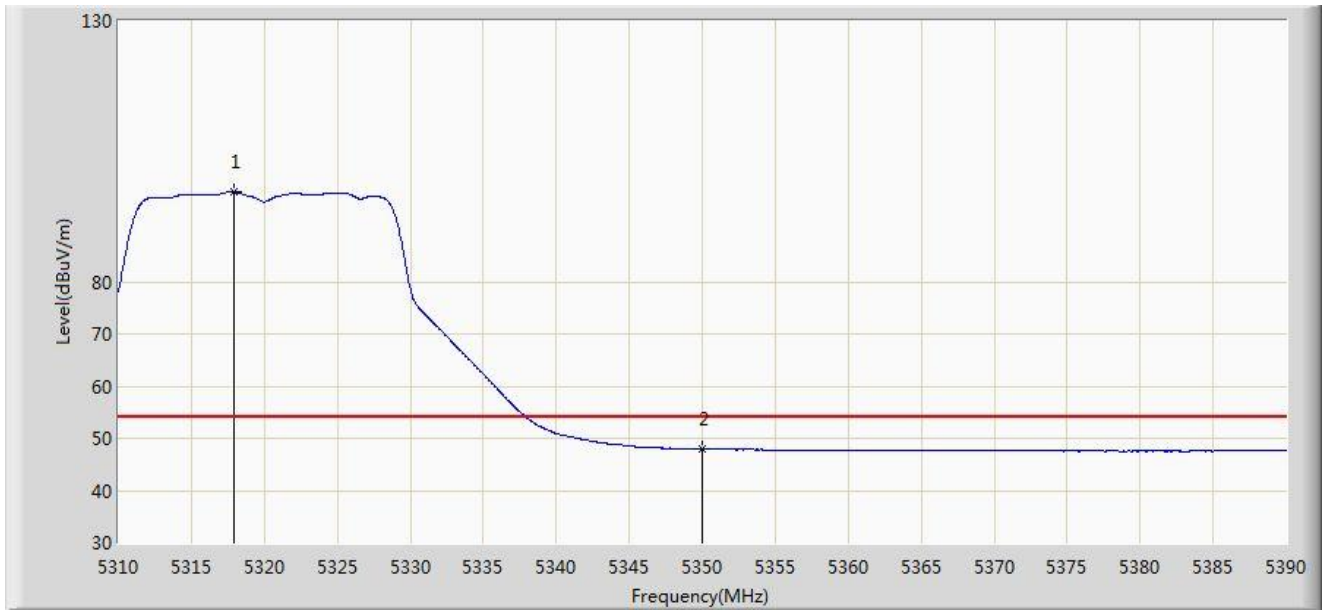


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.920	97.322	94.245	N/A	N/A	3.077	AV
2			5350.000	47.923	44.891	-6.077	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

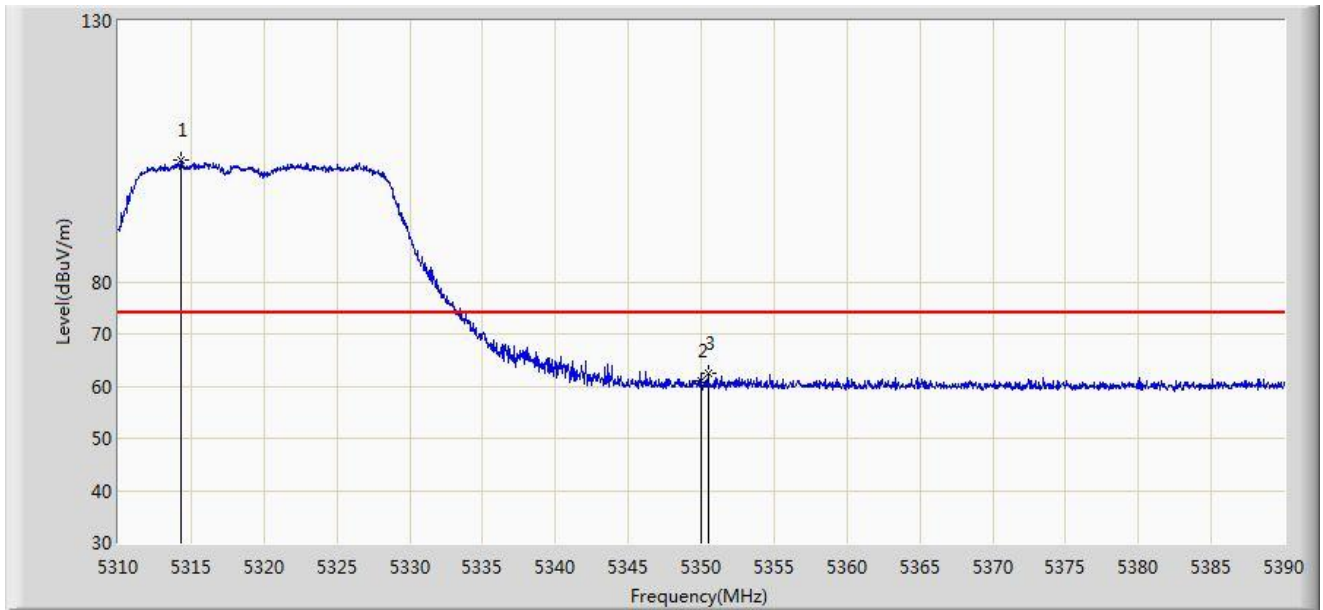


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.320	103.450	100.366	N/A	N/A	3.084	PK
2			5350.000	60.901	57.869	-13.099	74.000	3.032	PK
3			5350.480	62.562	59.530	-11.438	74.000	3.032	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

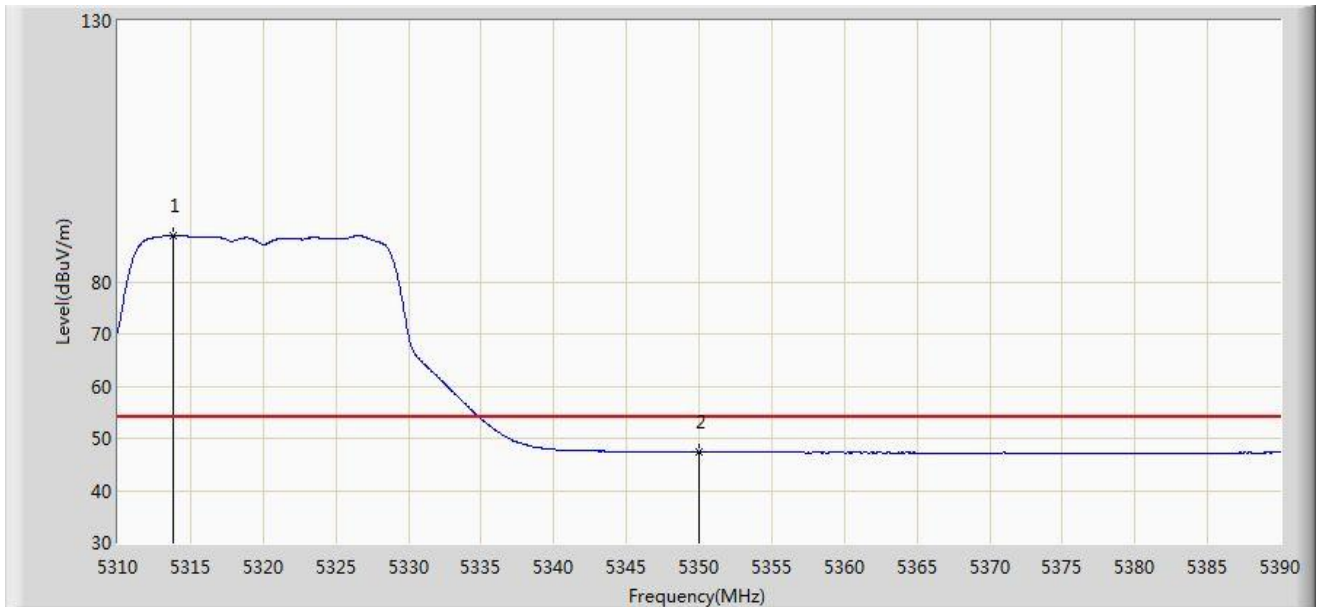


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.800	88.862	85.777	N/A	N/A	3.086	AV
2			5350.000	47.342	44.310	-6.658	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

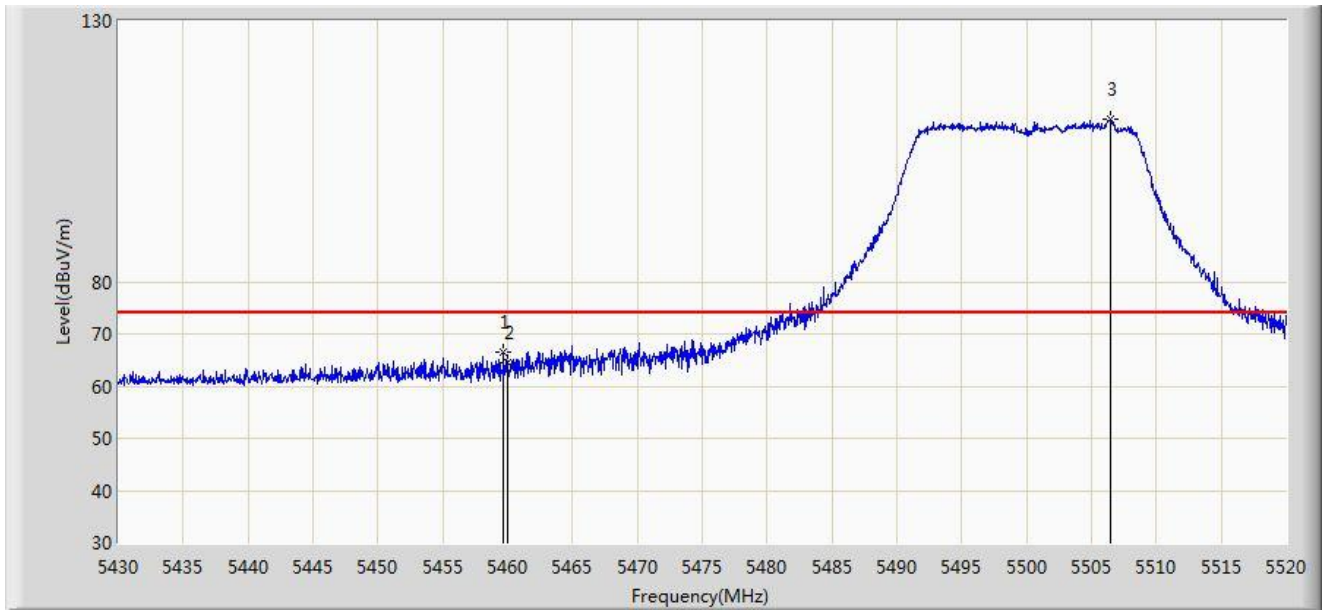


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.655	66.421	62.941	-7.579	74.000	3.480	PK
2			5460.000	64.516	61.034	-9.484	74.000	3.482	PK
3		*	5506.410	111.063	107.544	N/A	N/A	3.519	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

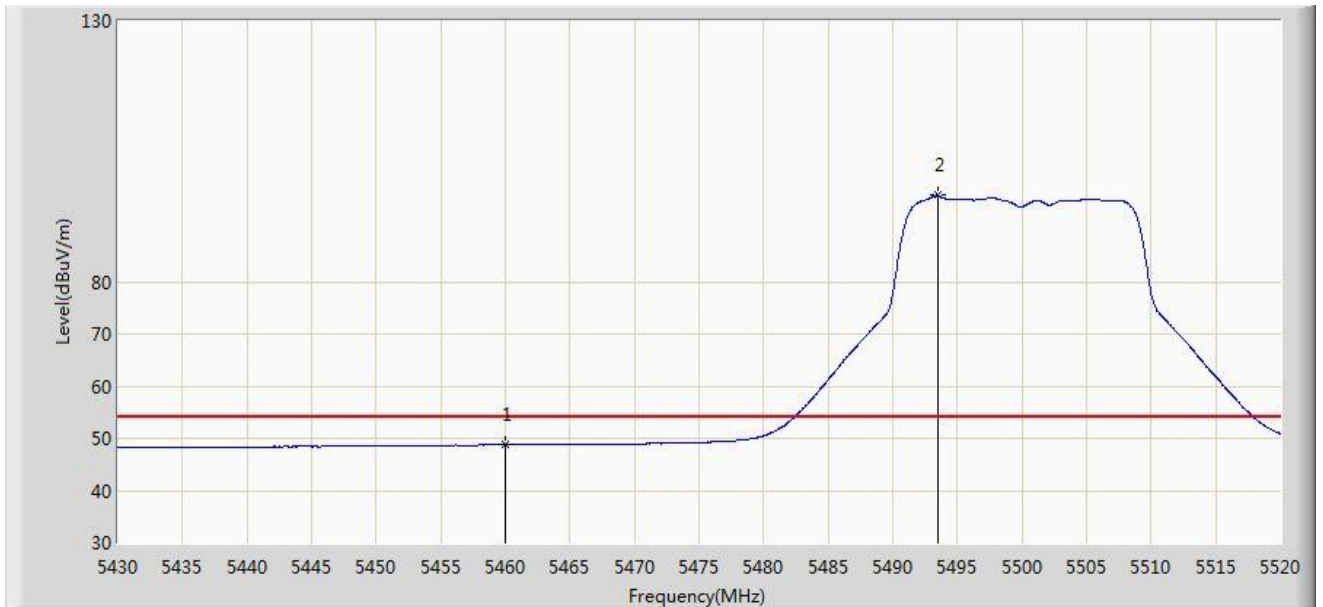


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.755	45.273	-5.245	54.000	3.482	AV
2		*	5493.495	96.530	92.997	N/A	N/A	3.533	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

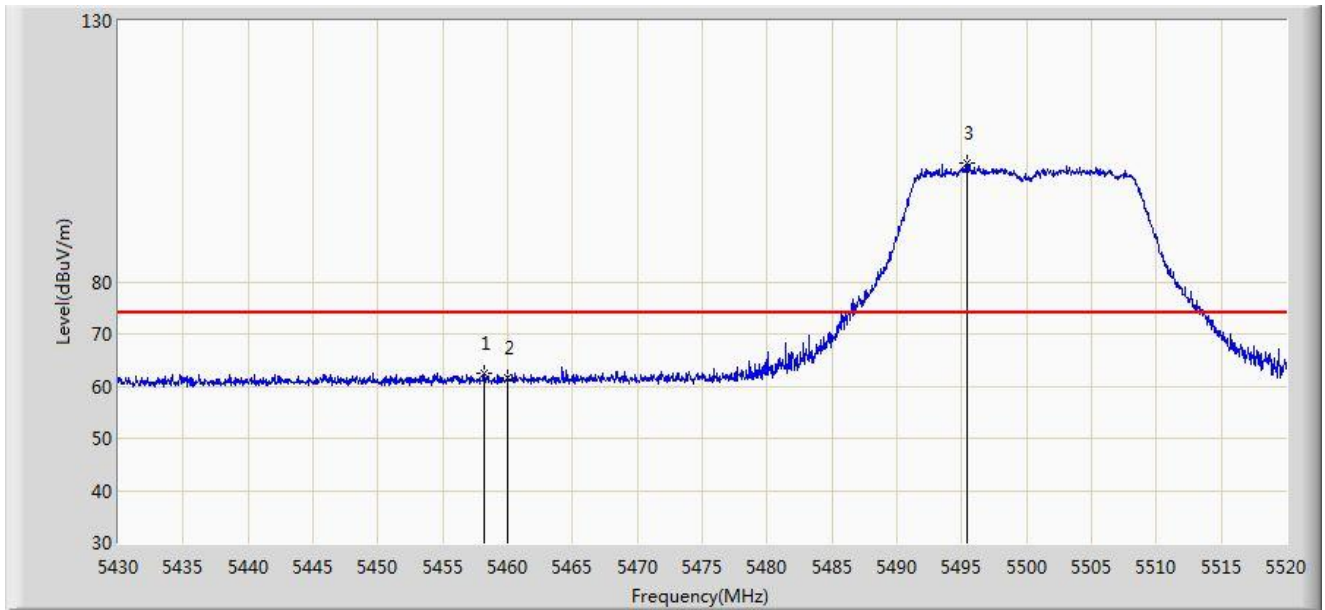


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.170	62.605	59.134	-11.395	74.000	3.471	PK
2			5460.000	61.611	58.129	-12.389	74.000	3.482	PK
3		*	5495.430	102.841	99.310	N/A	N/A	3.531	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

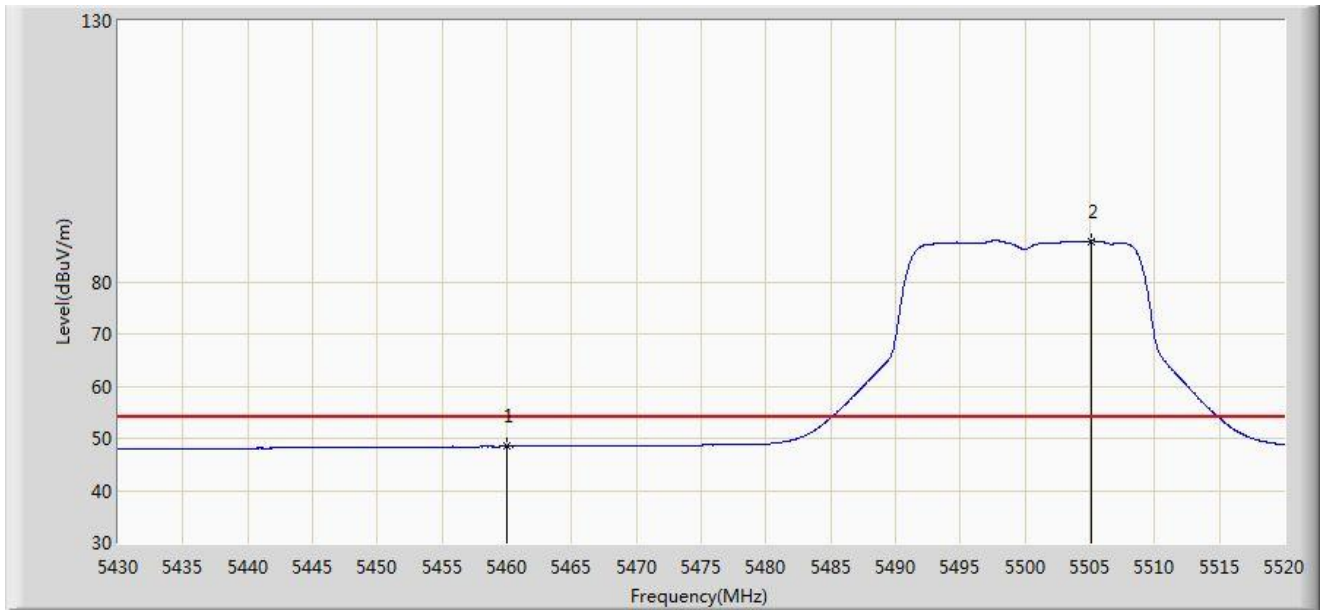


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.442	44.960	-5.558	54.000	3.482	AV
2		*	5505.105	87.813	84.292	N/A	N/A	3.521	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

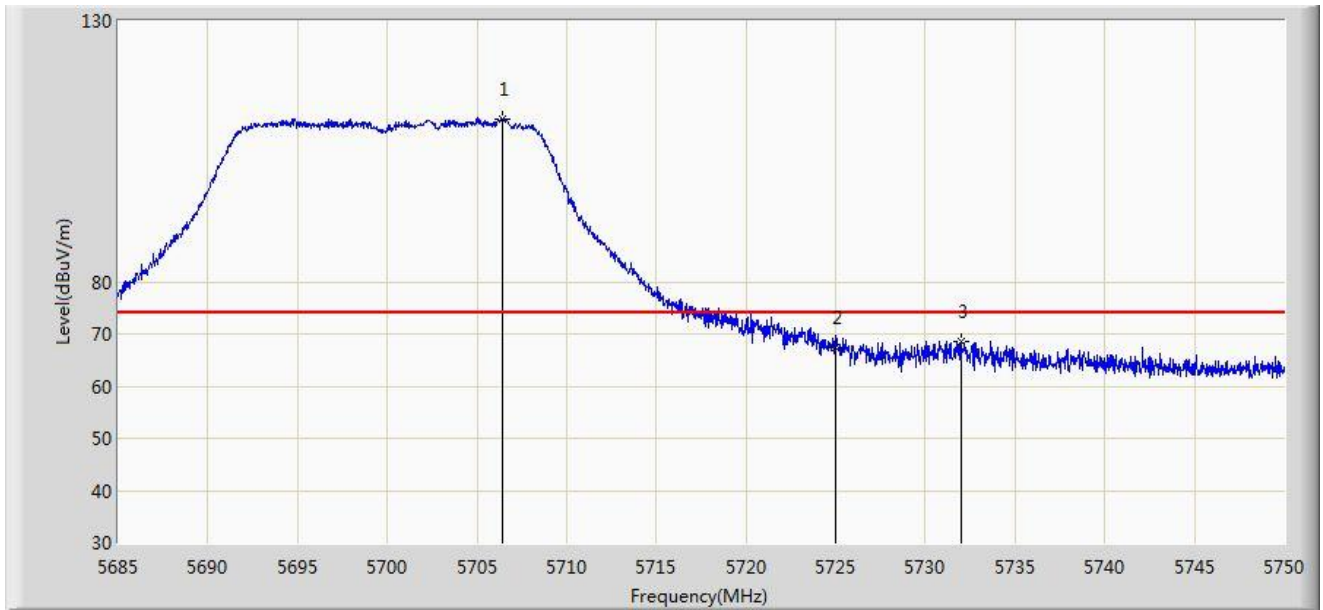


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.417	111.300	107.565	N/A	N/A	3.735	PK
2			5725.000	67.513	63.722	-6.487	74.000	3.791	PK
3			5731.962	68.620	64.808	-5.380	74.000	3.813	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

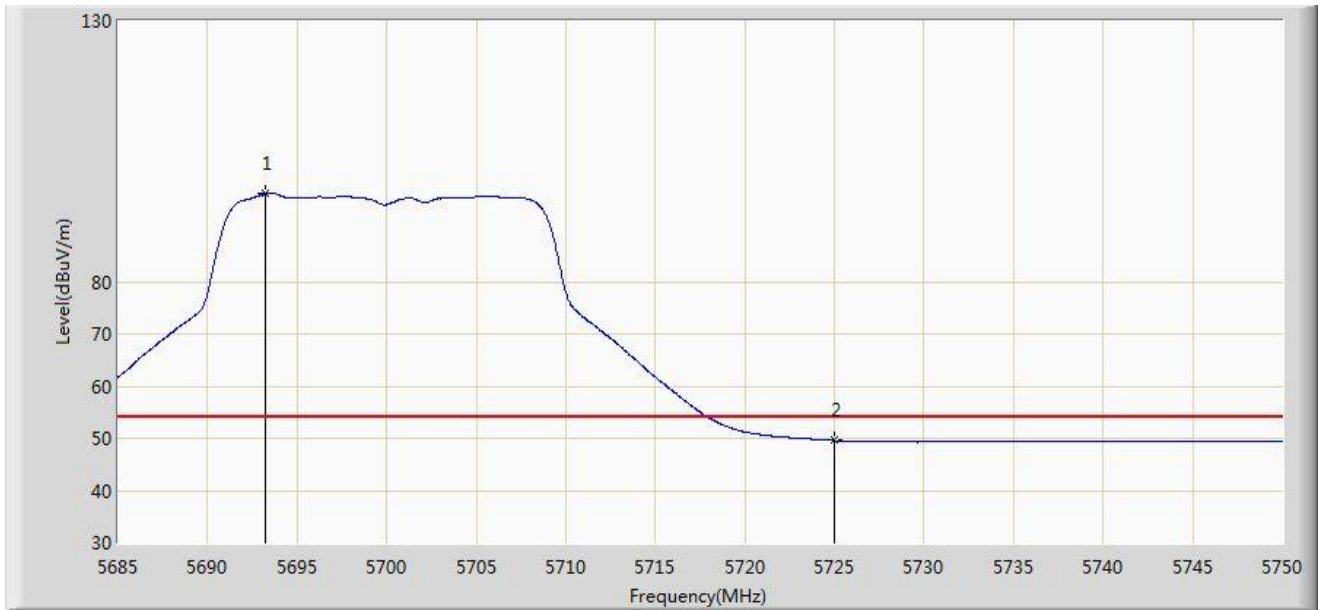


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.255	97.037	93.328	N/A	N/A	3.710	AV
2			5725.000	49.574	45.783	-4.426	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 18:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

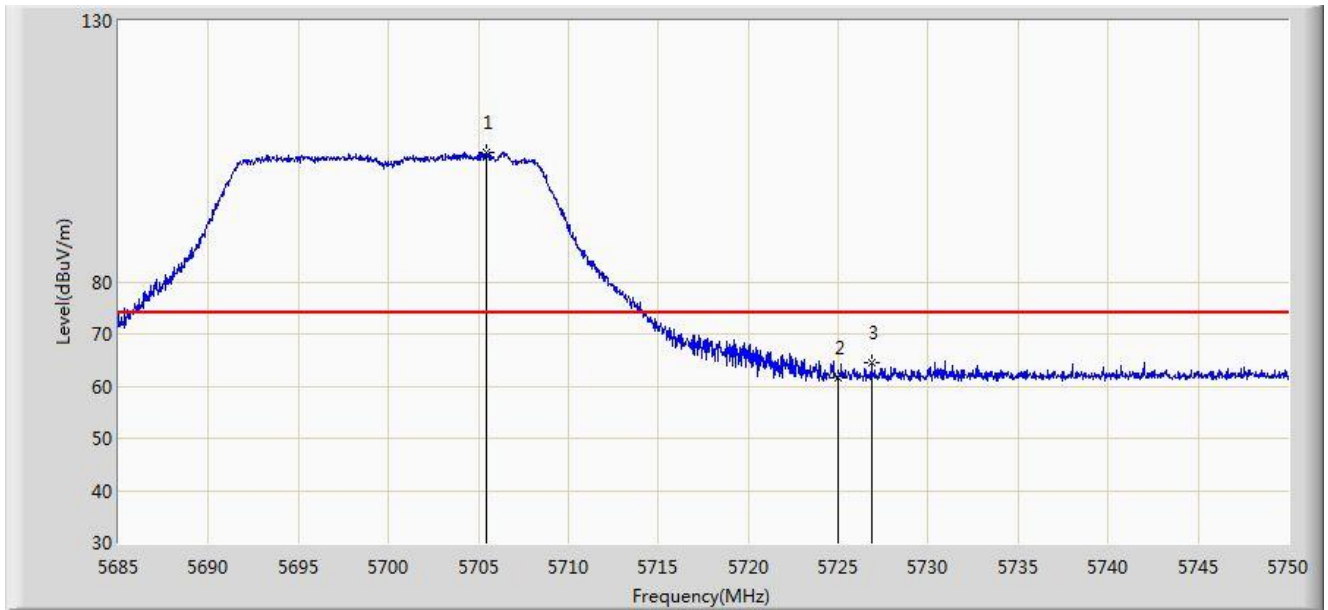


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.475	104.737	101.005	N/A	N/A	3.732	PK
2			5725.000	61.723	57.932	-12.277	74.000	3.791	PK
3			5726.828	64.597	60.801	-9.403	74.000	3.796	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

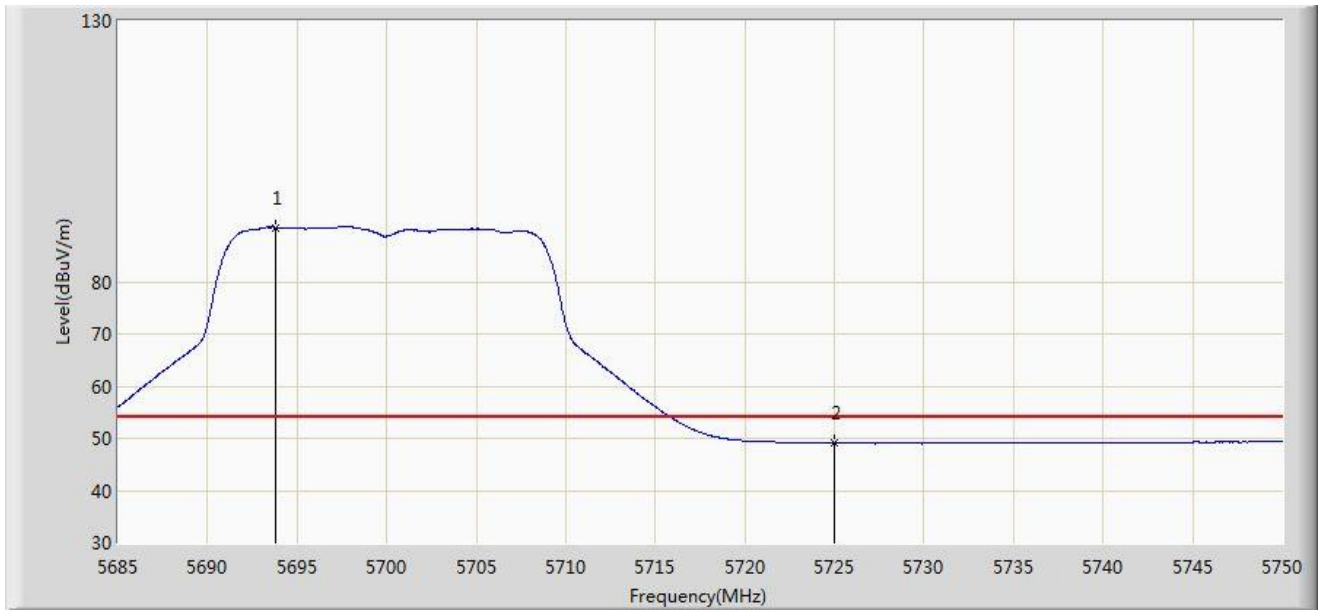


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.775	90.409	86.699	N/A	N/A	3.710	AV
2			5725.000	49.083	45.292	-4.917	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

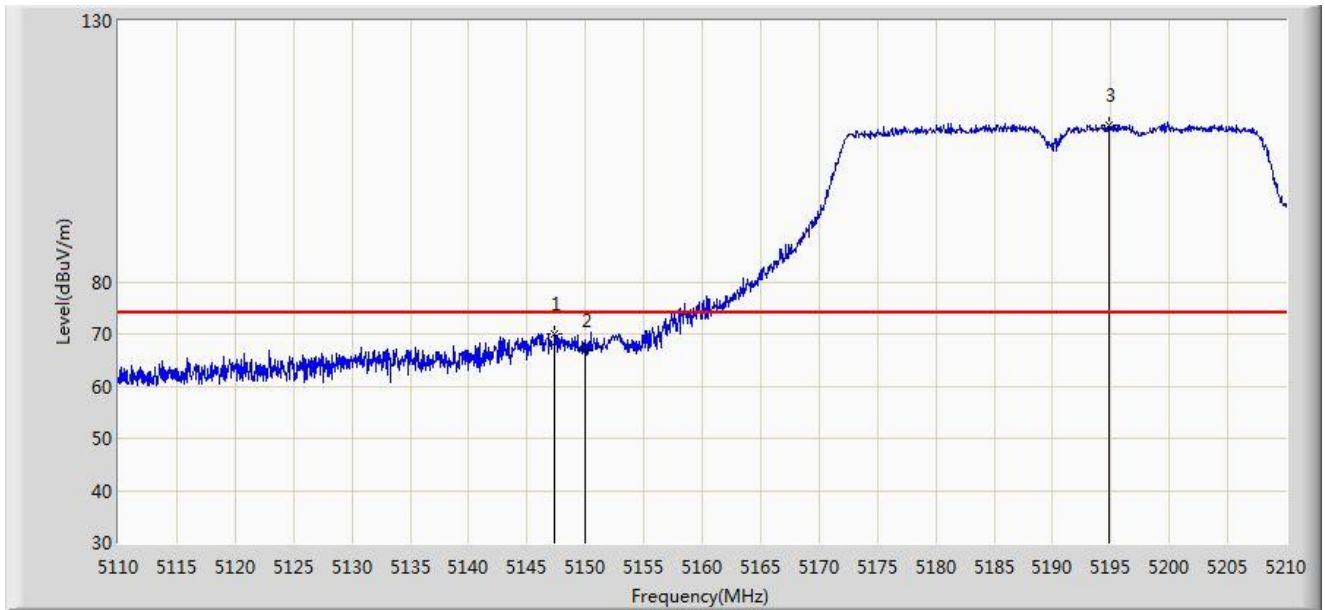


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.400	69.955	66.646	-4.045	74.000	3.309	PK
2			5150.000	66.950	63.641	-7.050	74.000	3.309	PK
3		*	5194.800	110.142	106.887	N/A	N/A	3.255	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

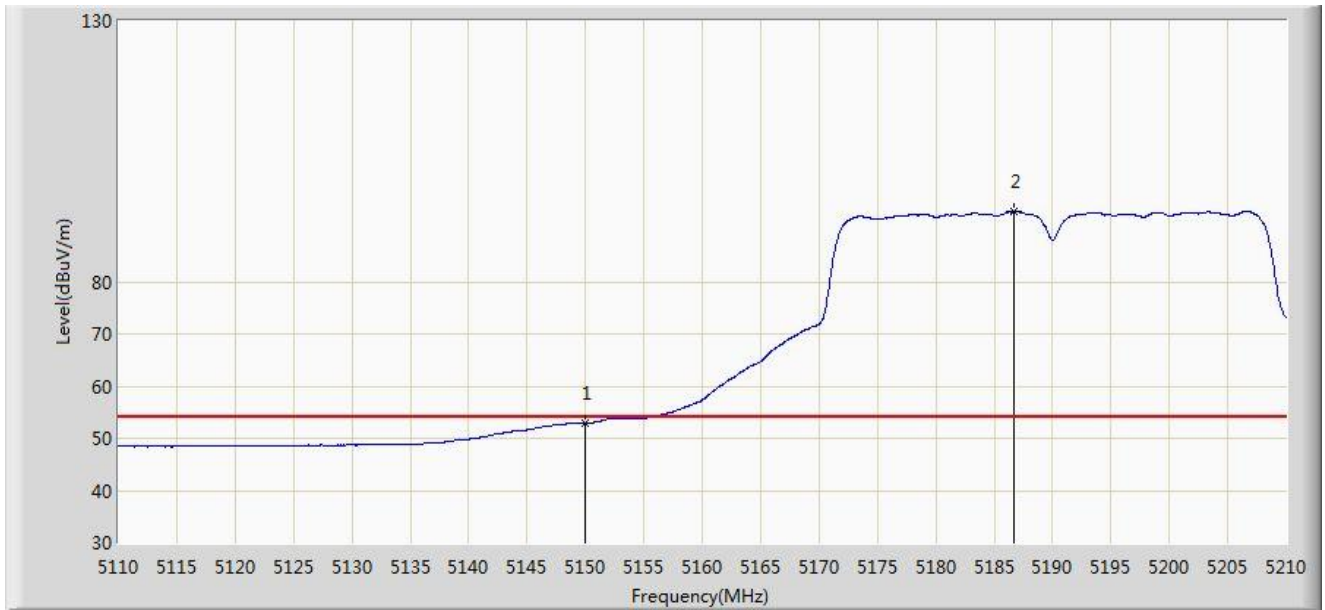


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.852	49.543	-1.148	54.000	3.309	AV
2		*	5186.750	93.531	90.266	N/A	N/A	3.265	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

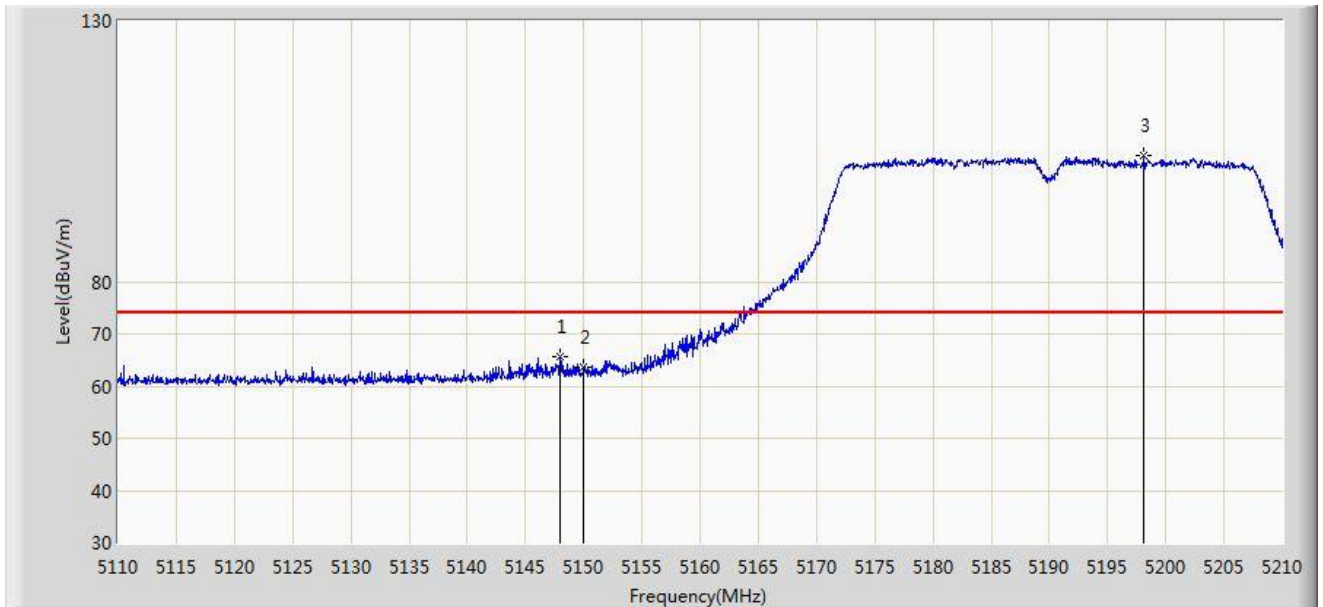


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.950	65.586	62.277	-8.414	74.000	3.309	PK
2			5150.000	63.630	60.321	-10.370	74.000	3.309	PK
3		*	5198.150	104.213	100.961	N/A	N/A	3.251	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

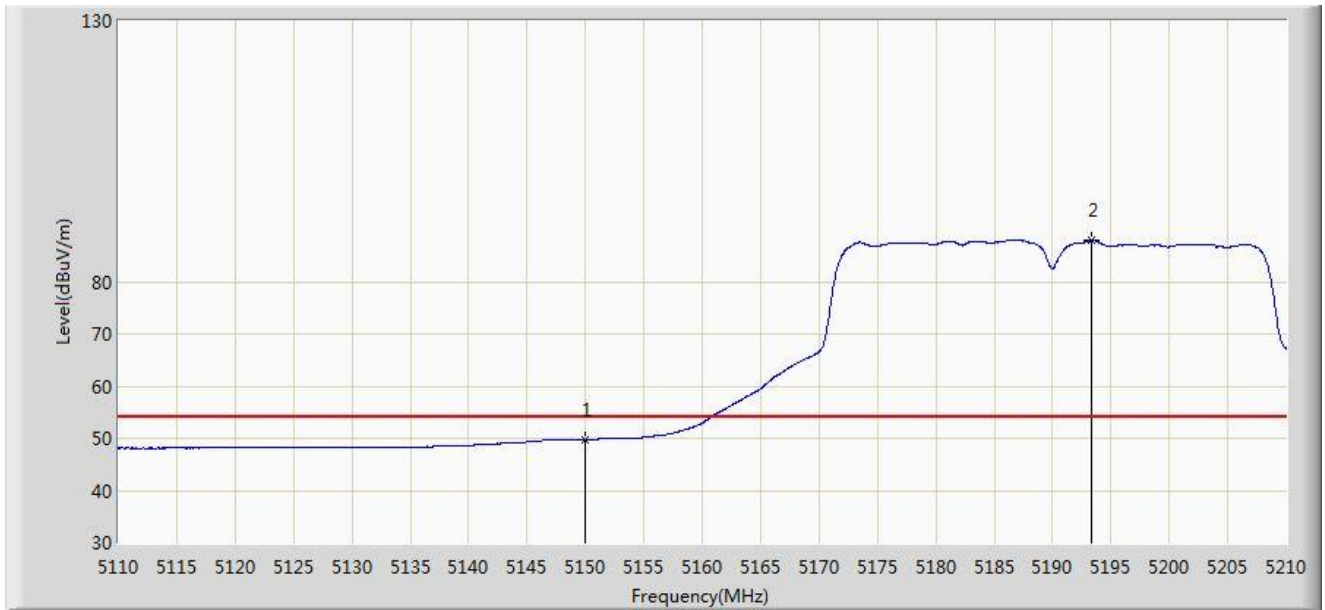


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.719	46.410	-4.281	54.000	3.309	AV
2		*	5193.300	87.953	84.696	N/A	N/A	3.257	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

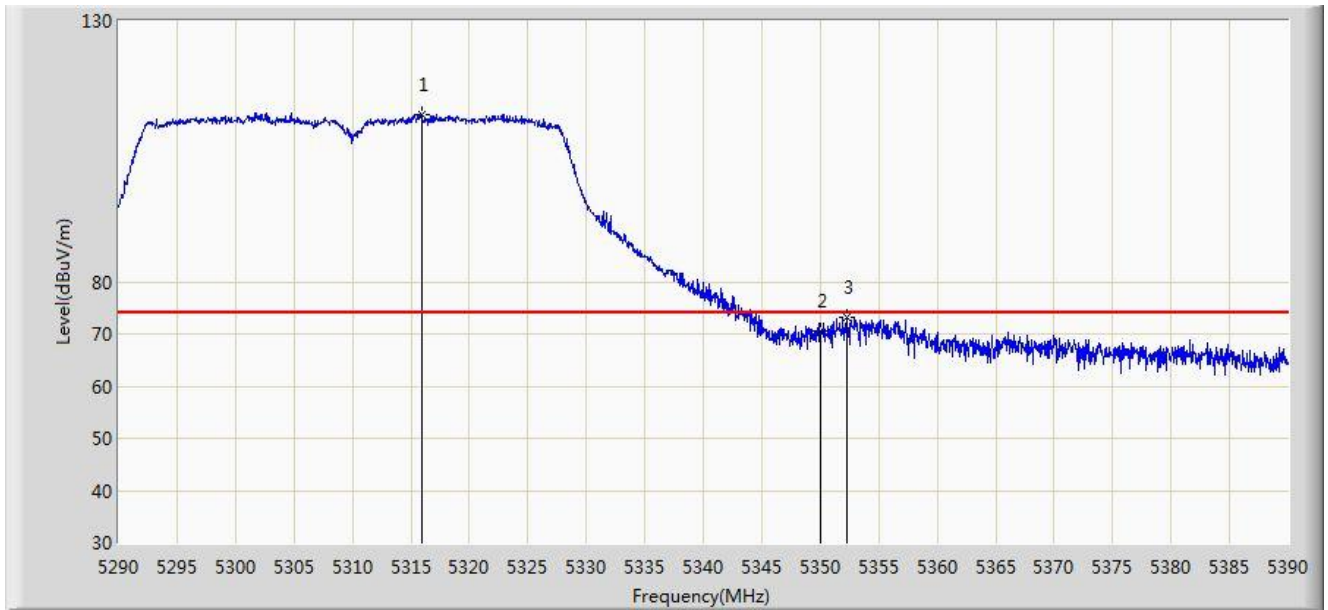


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.950	112.058	108.977	N/A	N/A	3.081	PK
2			5350.000	70.683	67.651	-3.317	74.000	3.032	PK
3			5352.300	73.279	70.249	-0.721	74.000	3.030	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

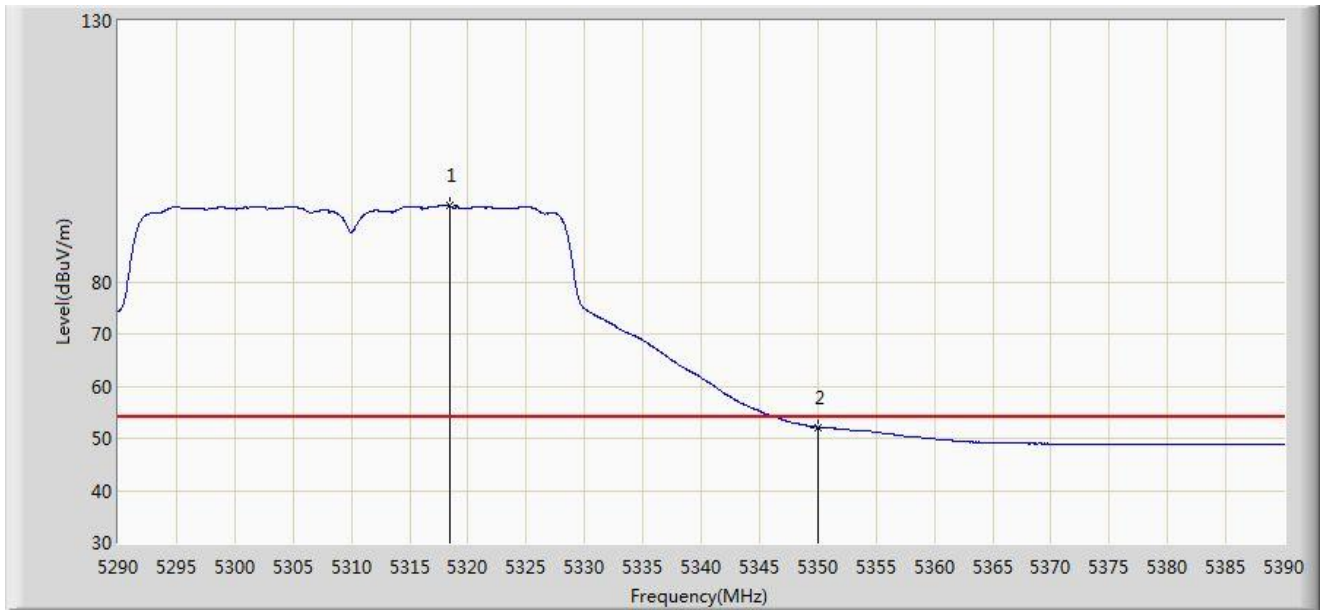


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.400	94.514	91.438	N/A	N/A	3.076	AV
2			5350.000	52.122	49.090	-1.878	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 18:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

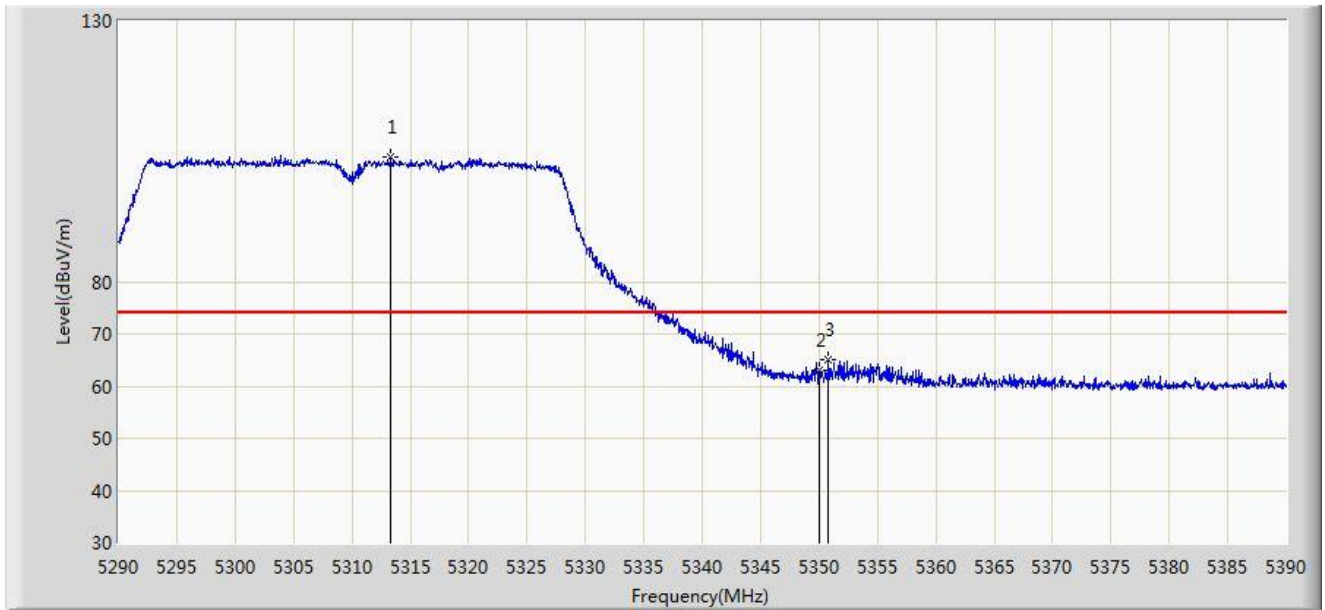


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.300	103.835	100.749	N/A	N/A	3.087	PK
2			5350.000	63.108	60.076	-10.892	74.000	3.032	PK
3			5350.800	65.129	62.098	-8.871	74.000	3.031	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

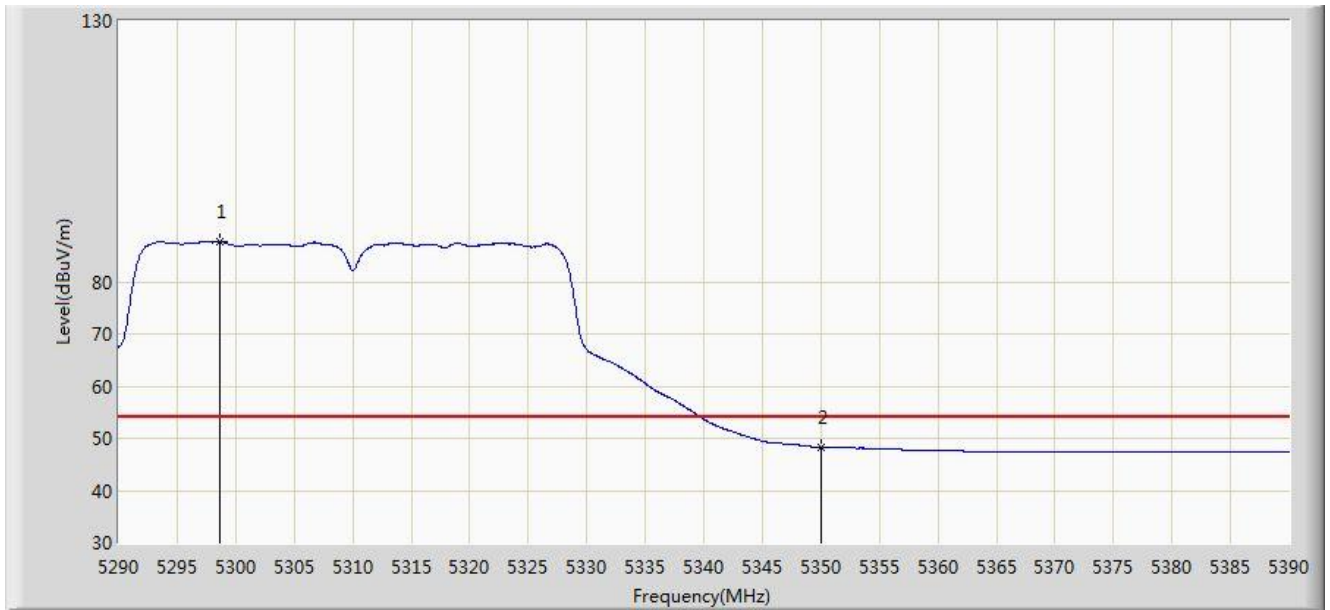


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.650	87.634	84.510	N/A	N/A	3.124	AV
2			5350.000	48.305	45.273	-5.695	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

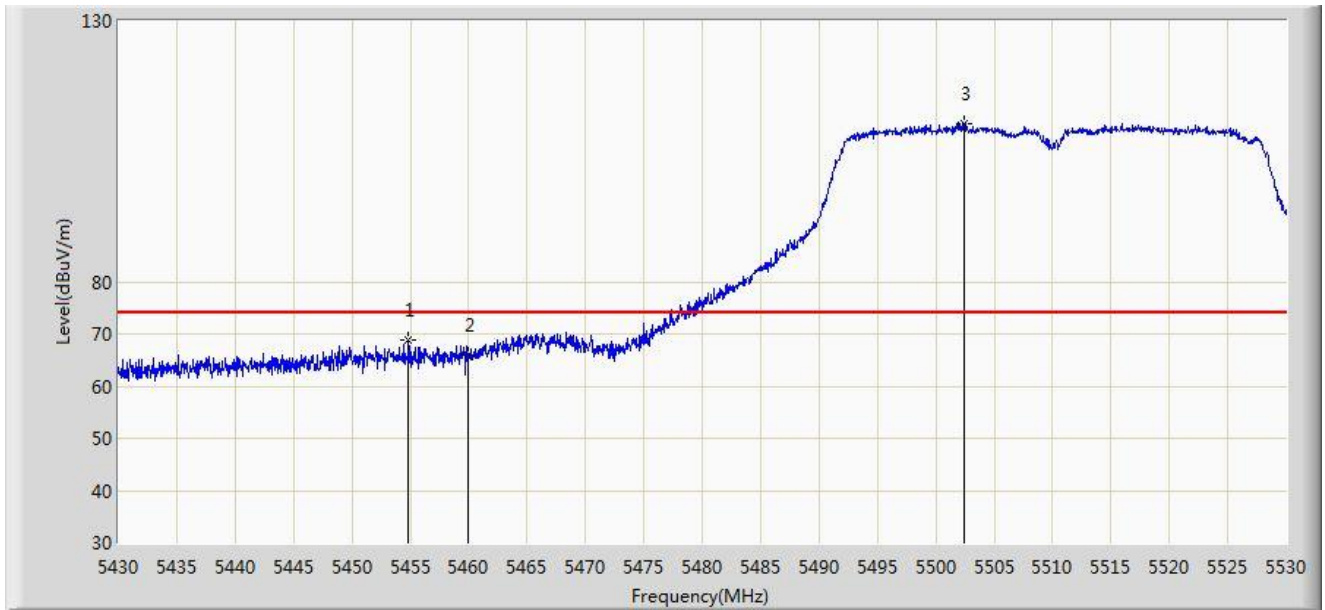


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.800	68.806	65.355	-5.194	74.000	3.451	PK
2			5460.000	65.937	62.455	-8.063	74.000	3.482	PK
3		*	5502.400	110.365	106.841	N/A	N/A	3.524	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

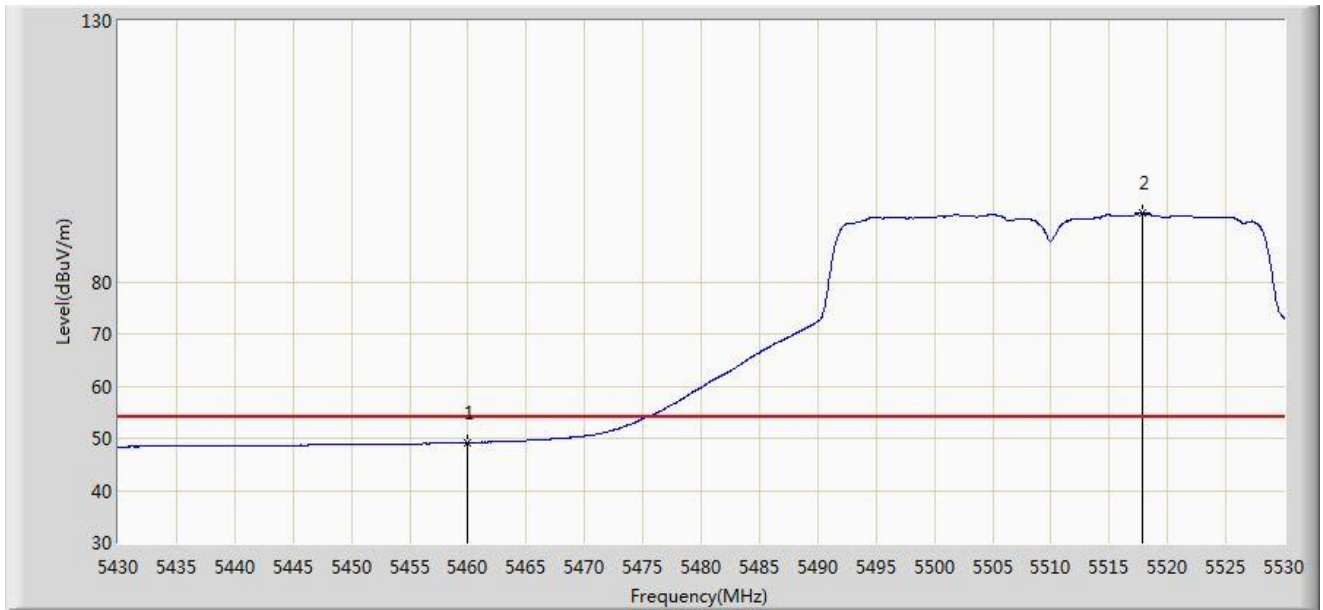


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.154	45.672	-4.846	54.000	3.482	AV
2		*	5517.800	93.109	89.602	N/A	N/A	3.508	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

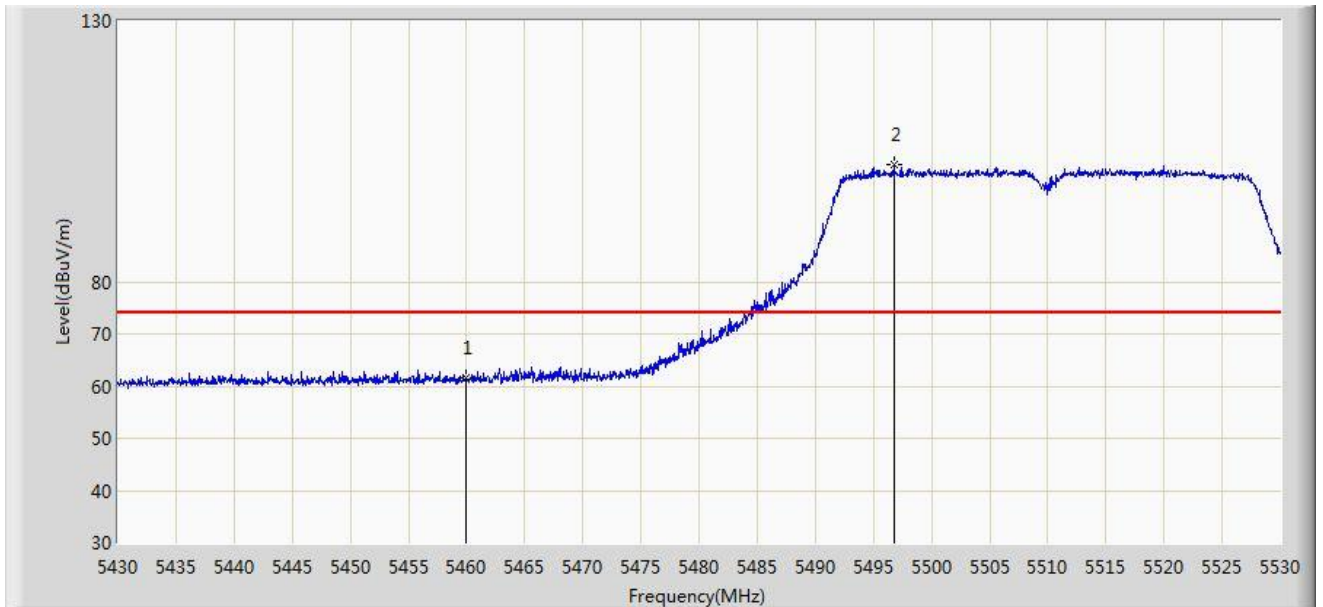


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	61.727	58.245	-12.273	74.000	3.482	PK
2		*	5496.750	102.578	99.048	N/A	N/A	3.530	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

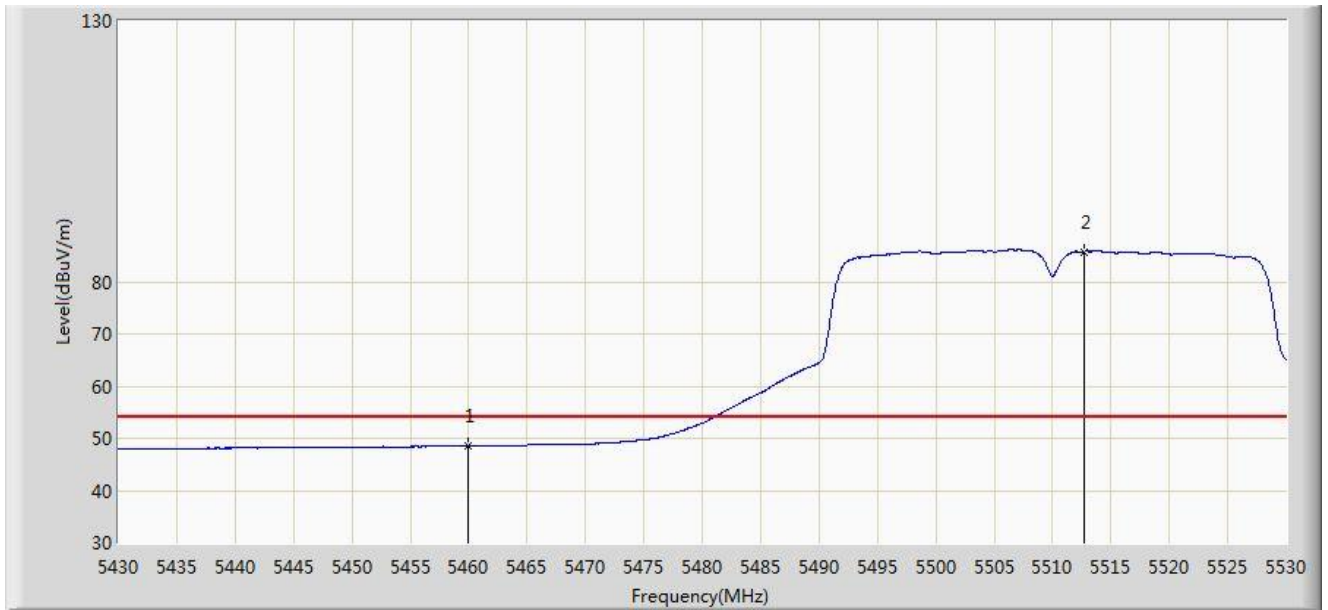


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.488	45.006	-5.512	54.000	3.482	AV
2		*	5512.700	85.778	82.265	N/A	N/A	3.513	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

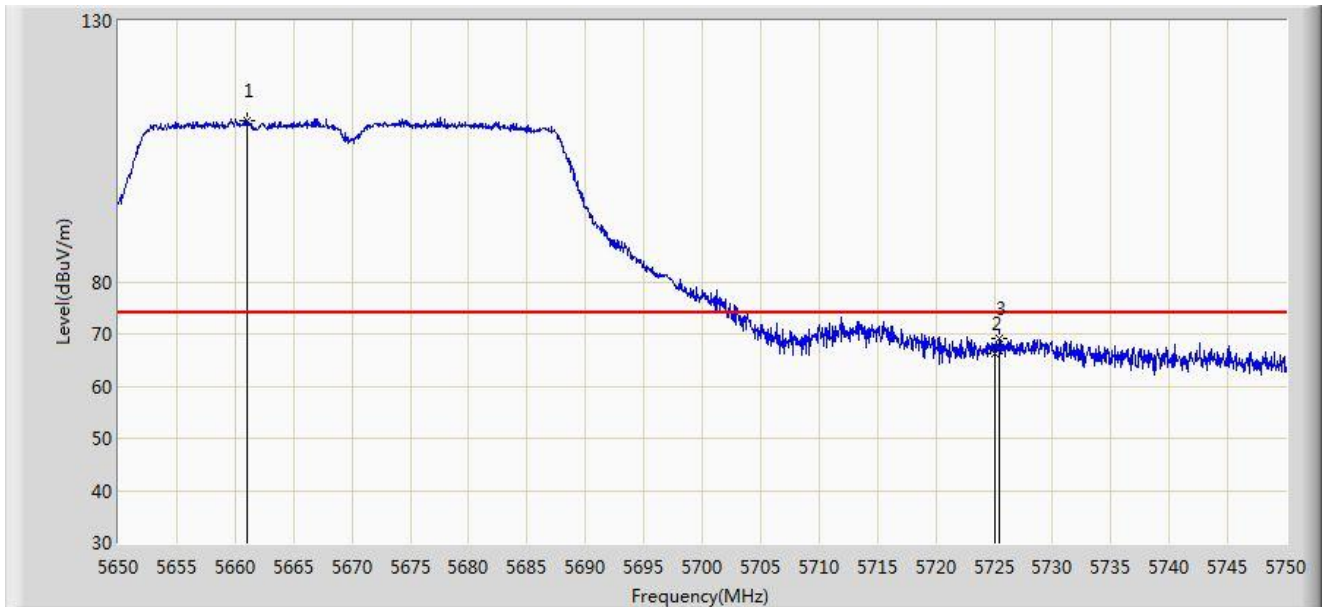


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.000	110.939	107.291	N/A	N/A	3.648	PK
2			5725.000	66.314	62.523	-7.686	74.000	3.791	PK
3			5725.400	68.995	65.203	-5.005	74.000	3.792	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

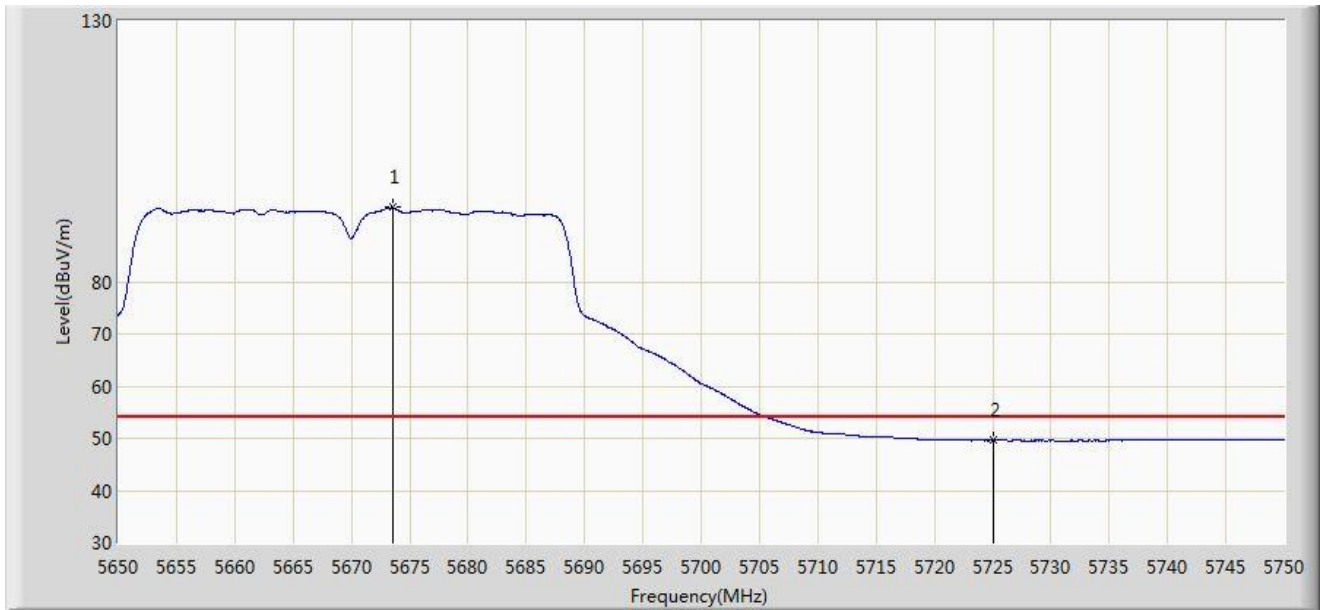


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.600	94.212	90.545	N/A	N/A	3.667	AV
2			5725.000	49.597	45.806	-4.403	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

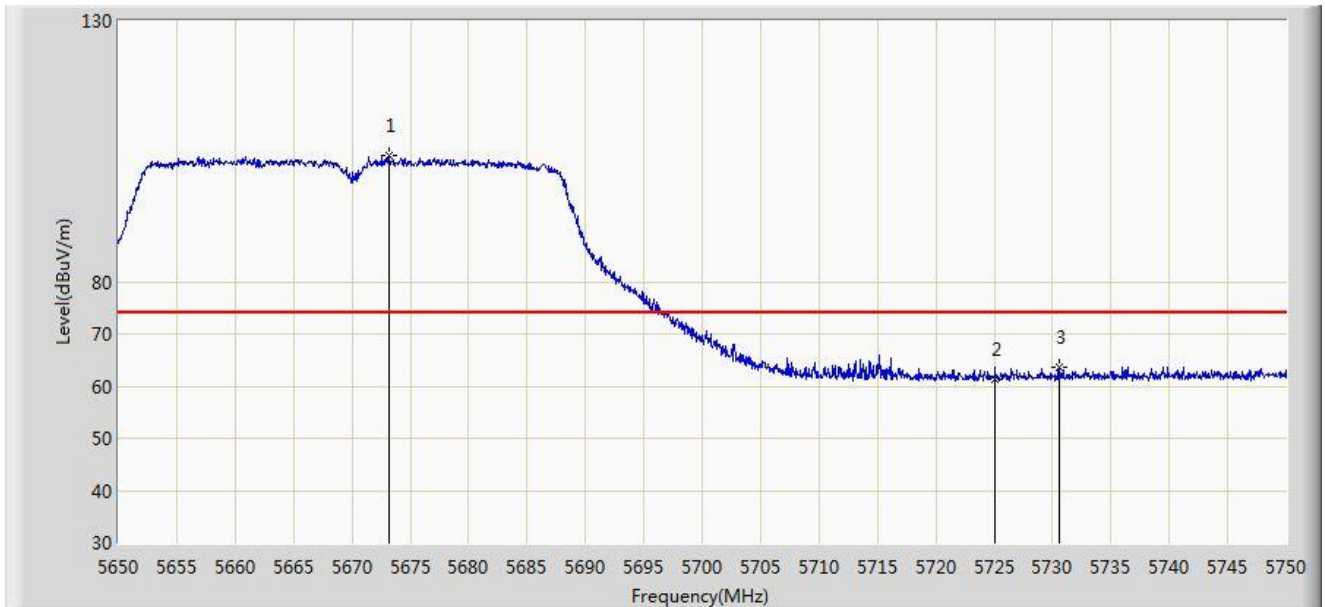


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.200	104.091	100.425	N/A	N/A	3.667	PK
2			5725.000	61.389	57.598	-12.611	74.000	3.791	PK
3			5730.600	63.753	59.945	-10.247	74.000	3.807	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

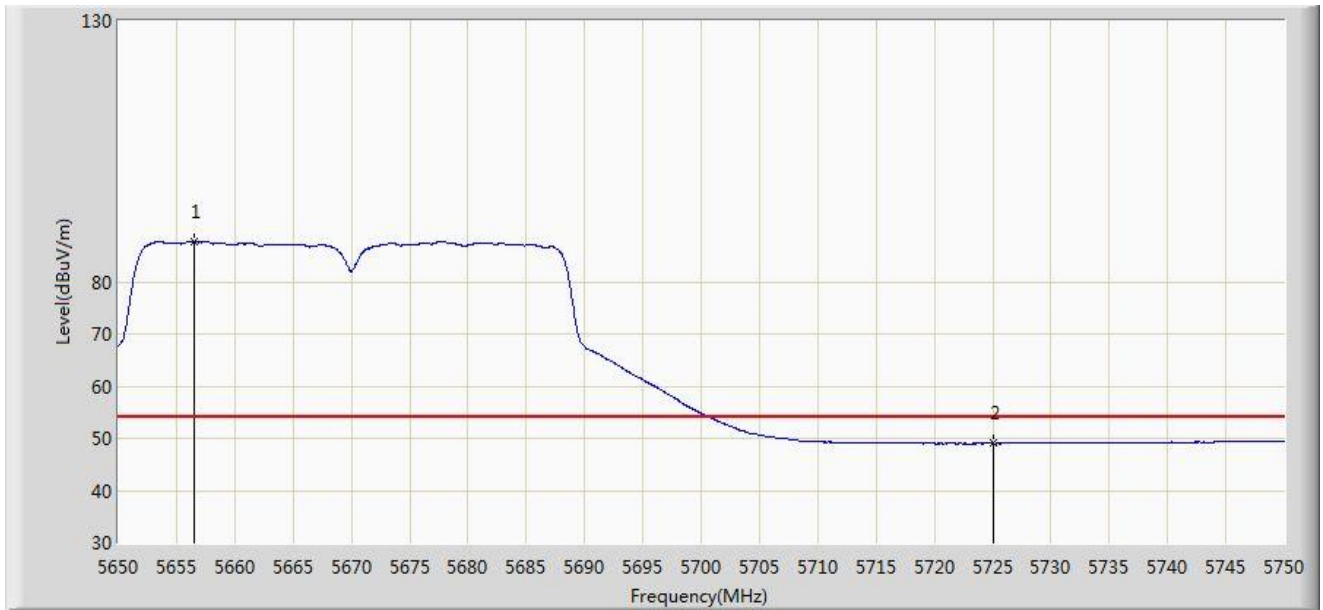


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.500	87.652	84.012	N/A	N/A	3.640	AV
2			5725.000	49.002	45.211	-4.998	54.000	3.791	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

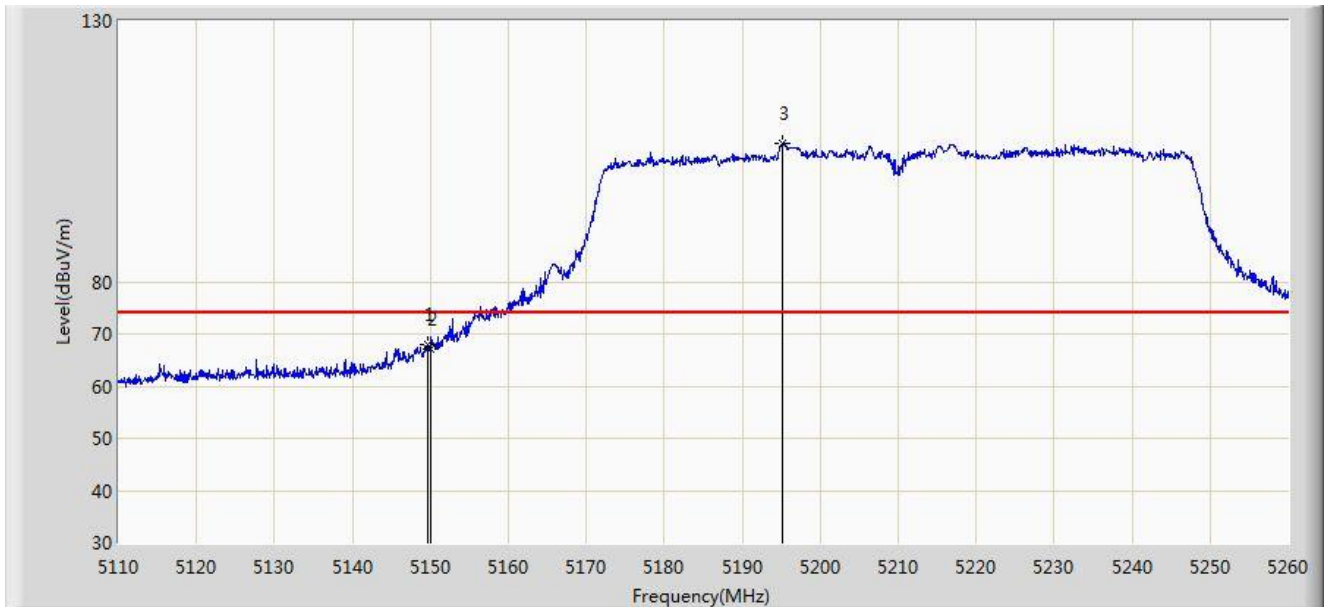


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	67.877	64.568	-6.123	74.000	3.308	PK
2			5150.000	67.240	63.931	-6.760	74.000	3.309	PK
3		*	5195.200	106.560	103.305	N/A	N/A	3.255	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

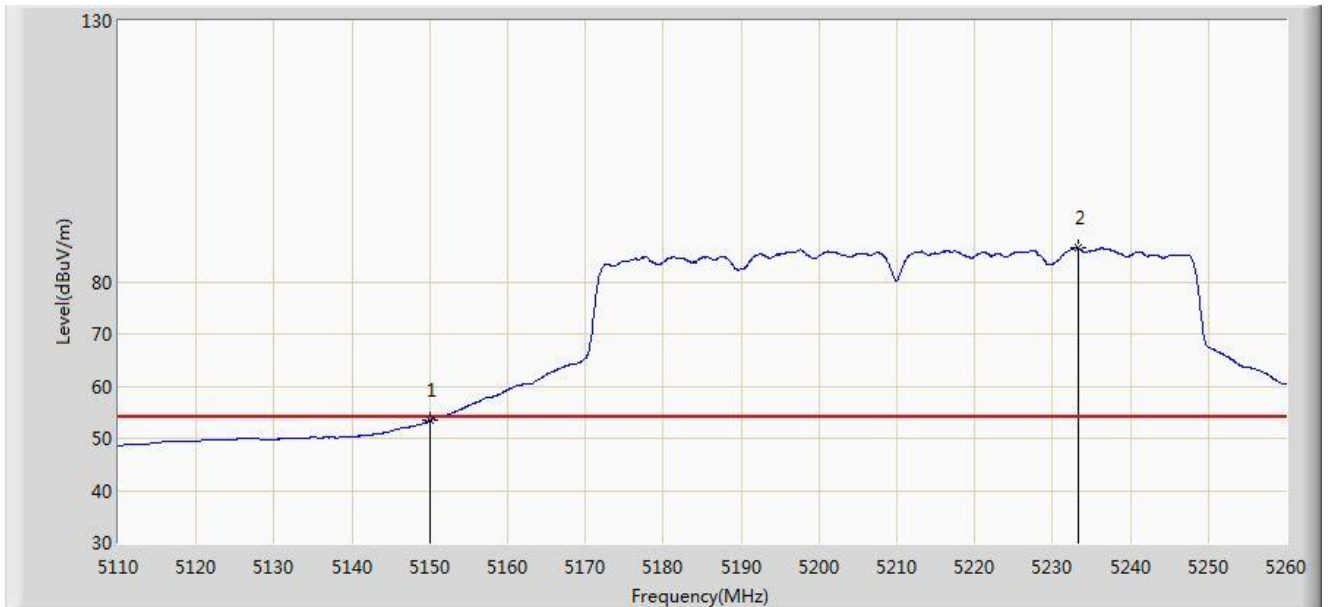


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.468	50.159	-0.532	54.000	3.309	AV
2		*	5233.300	86.526	83.327	N/A	N/A	3.198	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

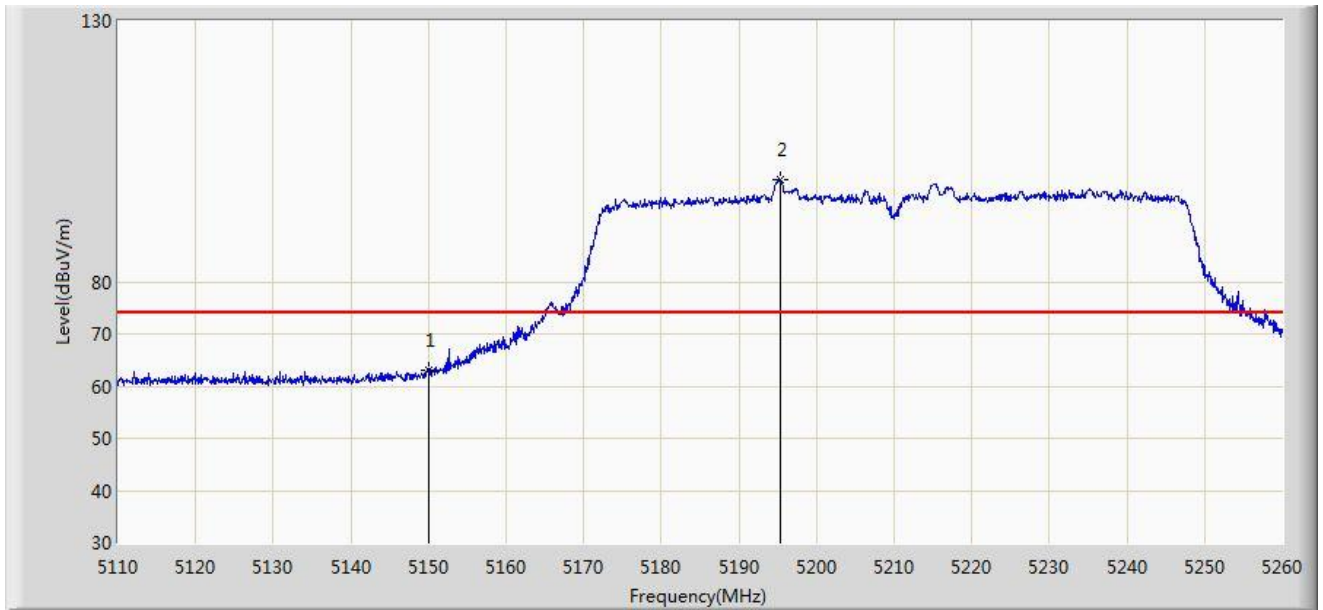

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	63.108	59.799	-10.892	74.000	3.309	PK
2		*	5195.275	99.596	96.341	N/A	N/A	3.255	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.666	46.357	-4.334	54.000	3.309	AV
2		*	5233.300	79.571	76.372	N/A	N/A	3.198	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

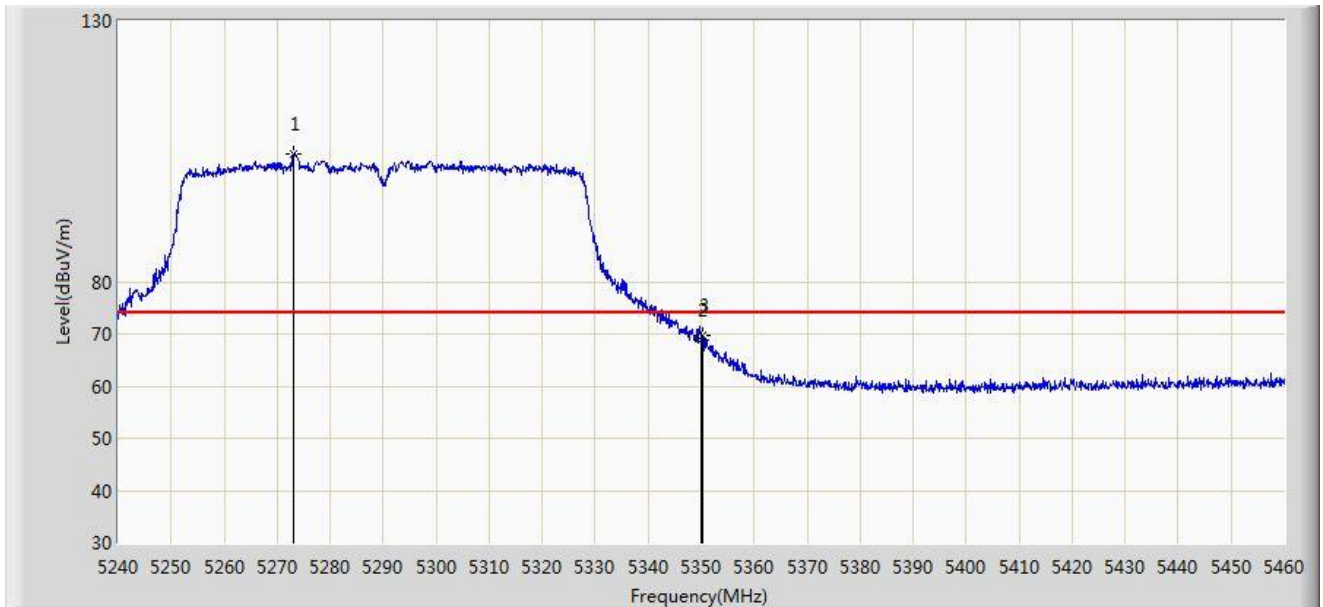


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5273.110	104.432	101.244	N/A	N/A	3.187	PK
2			5350.000	68.757	65.725	-5.243	74.000	3.032	PK
3			5350.330	69.846	66.814	-4.154	74.000	3.032	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

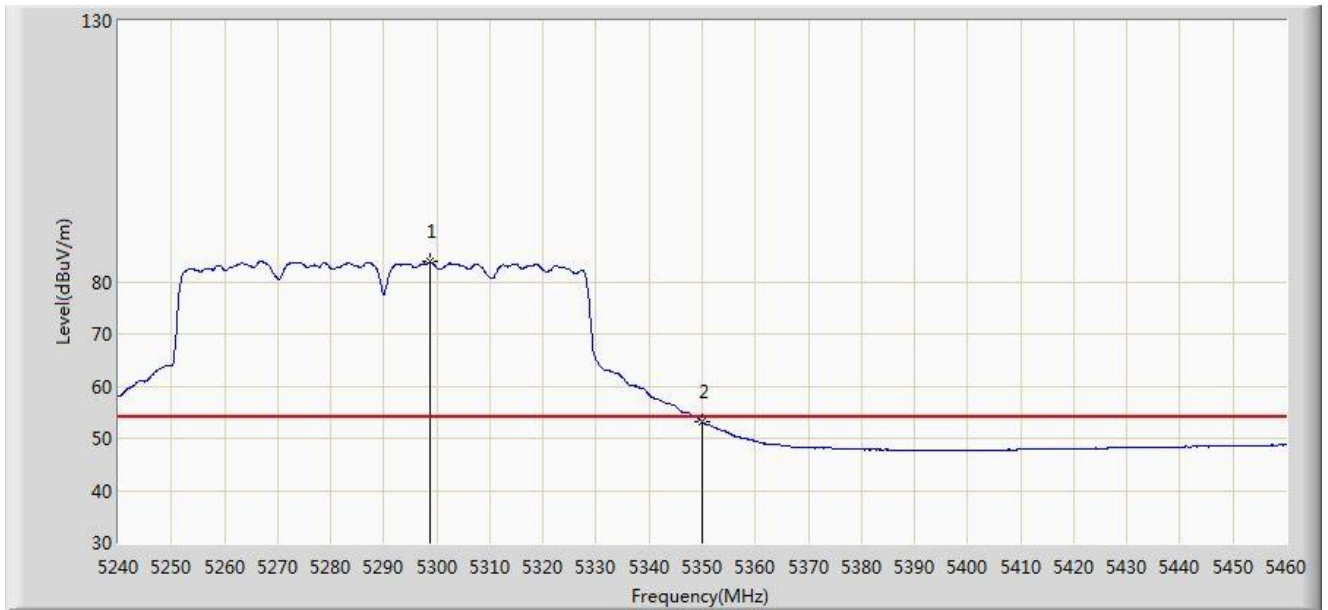


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.740	83.798	80.674	N/A	N/A	3.124	AV
2			5350.000	53.153	50.121	-0.847	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/05/05 - 18:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

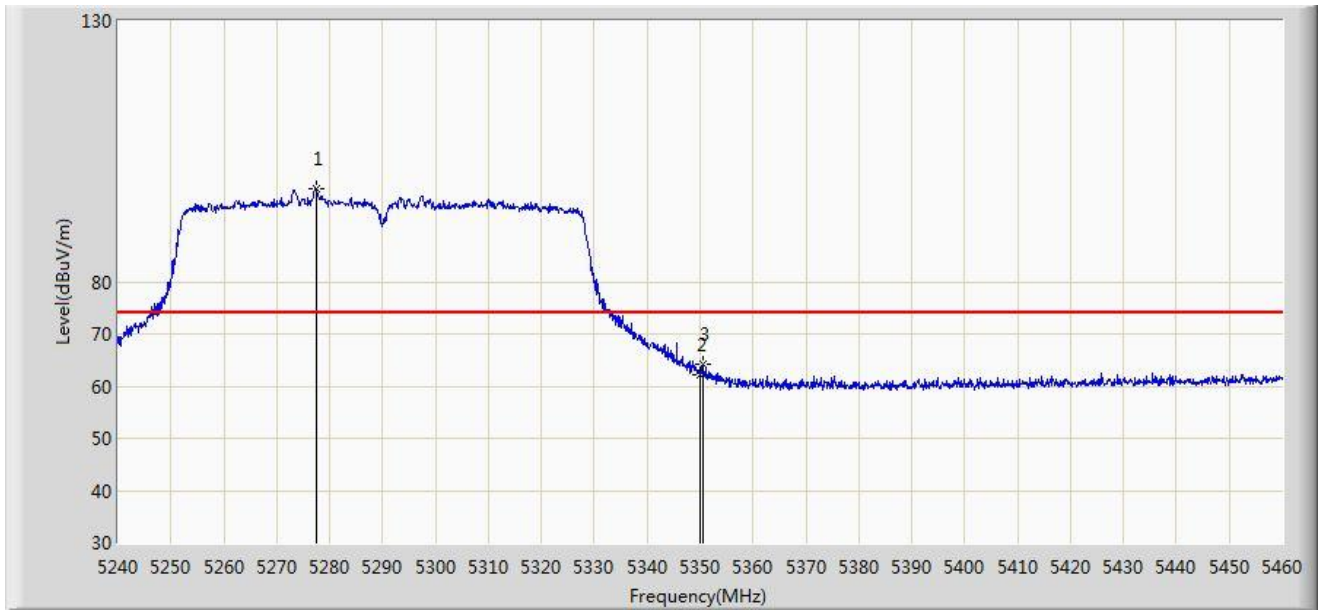


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5277.510	97.726	94.541	N/A	N/A	3.185	PK
2			5350.000	62.177	59.145	-11.823	74.000	3.032	PK
3			5350.660	64.272	61.240	-9.728	74.000	3.031	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/05 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

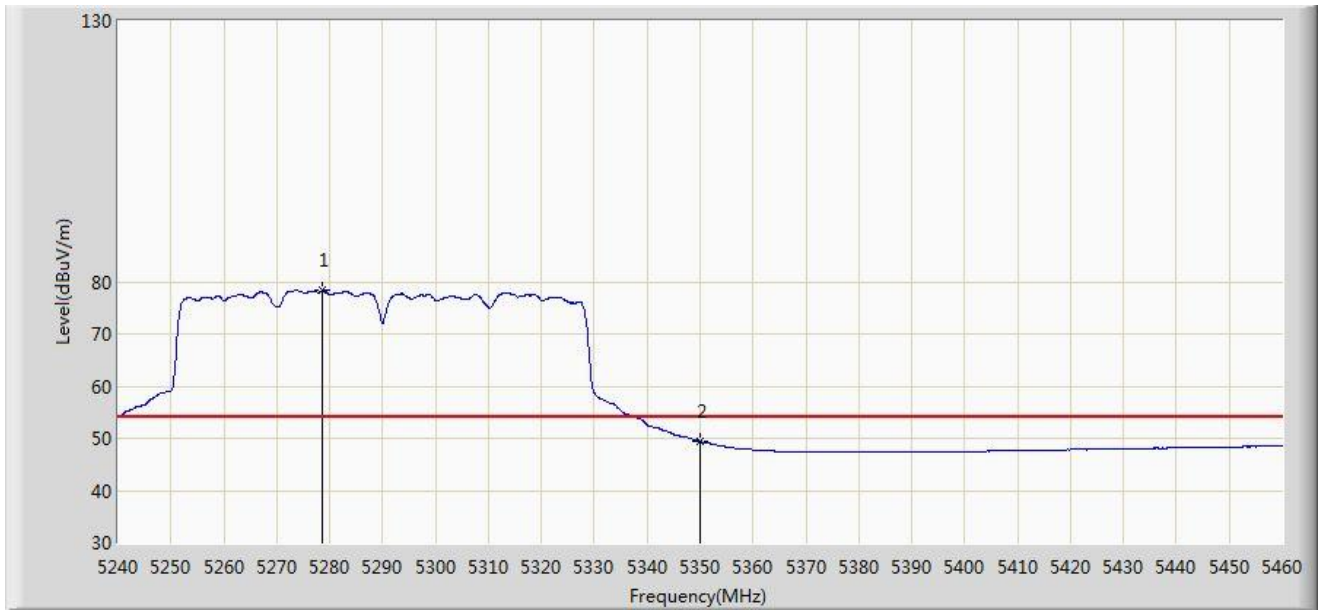


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5278.610	78.329	75.145	N/A	N/A	3.183	AV
2			5350.000	49.405	46.373	-4.595	54.000	3.032	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/08 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

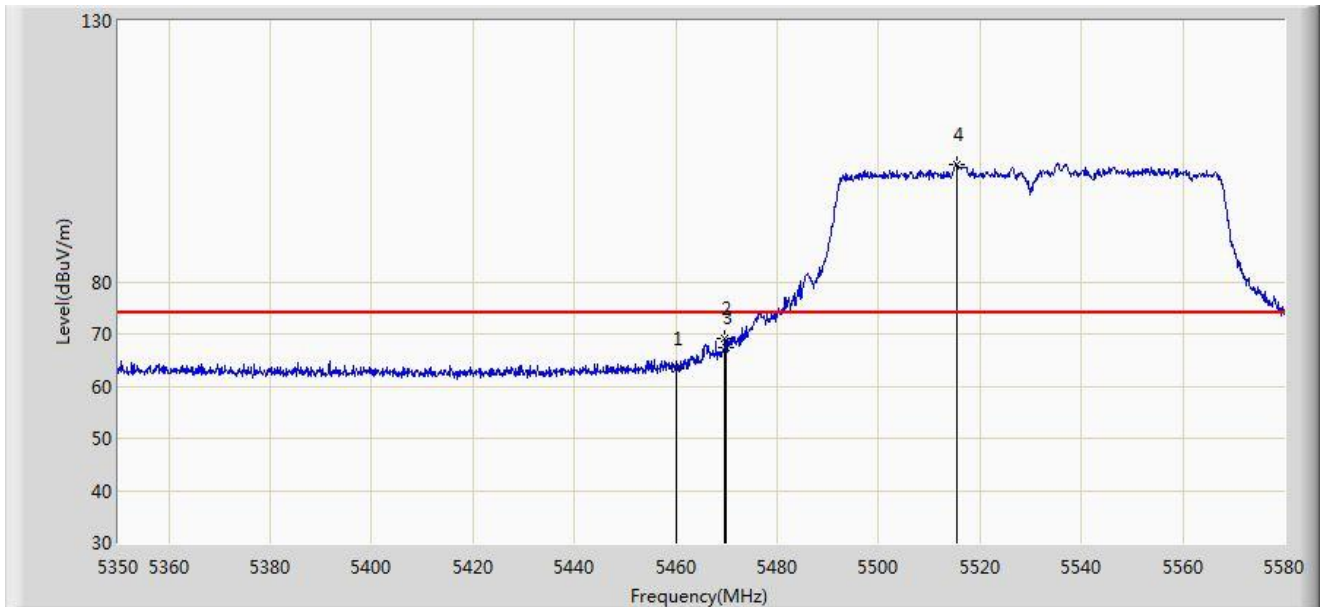


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.283	25.720	-10.717	74.000	37.563	PK
2			5469.715	69.135	31.547	-4.865	74.000	37.588	PK
3			5470.000	67.289	29.700	-6.711	74.000	37.588	PK
4		*	5515.370	102.585	64.943	N/A	N/A	37.641	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/08 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

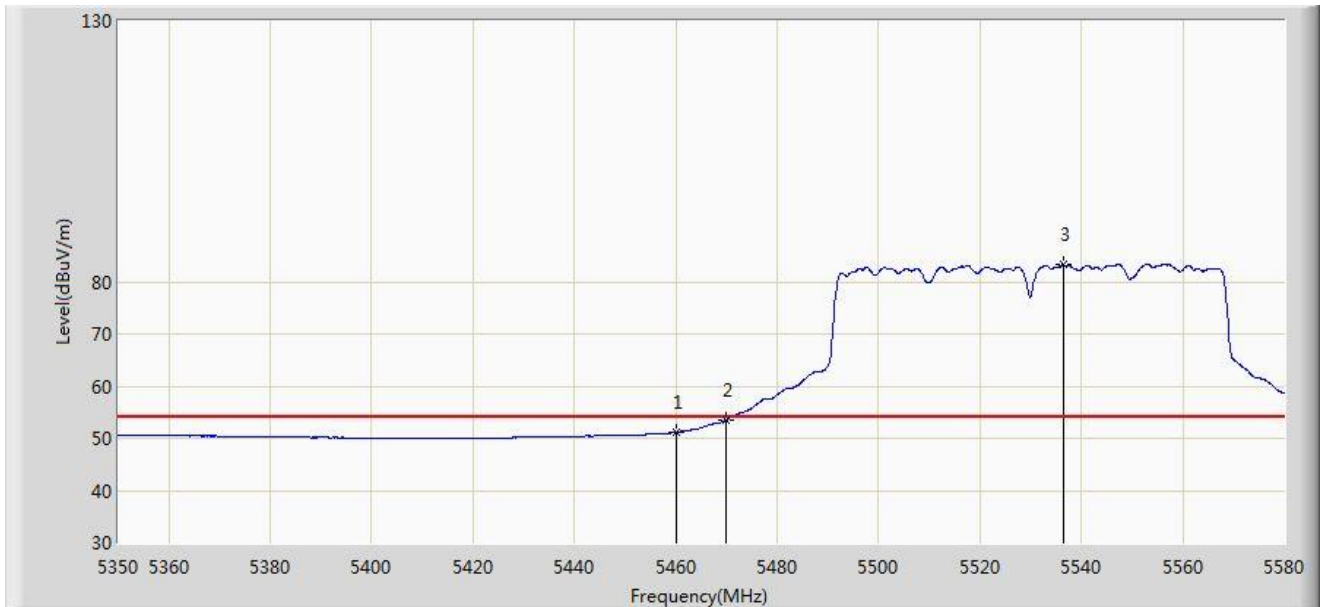


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.165	13.602	-2.835	54.000	37.563	AV
2			5470.000	53.585	15.996	-0.415	54.000	37.588	AV
3		*	5536.415	83.264	45.585	N/A	N/A	37.679	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/08 - 17:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

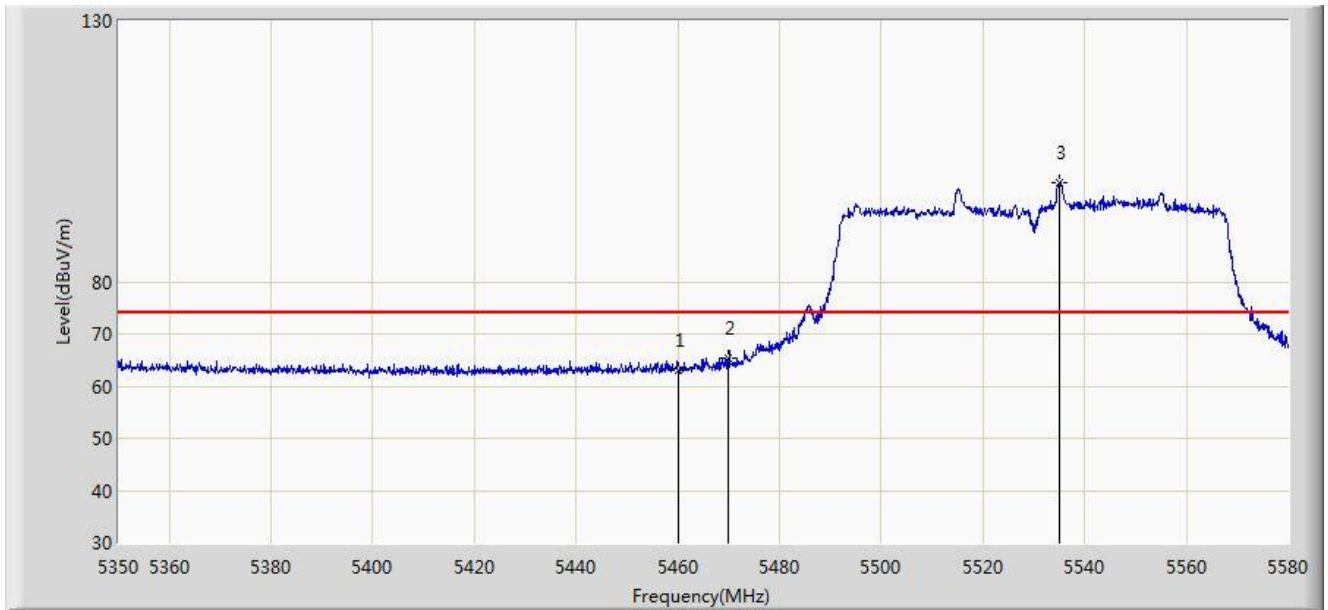


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.092	25.529	-10.908	74.000	37.563	PK
2			5470.000	65.396	27.807	-2.804	74.000	37.588	PK
3		*	5535.150	98.982	61.306	N/A	N/A	37.676	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/08 - 17:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

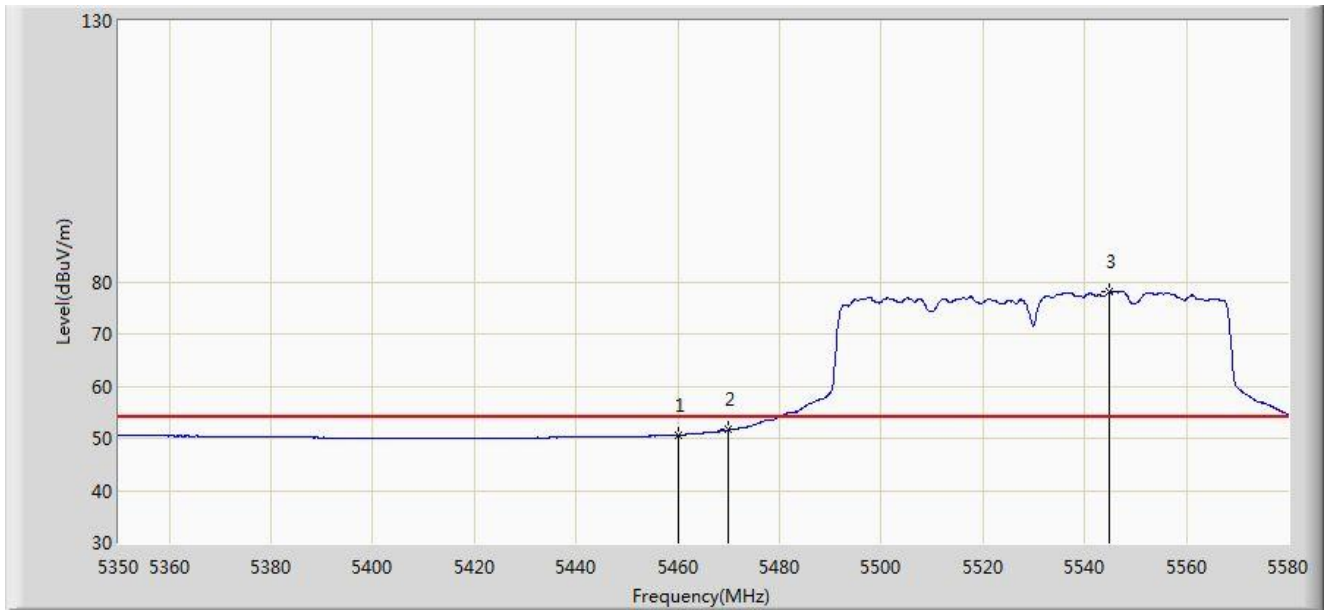


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.623	13.060	-3.377	54.000	37.563	AV
2			5470.000	51.626	14.037	-2.374	54.000	37.588	AV
3		*	5544.925	77.985	40.291	N/A	N/A	37.694	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

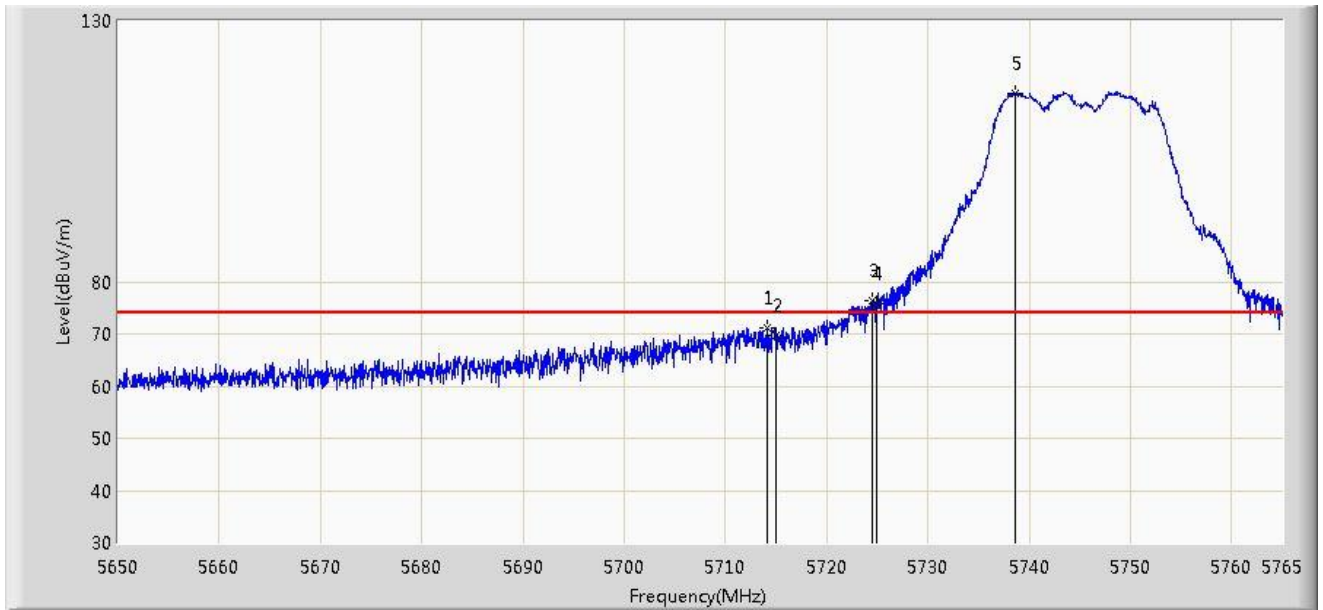


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.112	71.118	67.360	-2.882	74.000	3.758	PK
2			5715.000	69.717	65.956	-4.283	74.000	3.761	PK
3			5724.462	76.241	72.452	-1.959	78.200	3.790	PK
4			5725.000	75.851	72.060	-2.349	78.200	3.791	PK
5		*	5738.607	116.219	112.386	N/A	N/A	3.833	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

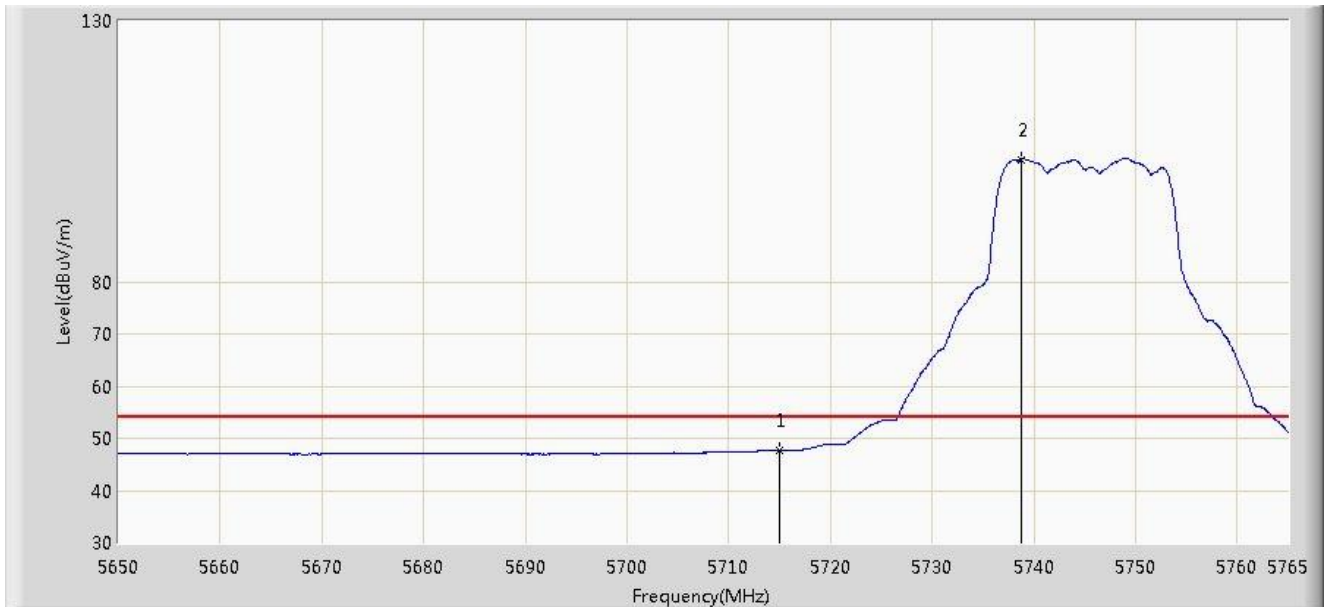


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.750	43.989	-6.250	54.000	3.761	AV
2		*	5738.780	103.463	99.629	N/A	N/A	3.834	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 11:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

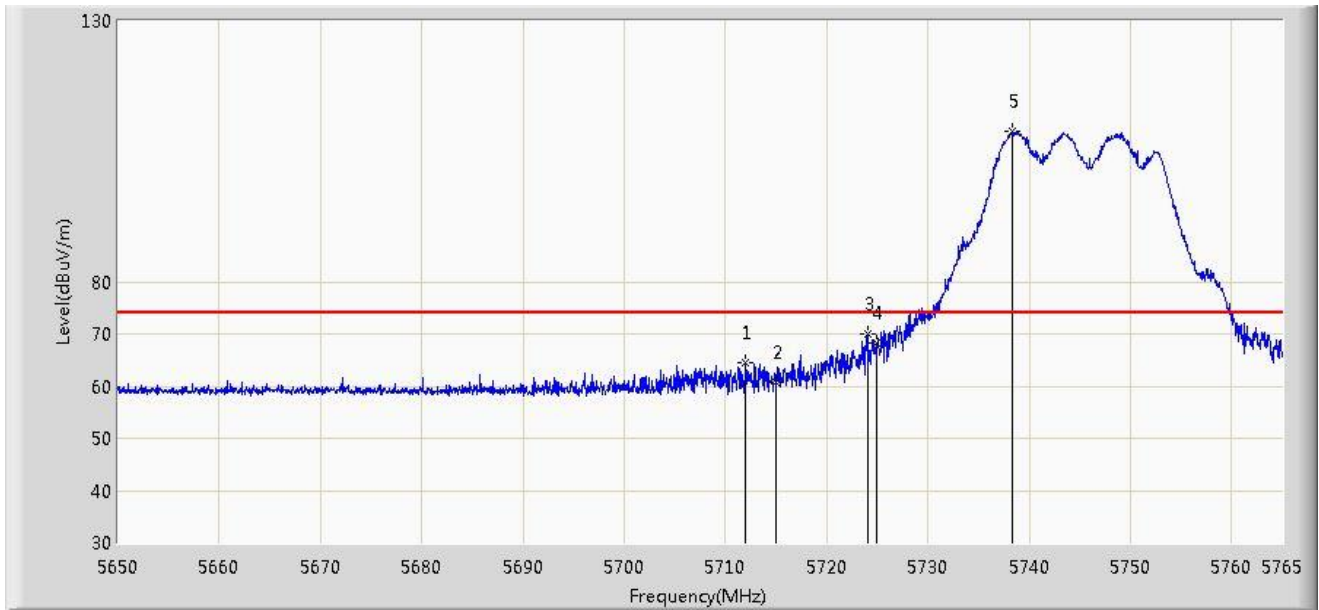

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.985	64.423	60.671	-9.577	74.000	3.752	PK
2			5715.000	60.820	57.059	-13.180	74.000	3.761	PK
3			5724.060	69.898	66.110	-8.302	78.200	3.788	PK
4			5725.000	68.362	64.571	-9.838	78.200	3.791	PK
5		*	5738.377	108.842	105.009	N/A	N/A	3.833	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.057	42.296	-7.943	54.000	3.761	AV
2		*	5738.665	96.495	92.662	N/A	N/A	3.833	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5785MHz	

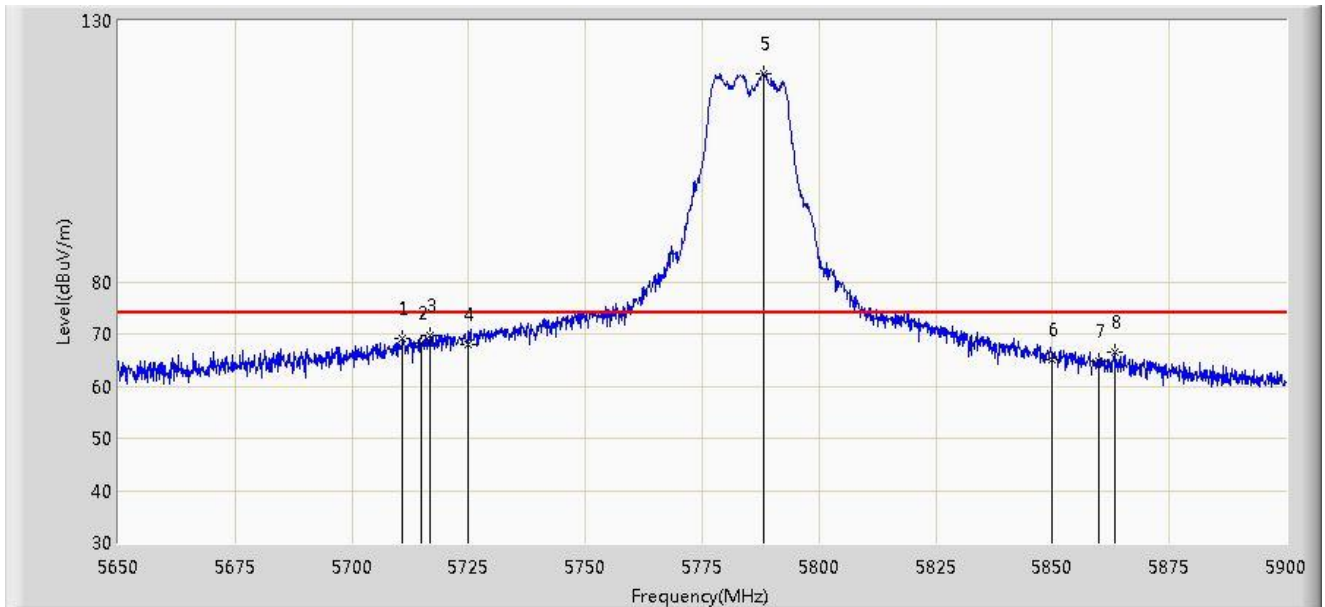


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.875	69.155	65.406	-4.845	74.000	3.748	PK
2			5715.000	68.305	64.544	-5.695	74.000	3.761	PK
3			5716.875	69.800	66.034	-8.400	78.200	3.767	PK
4			5725.000	67.834	64.043	-10.366	78.200	3.791	PK
5		*	5788.250	119.916	115.974	N/A	N/A	3.941	PK
6			5850.000	65.067	61.010	-13.133	78.200	4.058	PK
7			5860.000	64.859	60.796	-9.141	74.000	4.064	PK
8			5863.250	66.427	62.358	-7.573	74.000	4.068	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5785MHz	

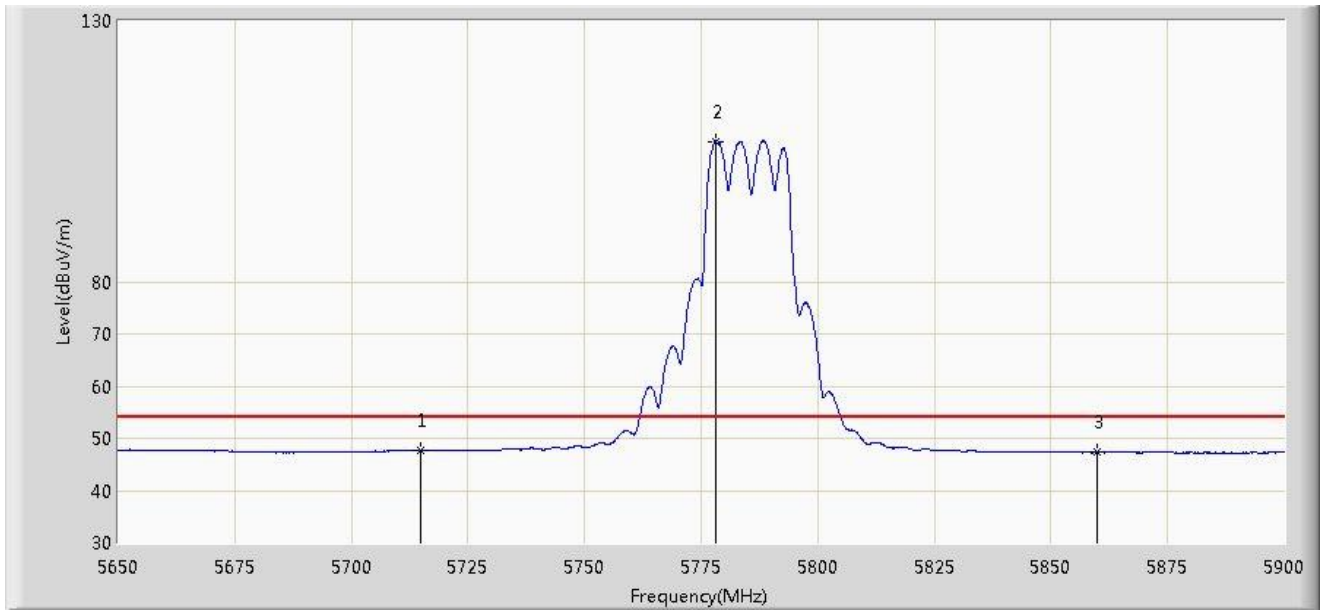


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.791	44.030	-6.209	54.000	3.761	AV
2		*	5778.125	106.918	102.995	N/A	N/A	3.924	AV
3			5860.000	47.270	43.207	-6.730	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5785MHz	

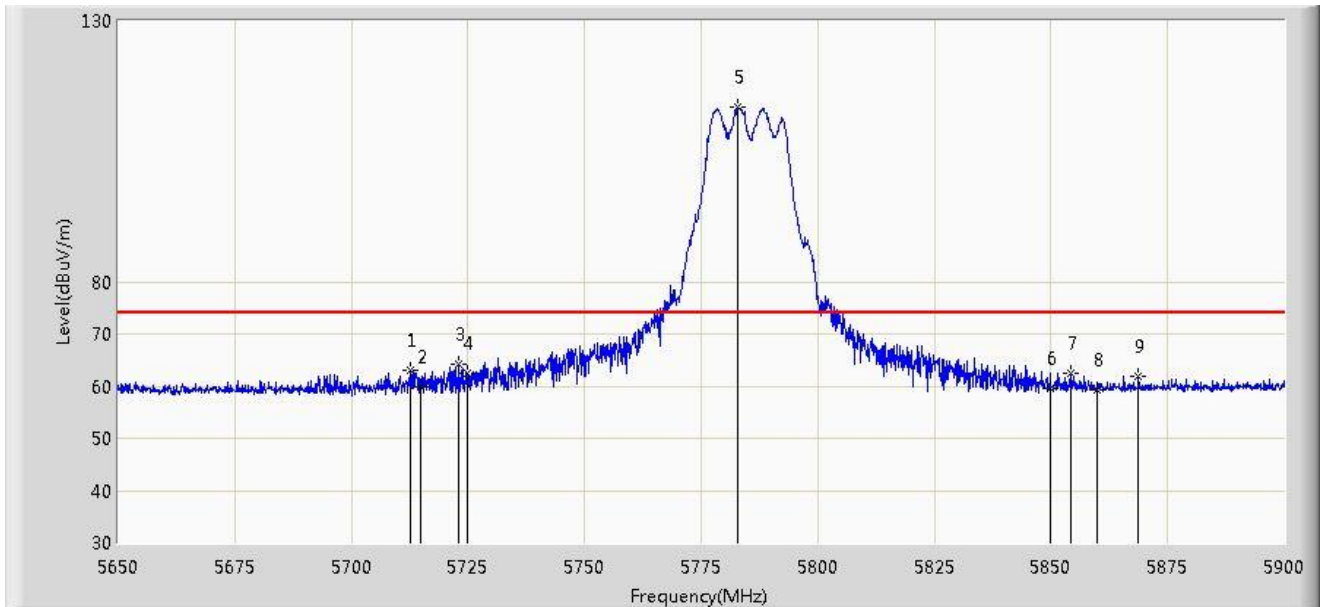


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.500	63.161	59.408	-10.839	74.000	3.753	PK
2			5715.000	59.805	56.044	-14.195	74.000	3.761	PK
3			5723.125	64.128	60.343	-14.072	78.200	3.785	PK
4			5725.000	62.592	58.801	-15.608	78.200	3.791	PK
5		*	5782.875	113.548	109.616	N/A	N/A	3.932	PK
6			5850.000	59.593	55.536	-18.607	78.200	4.058	PK
7			5854.375	62.577	58.517	-15.623	78.200	4.060	PK
8			5860.000	59.211	55.148	-14.789	74.000	4.064	PK
9			5868.750	61.943	57.857	-12.057	74.000	4.086	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5785MHz	

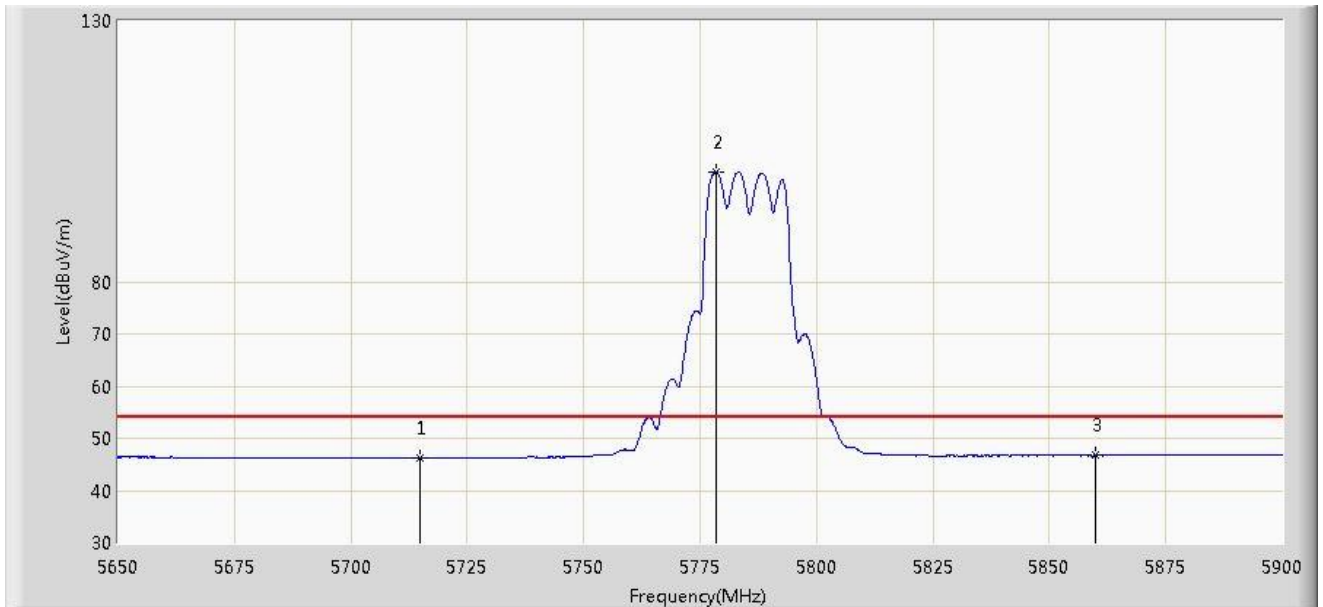


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.230	42.469	-7.770	54.000	3.761	AV
2		*	5778.500	101.097	97.173	N/A	N/A	3.924	AV
3			5860.000	46.708	42.645	-7.292	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

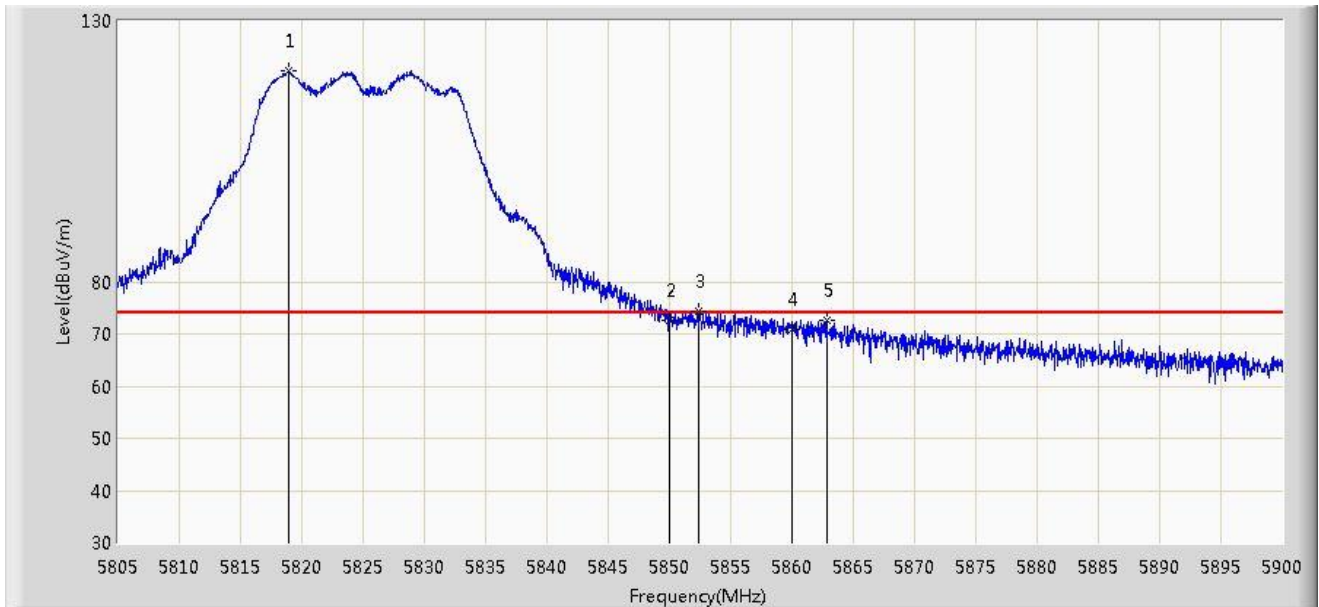


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.917	120.518	116.527	N/A	N/A	3.991	PK
2			5850.000	72.748	68.691	-5.452	78.200	4.058	PK
3			5852.357	74.233	70.174	-3.967	78.200	4.059	PK
4			5860.000	70.756	66.693	-3.244	74.000	4.064	PK
5			5862.808	72.683	68.616	-1.317	74.000	4.068	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

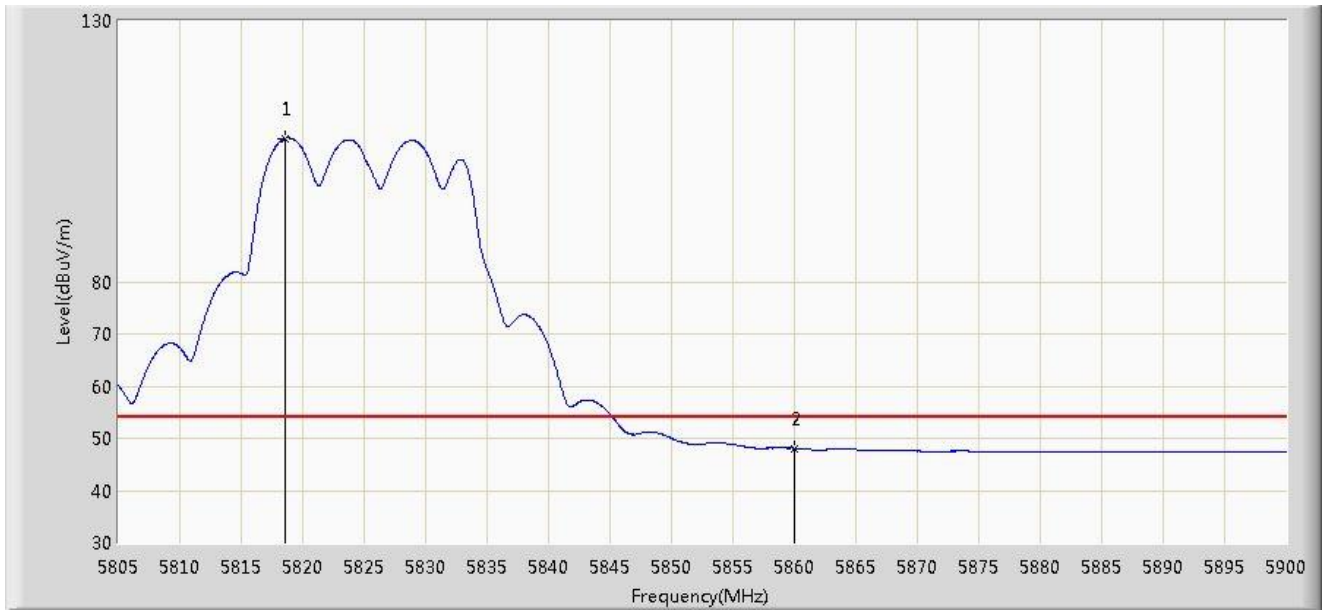


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.585	107.519	103.528	N/A	N/A	3.991	AV
2			5860.000	48.109	44.046	-5.891	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

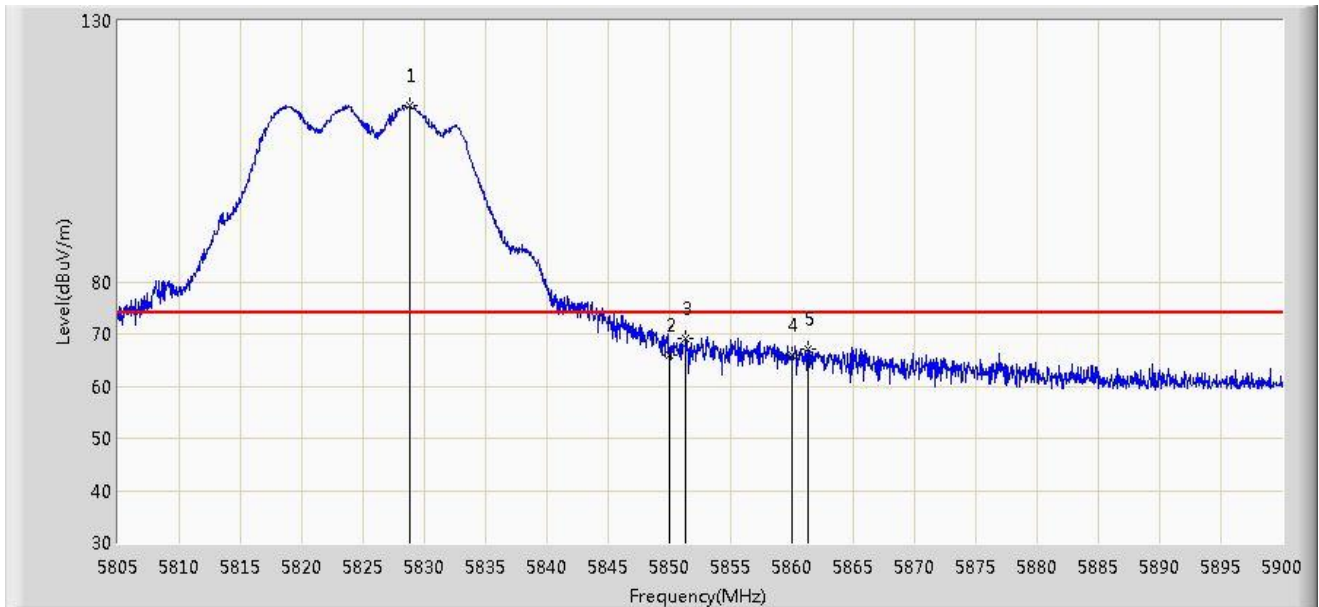

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.797	113.792	109.778	N/A	N/A	4.015	PK
2			5850.000	65.955	61.898	-12.245	78.200	4.058	PK
3			5851.360	69.129	65.071	-9.071	78.200	4.057	PK
4			5860.000	65.922	61.859	-8.078	74.000	4.064	PK
5			5861.335	67.126	63.062	-6.874	74.000	4.064	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.965	101.191	97.199	N/A	N/A	3.991	AV
2			5860.000	46.993	42.930	-7.007	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

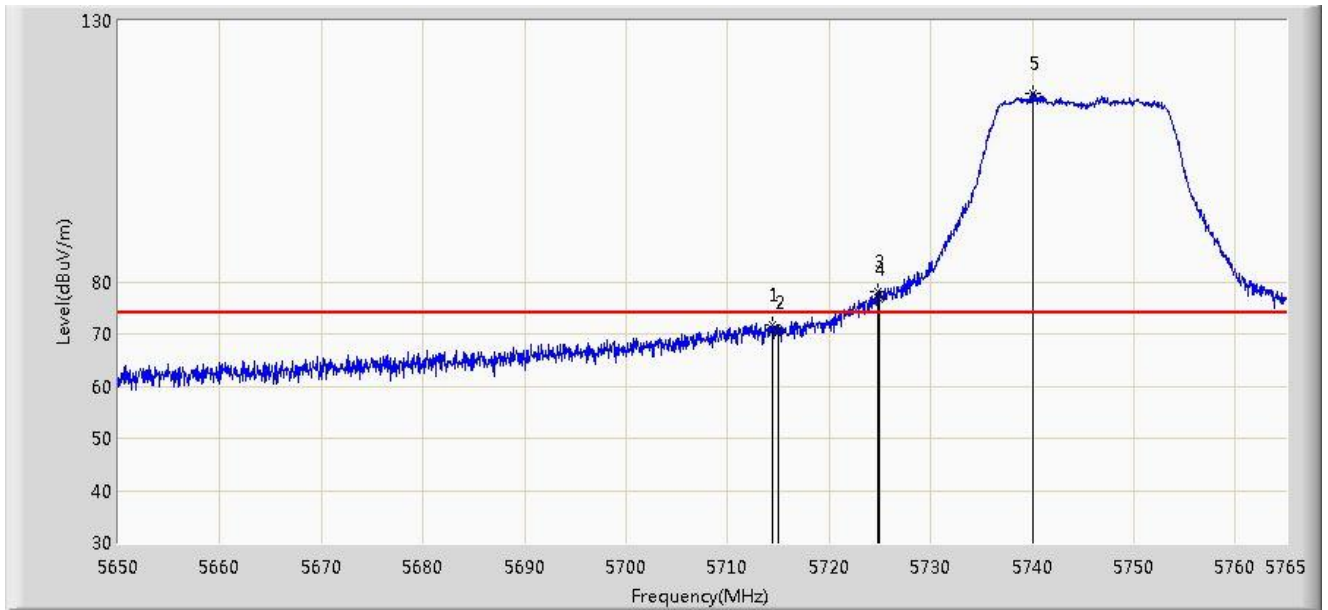


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.458	71.766	68.007	-2.234	74.000	3.759	PK
2			5715.000	70.432	66.671	-3.568	74.000	3.761	PK
3			5724.865	78.021	74.231	-0.179	78.200	3.790	PK
4			5725.000	76.720	72.929	-1.480	78.200	3.791	PK
5		*	5740.103	116.028	112.191	N/A	N/A	3.837	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

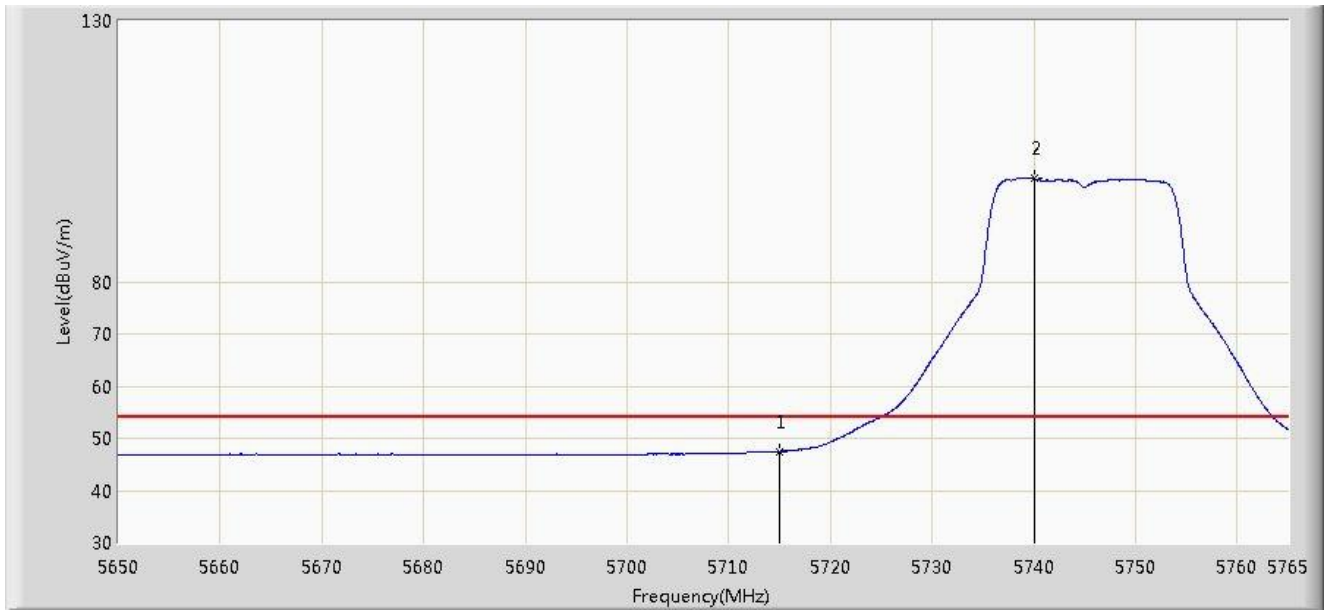


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.507	43.746	-6.493	54.000	3.761	AV
2		*	5740.103	99.722	95.885	N/A	N/A	3.837	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

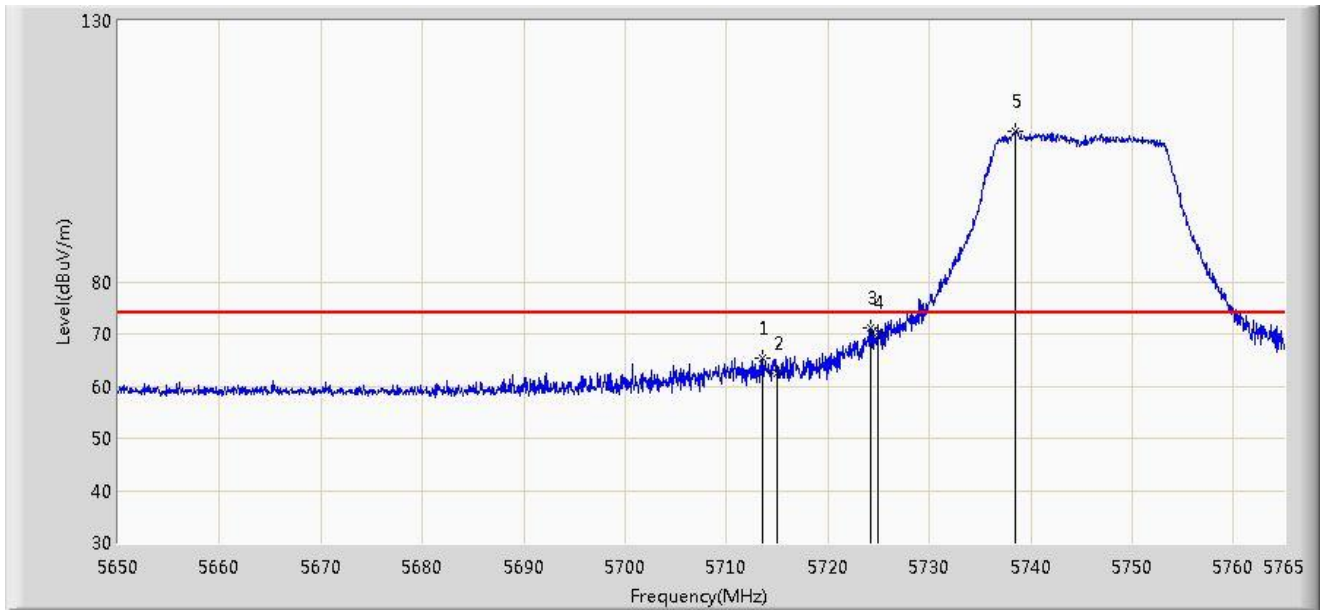


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.595	65.436	61.679	-8.564	74.000	3.756	PK
2			5715.000	62.567	58.806	-11.433	74.000	3.761	PK
3			5724.232	71.125	67.337	-7.075	78.200	3.789	PK
4			5725.000	70.311	66.520	-7.889	78.200	3.791	PK
5		*	5738.493	108.806	104.973	N/A	N/A	3.834	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 11:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

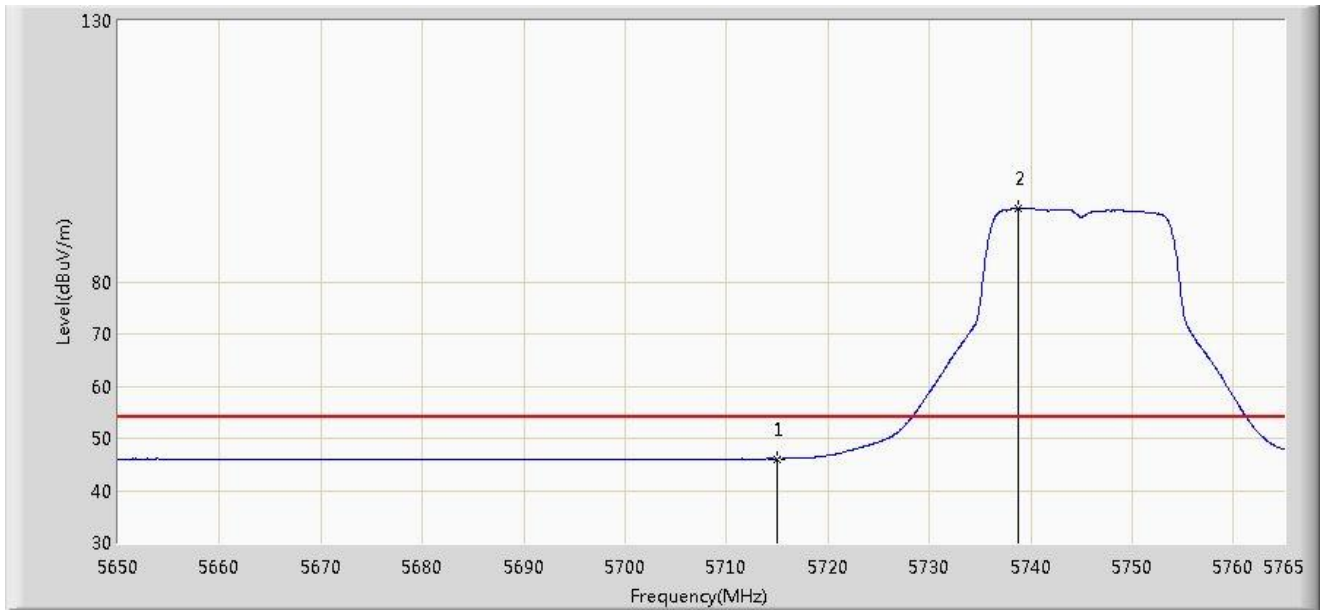


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.045	42.284	-7.955	54.000	3.761	AV
2		*	5738.837	94.136	90.302	N/A	N/A	3.834	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz	

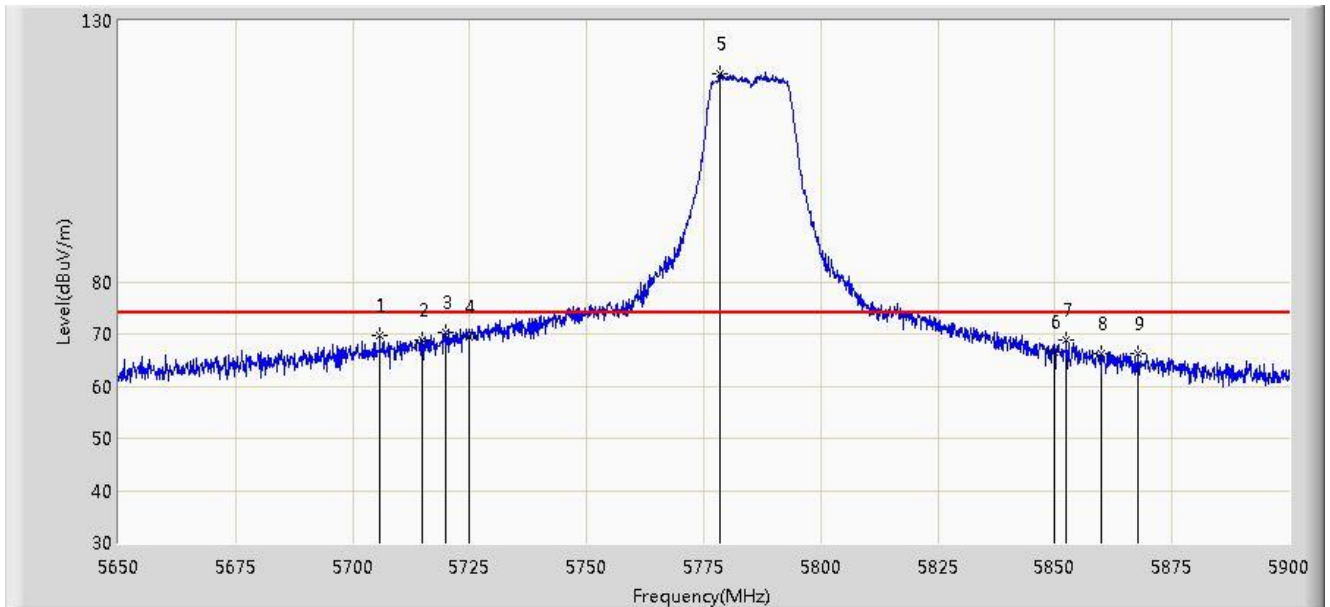


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5705.750	69.704	65.971	-4.296	74.000	3.732	PK
2			5715.000	68.773	65.012	-5.227	74.000	3.761	PK
3			5719.875	70.290	66.515	-7.910	78.200	3.775	PK
4			5725.000	69.502	65.711	-8.698	78.200	3.791	PK
5		*	5778.500	119.924	116.000	N/A	N/A	3.924	PK
6			5850.000	66.481	62.424	-11.719	78.200	4.058	PK
7			5852.375	68.746	64.687	-9.454	78.200	4.059	PK
8			5860.000	66.156	62.093	-7.844	74.000	4.064	PK
9			5867.625	66.301	62.219	-7.699	74.000	4.082	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz	

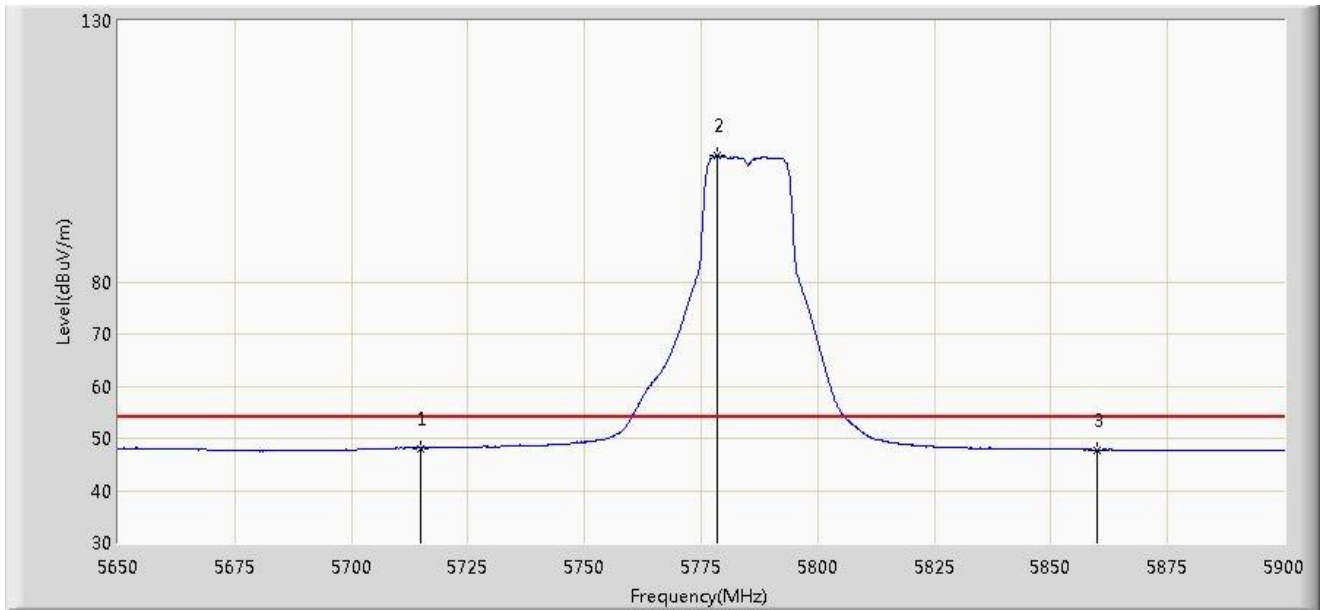


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.107	44.346	-5.893	54.000	3.761	AV
2		*	5778.500	104.099	100.175	N/A	N/A	3.924	AV
3			5860.000	47.795	43.732	-6.205	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 13:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz	

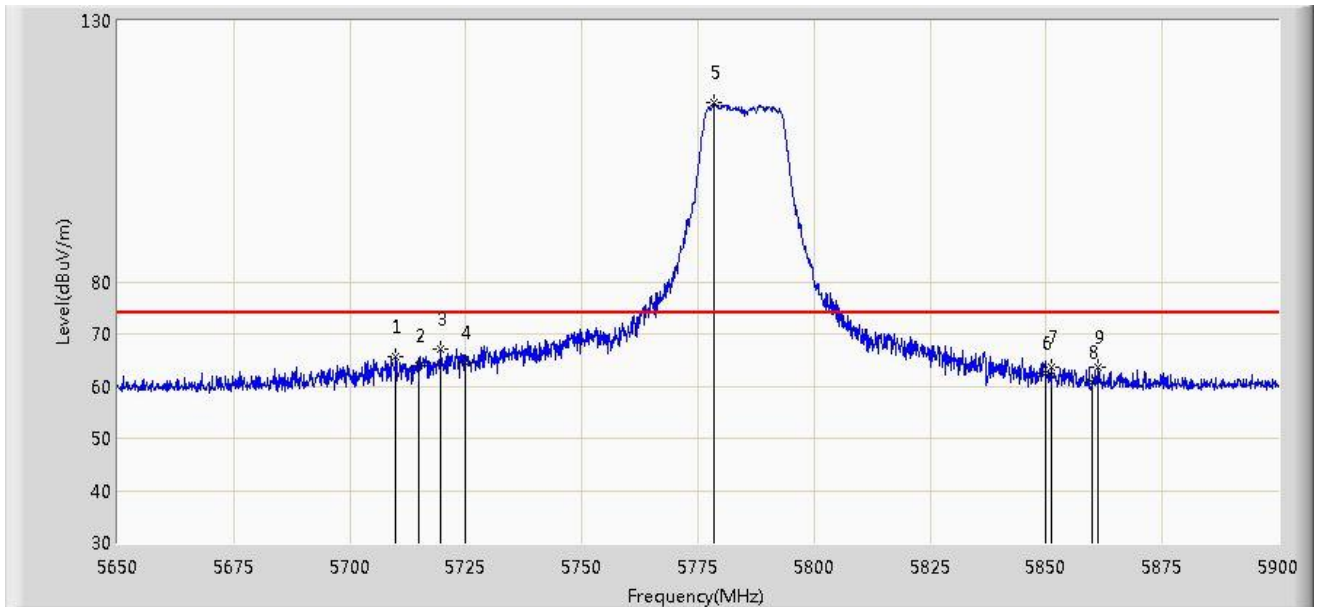


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5709.875	65.515	61.769	-8.485	74.000	3.745	PK
2			5715.000	63.866	60.105	-10.134	74.000	3.761	PK
3			5719.500	67.029	63.255	-11.171	78.200	3.774	PK
4			5725.000	64.456	60.665	-13.744	78.200	3.791	PK
5		*	5778.500	114.353	110.429	N/A	N/A	3.924	PK
6			5850.000	62.563	58.506	-15.637	78.200	4.058	PK
7			5851.000	63.525	59.467	-14.675	78.200	4.057	PK
8			5860.000	60.709	56.646	-13.291	74.000	4.064	PK
9			5861.000	63.591	59.527	-10.409	74.000	4.064	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz	

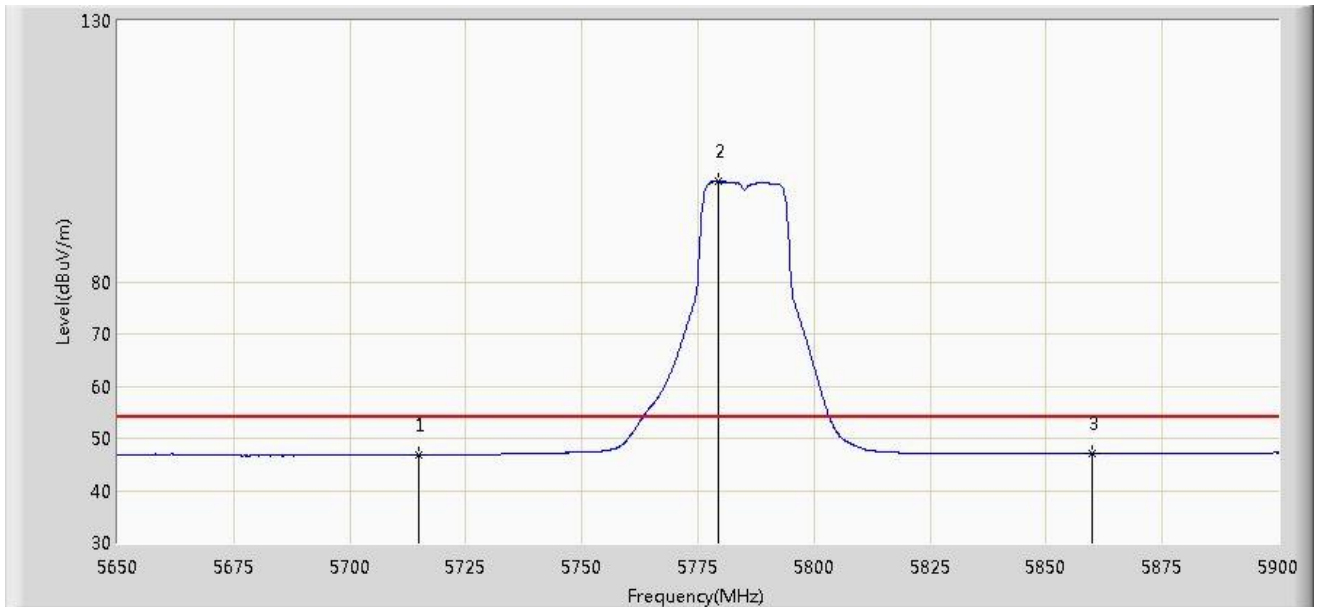


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.780	43.019	-7.220	54.000	3.761	AV
2		*	5779.375	99.226	95.300	N/A	N/A	3.926	AV
3			5860.000	47.034	42.971	-6.966	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

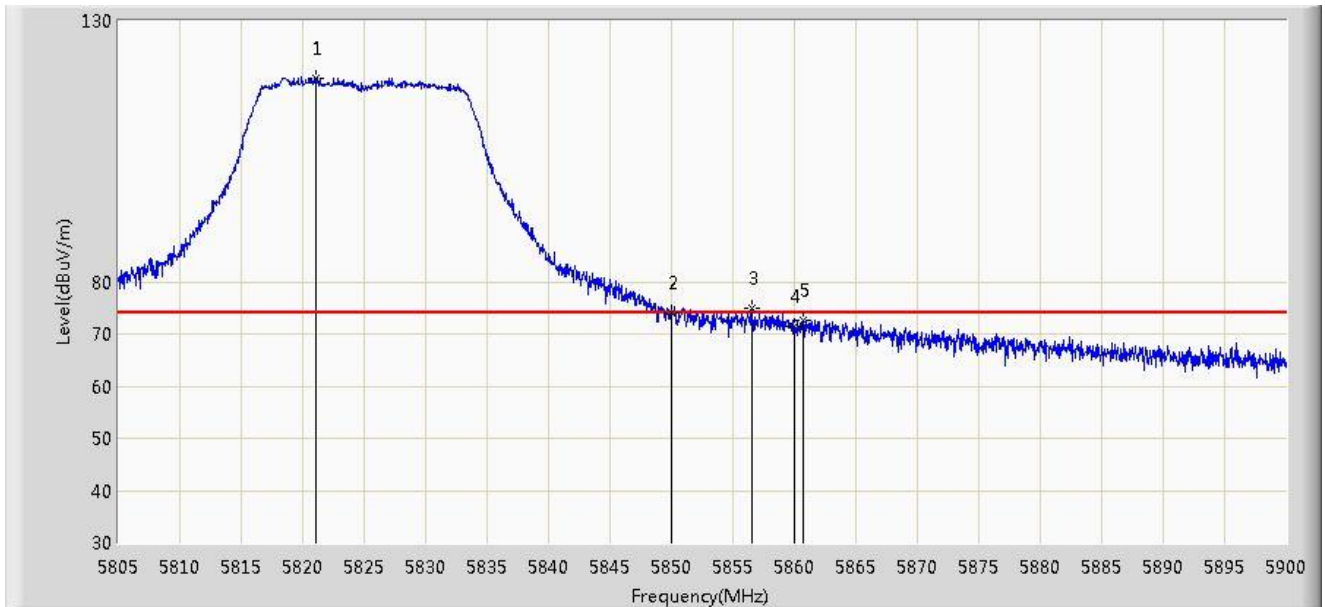


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.055	118.994	114.998	N/A	N/A	3.997	PK
2			5850.000	74.057	70.000	-4.143	78.200	4.058	PK
3			5856.490	74.993	70.932	-3.207	78.200	4.061	PK
4			5860.000	71.422	67.359	-2.578	74.000	4.064	PK
5			5860.670	72.669	68.605	-1.331	74.000	4.063	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

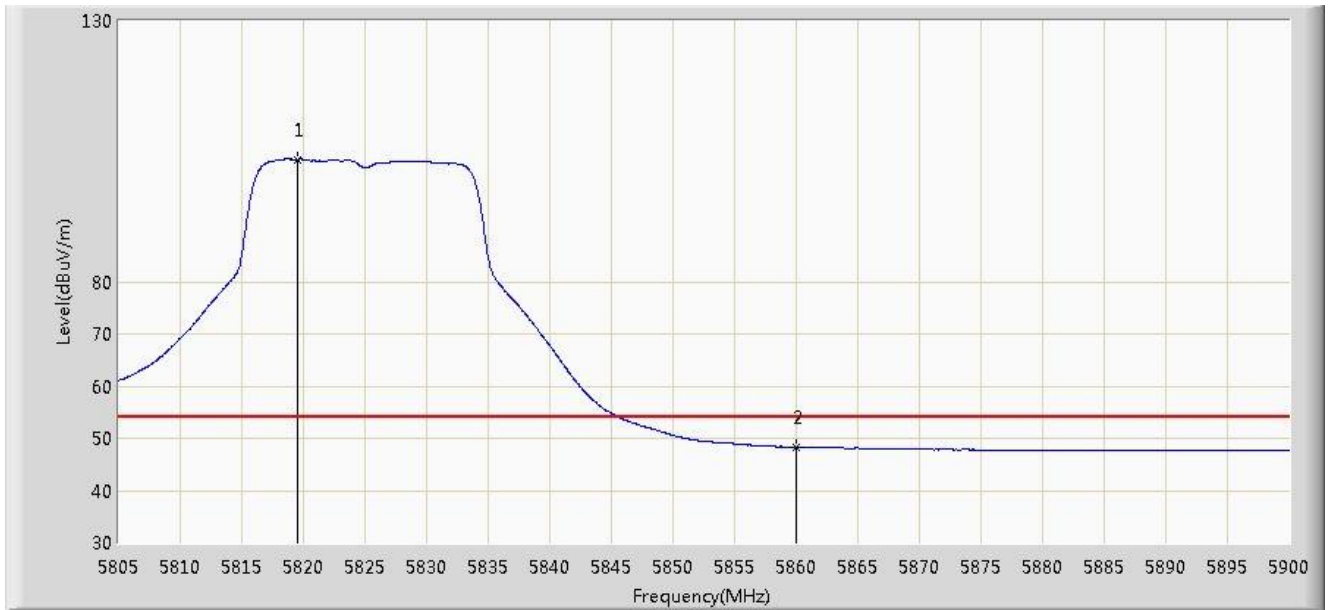

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.583	103.451	99.458	N/A	N/A	3.994	AV
2			5860.000	48.263	44.200	-5.737	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)