


Site: AC1	Time: 2015/04/29 - 13:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

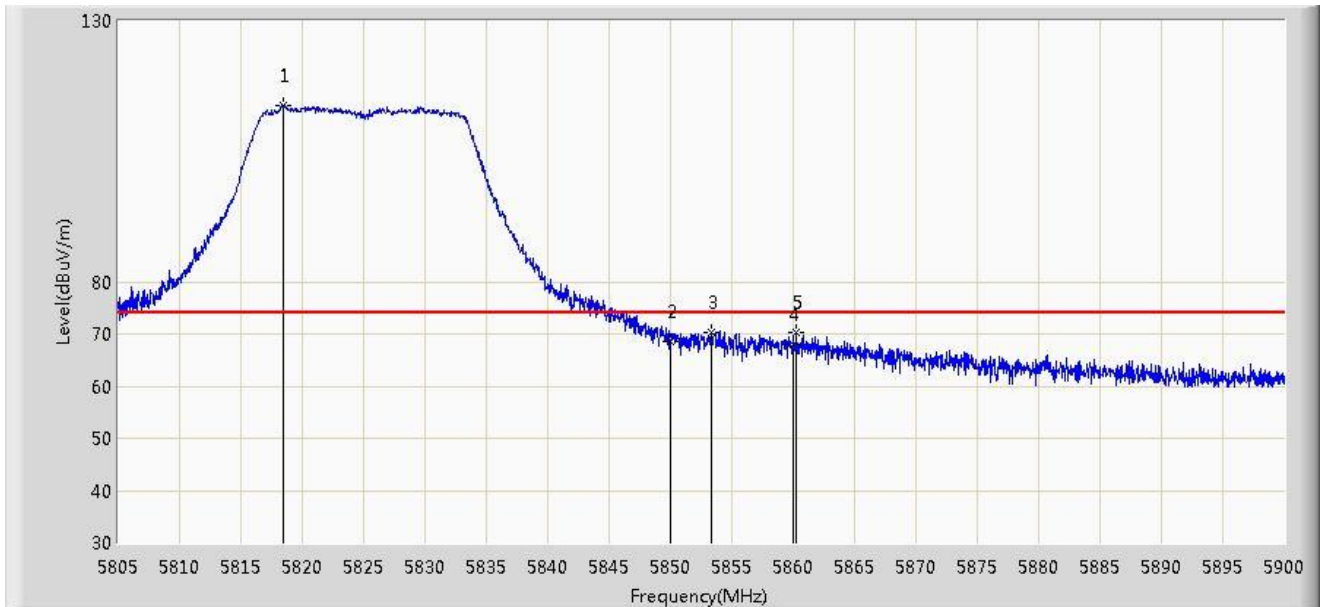


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.442	113.810	109.820	N/A	N/A	3.991	PK
2			5850.000	68.413	64.356	-9.787	78.200	4.058	PK
3			5853.308	70.228	66.169	-7.972	78.200	4.059	PK
4			5860.000	67.883	63.820	-6.117	74.000	4.064	PK
5			5860.243	70.331	66.267	-3.669	74.000	4.064	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

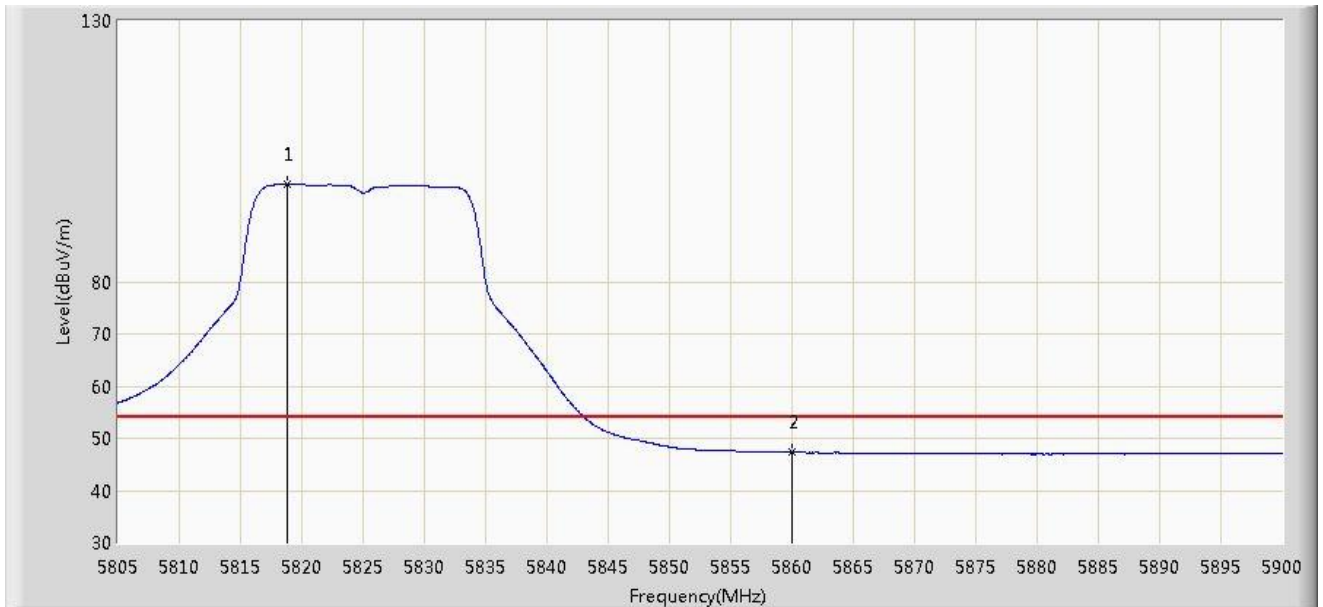


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.822	98.805	94.814	N/A	N/A	3.991	AV
2			5860.000	47.274	43.211	-6.726	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

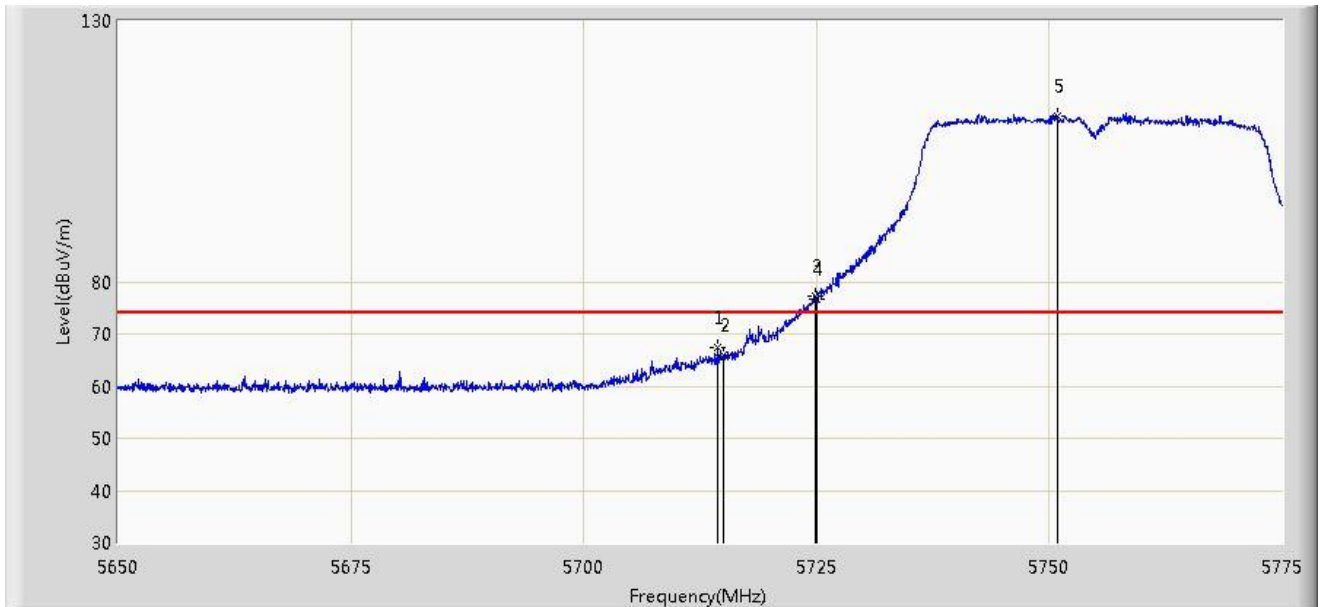


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.375	67.358	63.599	-6.642	74.000	3.758	PK
2			5715.000	65.860	62.099	-8.140	74.000	3.761	PK
3			5724.812	77.372	73.582	-0.828	78.200	3.790	PK
4			5725.000	76.751	72.960	-1.449	78.200	3.791	PK
5		*	5750.812	111.854	107.980	N/A	N/A	3.875	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

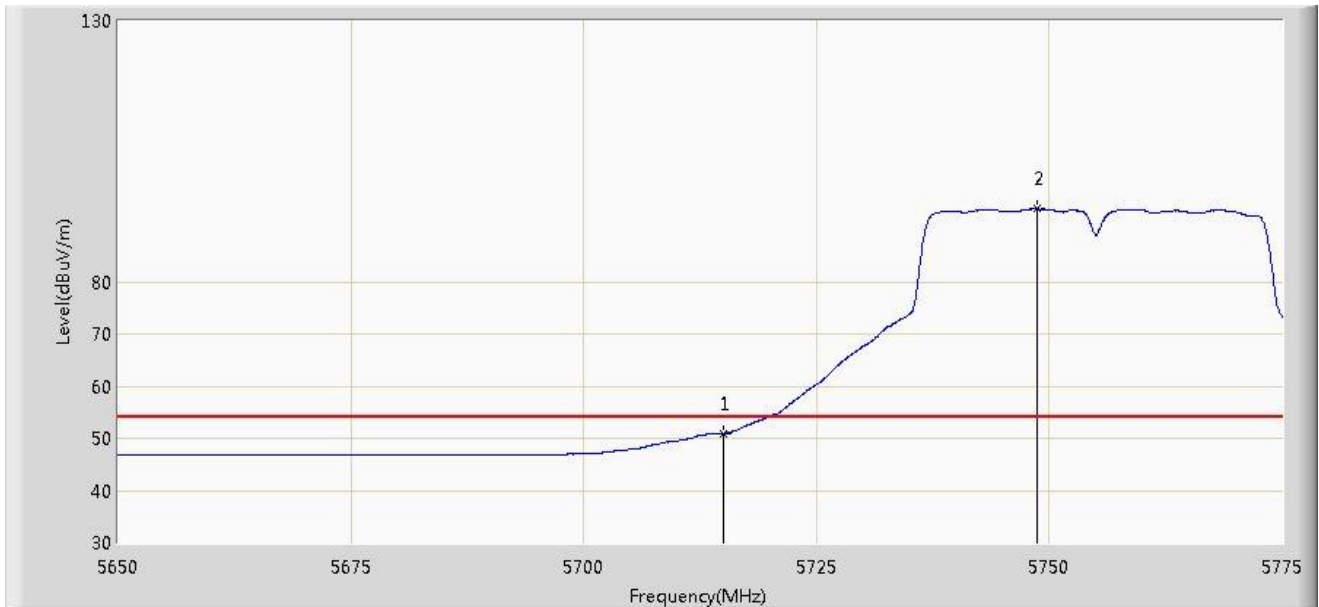


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.938	47.177	-3.062	54.000	3.761	AV
2		*	5748.687	94.008	90.142	N/A	N/A	3.867	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

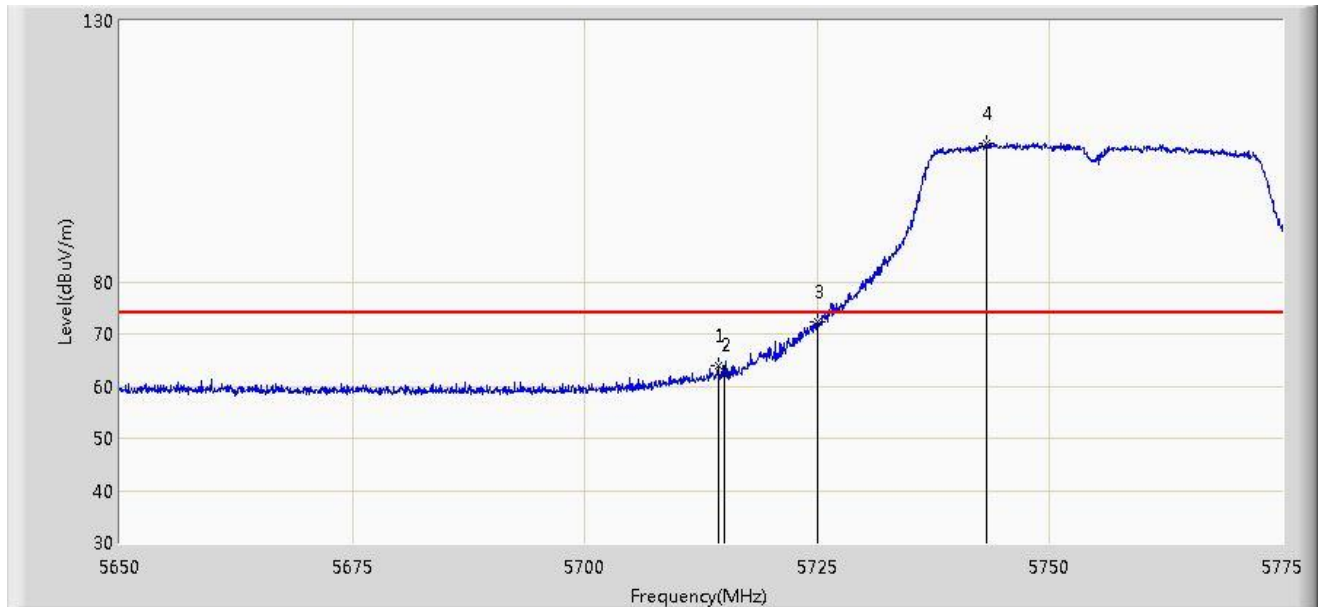


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.312	63.968	60.209	-10.032	74.000	3.758	PK
2			5715.000	62.150	58.389	-11.850	74.000	3.761	PK
3			5725.000	72.209	68.418	-5.991	78.200	3.791	PK
4		*	5743.187	106.618	102.772	N/A	N/A	3.846	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

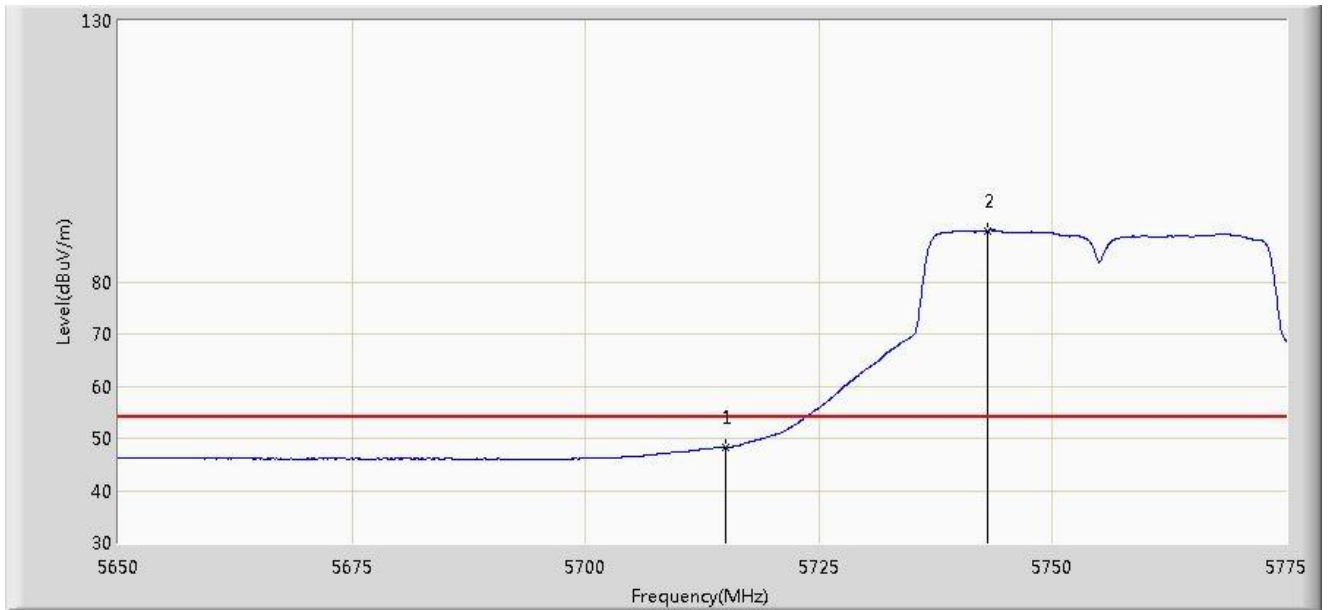


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.265	44.504	-5.735	54.000	3.761	AV
2		*	5743.062	89.797	85.952	N/A	N/A	3.845	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

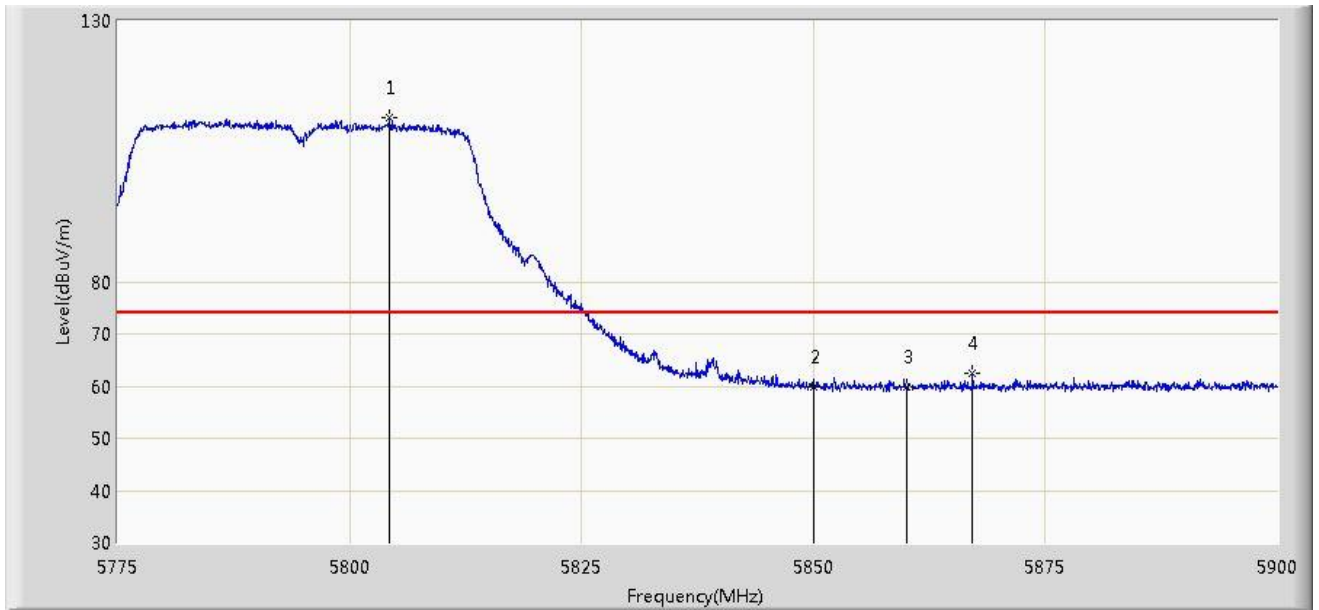


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5804.312	111.305	107.340	N/A	N/A	3.965	PK
2			5850.000	59.909	55.852	-18.291	78.200	4.058	PK
3			5860.000	59.857	55.794	-14.143	74.000	4.064	PK
4			5867.125	62.491	58.410	-11.509	74.000	4.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

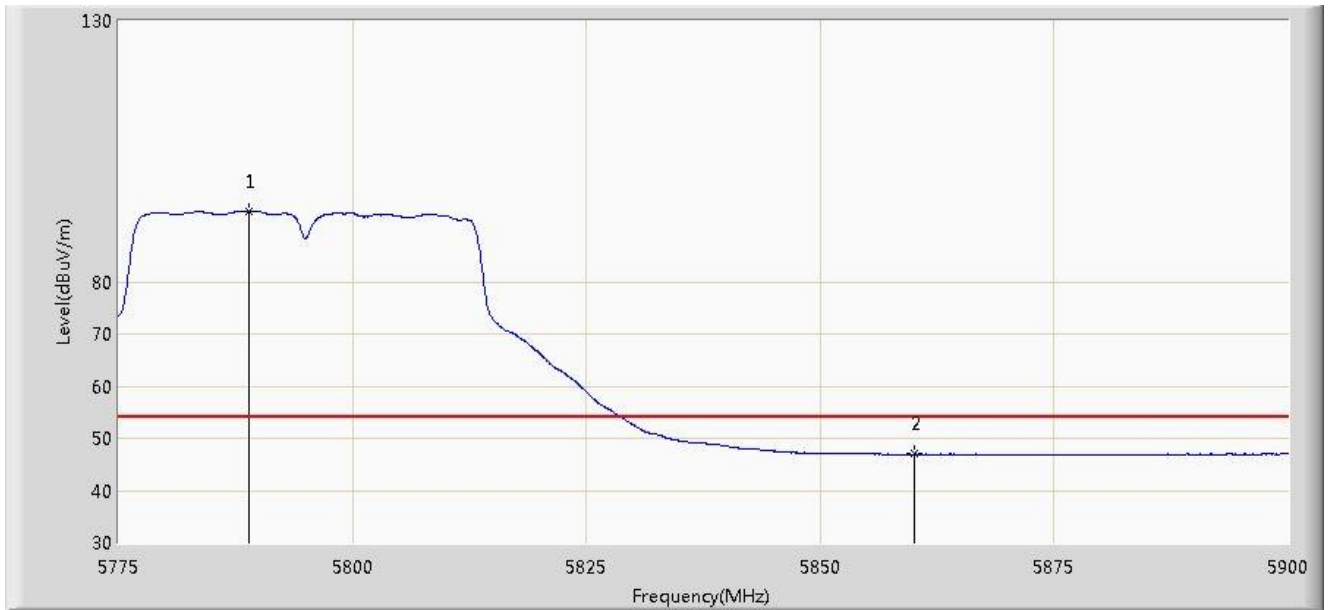


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5788.937	93.523	89.580	N/A	N/A	3.943	AV
2			5860.000	46.959	42.896	-7.041	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

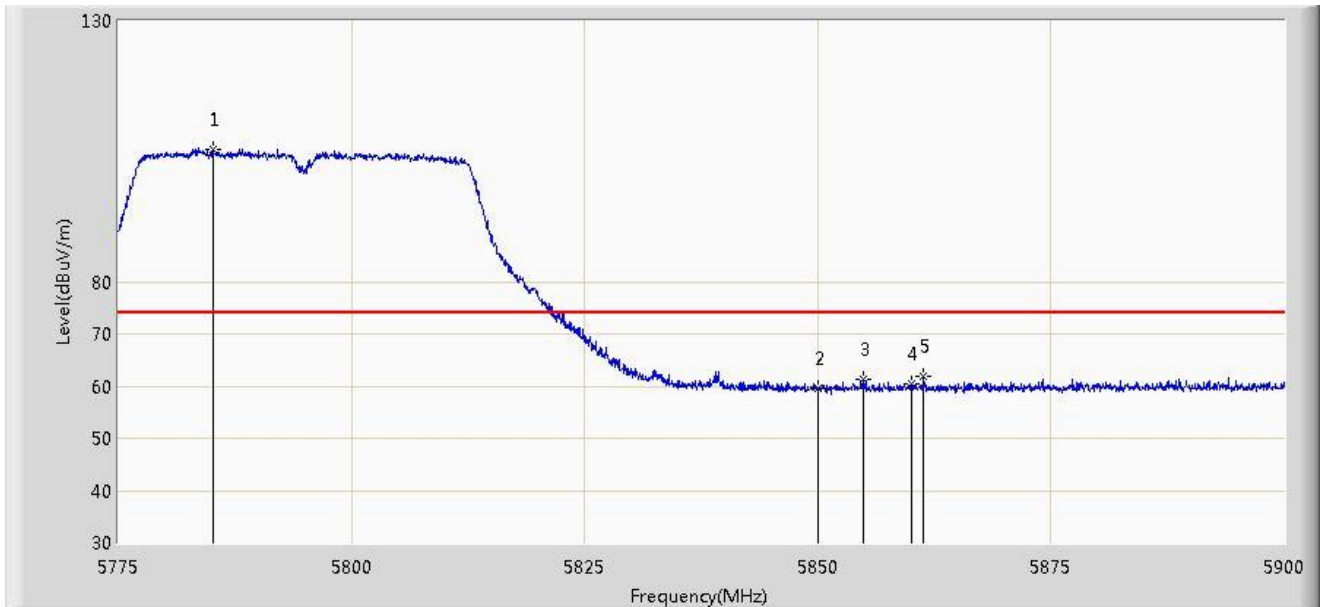


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.125	105.418	101.482	N/A	N/A	3.936	PK
2			5850.000	59.618	55.561	-18.582	78.200	4.058	PK
3			5854.937	61.359	57.299	-16.841	78.200	4.060	PK
4			5860.000	60.394	56.331	-13.606	74.000	4.064	PK
5			5861.375	61.865	57.801	-12.135	74.000	4.065	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

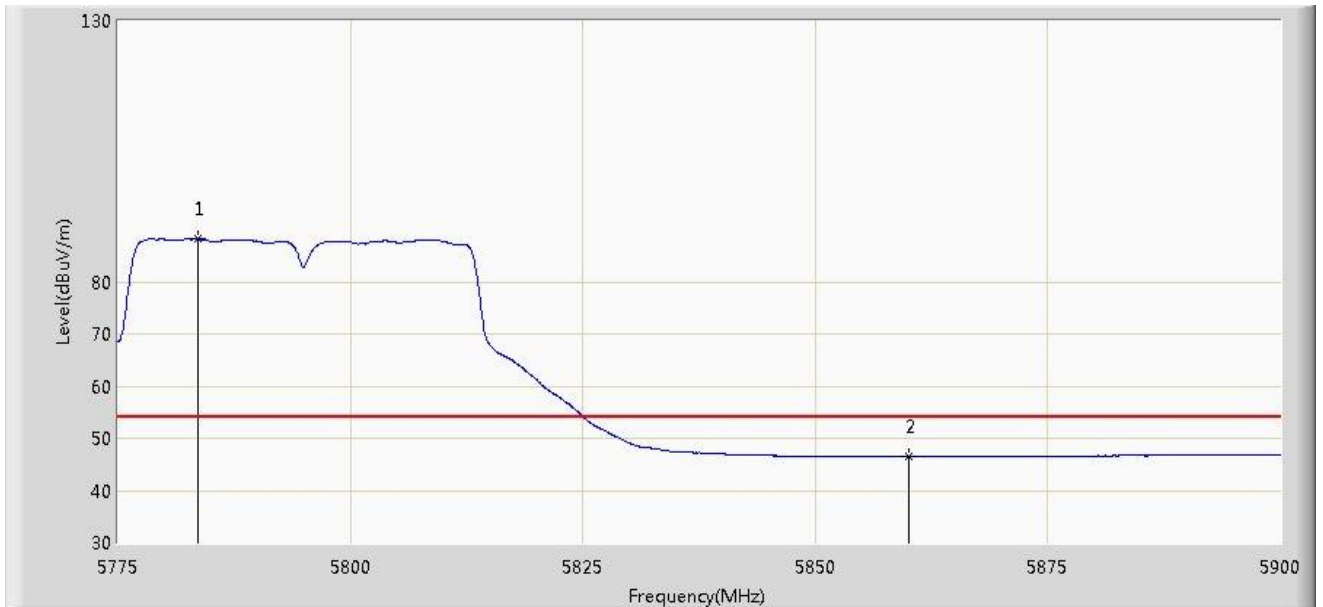


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.687	88.238	84.304	N/A	N/A	3.934	AV
2			5860.000	46.544	42.481	-7.456	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

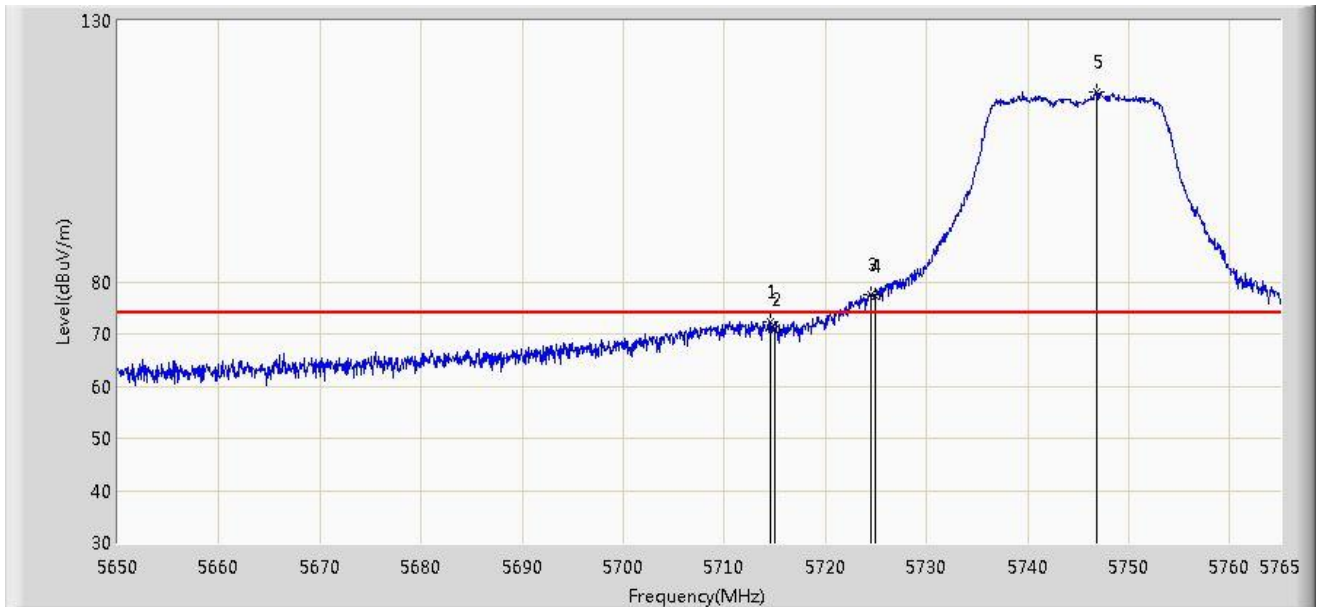


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.630	72.281	68.522	-1.719	74.000	3.759	PK
2			5715.000	70.964	67.203	-3.036	74.000	3.761	PK
3			5724.520	77.626	73.837	-0.574	78.200	3.790	PK
4			5725.000	77.134	73.343	-1.066	78.200	3.791	PK
5		*	5746.888	116.472	112.612	N/A	N/A	3.860	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

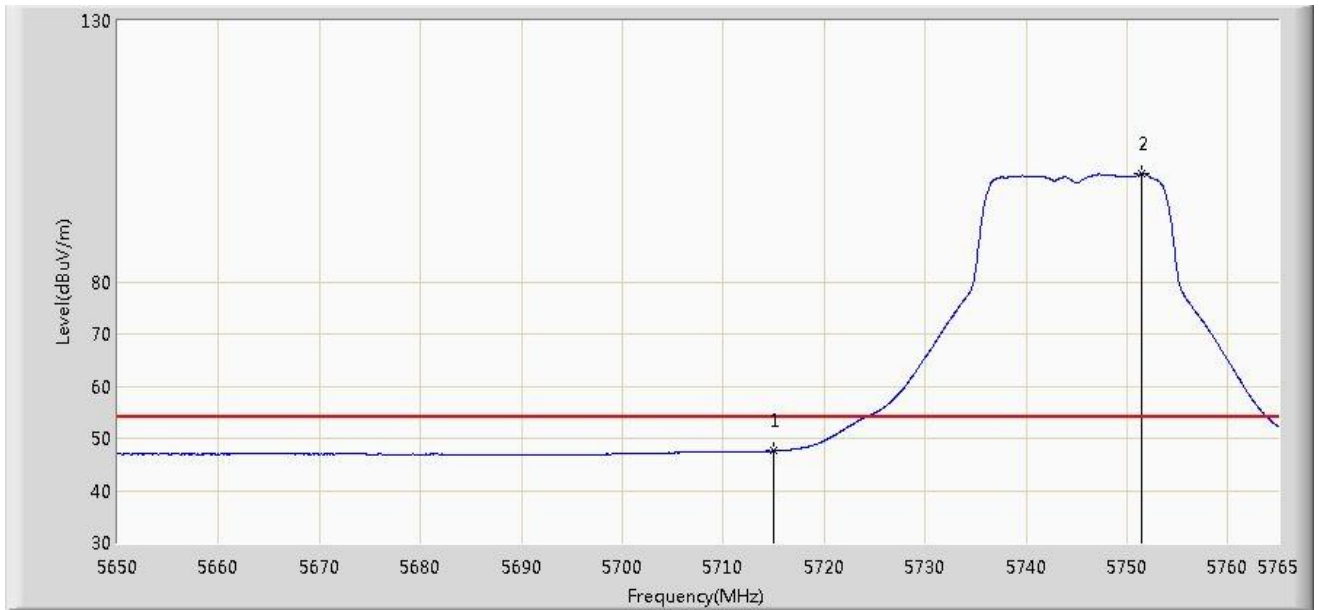


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.562	43.801	-6.438	54.000	3.761	AV
2		*	5751.430	100.663	96.786	N/A	N/A	3.876	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

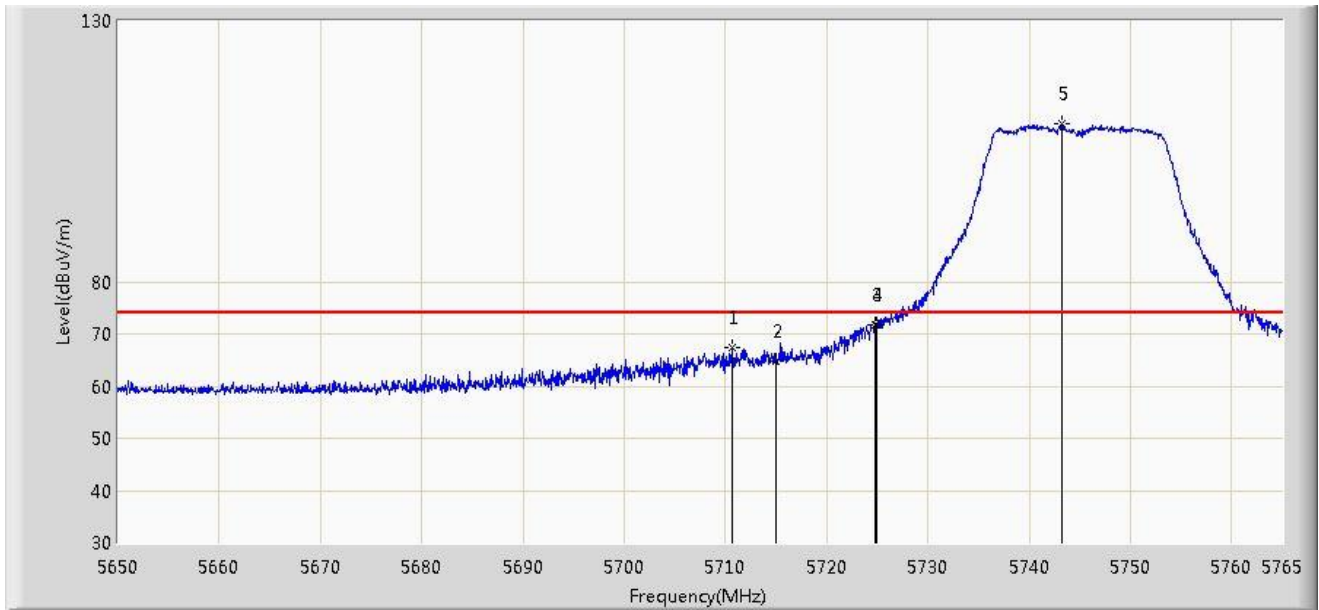


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.605	67.326	63.578	-6.674	74.000	3.747	PK
2			5715.000	64.909	61.148	-9.091	74.000	3.761	PK
3			5724.750	71.867	68.077	-6.333	78.200	3.790	PK
4			5725.000	71.828	68.037	-6.372	78.200	3.791	PK
5		*	5743.208	110.430	106.584	N/A	N/A	3.846	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

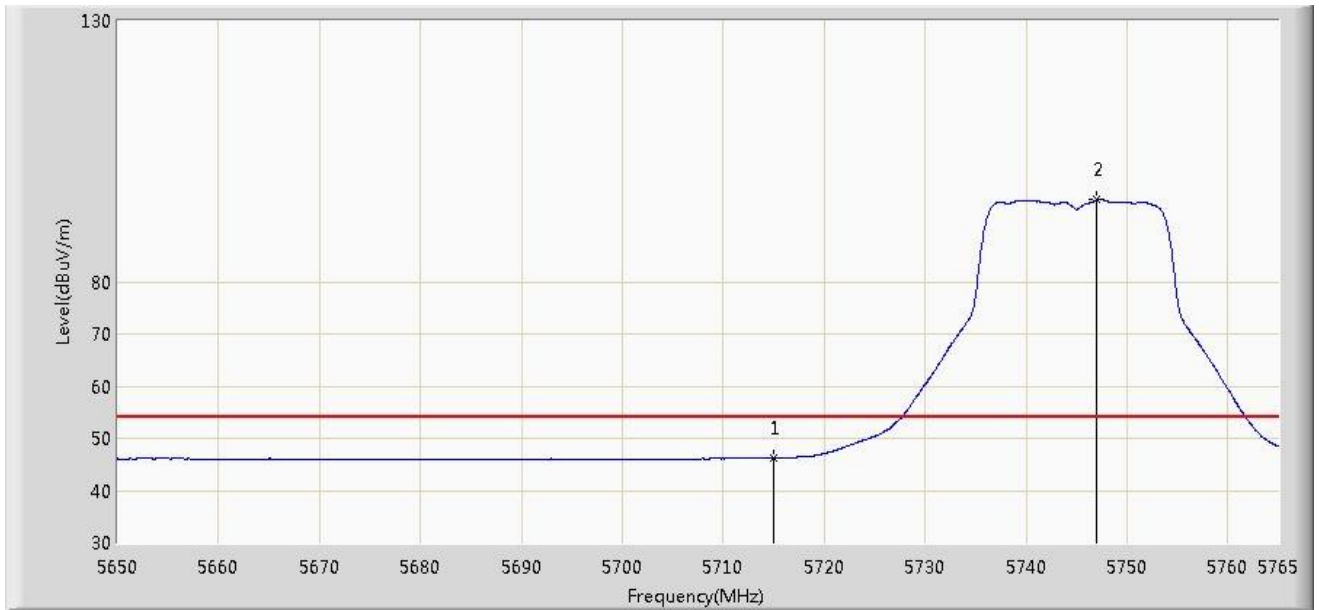


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.232	42.471	-7.768	54.000	3.761	AV
2		*	5746.945	95.686	91.826	N/A	N/A	3.860	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz	

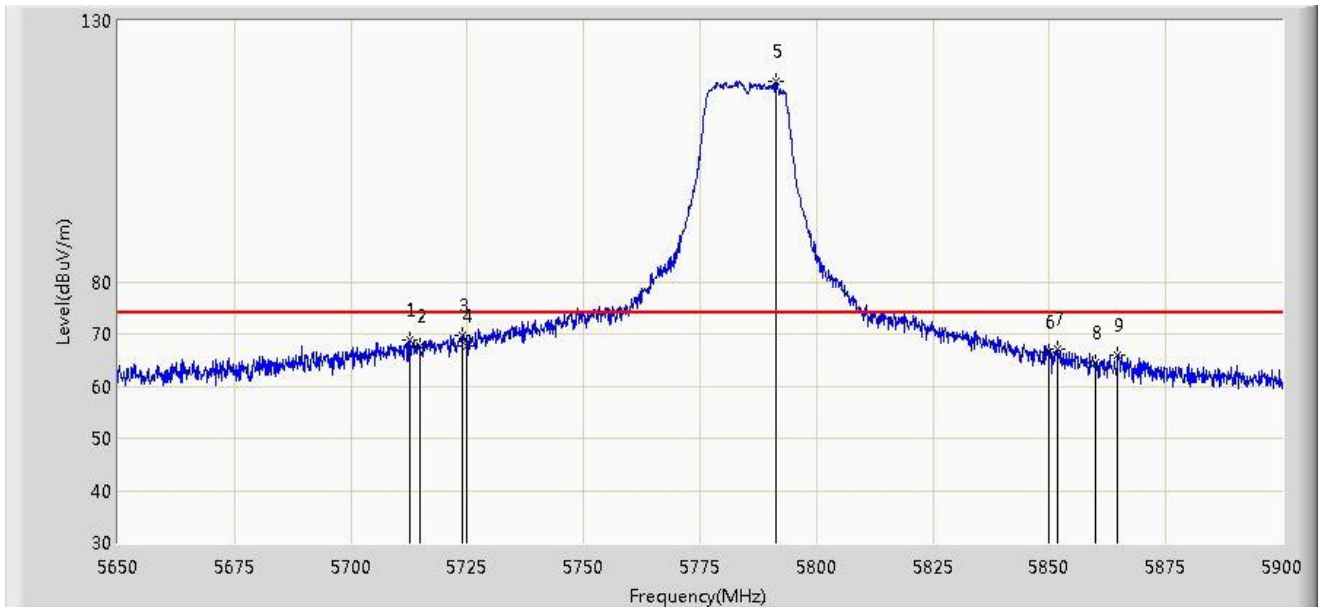


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.750	68.717	64.963	-5.283	74.000	3.754	PK
2			5715.000	67.573	63.812	-6.427	74.000	3.761	PK
3			5724.000	69.668	65.880	-8.532	78.200	3.788	PK
4			5725.000	67.742	63.951	-10.458	78.200	3.791	PK
5		*	5791.250	118.374	114.427	N/A	N/A	3.948	PK
6			5850.000	66.494	62.437	-11.706	78.200	4.058	PK
7			5851.625	67.039	62.981	-11.161	78.200	4.058	PK
8			5860.000	64.538	60.475	-9.462	74.000	4.064	PK
9			5864.625	66.042	61.969	-7.958	74.000	4.072	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz	

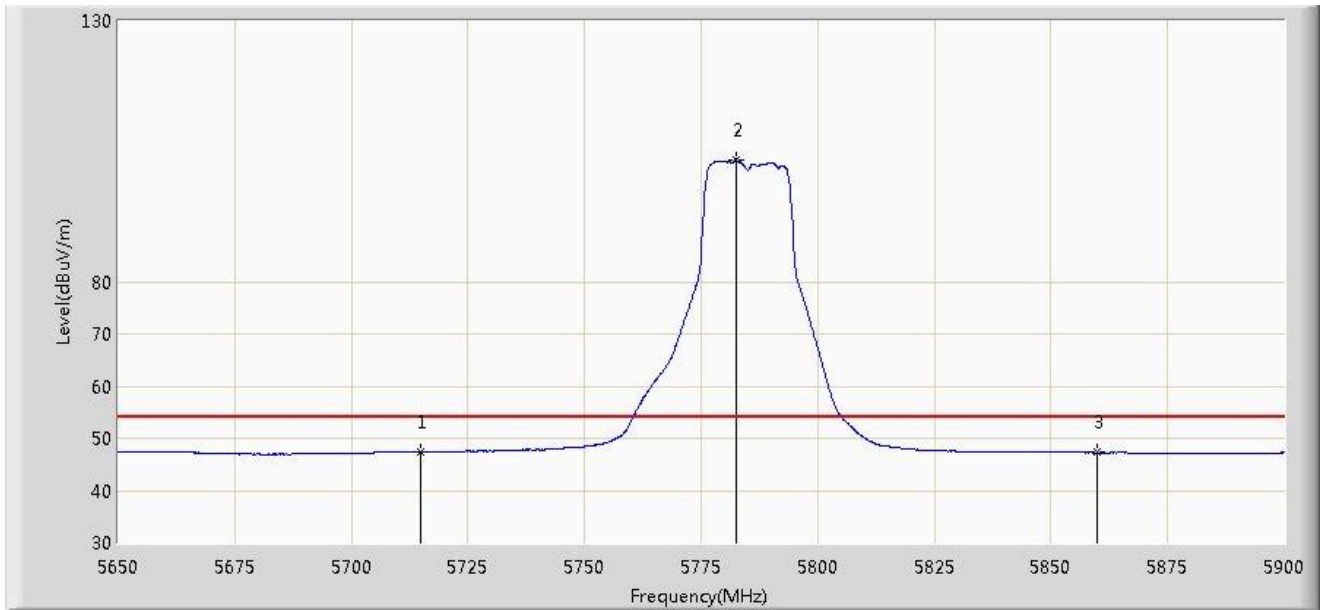


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.361	43.600	-6.639	54.000	3.761	AV
2		*	5782.375	103.449	99.518	N/A	N/A	3.931	AV
3			5860.000	47.252	43.189	-6.748	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 14:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz	

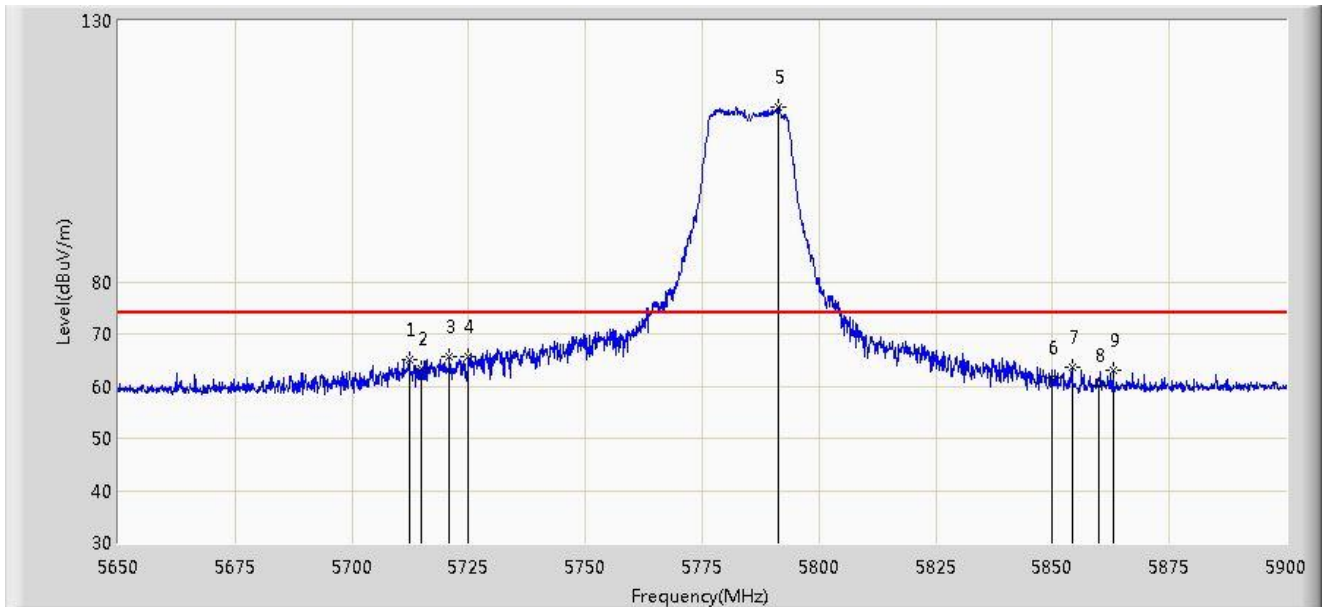


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.250	65.064	61.311	-8.936	74.000	3.753	PK
2			5715.000	63.449	59.688	-10.551	74.000	3.761	PK
3			5720.875	65.612	61.834	-12.588	78.200	3.778	PK
4			5725.000	65.784	61.993	-12.416	78.200	3.791	PK
5		*	5791.250	113.560	109.613	N/A	N/A	3.948	PK
6			5850.000	61.537	57.480	-16.663	78.200	4.058	PK
7			5854.125	63.682	59.622	-14.518	78.200	4.059	PK
8			5860.000	60.207	56.144	-13.793	74.000	4.064	PK
9			5863.000	63.083	59.015	-10.917	74.000	4.068	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz	

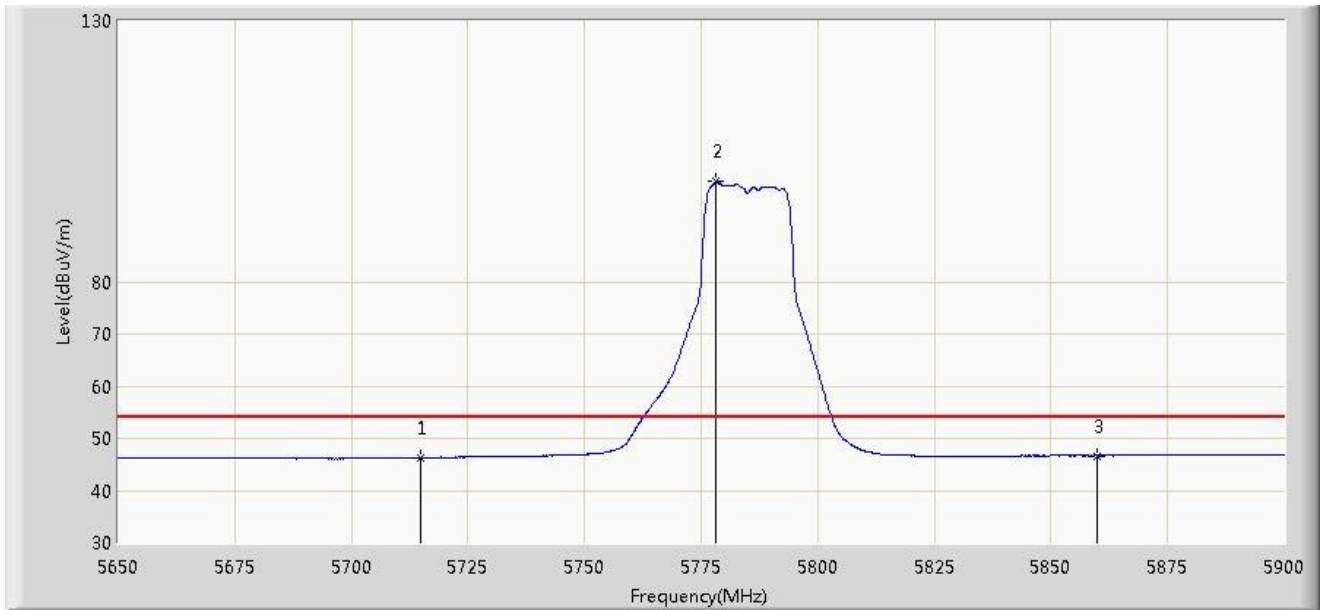


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.307	42.546	-7.693	54.000	3.761	AV
2		*	5778.250	99.179	95.255	N/A	N/A	3.924	AV
3			5860.000	46.653	42.590	-7.347	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

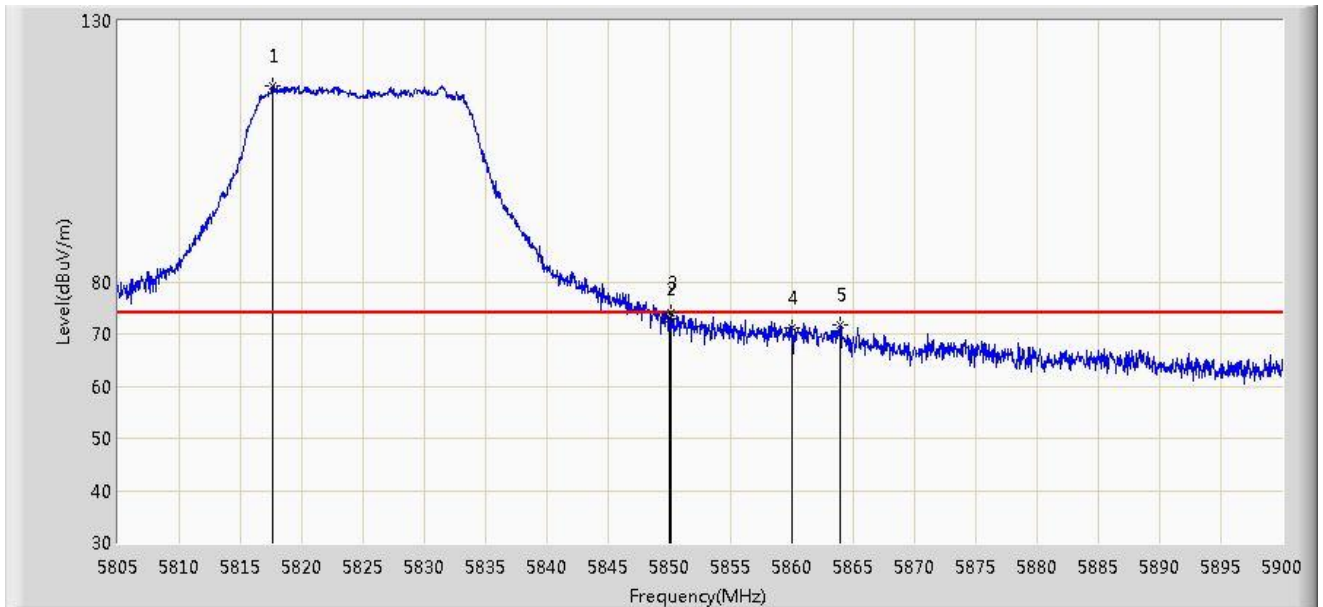


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5817.587	117.613	113.625	N/A	N/A	3.989	PK
2			5850.000	72.935	68.878	-5.265	78.200	4.058	PK
3			5850.172	73.972	69.915	-4.228	78.200	4.058	PK
4			5860.000	71.110	67.047	-2.890	74.000	4.064	PK
5			5863.947	71.641	67.570	-2.359	74.000	4.071	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

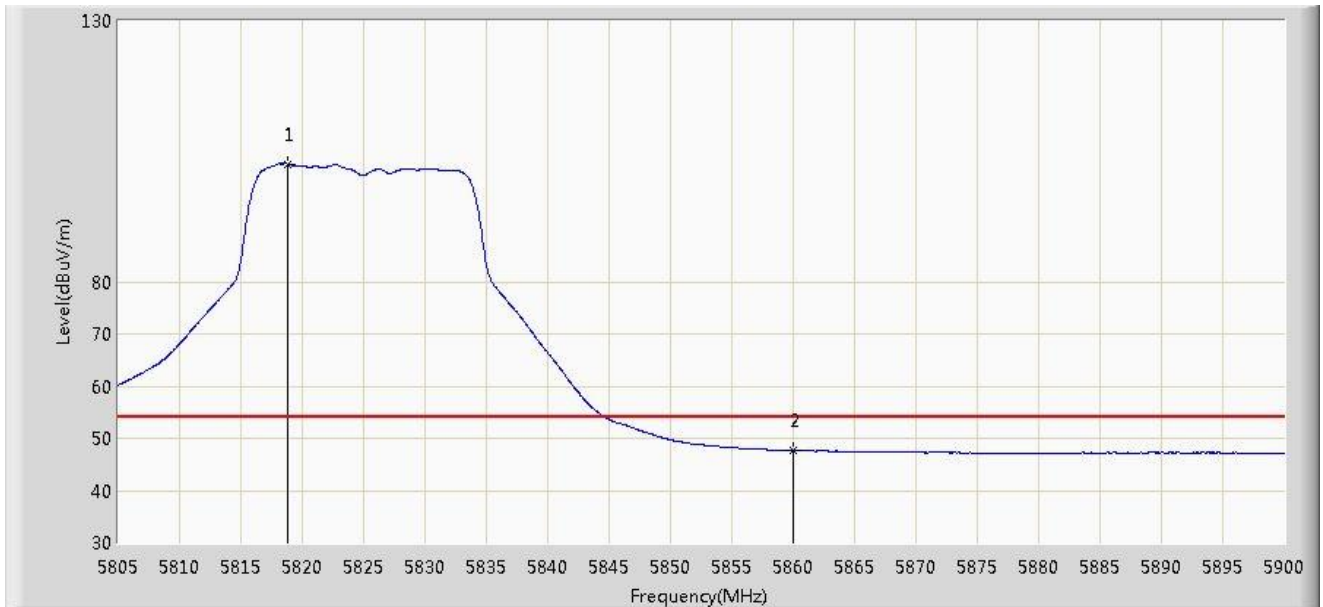


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.822	102.521	98.530	N/A	N/A	3.991	AV
2			5860.000	47.615	43.552	-6.385	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

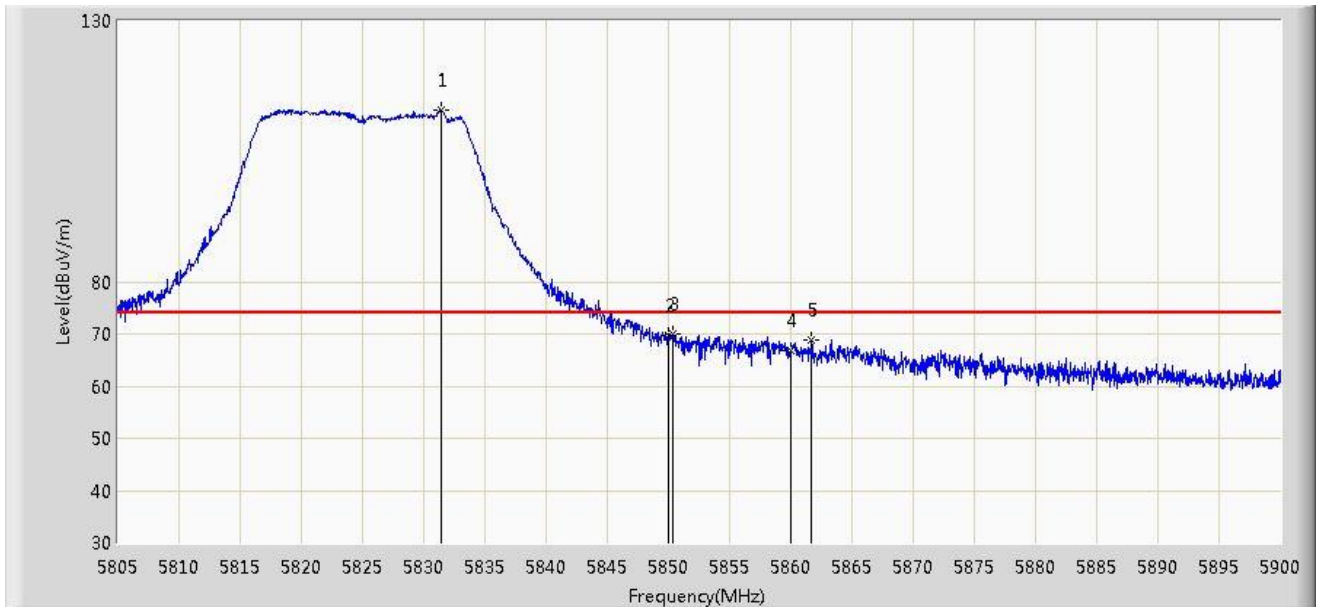


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.410	112.877	108.856	N/A	N/A	4.021	PK
2			5850.000	69.584	65.527	-8.616	78.200	4.058	PK
3			5850.315	70.047	65.990	-8.153	78.200	4.057	PK
4			5860.000	66.821	62.758	-7.179	74.000	4.064	PK
5			5861.715	68.849	64.785	-5.151	74.000	4.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

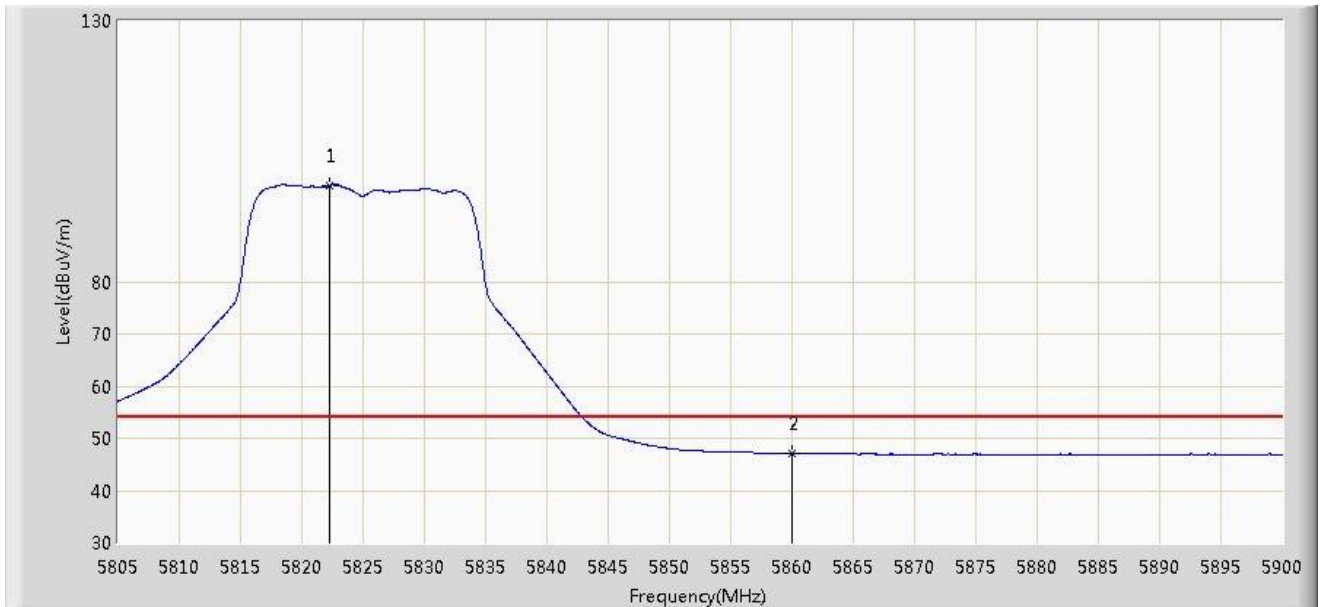


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.290	98.484	94.485	N/A	N/A	4.000	AV
2			5860.000	47.053	42.990	-6.947	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

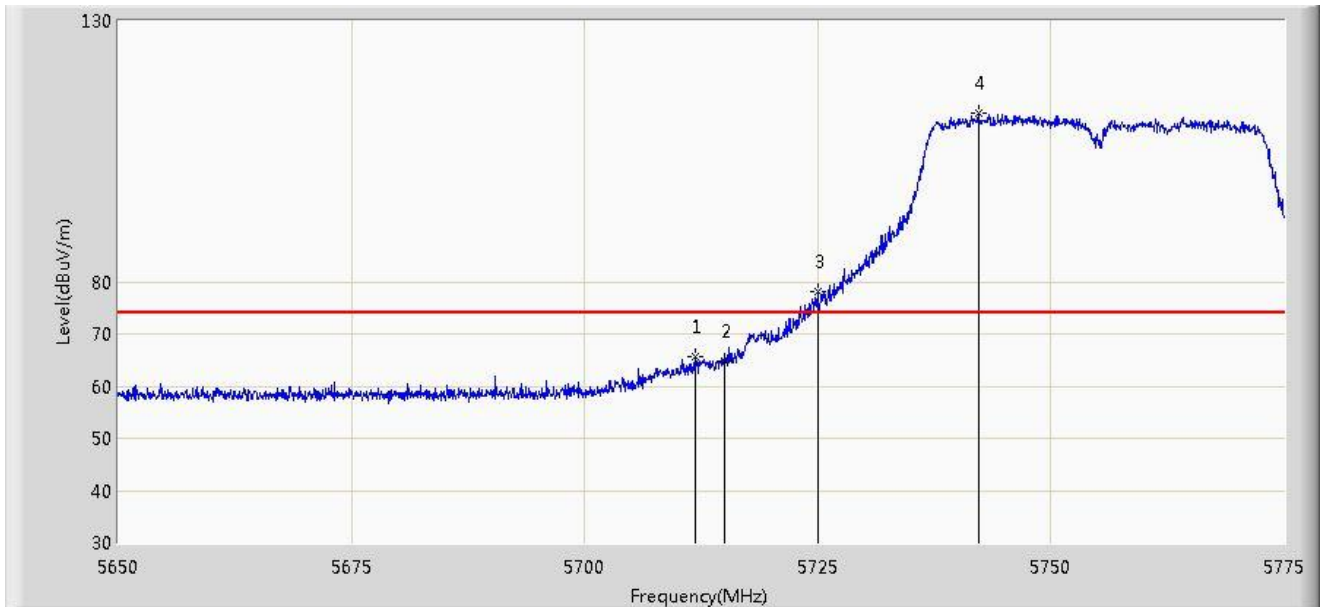


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.937	65.518	61.766	-8.482	74.000	3.752	PK
2			5715.000	64.644	60.883	-9.356	74.000	3.761	PK
3			5725.000	78.137	74.346	-0.063	78.200	3.791	PK
4		*	5742.187	112.384	108.541	N/A	N/A	3.843	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

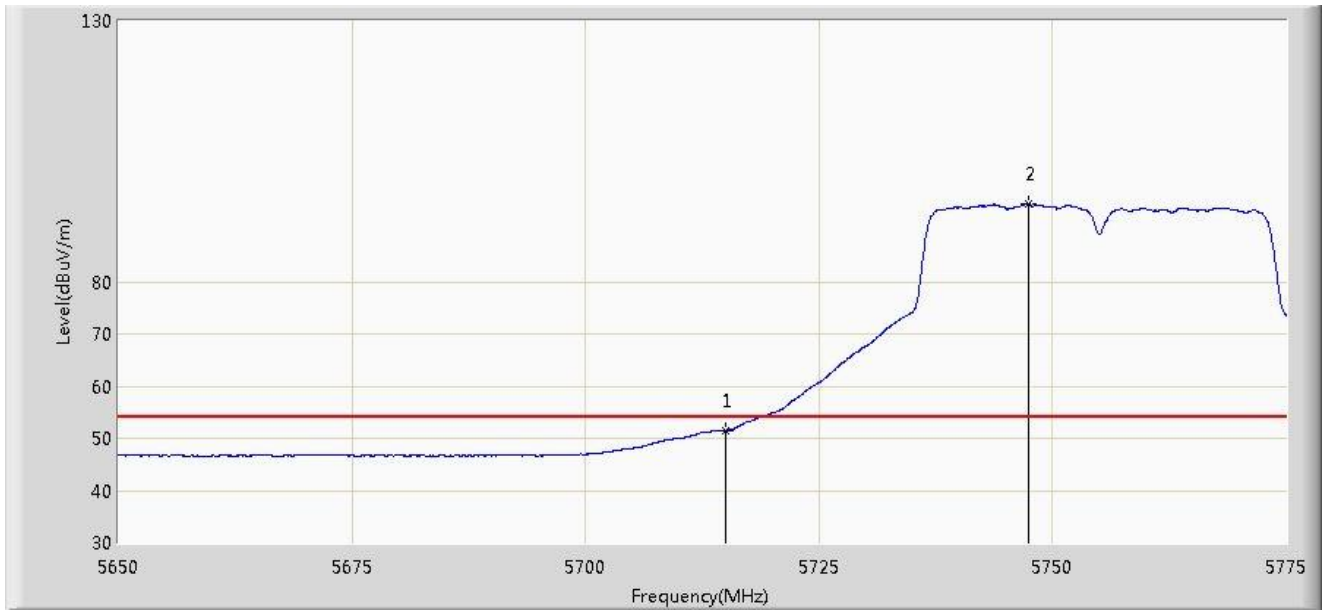


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.532	47.771	-2.468	54.000	3.761	AV
2		*	5747.500	94.829	90.967	N/A	N/A	3.862	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

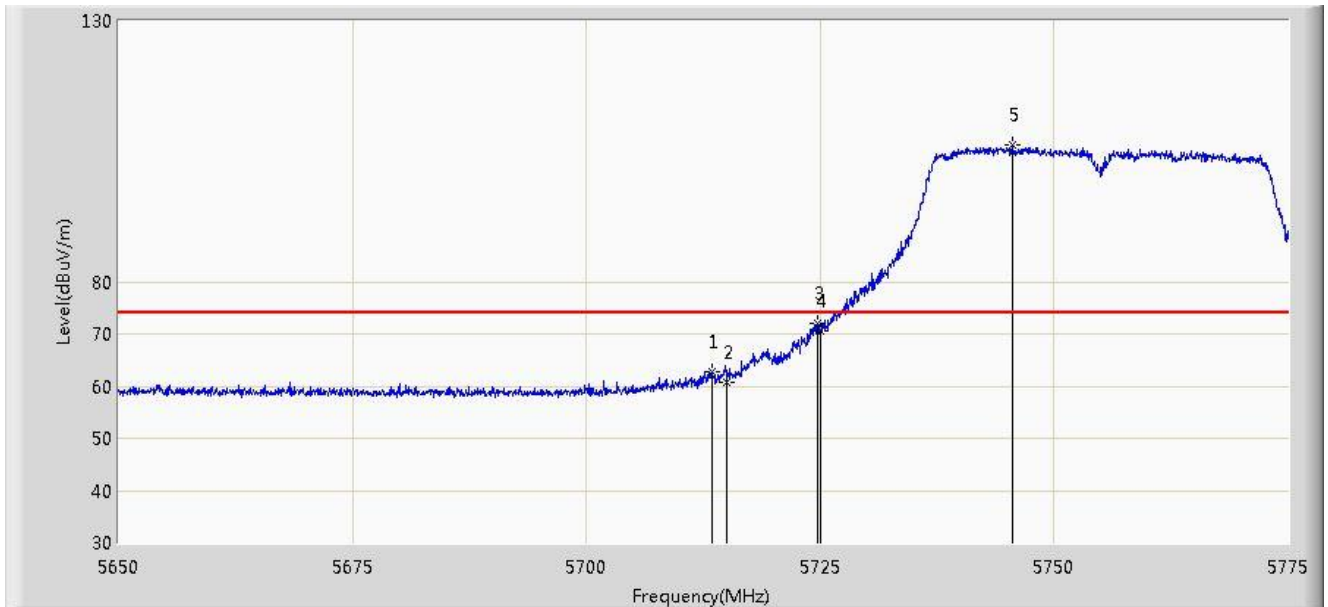


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.437	62.834	59.078	-11.166	74.000	3.756	PK
2			5715.000	60.763	57.002	-13.237	74.000	3.761	PK
3			5724.750	71.924	68.134	-6.276	78.200	3.790	PK
4			5725.000	70.589	66.798	-7.611	78.200	3.791	PK
5		*	5745.625	106.222	102.367	N/A	N/A	3.855	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

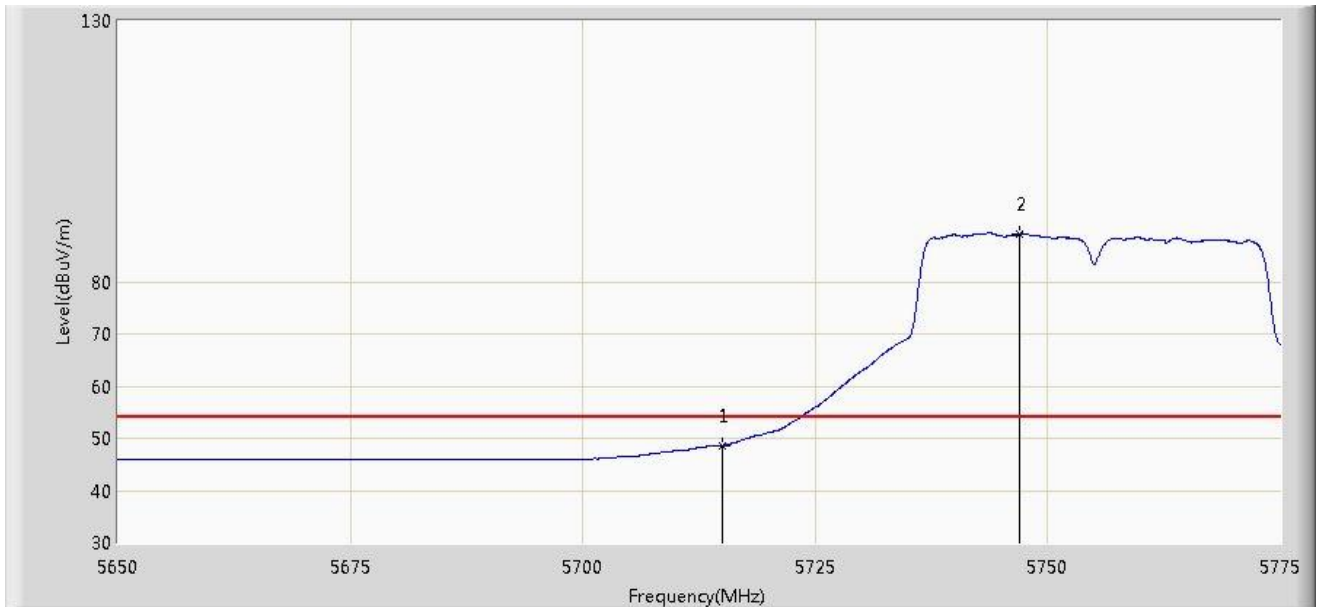


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.627	44.866	-5.373	54.000	3.761	AV
2		*	5747.000	89.188	85.328	N/A	N/A	3.860	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

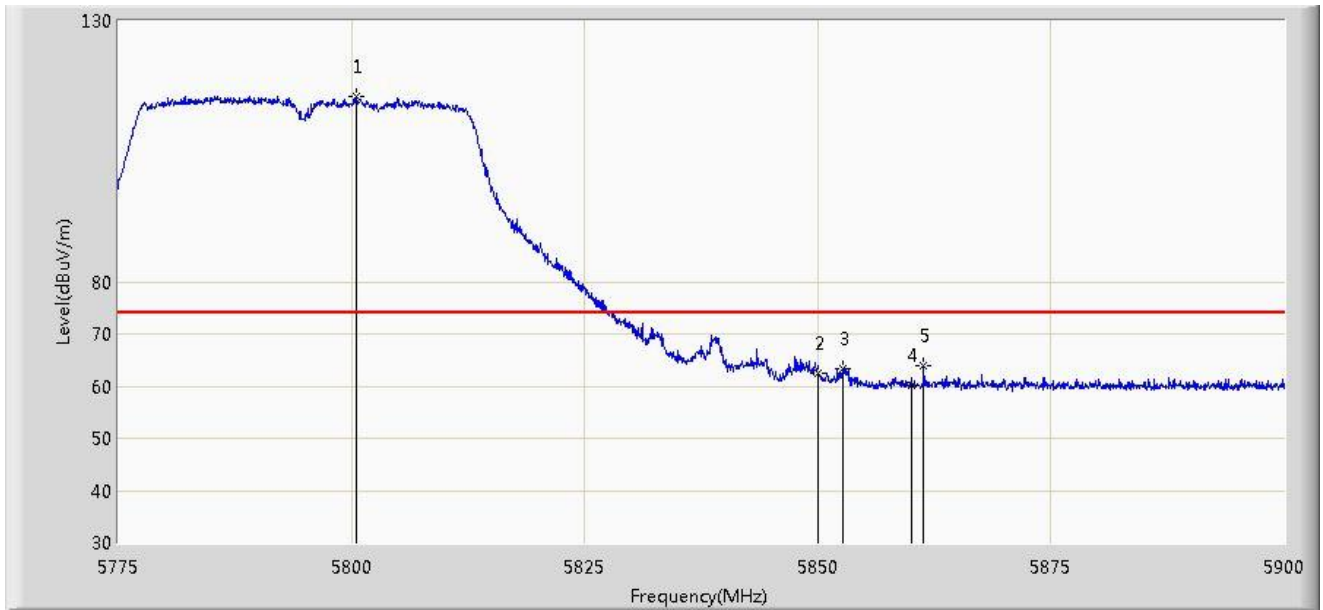


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5800.500	115.477	111.516	N/A	N/A	3.960	PK
2			5850.000	62.412	58.355	-15.788	78.200	4.058	PK
3			5852.687	63.445	59.386	-14.755	78.200	4.058	PK
4			5860.000	60.282	56.219	-13.718	74.000	4.064	PK
5			5861.375	64.048	59.984	-9.952	74.000	4.065	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

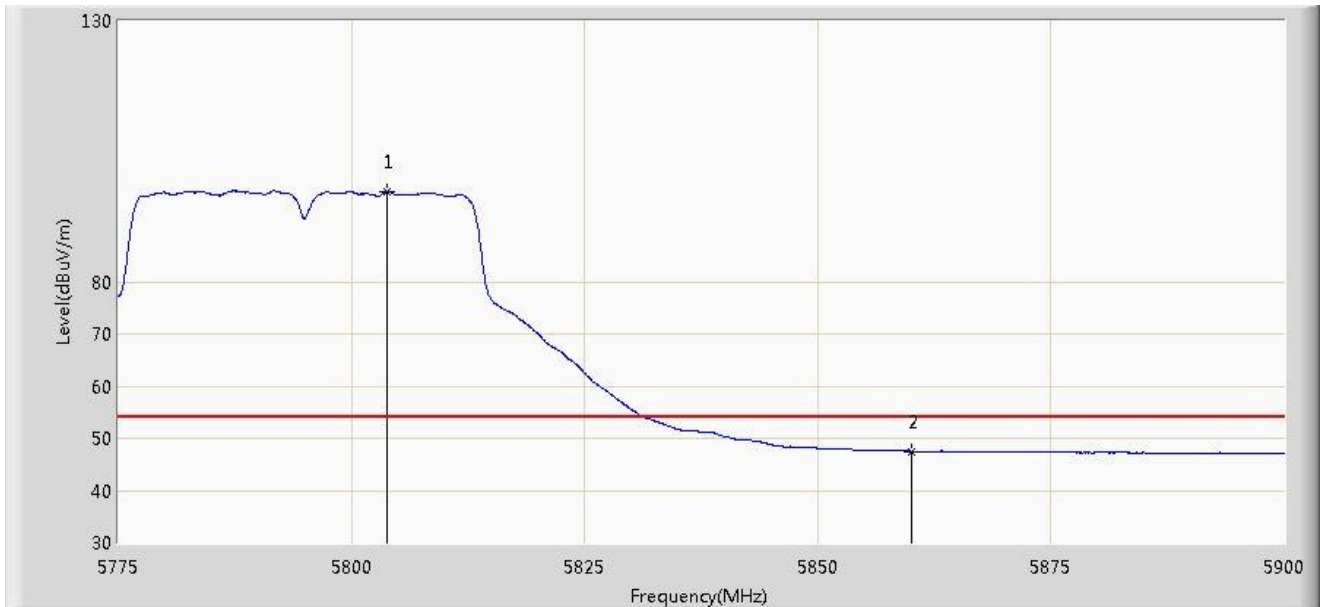


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5803.750	97.248	93.284	N/A	N/A	3.964	AV
2			5860.000	47.504	43.441	-6.496	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

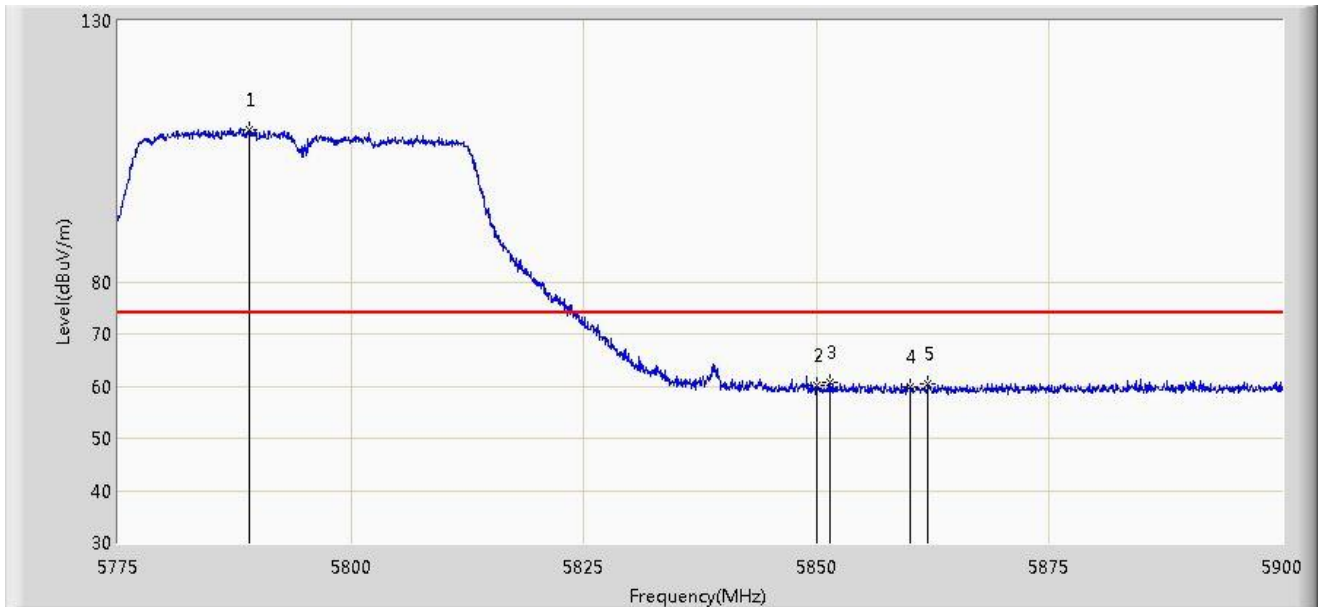


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5789.062	109.133	105.190	N/A	N/A	3.943	PK
2			5850.000	60.054	55.997	-18.146	78.200	4.058	PK
3			5851.375	60.592	56.534	-17.608	78.200	4.057	PK
4			5860.000	59.879	55.816	-14.121	74.000	4.064	PK
5			5862.000	60.374	56.309	-13.626	74.000	4.065	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 14:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

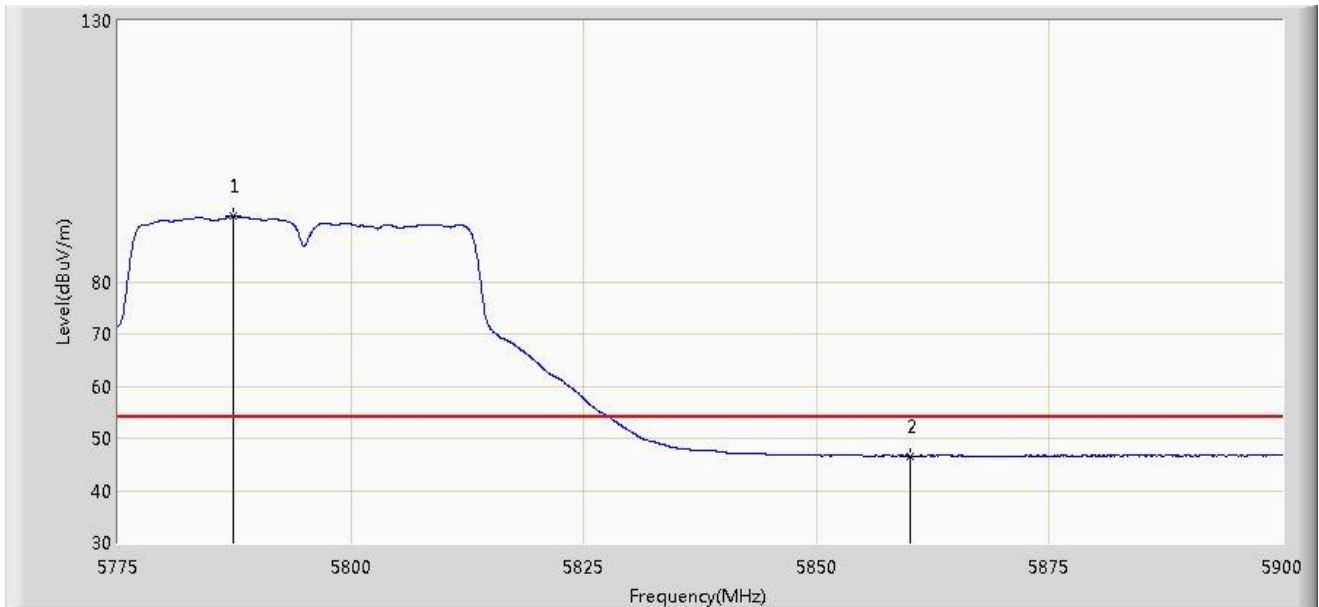


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.375	92.588	88.648	N/A	N/A	3.941	AV
2			5860.000	46.665	42.602	-7.335	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 15:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

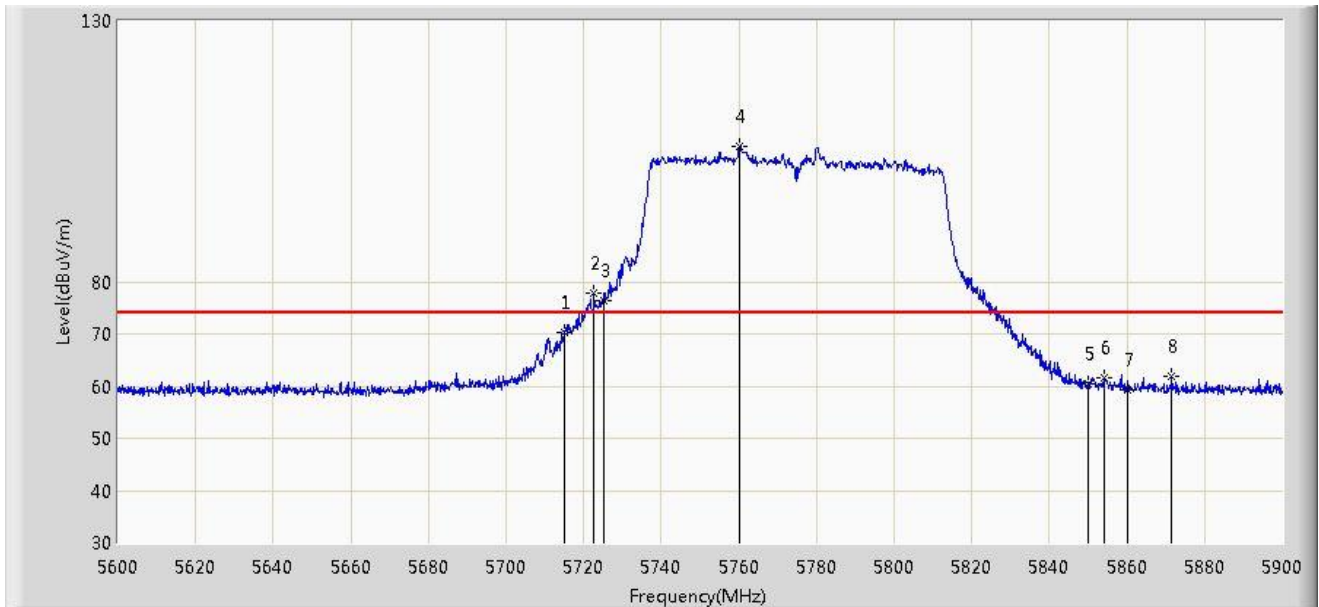


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	70.426	66.665	-3.574	74.000	3.761	PK
2			5722.700	77.926	74.142	-0.274	78.200	3.783	PK
3			5725.000	76.270	72.479	-1.930	78.200	3.791	PK
4		*	5760.200	106.043	102.137	N/A	N/A	3.907	PK
5			5850.000	60.535	56.478	-17.665	78.200	4.058	PK
6			5854.250	61.688	57.628	-16.512	78.200	4.060	PK
7			5860.000	59.176	55.113	-14.824	74.000	4.064	PK
8			5871.500	61.976	57.882	-12.024	74.000	4.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 15:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

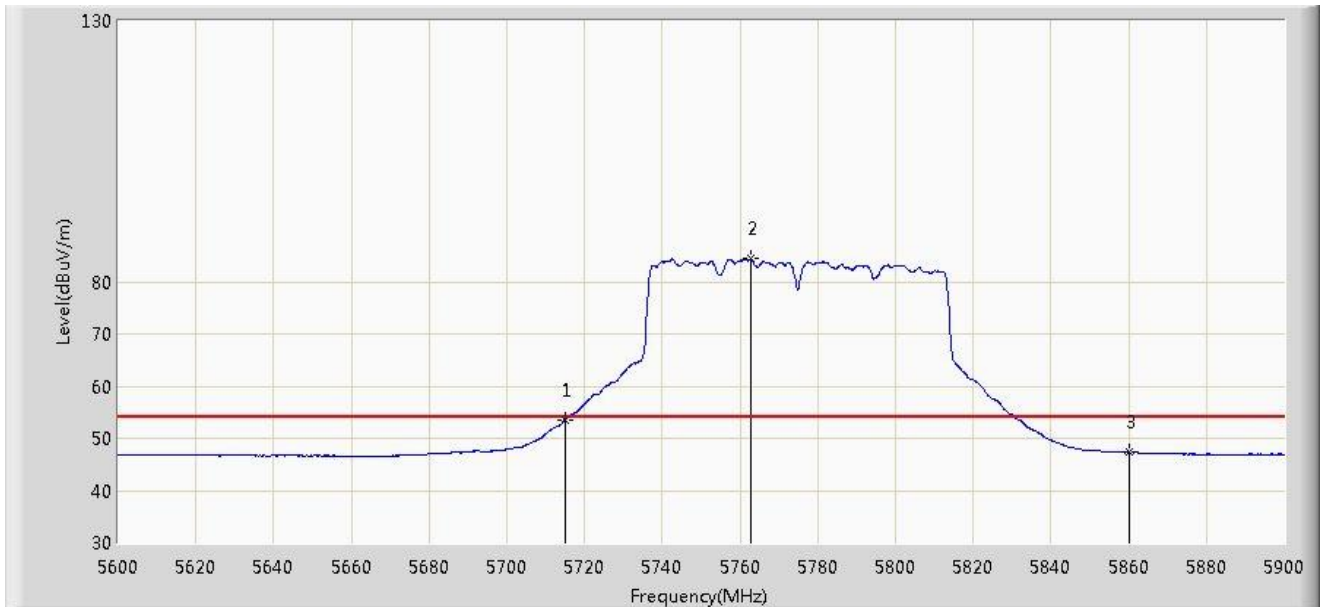


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.566	49.805	-0.434	54.000	3.761	AV
2		*	5762.600	84.378	80.470	N/A	N/A	3.908	AV
3			5860.000	47.251	43.188	-6.749	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 15:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

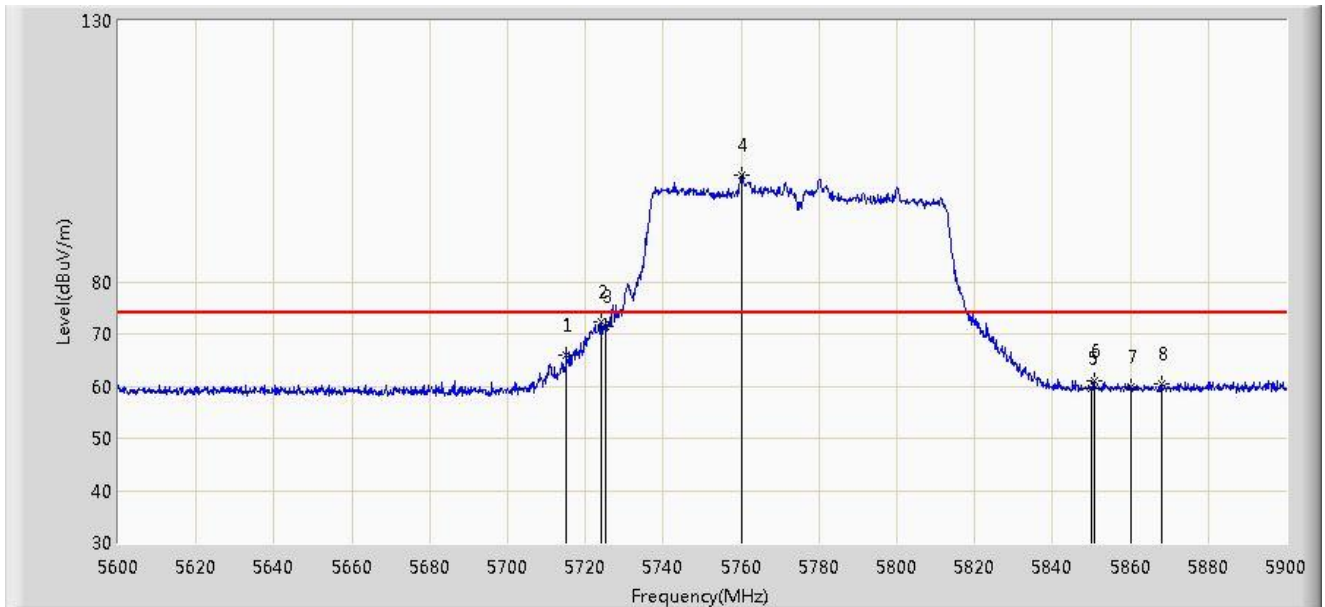


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	66.081	62.320	-7.919	74.000	3.761	PK
2			5724.050	72.335	68.547	-5.865	78.200	3.788	PK
3			5725.000	71.525	67.734	-6.675	78.200	3.791	PK
4		*	5760.050	100.357	96.451	N/A	N/A	3.906	PK
5			5850.000	59.518	55.461	-18.682	78.200	4.058	PK
6			5850.650	60.874	56.817	-17.326	78.200	4.058	PK
7			5860.000	59.836	55.773	-14.164	74.000	4.064	PK
8			5867.900	60.400	56.317	-13.600	74.000	4.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 15:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

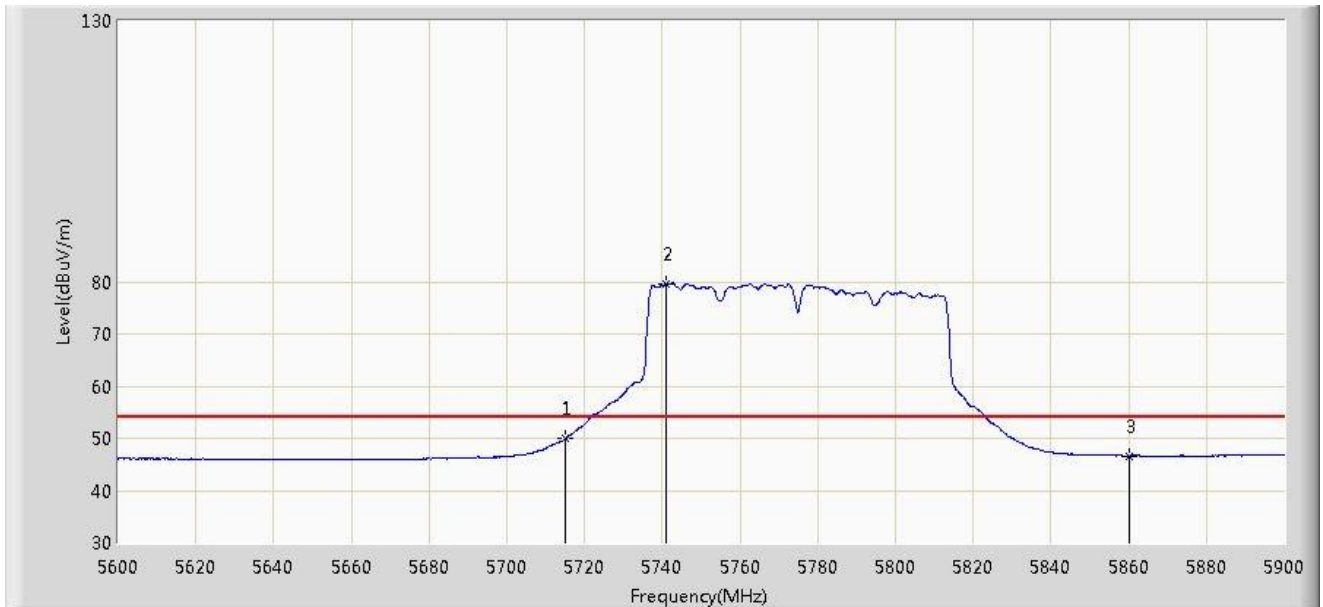


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.886	46.125	-4.114	54.000	3.761	AV
2		*	5741.000	79.610	75.770	N/A	N/A	3.839	AV
3			5860.000	46.647	42.584	-7.353	54.000	4.064	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

**ANTENNA 2#**

Site: AC1	Time: 2015/04/02 - 15:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5180MHz	

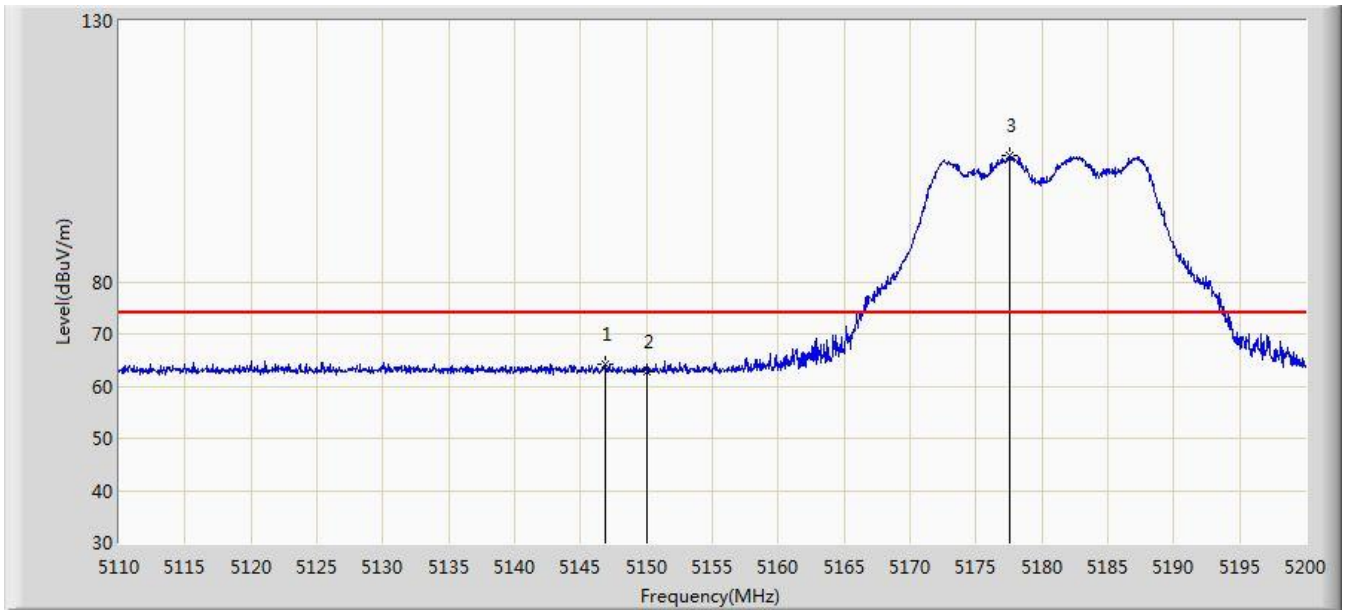


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.900	64.335	26.878	-9.665	74.000	37.456	PK
2			5150.000	62.836	25.384	-11.164	74.000	37.452	PK
3		*	5177.590	104.264	66.885	N/A	N/A	37.379	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5180MHz	

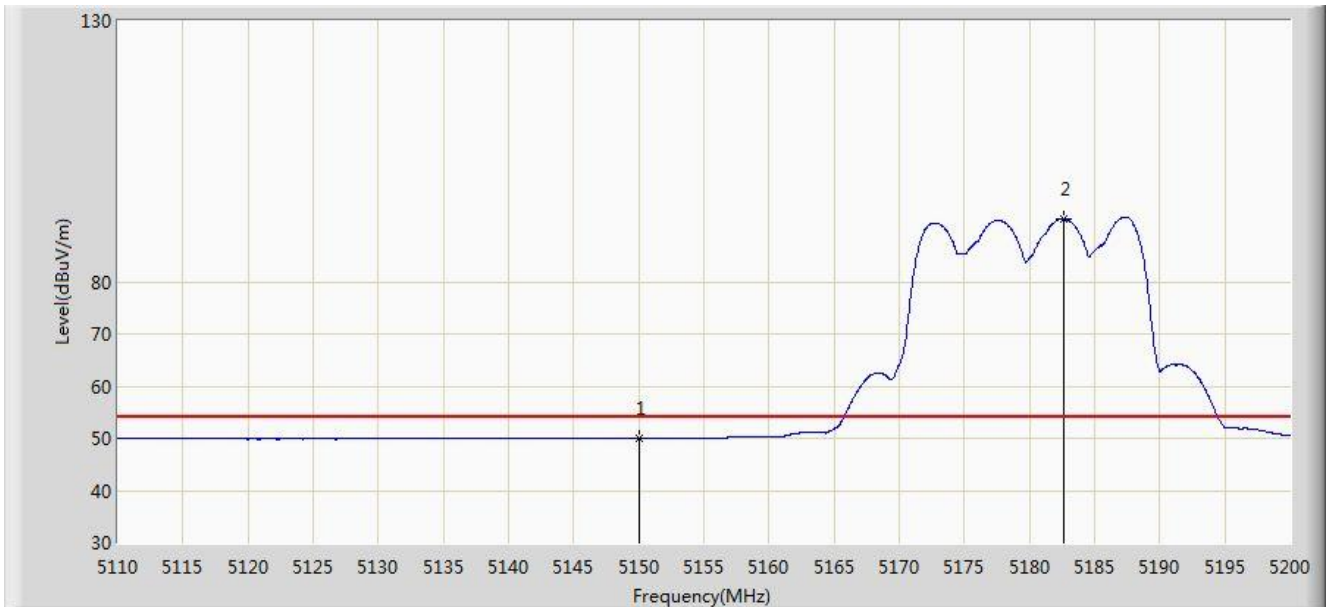


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.911	12.459	-4.089	54.000	37.452	AV
2		*	5182.585	92.075	54.707	N/A	N/A	37.368	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5180MHz	

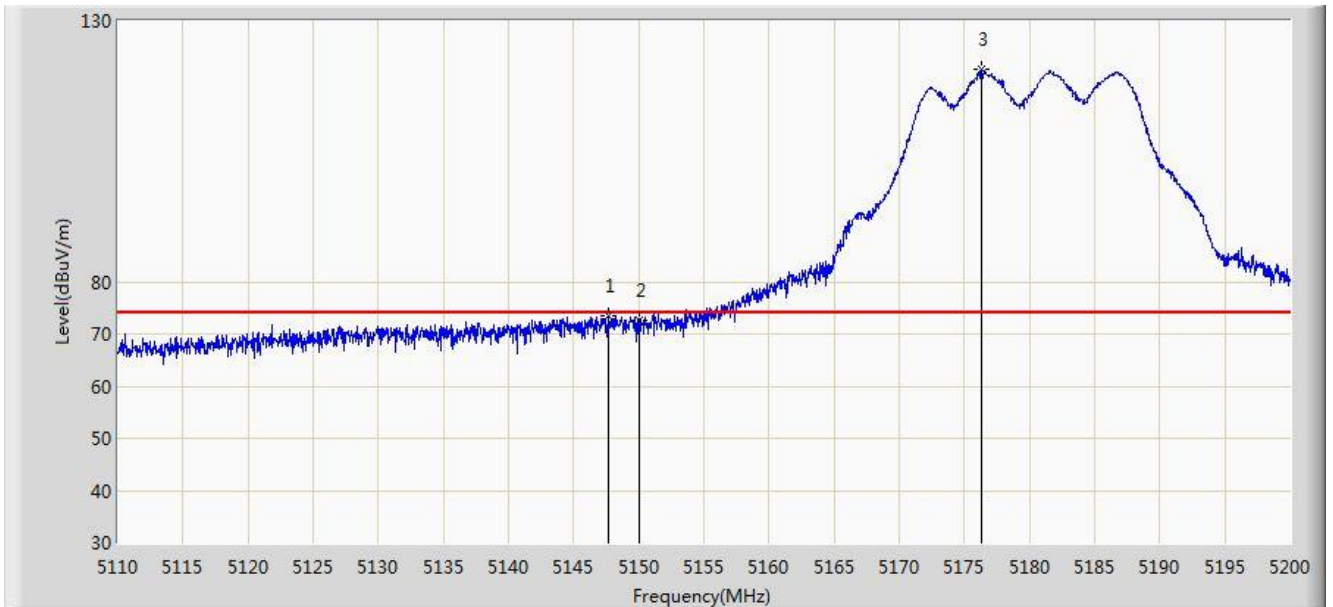

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.620	73.474	36.019	-0.526	74.000	37.455	PK
2			5150.000	72.664	35.212	-1.336	74.000	37.452	PK
3		*	5176.330	120.646	83.264	N/A	N/A	37.382	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5180MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.817	13.365	-3.183	54.000	37.452	AV
2		*	5181.775	107.333	69.963	N/A	N/A	37.370	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5320MHz	

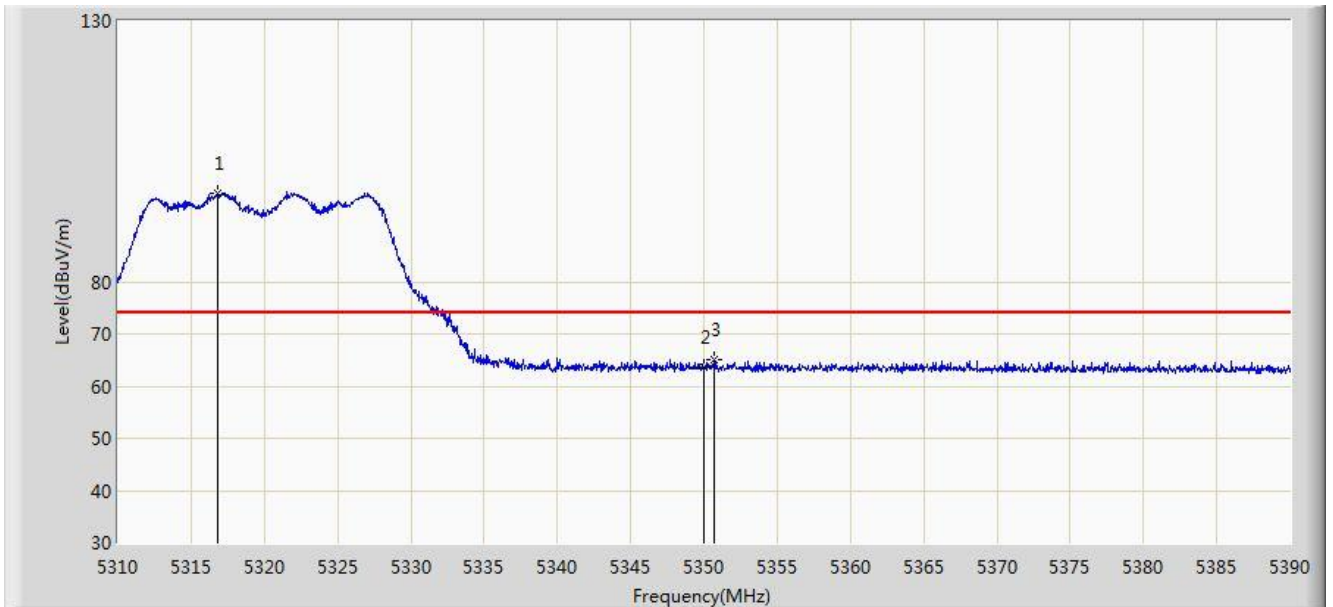


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.840	97.081	59.873	N/A	N/A	37.208	PK
2			5350.000	63.727	26.441	-10.273	74.000	37.286	PK
3			5350.680	64.964	27.675	-9.036	74.000	37.288	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5320MHz	

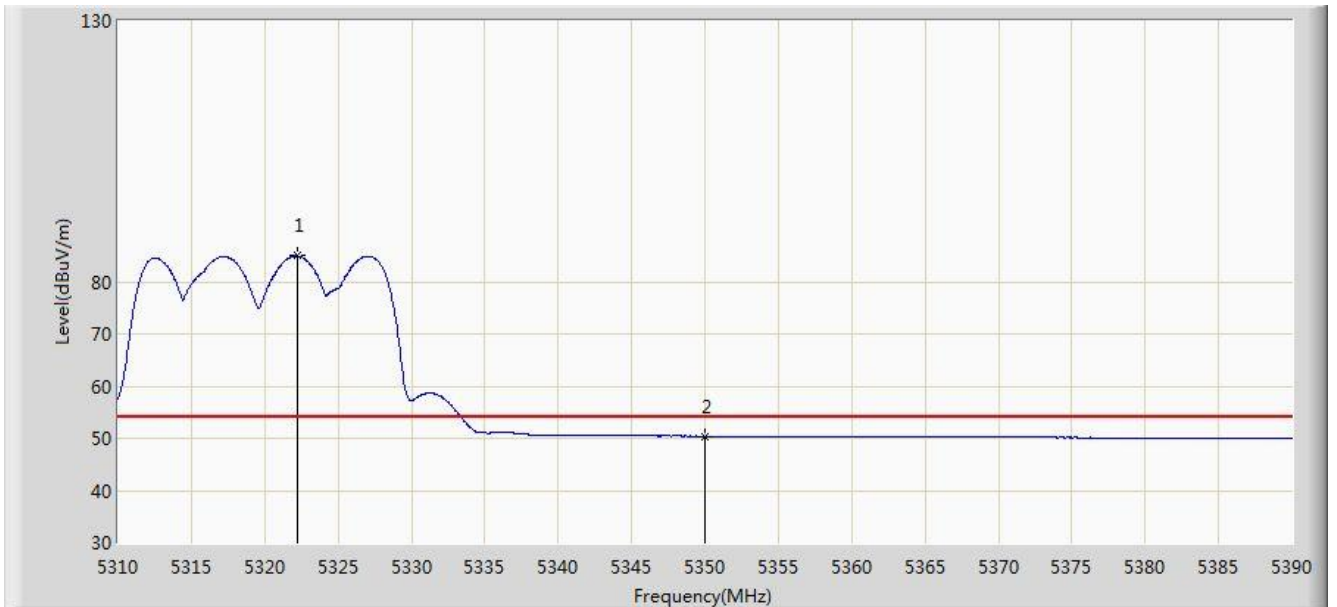


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.280	84.930	47.712	N/A	N/A	37.218	AV
2			5350.000	50.412	13.126	-3.588	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 15:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5320MHz	

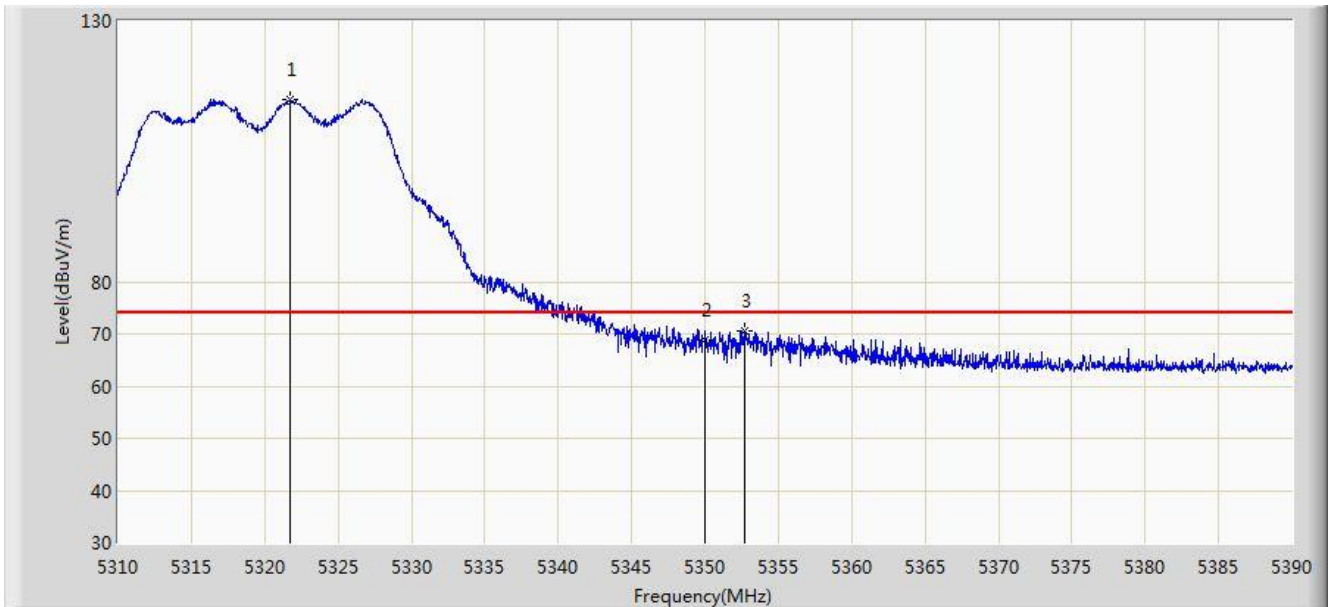


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.760	114.843	77.626	N/A	N/A	37.217	PK
2			5350.000	68.957	31.671	-5.043	74.000	37.286	PK
3			5352.680	70.577	33.283	-3.423	74.000	37.295	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5320MHz	

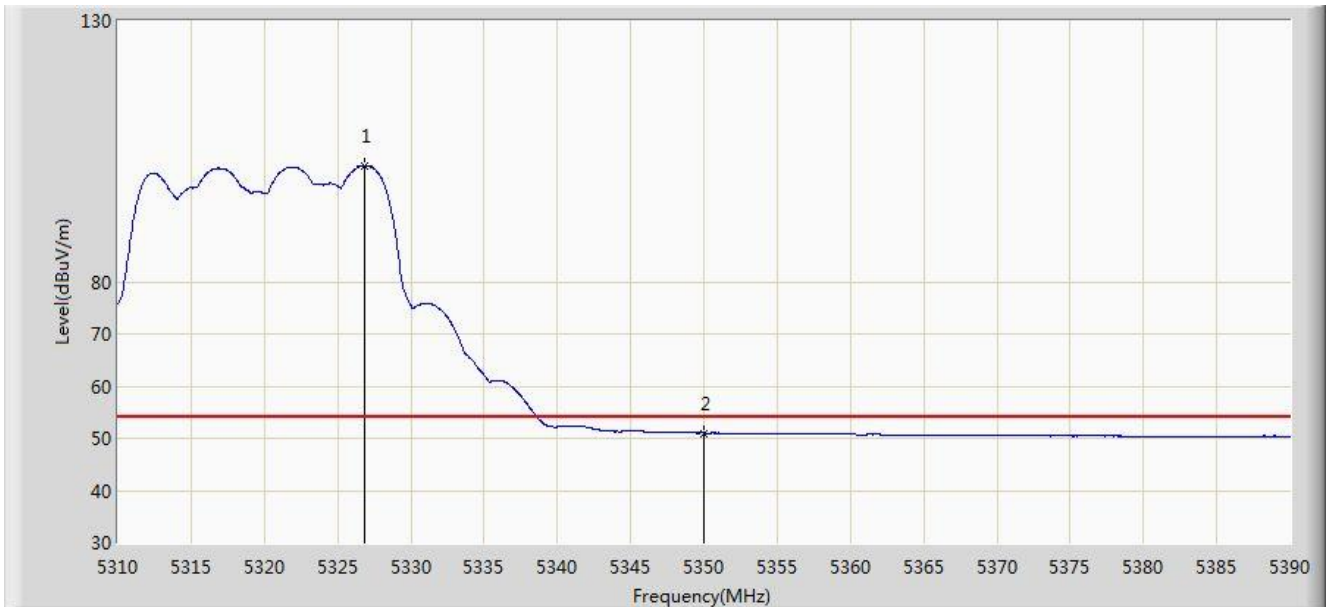


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.880	102.211	64.985	N/A	N/A	37.225	AV
2			5350.000	51.012	13.726	-2.988	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 15:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5500MHz	

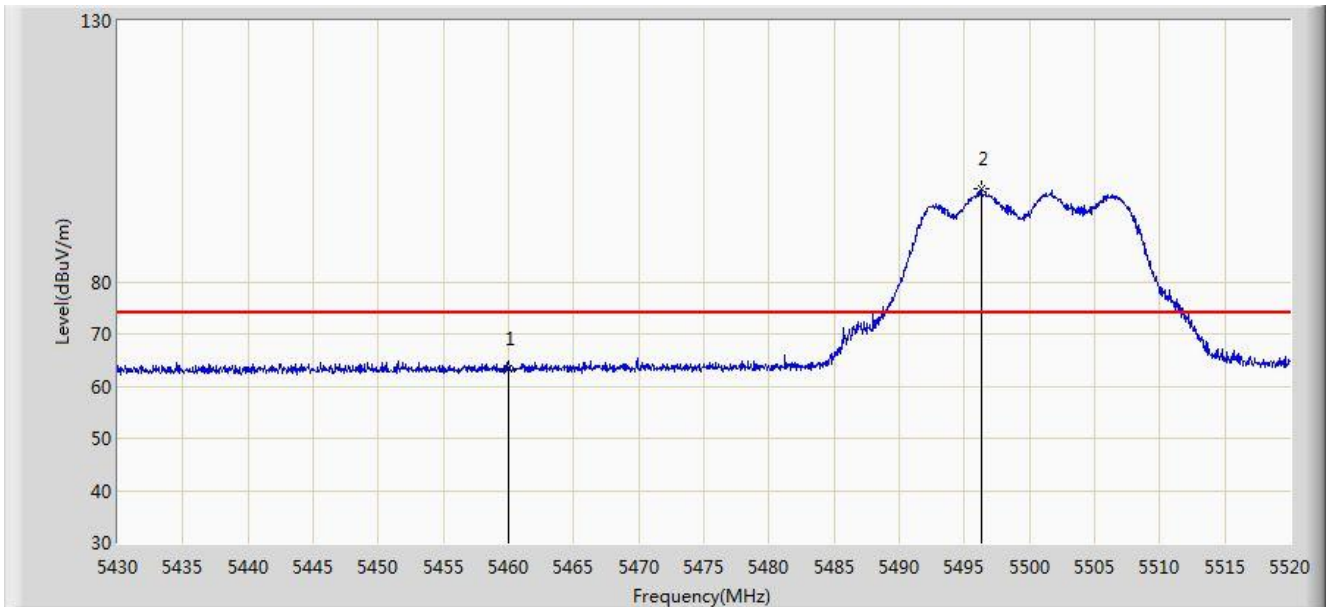


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.451	25.888	-10.549	74.000	37.563	PK
2		*	5496.285	97.872	60.252	N/A	N/A	37.620	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5500MHz	

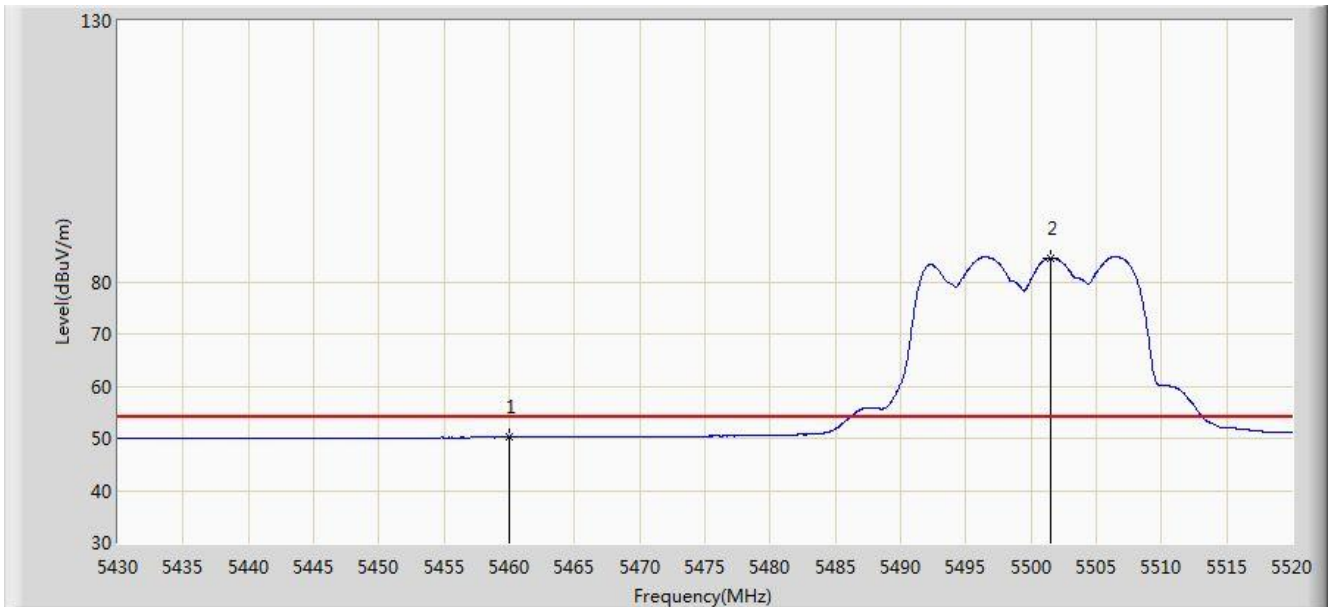


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.183	12.620	-3.817	54.000	37.563	AV
2		*	5501.460	84.573	46.947	N/A	N/A	37.626	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5500MHz	

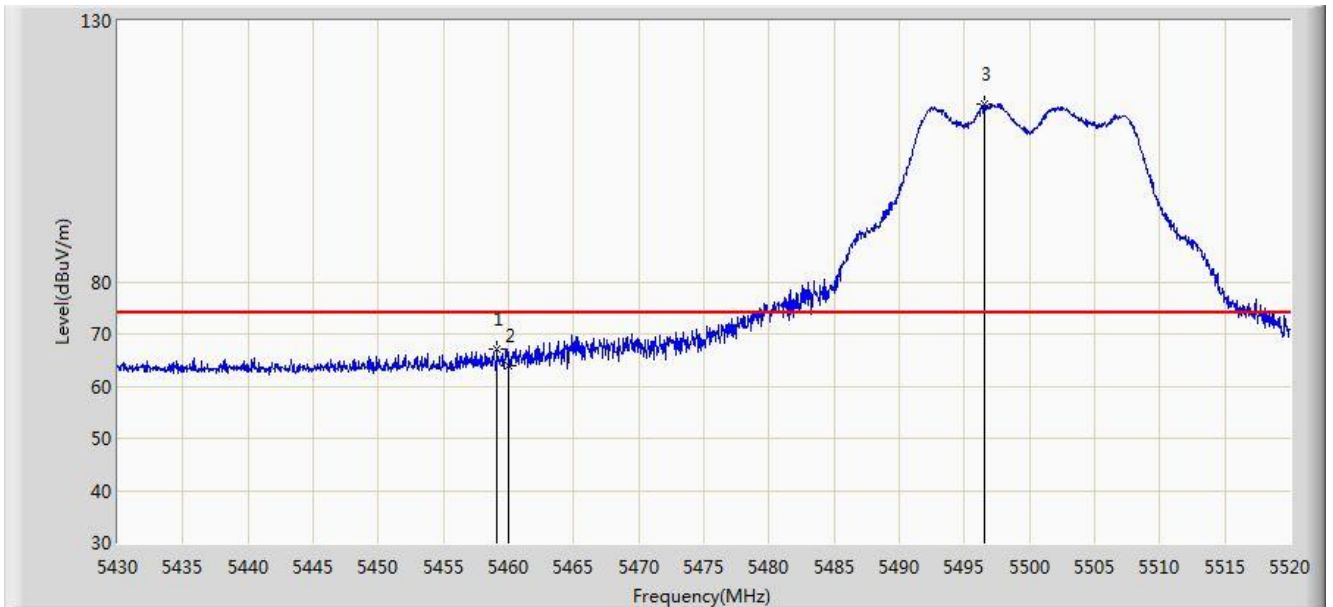


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.115	67.185	29.625	-6.815	74.000	37.560	PK
2			5460.000	63.946	26.383	-10.054	74.000	37.563	PK
3		*	5496.510	114.021	76.400	N/A	N/A	37.621	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5500MHz	

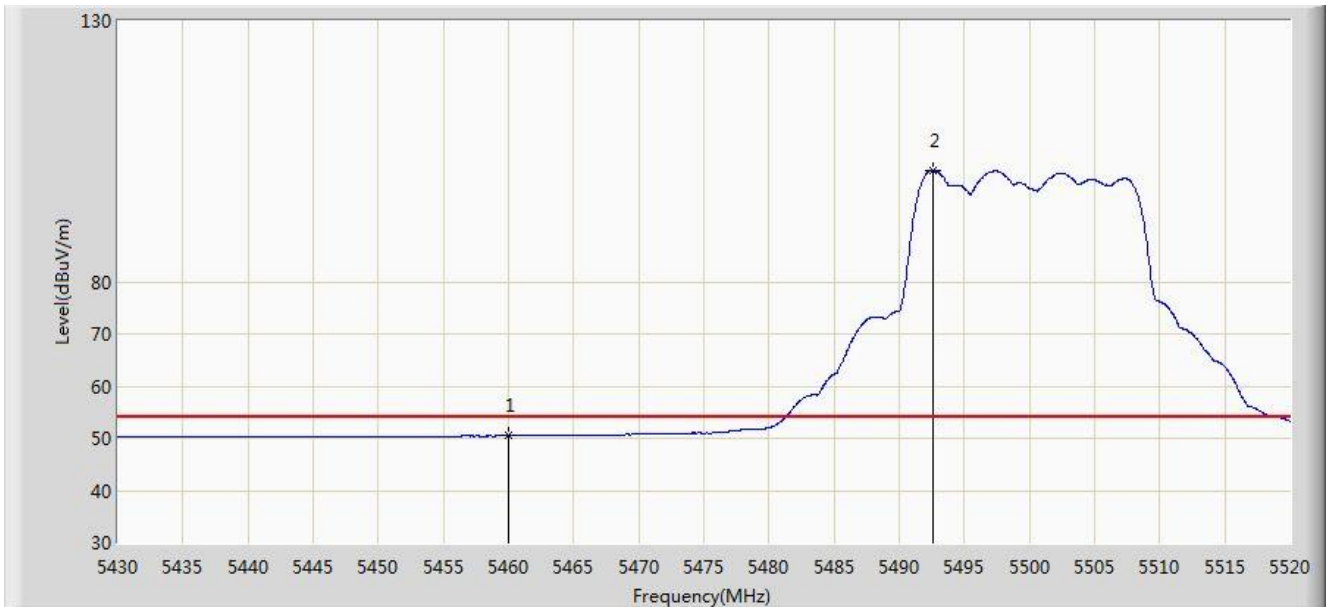


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.463	12.900	-3.537	54.000	37.563	AV
2		*	5492.640	101.294	63.678	N/A	N/A	37.616	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5700MHz	

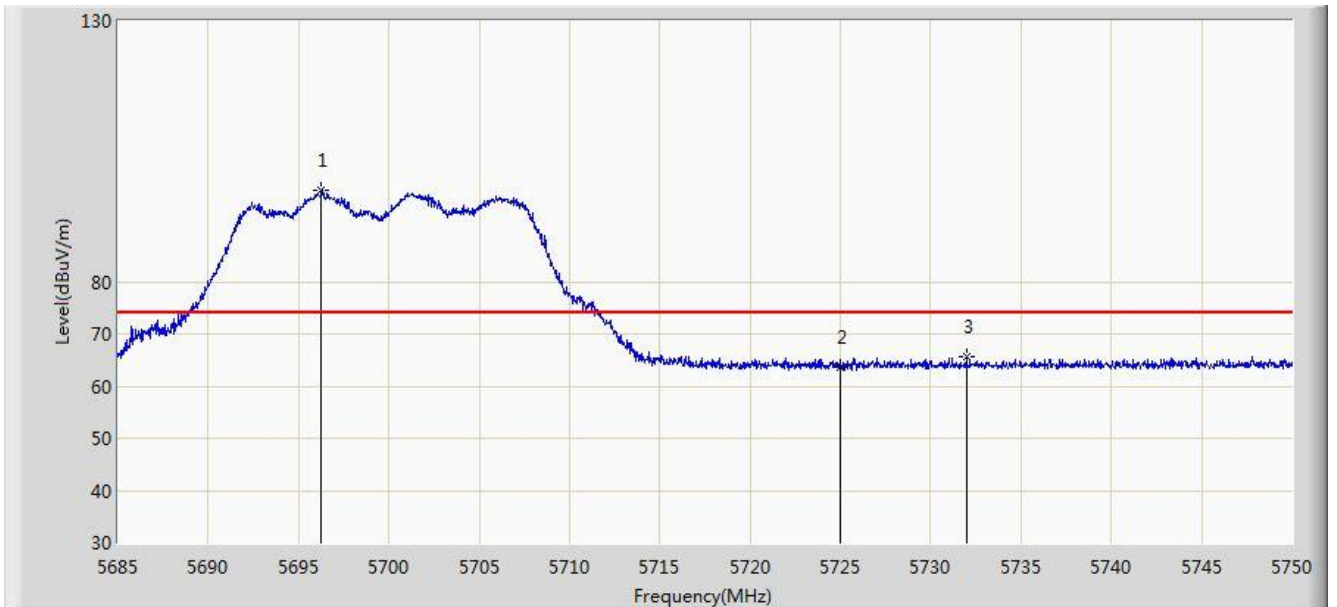


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.245	97.445	59.562	N/A	N/A	37.883	PK
2			5725.000	63.749	25.759	-10.251	74.000	37.990	PK
3			5731.995	65.669	27.650	-8.331	74.000	38.019	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5700MHz	

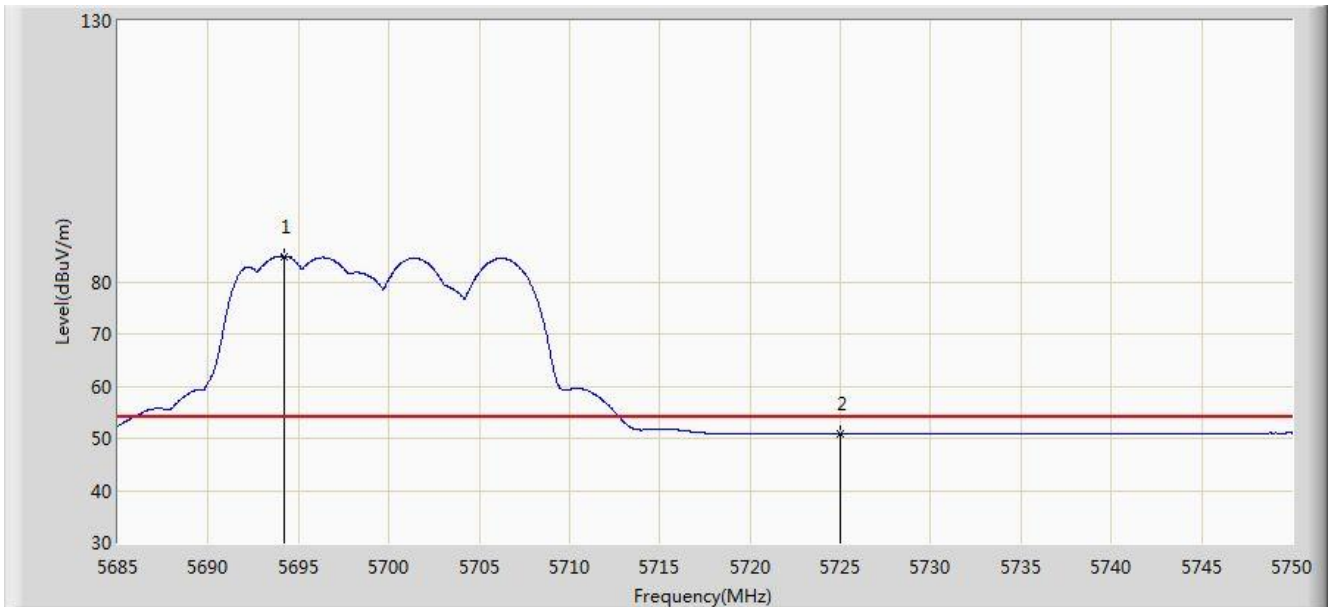


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.165	84.909	47.031	N/A	N/A	37.878	AV
2			5725.000	50.851	12.861	-3.149	54.000	37.990	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5700MHz	

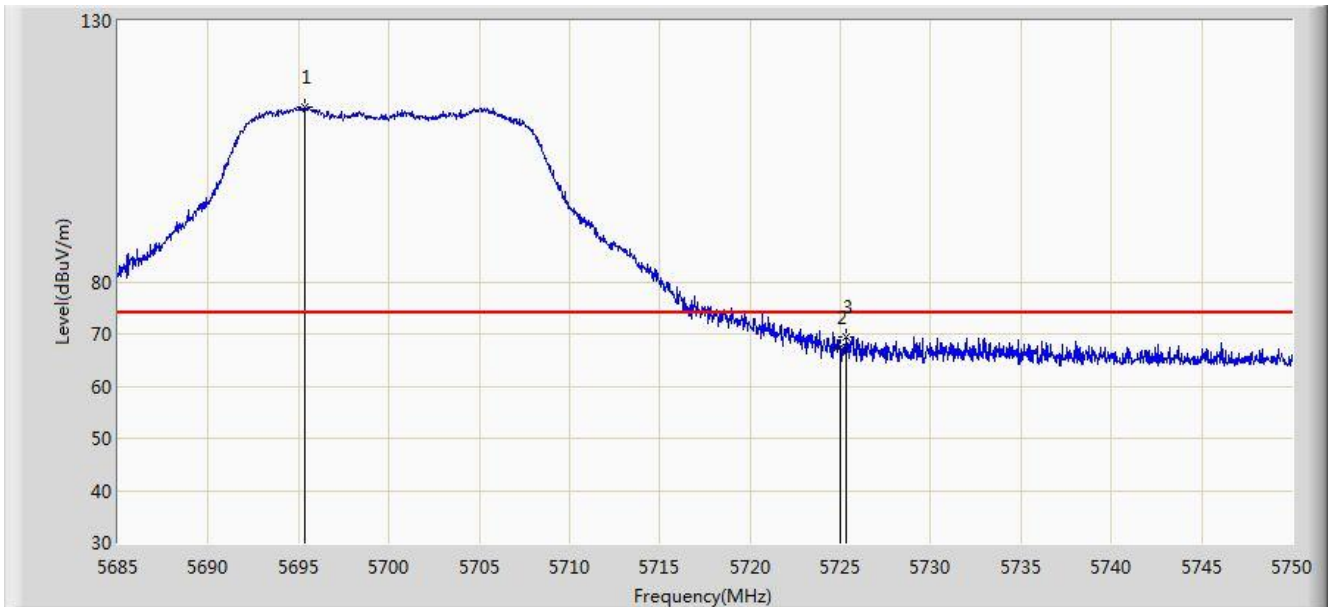


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.335	113.434	75.553	N/A	N/A	37.881	PK
2			5725.000	67.426	29.436	-6.574	74.000	37.990	PK
3			5725.333	69.301	31.310	-4.699	74.000	37.991	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5700MHz	

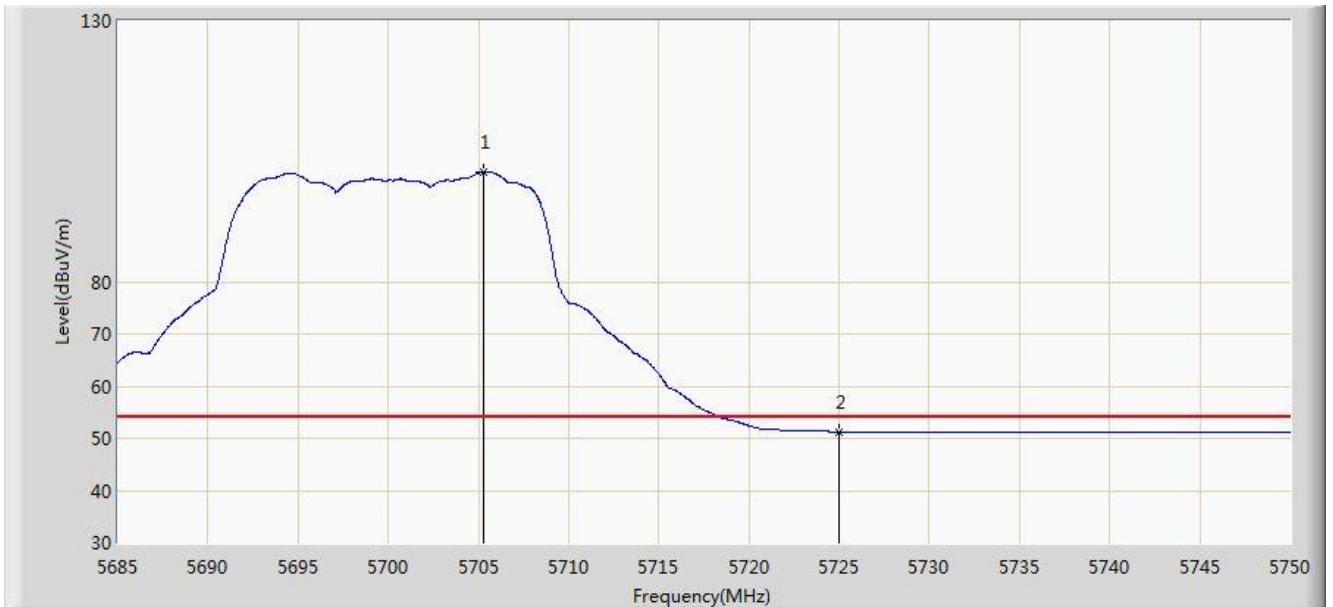


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.280	101.045	63.136	N/A	N/A	37.909	AV
2			5725.000	51.221	13.231	-2.779	54.000	37.990	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

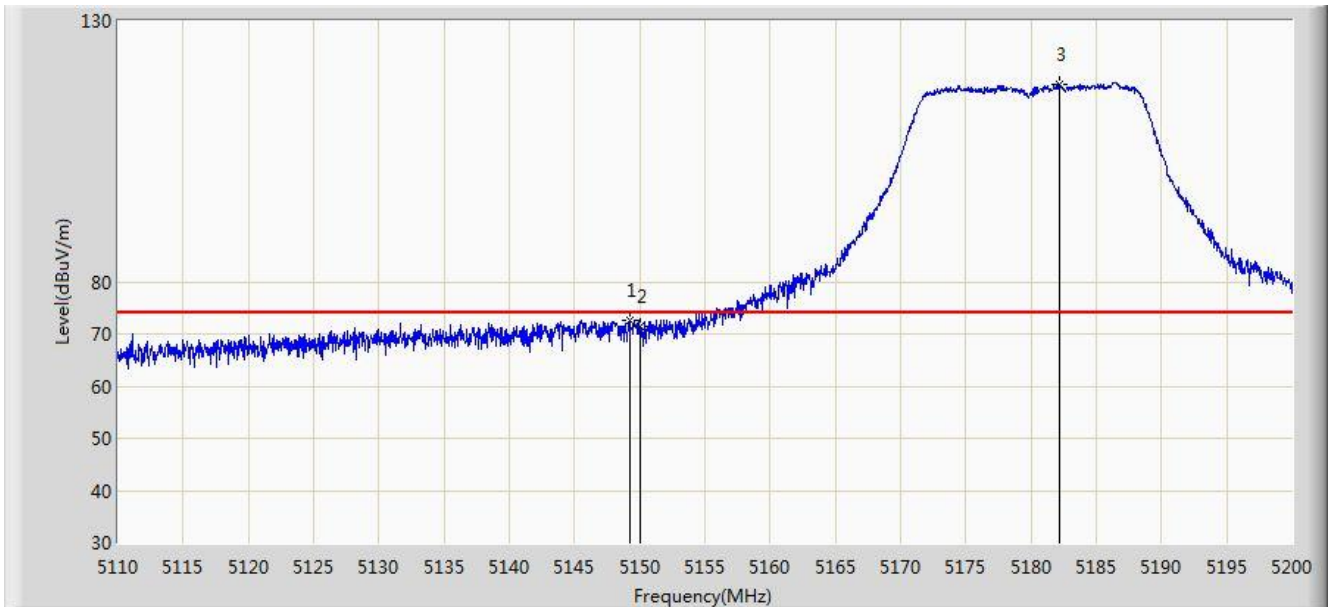


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.195	72.743	35.290	-1.257	74.000	37.453	PK
2			5150.000	71.392	33.940	-2.608	74.000	37.452	PK
3		*	5182.225	117.768	80.399	N/A	N/A	37.368	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

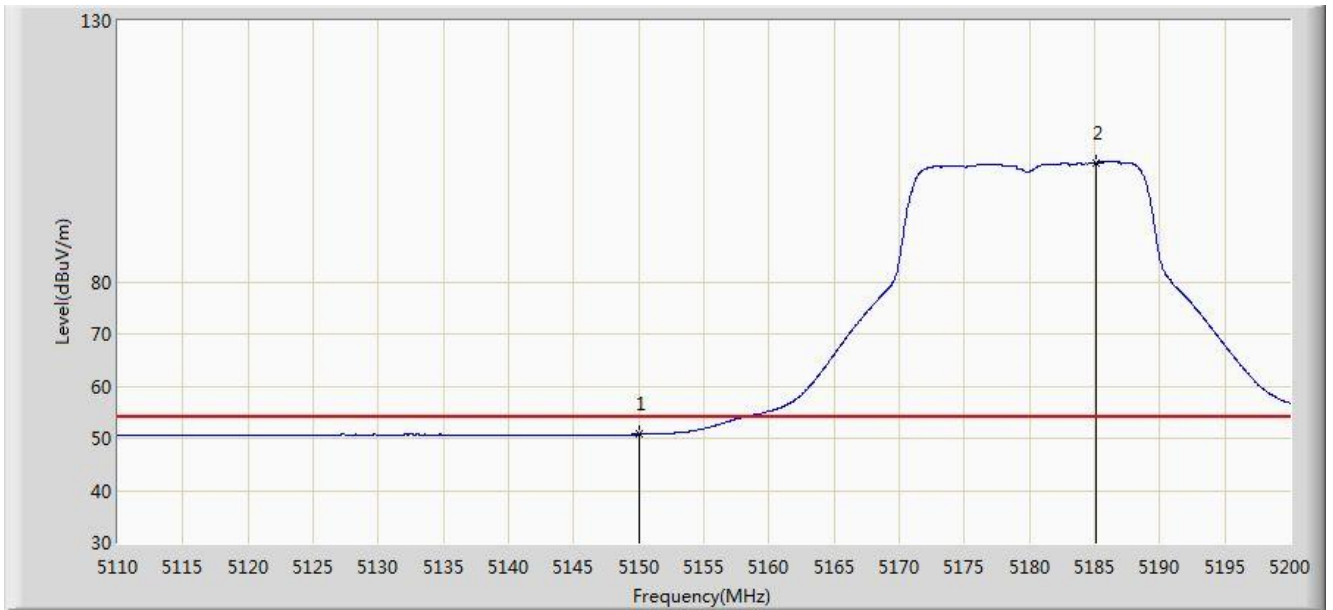


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.759	13.307	-3.241	54.000	37.452	AV
2		*	5185.060	102.859	65.498	N/A	N/A	37.362	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

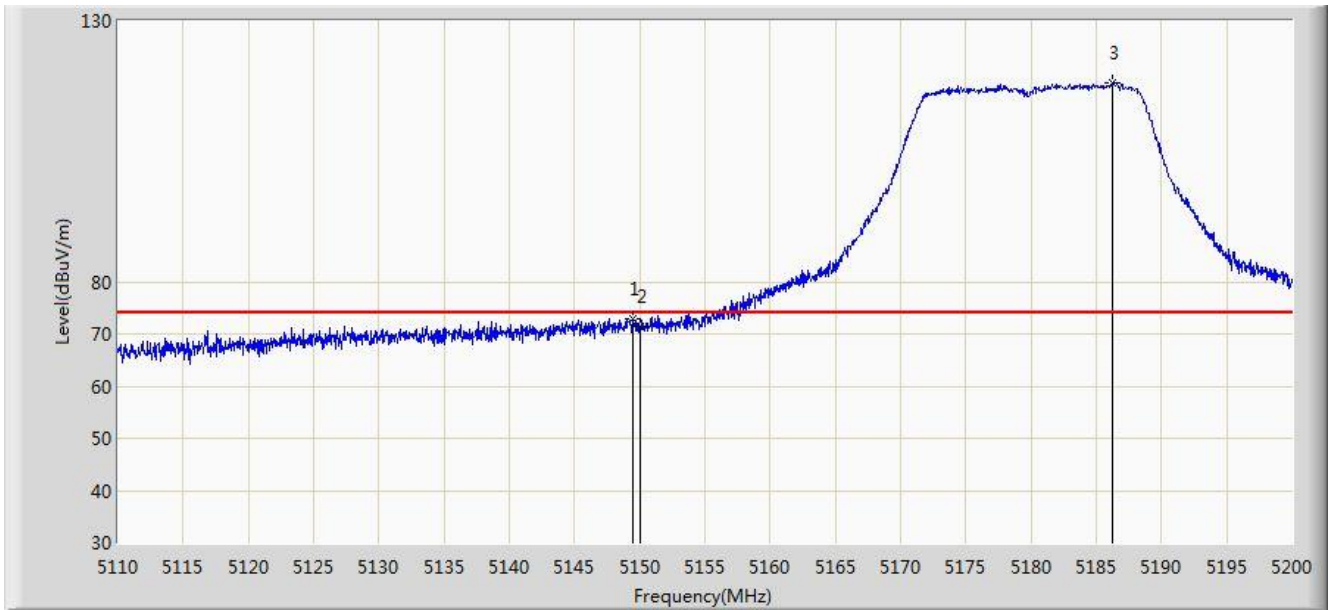


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.420	72.988	35.535	-1.012	74.000	37.453	PK
2			5150.000	71.465	34.013	-2.535	74.000	37.452	PK
3		*	5186.275	118.069	80.711	N/A	N/A	37.358	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

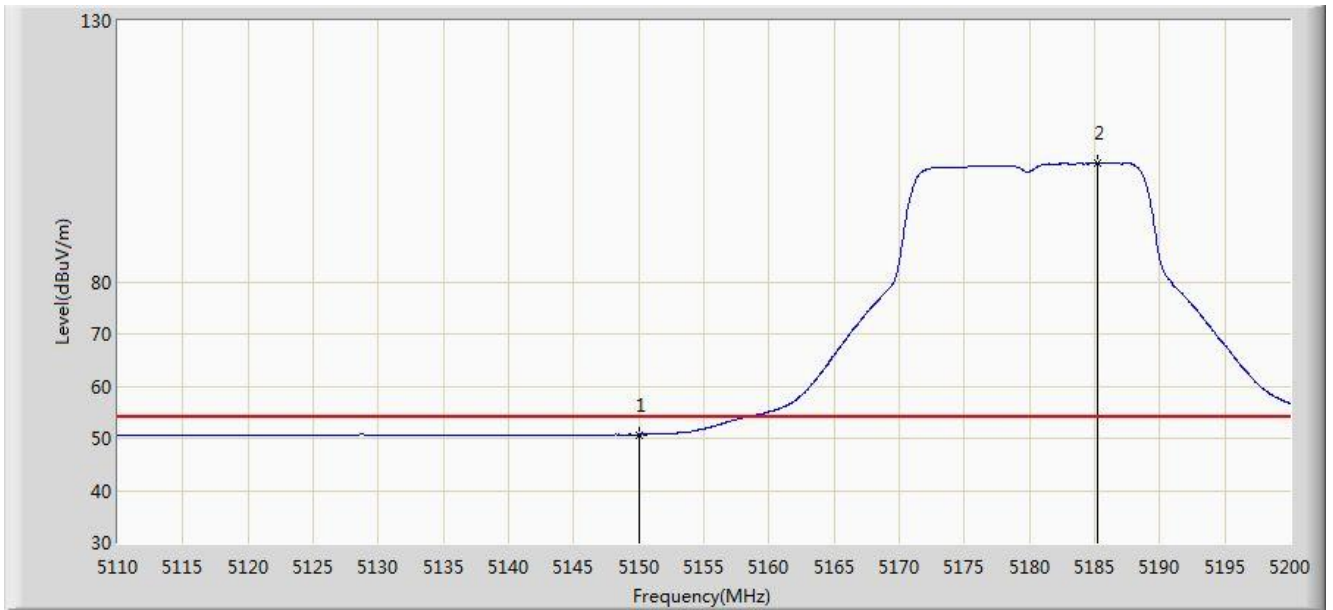


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.715	13.263	-3.285	54.000	37.452	AV
2		*	5185.240	102.826	65.465	N/A	N/A	37.361	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

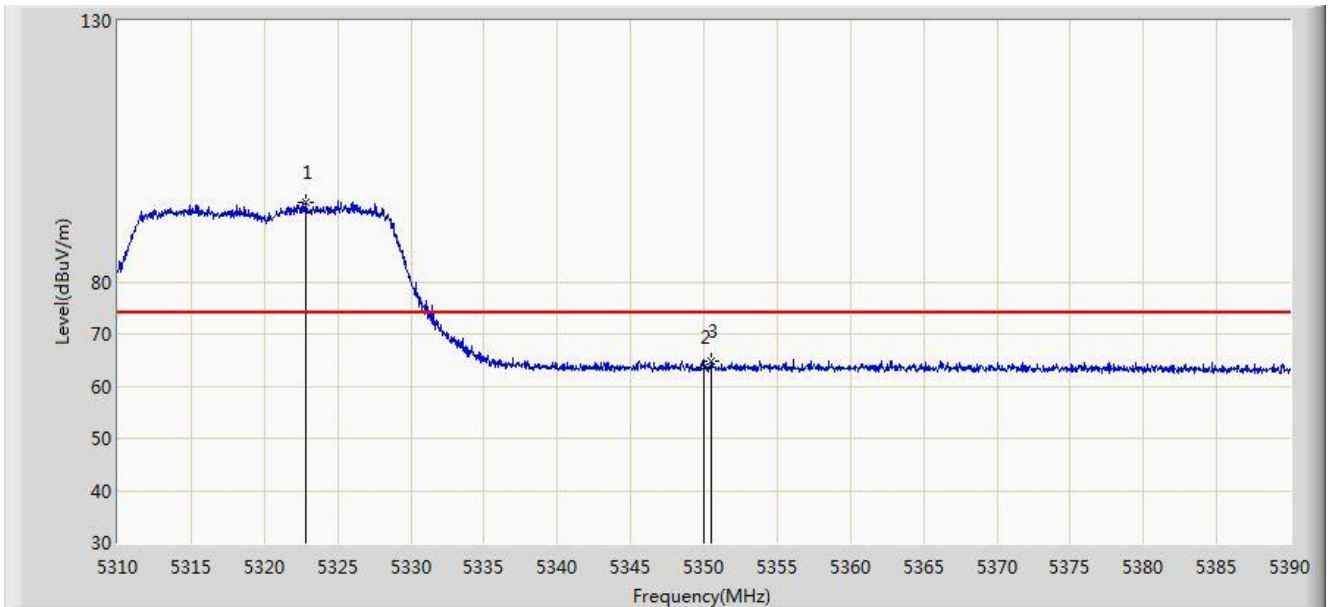


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.840	95.123	57.904	N/A	N/A	37.219	PK
2			5350.000	63.630	26.344	-10.370	74.000	37.286	PK
3			5350.480	64.648	27.360	-9.352	74.000	37.288	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 16:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

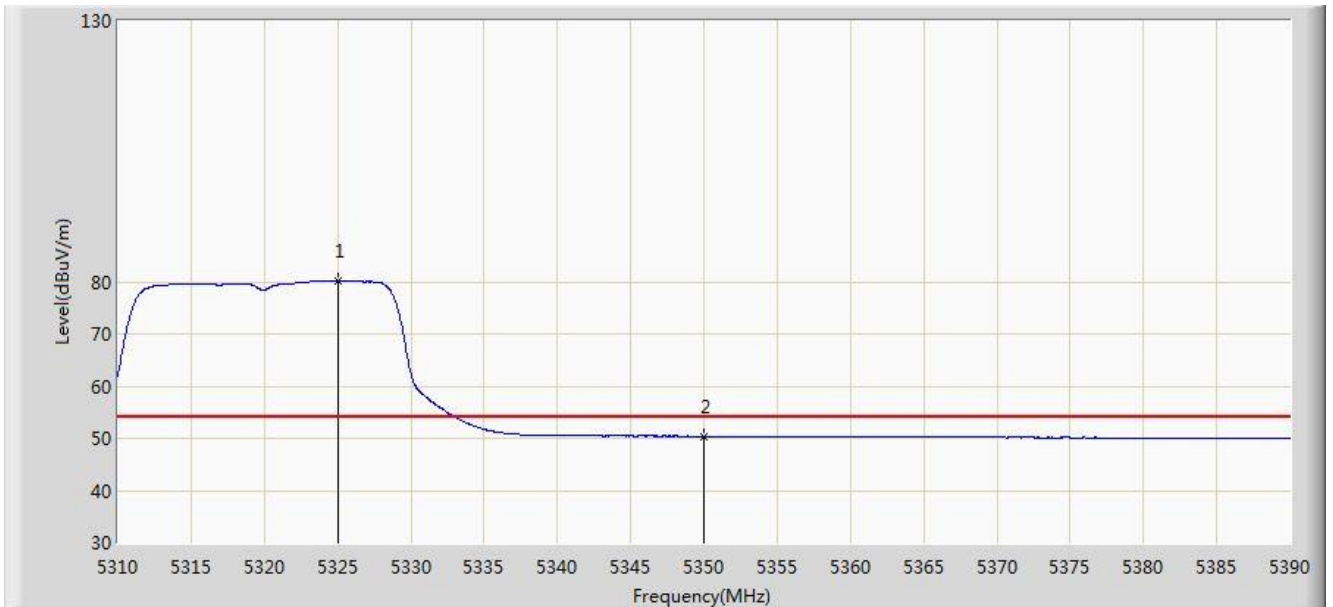


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.000	80.195	42.973	N/A	N/A	37.223	AV
2			5350.000	50.366	13.080	-3.634	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 16:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

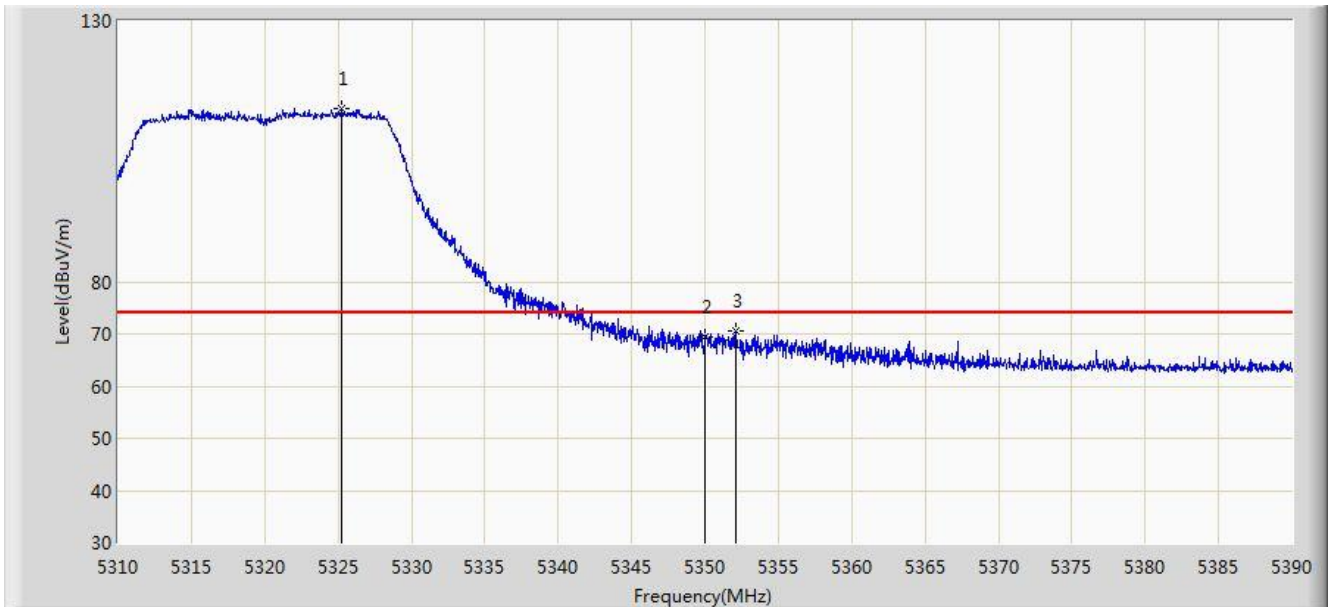


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.200	113.258	76.035	N/A	N/A	37.223	PK
2			5350.000	69.358	32.072	-4.642	74.000	37.286	PK
3			5352.120	70.452	33.159	-3.548	74.000	37.293	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

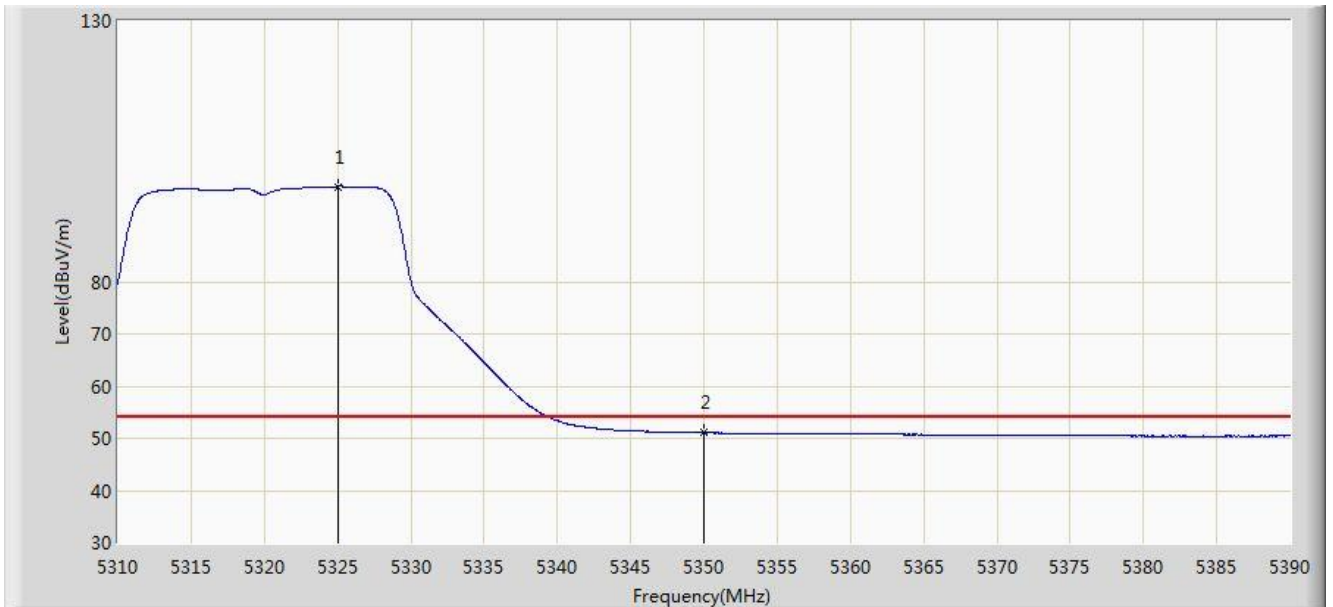


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.000	98.239	61.017	N/A	N/A	37.223	AV
2			5350.000	51.034	13.748	-2.966	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

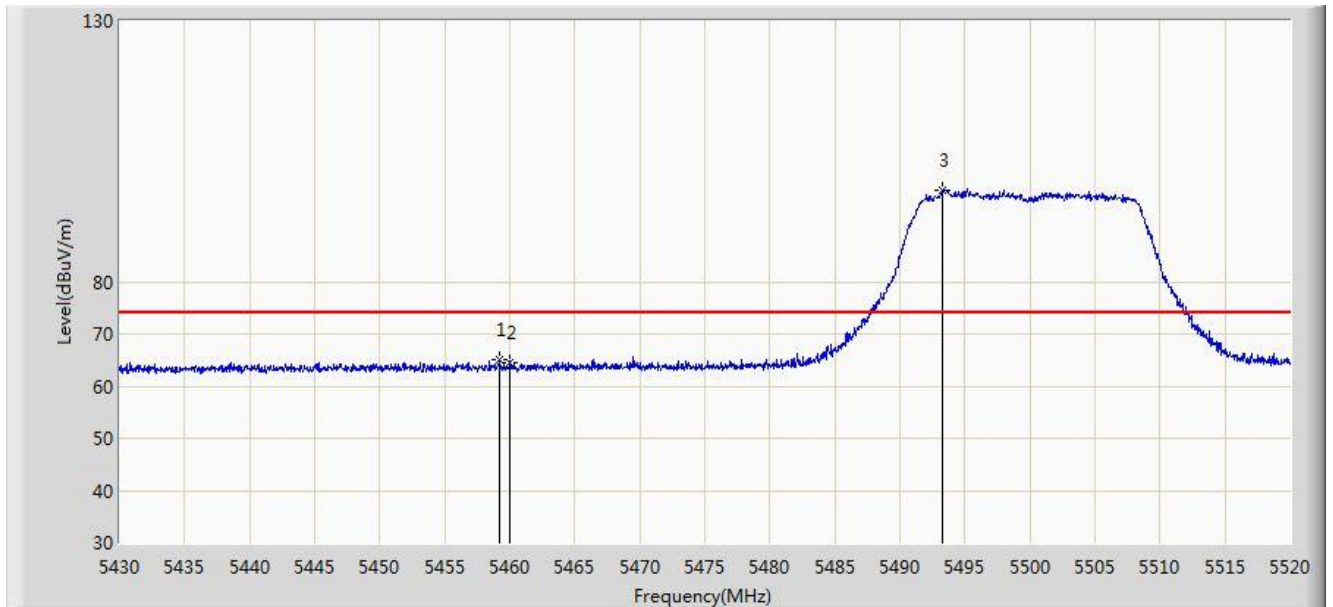


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.205	65.088	27.528	-8.912	74.000	37.560	PK
2			5460.000	64.438	26.875	-9.562	74.000	37.563	PK
3		*	5493.315	97.577	59.960	N/A	N/A	37.617	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

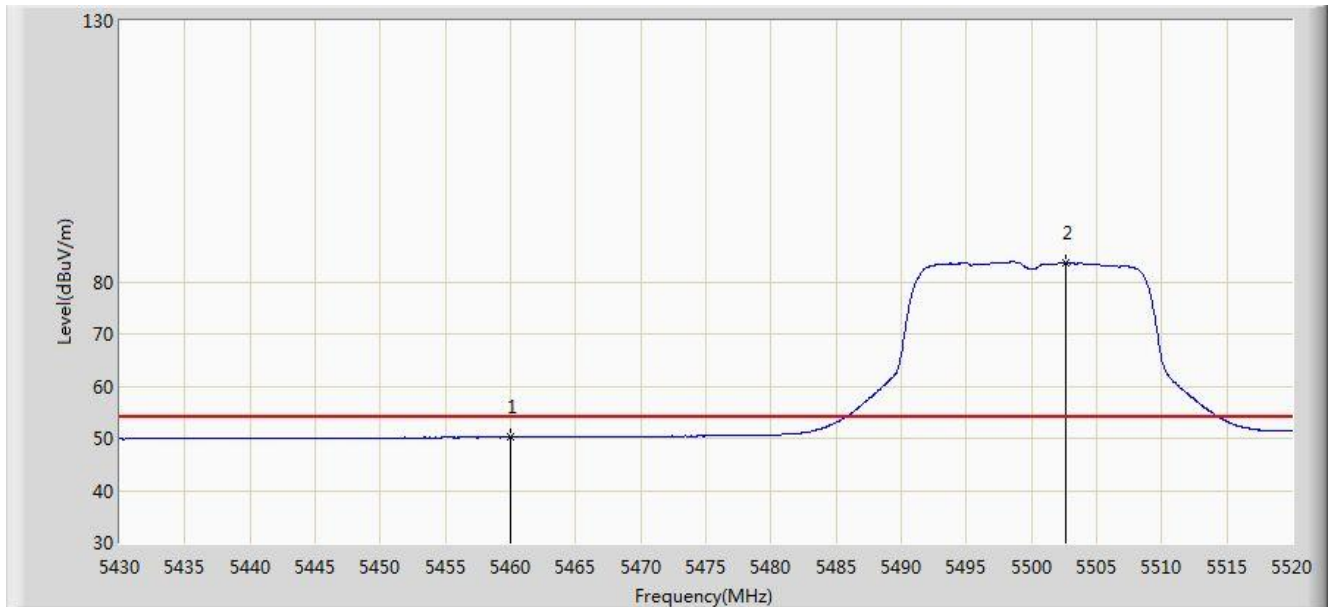


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.202	12.639	-3.798	54.000	37.563	AV
2		*	5502.585	83.595	45.968	N/A	N/A	37.627	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

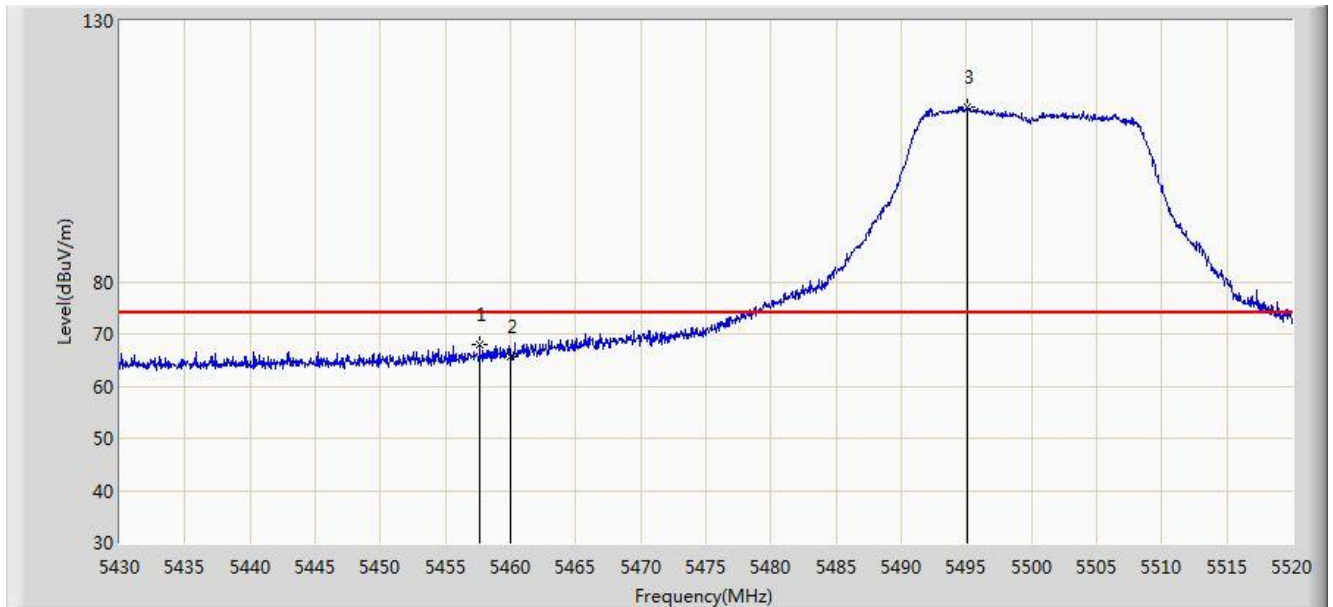


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.630	67.834	30.278	-6.166	74.000	37.557	PK
2			5460.000	65.733	28.170	-8.267	74.000	37.563	PK
3		*	5495.115	113.409	75.790	N/A	N/A	37.619	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

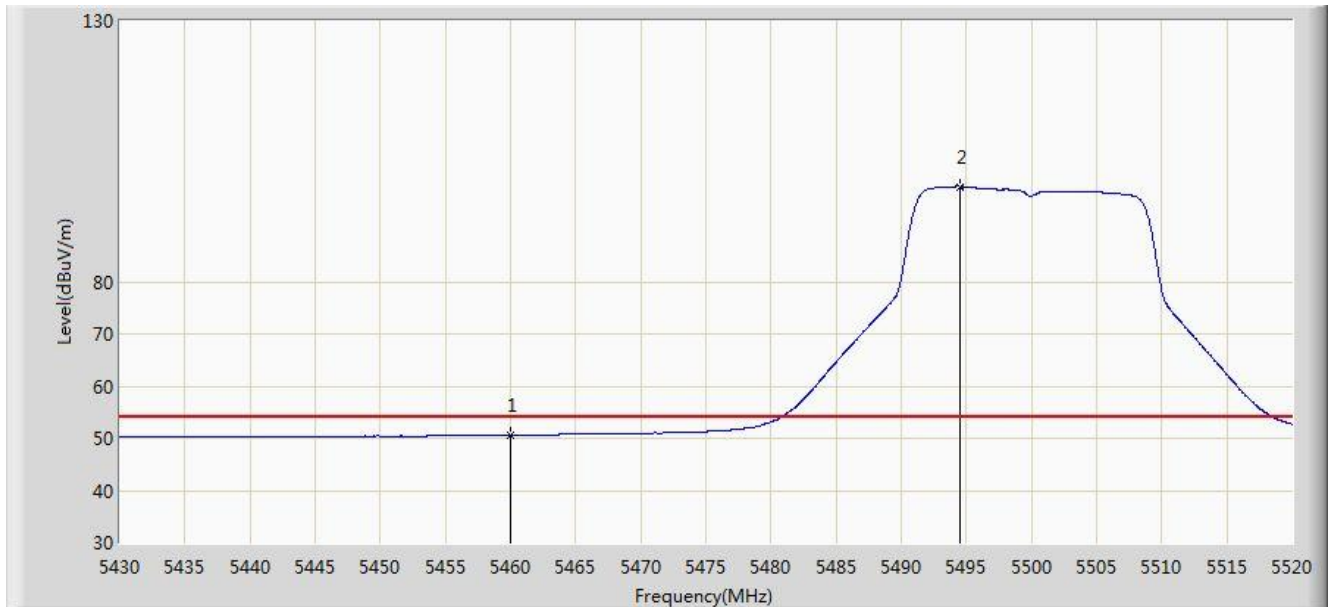


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.633	13.070	-3.367	54.000	37.563	AV
2		*	5494.485	98.257	60.639	N/A	N/A	37.618	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

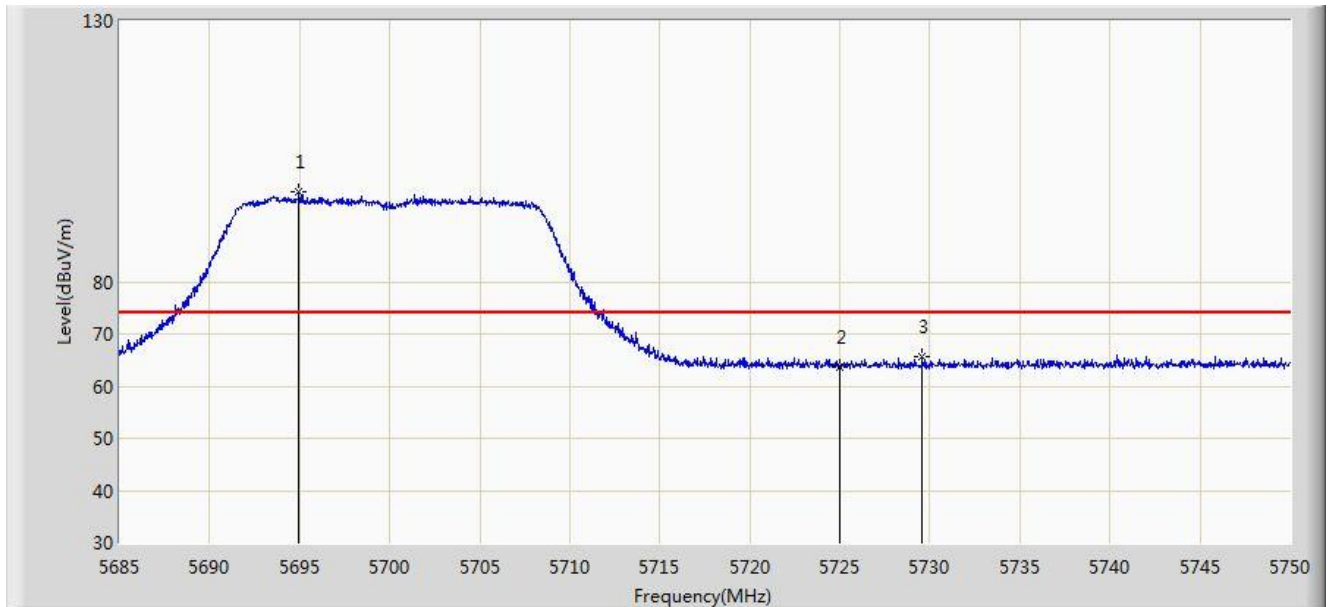


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.978	97.253	59.373	N/A	N/A	37.879	PK
2			5725.000	63.711	25.721	-10.289	74.000	37.990	PK
3			5729.590	65.668	27.659	-8.332	74.000	38.009	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

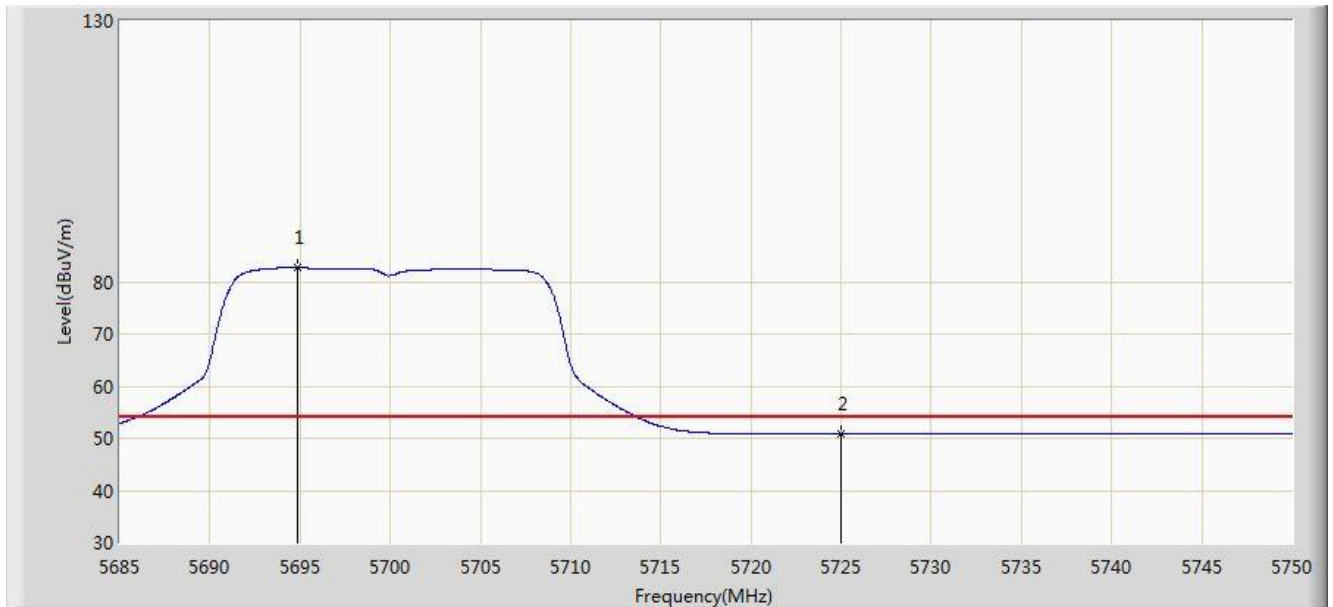


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.880	82.747	44.868	N/A	N/A	37.879	AV
2			5725.000	50.805	12.815	-3.195	54.000	37.990	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

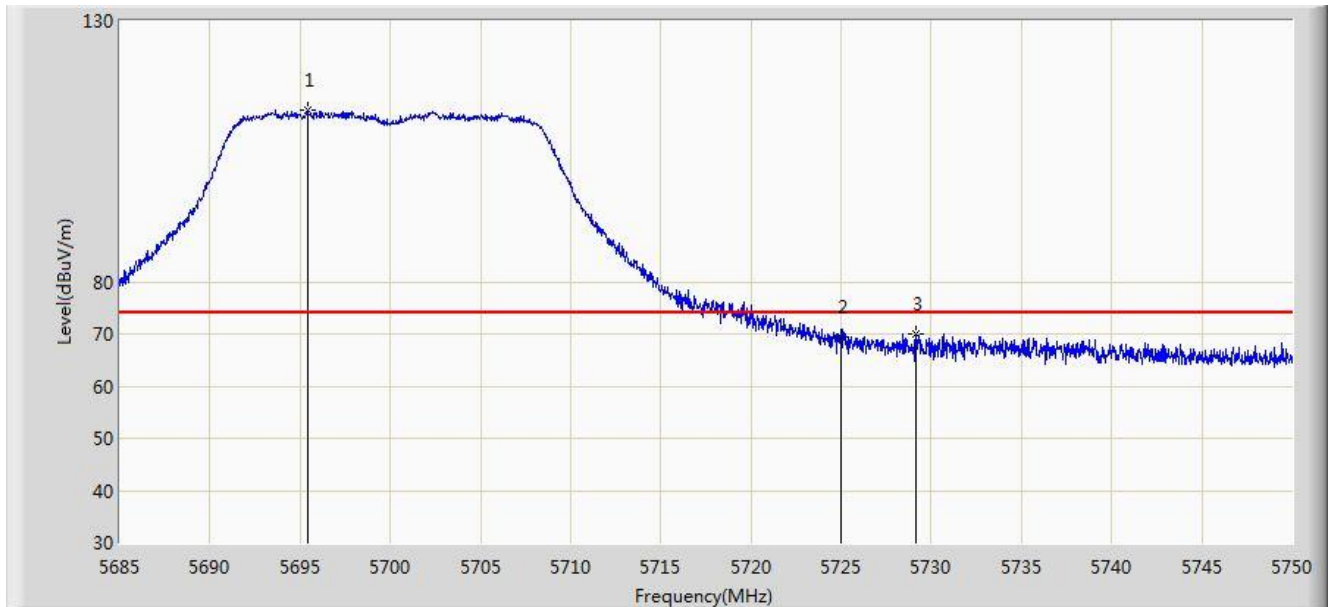


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.433	112.891	75.010	N/A	N/A	37.881	PK
2			5725.000	69.285	31.295	-4.715	74.000	37.990	PK
3			5729.167	70.091	32.084	-3.909	74.000	38.007	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

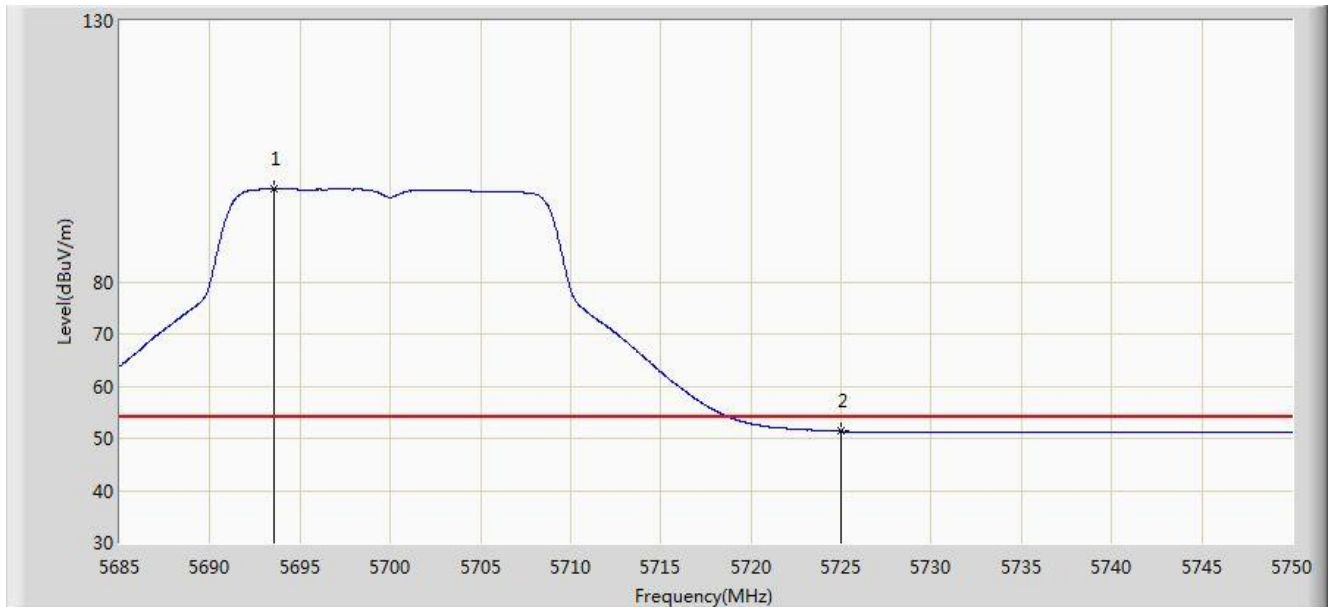


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.547	97.923	60.047	N/A	N/A	37.877	AV
2			5725.000	51.337	13.347	-2.663	54.000	37.990	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

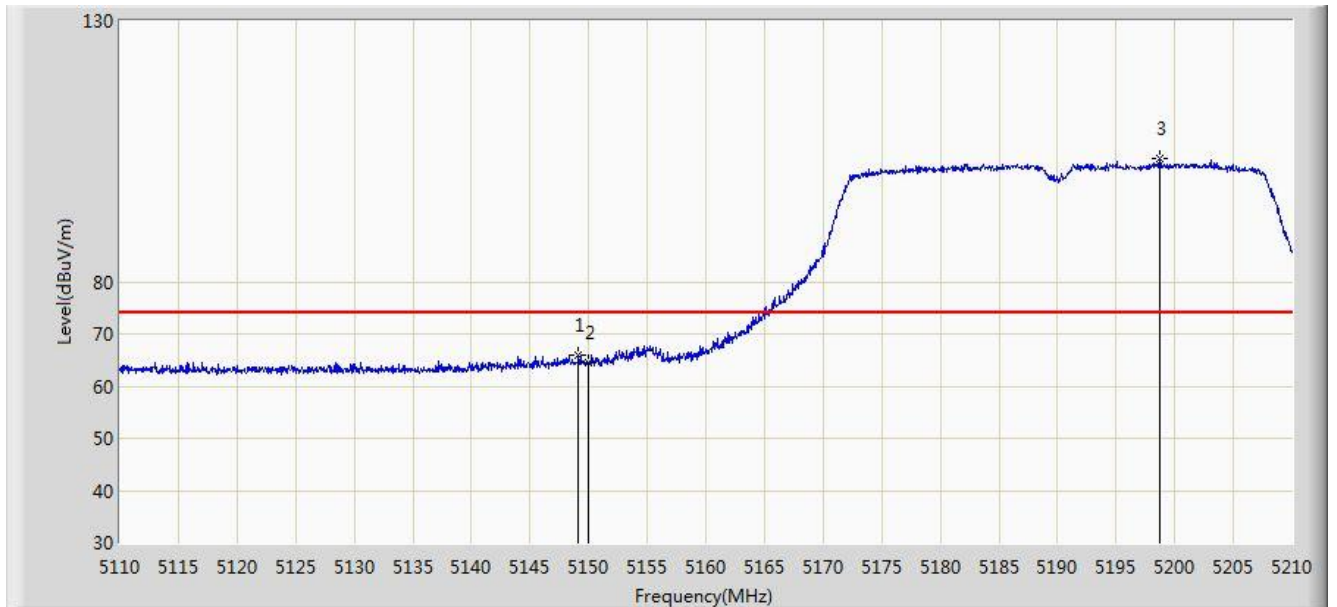


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	66.004	28.551	-7.996	74.000	37.453	PK
2			5150.000	64.480	27.028	-9.520	74.000	37.452	PK
3		*	5198.700	103.726	66.398	N/A	N/A	37.329	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

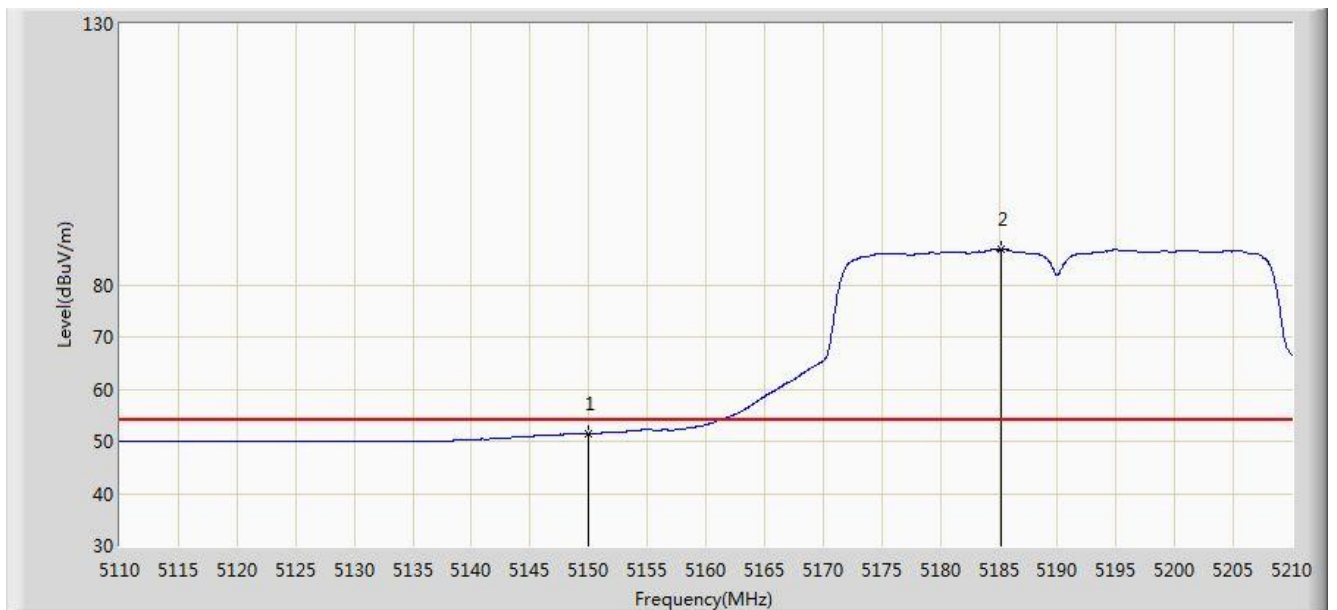


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.460	14.008	-2.540	54.000	37.452	AV
2		*	5185.200	86.718	49.357	N/A	N/A	37.361	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

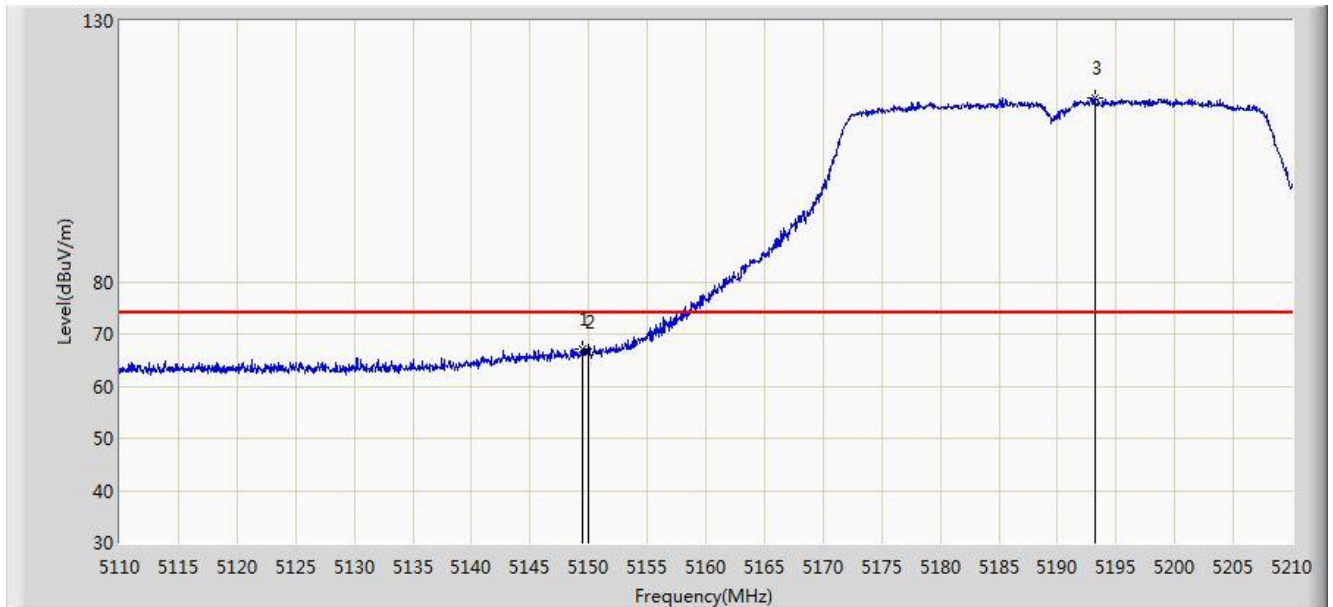


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.450	67.232	29.779	-6.768	74.000	37.453	PK
2			5150.000	66.616	29.164	-7.384	74.000	37.452	PK
3		*	5193.150	115.316	77.975	N/A	N/A	37.342	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

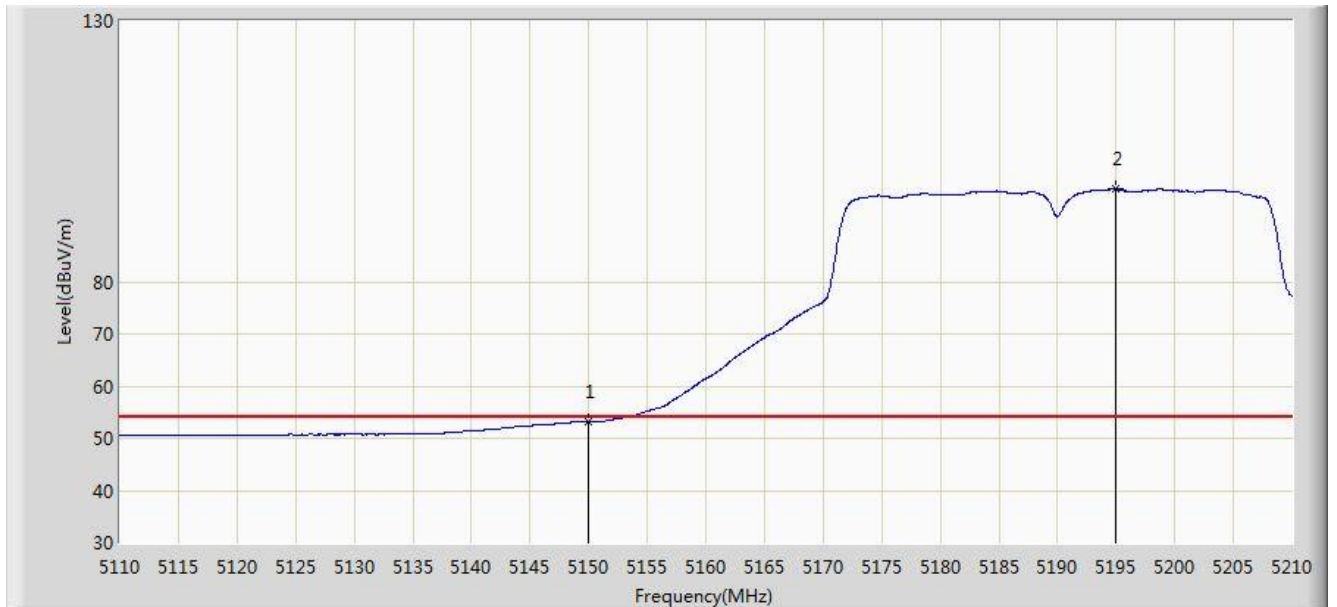


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.075	15.623	-0.925	54.000	37.452	AV
2		*	5195.000	97.705	60.368	N/A	N/A	37.337	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 17:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

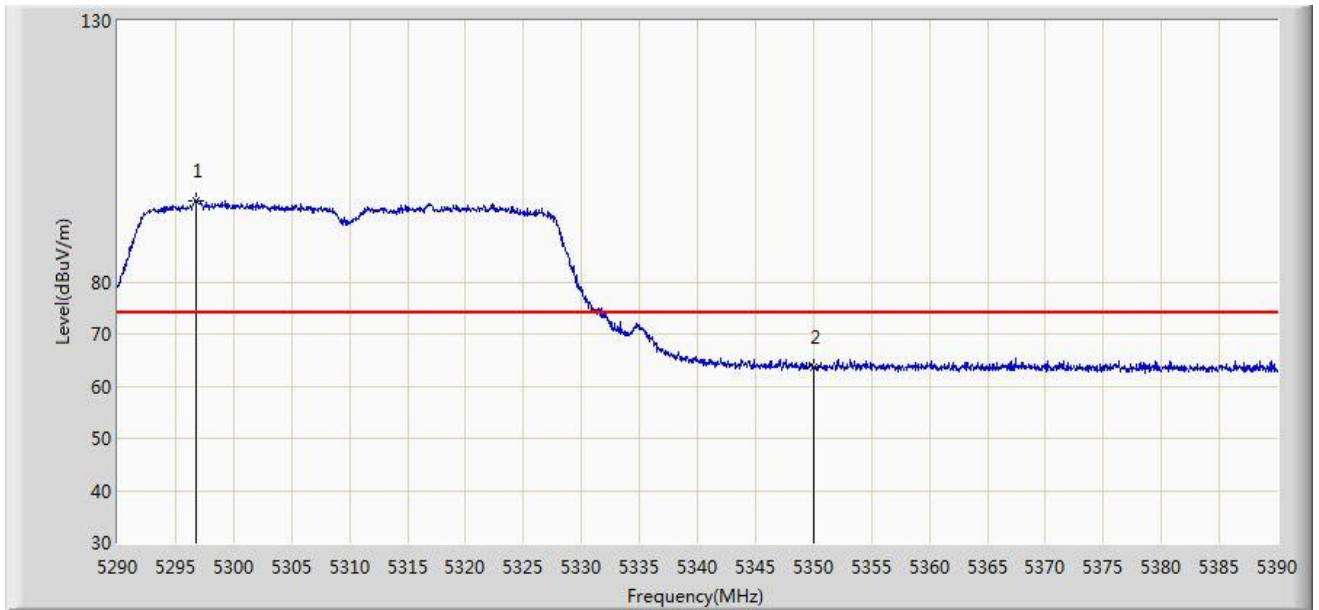


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.800	95.585	58.405	N/A	N/A	37.180	PK
2			5350.000	63.523	26.237	-10.477	74.000	37.286	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 18:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

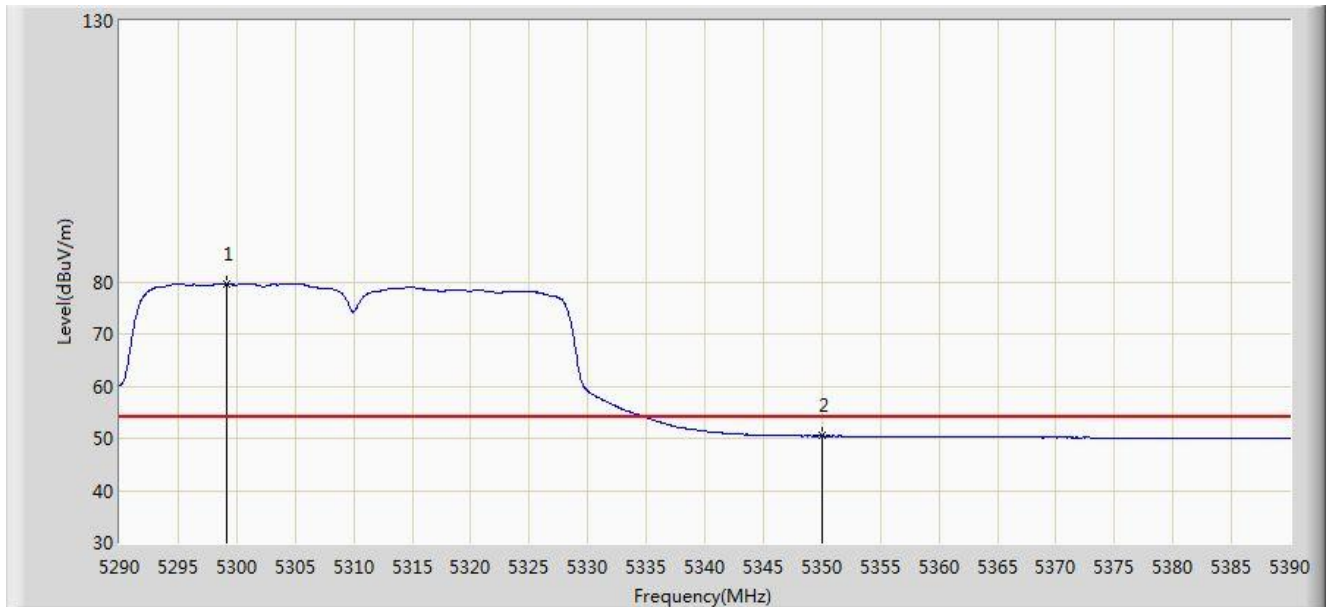


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.100	79.557	42.373	N/A	N/A	37.185	AV
2			5350.000	50.441	13.155	-3.559	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 18:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

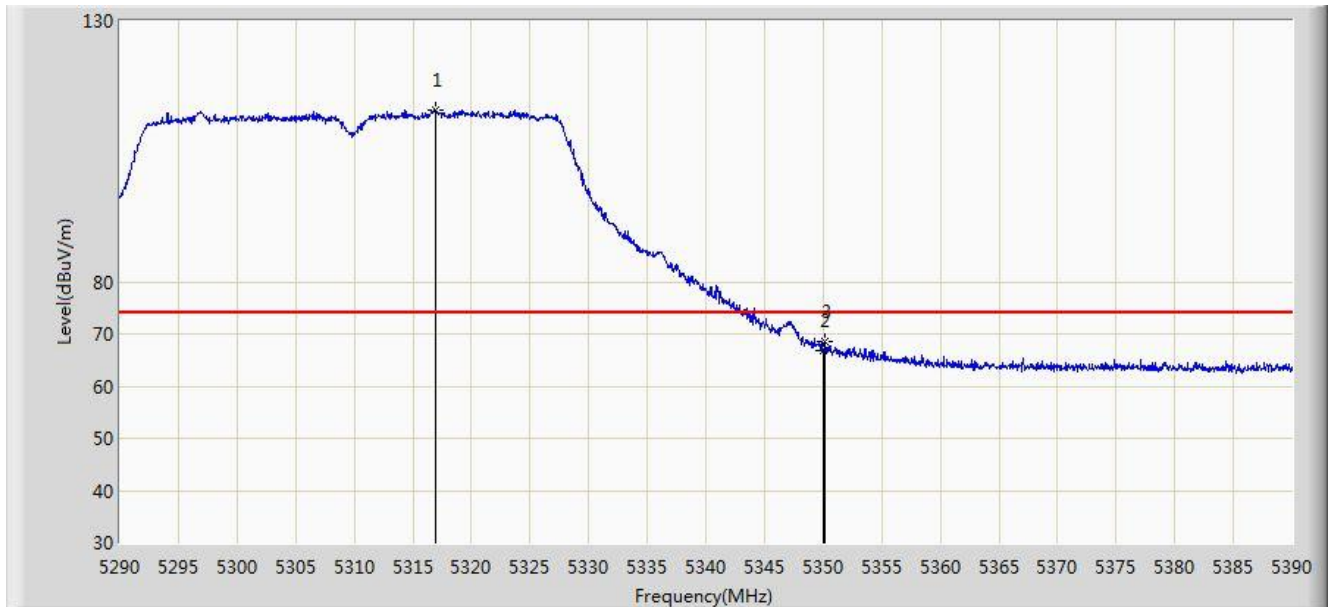


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.000	112.793	75.585	N/A	N/A	37.208	PK
2			5350.000	66.952	29.666	-7.048	74.000	37.286	PK
3			5350.150	68.406	31.119	-5.594	74.000	37.287	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 18:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

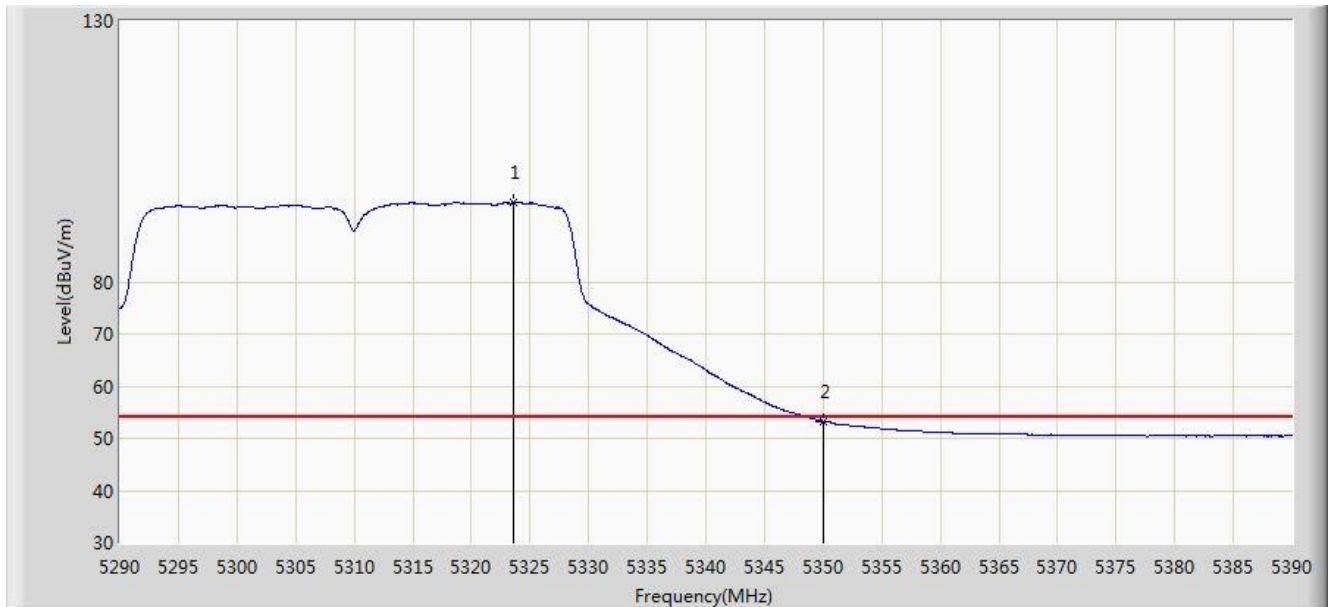


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.550	95.110	57.890	N/A	N/A	37.220	AV
2			5350.000	53.250	15.964	-0.750	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 18:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

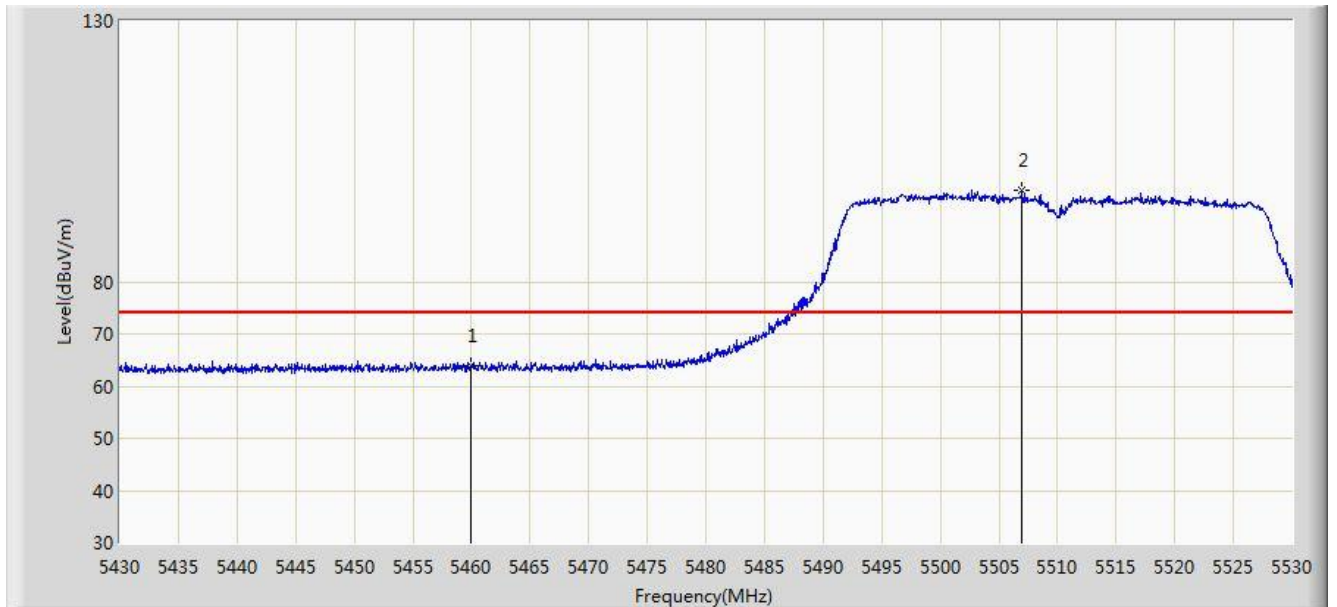


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	64.008	26.445	-9.992	74.000	37.563	PK
2		*	5506.950	97.651	60.019	N/A	N/A	37.632	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

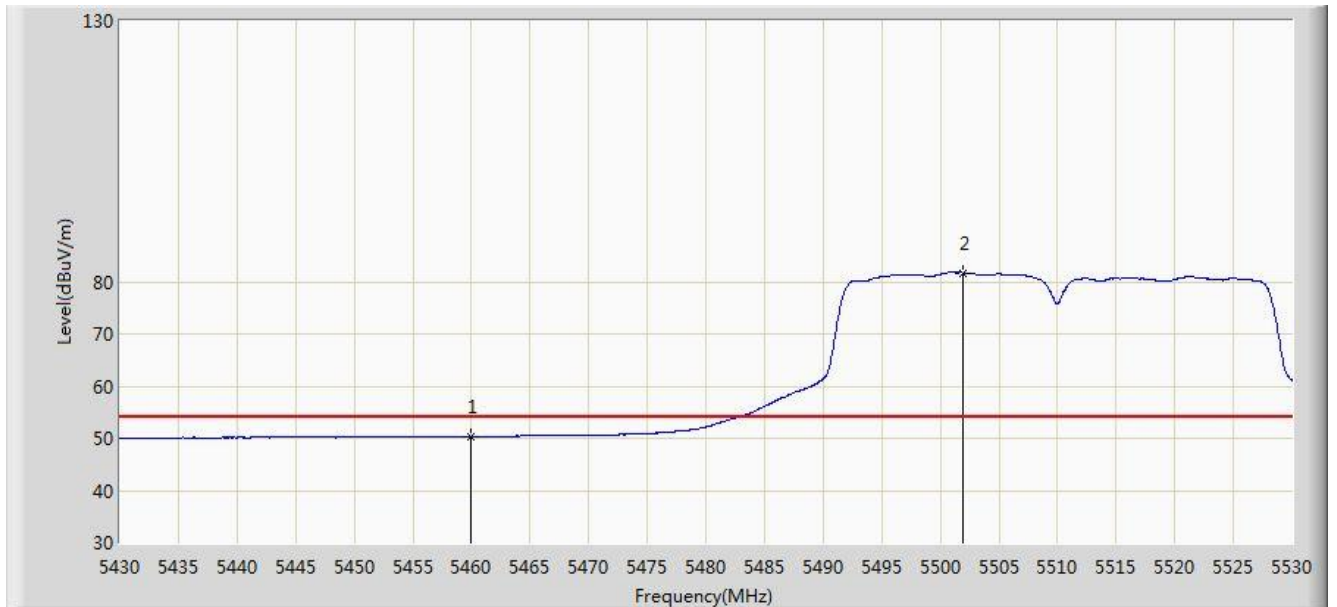


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.369	12.806	-3.631	54.000	37.563	AV
2		*	5501.950	81.711	44.085	N/A	N/A	37.627	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

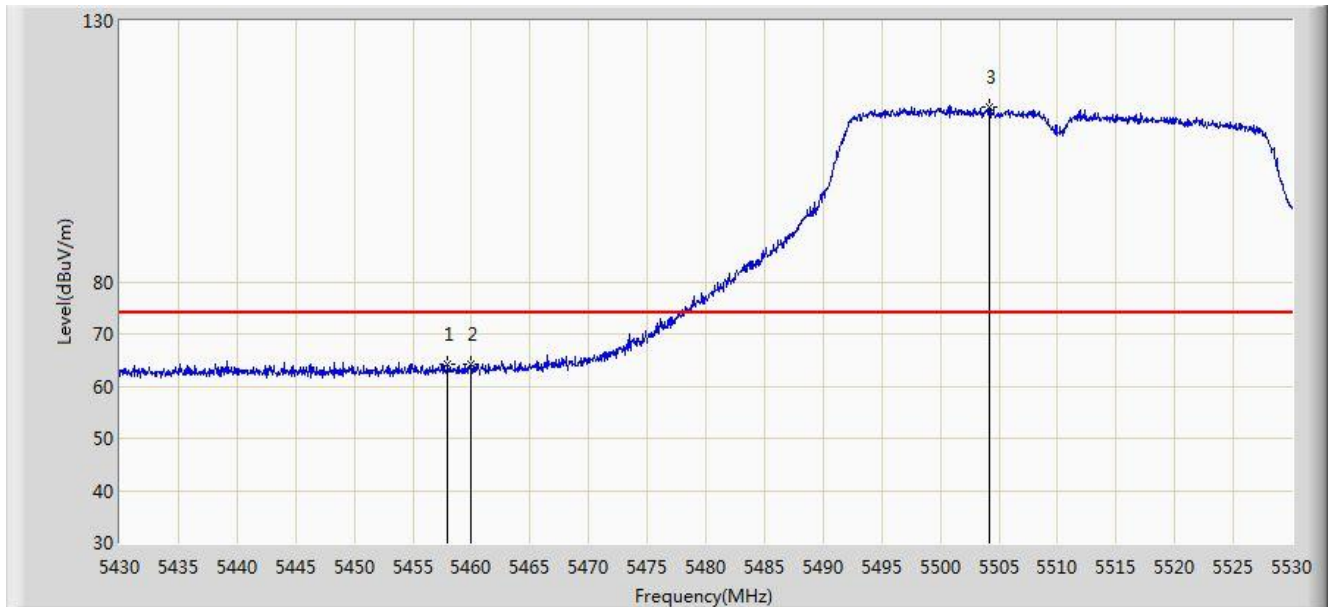


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.000	64.127	26.570	-9.873	74.000	37.557	PK
2			5460.000	64.088	26.525	-9.912	74.000	37.563	PK
3		*	5504.200	113.434	75.805	N/A	N/A	37.629	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

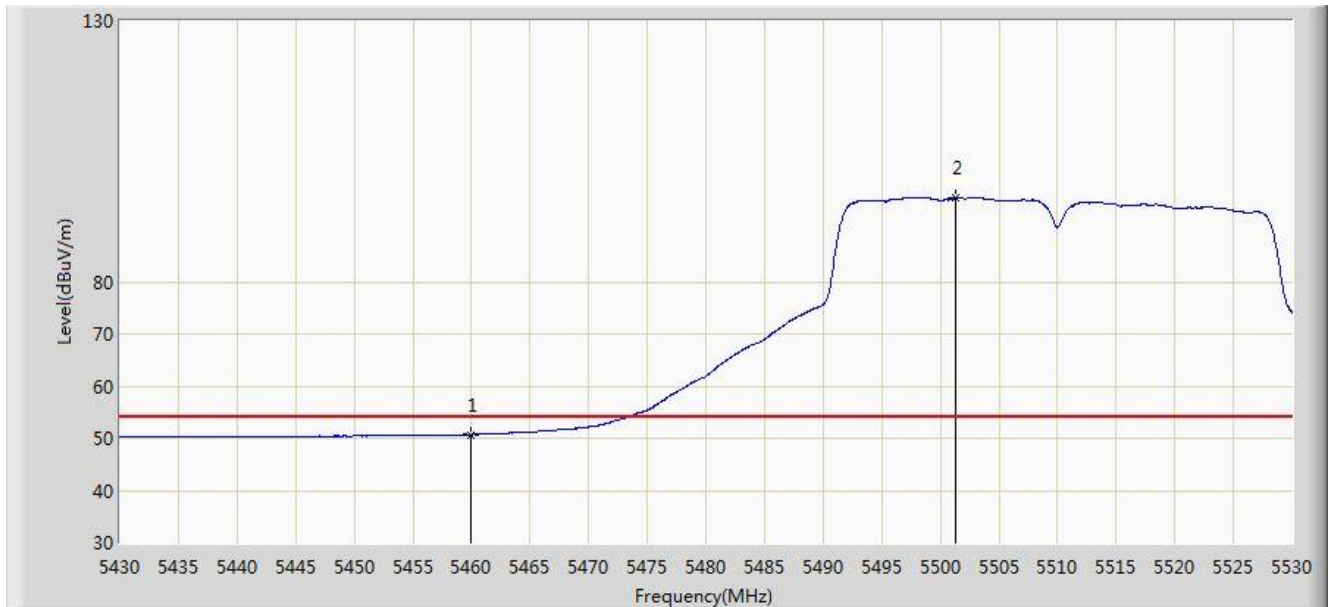


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.707	13.144	-3.293	54.000	37.563	AV
2		*	5501.300	96.001	58.375	N/A	N/A	37.626	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

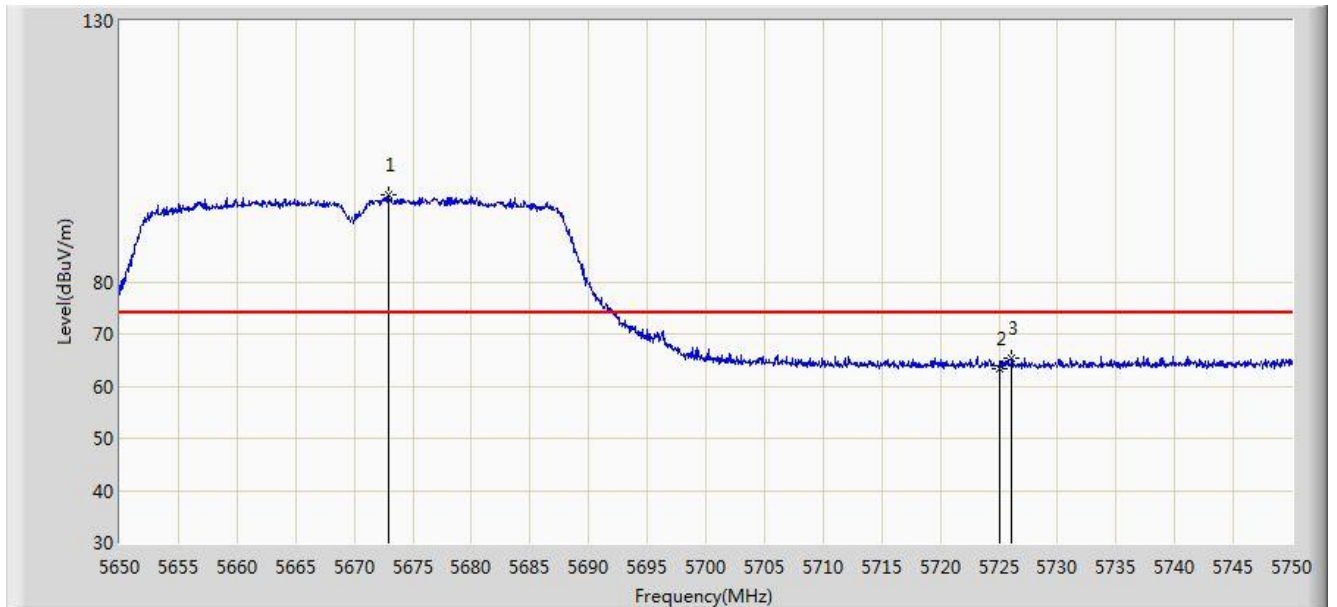


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.950	96.551	58.738	N/A	N/A	37.814	PK
2			5725.000	63.323	25.333	-10.677	74.000	37.990	PK
3			5726.100	65.344	27.350	-8.656	74.000	37.994	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

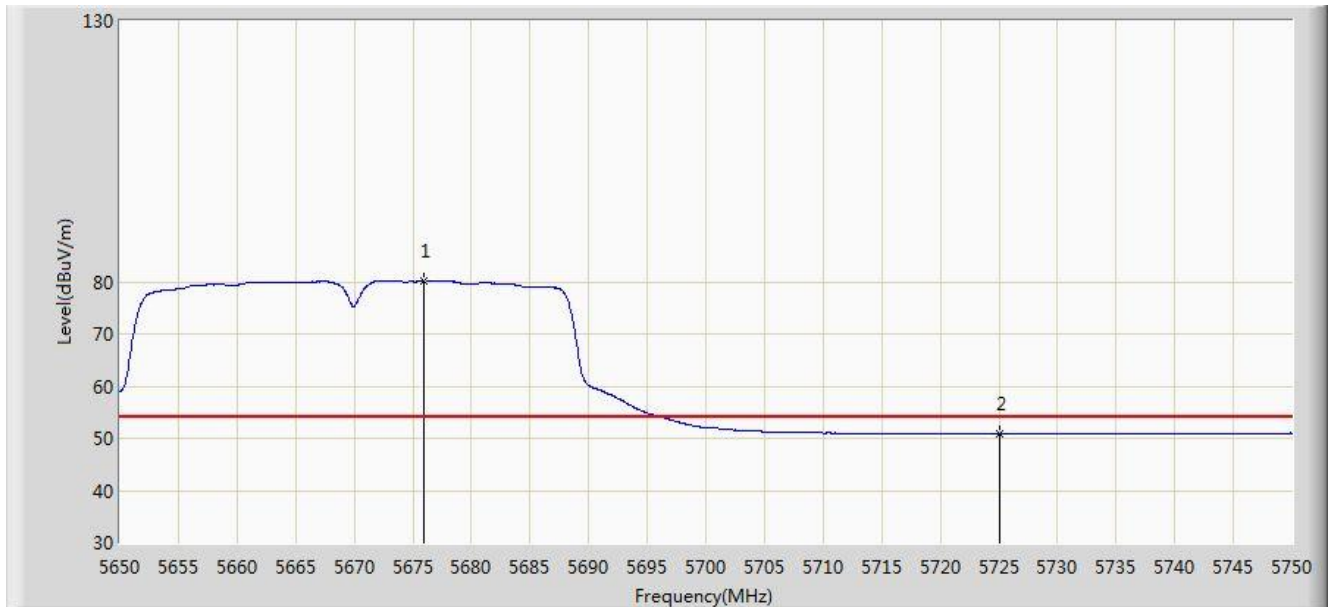


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.900	80.242	42.423	N/A	N/A	37.818	AV
2			5725.000	50.761	12.771	-3.239	54.000	37.990	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

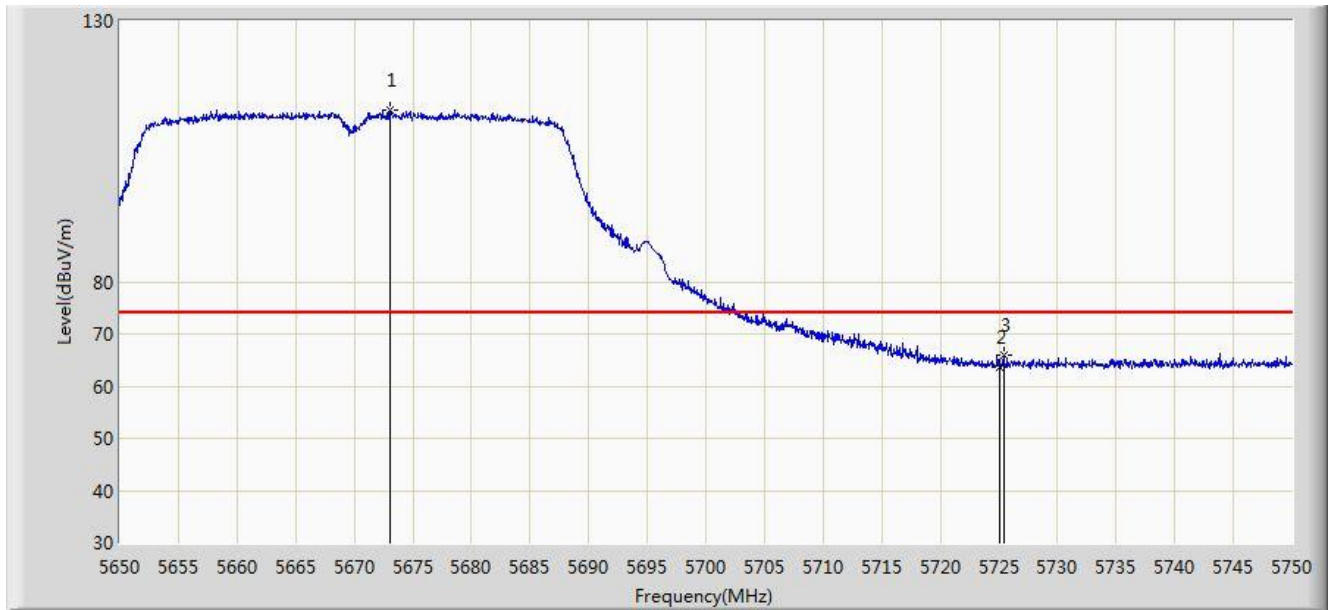


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.050	112.881	75.068	N/A	N/A	37.814	PK
2			5725.000	63.663	25.673	-10.337	74.000	37.990	PK
3			5725.400	65.949	27.958	-8.051	74.000	37.991	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

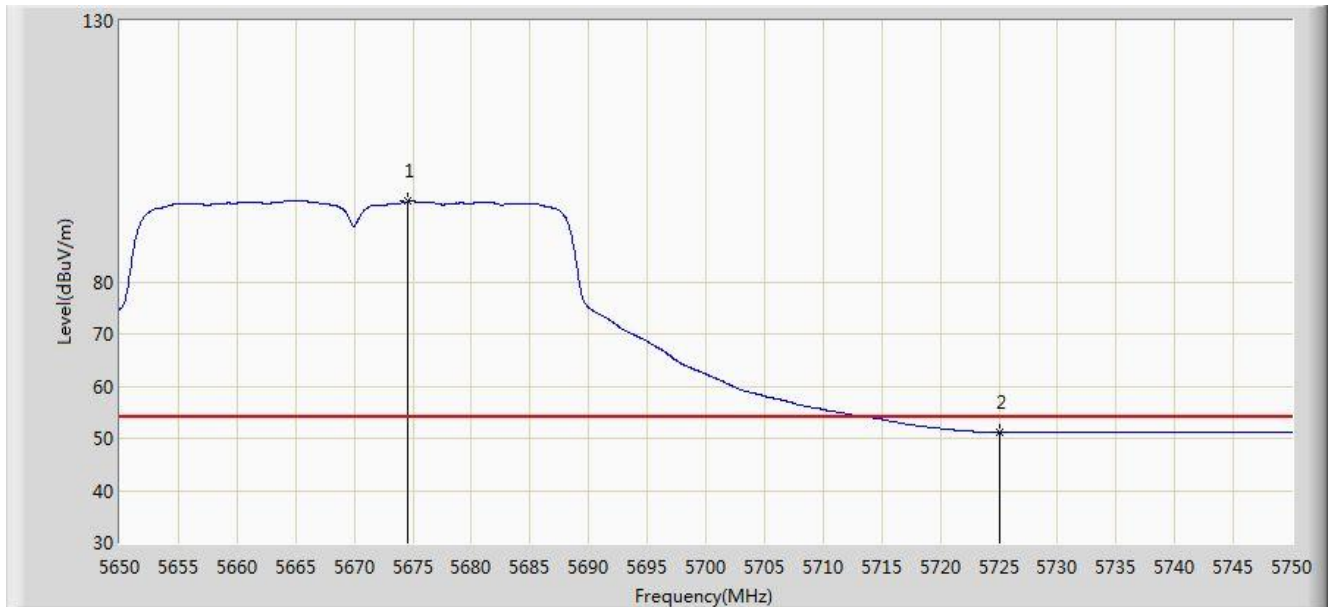


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.600	95.384	57.569	N/A	N/A	37.815	AV
2			5725.000	51.172	13.182	-2.828	54.000	37.990	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

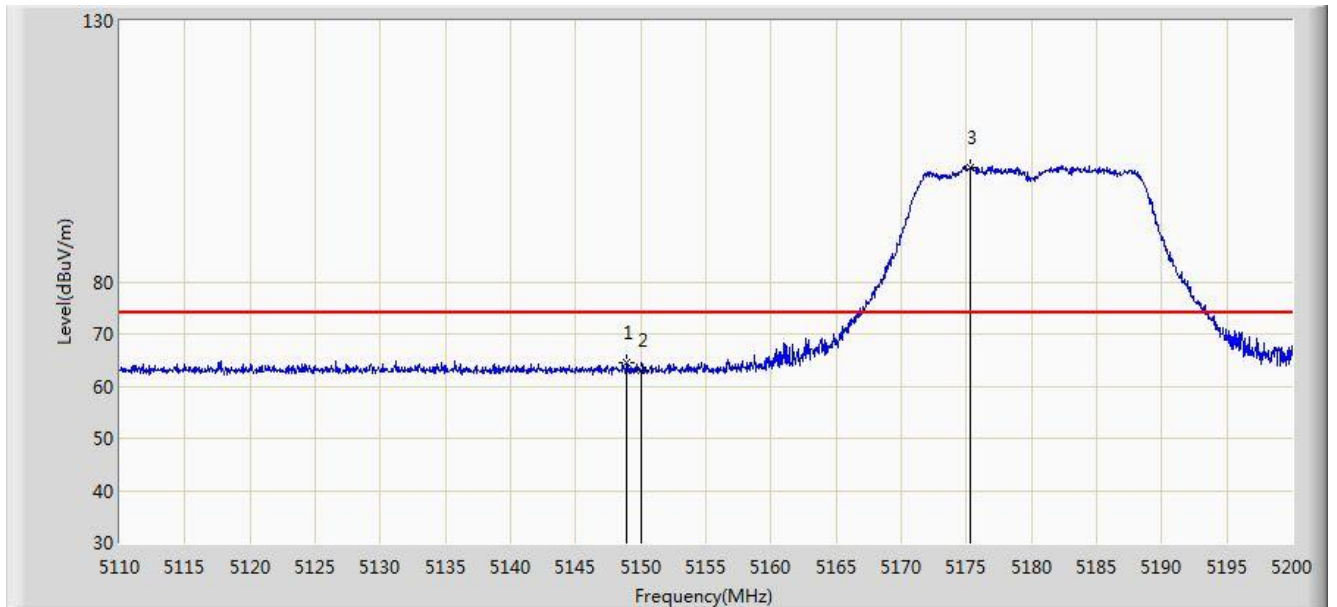


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.925	64.384	26.931	-9.616	74.000	37.453	PK
2			5150.000	62.942	25.490	-11.058	74.000	37.452	PK
3		*	5175.250	101.932	64.547	N/A	N/A	37.384	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

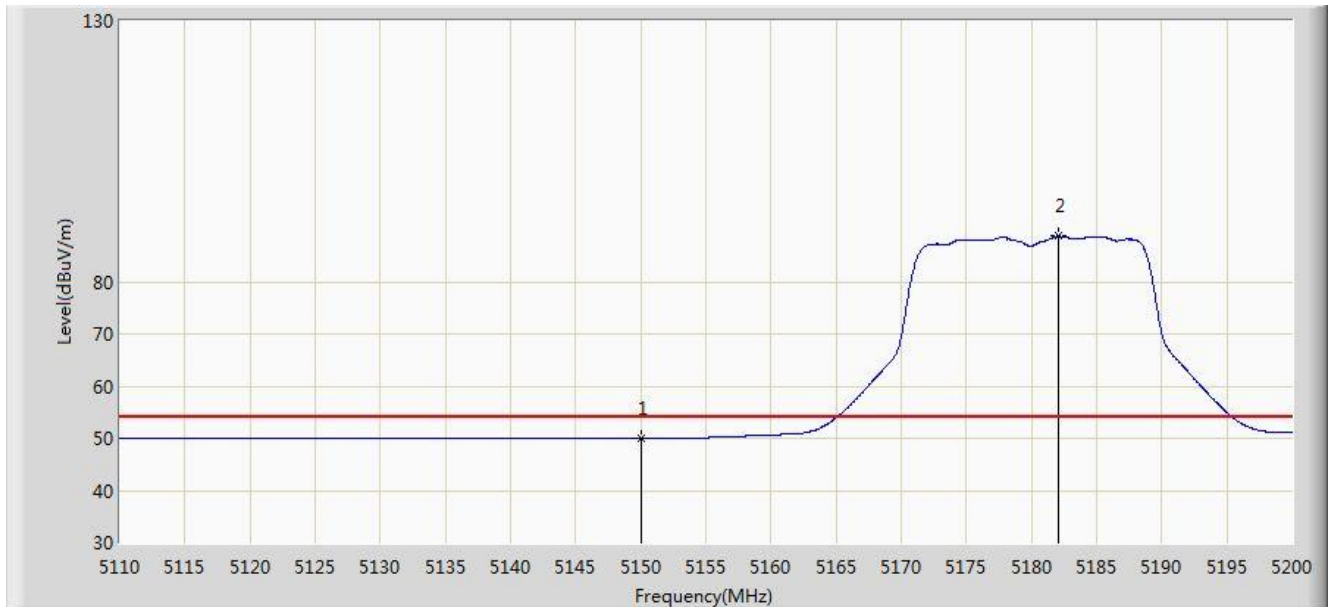


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.987	12.535	-4.013	54.000	37.452	AV
2		*	5182.045	88.739	51.370	N/A	N/A	37.369	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

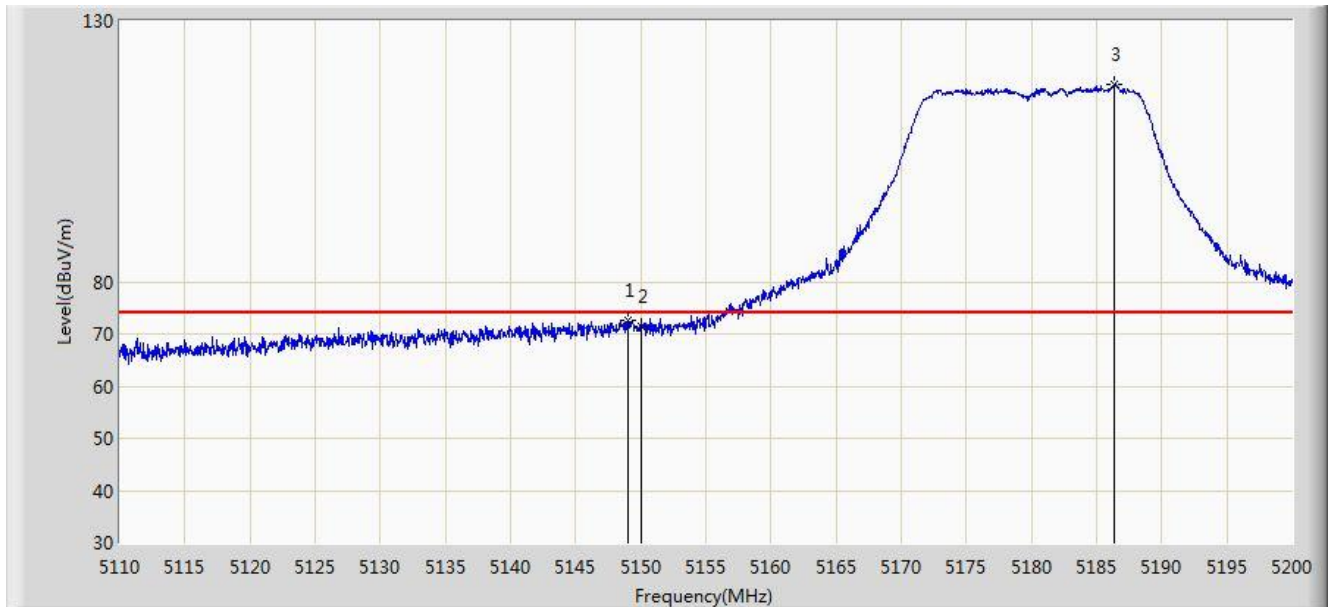


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.970	72.501	35.048	-1.499	74.000	37.453	PK
2			5150.000	71.594	34.142	-2.406	74.000	37.452	PK
3		*	5186.365	117.744	80.386	N/A	N/A	37.358	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

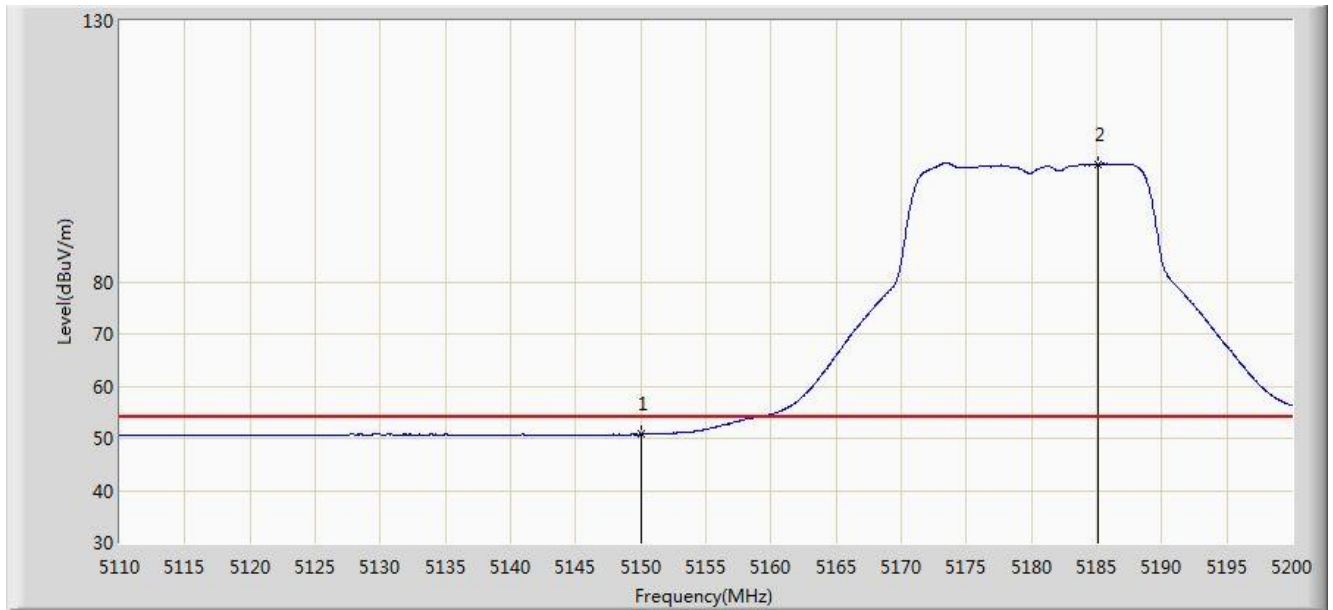


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.731	13.279	-3.269	54.000	37.452	AV
2		*	5185.105	102.543	65.182	N/A	N/A	37.361	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

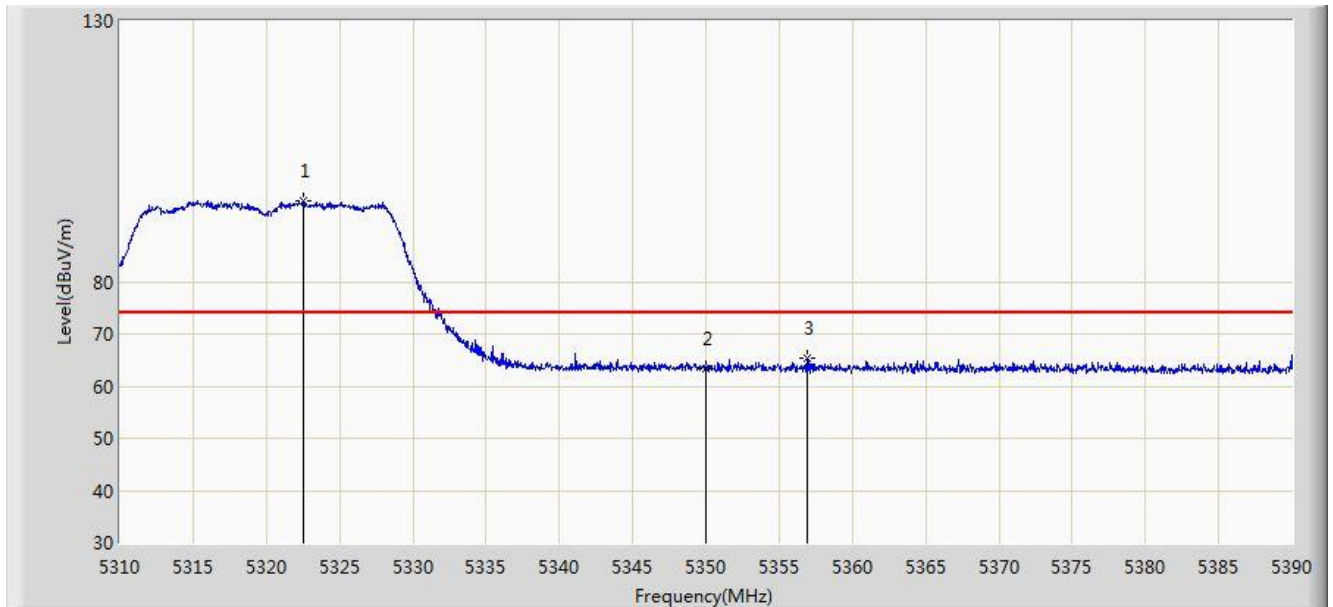


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.560	95.428	58.210	N/A	N/A	37.218	PK
2			5350.000	63.255	25.969	-10.745	74.000	37.286	PK
3			5356.920	65.348	28.042	-8.652	74.000	37.305	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

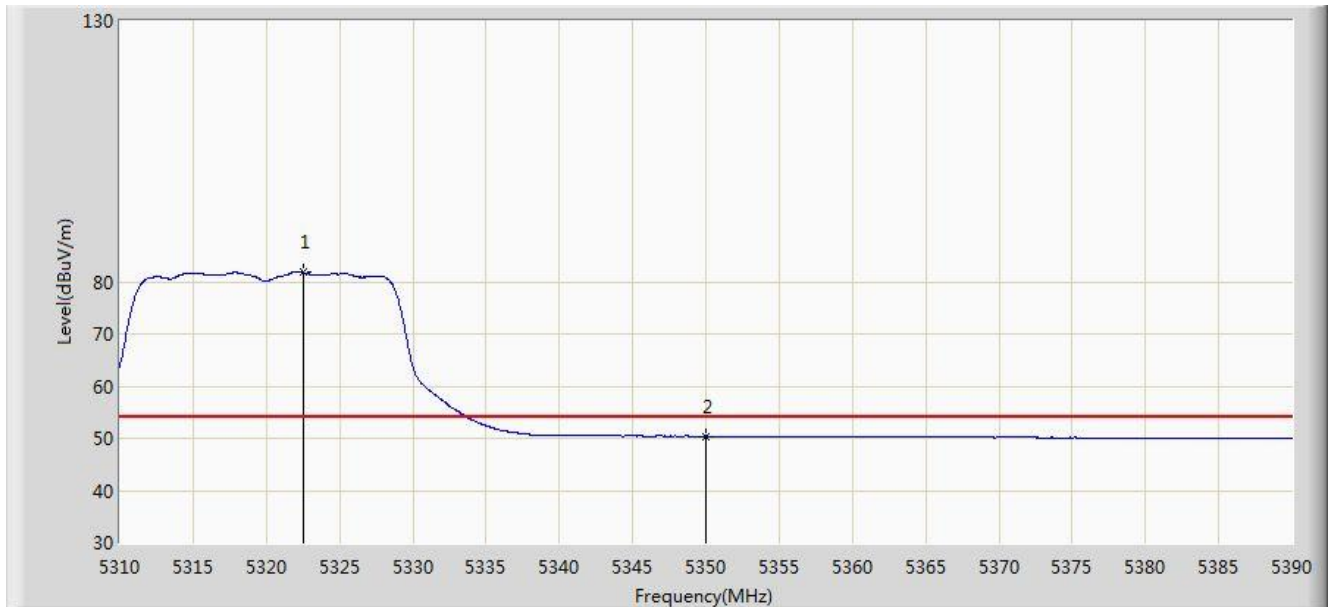


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.520	81.763	44.545	N/A	N/A	37.218	AV
2			5350.000	50.411	13.125	-3.589	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 19:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

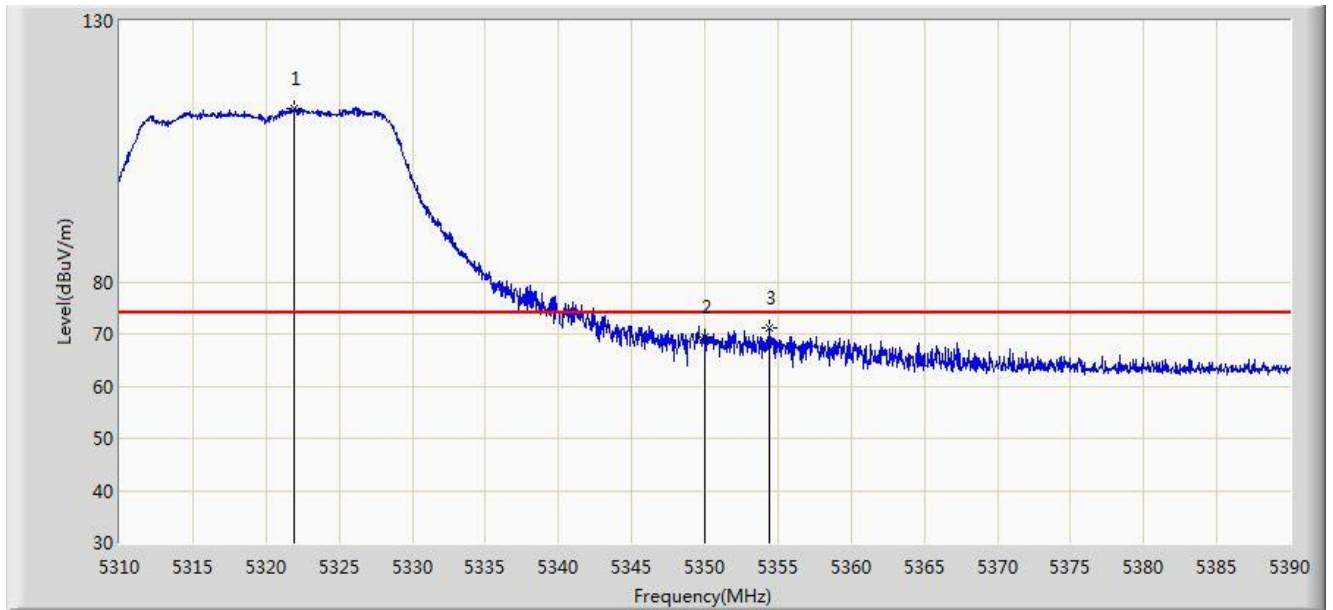


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.920	113.227	76.010	N/A	N/A	37.217	PK
2			5350.000	69.488	32.202	-4.512	74.000	37.286	PK
3			5354.400	71.186	33.887	-2.814	74.000	37.299	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

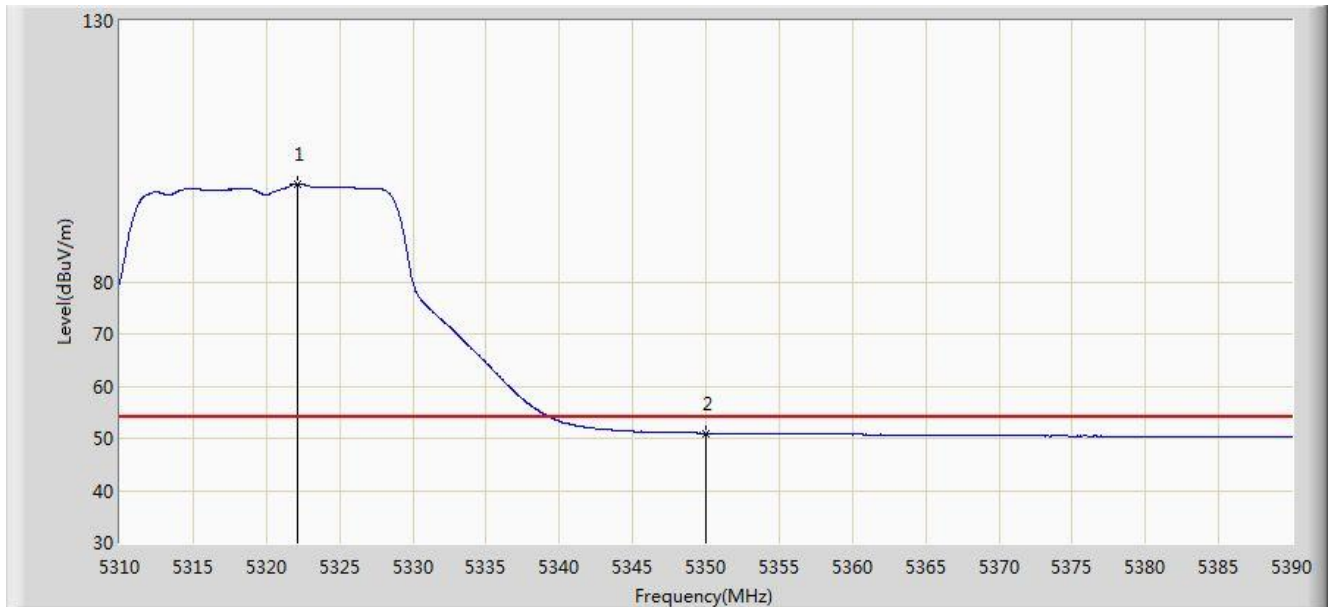


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.160	98.794	61.577	N/A	N/A	37.218	AV
2			5350.000	50.987	13.701	-3.013	54.000	37.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

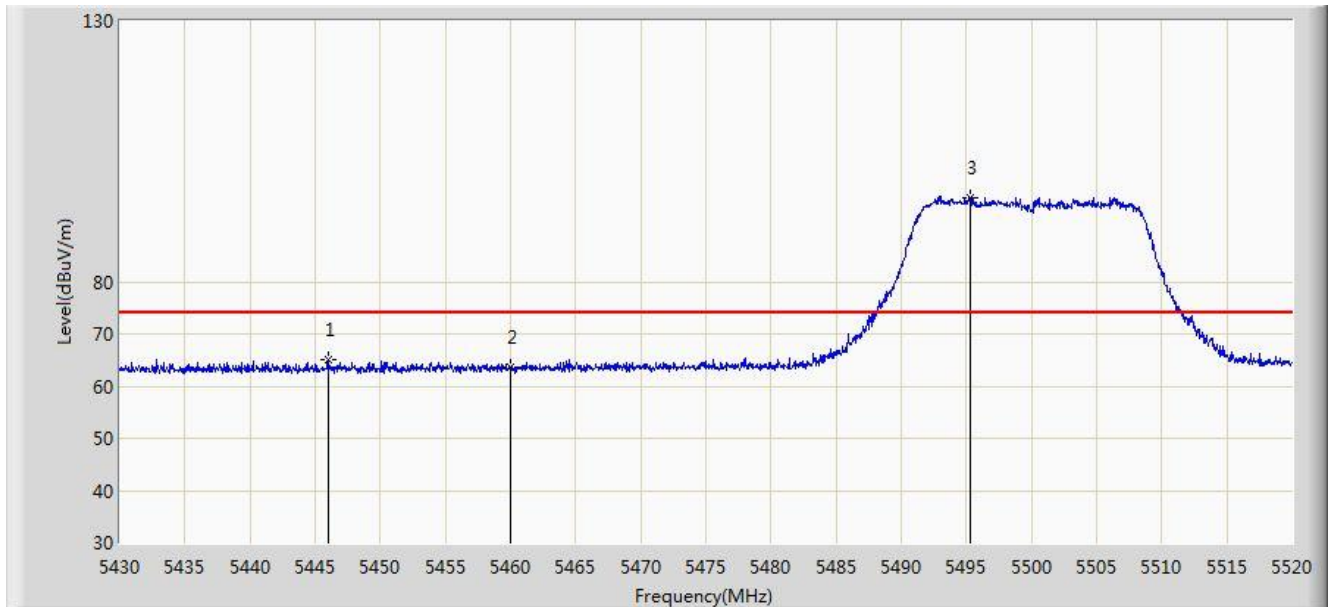


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.020	65.174	27.639	-8.826	74.000	37.535	PK
2			5460.000	63.587	26.024	-10.413	74.000	37.563	PK
3		*	5495.250	96.024	58.405	N/A	N/A	37.619	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

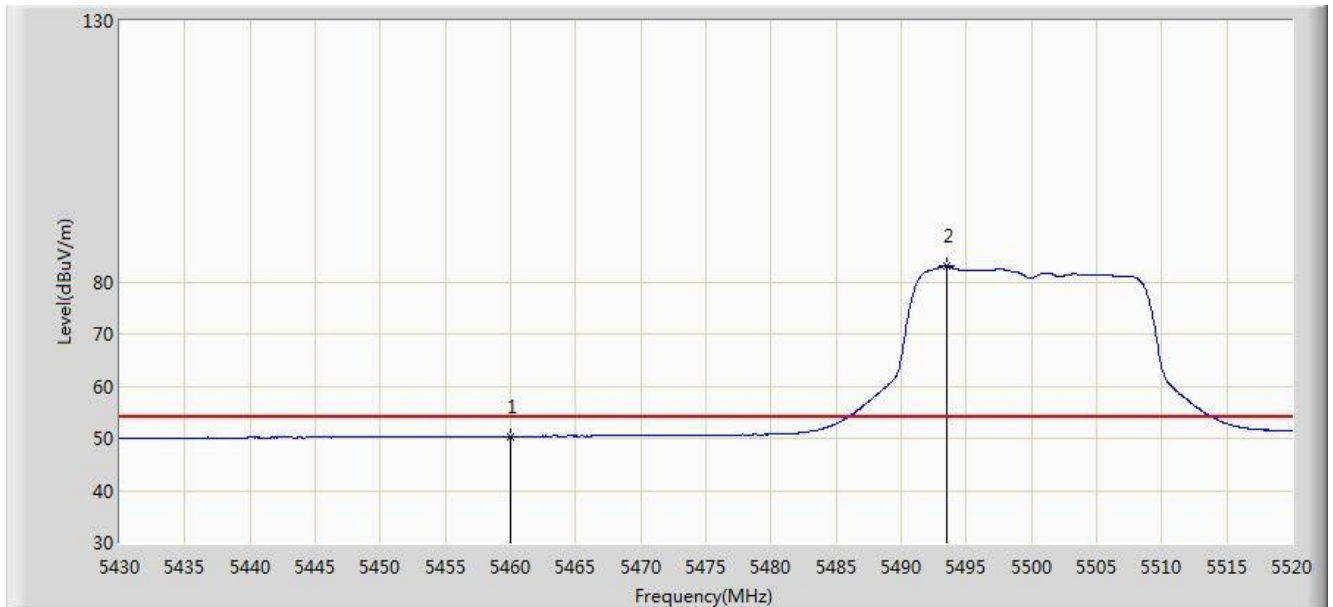


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.349	12.786	-3.651	54.000	37.563	AV
2		*	5493.495	83.012	45.395	N/A	N/A	37.617	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

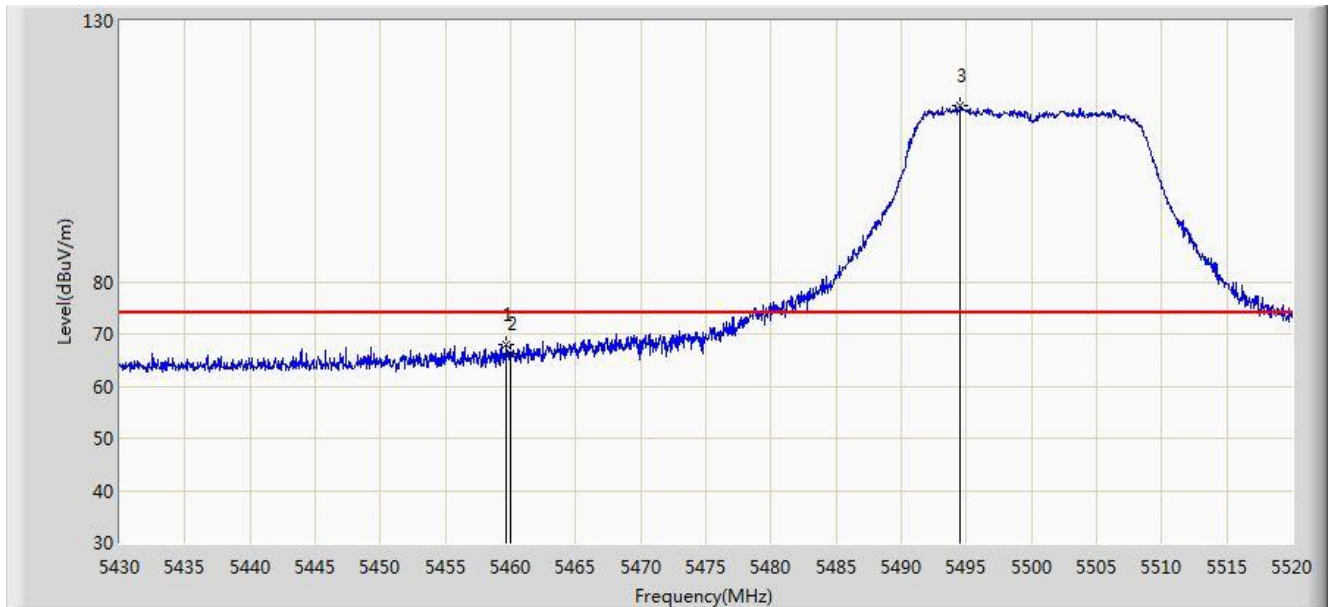


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	67.827	30.265	-6.173	74.000	37.562	PK
2			5460.000	66.185	28.622	-7.815	74.000	37.563	PK
3		*	5494.530	113.747	76.129	N/A	N/A	37.618	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

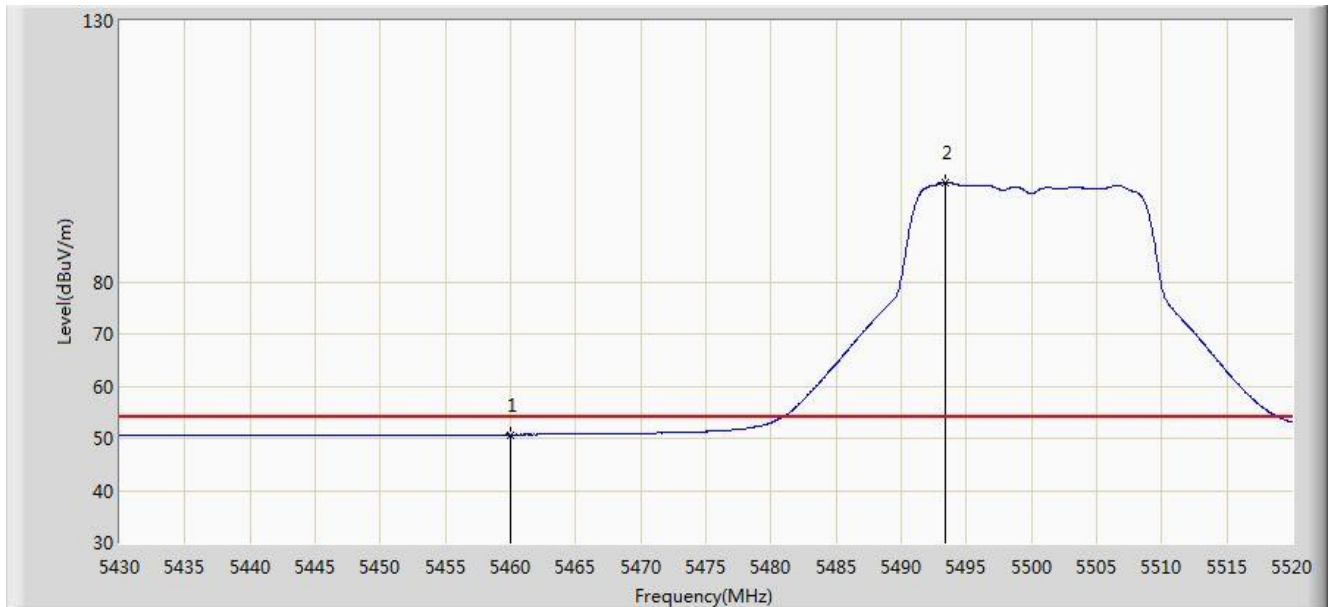


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.687	13.124	-3.313	54.000	37.563	AV
2		*	5493.360	99.035	61.418	N/A	N/A	37.617	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

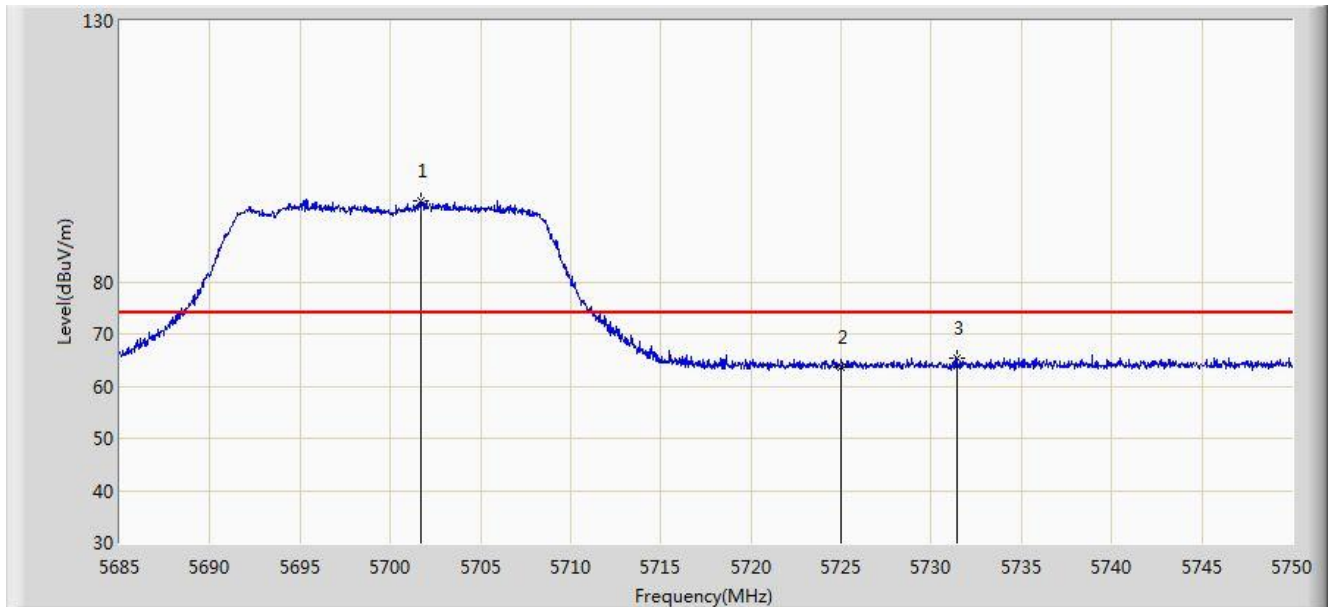


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.705	95.629	57.733	N/A	N/A	37.897	PK
2			5725.000	63.765	25.775	-10.235	74.000	37.990	PK
3			5731.410	65.441	27.425	-8.559	74.000	38.017	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 19:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

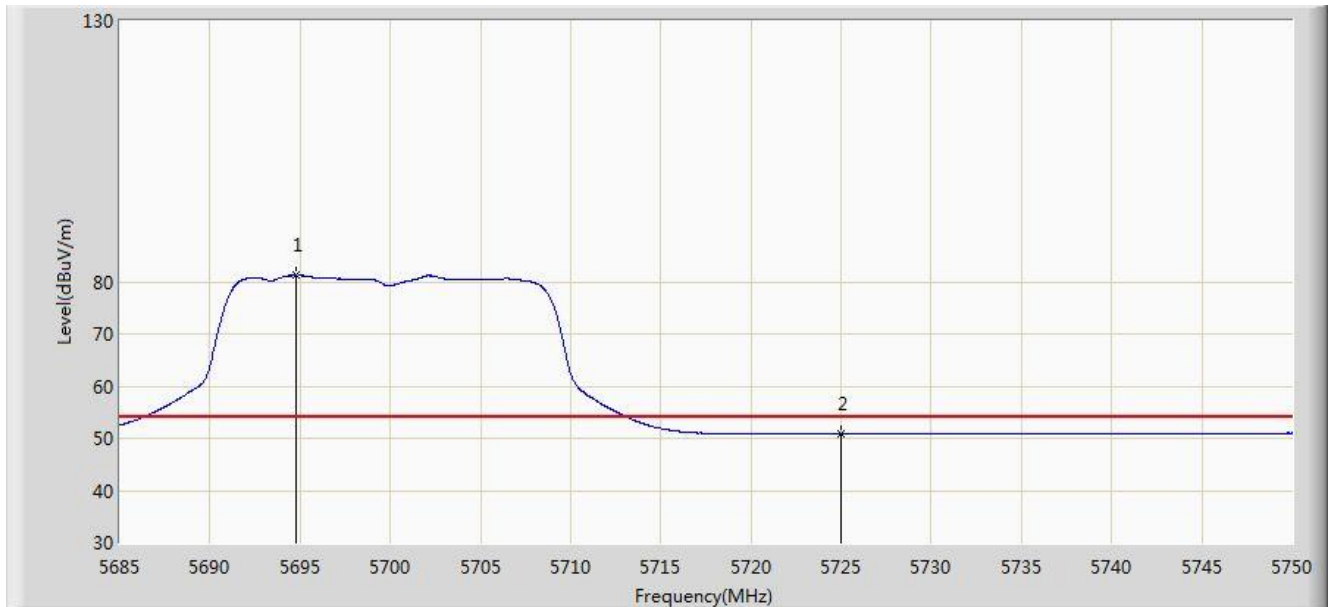


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.783	81.162	43.283	N/A	N/A	37.879	AV
2			5725.000	50.786	12.796	-3.214	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/02 - 20:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

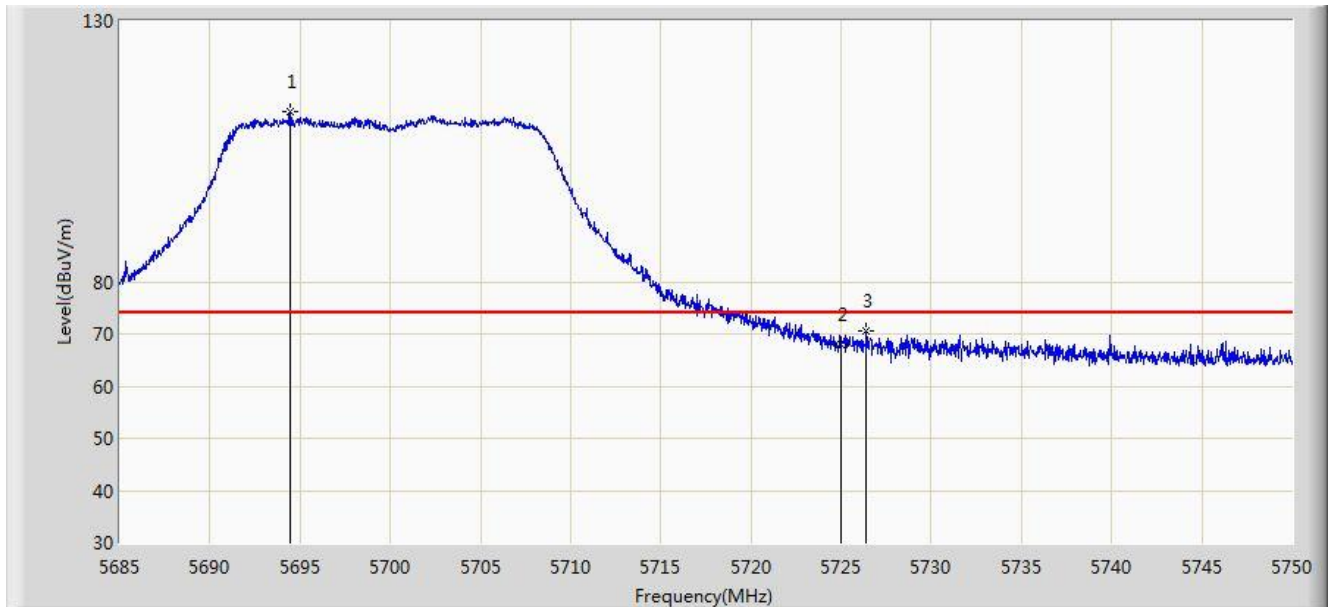


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.425	112.495	74.617	N/A	N/A	37.878	PK
2			5725.000	67.918	29.928	-6.082	74.000	37.990	PK
3			5726.405	70.699	32.704	-3.301	74.000	37.995	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 20:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

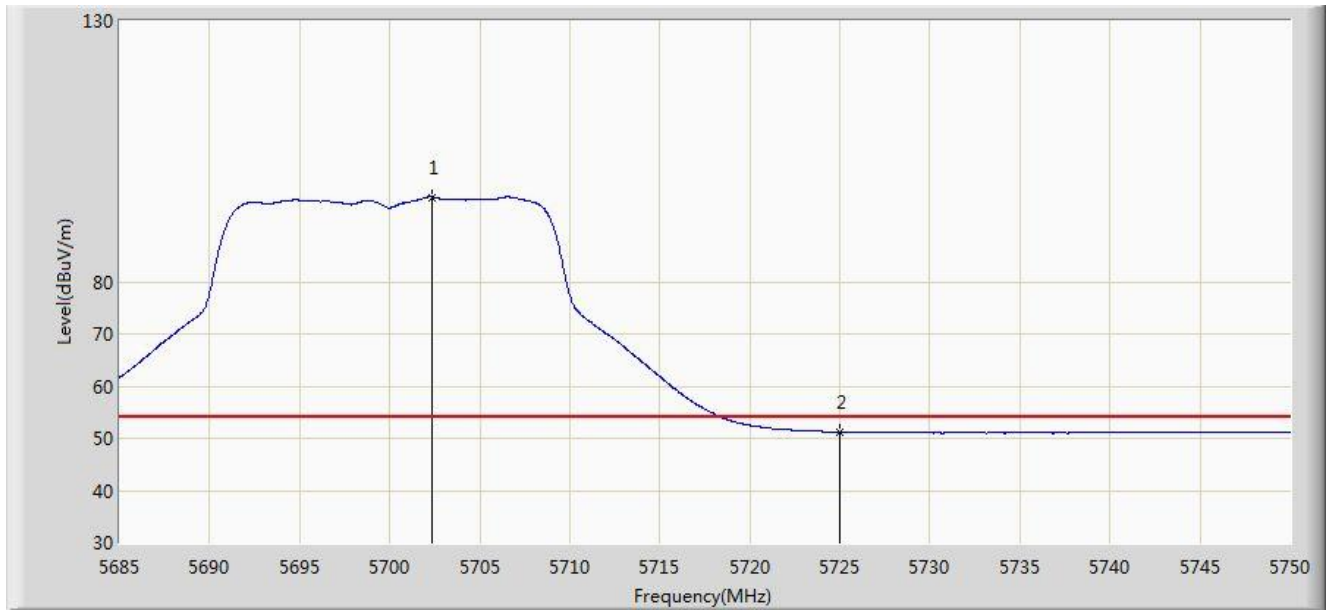


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.355	96.218	58.320	N/A	N/A	37.898	AV
2			5725.000	51.256	13.266	-2.744	54.000	37.990	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 20:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

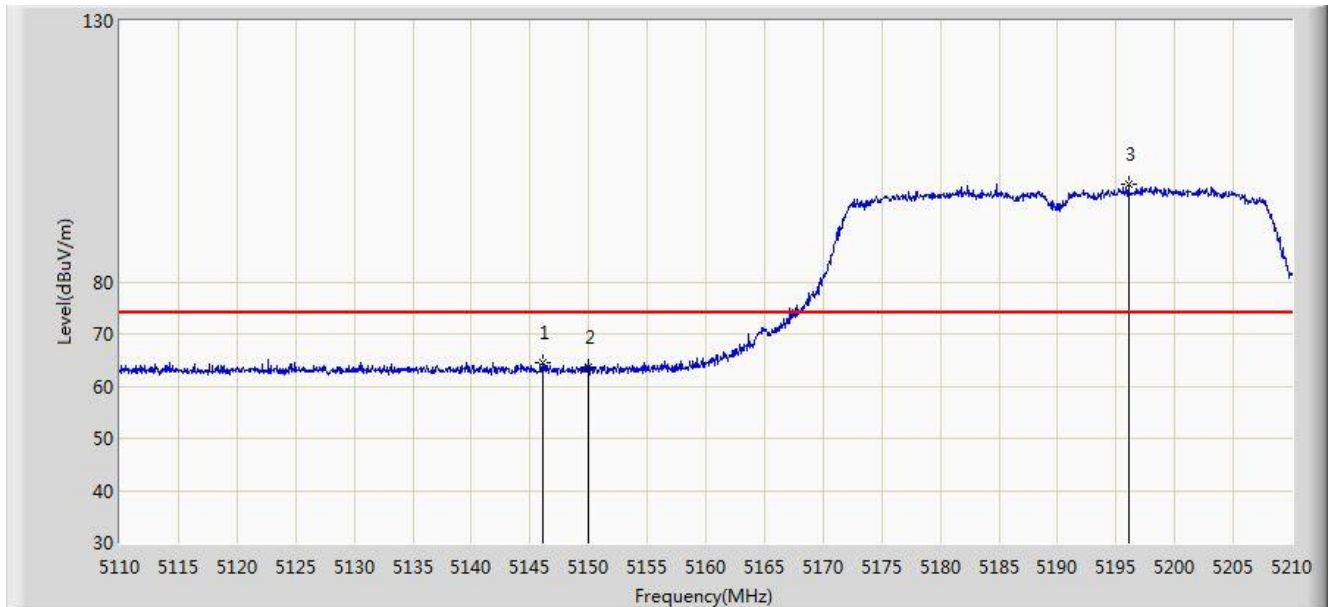


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.150	64.351	26.893	-9.649	74.000	37.457	PK
2			5150.000	63.544	26.092	-10.456	74.000	37.452	PK
3		*	5196.050	98.815	61.480	N/A	N/A	37.334	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 20:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

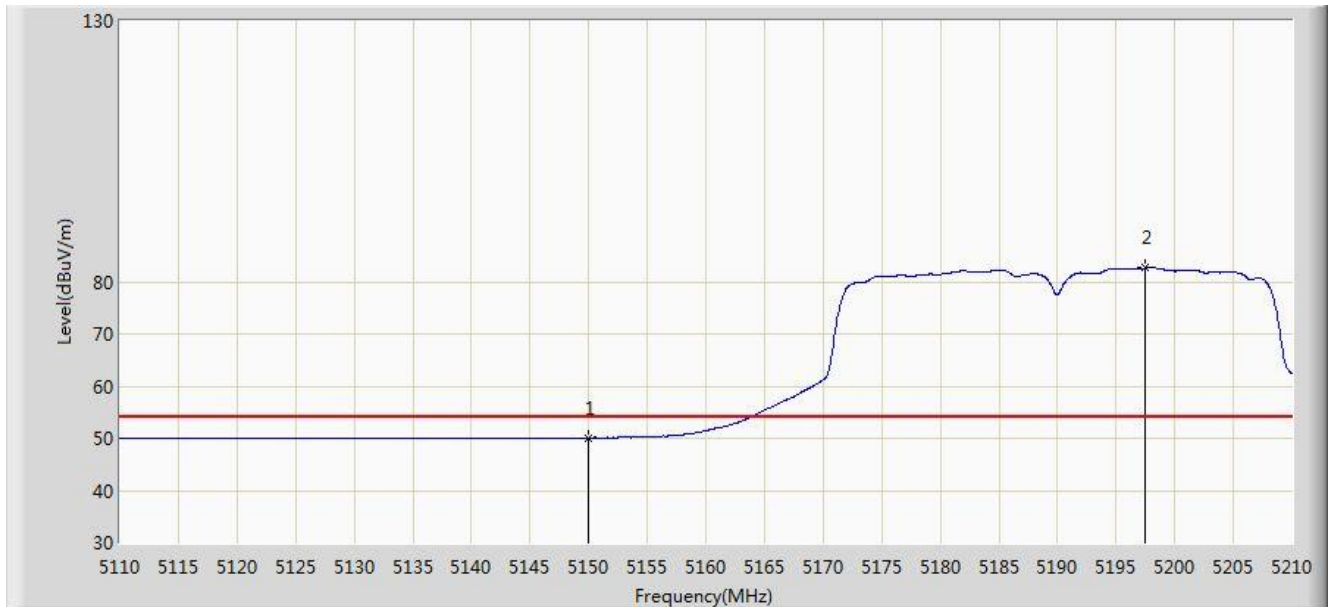


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.085	12.633	-3.915	54.000	37.452	AV
2		*	5197.500	82.656	45.325	N/A	N/A	37.332	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/02 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

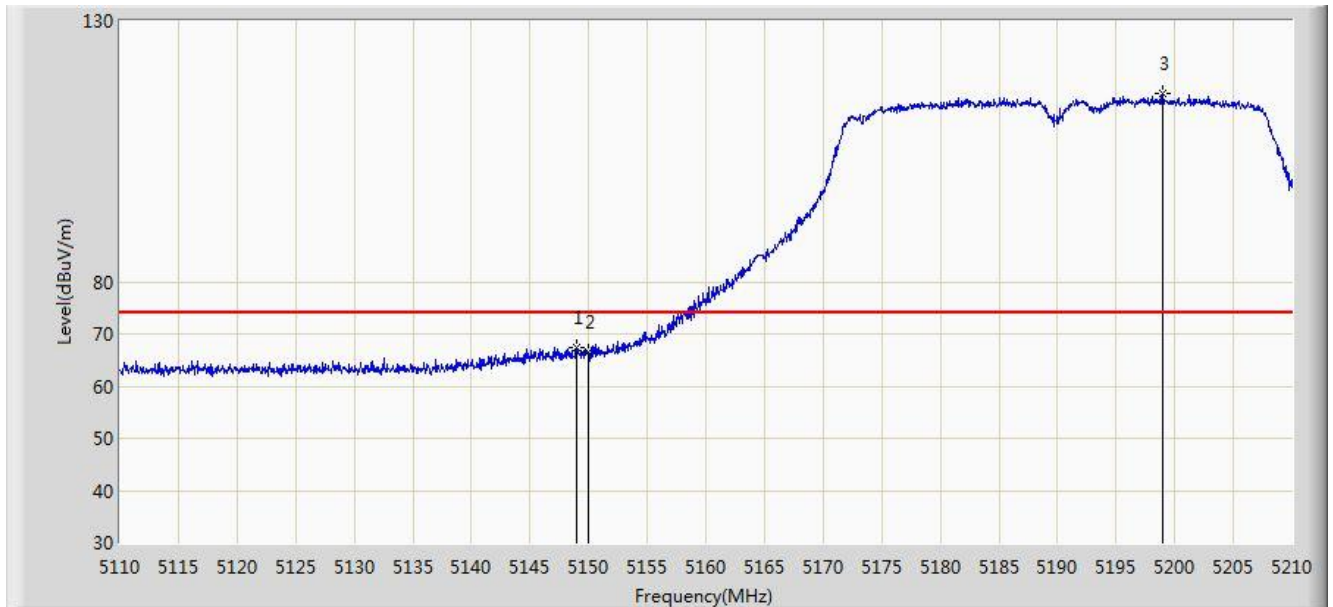

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.950	67.322	29.869	-6.678	74.000	37.453	PK
2			5150.000	66.504	29.052	-7.496	74.000	37.452	PK
3		*	5199.000	115.952	78.624	N/A	N/A	37.328	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)