


Site: AC1	Time: 2015/04/28 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5785MHz	

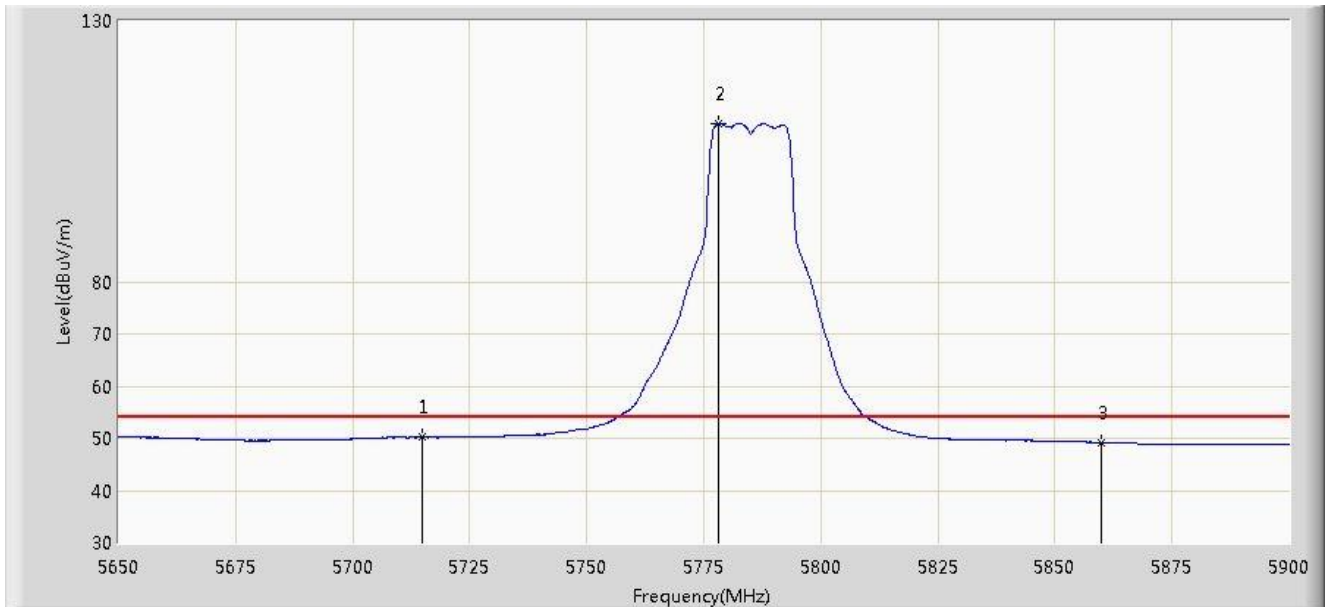


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.198	50.919	-3.802	54.000	-0.721	AV
2	X	*	5778.125	110.345	110.930	N/A	N/A	-0.584	AV
3			5860.000	49.183	49.660	-4.817	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5785MHz	

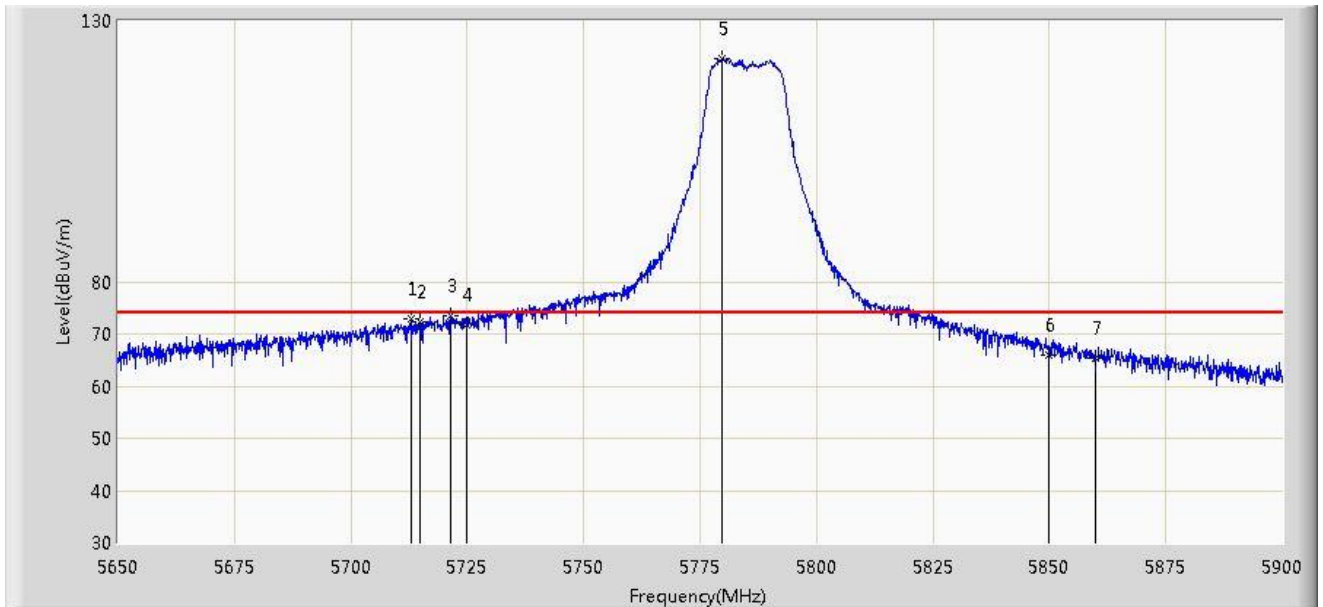


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.875	72.792	73.521	-1.208	74.000	-0.729	PK
2			5715.000	72.425	73.146	-1.575	74.000	-0.721	PK
3			5721.500	73.365	74.063	-4.835	78.200	-0.698	PK
4			5725.000	71.879	72.564	-6.321	78.200	-0.685	PK
5		*	5779.750	122.885	123.467	N/A	N/A	-0.582	PK
6			5850.000	65.923	66.406	-12.277	78.200	-0.482	PK
7			5860.000	65.454	65.931	-8.546	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5785MHz	

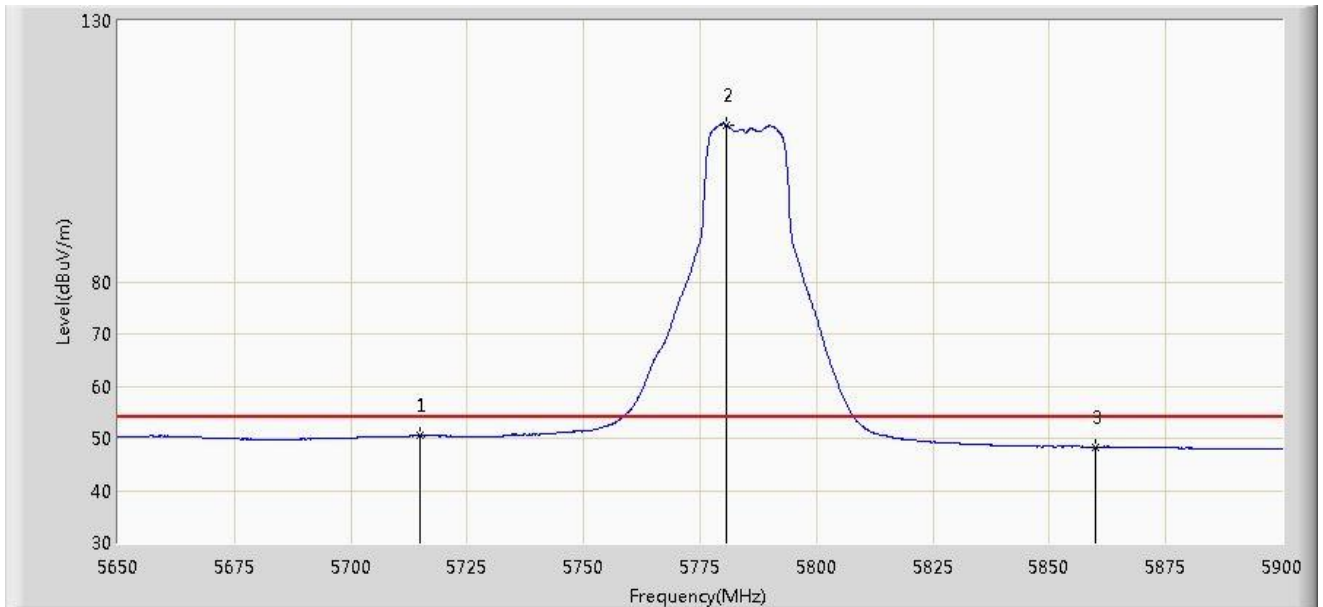


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.460	51.181	-3.540	54.000	-0.721	AV
2	X	*	5780.500	110.052	110.633	N/A	N/A	-0.581	AV
3			5860.000	48.366	48.843	-5.634	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5825MHz	

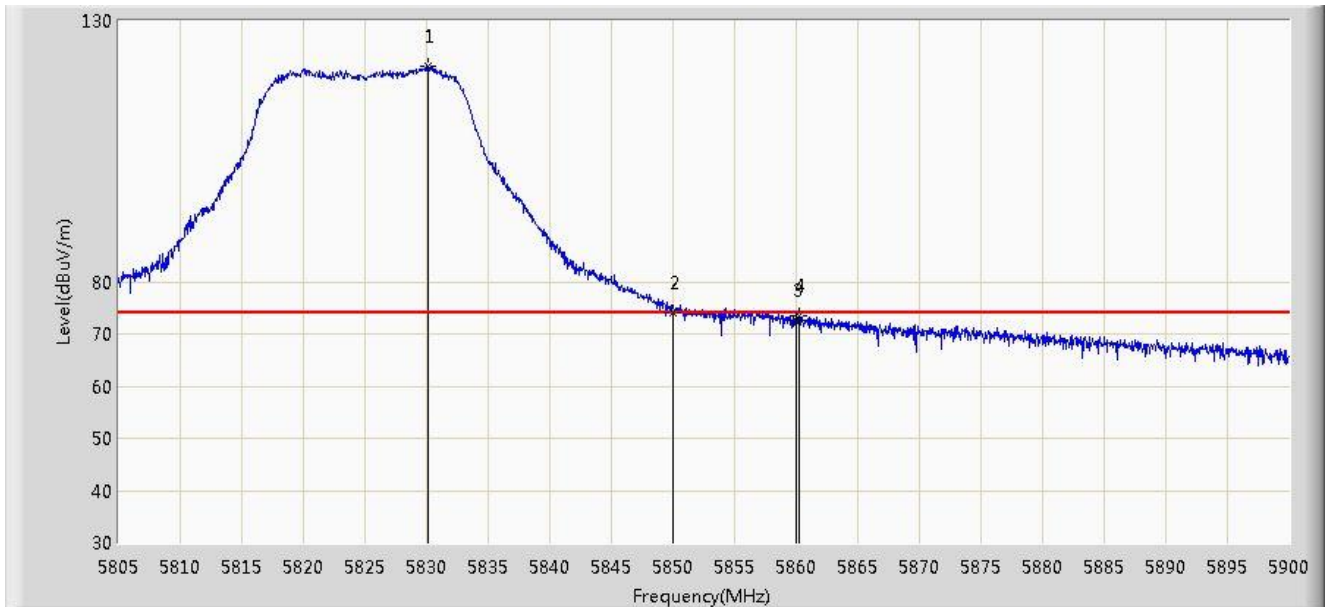


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.080	121.182	121.698	N/A	N/A	-0.517	PK
2			5850.000	73.933	74.416	-4.267	78.200	-0.482	PK
3			5860.000	72.585	73.062	-1.415	74.000	-0.477	PK
4			5860.243	73.462	73.939	-0.538	74.000	-0.477	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5825MHz	

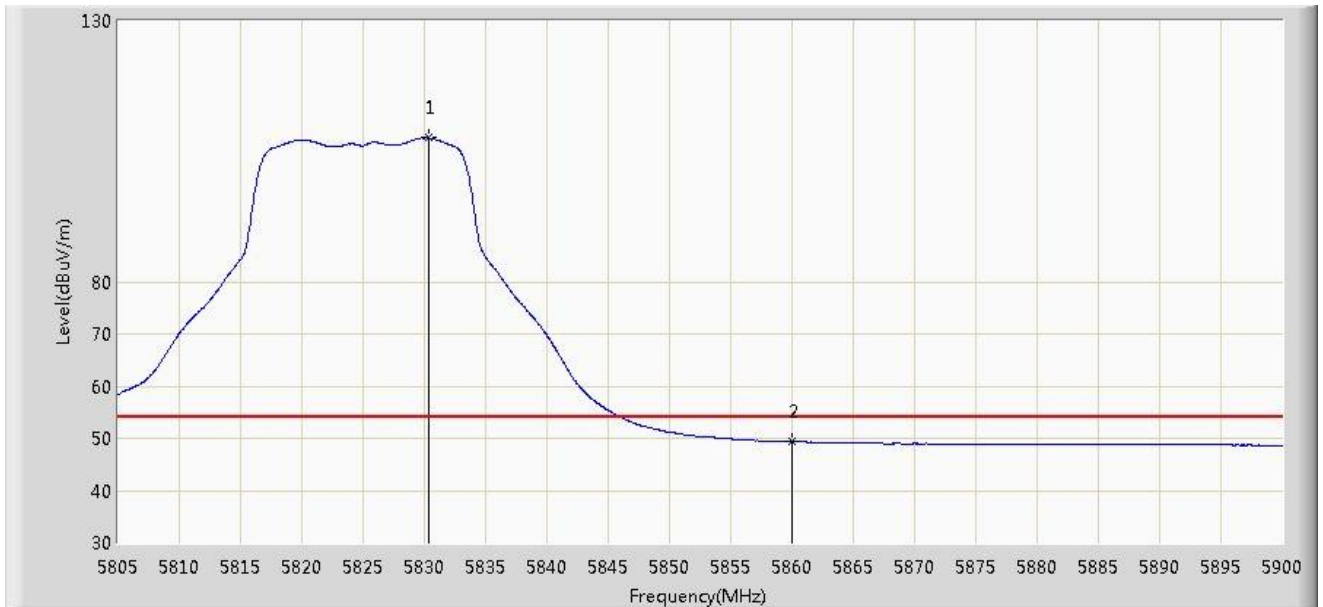


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.365	107.546	108.062	N/A	N/A	-0.516	AV
2			5860.000	49.297	49.774	-4.703	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5825MHz	

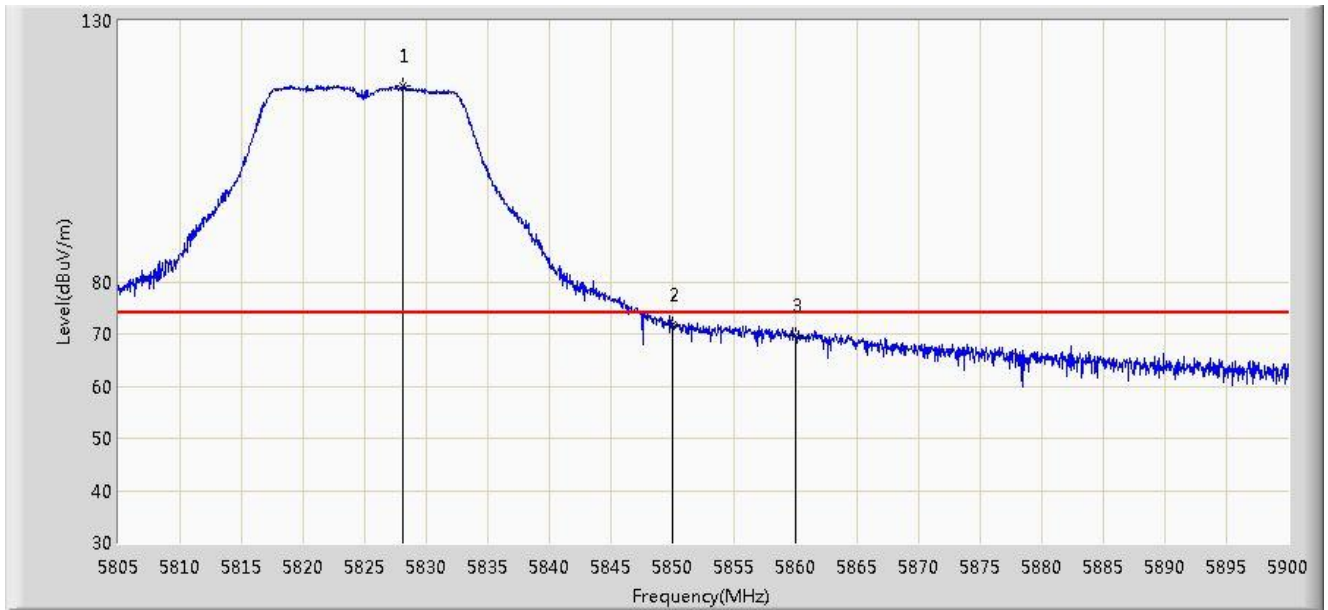


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.132	117.457	117.978	N/A	N/A	-0.520	PK
2			5850.000	71.712	72.195	-6.488	78.200	-0.482	PK
3			5860.000	69.578	70.055	-4.422	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at channel 5825MHz	

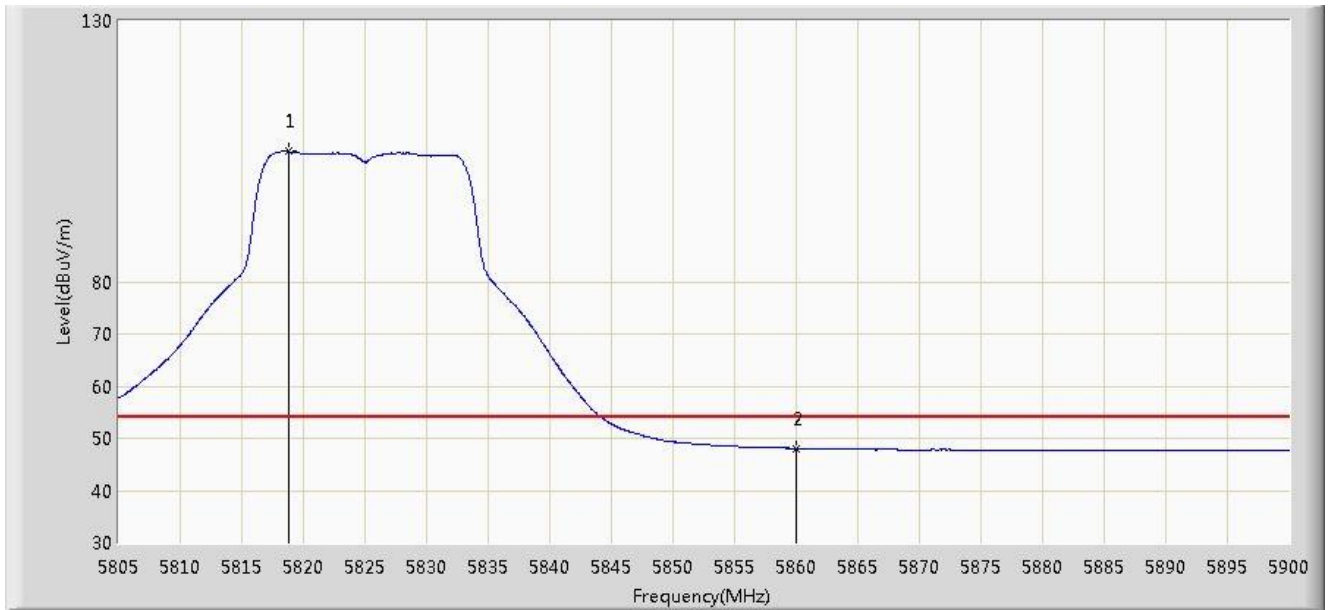


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.822	104.942	105.474	N/A	N/A	-0.532	AV
2			5860.000	48.083	48.560	-5.917	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

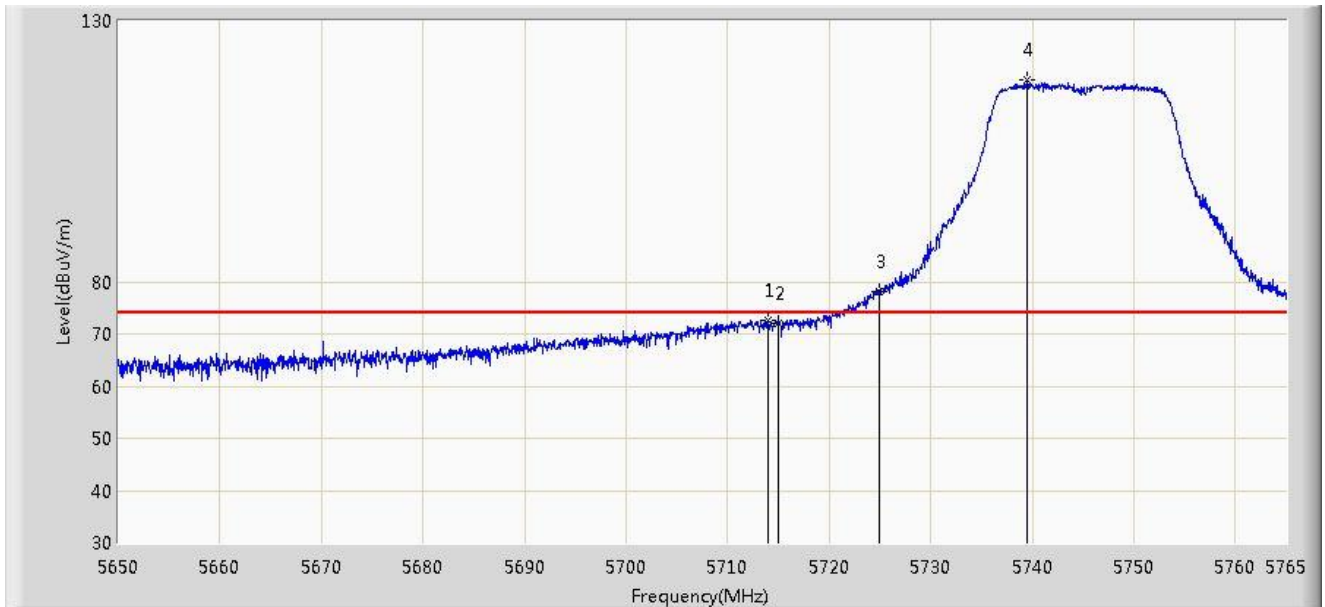


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.940	72.744	73.469	-1.256	74.000	-0.725	PK
2			5715.000	72.154	72.875	-1.846	74.000	-0.721	PK
3			5725.000	78.054	78.739	-0.146	78.200	-0.685	PK
4		*	5739.527	118.608	119.259	N/A	N/A	-0.652	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/28 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

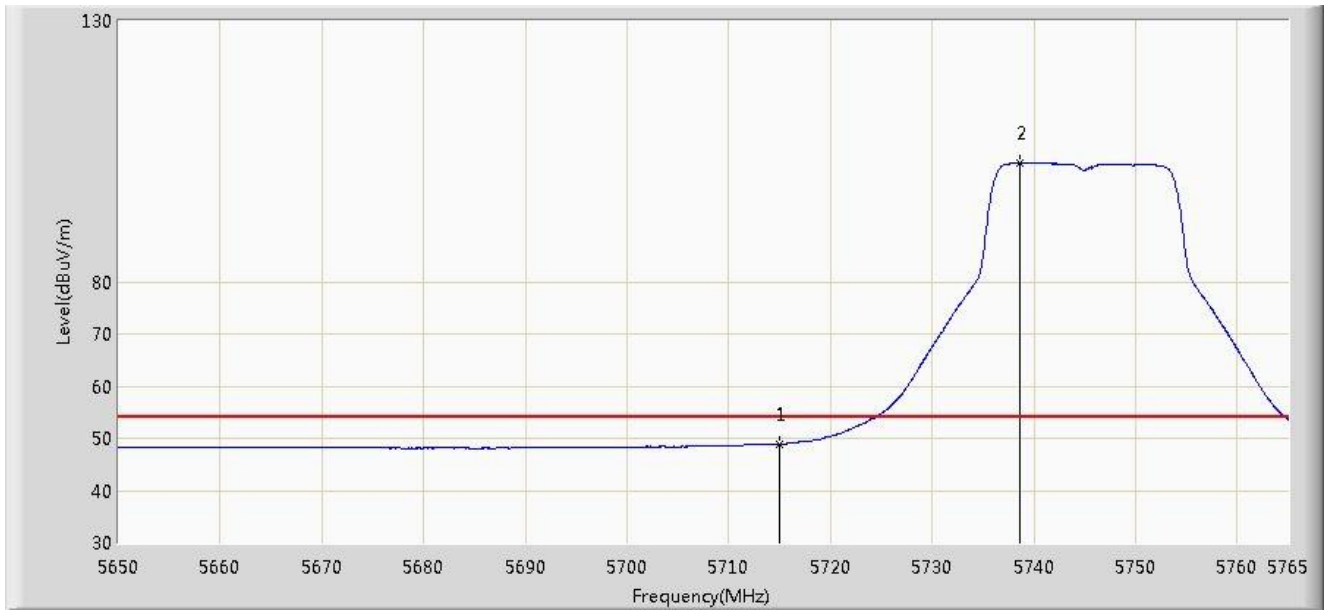


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.925	49.646	-5.075	54.000	-0.721	AV
2		*	5738.665	102.840	103.493	N/A	N/A	-0.653	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

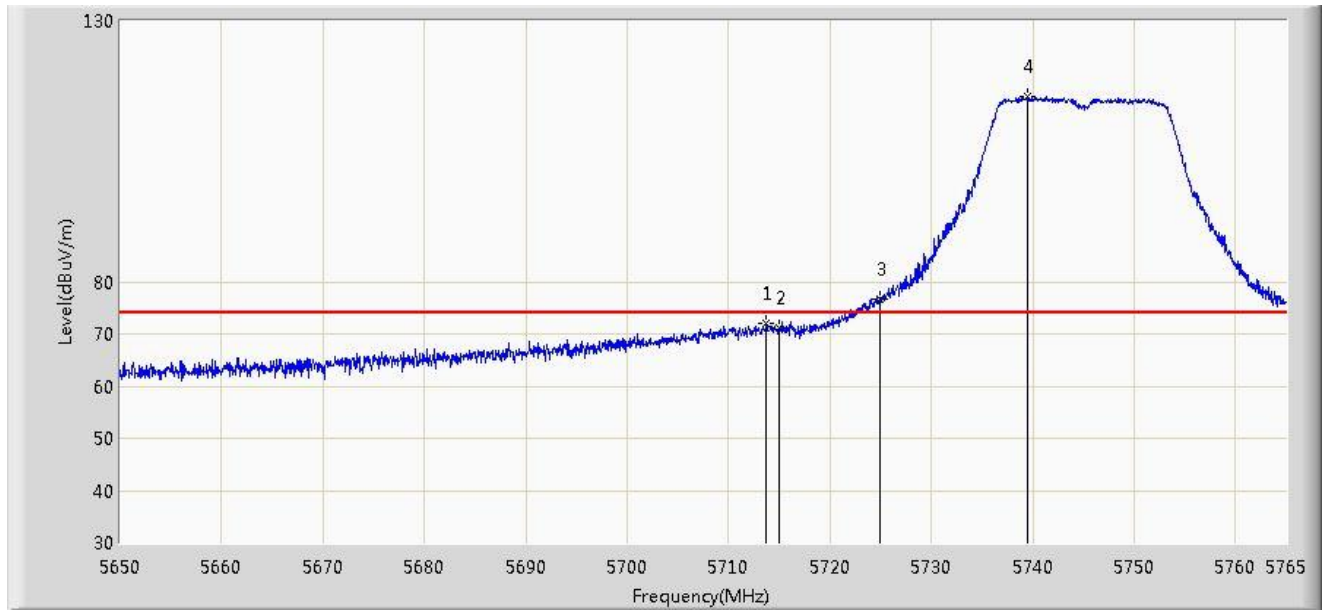


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.710	72.030	72.756	-1.970	74.000	-0.726	PK
2			5715.000	71.085	71.806	-2.915	74.000	-0.721	PK
3			5725.000	76.598	77.283	-1.602	78.200	-0.685	PK
4		*	5739.527	115.639	116.290	N/A	N/A	-0.652	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

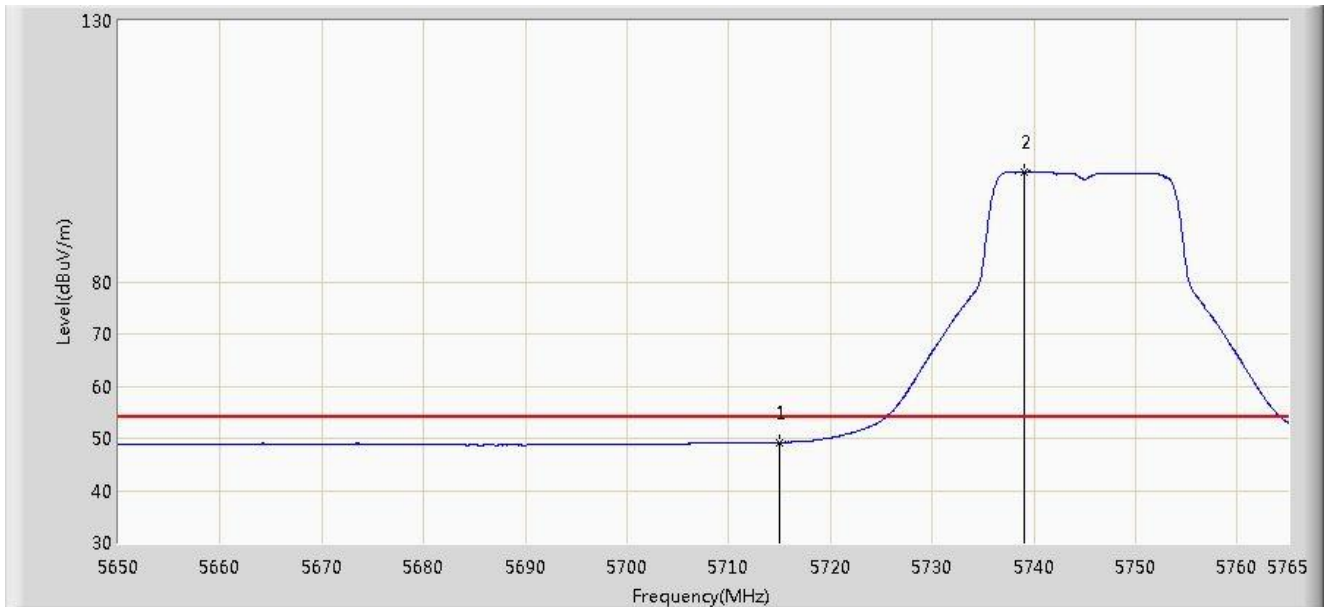


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.221	49.942	-4.779	54.000	-0.721	AV
2		*	5739.010	101.126	101.778	N/A	N/A	-0.653	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz	

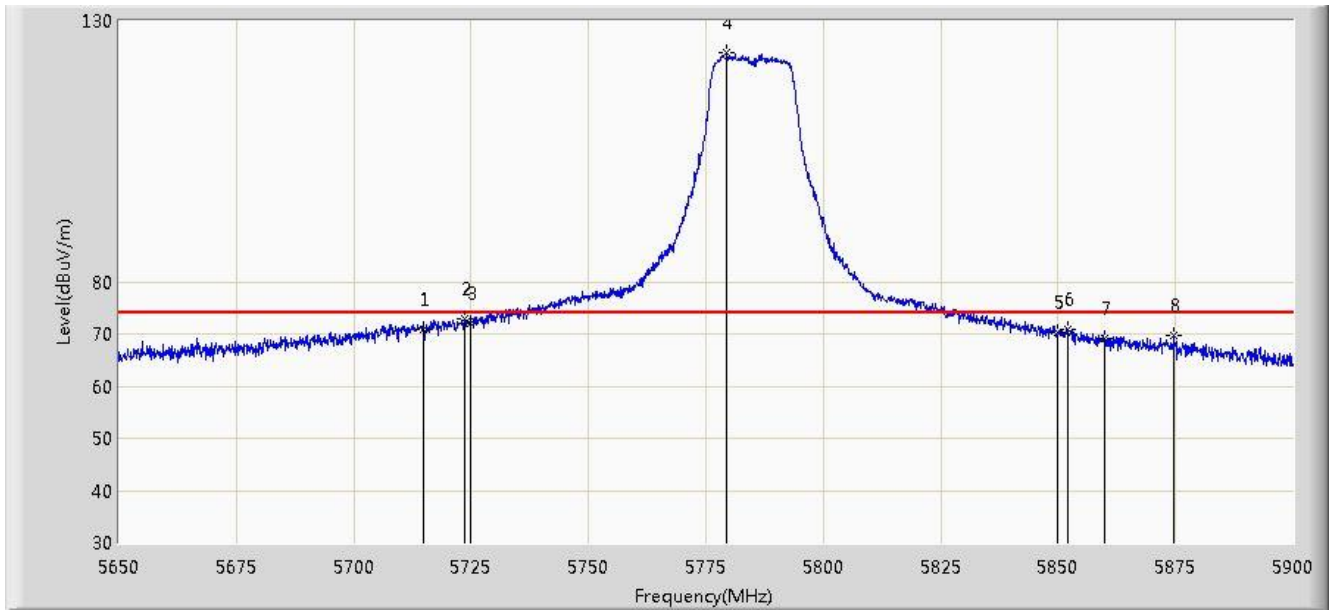


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	70.923	71.644	-3.077	74.000	-0.721	PK
2			5723.750	72.847	73.537	-5.353	78.200	-0.690	PK
3			5725.000	71.968	72.653	-6.232	78.200	-0.685	PK
4		*	5779.375	123.785	124.368	N/A	N/A	-0.583	PK
5			5850.000	70.262	70.745	-7.938	78.200	-0.482	PK
6			5852.125	70.918	71.399	-7.282	78.200	-0.482	PK
7			5860.000	69.046	69.523	-4.954	74.000	-0.477	PK
8			5874.625	69.667	70.116	-4.333	74.000	-0.449	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz	

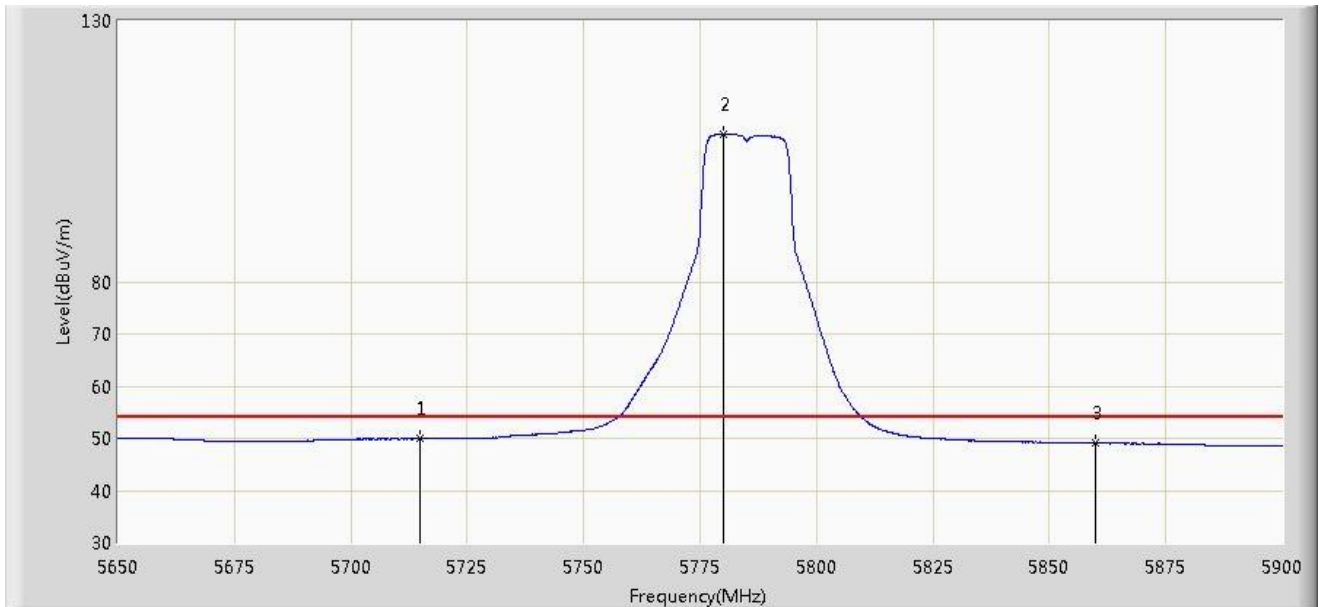


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.878	50.599	-4.122	54.000	-0.721	AV
2	X	*	5780.125	108.232	108.814	N/A	N/A	-0.582	AV
3			5860.000	49.037	49.514	-4.963	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz	

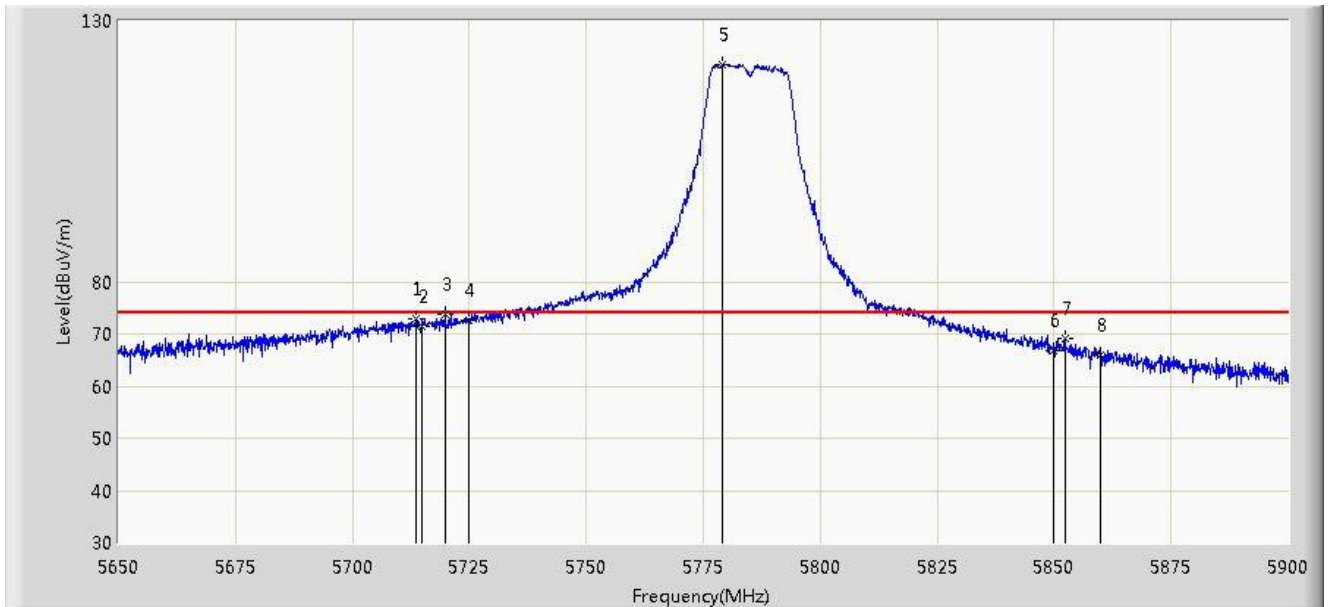


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.500	72.993	73.720	-1.007	74.000	-0.727	PK
2			5715.000	71.348	72.069	-6.852	74.000	-0.721	PK
3			5719.750	73.752	74.456	-4.448	78.200	-0.704	PK
4			5725.000	72.695	73.380	-1.305	78.200	-0.685	PK
5		*	5779.000	121.630	122.213	N/A	N/A	-0.584	PK
6			5850.000	66.914	67.397	-11.286	78.200	-0.482	PK
7			5852.250	69.086	69.567	-9.114	78.200	-0.481	PK
8			5860.000	65.889	66.366	-8.111	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz	

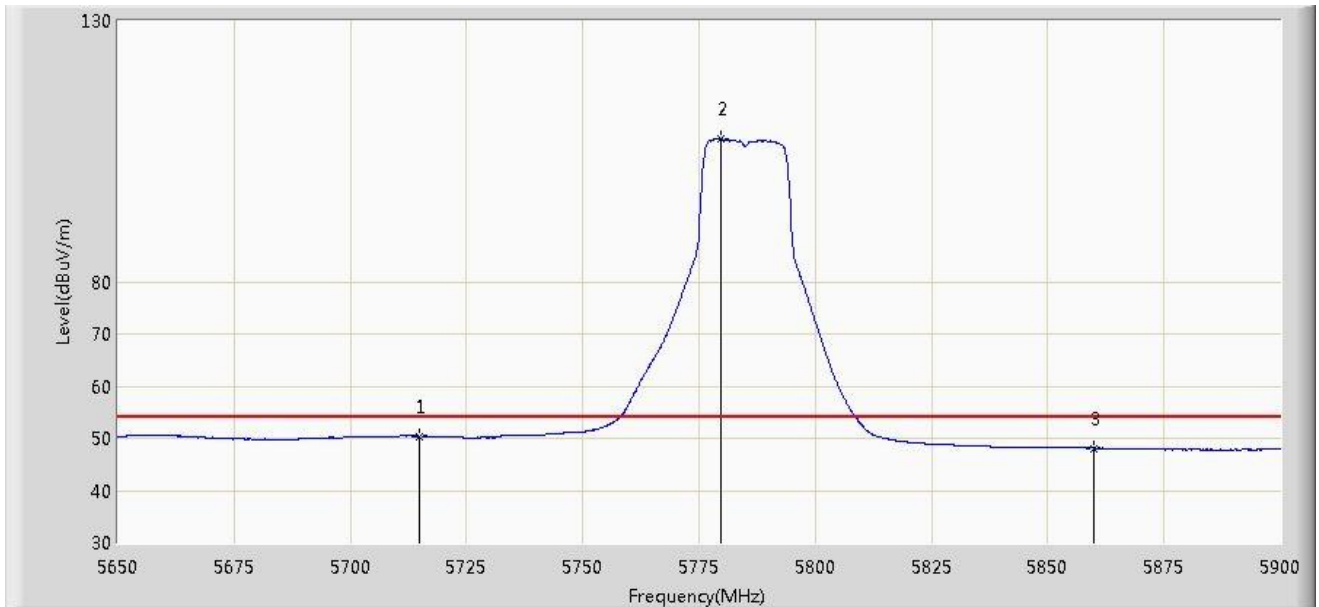


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.421	51.142	-3.579	54.000	-0.721	AV
2		*	5779.750	107.305	107.887	N/A	N/A	-0.582	AV
3			5860.000	48.099	48.576	-5.901	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

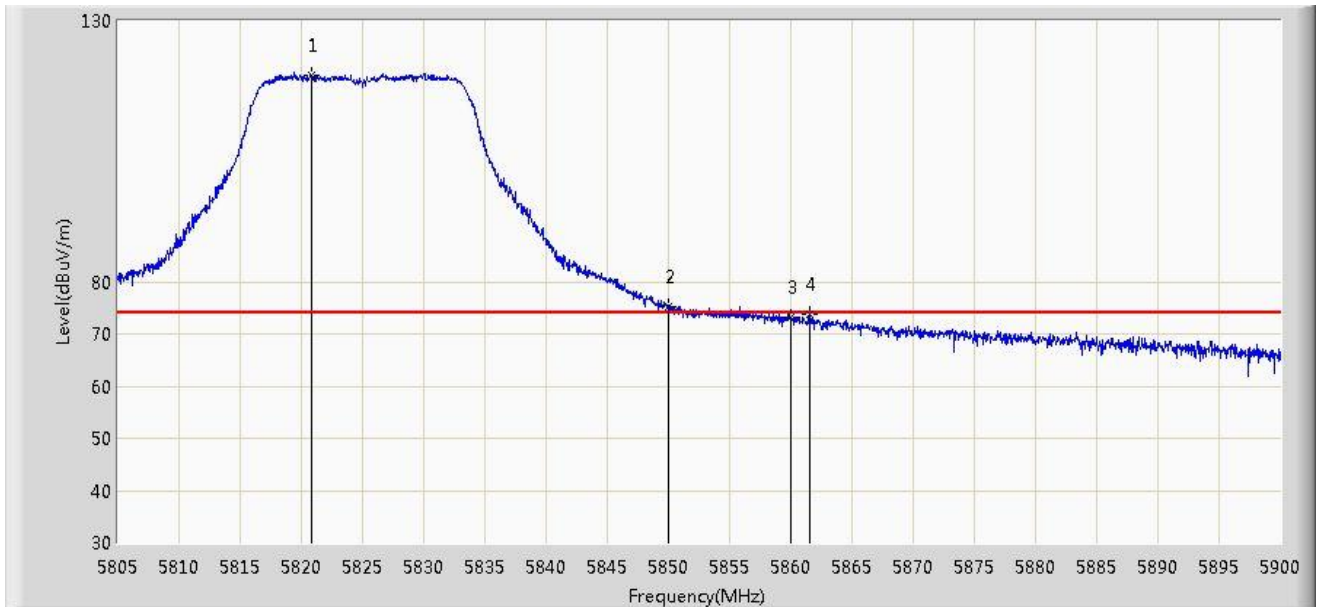


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.865	119.641	120.171	N/A	N/A	-0.530	PK
2			5850.000	75.189	75.672	-3.011	78.200	-0.482	PK
3			5860.000	73.235	73.712	-0.765	74.000	-0.477	PK
4			5861.525	73.674	74.151	-0.326	74.000	-0.476	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/28 - 20:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

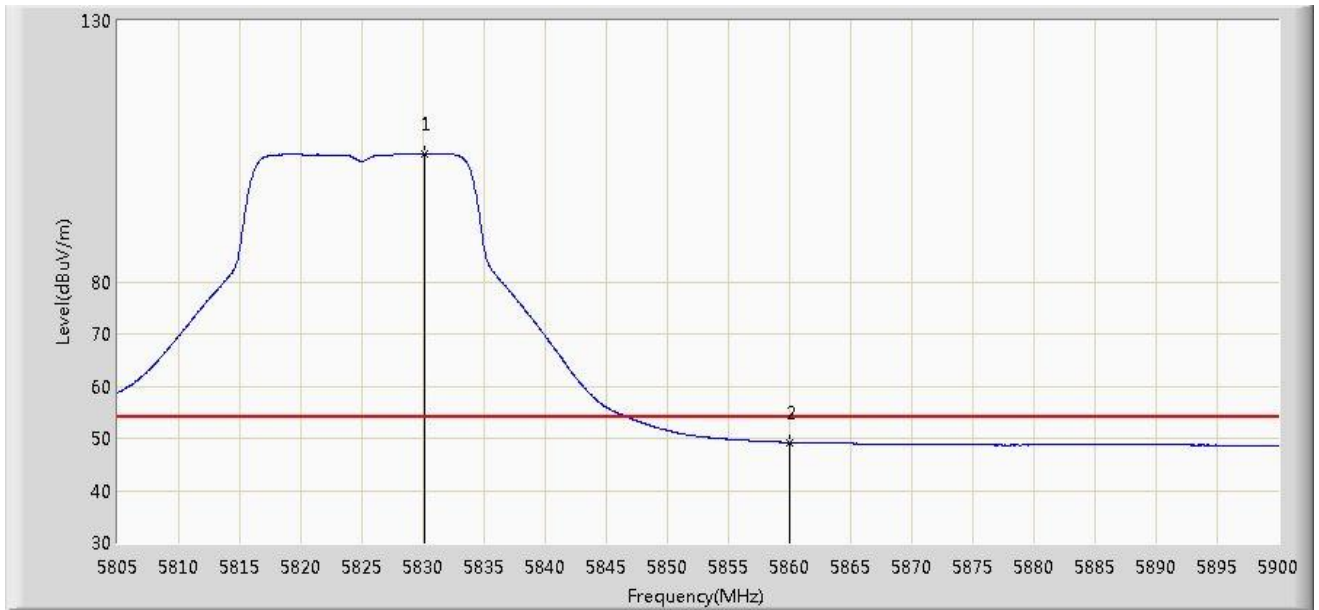


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.080	104.487	105.003	N/A	N/A	-0.517	AV
2			5860.000	49.212	49.689	-4.788	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

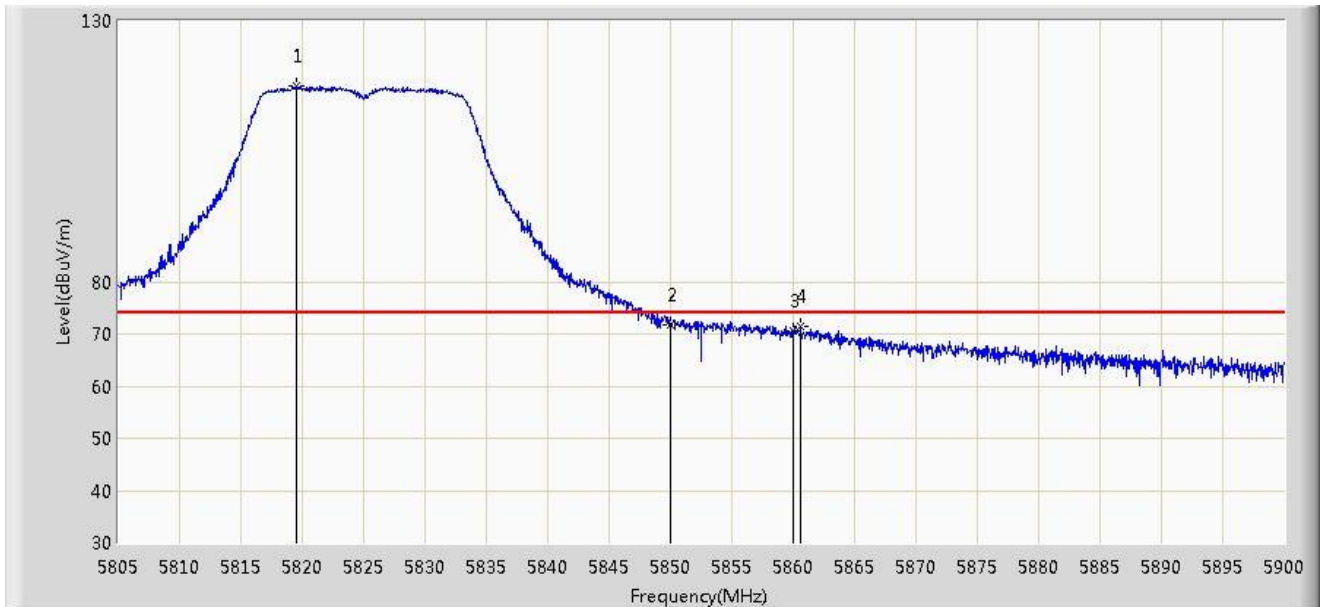


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.535	117.540	118.071	N/A	N/A	-0.532	PK
2			5850.000	71.676	72.159	-6.524	78.200	-0.482	PK
3			5860.000	70.447	70.924	-3.553	74.000	-0.477	PK
4			5860.623	71.492	71.969	-2.508	74.000	-0.477	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

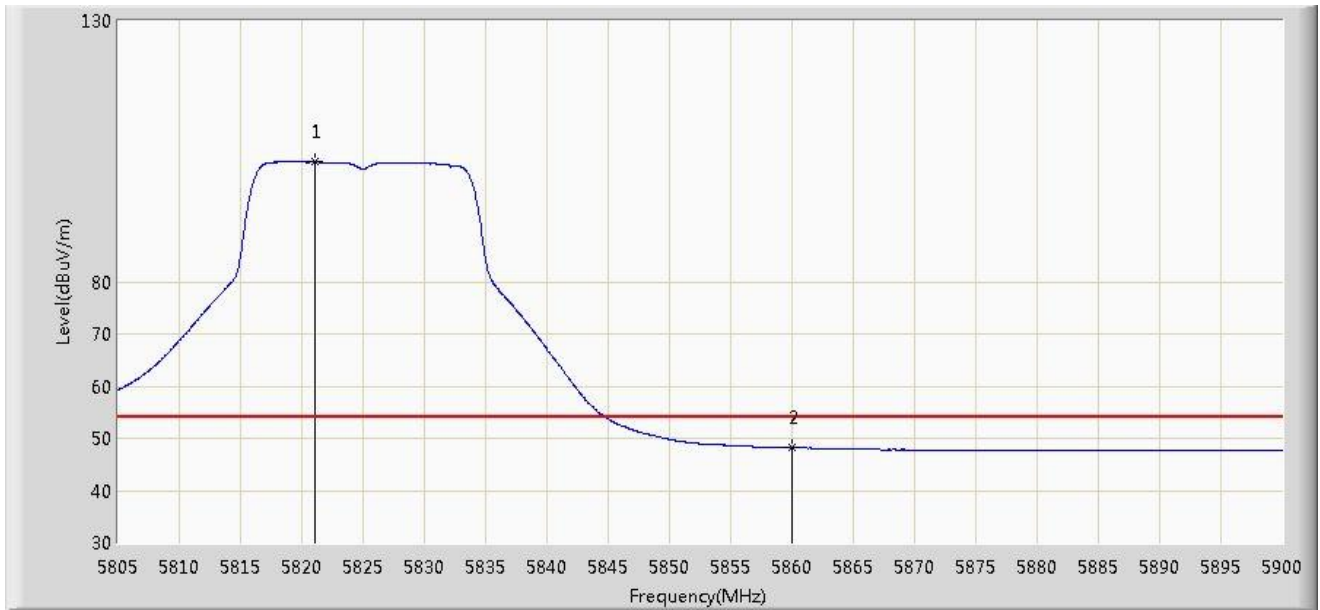


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.055	102.945	103.474	N/A	N/A	-0.529	AV
2			5860.000	48.146	48.623	-5.854	54.000	-0.477	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

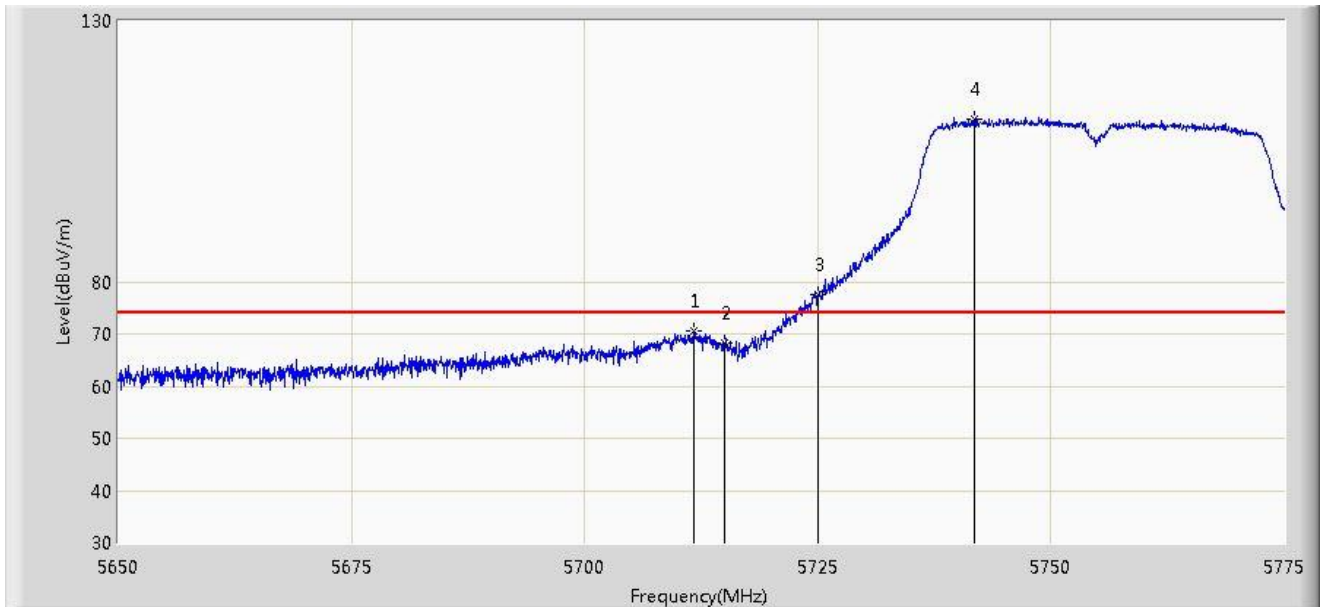


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.750	70.614	71.347	-3.386	74.000	-0.733	PK
2			5715.000	68.316	69.037	-5.684	74.000	-0.721	PK
3			5725.000	77.631	78.316	-0.569	78.200	-0.685	PK
4		*	5741.750	111.245	111.892	N/A	N/A	-0.647	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

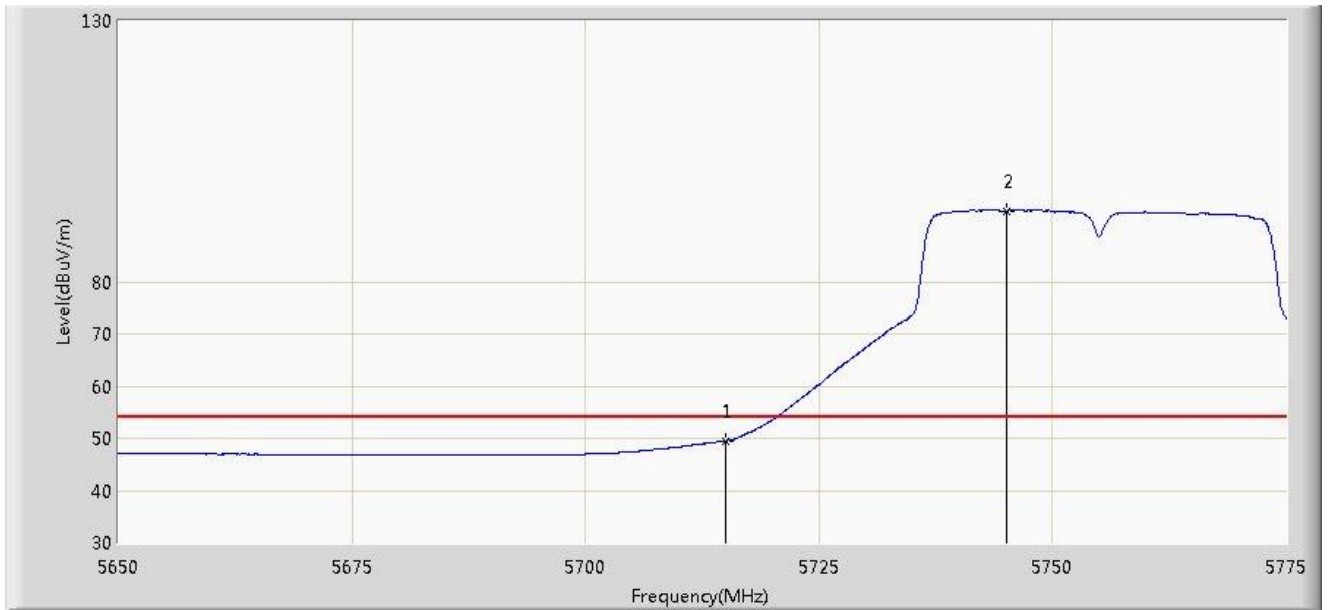


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.498	50.219	-4.502	54.000	-0.721	AV
2		*	5745.125	93.520	94.161	N/A	N/A	-0.640	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

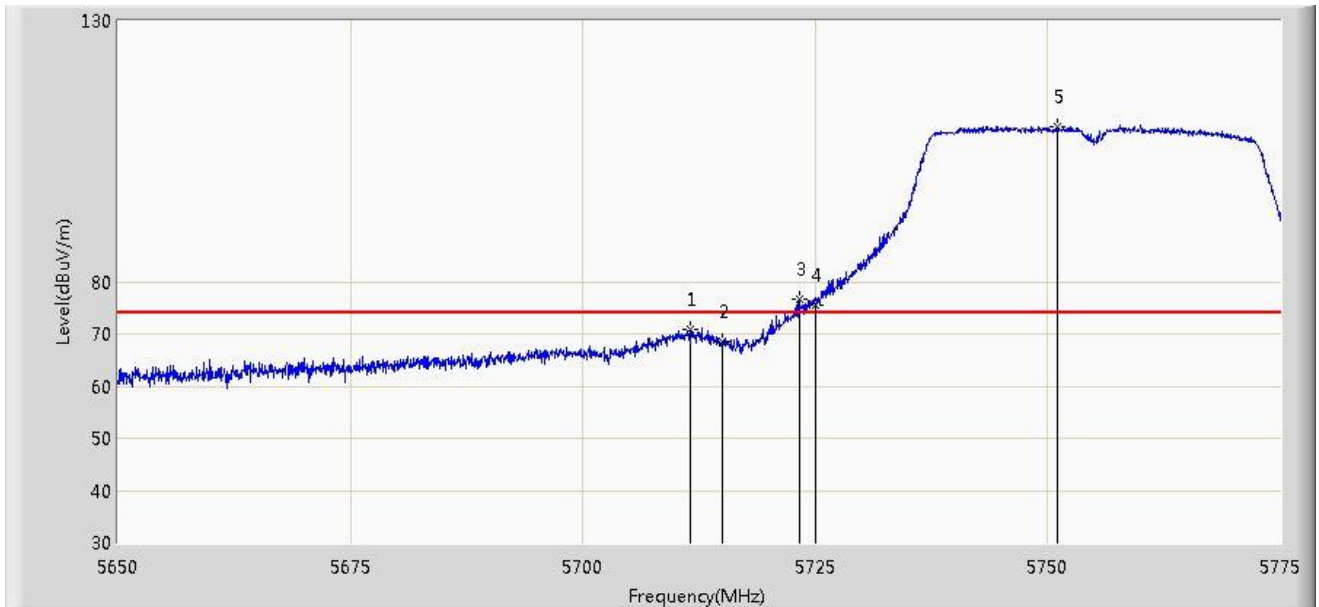


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.562	70.958	71.692	-3.042	74.000	-0.734	PK
2			5715.000	68.534	69.255	-5.466	74.000	-0.721	PK
3			5723.250	76.771	77.462	-1.429	78.200	-0.691	PK
4			5725.000	75.508	76.193	-2.692	78.200	-0.685	PK
5		*	5751.000	109.672	110.302	N/A	N/A	-0.630	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

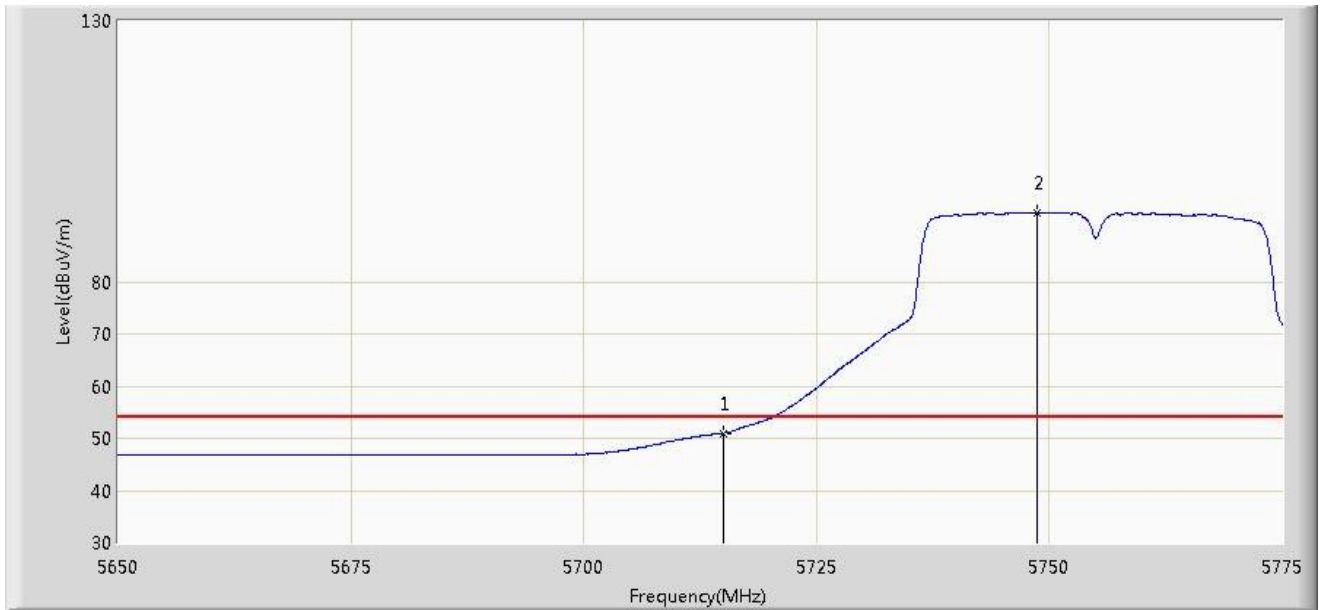


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.970	51.691	-3.030	54.000	-0.721	AV
2		*	5748.687	93.217	93.852	N/A	N/A	-0.634	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

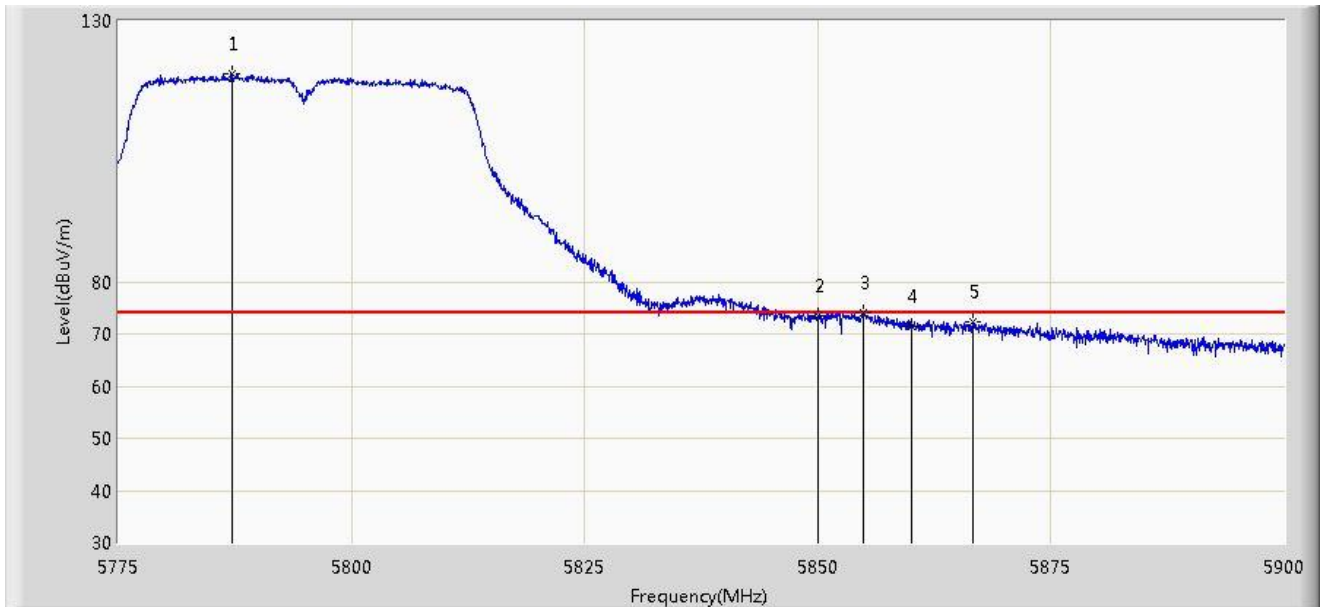


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.250	119.940	120.510	N/A	N/A	-0.571	PK
2			5850.000	73.345	73.828	-4.855	78.200	-0.482	PK
3			5854.875	73.979	74.459	-4.221	78.200	-0.480	PK
4			5860.000	71.369	71.846	-2.631	74.000	-0.477	PK
5			5866.625	72.429	72.895	-1.571	74.000	-0.466	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/28 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

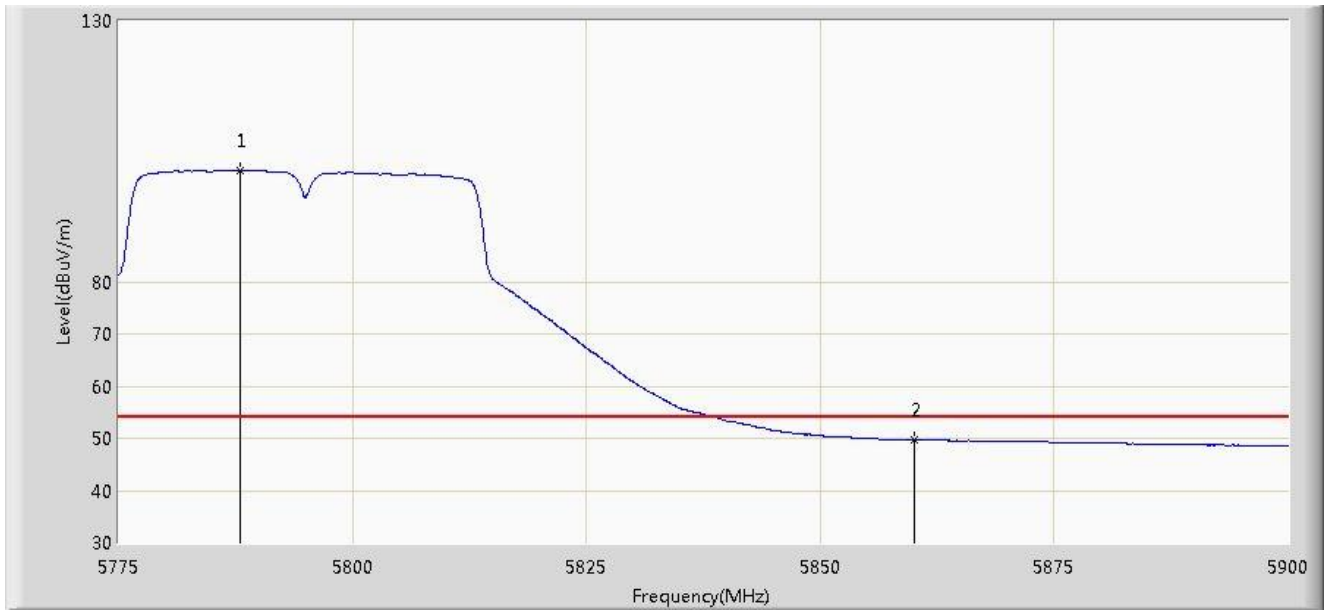


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.937	101.337	101.906	N/A	N/A	-0.570	AV
2			5860.000	49.704	50.181	-4.296	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

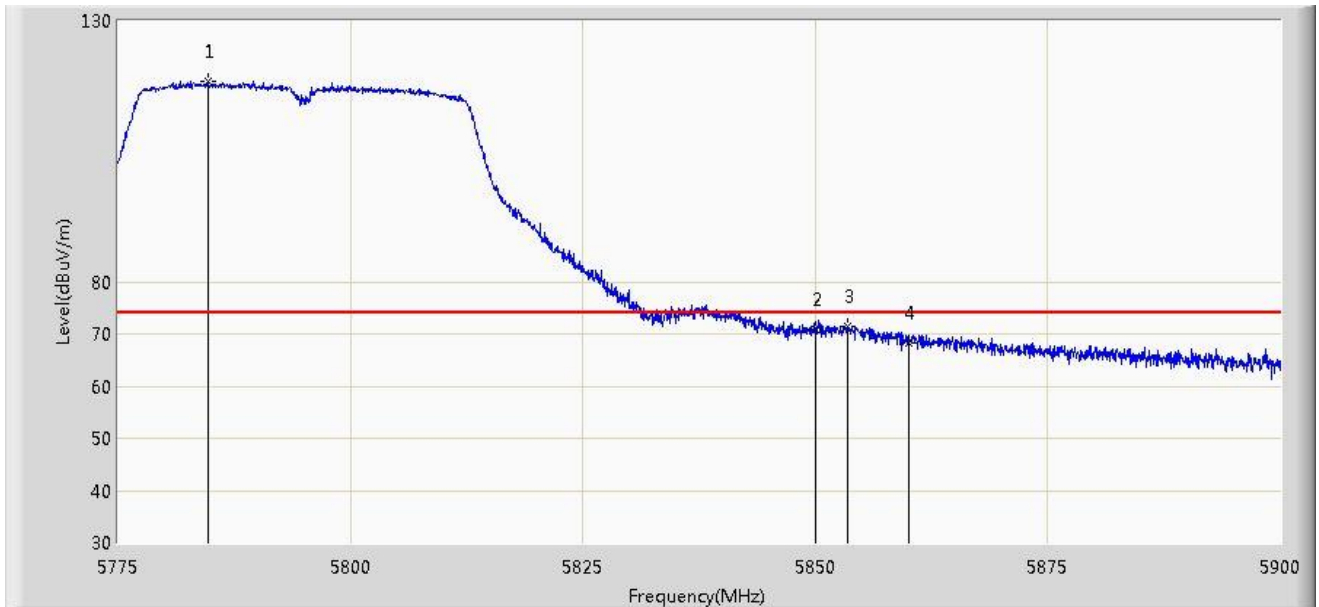


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.687	118.287	118.861	N/A	N/A	-0.574	PK
2			5850.000	70.909	71.392	-7.291	78.200	-0.482	PK
3			5853.437	71.510	71.991	-6.690	78.200	-0.480	PK
4			5860.000	68.323	68.800	-5.677	74.000	-0.477	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

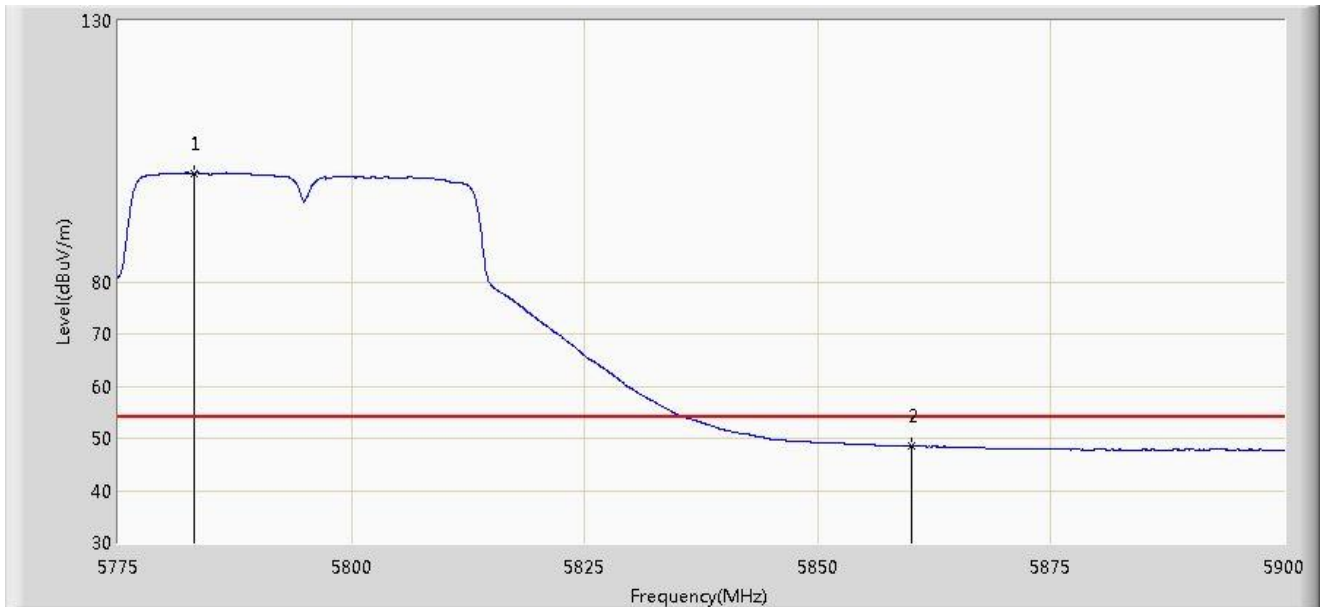


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.125	100.815	101.392	N/A	N/A	-0.576	AV
2			5860.000	48.531	49.008	-5.469	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

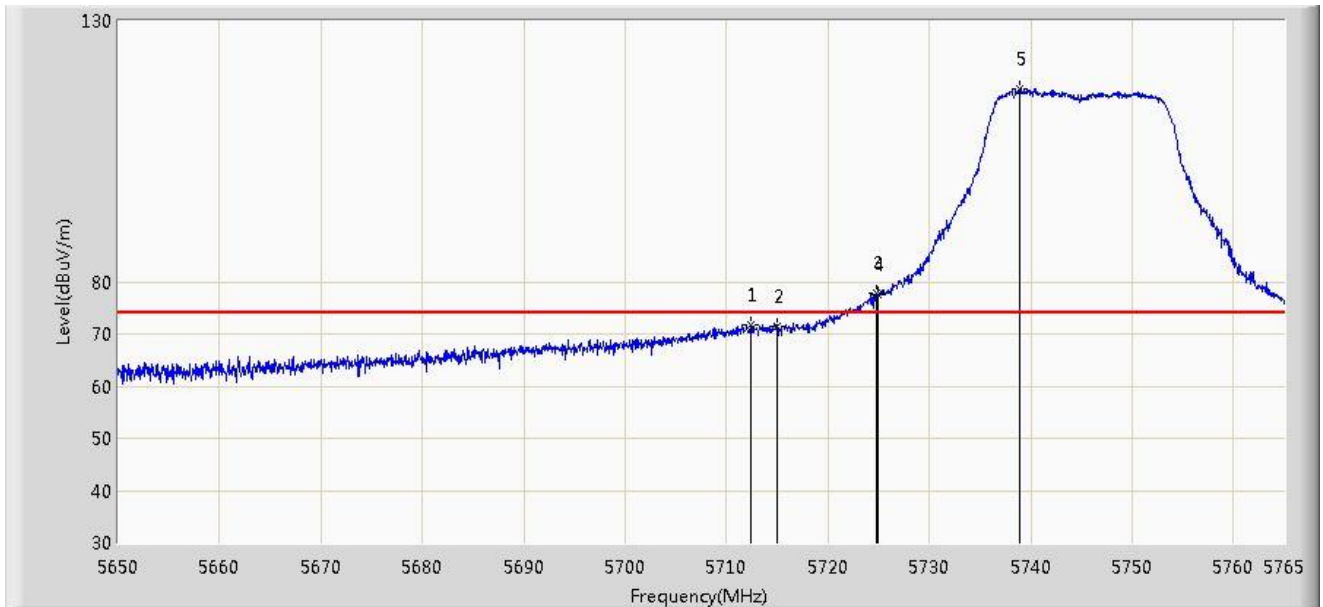


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.445	71.866	72.596	-2.134	74.000	-0.731	PK
2			5715.000	71.432	72.153	-2.568	74.000	-0.721	PK
3			5724.808	77.726	78.412	-0.474	78.200	-0.686	PK
4			5725.000	77.458	78.143	-0.742	78.200	-0.685	PK
5		*	5738.953	116.966	117.618	N/A	N/A	-0.653	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

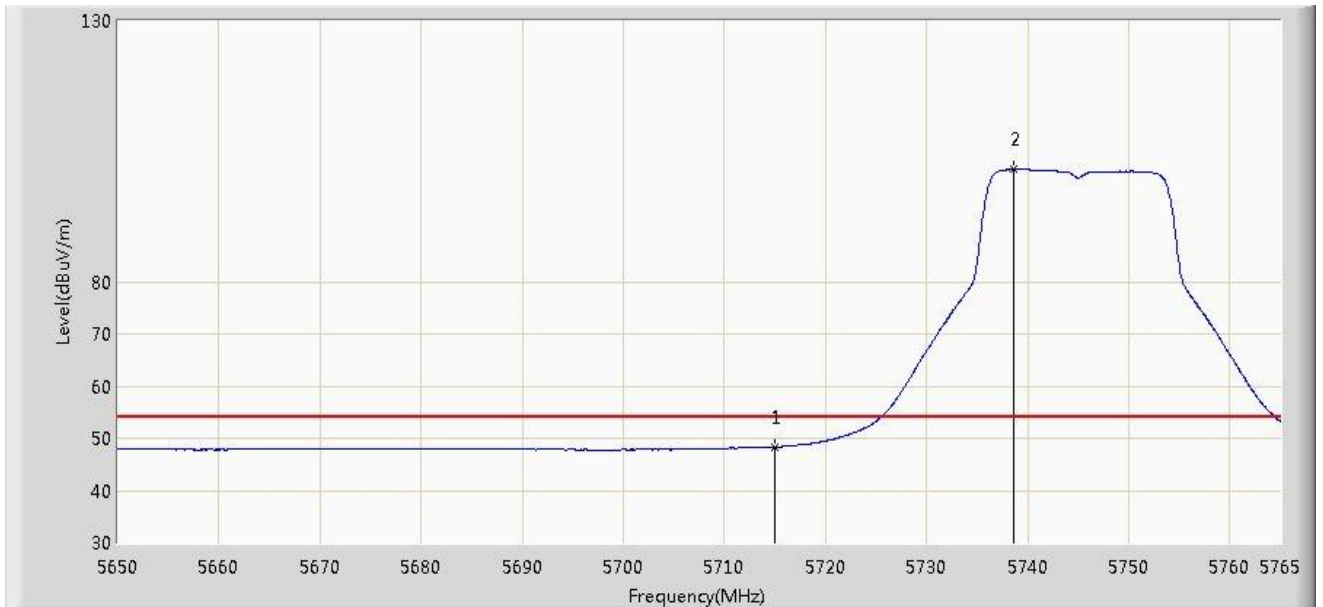


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.303	49.024	-5.697	54.000	-0.721	AV
2		*	5738.665	101.551	102.204	N/A	N/A	-0.653	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

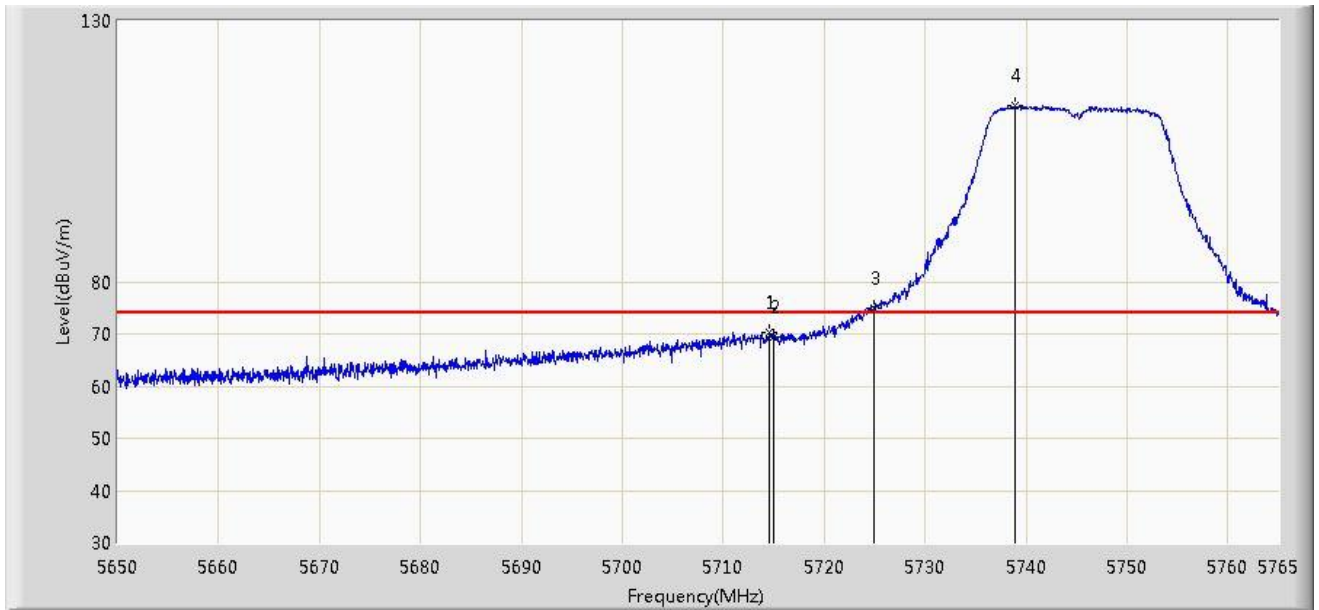


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.630	70.365	71.088	-3.635	74.000	-0.723	PK
2			5715.000	69.528	70.249	-4.472	74.000	-0.721	PK
3			5725.000	75.007	75.692	-3.193	78.200	-0.685	PK
4		*	5738.953	113.895	114.547	N/A	N/A	-0.653	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

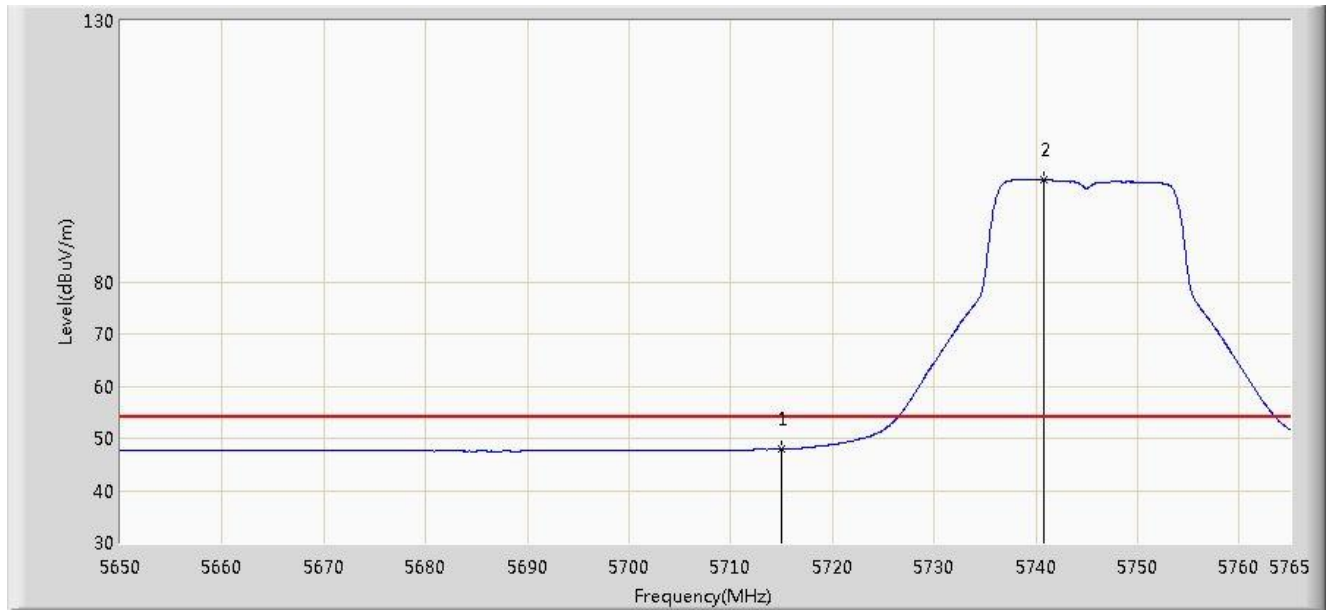


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.951	48.672	-6.049	54.000	-0.721	AV
2		*	5740.792	99.426	100.075	N/A	N/A	-0.649	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5785MHz	

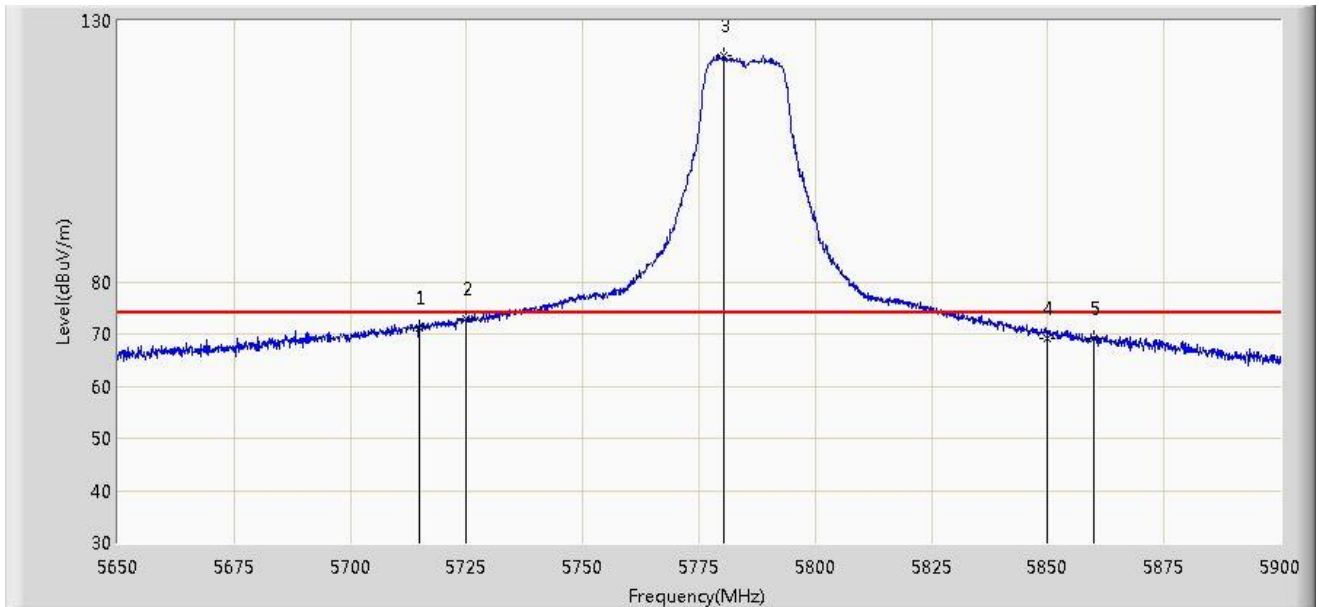


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	71.287	72.008	-2.713	74.000	-0.721	PK
2			5725.000	72.842	73.527	-5.358	78.200	-0.685	PK
3		*	5780.375	123.356	123.937	N/A	N/A	-0.581	PK
4			5850.000	69.182	69.665	-9.018	78.200	-0.482	PK
5			5860.000	69.210	69.687	-4.790	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 10:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5785MHz	

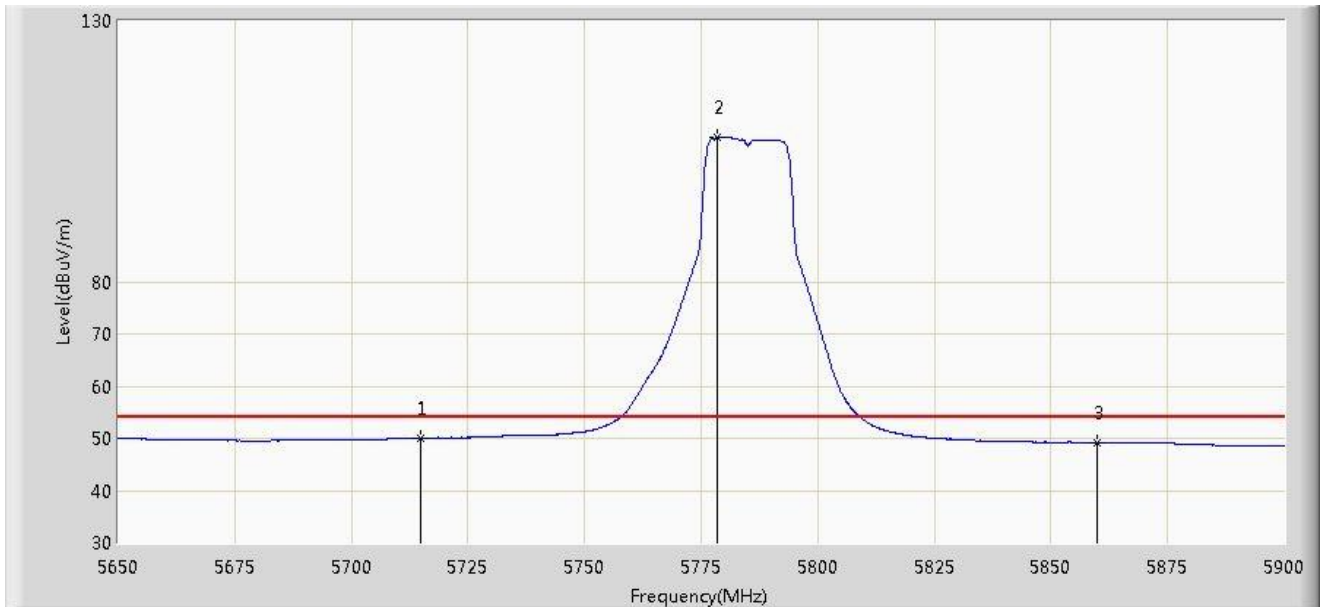


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.066	50.787	-3.934	54.000	-0.721	AV
2		*	5778.500	107.731	108.315	N/A	N/A	-0.584	AV
3			5860.000	49.132	49.609	-4.868	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5785MHz	

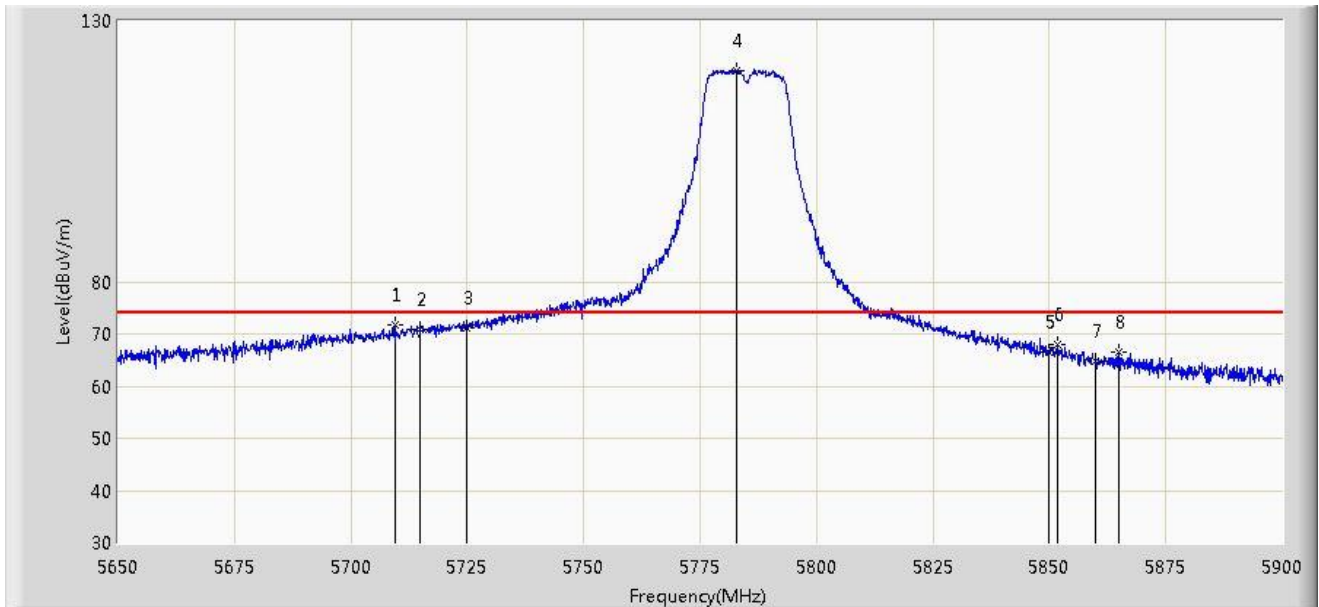


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5709.375	71.785	72.527	-2.215	74.000	-0.741	PK
2			5715.000	70.861	71.582	-3.139	74.000	-0.721	PK
3			5725.000	71.260	71.945	-6.940	78.200	-0.685	PK
4		*	5782.875	120.566	121.143	N/A	N/A	-0.578	PK
5			5850.000	66.501	66.984	-11.699	78.200	-0.482	PK
6			5851.750	67.908	68.390	-10.292	78.200	-0.481	PK
7			5860.000	64.870	65.347	-9.130	74.000	-0.477	PK
8			5865.000	66.664	67.134	-7.336	74.000	-0.470	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5785MHz	

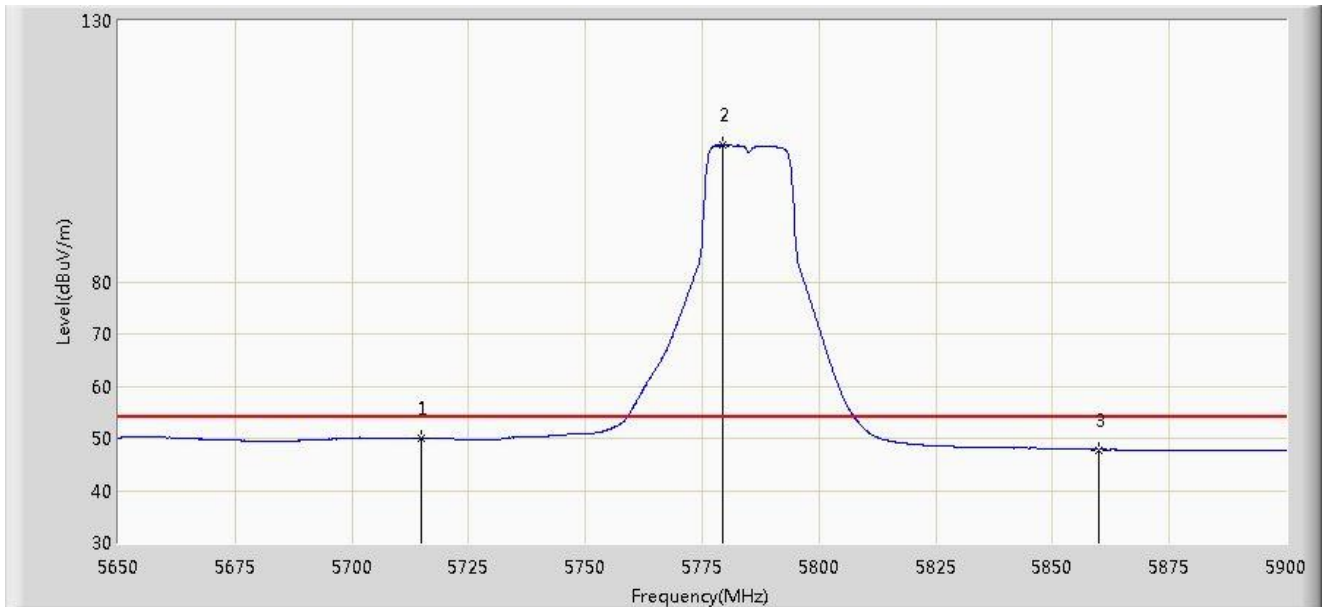


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.986	50.707	-4.014	54.000	-0.721	AV
2		*	5779.375	106.154	106.737	N/A	N/A	-0.583	AV
3			5860.000	47.821	48.298	-6.179	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

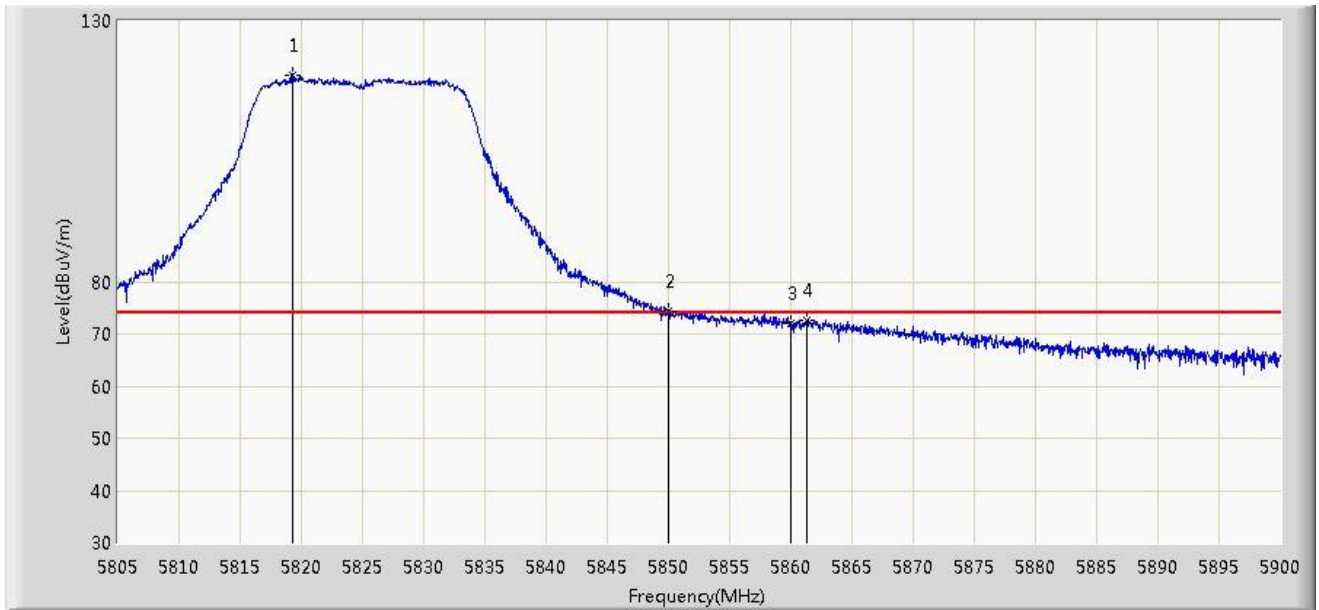


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.297	119.669	120.200	N/A	N/A	-0.531	PK
2			5850.000	74.336	74.819	-3.864	78.200	-0.482	PK
3			5860.000	71.976	72.453	-2.024	74.000	-0.477	PK
4			5861.288	72.710	73.187	-1.290	74.000	-0.477	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

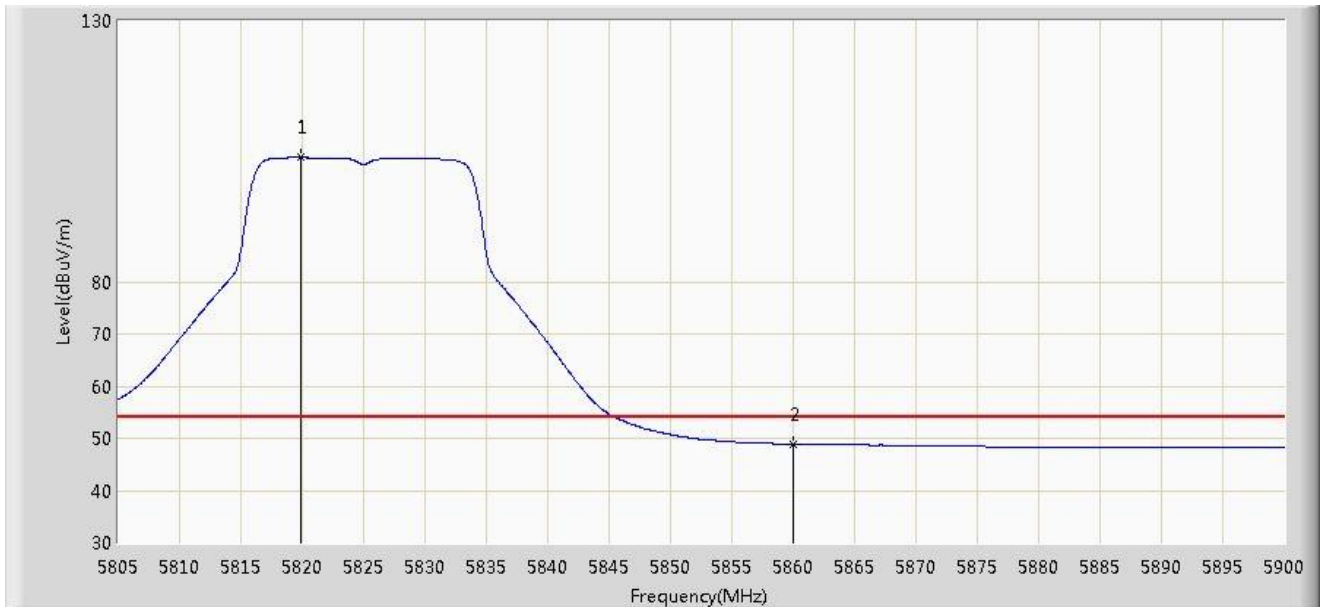


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	103.859	104.390	N/A	N/A	-0.531	AV
2			5860.000	48.900	49.377	-5.100	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

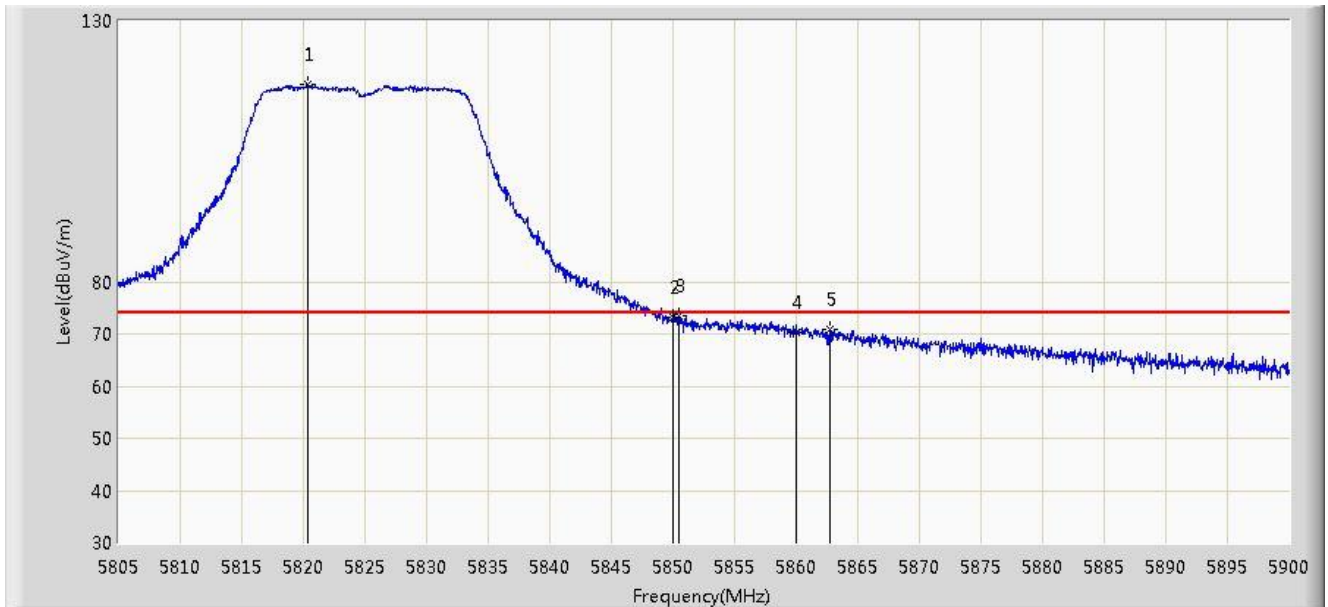


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.342	117.851	118.381	N/A	N/A	-0.531	PK
2			5850.000	73.265	73.748	-4.935	78.200	-0.482	PK
3			5850.505	73.567	74.049	-4.633	78.200	-0.482	PK
4			5860.000	70.203	70.680	-3.797	74.000	-0.477	PK
5			5862.760	70.933	71.408	-3.067	74.000	-0.474	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

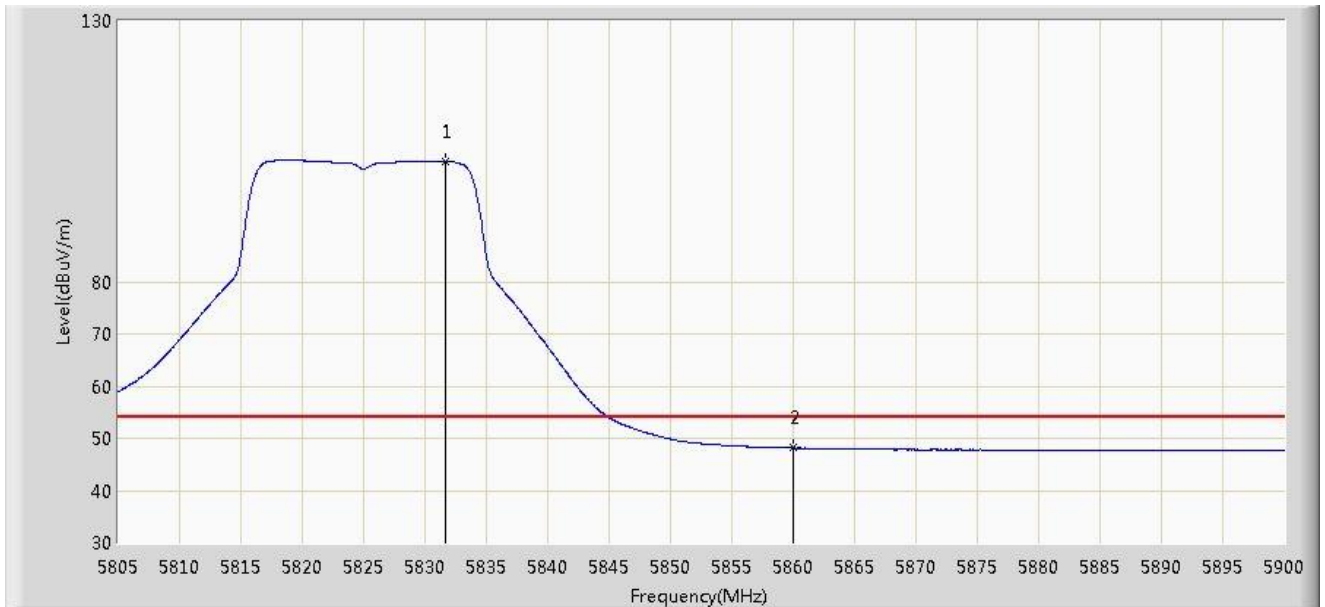


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.695	103.163	103.676	N/A	N/A	-0.513	AV
2			5860.000	48.127	48.604	-5.873	54.000	-0.477	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

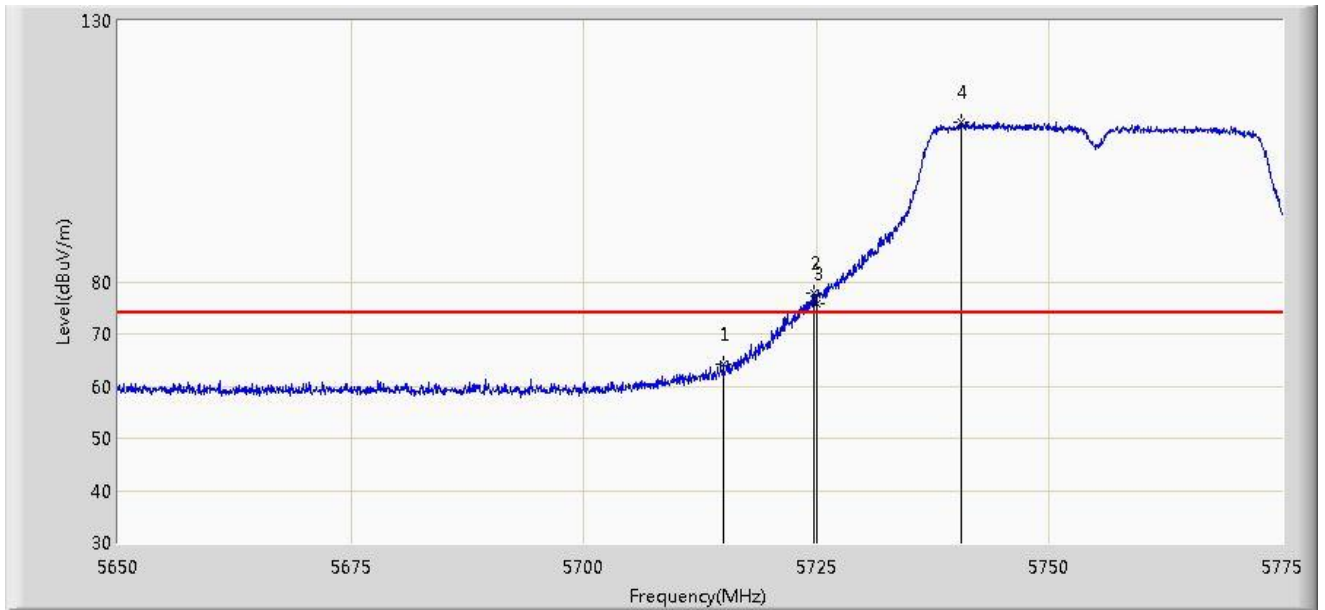


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.170	64.891	-9.830	74.000	-0.721	PK
2			5724.687	77.717	78.403	-0.483	78.200	-0.686	PK
3			5725.000	75.891	76.576	-2.309	78.200	-0.685	PK
4		*	5740.500	110.522	111.171	N/A	N/A	-0.650	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/29 - 10:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

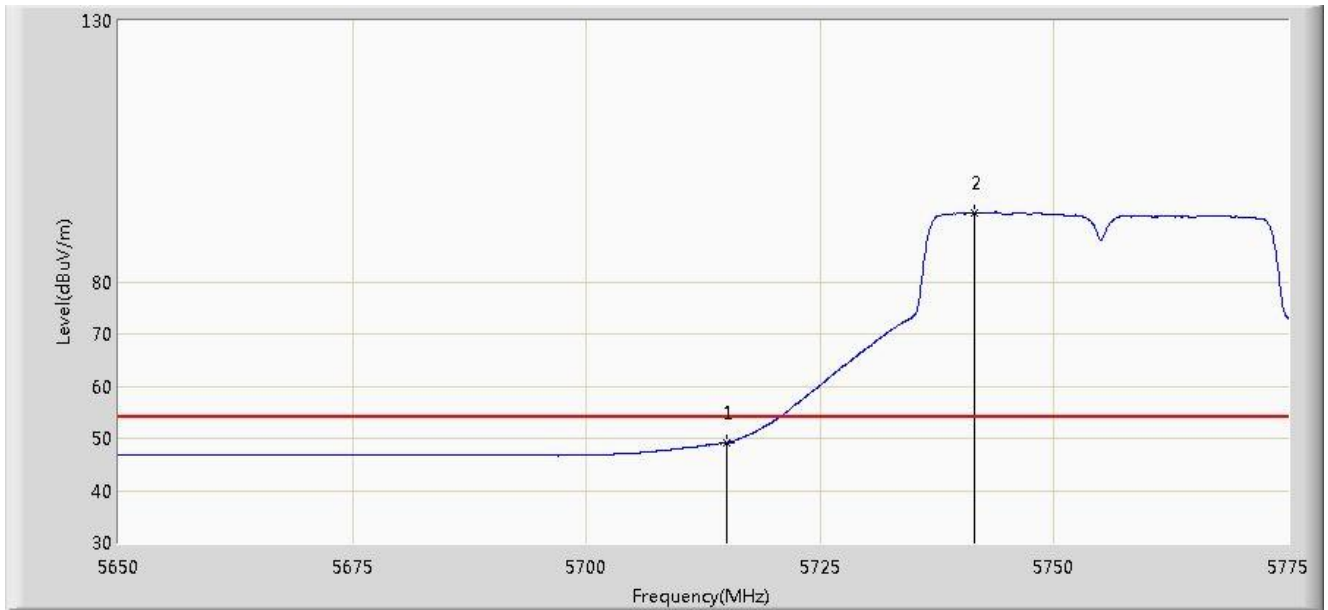


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.194	49.915	-4.806	54.000	-0.721	AV
2		*	5741.500	93.235	93.883	N/A	N/A	-0.647	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

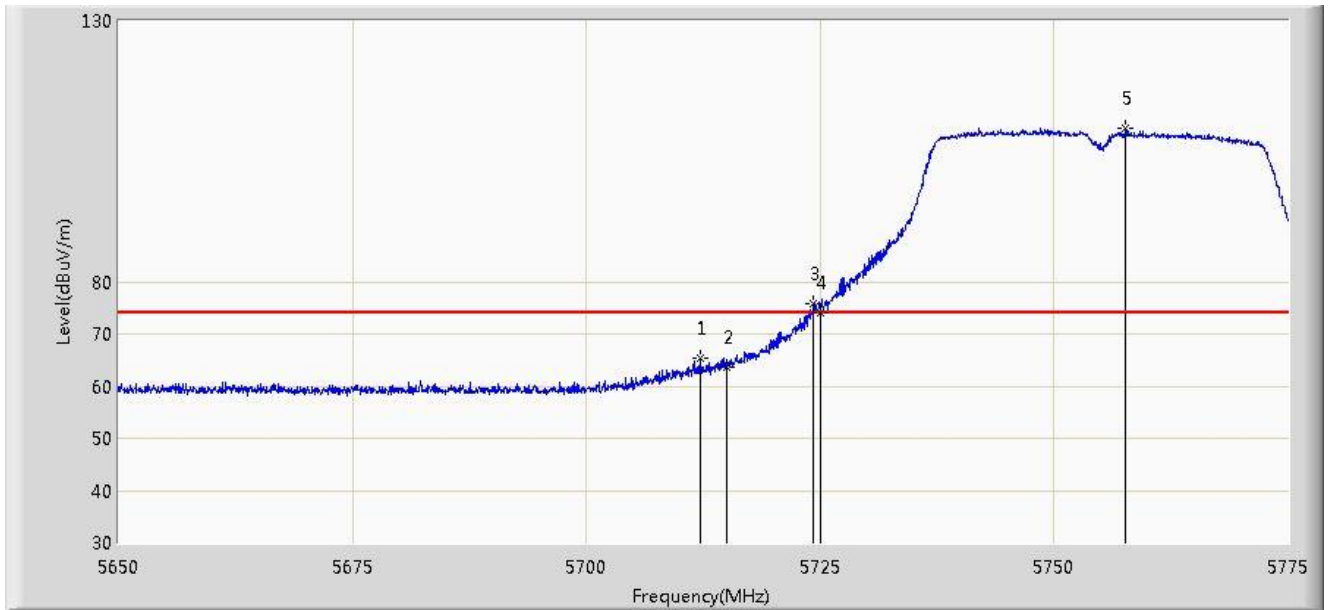


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.125	65.470	66.202	-8.530	74.000	-0.731	PK
2			5715.000	63.641	64.362	-10.359	74.000	-0.721	PK
3			5724.312	75.867	76.554	-2.333	78.200	-0.687	PK
4			5725.000	73.980	74.665	-4.220	78.200	-0.685	PK
5		*	5757.625	109.555	110.175	N/A	N/A	-0.620	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

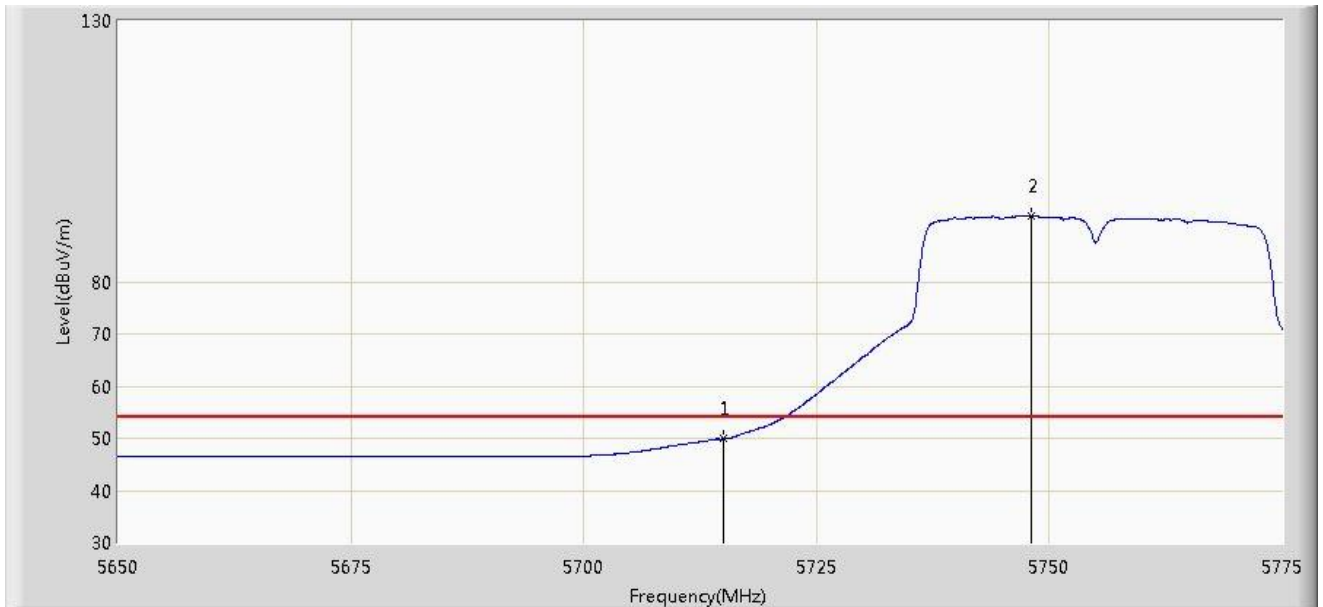


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.876	50.597	-4.124	54.000	-0.721	AV
2		*	5748.125	92.584	93.220	N/A	N/A	-0.635	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

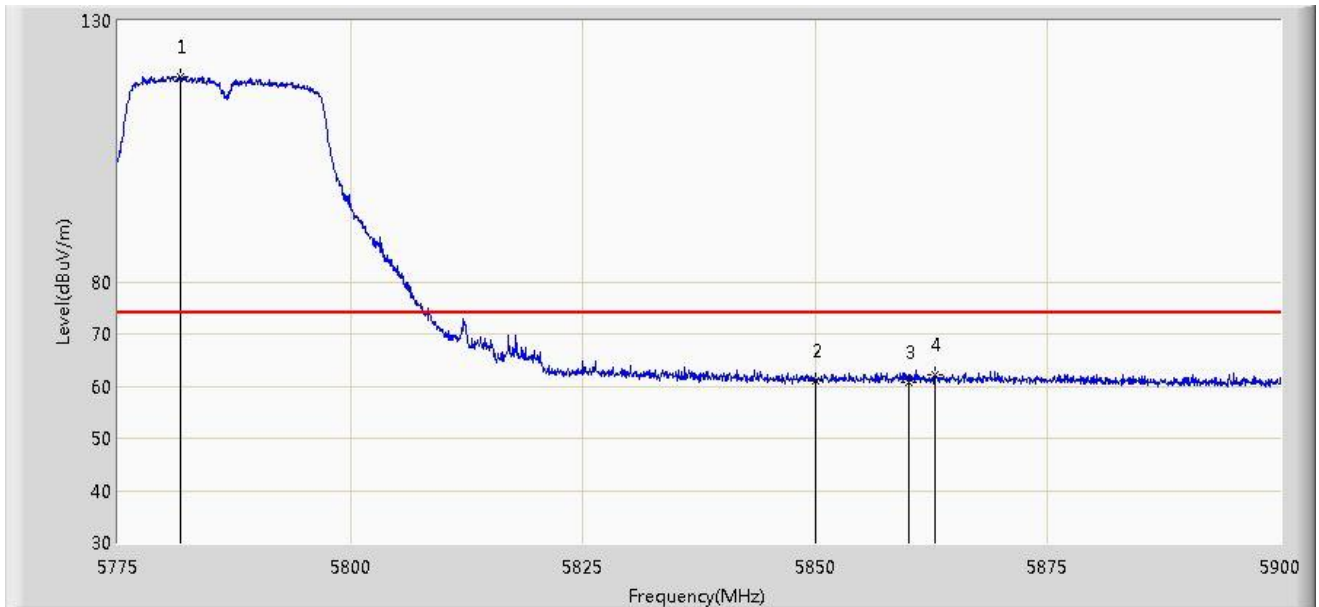


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.812	119.372	119.951	N/A	N/A	-0.579	PK
2			5850.000	60.945	61.428	-17.255	78.200	-0.482	PK
3			5860.000	60.659	61.136	-13.341	74.000	-0.477	PK
4			5862.937	62.318	62.792	-11.682	74.000	-0.474	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

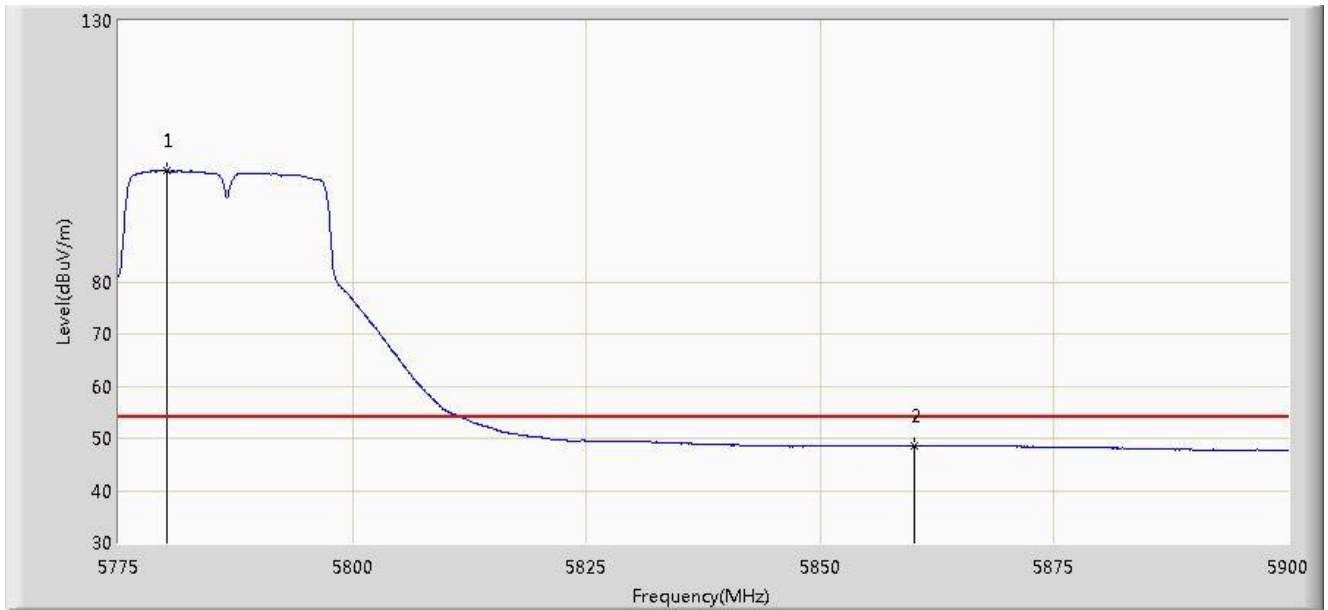


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5780.187	101.326	101.908	N/A	N/A	-0.582	AV
2			5860.000	48.554	49.031	-5.446	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

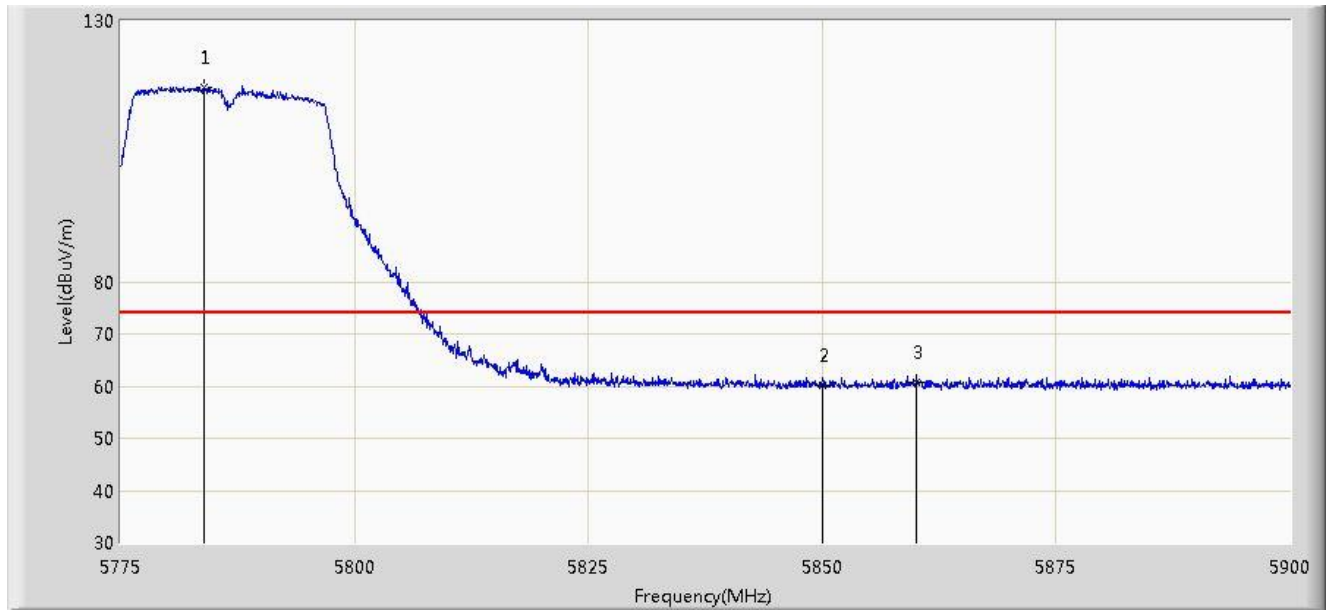


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.875	117.311	117.887	N/A	N/A	-0.576	PK
2			5850.000	60.009	60.492	-18.191	78.200	-0.482	PK
3			5860.000	60.600	61.077	-13.400	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/29 - 10:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

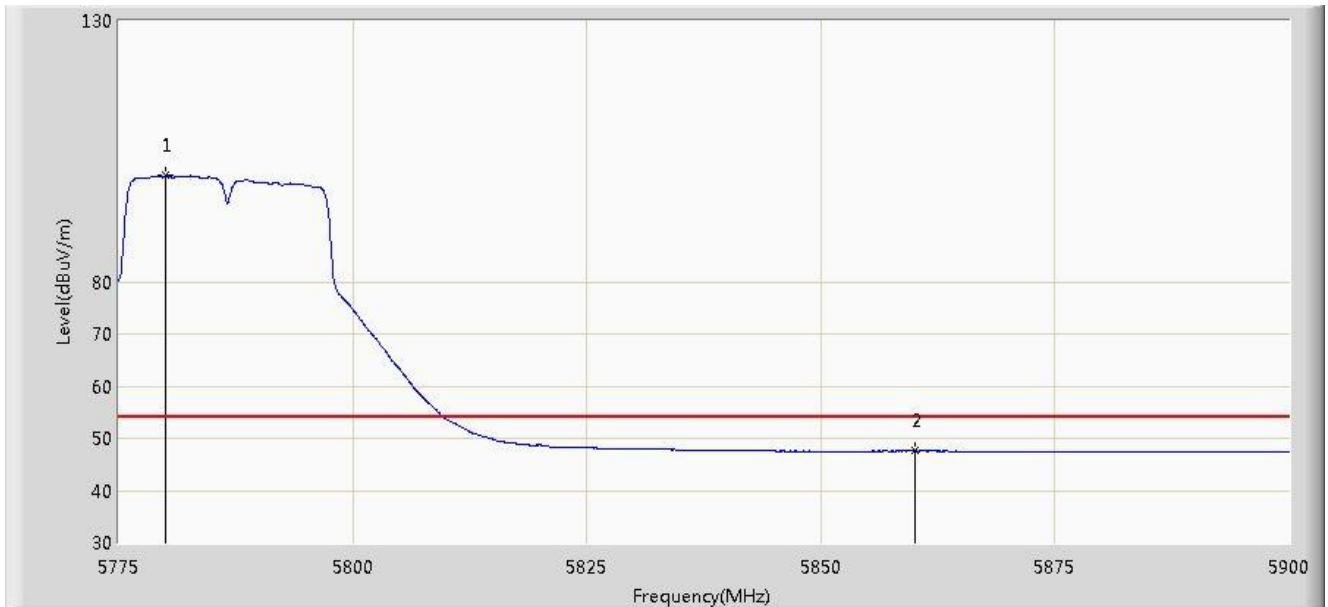


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5780.000	100.343	100.925	N/A	N/A	-0.581	AV
2			5860.000	47.556	48.033	-6.444	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

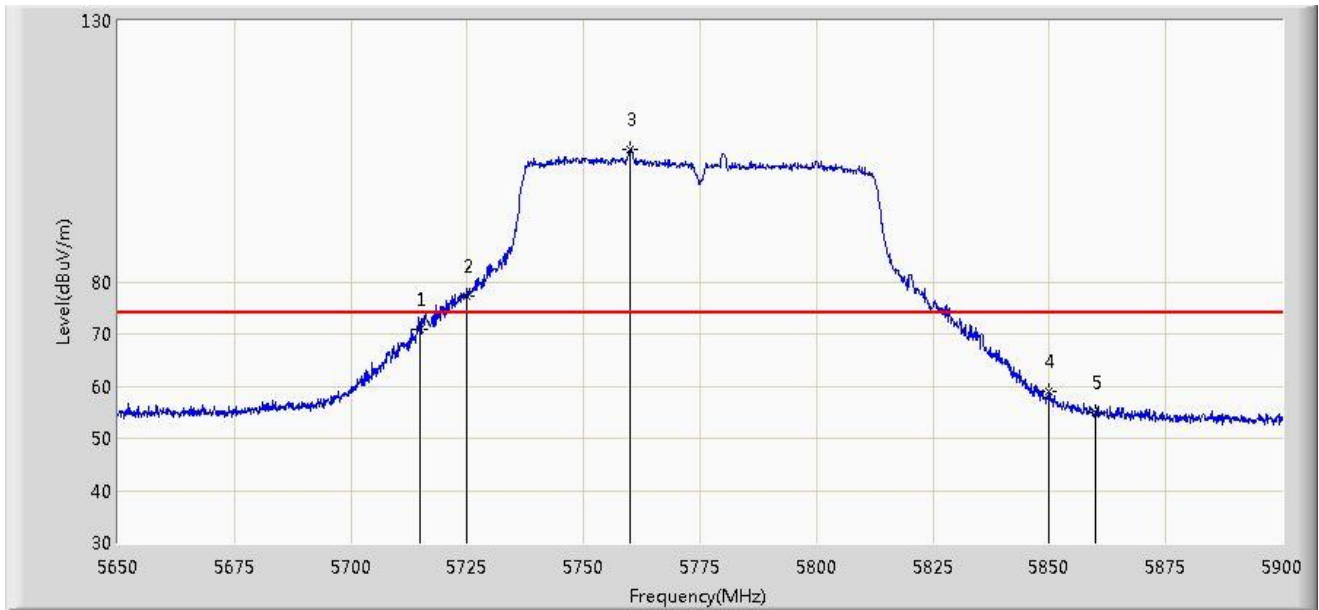


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	70.982	71.703	-3.018	74.000	-0.721	PK
2			5725.000	77.151	77.836	-1.049	78.200	-0.685	PK
3		*	5759.875	105.395	106.012	N/A	N/A	-0.617	PK
4			5850.000	58.999	59.482	-19.201	78.200	-0.482	PK
5			5860.000	54.937	55.414	-19.063	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2015/04/28 - 20:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

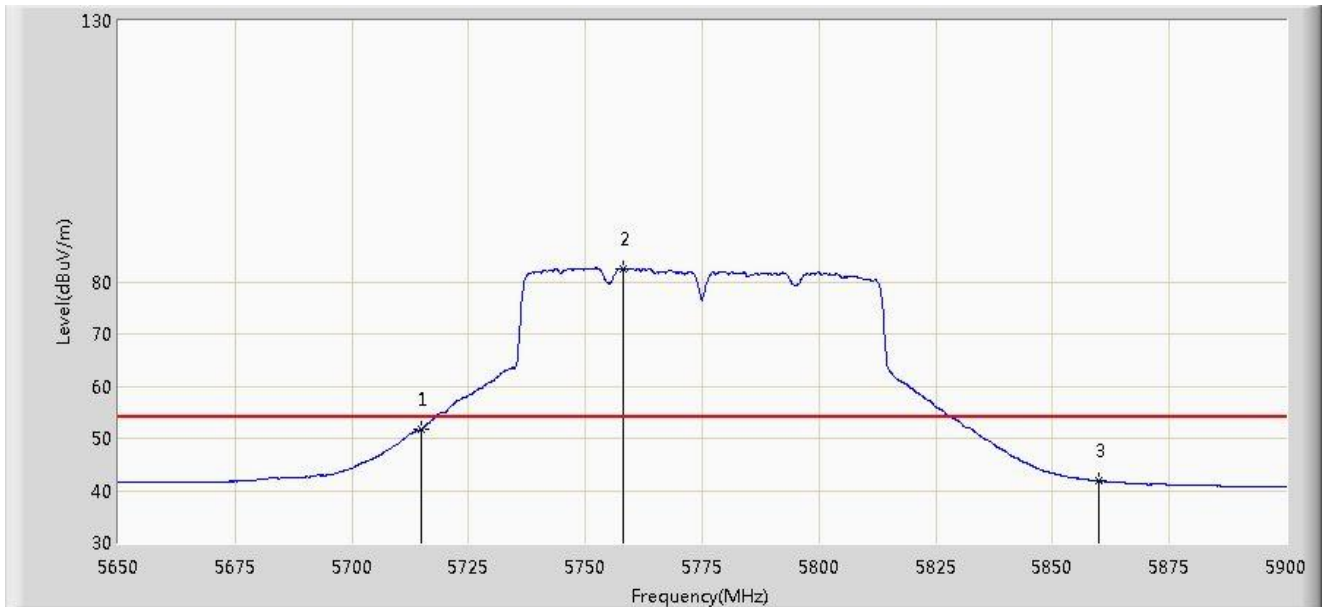


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.862	52.583	-2.138	54.000	-0.721	AV
2		*	5758.125	82.399	83.018	N/A	N/A	-0.619	AV
3			5860.000	41.795	42.272	-12.205	54.000	-0.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

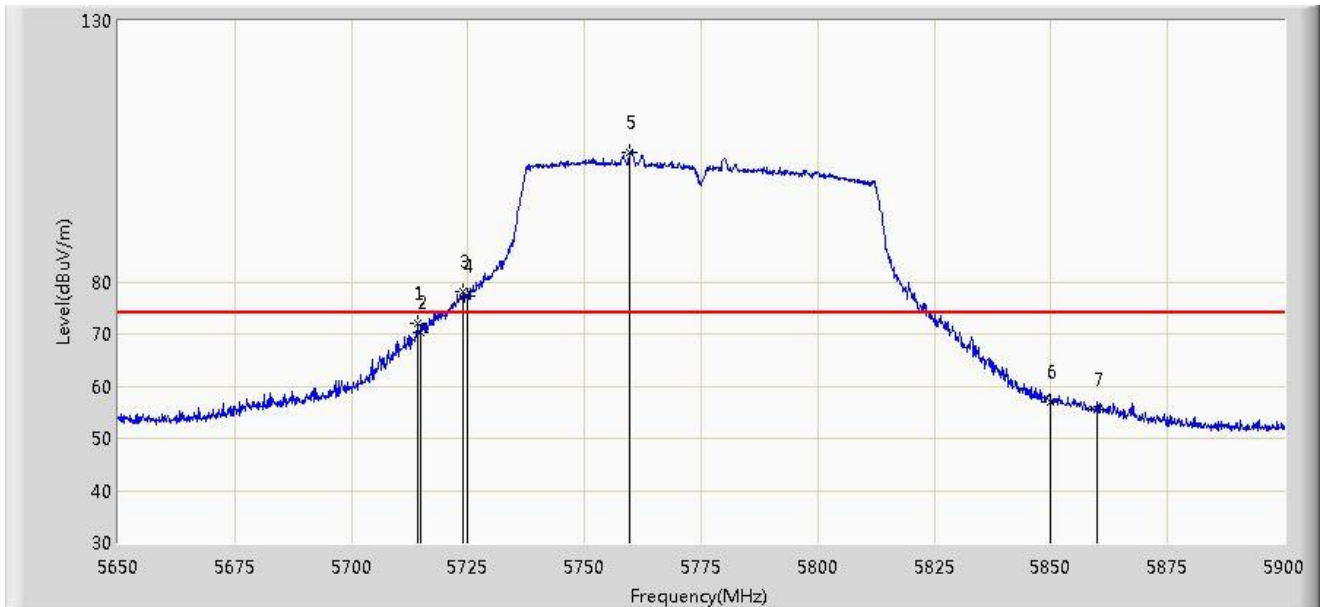


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.125	72.006	72.730	-1.994	74.000	-0.724	PK
2			5715.000	70.309	71.030	-3.691	74.000	-0.721	PK
3			5723.875	77.999	78.688	-0.201	78.200	-0.689	PK
4			5725.000	77.334	78.019	-0.866	78.200	-0.685	PK
5		*	5759.750	104.716	105.333	N/A	N/A	-0.618	PK
6			5850.000	57.083	57.566	-21.117	78.200	-0.482	PK
7			5860.000	55.579	56.056	-18.421	74.000	-0.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/28 - 20:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

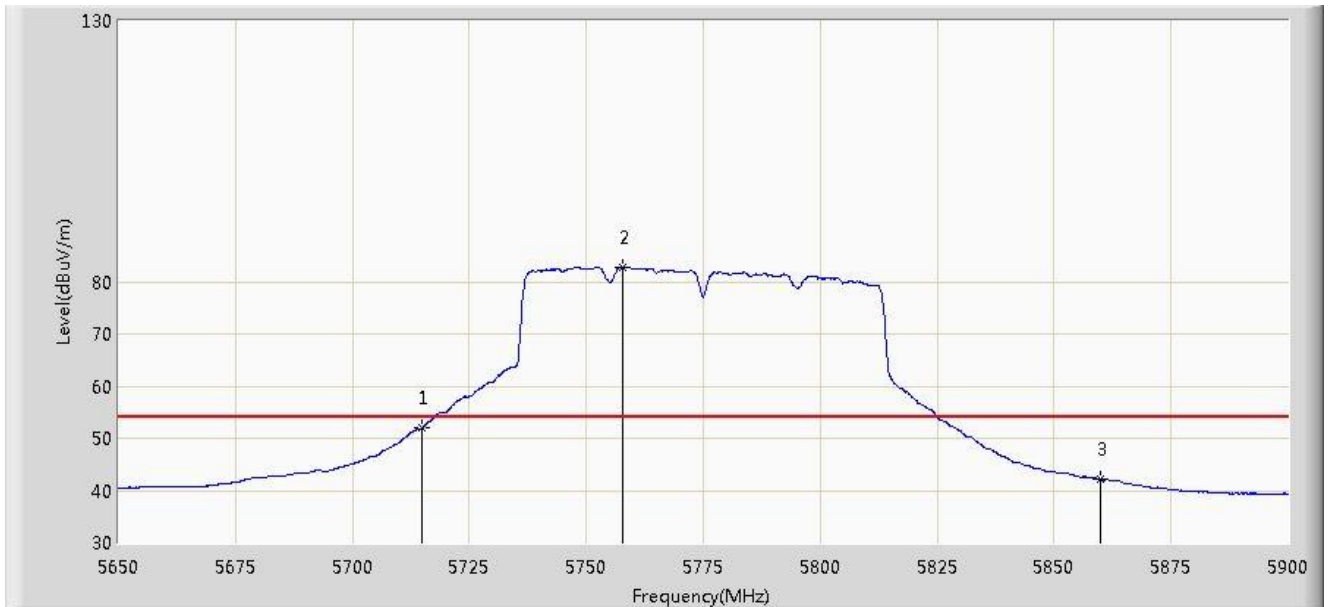

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.082	52.803	-1.918	54.000	-0.721	AV
2		*	5757.625	82.678	83.298	N/A	N/A	-0.620	AV
3			5860.000	42.084	42.561	-11.916	54.000	-0.477	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.10. AC Conducted Emissions Measurement

### 7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.10.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

### 7.10.3. Test Setup

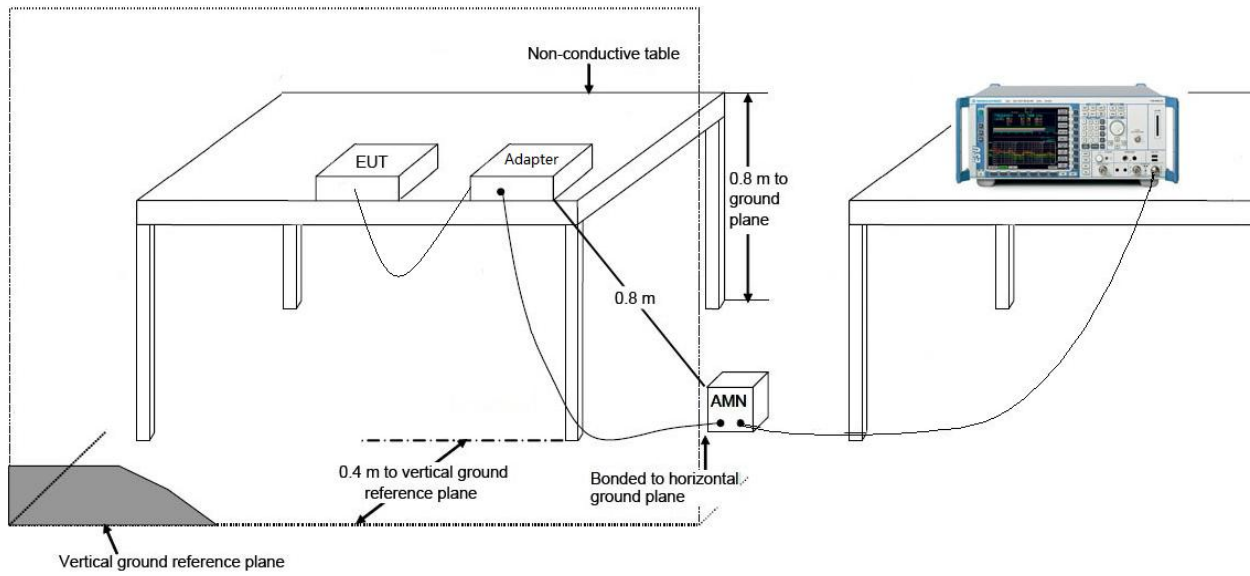

### 7.10.4. Test Result

Site: SR2	Time: 2015/04/15 - 10:11
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Mode1	

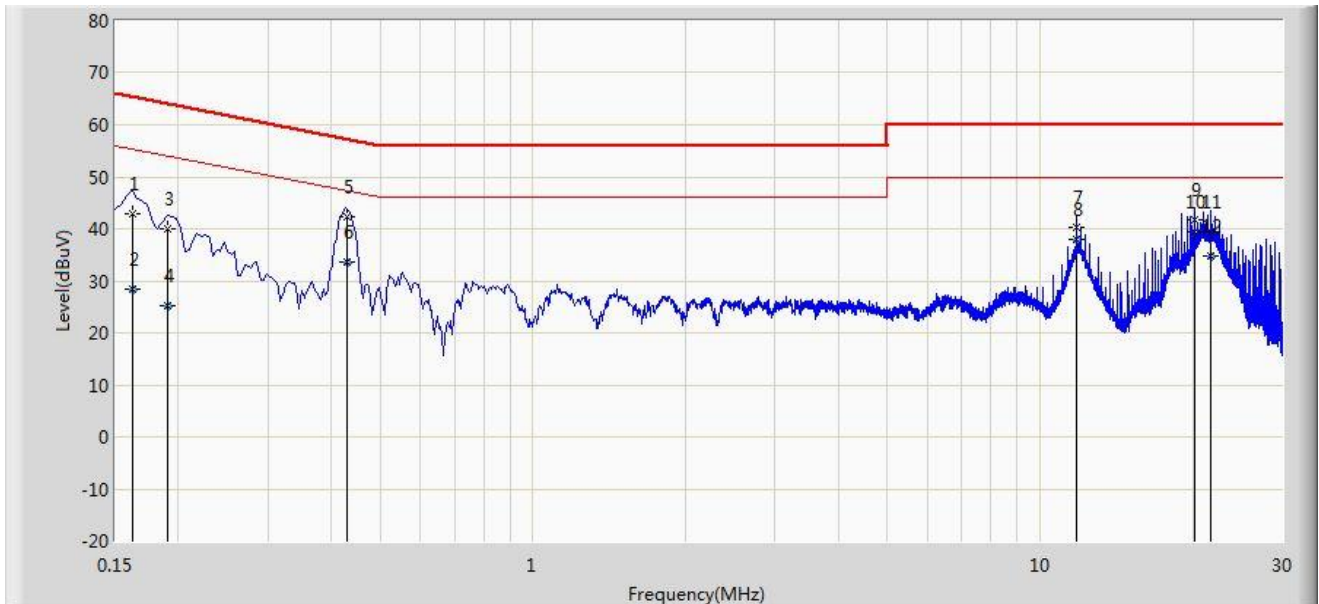


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.162	42.908	32.811	-22.453	65.361	10.097	QP
2			0.162	28.463	18.366	-26.898	55.361	10.097	AV
3			0.190	39.935	29.906	-24.102	64.037	10.029	QP
4			0.190	25.189	15.160	-28.848	54.037	10.029	AV
5			0.430	42.313	32.203	-14.939	57.253	10.110	QP
6			0.430	33.531	23.421	-13.722	47.253	10.110	AV
7			11.782	40.428	30.341	-19.572	60.000	10.087	QP
8			11.782	37.848	27.761	-12.152	50.000	10.087	AV
9			20.202	41.733	31.594	-18.267	60.000	10.139	QP
10		*	20.202	39.430	29.291	-10.570	50.000	10.139	AV
11			21.646	39.365	29.198	-20.635	60.000	10.167	QP
12			21.646	34.911	24.744	-15.089	50.000	10.167	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/04/15 - 10:15
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Note: Mode1	

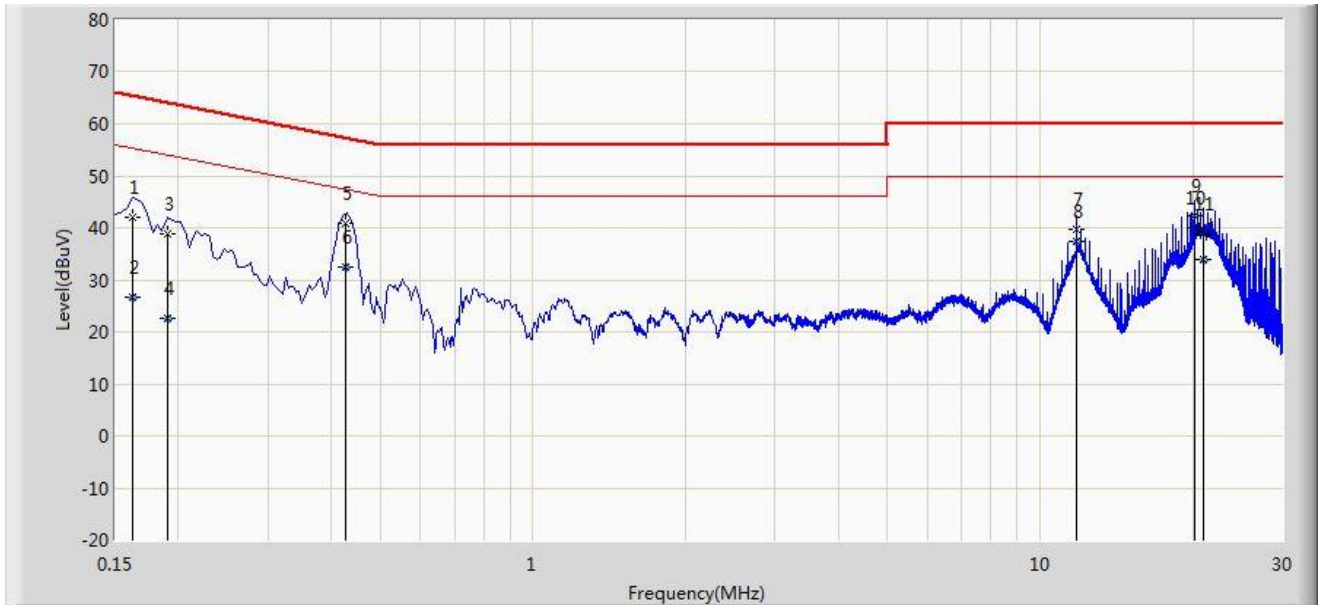

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.162	42.048	31.970	-23.313	65.361	10.078	QP
2			0.162	26.774	16.696	-28.587	55.361	10.078	AV
3			0.190	38.824	28.797	-25.212	64.037	10.028	QP
4			0.190	22.743	12.715	-31.293	54.037	10.028	AV
5			0.426	40.768	30.636	-16.563	57.330	10.132	QP
6			0.426	32.592	22.460	-14.738	47.330	10.132	AV
7			11.782	39.819	29.701	-20.181	60.000	10.118	QP
8			11.782	37.321	27.203	-12.679	50.000	10.118	AV
9			20.202	42.367	32.195	-17.633	60.000	10.172	QP
10		*	20.202	39.992	29.820	-10.008	50.000	10.172	AV
11			20.918	38.779	28.597	-21.221	60.000	10.181	QP
12			20.918	33.973	23.792	-16.027	50.000	10.181	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Wireless LAN Access Point FCC ID: O9C-BJNGAFB0008** is in compliance with Part 15E of the FCC Rules.

————— The End —————