

**TEST REPORT FROM:**

COMMUNICATION CERTIFICATION LABORATORY  
1940 W. Alexander Street  
Salt Lake City, Utah  
84119-2039

Type of Report: Certification

TEST OF: SL-1110

FCC ID: O9C-SL1110

To FCC PART 15.247, Subpart C

Test Report Serial No: 73-7671

Applicant:

3Com Corporation  
3930 West Parkway Blvd.  
West Valley City, UT 84120

Date(s) of Test: December 18-19, 2001 & January 23-24, 2002

Issue Date: January 25, 2002

Equipment Receipt Date: December 18, 2001 & January 23, 2002

**CERTIFICATION OF ENGINEERING REPORT**

This report has been prepared by Communication Certification Laboratory to determine compliance of the device described below with the requirements of FCC PART 15.247, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: 3Com Corporation
- Manufacturer: 3Com Corporation
- Brand Name: 3Com
- Model Number: SL-1110
- FCC ID: O9C-SL1110

On this 25<sup>th</sup> day of January, 2002 I, individually, and for Communication Certification Laboratory, certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

COMMUNICATION CERTIFICATION LABORATORY

Tested by: Kirk P. Thomas  
Project Engineer

**TABLE OF CONTENTS**

SECTION 1. CLIENT INFORMATION AND RESPONSIBLE PARTY:.....4

SECTION 2. EQUIPMENT UNDER TEST (EUT).....5

SECTION 3. TEST SPECIFICATION, METHODS & PROCEDURES.....7

SECTION 4. OPERATION OF EUT DURING TESTING.....13

SECTION 5. SUMMARY OF TEST RESULTS:.....14

SECTION 6. MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS:....15

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT.....89

APPENDIX 2 PHOTOGRAPHS.....97

**SECTION 1. CLIENT INFORMATION AND RESPONSIBLE PARTY:**

**1.1 Applicant:**

Company Name: 3Com Corporation  
3930 West Parkway Blvd.  
West Valley City, UT 84120

Contact Name: Kaan Gregersen  
Title: Regulatory Engineer

**1.2 Manufacturer:**

Company Name: 3Com Corporation  
3930 West Parkway Blvd.  
West Valley City, UT 84120

Contact Name: Kaan Gregersen  
Title: Regulatory Engineer

**SECTION 2. EQUIPMENT UNDER TEST (EUT)****2.1 Identification of EUT:**

Trade Name: 3Com  
Model Name or Number: SL-1110  
Serial Number: N/A  
Country of Manufacture: U.S.A.

**2.2 Description of EUT:**

The 3Com SL-1110 product is an IEEE 802.11b Wireless LAN Type II PC Card. Radio functionality is provided via two integrated antennas that are not detachable. The SL-1110 is available with either a retractable or a fixed antenna. This 802.11b Wireless LAN PC Card has standard 1Mbps, 2Mbps, 5.5Mbps and 11Mbps transmission rates utilizing various data encryption key lengths.

This report covers the transmitter portion of the device only the receiver/computer peripheral is covered under a separate declaration of conformity report.

**2.3 Modification Incorporated/Special Accessories on EUT:**

There were no modifications or special accessories required to comply with the specification.

**2.4 EUT and Support Equipment:**

The FCC ID numbers for all the EUT and support equipment used during the test (including inserted cards) are listed below:

Brand Name Model Number Serial No.	FCC ID Number	Description	Name of Interface Ports / Interface Cables
BN: 3Com MN: SL-1110 (1)	09C-SL1110	802.11b Wireless LAN Type II PC Card	See Sec 2.5.
BN: IBM MN: ThinkPad	ANOYMTNUMAEBI	Laptop Computer	PCMCIA Card Bus slot / None

- Note: (1) EUT.  
 (2) Interface port connected to EUT (See Section 2.4)  
 (3) Mouse cable permanently attached.  
 (4) Monitor's attached video cable includes manufacturer-supplied ferrite.

The support equipment listed above was not modified in order to achieve compliance with this standard.

**2.5 Interface Ports on EUT:**

Name of Port	No. of Ports Fitted to EUT.	Cable Descriptions/Length
Antenna	2	Fixed Antenna - Integrated directly onto PCB. Retractable Antenna - Mechanically connected when extended.
PCMCIA	1	Soldered directly to PCB

**2.6 Channels of Operation:**

The SL-1110 operates on the following channels:

Channel	Frequency (MHz)
1	2412.0
2	2417.0
3	2422.0
4	2427.0
5	2432.0
6	2437.0
7	2442.0
8	2447.0
9	2452.0
10	2457.0
11	2462.0

**SECTION 3. TEST SPECIFICATION, METHODS & PROCEDURES****3.1 Test Specification:**

Title: FCC PART 15.247, Subpart C (47 CFR 15).

Limits and methods of measurement of radio interference characteristics of radio frequency devices. Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

Purpose of Test: The tests were performed to demonstrate Initial compliance.

**3.2 Methods & Procedures:****3.2.1 §15.247**

(a) Operation under the provisions of this section is limited to frequency hopping and direct sequence spread spectrum intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the

system-hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitting signals.

(i) For frequency hopping systems operating in the 902 - 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 2400 - 2483.5 MHz and the 5725 - 5850 MHz bands shall use at least 75 hopping frequencies. The maximum allowed 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400 - 2483.5 MHz or 5725 - 5850 MHz band and for all direct sequence systems: 1 watt.

(2) For frequency hopping systems operating in the 902 - 928 MHz band: 1 watt for systems employing at least 50 hopping channels; and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) Except as show in paragraphs (b)(3)(i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(i) Systems operating in the 2400 - 2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi



provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725 - 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b) (3) (i) and (b) (3) (ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of the responsibility.

(4) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See Sec. 1.1307(b) (1) of this chapter.

(c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general levels specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

(d) For direct sequence systems, the peak power density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

(e) The processing gain of a direct sequence system shall be at least 10 dB. The processing gain represents the improvement to the received signal-to-noise ratio, after filtering to the information bandwidth, from the spreading/despreading function. The processing gain may be determined using one of the following methods:

(1) As measured at the demodulated output of the receiver: the ratio in dB of the signal-to-noise ratio with the system spreading code turned off to the signal-to-noise ratio with the system spreading code turned on.

(2) As measured using the CW jamming margin method: a signal generator is stepped in 50 kHz increments across the passband of the system, recording at each point the generator level required to produce the recommended Bit Error Rate (BER). This level is the jammer level. The output power of the intentional radiator is measured at the same point. This jammer to signal ratio (J/S) is then calculated, discarding the worst 20% of the J/S data points. The lowest remaining J/S ratio is used to calculate the processing gain, as follows:  $G_p = (S/N)_o + M_j + L_{sys}$ , where  $G_p$  = processing gain of the system,  $(S/N)_o$  = signal to noise ratio required for the chosen BER,  $M_j$  = J/S ratio, and  $L_{sys}$  = system losses. Note that total losses in a system, including intentional radiator and receiver, should be assumed to be no more than 2 dB.

(f) Hybrid systems that employ a combination of both direct sequence and frequency hopping modulation techniques shall achieve a processing gain of at least 17 dB from the combined techniques. The frequency hopping operation of the hybrid system, with the direct sequence operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The direct sequence operation of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmission over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopset to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

NOTE: Spread spectrum systems are sharing these bands on a non-interference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of part 18 of this chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP, which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U.S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

### **3.2.2 § 15.207 Conducted Limits**

(a) For an intentional radiator, which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with the provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

(b) The following option may be employed if the conducted emissions exceed the limits in paragraph (a) of this section when measured using instrumentation employing a quasi-peak detector function: If the level of the emission measured using the quasi-peak instrumentation is 6 dB, or more, higher than the level of the same emission measured with instrumentation having an average detector and a 9 kHz minimum bandwidth, that emission is considered broadband and the level obtained with the quasi-peak detector may be reduced by 13 dB for comparison to the limits. When employing this option, the following conditions shall be observed:

(1) The measuring instrumentation with the average detector shall employ a linear IF amplifier.

(2) Care must be taken not to exceed the dynamic range of the measuring instrument when measuring an emission with a low duty cycle.

(3) The test report required for verification of for an application for a grant of equipment authorization shall contain all details supporting the use of this option.

(c) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operation as intentional radiators on frequencies below 30 MHz. In lieu thereof, these

carrier current systems shall be subject to the following standards:

(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in § 15.205, 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(d) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operation while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### **3.2.3 Test Procedure**

The testing was performed according to the procedures in ANSI C63.4 (1992). Testing was performed at CCL's anechoic chamber located in Salt Lake City, Utah. This site has been fully described in a report submitted to the FCC, and was accepted in a letter dated March 1, 1999 (31040/SIT).

CCL participates in the National Voluntary Laboratory Accreditation Program (NVLAP) and has been accepted under NVLAP Lab Code:100272-0, which is effective until September 30,2002.

For radiated emissions testing that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

**SECTION 4. OPERATION OF EUT DURING TESTING.****4.1 Operating Environment:**

Power Supply: 3.3 VDC  
AC Mains Frequency: N/A

**4.2 Operating Modes:**

Each mode of operation was exercised to produce worst case emissions. The worst case emissions were with the SL-1110 running in the following mode. The SL-1110 was placed in the transmit mode with the same type of modulation that would normally be used during normal operation.

**4.3 Configuration & Peripherals:**

The SL-1110 was placed on the table in the transmit mode with the same type of modulation that would normally be used during normal operation.

**SECTION 5. SUMMARY OF TEST RESULTS:****5.1 FCC PART 15.247, Subpart C****5.1.1 Summary of Tests:**

<b>Section</b>	<b>Test Performed</b>	<b>Frequency Range (MHz)</b>	<b>Result</b>
15.247 (a) (2)	Emission Bandwidth	2400 to 2483.5	Complied
15.247 (b) (1)	Peak Output Power	2400 to 2483.5	Complied
15.247 (C)	Antenna Conducted Spurious Emissions	10 to 25,000	Complied
15.247 (C)	Radiated Spurious Emissions	10 to 25,000	Complied
15.247 (d)	Power Spectral Density	2400 to 2483.5	Complied
15.247 (e)	Processing Gain	2400 to 2483.5	Waived
15.207	Line Conducted Emissions (Hot Lead to Ground)	0.45 to 30	Complied
15.207	Line Conducted Emissions (Neutral Lead to Ground)	0.45 to 30	Complied

**5.2 Result**

In the configuration tested, the EUT complied with the requirements of the specification.

**SECTION 6. MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS:****6.1 General Comments:**

This section contains the test results only. Details of the test methods used, etc., can be found in Appendix 1 of this report.

The SL-1110 has two antennas. Each antenna can operate on eleven channels from 2412.0 MHz to 2462.0 MHz; therefore, each antenna was tested at three different channels (2412.0 MHz, 2437.0 MHz and 2462.0 MHz), the results for each channel are shown below.

**6.2 Test Results****6.2.1 § 15.247 (a) (2)****Measurement Data Emission Bandwidth:**

A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

SL-1110 (with retractable antenna)  
Antenna A

Frequency (MHz)	Emission Bandwidth (MHz)
2412.0	10.4
2437.0	10.5
2462.0	10.6

SL-1110 (with retractable antenna)  
Antenna B

Frequency (MHz)	Emission Bandwidth (MHz)
2412.0	10.4
2437.0	10.1
2462.0	10.2

SL-1110 (with fixed antenna)  
Antenna A

Frequency (MHz)	Emission Bandwidth (MHz)
2412.0	11.7
2437.0	11.2
2462.0	10.4

SL-1110 (with fixed antenna)  
Antenna B


Frequency (MHz)	Emission Bandwidth (MHz)
2412.0	11.7
2437.0	11.2
2462.0	12.1

**RESULT**

In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).




SL-1110 with Retractable Antenna (Channel One, Antenna A)

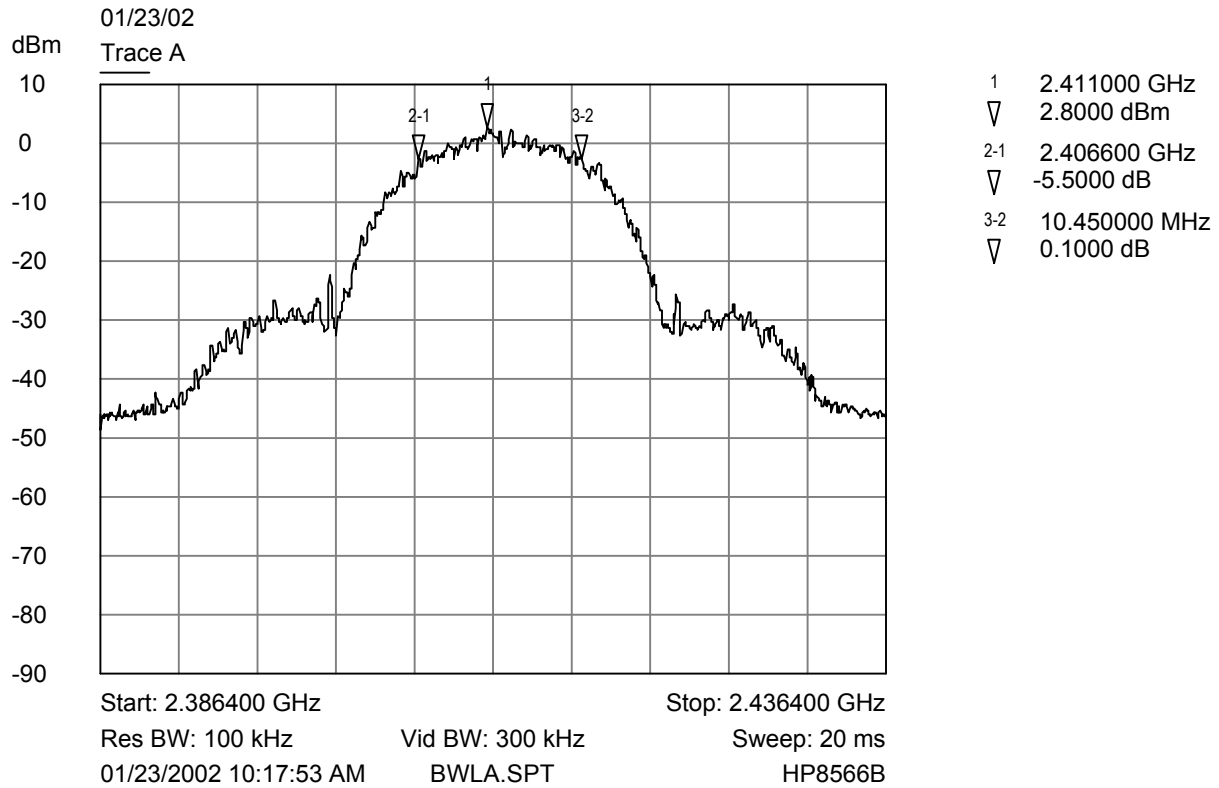


Bandwidth Plot (Channel 1, Antenna A, Power 36)

SL-1110 with Retractable Antenna (Channel Six, Antenna A)

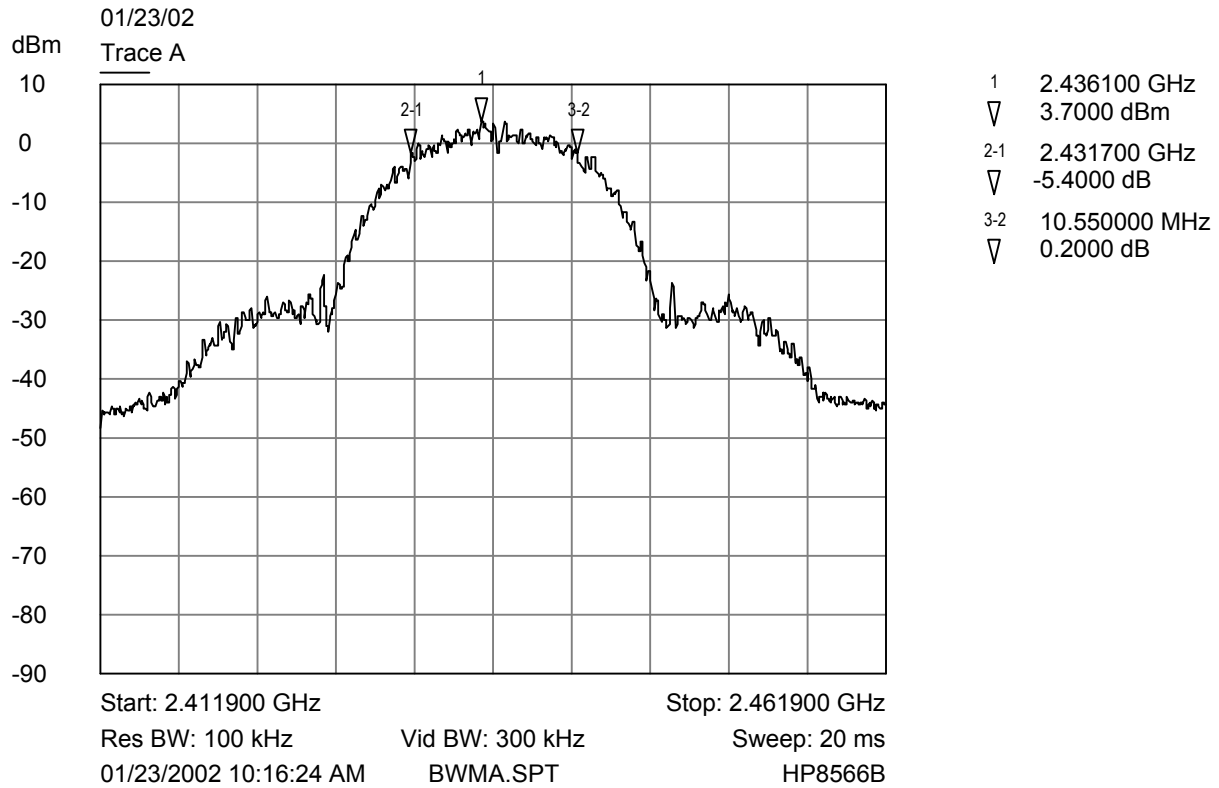


Bandwidth Plot (Channel 6, Antenna A, Power 36)

SL-1110 with Retractable Antenna (Channel Eleven, Antenna A)

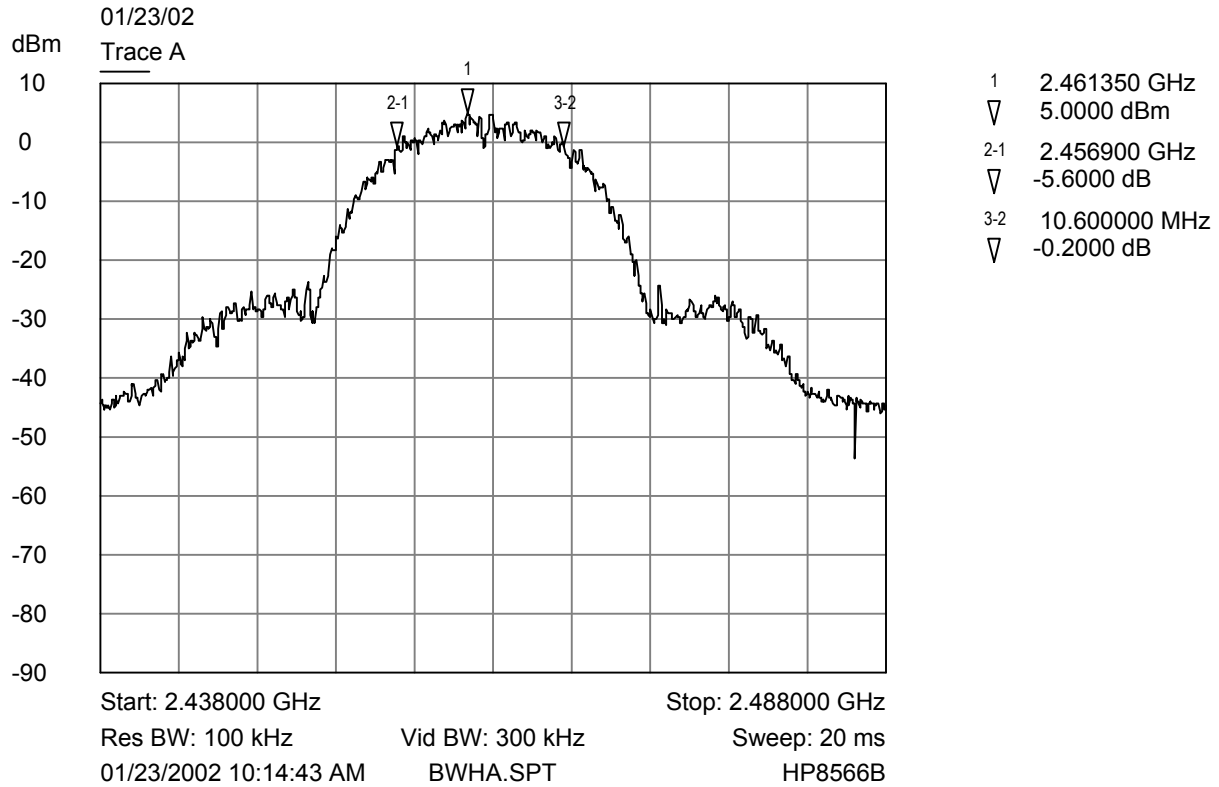


Bandwidth Plot (Channel 11, Antenna A, Power 36)

SL-1110 with Retractable Antenna (Channel One, Antenna B)

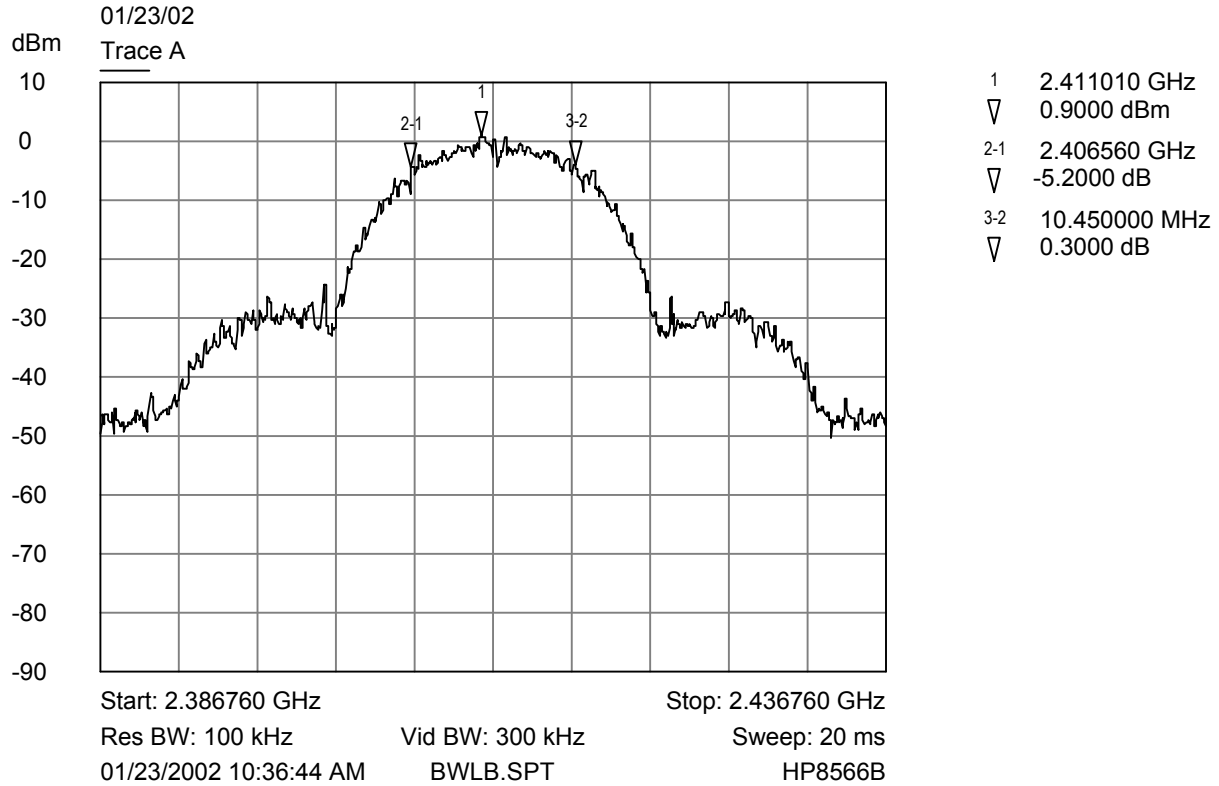


Bandwidth Plot (Channel 1, Antenna B, Power 36)

SL-1110 with Retractable Antenna (Channel Six, Antenna B)

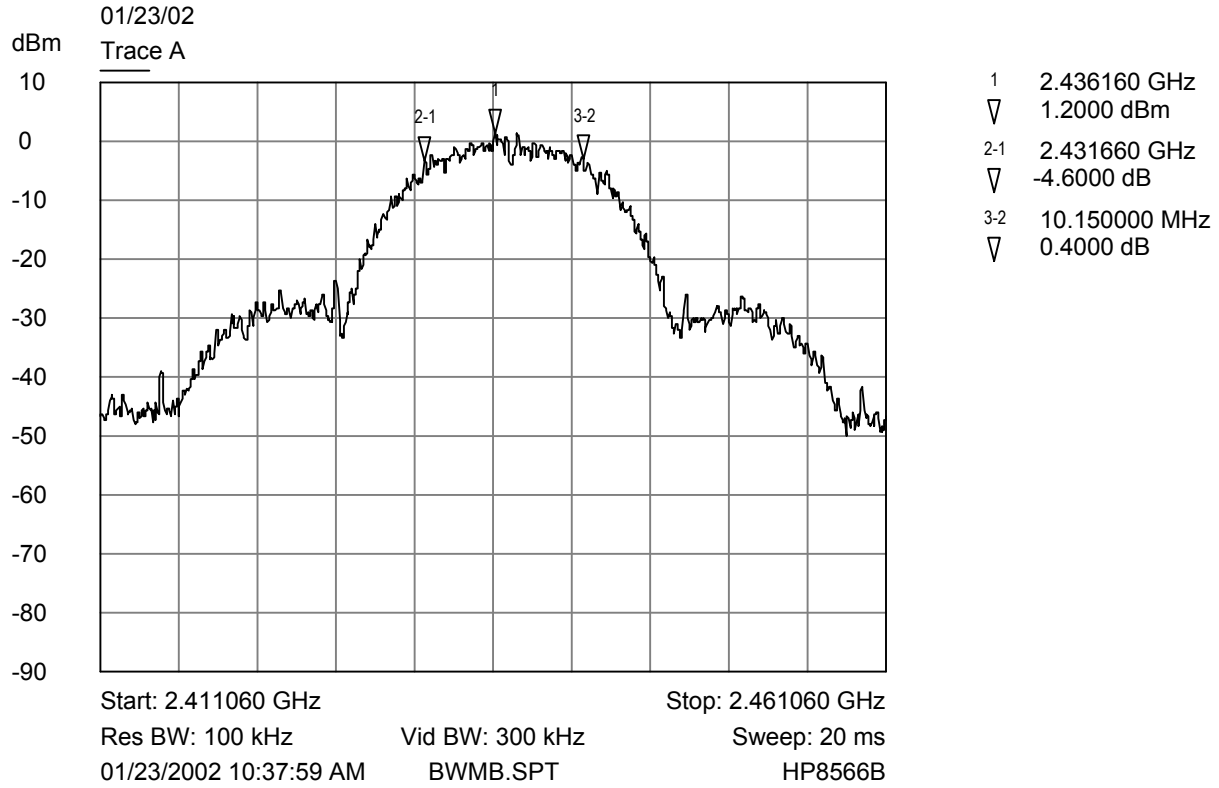


Bandwidth Plot (Channel 6, Antenna B, Power 36)

SL-1110 with Retractable Antenna (Channel Eleven, Antenna B)

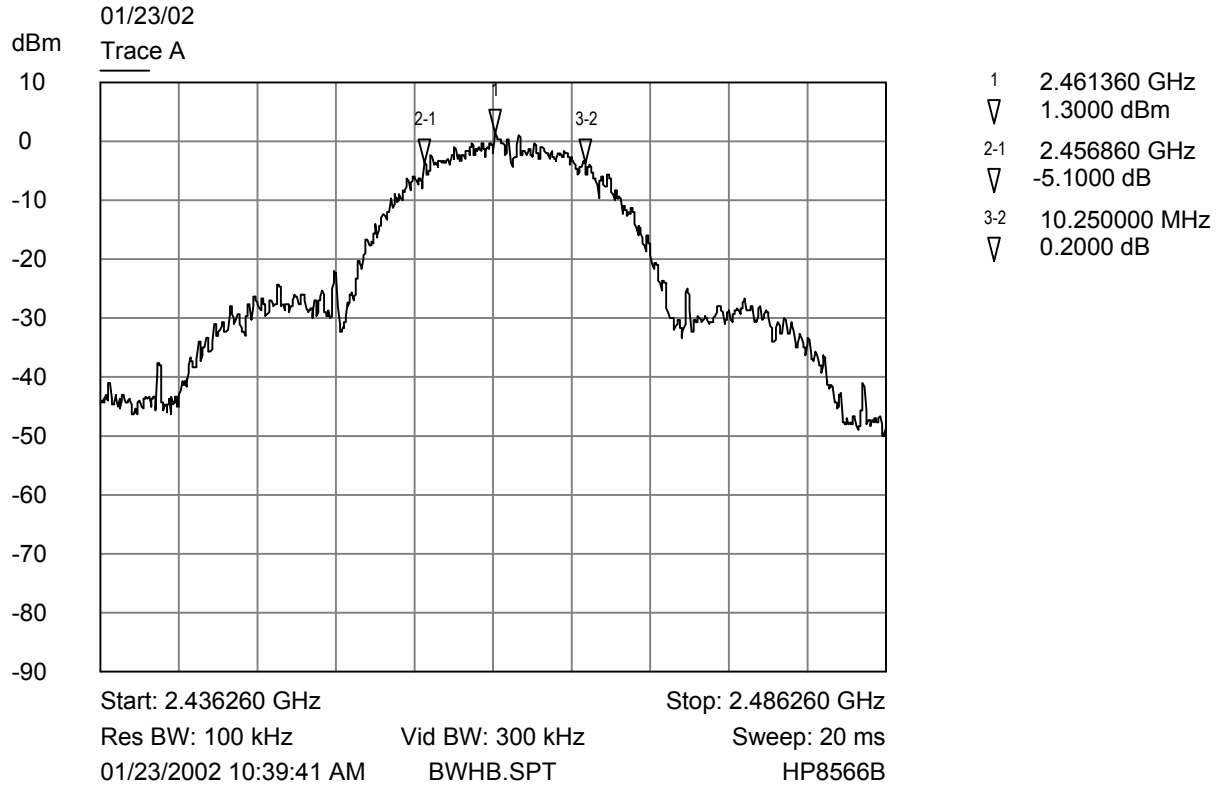


Bandwidth Plot (Channel 11, Antenna B, Power 36)

SL-1110 with Fixed Antenna (Channel One, Antenna A)

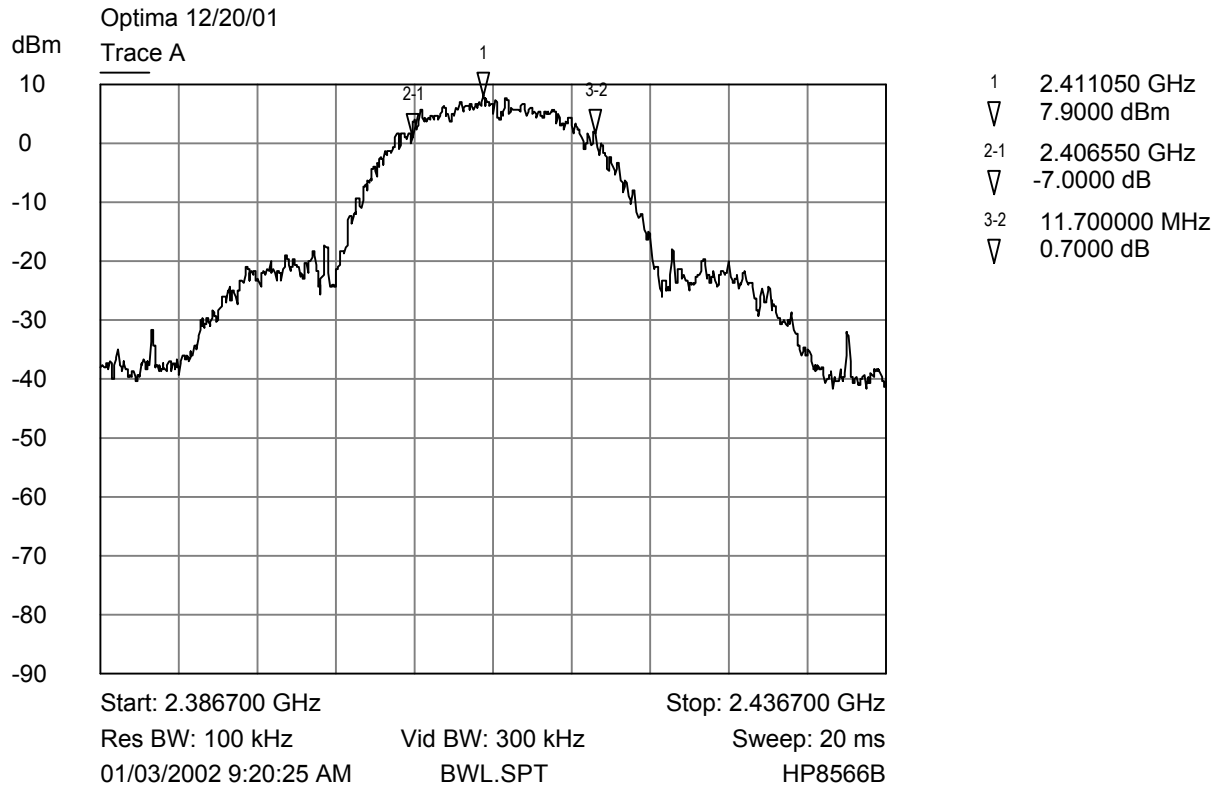

Bandwidth Plot (Channel 1, Antenna A)


SL-1110 with Fixed Antenna (Channel Six, Antenna A)

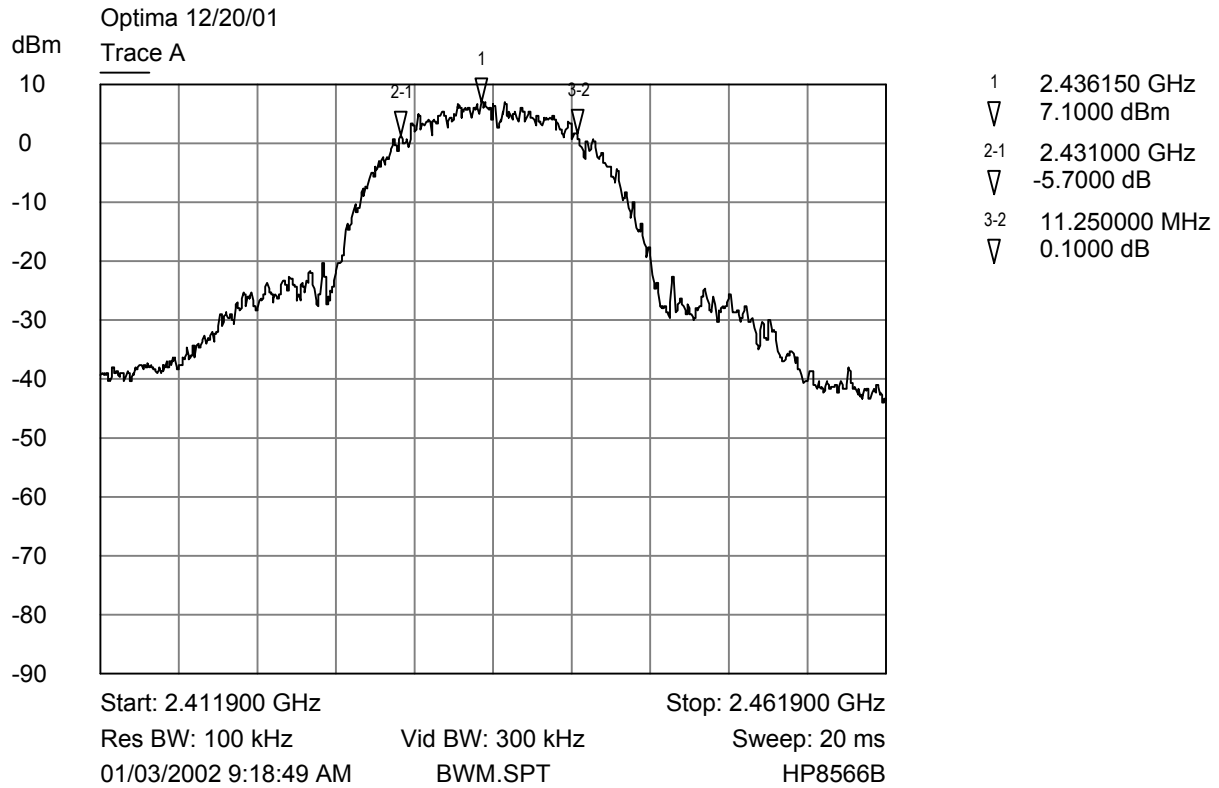

Bandwidth Plot (Channel 6, Antenna A)




SL-1110 with Fixed Antenna (Channel Eleven, Antenna A)

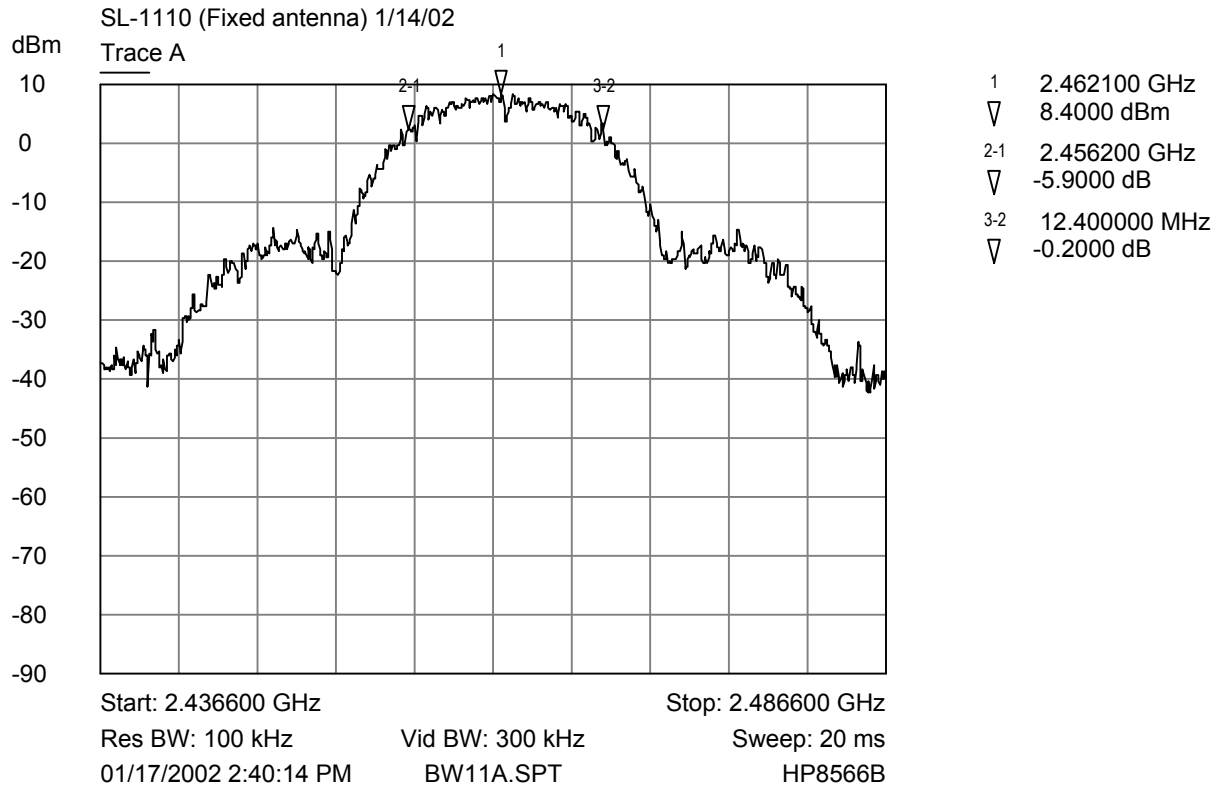


Bandwidth Plot (Channel 11, Antenna A)

SL-1110 with Fixed Antenna (Channel One, Antenna B)

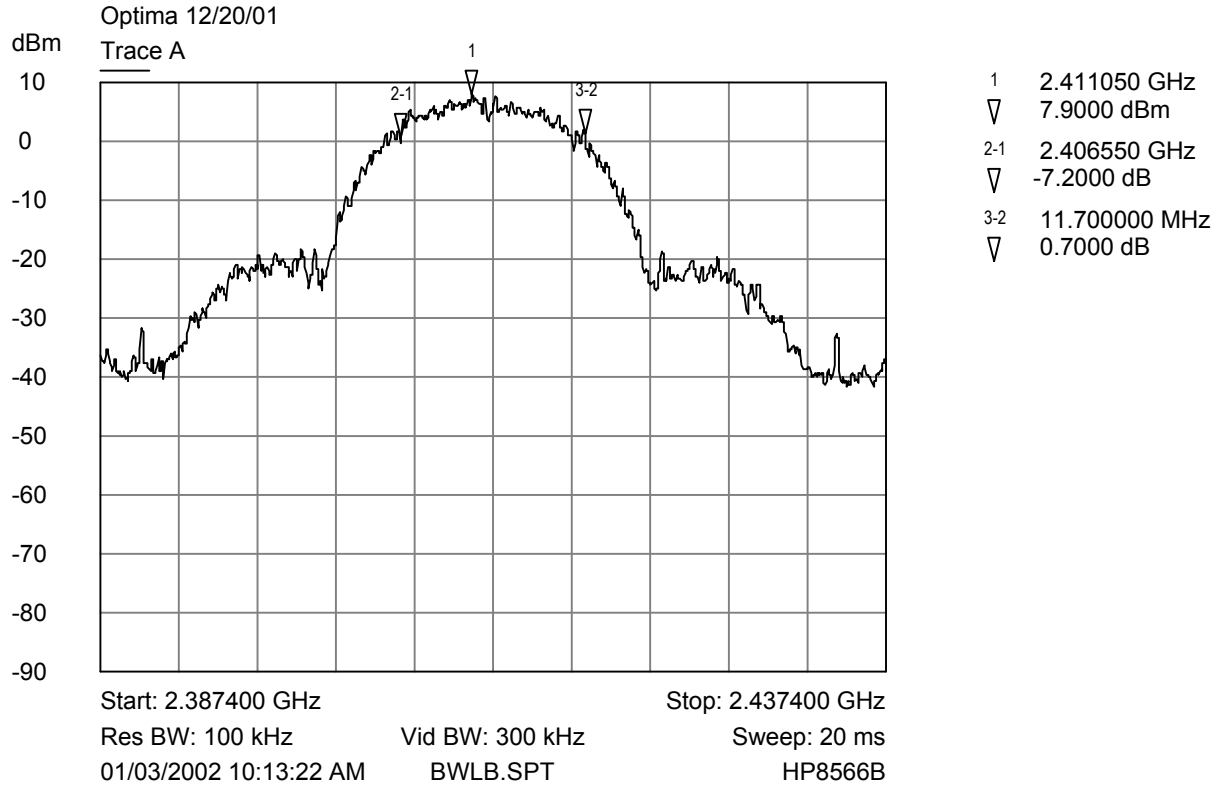


Bandwidth Plot (Channel 1, Antenna B)

SL-1110 with Fixed Antenna (Channel Six, Antenna B)

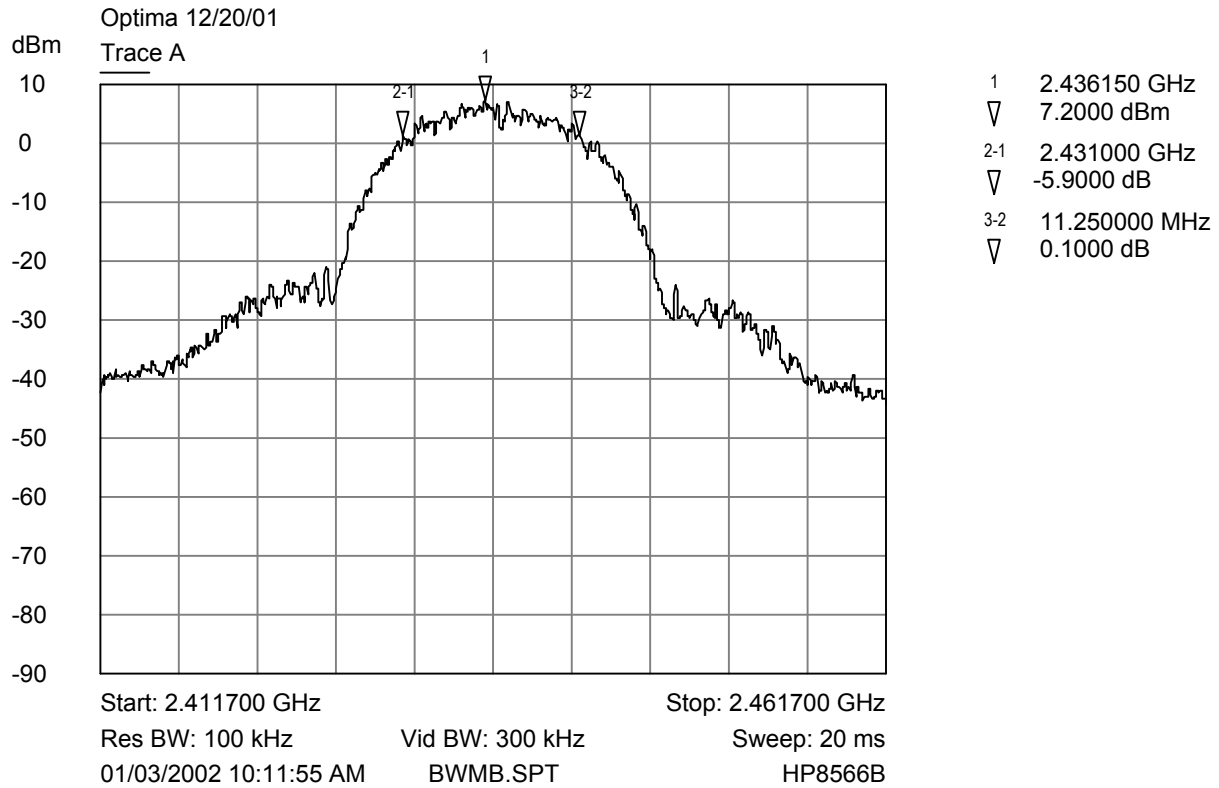

Bandwidth Plot (Channel 6, Antenna B)

SL-1110 with Fixed Antenna (Channel Eleven, Antenna B)

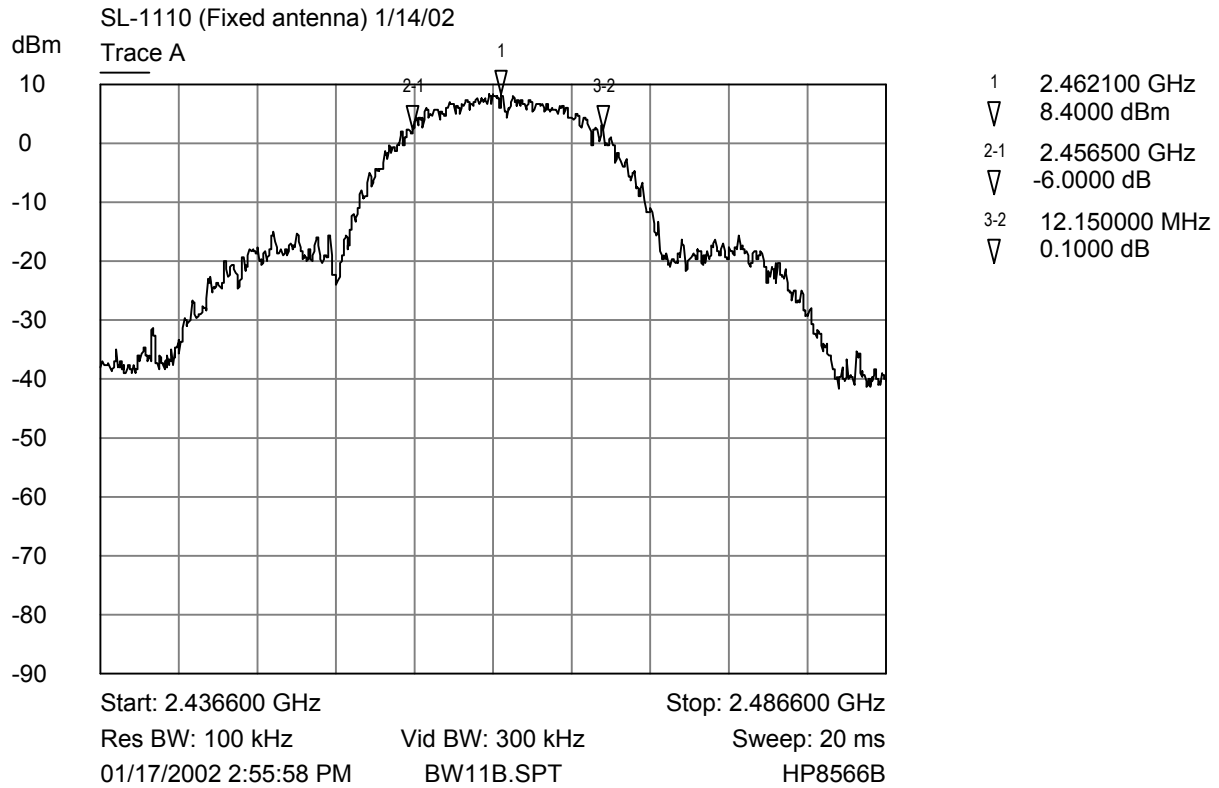

Bandwidth Plot (Channel 11, Antenna B)

**6.2.2 § 15.247 (b) Peak Output Power:****Measurement Data:**

The maximum peak RF Conducted output power measured for the retractable antenna was 38.9 mW or 15.9 dBm. The maximum antenna gain is 1.04 dBi; therefore, the EIRP for this device is 49.4 mW or 16.94 dBm.

The maximum peak RF Conducted output power measured for the fixed antenna was 48.9 mW or 16.9 dBm. The antenna gain is -0.3 dBi; therefore, the EIRP for this device is 45.7 mW or 16.6 dBm.

Shown below is the measured peak output power. The maximum directional gain of the antenna is less than 6 dBi; therefore, reduction of the output power limit is not required.

A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

SL-1110 Retractable Antenna  
Antenna A

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
2412.0	13.5	22.3
2437.0	14.6	28.8
2462.0	15.6	36.3

SL-1110 Retractable Antenna  
Antenna B

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
2412.0	15.4	34.6
2437.0	15.9	38.9
2462.0	15.2	33.1

SL-1110 Fixed Antenna  
Antenna A

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
2412.0	16.2	41.6
2437.0	16.9	48.9
2462.0	16.9	48.9


SL-1110 Fixed Antenna  
Antenna A

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
2412.0	16.4	43.6
2437.0	16.7	46.7
2462.0	16.2	41.6

**RESULT**


In the configuration tested, the peak conducted power output was less than 1 W (30 dBm); therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

SL-1110 Retractable Antenna (Channel One, Antenna A)

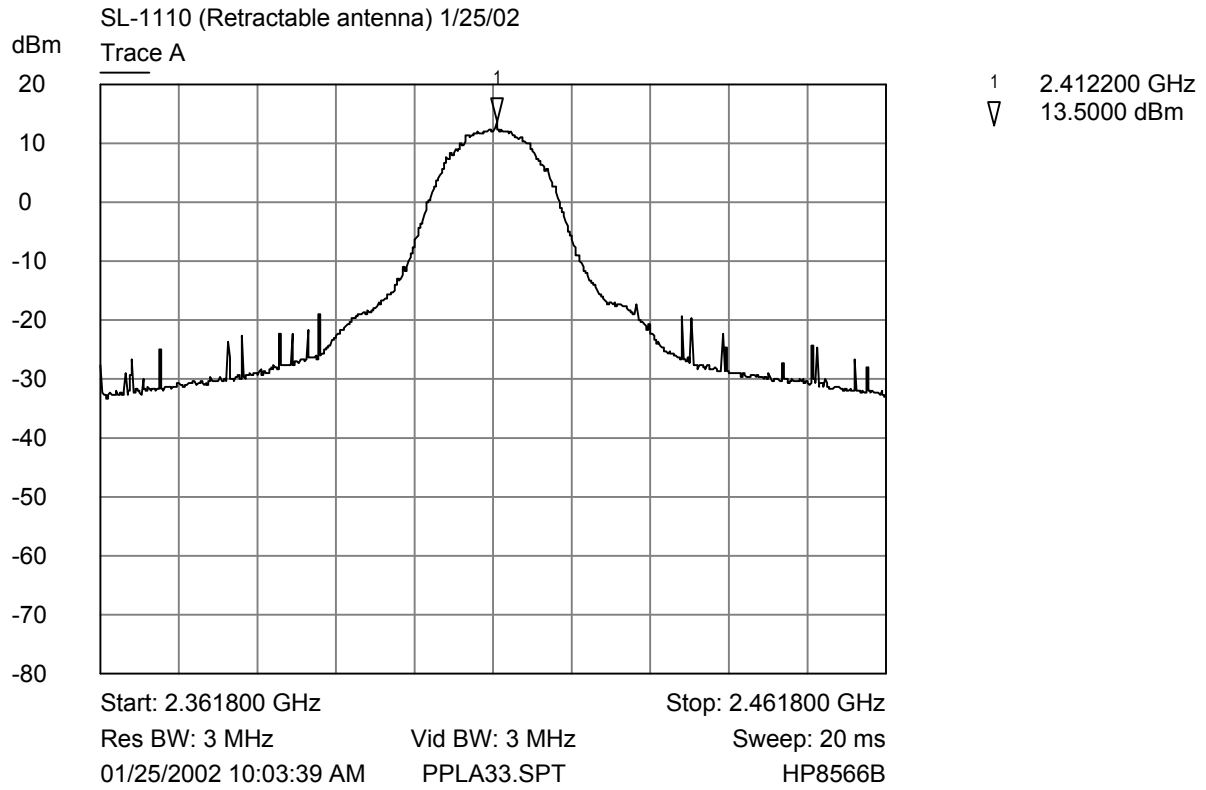

Peak Power (Channel 1, Antenna A, Power 33)


SL-1110 Retractable Antenna (Channel Six, Antenna A)

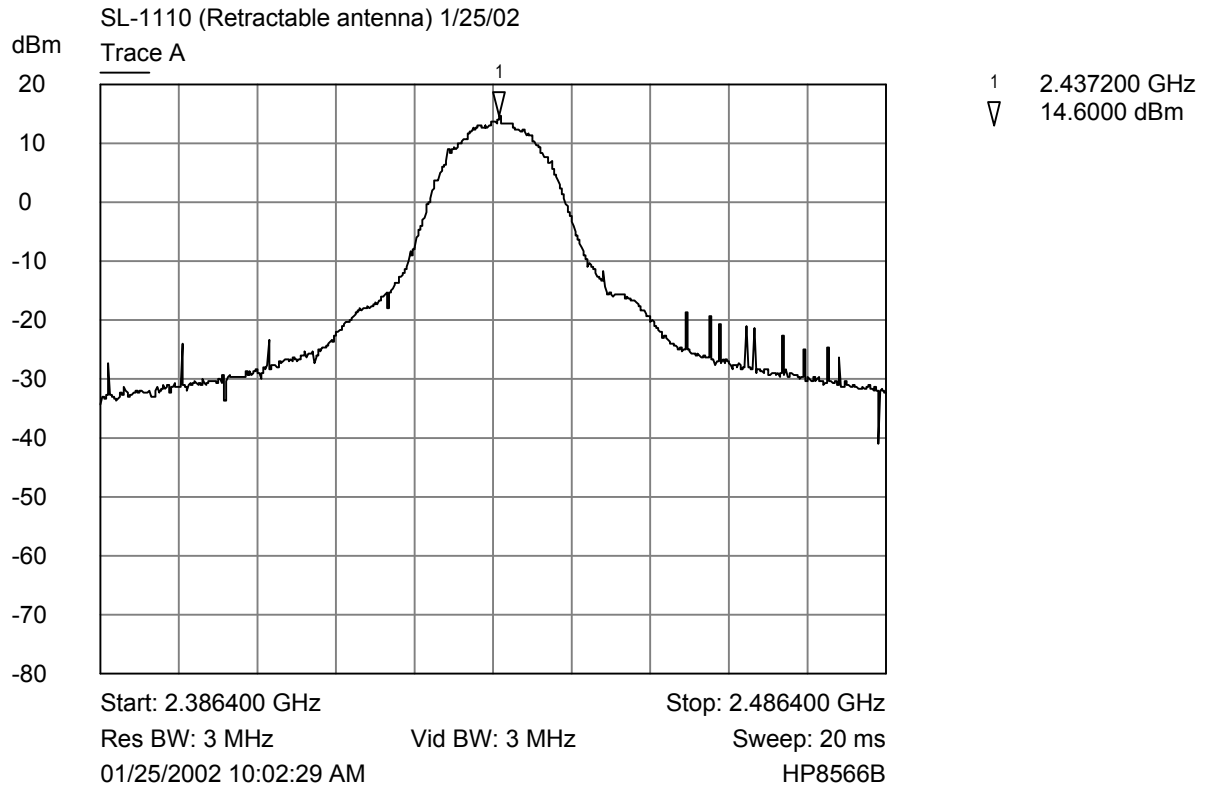

Peak Power (Channel 6, Antenna A, Power 33)




SL-1110 Retractable Antenna (Channel Eleven, Antenna A)

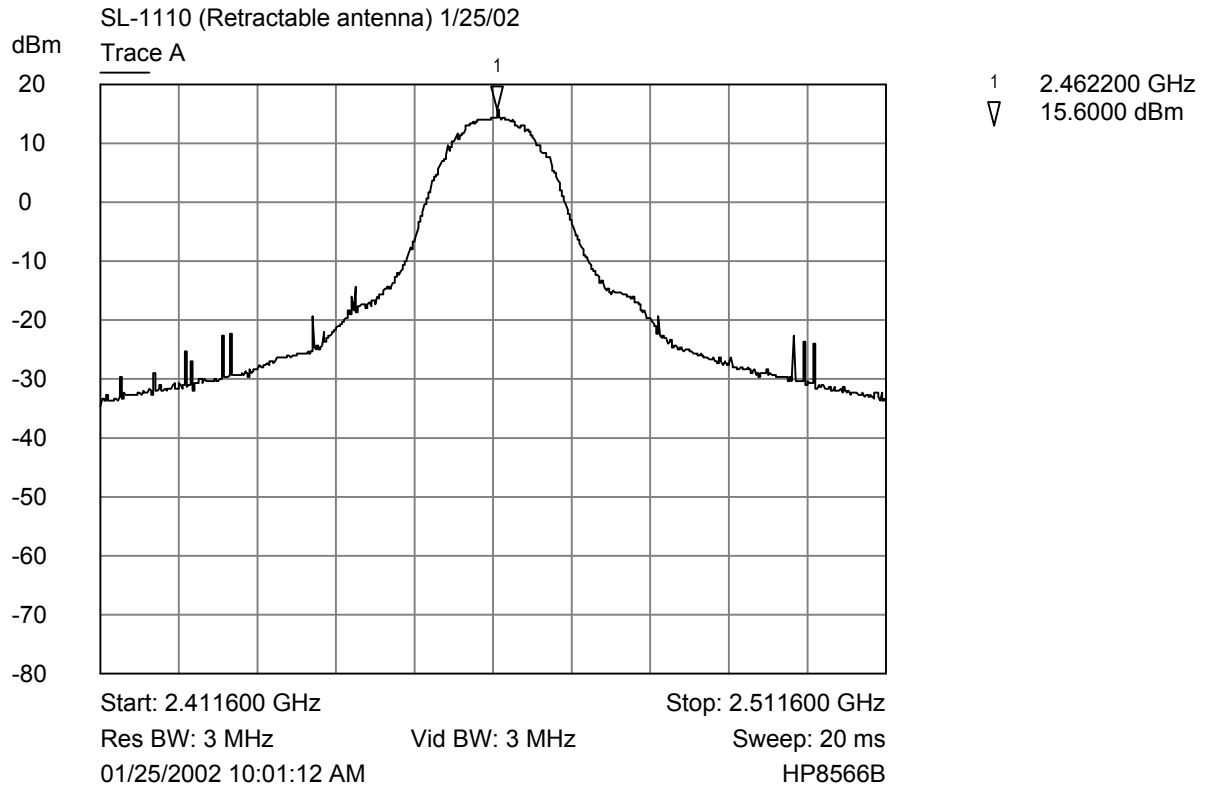


Peak Power (Channel 11, Antenna A, Power 33)

SL-1110 Retractable Antenna (Channel One, Antenna B)

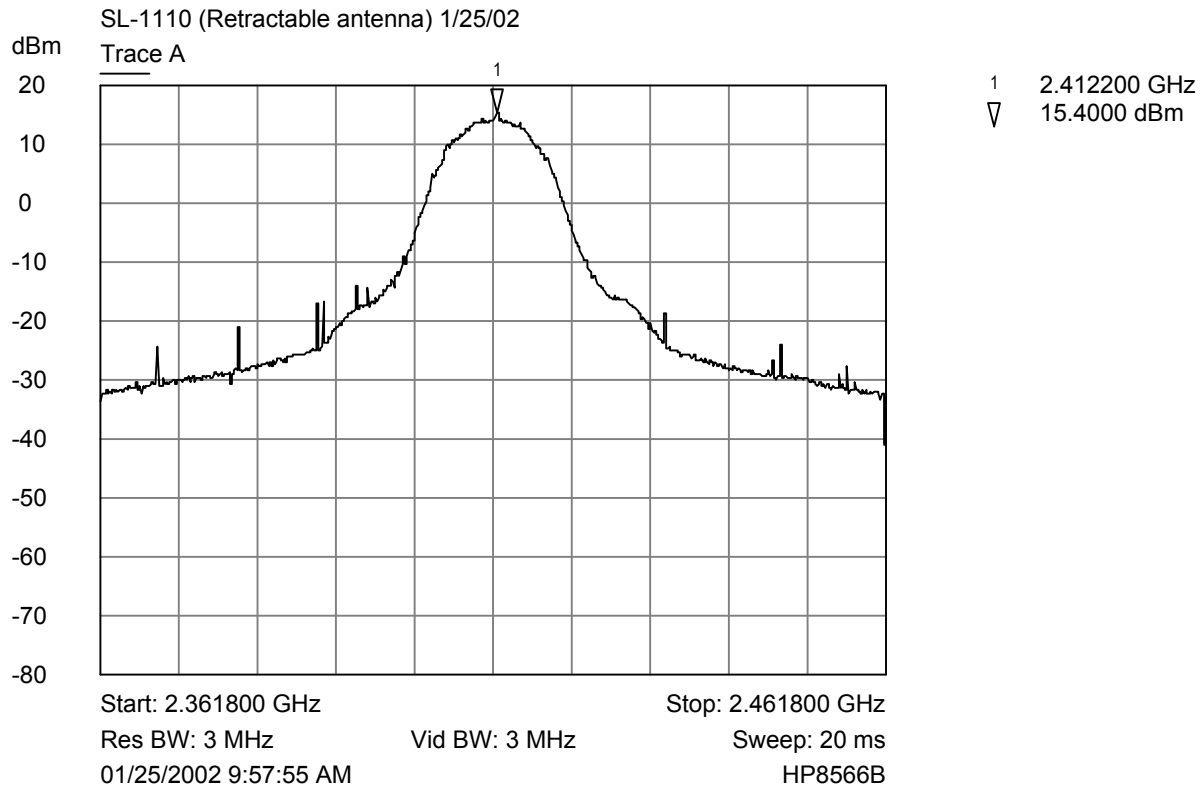


Peak Power (Channel 1, Antenna B, Power 33)

SL-1110 Retractable Antenna (Channel Six, Antenna B)

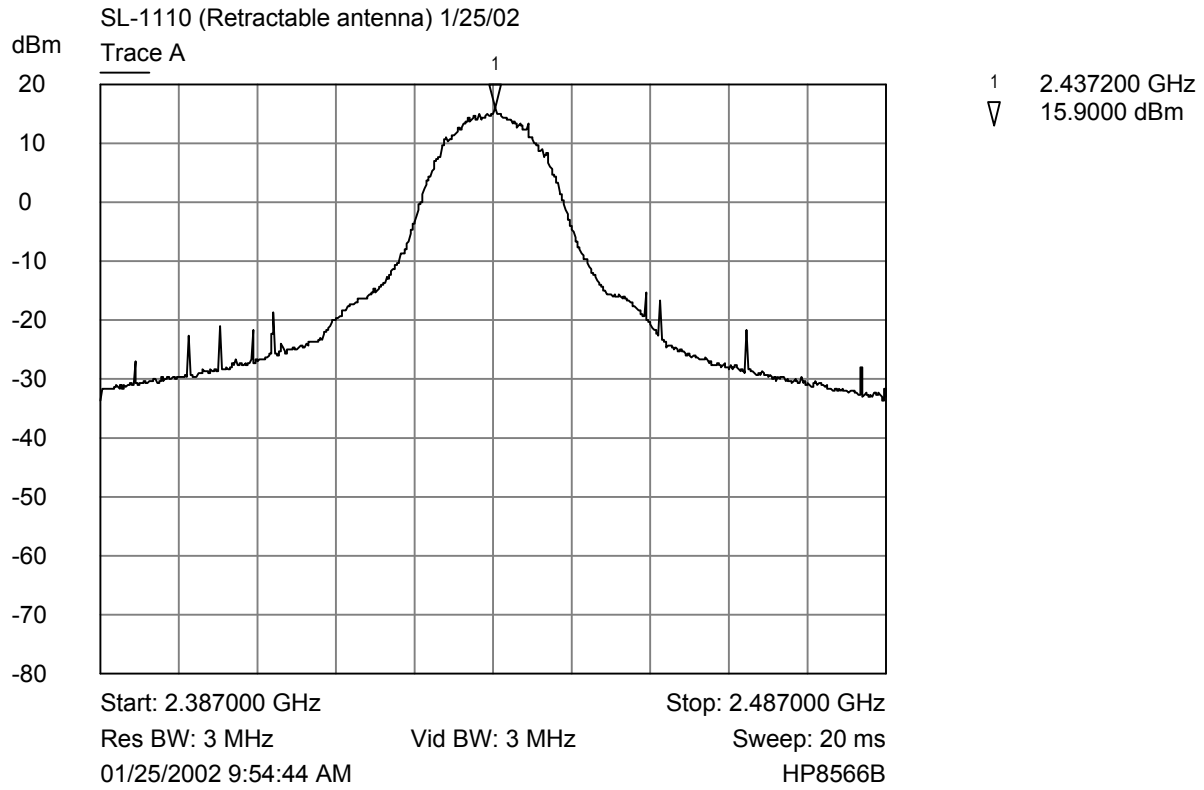


Peak Power (Channel 6, Antenna B, Power 33)

SL-1110 Retractable Antenna (Channel Eleven, Antenna B)

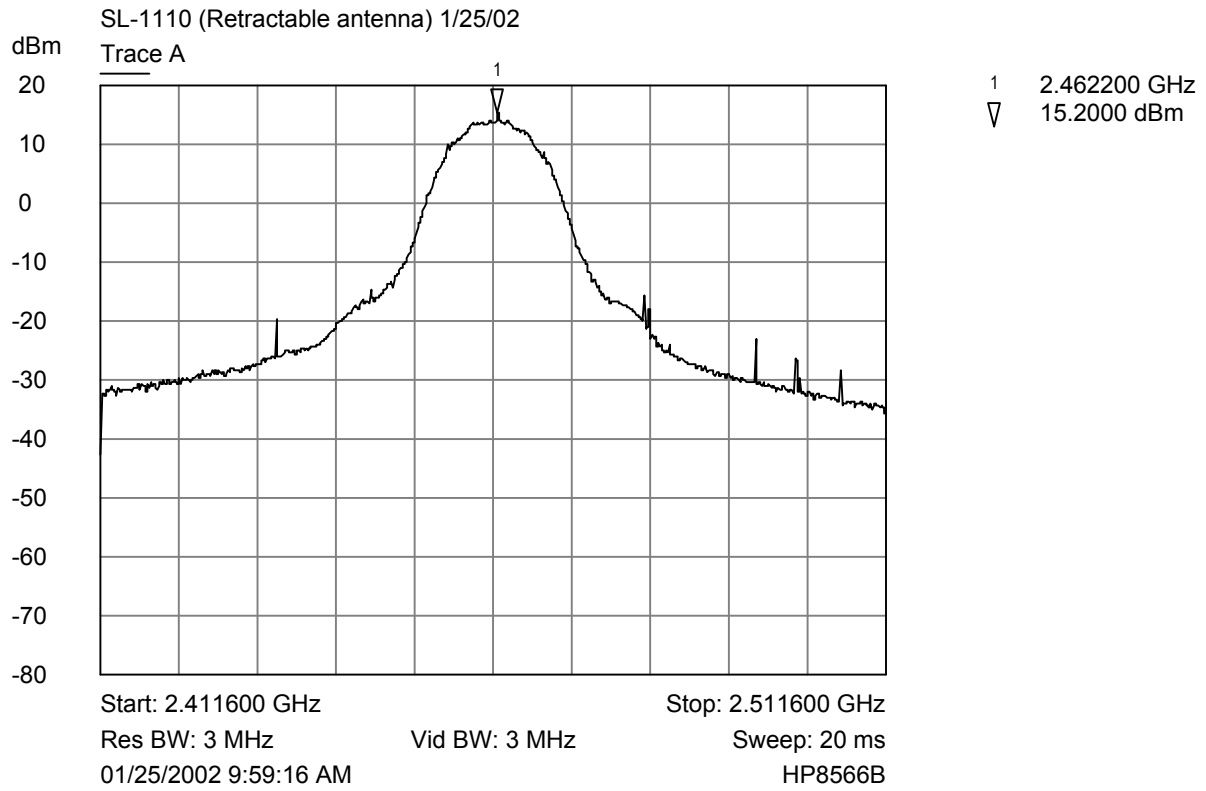


Peak Power (Channel 11, Antenna B, Power 33)

SL-1110 Fixed Antenna (Channel One, Antenna A)

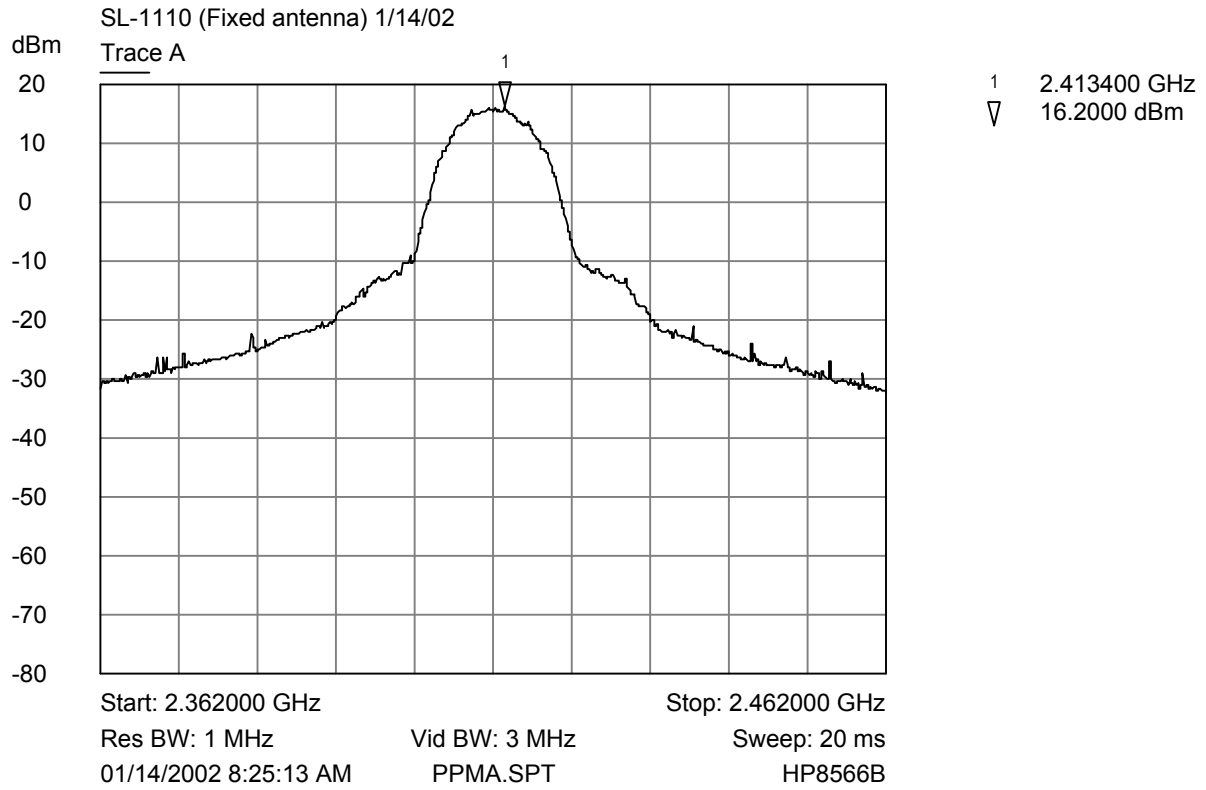


Peak Output Power (Channel 1, Antenna A)

SL-1110 Fixed Antenna (Channel Six, Antenna A)

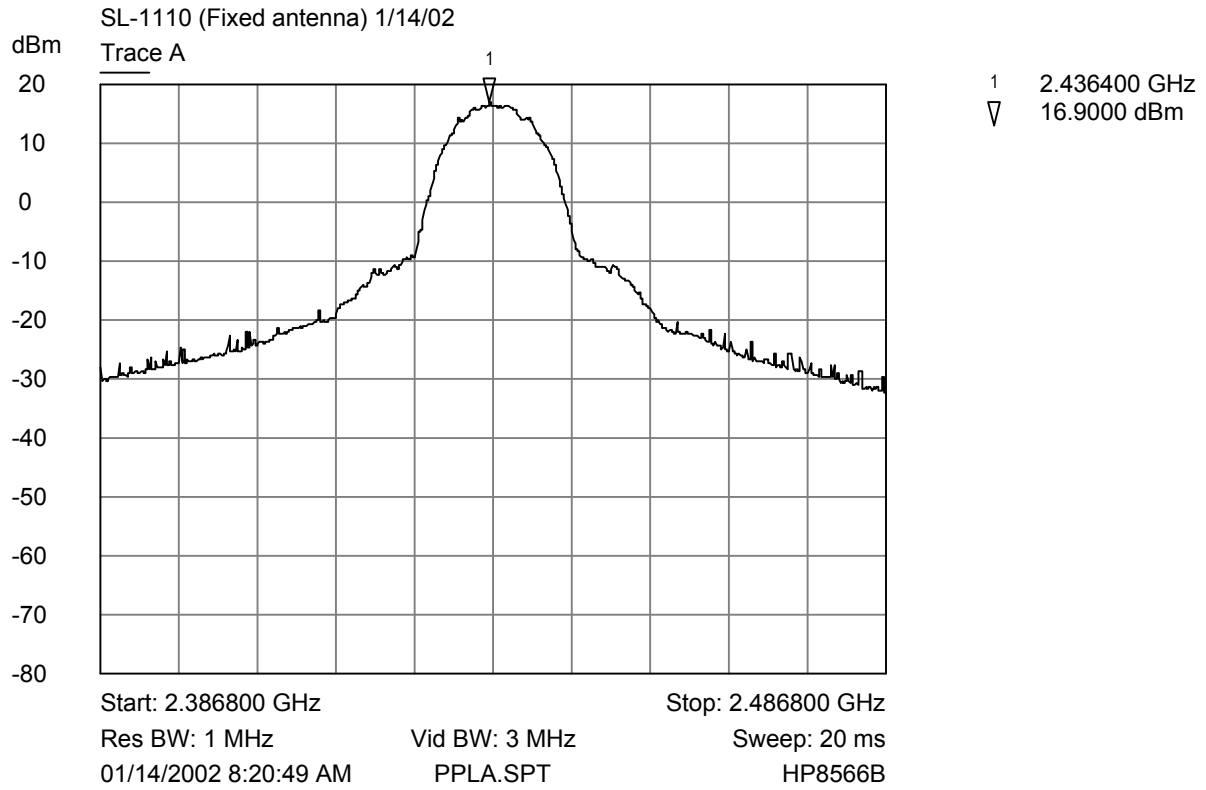


Peak Output Power (Channel 6, Antenna A)

SL-1110 Fixed Antenna (Channel Eleven, Antenna A)

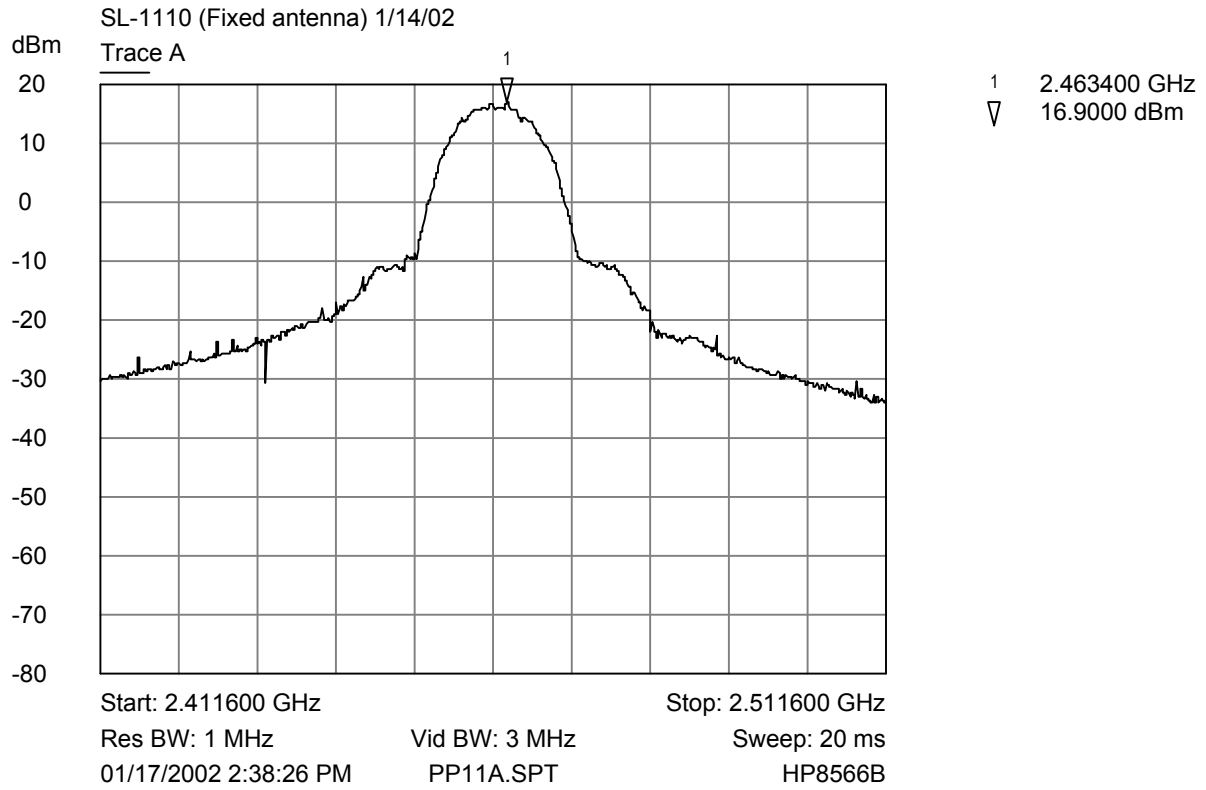

Peak Output Power (Channel 11, Antenna A)


SL-1110 Fixed Antenna (Channel One, Antenna B)

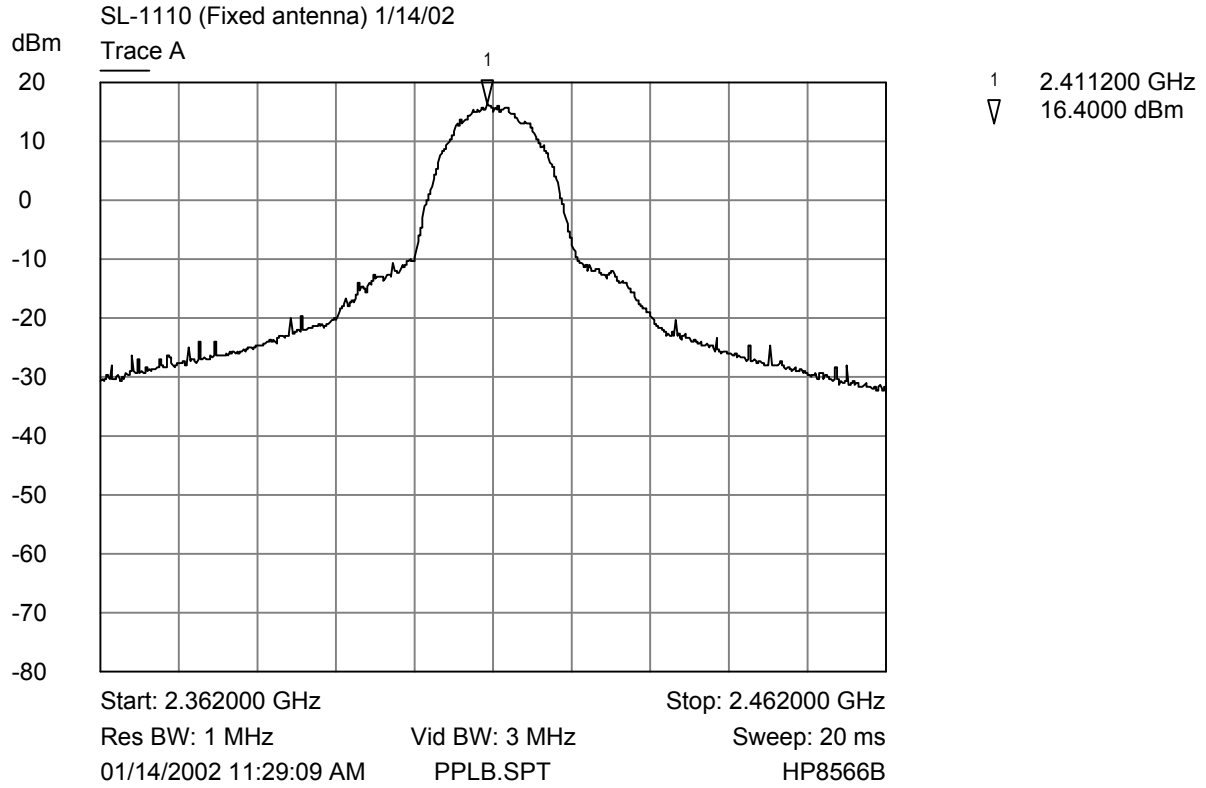

Peak Output Power (Channel 1, Antenna B)




SL-1110 Fixed Antenna (Channel Six, Antenna B)

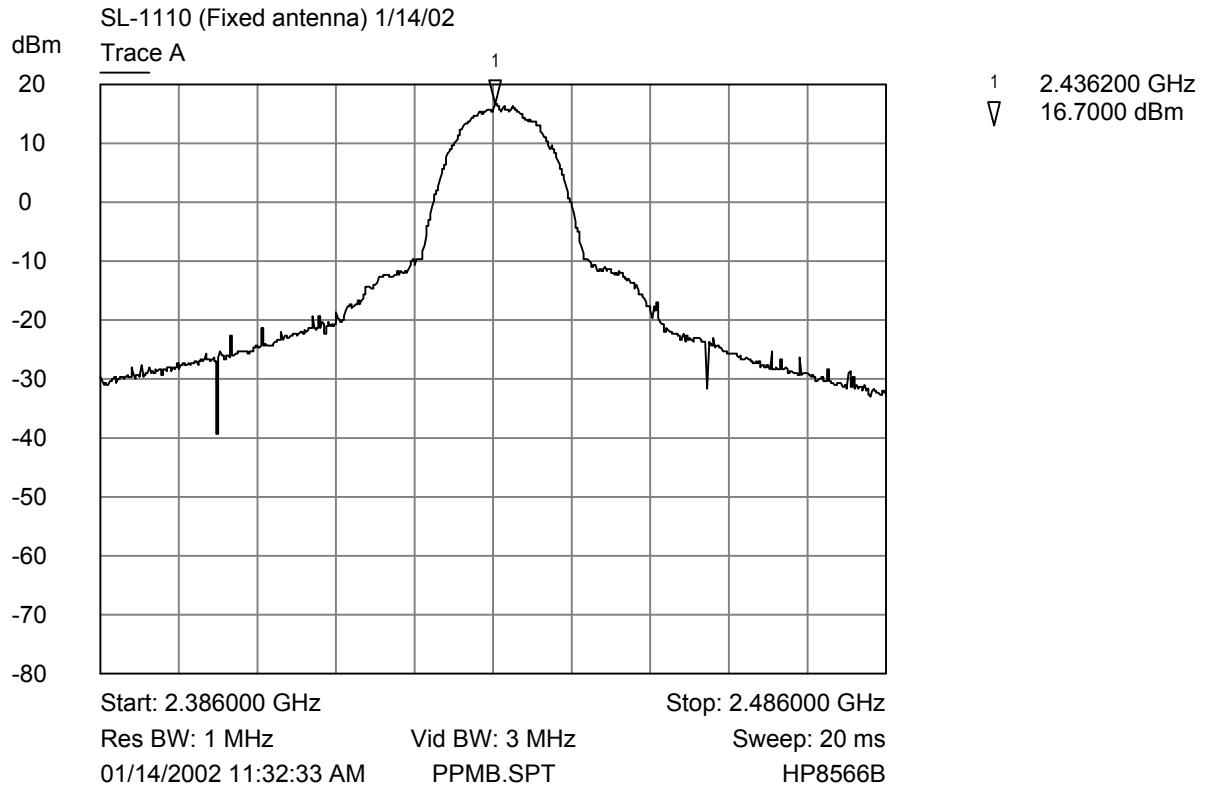

Peak Output Power (Channel 6, Antenna B)

SL-1110 Fixed Antenna (Channel Eleven, Antenna B)

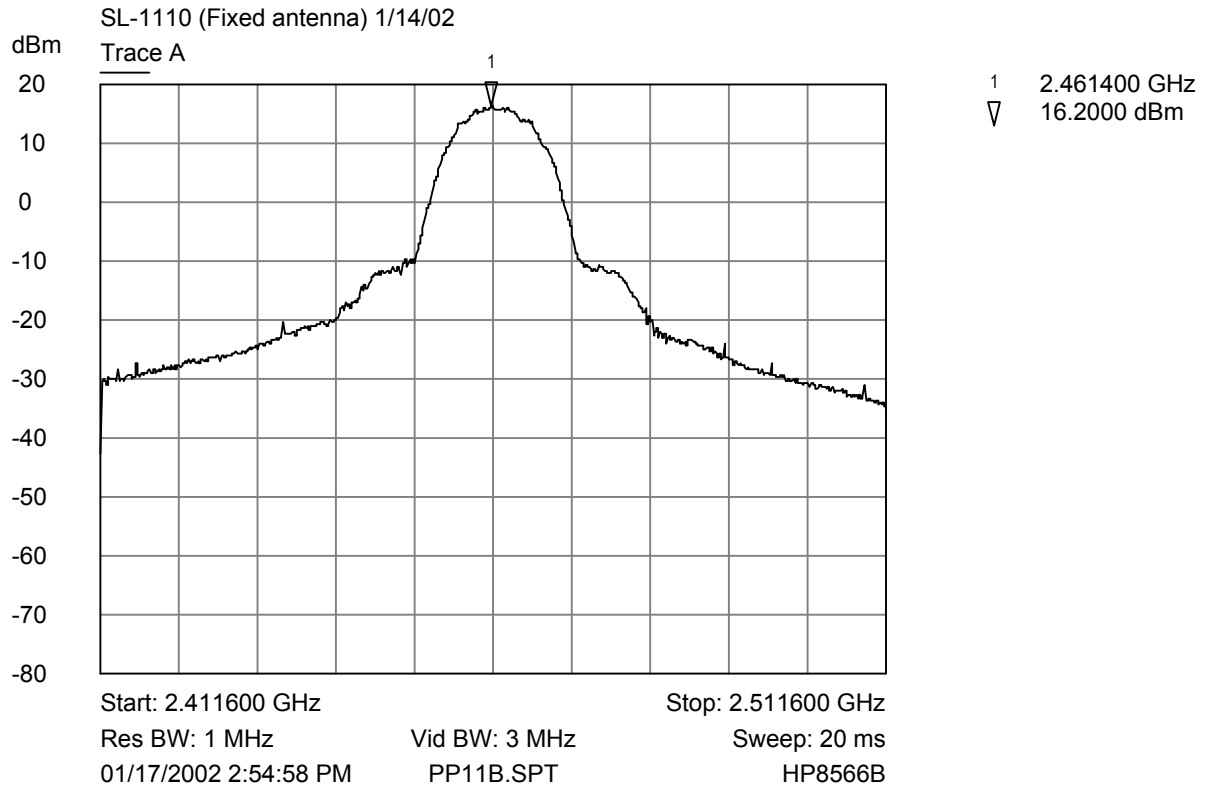

Peak Output Power (Channel 11, Antenna B)


**6.2.3 § 15.247 (c) Spurious Emissions:**

**Measurement Data Antenna Conducted Emissions:**

The frequency range from 10 MHz to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section.


A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

SL-1110 Retractable Antenna A (Low Channel)

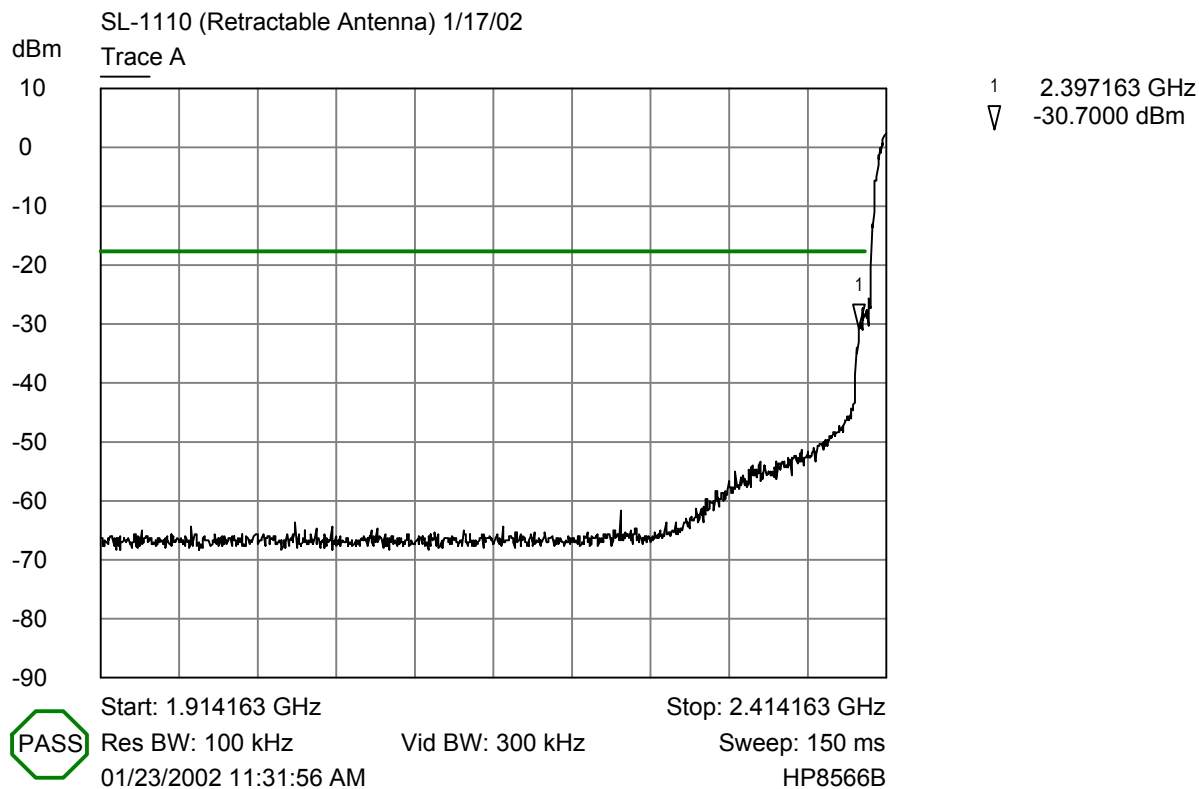

Band Edge Plot(Channel 1, Antenna A)


SL-1110 Retractable Antenna A (High Channel)

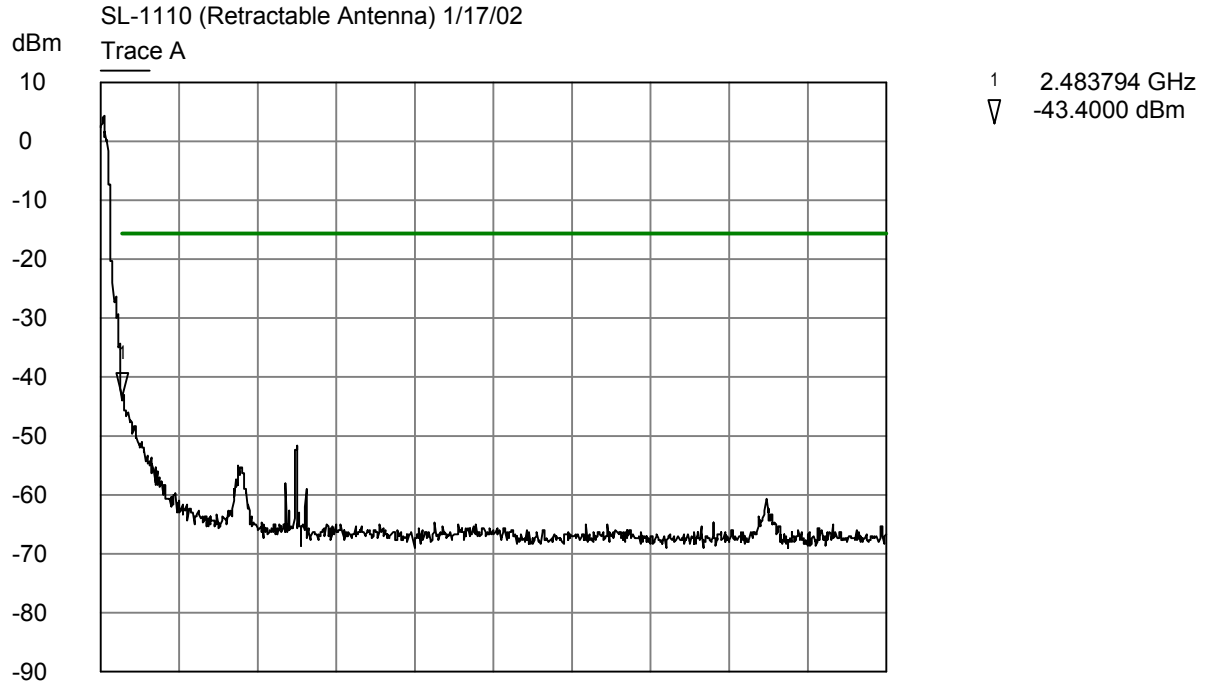

Start: 2.458893 GHz Stop: 3.348220 GHz  
Res BW: 100 kHz Vid BW: 300 kHz Sweep: 267 ms  
01/23/2002 11:35:35 AM HP8566B


PASS Band Edge Plot(Channel 11, Antenna A)

SL-1110 Retractable Antenna B (Low Channel)

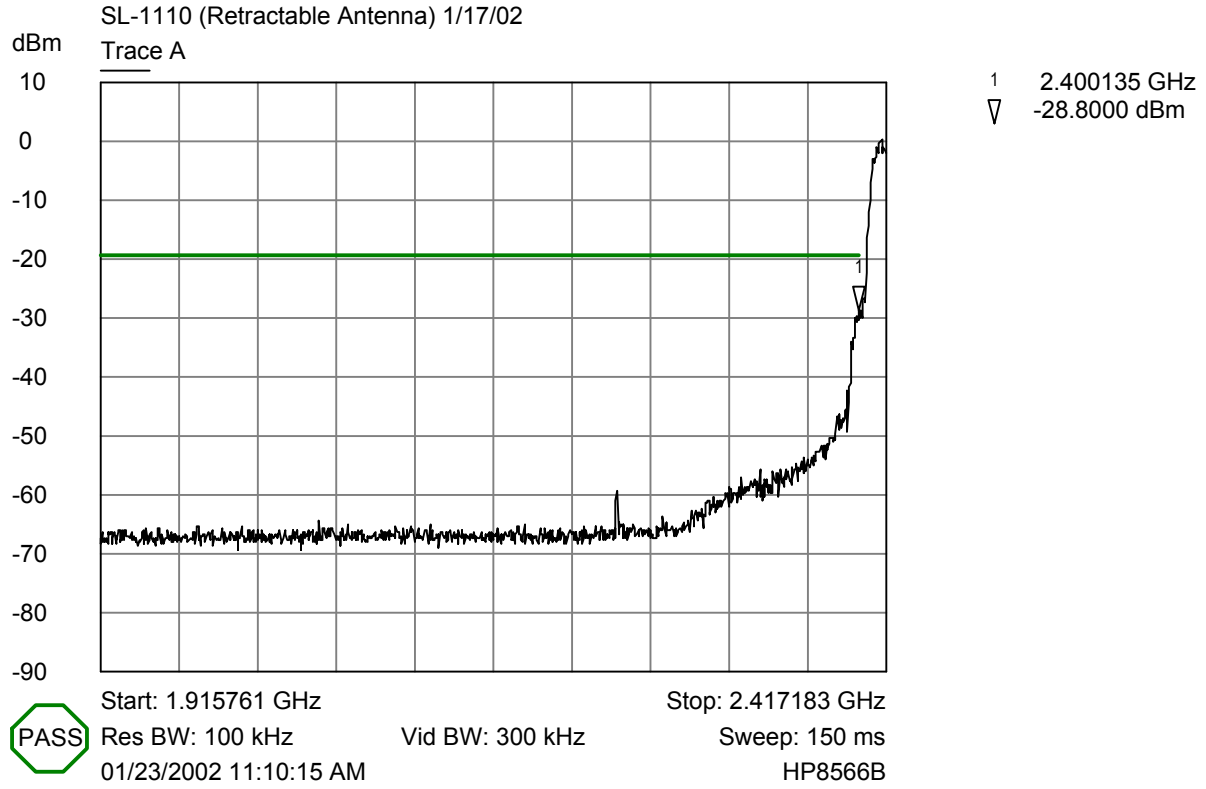


PASS Band Edge Plot(Channel 1, Antenna B)

SL-1110 Retractable Antenna B (High Channel)

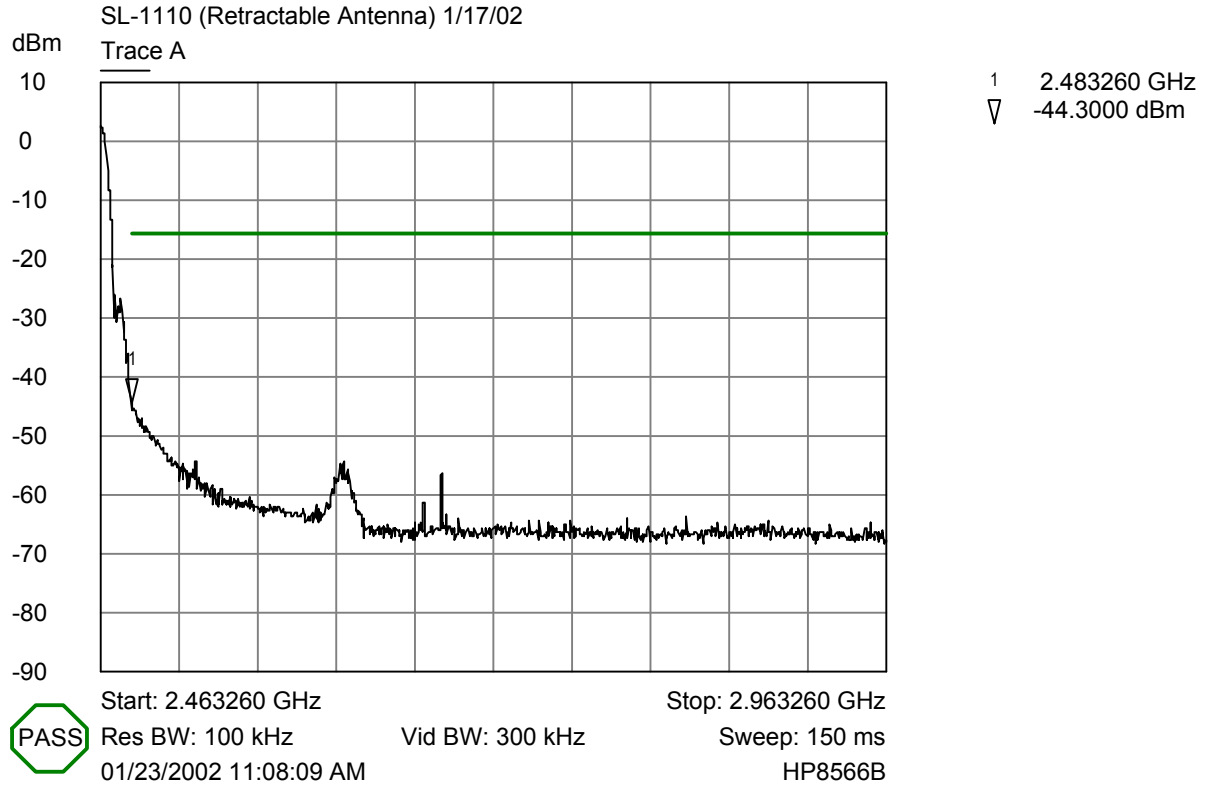


Band Edge Plot(Channel 11, Antenna B)

SL-1110 Fixed Antenna A (Low Channel)

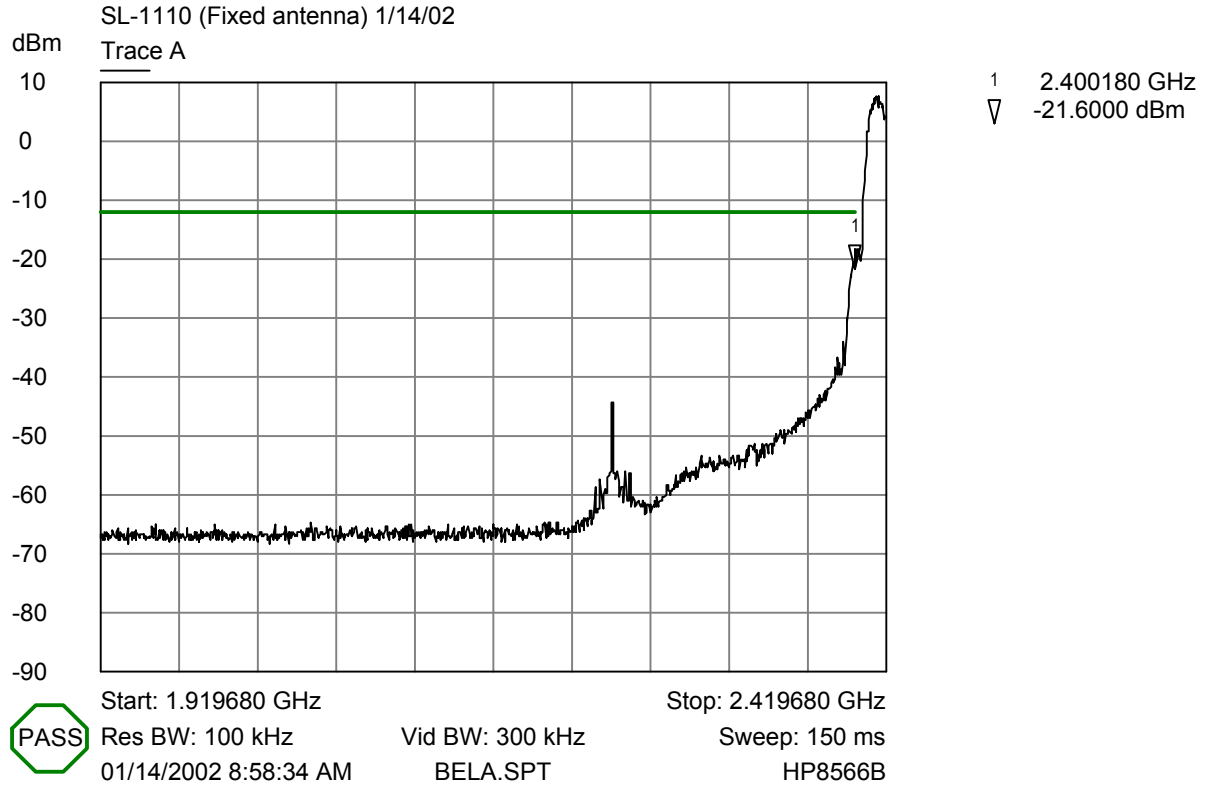

PASS  
Band Edge Plot(Channel 1, Antenna A)

SL-1110 Fixed Antenna A (High Channel)

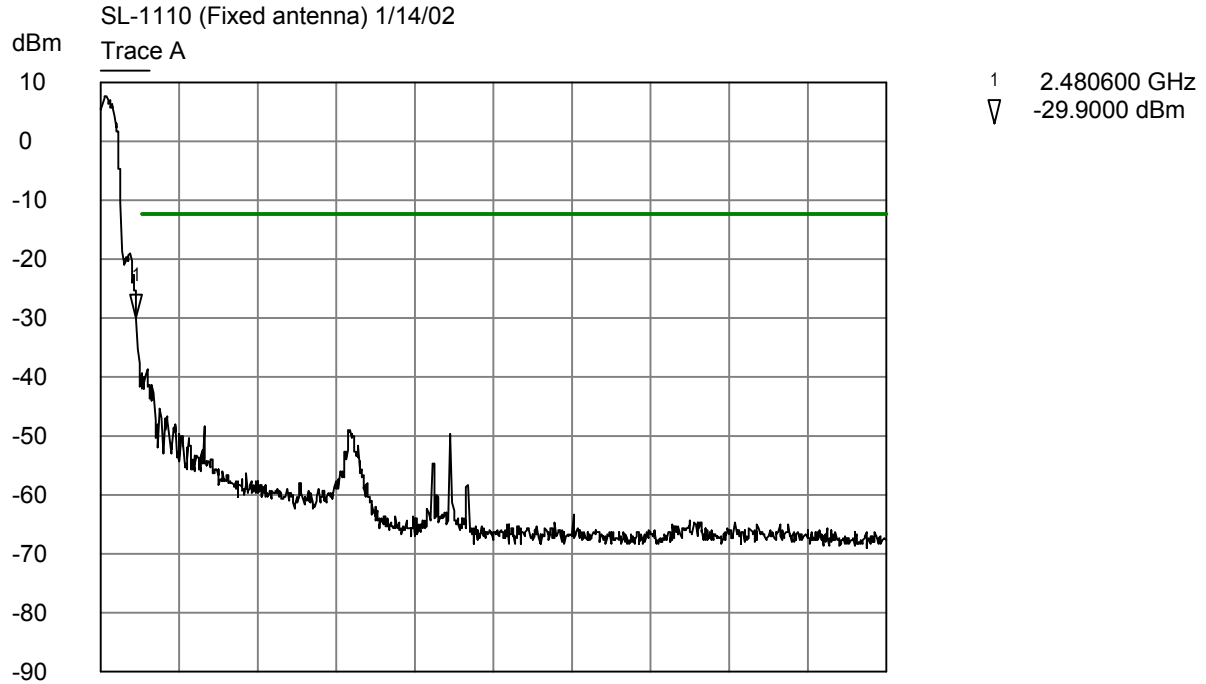


Start: 2.457600 GHz Stop: 2.957600 GHz  
Res BW: 100 kHz Vid BW: 300 kHz Sweep: 150 ms  
01/17/2002 2:42:20 PM BE11A.SPT HP8566B

Band Edge Plot(Channel 11, Antenna A)

PASS




SL-1110 Fixed Antenna B (Low Channel)

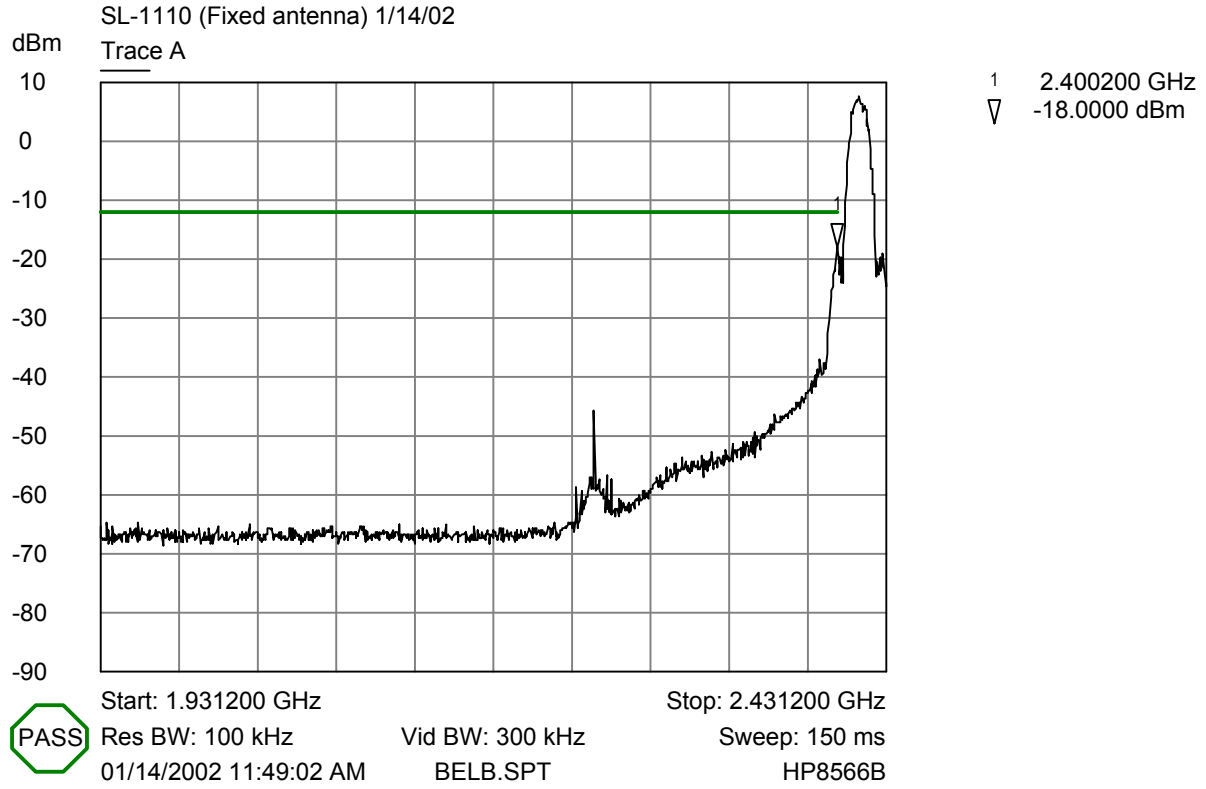

Band Edge Plot(Channel 1, Antenna B)

SL-1110 Fixed Antenna B (High Channel)

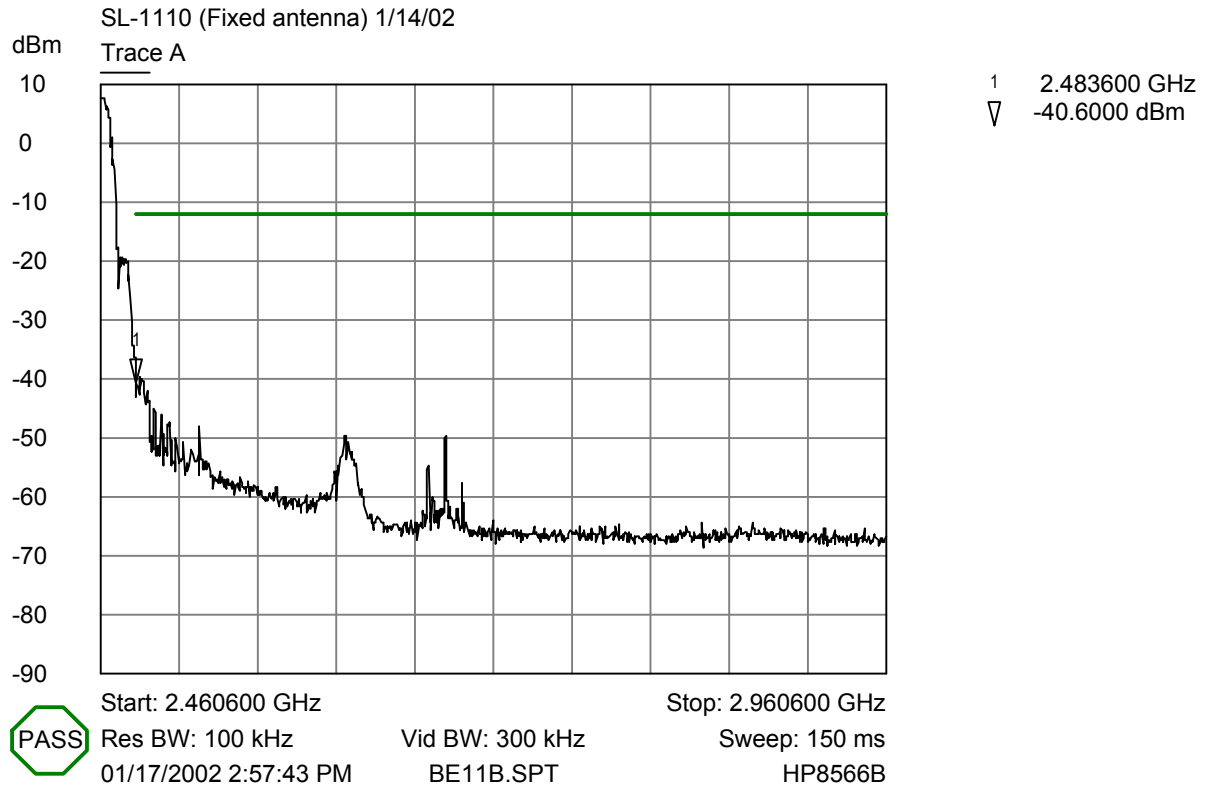

Band Edge Plot(Channel 11, Antenna B)

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 6.9 - 20.0 = -13.1 dBm.

Transmitting at 2412 MHz ( Retractable Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-45.7	-13.1
200 - 1000	601.6	-42.3	-13.1
1000 - 2000	1813.0	-41.9	-13.1
2000 - 2399.9	2399.1	-35.8	-13.1
2483.6 - 4000	2579.0	-40.9	-13.1
4000 - 6000	4076.0	-57.2	-13.1
6000 - 8000	6138.0 *	-59.1	-13.1
8000 - 11,000	10397.0 *	-58.7	-13.1
11,000 - 13,000	12596.0 *	-56.3	-13.1
13,000 - 15,000	14216.0 *	-55.6	-13.1
15,000 - 17,000	15322.0 *	-55.1	-13.1
17,000 - 20,000	19622.0 *	-52.2	-13.1
20,000 - 23,000	21617.0 *	-49.5	-13.1
23,000 - 25,000	23520.0 *	-48.2	-13.1
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 7.0 - 20.0 = -14.0 dBm.

Transmitting at 2437.0 MHz (Retractable Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	10.99	-44.5	-14.0
200 - 1000	626.4	-40.5	-14.0
1000 - 2000	1849.0	-39.7	-14.0
2000 - 2399.9	2399.9	-47.7	-14.0
2483.6 - 4000	2629.0	-40.6	-14.0
4000 - 6000	4124.0	-55.8	-14.0
6000 - 8000	6810.0 *	-59.4	-14.0
8000 - 11,000	10754.0 *	-59.6	-14.0
11,000 - 13,000	12868.0 *	-57.2	-14.0
13,000 - 15,000	13440.0 *	-55.2	-14.0
15,000 - 17,000	15852.0 *	-55.3	-14.0
17,000 - 20,000	19472.0 *	-52.3	-14.0
20,000 - 23,000	22559.0 *	-50.0	-14.0
23,000 - 25,000	23296.0 *	-48.6	-14.0
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is  $5.5 - 20.0 = -14.5$  dBm.

Transmitting at 2472.0 MHz (Retractable Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-48.0	-14.5
200 - 1000	662.4	-40.7	-14.5
1000 - 2000	1903.0	-45.8	-14.5
2000 - 2399.9	2327.1	-45.1	-14.5
2483.6 - 4000	2484.0	-35.9	-14.5
4000 - 6000	5858.0 *	-60.1	-14.5
6000 - 8000	6032.0 *	-59.6	-14.5
8000 - 11,000	10364.0 *	-59.0	-14.5
11,000 - 13,000	12870.0 *	-56.5	-14.5
13,000 - 15,000	13776.0 *	-55.9	-14.5
15,000 - 17,000	16352.0 *	-55.5	-14.5
17,000 - 20,000	19925.0 *	-51.7	-14.5
20,000 - 23,000	22658.0 *	-49.5	-14.5
23,000 - 25,000	23975.0 *	-48.5	-14.5
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is  $5.0 - 20.0 = -15.0$  dBm.

Transmitting at 2412 MHz (Retractable Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-49.7	-15.0
200 - 1000	748.8	-39.2	-15.0
1000 - 2000	1810.0	-46.6	-15.0
2000 - 2399.9	2399.9	-32.7	-15.0
2483.6 - 4000	2579.0	-47.0	-15.0
4000 - 6000	4074.0	-49.8	-15.0
6000 - 8000	6930.0 *	-59.2	-15.0
8000 - 11,000	9962.0 *	-59.1	-15.0
11,000 - 13,000	12922.0 *	-55.5	-15.0
13,000 - 15,000	13264.0 *	-54.9	-15.0
15,000 - 17,000	15938.0 *	-55.1	-15.0
17,000 - 20,000	18839.0 *	-51.6	-15.0
20,000 - 23,000	22370.0 *	-50.0	-15.0
23,000 - 25,000	23564.0 *	-48.0	-15.0
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 5.5 - 20.0 = -14.5 dBm.

Transmitting at 2437.0 MHz (Retractable Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-48.2	-14.5
200 - 1000	747.2	-38.1	-14.5
1000 - 2000	1849.0	-44.1	-14.5
2000 - 2399.9	2399.9	-47.7	-14.5
2483.6 - 4000	2629.0	-48.0	-14.5
4000 - 6000	4124.0	-48.3	-14.5
6000 - 8000	7312.0	-53.2	-14.5
8000 - 11,000	8684.0 *	-60.0	-14.5
11,000 - 13,000	12970.0 *	-56.5	-14.5
13,000 - 15,000	13370.0 *	-55.4	-14.5
15,000 - 17,000	15406.0 *	-54.9	-14.5
17,000 - 20,000	19712.0 *	-51.8	-14.5
20,000 - 23,000	22910.0 *	-49.9	-14.5
23,000 - 25,000	23530.0 *	-48.5	-14.5
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 4.3 - 20.0 = -15.7 dBm.

Transmitting at 2472.0 MHz (Retractable Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-49.5	-15.7
200 - 1000	748.8	-38.0	-15.7
1000 - 2000	1900.0	-47.6	-15.7
2000 - 2399.9	2327.5	-40.8	-15.7
2483.6 - 4000	2484.0	-35.6	-15.7
4000 - 6000	4194.0	-55.4	-15.7
6000 - 8000	6966.0 *	-59.2	-15.7
8000 - 11,000	10757.0 *	-59.4	-15.7
11,000 - 13,000	12920.0 *	-56.0	-15.7
13,000 - 15,000	12882.0 *	-55.5	-15.7
15,000 - 17,000	16304.0 *	-54.6	-15.7
17,000 - 20,000	19454.0 *	-51.6	-15.7
20,000 - 23,000	21149.0 *	-50.1	-15.7
23,000 - 25,000	23539.0 *	-48.6	-15.7
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 8.0 - 20.0 = -12.0 dBm.

Transmitting at 2412 MHz (Fixed Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-38.6	-12.0
200 - 1000	601.6	-35.4	-12.0
1000 - 2000	1810.0	-21.6	-12.0
2000 - 2399.9	2399.1	-14.7	-12.0
2483.6 - 4000	2579.0	-34.4	-12.0
4000 - 6000	4074.0	-59.4	-12.0
6000 - 8000	7236.0	-53.4	-12.0
8000 - 11,000	10994.0 *	-60.7	-12.0
11,000 - 13,000	12880.0 *	-57.5	-12.0
13,000 - 15,000	13988.0 *	-56.5	-12.0
15,000 - 17,000	15980.0 *	-56.3	-12.0
17,000 - 20,000	19487.0 *	-52.6	-12.0
20,000 - 23,000	22820.0 *	-50.7	-12.0
23,000 - 25,000	23412.0 *	-49.6	-12.0
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 8.1 - 20.0 = -11.9 dBm.

Transmitting at 2437.0 MHz (Fixed Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	68.5	-26.9	-11.9
200 - 1000	625.6	-31.1	-11.9
1000 - 2000	1850.0	-22.6	-11.9
2000 - 2399.9	2399.9	-35.2	-11.9
2483.6 - 4000	2629.0	-39.9	-11.9
4000 - 6000	4124.0	-59.9	-11.9
6000 - 8000	7312.0	-53.8	-11.9
8000 - 11,000	9746.0	-67.0	-11.9
11,000 - 13,000	12932.0 *	-65.8	-11.9
13,000 - 15,000	14226.0 *	-67.0	-11.9
15,000 - 17,000	15458.0 *	-66.1	-11.9
17,000 - 20,000	18842.0 *	-63.1	-11.9
20,000 - 23,000	22835.0 *	-61.2	-11.9
23,000 - 25,000	23458.0 *	-59.2	-11.9
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 7.8 - 20.0 = -12.2 dBm.

Transmitting at 2472.0 MHz (Fixed Antenna A)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	173.4	-27.2	-12.2
200 - 1000	661.6	-31.4	-12.2
1000 - 2000	1902.0	-21.8	-12.2
2000 - 2399.9	2328.3	-47.4	-12.2
2483.6 - 4000	2484.0	-20.4	-12.2
4000 - 6000	4194.0	-61.8	-12.2
6000 - 8000	7416.0	-50.5	-12.2
8000 - 11,000	9884.0 *	-64.0	-12.2
11,000 - 13,000	12844.0 *	-67.8	-12.2
13,000 - 15,000	14236.0 *	-67.0	-12.2
15,000 - 17,000	15500.0 *	-66.8	-12.2
17,000 - 20,000	19700.0 *	-61.8	-12.2
20,000 - 23,000	21671.0 *	-61.3	-12.2
23,000 - 25,000	23578.0 *	-59.5	-12.2
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 7.9 - 20.0 = -12.1 dBm.

Transmitting at 2412 MHz (Fixed Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	11.5	-37.7	-12.1
200 - 1000	601.6	-31.5	-12.1
1000 - 2000	1812.0	-23.1	-12.1
2000 - 2399.9	2399.1	-15.7	-12.1
2483.6 - 4000	2579.0	-35.6	-12.1
4000 - 6000	4074.0	-56.9	-12.1
6000 - 8000	7236.0	-57.3	-12.1
8000 - 11,000	9647.0	-64.7	-12.1
11,000 - 13,000	12056.0	-64.6	-12.1
13,000 - 15,000	14474.0 *	-64.6	-12.1
15,000 - 17,000	15396.0 *	-65.6	-12.1
17,000 - 20,000	19034.0 *	-63.0	-12.1
20,000 - 23,000	22121.0 *	-60.5	-12.1
23,000 - 25,000	23514.0 *	-59.3	-12.1
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 8.1 - 20.0 = -11.9 dBm.

Transmitting at 2437.0 MHz (Fixed Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	68.1	-26.6	-11.9
200 - 1000	627.2	-31.5	-11.9
1000 - 2000	1844.0	-23.5	-11.9
2000 - 2399.9	2399.1	-32.9	-11.9
2483.6 - 4000	2629.0	-40.5	-11.9
4000 - 6000	4124.0	-55.5	-11.9
6000 - 8000	7312.0	-55.2	-11.9
8000 - 11,000	9746.0	-65.2	-11.9
11,000 - 13,000	12190.0	-65.2	-11.9
13,000 - 15,000	14270.0 *	-67.3	-11.9
15,000 - 17,000	15370.0 *	-65.8	-11.9
17,000 - 20,000	19880.0 *	-63.1	-11.9
20,000 - 23,000	21455.0 *	-61.3	-11.9
23,000 - 25,000	23597.0 *	-59.7	-11.9
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 8.0 - 20.0 = -12.0 dBm.

Transmitting at 2472.0 MHz (Fixed Antenna B)			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
10 - 200	173.0	-26.6	-12.0
200 - 1000	661.6	-31.6	-12.0
1000 - 2000	1902.0	-22.2	-12.0
2000 - 2399.9	2329.5	-45.8	-12.0
2483.6 - 4000	2485.0	-20.1	-12.0
4000 - 6000	4196.0	-56.8	-12.0
6000 - 8000	7420.0	-50.2	-12.0
8000 - 11,000	9884.0 *	-68.5	-12.0
11,000 - 13,000	12368.0	-66.9	-12.0
13,000 - 15,000	13960.0 *	-65.8	-12.0
15,000 - 17,000	16282.0 *	-66.6	-12.0
17,000 - 20,000	19826.0 *	-62.2	-12.0
20,000 - 23,000	22355.0 *	-61.6	-12.0
23,000 - 25,000	23350.0 *	-59.5	-12.0
* Noise Floor			



**Measurement Data Radiated Emissions Restricted Bands § 15.205:**

The frequency range from 10 MHz to 25 GHz was investigated to measure any radiated emissions in the restricted bands.

A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

AVERAGE FACTOR

The SL-1110 transmits continuously; therefore, there is not an average factor for this device.

**Vertical Polarity (Retractable Antenna A)**

Transmitting at 2412.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	62.0	-3.6	0.0	58.4	74.0	-15.6
2483.5 A	43.5	-3.6	0.0	39.9	54.0	-14.1
4824.0 P	47.9	1.5	0.0	49.4	74.0	-24.6
4824.0 A	37.4	1.5	0.0	38.9	54.0	-15.1
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.7 *	9.1	0.0	59.8	74.0	-14.2
14472.0 A	38.0 *	9.1	0.0	47.1	54.0	-6.9
19296.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19296.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2437.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	67.2	-3.6	0.0	63.6	74.0	-10.4
2483.5 A	46.1	-3.6	0.0	42.5	54.0	-11.5
4874.0 P	46.6	1.6	0.0	48.2	74.0	-25.8
4874.0 A	35.0	1.6	0.0	36.6	54.0	-17.4
7311.0 P	47.3 *	4.6	0.0	51.9	74.0	-22.1
7311.0 A	34.9 *	4.6	0.0	39.5	54.0	-14.5
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19496.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	76.1	-3.6	0.0	72.5	74.0	-1.5
2483.5 A	56.6	-3.6	0.0	53.0	54.0	-1.0
4944.0 P	46.6	1.9	34.4	48.5	74.0	-25.5
4944.0 A	36.1	1.9	34.4	38.0	54.0	-16.0
7416.0 P	47.2 *	4.9	0.0	52.1	74.0	-21.9
7416.0 A	34.9 *	4.9	0.0	39.8	54.0	-14.2
12360.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12360.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19776.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19776.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22248.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22248.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Horizontal Polarity (Retractable Antenna A)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	60.2	-3.6	0.0	56.6	74.0	-17.4
2483.5 A	41.6	-3.6	0.0	38.0	54.0	-16.0
4824.0 P	46.8	1.5	0.0	48.3	74.0	-25.7
4824.0 A	34.8	1.5	0.0	36.3	54.0	-17.7
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.7 *	9.1	0.0	59.8	74.0	-14.2
14472.0 A	38.0 *	9.1	0.0	47.1	54.0	-6.9
19296.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19296.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	63.4	-3.6	0.0	59.8	74.0	-14.2
2483.5 A	41.7	-3.6	0.0	38.1	54.0	-15.9
4874.0 P	46.0	1.6	0.0	47.6	74.0	-26.4
4874.0 A	34.2	1.6	0.0	35.8	54.0	-18.2
7311.0 P	47.3 *	4.6	0.0	51.9	74.0	-22.1
7311.0 A	34.9 *	4.6	0.0	39.5	54.0	-14.5
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19496.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	72.9	-3.6	0.0	69.3	74.0	-4.7
2483.5 A	51.3	-3.6	0.0	47.7	54.0	-6.3
4944.0 P	46.1	1.9	0.0	48.0	74.0	-26.0
4944.0 A	34.3	1.9	0.0	36.2	54.0	-17.8
7416.0 P	47.2 *	4.9	0.0	52.1	74.0	-21.9
7416.0 A	34.9 *	4.9	0.0	39.8	54.0	-14.2
12360.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12360.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19776.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19776.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22248.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22248.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Vertical Polarity (Retractable Antenna B)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	62.2	-3.6	0.0	58.6	74.0	-15.4
2483.5 A	43.3	-3.6	0.0	39.7	54.0	-14.3
4824.0 P	46.2	1.5	0.0	47.7	74.0	-26.3
4824.0 A	33.3	1.5	0.0	34.8	54.0	-19.2
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.7 *	9.1	0.0	59.8	74.0	-14.2
14472.0 A	38.0 *	9.1	0.0	47.1	54.0	-6.9
19296.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19296.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	68.3	-3.6	0.0	64.7	74.0	-9.3
2483.5 A	43.8	-3.6	0.0	40.2	54.0	-13.8
4874.0 P	45.6	1.6	0.0	47.2	74.0	-26.8
4874.0 A	34.2	1.6	0.0	35.8	54.0	-18.2
7311.0 P	47.3 *	4.6	0.0	51.9	74.0	-22.1
7311.0 A	34.9 *	4.6	0.0	39.5	54.0	-14.5
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19496.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	77.0	-3.6	0.0	73.4	74.0	-0.6
2483.5 A	56.9	-3.6	0.0	53.3	54.0	-0.7
4924.0 P	48.9	1.9	0.0	50.7	74.0	-23.3
4924.0 A	36.9	1.9	0.0	38.7	54.0	-15.3
7386.0 P	47.2 *	4.9	0.0	52.1	74.0	-21.9
7386.0 A	34.9 *	4.9	0.0	39.8	54.0	-14.2
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Horizontal Polarity (Retractable Antenna B)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	59.2	-3.6	0.0	55.6	74.0	-18.4
2483.5 A	41.4	-3.6	0.0	37.8	54.0	-16.2
4824.0 P	45.3	1.5	0.0	46.8	74.0	-27.2
4824.0 A	33.6	1.5	0.0	35.1	54.0	-18.9
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.7 *	9.1	0.0	59.8	74.0	-14.2
14472.0 A	38.0 *	9.1	0.0	47.1	54.0	-6.9
19296.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19296.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	64.7	-3.6	0.0	61.1	74.0	-12.9
2483.5 A	37.6	-3.6	0.0	34.0	54.0	-20.0
4874.0 P	45.7	1.6	0.0	47.3	74.0	-26.7
4874.0 A	33.8	1.6	0.0	35.4	54.0	-18.6
7311.0 P	47.3 *	4.6	0.0	51.9	74.0	-22.1
7311.0 A	34.9 *	4.6	0.0	39.5	54.0	-14.5
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19496.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer



Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	72.8	-3.6	0.0	69.2	74.0	-4.8
2483.5 A	52.6	-3.6	0.0	49.0	54.0	-5.0
4924.0 P	46.2	1.9	0.0	48.0	74.0	-26.0
4924.0 A	35.0	1.9	0.0	36.8	54.0	-17.2
7386.0 P	47.2 *	4.9	0.0	52.1	74.0	-21.9
7386.0 A	34.9 *	4.9	0.0	39.8	54.0	-14.2
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P *	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A *	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Vertical Polarity (Fixed Antenna A)**

Transmitting at 2412.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	59.3	-3.6	0.0	55.7	74.0	-18.3
2483.5 A	41.0	-3.6	0.0	37.4	54.0	-16.6
4824.0 P	58.9	1.5	0.0	60.4	74.0	-13.6
4824.0 A	43.8	1.5	0.0	45.3	54.0	-8.7
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
14472.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
19296.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
19296.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2437.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	66.5	-3.6	0.0	62.9	74.0	-11.1
2483.5 A	47.0	-3.6	0.0	43.4	54.0	-10.6
4874.0 P	50.3	1.6	0.0	51.9	74.0	-22.1
4874.0 A	38.6	1.6	0.0	40.2	54.0	-13.8
7311.0 P	49.7	4.6	0.0	54.3	74.0	-19.7
7311.0 A	38.2	4.6	0.0	42.8	54.0	-11.2
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
19496.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	74.0	-3.6	0.0	70.4	74.0	-3.6
2483.5 A	55.8	-3.6	0.0	52.2	54.0	-1.8
4924.0 P	46.3	1.9	0.0	48.2	74.0	-25.8
4924.0 A	35.2	1.9	0.0	37.1	54.0	-16.9
7386.0 P	47.1	4.9	0.0	52.0	74.0	-22.0
7386.0 A	34.5	4.9	0.0	39.4	54.0	-14.6
12310.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12310.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Horizontal Polarity (Fixed Antenna A)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	59.2	-3.6	0.0	55.6	74.0	-18.4
2483.5 A	41.2	-3.6	0.0	37.6	54.0	-16.4
4824.0 P	53.6	1.5	0.0	55.1	74.0	-18.9
4824.0 A	42.4	1.5	0.0	43.9	54.0	-10.1
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
14472.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
19296.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
19296.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	64.1	-3.6	0.0	60.5	74.0	-13.5
2483.5 A	43.9	-3.6	0.0	40.3	54.0	-13.7
4874.0 P	53.6	1.6	0.0	55.2	74.0	-18.8
4874.0 A	42.4	1.6	0.0	44.0	54.0	-10.0
7311.0 P	47.1	4.6	0.0	51.7	74.0	-22.3
7311.0 A	34.5	4.6	0.0	39.1	54.0	-14.9
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
19496.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	72.1	-3.6	0.0	68.5	74.0	-5.5
2483.5 A	55.7	-3.6	0.0	52.1	54.0	-1.9
4924.0 P	47.4	1.9	0.0	49.3	74.0	-24.7
4924.0 A	36.6	1.9	0.0	38.5	54.0	-15.5
7386.0 P	47.7	4.9	0.0	52.6	74.0	-21.4
7386.0 A	34.9	4.9	0.0	39.8	54.0	-14.2
12310.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12310.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Vertical Polarity (Fixed Antenna B)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	59.6	-3.6	0.0	56.0	74.0	-18.0
2483.5 A	43.2	-3.6	0.0	39.6	54.0	-14.4
4824.0 P	51.9	1.5	0.0	53.4	74.0	-20.6
4824.0 A	40.5	1.5	0.0	42.0	54.0	-12.0
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
14472.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
19296.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
19296.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	65.7	-3.6	0.0	62.1	74.0	-11.9
2483.5 A	45.9	-3.6	0.0	42.3	54.0	-11.7
4874.0 P	50.8	1.6	0.0	52.4	74.0	-21.6
4874.0 A	39.2	1.6	0.0	40.8	54.0	-13.2
7311.0 P	47.5	4.6	0.0	52.1	74.0	-21.9
7311.0 A	35.1	4.6	0.0	39.7	54.0	-14.3
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
19496.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	75.6	-3.6	0.0	72.0	74.0	-2.0
2483.5 A	55.6	-3.6	0.0	52.0	54.0	-2.0
4924.0 P	47.8	1.8	0.0	49.6	74.0	-24.4
4924.0 A	36.1	1.8	0.0	37.9	54.0	-16.1
7386.0 P	47.6	4.8	0.0	52.4	74.0	-21.6
7386.0 A	34.9	4.8	0.0	39.7	54.0	-14.3
12310.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12310.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Horizontal Polarity (Fixed Antenna B)**

Transmitting at 2402.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	62.9	-3.6	0.0	59.3	74.0	-14.7
2483.5 A	43.8	-3.6	0.0	40.2	54.0	-13.8
4824.0 P	46.5	1.5	0.0	48.0	74.0	-26.0
4824.0 A	36.2	1.5	0.0	37.7	54.0	-16.3
12060.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12060.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
14472.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
14472.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
19296.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
19296.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 2441.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	68.3	-3.6	0.0	64.7	74.0	-9.3
2483.5 A	45.8	-3.6	0.0	42.2	54.0	-11.8
4874.0 P	48.1	1.6	0.0	49.7	74.0	-24.3
4874.0 A	36.1	1.6	0.0	37.7	54.0	-16.3
7311.0 P	47.4	4.6	0.0	52.0	74.0	-22.0
7311.0 A	35.1	4.6	0.0	39.7	54.0	-14.3
12185.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12185.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19496.0 P *	49.0 *	13.8	0.0	62.8	74.0	-11.2
19496.0 A *	37.3 *	13.8	0.0	51.1	54.0	-2.9

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer



Transmitting at 2472.0 MHz						
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
2483.5 P	75.0	-3.6	0.0	71.4	74.0	-2.6
2483.5 A	54.5	-3.6	0.0	50.9	54.0	-3.1
4924.0 P	46.4	1.8	0.0	48.2	74.0	-25.8
4924.0 A	34.5	1.8	0.0	36.3	54.0	-17.7
7386.0 P	47.3	4.8	0.0	52.1	74.0	-21.9
7386.0 A	34.8	4.8	0.0	39.6	54.0	-14.4
12310.0 P	45.9 *	8.9	0.0	54.8	74.0	-19.2
12310.0 A	33.2 *	8.9	0.0	42.1	54.0	-11.9
19696.0 P	50.9 *	13.2	0.0	64.1	74.0	-9.9
19696.0 A	38.1 *	13.2	0.0	52.3	54.0	-2.7
22158.0 P	49.0 *	13.8	0.0	62.8	74.0	-11.2
22158.0 A	37.3 *	13.8	0.0	51.1	54.0	-2.9
P = Peak Detection A = Average Detection * No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer						

**Sample Field Strength Calculation:**

The field strength is calculated by adding the Correction Factor (Antenna Factor + Cable Factor), to the measured level from the receiver. The basic equation with a sample calculation is shown below:

FS = RA + CF - AF Where

FS = Field Strength

RA = Receiver Amplitude (Receiver Reading - Amplifier Gain)

CF = Correction Factor (Antenna Factor + Cable Factor)

AF = Average Factor

**RESULT**

In the configuration tested, the EUT complied with the requirements of the specification.

**6.2.4 § 15.247 (d) Power Spectral Density:****Measurement Data:**

The maximum power spectral density measured for this device was -11.8 dBm. Shown below is the measured power spectral density.

A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

SL-1110 Retractable Antenna A

Frequency (MHz)	Measured Power Spectral Density (dBm)
2412.0	-11.8
2437.0	-12.4
2462.0	-13.1

## SL-1110 Retractable Antenna B

Frequency (MHz)	Measured Power Spectral Density (dBm)
2412.0	-11.8
2437.0	-12.4
2462.0	-13.1

## SL-1110 Fixed Antenna A

Frequency (MHz)	Measured Power Spectral Density (dBm)
2412.0	-11.8
2437.0	-12.4
2462.0	-13.1


## SL-1110 Fixed Antenna B

Frequency (MHz)	Measured Power Spectral Density (dBm)
2412.0	-11.8
2437.0	-12.4
2462.0	-13.1

**RESULT**


In the configuration tested, the peak power spectral density was less than 8 dBm; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

SL-1110 Retractable Antenna A (Low Channel)

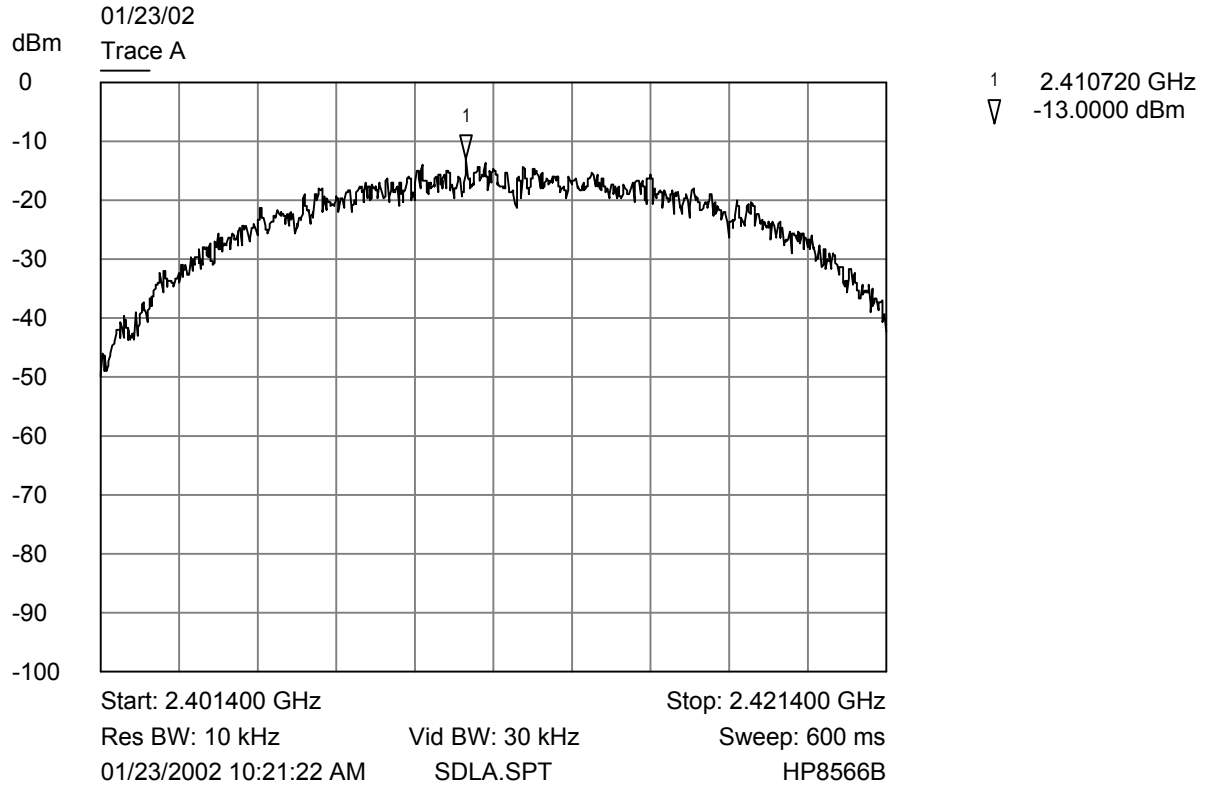


Spectral Density(Channel 1, Antenna A, Power 36)

SL-1110 Retractable Antenna A (Middle Channel)

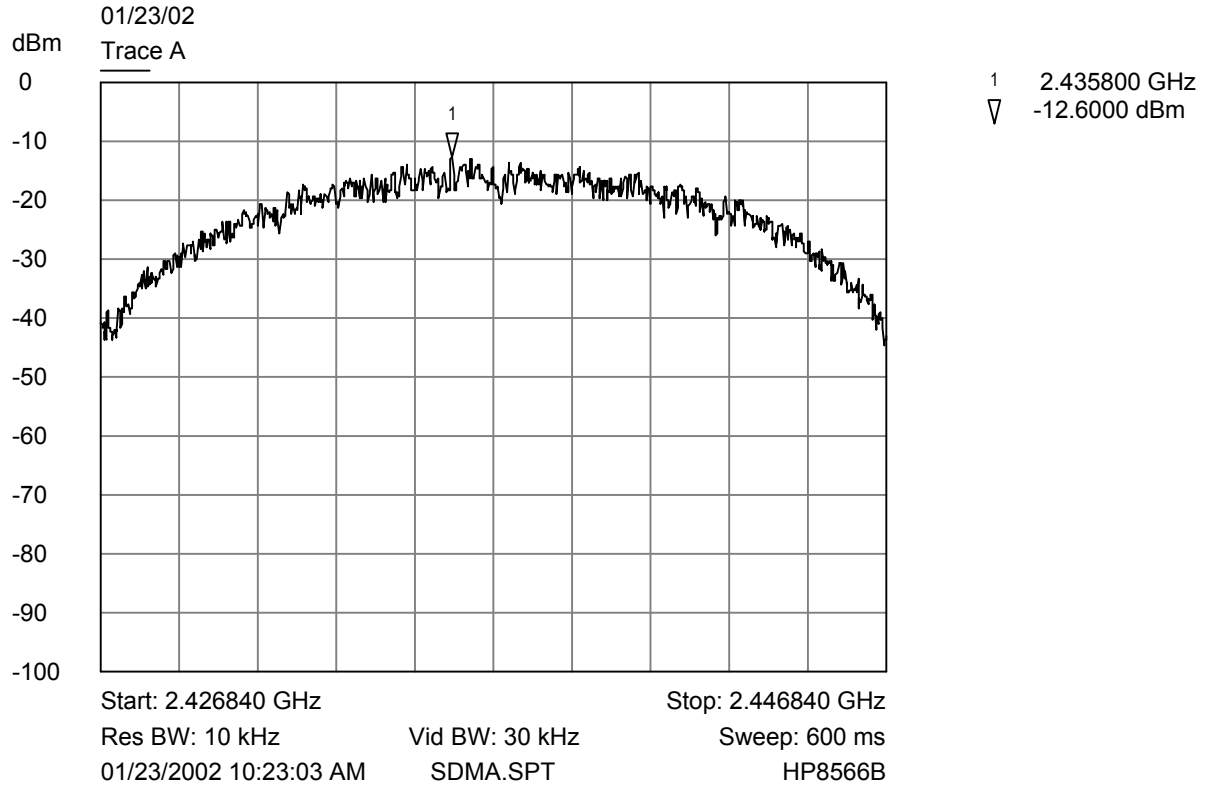


Spectral Density(Channel 6, Antenna A, Power 36)

SL-1110 Retractable Antenna A (High Channel)

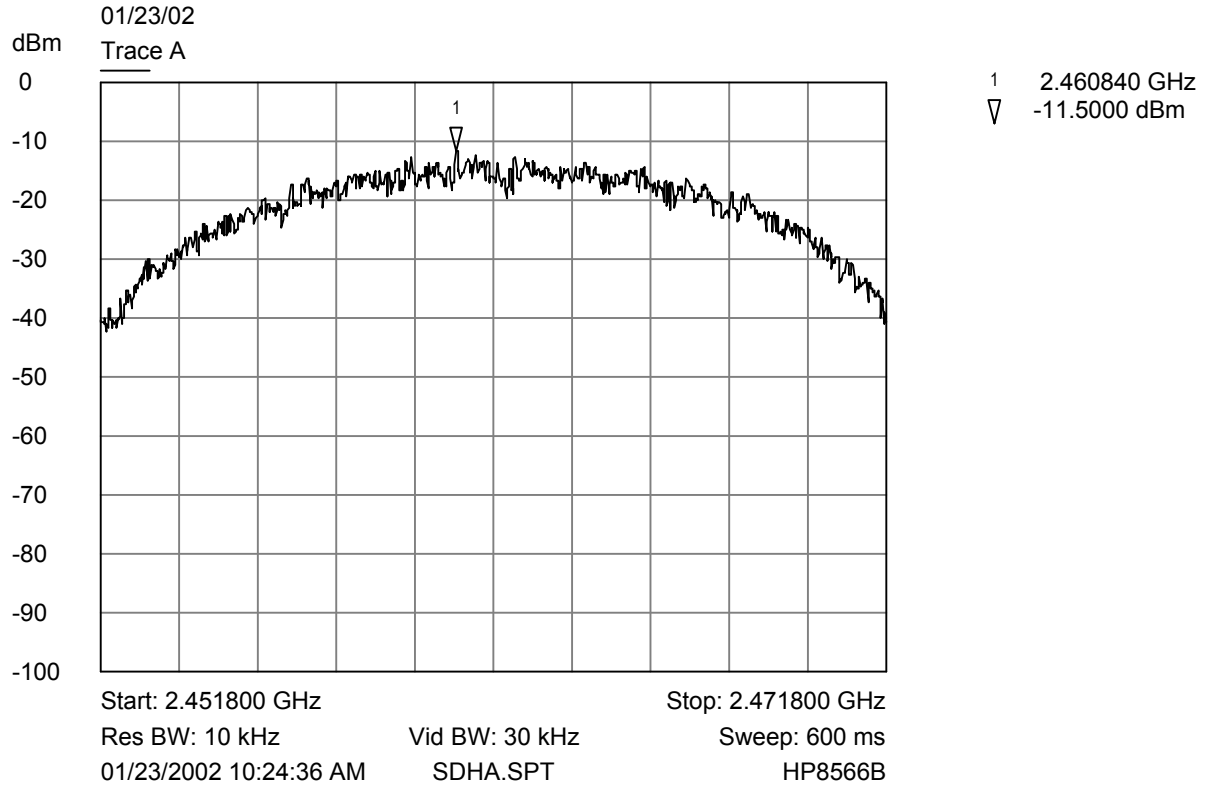


Spectral Density(Channel 11, Antenna A, Power 36)

SL-1110 Retractable Antenna B (Low Channel)

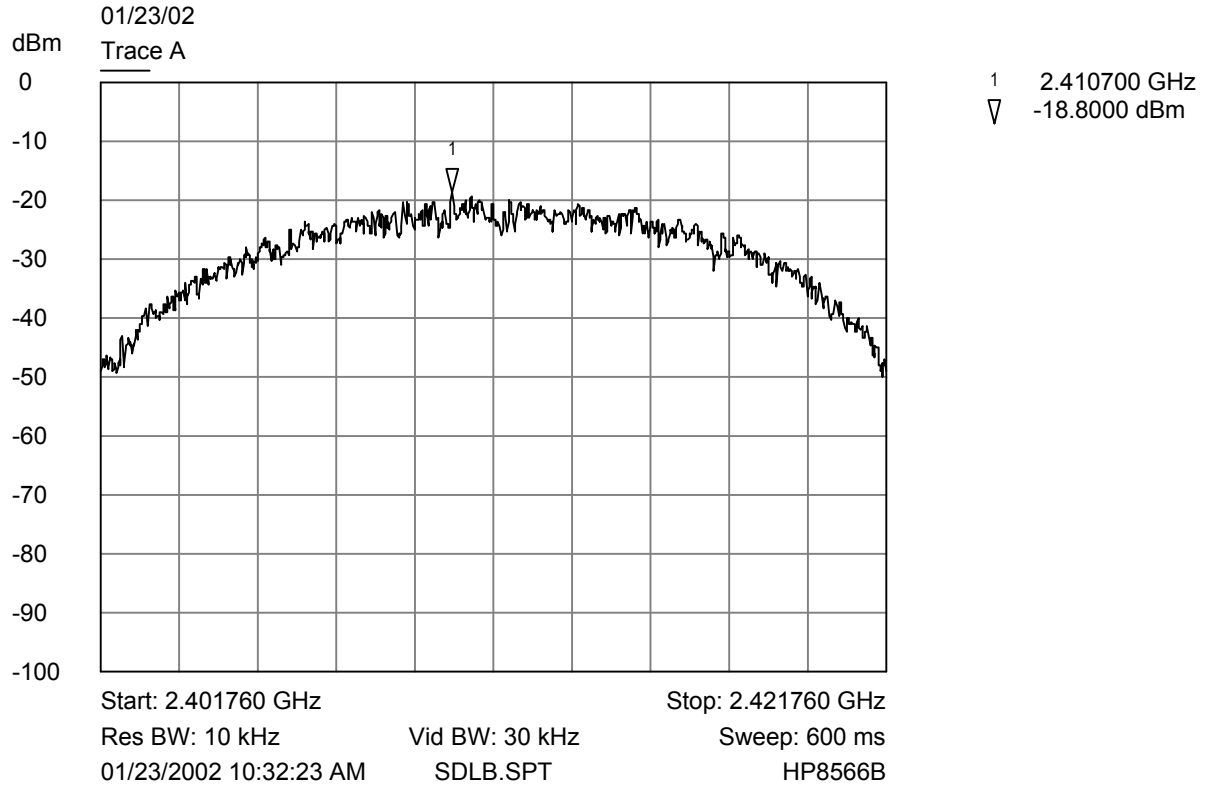

Spectral Density(Channel 1, Antenna B, Power 36)


SL-1110 Retractable Antenna B (Middle Channel)

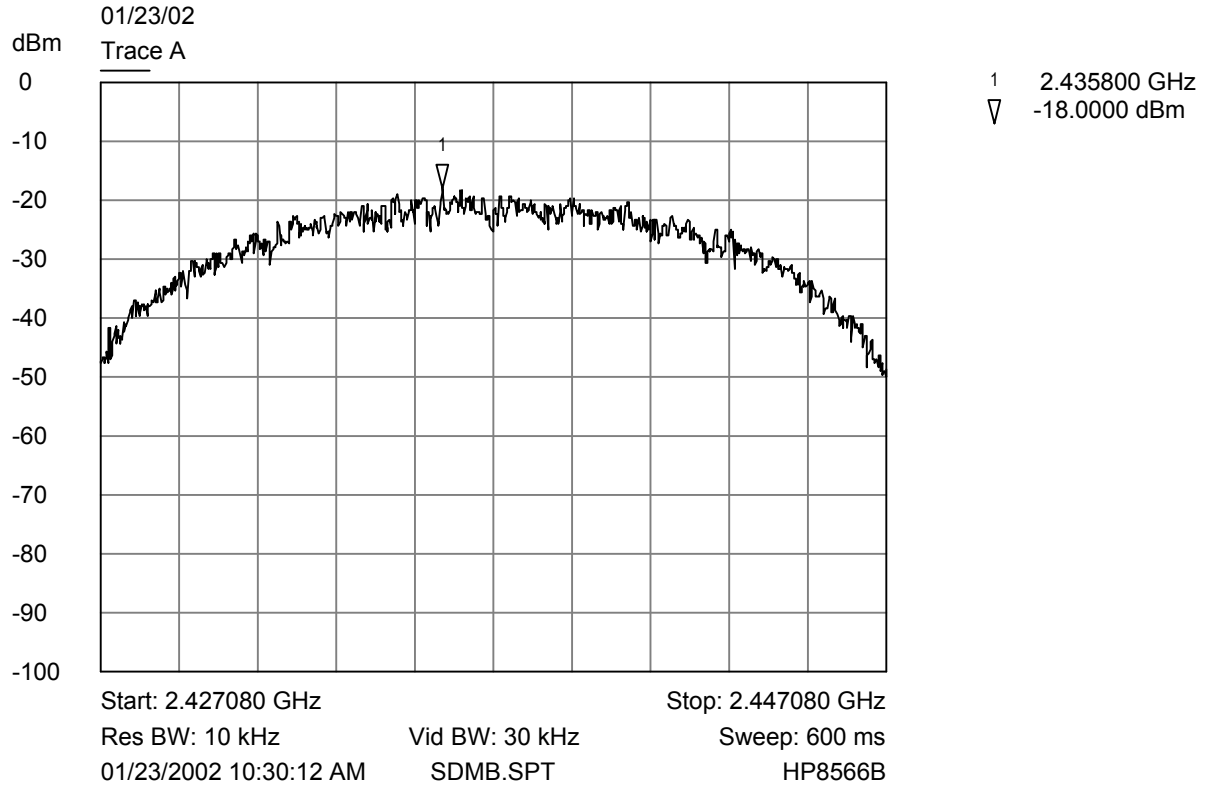

Spectral Density(Channel 6, Antenna B, Power 36)




SL-1110 Retractable Antenna B (High Channel)

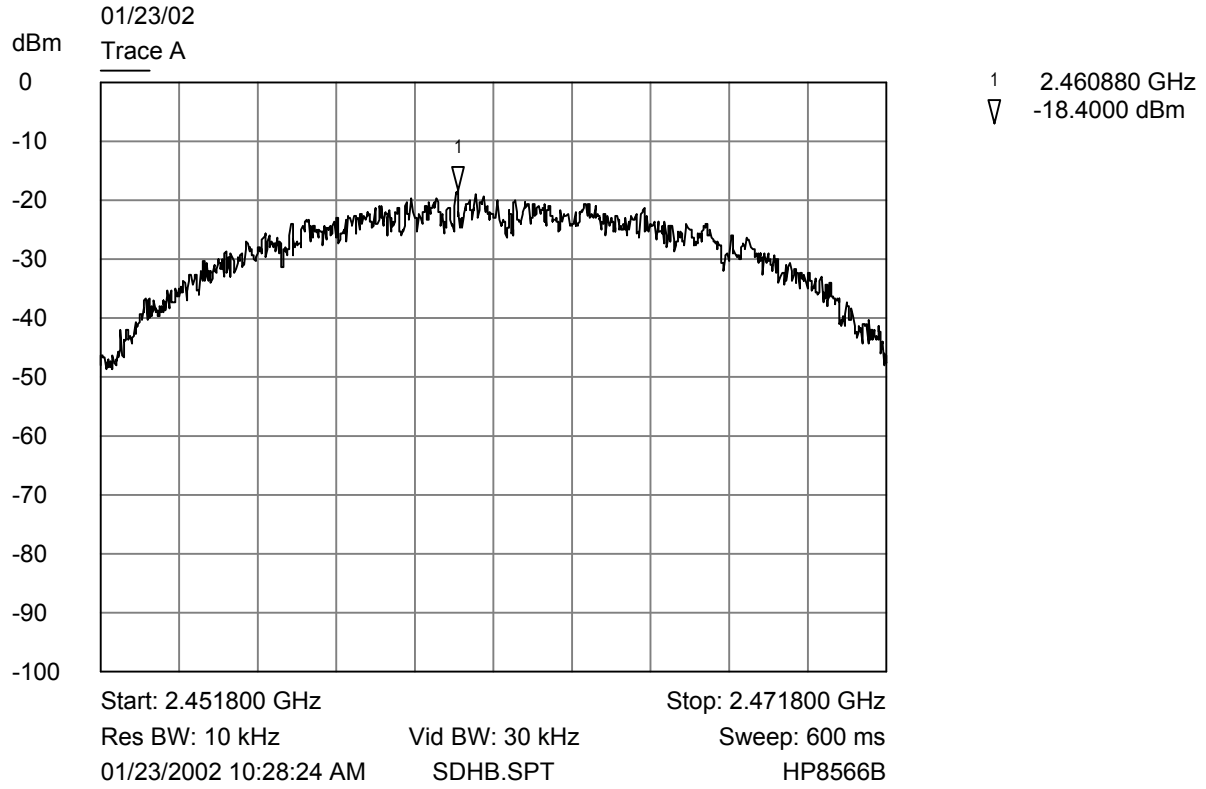


Spectral Density(Channel 11, Antenna B, Power 36)

SL-1110 Fixed Antenna A (Low Channel)

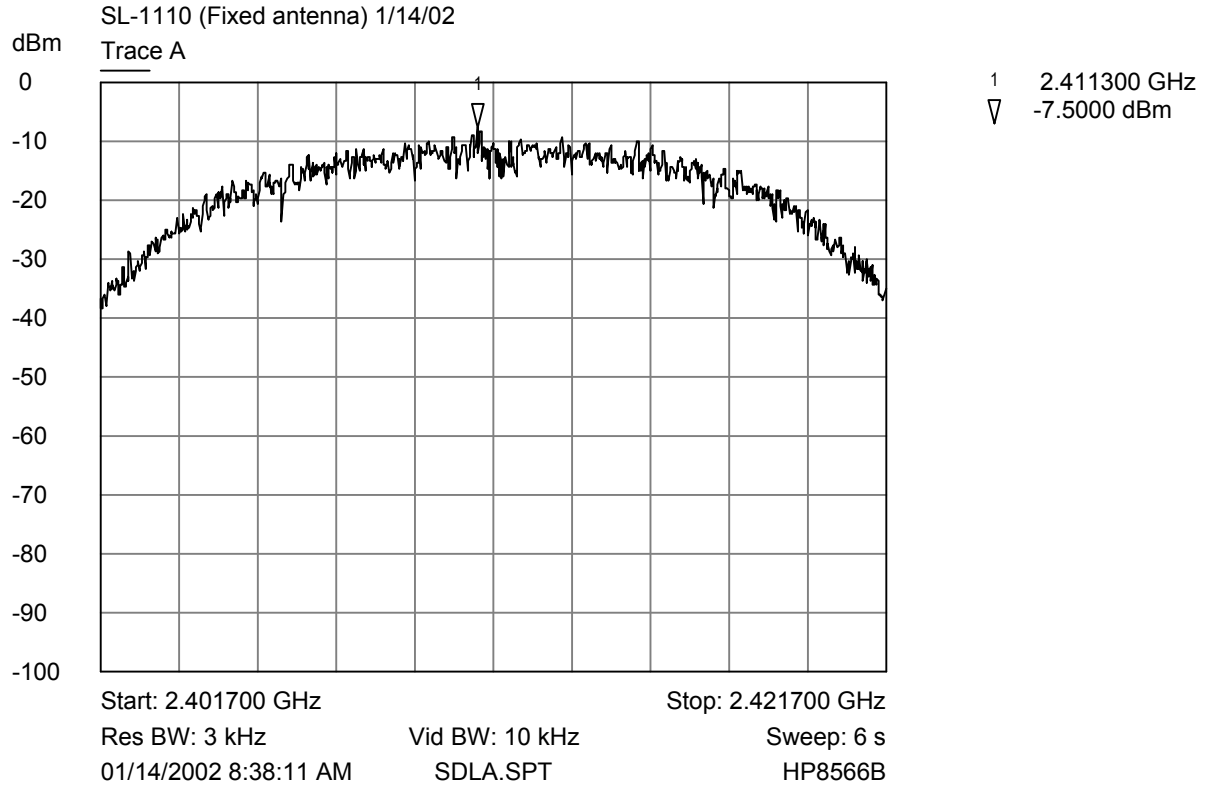


Spectral Density (Channel 1, Antenna A)

SL-1110 Fixed Antenna A (Middle Channel)

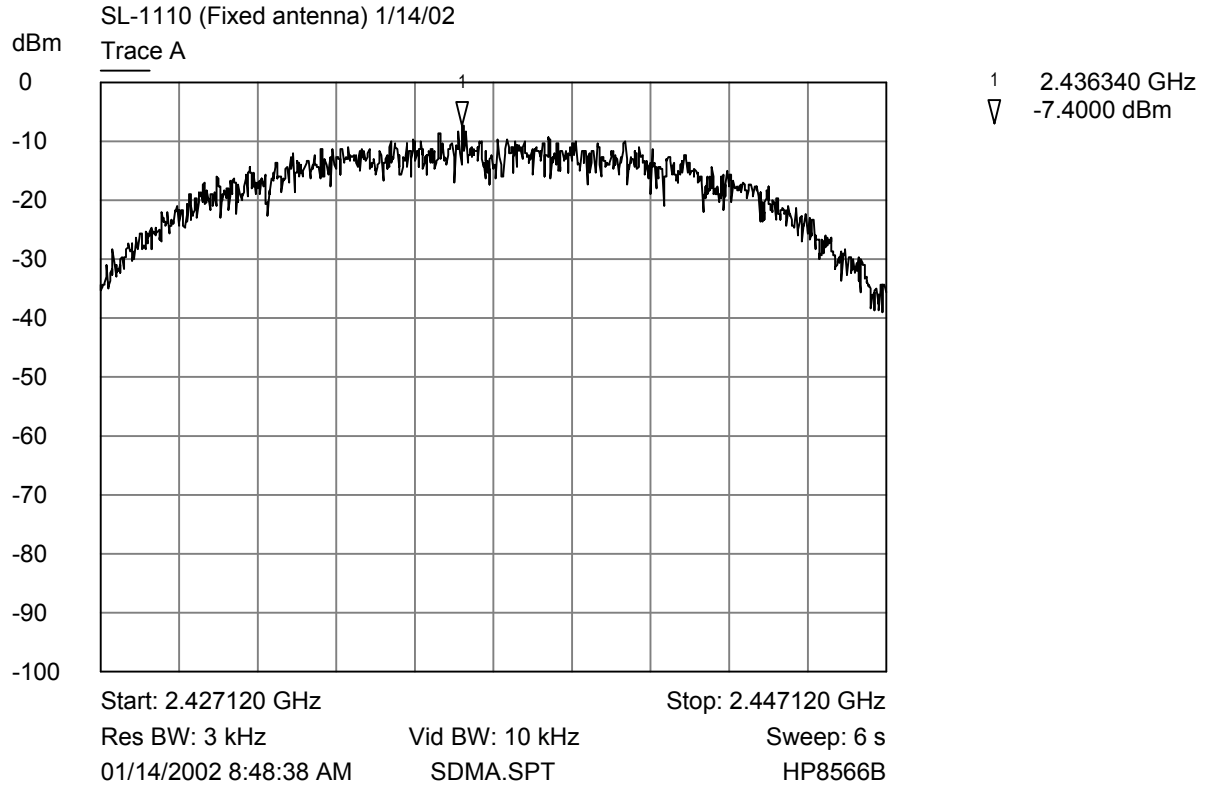


Spectral Density (Channel 6, Antenna A)

SL-1110 Fixed Antenna A (High Channel)

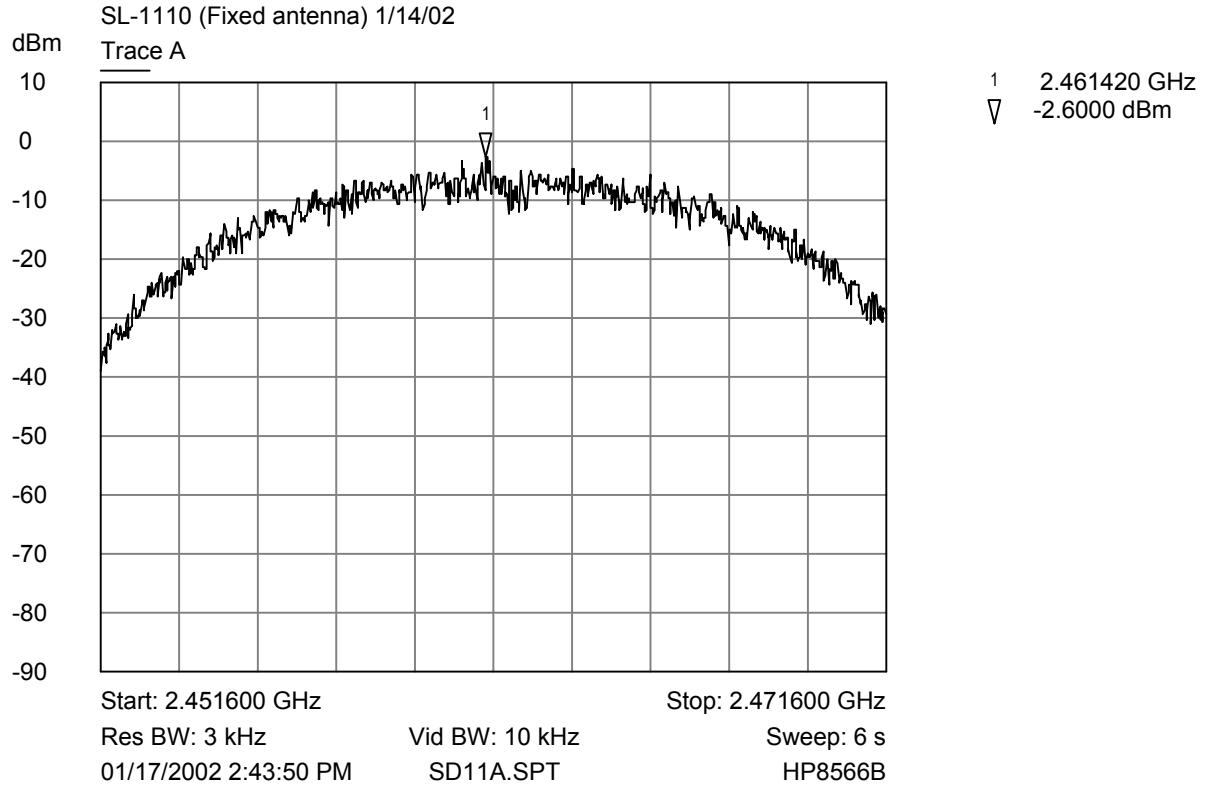


Spectral Density (Channel 11, Antenna A)

SL-1110 Fixed Antenna B (Low Channel)

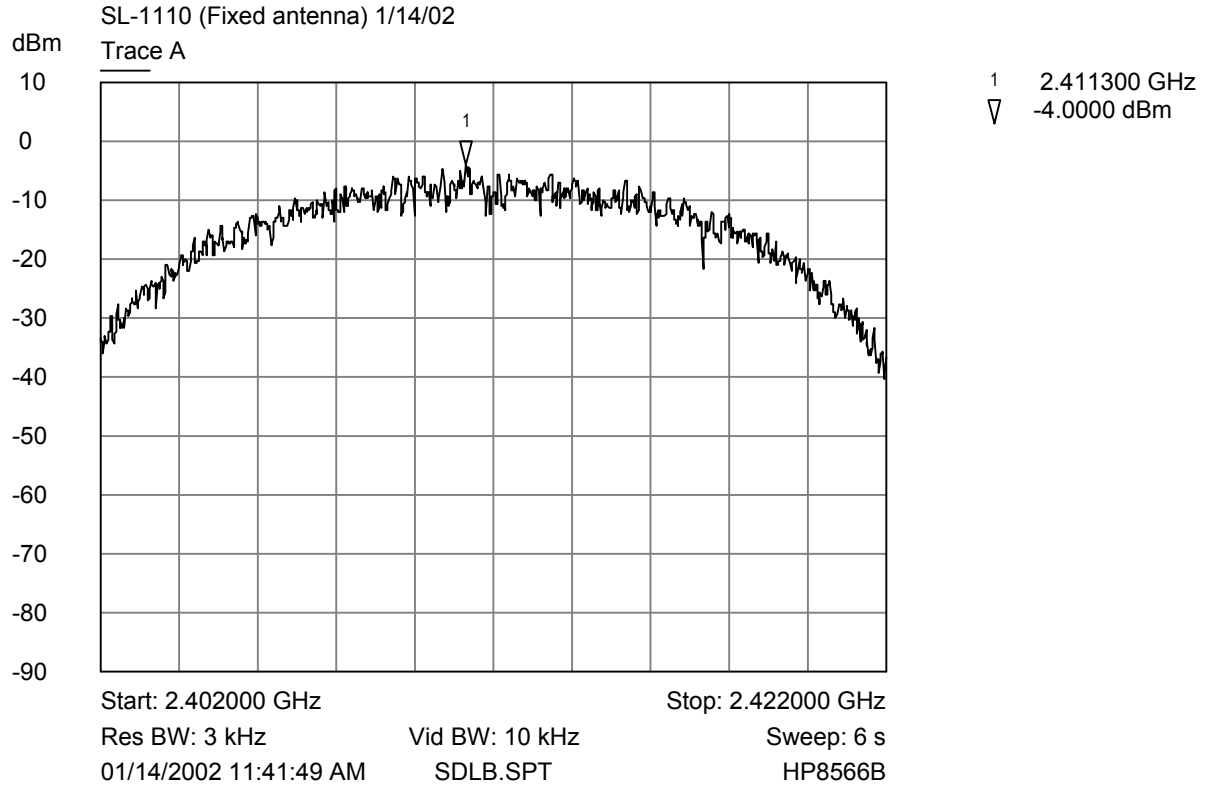


Spectral Density (Channel 1, Antenna B)

SL-1110 Fixed Antenna B (Middle Channel)

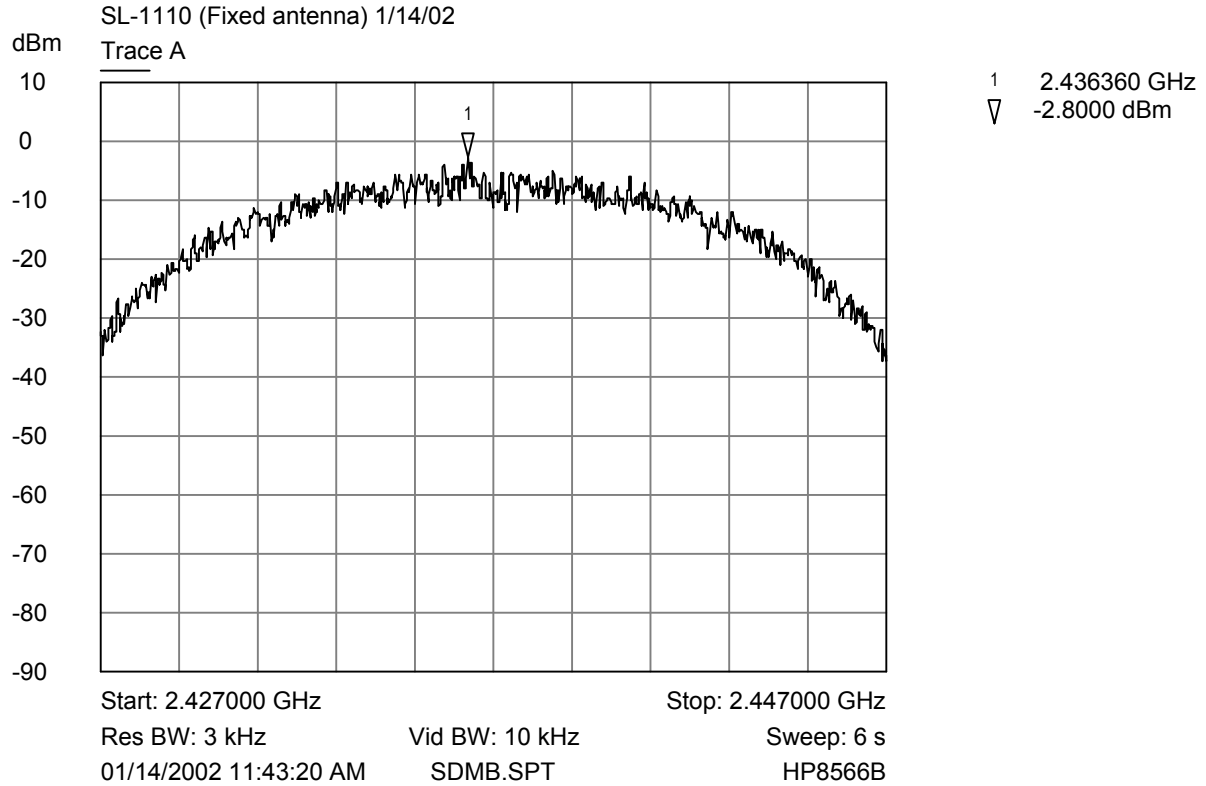

Spectral Density (Channel 6, Antenna B)

SL-1110 Fixed Antenna B (High Channel)

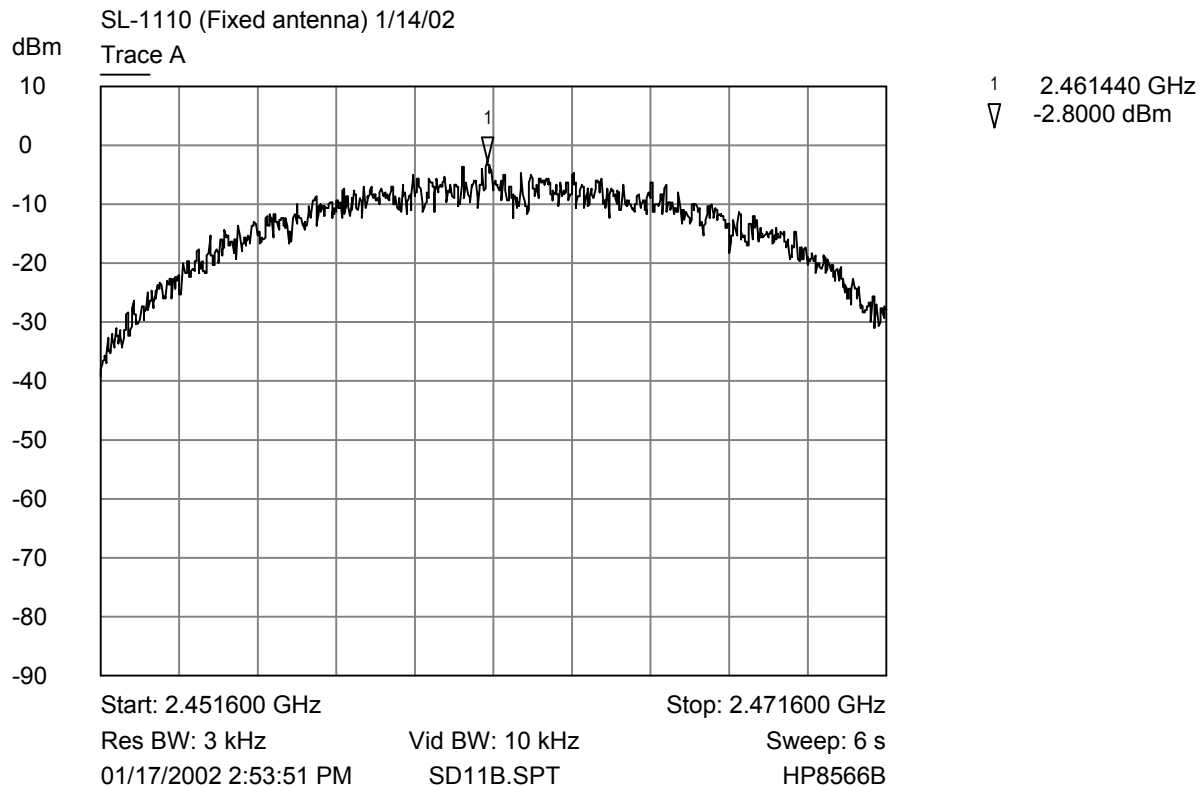

Spectral Density (Channel 11, Antenna B)

**6.2.4 § 15.247 (e) Processing Gain:**

This test report is covered under an interim blanket waiver for Digital Transmission Systems meeting the requirements pursuant to the Further Notice of Proposed Rulemaking and Order, ET Docket No. 99-231 (FCC 01-158), therefore no processing gain is required. Authorization is conditioned upon compliance with any final rules that may be adopted in the proceeding.

**6.2.5 § 15.207 Line Conducted Emissions:**

The frequency range from 450 kHz to 30 MHz was investigated to measure any AC line conducted emissions.

A diagram of the test configuration and the test equipment used is enclosed in Appendix 1.

**Line Conducted Data - (Hot Lead)**

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.57	Peak	37.3	48.0
0.86	Peak	33.6	48.0
4.65	Peak	32.0	48.0
5.64	Peak	33.9	48.0
11.38	Peak	30.7	48.0
11.60	Peak	31.0	48.0
12.09	Peak	31.5	48.0
12.42	Peak	31.2	48.0
20.27	Peak	38.8	48.0
26.85	Peak	41.2	48.0
27.42	Peak	41.0	48.0
29.78	Peak	43.0	48.0



**Line Conducted Data - (Neutral Lead)**

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.51	Peak	37.2	48.0
0.68	Peak	35.0	48.0
5.66	Peak	33.6	48.0
19.91	Peak	36.0	48.0
20.55	Peak	36.0	48.0
25.02	Peak	36.1	48.0
27.29	Peak	37.9	48.0
29.94	Peak	38.7	48.0

**APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT****FCC Sections 15.247 (a) (1) (ii) Emission Bandwidth**

The EUT was directly connected to the spectrum analyzer via the antenna output port as shown in the block diagram below.

The measurements were performed on three channels, as per 47 CFR 15.31(m), one near the bottom of the spectrum, one near the middle of the spectrum and one near the top of the spectrum.

The spectrum analyzer's resolution bandwidth and video bandwidth were set as follows:


RBW = 10 kHz

VBW = 30 kHz

Type of Equipment	Manufacturer	Model Number	Serial Number
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	8565A	3107A01582
Low Loss Cable (1 dB)	N/A	N/A	N/A

All the equipment listed above is calibrated every 12 months by an independent calibration laboratory or by CCL personal following outlined calibration procedures.

### Test Configuration Block Diagram

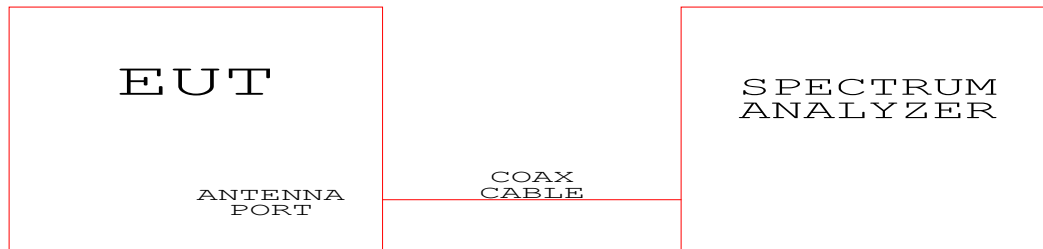

### FCC Sections 15.247 (b) (1) Peak Output Power

The EUT was directly connected to the spectrum analyzer via the antenna output port as shown in the block diagram below.

The measurements were performed on three channels, as per 47 CFR 15.31(m), one near the bottom of the spectrum, one near the middle of the spectrum and one near the top of the spectrum.


The spectrum analyzer's resolution bandwidth and video bandwidth were set as follows:

RBW = 3 MHz

VBW = 3 MHz

Type of Equipment	Manufacturer	Model Number	Serial Number
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	8565A	3107A01582
Low Loss Cable (1 dB)	N/A	N/A	N/A

All the equipment listed above is calibrated every 12 months by an independent calibration laboratory or by CCL personal following outlined calibration procedures.

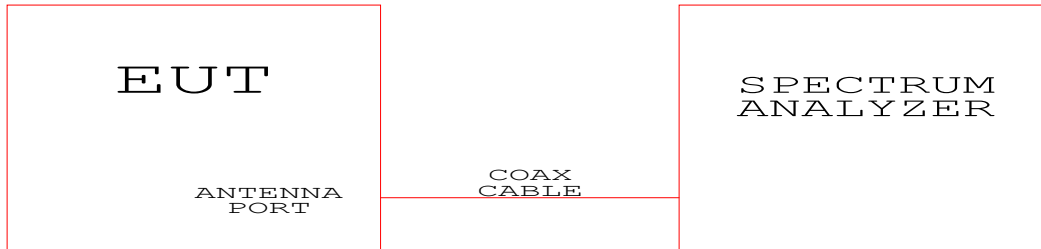**Test Configuration Block Diagram****FCC Sections 15.247 (c) Spurious Emissions****Conducted Spurious Emissions**

The EUT was directly connected to the spectrum analyzer via the antenna output port as shown in the block diagram below.

The measurements were performed on three channels, as per 47 CFR 15.31(m), one near the bottom of the spectrum, one near the middle of the spectrum and one near the top of the spectrum.


The spectrum analyzer's resolution bandwidth and video bandwidth were set as follows:

RBW = 100 kHz

VBW = 300 kHz

Type of Equipment	Manufacturer	Model Number	Serial Number
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	8565A	3107A01582
Low Loss Cable (1 dB)	N/A	N/A	N/A

All the equipment listed above is calibrated every 12 months by an independent calibration laboratory or by CCL personal following outlined calibration procedures.

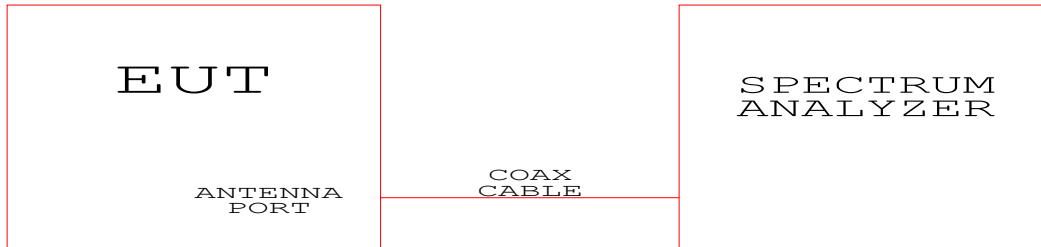**Test Configuration Block Diagram****Radiated Spurious Emissions in Restricted Bands:**

The radiated emission from the intentional radiator was measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings. A preamplifier with a fixed gain of 26 dB and a power amplifier with a fixed gain of 22 dB were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 10 Hz.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the intentional radiator was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.4 via the interconnecting cables listed in Section 2.5. These interconnecting cable were manipulated manually by a technician to obtain worst case radiated emissions. The intentional radiator was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the


emissions do not increase by more than 2 dB.

Desktop intentional radiator is measured on a non-conducting table one meter above the ground plane. The table is placed on a turntable which is level with the ground plane. The turntable has slip rings, which supply AC power to the intentional radiator. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

Type of Equipment	Manufacturer	Model Number	Serial Number
Anechoic Chamber	CCL	N/A	N/A
Test Software	CCL	Radiated Emissions	Revision 1.3
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	8565A	3107A01582
Biconilog Antenna	EMCO	3141	1045
Double Ridged Guide Antenna	EMCO	3115	9409-4355
Pyramidal Horn Antenna	EMCO	3160-09	0003-1197
Harmonic Mixer	Hewlett Packard	11970K	3003A05756
Radiated Emissions Cable Anechoic Chamber	CCL	Cable B	N/A
Amplifier	Hewlett Packard	11975A	2738A02030
Pre-Amplifier	Hewlett Packard	8447D	1937A03151
Pre-Amplifier	Hewlett Packard	8449B	3008A00777
6 dB Attenuator	Hewlett Packard	8491A	32835

All the equipment listed above is calibrated every 12 months by an independent calibration laboratory or by CCL personal following outlined calibration procedures.

## R a d i a t e d E m i s s i o n s T e s t

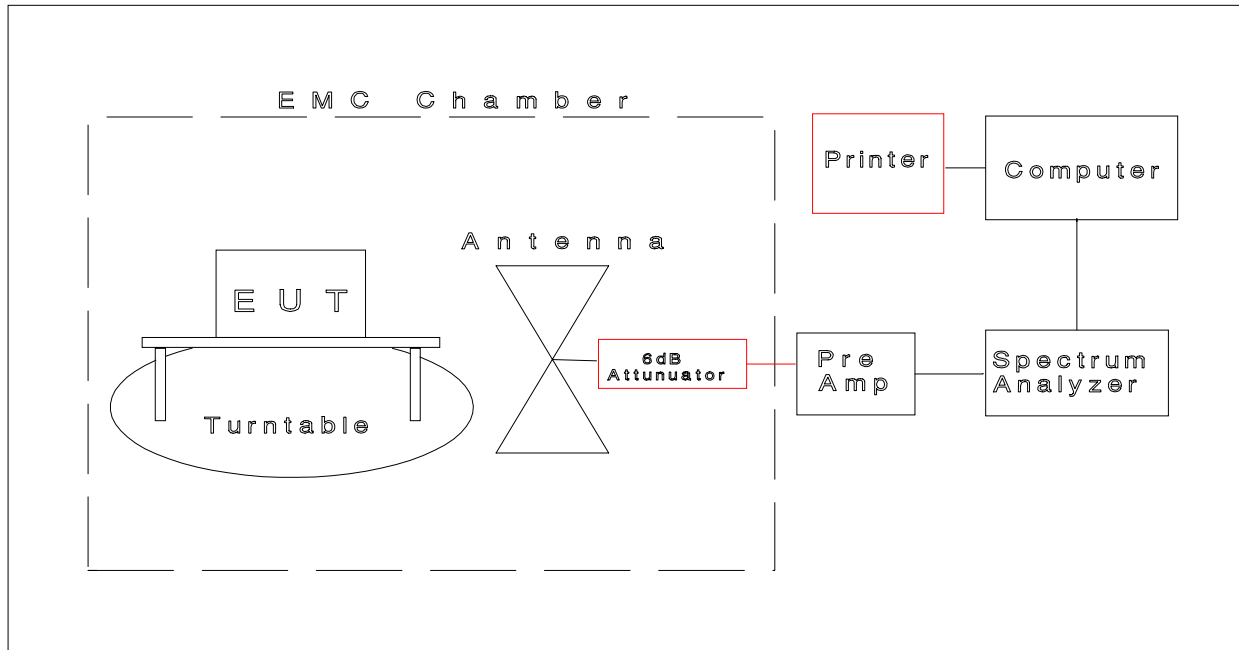**FCC Sections 15.207 AC Line Conducted Emissions:**

The conducted disturbance at mains ports from the ITE was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 450 kHz to 30 MHz frequency ranges.

The conducted disturbance at mains ports measurements are performed in a screen room using a (50  $\Omega$ /50  $\mu$ H) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of ITE with each ITE having its own power cord, the point of connection for the LISN is determined from the following rules:

- Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment


- d) shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- e) Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- f) When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.

Desktop ITE are placed on a non-conducting table at least 0.8 meters from the metallic floor. The equipment is placed a minimum of 40 cm from all walls. Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Serial Number
Anechoic Chamber Test Site #2	CCL	N/A	N/A
Test Software	CCL	Conducted Emissions	Revision 1.2
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	8565A	3107A01582
LISN	EMCO	3825/2	9307-1893
Conductance Cable Anechoic Chamber	CCL	Cable A	N/A
Transient Limiter	Hewlett Packard	11947A	3107A00895

An independent calibration laboratory or CCL personal calibrates all the equipment listed above every 12 months following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

# Line Conducted Emissions Test

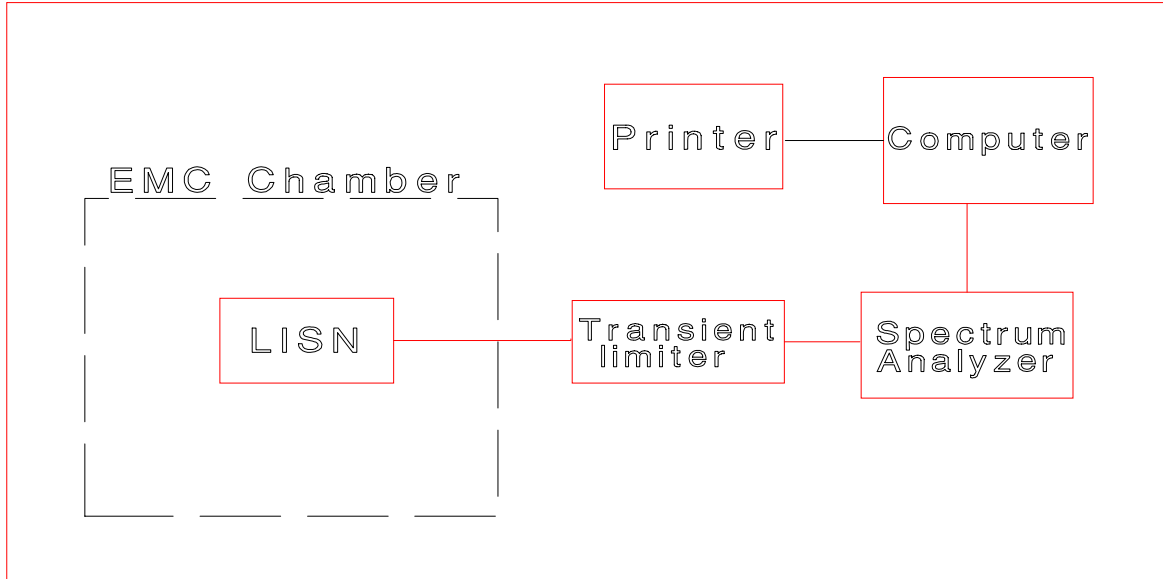



**APPENDIX 2 Photographs**

*Note: Pages 97 through 111 of this report have been removed from this document and are separately submitted as the following exhibits:*

□

*73-7671 x03 3Com nonretractable.pdf (External Photographs)*□

*73-7671 x03 3Com retractable.pdf (External Photographs)*□

*73-7671 x07 3Com.pdf (Test setup photographs)*□

*73-7671 x09 3Com nonretractable.pdf (Internal Photographs)*□

*73-7671 x09 3Com retractable.pdf (Internal Photographs)*□