

# Test Report

Industry Canada RSS-Gen Issue 3/RSS-210 Issue 8  
FCC Part15 Subpart C

Product Name : Wireless LAN access Point  
Model No. : H3C WA3620i-AGN; H3C WA3628i-AGN  
FCC ID : O9C-WA3620i  
IC : 2299L-WA3620i

Applicant : Hewlett Packard Corporation  
Address : 153 Taylor street, Litterton Massachusetts United  
States

Date of Receipt : 01/11/2011  
Test Date : 02/11/2011 ~ 04/12/2011  
Issued Date : 20/12/2011  
Report No. : 11BS004R-RF-US-P05V01  
Report Version : V1.2

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.  
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

# Test Report Certification

Issued Date : 20/12/2011

Report No. : 11BS004R-RF-US-P05V01



Product Name : Wireless LAN access Point  
 Applicant : Hewlett Packard Corporation  
 Address : 153 Taylor street, Litterton Massachusetts United States  
 Manufacturer : Hewlett Packard Corporation  
 Address : 153 Taylor street, Litterton Massachusetts United States  
 Model No. : H3C WA3620i-AGN; H3C WA3628i-AGN  
 FCC ID : O9C-WA3620i  
 IC : 2299L-WA3620i  
 EUT Voltage : 48Vdc, 0.27A (or POE input)  
 Brand Name : H3C  
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008  
 ANSI C63.4: 2009; ANSI C63.10: 2009  
 Industry Canada RSS-Gen Issue 3/RSS-210 Issue 8  
 Test Result : Complied  
 Performed Location : Suzhou EMC Laboratory  
 No.99 Hongye Rd., Suzhou Industrial Park Loufeng  
 Hi-Tech Development Zone., Suzhou, China  
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
 FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : Alice Ni  
 (Engineering ADM: Alice Ni)

Reviewed By : Jame Yuan  
 (Senior Engineer: Jame Yuan)

Approved By : Marlinchen  
 (Engineering Manager: Marlin Chen)

## Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

<b>Taiwan R.O.C.</b>	<b>: BSMI, NCC, TAF</b>
<b>Germany</b>	<b>: TUV Rheinland</b>
<b>Norway</b>	<b>: Nemko, DNV</b>
<b>USA</b>	<b>: FCC, NVLAP</b>
<b>Japan</b>	<b>: VCCI</b>

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>  
 The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>  
 If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

### HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.  
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : [service@quietek.com](mailto:service@quietek.com)



### LinKou Testing Laboratory :

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.  
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : [service@quietek.com](mailto:service@quietek.com)



### Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.  
 TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : [service@quietek.com](mailto:service@quietek.com)



**TABLE OF CONTENTS**

Description	Page
1. General Information .....	6
1.1. EUT Description .....	6
1.2. Mode of Operation .....	8
1.3. Tested System Details .....	9
1.4. Configuration of Tested System .....	10
1.5. EUT Exercise Software .....	11
2. Technical Test .....	12
2.1. Summary of Test Result .....	12
2.2. Test Environment .....	14
3. Conducted Emission .....	15
3.1. Test Equipment .....	15
3.2. Test Setup .....	15
3.3. Limit.....	16
3.4. Test Procedure .....	16
3.5. Uncertainty .....	16
3.6. Test Result .....	17
4. Radiated Emission.....	19
4.1. Test Equipment .....	19
4.2. Test Setup .....	20
4.3. Limit.....	21
4.4. Test Procedure .....	21
4.5. Uncertainty .....	21
4.6. Test Result .....	22
5. RF Antenna Conducted Spurious.....	98
5.1. Test Equipment .....	98
5.2. Test Setup .....	98
5.3. Limit.....	98
5.4. Test Procedure .....	99
5.5. Uncertainty .....	99
5.6. Test Result .....	100
6. Radiated Emission Band Edge .....	139
6.1. Test Equipment .....	139
6.2. Test Setup .....	140
6.3. Limit.....	140
6.4. Test Procedure .....	140
6.5. Uncertainty .....	140
6.6. Test Result .....	141

- 7. Operation Frequency Range of 20dB Bandwidth..... 653
  - 7.1. Test Equipment ..... 653
  - 7.2. Test Setup ..... 653
  - 7.3. Limit..... 653
  - 7.4. Test Procedure ..... 653
  - 7.5. Uncertainty ..... 653
  - 7.6. Test Result ..... 654
- 8. Occupied Bandwidth ..... 675
  - 8.1. Test Equipment ..... 675
  - 8.2. Test Setup ..... 675
  - 8.3. Limit..... 675
  - 8.4. Test Procedure ..... 675
  - 8.5. Uncertainty ..... 675
  - 8.6. Test Result ..... 676
- 9. Power Output..... 754
  - 9.1. Test Equipment ..... 754
  - 9.2. Test Setup ..... 754
  - 9.3. Limit..... 754
  - 9.4. Test Procedure ..... 755
  - 9.5. Uncertainty ..... 755
  - 9.6. Test Result ..... 756
- 10. Power Spectral Density ..... 766
  - 10.1. Test Equipment..... 766
  - 10.2. Test Setup..... 766
  - 10.3. Limit..... 766
  - 10.4. Test Procedure ..... 767
  - 10.5. Uncertainty ..... 767
  - 10.6. Test Result..... 768

1. General Information

1.1. EUT Description

Product Name	Wireless LAN access Point
Brand Name	H3C
Model No.	H3C WA3620i-AGN; H3C WA3628i-AGN
EUT Voltage	48Vdc, 0.27A (or POE input)
Frequency Range	<p><b>For 2.4GHz Band</b></p> <p>802.11b/g/n(20MHz): 2412~2462MHz</p> <p>802.11n(40MHz): 2422~2452MHz</p> <p><b>For 5.0GHz Band</b></p> <p>802.11a/n(20MHz):</p> <p>5180~5320MHz, 5500~5580, 5660~5700MHz, 5745~5825MHz</p> <p>802.11n(40MHz):</p> <p>5190~5310MHz, 5510~5550MHz, 5670MHz,5755~5795MHz</p>
Channel Number	<p>For 2.4GHz Band</p> <p>802.11b/g/n(20MHz): 11 802.11n(40MHz): 7</p> <p>For 5.0GHz Band</p> <p>802.11a/n(20MHz): 21 802.11n(40MHz): 9</p>
Type of Modulation	<p>802.11b: DSSS</p> <p>802.11a/g/n: OFDM</p>
Data Rate	<p>802.11a/g: 6/9/12/18/24/36/48/54 Mbps</p> <p>802.11b: 1/2/5.5/11 Mbps</p> <p>802.11n: up to 450 Mbps</p>
Channel Control	Auto
Antenna Delivery	3*Tx + 3*Rx
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note

1:H3C WA3628i-AGN have external antenna and build-in antenna, H3C WA3620i-AGN just have build-in antenna.

2:The EUT has three chains (chain 0/chain 1/chain 2) respectively 2.4GHz and 5GHz side. The software can support chain 0/chain 1/chain 2/chain 0+1/chain 0+1+2. These chains can transmit or receive continuously.

**For 2.4GHz Band**

802.11b/g/n(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz	04	2427 MHz
05	2432 MHz	06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	10	2457 MHz	11	2462 MHz	N/A	N/A

802.11n(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz	N/A	N/A

**For 5.0GHz Band**

802.11a/n(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz	N/A	N/A

Note: This Wireless LAN Access Point can not operate in 5600~5650 MHz band in Canada/US.

**802.11a/b/g/n Antenna List**

Antenna	Manufacturer	Model No.	Peak Gain
Built-in Antenna			
Internal Antenna	H3C	2701A01E	2.4GHz: 6dBi; 5GHz: 6.3dBi
External Antenna			
Dipole Antenna	WHA YU GROUP	C5060-510002-A	2.4GHz: 2dBi; 5GHz: 3dBi
Panel Antenna	H3C	ANT-2503C-M3	2.4GHz: 2.5dBi; 5GHz: 4dBi
Panel Antenna	H3C	ANT-2503C-M6	2.4GHz: 2.5dBi; 5GHz: 4.5dBi

**1.2. Mode of Operation**

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by 802.11b
Mode 2: Transmit by 802.11g
Mode 3: Transmit by 802.11a
Mode 4: Transmit by 802.11n (20MHz)
Mode 5: Transmit by 802.11n (40MHz)

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. This device is a composite device in accordance with Part 15 Subpart B regulations. The function for the receiver was measured and made a test report that the report number is 11BS004R-RF-CE-P01V02.




**1.3. Tested System Details**

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	DELL	PP19L	JH097 A01	N/A

### 1.4. Configuration of Tested System

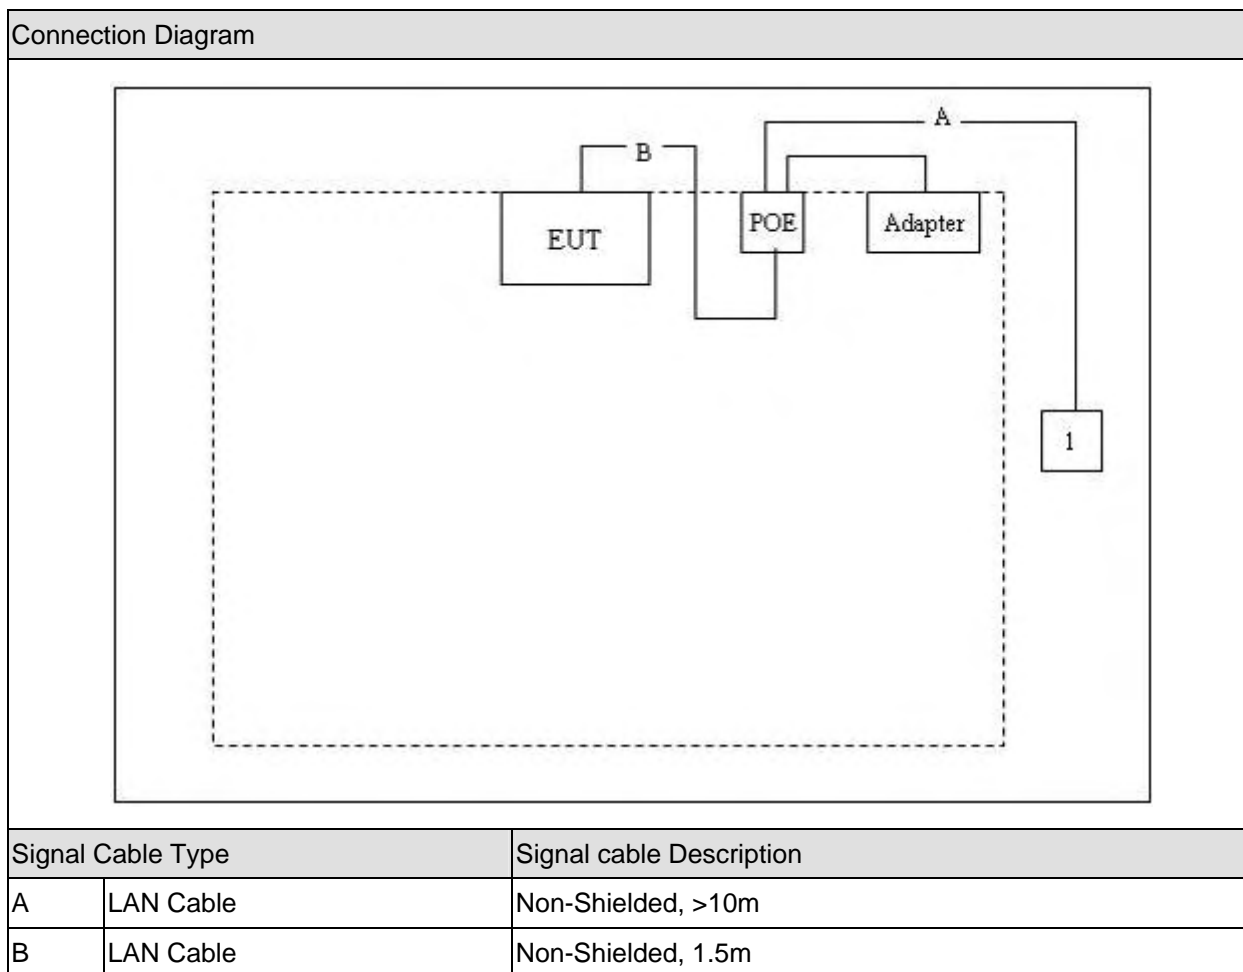

**1.5. EUT Exercise Software**

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Execute the “ART2” test program on the PC.
4	Setup the test channel and the test mode press ok to start the continue transmit.

**2. Technical Test**

**2.1. Summary of Test Result**

- No deviations from the test standards
- Deviations from the test standards as below description:

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.209	Yes	No
RF Antenna Conducted Spurious	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)	Yes	No
Operation Frequency Range of 20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 15.215(c)	Yes	No
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(2)	Yes	No
Power Output	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(b)(3)	Yes	No
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(e)	Yes	No

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 3 December 2010 Section 7.2.2	Yes	No
Radiated Emission	RSS-210 Issue 8 December 2010 Section 2.7 Table 2 and Table 3	Yes	No
RF Antenna Conducted Spurious	RSS-210 Issue 8 December 2010 Section A8.5	Yes	No
Radiated Emission Band Edge	RSS-210 Issue 8 December 2010 Section A8.5	Yes	No
Occupied Bandwidth	RSS-Gen Issue 3 December 2010 Section 4.6.1 and 4.6.2 RSS-210 Issue 8 December 2010 Section A8.2(1)	Yes	No
Power Output	RSS-210 Issue 8 December 2010 Section A8.4(4)	Yes	No
Power Spectral Density	RSS-210 Issue 8 December 2010 Section A8.2(2)	Yes	No

**2.2. Test Environment**

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

### 3. Conducted Emission


#### 3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2012.04.23
Two-Line V-Network	R&S	ENV216	100043	2012.04.29
Two-Line V-Network	R&S	ENV216	100044	2012.09.07
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2012.05.05
50ohm Termination	SHX	TF2	07081401	2012.09.22
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2012.01.14

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

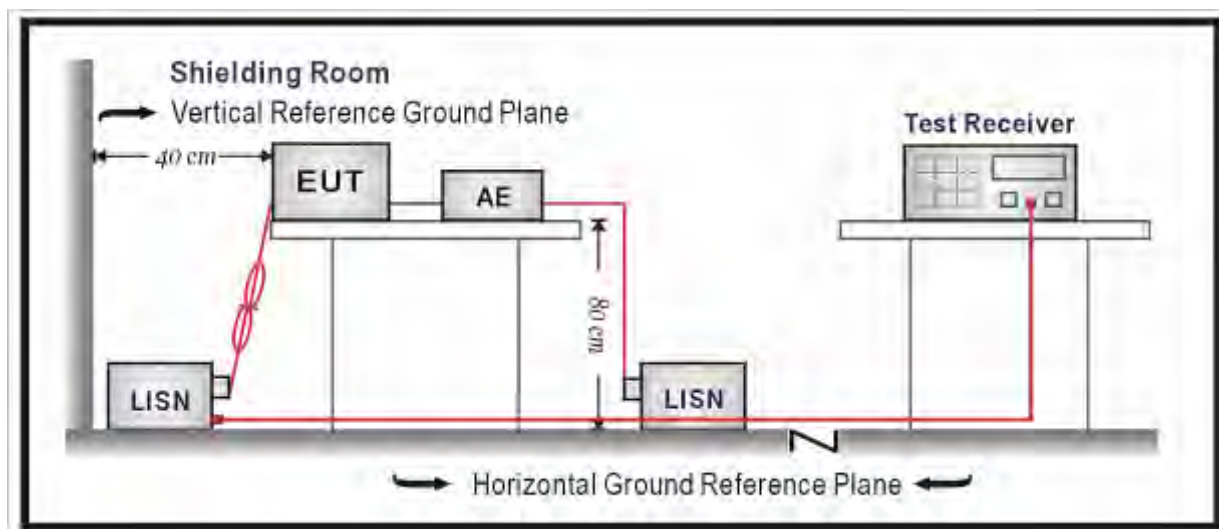

**3.3. Limit**

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**3.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


**3.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 2.02$  dB




### 3.6. Test Result

Profile: 11BS004R	Page No.: 1
Engineer: Jame	
Site: TR1	Time: 2011/11/24 - 13:40
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101043(0.009-30MHz)	Polarity: Line
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1	

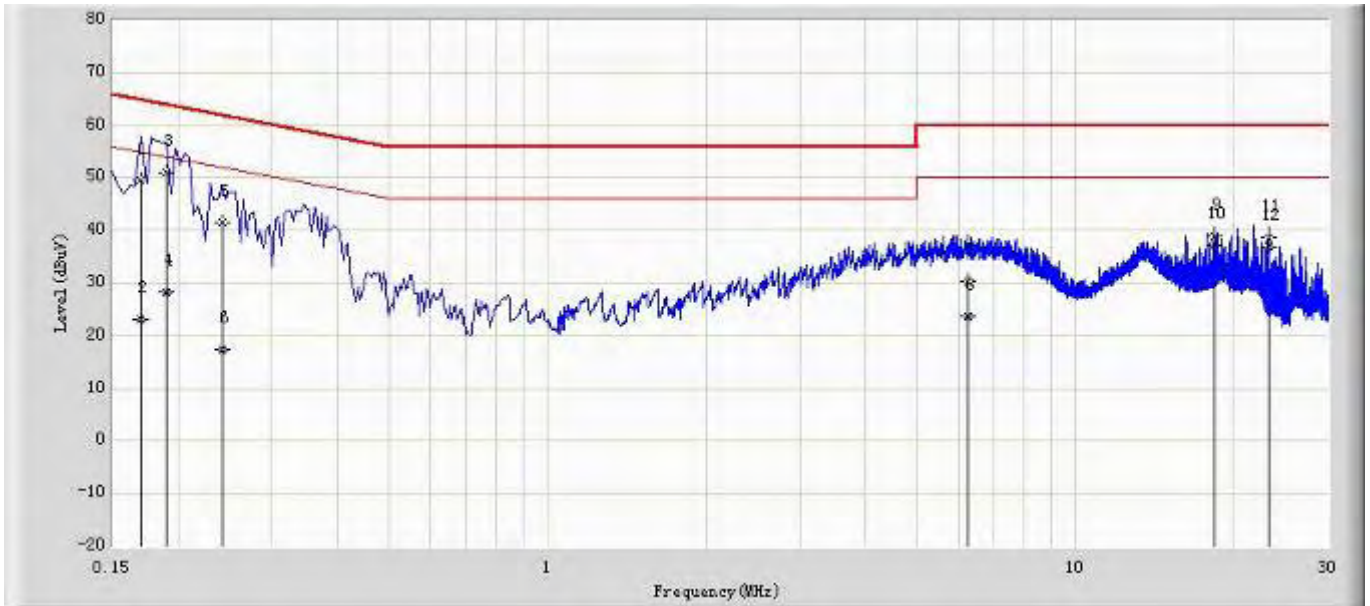

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.170	49.671	40.063	-15.290	64.960	9.608	QP
2		0.170	23.198	13.590	-31.763	54.960	9.608	AV
3		0.190	51.049	41.394	-12.988	64.037	9.654	QP
4		0.190	28.303	18.649	-25.734	54.037	9.654	AV
5		0.242	41.399	31.719	-20.628	62.027	9.680	QP
6		0.242	17.348	7.668	-34.679	52.027	9.680	AV
7		6.254	30.253	20.391	-29.747	60.000	9.863	QP
8		6.254	23.592	13.730	-26.408	50.000	9.863	AV
9		18.242	38.781	28.568	-21.219	60.000	10.213	QP
10	*	18.242	37.309	27.095	-12.691	50.000	10.213	AV
11		23.130	38.749	28.402	-21.251	60.000	10.347	QP
12		23.130	36.857	26.510	-13.143	50.000	10.347	AV

Profile: 11BS004R	Page No.: 2
Engineer: Jame	
Site: TR1	Time: 2011/11/24 - 13:46
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101043(0.009-30MHz)	Polarity: Neutral
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1	

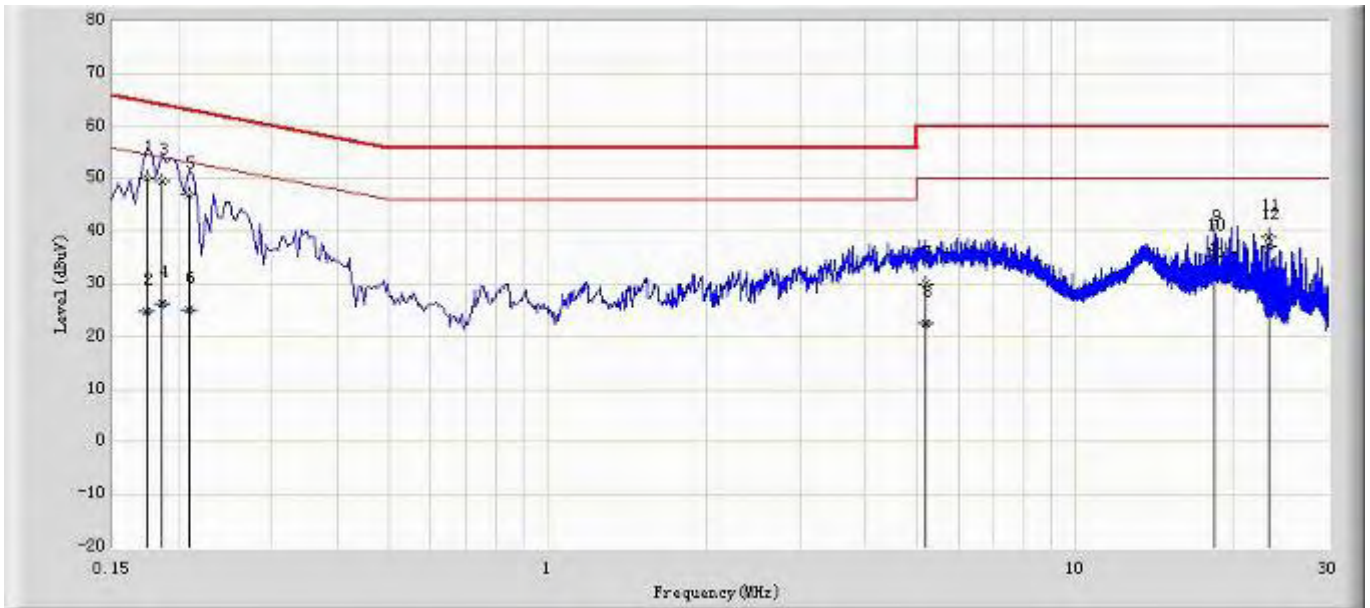

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.174	50.105	40.393	-14.662	64.767	9.712	QP
2		0.174	24.746	15.033	-30.022	54.767	9.712	AV
3		0.186	49.641	39.957	-14.573	64.213	9.684	QP
4		0.186	26.336	16.653	-27.877	54.213	9.684	AV
5		0.210	47.049	37.391	-16.156	63.205	9.658	QP
6		0.210	25.052	15.394	-28.153	53.205	9.658	AV
7		5.194	30.051	20.226	-29.949	60.000	9.825	QP
8		5.194	22.419	12.594	-27.581	50.000	9.825	AV
9		18.246	36.941	26.639	-23.059	60.000	10.302	QP
10		18.246	35.135	24.833	-14.865	50.000	10.302	AV
11		23.130	38.937	28.540	-21.063	60.000	10.396	QP
12	*	23.130	37.078	26.681	-12.922	50.000	10.396	AV

**4. Radiated Emission**

**4.1. Test Equipment**


Radiated Emission / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2012.04.23
EMI Test Receiver	R&S	ESCI	100906	2012.01.15
Preamplifier	Quietek	AP-180C	CHM-0602013	2012.03.07
Preamplifier	Quietek	AP-040G	CHM-0906001	2012.05.05
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2012.10.18
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2012.06.11
High-Pass Filter	Wainwright	WHKX2.8/18G-12SS	SN1	2012.03.03
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	SN16	2012.03.03
Lowpass Filter	Wainwright	WLKS4500-9SS	SN2	2012.03.03
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2012.01.14


Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

**4.2. Test Setup**

Below 1GHz Test Setup:

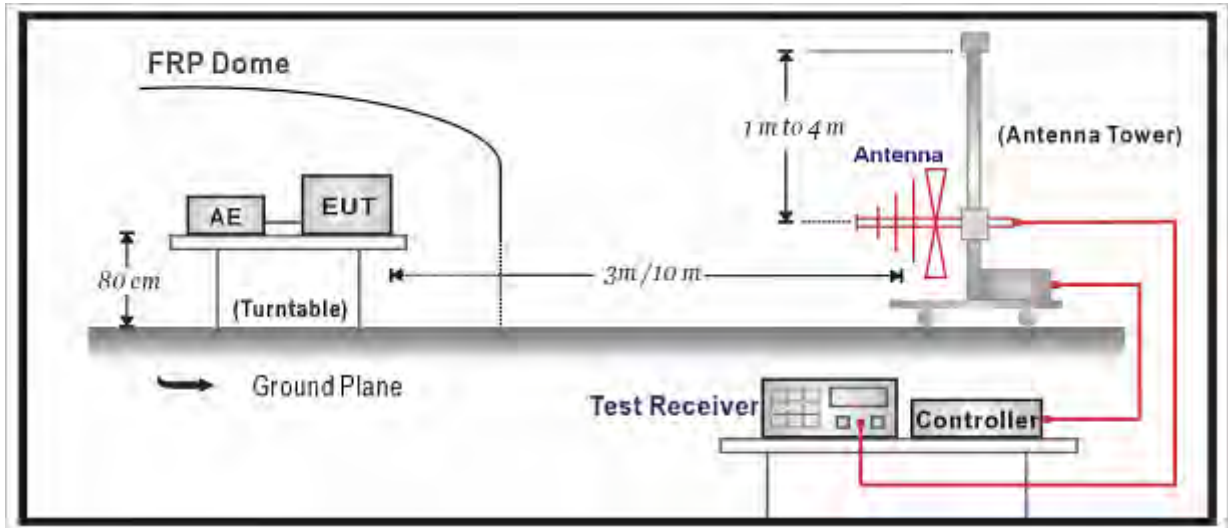

Above 1GHz Test Setup:

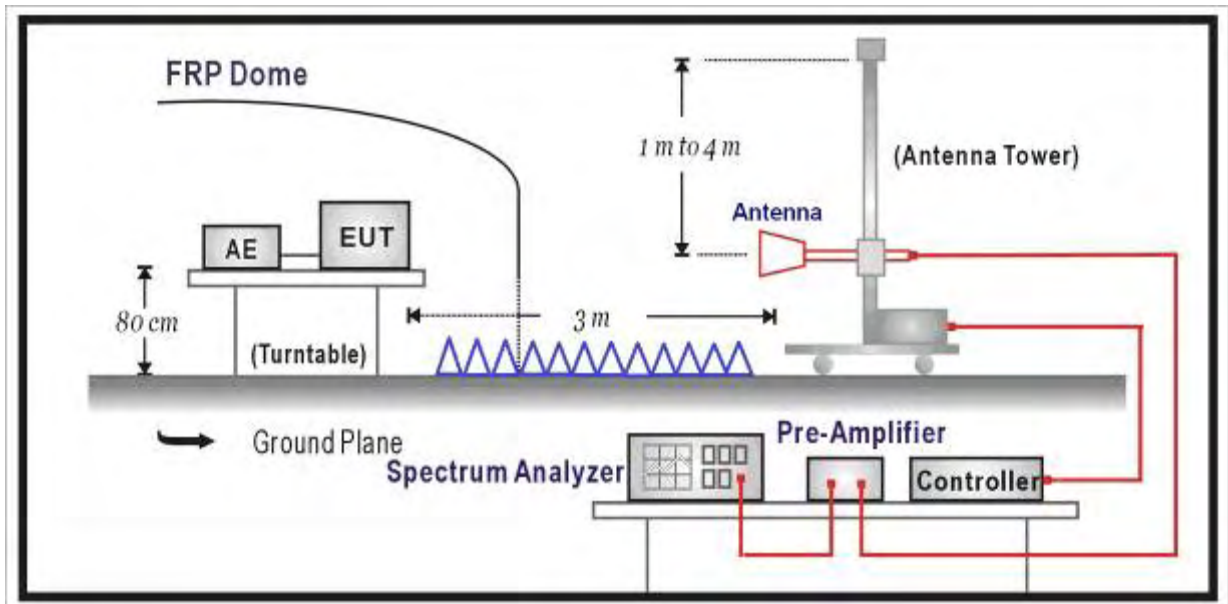

**4.3. Limit**

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

**4.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

**4.5. Uncertainty**

The measurement uncertainty above 1G is defined as ± 3.9 dB  
 below 1G is defined as ± 3.8 dB

**4.6. Test Result**

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain

Test by external antenna(Dipole Antenna)

802.11b

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2411.0	73.8	31.2	105.0	Fundamental	/	PK
		V	553.3	5.9	12.0	17.9	46	-28.1	QP
		V	666.8	6.1	13.3	19.4	46	-26.6	QP
		H	3200.0	43.0	-0.7	42.3	54(note1)	-11.7	PK
		V	4824.0	44.2	3.1	47.3	54(note1)	-6.7	PK
		H	7250.0	40.9	9.6	50.5	54(note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	74.1	31.2	105.3	Fundamental	/	PK
		V	599.8	4.1	13.7	17.8	46	-28.2	QP
		V	697.3	2.8	14.3	17.1	46	-28.9	QP
		V	3200.0	44.0	-0.7	43.3	54(note1)	-10.7	PK
		V	4874.0	42.8	3.1	45.9	54(note1)	-8.1	PK
		V	7311.0	41.0	9.4	50.4	54(note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	11	V	2462.6	78.3	31.2	109.5	Fundamental	/	PK
		H	553.3	5.8	11.9	17.7	46	-28.3	QP
		H	697.3	3.4	14.3	17.7	46	-28.3	QP
		V	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK
		V	4924.0	42.0	3.3	45.3	54(note1)	-8.7	PK
		V	7386.0	40.9	9.7	50.6	54(note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 1	1	V	2410.4	75.8	31.2	107	Fundamental	/	PK
		H	599.8	2.0	13.4	15.4	46	-30.6	QP
		H	666.8	5.4	12.2	17.6	46	-28.4	QP
		H	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK
		V	4824.0	41.0	3.1	44.1	54(note1)	-9.9	PK

Chain 2		V	7236.0	40.4	9.6	50.0	54(note1)	-4.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	6	V	2437.0	77.9	31.2	109.1	Fundamental	/	PK	
		H	553.3	7.1	11.9	19.0	46	-27.0	QP	
		H	666.8	12.9	12.2	25.1	46	-20.9	QP	
		V	3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK	
		V	4874.0	43.3	3.1	46.4	54(note1)	-7.6	PK	
		V	7311.0	41.2	9.4	50.6	54(note1)	-3.4	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	11	V	2461.0	82.5	31.2	113.7	Fundamental	/	PK	
		H	599.8	6.3	13.4	19.7	46	-26.3	QP	
		H	697.3	4.6	14.3	18.9	46	-27.1	QP	
		H	3200.0	42.7	-0.7	42.0	54(note1)	-12.0	PK	
		V	4924.0	42.4	3.3	45.7	54(note1)	-8.3	PK	
		V	7386.0	41.0	9.7	50.7	54(note1)	-3.3	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	Chain 2	1	V	2410.4	82.8	31.2	114.0	Fundamental	/	PK
			V	553.3	6.2	12.0	18.2	46	-27.8	QP
			V	697.3	0.7	14.3	15.0	46	-31.0	QP
			H	3200.0	42.9	-0.7	42.2	54(note1)	-11.8	PK
			V	4824.0	42.1	3.1	45.2	54(note1)	-8.8	PK
			H	7250.0	41.1	9.6	50.7	54(note1)	-3.3	PK
			H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
6		V	2437.0	82.4	31.2	113.6	Fundamental	/	PK	
		V	599.8	1.9	13.7	15.6	46	-30.4	QP	
		V	666.8	9.3	13.3	22.6	46	-23.4	QP	
		V	3200.0	44.0	-0.7	43.3	54(note1)	-10.7	PK	
		V	4874.0	43.9	3.1	47.0	54(note1)	-7.0	PK	
		H	7250.0	41.0	9.6	50.6	54(note1)	-3.4	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
11		V	2462.6	82.4	31.2	113.6	Fundamental	/	PK	
		V	553.3	7.7	12.0	19.7	46	-26.3	QP	
		V	666.8	7.2	13.3	20.5	46	-25.5	QP	
		V	3200.0	43.1	-0.7	42.4	54(note1)	-11.6	PK	
		V	4924.0	43.7	3.3	47.0	54(note1)	-7.0	PK	
		V	7386.0	41.3	9.7	51.0	54(note1)	-3.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11g

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2418.9	82.4	31.2	113.6	Fundamental	/	PK
		V	599.8	2.2	13.7	15.9	46	-30.1	QP
		V	697.3	0.6	14.3	14.9	46	-31.1	QP
		V	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK
		V	4824.0	42.8	3.1	45.9	54(note1)	-8.1	PK
		V	7250.0	40.6	9.6	50.2	54(note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	82.6	31.2	113.8	Fundamental	/	PK
		H	553.3	6.1	11.9	18.0	46	-28.0	QP
		H	666.8	11.8	12.2	24.0	46	-22.0	QP
		H	3200.0	43.7	-0.7	43.0	54(note1)	-11.0	PK
		H	4874.0	41.3	3.1	44.4	54(note1)	-9.6	PK
		V	7311.0	40.8	9.4	50.2	54(note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	11	V	2465.9	81.6	31.2	112.8	Fundamental	/	PK
		H	599.8	5.4	13.4	18.8	46	-27.2	QP
		H	697.3	4.0	14.3	18.3	46	-27.7	QP
		V	3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK
		V	4924.0	41.7	3.3	45.0	54(note1)	-9.0	PK
		V	7386.0	41.8	9.7	51.5	54(note1)	-2.5	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 1	1	V	2404.6	78.1	31.2	109.3	Fundamental	/	PK
		H	553.3	6.3	11.9	18.2	46	-27.8	QP
		H	697.3	3.9	14.3	18.2	46	-27.8	QP
		H	3200.0	42.7	-0.7	42.0	54(note1)	-12.0	PK
		V	4824.0	41.2	3.1	44.3	54(note1)	-9.7	PK
		H	7236.0	39.8	9.6	49.4	54(note1)	-4.6	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	78	31.2	109.2	Fundamental	/	PK
		H	599.8	4.9	13.4	18.3	46	-27.7	QP



		H	666.8	12.2	12.2	24.4	46	-21.6	QP	
		H	3200.0	42.9	-0.7	42.2	54(note1)	-11.8	PK	
		V	4874.0	41.7	3.1	44.8	54(note1)	-9.2	PK	
		V	7311.0	40.8	9.4	50.2	54(note1)	-3.8	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	11	V	2466.4	81.6	31.2	112.8	Fundamental	/	PK	
		V	553.3	5.6	12.0	17.6	46	-28.4	QP	
		V	666.8	7.2	13.3	20.5	46	-25.5	QP	
		V	3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK	
		V	4924.0	42.3	3.3	45.6	54(note1)	-8.4	PK	
		V	7386.0	41.3	9.7	51.0	54(note1)	-3.0	PK	
	Chain 2	1	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
			V	2405.7	80.6	31.2	111.8	Fundamental	/	PK
			V	599.8	2.9	13.7	16.6	46	-29.4	QP
V			697.3	1.7	14.3	16.0	46	-30.0	QP	
V			3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK	
V			4824.0	41.7	3.1	44.8	54(note1)	-9.2	PK	
V			7250.0	41.1	9.6	50.7	54(note1)	-3.3	PK	
6		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		V	2437.0	80.2	31.2	111.4	Fundamental	/	PK	
		V	553.3	5.9	12.0	17.9	46	-28.1	QP	
		V	666.8	8.1	13.3	21.4	46	-24.6	QP	
		H	3200.0	43.1	-0.7	42.4	54(note1)	-11.6	PK	
		V	4874.0	42.3	3.1	45.4	54(note1)	-8.6	PK	
		V	7311.0	41.0	9.4	50.4	54(note1)	-3.6	PK	
11	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK		
	V	2468.6	81.6	31.2	112.8	Fundamental	/	PK		
	V	599.8	2.9	13.7	16.6	46	-29.4	QP		
	V	697.3	1.8	14.3	16.1	46	-29.9	QP		
	V	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK		
	V	4924.0	41.8	3.3	45.1	54(note1)	-8.9	PK		
	H	7386.0	41.1	9.7	50.8	54(note1)	-3.2	PK		
H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK			

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11a

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	149	V	5745.0	88.1	20.9	109.0	Fundamental	/	PK
		H	553.3	6.6	11.9	18.5	46	-27.5	QP
		H	666.8	11.4	12.2	23.6	46	-22.4	QP
		V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK
		H	11590.0	41.2	15.5	56.7	74	-17.3	PK
		H	11590.0	27.2	15.5	42.7	54	-11.3	AV
		H	16200.0	42.8	17.4	60.2	74	-13.8	PK
		H	16200.0	28.8	17.4	46.2	54	-7.8	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	157	V	5785.0	88.2	20.9	109.1	Fundamental	/	PK
		H	599.8	5.9	13.4	19.3	46	-26.7	QP
		H	697.3	3.8	14.3	18.1	46	-27.9	QP
		V	3200.0	42.4	-1.8	40.6	54(note1)	-13.4	PK
		H	11570.0	40.9	15.2	56.1	74	-17.9	PK
		H	11570.0	26.9	15.2	42.1	54	-11.9	AV
		H	16200.0	42.3	17.4	59.7	74	-14.3	PK
		H	16200.0	28.3	17.4	45.7	54	-8.3	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	165	V	5825.0	88.1	20.9	109.0	Fundamental	/	PK
		H	553.3	6.7	11.9	18.6	46	-27.4	QP
		H	666.8	11.4	12.2	23.6	46	-22.4	QP
		V	3200.0	42.7	-1.8	40.9	54(note1)	-13.1	PK
		V	11650.0	41.2	15.2	56.4	74	-17.6	PK
		V	11650.0	27.2	15.2	42.4	54	-11.6	AV
		H	16200.0	42.0	17.4	59.4	74	-14.6	PK
		H	16200.0	28.0	17.4	45.4	54	-8.6	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 1	149	V	5745.0	88.0	20.9	108.9	Fundamental	/	PK
		H	599.8	6.5	13.4	19.9	46	-26.1	QP
		H	697.3	4.1	14.3	18.4	46	-27.6	QP
		H	3200.0	42.5	-1.8	40.7	54(note1)	-13.3	PK
		V	11490.0	41.1	15.5	56.6	74	-17.4	PK
		V	11490.0	27.1	15.5	42.6	54	-11.4	AV

		H	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	157	V	5785.0	88.1	20.9	109.0	Fundamental	/	PK	
		V	553.3	5.8	12.0	17.8	46	-28.2	QP	
		V	666.8	8.1	13.3	21.4	46	-24.6	QP	
		V	3200.0	42.9	-1.8	41.1	54(note1)	-12.9	PK	
		H	11570.0	40.9	15.2	56.1	74	-17.9	PK	
		H	11570.0	26.9	15.2	42.1	54	-11.9	AV	
		H	16200.0	41.8	17.4	59.2	74	-14.8	PK	
		H	16200.0	27.8	17.4	45.2	54	-8.8	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		165	V	5825.0	88.3	20.9	109.2	Fundamental	/	PK
			V	599.8	3.6	13.7	17.3	46	-28.7	QP
	V		697.3	1.2	14.3	15.5	46	-30.5	QP	
	V		3200.0	42.7	-1.8	40.9	54(note1)	-13.1	PK	
	H		11650.0	41.5	15.2	56.7	74	-17.3	PK	
	H		11650.0	27.5	15.2	42.7	54	-11.3	AV	
	H		16200.0	42.0	17.4	59.4	74	-14.6	PK	
	H		16200.0	28.0	17.4	45.4	54	-8.6	AV	
	H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	Chain 2	149	V	5745.0	88.1	20.9	109.0	Fundamental	/	PK
			V	553.3	5.3	12.0	17.3	46	-28.7	QP
			V	666.8	12.1	13.3	25.4	46	-20.6	QP
V			3200.0	42.5	-1.8	40.7	54(note1)	-13.3	PK	
V			11490.0	41.4	15.5	56.9	74	-17.1	PK	
V			11490.0	27.4	15.5	42.9	54	-11.1	AV	
H			16200.0	43.0	17.4	60.4	74	-13.6	PK	
H			16200.0	29.0	17.4	46.4	54	-7.6	AV	
H			24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
157		V	5785.0	88.2	20.9	109.1	Fundamental	/	PK	
		V	599.8	2.7	13.7	16.4	46	-29.6	QP	
		V	697.3	1.7	14.3	16.0	46	-30.0	QP	
		V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK	
		H	11570.0	40.6	15.2	55.8	74	-18.2	PK	
		H	11570.0	26.6	15.2	41.8	54	-12.2	AV	
H	16200.0	42.6	17.4	60.0	74	-14.0	PK			

165	H	16200.0	28.6	17.4	46.0	54	-8.0	AV
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	V	5825.0	88.3	20.9	109.2	Fundamental	/	PK
	H	553.3	6.5	11.9	18.4	46	-27.6	QP
	H	666.8	13.0	12.2	25.2	46	-20.8	QP
	V	3200.0	42.9	-1.8	41.1	54(note1)	-12.9	PK
	V	11650.0	40.9	15.2	56.1	74	-17.9	PK
	V	11650.0	26.9	15.2	42.1	54	-11.9	AV
	V	16200.0	42.6	17.4	60.0	74	-14.0	PK
	V	16200.0	28.6	17.4	46.0	54	-8.0	AV
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(20MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2418.6	78.2	31.2	109.4	Fundamental	/	PK
		H	599.8	6.2	13.4	19.6	46	-26.4	QP
		H	697.3	3.1	14.3	17.4	46	-28.6	QP
		H	3200.0	42.8	-0.7	42.1	54(note1)	-11.9	PK
		V	4824.0	41.9	3.1	45.0	54(note1)	-9.0	PK
		H	7250.0	40.9	9.6	50.5	54(note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	80.2	31.2	111.4	Fundamental	/	PK
		H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	666.8	12.6	12.2	24.8	46	-21.2	QP
		H	3200.0	43.5	-0.7	42.8	54(note1)	-11.2	PK
		H	4874.0	41.6	3.1	44.7	54(note1)	-9.3	PK
		V	7311.0	40.7	9.4	50.1	54(note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	11	V	2465.4	80.2	31.2	111.4	Fundamental	/	PK
		H	599.8	5.0	13.4	18.4	46	-27.6	QP
		H	697.3	3.9	14.3	18.2	46	-27.8	QP
		H	3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK
		V	4924.0	41.4	3.3	44.7	54(note1)	-9.3	PK

		H	7386.0	40.5	9.7	50.2	54(note1)	-3.8	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	149	V	5745.0	88.4	20.9	109.3	Fundamental	/	PK	
		V	553.3	6.2	12.0	18.2	46	-27.8	QP	
		V	697.3	1.6	14.3	15.9	46	-30.1	QP	
		H	3200.0	42.6	-1.8	40.8	54(note1)	-13.2	PK	
		V	11490.0	41.0	15.1	56.1	74	-17.9	PK	
		V	11490.0	21.5	15.1	36.6	54	-17.4	AV	
		H	16200.0	43.3	17.4	60.7	74	-13.3	PK	
		H	16200.0	29.2	17.4	46.6	54	-7.4	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		157	V	5785.0	88.3	20.9	109.2	Fundamental	/	PK
	V		599.8	2.7	13.7	16.4	46	-29.6	QP	
	V		666.8	7.7	13.3	21.0	46	-25.0	QP	
	V		3200.0	42.7	-1.8	40.9	54(note1)	-13.1	PK	
	V		11570.0	41.4	15.2	56.6	74	-17.4	PK	
	V		11570.0	27.4	15.2	42.6	54	-11.4	AV	
	V		16200.0	42.1	17.4	59.5	74	-14.5	PK	
	V		16200.0	28.1	17.4	45.5	54	-8.5	AV	
	H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	165	V	5825.0	88.3	20.9	109.2	Fundamental	/	PK	
		V	553.3	5.9	12.0	17.9	46	-28.1	QP	
		V	697.3	1.5	14.3	15.8	46	-30.2	QP	
		H	3200.0	42.6	-1.8	40.8	54(note1)	-13.2	PK	
		V	11650.0	41.2	15.1	56.3	74	-17.7	PK	
		V	11650.0	27.2	15.1	42.3	54	-11.7	AV	
		V	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		V	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	Chain 1	1	V	2405.3	75.0	31.2	106.2	Fundamental	/	PK
			V	599.8	2.1	13.7	15.8	46	-30.2	QP
			V	666.8	8.8	13.3	22.1	46	-23.9	QP
			V	3200.0	42.6	-0.7	41.9	54(note1)	-12.1	PK
			V	4824.0	41.0	3.1	44.1	54(note1)	-9.9	PK
			V	7236.0	40.0	9.6	49.6	54(note1)	-4.4	PK
			H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
6		V	2437.0	75.5	31.2	106.7	Fundamental	/	PK	

		H	553.3	7.6	11.9	19.5	46	-26.5	QP	
		H	666.8	10.4	12.2	22.6	46	-23.4	QP	
		H	3200.0	43.1	-0.7	42.4	54(note1)	-11.6	PK	
		V	4874.0	42.8	3.1	45.9	54(note1)	-8.1	PK	
		H	7311.0	40.7	9.4	50.1	54(note1)	-3.9	PK	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	11		V	2461.9	79.0	31.2	110.2	Fundamental	/	PK
			H	599.8	5.1	13.4	18.5	46	-27.5	QP
			H	697.3	3.3	14.3	17.6	46	-28.4	QP
			V	3200.0	42.5	-0.7	41.8	54(note1)	-12.2	PK
			V	4924.0	41.8	3.3	45.1	54(note1)	-8.9	PK
			H	7386.0	40.8	9.7	50.5	54(note1)	-3.5	PK
	149		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
			V	5745.0	87.5	20.9	108.4	Fundamental	/	PK
			H	553.3	7.3	11.9	19.2	46	-26.8	QP
			H	697.3	4.3	14.3	18.6	46	-27.4	QP
			H	3200.0	43.5	-1.8	41.7	54(note1)	-12.3	PK
			H	11490.0	41.3	15.1	56.4	74	-17.6	PK
			H	11490.0	27.3	15.1	42.4	54	-11.6	AV
			V	16200.0	42.5	17.4	59.9	74	-14.1	PK
			V	16200.0	28.7	17.4	46.1	54	-7.9	AV
	157		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
			V	5785.0	88.0	20.9	108.9	Fundamental	/	PK
			H	599.8	5.9	13.4	19.3	46	-26.7	QP
			H	666.8	11.7	12.2	23.9	46	-22.1	QP
			H	3200.0	43.4	-1.8	41.6	54(note1)	-12.4	PK
			H	11570.0	41.2	15.2	56.4	74	-17.6	PK
H			11570.0	27.2	15.2	42.4	54	-11.6	AV	
H			16200.0	41.9	17.4	59.3	74	-14.7	PK	
H			16200.0	27.9	17.4	45.3	54	-8.7	AV	
165		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		V	5825.0	88.2	20.9	109.1	Fundamental	/	PK	
		V	553.3	5.2	12.0	17.2	46	-28.8	QP	
		V	666.8	8.4	13.3	21.7	46	-24.3	QP	
		V	3200.0	42.9	-1.8	41.1	54(note1)	-12.9	PK	
		V	11650.0	41.3	15.1	56.4	74	-17.6	PK	
		V	11650.0	27.3	15.1	42.4	54	-11.6	AV	

		V	16200.0	41.8	17.4	59.2	74	-14.8	PK
		V	16200.0	27.8	17.4	45.2	54	-8.8	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 2	1	V	2405.2	78.3	31.2	109.5	Fundamental	/	PK
		V	599.8	1.9	13.7	15.6	46	-30.4	QP
		V	697.3	1.0	14.3	15.3	46	-30.7	QP
		V	3200.0	43.0	-0.7	42.3	54(note1)	-11.7	PK
		V	4824.0	41.5	3.1	44.6	54(note1)	-9.4	PK
		H	7250.0	40.6	9.6	50.2	54(note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
		6	V	2437.0	78.9	31.2	110.1	Fundamental	/
	V		553.3	7.2	12.0	19.2	46	-26.8	QP
	V		666.8	8.4	13.3	21.7	46	-24.3	QP
	V		3200.0	44.2	-0.7	43.5	54(note1)	-10.5	PK
	V		4874.0	42.0	3.1	45.1	54(note1)	-8.9	PK
	V		7311.0	40.7	9.4	50.1	54(note1)	-3.9	PK
	H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	11	V	2469.3	79.6	31.2	110.8	Fundamental	/	PK
		V	599.8	2.5	13.7	16.2	46	-29.8	QP
		V	697.3	1.2	14.3	15.5	46	-30.5	QP
		V	3200.0	42.8	-0.7	42.1	54(note1)	-11.9	PK
		V	4924.0	41.6	3.3	44.9	54(note1)	-9.1	PK
		V	7386.0	41.0	9.7	50.7	54(note1)	-3.3	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	149	V	5745.0	85.8	20.9	106.7	Fundamental	/	PK
		H	553.3	7.1	11.9	19.0	46	-27.0	QP
		H	666.8	10.7	12.2	22.9	46	-23.1	QP
		V	3200.0	43.5	-1.8	41.7	54(note1)	-12.3	PK
		V	11490.0	41.3	15.1	56.4	74	-17.6	PK
		V	11490.0	27.3	15.1	42.4	54	-11.6	AV
		V	16200.0	43.5	17.4	60.9	74	-13.1	PK
V		16200.0	28.5	17.4	45.9	54	-8.1	AV	
H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
157		V	5785.0	86.0	20.9	106.9	Fundamental	/	PK
	H	599.8	5.8	13.4	19.2	46	-26.8	QP	
	H	697.3	3.9	14.3	18.2	46	-27.8	QP	
	V	3200.0	43.0	-1.8	41.2	54(note1)	-12.8	PK	

Chain 0+1	165	V	11570.0	41.5	15.2	56.7	74	-17.3	PK
		V	11570.0	27.5	15.2	42.7	54	-11.3	AV
		H	16200.0	42.0	17.4	59.4	74	-14.6	PK
		H	16200.0	28.0	17.4	45.4	54	-8.6	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	V	5825.0	83.1	20.9	104.0	Fundamental	/	PK	
	H	553.3	6.9	11.9	18.8	46	-27.2	QP	
	H	697.3	4.9	14.3	19.2	46	-26.8	QP	
	V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK	
	H	11650.0	41.7	15.1	56.8	74	-17.2	PK	
	H	11650.0	27.7	15.1	42.8	54	-11.2	AV	
	H	16200.0	42.3	17.4	59.7	74	-14.3	PK	
	H	16200.0	28.3	17.4	45.7	54	-8.3	AV	
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	V	2408.5	77.4	31.2	108.6	Fundamental	/	PK	
	H	599.8	4.8	13.4	18.2	46	-27.8	QP	
	H	666.8	12.3	12.2	24.5	46	-21.5	QP	
	V	3200.0	43.8	-0.7	43.1	54(note1)	-10.9	PK	
V	4824.0	41.2	3.1	44.3	54(note1)	-9.7	PK		
H	7250.0	40.9	9.6	50.5	54(note1)	-3.5	PK		
H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK		
6	V	2437.0	79.1	31.2	110.3	Fundamental	/	PK	
	V	553.3	6.0	12.0	18.0	46	-28.0	QP	
	V	666.8	8.2	13.3	21.5	46	-24.5	QP	
	H	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK	
	H	4874.0	41.5	3.1	44.6	54(note1)	-9.4	PK	
	H	7311.0	40.9	9.4	50.3	54(note1)	-3.7	PK	
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
11	V	2465.6	82.5	31.2	113.7	Fundamental	/	PK	
	V	599.8	3.6	13.7	17.3	46	-28.7	QP	
	V	697.3	1.3	14.3	15.6	46	-30.4	QP	
	H	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK	
	H	4924.0	41.7	3.3	45.0	54(note1)	-9.0	PK	
	V	7386.0	41.3	9.7	51.0	54(note1)	-3.0	PK	
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
149	V	5745.0	88.6	20.9	109.5	Fundamental	/	PK	
	V	553.3	5.6	12.0	17.6	46	-28.4	QP	



		V	697.3	3.7	14.3	18.0	46	-28.0	QP	
		H	3200.0	43.3	-1.8	41.5	54(note1)	-12.5	PK	
		H	11490.0	41.2	15.1	56.3	74	-17.7	PK	
		H	11490.0	27.2	15.1	42.3	54	-11.7	AV	
		V	16200.0	42.6	17.4	60.0	74	-14.0	PK	
		V	16200.0	28.6	17.4	46.0	54	-8.0	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	157	V	5785.0	87.7	20.9	108.6	Fundamental	/	PK	
		V	599.8	3.7	13.7	17.4	46	-28.6	QP	
		V	666.8	4.7	13.3	18.0	46	-28.0	QP	
		V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK	
		V	11570.0	41.7	15.2	56.9	74	-17.1	PK	
		V	11570.0	27.7	15.2	42.9	54	-11.1	AV	
		H	16200.0	42.5	17.4	59.9	74	-14.1	PK	
		H	16200.0	28.5	17.4	45.9	54	-8.1	AV	
	165	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		V	5825.0	87.5	20.9	108.4	Fundamental	/	PK	
		H	553.3	6.8	11.9	18.7	46	-27.3	QP	
		H	666.8	12.4	12.2	24.6	46	-21.4	QP	
		V	3200.0	43.2	-1.8	41.4	54(note1)	-12.6	PK	
		H	11650.0	41.1	15.1	56.2	74	-17.8	PK	
		H	11650.0	27.1	15.1	42.2	54	-11.8	AV	
		V	16200.0	42.1	17.4	59.5	74	-14.5	PK	
	Chain 0+1+2	V	16200.0	28.1	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
		1	V	2419.3	79.9	31.2	111.1	Fundamental	/	PK
			H	599.8	7.4	13.4	20.8	46	-25.2	QP
			H	697.3	4.8	14.3	19.1	46	-26.9	QP
V			3200.0	42.9	-0.7	42.2	54(note1)	-11.8	PK	
H			4824.0	41.2	3.1	44.3	54(note1)	-9.7	PK	
6		V	7250.0	40.3	9.6	49.9	54(note1)	-4.1	PK	
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK		
	V	2437.0	81.5	31.2	112.7	Fundamental	/	PK		
	H	553.3	6.8	11.9	18.7	46	-27.3	QP		
	H	666.8	10.6	12.2	22.8	46	-23.2	QP		
	V	3252.5	46.5	-0.4	46.1	54(note1)	-7.9	PK		
	V	4874.0	41.7	3.1	44.8	54(note1)	-9.2	PK		

		H	7311.0	40.8	9.4	50.2	54(note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	11	V	2464.8	86.3	31.2	117.5	Fundamental	/	PK
		H	599.8	6.2	13.4	19.6	46	-26.4	QP
		H	697.3	5.4	14.3	19.7	46	-26.3	QP
		V	3278.0	46.0	-0.3	45.7	54(note1)	-8.3	PK
		H	4924.0	42.3	3.3	45.6	54(note1)	-8.4	PK
		V	7386.0	40.9	9.7	50.6	54(note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
		149	V	5745.0	91.1	20.9	112.0	Fundamental	/
	V		553.3	5.7	12.0	17.7	46	-28.3	QP
	V		697.3	1.5	14.3	15.8	46	-30.2	QP
	V		3200.0	43.2	-1.8	41.4	54(note1)	-12.6	PK
	H		11490.0	41.3	15.1	56.4	74	-17.6	PK
	H		11490.0	27.3	15.1	42.4	54	-11.6	AV
	V		16200.0	42.3	17.4	59.7	74	-14.3	PK
	V		16200.0	28.3	17.4	45.7	54	-8.3	AV
	157	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
		V	5785.0	90.8	20.9	111.7	Fundamental	/	PK
		V	599.8	4.5	13.7	18.2	46	-27.8	QP
		V	666.8	5.2	13.3	18.5	46	-27.5	QP
		H	3200.0	43.4	-1.8	41.6	54(note1)	-12.4	PK
		H	11570.0	42.3	15.2	57.5	74	-16.5	PK
		H	11570.0	28.3	15.2	43.5	54	-10.5	AV
		H	16200.0	42.8	17.4	60.2	74	-13.8	PK
	165	H	16200.0	28.8	17.4	46.2	54	-7.8	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
		V	5825.0	90.6	20.9	111.5	Fundamental	/	PK
		V	553.3	5.9	12.0	17.9	46	-28.1	QP
		V	666.8	4.5	13.3	17.8	46	-28.2	QP
		H	3200.0	43.2	-1.8	41.4	54(note1)	-12.6	PK
		V	11650.0	41.7	15.1	56.8	74	-17.2	PK
		V	11650.0	27.7	15.1	42.8	54	-11.2	AV
		V	16200.0	42.4	17.4	59.8	74	-14.2	PK
		V	16200.0	28.4	17.4	45.8	54	-8.2	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average

limit, then average measurement needn't be performed.

802.11n(40MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	3	V	2424.7	75.0	31.2	106.2	Fundamental	/	PK
		V	599.8	5.1	13.7	18.8	46	-27.2	QP
		V	697.3	1.6	14.3	15.9	46	-30.1	QP
		H	3200.0	43.2	-0.7	42.5	54(note1)	-11.5	PK
		H	4844.0	42.0	3.1	45.1	54(note1)	-8.9	PK
		H	7266.0	40.8	9.5	50.3	54(note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	78.3	31.2	109.5	Fundamental	/	PK
		H	553.3	5.4	11.9	17.3	46	-28.7	QP
		H	666.8	8.8	12.2	21.0	46	-25.0	QP
		H	3200.0	43.4	-0.7	42.7	54(note1)	-11.3	PK
		H	4874.0	41.7	3.1	44.8	54(note1)	-9.2	PK
		H	7311.0	40.7	9.4	50.1	54(note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	9	V	2464.5	71.6	31.2	102.8	Fundamental	/	PK
		H	599.8	6.7	13.4	20.1	46	-25.9	QP
		H	697.3	4.6	14.3	18.9	46	-27.1	QP
		H	3200.0	43.4	-0.7	42.7	54(note1)	-11.3	PK
		H	4904.0	41.2	3.2	44.4	54(note1)	-9.6	PK
		V	7356.0	41.2	9.6	50.8	54(note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	151	V	5755.0	80.2	20.5	100.7	Fundamental	/	PK
		H	553.3	6.4	11.9	18.3	46	-27.7	QP
		H	697.3	4.8	14.3	19.1	46	-26.9	QP
		H	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK
		H	11510.0	41.3	15.0	56.3	74	-17.7	PK
		H	11510.0	27.3	15.0	42.3	54	-11.7	AV
V		16200.0	42.1	17.4	59.5	74	-14.5	PK	
V		16200.0	28.1	17.4	45.5	54	-8.5	AV	
H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
159	V	5795.0	80.1	20.5	100.6	Fundamental	/	PK	

		H	599.8	5.7	13.4	19.1	46	-26.9	QP
		H	666.8	10.1	12.2	22.3	46	-23.7	QP
		V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK
		V	11590.0	41.1	15.5	56.6	74	-17.4	PK
		V	11590.0	27.1	15.5	42.6	54	-11.4	AV
		H	16200.0	42.5	17.4	59.9	74	-14.1	PK
		H	16200.0	28.5	17.4	45.9	54	-8.1	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 1	3	V	2409.2	69.1	31.2	100.3	Fundamental	/	PK
		V	553.3	5.7	12.0	17.7	46	-28.3	QP
		V	666.8	6.3	13.3	19.6	46	-26.4	QP
		V	3200.0	43.9	-0.7	43.2	54(note1)	-10.8	PK
		V	4844.0	41.6	3.1	44.7	54(note1)	-9.3	PK
		H	7266.0	41.4	9.5	50.9	54(note1)	-3.1	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	71.5	31.2	102.7	Fundamental	/	PK
		V	599.8	5.2	13.7	18.9	46	-27.1	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	42.7	-0.7	42.0	54(note1)	-12.0	PK
		H	4874.0	41.7	3.1	44.8	54(note1)	-9.2	PK
		H	7311.0	41.1	9.4	50.5	54(note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	9	V	2465.7	72.7	31.2	103.9	Fundamental	/	PK
		V	553.3	4.6	12.0	16.6	46	-29.4	QP
		V	666.8	6.4	13.3	19.7	46	-26.3	QP
		H	3200.0	43.0	-0.7	42.3	54(note1)	-11.7	PK
		H	4904.0	42.0	3.2	45.2	54(note1)	-8.8	PK
		H	7356.0	41.3	9.6	50.9	54(note1)	-3.1	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	151	V	5755.0	84.9	20.5	105.4	Fundamental	/	PK
		V	599.8	4.9	13.7	18.6	46	-27.4	QP
		V	697.3	1.9	14.3	16.2	46	-29.8	QP
		V	3200.0	43.1	-1.8	41.3	54(note1)	-12.7	PK
		H	11510.0	41.2	15.0	56.2	74	-17.8	PK
		H	11510.0	27.2	15.0	42.2	54	-11.8	AV
H		16200.0	43.5	17.4	60.9	74	-13.1	PK	
H		16200.0	29.5	17.4	46.9	54	-7.1	AV	

		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	159	V	5795.0	85.1	20.5	105.6	Fundamental	/	PK
		H	553.3	6.0	11.9	17.9	46	-28.1	QP
		H	697.3	4.0	14.3	18.3	46	-27.7	QP
		V	3200.0	43.7	-1.8	41.9	54(note1)	-12.1	PK
		V	11590.0	41.4	15.5	56.9	74	-17.1	PK
		V	11590.0	27.4	15.5	42.9	54	-11.1	AV
		V	16200.0	42.4	17.4	59.8	74	-14.2	PK
		V	16200.0	28.4	17.4	45.8	54	-8.2	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
Chain 2		3	V	2436.1	76.8	31.2	108.0	Fundamental	/
	H		599.8	5.8	13.4	19.2	46	-26.8	QP
	H		666.8	8.6	12.2	20.8	46	-25.2	QP
	H		3200.0	43.3	-0.7	42.6	54(note1)	-11.4	PK
	H		4844.0	41.1	3.1	44.2	54(note1)	-9.8	PK
	V		7266.0	40.7	9.5	50.2	54(note1)	-3.8	PK
	H		24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	6	V	2437.0	76.4	31.2	107.6	Fundamental	/	PK
		H	553.3	7.1	11.9	19.0	46	-27.0	QP
		H	666.8	11.9	12.2	24.1	46	-21.9	QP
		V	3200.0	43.1	-0.7	42.4	54(note1)	-11.6	PK
		V	4874.0	41.5	3.1	44.6	54(note1)	-9.4	PK
		V	7311.0	41.4	9.4	50.8	54(note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	9	V	2436.6	71.9	31.2	103.1	Fundamental	/	PK
		H	599.8	6.1	13.4	19.5	46	-26.5	QP
		H	697.3	5.1	14.3	19.4	46	-26.6	QP
		V	3200.0	42.9	-0.7	42.2	54(note1)	-11.8	PK
		V	4904.0	41.8	3.2	45.0	54(note1)	-9.0	PK
		V	7356.0	41.0	9.6	50.6	54(note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	151	V	5755.0	83.6	20.5	104.1	Fundamental	/	PK
		V	553.3	6.5	12.0	18.5	46	-27.5	QP
		V	666.8	2.0	13.3	15.3	46	-30.7	QP
		H	3200.0	42.9	-1.8	41.1	54(note1)	-12.9	PK
		V	11510.0	41.4	15.0	56.4	74	-17.6	PK
		V	11510.0	27.4	15.0	42.4	54	-11.6	AV

		H	16200.0	42.5	17.4	59.9	74	-14.1	PK			
		H	16200.0	28.5	17.4	45.9	54	-8.1	AV			
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK			
	159		V	5795.0	83.5	20.5	104.0	Fundamental	/	PK		
			V	599.8	5.0	13.7	18.7	46	-27.3	QP		
			V	697.3	2.9	14.3	17.2	46	-28.8	QP		
			H	3200.0	42.7	-1.8	40.9	54(note1)	-13.1	PK		
			H	11590.0	40.4	15.5	55.9	74	-18.1	PK		
			H	11590.0	26.4	15.5	41.9	54	-12.1	AV		
			V	16200.0	42.2	17.4	59.6	74	-14.4	PK		
			V	16200.0	28.2	17.4	45.6	54	-8.4	AV		
			H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK		
			Chain 0+1	3	V	2418.3	73.5	31.2	104.7	Fundamental	/	PK
					H	553.3	7.0	12.0	19.0	46	-27.0	QP
					H	666.8	6.5	13.3	19.8	46	-26.2	QP
6	V	3200.0		43.4	-0.7	42.7	54(note1)	-11.3	PK			
	H	4844.0		41.1	3.1	44.2	54(note1)	-9.8	PK			
	V	7266.0		40.7	9.5	50.2	54(note1)	-3.8	PK			
	H	24000.0		59.1	-8.9	50.2	54(note1)	-3.8	PK			
	V	2437.0		85.2	31.2	116.4	Fundamental	/	PK			
	H	599.8		6.2	13.7	19.9	46	-26.1	QP			
	H	697.3		2.0	14.3	16.3	46	-29.7	QP			
9	H	3200.0		43.0	-0.7	42.3	54(note1)	-11.7	PK			
	V	4874.0		42.1	3.1	45.2	54(note1)	-8.8	PK			
	H	7311.0		41.0	9.4	50.4	54(note1)	-3.6	PK			
	H	24000.0		59.1	-8.9	50.2	54(note1)	-3.8	PK			
	V	2463.1		74.4	31.2	105.6	Fundamental	/	PK			
	H	553.3	6.8	11.9	18.7	46	-27.3	QP				
	H	666.8	11.8	12.2	24.0	46	-22.0	QP				
151	V	3200.0	43.0	-0.7	42.3	54(note1)	-11.7	PK				
	H	4904.0	41.8	3.2	45.0	54(note1)	-9.0	PK				
	H	7356.0	41.6	9.6	51.2	54(note1)	-2.8	PK				
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK				
		V	5755.0	82.2	20.5	102.7	Fundamental	/	PK			
		H	599.8	6.5	13.4	19.9	46	-26.1	QP			
		H	697.3	4.4	14.3	18.7	46	-27.3	QP			
		V	3200.0	42.6	-1.8	40.8	54(note1)	-13.2	PK			

		V	11510.0	41.1	15.0	56.1	74	-17.9	PK
		V	11510.0	27.1	15.0	42.1	54	-11.9	AV
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.6	-8.9	50.7	54(note1)	-3.3	PK
	159	V	5795.0	81.8	20.5	102.3	Fundamental	/	PK
		H	553.3	6.7	11.9	18.6	46	-27.4	QP
		H	666.8	11.6	12.2	23.8	46	-22.2	QP
		H	3200.0	43.2	-1.8	41.4	54(note1)	-12.6	PK
		H	11590.0	40.7	15.5	56.2	74	-17.8	PK
		H	11590.0	26.7	15.5	42.2	54	-11.8	AV
		H	16200.0	43.2	17.4	60.6	74	-13.4	PK
		H	16200.0	29.2	17.4	46.6	54	-7.4	AV
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
	Chain 0+1+2	3	V	2425.0	76.9	31.2	108.1	Fundamental	/
H			599.8	6.2	13.4	19.6	46	-26.4	QP
H			697.3	4.7	14.3	19.0	46	-27.0	QP
H			3200.0	43.4	-0.7	42.7	54(note1)	-11.3	PK
H			4844.0	41.4	3.1	44.5	54(note1)	-9.5	PK
H			7266.0	41.6	9.5	51.1	54(note1)	-2.9	PK
H			24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
6		V	2437.0	78.4	31.2	109.6	Fundamental	/	PK
		V	553.3	5.4	12.0	17.4	46	-28.6	QP
		V	697.3	2.4	14.3	16.7	46	-29.3	QP
		V	3244.0	45.3	-0.4	44.9	54(note1)	-9.1	PK
		V	4874.0	40.9	3.1	44.0	54(note1)	-10.0	PK
		V	7311.0	40.6	9.4	50.0	54(note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
9		V	2467.6	75.9	31.2	107.1	Fundamental	/	PK
	V	599.8	5.8	13.7	19.5	46	-26.5	QP	
	V	666.8	7.7	13.3	21.0	46	-25.0	QP	
	H	3200.0	42.9	-0.7	42.2	54(note1)	-11.8	PK	
	V	4904.0	41.5	3.2	44.7	54(note1)	-9.3	PK	
	V	7356.0	41.0	9.6	50.6	54(note1)	-3.4	PK	
	H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK	
151	V	5755.0	83.8	20.5	104.3	Fundamental	/	PK	
	V	553.3	5.4	12.0	17.4	46	-28.6	QP	

		V	666.8	7.3	13.3	20.6	46	-25.4	QP
		V	3200.0	43.5	-1.8	41.7	54(note1)	-12.3	PK
		H	11510.0	41.0	15.0	56.0	74	-18.0	PK
		H	11510.0	27.0	15.0	42.0	54	-12.0	AV
		H	16200.0	42.7	17.4	60.1	74	-13.9	PK
		H	16200.0	28.7	17.4	46.1	54	-7.9	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK
	159	V	5795.0	83.6	20.5	104.1	Fundamental	/	PK
		V	599.8	4.6	13.7	18.3	46	-27.7	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	42.5	-1.8	40.7	54(note1)	-13.3	PK
		V	11590.0	40.9	15.5	56.4	74	-17.6	PK
		V	11590.0	26.9	15.5	42.4	54	-11.6	AV
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.1	-8.9	50.2	54(note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.



Test by build-in antenna (PCB antenna)

802.11b

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2413.5	78.8	31.2	110.0	Fundamental	/	PK
		H	599.8	6.0	13.4	19.4	46	-26.6	QP
		H	697.3	5.5	14.3	19.8	46	-26.2	QP
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK
		V	4824.0	43.0	3.1	46.1	54(Note1)	-7.9	PK
		H	7250.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	79.1	31.2	110.3	Fundamental	/	PK
		H	553.3	5.8	11.9	17.7	46	-28.3	QP
		H	697.3	4.3	14.3	18.6	46	-27.4	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4874.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		V	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2462.7	82.8	31.2	114.0	Fundamental	/	PK
		H	599.8	5.7	13.4	19.1	46	-26.9	QP
		H	666.8	13.3	12.2	25.5	46	-20.5	QP
		V	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK
		V	4924.0	43.5	3.3	46.8	54(Note1)	-7.2	PK
		H	7386.0	41.2	9.7	50.9	54(Note1)	-3.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	V	2410.8	75.3	31.2	106.5	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.2	13.3	21.5	46	-24.5	QP
		V	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		H	4824.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
		V	7250.0	41.2	9.6	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	81.1	31.2	112.3	Fundamental	/	PK
		V	599.8	4.9	13.7	18.6	46	-27.4	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	43.5	-0.7	42.8	54(Note1)	-11.2	PK

		V	4874.0	41.9	3.1	45.0	54(Note1)	-9.0	PK	
		V	7311.0	41.0	9.4	50.4	54(Note1)	-3.6	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	11		V	2460.9	80.0	31.2	111.2	Fundamental	/	PK
			V	553.3	5.9	12.0	17.9	46	-28.1	QP
			V	666.8	6.0	13.3	19.3	46	-26.7	QP
			V	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK
			V	4924.0	42.4	3.3	45.7	54(Note1)	-8.3	PK
			H	7386.0	41.8	9.7	51.5	54(Note1)	-2.5	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	1		V	2410.9	80.8	31.2	112.0	Fundamental	/	PK
			V	599.8	3.9	13.7	17.6	46	-28.4	QP
			V	697.3	3.5	14.3	17.8	46	-28.2	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK	
		V	4824.0	42.6	3.1	45.7	54(Note1)	-8.3	PK	
		V	7250.0	40.2	9.6	49.8	54(Note1)	-4.2	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	6	V	2437.0	80.4	31.2	111.6	Fundamental	/	PK	
		H	553.3	6.6	11.9	18.5	46	-27.5	QP	
		H	666.8	8.8	12.2	21.0	46	-25.0	QP	
H		3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK		
V		4874.0	44.0	3.1	47.1	54(Note1)	-6.9	PK		
V		7311.0	41.0	9.4	50.4	54(Note1)	-3.6	PK		
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
11	V	2462.6	82.0	31.2	113.2	Fundamental	/	PK		
	H	599.8	5.2	13.4	18.6	46	-27.4	QP		
	H	697.3	1.9	14.3	16.2	46	-29.8	QP		
	V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK		
	V	4924.0	41.6	3.3	44.9	54(Note1)	-9.1	PK		
	V	7386.0	41.2	9.7	50.9	54(Note1)	-3.1	PK		
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11g

Chain	CH	Antenna	Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBuV/m)	Margin (dB)	Detector
-------	----	---------	-----------------	---------------	-------------	---------------	----------------	-------------	----------

				(dBuV/m)		(dBuV/m)			
Chain 0	1	V	2419.3	77.5	31.2	108.7	Fundamental	/	PK
		H	553.3	6.4	11.9	18.3	46	-27.7	QP
		H	666.8	6.6	12.2	18.8	46	-27.2	QP
		H	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		H	4824.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		H	7250.0	40.8	9.6	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	77.7	31.2	108.9	Fundamental	/	PK
		H	599.8	6.0	13.4	19.4	46	-26.6	QP
		H	697.3	3.6	14.3	17.9	46	-28.1	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4874.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		V	7311.0	40.9	9.4	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2466.1	79.9	31.2	111.1	Fundamental	/	PK
		V	553.3	6.9	12.0	18.9	46	-27.1	QP
		V	697.3	4.8	14.3	19.1	46	-26.9	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4924.0	41.6	3.3	44.9	54(Note1)	-9.1	PK
		H	7386.0	41.5	9.7	51.2	54(Note1)	-2.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	V	2404.8	76.9	31.2	108.1	Fundamental	/	PK
		V	553.3	5.6	12.0	17.6	46	-28.4	QP
		V	666.8	6.1	13.3	19.4	46	-26.6	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4824.0	40.8	3.1	43.9	54(Note1)	-10.1	PK
		V	7250.0	40.3	9.6	49.9	54(Note1)	-4.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	76.8	31.2	108.0	Fundamental	/	PK
		V	599.8	4.2	13.7	17.9	46	-28.1	QP
		V	697.3	2.7	14.3	17.0	46	-29.0	QP
		V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		V	4874.0	41.3	3.1	44.4	54(Note1)	-9.6	PK
		V	7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

	11	V	2466.3	78.8	31.2	110.0	Fundamental	/	PK
		H	553.3	5.8	11.9	17.7	46	-28.3	QP
		H	697.3	3.4	14.3	17.7	46	-28.3	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4924.0	41.5	3.3	44.8	54(Note1)	-9.2	PK
		H	7386.0	41.6	9.7	51.3	54(Note1)	-2.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	1	V	2405.0	80.5	31.2	111.7	Fundamental	/	PK
		H	599.8	2.2	13.4	15.6	46	-30.4	QP
		H	666.8	5.7	12.2	17.9	46	-28.1	QP
		H	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		H	4824.0	40.9	3.1	44.0	54(Note1)	-10.0	PK
		H	7250.0	40.5	9.6	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	80.4	31.2	111.6	Fundamental	/	PK
		H	553.3	7.4	11.9	19.3	46	-26.7	QP
		H	666.8	12.8	12.2	25.0	46	-21.0	QP
		V	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
		H	4874.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
		V	7311.0	39.9	9.4	49.3	54(Note1)	-4.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2469.3	82.6	31.2	113.8	Fundamental	/	PK
		H	599.8	6.6	13.4	20.0	46	-26.0	QP
		H	697.3	4.7	14.3	19.0	46	-27.0	QP
		V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		V	4924.0	41.8	3.3	45.1	54(Note1)	-8.9	PK
		H	7386.0	40.5	9.7	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11a

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	149	V	5745.0	89.0	20.9	109.9	Fundamental	/	PK
		V	599.8	1.9	13.7	15.6	46	-30.4	QP

		V	666.8	9.3	13.3	22.6	46	-23.4	QP	
		V	3200.0	43.4	-1.8	41.6	54(Note1)	-12.4	PK	
		V	11490.0	41.1	15.1	56.2	74	-17.7	PK	
		V	11490.0	27.1	15.1	42.2	54	-11.7	AV	
		V	16200.0	43.1	17.4	60.5	74	-13.6	PK	
		V	16200.0	29.1	17.4	46.5	54	-7.6	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	V	5785.0	89.1	20.9	110.0	Fundamental	/	PK	
		V	553.3	7.8	12.0	19.8	46	-26.2	QP	
		V	666.8	7.2	13.3	20.5	46	-25.5	QP	
		H	3200.0	43.3	-1.8	41.5	54(Note1)	-12.6	PK	
		H	11570.0	40.9	15.2	56.1	74	-17.8	PK	
		H	11570.0	26.9	15.2	42.1	54	-11.8	AV	
		H	16200.0	41.6	17.4	59.0	74	-15.0	PK	
		H	16200.0	27.6	17.4	45.0	54	-9.0	AV	
	165	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5825.0	88.9	20.9	109.8	Fundamental	/	PK	
		V	599.8	2.4	13.7	16.1	46	-29.9	QP	
		V	697.3	0.9	14.3	15.2	46	-30.8	QP	
		V	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK	
		V	11650.0	40.8	15.1	55.9	74	-18.0	PK	
		V	11650.0	26.8	15.1	41.9	54	-12.0	AV	
		V	16200.0	42.7	17.4	60.1	74	-13.9	PK	
		V	16200.0	28.7	17.4	46.1	54	-7.9	AV	
	Chain 1	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		149	V	5745.0	88.7	20.9	109.6	Fundamental	/	PK
			H	553.3	6.4	11.9	18.3	46	-27.7	QP
			H	666.8	11.9	12.2	24.1	46	-21.9	QP
			V	3200.0	43.4	-1.8	41.6	54(Note1)	-12.4	PK
			V	11490.0	40.7	15.1	55.8	74	-18.1	PK
			V	11490.0	26.7	15.1	41.8	54	-12.1	AV
			V	16200.0	41.7	17.4	59.1	74	-14.9	PK
			V	16200.0	27.7	17.4	45.1	54	-8.9	AV
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
157	V	5785.0	88.6	20.9	109.5	Fundamental	/	PK		
	H	599.8	5.2	13.4	18.6	46	-27.4	QP		
	H	697.3	4.0	14.3	18.3	46	-27.7	QP		

		H	3200.0	42.8	-1.8	41.0	54(Note1)	-13.1	PK	
		H	11570.0	40.6	15.2	55.8	74	-18.1	PK	
		H	11570.0	26.6	15.2	41.8	54	-12.1	AV	
		H	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	V	5825.0	88.9	20.9	109.8	Fundamental	/	PK	
		H	553.3	6.1	11.9	18.0	46	-28.0	QP	
		H	697.3	3.9	14.3	18.2	46	-27.8	QP	
		V	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK	
		V	11650.0	41.0	15.1	56.1	74	-17.8	PK	
		V	11650.0	27.0	15.1	42.1	54	-11.8	AV	
		V	16200.0	42.3	17.4	59.7	74	-14.3	PK	
		V	16200.0	28.3	17.4	45.7	54	-8.3	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 2	149	V	5745.0	88.7	20.9	109.6	Fundamental	/	PK
			H	599.8	4.8	13.4	18.2	46	-27.8	QP
			H	666.8	12.1	12.2	24.3	46	-21.7	QP
H			3200.0	42.4	-1.8	40.6	54(Note1)	-13.4	PK	
H			11490.0	42.1	15.1	57.2	74	-16.8	PK	
H			11490.0	28.1	15.1	43.2	54	-10.8	AV	
H			16200.0	41.9	17.4	59.3	74	-14.7	PK	
H			16200.0	27.9	17.4	45.3	54	-8.7	AV	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
157		V	5785.0	88.9	20.9	109.8	Fundamental	/	PK	
		V	553.3	5.7	12.0	17.7	46	-28.3	QP	
		V	666.8	7.4	13.3	20.7	46	-25.3	QP	
		H	3200.0	42.2	-1.8	40.4	54(Note1)	-13.7	PK	
		H	11570.0	40.8	15.2	56.0	74	-18.0	PK	
		H	11570.0	26.8	15.2	42.0	54	-12.0	AV	
		H	16200.0	41.6	17.4	59.0	74	-15.0	PK	
		H	16200.0	27.6	17.4	45.0	54	-9.0	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165		V	5825.0	89.1	20.9	110.0	Fundamental	/	PK	
		V	599.8	2.9	13.7	16.6	46	-29.4	QP	
		V	697.3	1.9	14.3	16.2	46	-29.8	QP	
		V	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK	

	V	11650.0	41.4	15.1	56.5	74	-17.4	PK
	V	11650.0	27.4	15.1	42.5	54	-11.4	AV
	V	16200.0	42.2	17.4	59.6	74	-14.4	PK
	V	16200.0	28.2	17.4	45.6	54	-8.4	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(20MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2419.7	74.5	31.2	105.7	Fundamental	/	PK
		V	553.3	5.6	12.0	17.6	46	-28.4	QP
		V	666.8	8.2	13.3	21.5	46	-24.5	QP
		V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4824.0	40.8	3.1	43.9	54(Note1)	-10.1	PK
		V	7250.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	76.4	31.2	107.6	Fundamental	/	PK
		V	599.8	2.7	13.7	16.4	46	-29.6	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK
		V	4874.0	41.9	3.1	45.0	54(Note1)	-9.0	PK
		V	7311.0	40.3	9.4	49.7	54(Note1)	-4.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2464.8	77.8	31.2	109.0	Fundamental	/	PK
		H	553.3	6.6	11.9	18.5	46	-27.5	QP
		H	666.8	11.4	12.2	23.6	46	-22.4	QP
		V	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
		V	4924.0	42.2	3.3	45.5	54(Note1)	-8.5	PK
		H	7386.0	41.5	9.7	51.2	54(Note1)	-2.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	V	5745.0	85.9	20.9	106.8	Fundamental	/	PK
		H	599.8	5.6	13.4	19.0	46	-27.0	QP
		H	697.3	3.9	14.3	18.2	46	-27.8	QP
		H	3200.0	43.1	-1.8	41.3	54(Note1)	-12.7	PK

		H	11490.0	40.6	15.1	55.7	74	-18.3	PK	
		H	11490.0	26.6	15.1	41.7	54	-12.3	AV	
		H	16200.0	42.3	17.4	59.7	74	-14.3	PK	
		H	16200.0	28.3	17.4	45.7	54	-8.3	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	V	5785.0	85.7	20.9	106.6	Fundamental	/	PK	
		H	553.3	6.5	11.9	18.4	46	-27.6	QP	
		H	666.8	11.4	12.2	23.6	46	-22.4	QP	
		V	3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK	
		V	11570.0	42.4	15.2	57.6	74	-16.4	PK	
		V	11570.0	28.4	15.2	43.6	54	-10.4	AV	
		V	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		V	16200.0	28.1	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	V	5825.0	85.6	20.9	106.5	Fundamental	/	PK	
		H	599.8	6.5	13.4	19.9	46	-26.1	QP	
		H	697.3	4.1	14.3	18.4	46	-27.6	QP	
		H	3200.0	43.3	-1.8	41.5	54(Note1)	-12.5	PK	
		H	11650.0	41.8	15.1	56.9	74	-17.1	PK	
		H	11650.0	27.8	15.1	42.9	54	-11.1	AV	
		H	16200.0	41.9	17.4	59.3	74	-14.8	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.8	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 1	1	V	2405.7	75.2	31.2	106.4	Fundamental	/	PK
			V	553.3	5.8	12.0	17.8	46	-28.2	QP
			V	666.8	8.4	13.3	21.7	46	-24.3	QP
			V	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
			H	4824.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
H			7250.0	40.2	9.6	49.8	54(Note1)	-4.2	PK	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
6		V	2437.0	76.7	31.2	107.9	Fundamental	/	PK	
		V	599.8	3.6	13.7	17.3	46	-28.7	QP	
		V	697.3	1.5	14.3	15.8	46	-30.2	QP	
		V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK	
		V	4874.0	42.0	3.1	45.1	54(Note1)	-8.9	PK	
		H	7311.0	41.2	9.4	50.6	54(Note1)	-3.4	PK	
H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK			



	11	V	2467.4	76.1	31.2	107.3	Fundamental	/	PK	
		V	553.3	5.3	12.0	17.3	46	-28.7	QP	
		V	666.8	12.4	13.3	25.7	46	-20.3	QP	
		V	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK	
		V	4924.0	41.5	3.3	44.8	54(Note1)	-9.2	PK	
		V	7386.0	41.3	9.7	51.0	54(Note1)	-3.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149	V	5745.0	85.1	20.9	106.0	Fundamental	/	PK	
		V	599.8	2.8	13.7	16.5	46	-29.5	QP	
		V	697.3	1.9	14.3	16.2	46	-29.8	QP	
		H	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK	
		H	11490.0	40.7	15.1	55.8	74	-18.2	PK	
		H	11490.0	26.7	15.1	41.8	54	-12.2	AV	
		H	16200.0	41.9	17.4	59.3	74	-14.8	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.8	AV	
	157	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5785.0	85.3	20.9	106.2	Fundamental	/	PK	
		H	553.3	6.5	11.9	18.4	46	-27.6	QP	
		H	666.8	13.3	12.2	25.5	46	-20.5	QP	
		V	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK	
		V	11570.0	41.0	15.2	56.2	74	-17.7	PK	
		V	11570.0	27.0	15.2	42.2	54	-11.7	AV	
		V	16200.0	42.3	17.4	59.7	74	-14.3	PK	
		V	16200.0	28.3	17.4	45.7	54	-8.3	AV	
	165	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5825.0	85.7	20.9	106.6	Fundamental	/	PK	
		H	599.8	6.1	13.4	19.5	46	-26.5	QP	
		H	697.3	3.2	14.3	17.5	46	-28.5	QP	
		H	3200.0	43.8	-1.8	42.0	54(Note1)	-12.0	PK	
		H	11650.0	42.1	15.1	57.2	74	-16.7	PK	
		H	11650.0	28.1	15.1	43.2	54	-10.7	AV	
		H	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		H	16200.0	28.1	17.4	45.5	54	-8.5	AV	
	Chain 2	1	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			V	2404.1	78.6	31.2	109.8	Fundamental	/	PK
			H	553.3	6.9	11.9	18.8	46	-27.2	QP
		H	666.8	12.6	12.2	24.8	46	-21.2	QP	

		V	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK
		V	4824.0	40.9	3.1	44.0	54(Note1)	-10.0	PK
		V	7250.0	39.7	9.6	49.3	54(Note1)	-4.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	79.1	31.2	110.3	Fundamental	/	PK
		H	599.8	5.2	13.4	18.6	46	-27.4	QP
		H	697.3	3.9	14.3	18.2	46	-27.8	QP
		V	3200.0	42.4	-0.7	41.7	54(Note1)	-12.3	PK
		V	4874.0	40.7	3.1	43.8	54(Note1)	-10.2	PK
		V	7311.0	40.9	9.4	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2469.3	80.1	31.2	111.3	Fundamental	/	PK
		V	553.3	6.2	12.0	18.2	46	-27.8	QP
		V	697.3	1.6	14.3	15.9	46	-30.1	QP
		V	3200.0	42.2	-0.7	41.5	54(Note1)	-12.5	PK
		H	4924.0	41.1	3.3	44.4	54(Note1)	-9.6	PK
		H	7386.0	40.7	9.7	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	V	5745.0	87.2	20.9	108.1	Fundamental	/	PK
		V	599.8	2.8	13.7	16.5	46	-29.5	QP
		V	666.8	7.5	13.3	20.8	46	-25.2	QP
		H	3200.0	42.7	-1.8	40.9	54(Note1)	-13.2	PK
		H	11490.0	41.5	15.1	56.6	74	-17.3	PK
		H	11490.0	27.5	15.1	42.6	54	-11.3	AV
		H	16200.0	42.0	17.4	59.4	74	-14.6	PK
		H	16200.0	28.0	17.4	45.4	54	-8.6	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	V	5785.0	87.4	20.9	108.3	Fundamental	/	PK
V		553.3	5.8	12.0	17.8	46	-28.2	QP	
V		697.3	1.6	14.3	15.9	46	-30.1	QP	
V		3200.0	43.0	-1.8	41.2	54(Note1)	-12.8	PK	
V		11570.0	41.0	15.2	56.2	74	-17.8	PK	
V		11570.0	27.0	15.2	42.2	54	-11.8	AV	
V		16200.0	42.8	17.4	60.2	74	-13.8	PK	
V		16200.0	28.8	17.4	46.2	54	-7.8	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165	V	5825.0	87.3	20.9	108.2	Fundamental	/	PK	

		V	599.8	2.1	13.7	15.8	46	-30.2	QP	
		V	666.8	8.9	13.3	22.2	46	-23.8	QP	
		H	3200.0	42.8	-1.8	41.0	54(Note1)	-13.1	PK	
		H	11650.0	41.1	15.1	56.2	74	-17.8	PK	
		H	11650.0	27.1	15.1	42.2	54	-11.8	AV	
		H	16200.0	41.7	17.4	59.1	74	-14.9	PK	
		H	16200.0	27.7	17.4	45.1	54	-8.9	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
Chain 0+1	1	V	2418.8	79.6	31.2	110.8	Fundamental	/	PK	
		H	553.3	7.7	11.9	19.6	46	-26.4	QP	
		H	666.8	10.5	12.2	22.7	46	-23.3	QP	
		V	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK	
		H	4824.0	41.9	3.1	45.0	54(Note1)	-9.0	PK	
		H	7250.0	40.5	9.6	50.1	54(Note1)	-3.9	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		6	V	2437.0	81.1	31.2	112.3	Fundamental	/	PK
			H	599.8	5.1	13.4	18.5	46	-27.5	QP
			H	697.3	3.2	14.3	17.5	46	-28.5	QP
			V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK
			V	4874.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
			V	7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		11	V	2460.4	80.6	31.2	111.8	Fundamental	/	PK
			H	553.3	7.3	11.9	19.2	46	-26.8	QP
			H	697.3	4.4	14.3	18.7	46	-27.3	QP
			H	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
			H	4924.0	41.0	3.3	44.3	54(Note1)	-9.7	PK
			H	7386.0	40.7	9.7	50.4	54(Note1)	-3.6	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		149	V	5745.0	88.7	20.9	109.6	Fundamental	/	PK
			H	599.8	5.8	13.4	19.2	46	-26.8	QP
			H	666.8	11.8	12.2	24.0	46	-22.0	QP
			V	3200.0	42.8	-1.8	41.0	54(Note1)	-13.1	PK
			V	11490.0	40.9	15.1	56.0	74	-17.9	PK
			V	11490.0	26.9	15.1	42.0	54	-11.9	AV
			V	16200.0	43.0	17.4	60.4	74	-13.6	PK
	V		16200.0	29.0	17.4	46.4	54	-7.6	AV	

		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	V	5785.0	87.6	20.9	108.5	Fundamental	/	PK
		V	553.3	5.4	12.0	17.4	46	-28.6	QP
		V	666.8	8.5	13.3	21.8	46	-24.2	QP
		H	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK
		H	11570.0	41.2	15.2	56.4	74	-17.6	PK
		H	11570.0	27.2	15.2	42.4	54	-11.6	AV
		H	16200.0	42.2	17.4	59.6	74	-14.4	PK
		H	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		165	V	5825.0	87.5	20.9	108.4	Fundamental	/
	V		599.8	1.7	13.7	15.4	46	-30.6	QP
	V		697.3	1.2	14.3	15.5	46	-30.5	QP
	V		3200.0	42.9	-1.8	41.1	54(Note1)	-13.0	PK
	V		11650.0	41.2	15.1	56.3	74	-17.7	PK
	V		11650.0	27.2	15.1	42.3	54	-11.7	AV
	V		16200.0	42.7	17.4	60.1	74	-13.9	PK
	V		16200.0	28.7	17.4	46.1	54	-7.9	AV
	H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	1	V	2418.1	81.2	31.2	112.4	Fundamental	/	PK
		V	599.8	2.7	13.7	16.4	46	-29.6	QP
		V	697.3	1.3	14.3	15.6	46	-30.4	QP
		V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4824.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
		V	7250.0	40.4	9.6	50.0	54(Note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	82.7	31.2	113.9	Fundamental	/	PK
		V	553.3	7.4	12.0	19.4	46	-26.6	QP
		V	666.8	8.4	13.3	21.7	46	-24.3	QP
		H	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		H	4874.0	42.2	3.1	45.3	54(Note1)	-8.7	PK
		H	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2467.8	84.0	31.2	115.2	Fundamental	/	PK
		H	553.3	7.5	11.9	19.4	46	-26.6	QP
		H	666.8	10.9	12.2	23.1	46	-22.9	QP
		H	3200.0	43.7	-0.7	43.0	54(Note1)	-11.0	PK

		H	4924.0	42.0	3.3	45.3	54(Note1)	-8.7	PK	
		H	7386.0	41.2	9.7	50.9	54(Note1)	-3.1	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149		V	5745.0	88.6	20.9	109.5	Fundamental	/	PK
			H	599.8	5.8	13.4	19.2	46	-26.8	QP
			H	697.3	3.8	14.3	18.1	46	-27.9	QP
			H	3200.0	42.9	-1.8	41.1	54(Note1)	-13.0	PK
			H	11490.0	40.8	15.1	55.9	74	-18.1	PK
			H	11490.0	26.8	15.1	41.9	54	-12.1	AV
			H	16200.0	42.0	17.4	59.4	74	-14.6	PK
			H	16200.0	28.0	17.4	45.4	54	-8.6	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			157		V	5785.0	89.4	20.9	110.3	Fundamental
	H	553.3			6.7	11.9	18.6	46	-27.4	QP
	H	697.3			4.4	14.3	18.7	46	-27.3	QP
	V	3200.0			44.2	-1.8	42.4	54(Note1)	-11.6	PK
	V	11570.0			41.1	15.2	56.3	74	-17.7	PK
	V	11570.0			27.1	15.2	42.3	54	-11.7	AV
	V	16200.0			41.9	17.4	59.3	74	-14.7	PK
	V	16200.0			27.9	17.4	45.3	54	-8.7	AV
	H	24000.0			59.1	-8.9	50.2	54(Note1)	-3.8	PK
	165		V	5825.0	89.2	20.9	110.1	Fundamental	/	PK
			H	599.8	4.7	13.4	18.1	46	-27.9	QP
			H	666.8	12.5	12.2	24.7	46	-21.3	QP
			H	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK
			H	11650.0	41.2	15.1	56.3	74	-17.6	PK
			H	11650.0	27.2	15.1	42.3	54	-11.6	AV
			H	16200.0	42.5	17.4	59.9	74	-14.1	PK
			H	16200.0	28.5	17.4	45.9	54	-8.1	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(40MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector

Chain 0	3	V	2424.5	75.0	31.2	106.2	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.3	13.3	21.6	46	-24.4	QP
		V	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK
		V	4844.0	41.3	3.1	44.4	54(Note1)	-9.6	PK
		H	7266.0	41.8	9.5	51.3	54(Note1)	-2.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	78.2	31.2	109.4	Fundamental	/	PK
		V	599.8	3.5	13.7	17.2	46	-28.8	QP
		V	697.3	1.4	14.3	15.7	46	-30.3	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4874.0	40.6	3.1	43.7	54(Note1)	-10.3	PK
		V	7311.0	40.6	9.4	50.0	54(Note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2465.0	73.8	31.2	105.0	Fundamental	/	PK
		V	553.3	5.5	12.0	17.5	46	-28.5	QP
		V	697.3	3.7	14.3	18.0	46	-28.0	QP
		H	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		H	4904.0	41.4	3.2	44.6	54(Note1)	-9.4	PK
		V	7356.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	81.6	20.9	102.5	Fundamental	/	PK
		V	599.8	3.6	13.7	17.3	46	-28.7	QP
		V	666.8	4.6	13.3	17.9	46	-28.1	QP
		V	3200.0	42.8	-1.8	41.0	54(Note1)	-13.1	PK
		V	11510.0	40.9	15.0	55.9	74	-18.0	PK
		V	11510.0	26.9	15.0	41.9	54	-12.0	AV
		V	16200.0	43.0	17.4	60.4	74	-13.6	PK
		V	16200.0	29.0	17.4	46.4	54	-7.6	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	159	V	5795.0	81.4	20.9	102.3	Fundamental	/	PK
		H	553.3	6.9	11.9	18.8	46	-27.2	QP
		H	666.8	12.4	12.2	24.6	46	-21.4	QP
		H	3200.0	42.9	-1.8	41.1	54(Note1)	-12.9	PK
		H	11590.0	41.0	15.5	56.5	74	-17.5	PK
		H	11590.0	27.0	15.5	42.5	54	-11.5	AV
		H	16200.0	42.2	17.4	59.6	74	-14.4	PK

		H	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	3	V	2406.6	69.5	31.2	100.7	Fundamental	/	PK
		H	599.8	7.5	13.4	20.9	46	-25.1	QP
		H	697.3	4.5	14.3	18.8	46	-27.2	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4844.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		V	7266.0	40.8	9.5	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		V	2437.0	71.3	31.2	102.5	Fundamental	/	PK
	6	H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	666.8	10.3	12.2	22.5	46	-23.5	QP
		V	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
		V	4874.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
		V	7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2435.8	70.4	31.2	101.6	Fundamental	/	PK
		H	599.8	6.2	13.4	19.6	46	-26.4	QP
		H	697.3	5.7	14.3	20.0	46	-26.0	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4904.0	42.5	3.2	45.7	54(Note1)	-8.3	PK
		H	7356.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	82.6	20.9	103.5	Fundamental	/	PK
		V	553.3	5.5	12.0	17.5	46	-28.5	QP
		V	697.3	1.5	14.3	15.8	46	-30.2	QP
		V	3200.0	42.0	-1.8	40.2	54(Note1)	-13.8	PK
		V	11510.0	41.3	15.0	56.3	74	-17.7	PK
		V	11510.0	27.3	15.0	42.3	54	-11.7	AV
		V	16200.0	42.8	17.4	60.2	74	-13.8	PK
V		16200.0	28.8	17.4	46.2	54	-7.8	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159	V	5795.0	82.7	20.9	103.6	Fundamental	/	PK	
	V	599.8	4.5	13.7	18.2	46	-27.8	QP	
	V	666.8	5.1	13.3	18.4	46	-27.6	QP	
	H	3200.0	43.3	-1.8	41.5	54(Note1)	-12.6	PK	
	H	11590.0	40.5	15.5	56.0	74	-18.0	PK	

		H	11590.0	26.5	15.5	42.0	54	-12.0	AV
		H	16200.0	41.7	17.4	59.1	74	-15.0	PK
		H	16200.0	27.7	17.4	45.1	54	-9.0	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	3	V	2436.8	75.6	31.2	106.8	Fundamental	/	PK
		V	553.3	6.2	12.0	18.2	46	-27.8	QP
		V	666.8	4.4	13.3	17.7	46	-28.3	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4844.0	41.9	3.1	45.0	54(Note1)	-9.0	PK
		H	7266.0	41.2	9.5	50.7	54(Note1)	-3.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	75.5	31.2	106.7	Fundamental	/	PK
		V	599.8	5.2	13.7	18.9	46	-27.1	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK
		H	4874.0	40.7	3.1	43.8	54(Note1)	-10.2	PK
		V	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2435.8	71.5	31.2	102.7	Fundamental	/	PK
		H	553.3	5.5	11.9	17.4	46	-28.6	QP
		H	666.8	8.6	12.2	20.8	46	-25.2	QP
		H	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		V	4904.0	41.4	3.2	44.6	54(Note1)	-9.4	PK
		H	7356.0	41.4	9.6	51.0	54(Note1)	-3.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	82.5	20.9	103.4	Fundamental	/	PK
		H	599.8	6.4	13.4	19.8	46	-26.2	QP
		H	697.3	4.5	14.3	18.8	46	-27.2	QP
		V	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK
		V	11510.0	41.0	15.0	56.0	74	-17.9	PK
		V	11510.0	27.0	15.0	42.0	54	-11.9	AV
V		16200.0	42.1	17.4	59.5	74	-14.5	PK	
V		16200.0	28.1	17.4	45.5	54	-8.5	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159	V	5795.0	82.7	20.9	103.6	Fundamental	/	PK	
	H	553.3	6.2	11.9	18.1	46	-27.9	QP	
	H	697.3	4.6	14.3	18.9	46	-27.1	QP	



		H	3200.0	43.0	-1.8	41.2	54(Note1)	-12.8	PK
		H	11590.0	41.0	15.5	56.5	74	-17.6	PK
		H	11590.0	27.0	15.5	42.5	54	-11.6	AV
		H	16200.0	42.6	17.4	60.0	74	-14.0	PK
		H	16200.0	28.6	17.4	46.0	54	-8.0	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1	3	V	2425.6	74.6	31.2	105.8	Fundamental	/	PK
		H	599.8	5.6	13.4	19.0	46	-27.0	QP
		H	666.8	10.1	12.2	22.3	46	-23.7	QP
		H	3200.0	43.5	-0.7	42.8	54(Note1)	-11.2	PK
		H	4844.0	41.7	3.1	44.8	54(Note1)	-9.2	PK
		H	7266.0	41.5	9.5	51.0	54(Note1)	-3.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	73.1	31.2	104.3	Fundamental	/	PK
		V	553.3	5.6	12.0	17.6	46	-28.4	QP
		V	666.8	6.3	13.3	19.6	46	-26.4	QP
		V	3200.0	44.0	-0.7	43.3	54(Note1)	-10.7	PK
		H	4874.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
		H	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2467.7	76.5	31.2	107.7	Fundamental	/	PK
		V	599.8	5.1	13.7	18.8	46	-27.2	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	42.5	-0.7	41.8	54(Note1)	-12.2	PK
		H	4904.0	41.8	3.2	45.0	54(Note1)	-9.0	PK
		H	7356.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	84.9	20.9	105.8	Fundamental	/	PK
		V	553.3	4.5	12.0	16.5	46	-29.5	QP
		V	666.8	6.5	13.3	19.8	46	-26.2	QP
		H	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK
		H	11510.0	41.0	15.0	56.0	74	-18.0	PK
		H	11510.0	27.0	15.0	42.0	54	-12.0	AV
H		16200.0	42.4	17.4	59.8	74	-14.2	PK	
H		16200.0	28.4	17.4	45.8	54	-8.2	AV	
H		24000.0	59.6	-8.9	50.7	54(Note1)	-3.3	PK	
159	V	5795.0	84.5	20.9	105.4	Fundamental	/	PK	

		V	599.8	5.2	13.7	18.9	46	-27.1	QP
		V	697.3	1.9	14.3	16.2	46	-29.8	QP
		V	3200.0	42.3	-1.8	40.5	54(Note1)	-13.5	PK
		V	11590.0	41.1	15.5	56.6	74	-17.5	PK
		V	11590.0	27.1	15.5	42.6	54	-11.5	AV
		V	16200.0	41.8	17.4	59.2	74	-14.8	PK
		V	16200.0	27.8	17.4	45.2	54	-8.8	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	3	V	2437.7	66.8	31.2	98.0	Fundamental	/	PK
		H	553.3	6.2	11.9	18.1	46	-27.9	QP
		H	697.3	4.0	14.3	18.3	46	-27.7	QP
		V	3200.0	43.5	-0.7	42.8	54(Note1)	-11.2	PK
		V	4844.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
		V	7266.0	40.7	9.5	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	77.8	31.2	109.0	Fundamental	/	PK
		H	599.8	5.9	13.4	19.3	46	-26.7	QP
		H	666.8	8.6	12.2	20.8	46	-25.2	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4874.0	41.9	3.1	45.0	54(Note1)	-9.0	PK
		H	7311.0	41.0	9.4	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2437.4	76.9	31.2	108.1	Fundamental	/	PK
		H	553.3	7.2	11.9	19.1	46	-26.9	QP
		H	666.8	11.5	12.2	23.7	46	-22.3	QP
		V	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK
		V	4904.0	41.9	3.2	45.1	54(Note1)	-8.9	PK
		V	7356.0	41.1	9.6	50.7	54(Note1)	-3.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	85.2	20.9	106.1	Fundamental	/	PK
		H	599.8	6.2	13.4	19.6	46	-26.4	QP
		H	697.3	5.1	14.3	19.4	46	-26.6	QP
		V	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK
		V	11510.0	41.5	15.0	56.5	74	-17.4	PK
		V	11510.0	27.5	15.0	42.5	54	-11.4	AV
		V	16200.0	41.7	17.4	59.1	74	-15.0	PK
V		16200.0	27.7	17.4	45.1	54	-9.0	AV	

	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
159	V	5795.0	85.4	20.9	106.3	Fundamental	/	PK
	V	553.3	6.4	12.0	18.4	46	-27.6	QP
	V	666.8	2.0	13.3	15.3	46	-30.7	QP
	H	3200.0	43.5	-1.8	41.7	54(Note1)	-12.3	PK
	H	11590.0	41.2	15.5	56.7	74	-17.4	PK
	H	11590.0	27.2	15.5	42.7	54	-11.4	AV
	H	16200.0	42.6	17.4	60.0	74	-14.0	PK
	H	16200.0	28.6	17.4	46.0	54	-8.0	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Test by build-in antenna (Metal antenna)

802.11b

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2410.8	77.9	31.2	109.1	Fundamental	/	PK
		H	553.3	7.1	12.0	19.1	46	-26.9	QP
		H	666.8	6.4	13.3	19.7	46	-26.3	QP
		V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4824.0	42.3	3.1	45.4	54(Note1)	-8.6	PK
		V	7250.0	40.6	9.6	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	78.2	31.2	109.4	Fundamental	/	PK
		H	599.8	6.2	13.7	19.9	46	-26.1	QP
		H	697.3	2.3	14.3	16.6	46	-29.4	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4874.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		V	7311.0	41.2	9.4	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2462.6	84.3	31.2	115.5	Fundamental	/	PK
		H	553.3	6.9	11.9	18.8	46	-27.2	QP
		H	666.8	11.8	12.2	24.0	46	-22.0	QP
		V	3200.0	43.9	-0.7	43.2	54(Note1)	-10.8	PK
		V	4924.0	43.6	3.3	46.9	54(Note1)	-7.1	PK
		V	7386.0	41.7	9.7	51.4	54(Note1)	-2.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	V	2410.6	77.0	31.2	108.2	Fundamental	/	PK
		H	599.8	6.3	13.4	19.7	46	-26.3	QP
		H	697.3	4.5	14.3	18.8	46	-27.2	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4824.0	41.3	3.1	44.4	54(Note1)	-9.6	PK
		H	7250.0	40.8	9.6	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	79.3	31.2	110.5	Fundamental	/	PK
		H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	666.8	11.6	12.2	23.8	46	-22.2	QP
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK

Chain 2	11	V	4874.0	41.7	3.1	44.8	54(Note1)	-9.2	PK	
		V	7311.0	41.2	9.4	50.6	54(Note1)	-3.4	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	2460.9	79.9	31.2	111.1	Fundamental	/	PK	
		H	599.8	6.1	13.4	19.5	46	-26.5	QP	
		H	697.3	4.7	14.3	19.0	46	-27.0	QP	
		V	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK	
		V	4924.0	42.3	3.3	45.6	54(Note1)	-8.4	PK	
		H	7386.0	40.9	9.7	50.6	54(Note1)	-3.4	PK	
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
	Chain 2	1	V	2409.6	79.9	31.2	111.1	Fundamental	/	PK
			V	553.3	5.3	12.0	17.3	46	-28.7	QP
			V	697.3	2.4	14.3	16.7	46	-29.3	QP
			H	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK
			V	4824.0	42.7	3.1	45.8	54(Note1)	-8.2	PK
			H	7250.0	40.8	9.6	50.4	54(Note1)	-3.6	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		6	V	2437.0	79.5	31.2	110.7	Fundamental	/	PK
V			599.8	5.6	13.7	19.3	46	-26.7	QP	
V			666.8	7.7	13.3	21.0	46	-25.0	QP	
H			3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK	
V			4874.0	42.7	3.1	45.8	54(Note1)	-8.2	PK	
H			7311.0	42.1	9.4	51.5	54(Note1)	-2.5	PK	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
11		V	2462.6	81.7	31.2	112.9	Fundamental	/	PK	
		V	553.3	5.3	12.0	17.3	46	-28.7	QP	
		V	666.8	7.3	13.3	20.6	46	-25.4	QP	
		V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK	
	V	4924.0	42.1	3.3	45.4	54(Note1)	-8.6	PK		
	V	7386.0	41.0	9.7	50.7	54(Note1)	-3.3	PK		
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

### 802.11g

Chain	CH	Antenna	Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBuV/m)	Margin (dB)	Detector
-------	----	---------	-----------------	---------------	-------------	---------------	----------------	-------------	----------

				(dBuV/m)		(dBuV/m)			
Chain 0	1	V	2419.0	80.5	31.2	111.7	Fundamental	/	PK
		V	599.8	4.6	13.7	18.3	46	-27.7	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4824.0	42.1	3.1	45.2	54(Note1)	-8.8	PK
		H	7250.0	40.6	9.6	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	80.7	31.2	111.9	Fundamental	/	PK
		H	553.3	6.1	11.9	18.0	46	-28.0	QP
		H	666.8	13.4	12.2	25.6	46	-20.4	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4874.0	42.1	3.1	45.2	54(Note1)	-8.8	PK
		V	7311.0	40.5	9.4	49.9	54(Note1)	-4.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2464.4	79.7	31.2	110.9	Fundamental	/	PK
		H	599.8	6.0	13.4	19.4	46	-26.6	QP
		H	697.3	5.5	14.3	19.8	46	-26.2	QP
		V	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		V	4924.0	41.4	3.3	44.7	54(Note1)	-9.3	PK
		V	7386.0	41.7	9.7	51.4	54(Note1)	-2.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	V	2405.3	78.5	31.2	109.7	Fundamental	/	PK
		H	553.3	5.6	11.9	17.5	46	-28.5	QP
		H	697.3	4.3	14.3	18.6	46	-27.4	QP
		V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4824.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
		H	7250.0	41.0	9.6	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	78.4	31.2	109.6	Fundamental	/	PK
		H	599.8	5.6	13.4	19.0	46	-27.0	QP
		H	666.8	13.3	12.2	25.5	46	-20.5	QP
		V	3200.0	43.7	-0.7	43.0	54(Note1)	-11.0	PK
		V	4874.0	42.2	3.1	45.3	54(Note1)	-8.7	PK
		H	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

	11	V	2467.4	78.2	31.2	109.4	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.2	13.3	21.5	46	-24.5	QP
		H	3200.0	44.2	-0.7	43.5	54(Note1)	-10.5	PK
		H	4924.0	41.6	3.3	44.9	54(Note1)	-9.1	PK
		V	7386.0	41.1	9.7	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	1	V	2405.0	80.5	31.2	111.7	Fundamental	/	PK
		V	599.8	4.9	13.7	18.6	46	-27.4	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK
		V	4824.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
		V	7250.0	40.8	9.6	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	80.1	31.2	111.3	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	6.0	13.3	19.3	46	-26.7	QP
		H	3200.0	43.7	-0.7	43.0	54(Note1)	-11.0	PK
		V	4874.0	41.3	3.1	44.4	54(Note1)	-9.6	PK
		H	7311.0	41.3	9.4	50.7	54(Note1)	-3.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2469.0	82.4	31.2	113.6	Fundamental	/	PK
		V	599.8	3.6	13.7	17.3	46	-28.7	QP
		V	697.3	3.5	14.3	17.8	46	-28.2	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4924.0	41.6	3.3	44.9	54(Note1)	-9.1	PK
		H	7386.0	41.1	9.7	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11a

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	149	V	5745.0	87.9	20.9	108.8	Fundamental	/	PK
		H	553.3	6.5	11.9	18.4	46	-27.6	QP

		H	666.8	8.7	12.2	20.9	46	-25.1	QP	
		V	3200.0	43.5	-1.8	41.7	54(Note1)	-12.3	PK	
		V	11490.0	41.2	15.1	56.3	74	-17.6	PK	
		V	11490.0	27.2	15.1	42.3	54	-11.6	AV	
		V	16200.0	43.2	17.4	60.6	74	-13.5	PK	
		V	16200.0	29.2	17.4	46.6	54	-7.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	V	5785.0	87.8	20.9	108.7	Fundamental	/	PK	
		H	599.8	5.4	13.4	18.8	46	-27.2	QP	
		H	697.3	1.8	14.3	16.1	46	-29.9	QP	
		H	3200.0	43.2	-1.8	41.4	54(Note1)	-12.7	PK	
		H	11570.0	40.8	15.2	56.0	74	-17.9	PK	
		H	11570.0	26.8	15.2	42.0	54	-11.9	AV	
		H	16200.0	41.5	17.4	58.9	74	-15.1	PK	
		H	16200.0	27.5	17.4	44.9	54	-9.1	AV	
	165	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5825.0	87.7	20.9	108.6	Fundamental	/	PK	
		H	553.3	6.7	11.9	18.6	46	-27.4	QP	
		H	666.8	6.5	12.2	18.7	46	-27.3	QP	
		V	3200.0	43.4	-1.8	41.6	54(Note1)	-12.4	PK	
		V	11650.0	41.0	15.1	56.1	74	-17.8	PK	
		V	11650.0	27.0	15.1	42.1	54	-11.8	AV	
		V	16200.0	42.9	17.4	60.3	74	-13.7	PK	
	Chain 1	149	V	16200.0	28.9	17.4	46.3	54	-7.7	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			V	5745.0	87.6	20.9	108.5	Fundamental	/	PK
			H	599.8	6.3	13.4	19.7	46	-26.3	QP
			H	697.3	3.4	14.3	17.7	46	-28.3	QP
			H	3200.0	42.2	-1.8	40.4	54(Note1)	-13.6	PK
			V	11490.0	41.4	15.5	56.9	74	-17.1	PK
		157	V	11490.0	27.3	15.5	42.8	54	-11.2	AV
			H	16200.0	41.9	17.4	59.3	74	-14.7	PK
			H	16200.0	27.9	17.4	45.3	54	-8.7	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
	V	5785.0	87.5	20.9	108.4	Fundamental	/	PK		
	V	553.3	6.8	12.0	18.8	46	-27.2	QP		
		V	697.3	4.9	14.3	19.2	46	-26.8	QP	



		V	3200.0	43.6	-1.8	41.8	54(Note1)	-12.2	PK	
		V	11490.0	40.9	15.1	56.0	74	-17.9	PK	
		V	11490.0	26.9	15.1	42.0	54	-11.9	AV	
		V	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		V	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	V	5825.0	87.7	20.9	108.6	Fundamental	/	PK	
		V	553.3	5.5	12.0	17.5	46	-28.5	QP	
		V	666.8	6.4	13.3	19.7	46	-26.3	QP	
		H	3200.0	42.8	-1.8	41.0	54(Note1)	-13.1	PK	
		H	11570.0	40.6	15.2	55.8	74	-18.1	PK	
		H	11570.0	26.6	15.2	41.8	54	-12.1	AV	
		H	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 2	149	V	5745.0	87.4	20.9	108.3	Fundamental	/	PK
			V	599.8	4.1	13.7	17.8	46	-28.2	QP
			V	697.3	2.6	14.3	16.9	46	-29.1	QP
H			3200.0	43.5	-1.8	41.7	54(Note1)	-12.4	PK	
H			11490.0	40.7	15.1	55.8	74	-18.2	PK	
H			11490.0	26.7	15.1	41.8	54	-12.2	AV	
H			16200.0	41.9	17.4	59.3	74	-14.8	PK	
H			16200.0	27.9	17.4	45.3	54	-8.8	AV	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
157		V	5785.0	87.6	20.9	108.5	Fundamental	/	PK	
		H	553.3	5.7	11.9	17.6	46	-28.4	QP	
		H	697.3	3.3	14.3	17.6	46	-28.4	QP	
		H	3200.0	42.3	-1.8	40.5	54(Note1)	-13.6	PK	
		H	11570.0	40.9	15.2	56.1	74	-17.9	PK	
		H	11570.0	26.9	15.2	42.1	54	-11.9	AV	
		H	16200.0	41.7	17.4	59.1	74	-14.9	PK	
		H	16200.0	27.7	17.4	45.1	54	-8.9	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165		V	5825.0	87.8	20.9	108.7	Fundamental	/	PK	
		H	599.8	2.3	13.4	15.7	46	-30.3	QP	
		H	666.8	5.6	12.2	17.8	46	-28.2	QP	
		V	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK	

	V	11650.0	41.4	15.1	56.5	74	-17.4	PK
	V	11650.0	27.4	15.1	42.5	54	-11.4	AV
	V	16200.0	42.2	17.4	59.6	74	-14.4	PK
	V	16200.0	28.2	17.4	45.6	54	-8.4	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(20MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	V	2418.9	78.4	31.2	109.6	Fundamental	/	PK
		H	553.3	7.3	11.9	19.2	46	-26.8	QP
		H	666.8	12.2	12.2	24.4	46	-21.6	QP
		H	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		H	4824.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
		H	7250.0	40.6	9.6	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	80.6	31.2	111.8	Fundamental	/	PK
		H	599.8	6.4	13.4	19.8	46	-26.2	QP
		H	697.3	4.4	14.3	18.7	46	-27.3	QP
		H	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		V	4874.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
		V	7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2465.2	78.7	31.2	109.9	Fundamental	/	PK
		V	553.3	6.2	12.0	18.2	46	-27.8	QP
		V	697.3	0.9	14.3	15.2	46	-30.8	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4924.0	41.3	3.3	44.6	54(Note1)	-9.4	PK
		V	7386.0	41.5	9.7	51.2	54(Note1)	-2.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	V	5745.0	86.9	20.9	107.8	Fundamental	/	PK
		V	599.8	1.1	13.7	14.8	46	-31.2	QP
		V	666.8	9.6	13.3	22.9	46	-23.1	QP
		H	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK

		H	11490.0	40.7	15.1	55.8	74	-18.2	PK	
		H	11490.0	26.7	15.1	41.8	54	-12.2	AV	
		H	16200.0	42.4	17.4	59.8	74	-14.2	PK	
		H	16200.0	28.4	17.4	45.8	54	-8.2	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	V	5785.0	86.7	20.9	107.6	Fundamental	/	PK	
		V	553.3	7.6	12.0	19.6	46	-26.4	QP	
		V	666.8	7.1	13.3	20.4	46	-25.6	QP	
		V	3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK	
		V	11570.0	42.4	15.2	57.6	74	-16.4	PK	
		V	11570.0	28.4	15.2	43.6	54	-10.4	AV	
		V	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		V	16200.0	28.1	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	V	5825.0	86.6	20.9	107.5	Fundamental	/	PK	
		V	599.8	2.3	13.7	16.0	46	-30.0	QP	
		V	697.3	0.8	14.3	15.1	46	-30.9	QP	
		H	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK	
		H	11650.0	42.3	15.1	57.4	74	-16.5	PK	
		H	11650.0	28.3	15.1	43.4	54	-10.5	AV	
		H	16200.0	42.0	17.4	59.4	74	-14.6	PK	
		H	16200.0	28.0	17.4	45.4	54	-8.6	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 1	1	V	2405.3	76.0	31.2	107.2	Fundamental	/	PK
			H	553.3	6.3	11.9	18.2	46	-27.8	QP
			H	666.8	11.7	12.2	23.9	46	-22.1	QP
			V	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
			V	4824.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
V			7250.0	40.4	9.6	50.0	54(Note1)	-4.0	PK	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
6		V	2437.0	76.4	31.2	107.6	Fundamental	/	PK	
		H	599.8	5.4	13.4	18.8	46	-27.2	QP	
		H	697.3	4.1	14.3	18.4	46	-27.6	QP	
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK	
		V	4874.0	41.8	3.1	44.9	54(Note1)	-9.1	PK	
		V	7311.0	40.9	9.4	50.3	54(Note1)	-3.7	PK	
H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK			

	11	V	2461.8	76.8	31.2	108.0	Fundamental	/	PK	
		H	553.3	6.3	11.9	18.2	46	-27.8	QP	
		H	697.3	3.5	14.3	17.8	46	-28.2	QP	
		V	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK	
		V	4924.0	40.9	3.3	44.2	54(Note1)	-9.8	PK	
		V	7386.0	40.7	9.7	50.4	54(Note1)	-3.6	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149	V	5745.0	84.6	20.9	105.5	Fundamental	/	PK	
		H	599.8	4.7	13.4	18.1	46	-27.9	QP	
		H	666.8	12.5	12.2	24.7	46	-21.3	QP	
		H	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK	
		H	11490.0	40.6	15.1	55.7	74	-18.3	PK	
		H	11490.0	26.6	15.1	41.7	54	-12.3	AV	
		H	16200.0	41.8	17.4	59.2	74	-14.9	PK	
		H	16200.0	27.8	17.4	45.2	54	-8.9	AV	
	157	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5785.0	84.5	20.9	105.4	Fundamental	/	PK	
		V	553.3	5.8	12.0	17.8	46	-28.2	QP	
		V	666.8	7.5	13.3	20.8	46	-25.2	QP	
		V	3200.0	43.4	-1.8	41.6	54(Note1)	-12.4	PK	
		V	11570.0	41.2	15.2	56.4	74	-17.5	PK	
		V	11570.0	27.2	15.2	42.4	54	-11.5	AV	
		V	16200.0	42.5	17.4	59.9	74	-14.1	PK	
		V	16200.0	28.5	17.4	45.9	54	-8.1	AV	
	165	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		V	5825.0	84.7	20.9	105.6	Fundamental	/	PK	
		V	599.8	2.5	13.7	16.2	46	-29.8	QP	
		V	697.3	1.5	14.3	15.8	46	-30.2	QP	
		H	3200.0	43.9	-1.8	42.1	54(Note1)	-11.9	PK	
		H	11650.0	42.2	15.1	57.3	74	-16.6	PK	
		H	11650.0	28.2	15.1	43.3	54	-10.6	AV	
		H	16200.0	42.2	17.4	59.6	74	-14.4	PK	
		H	16200.0	28.2	17.4	45.6	54	-8.4	AV	
	Chain 2	1	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			V	2404.7	77.1	31.2	108.3	Fundamental	/	PK
			V	553.3	5.6	12.0	17.6	46	-28.4	QP
		V	666.8	8.1	13.3	21.4	46	-24.6	QP	

		V	3907.0	44.0	0.6	44.6	54(Note1)	-9.4	PK
		V	6448.5	43.1	6.9	50.0	54(Note1)	-4.0	PK
		V	10647.5	41.9	16.3	58.2	54(Note1)	4.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	77.8	31.2	109.0	Fundamental	/	PK
		V	599.8	2.6	13.7	16.3	46	-29.7	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		V	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
		V	4874.0	40.5	3.1	43.6	54(Note1)	-10.4	PK
		V	7311.0	40.2	9.4	49.6	54(Note1)	-4.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2469.0	79.7	31.2	110.9	Fundamental	/	PK
		H	553.3	6.7	11.9	18.6	46	-27.4	QP
		H	666.8	11.5	12.2	23.7	46	-22.3	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4924.0	42.0	3.3	45.3	54(Note1)	-8.7	PK
		V	7386.0	40.5	9.7	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	V	5745.0	86.2	20.9	107.1	Fundamental	/	PK
		H	599.8	5.7	13.4	19.1	46	-26.9	QP
		H	697.3	3.8	14.3	18.1	46	-27.9	QP
		H	3200.0	42.6	-1.8	40.8	54(Note1)	-13.3	PK
		H	11490.0	41.4	15.1	56.5	74	-17.4	PK
		H	11490.0	27.4	15.1	42.5	54	-11.4	AV
		H	16200.0	41.9	17.4	59.3	74	-14.7	PK
		H	16200.0	27.9	17.4	45.3	54	-8.7	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	V	5785.0	86.4	20.9	107.3	Fundamental	/	PK
H		553.3	6.7	11.9	18.6	46	-27.4	QP	
H		666.8	11.6	12.2	23.8	46	-22.2	QP	
V		3200.0	43.0	-1.8	41.2	54(Note1)	-12.8	PK	
V		11570.0	41.0	15.2	56.2	74	-17.8	PK	
V		11570.0	27.0	15.2	42.2	54	-11.8	AV	
V		16200.0	42.8	17.4	60.2	74	-13.8	PK	
V		16200.0	28.8	17.4	46.2	54	-7.8	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165	V	5825.0	86.3	20.9	107.2	Fundamental	/	PK	

		H	599.8	6.7	13.4	20.1	46	-25.9	QP	
		H	697.3	4.3	14.3	18.6	46	-27.4	QP	
		H	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK	
		H	11650.0	41.2	15.1	56.3	74	-17.6	PK	
		H	11650.0	27.2	15.1	42.3	54	-11.6	AV	
		H	16200.0	43.0	17.4	60.4	74	-13.6	PK	
		H	16200.0	29.0	17.4	46.4	54	-7.6	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
Chain 0+1	1	V	2418.1	79.3	31.2	110.5	Fundamental	/	PK	
		V	553.3	5.5	12.0	17.5	46	-28.5	QP	
		V	666.8	8.1	13.3	21.4	46	-24.6	QP	
		V	3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK	
		V	4824.0	41.3	3.1	44.4	54(Note1)	-9.6	PK	
		V	7250.0	40.2	9.6	49.8	54(Note1)	-4.2	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
		6	V	2437.0	80.8	31.2	112.0	Fundamental	/	PK
			V	599.8	3.8	13.7	17.5	46	-28.5	QP
			V	697.3	1.5	14.3	15.8	46	-30.2	QP
			V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
			V	4874.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
			V	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		11	V	2466.0	81.3	31.2	112.5	Fundamental	/	PK
			V	553.3	5.5	12.0	17.5	46	-28.5	QP
			V	666.8	12.4	13.3	25.7	46	-20.3	QP
			V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
			H	4924.0	41.8	3.2	45.0	54(Note1)	-9.0	PK
			H	7386.0	40.8	9.6	50.4	54(Note1)	-3.6	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		149	V	5745.0	89.4	20.9	110.3	Fundamental	/	PK
			V	599.8	2.8	13.7	16.5	46	-29.5	QP
			V	697.3	1.8	14.3	16.1	46	-29.9	QP
			V	3200.0	42.9	-1.8	41.1	54(Note1)	-12.9	PK
			V	11490.0	40.9	15.1	56.0	74	-18.0	PK
			V	11490.0	26.9	15.1	42.0	54	-12.0	AV
			V	16200.0	42.5	17.4	59.9	74	-14.1	PK
	V		16200.0	28.5	17.4	45.9	54	-8.1	AV	

		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	V	5785.0	88.1	20.9	109.0	Fundamental	/	PK
		H	553.3	6.5	11.9	18.4	46	-27.6	QP
		H	666.8	13.2	12.2	25.4	46	-20.6	QP
		H	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK
		H	11570.0	41.4	15.2	56.6	74	-17.4	PK
		H	11570.0	27.4	15.2	42.6	54	-11.4	AV
		H	16200.0	42.4	17.4	59.8	74	-14.2	PK
		H	16200.0	28.4	17.4	45.8	54	-8.2	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		165	V	5825.0	88.0	20.9	108.9	Fundamental	/
	H		599.8	6.2	13.4	19.6	46	-26.4	QP
	H		697.3	3.2	14.3	17.5	46	-28.5	QP
	V		3200.0	43.0	-1.8	41.2	54(Note1)	-12.9	PK
	V		11650.0	41.3	15.1	56.4	74	-17.6	PK
	V		11650.0	27.3	15.1	42.4	54	-11.6	AV
	V		16200.0	42.8	17.4	60.2	74	-13.8	PK
	V		16200.0	28.8	17.4	46.2	54	-7.8	AV
	H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	1	V	2408.1	79.8	31.2	111.0	Fundamental	/	PK
		H	553.3	6.7	11.9	18.6	46	-27.4	QP
		H	666.8	12.6	12.2	24.8	46	-21.2	QP
		V	3200.0	42.4	-0.7	41.7	54(Note1)	-12.3	PK
		V	4824.0	41.0	3.1	44.1	54(Note1)	-9.9	PK
		V	7250.0	40.2	9.6	49.8	54(Note1)	-4.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	81.2	31.2	112.4	Fundamental	/	PK
		H	599.8	5.2	13.4	18.6	46	-27.4	QP
		H	697.3	3.8	14.3	18.1	46	-27.9	QP
		V	3200.0	43.9	-0.7	43.2	54(Note1)	-10.8	PK
		V	4874.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		H	7311.0	41.7	9.4	51.1	54(Note1)	-2.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	V	2467.9	84.0	31.2	115.2	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	697.3	1.6	14.3	15.9	46	-30.1	QP
		V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK

		V	4924.0	41.6	3.2	44.8	54(Note1)	-9.2	PK	
		V	7386.0	40.8	9.6	50.4	54(Note1)	-3.6	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149		V	5745.0	88.1	20.9	109.0	Fundamental	/	PK
			V	599.8	2.8	13.7	16.5	46	-29.5	QP
			V	666.8	7.7	13.3	21.0	46	-25.0	QP
			H	3200.0	43.0	-1.8	41.2	54(Note1)	-12.9	PK
			H	11490.0	40.9	15.1	56.0	74	-18.0	PK
			H	11490.0	26.9	15.1	42.0	54	-12.0	AV
			H	16200.0	42.1	17.4	59.5	74	-14.5	PK
			H	16200.0	28.1	17.4	45.5	54	-8.5	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			157		V	5785.0	87.8	20.9	108.7	Fundamental
	V	553.3			5.8	12.0	17.8	46	-28.2	QP
	V	697.3			1.8	14.3	16.1	46	-29.9	QP
	V	3200.0			44.1	-1.8	42.3	54(Note1)	-11.7	PK
	V	11570.0			41.0	15.2	56.2	74	-17.8	PK
	V	11570.0			27.0	15.2	42.2	54	-11.8	AV
	V	16200.0			41.8	17.4	59.2	74	-14.8	PK
	V	16200.0			27.8	17.4	45.2	54	-8.8	AV
	H	24000.0			59.1	-8.9	50.2	54(Note1)	-3.8	PK
	165		V	5825.0	87.5	20.9	108.4	Fundamental	/	PK
			V	599.8	2.1	13.7	15.8	46	-30.2	QP
			V	666.8	8.6	13.3	21.9	46	-24.1	QP
			H	3200.0	42.9	-1.8	41.1	54(Note1)	-12.9	PK
			H	11650.0	41.4	15.1	56.5	74	-17.4	PK
			H	11650.0	27.4	15.1	42.5	54	-11.4	AV
			H	16200.0	42.7	17.4	60.1	74	-13.9	PK
			H	16200.0	28.7	17.4	46.1	54	-7.9	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

### 802.11n(40MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector



Chain 0	3	V	2425.1	75.5	31.2	106.7	Fundamental	/	PK
		H	553.3	7.6	11.9	19.5	46	-26.5	QP
		H	666.8	10.4	12.2	22.6	46	-23.4	QP
		H	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		H	4844.0	42.3	3.1	45.4	54(Note1)	-8.6	PK
		H	7266.0	40.6	9.5	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	78.3	31.2	109.5	Fundamental	/	PK
		H	599.8	5.0	13.4	18.4	46	-27.6	QP
		H	697.3	3.1	14.3	17.4	46	-28.6	QP
		H	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		H	4874.0	41.7	3.1	44.8	54(Note1)	-9.2	PK
		H	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2462.7	74.3	31.2	105.5	Fundamental	/	PK
		H	553.3	7.2	11.9	19.1	46	-26.9	QP
		H	697.3	4.5	14.3	18.8	46	-27.2	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4904.0	41.6	3.2	44.8	54(Note1)	-9.2	PK
		V	7356.0	41.3	9.6	50.9	54(Note1)	-3.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	82.7	20.9	103.6	Fundamental	/	PK
		H	599.8	5.9	13.4	19.3	46	-26.7	QP
		H	666.8	11.2	12.2	23.4	46	-22.6	QP
		V	3200.0	43.1	-1.8	41.3	54(Note1)	-12.8	PK
		V	11510.0	41.2	15.0	56.2	74	-17.7	PK
		V	11510.0	27.2	15.0	42.2	54	-11.7	AV
		V	16200.0	43.3	17.4	60.7	74	-13.3	PK
		V	16200.0	29.3	17.4	46.7	54	-7.3	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	159	V	5795.0	82.6	20.9	103.5	Fundamental	/	PK
		V	553.3	5.5	12.0	17.5	46	-28.5	QP
		V	666.8	8.5	13.3	21.8	46	-24.2	QP
		H	3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK
		H	11590.0	40.9	15.5	56.4	74	-17.6	PK
		H	11590.0	26.9	15.5	42.4	54	-11.6	AV
		H	16200.0	42.1	17.4	59.5	74	-14.5	PK

		H	16200.0	28.1	17.4	45.5	54	-8.5	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	3	V	2406.6	68.4	31.2	99.6	Fundamental	/	PK
		V	599.8	1.8	13.7	15.5	46	-30.5	QP
		V	697.3	1.2	14.3	15.5	46	-30.5	QP
		V	3200.0	44.2	-0.7	43.5	54(Note1)	-10.5	PK
		V	4844.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		H	7266.0	40.9	9.5	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		6	V	2437.0	70.8	31.2	102.0	Fundamental	/
	V		553.3	7.5	12.0	19.5	46	-26.5	QP
	V		666.8	8.4	13.3	21.7	46	-24.3	QP
	V		3200.0	42.8	-0.7	42.1	54(Note1)	-11.9	PK
	H		4874.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
	H		7311.0	41.1	9.4	50.5	54(Note1)	-3.5	PK
	H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2434.8	70.9	31.2	102.1	Fundamental	/	PK
		V	599.8	2.8	13.7	16.5	46	-29.5	QP
		V	697.3	1.3	14.3	15.6	46	-30.4	QP
		H	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		H	4904.0	42.2	3.2	45.4	54(Note1)	-8.6	PK
		H	7356.0	41.2	9.6	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	83.4	20.9	104.3	Fundamental	/	PK
		H	553.3	7.6	11.9	19.5	46	-26.5	QP
		H	666.8	10.9	12.2	23.1	46	-22.9	QP
		V	3200.0	41.9	-1.8	40.1	54(Note1)	-13.9	PK
		V	11510.0	41.2	15.0	56.2	74	-17.8	PK
		V	11510.0	27.2	15.0	42.2	54	-11.8	AV
		V	16200.0	42.7	17.4	60.1	74	-13.9	PK
		V	16200.0	28.7	17.4	46.1	54	-7.9	AV
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159		V	5795.0	83.5	20.9	104.4	Fundamental	/	PK
	H	599.8	5.5	13.4	18.9	46	-27.1	QP	
	H	697.3	3.8	14.3	18.1	46	-27.9	QP	
	H	3200.0	43.3	-1.8	41.5	54(Note1)	-12.6	PK	
	H	11590.0	40.5	15.5	56.0	74	-18.0	PK	

		H	11590.0	26.5	15.5	42.0	54	-12.0	AV
		H	16200.0	41.7	17.4	59.1	74	-15.0	PK
		H	16200.0	27.7	17.4	45.1	54	-9.0	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	3	V	2435.6	77.5	31.2	108.7	Fundamental	/	PK
		H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	697.3	4.4	14.3	18.7	46	-27.3	QP
		V	3200.0	44.8	-0.7	44.1	54(Note1)	-9.9	PK
		V	4844.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		H	7266.0	41.3	9.5	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	77.1	31.2	108.3	Fundamental	/	PK
		H	599.8	4.9	13.4	18.3	46	-27.7	QP
		H	666.8	12.5	12.2	24.7	46	-21.3	QP
		V	3200.0	42.9	-0.7	42.2	54(Note1)	-11.8	PK
		H	4874.0	41.7	3.1	44.8	54(Note1)	-9.2	PK
		H	7311.0	41.3	9.4	50.7	54(Note1)	-3.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2435.7	72.5	31.2	103.7	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.2	13.3	21.5	46	-24.5	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		H	4904.0	42.6	3.2	45.8	54(Note1)	-8.2	PK
		H	7356.0	40.7	9.6	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	84.6	20.9	105.5	Fundamental	/	PK
		V	599.8	3.5	13.7	17.2	46	-28.8	QP
		V	697.3	1.4	14.3	15.7	46	-30.3	QP
		V	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK
		V	11510.0	41.1	15.0	56.1	74	-17.8	PK
		V	11510.0	27.1	15.0	42.1	54	-11.8	AV
V		16200.0	42.2	17.4	59.6	74	-14.4	PK	
V		16200.0	28.2	17.4	45.6	54	-8.4	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159	V	5795.0	84.5	20.9	105.4	Fundamental	/	PK	
	V	553.3	5.4	12.0	17.4	46	-28.6	QP	
	V	697.3	3.7	14.3	18.0	46	-28.0	QP	

		H	3200.0	43.0	-1.8	41.2	54(Note1)	-12.8	PK
		H	11590.0	41.0	15.5	56.5	74	-17.6	PK
		H	11590.0	27.0	15.5	42.5	54	-11.6	AV
		H	16200.0	42.6	17.4	60.0	74	-14.0	PK
		H	16200.0	28.6	17.4	46.0	54	-8.0	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1	3	V	2424.8	75.1	31.2	106.3	Fundamental	/	PK
		V	599.8	3.6	13.7	17.3	46	-28.7	QP
		V	666.8	4.8	13.3	18.1	46	-27.9	QP
		V	3200.0	45.0	-0.7	44.3	54(Note1)	-9.7	PK
		V	4844.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		H	7266.0	40.9	9.5	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	76.8	31.2	108.0	Fundamental	/	PK
		H	553.3	6.9	11.9	18.8	46	-27.2	QP
		H	666.8	12.6	12.2	24.8	46	-21.2	QP
		V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4874.0	40.9	3.1	44.0	54(Note1)	-10.0	PK
		H	7311.0	41.1	9.4	50.5	54(Note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2459.1	77.8	31.2	109.0	Fundamental	/	PK
		H	599.8	7.3	13.4	20.7	46	-25.3	QP
		H	697.3	4.5	14.3	18.8	46	-27.2	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4904.0	42.5	3.2	45.7	54(Note1)	-8.3	PK
		H	7356.0	40.7	9.6	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	85.1	20.9	106.0	Fundamental	/	PK
		H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	666.8	10.3	12.2	22.5	46	-23.5	QP
H		3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK	
H		11510.0	40.9	15.0	55.9	74	-18.1	PK	
H		11510.0	26.9	15.0	41.9	54	-12.1	AV	
H		16200.0	42.3	17.4	59.7	74	-14.3	PK	
H		16200.0	28.3	17.4	45.7	54	-8.3	AV	
H		24000.0	59.6	-8.9	50.7	54(Note1)	-3.3	PK	
159	V	5795.0	84.9	20.9	105.8	Fundamental	/	PK	

		H	599.8	6.2	13.4	19.6	46	-26.4	QP
		H	697.3	5.8	14.3	20.1	46	-25.9	QP
		V	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK
		V	11590.0	41.3	15.5	56.8	74	-17.3	PK
		V	11590.0	27.3	15.5	42.8	54	-11.3	AV
		V	16200.0	42.0	17.4	59.4	74	-14.6	PK
		V	16200.0	28.0	17.4	45.4	54	-8.6	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	3	V	2418.3	75.2	31.2	106.4	Fundamental	/	PK
		V	553.3	5.5	12.0	17.5	46	-28.5	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		V	3200.0	45.5	-0.7	44.8	54(Note1)	-9.2	PK
		V	4844.0	40.7	3.1	43.8	54(Note1)	-10.2	PK
		H	7266.0	40.6	9.5	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	V	2437.0	76.8	31.2	108.0	Fundamental	/	PK
		V	599.8	4.5	13.7	18.2	46	-27.8	QP
		V	666.8	5.2	13.3	18.5	46	-27.5	QP
		V	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		H	4874.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		H	7311.0	41.5	9.4	50.9	54(Note1)	-3.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	V	2462.9	76.5	31.2	107.7	Fundamental	/	PK
		V	553.3	6.2	12.0	18.2	46	-27.8	QP
		V	666.8	4.5	13.3	17.8	46	-28.2	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		H	4904.0	42.4	3.2	45.6	54(Note1)	-8.4	PK
		H	7356.0	40.7	9.6	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	V	5755.0	84.2	20.9	105.1	Fundamental	/	PK
		V	599.8	5.2	13.7	18.9	46	-27.1	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		V	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK
		V	11510.0	41.6	15.0	56.6	74	-17.3	PK
		V	11510.0	27.6	15.0	42.6	54	-11.3	AV
		V	16200.0	41.8	17.4	59.2	74	-14.9	PK
V		16200.0	27.8	17.4	45.2	54	-8.9	AV	

	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
159	V	5795.0	84.1	20.9	105.0	Fundamental	/	PK
	H	553.3	5.5	11.9	17.4	46	-28.6	QP
	H	666.8	8.7	12.2	20.9	46	-25.1	QP
	H	3200.0	43.4	-1.8	41.6	54(Note1)	-12.4	PK
	H	11590.0	41.1	15.5	56.6	74	-17.5	PK
	H	11590.0	27.1	15.5	42.6	54	-11.5	AV
	H	16200.0	42.5	17.4	59.9	74	-14.1	PK
	H	16200.0	28.5	17.4	45.9	54	-8.1	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Test by build-in antenna (Panel antenna)

802.11b

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	H	2413.4	82.8	31.2	114.0	Fundamental	/	PK
		H	599.8	6.5	13.4	19.9	46	-26.1	QP
		H	697.3	4.6	14.3	18.9	46	-27.1	QP
		V	3200.0	43.2	-0.7	42.4	54(Note1)	-11.6	PK
		V	4824.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
		V	7250.0	39.8	9.6	49.3	54(Note1)	-4.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	83.1	31.2	114.3	Fundamental	/	PK
		H	553.3	6.2	11.9	18.1	46	-27.9	QP
		H	697.3	4.4	14.3	18.7	46	-27.3	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4874.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
		H	7311.0	40.3	9.4	49.7	54(Note1)	-4.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2462.7	83.7	31.2	114.9	Fundamental	/	PK
		H	599.8	5.8	13.4	19.2	46	-26.8	QP
		H	666.8	10.1	12.2	22.3	46	-23.7	QP
		V	3329.0	46.6	-0.5	46.1	54(Note1)	-7.9	PK
		V	4927.0	44.4	3.3	47.7	54(Note1)	-6.3	PK
		V	7783.0	43.4	10.0	53.4	54(Note1)	-0.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	H	2410.8	77.9	31.2	109.1	Fundamental	/	PK
		V	553.3	5.3	12.0	17.3	46	-28.7	QP
		V	666.8	6.3	13.3	19.6	46	-26.4	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4824.0	42.4	3.1	45.5	54(Note1)	-8.5	PK
		V	7250.0	40.7	9.6	50.3	54(Note1)	-3.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	80.2	31.2	111.4	Fundamental	/	PK
		V	599.8	5.1	13.7	18.8	46	-27.2	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		H	3200.0	43.7	-0.7	42.9	54(Note1)	-11.1	PK

		H	4874.0	42.1	3.1	45.3	54(Note1)	-8.7	PK	
		H	7311.0	41.1	9.4	50.5	54(Note1)	-3.5	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	11		H	2461.0	82.0	31.2	113.2	Fundamental	/	PK
			V	553.3	4.8	12.0	16.8	46	-29.2	QP
			V	666.8	6.5	13.3	19.8	46	-26.2	QP
			V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.6	PK
			V	4924.0	42.3	3.3	45.6	54(Note1)	-8.4	PK
			V	7386.0	41.6	9.7	51.2	54(Note1)	-2.8	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	1		H	2410.4	78.0	31.2	109.2	Fundamental	/	PK
			V	599.8	5.2	13.7	18.9	46	-27.1	QP
			V	697.3	1.9	14.3	16.2	46	-29.8	QP
		V	3200.0	42.5	-0.7	41.8	54(Note1)	-12.2	PK	
		V	4824.0	41.2	3.1	44.3	54(Note1)	-9.7	PK	
		V	7250.0	40.7	9.6	50.2	54(Note1)	-3.8	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	6	H	2437.0	77.6	31.2	108.8	Fundamental	/	PK	
		H	553.3	6.2	11.9	18.1	46	-27.9	QP	
		H	697.3	4.2	14.3	18.5	46	-27.5	QP	
H		3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK		
H		4874.0	44.0	3.1	47.1	54(Note1)	-6.9	PK		
H		7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK		
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
11	H	2461.0	80.9	31.2	112.1	Fundamental	/	PK		
	H	599.8	5.9	13.4	19.3	46	-26.7	QP		
	H	666.8	8.6	12.2	20.8	46	-25.2	QP		
	V	3200.0	43.3	-0.7	42.6	54(Note1)	-11.4	PK		
	V	4924.0	41.3	3.3	44.6	54(Note1)	-9.4	PK		
	V	7386.0	41.1	9.7	50.8	54(Note1)	-3.2	PK		
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

### 802.11g

Chain	CH	Antenna	Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBuV/m)	Margin (dB)	Detector
-------	----	---------	-----------------	---------------	-------------	---------------	----------------	-------------	----------



				(dBuV/m)		(dBuV/m)			
Chain 0	1	H	2418.5	79.9	31.2	111.1	Fundamental	/	PK
		H	553.3	7.3	11.9	19.2	46	-26.8	QP
		H	666.8	11.7	12.2	23.9	46	-22.1	QP
		H	3200.0	43.5	-0.7	42.8	54(Note1)	-11.2	PK
		H	4824.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
		H	7250.0	40.4	9.6	50.0	54(Note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	80.2	31.2	111.4	Fundamental	/	PK
		H	599.8	6.1	13.4	19.5	46	-26.5	QP
		H	697.3	5.1	14.3	19.4	46	-26.6	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4874.0	41.1	3.1	44.3	54(Note1)	-9.7	PK
		V	7311.0	40.2	9.4	49.6	54(Note1)	-4.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2466.1	80.5	31.2	111.7	Fundamental	/	PK
		V	553.3	6.4	12.0	18.4	46	-27.6	QP
		V	666.8	2.0	13.3	15.3	46	-30.7	QP
		H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		H	4924.0	41.5	3.3	44.8	54(Note1)	-9.2	PK
		H	7386.0	40.9	9.7	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	1	H	2417.2	79.9	31.2	111.1	Fundamental	/	PK
		V	599.8	5.3	13.7	19.0	46	-27.0	QP
		V	697.3	2.8	14.3	17.1	46	-28.9	QP
		H	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
		H	4824.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
		H	7250.0	41.4	9.6	51.0	54(Note1)	-3.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	79.8	31.2	111.0	Fundamental	/	PK
		H	553.3	7.1	12.0	19.1	46	-26.9	QP
		H	666.8	6.4	13.3	19.7	46	-26.3	QP
		V	3200.0	42.5	-0.7	41.7	54(Note1)	-12.3	PK
		V	4824.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		V	7250.0	41.2	9.6	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Chain 2	11	H	2462.6	80.3	31.2	111.5	Fundamental	/	PK	
		H	599.8	6.1	13.7	19.8	46	-26.2	QP	
		H	697.3	2.3	14.3	16.6	46	-29.4	QP	
		H	3200.0	43.3	-0.7	42.5	54(Note1)	-11.5	PK	
		H	4924.0	41.5	3.3	44.8	54(Note1)	-9.2	PK	
		H	7386.0	41.4	9.7	51.0	54(Note1)	-3.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 2	1	H	2404.4	79.0	31.2	110.2	Fundamental	/	PK
			H	553.3	6.8	11.9	18.7	46	-27.3	QP
			H	666.8	11.8	12.2	24.0	46	-22.0	QP
			H	3200.0	44.0	-0.7	43.3	54(Note1)	-10.7	PK
			H	4824.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
			H	7250.0	40.1	9.6	49.6	54(Note1)	-4.4	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
6		H	2437.0	78.6	31.2	109.8	Fundamental	/	PK	
		H	599.8	6.1	13.4	19.5	46	-26.5	QP	
		H	697.3	4.5	14.3	18.8	46	-27.2	QP	
		V	3200.0	42.6	-0.7	41.8	54(Note1)	-12.2	PK	
		V	4874.0	41.4	3.1	44.6	54(Note1)	-9.4	PK	
		V	7311.0	40.5	9.4	50.0	54(Note1)	-4.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
11	H	2468.9	81.6	31.2	112.8	Fundamental	/	PK		
	H	553.3	6.7	11.9	18.6	46	-27.4	QP		
	H	666.8	11.6	12.2	23.8	46	-22.2	QP		
	H	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK		
	H	4924.0	42.5	3.3	45.8	54(Note1)	-8.2	PK		
	H	7386.0	40.9	9.7	50.6	54(Note1)	-3.4	PK		
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11a

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	149	H	5745.0	87.1	20.9	108.0	Fundamental	/	PK
		H	599.8	6.2	13.4	19.6	46	-26.4	QP

		H	697.3	4.7	14.3	19.0	46	-27.0	QP	
		H	3200.0	42.5	-1.8	40.6	54(Note1)	-13.4	PK	
		H	11490.0	40.6	15.1	55.8	74	-18.2	PK	
		H	11490.0	26.6	15.1	41.8	54	-12.2	AV	
		H	16200.0	42.4	17.4	59.8	74	-14.2	PK	
		H	16200.0	28.4	17.4	45.8	54	-8.2	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	H	5785.0	87.2	20.9	108.1	Fundamental	/	PK	
		V	553.3	5.5	12.0	17.5	46	-28.5	QP	
		V	697.3	2.4	14.3	16.7	46	-29.3	QP	
		V	3200.0	42.9	-1.8	41.0	54(Note1)	-13.0	PK	
		V	11570.0	40.8	15.2	56.1	74	-17.9	PK	
		V	11570.0	26.8	15.2	42.1	54	-11.9	AV	
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK	
		V	16200.0	26.2	17.4	43.6	54	-10.4	AV	
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
	165	H	5825.0	87.0	20.9	107.9	Fundamental	/	PK	
		V	599.8	5.8	13.7	19.5	46	-26.5	QP	
		V	666.8	7.7	13.3	21.0	46	-25.0	QP	
		H	3200.0	43.5	-1.8	41.7	54(Note1)	-12.3	PK	
		H	11650.0	41.4	15.1	56.6	74	-17.4	PK	
		H	11650.0	27.4	15.1	42.6	54	-11.4	AV	
		H	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		H	16200.0	28.1	17.4	45.5	54	-8.5	AV	
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK		
	Chain 1	149	H	5745.0	86.9	20.9	107.8	Fundamental	/	PK
			V	553.3	5.2	12.0	17.2	46	-28.8	QP
			V	666.8	7.3	13.3	20.6	46	-25.4	QP
			H	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK
			H	11490.0	40.6	15.1	55.8	74	-18.2	PK
			H	11490.0	26.6	15.1	41.8	54	-12.2	AV
			H	16200.0	42.7	17.4	60.1	74	-13.9	PK
			H	16200.0	28.7	17.4	46.1	54	-7.9	AV
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
157			H	5785.0	86.8	20.9	107.7	Fundamental	/	PK
		V	599.8	4.6	13.7	18.3	46	-27.7	QP	
		V	697.3	1.6	14.3	15.9	46	-30.1	QP	

		V	3200.0	42.6	-1.8	40.7	54(Note1)	-13.3	PK	
		V	11570.0	41.1	15.2	56.4	74	-17.6	PK	
		V	11570.0	27.1	15.2	42.4	54	-11.6	AV	
		V	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		V	16200.0	28.1	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	H	5825.0	87.0	20.9	107.9	Fundamental	/	PK	
		H	553.3	6.1	11.9	18.0	46	-28.0	QP	
		H	666.8	13.3	12.2	25.5	46	-20.5	QP	
		H	3200.0	42.7	-1.8	40.8	54(Note1)	-13.2	PK	
		H	11650.0	43.0	15.1	58.2	74	-15.8	PK	
		H	11650.0	29.0	15.1	44.2	54	-9.8	AV	
		H	16200.0	42.3	17.4	59.7	74	-14.3	PK	
		H	16200.0	28.3	17.4	45.7	54	-8.3	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 2	149	H	5745.0	86.7	20.9	107.6	Fundamental	/	PK
			H	599.8	6.1	13.4	19.5	46	-26.5	QP
			H	697.3	5.6	14.3	19.9	46	-26.1	QP
			V	3200.0	42.9	-1.8	41.0	54(Note1)	-13.0	PK
V			11490.0	40.4	15.1	55.6	74	-18.4	PK	
V			11490.0	26.4	15.1	41.6	54	-12.4	AV	
V			16200.0	42.2	17.4	59.6	74	-14.4	PK	
V			16200.0	28.2	17.4	45.6	54	-8.4	AV	
H			24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
157		H	5785.0	86.9	20.9	107.8	Fundamental	/	PK	
		H	553.3	5.2	11.9	17.1	46	-28.9	QP	
		H	697.3	4.3	14.3	18.6	46	-27.4	QP	
		V	3200.0	42.6	-1.8	40.7	54(Note1)	-13.3	PK	
		V	11570.0	40.9	15.2	56.1	74	-17.9	PK	
		V	11570.0	26.9	15.2	42.1	54	-11.9	AV	
		V	16200.0	41.7	17.4	59.0	74	-15.0	PK	
		V	16200.0	27.7	17.4	45.0	54	-9.0	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165		H	5825.0	87.0	20.9	107.9	Fundamental	/	PK	
		H	599.8	5.6	13.4	19.0	46	-27.0	QP	
		H	666.8	13.2	12.2	25.4	46	-20.6	QP	
		H	3200.0	43.2	-1.8	41.3	54(Note1)	-12.7	PK	

	H	11650.0	41.2	15.1	56.4	74	-17.6	PK
	H	11650.0	27.2	15.1	42.4	54	-11.6	AV
	H	16200.0	42.1	17.4	59.5	74	-14.5	PK
	H	16200.0	28.1	17.4	45.5	54	-8.5	AV
	H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(20MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Chain 0	1	H	2419.1	78.1	31.2	109.3	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.3	13.3	21.6	46	-24.4	QP
		V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		V	4824.0	41.0	3.1	44.1	54(Note1)	-9.9	PK
		V	7250.0	39.8	9.6	49.3	54(Note1)	-4.7	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	80.2	31.2	111.4	Fundamental	/	PK
		V	599.8	4.9	13.7	18.6	46	-27.4	QP
		V	697.3	1.7	14.3	16.0	46	-30.0	QP
		H	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK
		H	4874.0	41.1	3.1	44.3	54(Note1)	-9.7	PK
		H	7311.0	40.9	9.4	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2465.4	79.1	31.2	110.3	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	6.0	13.3	19.3	46	-26.7	QP
		V	3200.0	43.4	-0.7	42.7	54(Note1)	-11.3	PK
		V	4924.0	41.2	3.3	44.5	54(Note1)	-9.5	PK
		V	7386.0	40.9	9.7	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	H	5745.0	87.3	20.9	108.2	Fundamental	/	PK
		V	599.8	3.6	13.7	17.3	46	-28.7	QP
		V	697.3	3.5	14.3	17.8	46	-28.2	QP
		V	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK

		V	11490.0	40.6	15.1	55.7	74	-18.3	PK	
		V	11490.0	26.6	15.1	41.7	54	-12.3	AV	
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK	
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	H	5785.0	87.2	20.9	108.1	Fundamental	/	PK	
		H	553.3	6.5	11.9	18.4	46	-27.6	QP	
		H	666.8	8.6	12.2	20.8	46	-25.2	QP	
		H	3200.0	43.1	-1.8	41.3	54(Note1)	-12.7	PK	
		H	11570.0	41.0	15.2	56.2	74	-17.8	PK	
		H	11570.0	27.0	15.2	42.2	54	-11.8	AV	
		H	16200.0	42.2	17.4	59.5	74	-14.5	PK	
		H	16200.0	28.2	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	H	5825.0	87.1	20.9	108.0	Fundamental	/	PK	
		H	599.8	5.3	13.4	18.7	46	-27.3	QP	
		H	697.3	1.8	14.3	16.1	46	-29.9	QP	
		V	3200.0	43.0	-1.8	41.1	54(Note1)	-12.9	PK	
		V	11650.0	40.8	15.1	55.9	74	-18.1	PK	
		V	11650.0	26.8	15.1	41.9	54	-12.1	AV	
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK	
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 1	1	H	2417.4	31.2	109.3	31.2	Fundamental	/	PK
			H	553.3	6.4	11.9	18.3	46	-27.7	QP
			H	666.8	6.2	12.2	18.4	46	-27.6	QP
			V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
			V	4824.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
			V	7250.0	40.4	9.6	49.9	54(Note1)	-4.1	PK
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
		6	H	2437.0	78.6	31.2	109.8	Fundamental	/	PK
			V	553.3	6.6	12.0	18.6	46	-27.4	QP
			V	697.3	4.9	14.3	19.2	46	-26.8	QP
H			3200.0	43.5	-0.7	42.7	54(Note1)	-11.3	PK	
H			4874.0	41.2	3.1	44.4	54(Note1)	-9.6	PK	
H			7311.0	40.4	9.4	49.8	54(Note1)	-4.2	PK	
H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK			

	11	H	2465.4	77.7	31.2	108.9	Fundamental	/	PK	
		V	553.3	5.4	12.0	17.4	46	-28.6	QP	
		V	666.8	6.2	13.3	19.5	46	-26.5	QP	
		V	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK	
		V	4924.0	41.7	3.3	45.0	54(Note1)	-9.0	PK	
		V	7386.0	41.3	9.7	51.0	54(Note1)	-3.0	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149	H	5745.0	86.3	20.9	107.2	Fundamental	/	PK	
		V	599.8	4.3	13.7	18.0	46	-28.0	QP	
		V	697.3	2.7	14.3	17.0	46	-29.0	QP	
		V	3200.0	42.6	-1.8	40.7	54(Note1)	-13.3	PK	
		V	11490.0	41.4	15.1	56.5	74	-17.5	PK	
		V	11490.0	27.4	15.1	42.5	54	-11.5	AV	
		V	16200.0	42.1	17.4	59.5	74	-14.5	PK	
		V	16200.0	28.1	17.4	45.5	54	-8.5	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	157	H	5785.0	86.4	20.9	107.3	Fundamental	/	PK	
		H	553.3	5.5	11.9	17.4	46	-28.6	QP	
		H	697.3	3.2	14.3	17.5	46	-28.5	QP	
		H	3200.0	42.7	-1.8	40.8	54(Note1)	-13.2	PK	
		H	11570.0	40.5	15.2	55.8	74	-18.2	PK	
		H	11570.0	26.5	15.2	41.8	54	-12.2	AV	
		H	16200.0	41.9	17.4	59.3	74	-14.7	PK	
		H	16200.0	27.9	17.4	45.3	54	-8.7	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	165	H	5825.0	86.6	20.9	107.5	Fundamental	/	PK	
		H	599.8	2.8	13.4	16.2	46	-29.8	QP	
		H	666.8	5.1	12.2	17.3	46	-28.7	QP	
		V	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK	
		V	11650.0	41.7	15.1	56.8	74	-17.2	PK	
		V	11650.0	27.7	15.1	42.8	54	-11.2	AV	
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK	
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	Chain 2	1	H	2404.2	75.6	31.2	106.8	Fundamental	/	PK
			H	553.3	7.8	11.9	19.7	46	-26.3	QP
			H	666.8	12.2	12.2	24.4	46	-21.6	QP

		V	3200.0	42.9	-0.7	42.1	54(Note1)	-11.9	PK
		V	4824.0	41.5	3.1	44.6	54(Note1)	-9.4	PK
		V	7250.0	39.7	9.6	49.2	54(Note1)	-4.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	76.4	31.2	107.6	Fundamental	/	PK
		H	599.8	6.5	13.4	19.9	46	-26.1	QP
		H	697.3	4.2	14.3	18.5	46	-27.5	QP
		H	3200.0	44.1	-0.7	43.3	54(Note1)	-10.7	PK
		H	4874.0	41.3	3.1	44.5	54(Note1)	-9.5	PK
		H	7311.0	40.8	9.4	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2468.6	79.6	31.2	110.8	Fundamental	/	PK
		V	553.3	6.2	12.0	18.2	46	-27.8	QP
		V	697.3	0.7	14.3	15.0	46	-31.0	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4924.0	41.6	3.3	44.9	54(Note1)	-9.1	PK
		V	7386.0	41.1	9.7	50.8	54(Note1)	-3.2	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	H	5745.0	86.1	20.9	107.0	Fundamental	/	PK
		V	599.8	1.4	13.7	15.1	46	-30.9	QP
		V	666.8	9.5	13.3	22.8	46	-23.2	QP
		V	3200.0	43.3	-1.8	41.4	54(Note1)	-12.6	PK
		V	11490.0	41.3	15.1	56.5	74	-17.5	PK
		V	11490.0	27.3	15.1	42.5	54	-11.5	AV
		V	16200.0	42.4	17.4	59.8	74	-14.2	PK
		V	16200.0	28.4	17.4	45.8	54	-8.2	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	H	5785.0	86.3	20.9	107.2	Fundamental	/	PK
V		553.3	7.6	12.0	19.6	46	-26.4	QP	
V		666.8	7.3	13.3	20.6	46	-25.4	QP	
H		3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK	
H		11570.0	41.4	15.2	56.6	74	-17.4	PK	
H		11570.0	27.4	15.2	42.6	54	-11.4	AV	
H		16200.0	42.3	17.4	59.7	74	-14.3	PK	
H		16200.0	28.3	17.4	45.7	54	-8.3	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
165	H	5825.0	86.2	20.9	107.1	Fundamental	/	PK	



		V	599.8	2.5	13.7	16.2	46	-29.8	QP
		V	697.3	0.8	14.3	15.1	46	-30.9	QP
		V	3200.0	43.1	-1.8	41.3	54(Note1)	-12.7	PK
		V	11650.0	40.6	15.1	55.8	74	-18.2	PK
		V	11650.0	26.6	15.1	41.8	54	-12.2	AV
		V	16200.0	42.6	17.4	60.0	74	-14.0	PK
		V	16200.0	28.6	17.4	46.0	54	-8.0	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1	1	H	2417.0	79.6	31.2	110.8	Fundamental	/	PK
		H	553.3	6.2	11.9	18.1	46	-27.9	QP
		H	666.8	11.2	12.2	23.4	46	-22.6	QP
		V	3200.0	42.6	-0.7	41.9	54(Note1)	-12.1	PK
		V	5020.5	42.9	3.7	46.6	54(Note1)	-7.4	PK
		V	7250.0	40.9	9.6	50.5	54(Note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	81.2	31.2	112.4	Fundamental	/	PK
		H	599.8	5.7	13.4	19.1	46	-26.9	QP
		H	697.3	4.3	14.3	18.6	46	-27.4	QP
		H	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		H	4824.0	41.3	3.1	44.3	54(Note1)	-9.7	PK
		H	7311.0	40.6	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2463.2	79.7	31.2	110.9	Fundamental	/	PK
		H	553.3	6.7	11.9	18.6	46	-27.4	QP
		H	697.3	3.7	14.3	18.0	46	-28.0	QP
		V	3200.0	43.0	-0.7	42.2	54(Note1)	-11.8	PK
		V	4924.0	41.3	3.3	44.6	54(Note1)	-9.4	PK
		V	7386.0	41.5	9.7	51.2	54(Note1)	-2.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	149	H	5745.0	87.8	20.9	108.7	Fundamental	/	PK
		H	599.8	4.9	13.4	18.3	46	-27.7	QP
		H	666.8	12.5	12.2	24.7	46	-21.3	QP
		H	3200.0	43.8	-1.8	41.9	54(Note1)	-12.1	PK
		H	11490.0	40.7	15.1	55.8	74	-18.2	PK
		H	11490.0	26.7	15.1	41.8	54	-12.2	AV
		H	16200.0	41.9	17.4	59.3	74	-14.7	PK
H		16200.0	27.9	17.4	45.3	54	-8.7	AV	

		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	157	H	5785.0	86.7	20.9	107.6	Fundamental	/	PK
		V	553.3	5.8	12.0	17.8	46	-28.2	QP
		V	666.8	7.0	13.3	20.3	46	-25.7	QP
		V	3200.0	43.0	-1.8	41.1	54(Note1)	-12.9	PK
		V	11570.0	40.6	15.2	55.9	74	-18.1	PK
		V	11570.0	26.6	15.2	41.9	54	-12.1	AV
		V	16200.0	42.5	17.4	59.9	74	-14.1	PK
		V	16200.0	28.5	17.4	45.9	54	-8.1	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	165	H	5825.0	86.6	20.9	107.5	Fundamental	/	PK
		V	599.8	2.4	13.7	16.1	46	-29.9	QP
		V	697.3	1.1	14.3	15.4	46	-30.6	QP
		H	3200.0	42.5	-1.8	40.7	54(Note1)	-13.3	PK
		H	11650.0	41.1	15.1	56.2	74	-17.8	PK
		H	11650.0	27.1	15.1	42.2	54	-11.8	AV
		H	16200.0	42.3	17.4	59.7	74	-14.3	PK
		H	16200.0	28.3	17.4	45.7	54	-8.3	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	1	H	2417.9	81.2	31.2	112.4	Fundamental	/	PK
		V	553.3	5.7	12.0	17.7	46	-28.3	QP
		V	666.8	8.5	13.3	21.8	46	-24.2	QP
		H	3218.5	47.7	-0.7	47.1	54(Note1)	-6.9	PK
		H	4824.0	42.2	3.1	45.3	54(Note1)	-8.7	PK
		H	7250.0	40.2	9.6	49.7	54(Note1)	-4.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	82.8	31.2	114.0	Fundamental	/	PK
		V	599.8	2.3	13.7	16.0	46	-30.0	QP
		V	697.3	1.9	14.3	16.2	46	-29.8	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4874.0	41.2	3.1	44.3	54(Note1)	-9.7	PK
		V	7311.0	40.7	9.4	50.1	54(Note1)	-3.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	11	H	2467.6	82.1	31.2	113.3	Fundamental	/	PK
		H	553.3	6.6	11.9	18.5	46	-27.5	QP
		H	666.8	11.3	12.2	23.5	46	-22.5	QP
		H	3286.5	46.5	-0.3	46.2	54(Note1)	-7.8	PK

		H	4924.0	42.8	3.3	46.0	54(Note1)	-8.0	PK	
		H	7386.0	41.0	9.7	50.6	54(Note1)	-3.4	PK	
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
	149		H	5745.0	87.1	20.9	108.0	Fundamental	/	PK
			H	599.8	5.4	13.4	18.8	46	-27.2	QP
			H	697.3	3.6	14.3	17.9	46	-28.1	QP
			V	3200.0	43.5	-1.8	41.6	54(Note1)	-12.4	PK
			V	11490.0	41.0	15.1	56.1	74	-17.9	PK
			V	11490.0	27.0	15.1	42.1	54	-11.9	AV
			V	16200.0	41.9	17.4	59.3	74	-14.7	PK
			V	16200.0	27.9	17.4	45.3	54	-8.7	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
			157		H	5785.0	86.9	20.9	107.8	Fundamental
	H	553.3			6.8	11.9	18.7	46	-27.3	QP
	H	666.8			11.2	12.2	23.4	46	-22.6	QP
	H	3200.0			43.8	-1.8	42.0	54(Note1)	-12.0	PK
	H	11570.0			40.6	15.2	55.8	74	-18.2	PK
	H	11570.0			26.6	15.2	41.8	54	-12.2	AV
	H	16200.0			41.9	17.4	59.3	74	-14.7	PK
	H	16200.0			27.9	17.4	45.3	54	-8.7	AV
	H	24000.0			59.1	-8.9	50.2	54(Note1)	-3.8	PK
	165		H	5825.0	86.8	20.9	107.7	Fundamental	/	PK
			H	599.8	6.9	13.4	20.3	46	-25.7	QP
			H	697.3	4.1	14.3	18.4	46	-27.6	QP
			V	3200.0	43.1	-1.8	41.2	54(Note1)	-12.8	PK
			V	11650.0	40.7	15.1	55.8	74	-18.2	PK
			V	11650.0	26.7	15.1	41.8	54	-12.2	AV
			V	16200.0	41.8	17.4	59.2	74	-14.8	PK
			V	16200.0	27.8	17.4	45.2	54	-8.8	AV
			H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

### 802.11n(40MHz)

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector

Chain 0	3	H	2425.3	75.6	31.2	106.8	Fundamental	/	PK
		V	553.3	5.9	12.0	17.9	46	-28.1	QP
		V	666.8	8.2	13.3	21.5	46	-24.5	QP
		H	3200.0	42.7	-0.7	42.0	54(Note1)	-12.0	PK
		H	4844.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
		H	7266.0	40.7	9.5	50.2	54(Note1)	-3.8	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	78.9	31.2	110.1	Fundamental	/	PK
		V	599.8	3.7	13.7	17.4	46	-28.6	QP
		V	697.3	1.6	14.3	15.9	46	-30.1	QP
		V	3200.0	42.2	-0.7	41.5	54(Note1)	-12.5	PK
		V	4874.0	40.8	3.1	43.9	54(Note1)	-10.0	PK
		V	7311.0	40.3	9.4	49.7	54(Note1)	-4.3	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	H	2464.4	73.9	31.2	105.1	Fundamental	/	PK
		V	553.3	5.4	12.0	17.4	46	-28.6	QP
		V	666.8	12.3	13.3	25.6	46	-20.4	QP
		H	3200.0	42.2	-0.7	41.5	54(Note1)	-12.5	PK
		H	4904.0	41.1	3.2	44.3	54(Note1)	-9.7	PK
		H	7356.0	41.9	9.6	51.5	54(Note1)	-2.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	H	5755.0	73.1	20.9	94.0	Fundamental	/	PK
		V	599.8	2.9	13.7	16.6	46	-29.4	QP
		V	697.3	2.2	14.3	16.5	46	-29.5	QP
		H	3200.0	43.3	-1.8	41.5	54(Note1)	-12.6	PK
		H	11510.0	40.6	15.0	55.6	74	-18.4	PK
		H	11510.0	26.6	15.0	41.6	54	-12.4	AV
		H	16200.0	42.1	17.4	59.5	74	-14.6	PK
		H	16200.0	28.1	17.4	45.5	54	-8.6	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	159	H	5795.0	73.0	20.9	93.9	Fundamental	/	PK
		H	553.3	6.5	11.9	18.4	46	-27.6	QP
		H	666.8	13.2	12.2	25.4	46	-20.6	QP
		V	3200.0	42.6	-1.8	40.8	54(Note1)	-13.2	PK
		V	11590.0	41.1	15.5	56.6	74	-17.4	PK
		V	11590.0	27.1	15.5	42.6	54	-11.4	AV
		V	16200.0	41.8	17.4	59.2	74	-14.8	PK

		V	16200.0	27.8	17.4	45.2	54	-8.8	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 1	3	H	2408.7	70.9	31.2	102.1	Fundamental	/	PK
		H	599.8	6.5	13.4	19.9	46	-26.1	QP
		H	697.3	3.4	14.3	17.7	46	-28.3	QP
		H	3200.0	43.0	-0.7	42.3	54	-11.7	PK
		H	4844.0	41.0	3.1	44.1	54	-9.9	PK
		H	7266.0	40.5	9.5	50.0	54	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(note)	-3.8	PK
		6	H	2437.0	73.2	31.2	104.4	Fundamental	/
	H		553.3	6.9	11.9	18.8	46	-27.2	QP
	H		666.8	12.1	12.2	24.3	46	-21.7	QP
	V		3200.0	42.5	-0.7	41.8	54(Note1)	-12.2	PK
	V		4874.0	41.9	3.1	45.0	54(Note1)	-8.9	PK
	V		7311.0	41.3	9.4	50.7	54(Note1)	-3.3	PK
	H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	H	2434.7	72.8	31.2	104.0	Fundamental	/	PK
		H	599.8	5.5	13.4	18.9	46	-27.1	QP
		H	697.3	3.7	14.3	18.0	46	-28.0	QP
		H	3200.0	43.5	-0.7	42.8	54(Note1)	-11.3	PK
		H	4904.0	41.7	3.2	44.9	54(Note1)	-9.1	PK
		H	7356.0	40.9	9.6	50.5	54(Note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	H	5755.0	85.3	20.9	106.2	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	697.3	1.6	14.3	15.9	46	-30.1	QP
		H	3200.0	42.3	-1.8	40.5	54(Note1)	-13.5	PK
		H	11510.0	40.8	15.0	55.8	74	-18.1	PK
		H	11510.0	26.8	15.0	41.8	54	-12.1	AV
		H	16200.0	42.7	17.4	60.1	74	-13.9	PK
H		16200.0	28.7	17.4	46.1	54	-7.9	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159	H	5795.0	85.4	20.9	106.3	Fundamental	/	PK	
	V	599.8	2.8	13.7	16.5	46	-29.5	QP	
	V	666.8	7.8	13.3	21.1	46	-24.9	QP	
	V	3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK	
	V	11590.0	40.8	15.5	56.3	74	-17.7	PK	

		V	11590.0	26.8	15.5	42.3	54	-11.7	AV
		V	16200.0	41.8	17.4	59.2	74	-14.8	PK
		V	16200.0	27.8	17.4	45.2	54	-8.8	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 2	3	H	2435.9	74.5	31.2	105.7	Fundamental	/	PK
		V	553.3	5.2	12.0	17.2	46	-28.8	QP
		V	697.3	1.8	14.3	16.1	46	-29.9	QP
		H	3200.0	43.6	-0.7	42.9	54(Note1)	-11.2	PK
		H	4844.0	41.6	3.1	44.7	54(Note1)	-9.3	PK
		H	7266.0	41.5	9.5	51.0	54(Note1)	-3.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	74.1	31.2	105.3	Fundamental	/	PK
		V	599.8	2.6	13.7	16.3	46	-29.7	QP
		V	666.8	8.5	13.3	21.8	46	-24.2	QP
		V	3200.0	42.3	-0.7	41.6	54(Note1)	-12.4	PK
		V	4874.0	41.0	3.1	44.1	54(Note1)	-9.9	PK
		V	7311.0	40.5	9.4	49.9	54(Note1)	-4.1	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	H	2436.9	69.4	31.2	100.6	Fundamental	/	PK
		H	553.3	7.6	11.9	19.5	46	-26.5	QP
		H	666.8	10.3	12.2	22.5	46	-23.5	QP
		H	3200.0	42.4	-0.7	41.7	54(Note1)	-12.4	PK
		H	4904.0	41.2	3.2	44.4	54(Note1)	-9.6	PK
		H	7356.0	41.6	9.5	51.1	54(Note1)	-2.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	H	5755.0	81.1	20.9	102.0	Fundamental	/	PK
		H	599.8	5.3	13.4	18.7	46	-27.3	QP
		H	697.3	3.3	14.3	17.6	46	-28.4	QP
		H	3200.0	43.0	-1.8	41.2	54(Note1)	-12.9	PK
		H	11510.0	41.1	15.0	56.1	74	-17.9	PK
		H	11510.0	27.1	15.0	42.1	54	-11.9	AV
H		16200.0	42.0	17.4	59.4	74	-14.6	PK	
H		16200.0	28.0	17.4	45.4	54	-8.6	AV	
H		24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK	
159	H	5795.0	81.0	20.9	101.9	Fundamental	/	PK	
	H	553.3	7.7	11.9	19.6	46	-26.4	QP	
	H	697.3	4.6	14.3	18.9	46	-27.1	QP	

		V	3200.0	43.0	-1.8	41.2	54(Note1)	-12.8	PK
		V	11590.0	40.6	15.5	56.1	74	-18.0	PK
		V	11590.0	26.6	15.5	42.1	54	-12.0	AV
		V	16200.0	42.2	17.4	59.6	74	-14.4	PK
		V	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1	3	H	2424.7	74.3	31.2	105.5	Fundamental	/	PK
		H	599.8	5.2	13.4	18.6	46	-27.4	QP
		H	666.8	11.2	12.2	23.4	46	-22.6	QP
		H	3200.0	43.2	-0.7	42.5	54(Note1)	-11.5	PK
		H	4844.0	41.4	3.1	44.5	54(Note1)	-9.5	PK
		H	7266.0	40.4	9.6	50.0	54(Note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	75.8	31.2	107.0	Fundamental	/	PK
		V	553.3	5.7	12.0	17.7	46	-28.3	QP
		V	666.8	8.7	13.3	22.0	46	-24.0	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.8	PK
		V	4874.0	41.1	3.1	44.2	54(Note1)	-9.8	PK
		V	7311.0	40.5	9.5	50.0	54(Note1)	-4.0	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	H	2468.3	75.9	31.2	107.1	Fundamental	/	PK
		V	599.8	1.6	13.7	15.3	46	-30.7	QP
		V	697.3	1.1	14.3	15.4	46	-30.6	QP
		H	3200.0	43.7	-0.7	43.0	54(Note1)	-11.0	PK
		H	4904.0	41.1	3.2	44.3	54(Note1)	-9.7	PK
		H	7356.0	40.9	9.5	50.4	54(Note1)	-3.6	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	151	H	5755.0	87.6	20.9	108.5	Fundamental	/	PK
		V	553.3	7.4	12.0	19.4	46	-26.6	QP
		V	666.8	8.4	13.3	21.7	46	-24.3	QP
		V	3200.0	42.7	-1.8	40.9	54(Note1)	-13.1	PK
		V	11510.0	41.1	15.0	56.1	74	-17.8	PK
		V	11510.0	27.1	15.0	42.1	54	-11.8	AV
V		16200.0	42.5	17.4	59.9	74	-14.1	PK	
V		16200.0	28.5	17.4	45.9	54	-8.1	AV	
H		24000.0	59.6	-8.9	50.7	54(Note1)	-3.3	PK	
159	H	5795.0	87.3	20.9	108.2	Fundamental	/	PK	

		V	599.8	2.4	13.7	16.1	46	-29.9	QP
		V	697.3	1.2	14.3	15.5	46	-30.5	QP
		H	3200.0	43.2	-1.8	41.4	54(Note1)	-12.6	PK
		H	11590.0	41.7	15.5	57.2	74	-16.8	PK
		H	11590.0	27.7	15.5	43.2	54	-10.8	AV
		H	16200.0	42.2	17.4	59.6	74	-14.4	PK
		H	16200.0	28.2	17.4	45.6	54	-8.4	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
Chain 0+1+2	3	H	2417.8	76.1	31.2	107.3	Fundamental	/	PK
		H	553.3	7.2	11.9	19.1	46	-26.9	QP
		H	666.8	10.6	12.2	22.8	46	-23.2	QP
		V	3200.0	43.1	-0.7	42.4	54(Note1)	-11.6	PK
		V	4808.0	44.1	3.1	47.2	54(Note1)	-6.8	PK
		V	7266.0	41.1	9.5	50.6	54(Note1)	-3.4	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	6	H	2437.0	87.7	31.2	118.9	Fundamental	/	PK
		H	599.8	5.8	13.4	19.2	46	-26.8	QP
		H	697.3	3.2	14.3	17.5	46	-28.5	QP
		H	3200.0	43.6	-0.7	42.9	54(Note1)	-11.1	PK
		H	4874.0	41.8	3.1	44.9	54(Note1)	-9.1	PK
		H	7311.0	41.7	9.4	51.1	54(Note1)	-2.9	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	9	H	2461.3	76.7	31.2	107.9	Fundamental	/	PK
		H	553.3	6.8	11.9	18.7	46	-27.3	QP
		H	697.3	4.4	14.3	18.7	46	-27.3	QP
		V	3200.0	43.0	-0.7	42.3	54(Note1)	-11.7	PK
		V	4904.0	41.0	3.2	44.2	54(Note1)	-9.8	PK
		V	7356.0	41.0	9.5	50.5	54(Note1)	-3.5	PK
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
151	H	5755.0	84.5	20.9	105.4	Fundamental	/	PK	
	H	599.8	4.8	13.4	18.2	46	-27.8	QP	
	H	666.8	12.4	12.2	24.6	46	-21.4	QP	
	H	3200.0	42.8	-1.8	41.0	54(Note1)	-13.0	PK	
	H	11510.0	41.1	15.0	56.1	74	-17.9	PK	
	H	11510.0	27.1	15.0	42.1	54	-11.9	AV	
	H	16200.0	41.8	17.4	59.2	74	-14.8	PK	
	H	16200.0	27.8	17.4	45.2	54	-8.8	AV	



		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK
	159	H	5795.0	84.4	20.9	105.3	Fundamental	/	PK
		V	553.3	6.1	12.0	18.1	46	-27.9	QP
		V	666.8	8.0	13.3	21.3	46	-24.7	QP
		V	3200.0	40.9	-1.9	39.0	54(Note1)	-15.0	PK
		V	11590.0	38.6	15.5	54.1	74	-19.9	PK
		V	11590.0	24.6	15.5	40.1	54	-13.9	AV
		V	16200.0	39.8	17.4	57.2	74	-16.8	PK
		V	16200.0	25.8	17.4	43.2	54	-10.8	AV
		H	24000.0	59.1	-8.9	50.2	54(Note1)	-3.8	PK

Note 1: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

## 5. RF Antenna Conducted Spurious


### 5.1. Test Equipment

RF Antenna Conducted Spurious / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2012.04.30
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2012.05.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 5.2. Test Setup

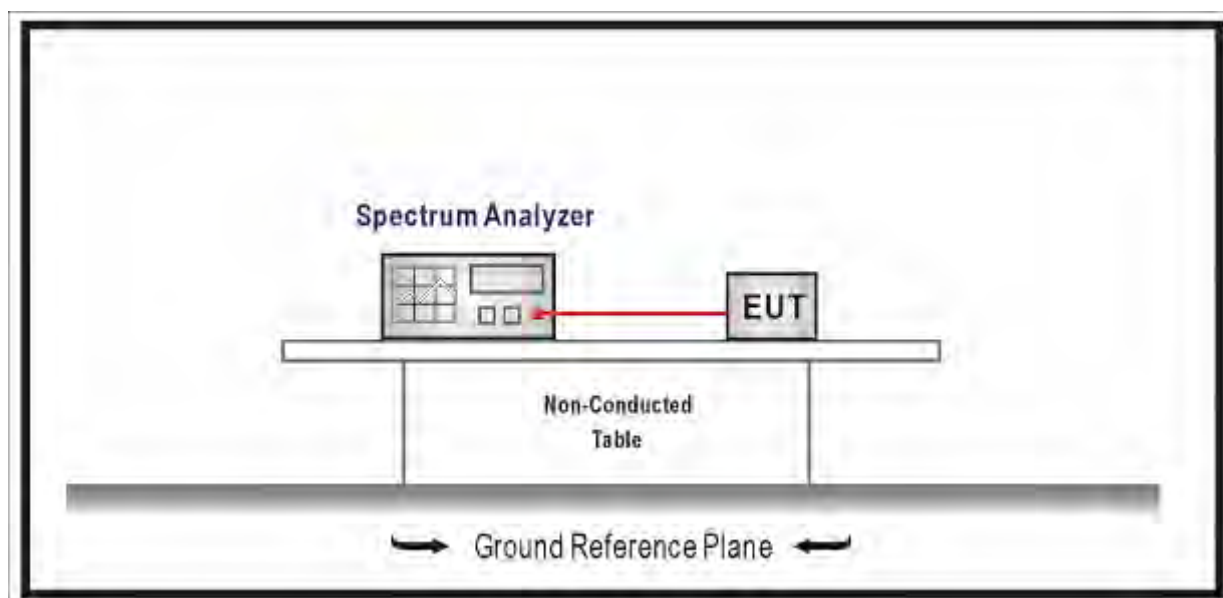

### 5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### **5.4. Test Procedure**

The EUT was tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


#### **5.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB


5.6. Test Result

Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11b (Chain 0)


Channel 01 (2412MHz)

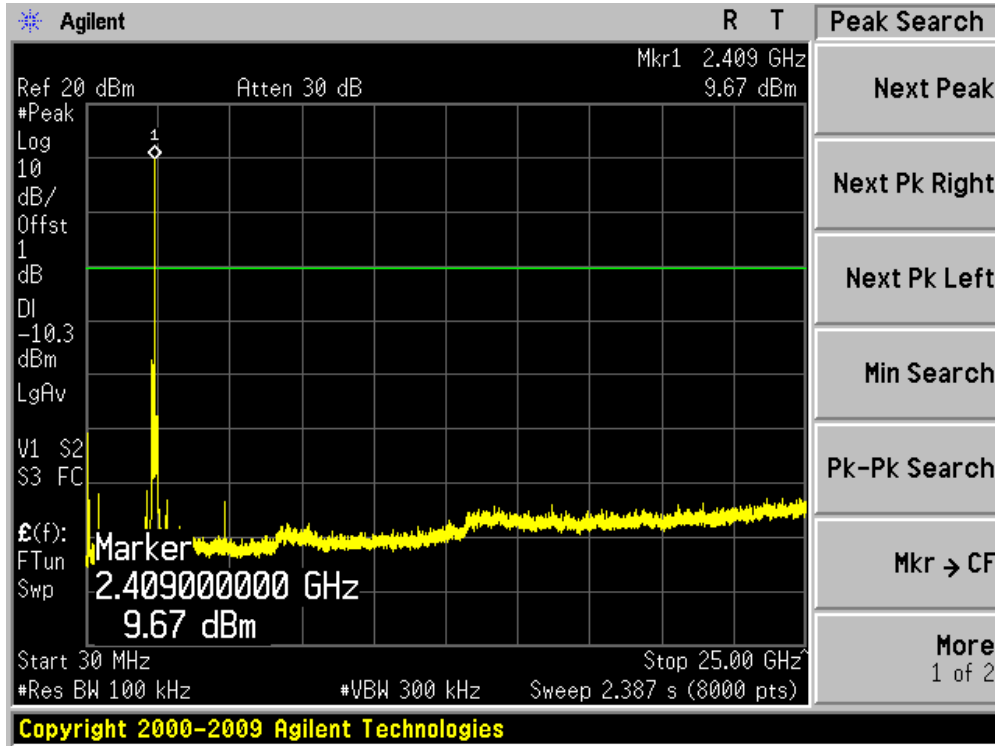

Channel 06 (2437MHz)

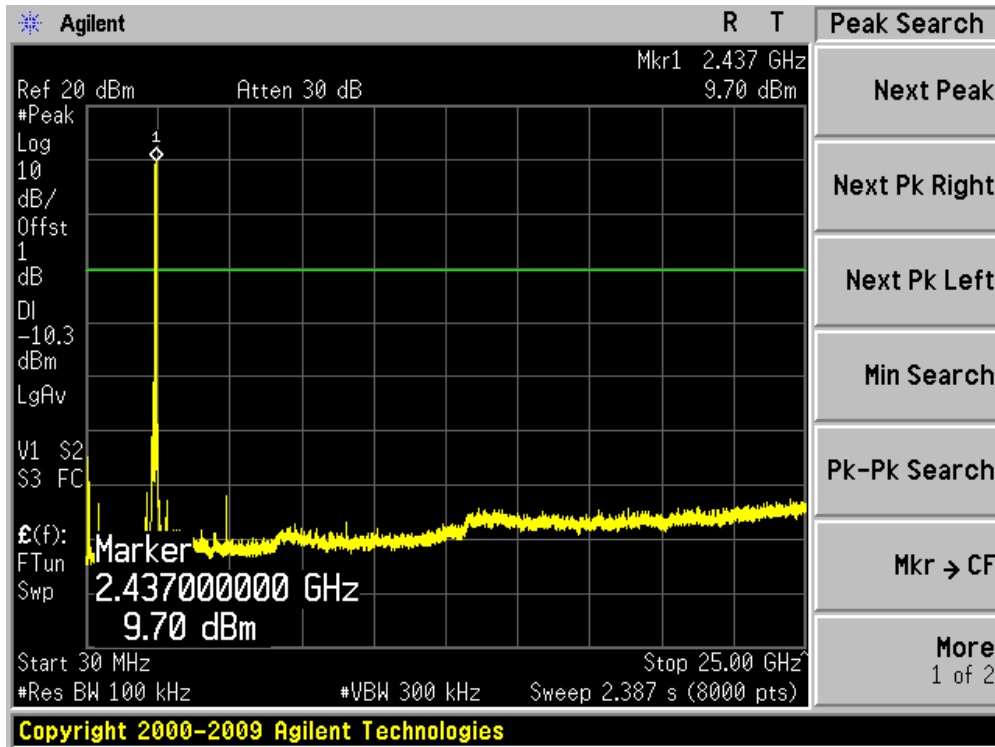


Channel 11 (2462MHz)

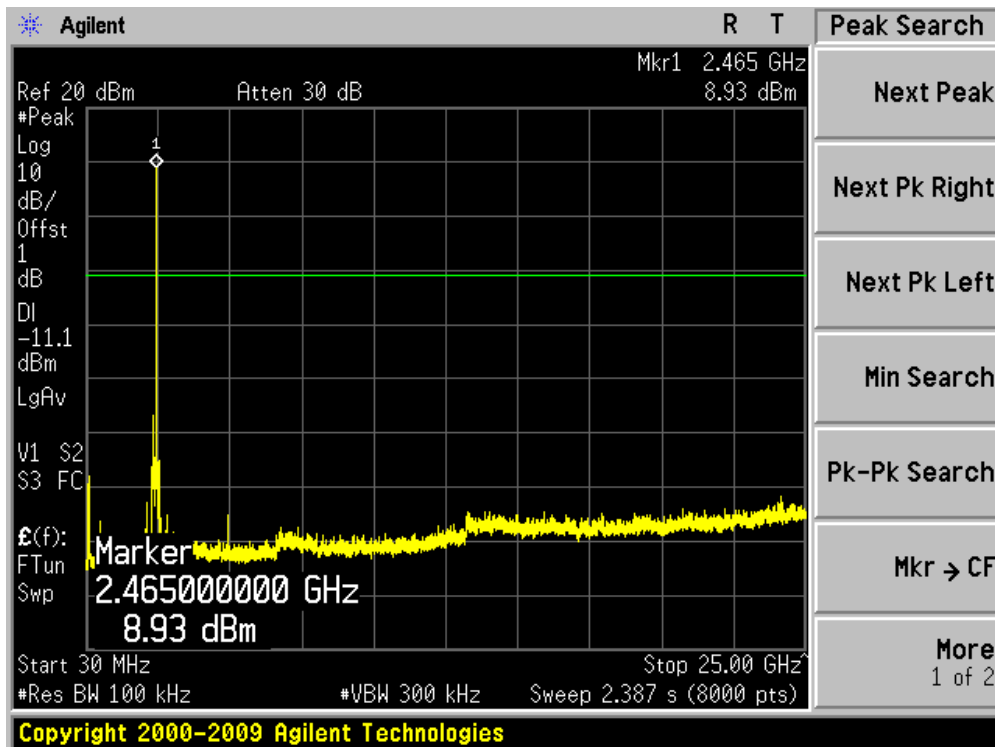


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmit by 802.11g (Chain 0)


Channel 01 (2412MHz)

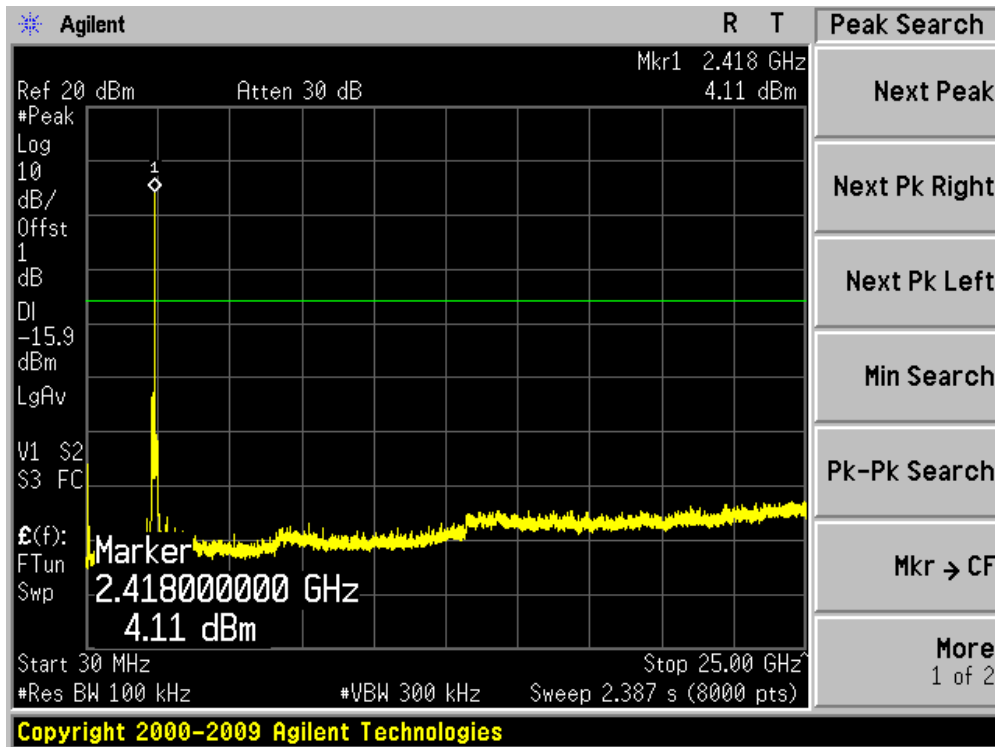

Channel 06 (2437MHz)

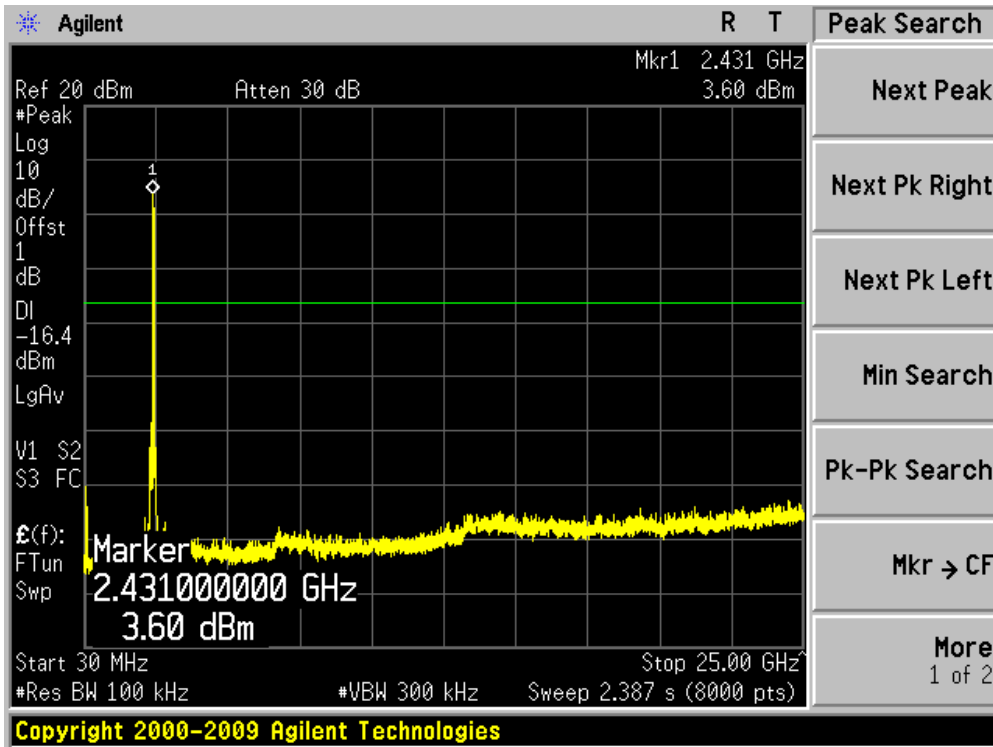


Channel 11 (2462MHz)

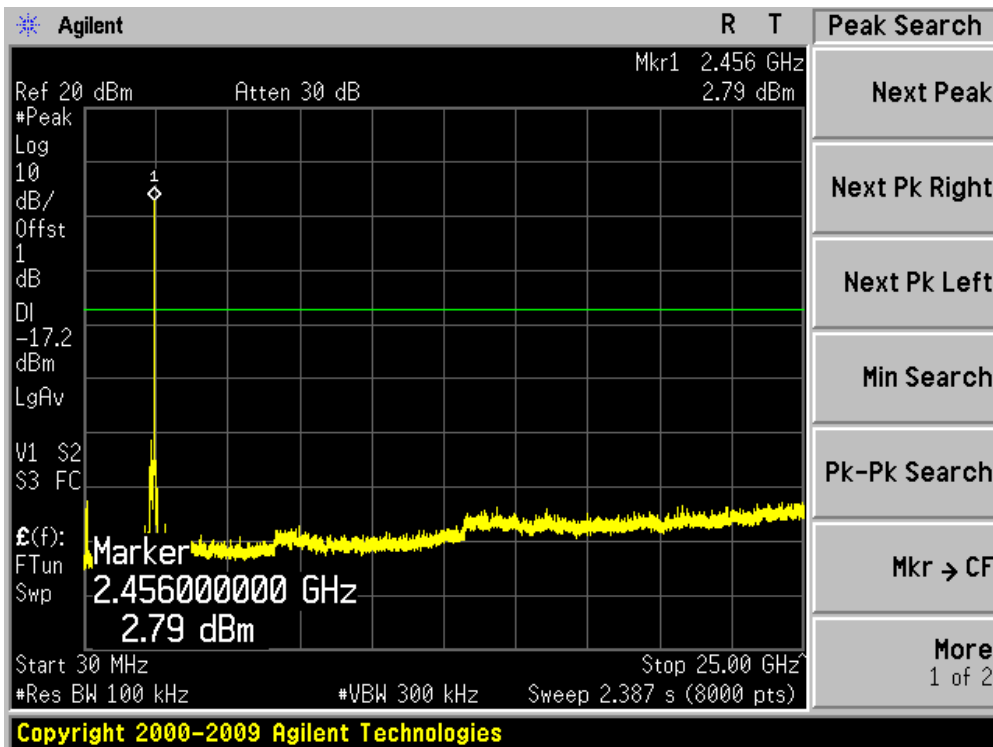


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmit by 802.11a (Chain 0)

Channel 149 (5745MHz)

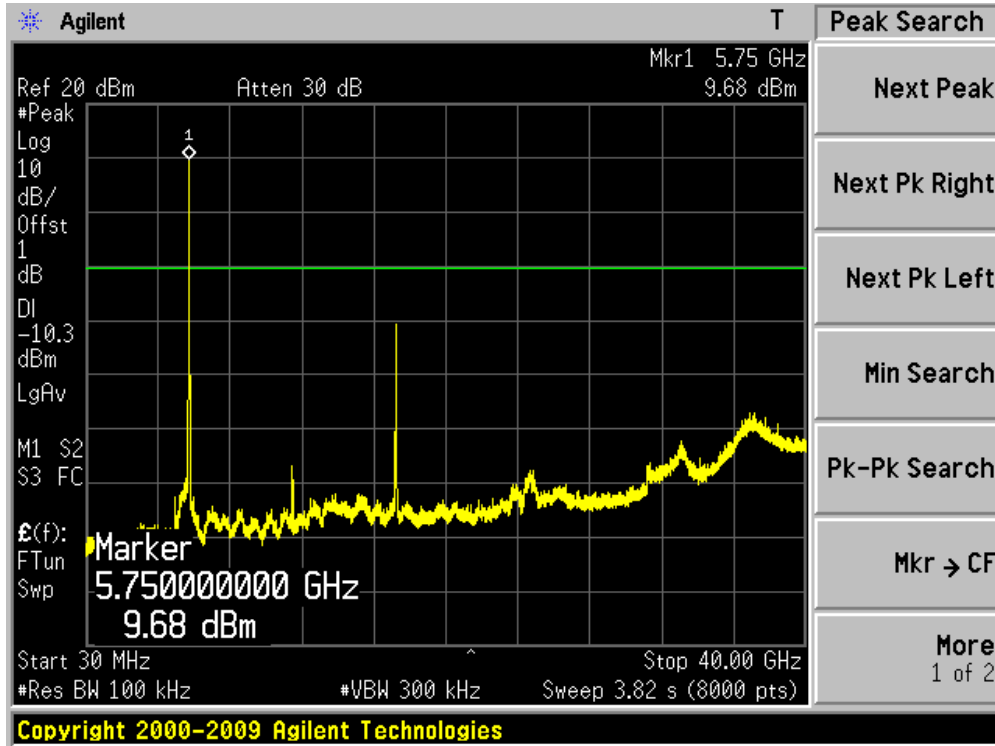




Channel 157 (5785MHz)

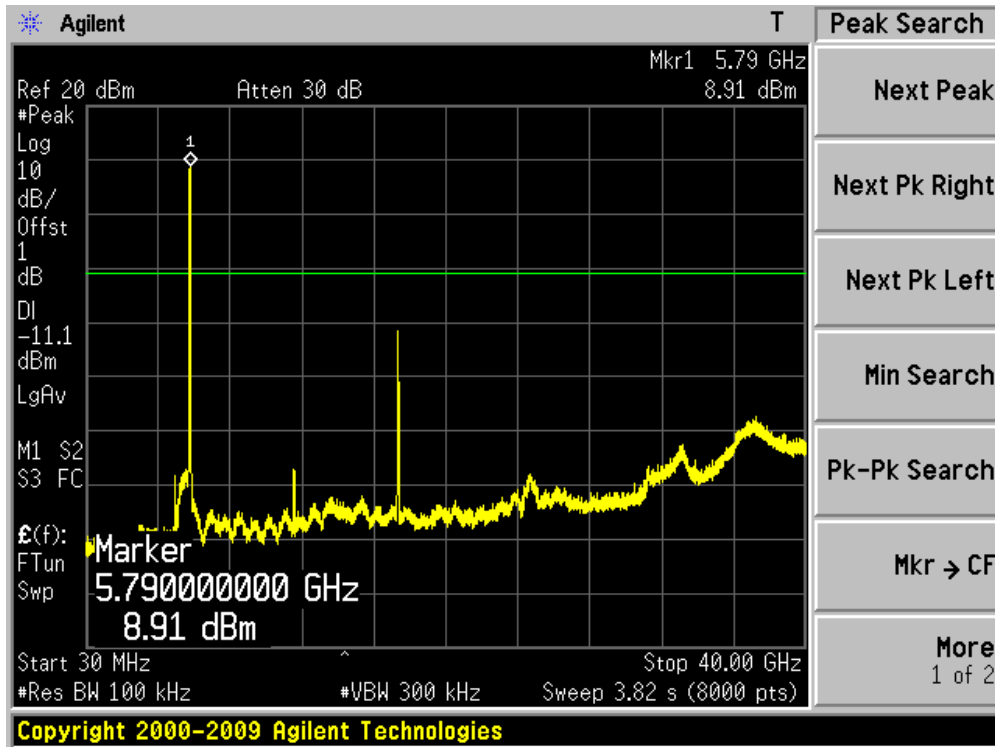


Channel 165 (5825MHz)

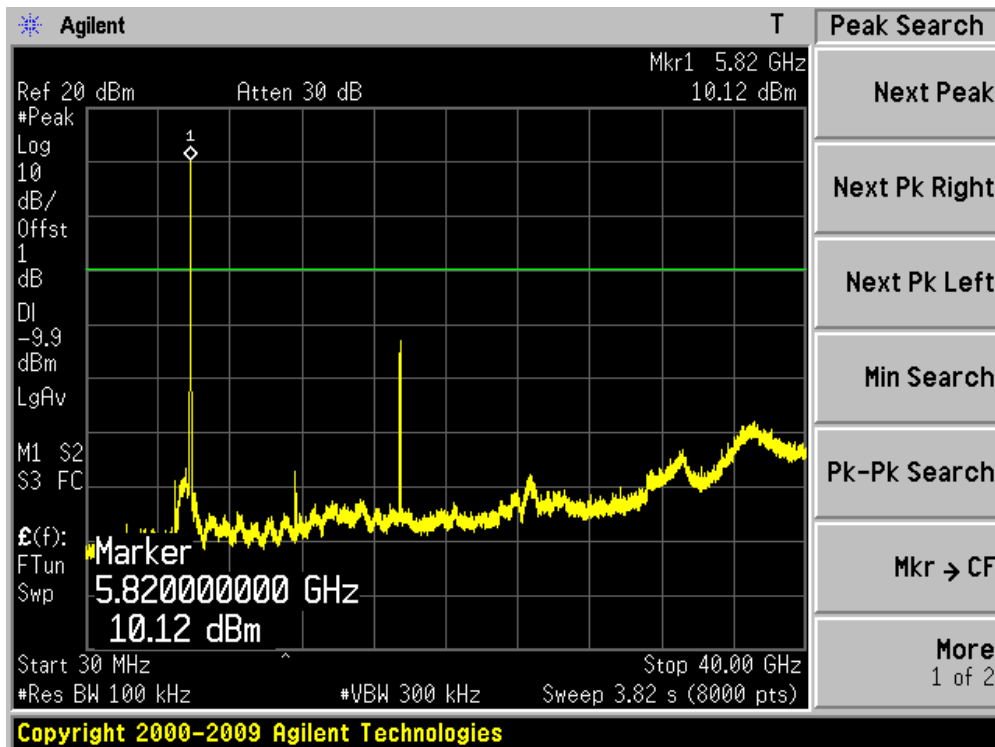


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 4: Transmit by 802.11n (20MHz)(Chain 0)


Channel 01 (2412MHz)

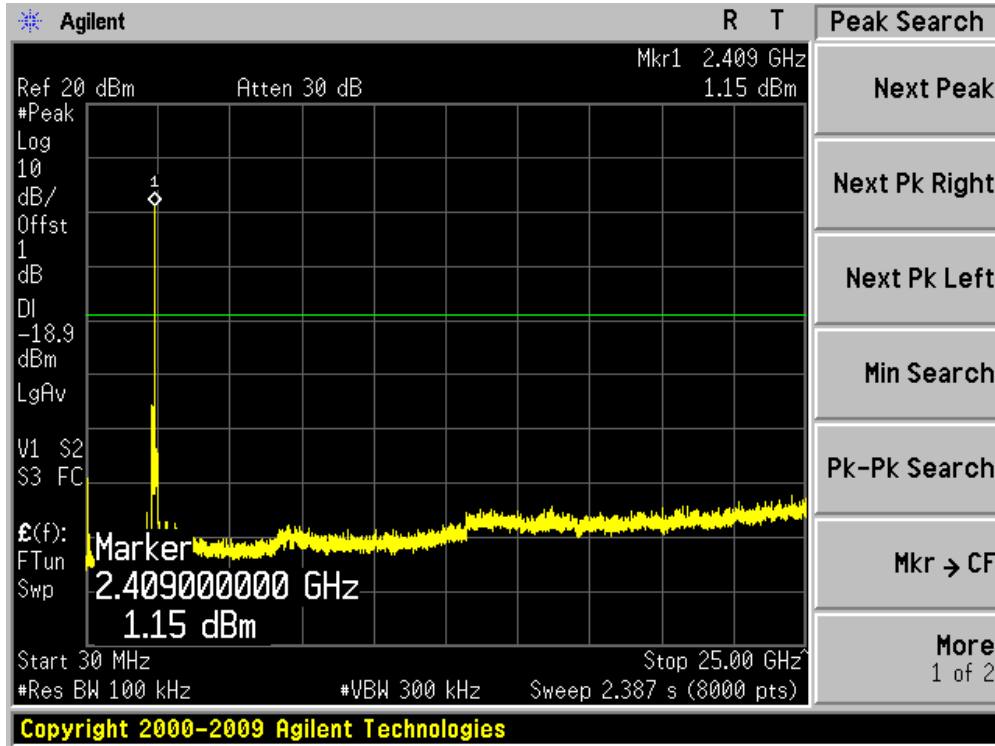


Channel 06 (2437MHz)

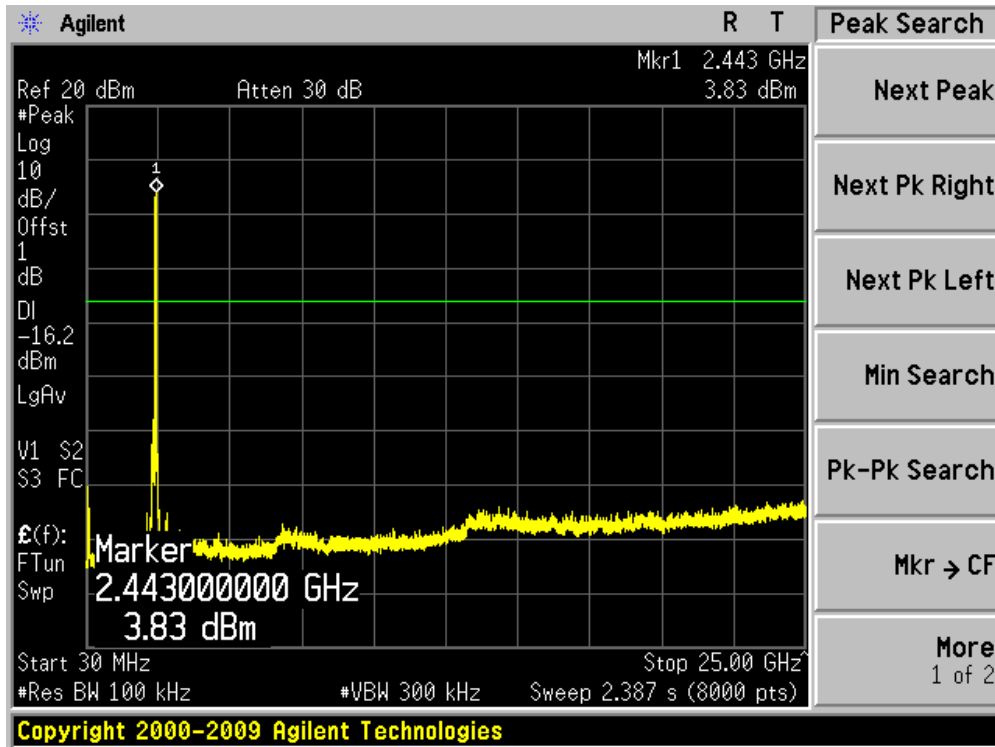


Channel 11 (2462MHz)

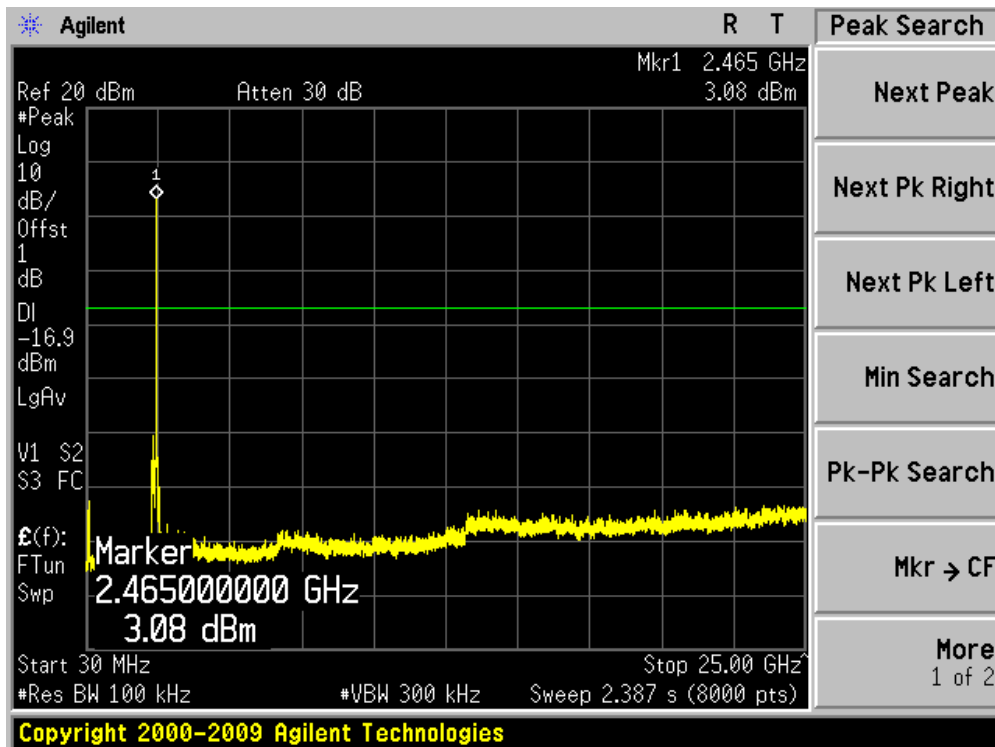


Channel 149 (5745MHz)

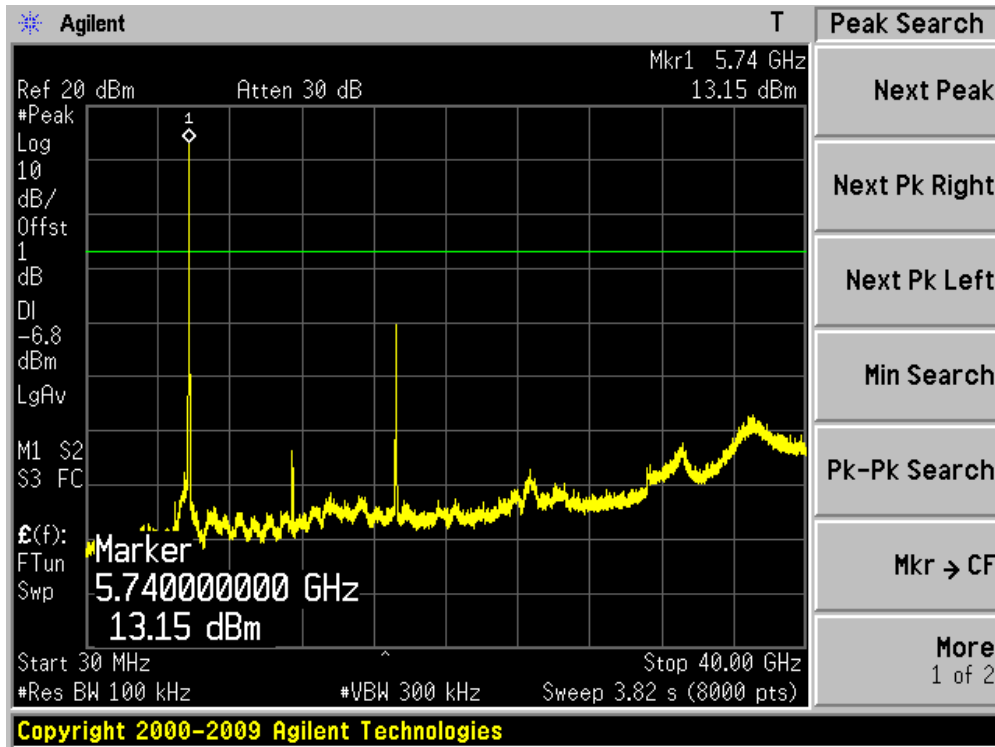

Channel 157 (5785MHz)

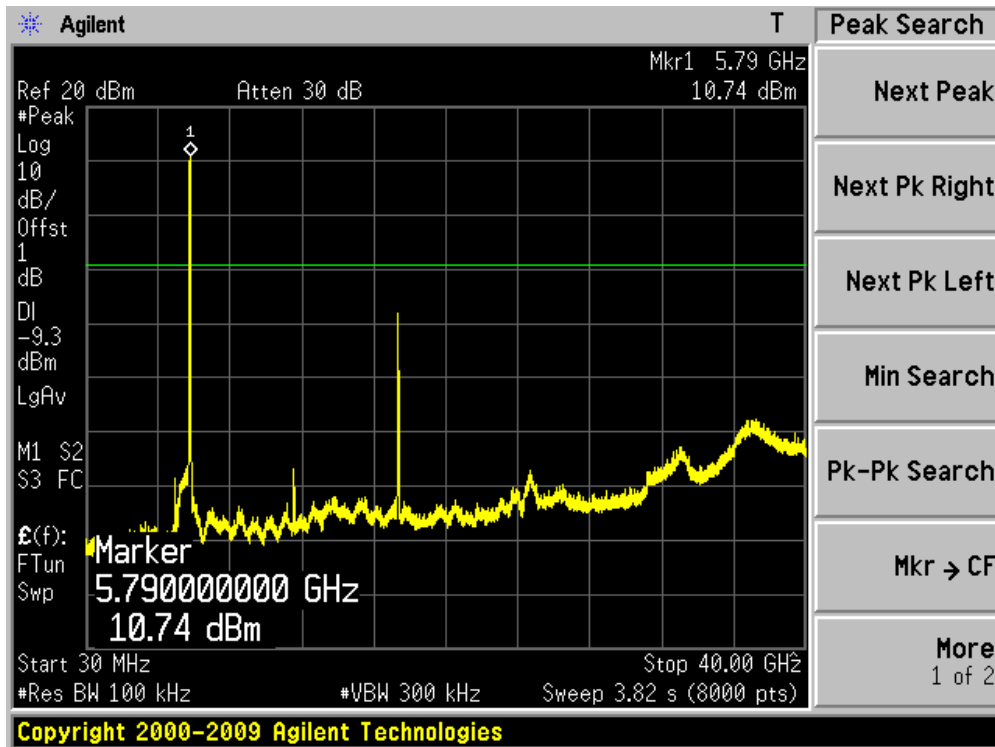


Channel 165 (5825MHz)

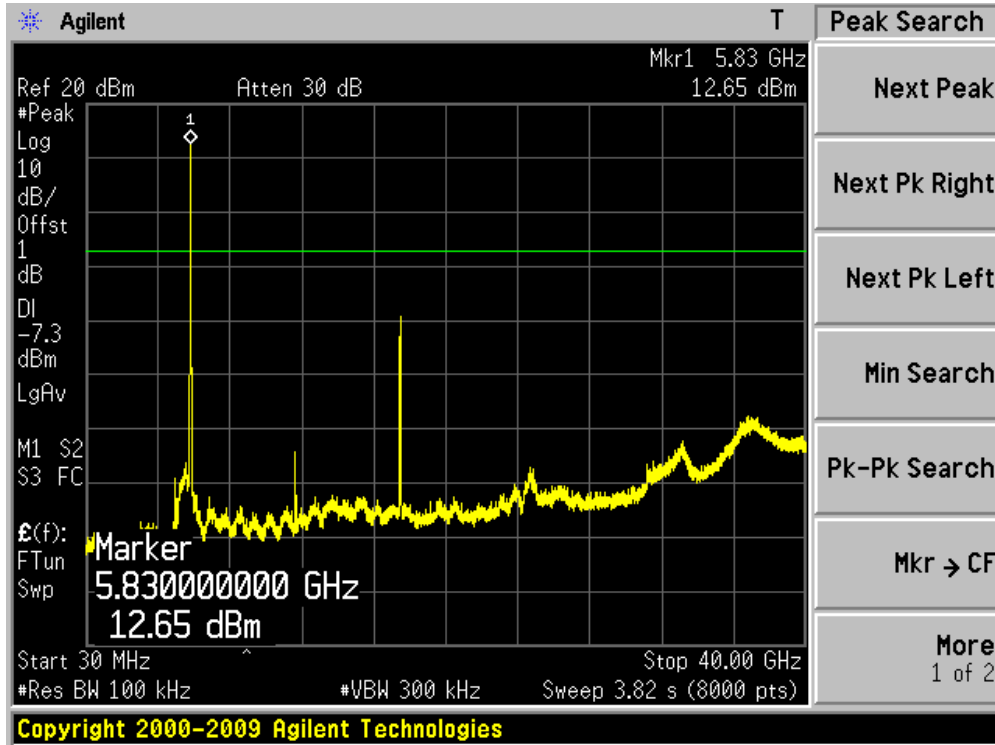


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 5: Transmit by 802.11n (40MHz) (Chain 0)


Channel 03 (2422MHz)

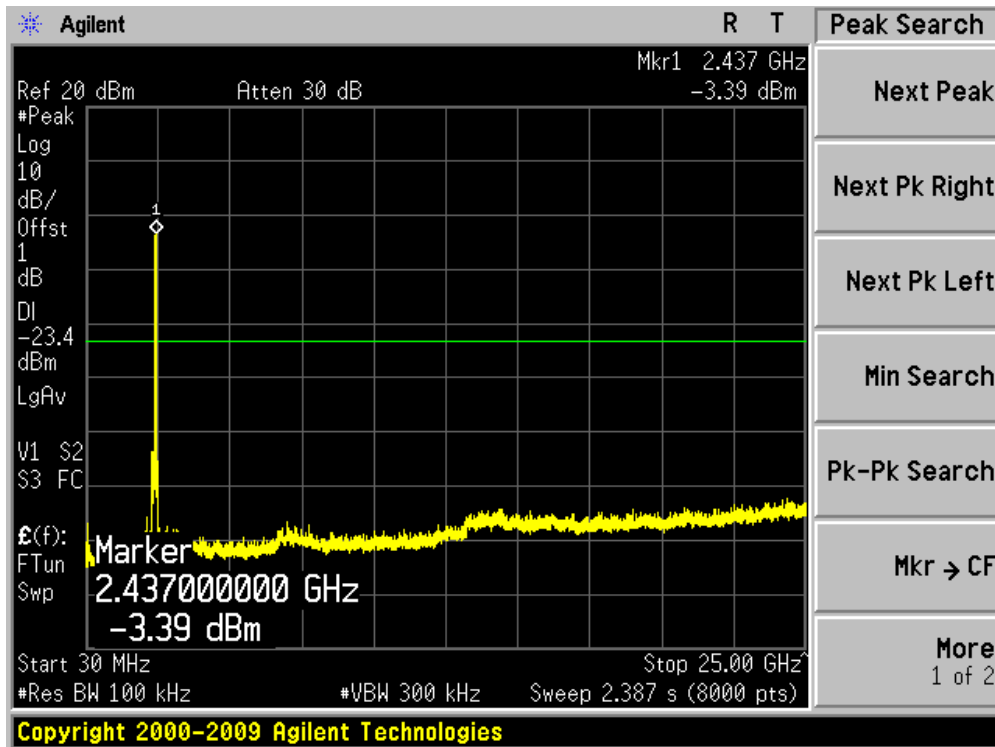


Channel 06 (2437MHz)

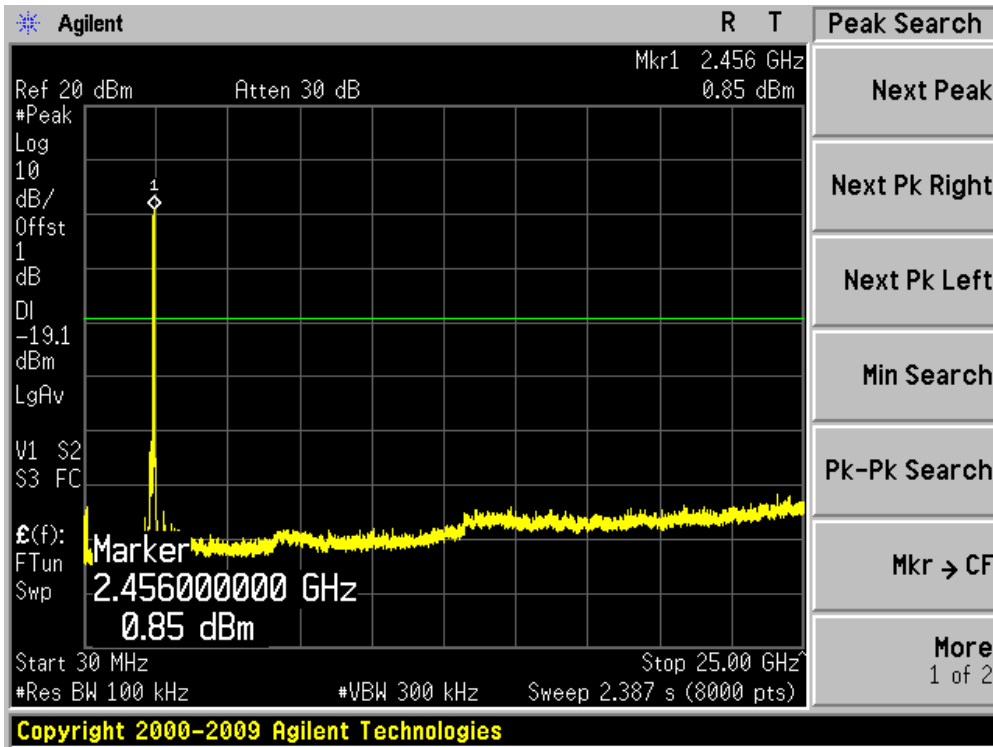


Channel 09 (2452MHz)

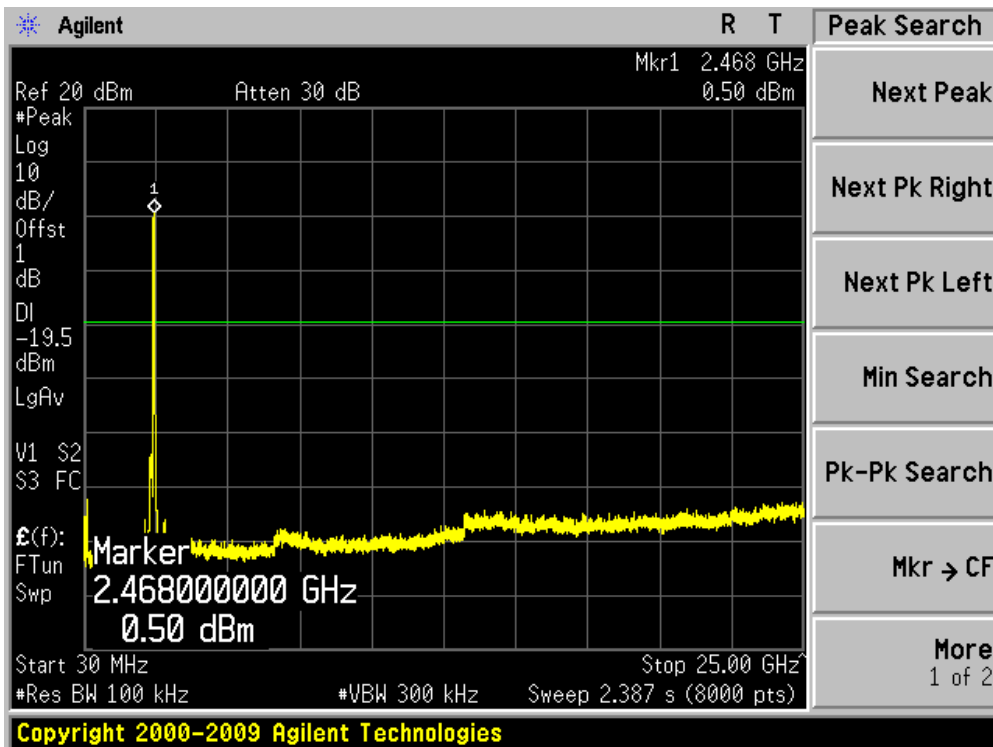

Channel 151 (5755MHz)

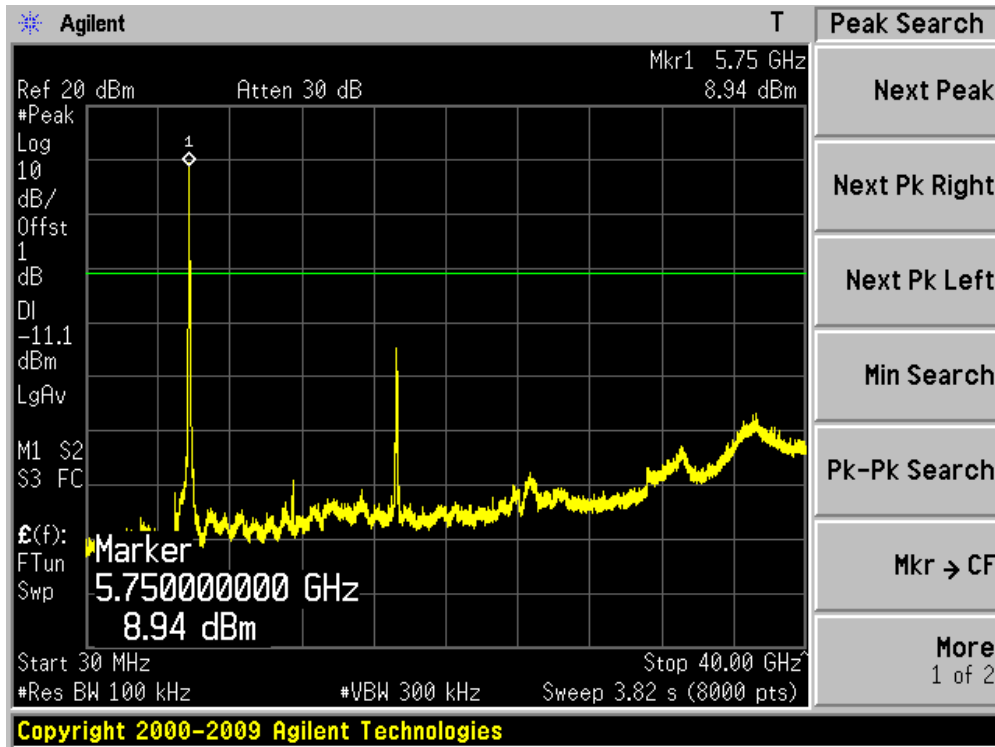


Channel 159 (5795MHz)

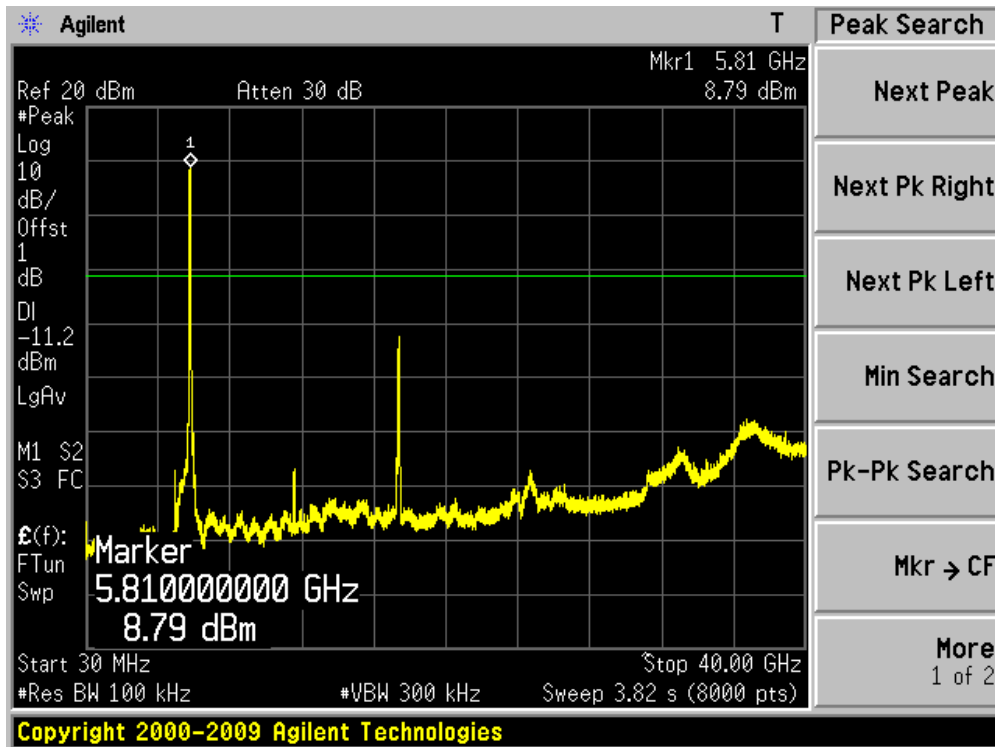




Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11b (Chain 1)


Channel 01 (2412MHz)

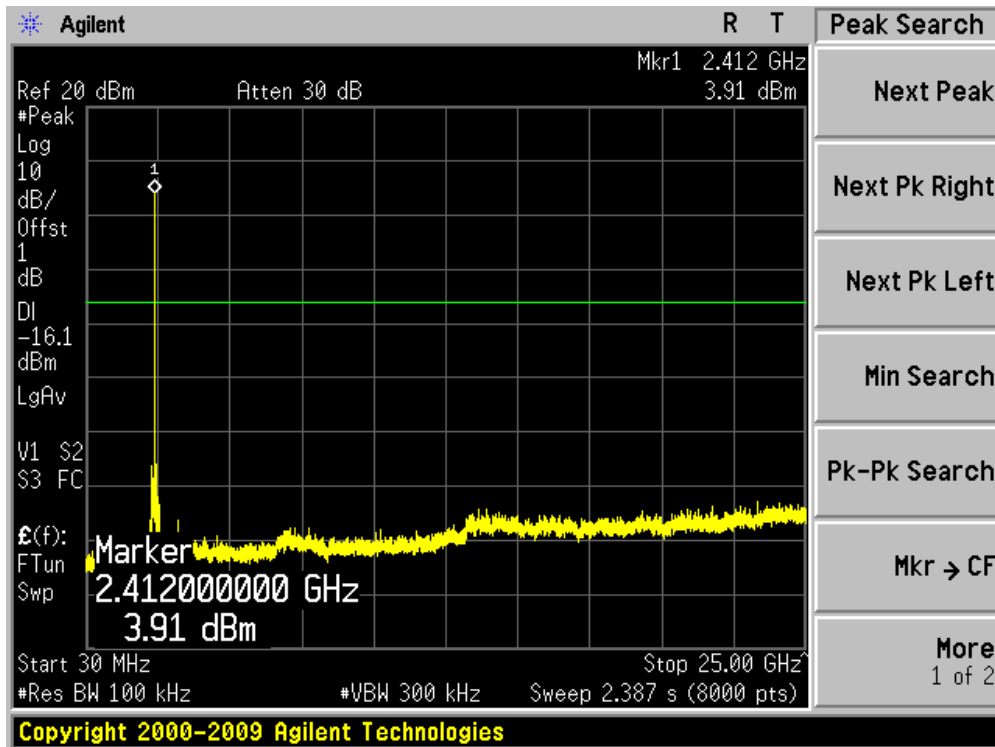

Channel 06 (2437MHz)

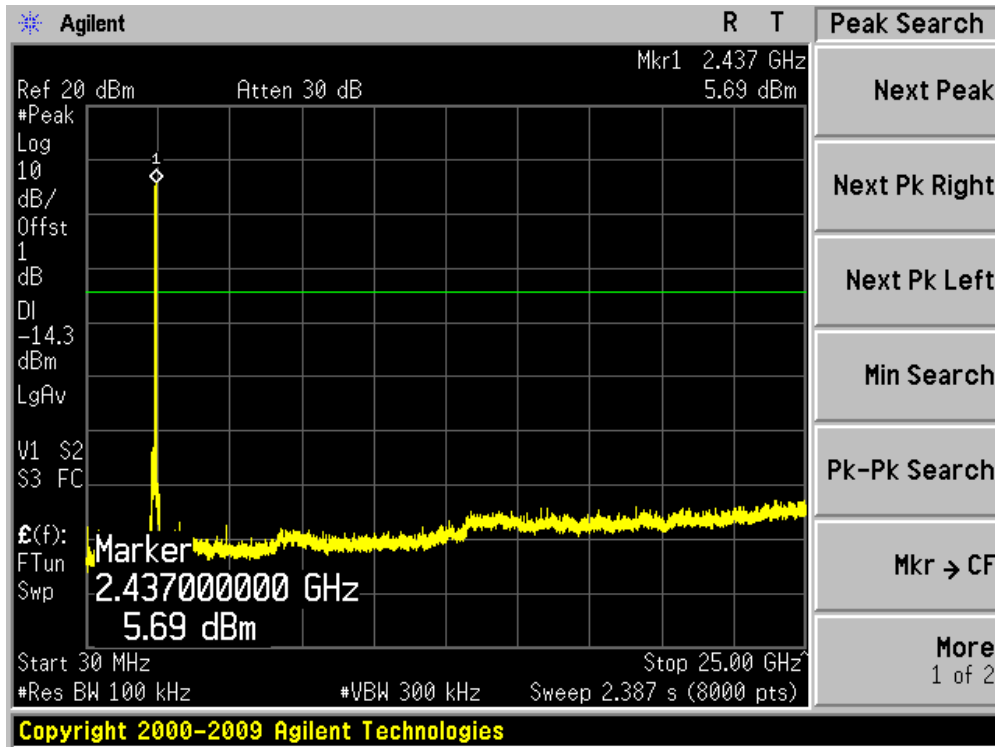


Channel 11 (2462MHz)

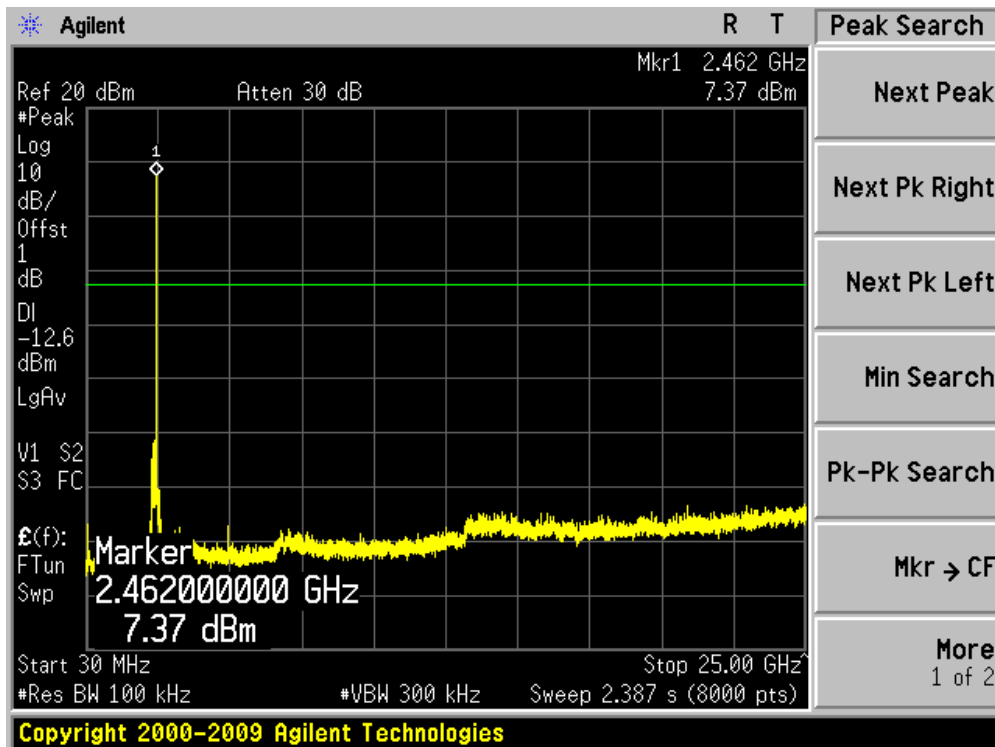


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmit by 802.11g (Chain 1)


Channel 01 (2412MHz)

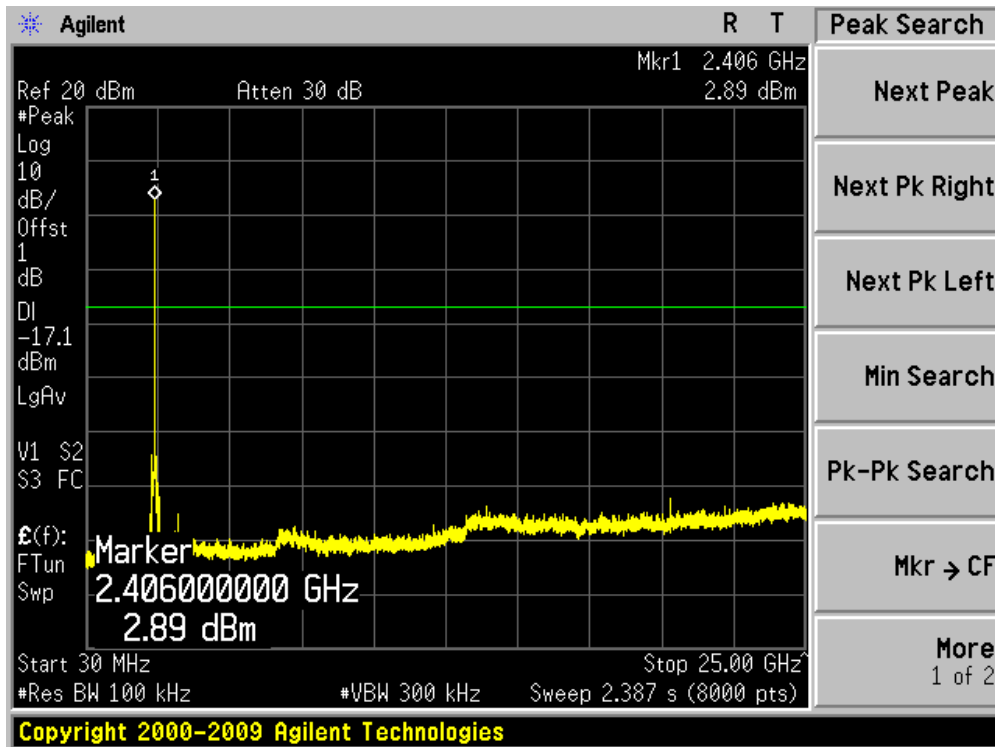

Channel 06 (2437MHz)

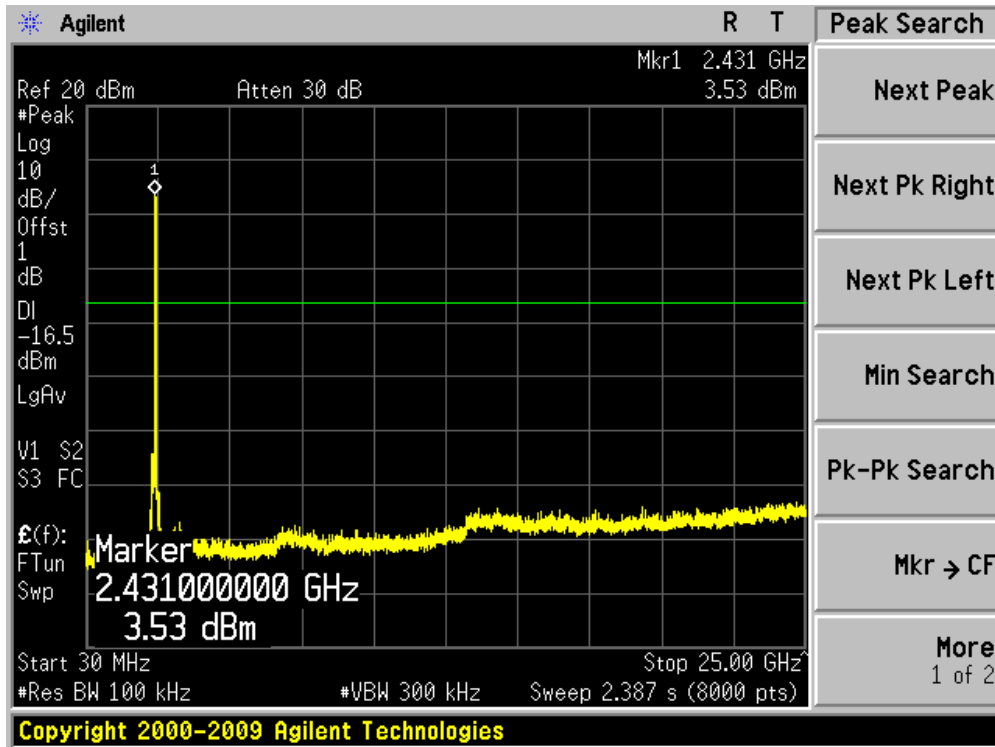


Channel 11 (2462MHz)

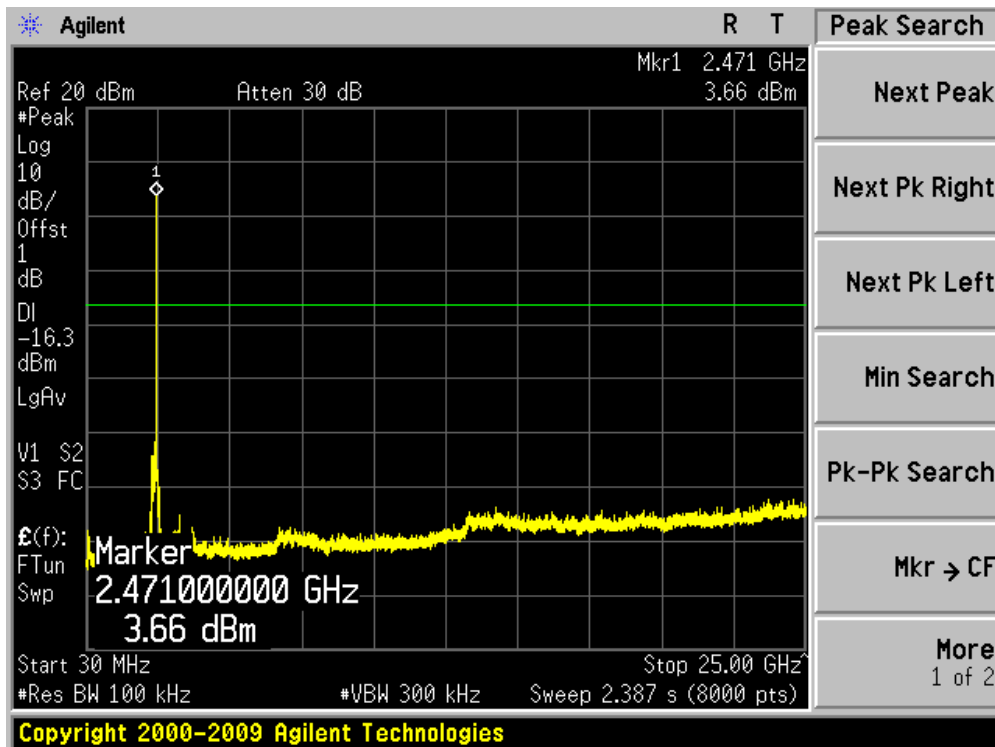


Product	: Wireless LAN access Point
Test Item	: RF Antenna Conducted Spurious
Test Site	: TR-8
Test Mode	: Mode 3: Transmit by 802.11a (Chain 1)


Channel 149 (5745MHz)

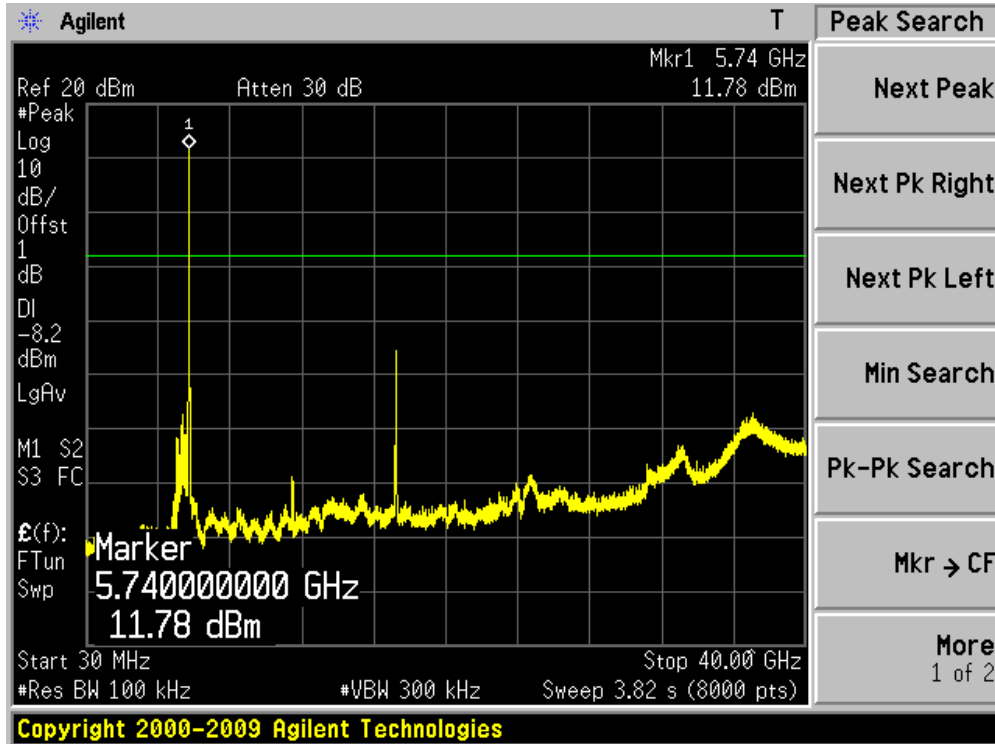

Channel 157 (5785MHz)

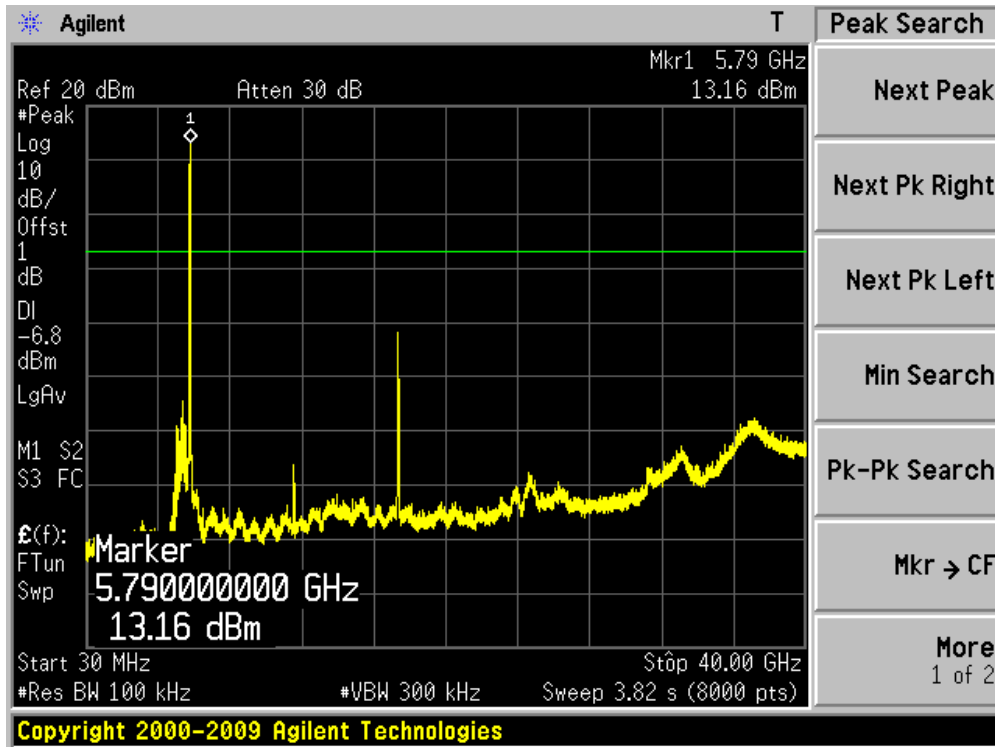


Channel 165 (5825MHz)

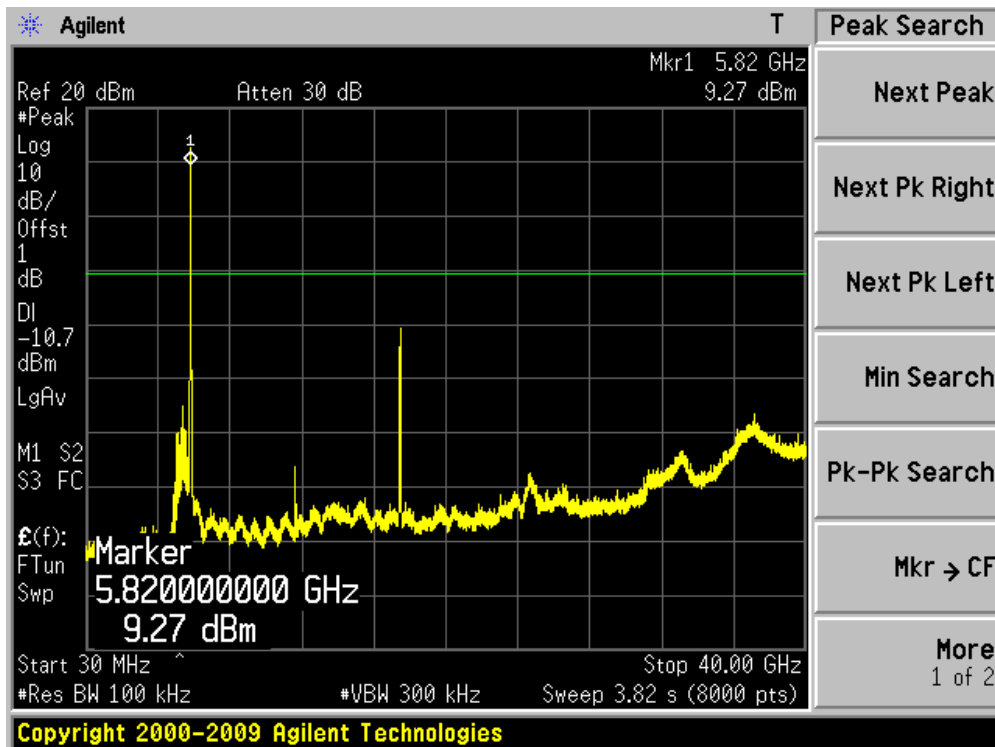


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 4: Transmit by 802.11n (20MHz) (Chain 1)


Channel 01 (2412MHz)

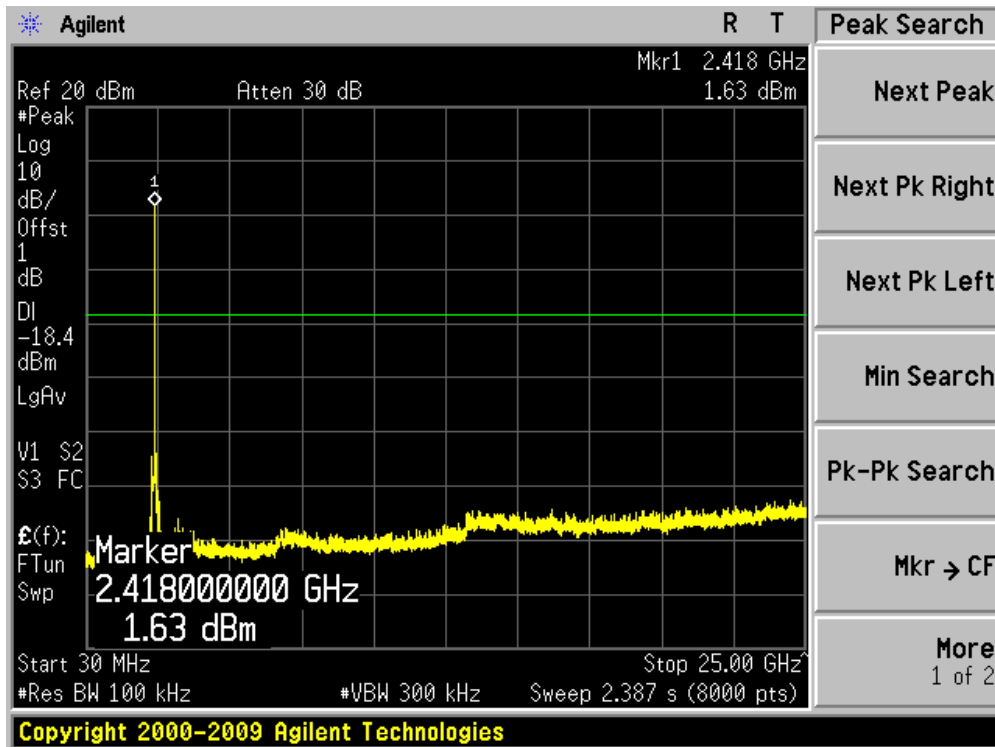

Channel 06 (2437MHz)

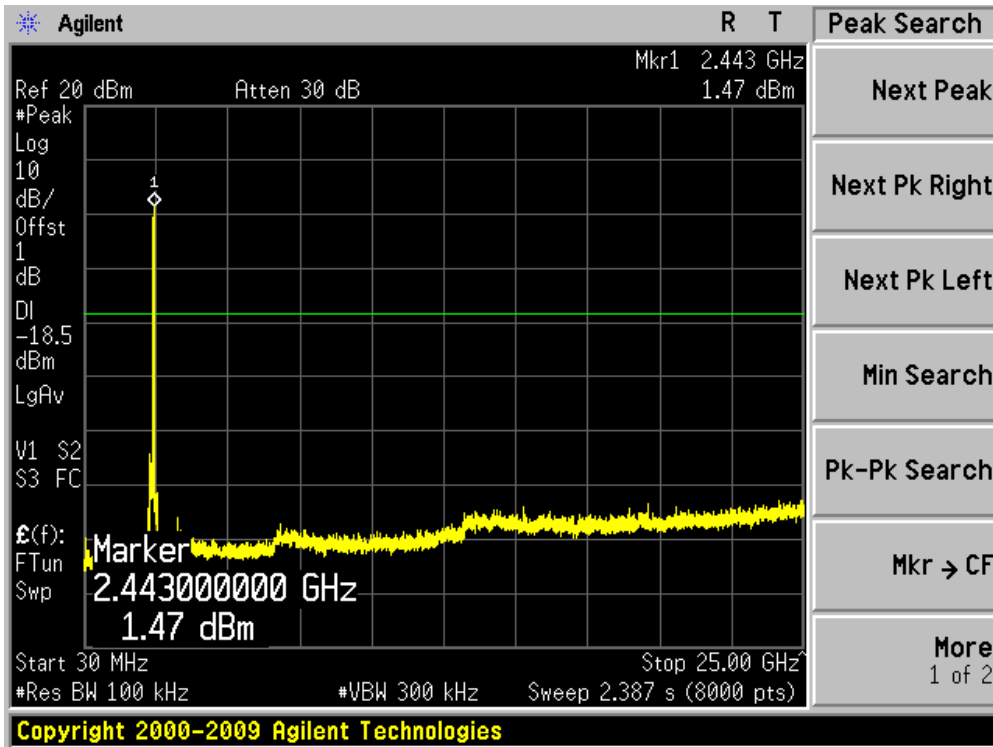


Channel 11 (2462MHz)

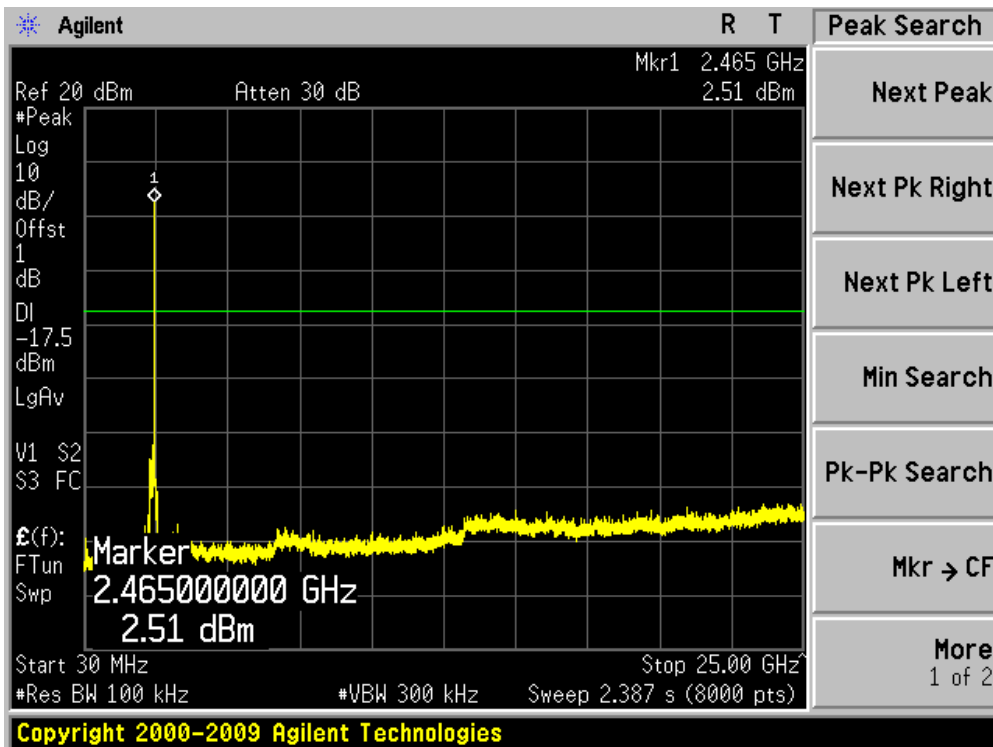





Channel 149 (5745MHz)

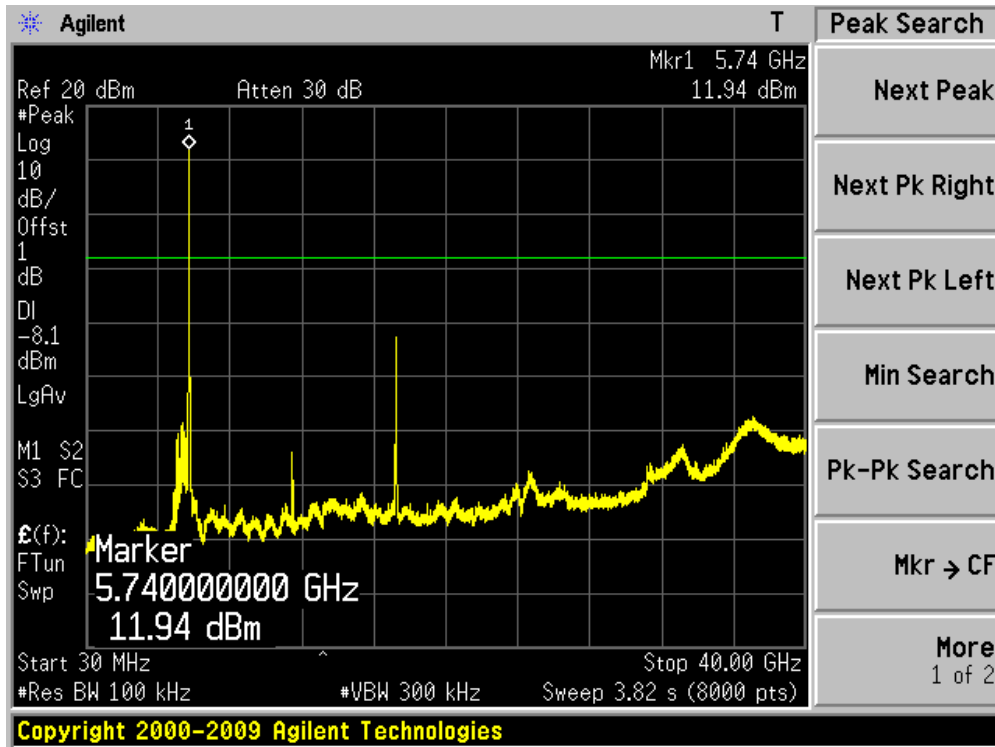

Channel 157 (5785MHz)

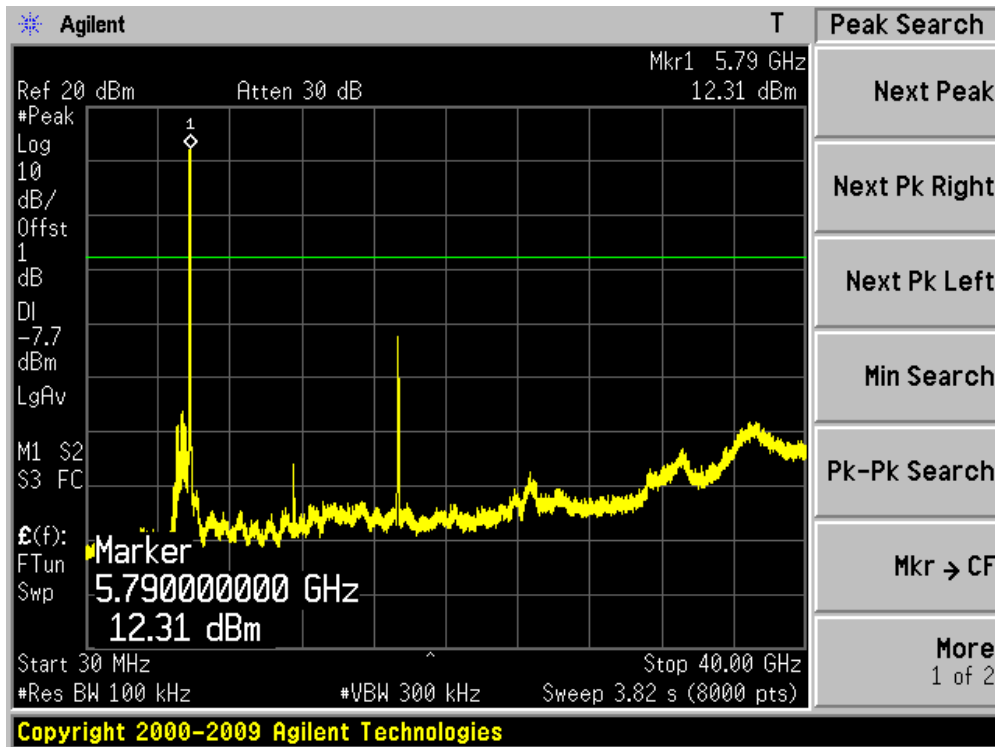


Channel 165 (5825MHz)

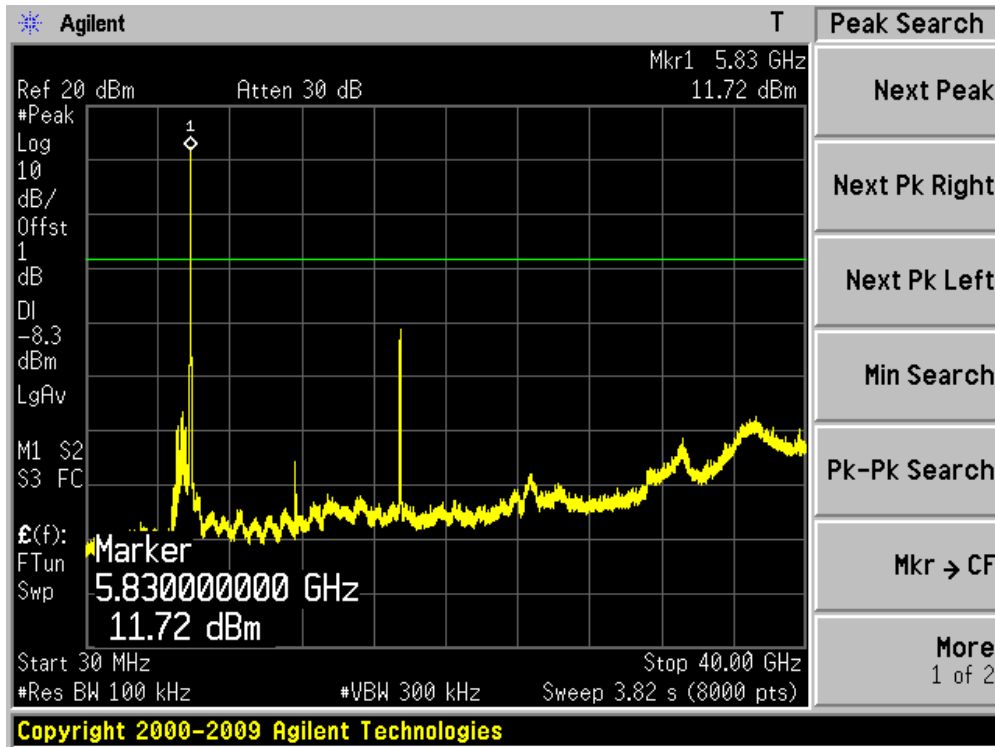


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 5: Transmit by 802.11n (40MHz) (Chain 1)


Channel 03 (2422MHz)

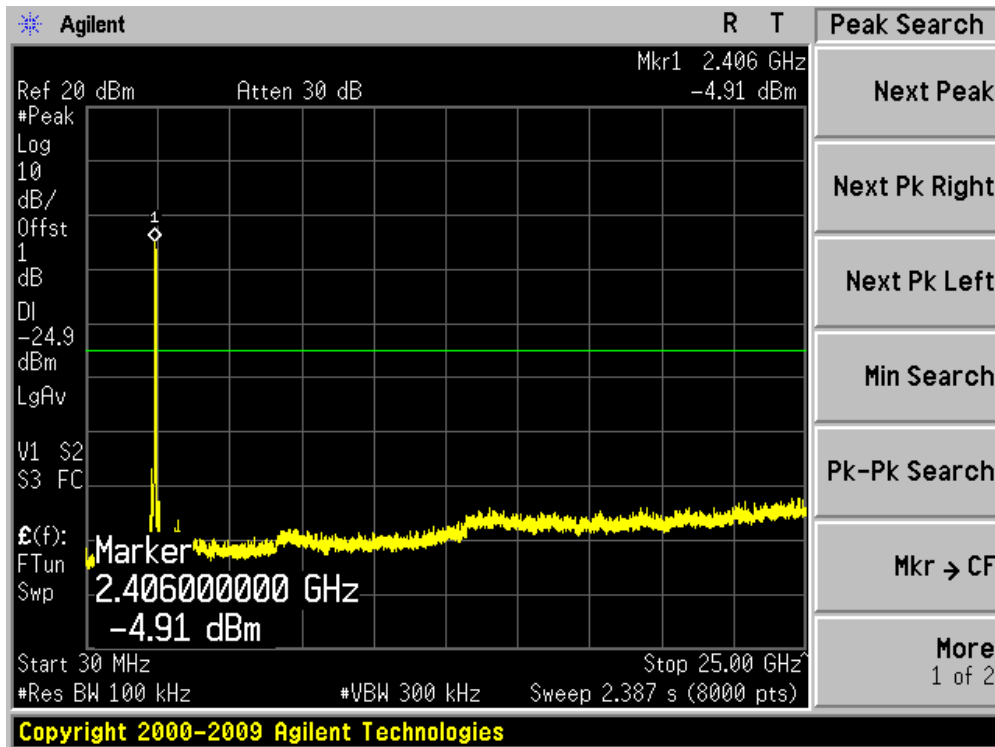


Channel 06 (2437MHz)

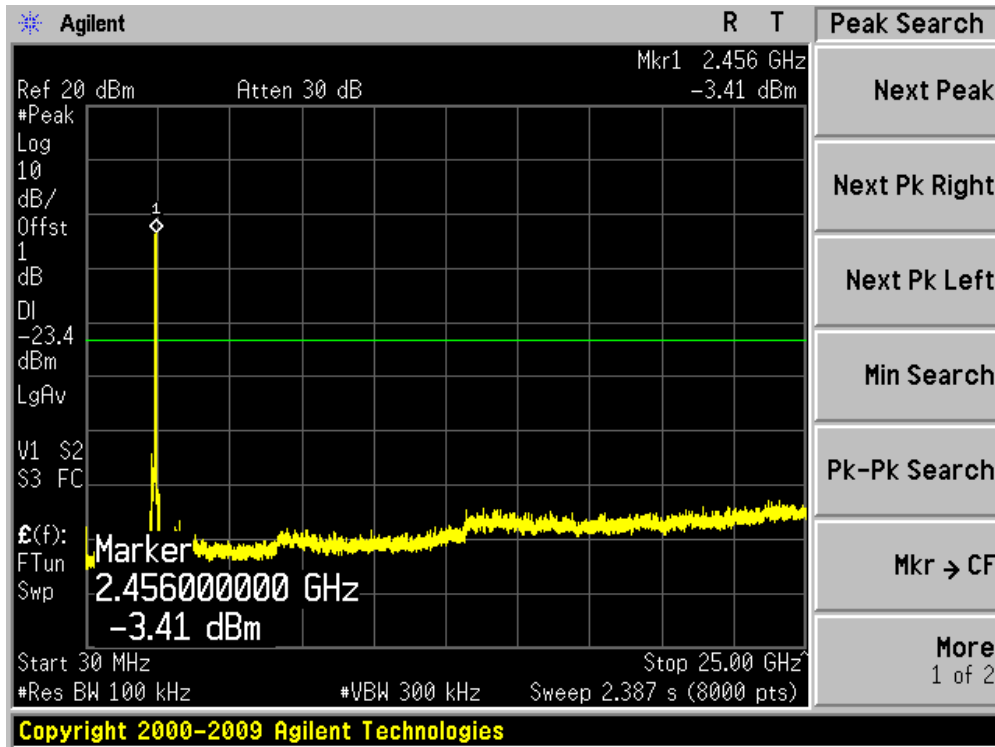


Channel 09 (2452MHz)

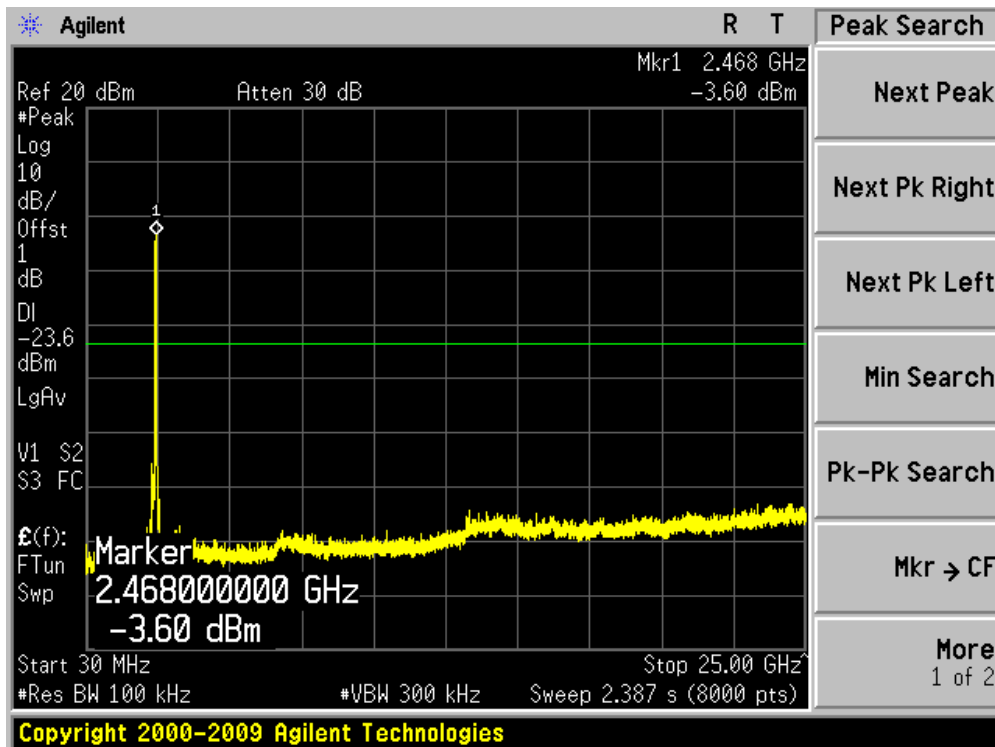

Channel 151 (5755MHz)

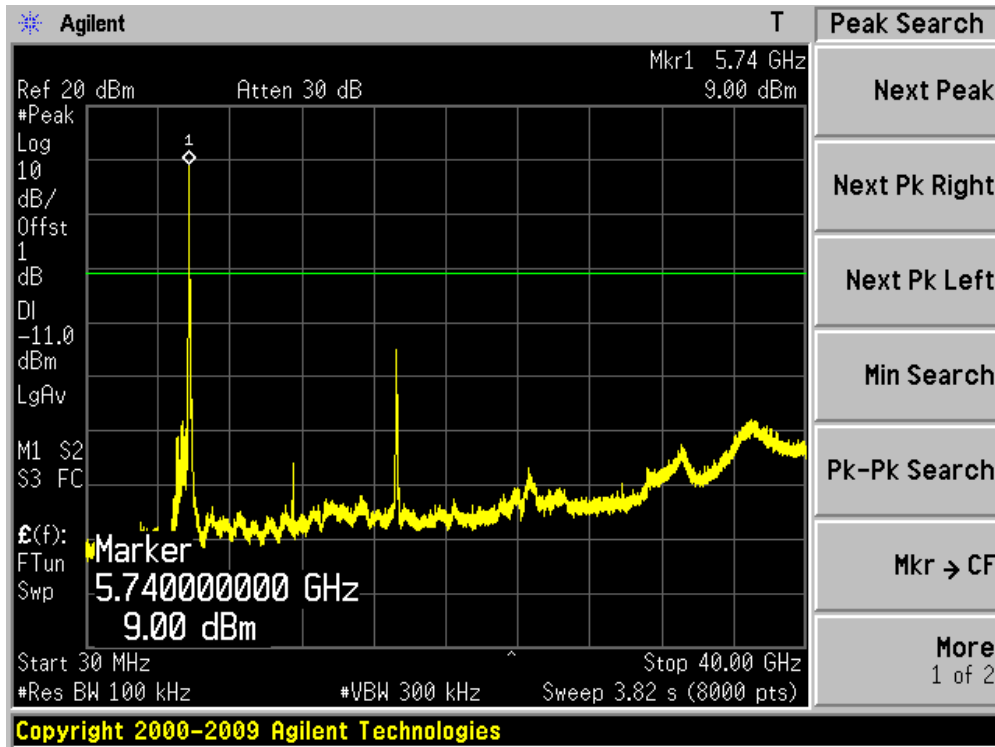


Channel 159 (5795MHz)

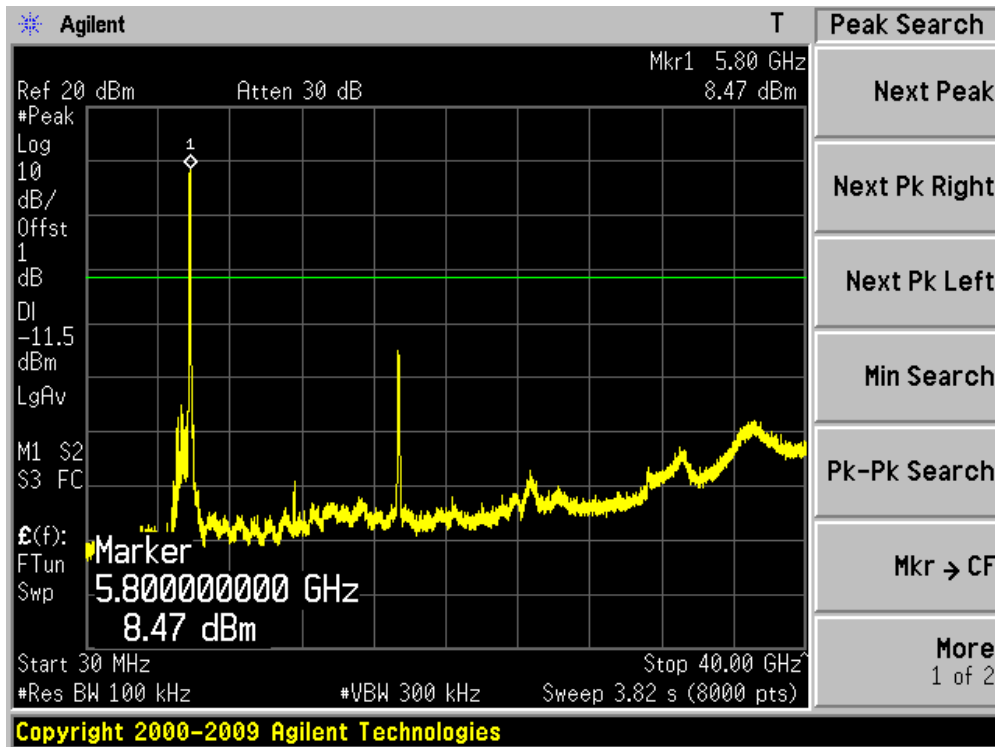


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit by 802.11b (Chain 2)


Channel 01 (2412MHz)

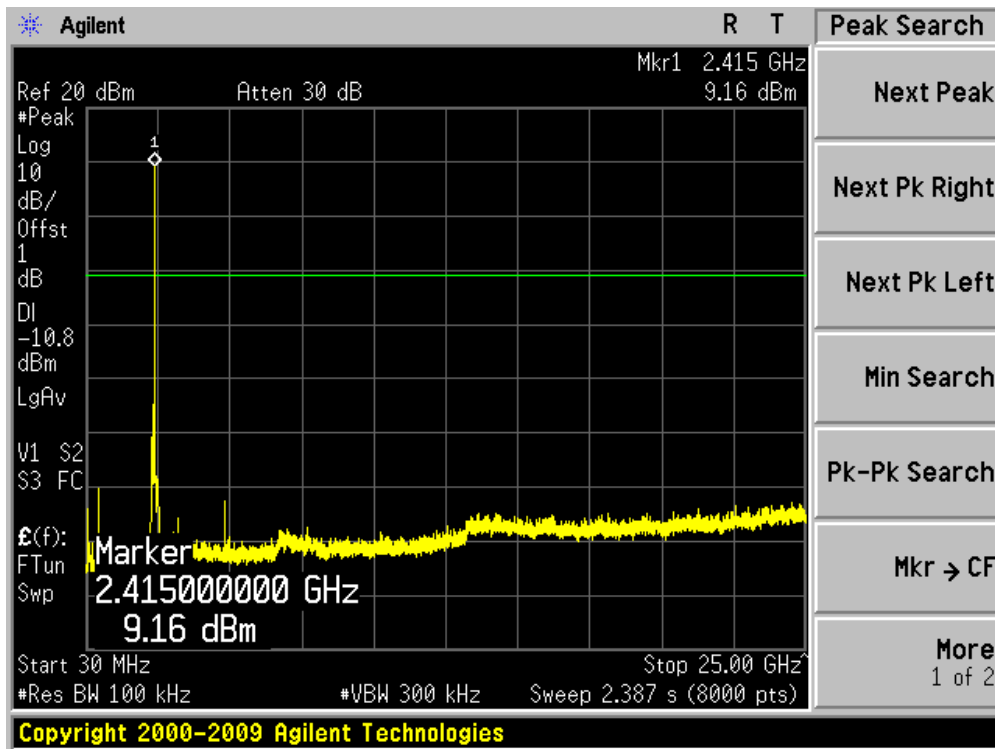

Channel 06 (2437MHz)

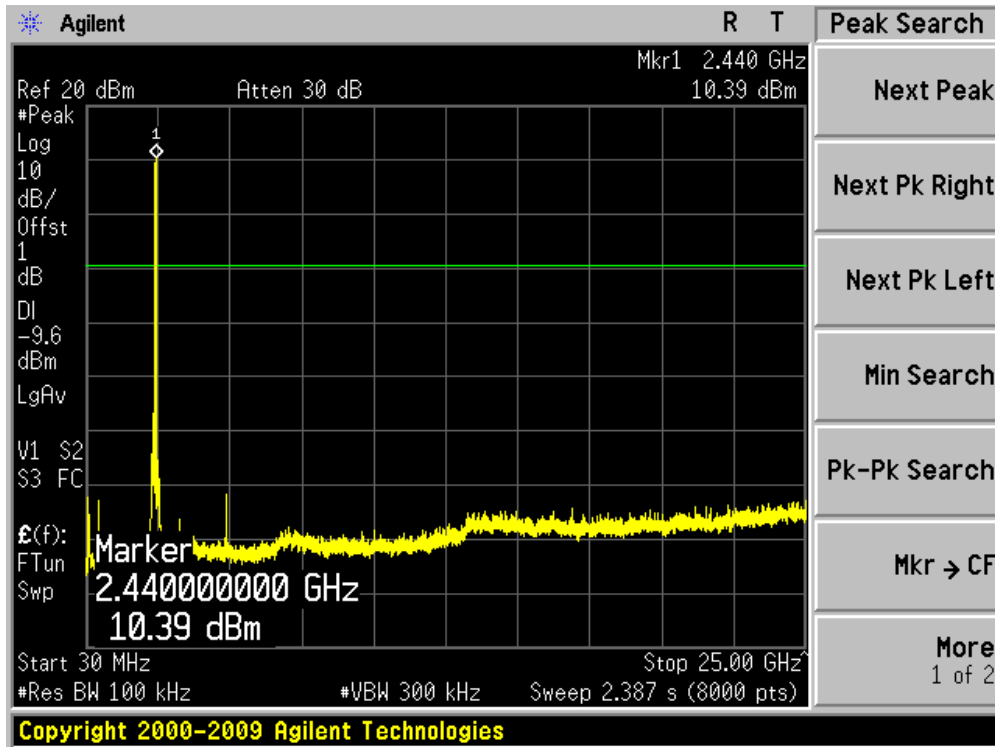


Channel 11 (2462MHz)

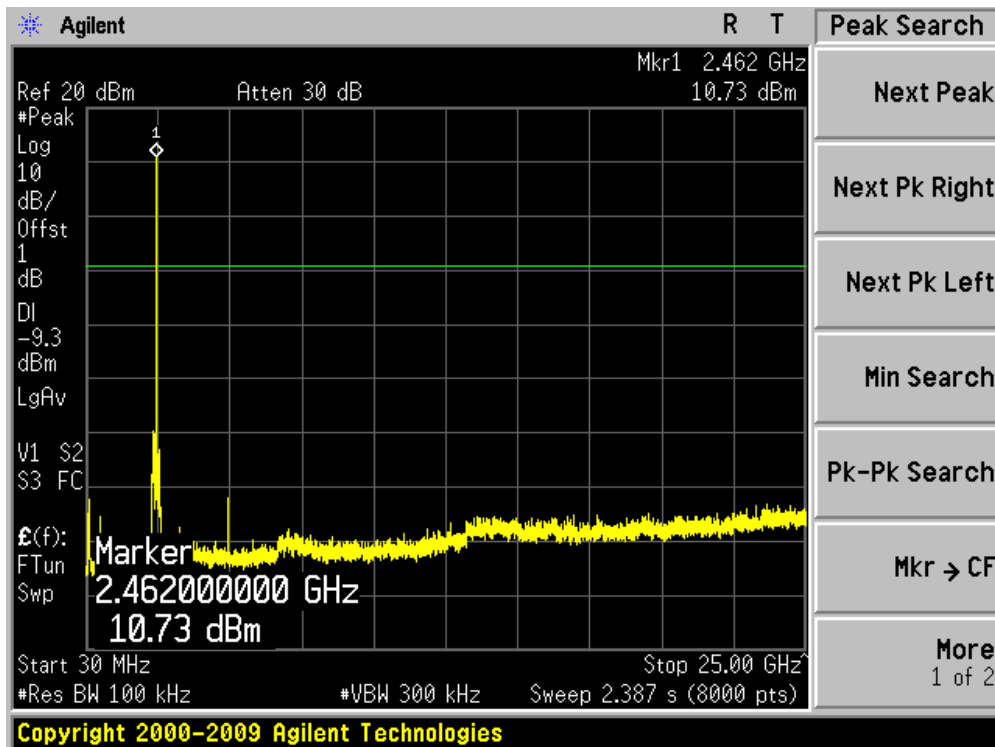


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmit by 802.11g (Chain 2)

Channel 01 (2412MHz)

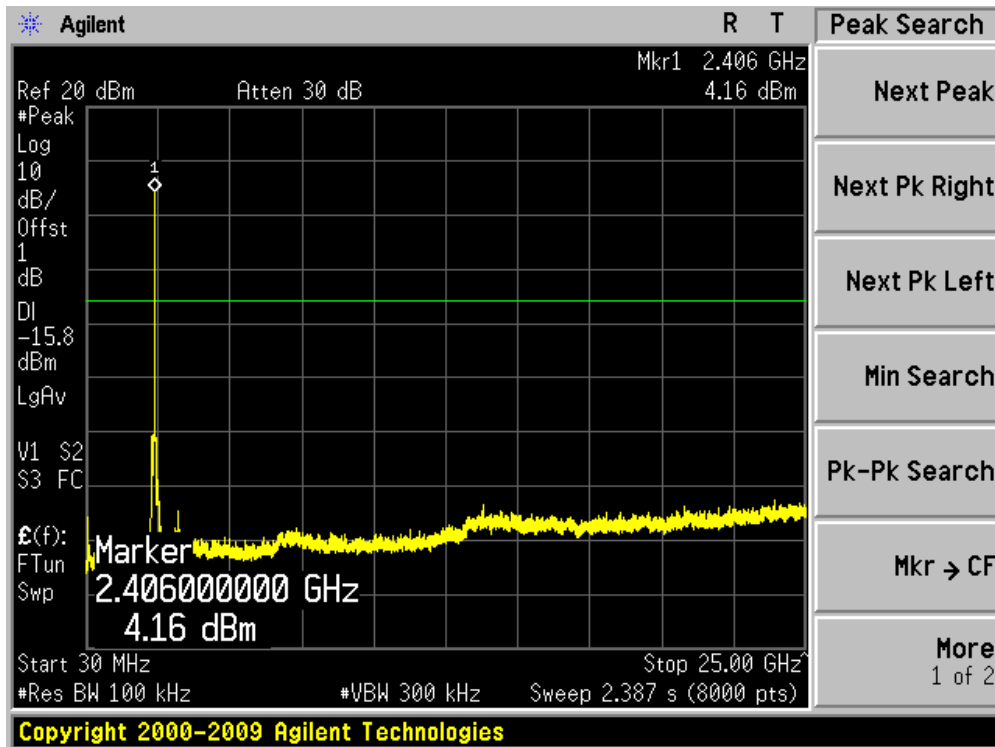




Channel 06 (2437MHz)

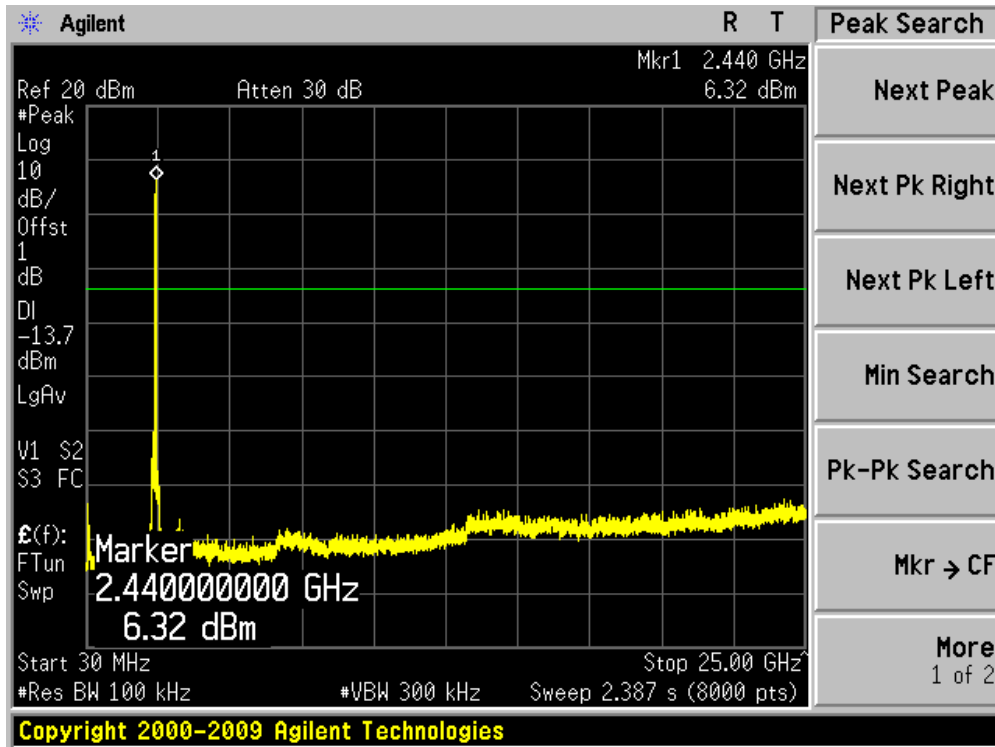


Channel 11 (2462MHz)

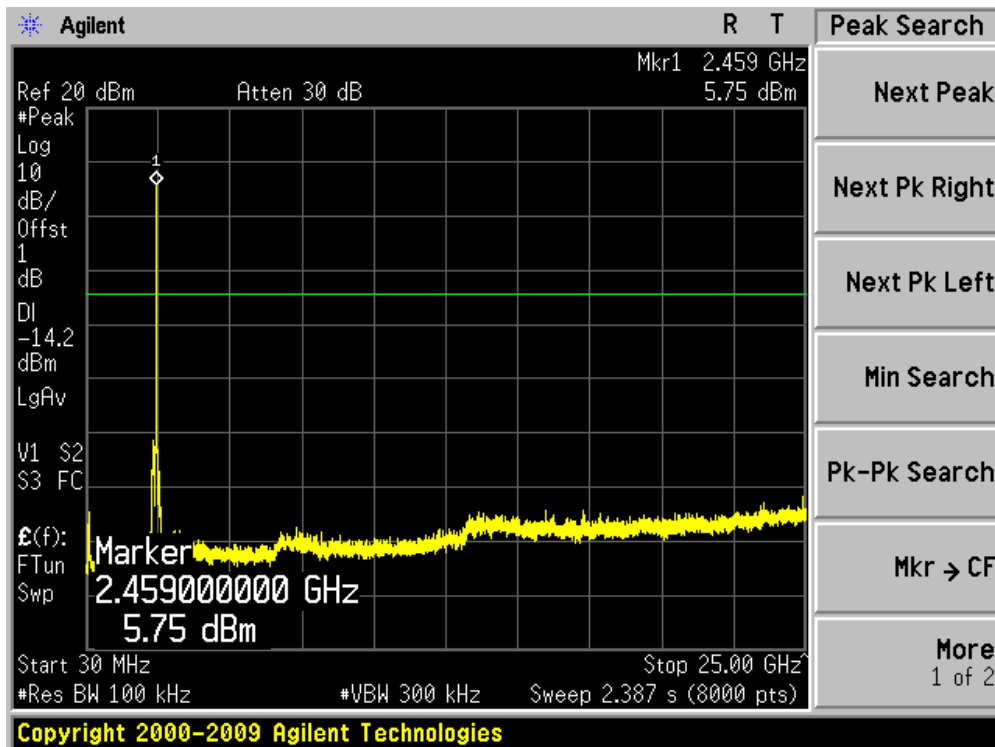


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmit by 802.11a (Chain 2)


Channel 149 (5745MHz)

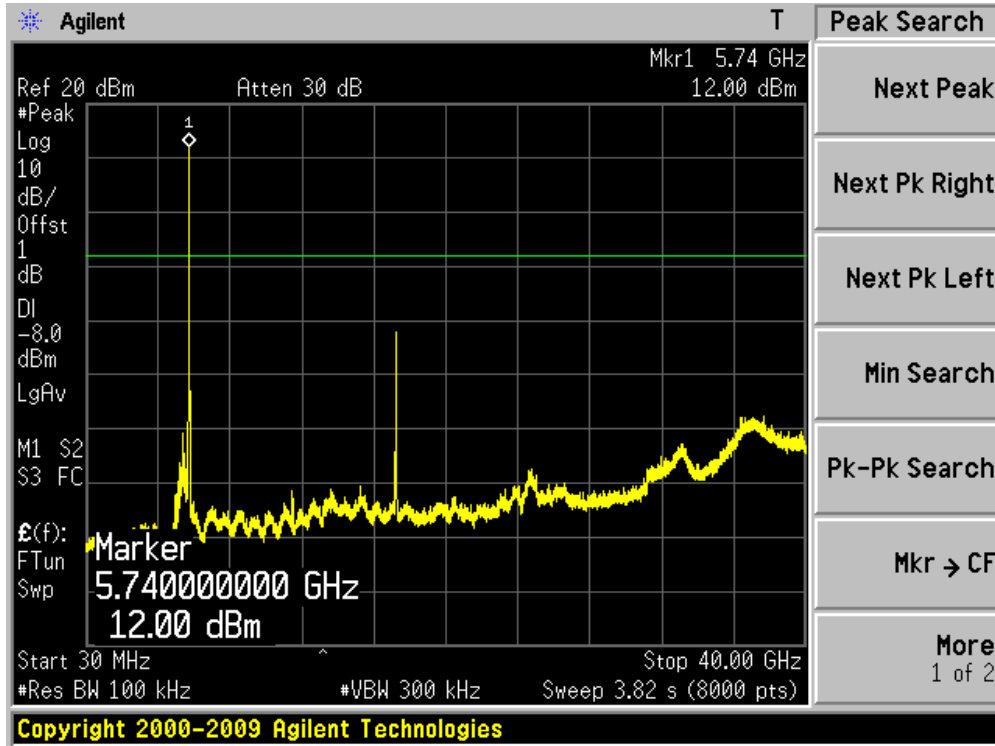

Channel 157 (5785MHz)

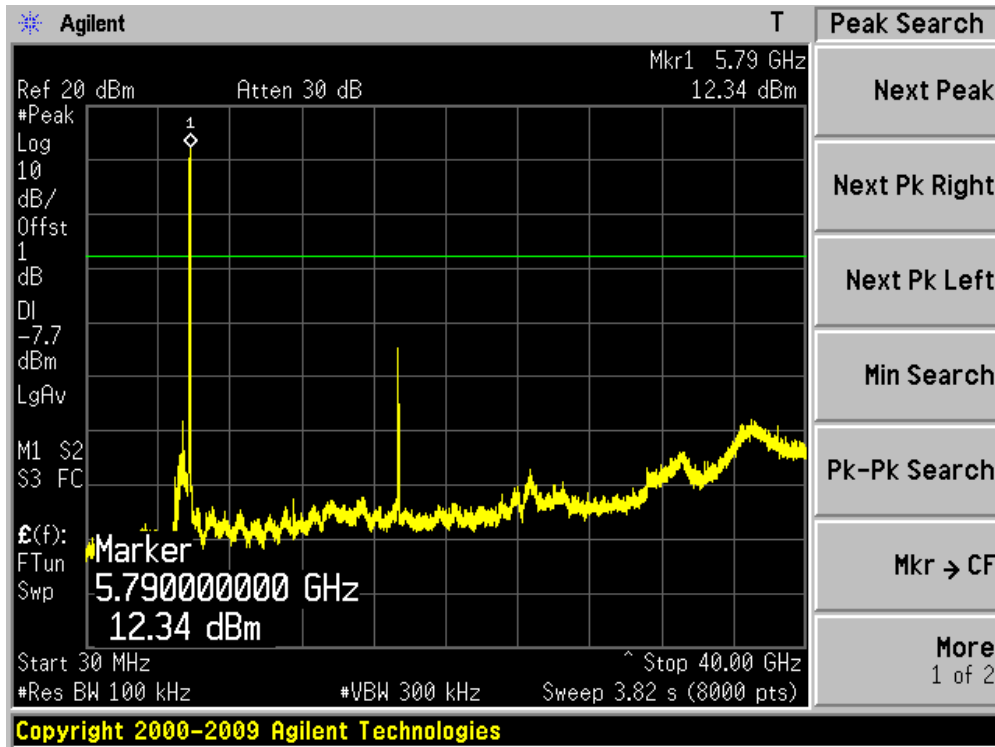


Channel 165 (5825MHz)

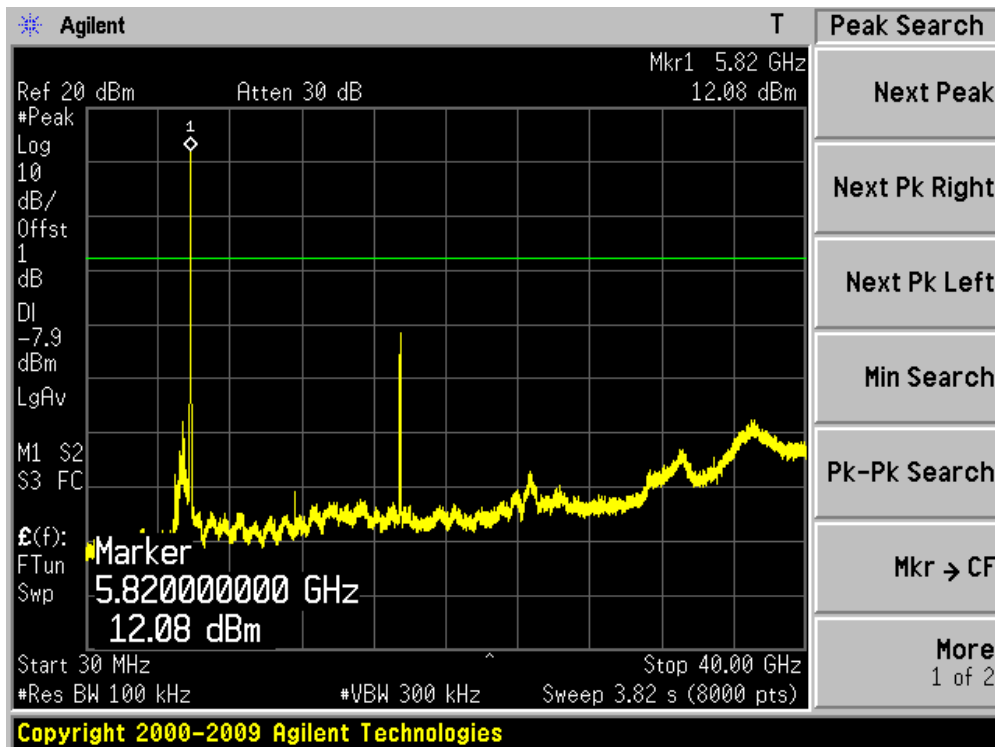


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 4: Transmit by 802.11n (20MHz) (Chain 2)


Channel 01 (2412MHz)

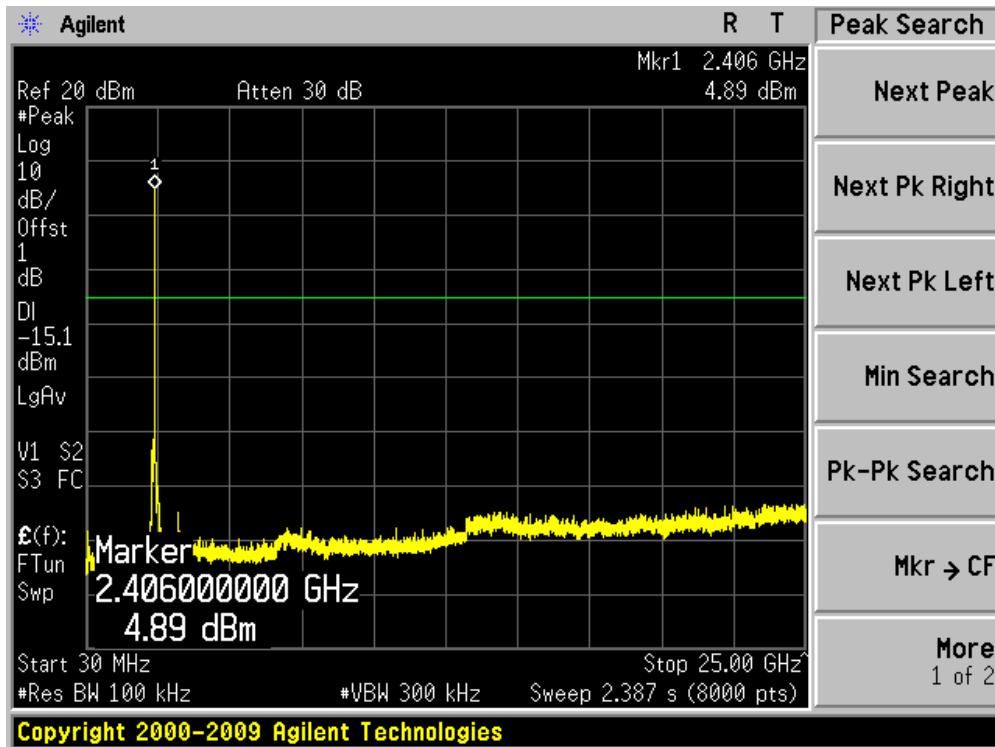


Channel 06 (2437MHz)

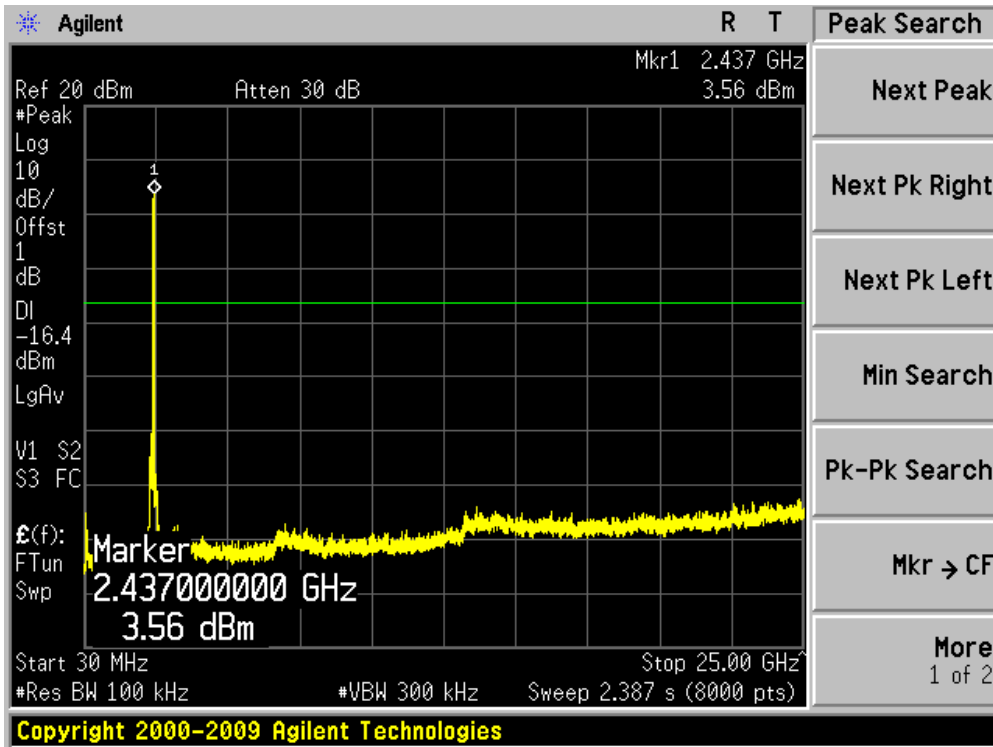


Channel 11 (2462MHz)

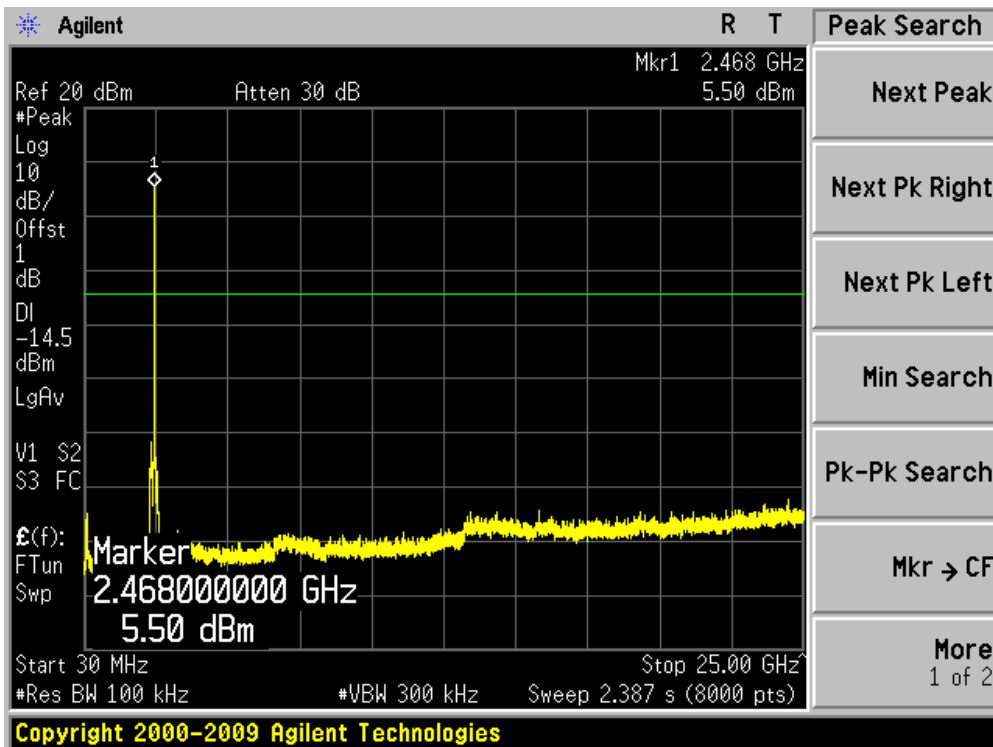


Channel 149 (5745MHz)

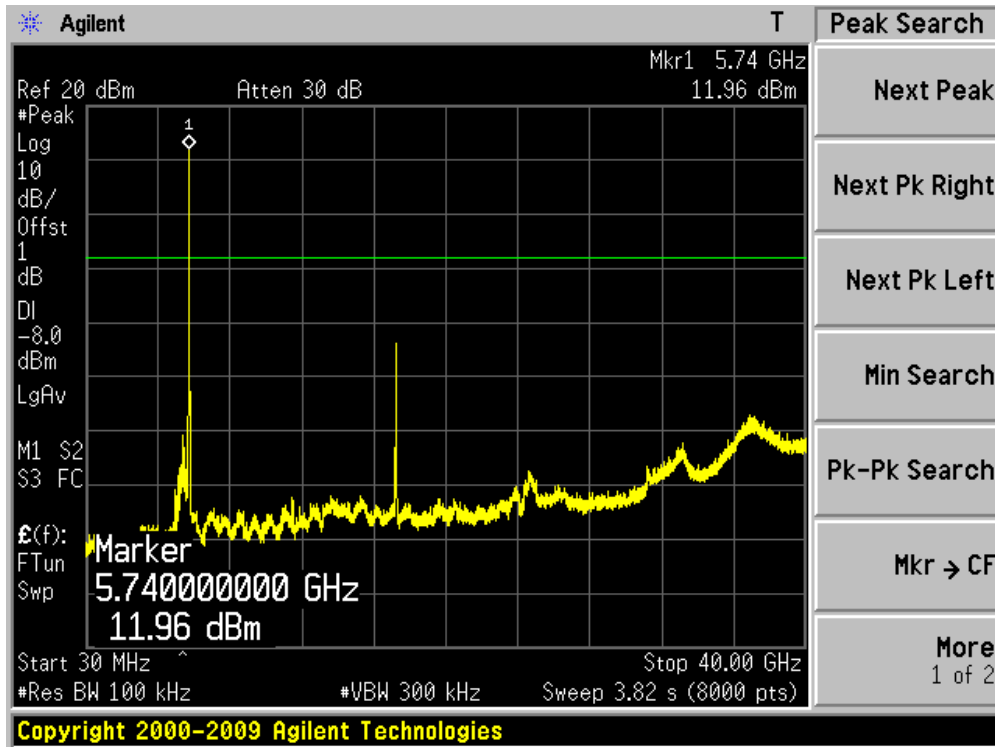

Channel 157 (5785MHz)

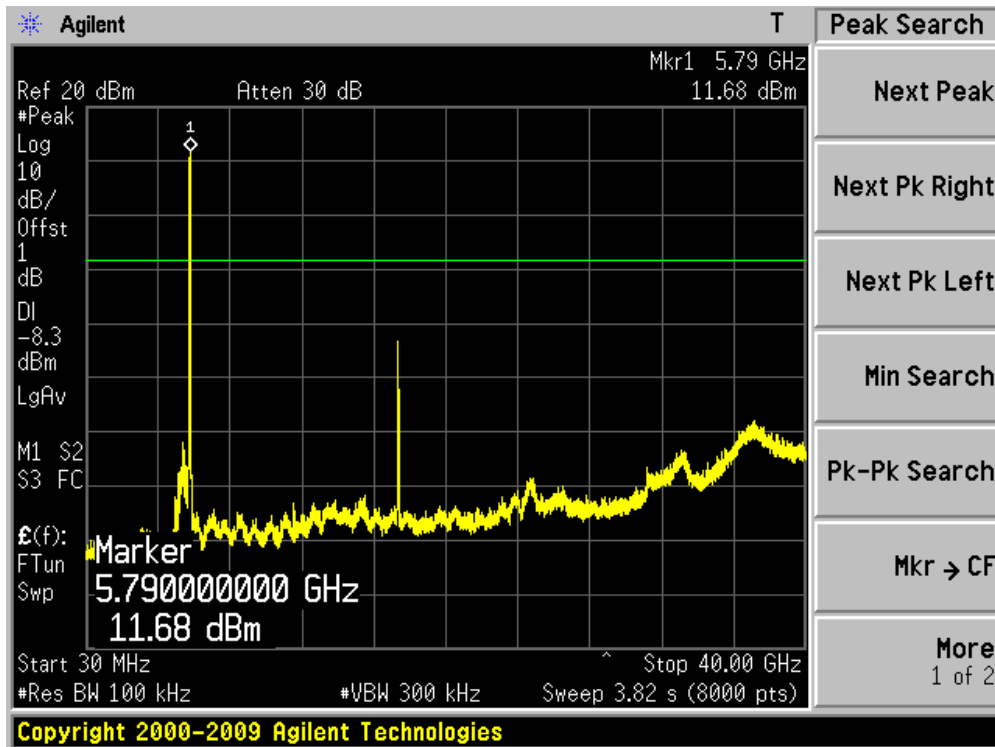


Channel 165 (5825MHz)

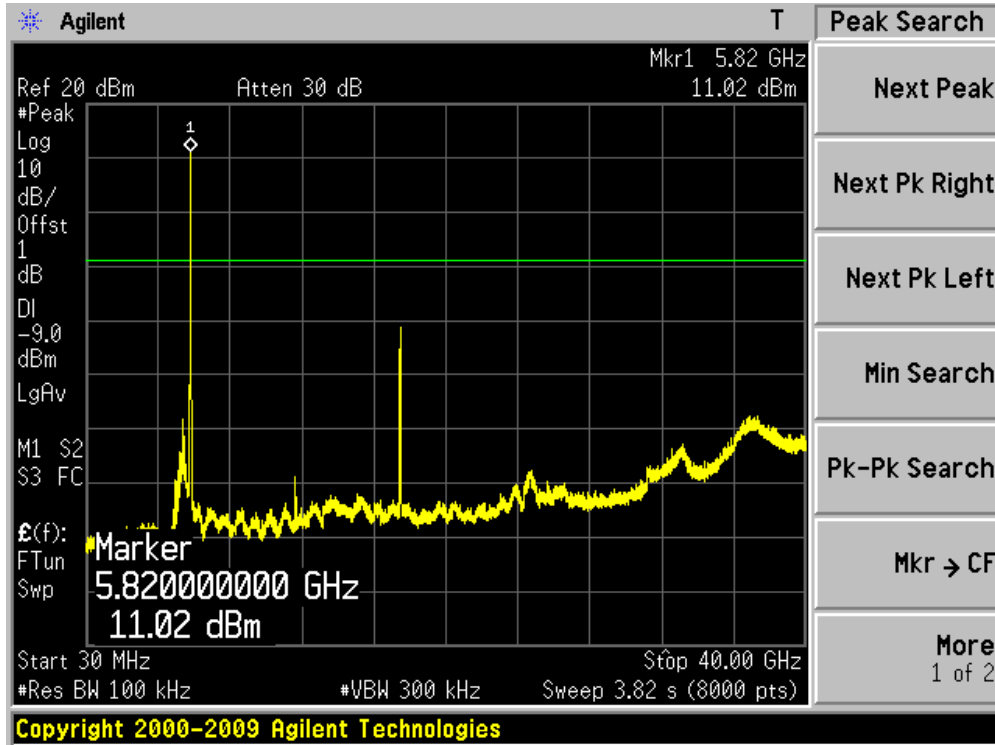


Product	:	Wireless LAN access Point
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 5: Transmit by 802.11n (40MHz) (Chain 2)

Channel 03 (2422MHz)

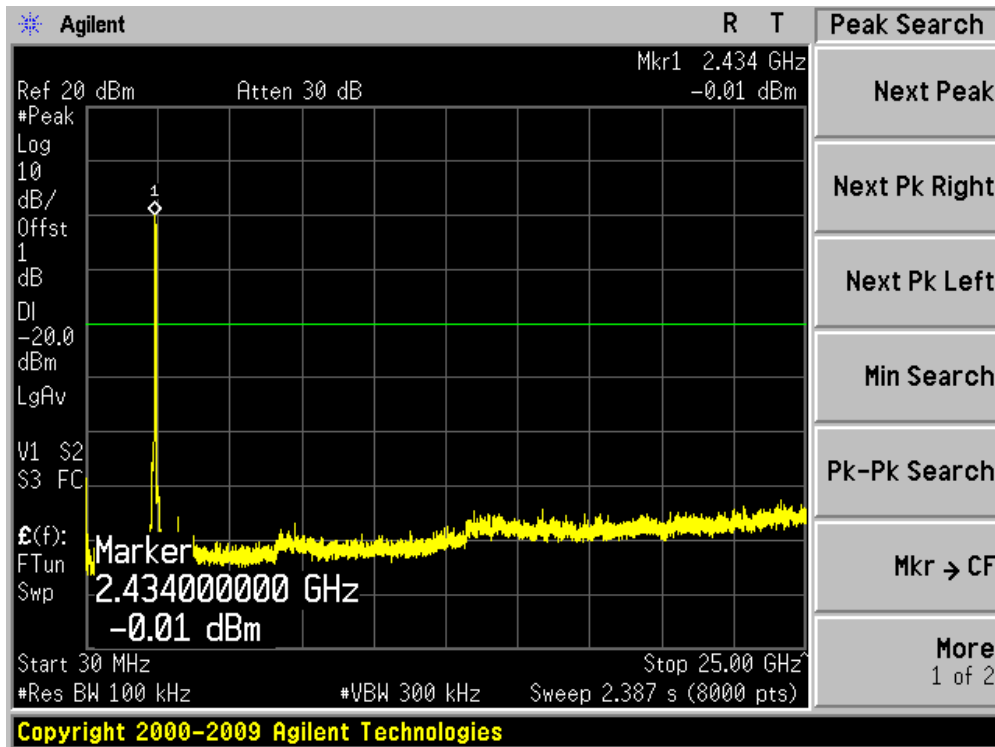





Channel 06 (2437MHz)

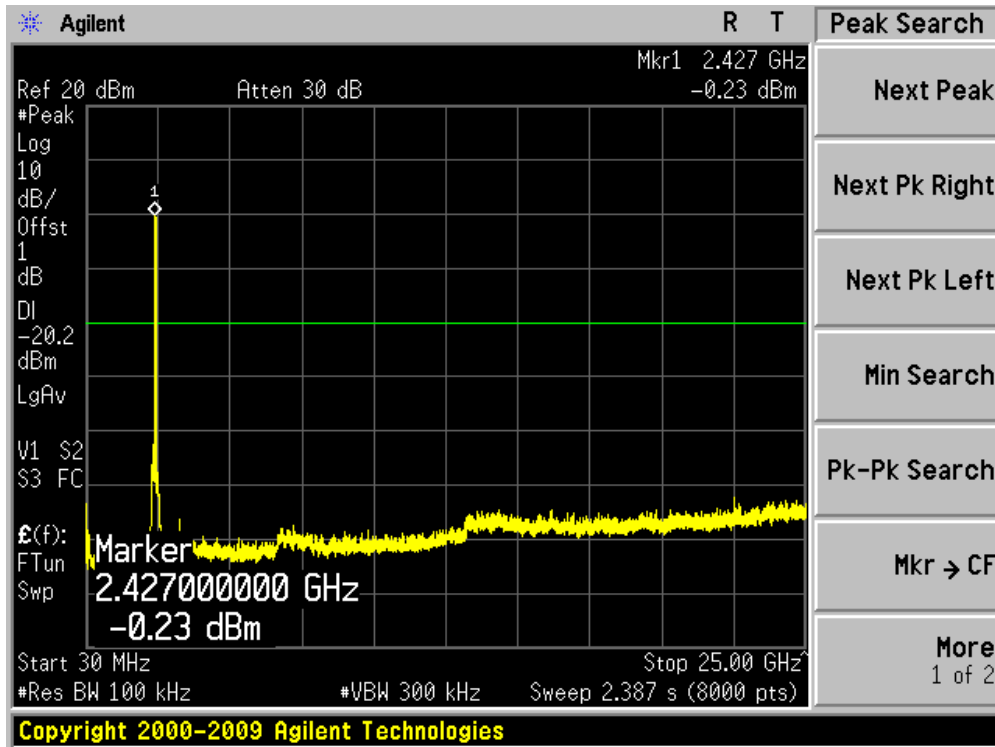


Channel 09 (2452MHz)

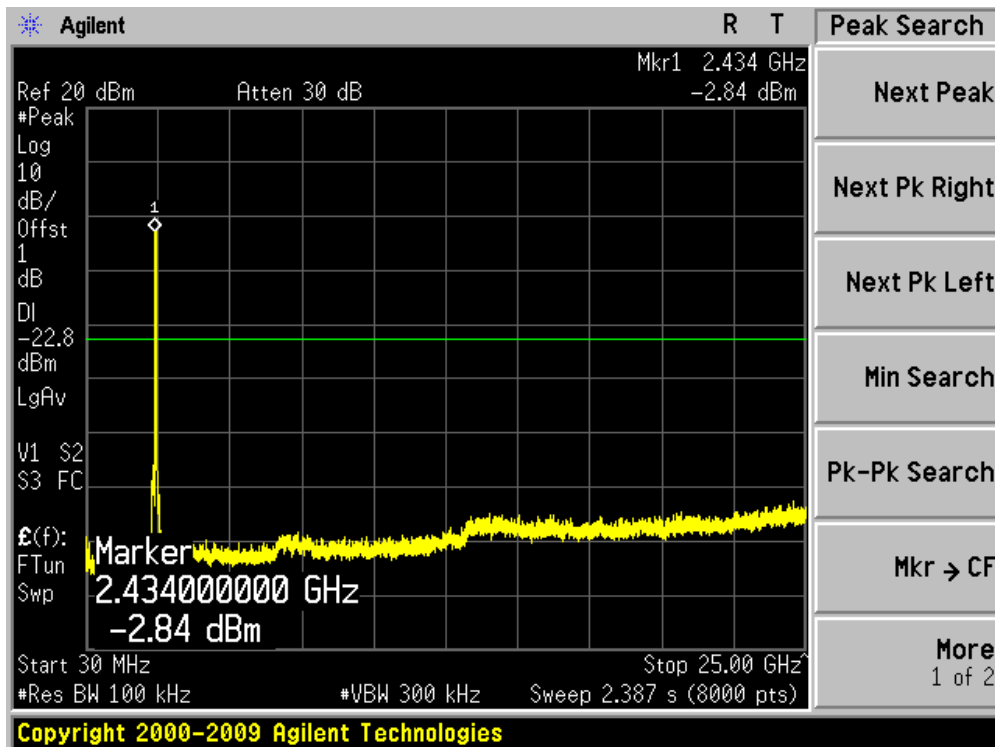

Channel 151 (5755MHz)

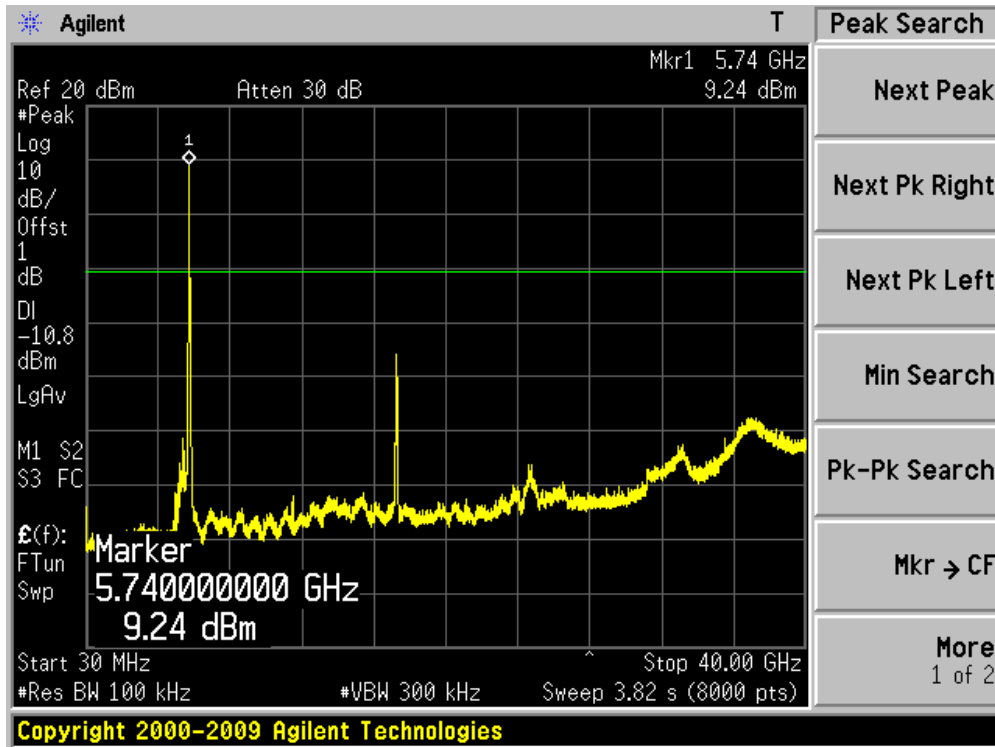

Channel 159 (5795MHz)

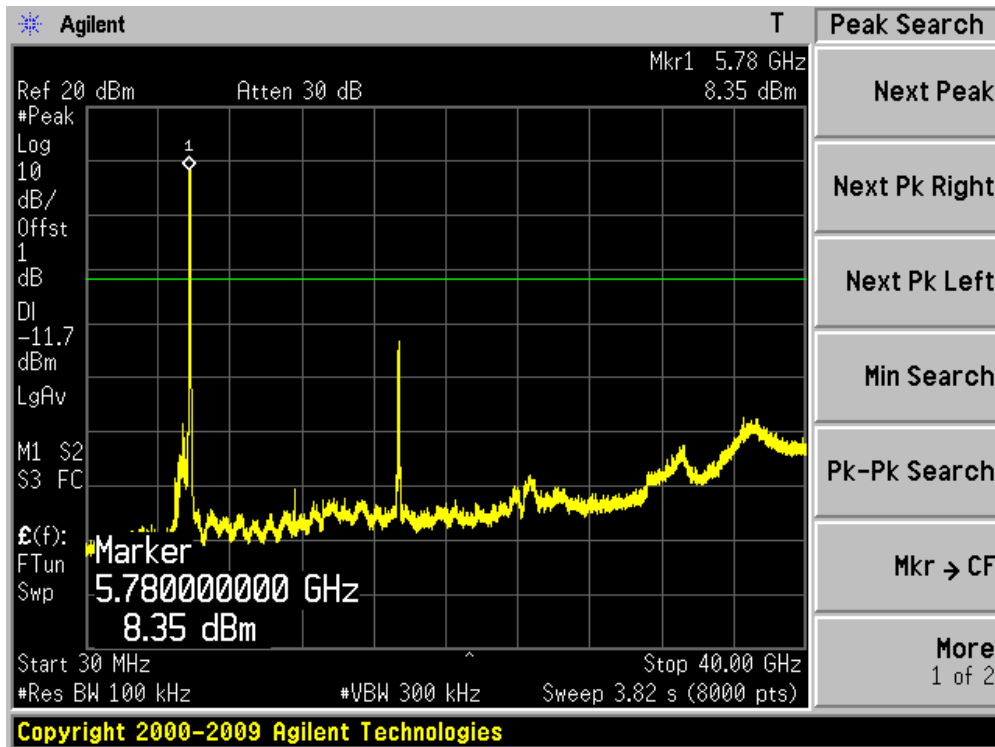

**6. Radiated Emission Band Edge**


**6.1. Test Equipment**

Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2012.04.23
EMI Test Receiver	R&S	ESCI	100573	2012.04.23
Preamplifier	Quietek	AP-025C	CHM-0511006	2012.04.12
Preamplifier	Quietek	AP-180C	CHM-0602013	2012.03.07
Bilog Type Antenna	Schaffner	CBL6112B	2932	2012.10.18
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2012.06.11
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2012.05.05
Temperature/Humidity Meter	zhicheng	ZC1-2	AC5-TH	2012.01.14

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

**6.2. Test Setup**

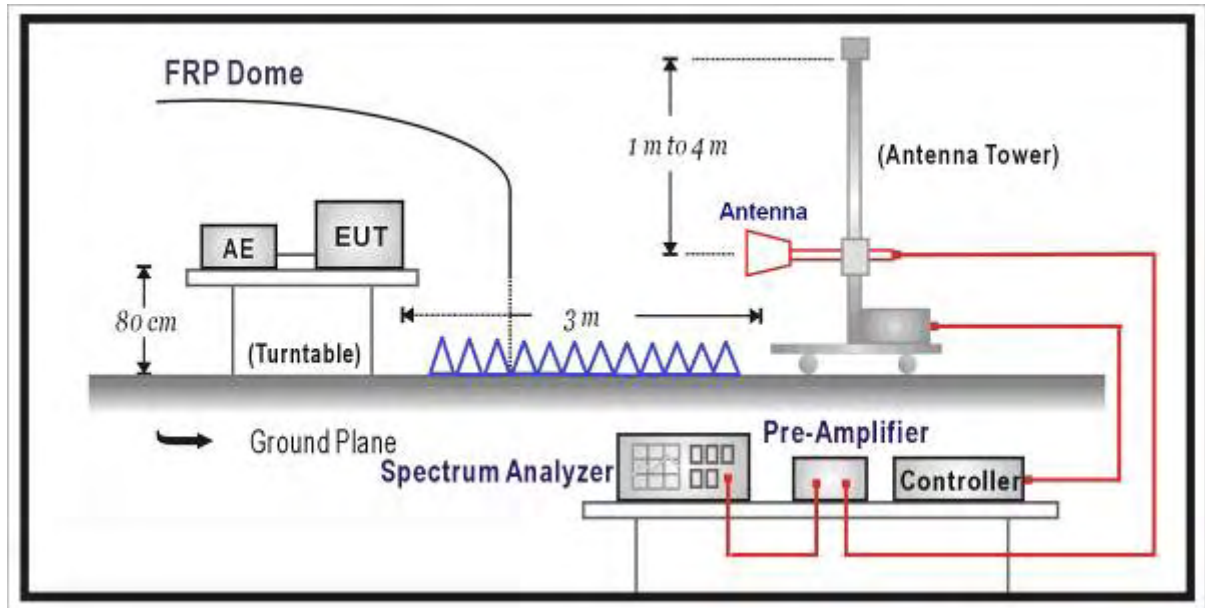

**6.3. Limit**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**6.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.


**6.5. Uncertainty**

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB

## 6.6. Test Result


Test by external antenna(Dipole Antenna)

Profile: 11BS004R	Page No.: 1
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 0)	

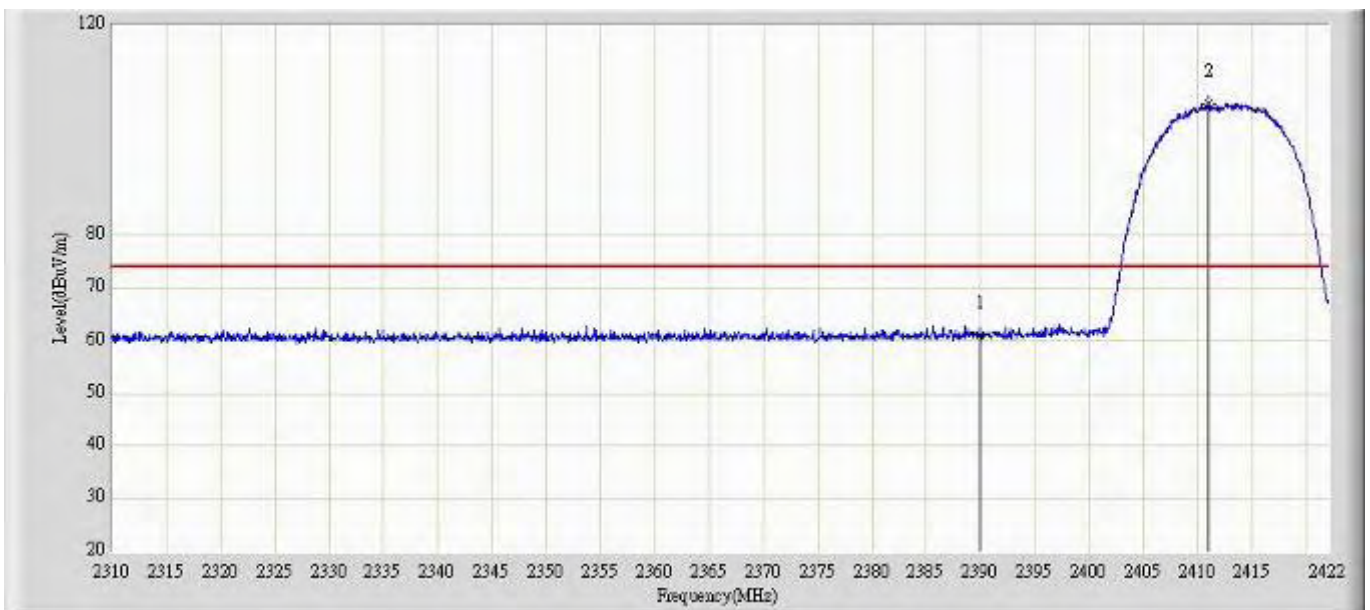


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.057	29.872	-12.943	74.000	31.185	PK
2		*	2411.024	105.029	73.849	N/A	N/A	31.180	PK

Profile: 11BS004R	Page No.: 2
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 0)	

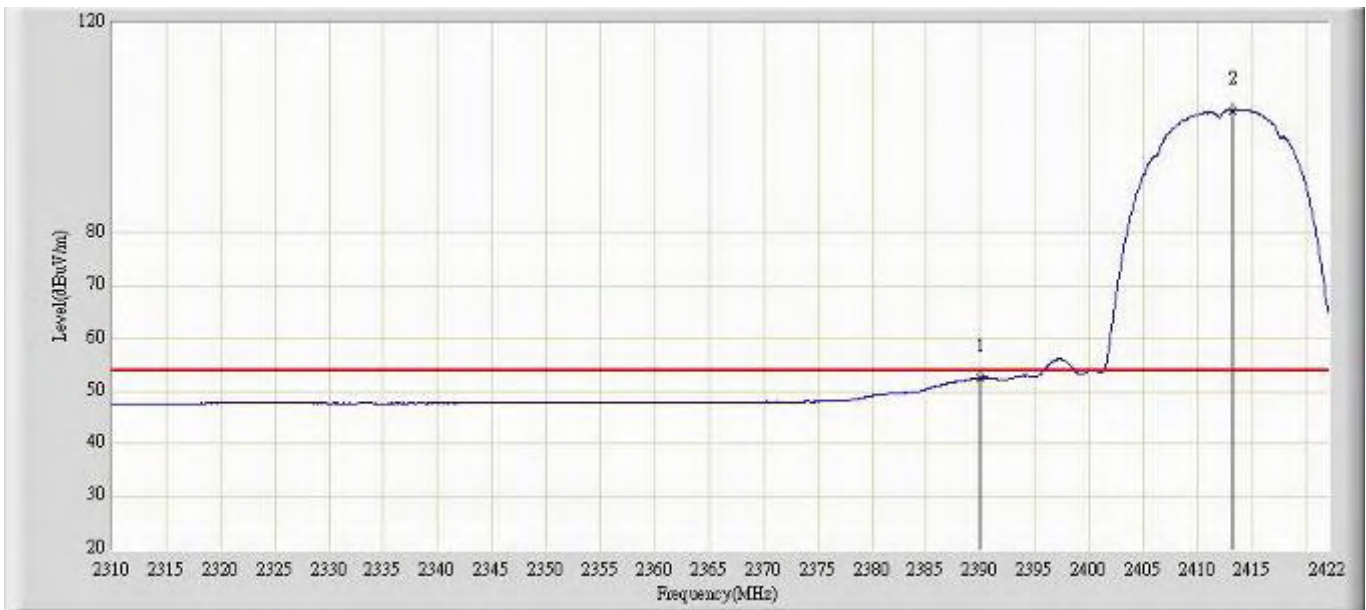


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.485	21.300	-1.515	54.000	31.185	AV
2		*	2413.208	103.365	72.184	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 3
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 0)	

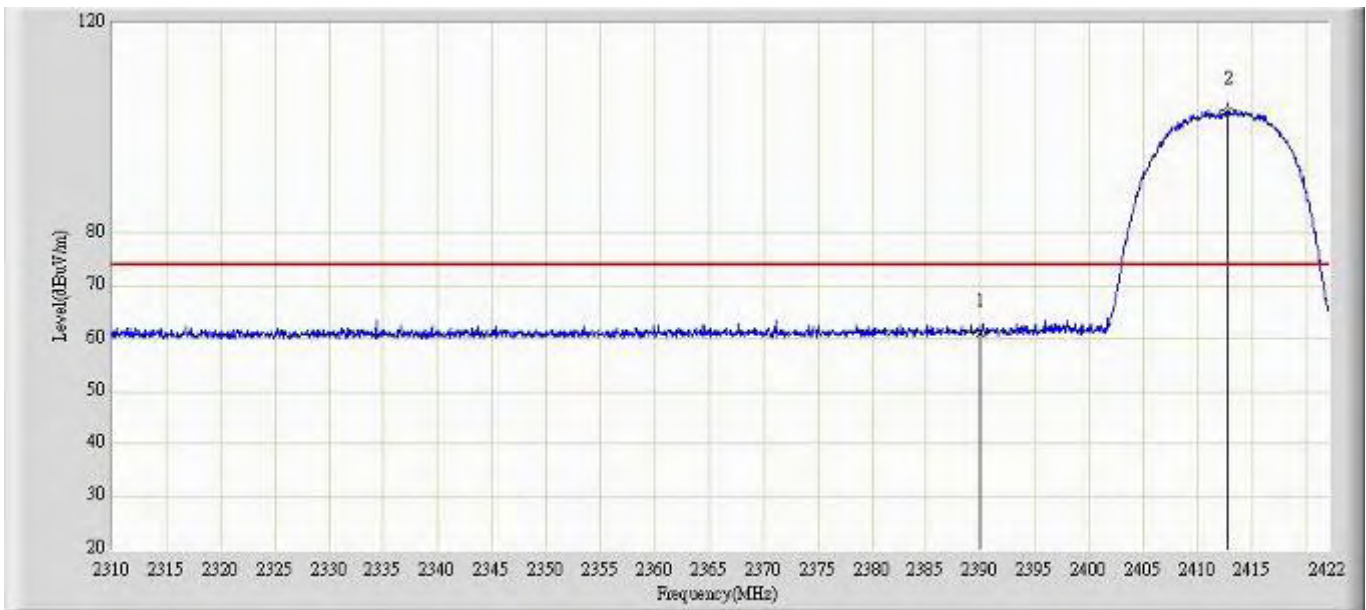

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.104	29.919	-12.896	74.000	31.185	PK
2		*	2412.760	103.201	72.020	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 4
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 0)	

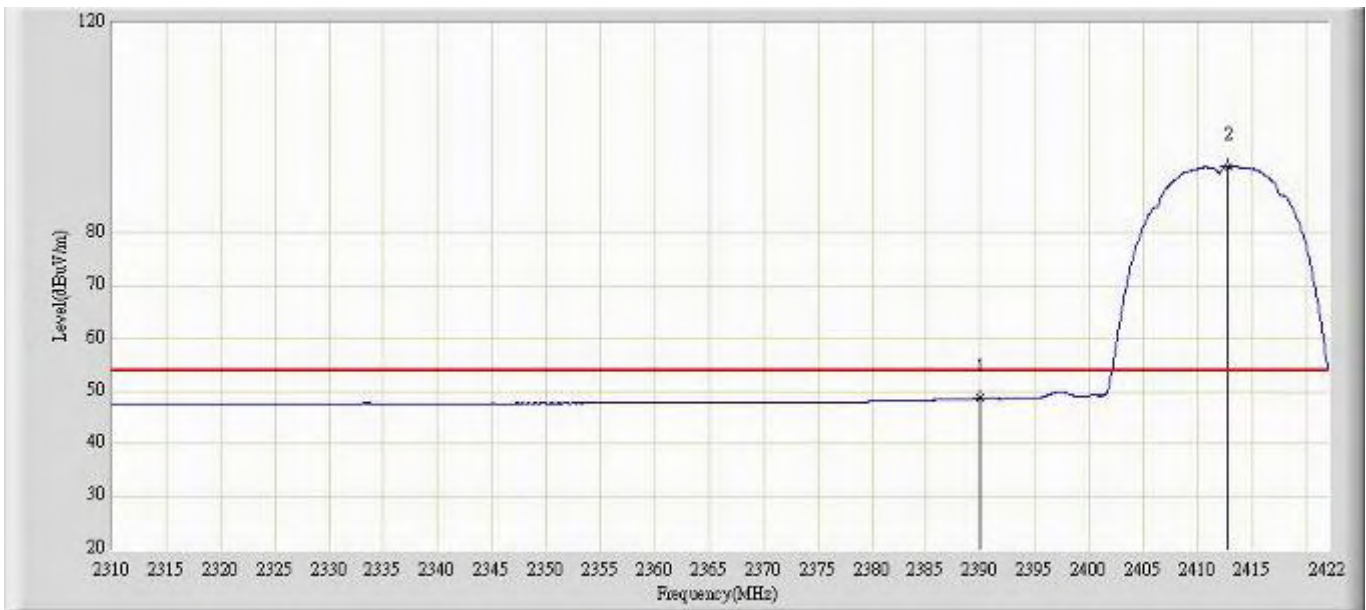

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.646	17.461	-5.354	54.000	31.185	AV
2		*	2412.872	92.660	61.479	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 5
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 0)	

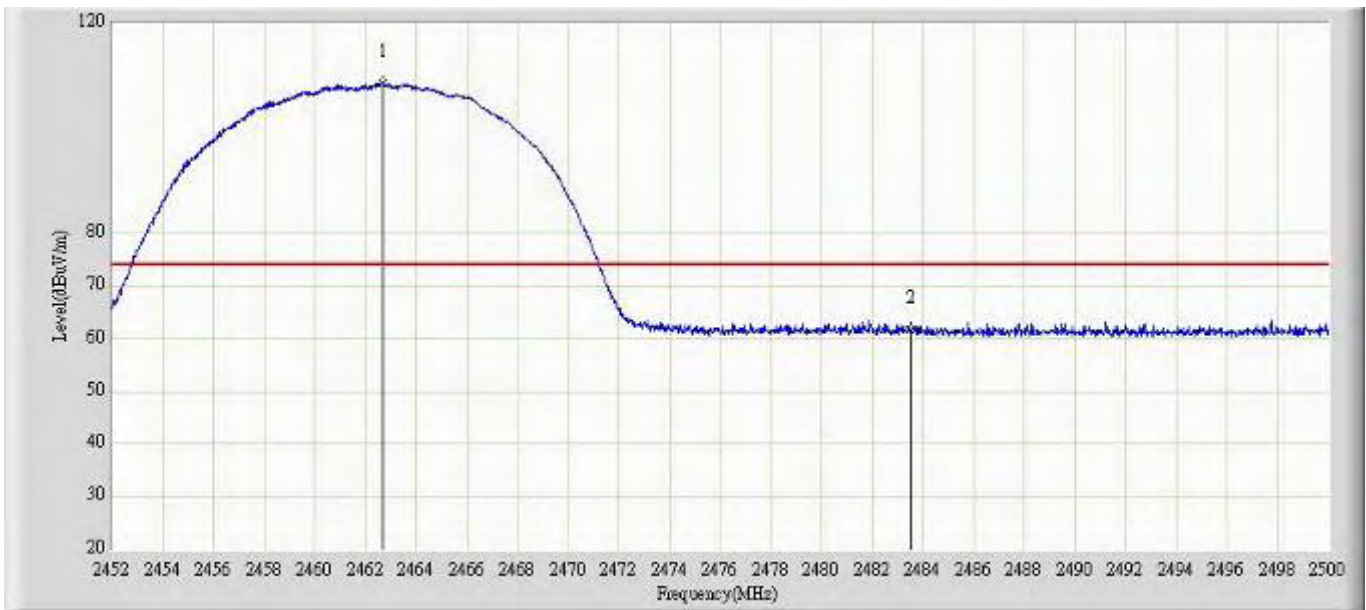


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.680	108.426	77.223	N/A	N/A	31.204	PK
2			2483.500	61.598	30.389	-12.402	74.000	31.209	PK

Profile: 11BS004R	Page No.: 6
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 0)	

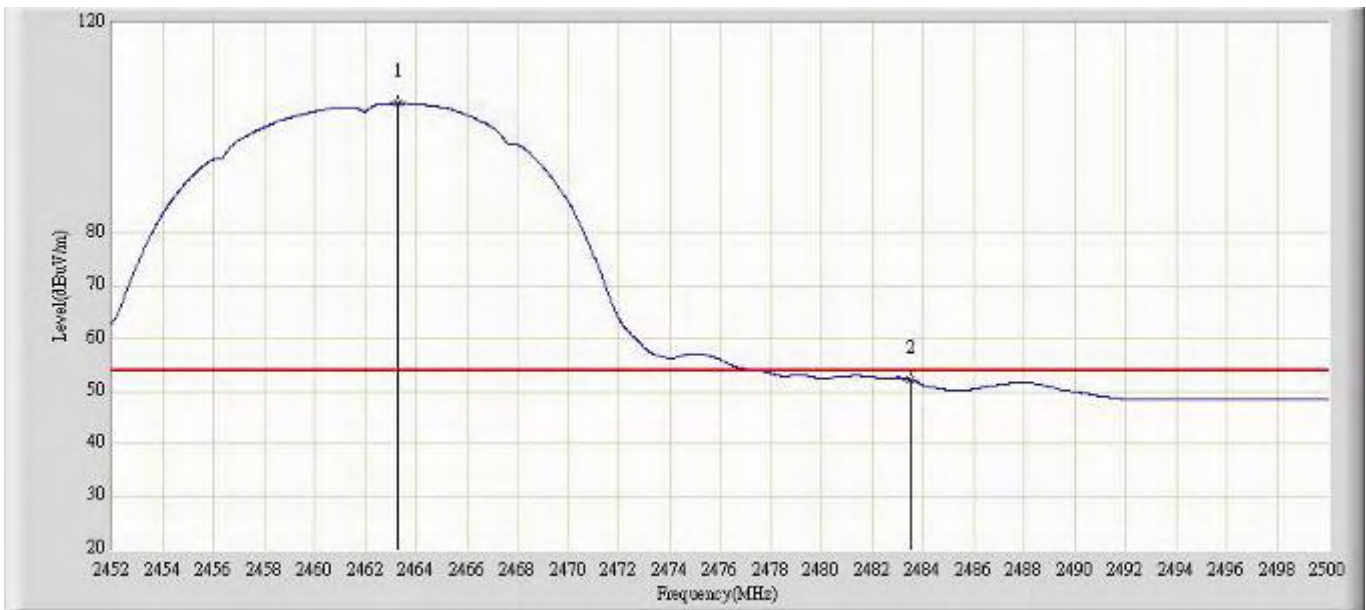


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2463.256	104.726	73.523	N/A	N/A	31.203	AV
2			2483.500	52.222	21.013	-1.778	54.000	31.209	AV

Profile: 11BS004R	Page No.: 7
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 0)	

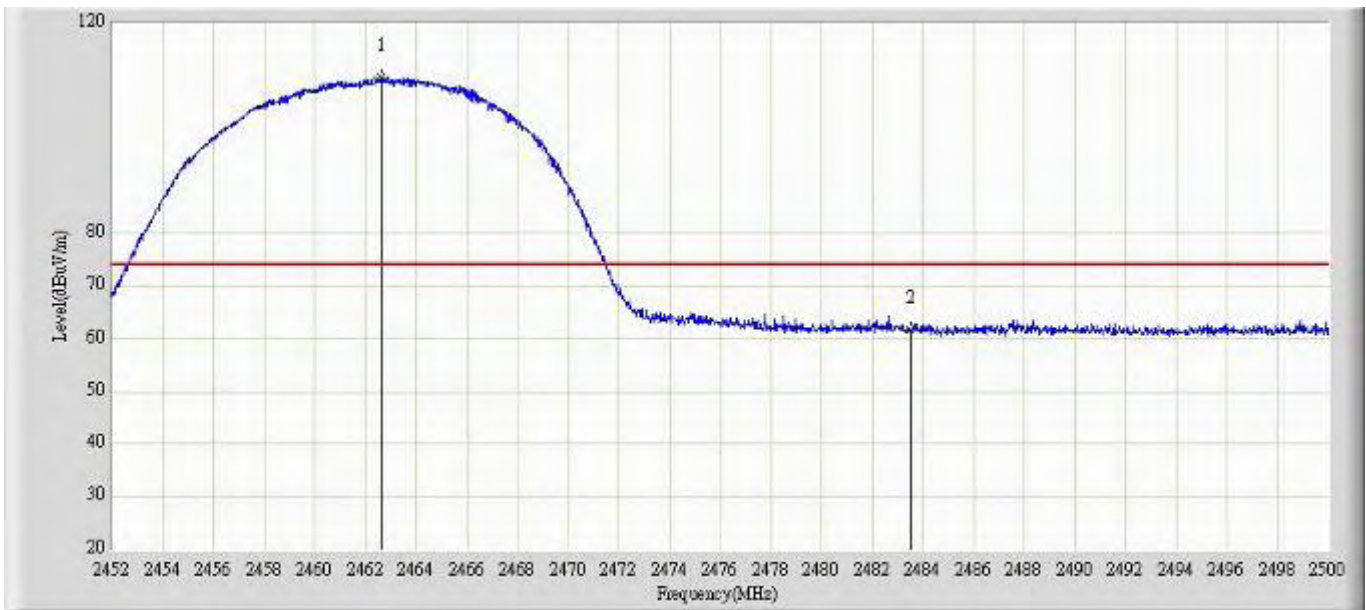


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.656	109.565	78.362	N/A	N/A	31.204	PK
2			2483.500	61.564	30.355	-12.436	74.000	31.209	PK

Profile: 11BS004R	Page No.: 8
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 0)	

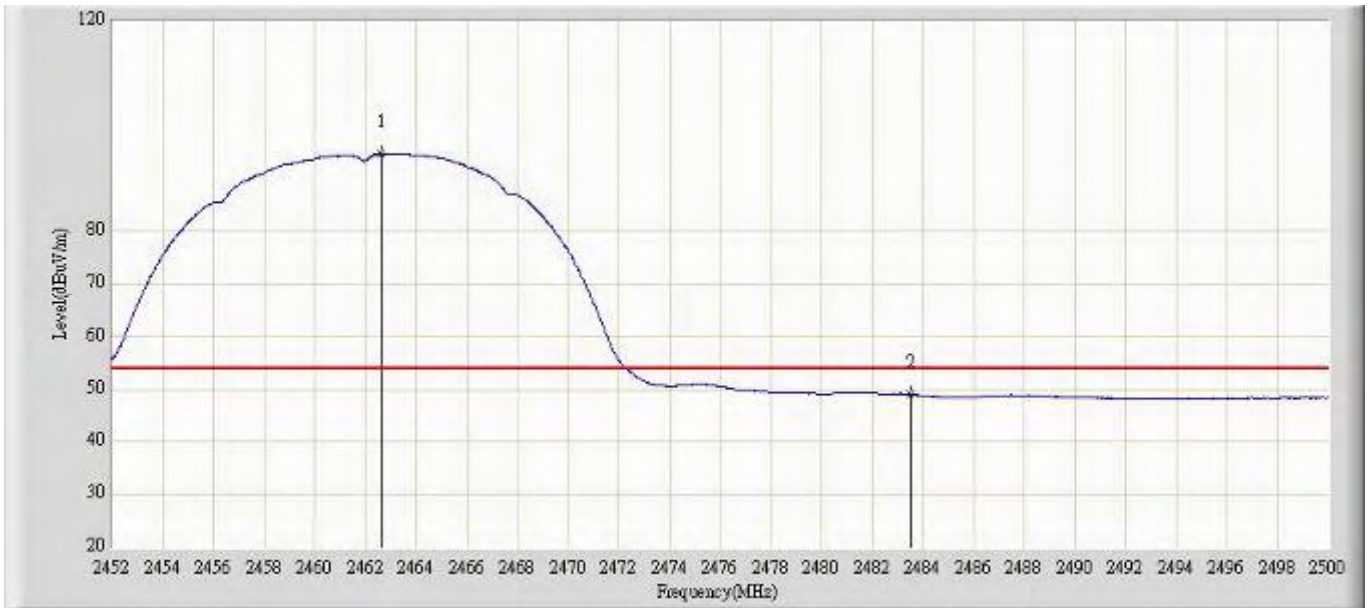


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.656	94.743	63.540	N/A	N/A	31.204	AV
2			2483.500	49.004	17.795	-4.996	54.000	31.209	AV

Profile: 11BS004R	Page No.: 9
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 1)	

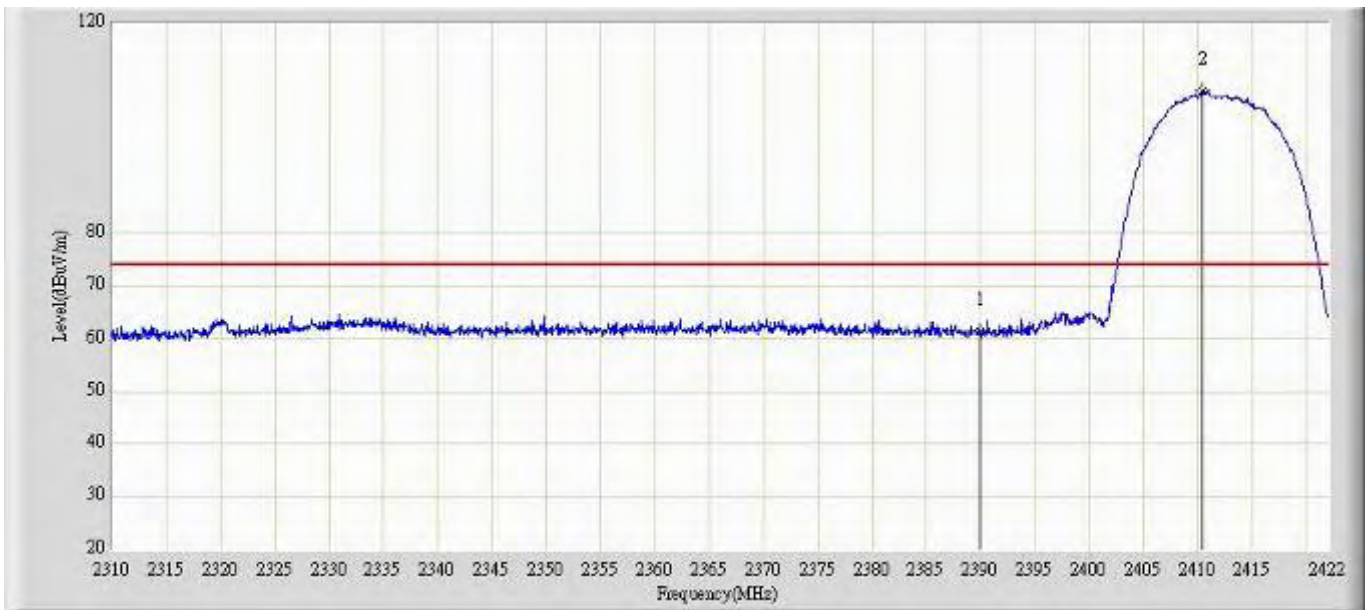


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.284	30.099	-12.716	74.000	31.185	PK
2		*	2410.408	107.068	75.888	N/A	N/A	31.180	PK

Profile: 11BS004R	Page No.: 10
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 1)	

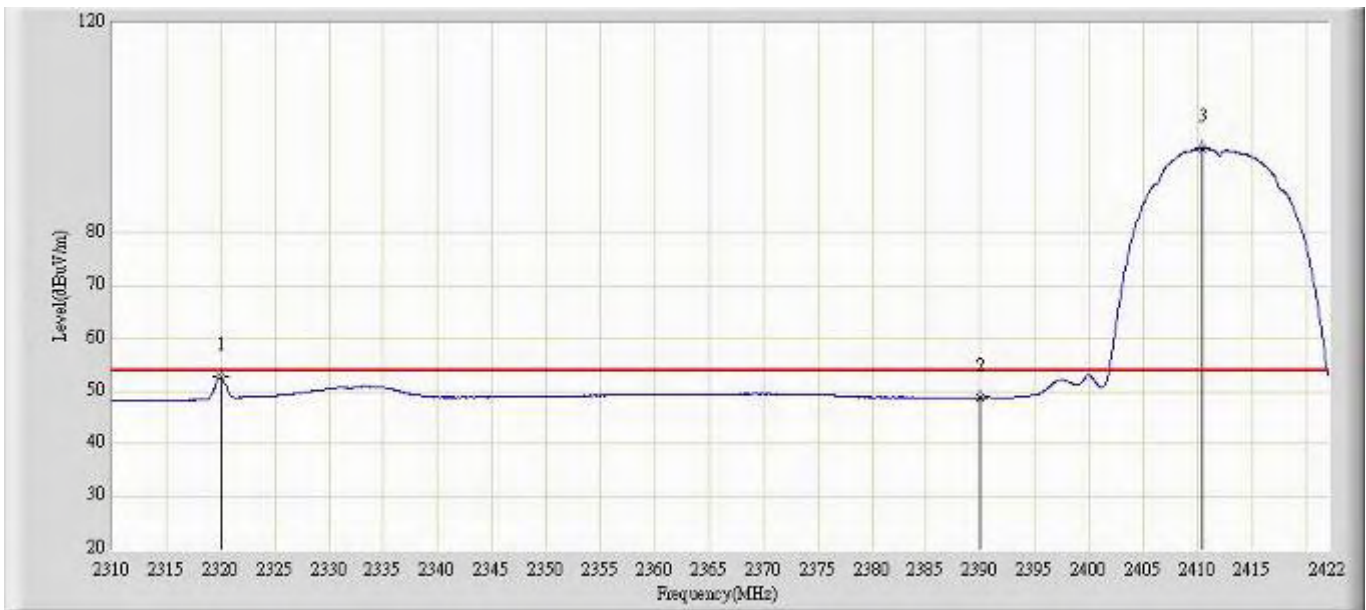


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2320.024	52.631	21.383	-1.369	54.000	31.249	AV
2			2390.000	48.855	17.670	-5.145	54.000	31.185	AV
3		*	2410.464	96.075	64.895	N/A	N/A	31.180	AV

Profile: 11BS004R	Page No.: 11
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 10:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 1)	

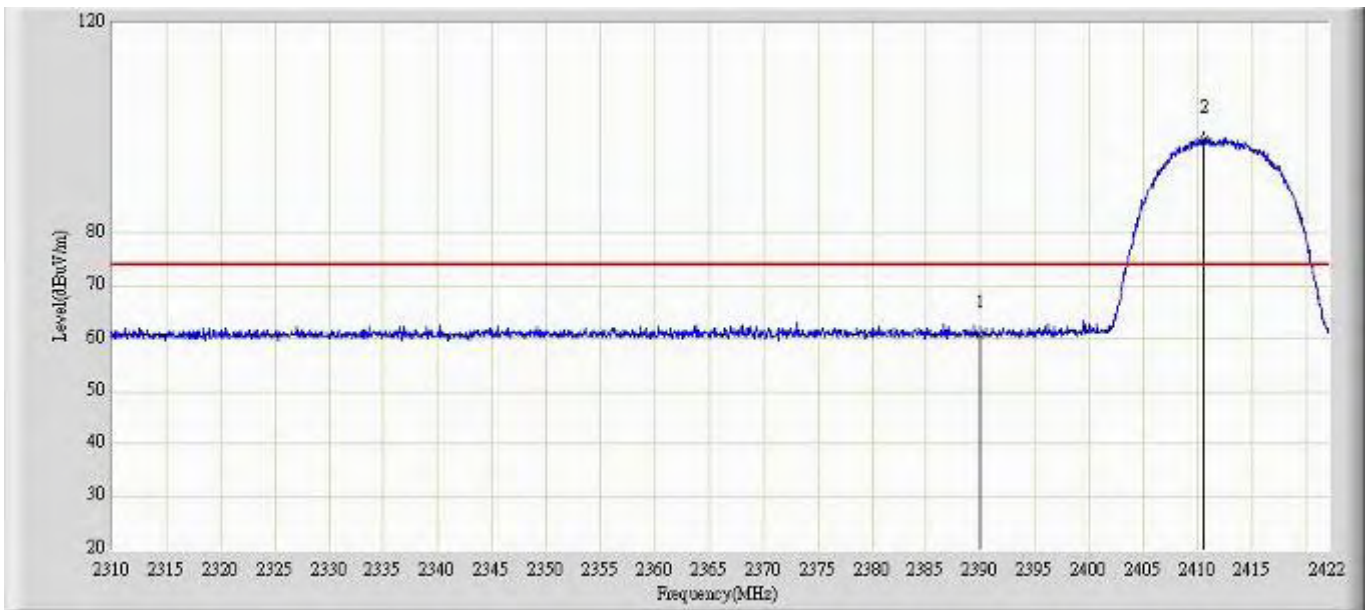

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.871	29.686	-13.129	74.000	31.185	PK
2		*	2410.632	97.967	66.787	N/A	N/A	31.180	PK


Profile: 11BS004R	Page No.: 12
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 1)	

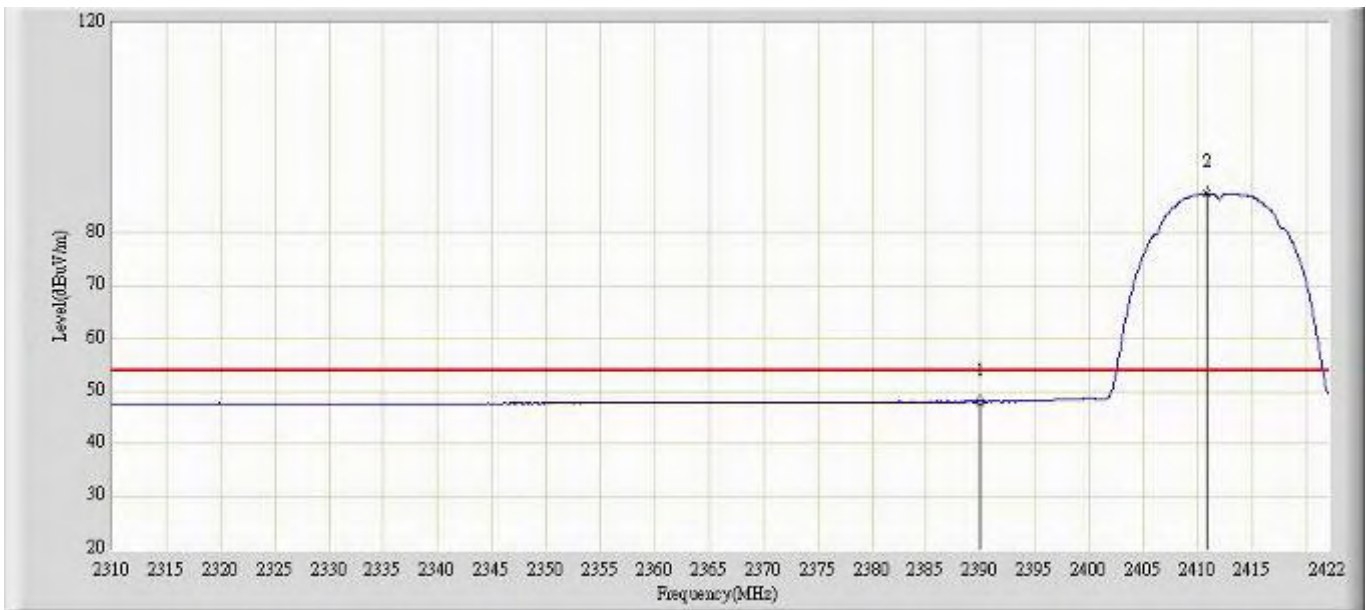

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.011	16.826	-5.989	54.000	31.185	AV
2		*	2410.800	87.618	56.438	N/A	N/A	31.180	AV




Profile: 11BS004R	Page No.: 13
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 1)	

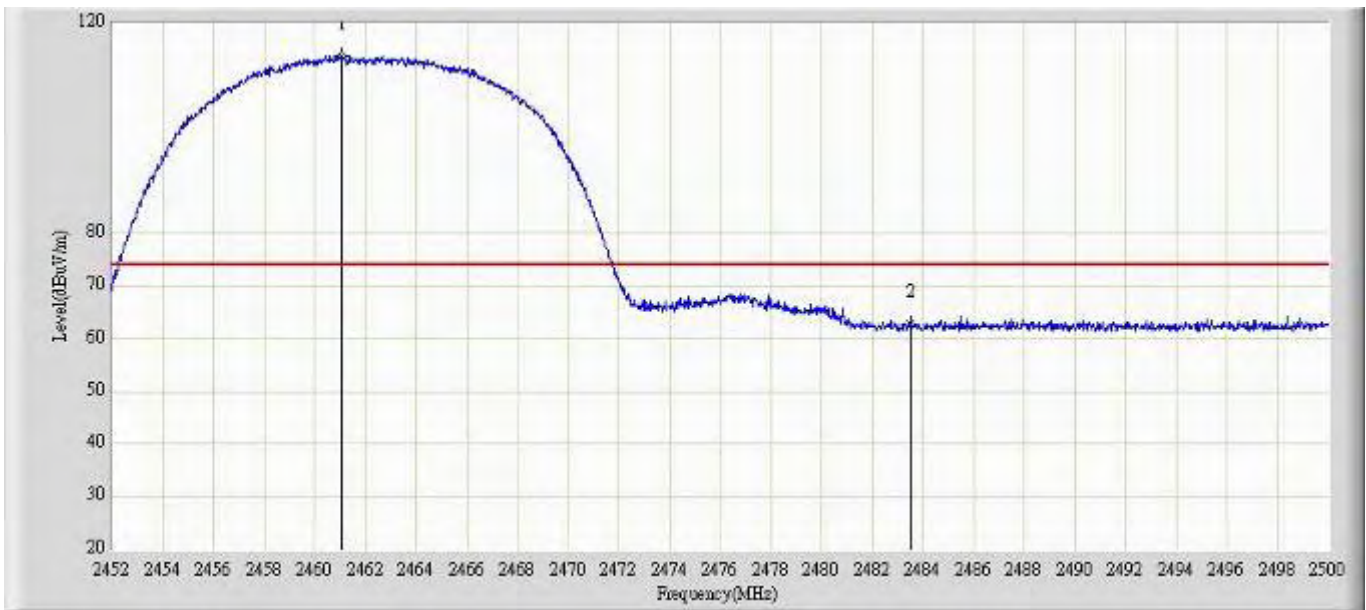


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2461.096	113.761	82.559	N/A	N/A	31.202	PK
2			2483.500	62.885	31.676	-11.115	74.000	31.209	PK

Profile: 11BS004R	Page No.: 14
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 1)	

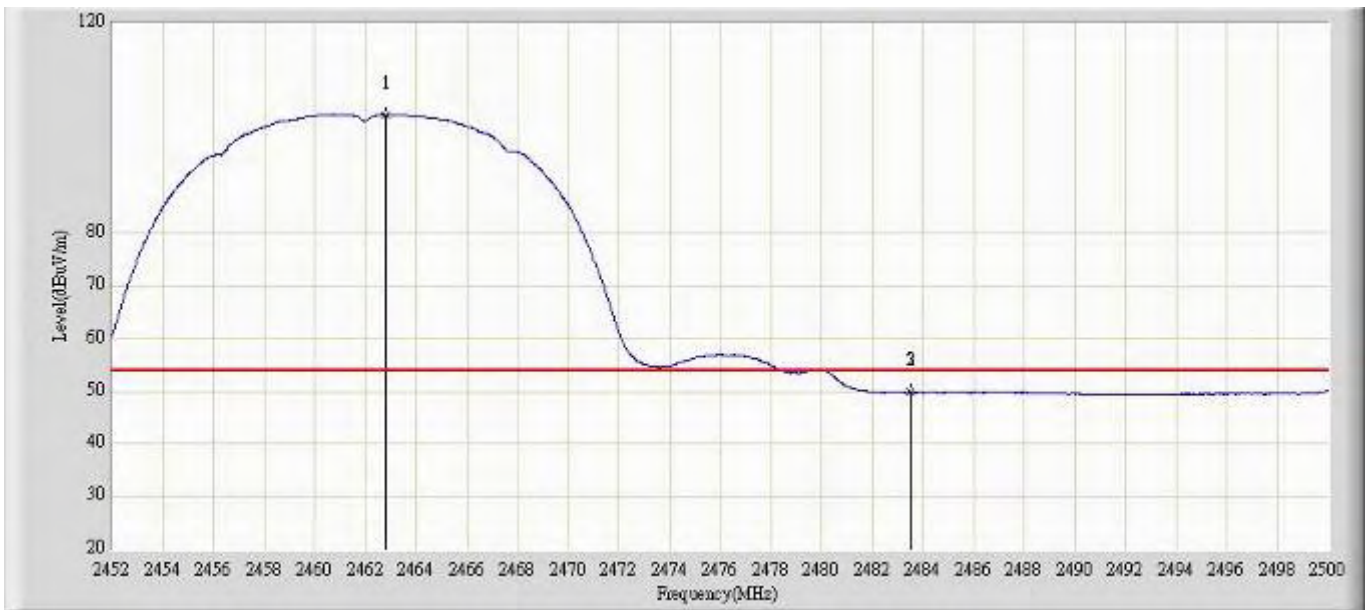


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.800	102.580	71.377	N/A	N/A	31.204	AV
2			2483.500	49.791	18.582	-4.209	54.000	31.209	AV

Profile: 11BS004R	Page No.: 15
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 1)	

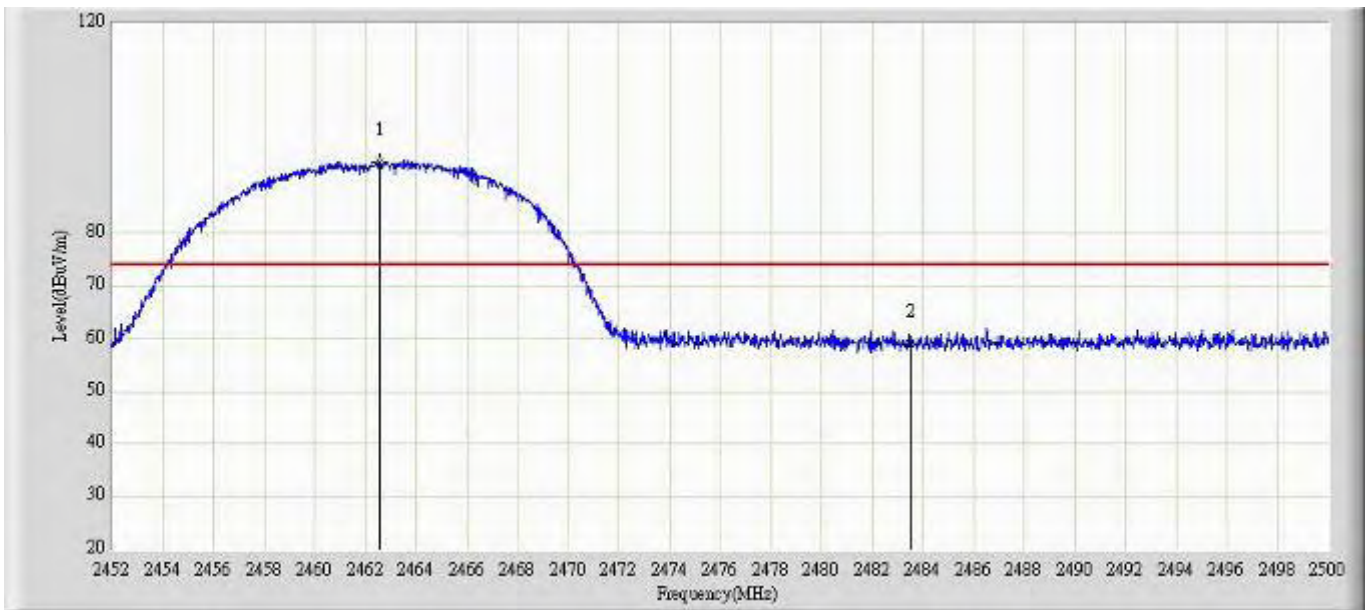


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.560	93.665	62.462	N/A	N/A	31.203	PK
2			2483.500	59.174	27.965	-14.826	74.000	31.209	PK

Profile: 11BS004R	Page No.: 16
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 1)	

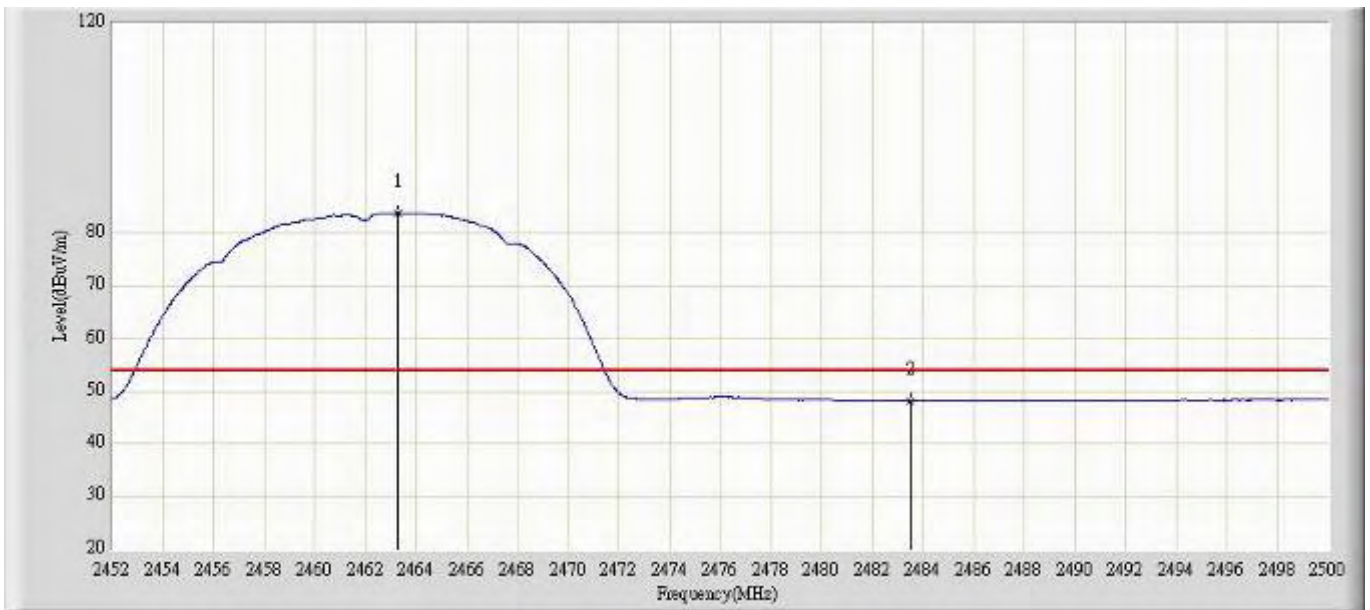


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2463.256	83.917	52.714	N/A	N/A	31.203	AV
2			2483.500	48.122	16.913	-5.878	54.000	31.209	AV

Profile: 11BS004R	Page No.: 17
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 2)	

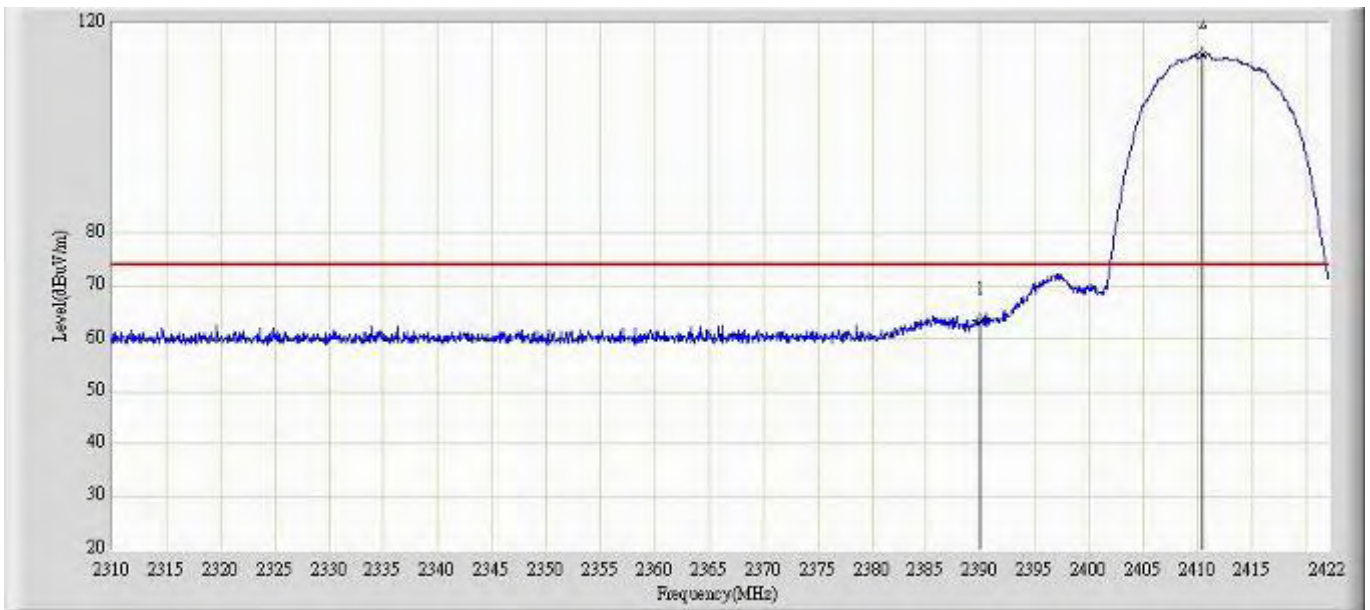


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	63.262	32.077	-10.738	74.000	31.185	PK
2		*	2410.464	114.011	82.831	N/A	N/A	31.180	PK

Profile: 11BS004R	Page No.: 18
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 2)	

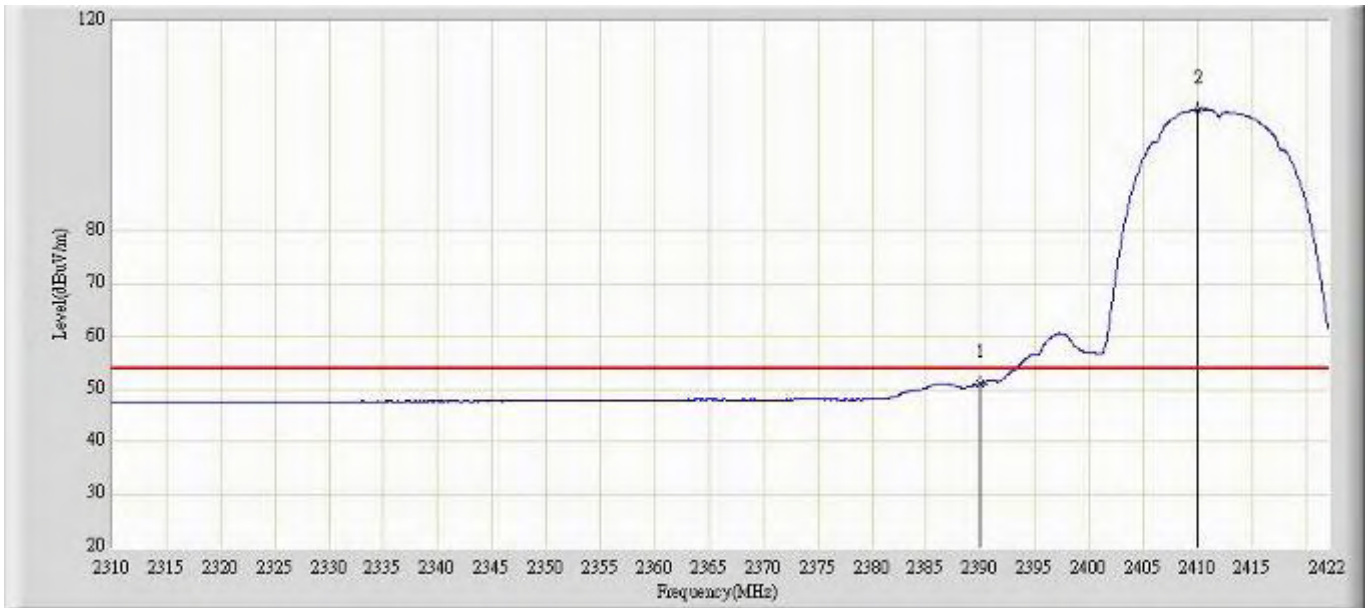


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	50.998	19.813	-3.002	54.000	31.185	AV
2		*	2410.072	103.144	71.964	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 19
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 2)	

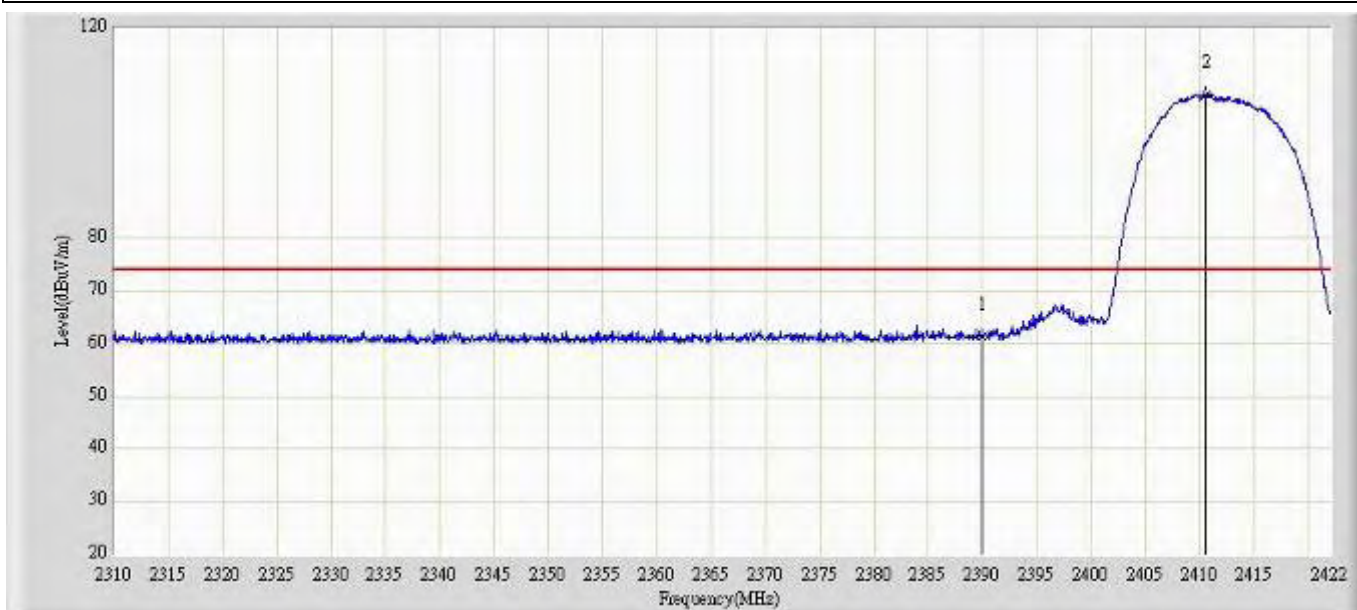

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.369	30.184	-12.631	74.000	31.185	PK
2		*	2410.632	107.395	76.215	N/A	N/A	31.180	PK


Profile: 11BS004R	Page No.: 20
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b (Chain 2)	

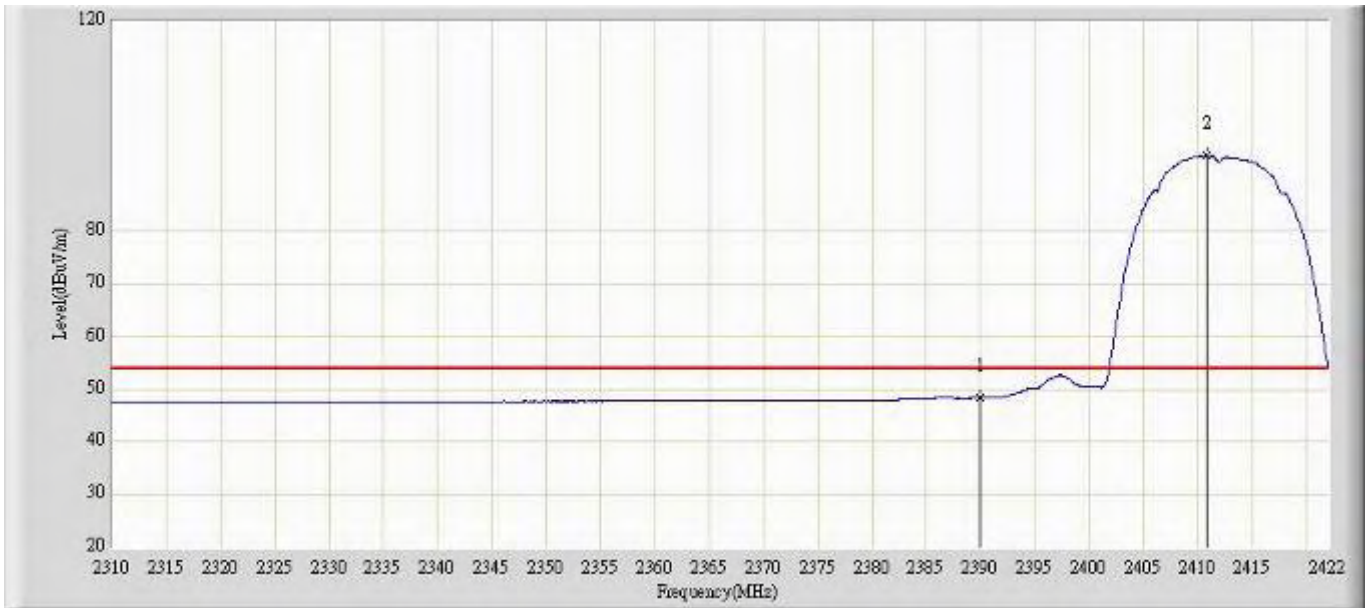

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.402	17.217	-5.598	54.000	31.185	AV
2		*	2410.800	94.321	63.141	N/A	N/A	31.180	AV




Profile: 11BS004R	Page No.: 21
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 2)	

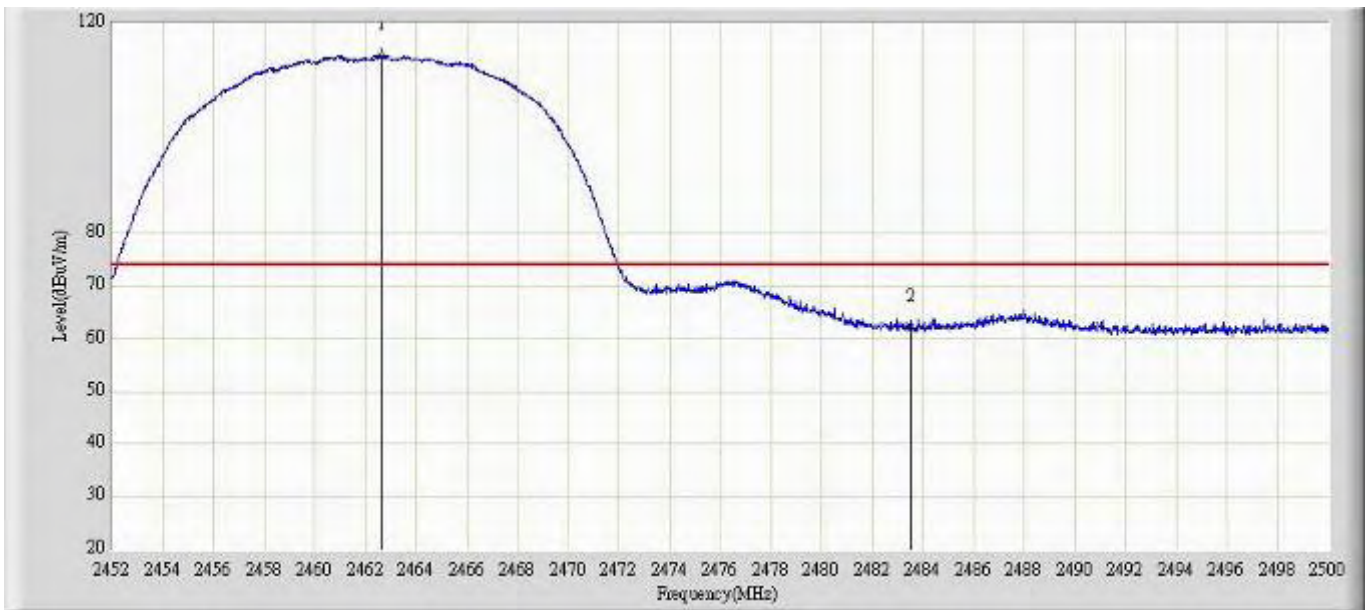


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.656	113.635	82.432	N/A	N/A	31.204	PK
2			2483.500	62.068	30.859	-11.932	74.000	31.209	PK

Profile: 11BS004R	Page No.: 22
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 2)	

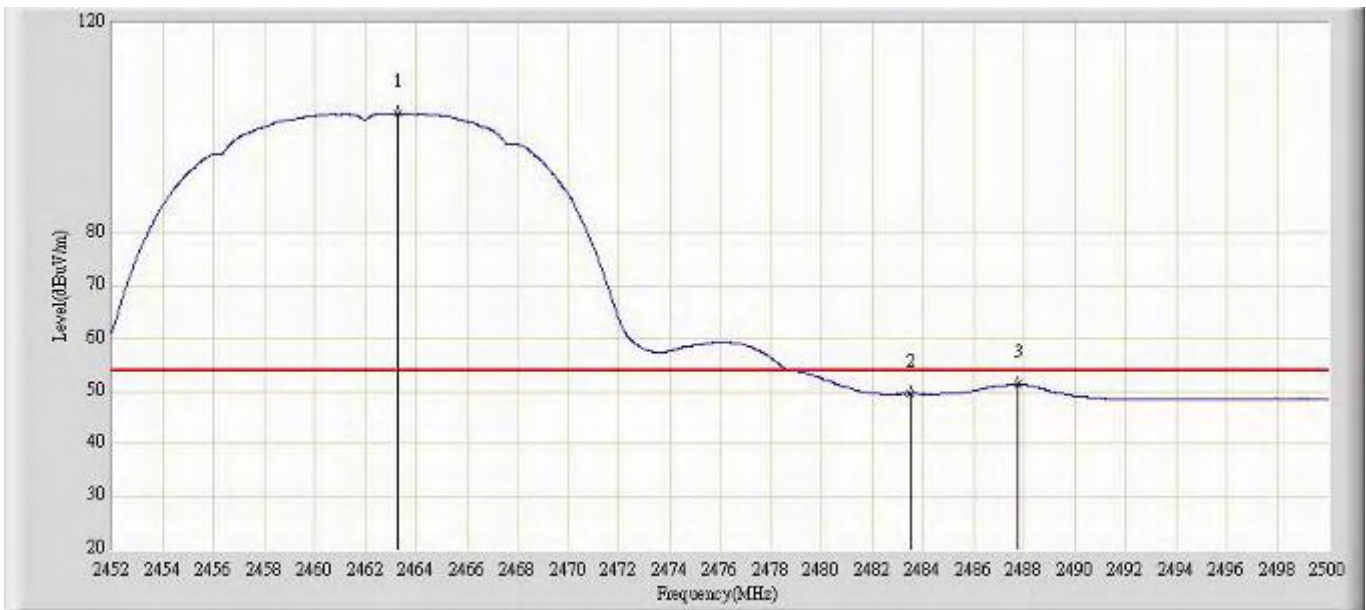


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2463.256	102.863	71.660	N/A	N/A	31.203	AV
2			2483.500	49.510	18.301	-4.490	54.000	31.209	AV
3			2487.736	51.258	20.046	-2.742	54.000	31.212	AV

Profile: 11BS004R	Page No.: 23
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 2)	

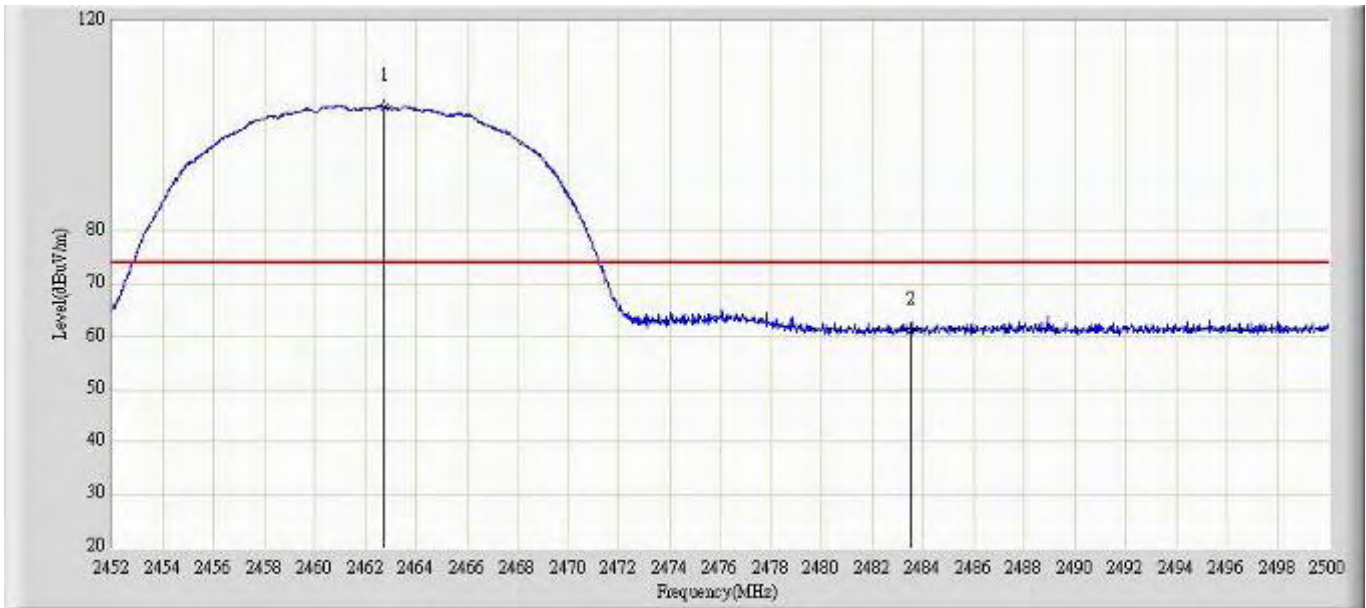


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.728	103.708	72.505	N/A	N/A	31.204	PK
2			2483.500	61.133	29.924	-12.867	74.000	31.209	PK

Profile: 11BS004R	Page No.: 24
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b (Chain 2)	

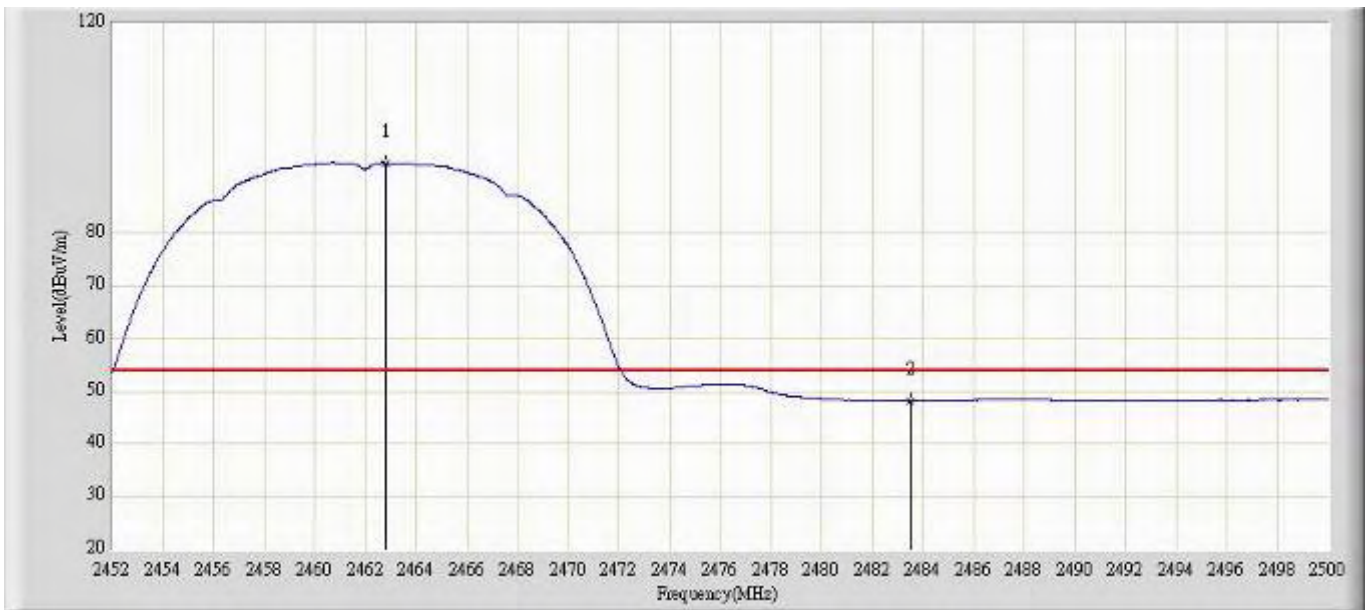


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.800	93.410	62.207	N/A	N/A	31.204	AV
2			2483.500	48.185	16.976	-5.815	54.000	31.209	AV

Profile: 11BS004R	Page No.: 25
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 0)	

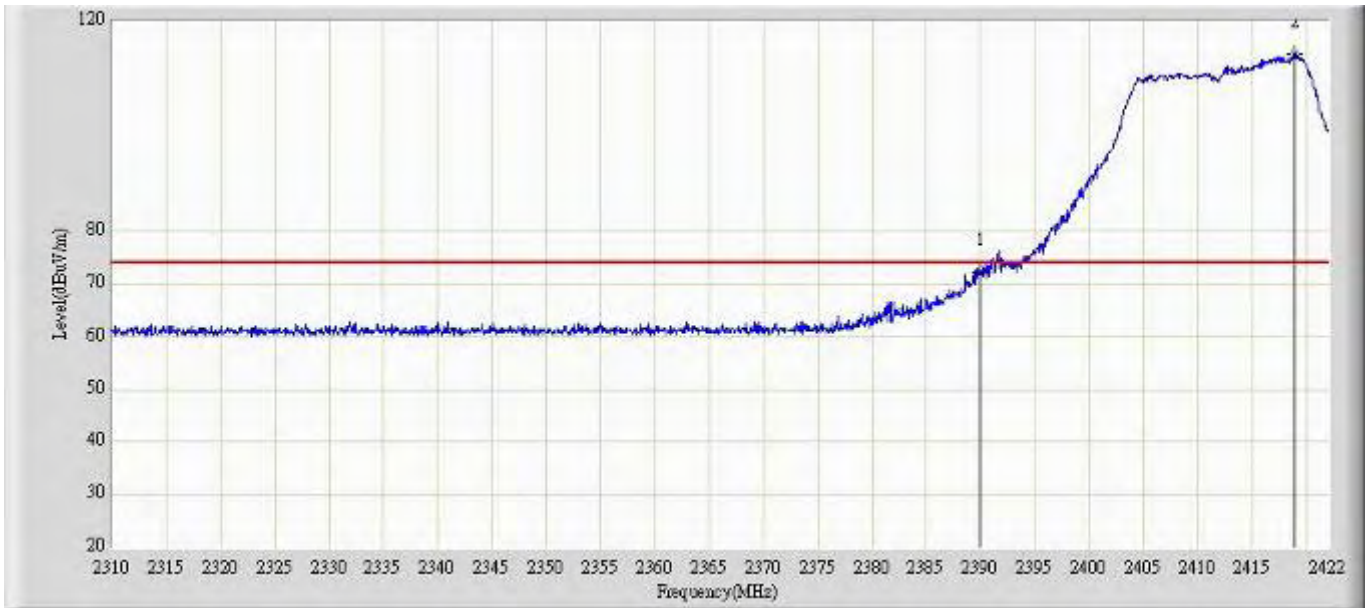


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	72.249	41.064	-1.751	74.000	31.185	PK
2		*	2418.976	113.677	82.494	N/A	N/A	31.183	PK

Profile: 11BS004R	Page No.: 26
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 0)	

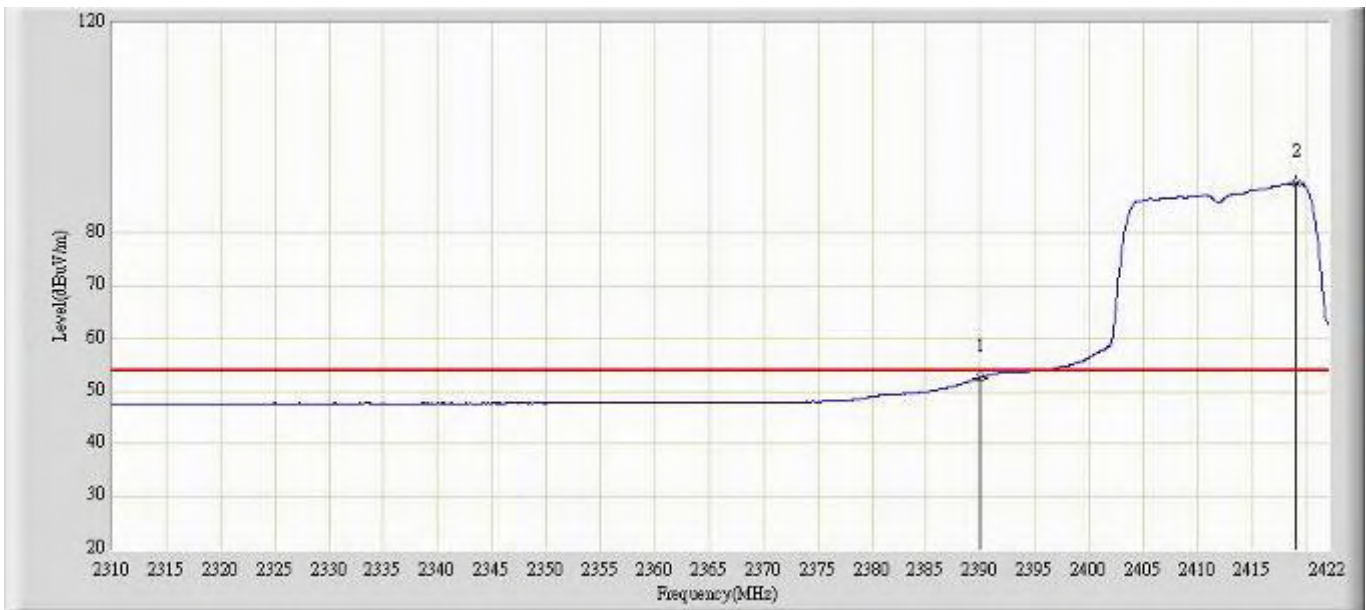


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.596	21.411	-1.404	54.000	31.185	AV
2		*	2419.144	89.614	58.431	N/A	N/A	31.183	AV

Profile: 11BS004R	Page No.: 27
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 0)	

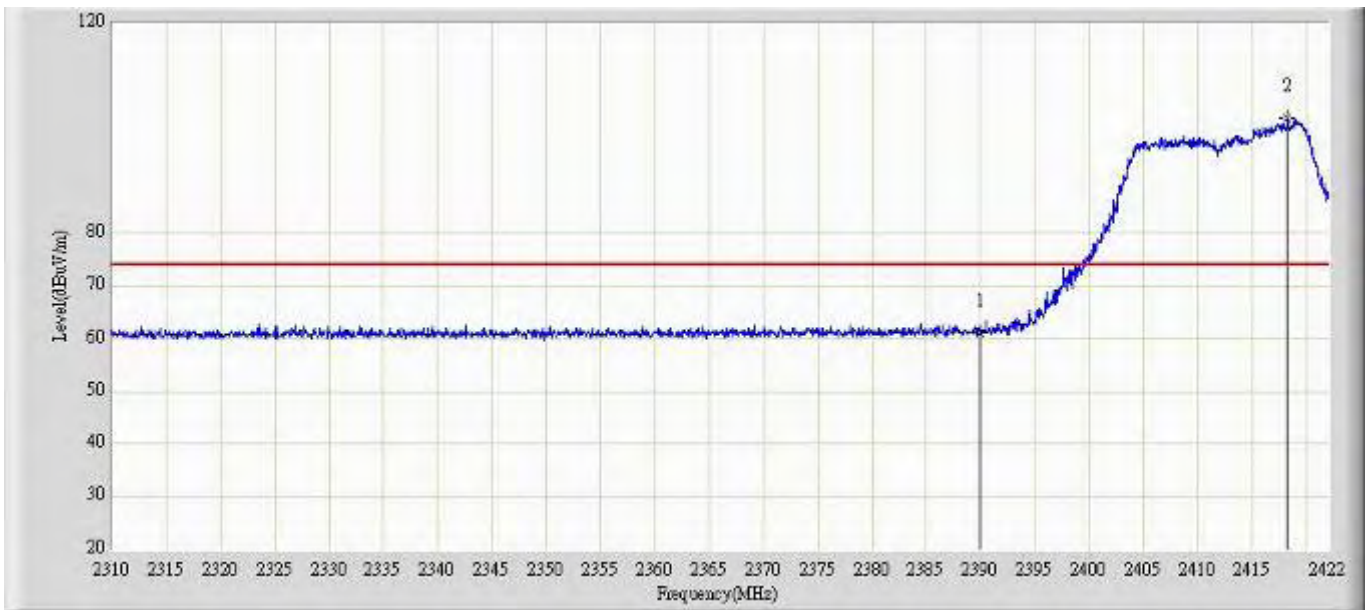

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.192	30.007	-12.808	74.000	31.185	PK
2		*	2418.248	101.922	70.739	N/A	N/A	31.183	PK


Profile: 11BS004R	Page No.: 28
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 0)	

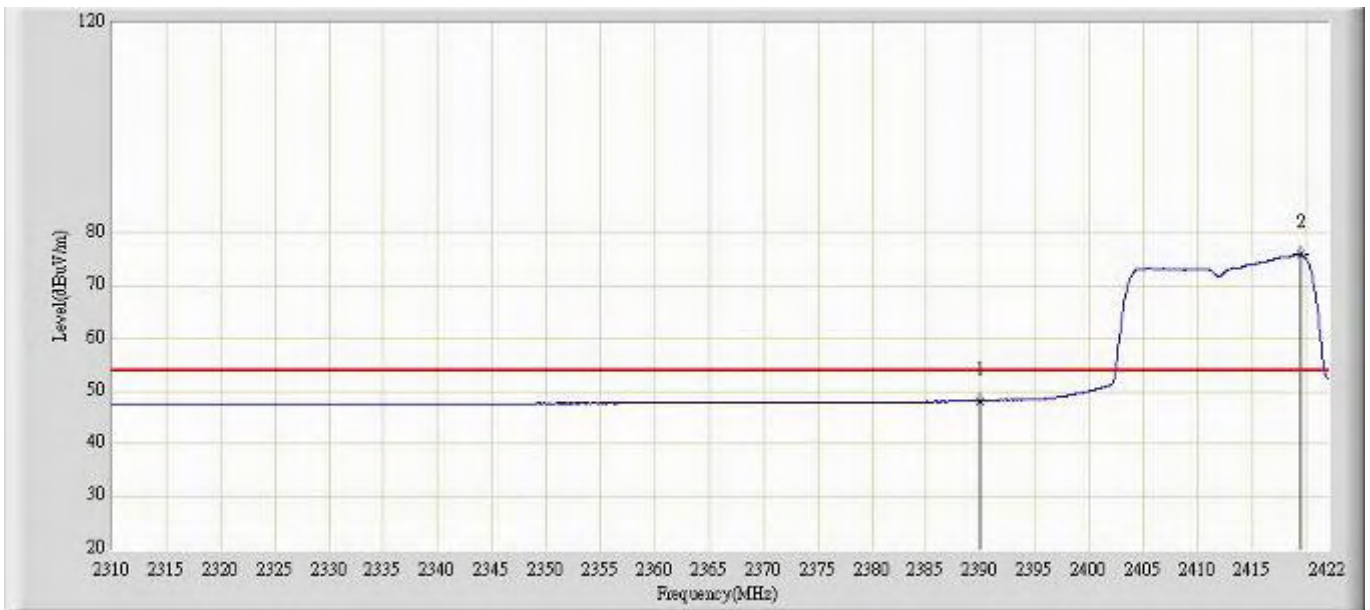

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.190	17.005	-5.810	54.000	31.185	AV
2		*	2419.480	75.980	44.797	N/A	N/A	31.183	AV




Profile: 11BS004R	Page No.: 29
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 0)	

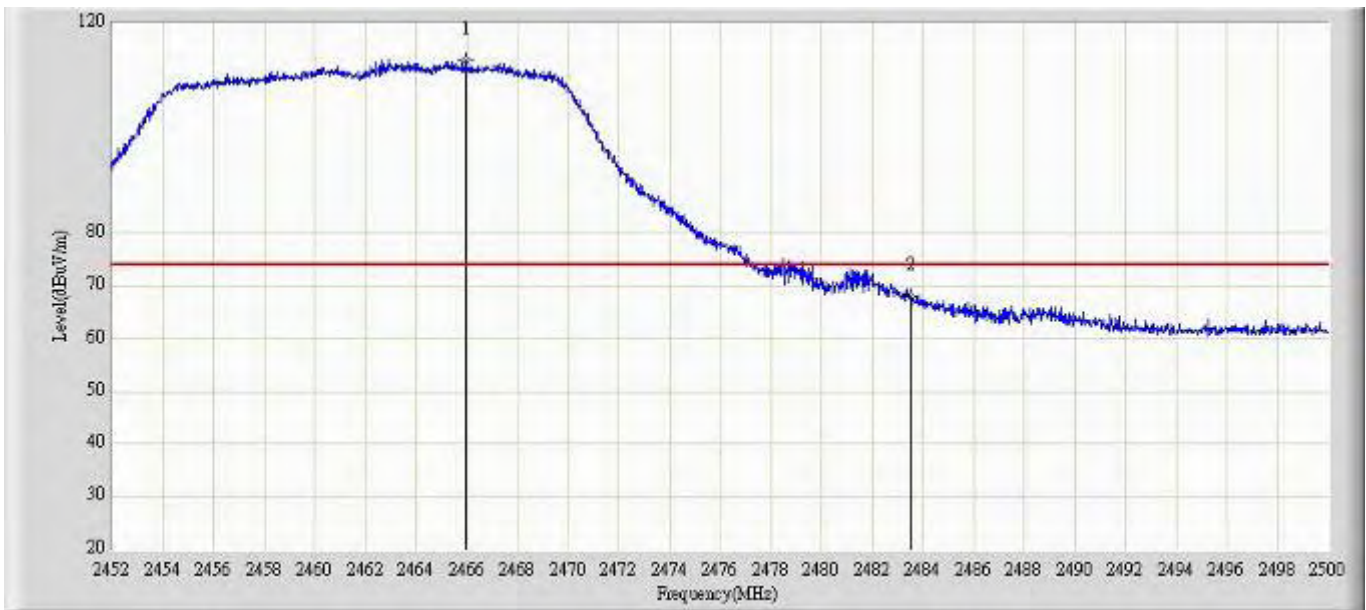


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.944	112.853	81.649	N/A	N/A	31.204	PK
2			2483.500	67.941	36.732	-6.059	74.000	31.209	PK

Profile: 11BS004R	Page No.: 30
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 0)	

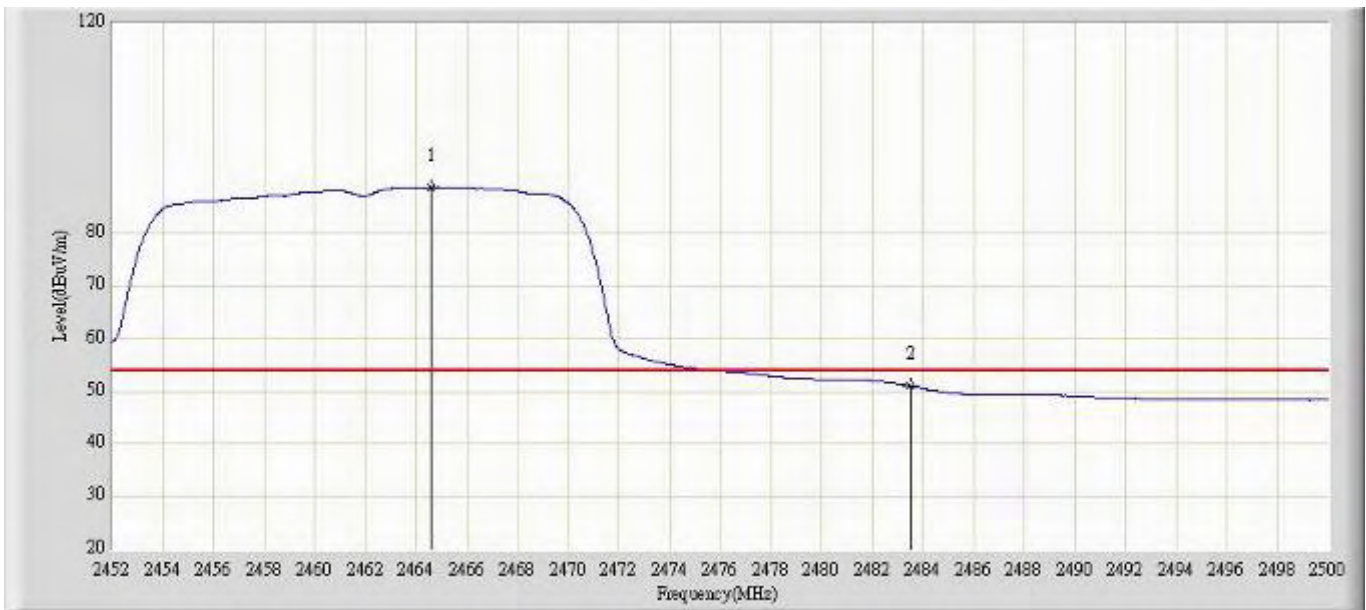


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.600	88.792	57.589	N/A	N/A	31.203	AV
2			2483.500	51.021	19.812	-2.979	54.000	31.209	AV

Profile: 11BS004R	Page No.: 31
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 0)	

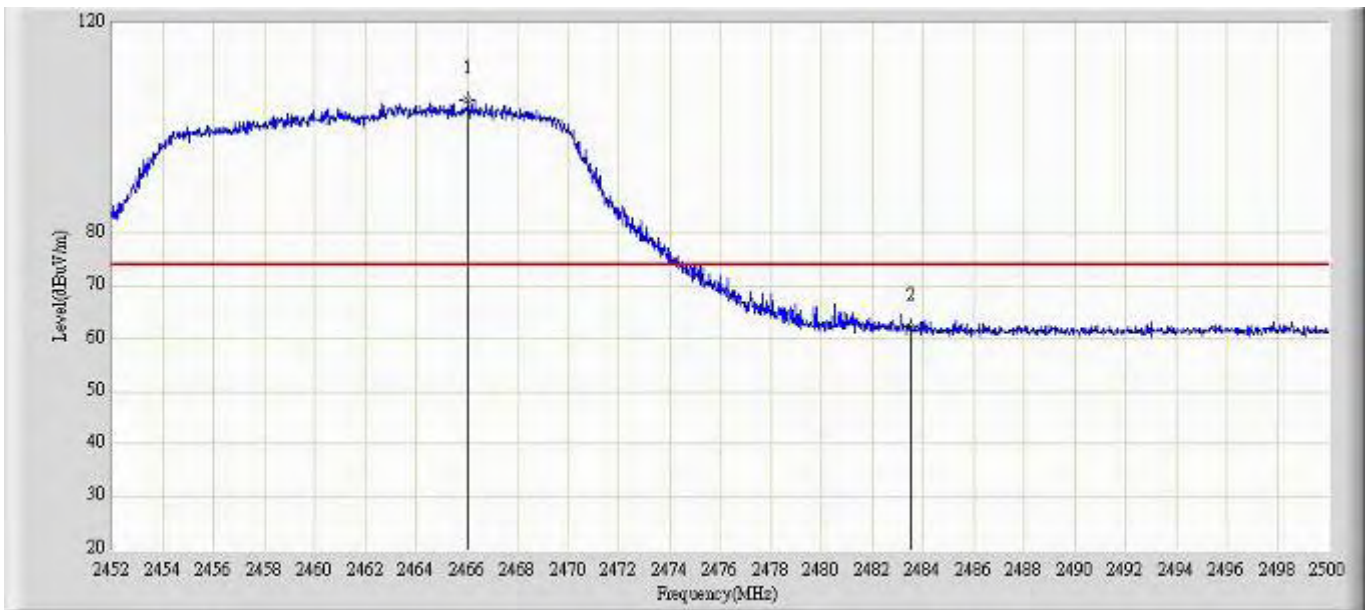


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2466.040	105.397	74.193	N/A	N/A	31.204	PK
2			2483.500	62.212	31.003	-11.788	74.000	31.209	PK

Profile: 11BS004R	Page No.: 32
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 0)	

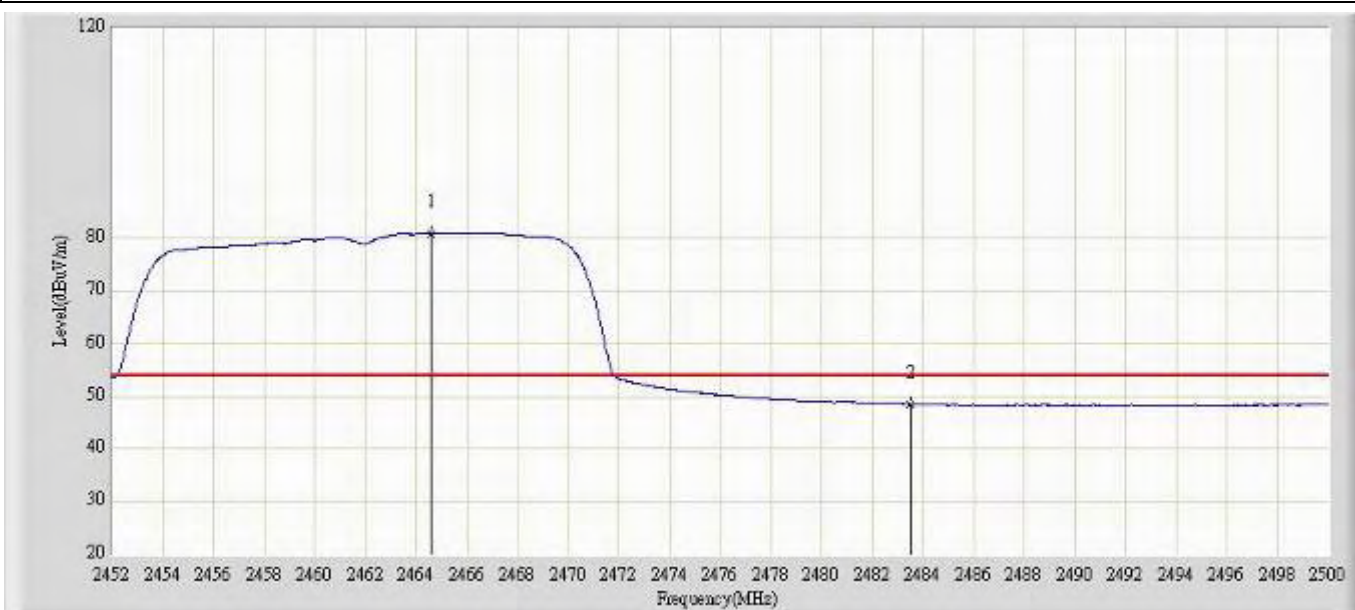


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.600	80.984	49.781	N/A	N/A	31.203	AV
2			2483.500	48.550	17.341	-5.450	54.000	31.209	AV

Profile: 11BS004R	Page No.: 33
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 1)	

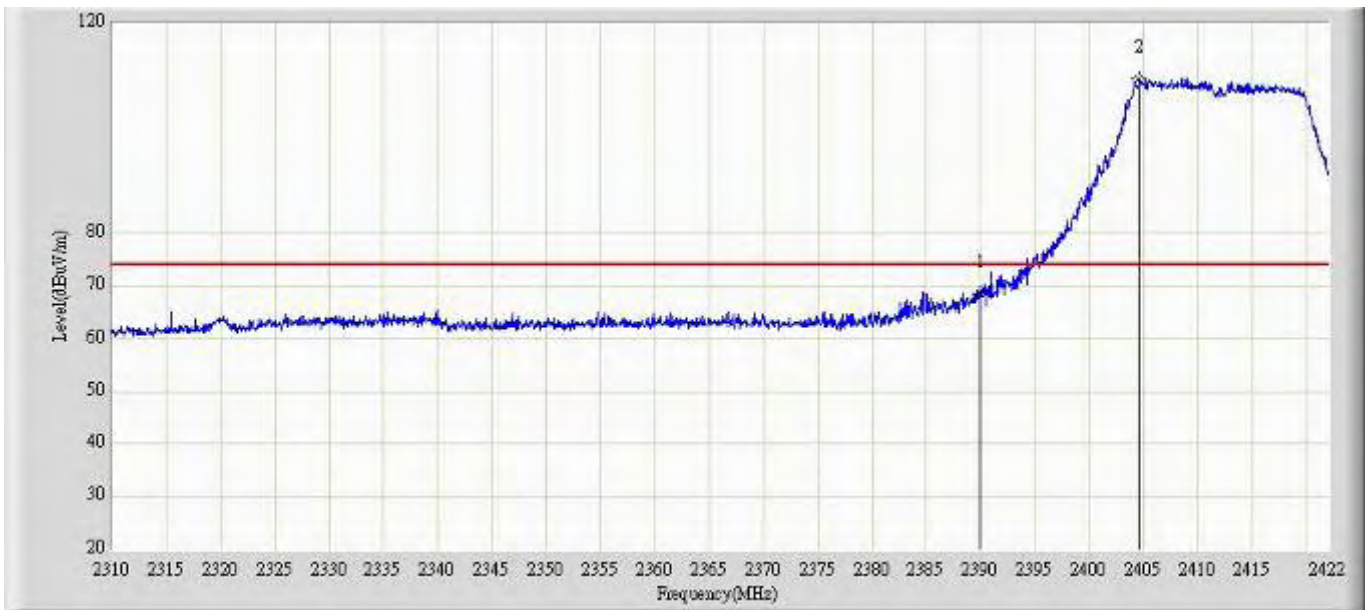


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	68.564	37.379	-5.436	74.000	31.185	PK
2		*	2404.640	109.346	78.165	N/A	N/A	31.181	PK

Profile: 11BS004R	Page No.: 34
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 1)	

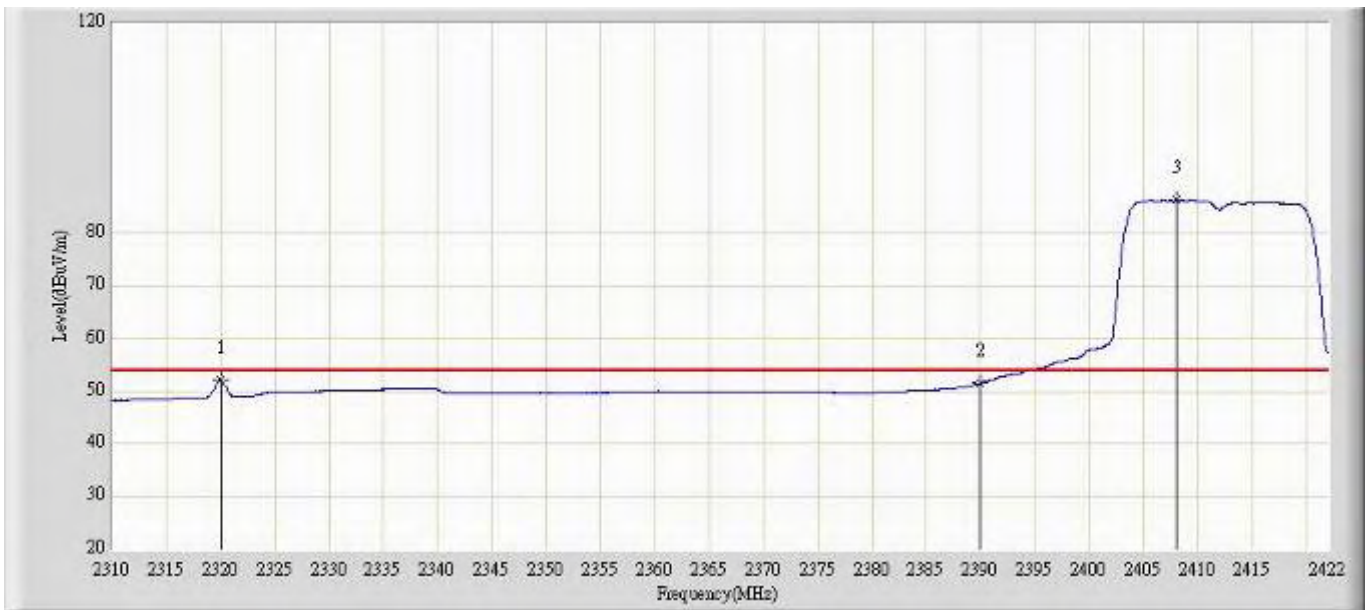


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2320.024	52.080	20.832	-1.920	54.000	31.249	AV
2			2390.000	51.517	20.332	-2.483	54.000	31.185	AV
3		*	2408.000	86.312	55.131	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 35
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 1)	

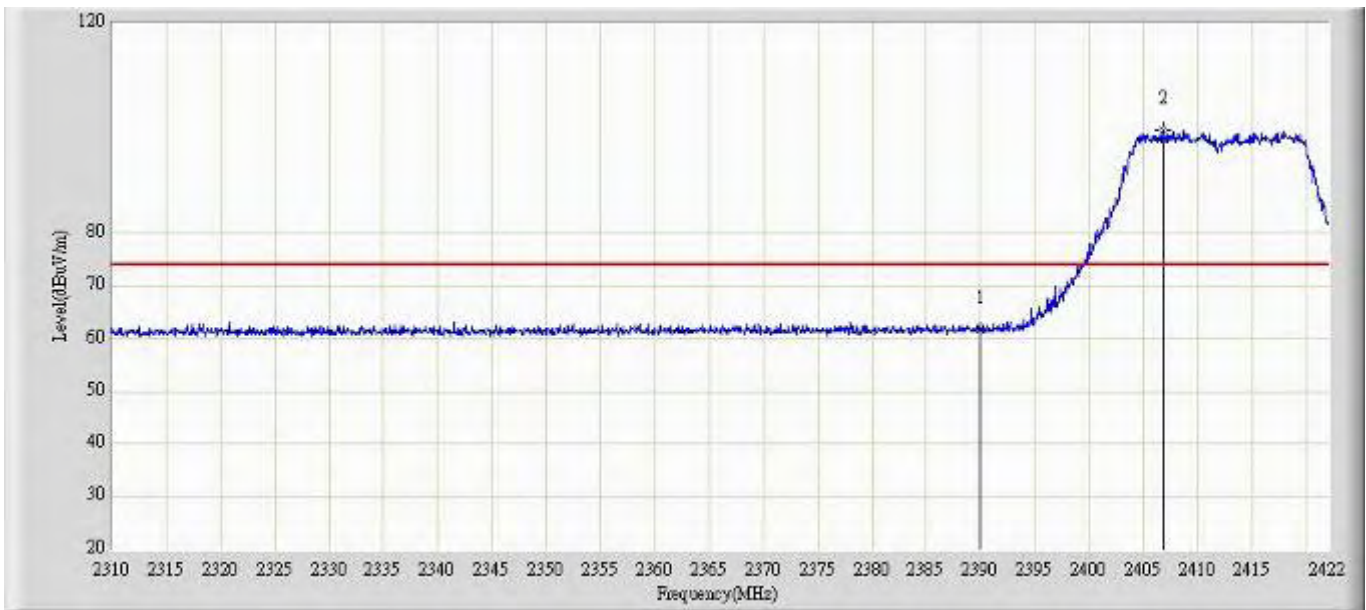

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.786	30.601	-12.214	74.000	31.185	PK
2		*	2406.768	99.545	68.364	N/A	N/A	31.180	PK


Profile: 11BS004R	Page No.: 36
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 1)	

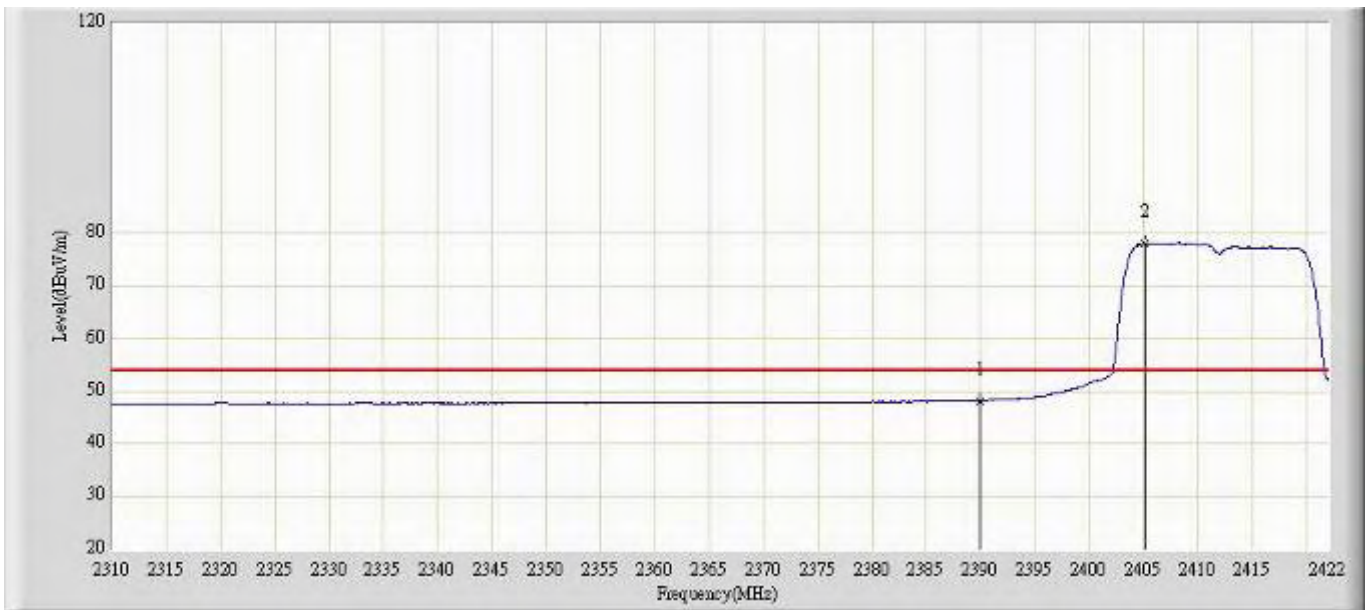

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.234	17.049	-5.766	54.000	31.185	AV
2		*	2405.200	77.931	46.750	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 37
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 1)	

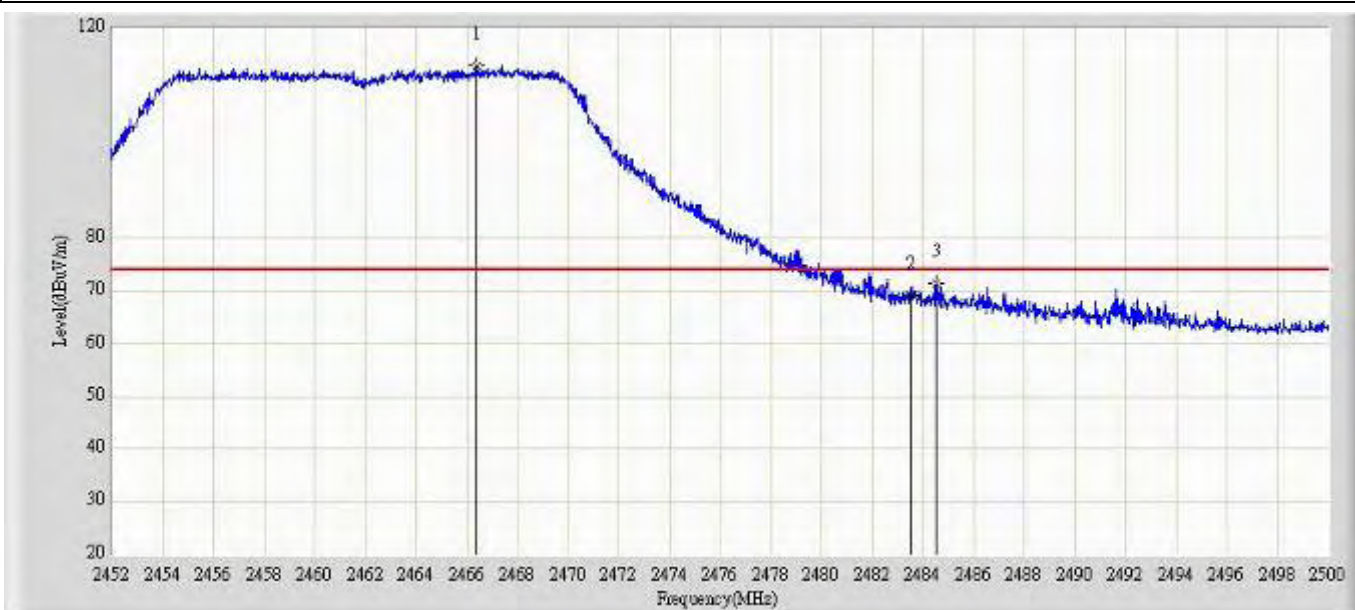


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2466.400	112.825	81.621	N/A	N/A	31.203	PK
2			2483.500	69.013	37.804	-4.987	74.000	31.209	PK
3			2484.520	71.432	40.222	-2.568	74.000	31.210	PK

Profile: 11BS004R	Page No.: 38
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 1)	

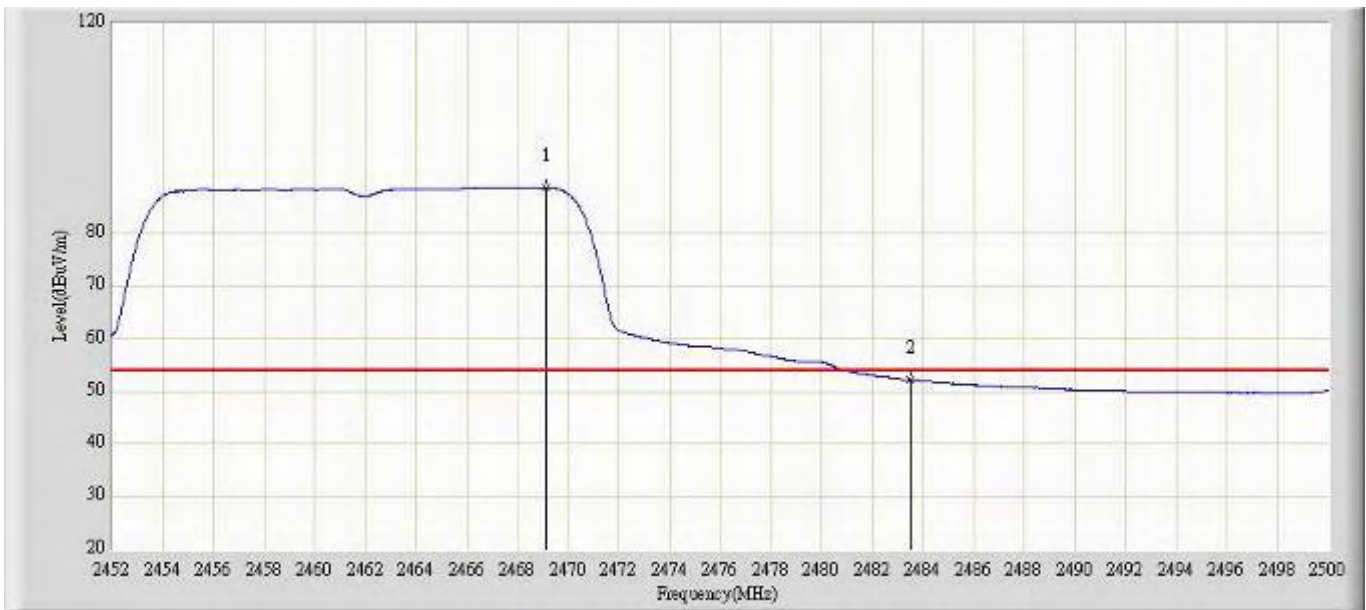


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.136	88.816	57.612	N/A	N/A	31.204	AV
2			2483.500	52.187	20.978	-1.813	54.000	31.209	AV

Profile: 11BS004R	Page No.: 39
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 1)	

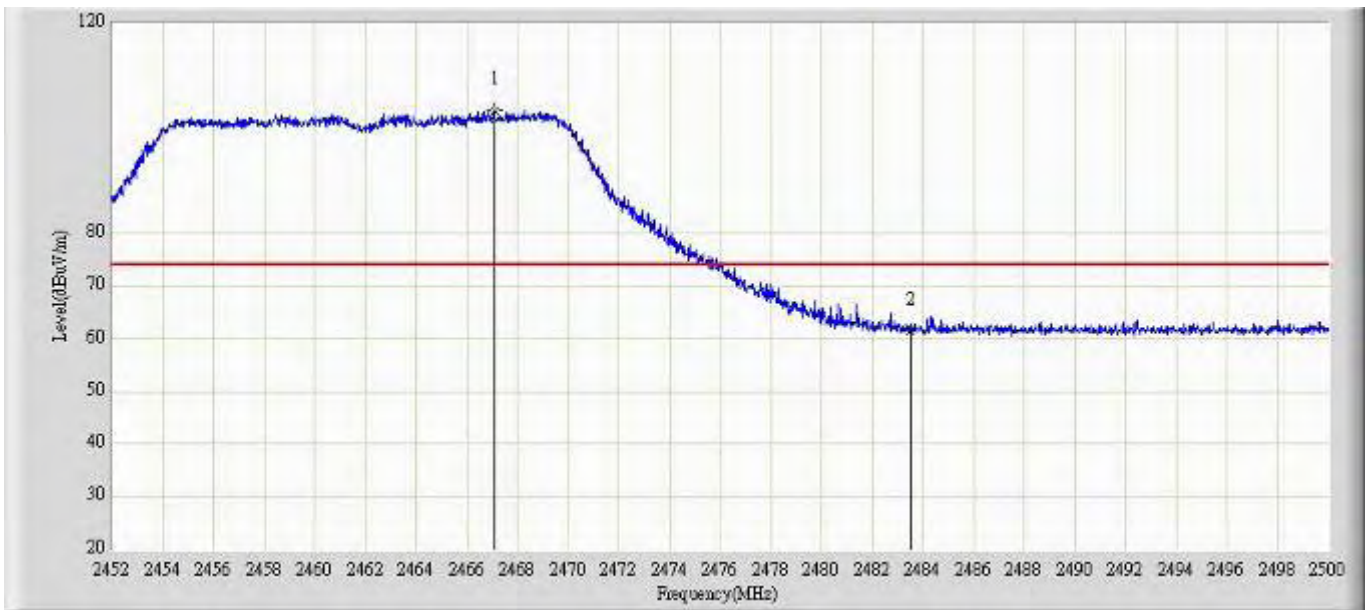


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2467.096	103.415	72.211	N/A	N/A	31.204	PK
2			2483.500	61.507	30.298	-12.493	74.000	31.209	PK

Profile: 11BS004R	Page No.: 40
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 1)	

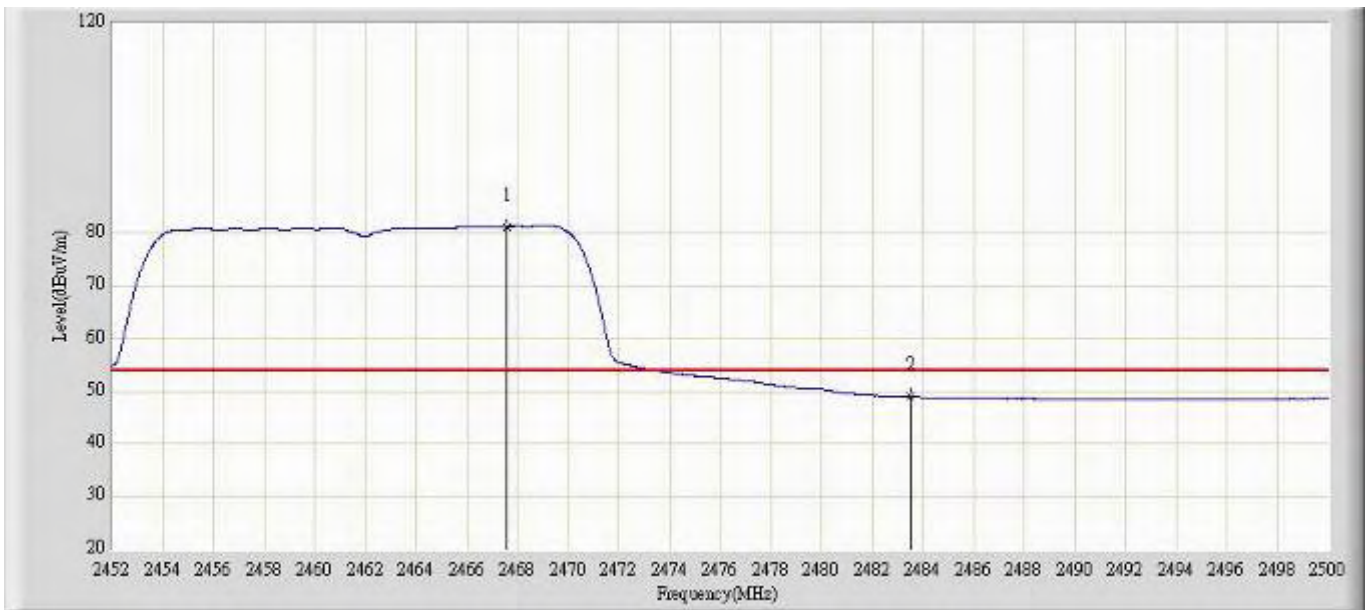


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2467.576	81.311	50.107	N/A	N/A	31.204	AV
2			2483.500	48.912	17.703	-5.088	54.000	31.209	AV

Profile: 11BS004R	Page No.: 41
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 2)	

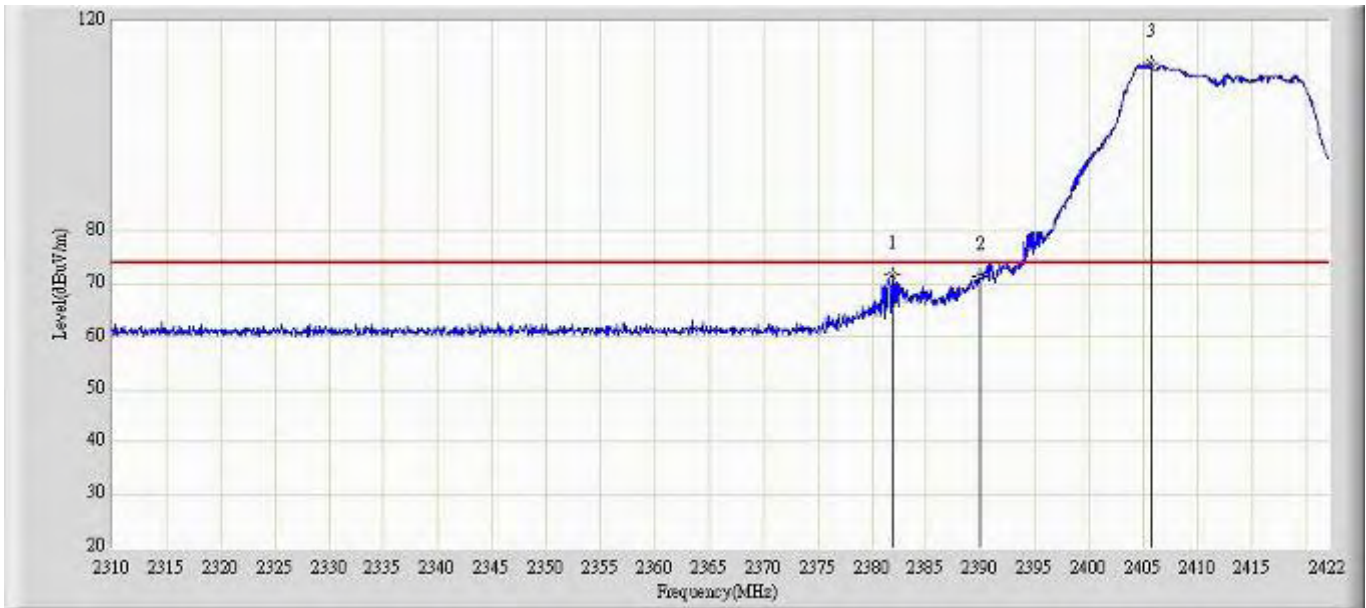


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2381.848	71.801	40.612	-2.199	74.000	31.188	PK
2			2390.000	71.313	40.128	-2.687	74.000	31.185	PK
3		*	2405.704	111.850	80.669	N/A	N/A	31.181	PK

Profile: 11BS004R	Page No.: 42
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 2)	

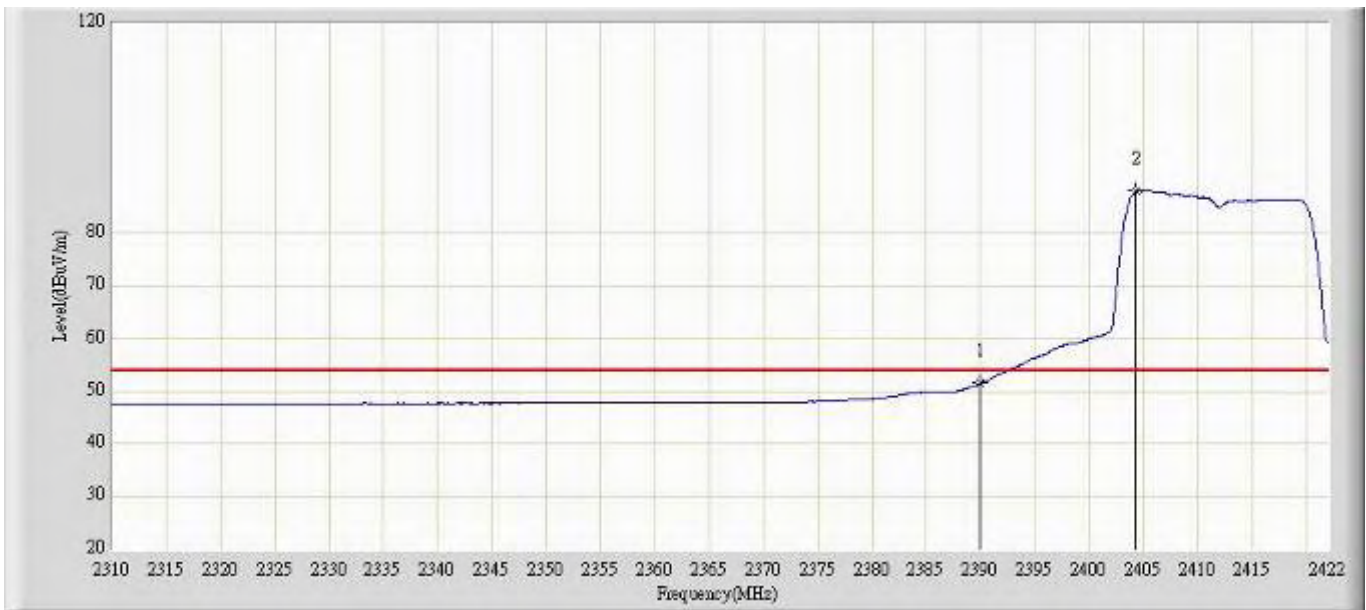


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	51.499	20.314	-2.501	54.000	31.185	AV
2		*	2404.360	87.969	56.788	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 43
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 2)	

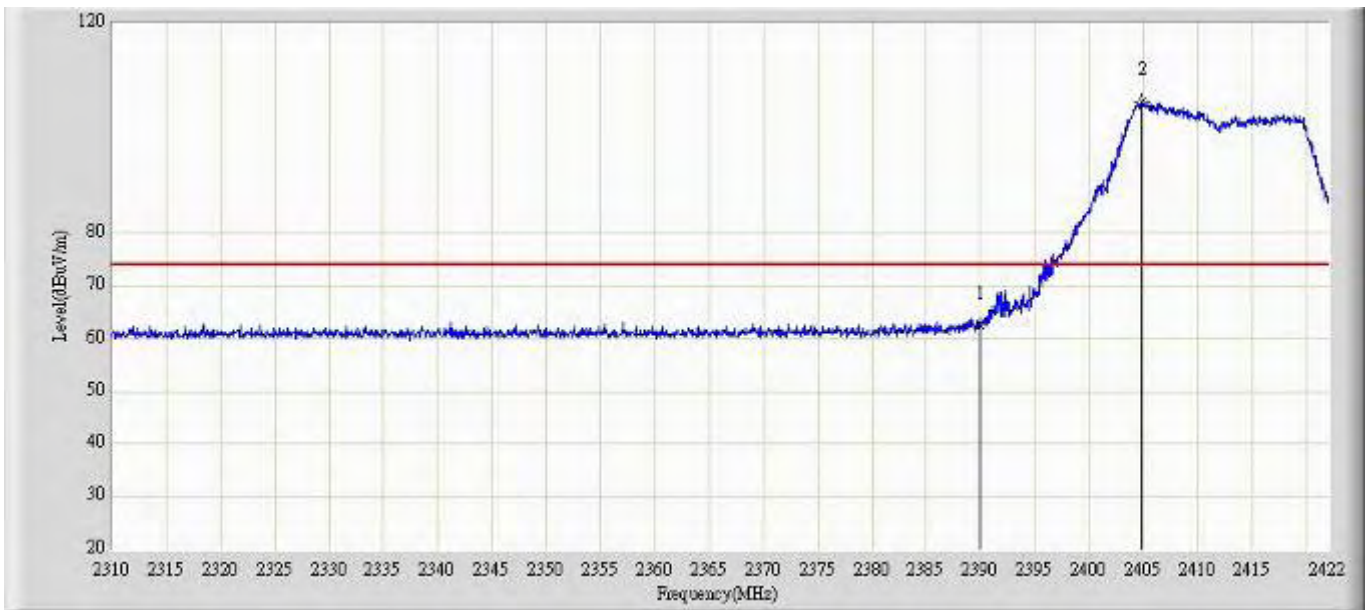

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	62.522	31.337	-11.478	74.000	31.185	PK
2		*	2404.920	105.025	73.844	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 44
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 11:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g (Chain 2)	

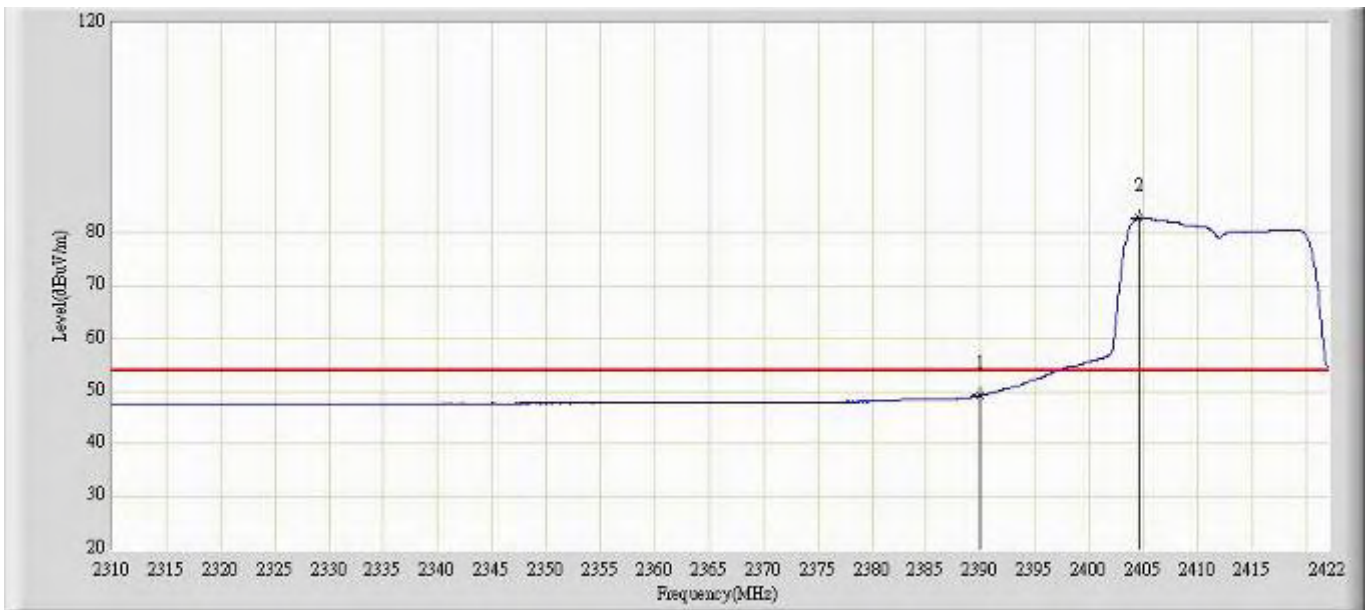

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.203	18.018	-4.797	54.000	31.185	AV
2		*	2404.528	82.899	51.718	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 45
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 2)	

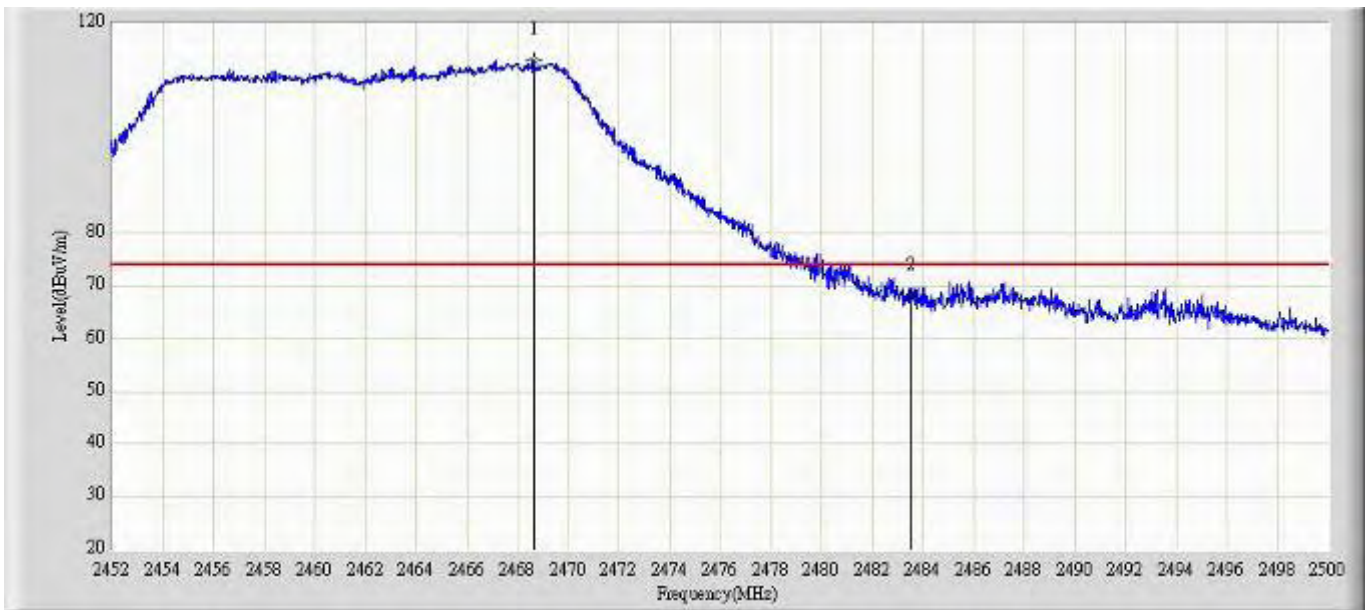


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2468.656	112.817	81.613	N/A	N/A	31.204	PK
2			2483.500	67.930	36.721	-6.070	74.000	31.209	PK

Profile: 11BS004R	Page No.: 46
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 2)	

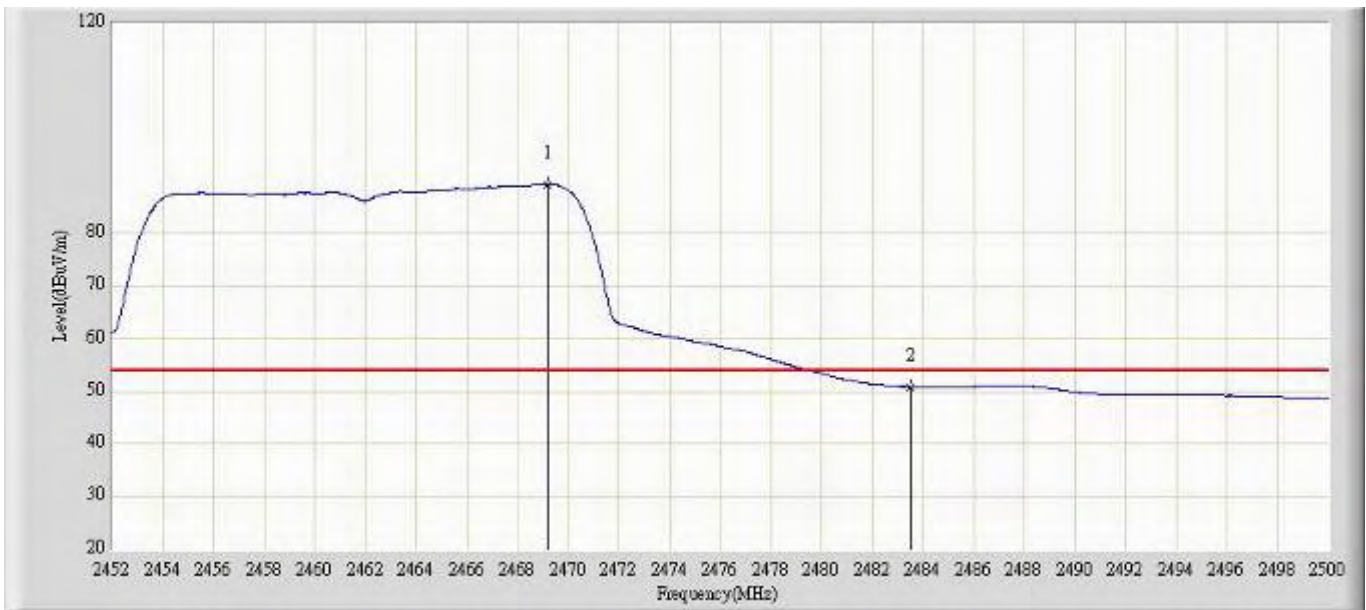


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.208	89.365	58.161	N/A	N/A	31.205	AV
2			2483.500	50.833	19.624	-3.167	54.000	31.209	AV

Profile: 11BS004R	Page No.: 47
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 2)	

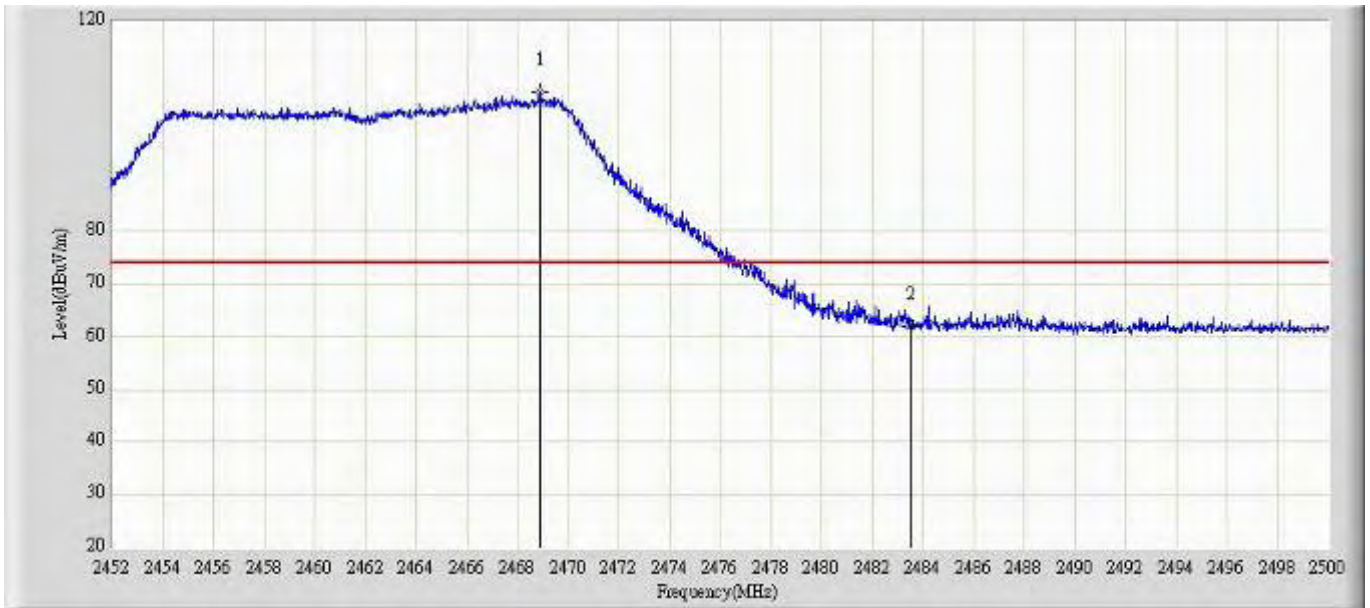


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2468.872	106.413	75.209	N/A	N/A	31.204	PK
2			2483.500	61.838	30.629	-12.162	74.000	31.209	PK

Profile: 11BS004R	Page No.: 48
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2462MHz by 802.11g (Chain 2)	

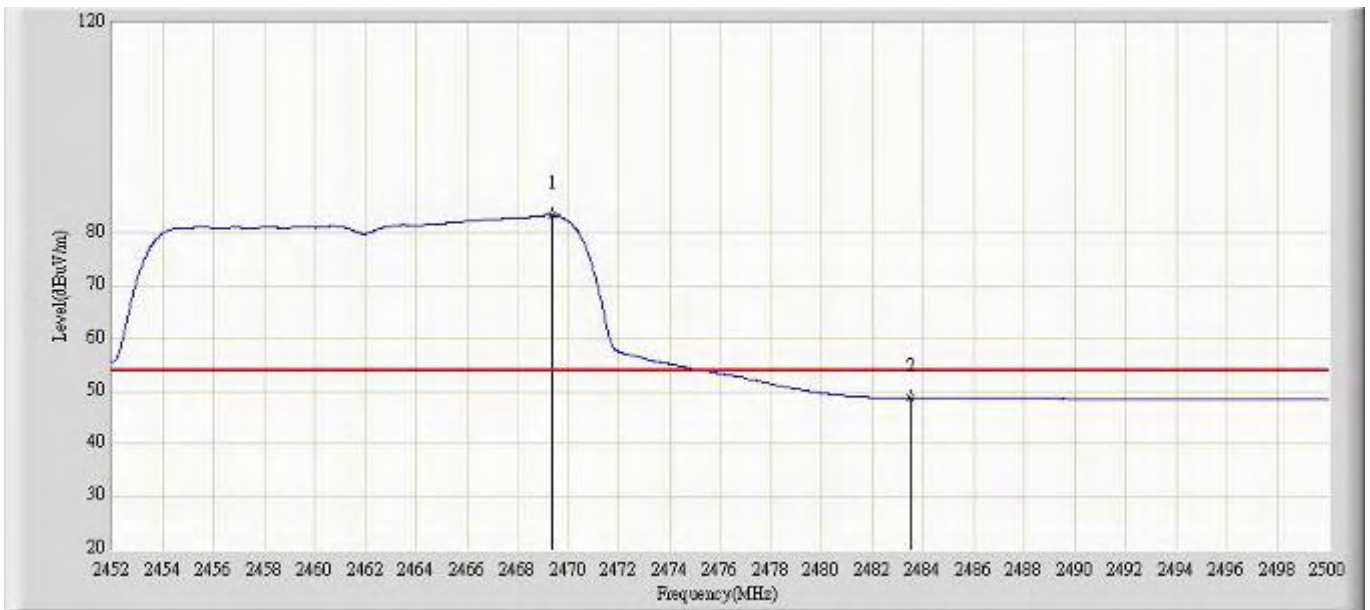


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.376	83.389	52.185	N/A	N/A	31.205	AV
2			2483.500	48.693	17.484	-5.307	54.000	31.209	AV

Profile: 11BS004R	Page No.: 49
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0)	

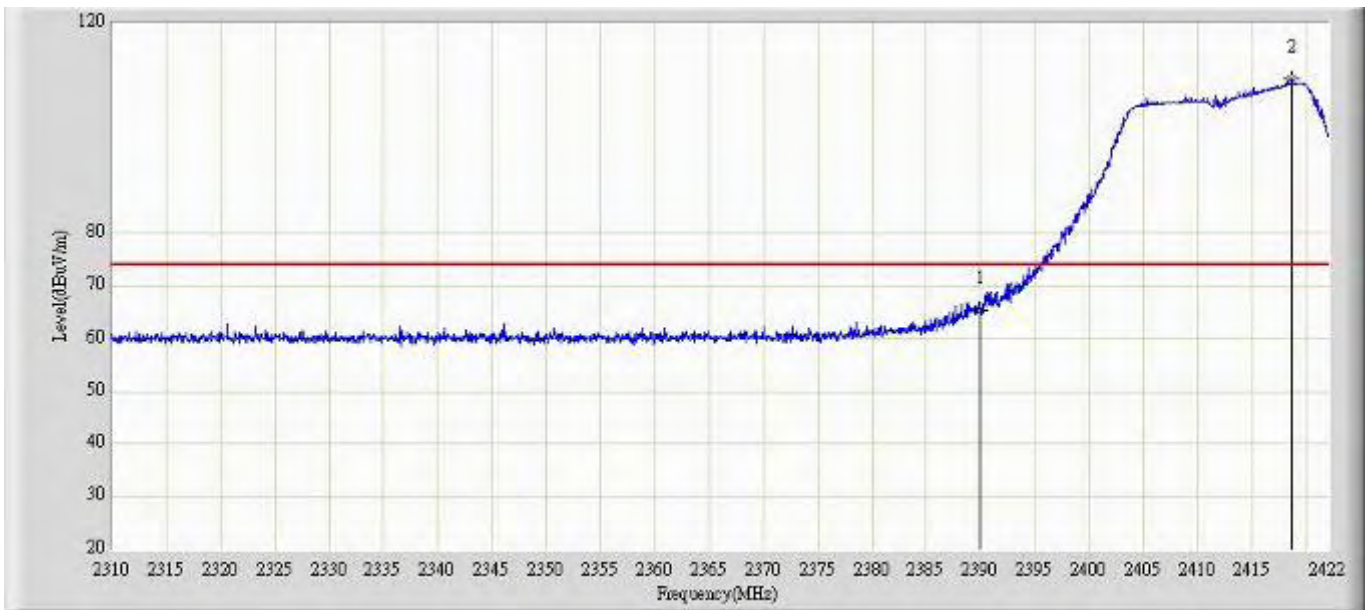


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	65.306	34.121	-8.694	74.000	31.185	PK
2		*	2418.696	109.453	78.270	N/A	N/A	31.182	PK

Profile: 11BS004R	Page No.: 50
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0)	

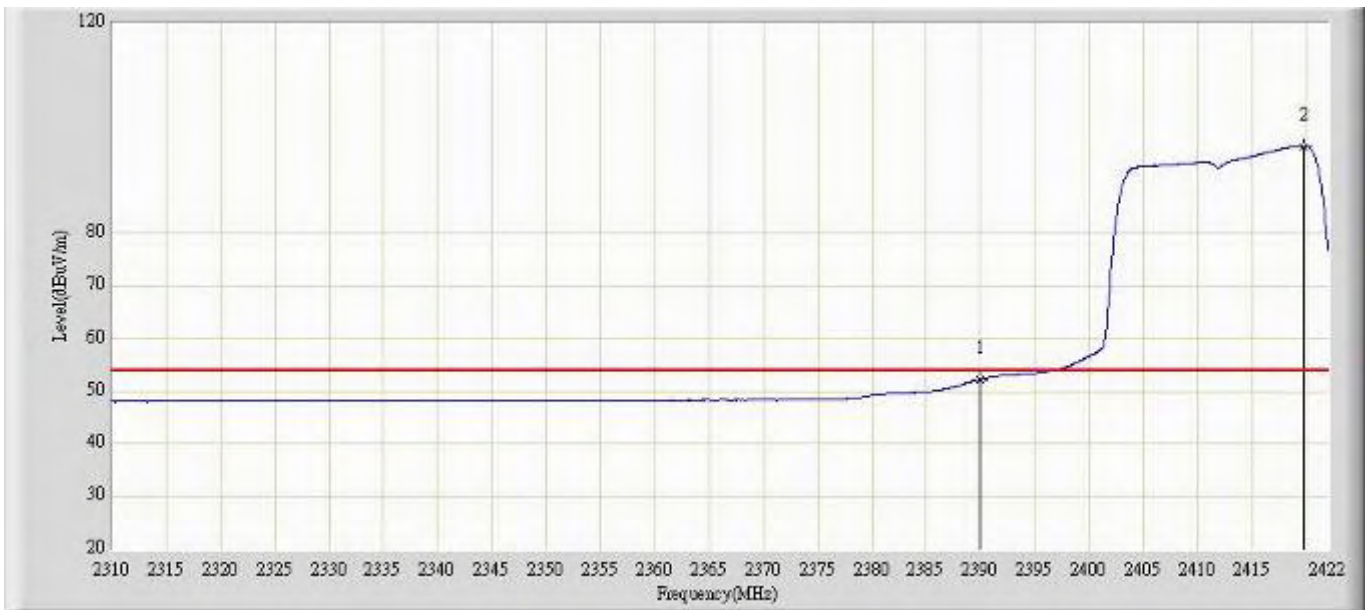


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.273	21.088	-1.727	54.000	31.185	AV
2		*	2419.704	96.557	65.374	N/A	N/A	31.183	AV

Profile: 11BS004R	Page No.: 51
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0)	

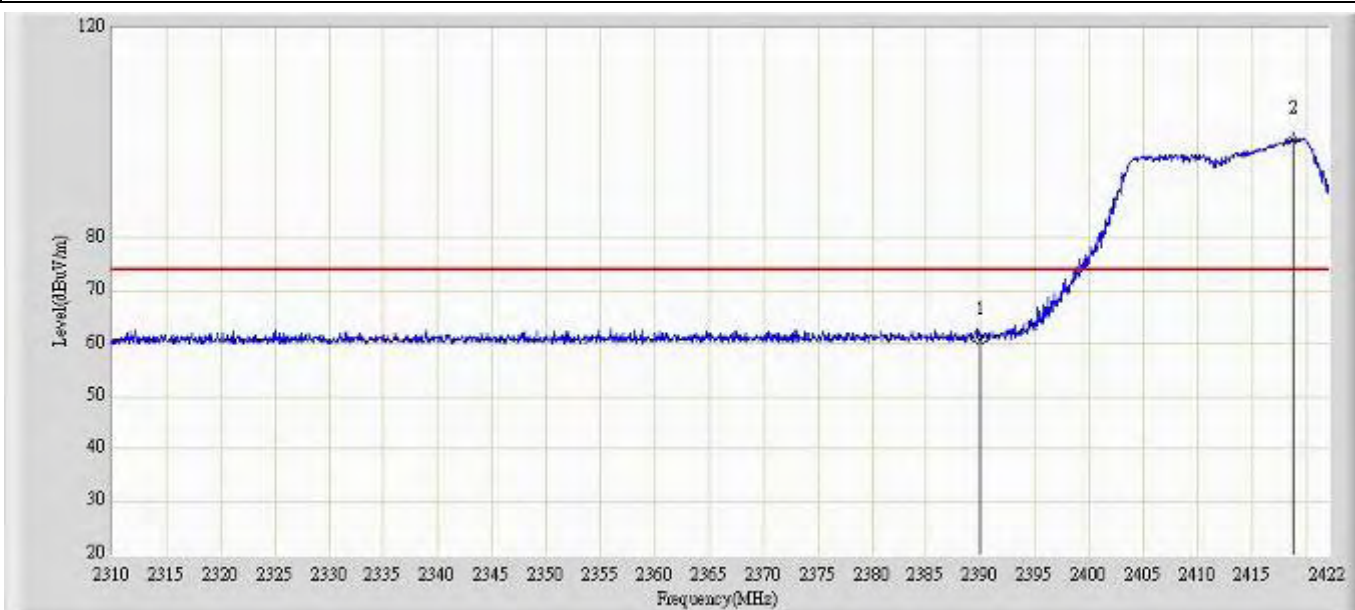

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.494	29.309	-13.506	74.000	31.185	PK
2		*	2418.808	98.769	67.586	N/A	N/A	31.182	PK


Profile: 11BS004R	Page No.: 52
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 13:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0)	

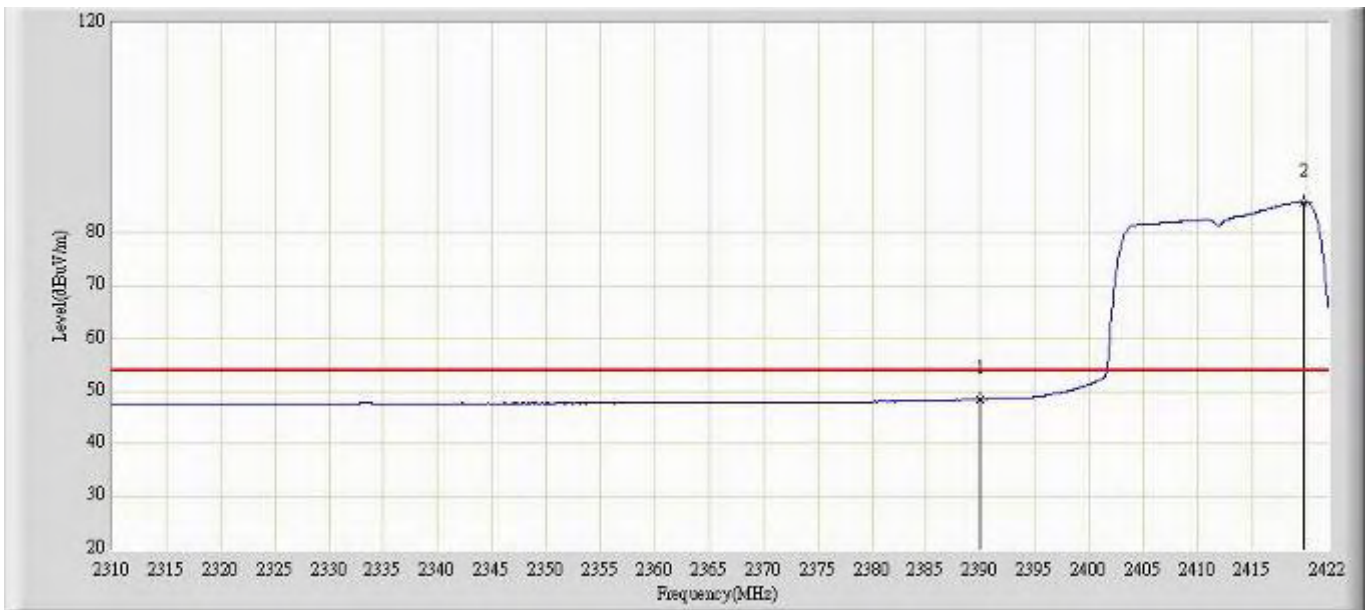

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.510	17.325	-5.490	54.000	31.185	AV
2		*	2419.704	85.910	54.727	N/A	N/A	31.183	AV




Profile: 11BS004R	Page No.: 53
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0)	

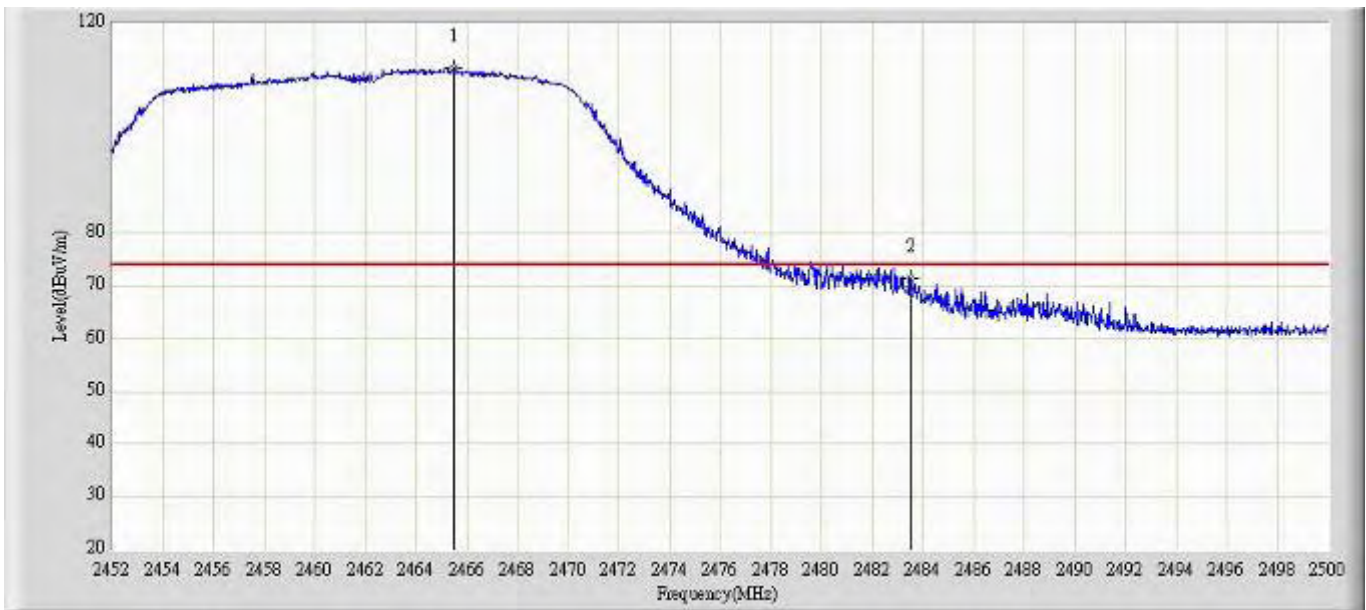


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.464	111.472	80.268	N/A	N/A	31.204	PK
2			2483.500	71.433	40.224	-2.567	74.000	31.209	PK

Profile: 11BS004R	Page No.: 54
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0)	

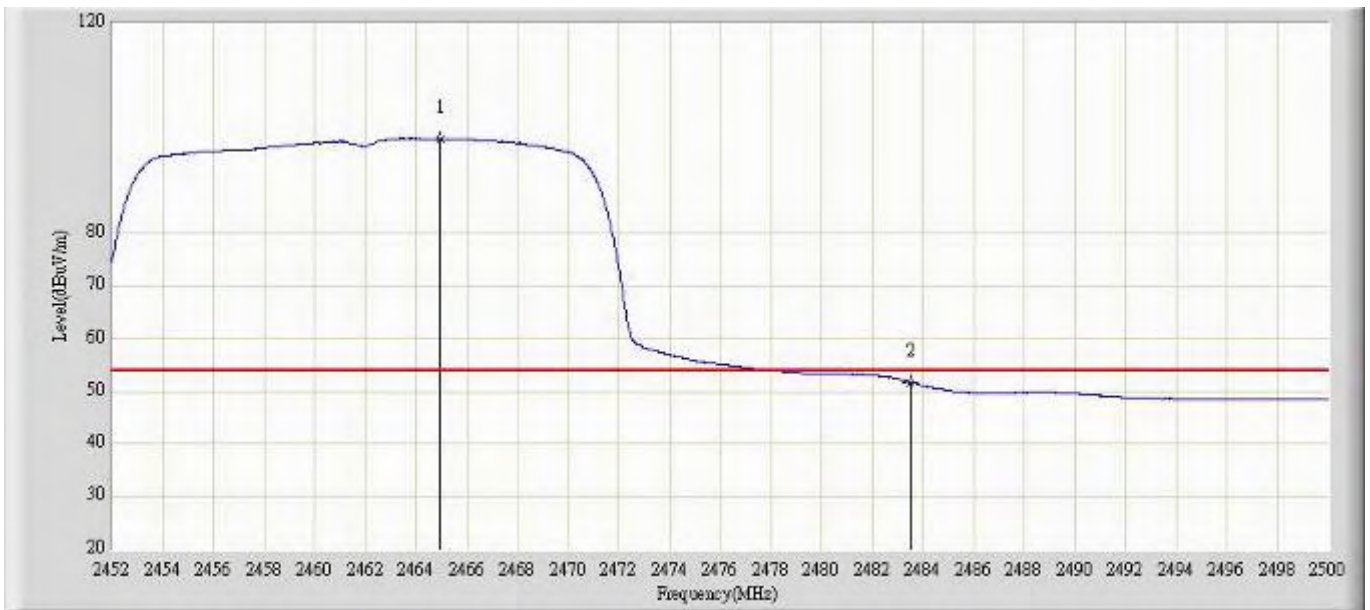


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.960	97.981	66.777	N/A	N/A	31.203	AV
2			2483.500	51.722	20.513	-2.278	54.000	31.209	AV

Profile: 11BS004R	Page No.: 55
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0)	

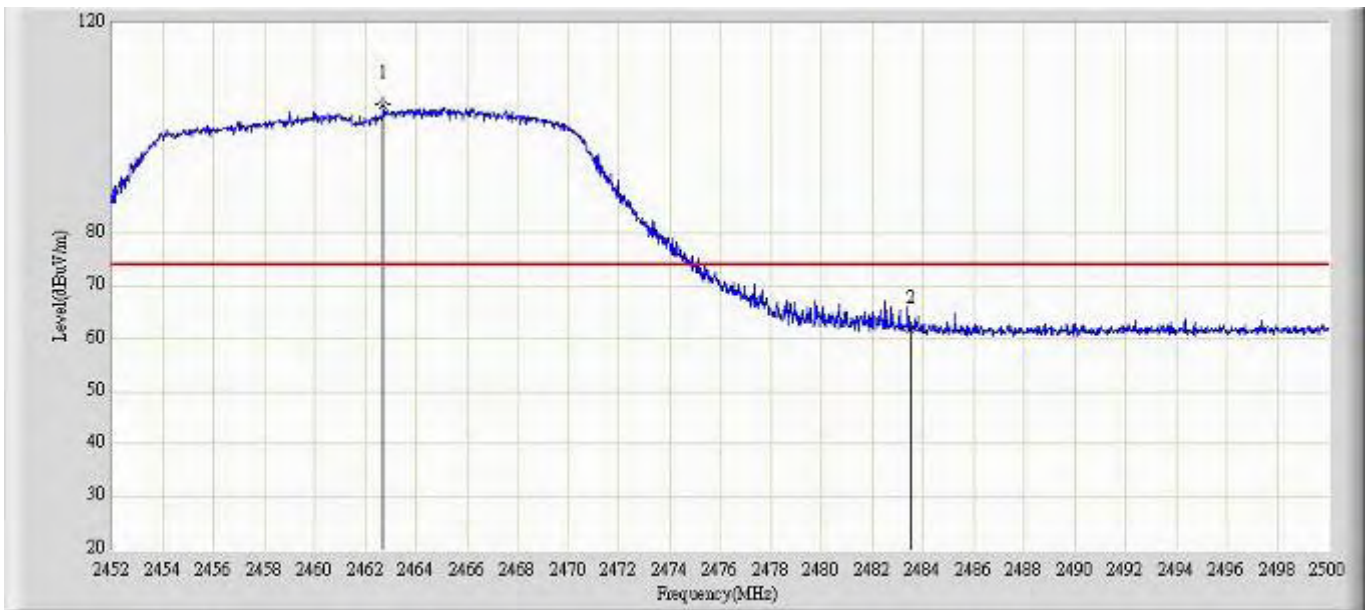


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.704	104.414	73.211	N/A	N/A	31.204	PK
2			2483.500	61.544	30.335	-12.456	74.000	31.209	PK

Profile: 11BS004R	Page No.: 56
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0)	

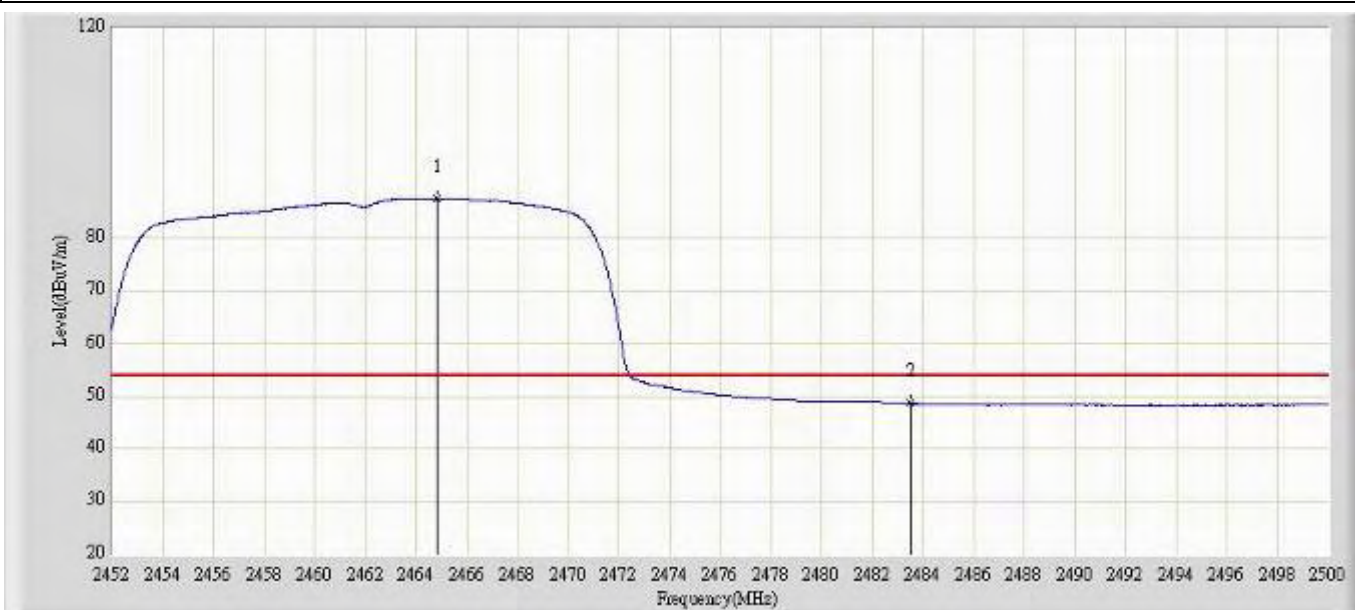


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.816	87.569	56.366	N/A	N/A	31.203	AV
2			2483.500	48.654	17.445	-5.346	54.000	31.209	AV

Profile: 11BS004R	Page No.: 57
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 1)	

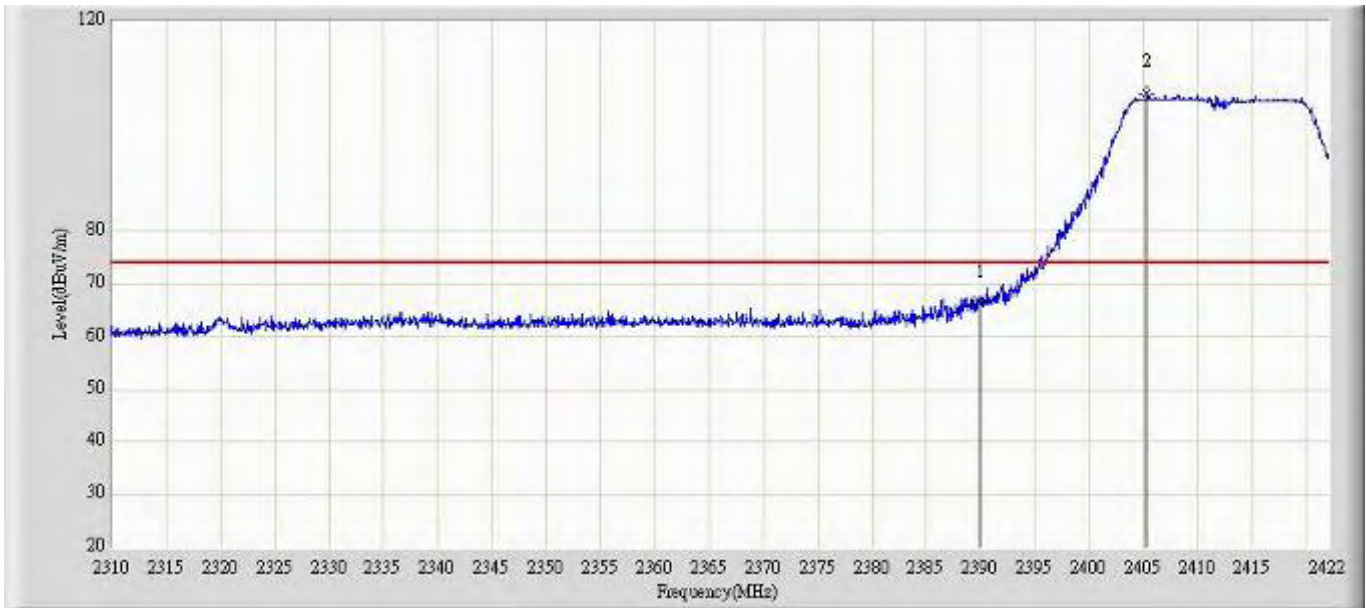


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	66.292	35.107	-7.708	74.000	31.185	PK
2		*	2405.312	106.274	75.093	N/A	N/A	31.181	PK

Profile: 11BS004R	Page No.: 58
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 1)	

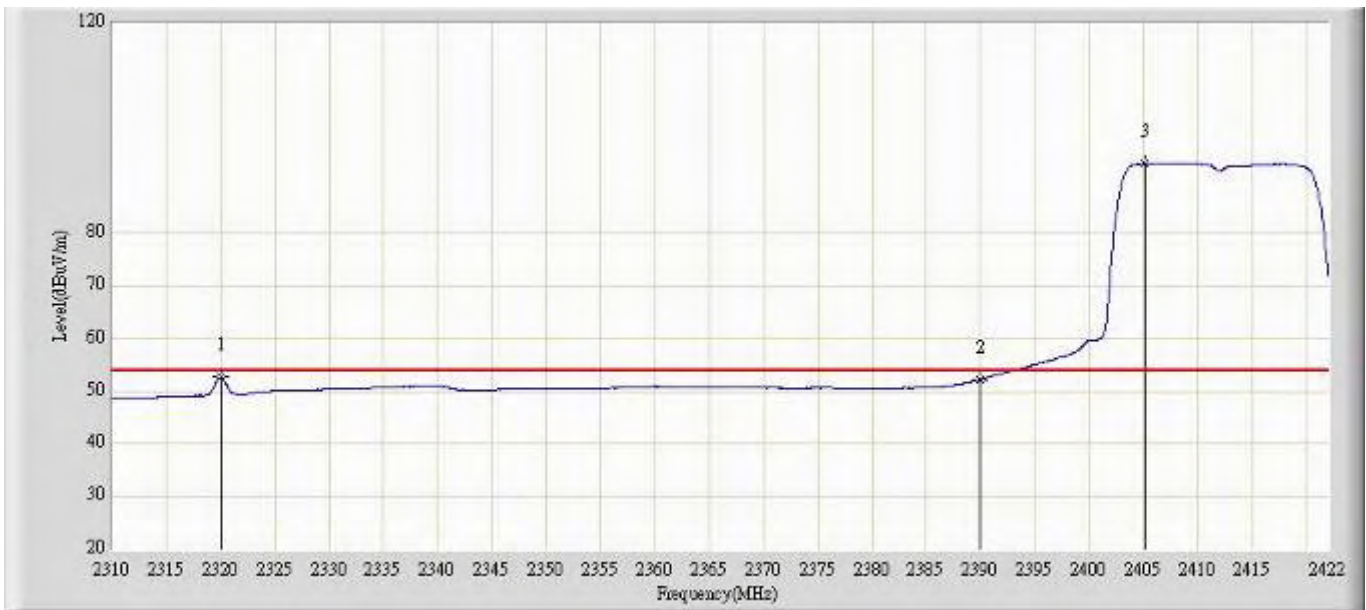


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2320.024	52.621	21.373	-1.379	54.000	31.249	AV
2			2390.000	52.243	21.058	-1.757	54.000	31.185	AV
3		*	2405.200	93.324	62.143	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 59
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 1)	

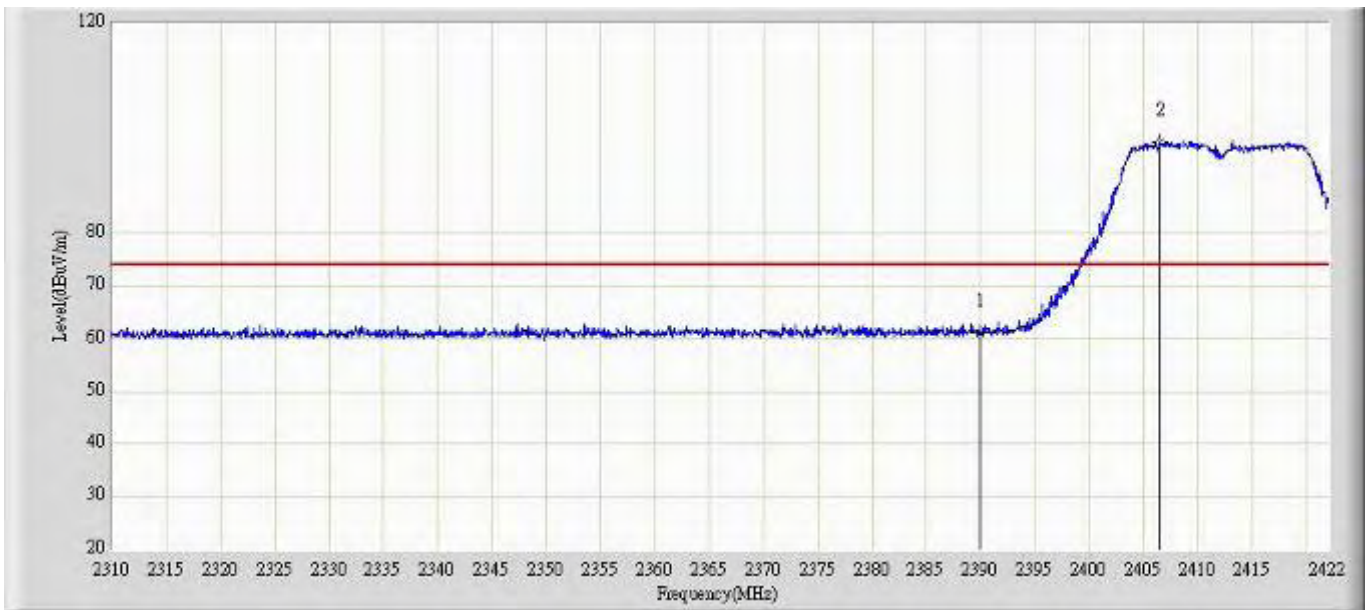

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.185	30.000	-12.815	74.000	31.185	PK
2		*	2406.544	97.196	66.015	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 60
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 1)	

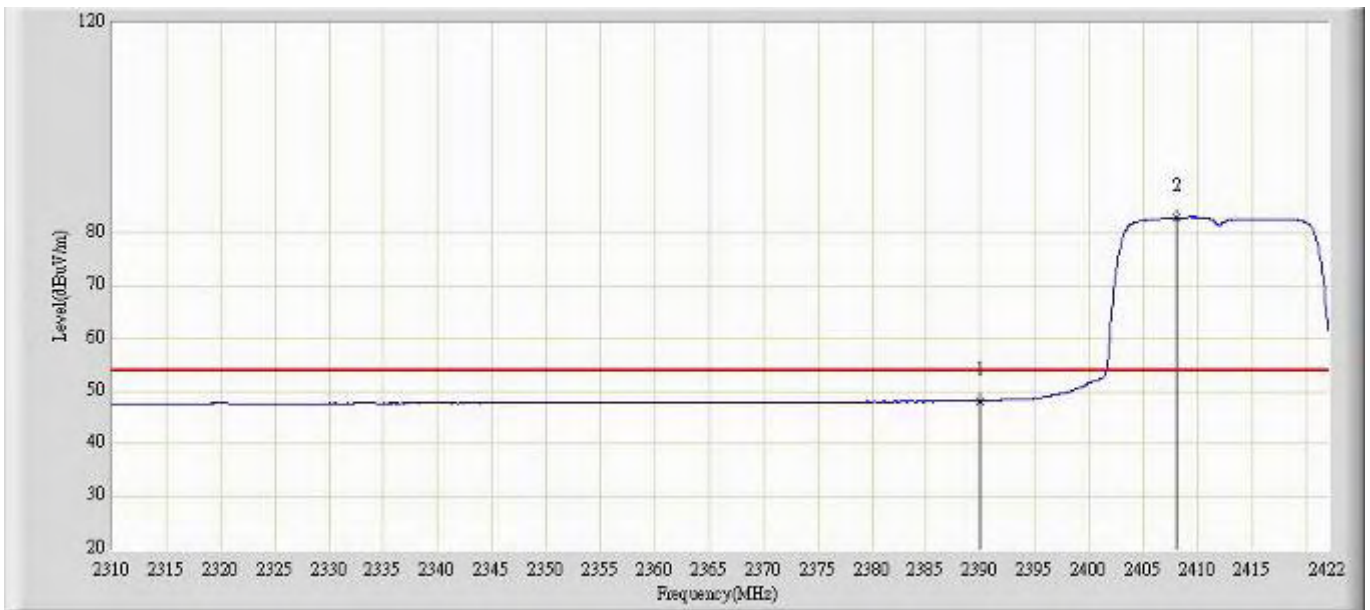

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.165	16.980	-5.835	54.000	31.185	AV
2		*	2408.000	82.966	51.785	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 61
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 1)	

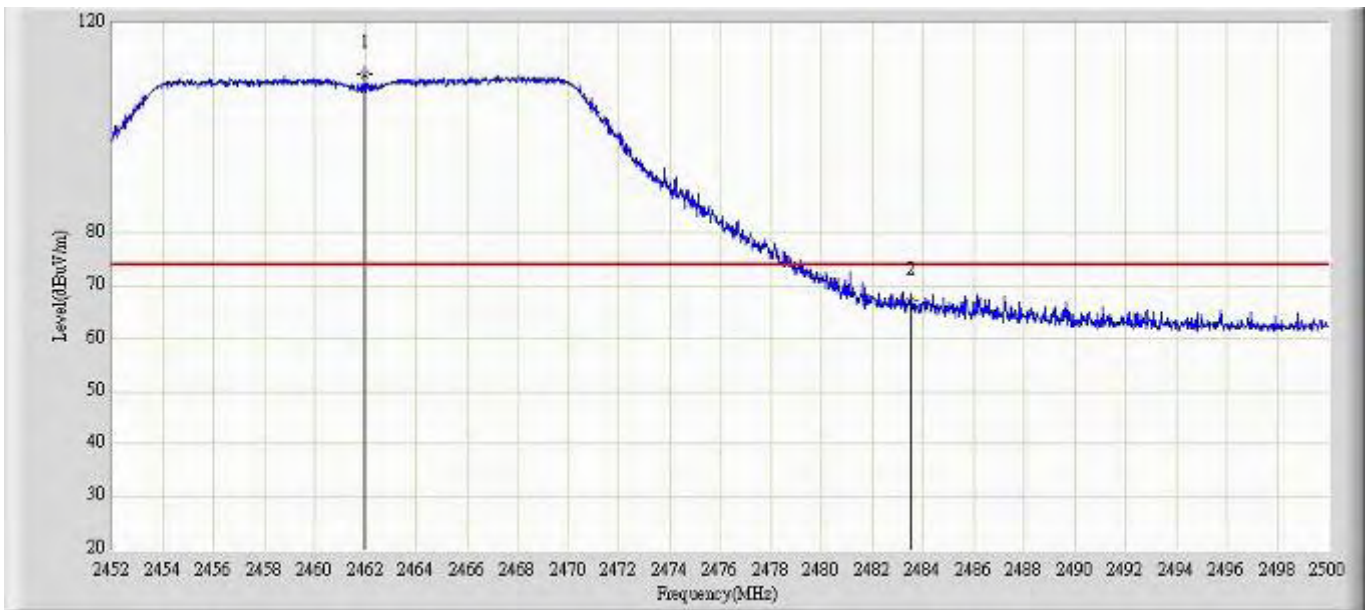


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2461.984	110.247	79.044	N/A	N/A	31.203	PK
2			2483.500	67.236	36.027	-6.764	74.000	31.209	PK

Profile: 11BS004R	Page No.: 62
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 1)	

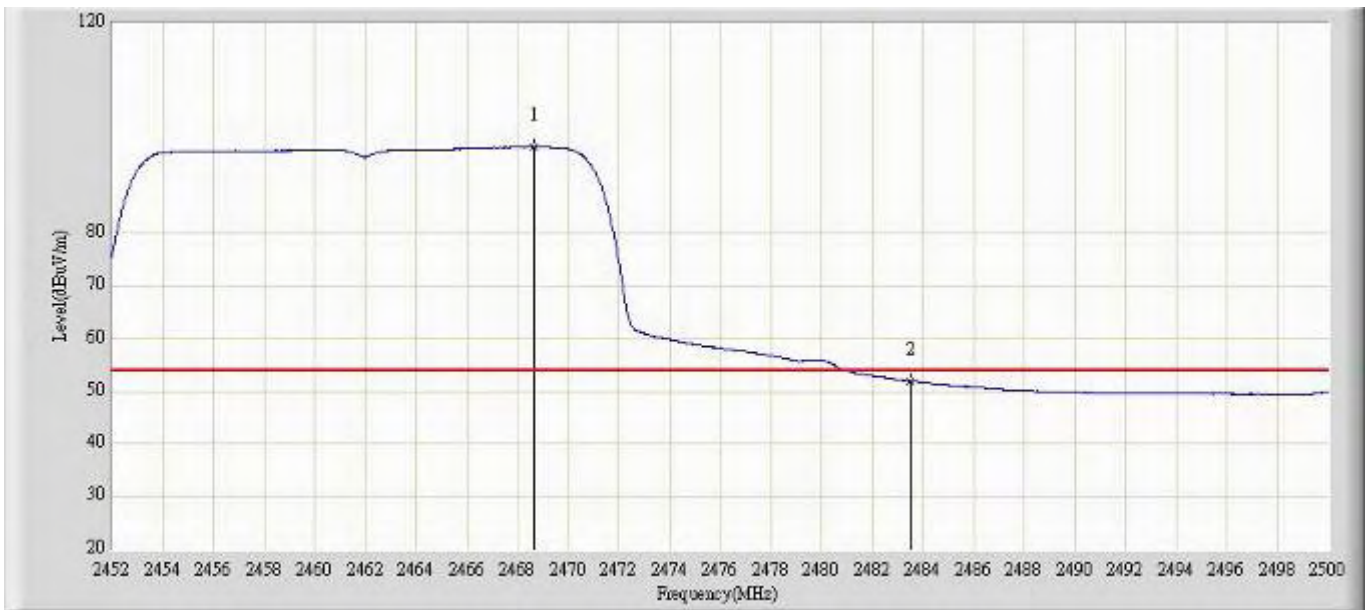


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2468.632	96.365	65.161	N/A	N/A	31.204	AV
2			2483.500	51.922	20.713	-2.078	54.000	31.209	AV

Profile: 11BS004R	Page No.: 63
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 1)	

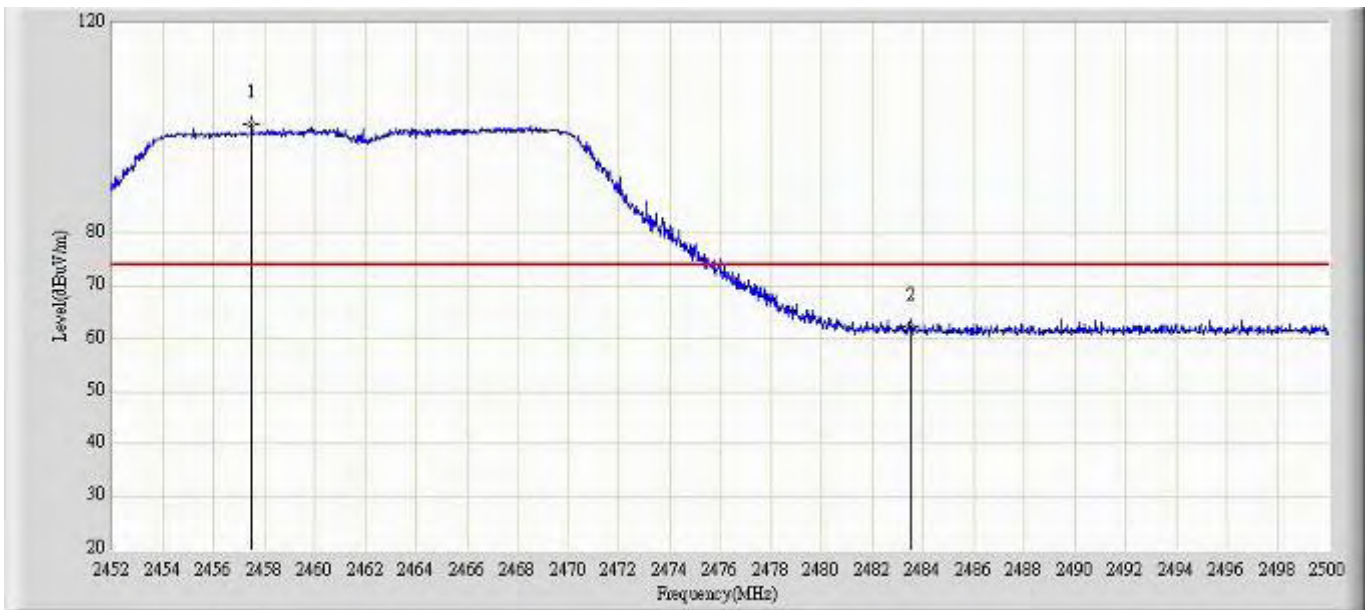


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2457.520	100.629	69.431	N/A	N/A	31.198	PK
2			2483.500	62.159	30.950	-11.841	74.000	31.209	PK

Profile: 11BS004R	Page No.: 64
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 1)	

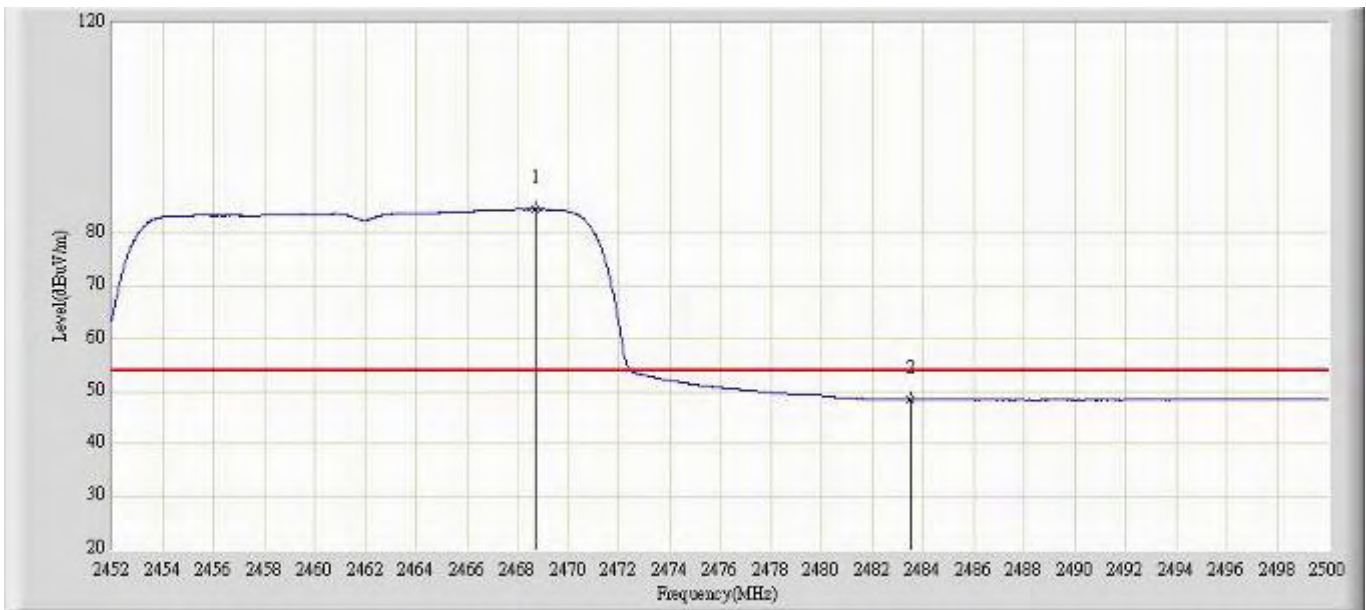


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2468.704	84.537	53.333	N/A	N/A	31.204	AV
2			2483.500	48.468	17.259	-5.532	54.000	31.209	AV

Profile: 11BS004R	Page No.: 65
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 2)	

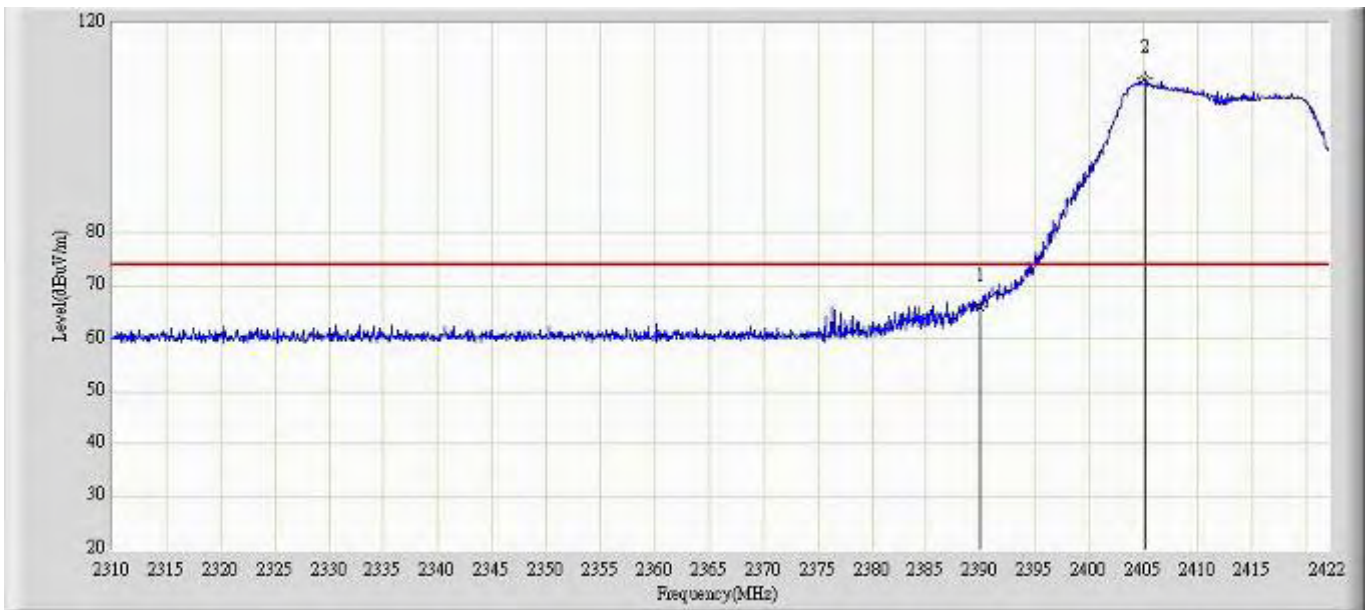


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	66.018	34.833	-7.982	74.000	31.185	PK
2		*	2405.200	109.509	78.328	N/A	N/A	31.181	PK

Profile: 11BS004R	Page No.: 66
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 2)	

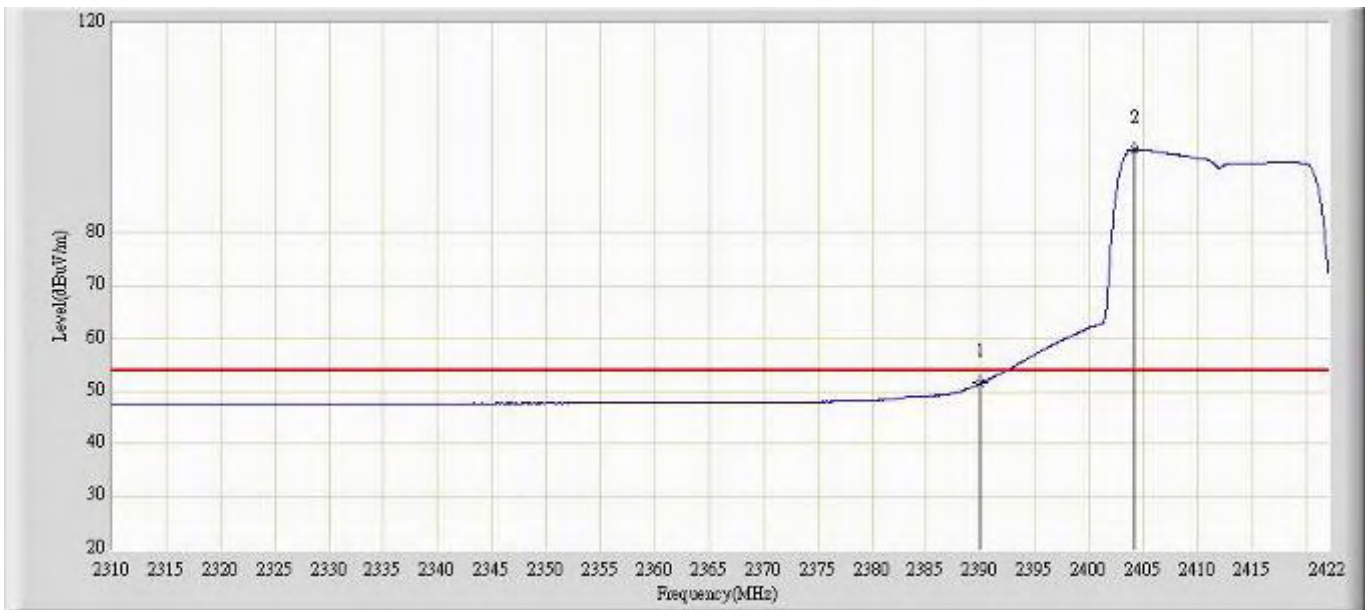


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	51.528	20.343	-2.472	54.000	31.185	AV
2		*	2404.192	95.957	64.776	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 67
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 2)	

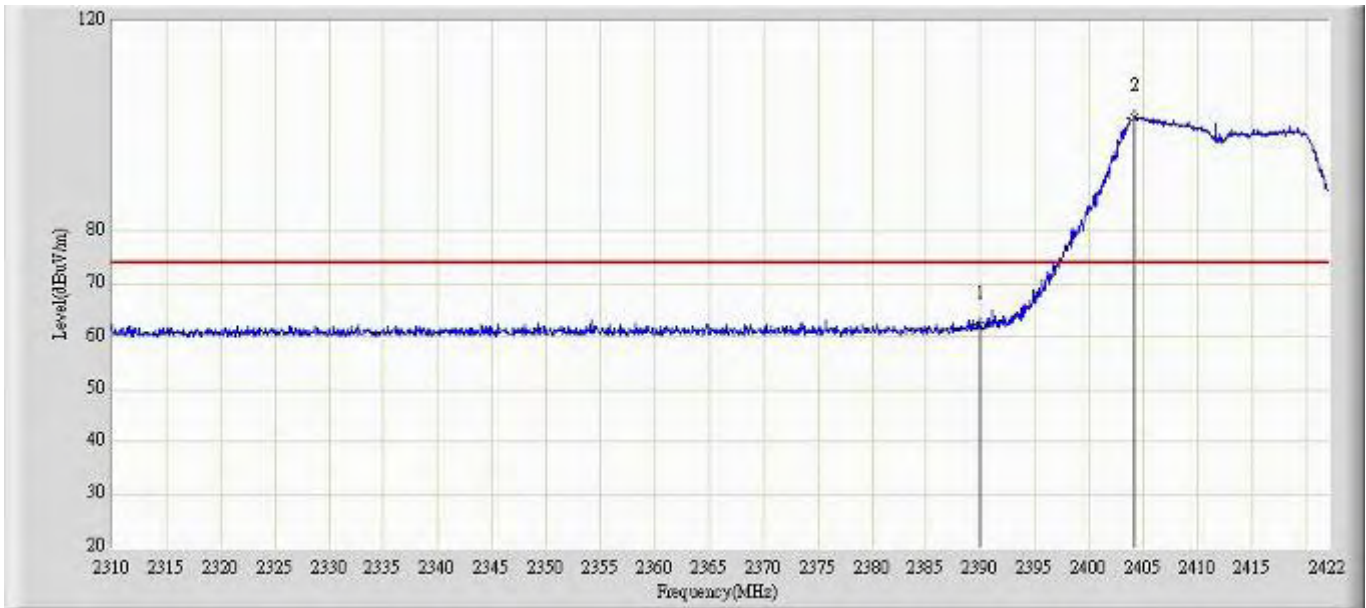

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	62.248	31.063	-11.752	74.000	31.185	PK
2		*	2404.192	101.622	70.441	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 68
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 2)	

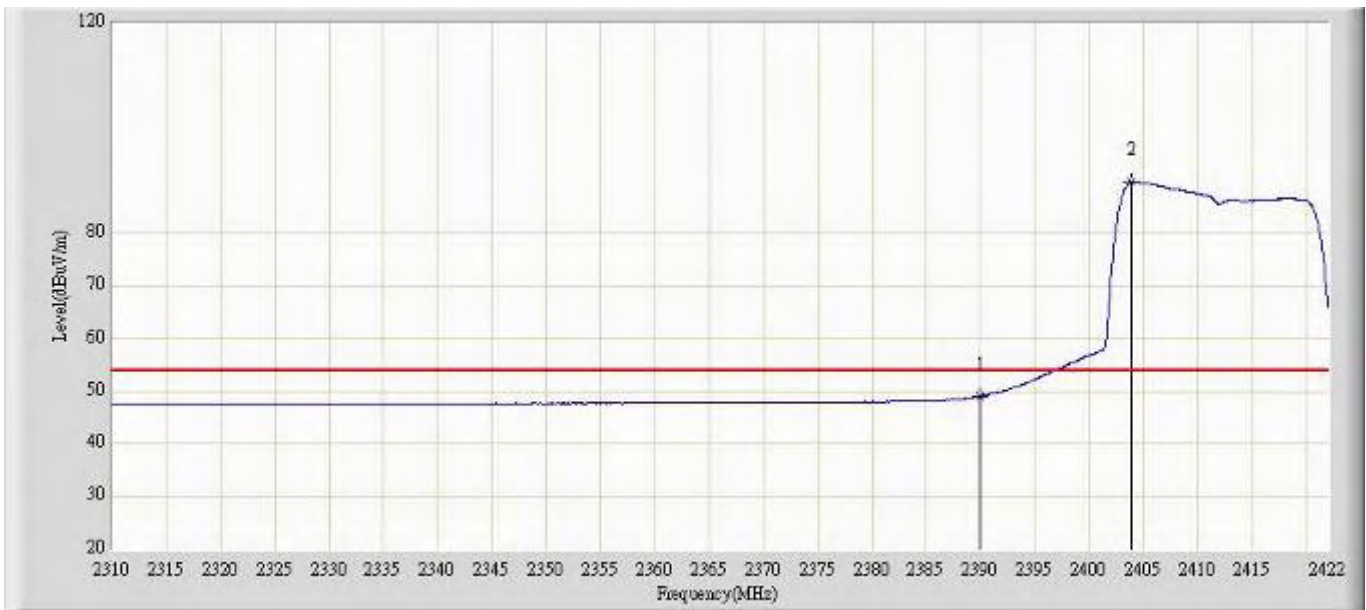

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.062	17.877	-4.938	54.000	31.185	AV
2		*	2403.856	89.754	58.573	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 69
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 2)	

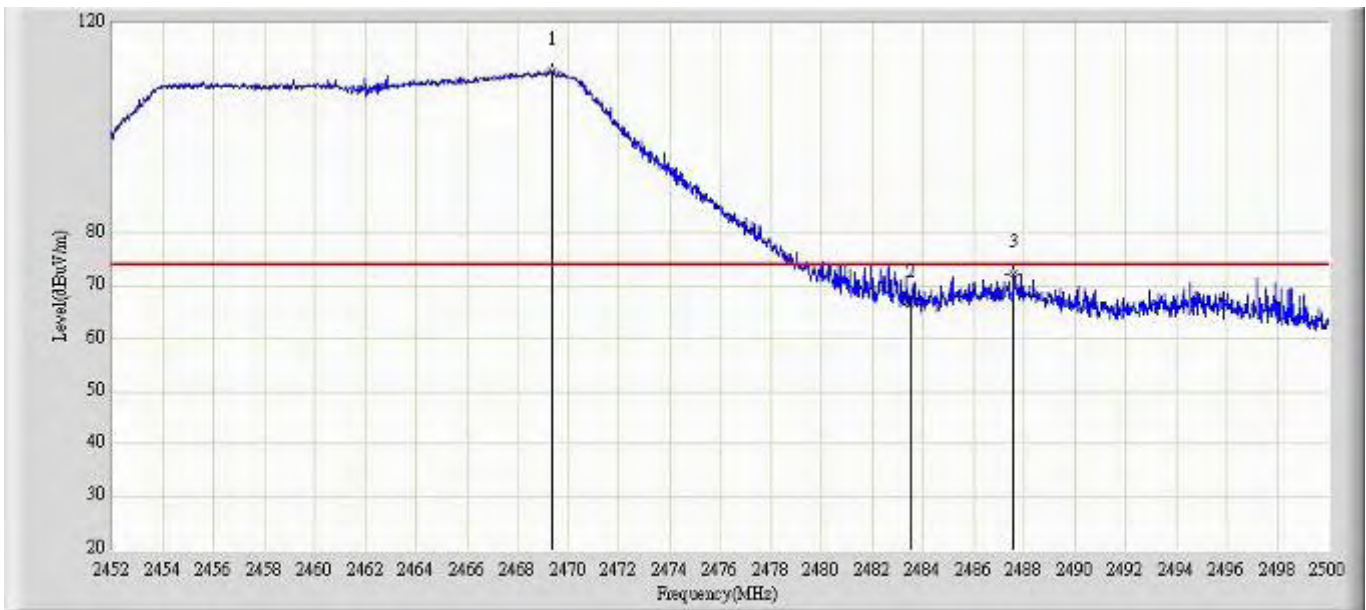


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.376	110.834	79.630	N/A	N/A	31.205	PK
2			2483.500	66.597	35.388	-7.403	74.000	31.209	PK
3			2487.592	72.366	41.154	-1.634	74.000	31.212	PK

Profile: 11BS004R	Page No.: 70
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 2)	

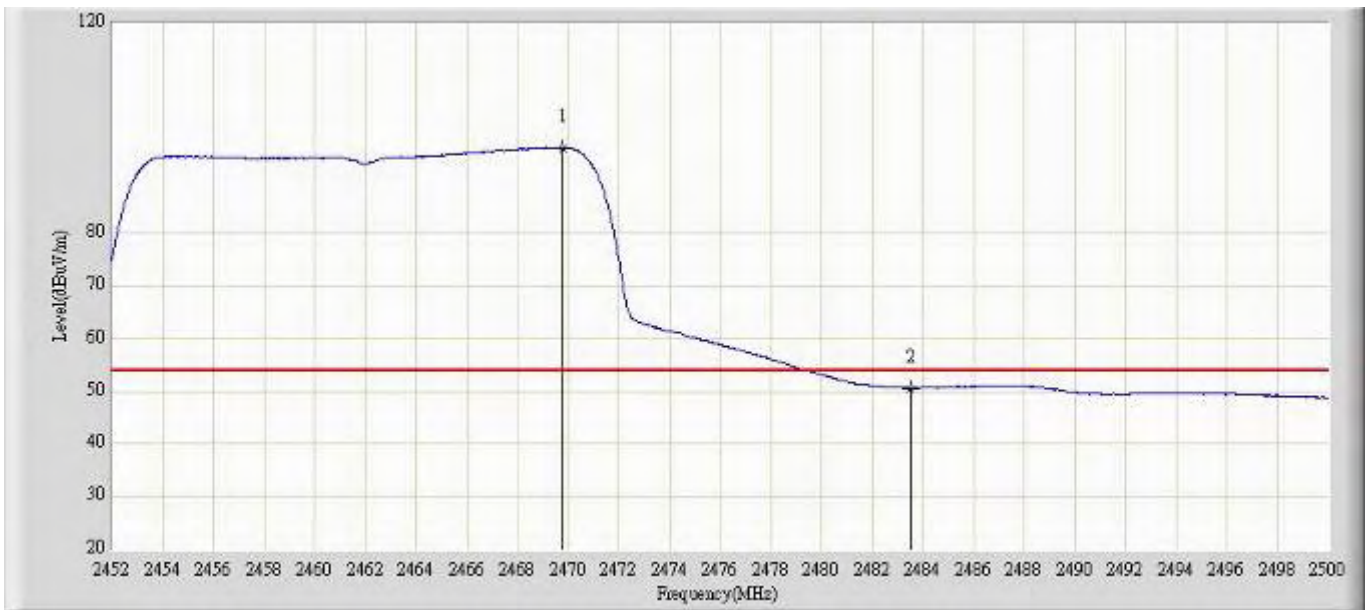


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.808	96.193	64.989	N/A	N/A	31.204	AV
2			2483.500	50.595	19.386	-3.405	54.000	31.209	AV

Profile: 11BS004R	Page No.: 71
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 2)	

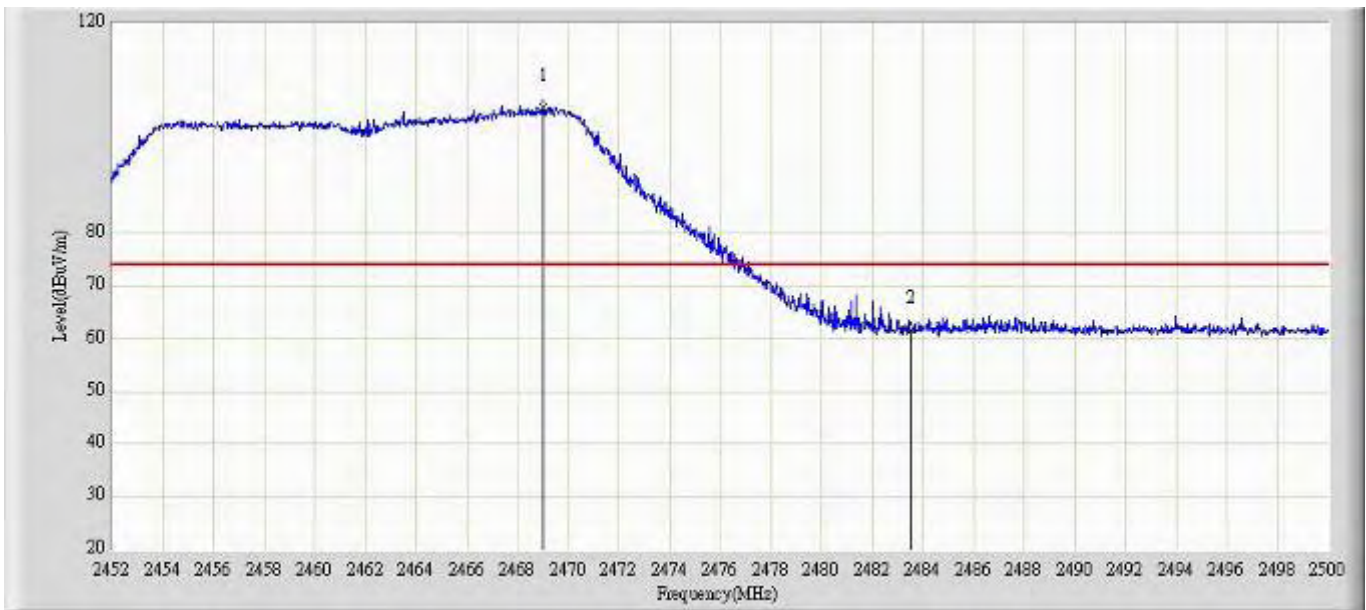


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.040	103.846	72.642	N/A	N/A	31.204	PK
2			2483.500	61.781	30.572	-12.219	74.000	31.209	PK

Profile: 11BS004R	Page No.: 72
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 2)	

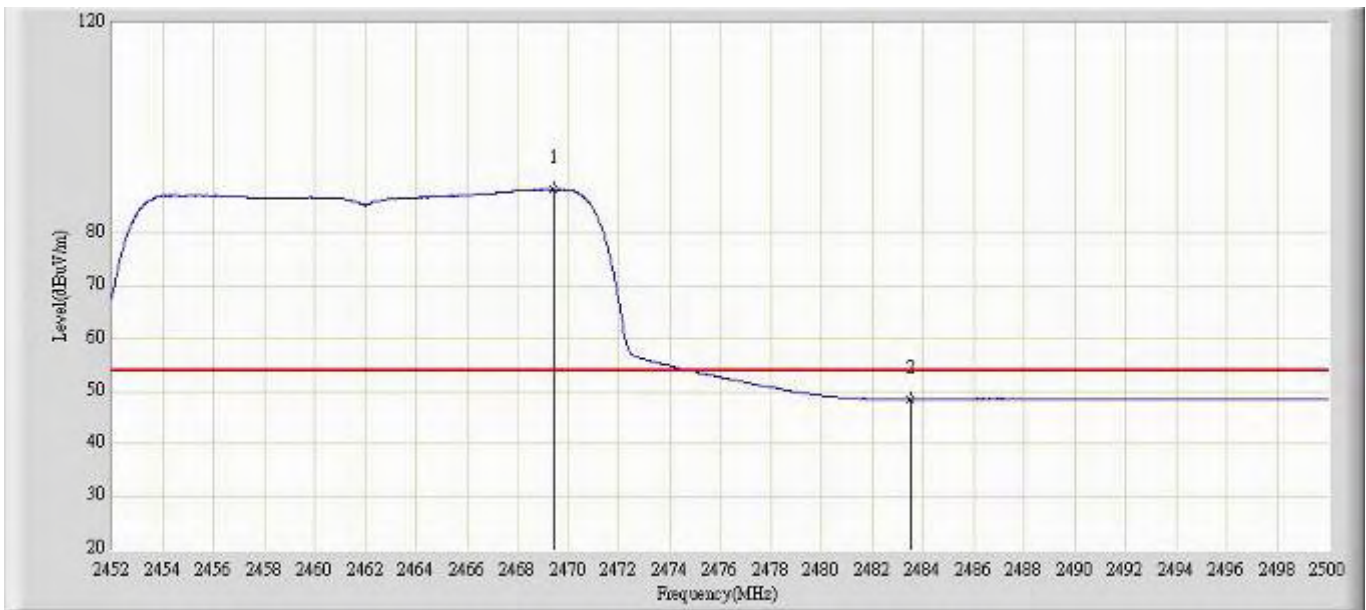


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.448	88.269	57.065	N/A	N/A	31.205	AV
2			2483.500	48.462	17.253	-5.538	54.000	31.209	AV

Profile: 11BS004R	Page No.: 73
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1)	

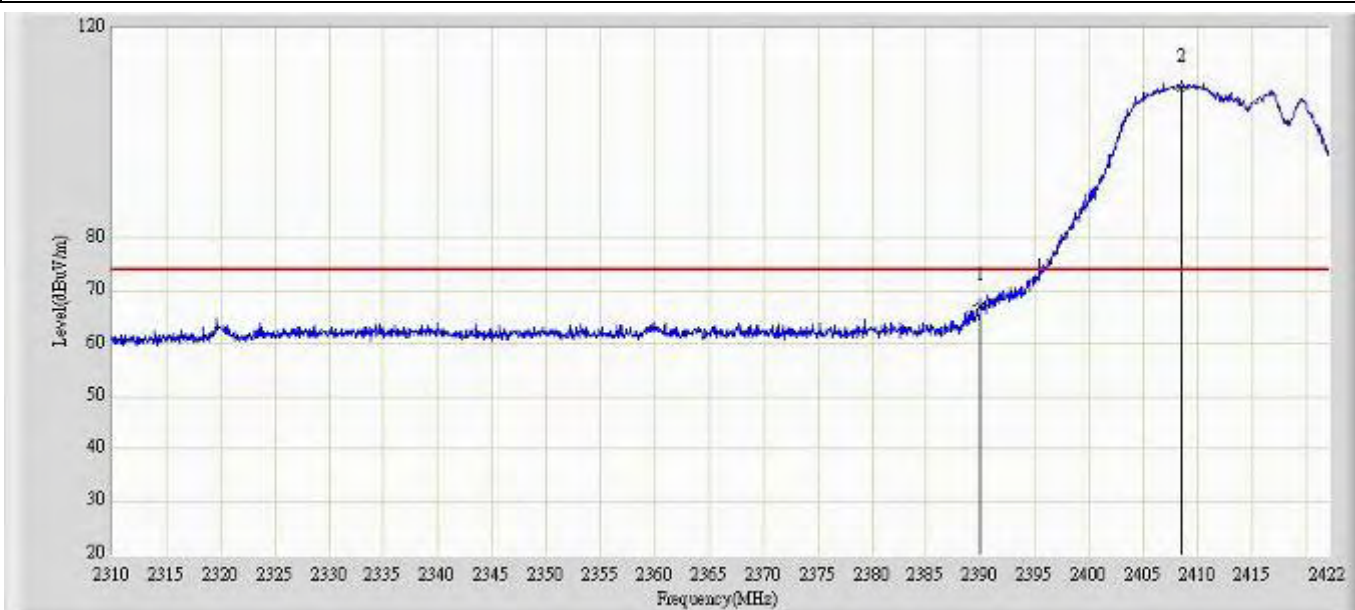


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	67.041	35.856	-6.959	74.000	31.185	PK
2		*	2408.504	108.627	77.447	N/A	N/A	31.180	PK

Profile: 11BS004R	Page No.: 74
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1)	

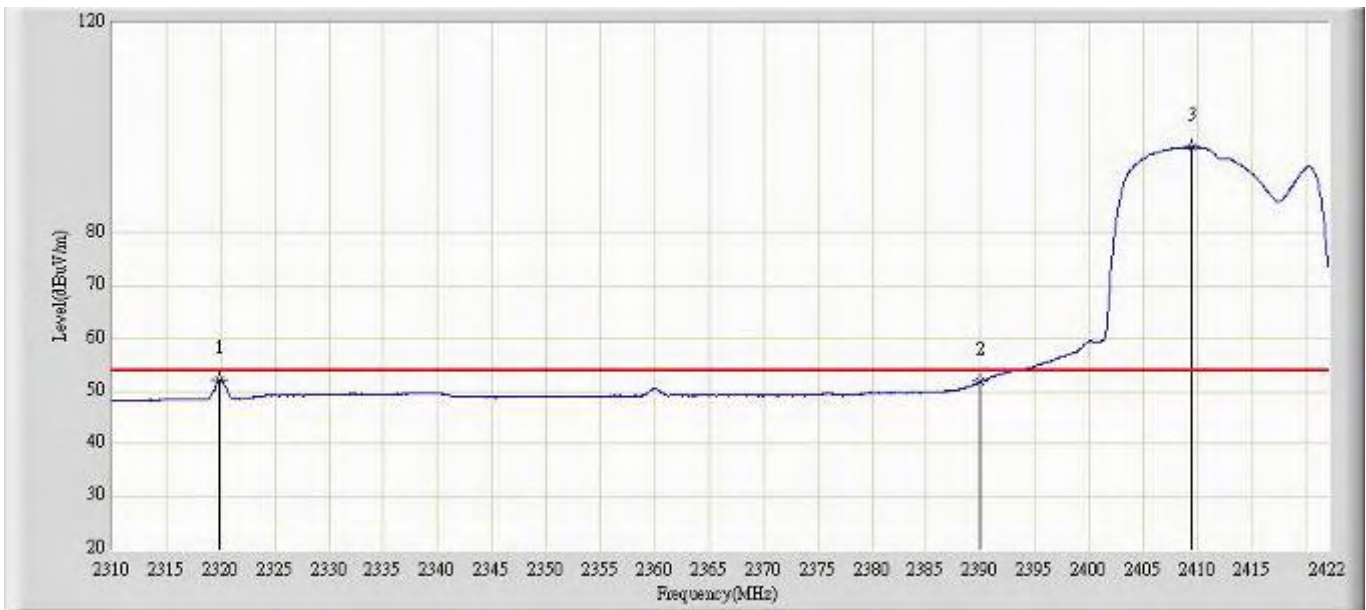


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2319.856	52.259	21.011	-1.741	54.000	31.248	AV
2			2390.000	51.763	20.578	-2.237	54.000	31.185	AV
3		*	2409.400	96.360	65.180	N/A	N/A	31.180	AV

Profile: 11BS004R	Page No.: 75
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1)	

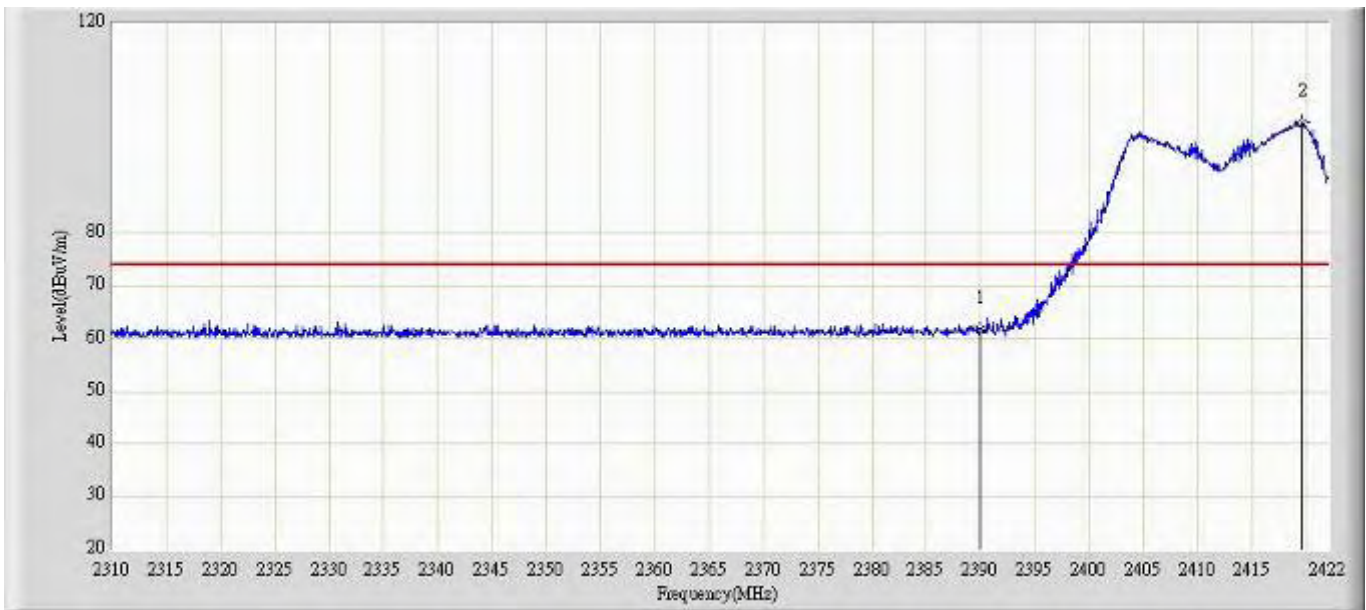

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.685	30.500	-12.315	74.000	31.185	PK
2		*	2419.592	100.936	69.753	N/A	N/A	31.183	PK


Profile: 11BS004R	Page No.: 76
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1)	

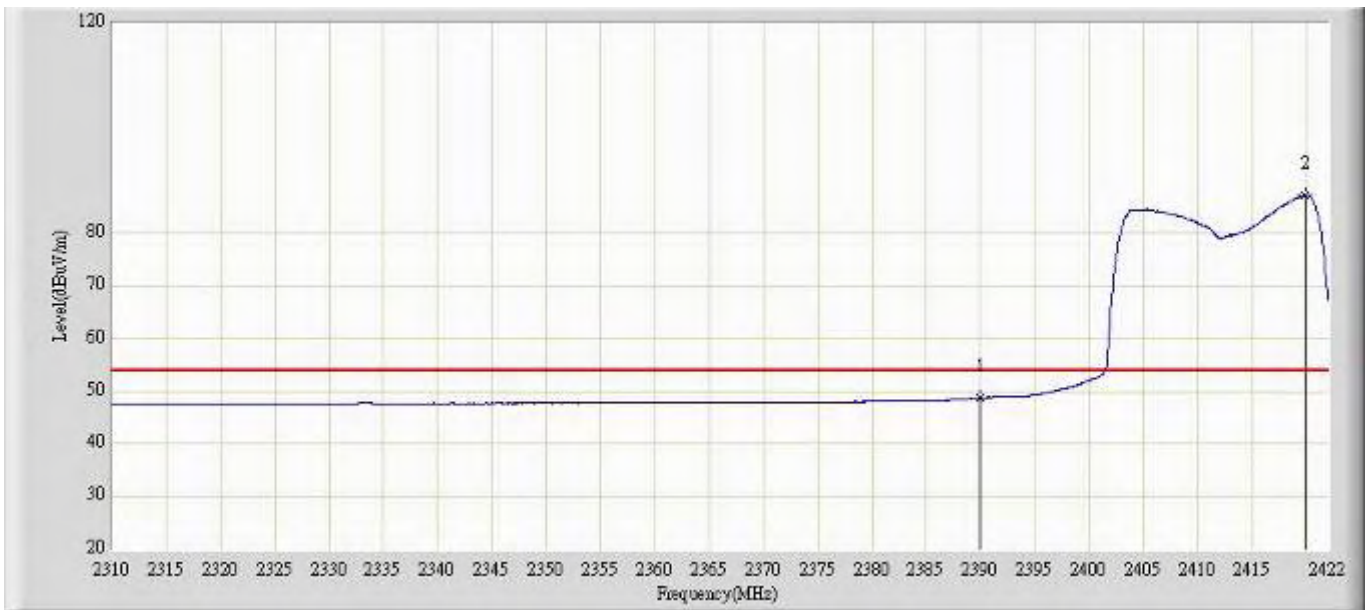

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.795	17.610	-5.205	54.000	31.185	AV
2		*	2419.872	87.257	56.074	N/A	N/A	31.183	AV




Profile: 11BS004R	Page No.: 77
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1)	

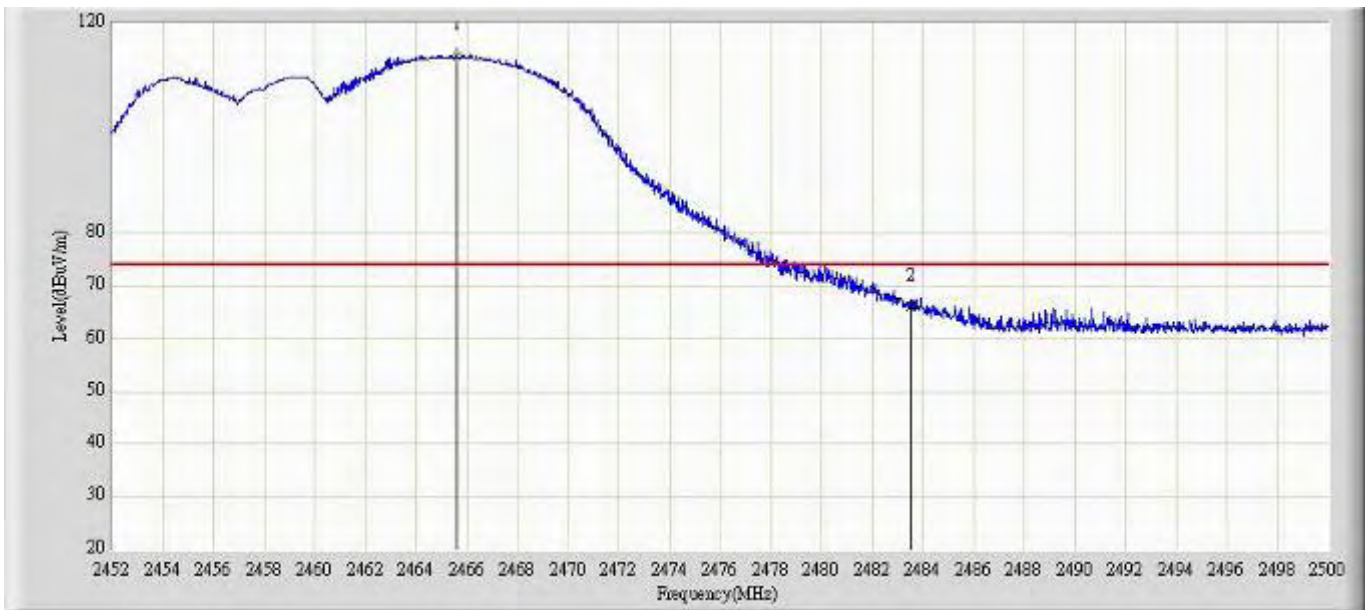


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.632	113.737	82.533	N/A	N/A	31.204	PK
2			2483.500	65.891	34.682	-8.109	74.000	31.209	PK

Profile: 11BS004R	Page No.: 78
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1)	

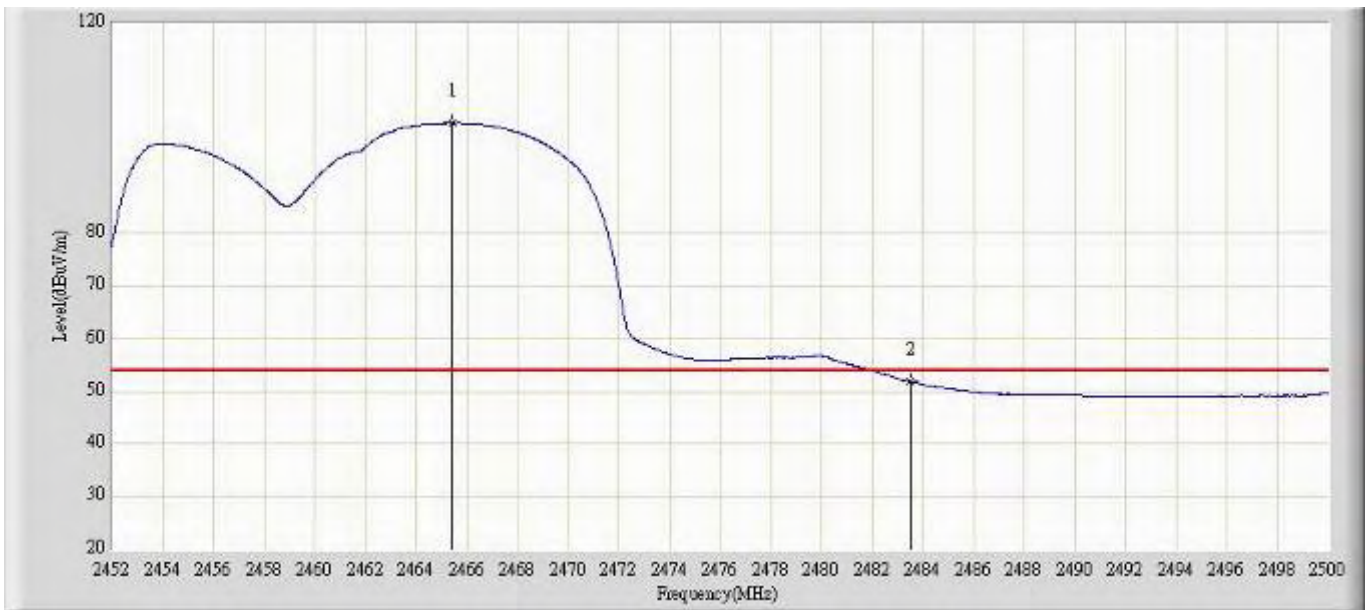


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.440	100.910	69.706	N/A	N/A	31.204	AV
2			2483.500	51.811	20.602	-2.189	54.000	31.209	AV

Profile: 11BS004R	Page No.: 79
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1)	

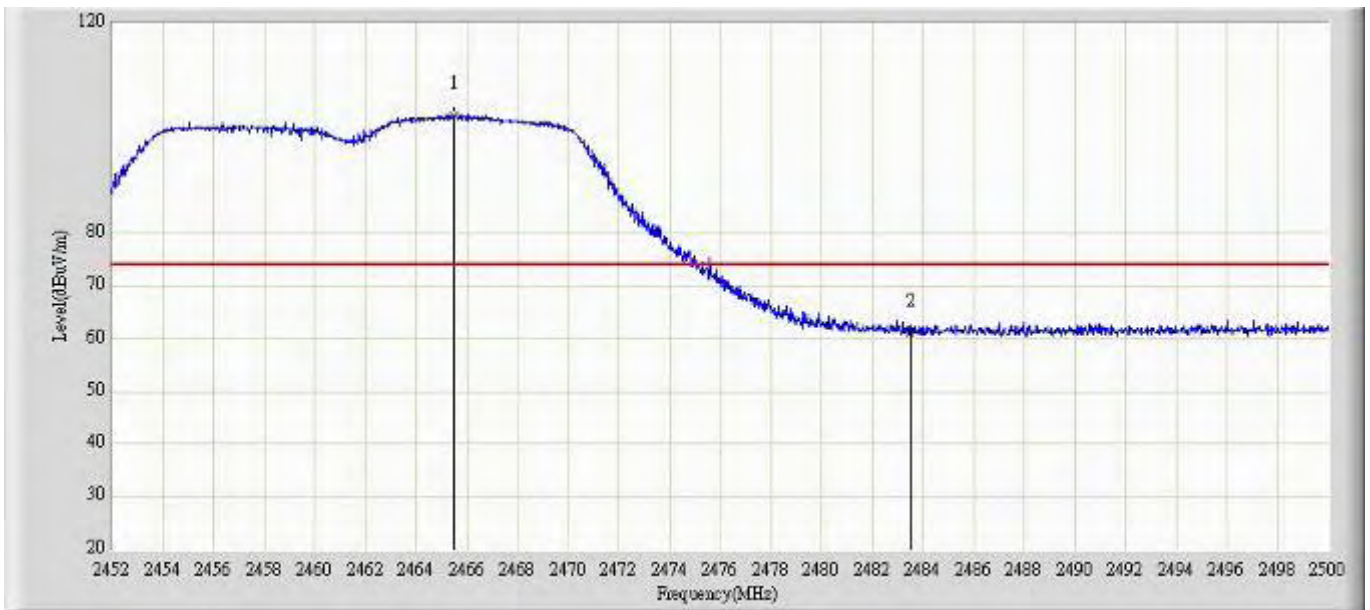


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.464	102.590	71.386	N/A	N/A	31.204	PK
2			2483.500	61.211	30.002	-12.789	74.000	31.209	PK

Profile: 11BS004R	Page No.: 80
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1)	

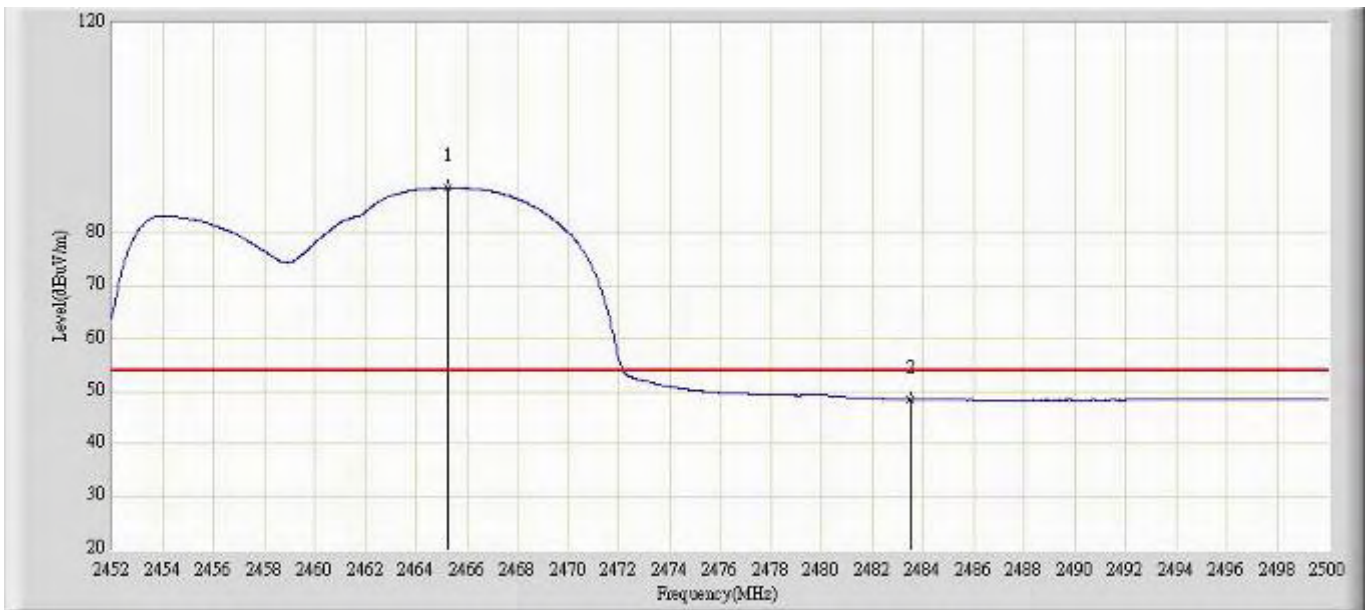


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.272	88.573	57.369	N/A	N/A	31.204	AV
2			2483.500	48.466	17.257	-5.534	54.000	31.209	AV

Profile: 11BS004R	Page No.: 81
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 14:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1+2)	

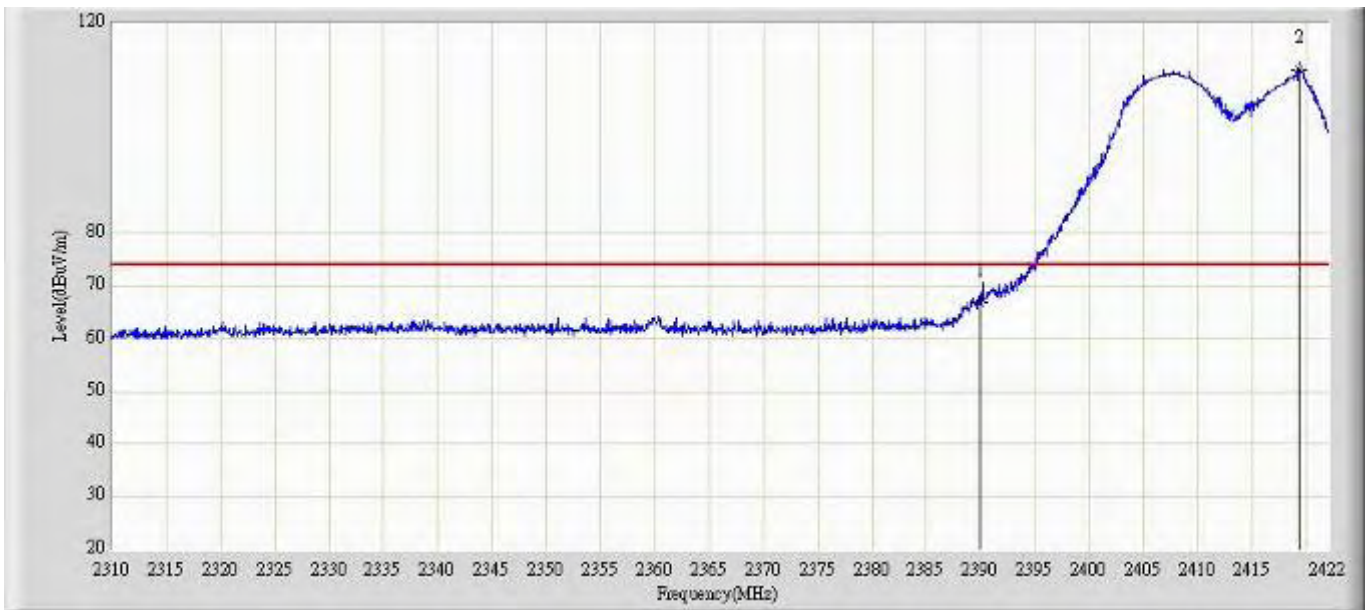


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	66.974	35.789	-7.026	74.000	31.185	PK
2		*	2419.312	111.182	79.999	N/A	N/A	31.183	PK

Profile: 11BS004R	Page No.: 82
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1+2)	

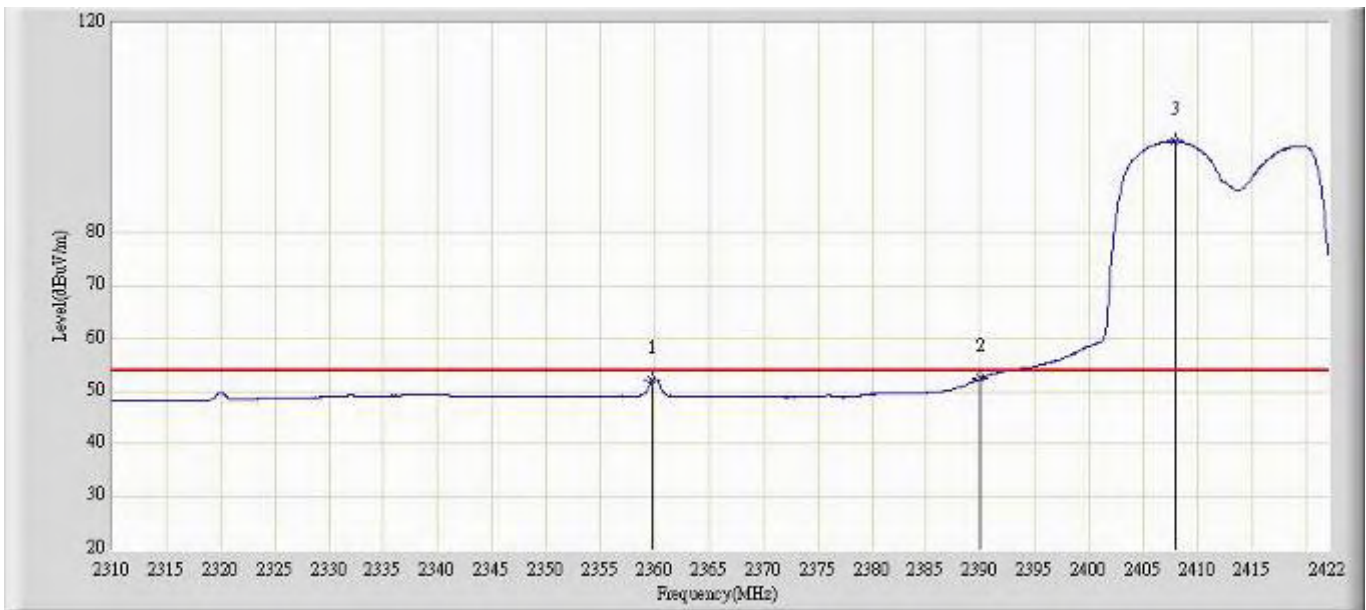


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2359.784	52.144	20.930	-1.856	54.000	31.214	AV
2			2390.000	52.428	21.243	-1.572	54.000	31.185	AV
3		*	2407.888	97.513	66.332	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 83
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1+2)	

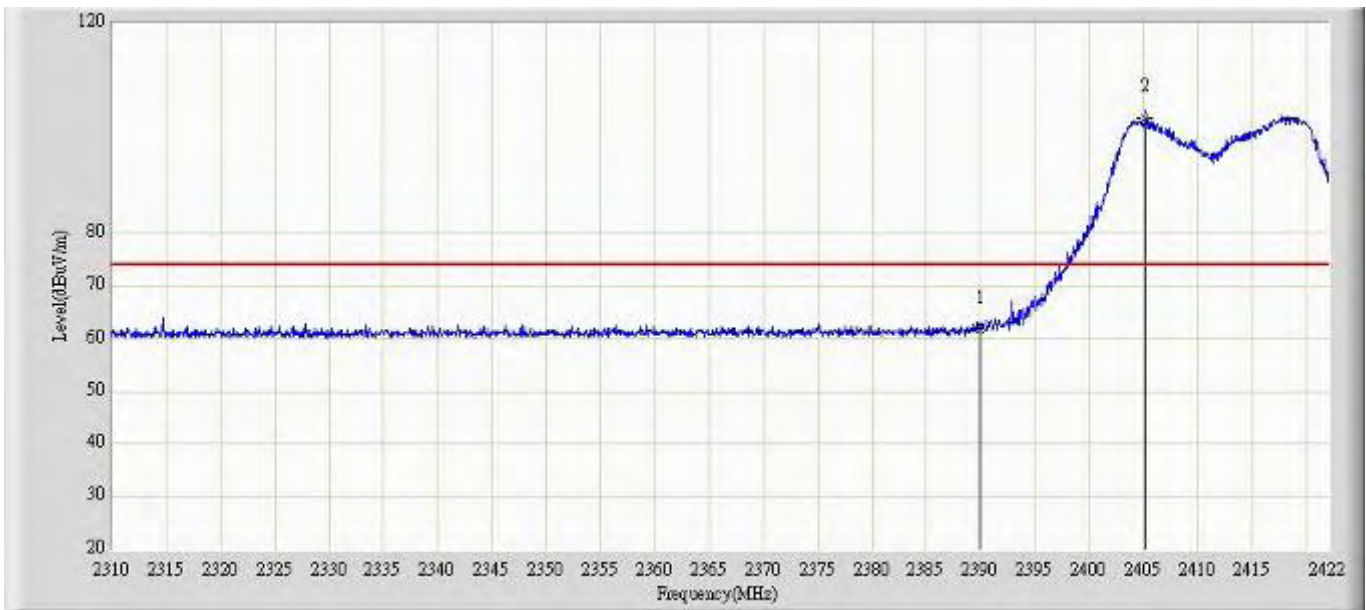

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.543	30.358	-12.457	74.000	31.185	PK
2		*	2405.144	101.870	70.689	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 84
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2412MHz by 802.11n20 (Chain 0+1+2)	

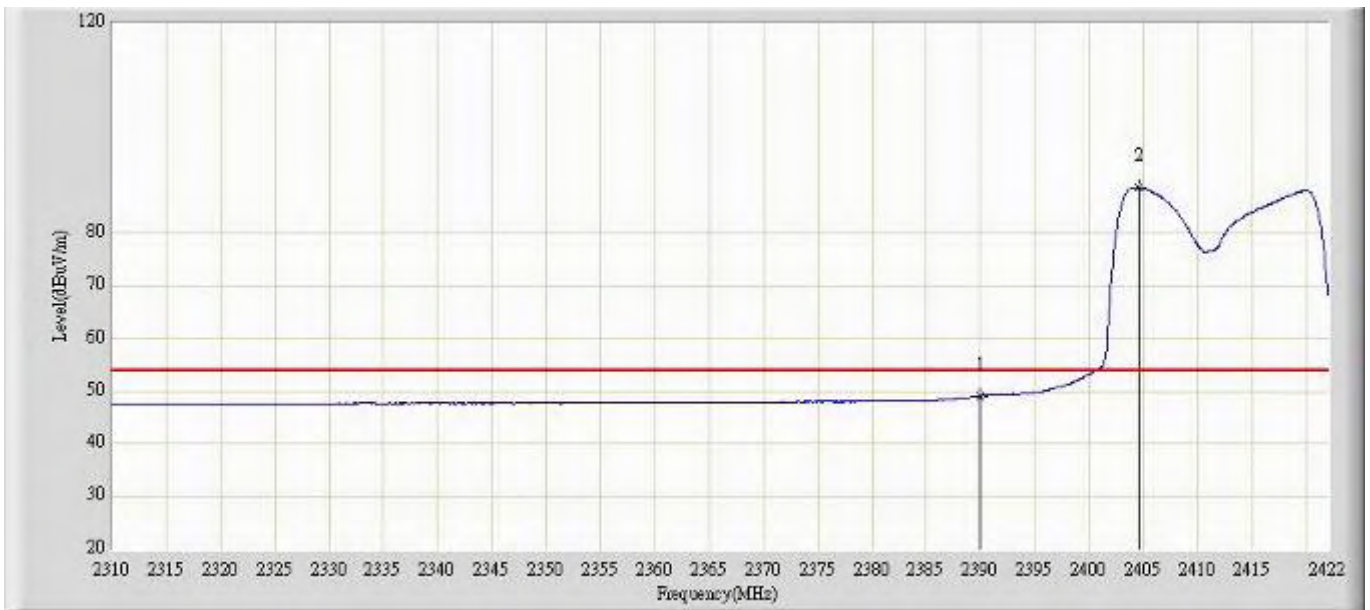

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.140	17.955	-4.860	54.000	31.185	AV
2		*	2404.528	88.580	57.399	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 85
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1+2)	

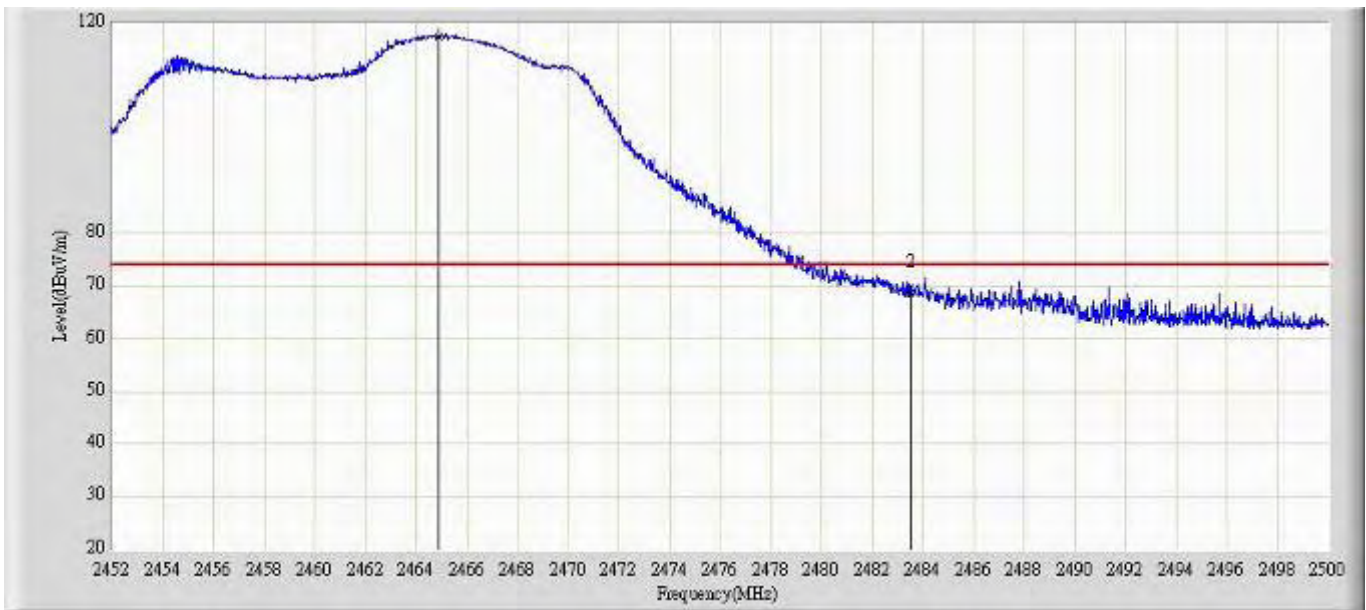


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.888	117.535	86.331	N/A	N/A	31.203	PK
2			2483.500	68.622	37.413	-5.378	74.000	31.209	PK

Profile: 11BS004R	Page No.: 86
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1+2)	

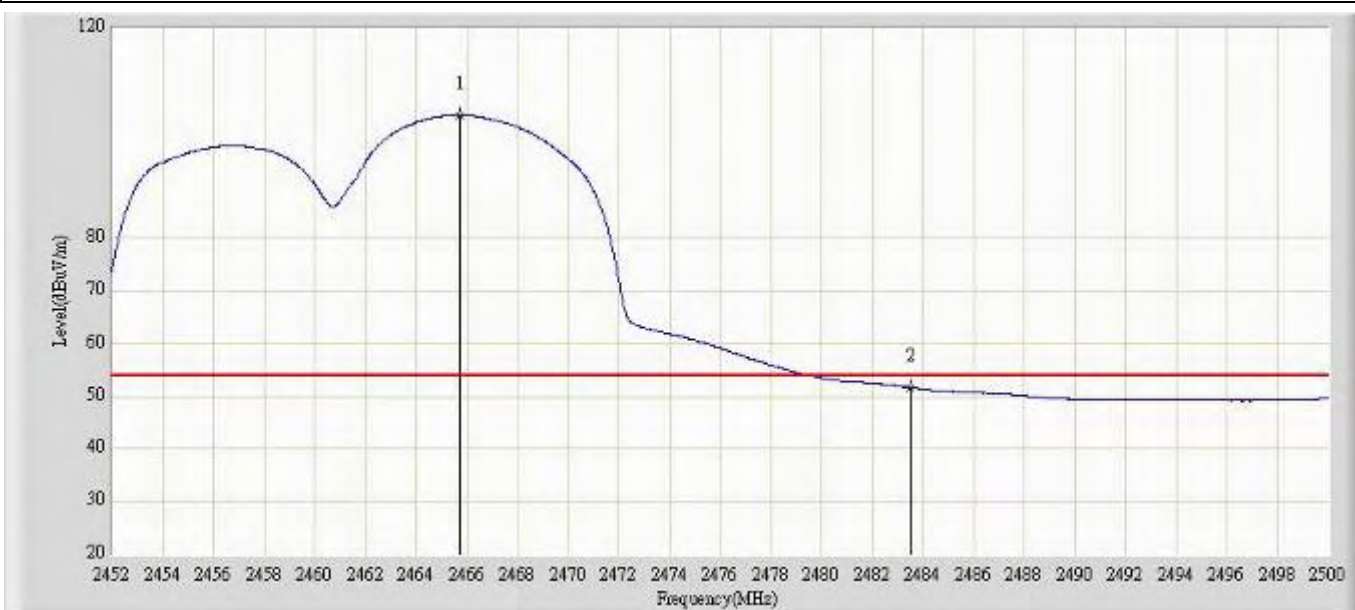


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.704	103.408	72.204	N/A	N/A	31.204	AV
2			2483.500	51.636	20.427	-2.364	54.000	31.209	AV

Profile: 11BS004R	Page No.: 87
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1+2)	

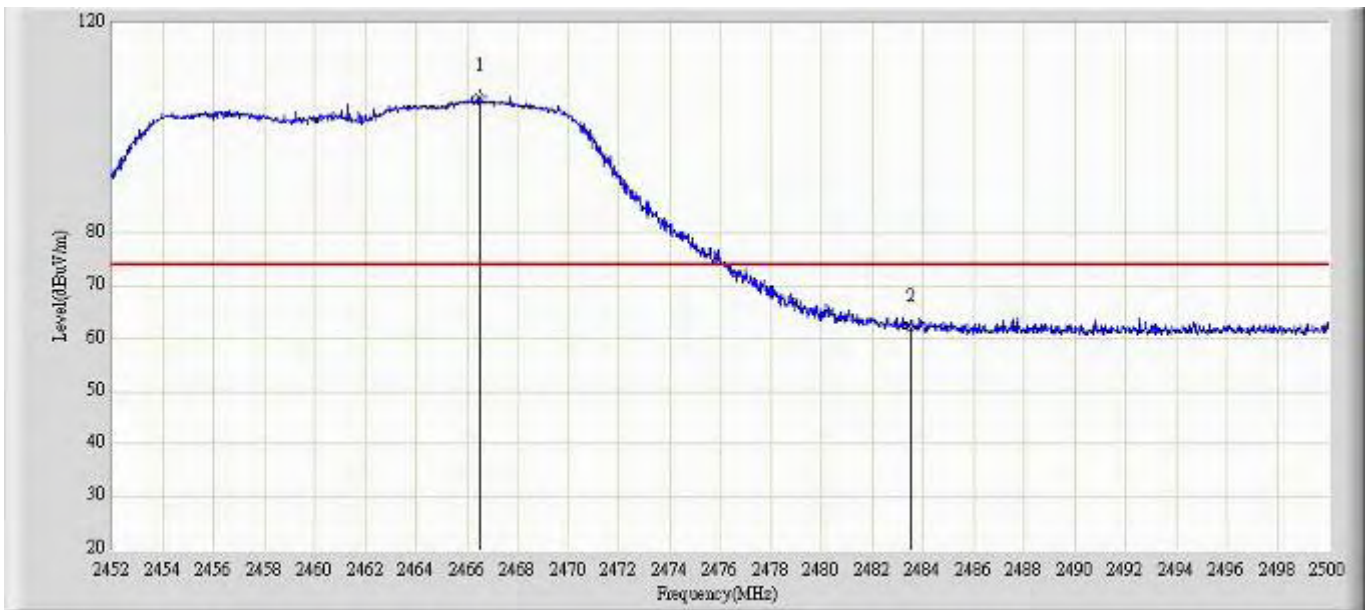


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2466.496	105.900	74.696	N/A	N/A	31.203	PK
2			2483.500	62.096	30.887	-11.904	74.000	31.209	PK

Profile: 11BS004R	Page No.: 88
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 2462MHz by 802.11n20 (Chain 0+1+2)	

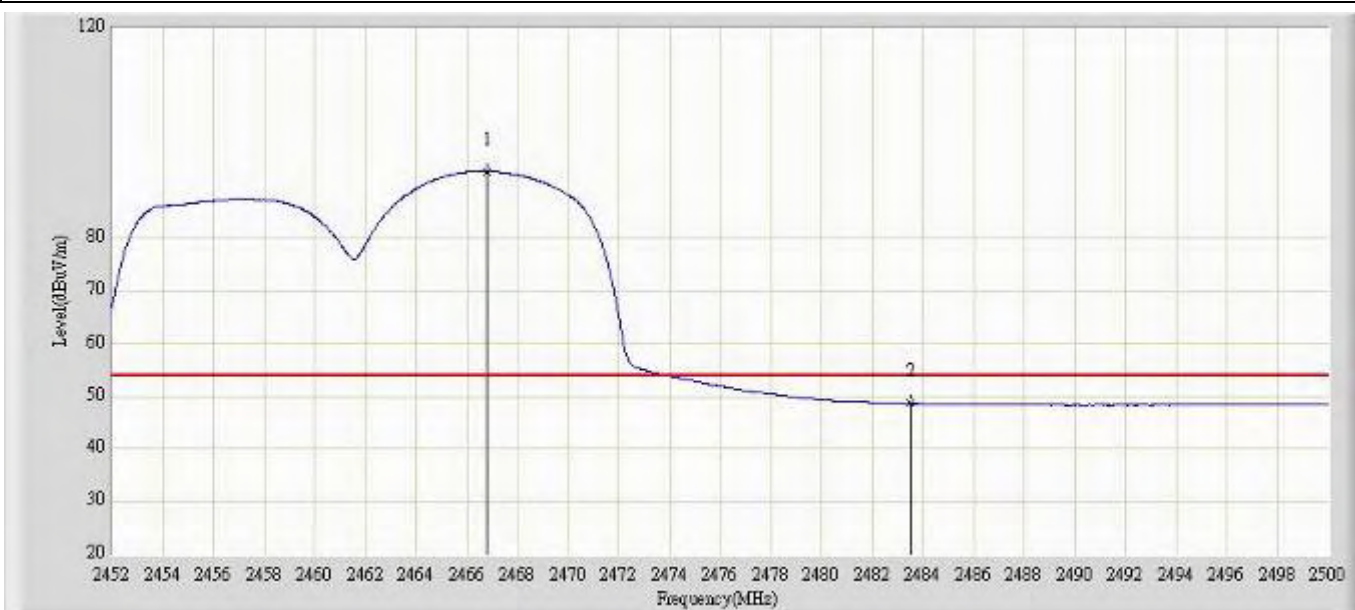


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2466.832	92.728	61.524	N/A	N/A	31.204	AV
2			2483.500	48.618	17.409	-5.382	54.000	31.209	AV

Profile: 11BS004R	Page No.: 89
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0)	

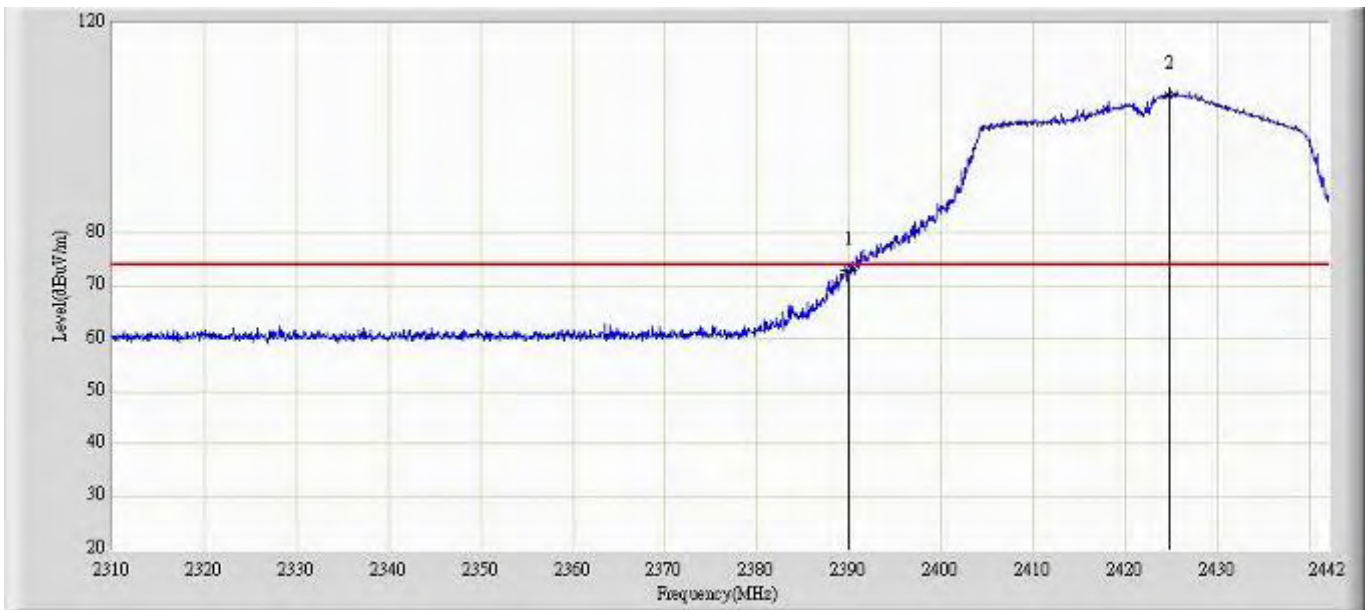


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	72.801	41.616	-1.199	74.000	31.185	PK
2		*	2424.708	106.269	75.084	N/A	N/A	31.185	PK

Profile: 11BS004R	Page No.: 90
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0)	

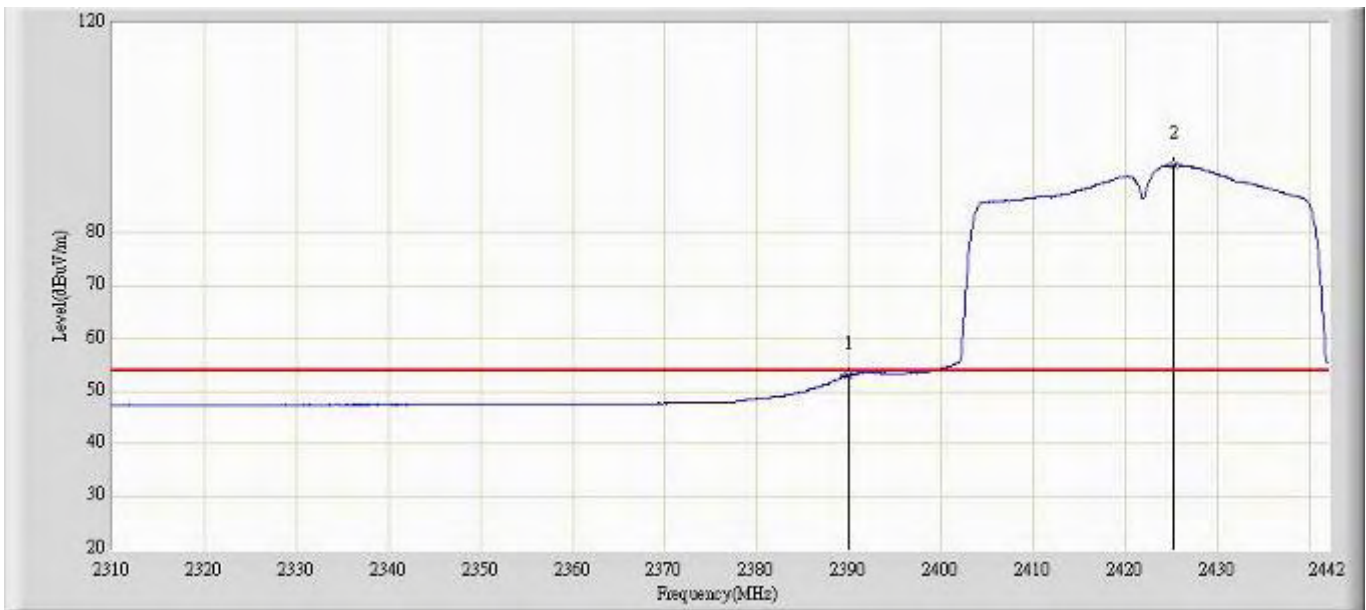


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	53.032	21.847	-0.968	54.000	31.185	AV
2		*	2425.236	92.894	61.709	N/A	N/A	31.185	AV

Profile: 11BS004R	Page No.: 91
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0)	

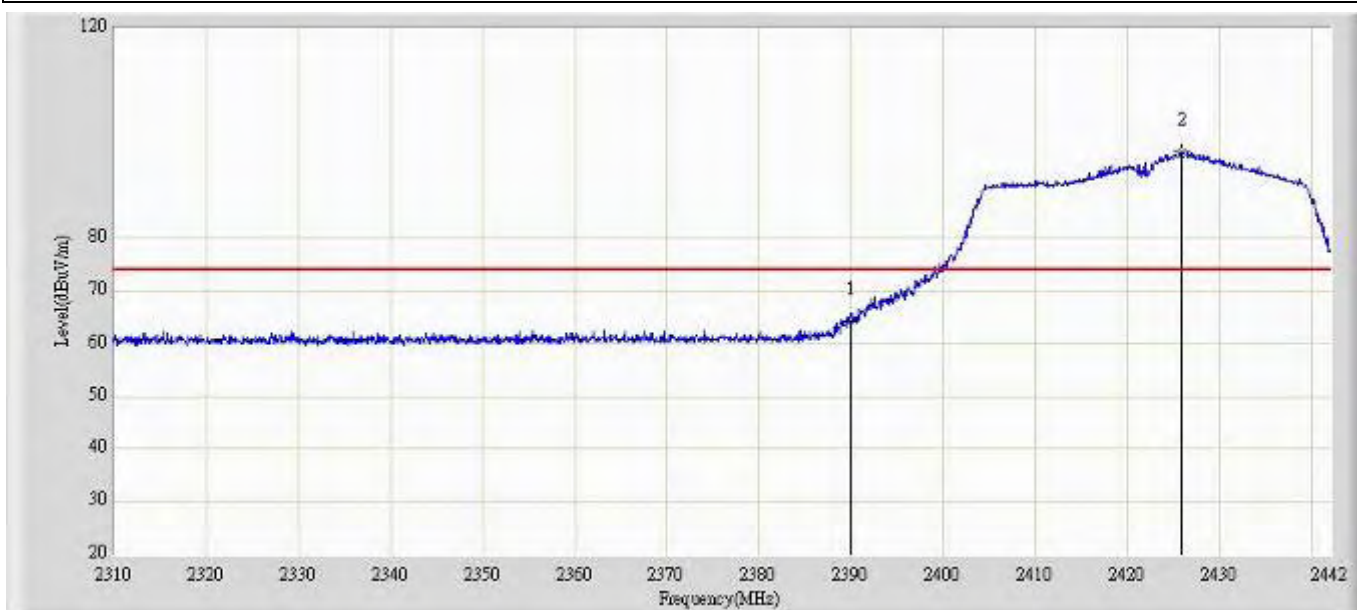

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	64.285	33.100	-9.715	74.000	31.185	PK
2		*	2425.830	96.387	65.202	N/A	N/A	31.185	PK


Profile: 11BS004R	Page No.: 92
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0)	

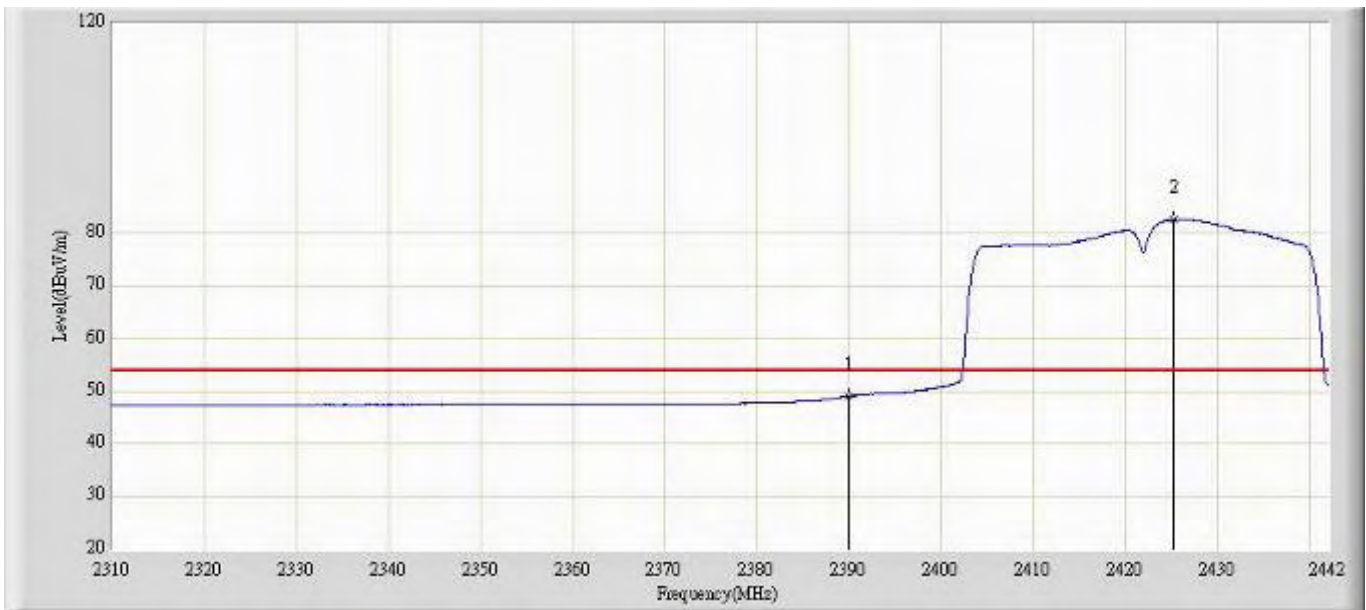

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.081	17.896	-4.919	54.000	31.185	AV
2		*	2425.302	82.592	51.407	N/A	N/A	31.185	AV




Profile: 11BS004R	Page No.: 93
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0)	

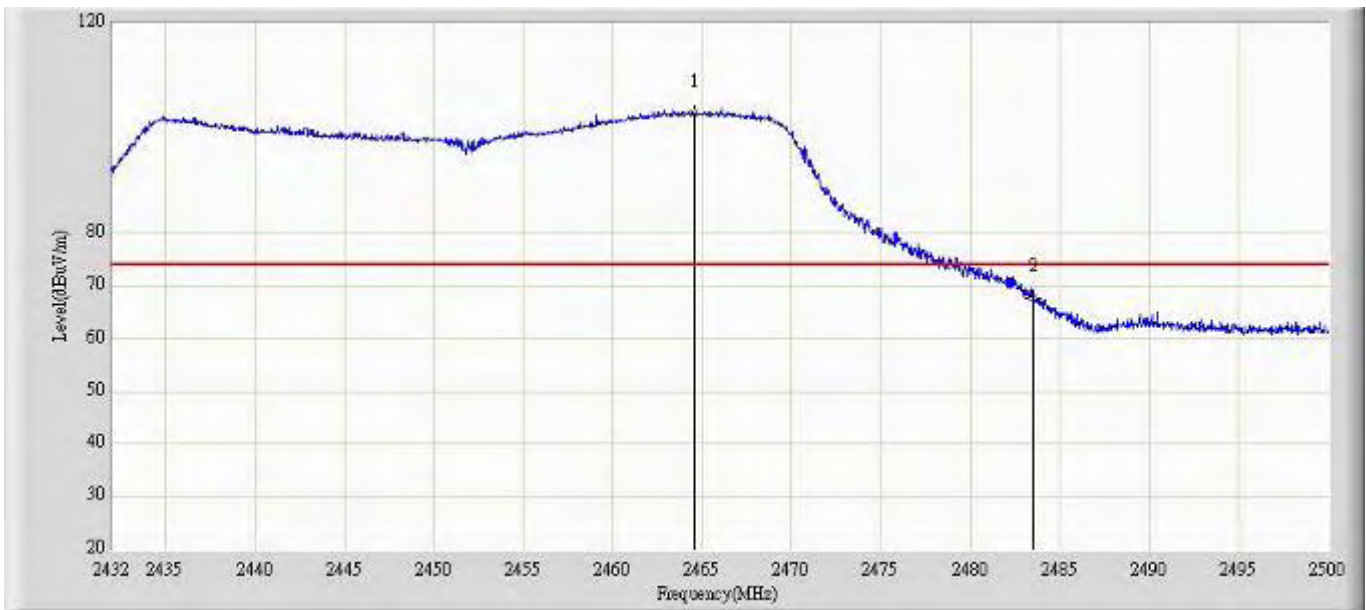


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.538	102.871	71.668	N/A	N/A	31.204	PK
2			2483.500	67.776	36.567	-6.224	74.000	31.209	PK

Profile: 11BS004R	Page No.: 94
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0)	

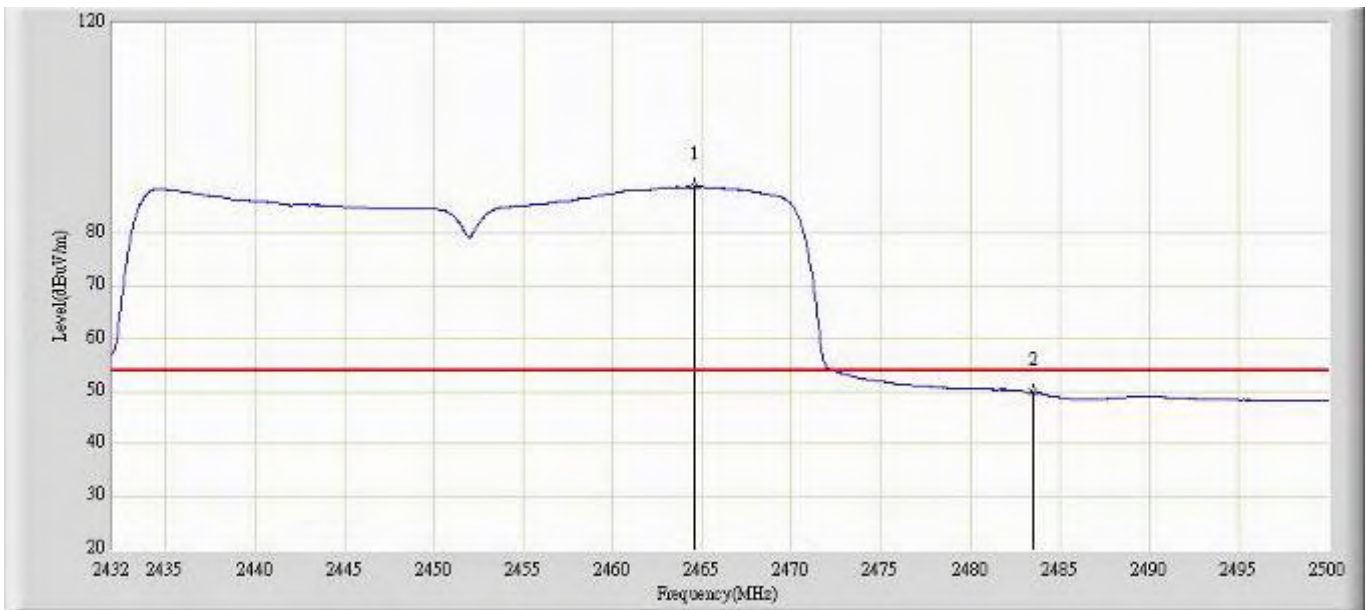


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.572	88.826	57.623	N/A	N/A	31.203	AV
2			2483.500	49.785	18.576	-4.215	54.000	31.209	AV

Profile: 11BS004R	Page No.: 95
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0)	

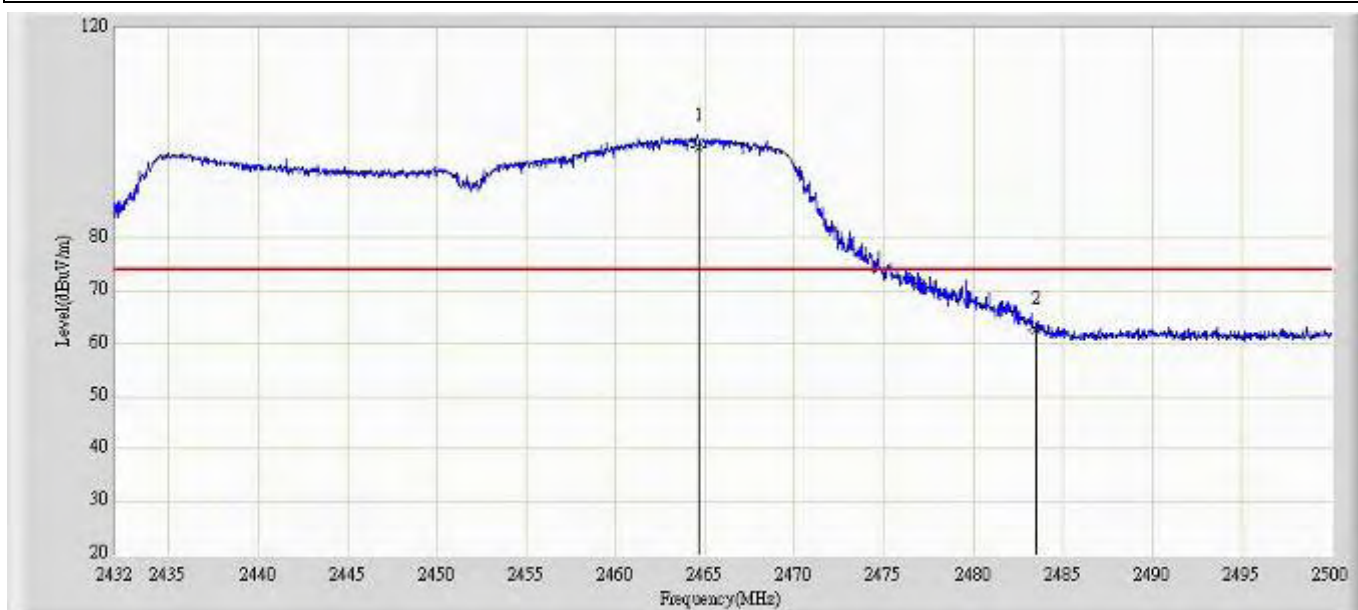


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.678	97.233	66.030	N/A	N/A	31.203	PK
2			2483.500	62.570	31.361	-11.430	74.000	31.209	PK

Profile: 11BS004R	Page No.: 96
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0)	

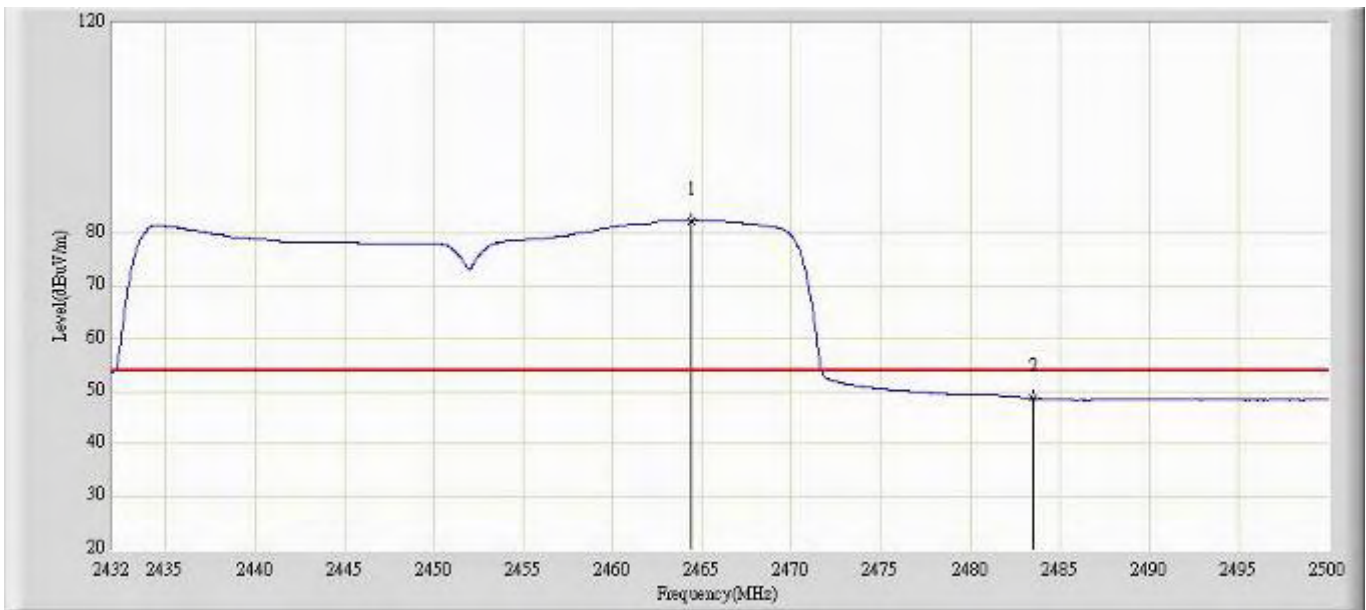


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.361	82.452	51.249	N/A	N/A	31.204	AV
2			2483.500	48.678	17.469	-5.322	54.000	31.209	AV

Profile: 11BS004R	Page No.: 97
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 1)	

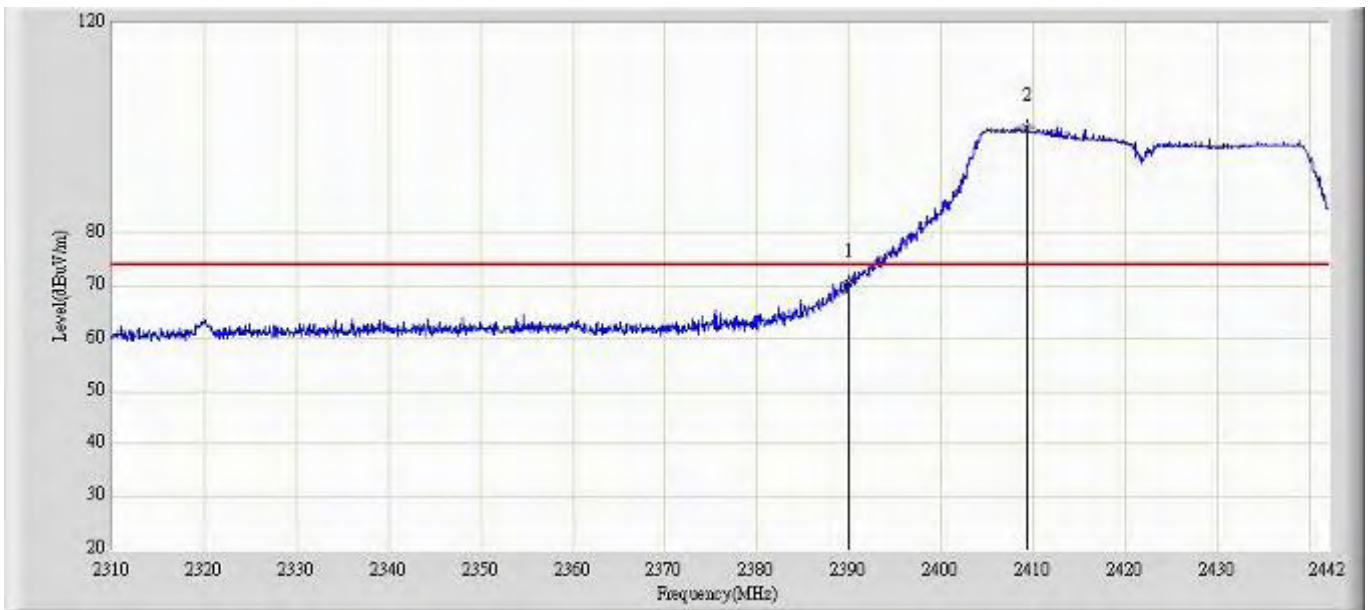


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	70.437	39.252	-3.563	74.000	31.185	PK
2		*	2409.264	100.304	69.124	N/A	N/A	31.180	PK

Profile: 11BS004R	Page No.: 98
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 1)	

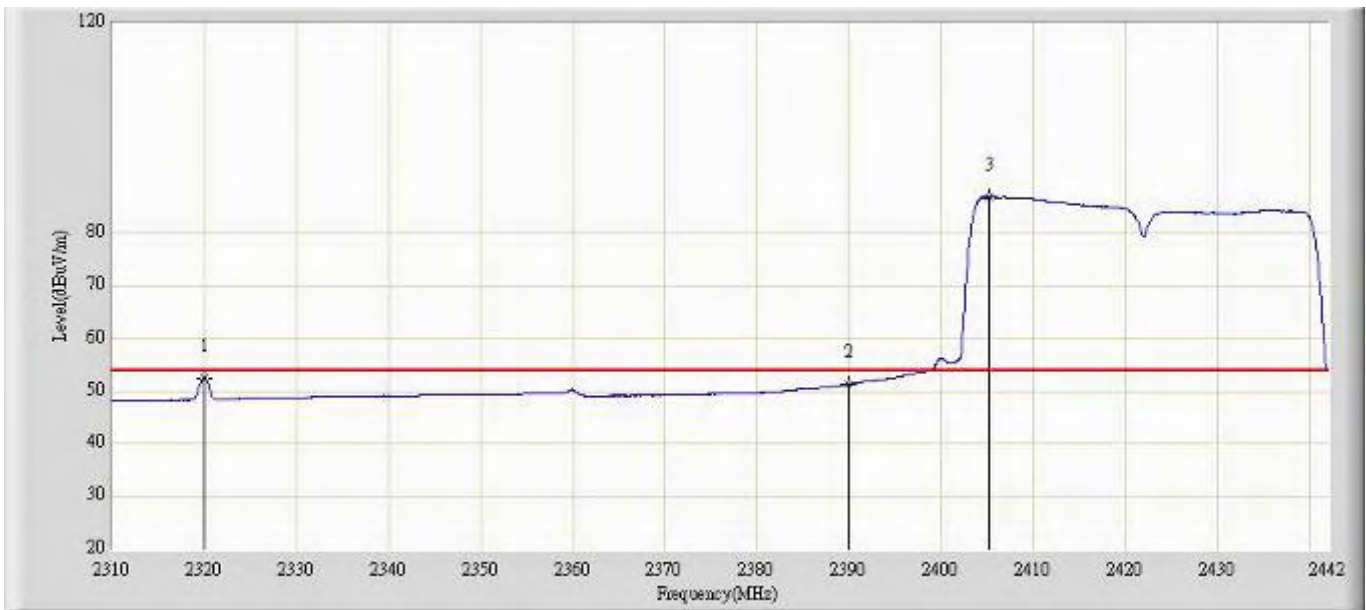


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2319.966	52.541	21.293	-1.459	54.000	31.249	AV
2			2390.000	51.321	20.136	-2.679	54.000	31.185	AV
3		*	2405.172	86.840	55.659	N/A	N/A	31.181	AV

Profile: 11BS004R	Page No.: 99
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 1)	

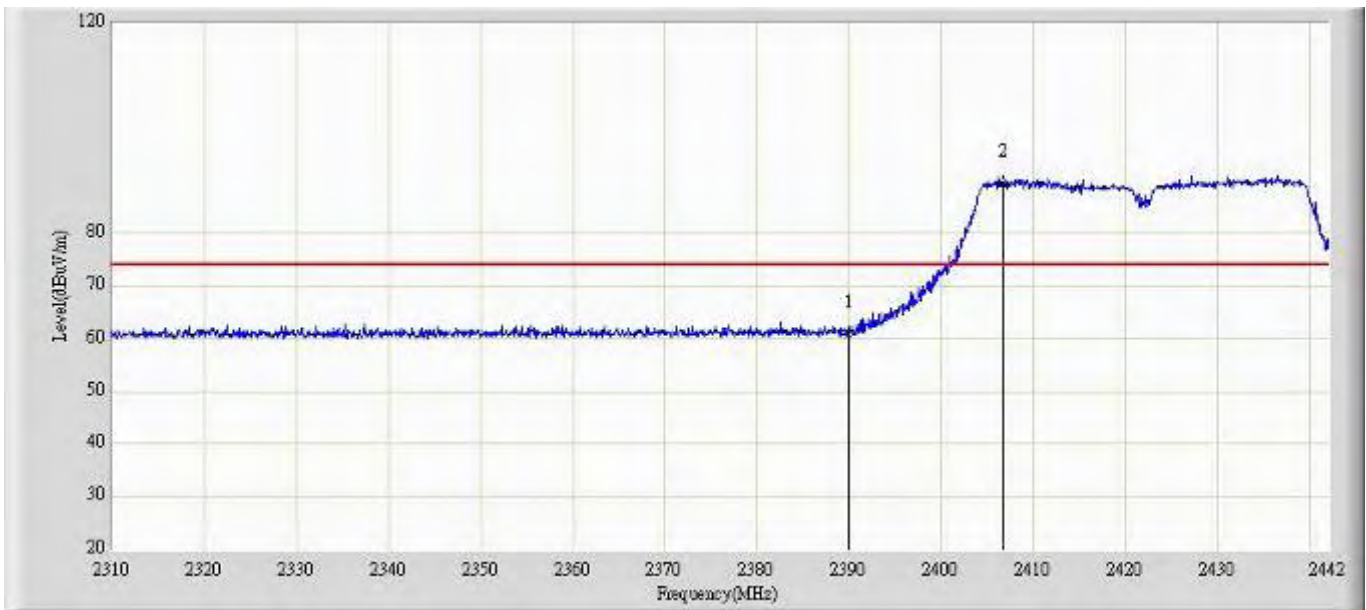

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.903	29.718	-13.097	74.000	31.185	PK
2		*	2406.691	89.408	58.227	N/A	N/A	31.181	PK


Profile: 11BS004R	Page No.: 100
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 1)	

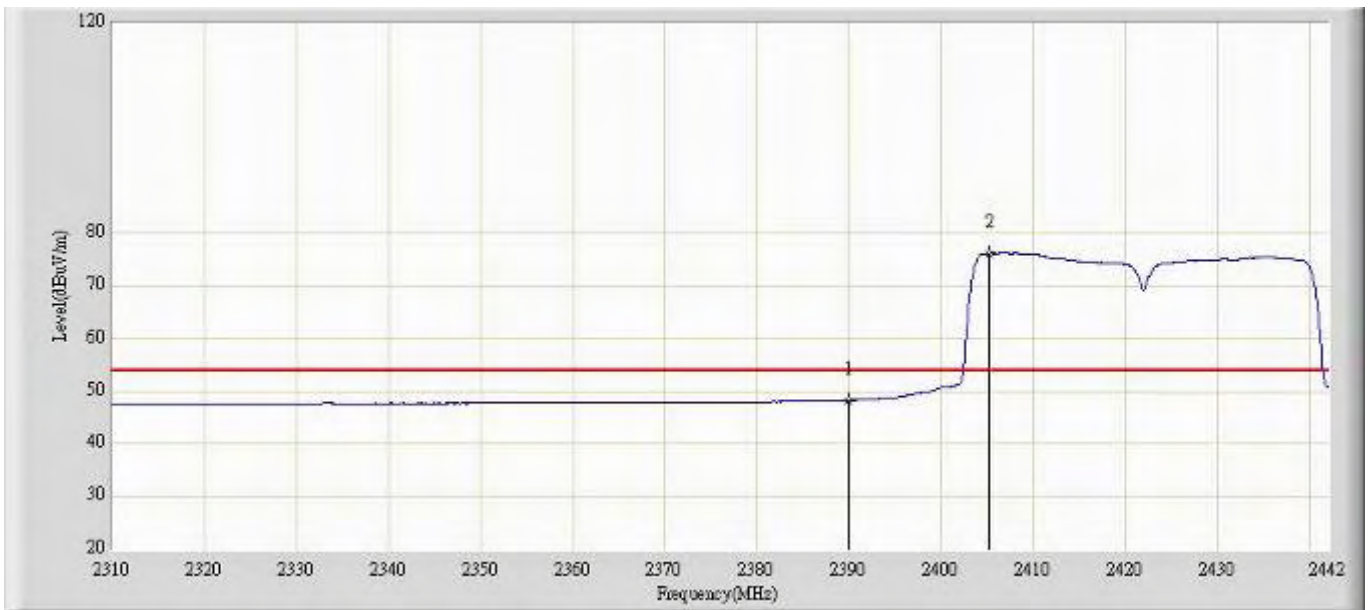

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.272	17.087	-5.728	54.000	31.185	AV
2		*	2405.253	76.162	44.981	N/A	N/A	31.181	AV




Profile: 11BS004R	Page No.: 101
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 1)	

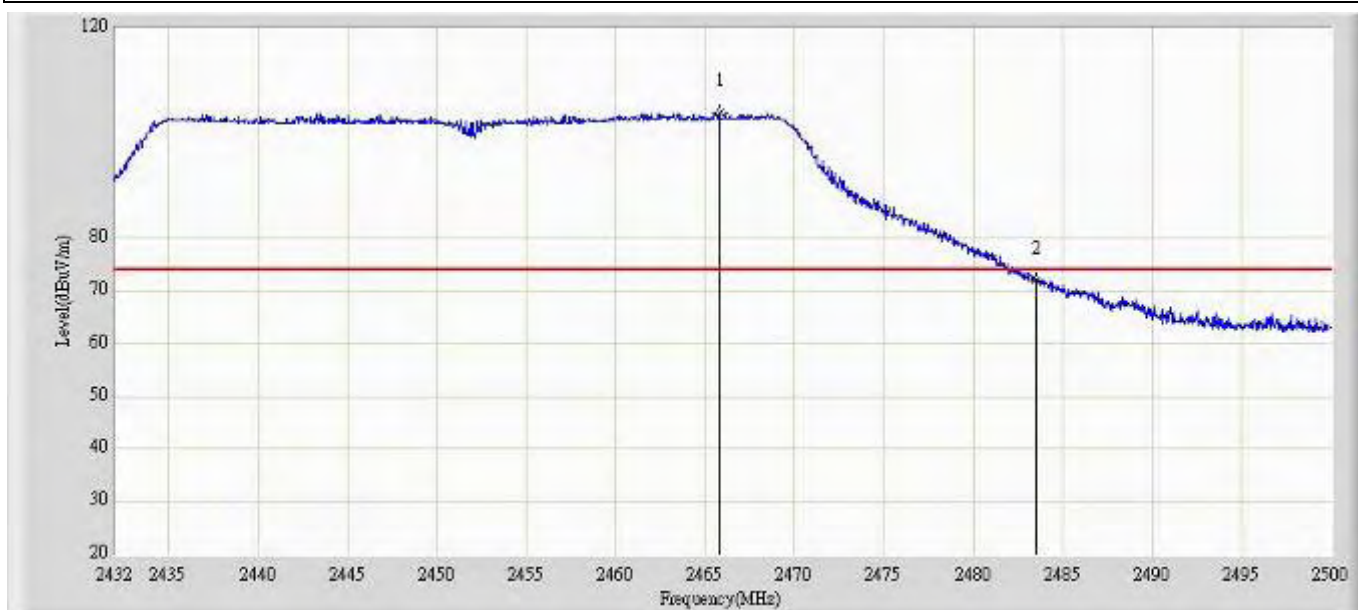


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.796	103.974	72.770	N/A	N/A	31.204	PK
2			2483.500	72.097	40.888	-1.903	74.000	31.209	PK

Profile: 11BS004R	Page No.: 102
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 1)	

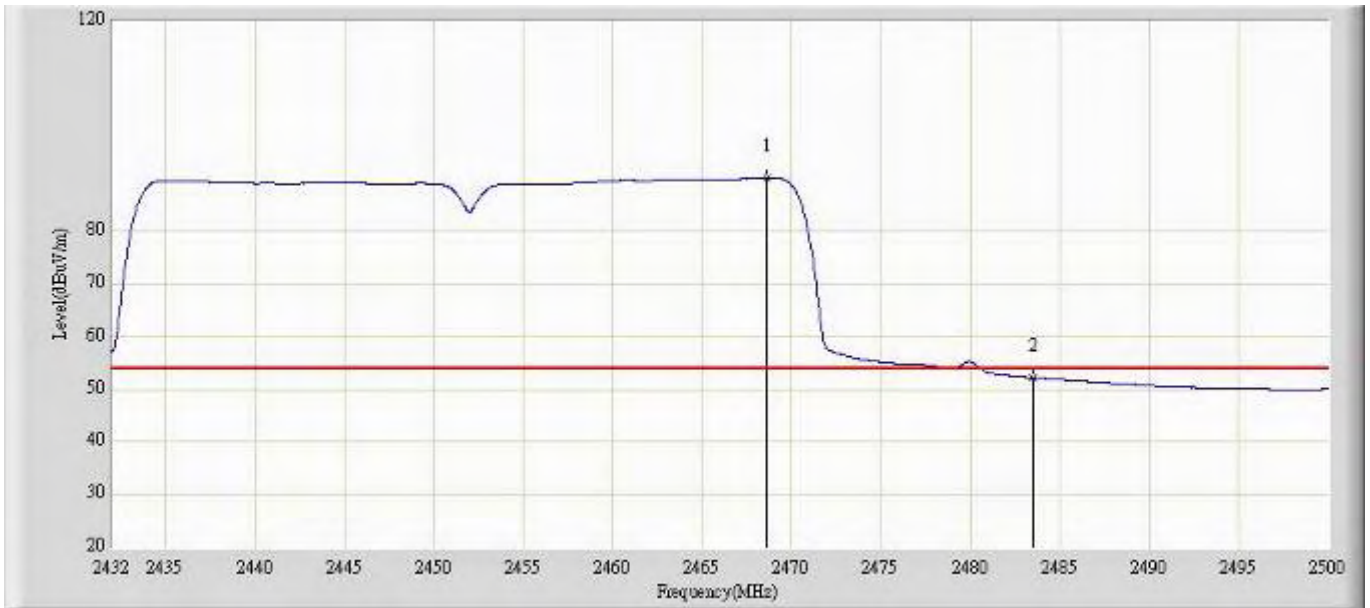


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2468.652	90.036	58.832	N/A	N/A	31.204	AV
2			2483.500	52.205	20.996	-1.795	54.000	31.209	AV

Profile: 11BS004R	Page No.: 103
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 1)	

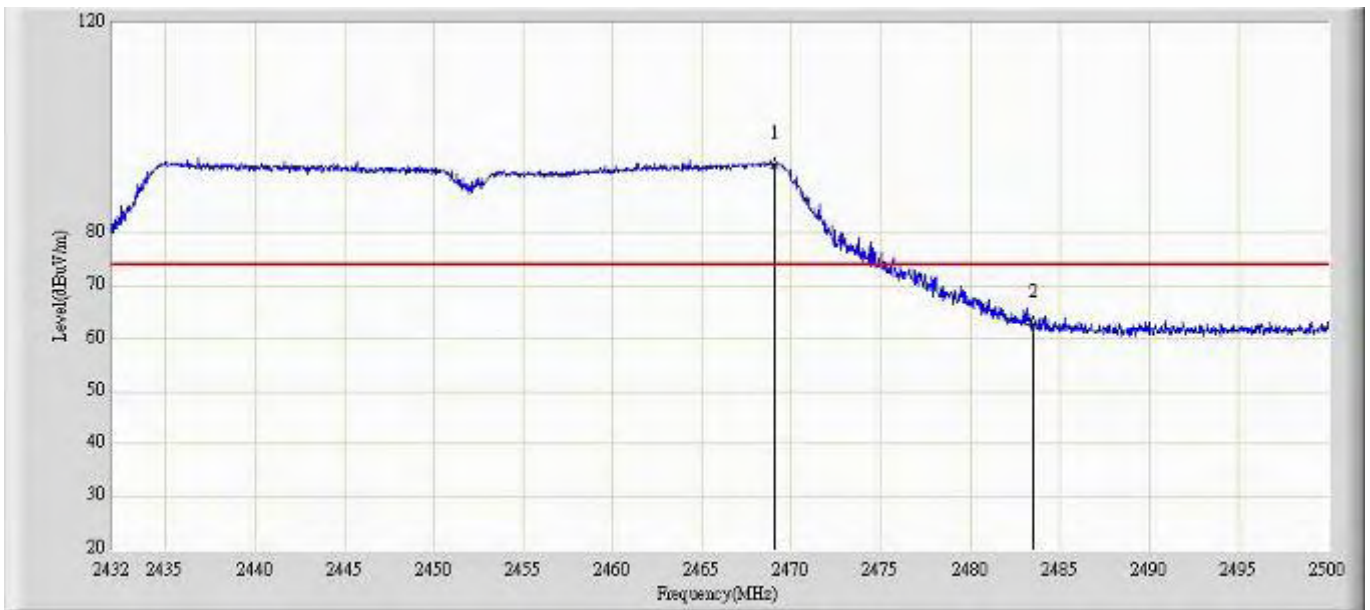


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.014	93.108	61.904	N/A	N/A	31.204	PK
2			2483.500	62.946	31.737	-11.054	74.000	31.209	PK

Profile: 11BS004R	Page No.: 104
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 1)	

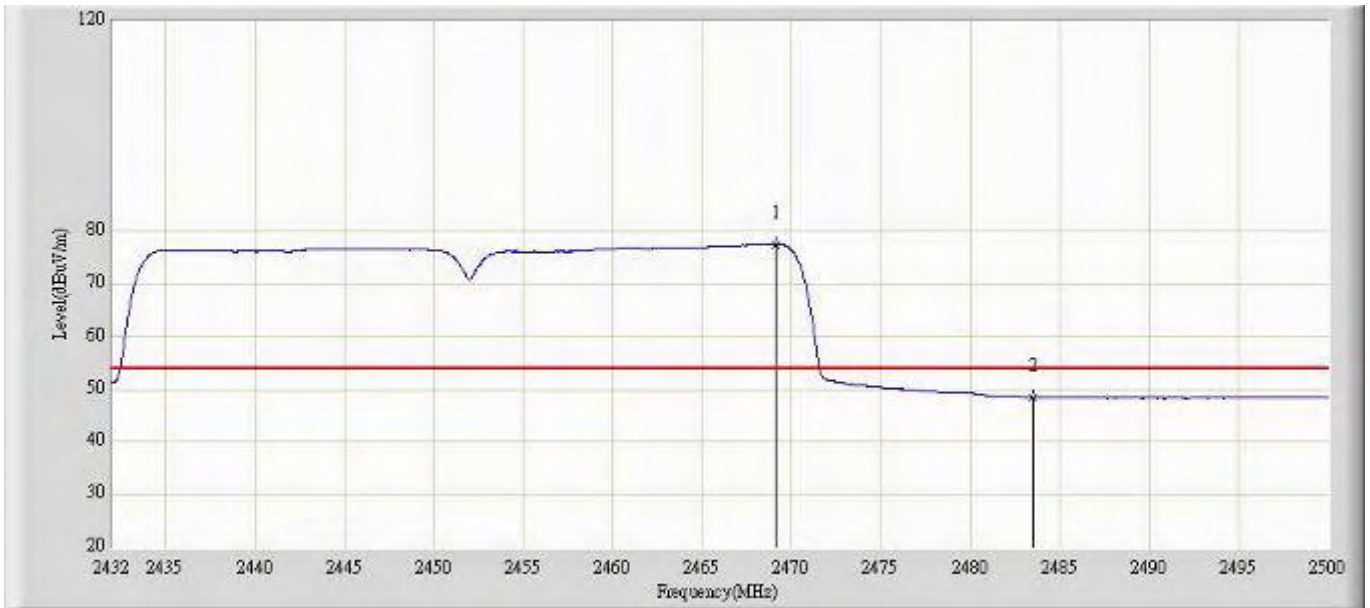


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.162	77.612	46.408	N/A	N/A	31.204	AV
2			2483.500	48.529	17.320	-5.471	54.000	31.209	AV

Profile: 11BS004R	Page No.: 105
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 2)	

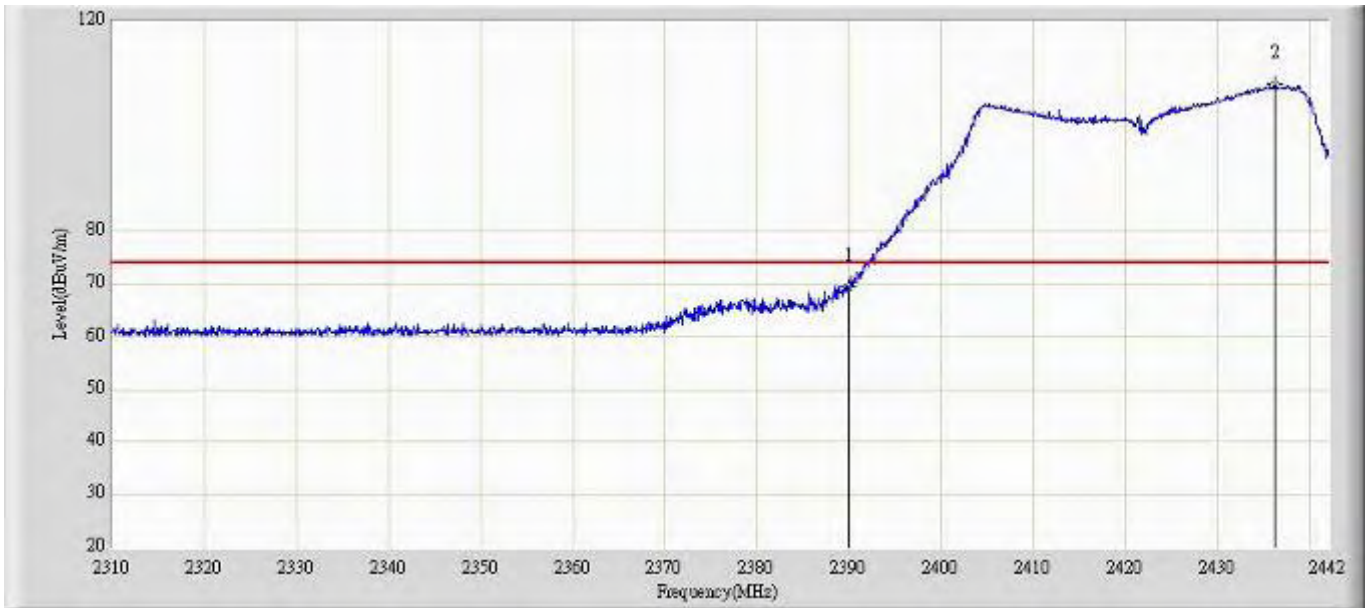


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	69.320	38.135	-4.680	74.000	31.185	PK
2		*	2436.192	108.014	76.828	N/A	N/A	31.185	PK

Profile: 11BS004R	Page No.: 106
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 2)	

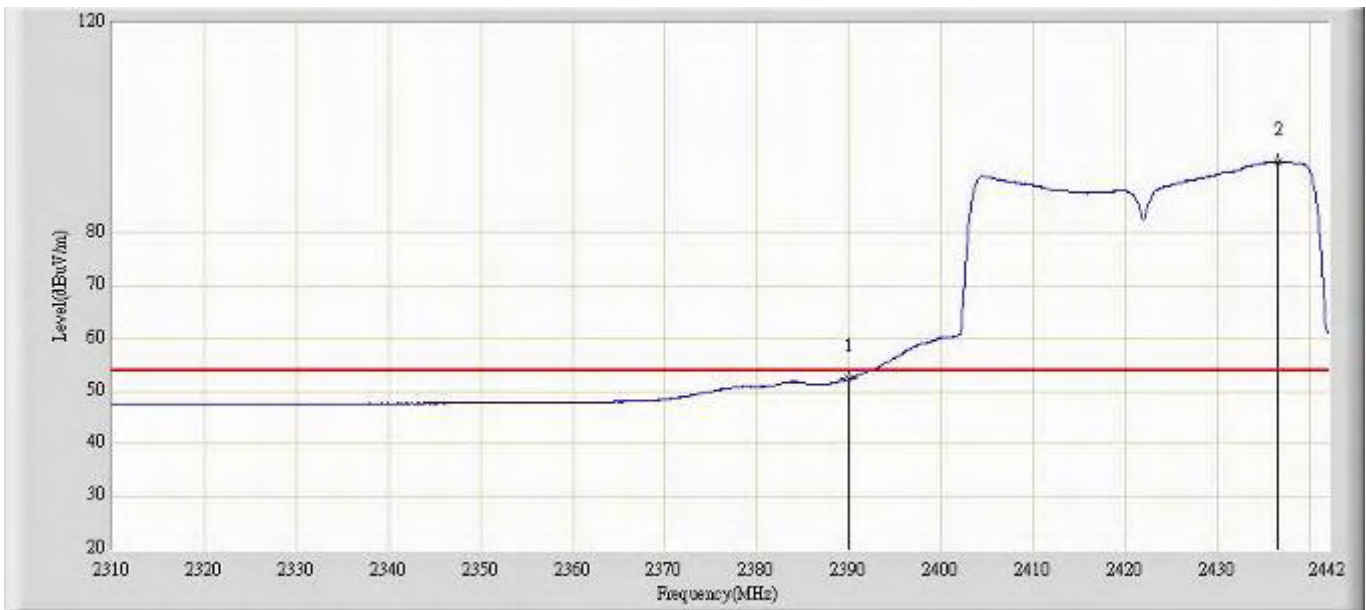


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.350	21.165	-1.650	54.000	31.185	AV
2		*	2436.588	93.583	62.398	N/A	N/A	31.186	AV

Profile: 11BS004R	Page No.: 107
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 2)	

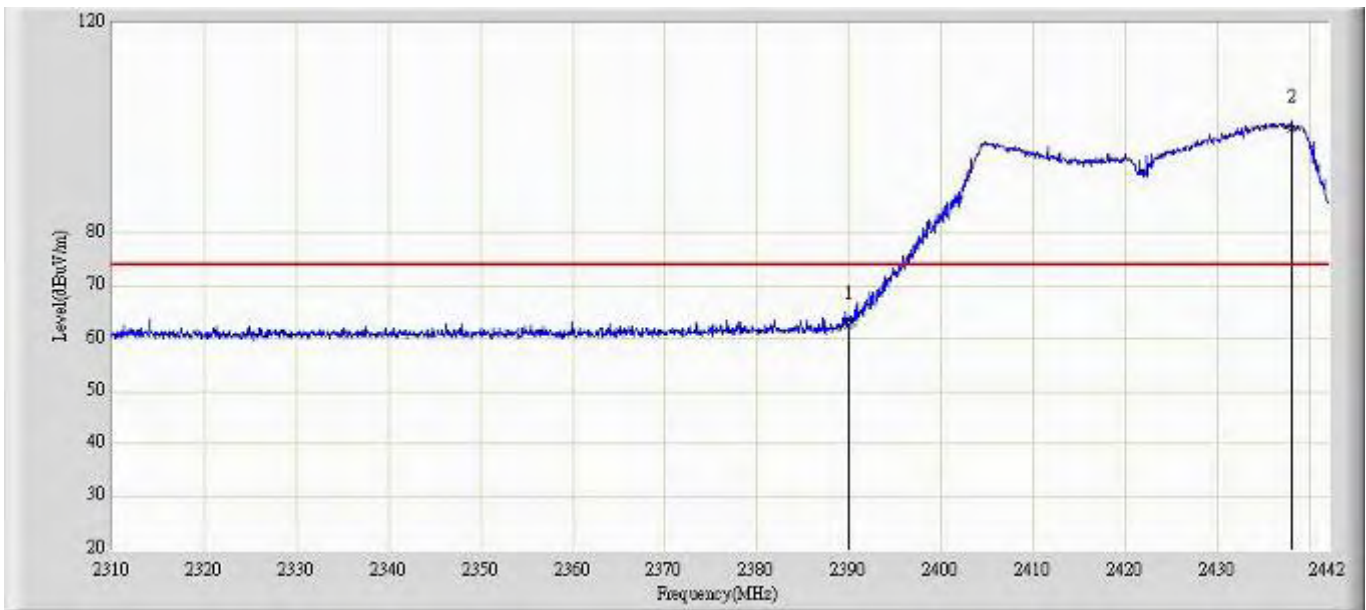

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	62.441	31.256	-11.559	74.000	31.185	PK
2		*	2438.100	99.973	68.788	N/A	N/A	31.185	PK


Profile: 11BS004R	Page No.: 108
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 15:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 2)	

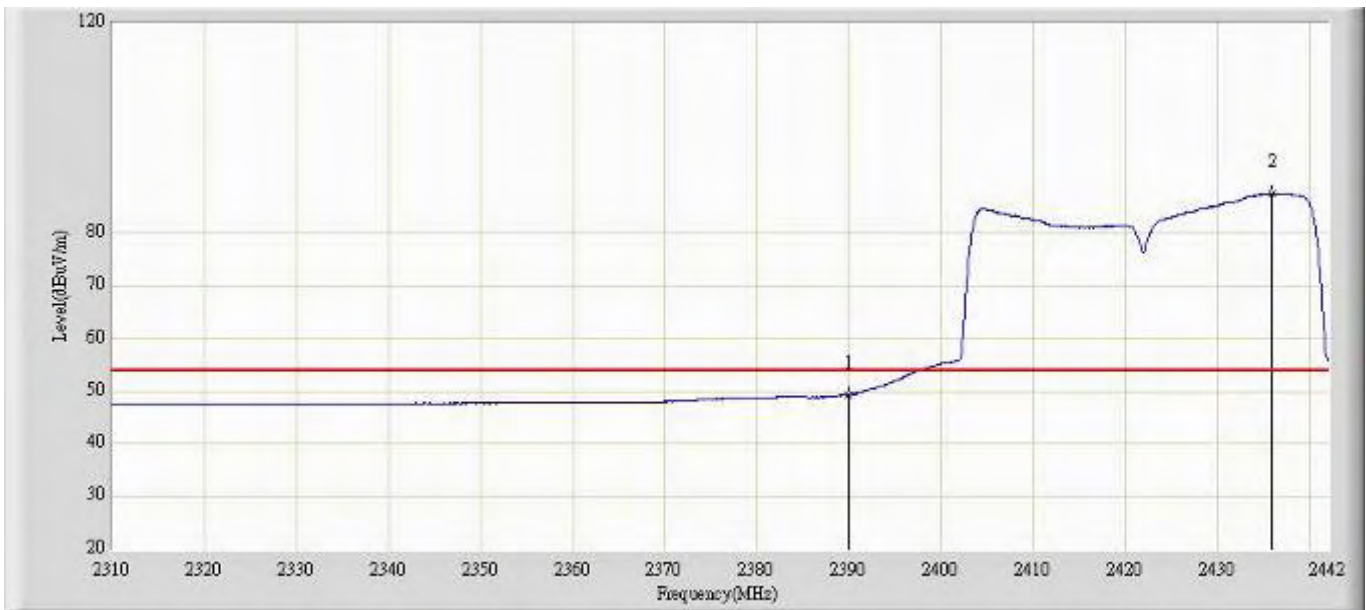

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.384	18.199	-4.616	54.000	31.185	AV
2		*	2435.994	87.625	56.439	N/A	N/A	31.185	AV




Profile: 11BS004R	Page No.: 109
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 2)	

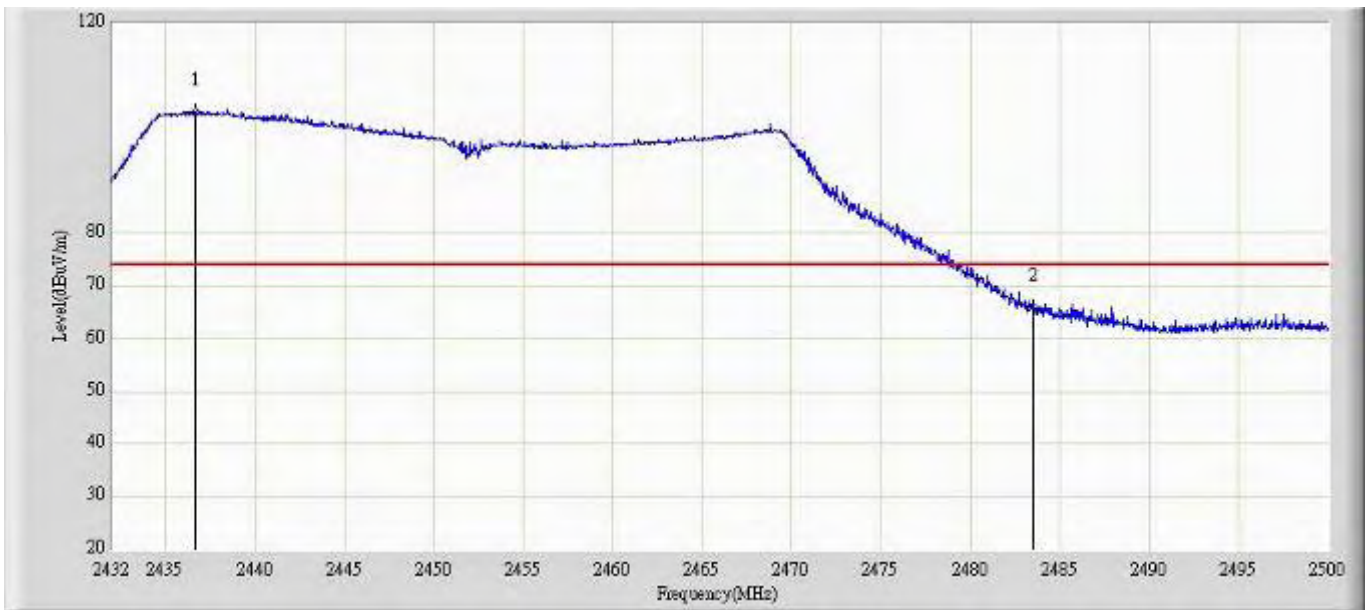


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2436.624	103.115	71.930	N/A	N/A	31.186	PK
2			2483.500	65.998	34.789	-8.002	74.000	31.209	PK

Profile: 11BS004R	Page No.: 110
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 2)	

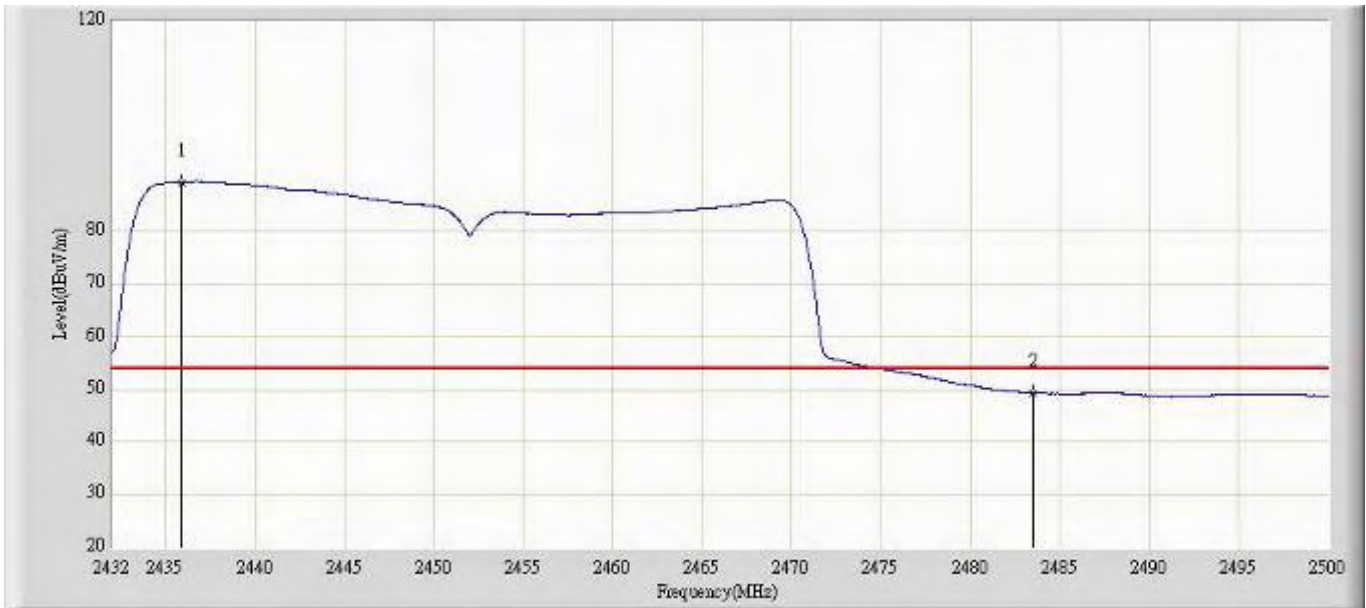


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2435.876	89.363	58.177	N/A	N/A	31.185	AV
2			2483.500	49.298	18.089	-4.702	54.000	31.209	AV

Profile: 11BS004R	Page No.: 111
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 2)	

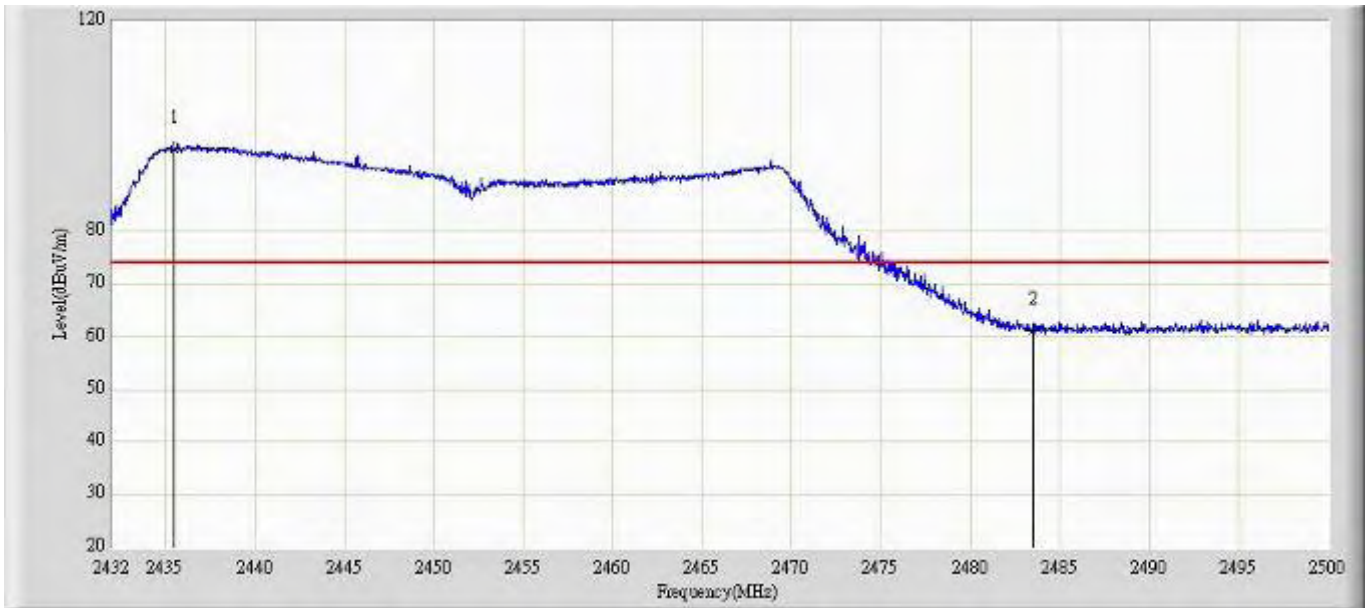


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2435.490	95.582	64.396	N/A	N/A	31.186	PK
2			2483.500	61.025	29.816	-12.975	74.000	31.209	PK

Profile: 11BS004R	Page No.: 112
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 2)	

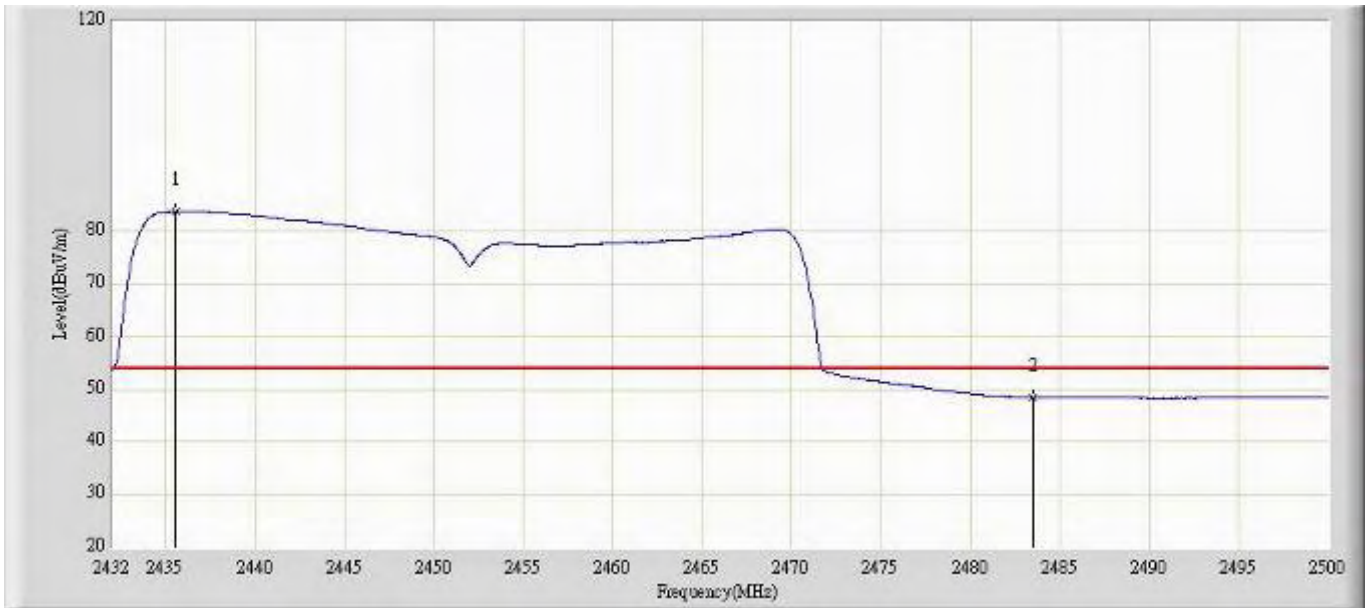


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2435.570	83.731	52.545	N/A	N/A	31.186	AV
2			2483.500	48.415	17.206	-5.585	54.000	31.209	AV

Profile: 11BS004R	Page No.: 113
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1)	

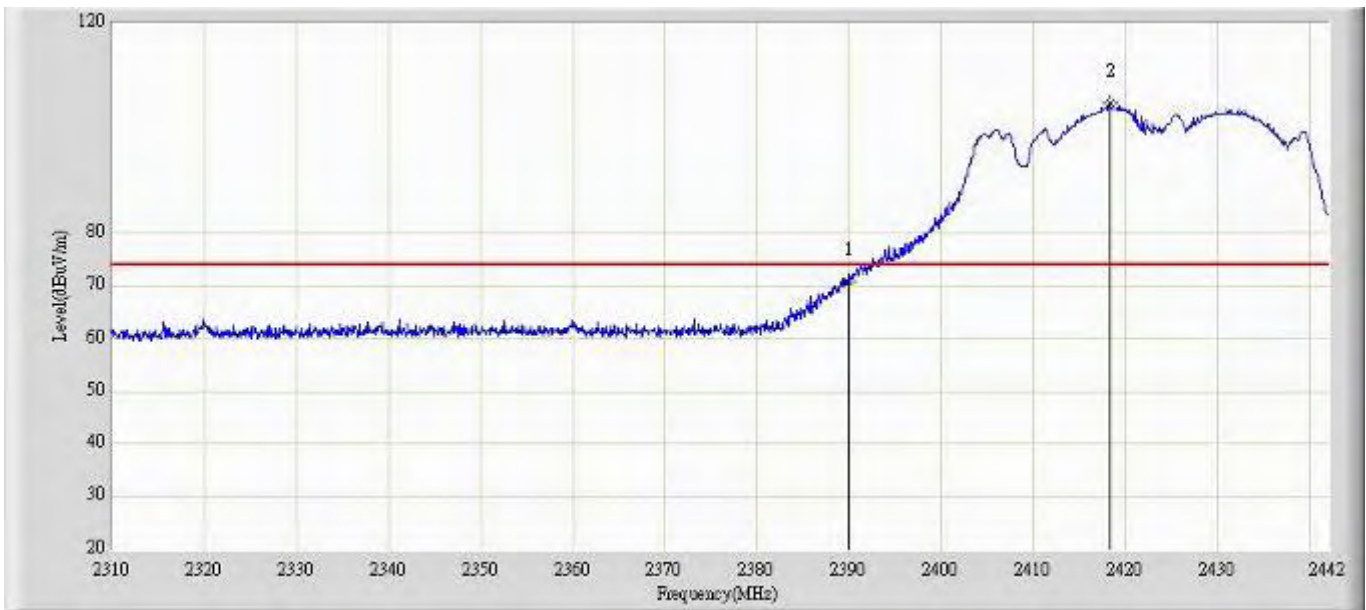


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	70.982	39.797	-3.018	74.000	31.185	PK
2		*	2418.306	104.715	73.532	N/A	N/A	31.183	PK

Profile: 11BS004R	Page No.: 114
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1)	

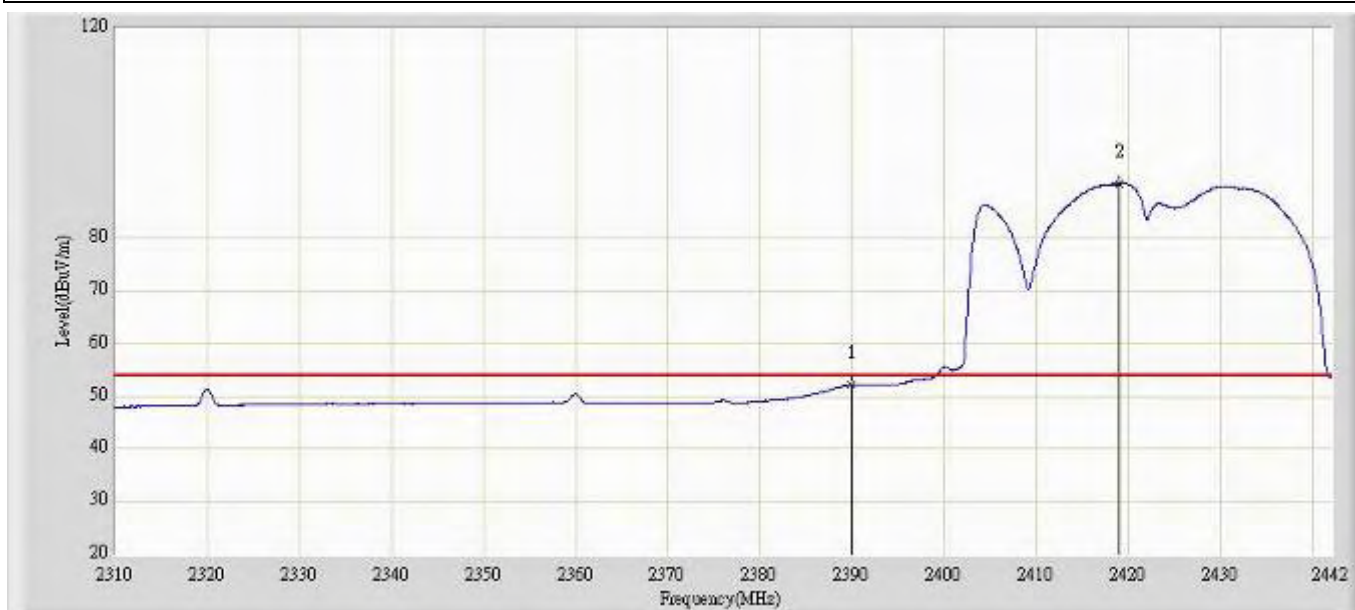


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.056	20.871	-1.944	54.000	31.185	AV
2		*	2418.966	90.380	59.197	N/A	N/A	31.182	AV

Profile: 11BS004R	Page No.: 115
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1)	

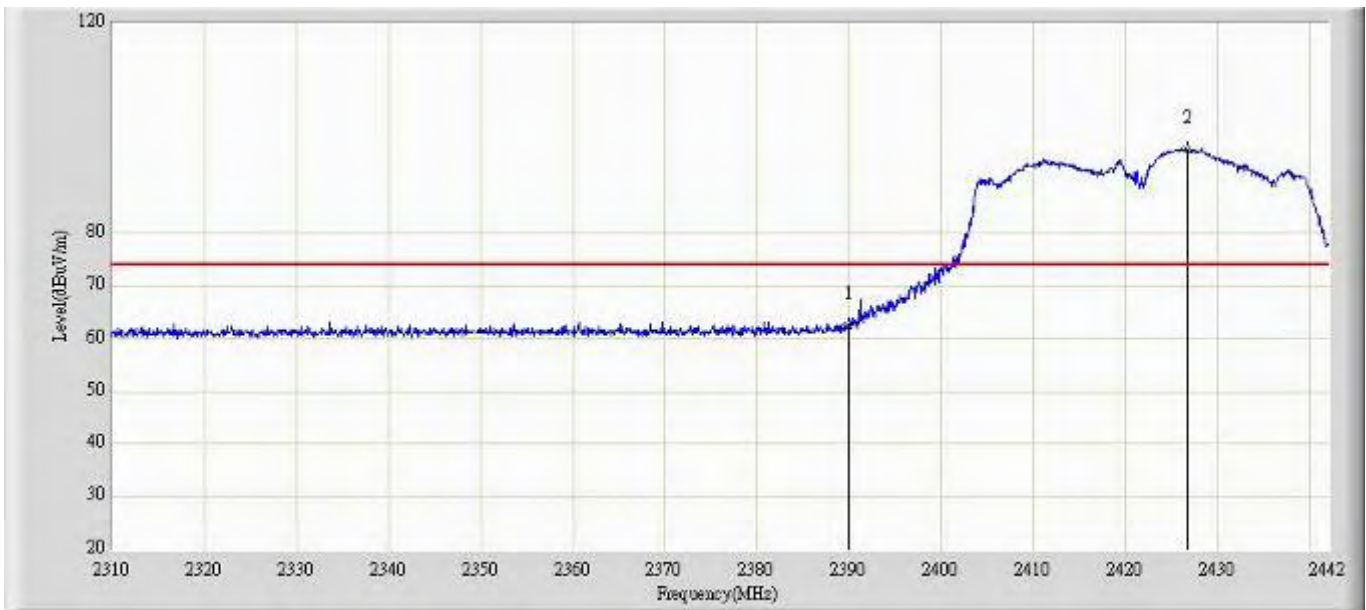

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	62.443	31.258	-11.557	74.000	31.185	PK
2		*	2426.809	95.773	64.587	N/A	N/A	31.186	PK


Profile: 11BS004R	Page No.: 116
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1)	

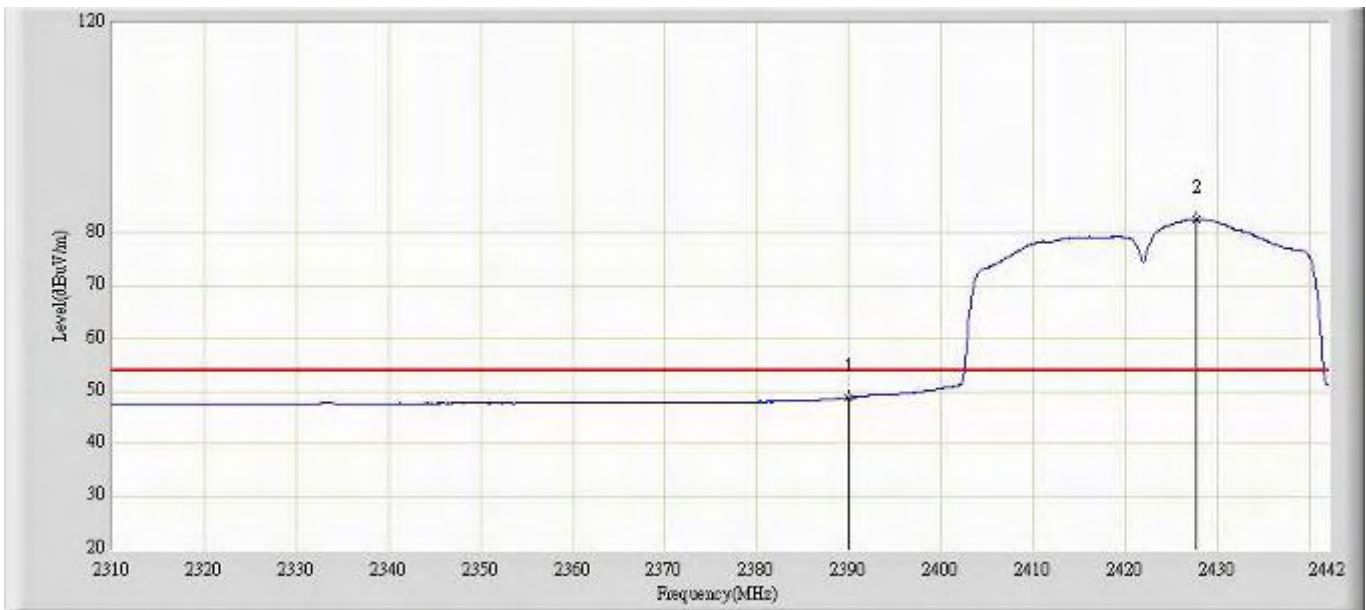

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.832	17.647	-5.168	54.000	31.185	AV
2		*	2427.744	82.693	51.507	N/A	N/A	31.186	AV




Profile: 11BS004R	Page No.: 117
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1)	

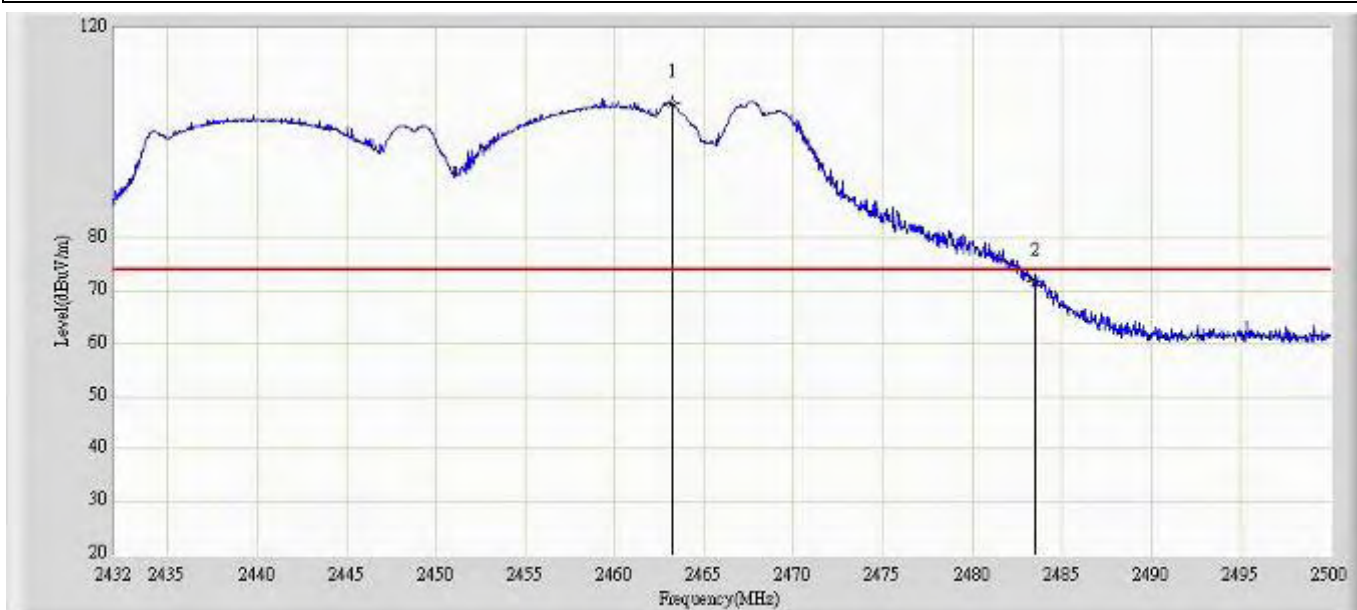


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2463.178	105.645	74.442	N/A	N/A	31.203	PK
2			2483.500	71.739	40.530	-2.261	74.000	31.209	PK

Profile: 11BS004R	Page No.: 118
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1)	

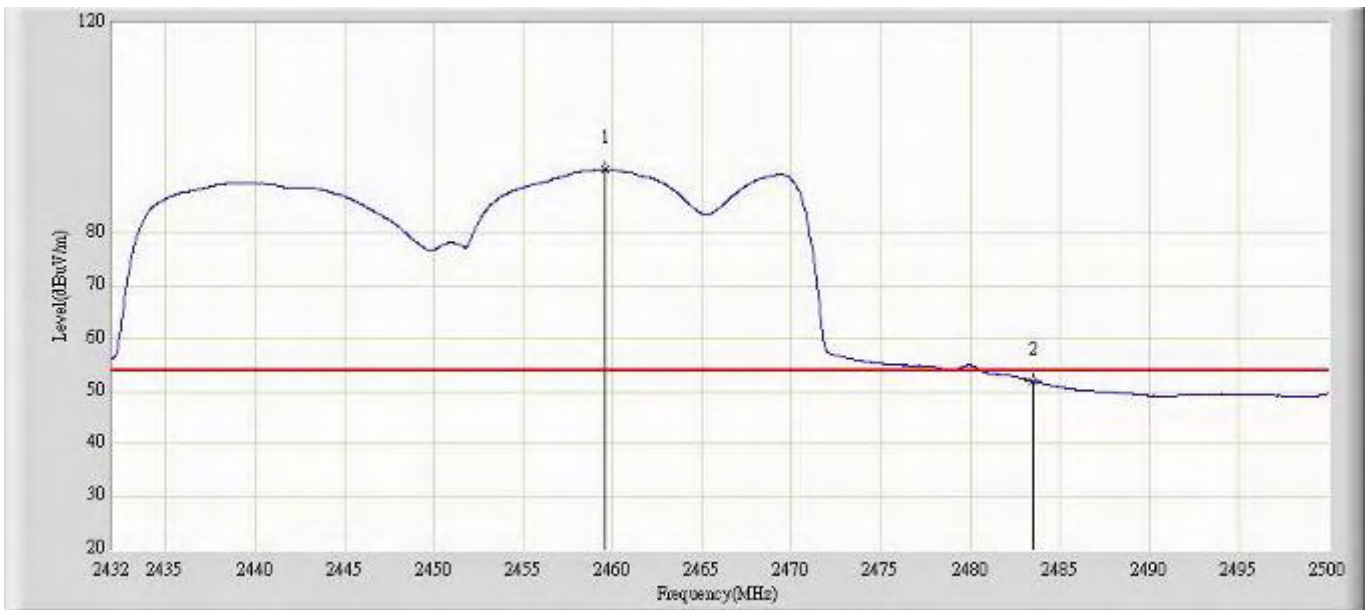


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2459.574	92.212	61.012	N/A	N/A	31.200	AV
2			2483.500	52.017	20.808	-1.983	54.000	31.209	AV

Profile: 11BS004R	Page No.: 119
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1)	

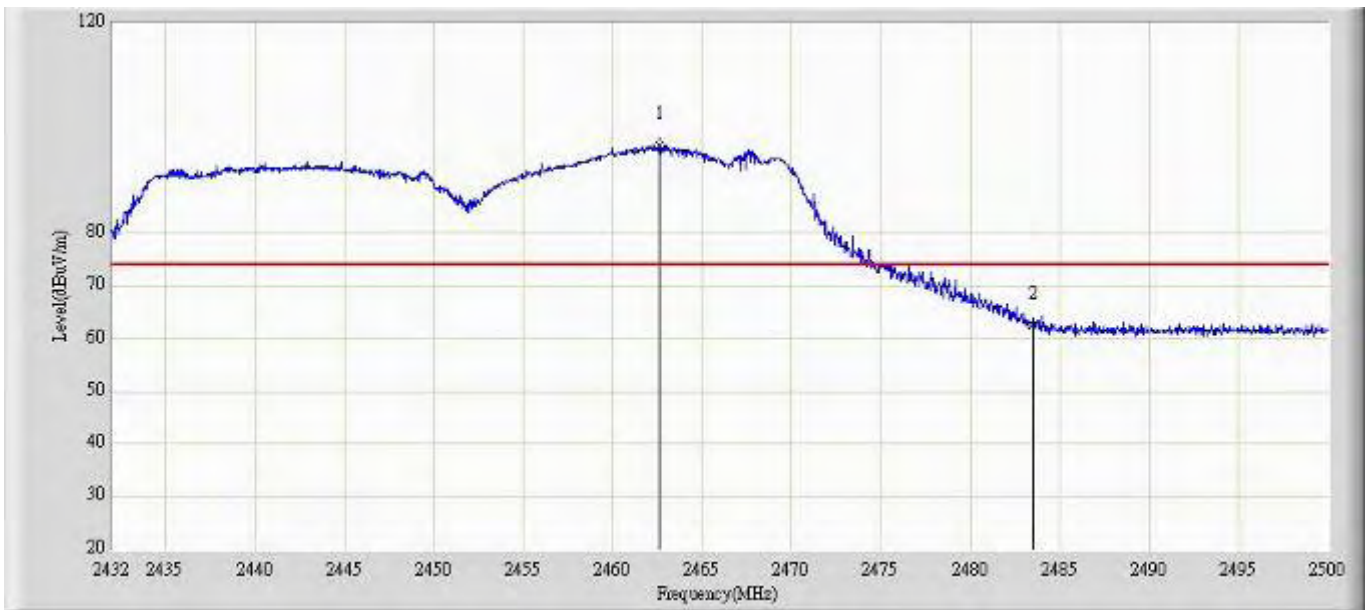


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.634	96.615	65.412	N/A	N/A	31.203	PK
2			2483.500	62.548	31.339	-11.452	74.000	31.209	PK

Profile: 11BS004R	Page No.: 120
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1)	

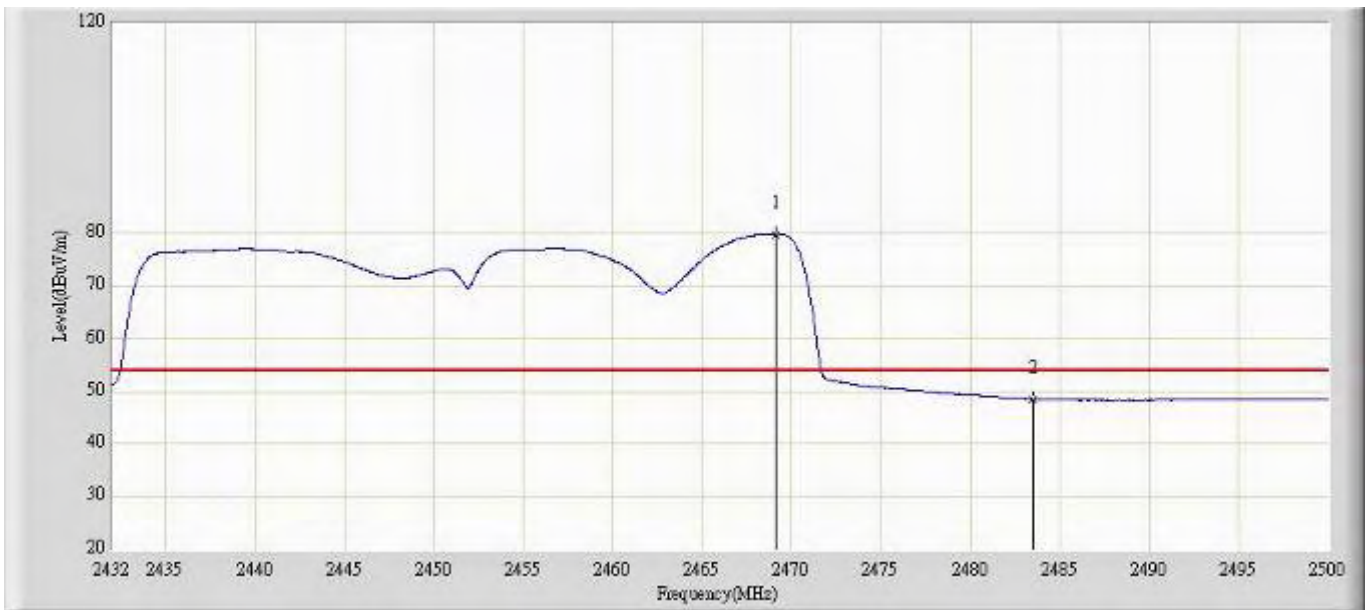


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2469.094	79.895	48.691	N/A	N/A	31.204	AV
2			2483.500	48.522	17.313	-5.478	54.000	31.209	AV

Profile: 11BS004R	Page No.: 121
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1+2)	

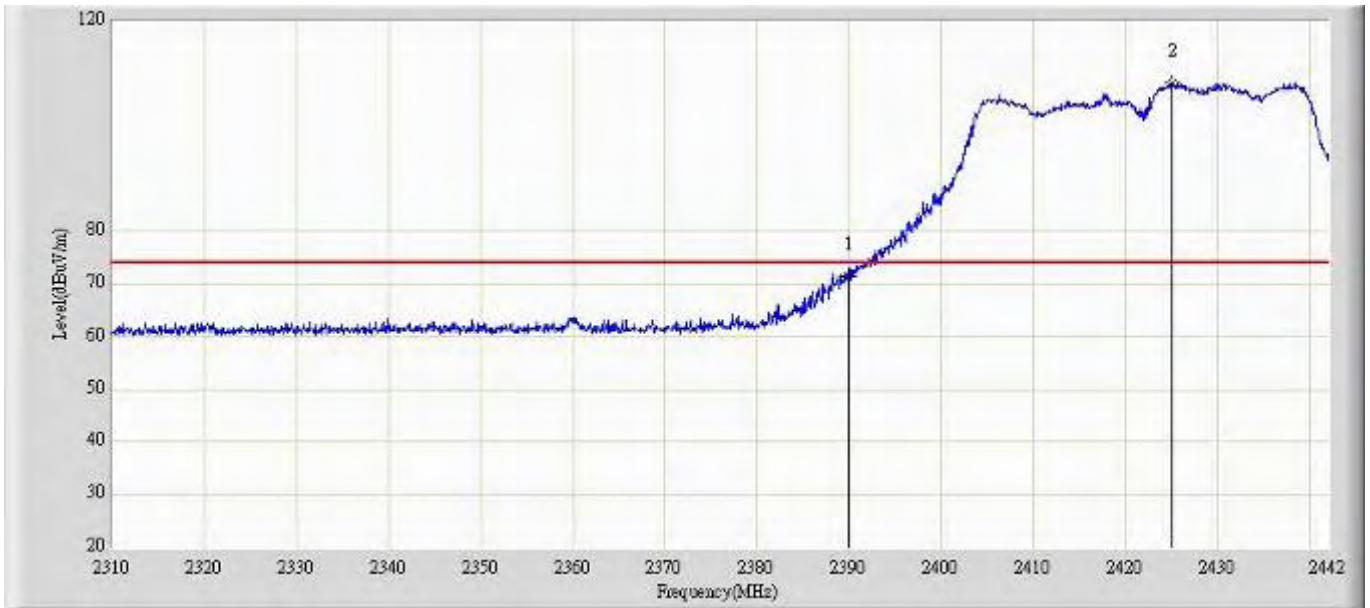


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	71.382	40.197	-2.618	74.000	31.185	PK
2		*	2425.038	108.122	76.937	N/A	N/A	31.185	PK

Profile: 11BS004R	Page No.: 122
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1+2)	

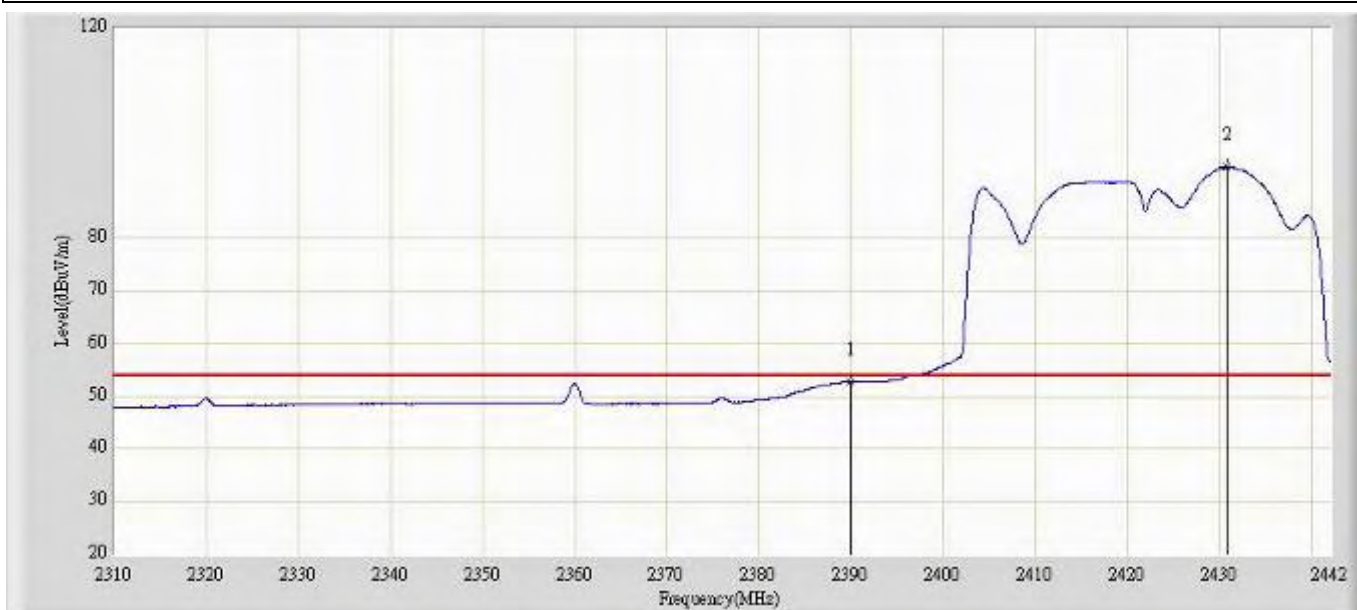


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.719	21.534	-1.281	54.000	31.185	AV
2		*	2430.846	93.503	62.317	N/A	N/A	31.186	AV

Profile: 11BS004R	Page No.: 123
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1+2)	

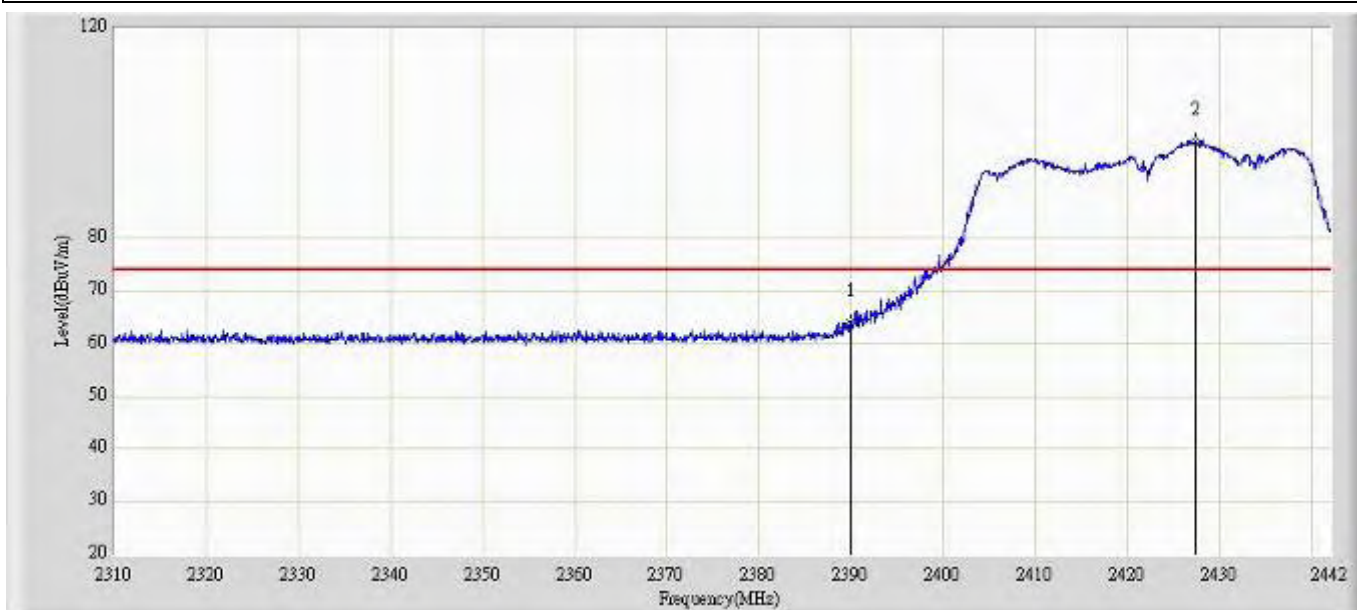

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	64.011	32.826	-9.989	74.000	31.185	PK
2		*	2427.348	98.510	67.324	N/A	N/A	31.185	PK


Profile: 11BS004R	Page No.: 124
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2422MHz by 802.11n40 (Chain 0+1+2)	

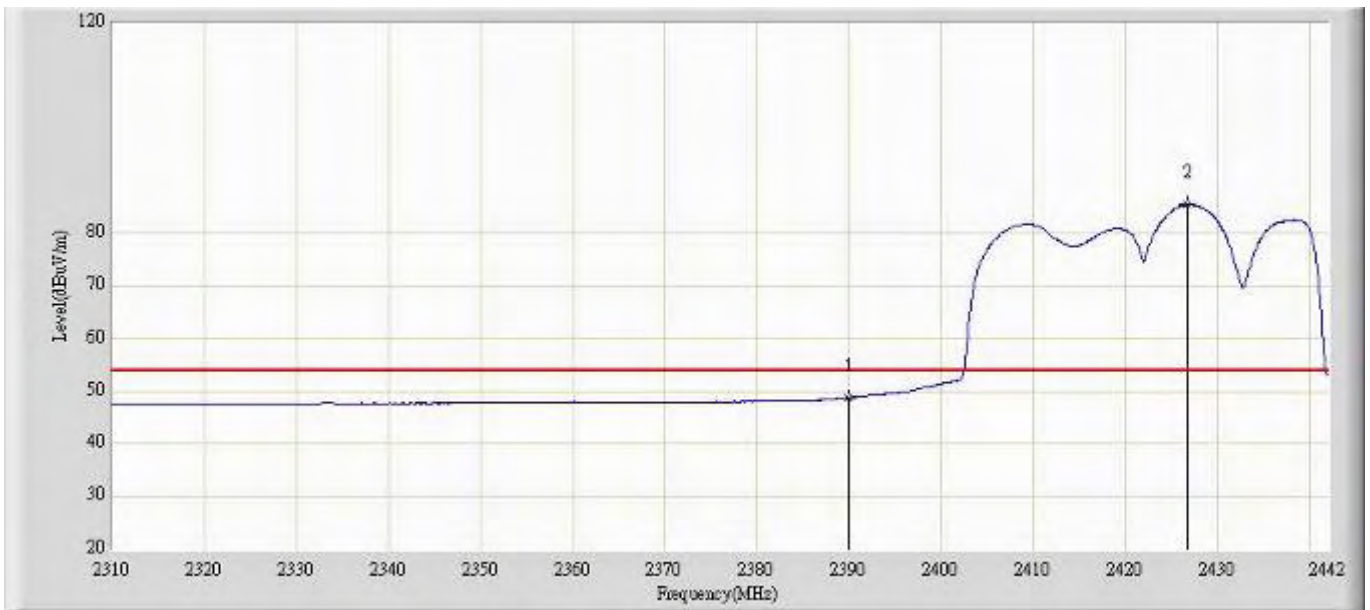

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.865	17.680	-5.135	54.000	31.185	AV
2		*	2426.754	85.484	54.298	N/A	N/A	31.186	AV




Profile: 11BS004R	Page No.: 125
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1+2)	

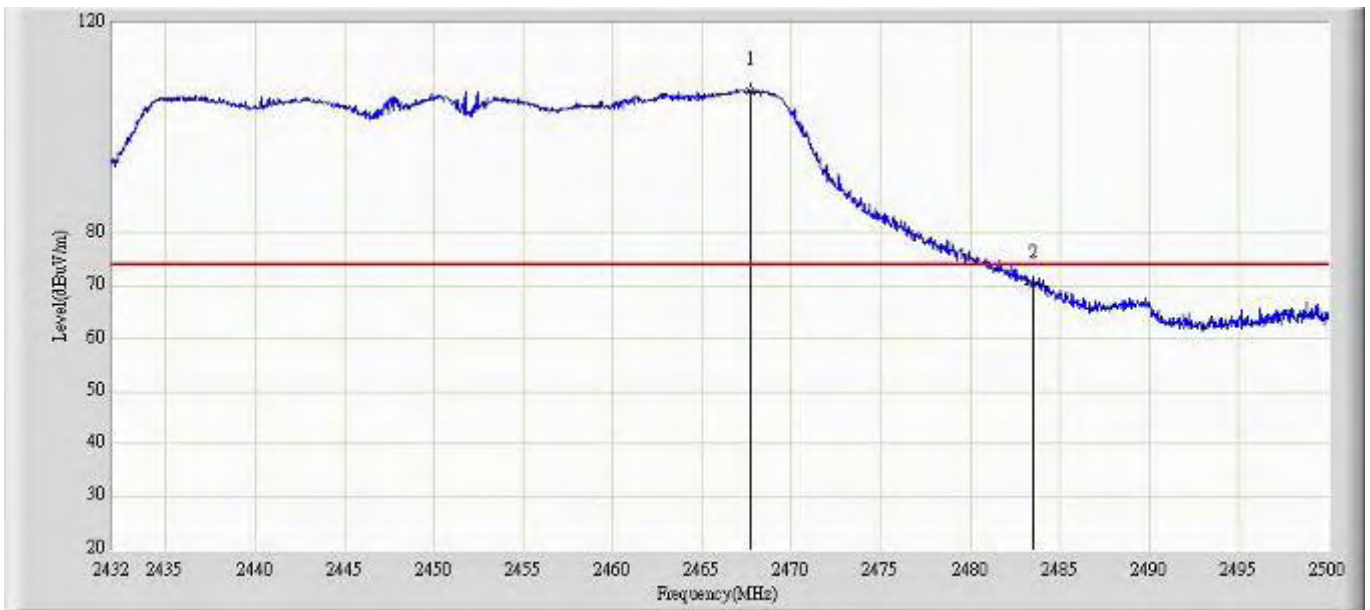


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2467.666	107.174	75.970	N/A	N/A	31.204	PK
2			2483.500	70.150	38.941	-3.850	74.000	31.209	PK

Profile: 11BS004R	Page No.: 126
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1+2)	

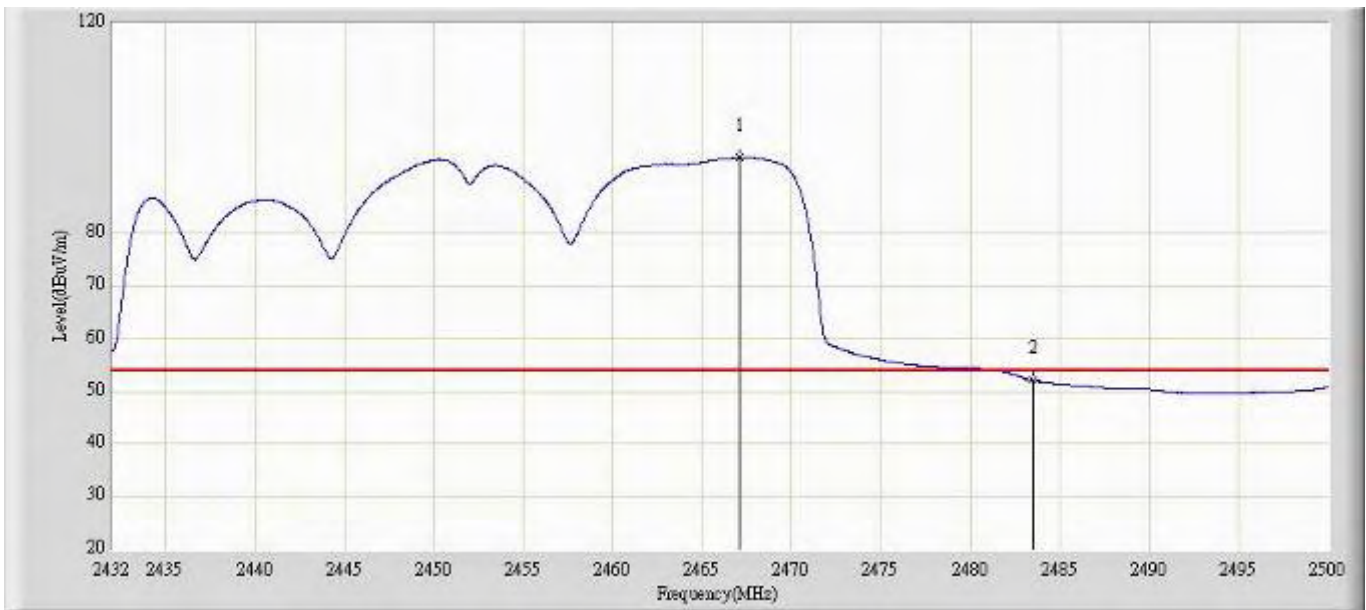


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2467.088	94.320	63.116	N/A	N/A	31.204	AV
2			2483.500	52.071	20.862	-1.929	54.000	31.209	AV

Profile: 11BS004R	Page No.: 127
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1+2)	

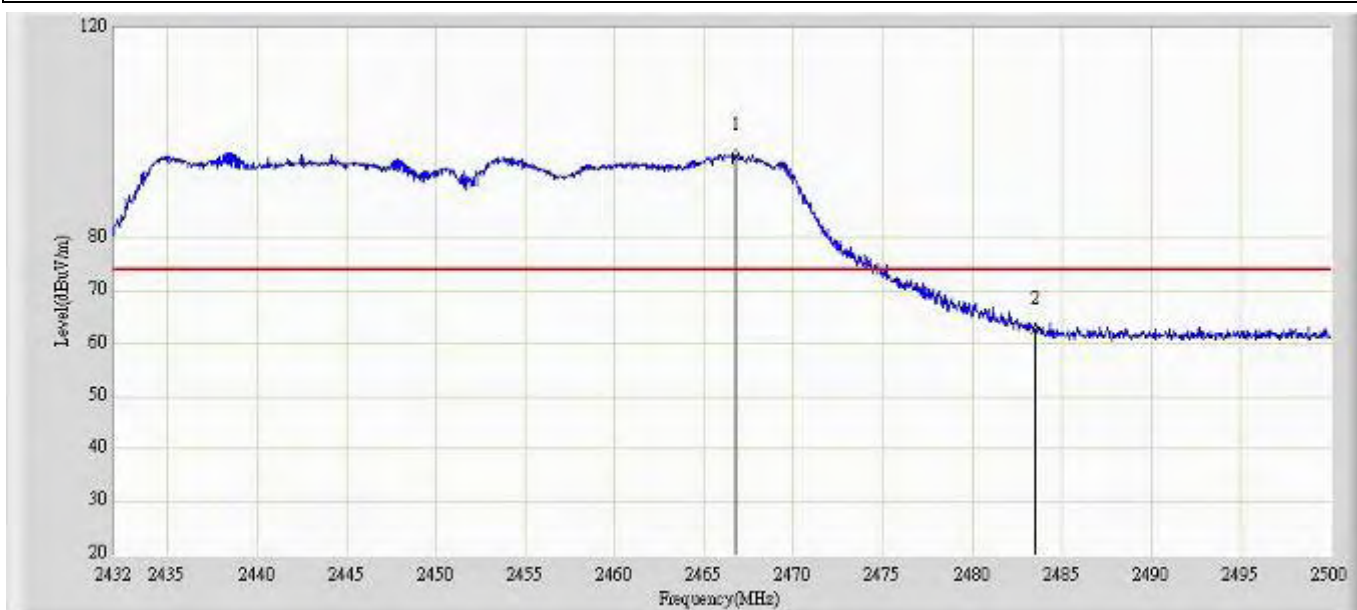

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2466.748	95.621	64.417	N/A	N/A	31.204	PK
2			2483.500	62.432	31.223	-11.568	74.000	31.209	PK


Profile: 11BS004R	Page No.: 128
Engineer: Toms	
Site: AC5	Time: 2011/11/18 - 16:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 2452MHz by 802.11n40 (Chain 0+1+2)	

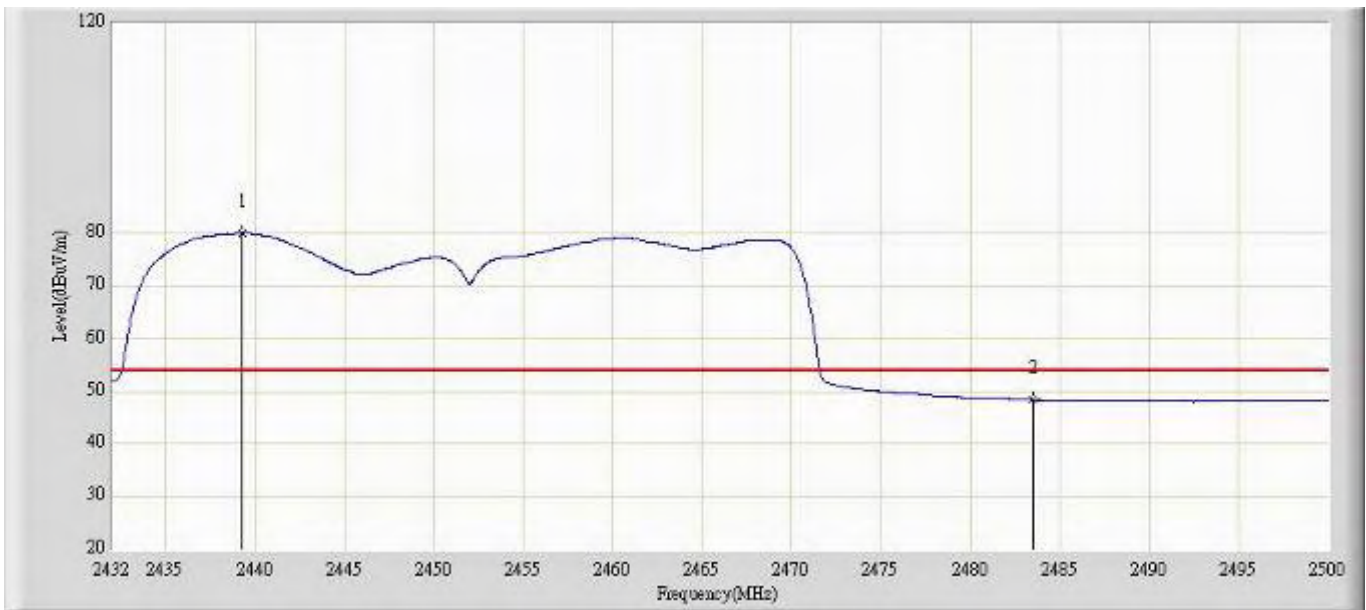

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2439.276	80.010	48.825	N/A	N/A	31.185	AV
2			2483.500	48.346	17.137	-5.654	54.000	31.209	AV


Test by build-in antenna (PCB antenna)

Profile: 11BS004R	Page No.: 1
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 10:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 0	

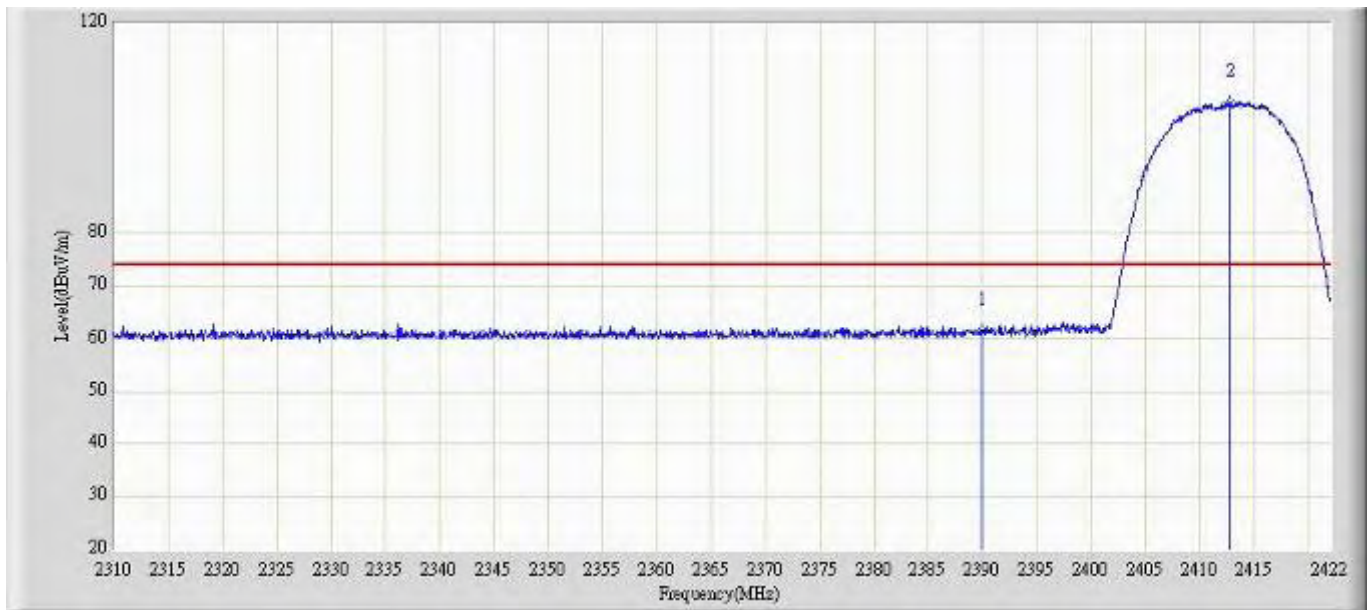


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.320	30.135	-12.680	74.000	31.185	PK
2	*	2412.816	104.633	73.452	30.633	74.000	31.181	PK

Profile: 11BS004R	Page No.: 2
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 10:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 0	

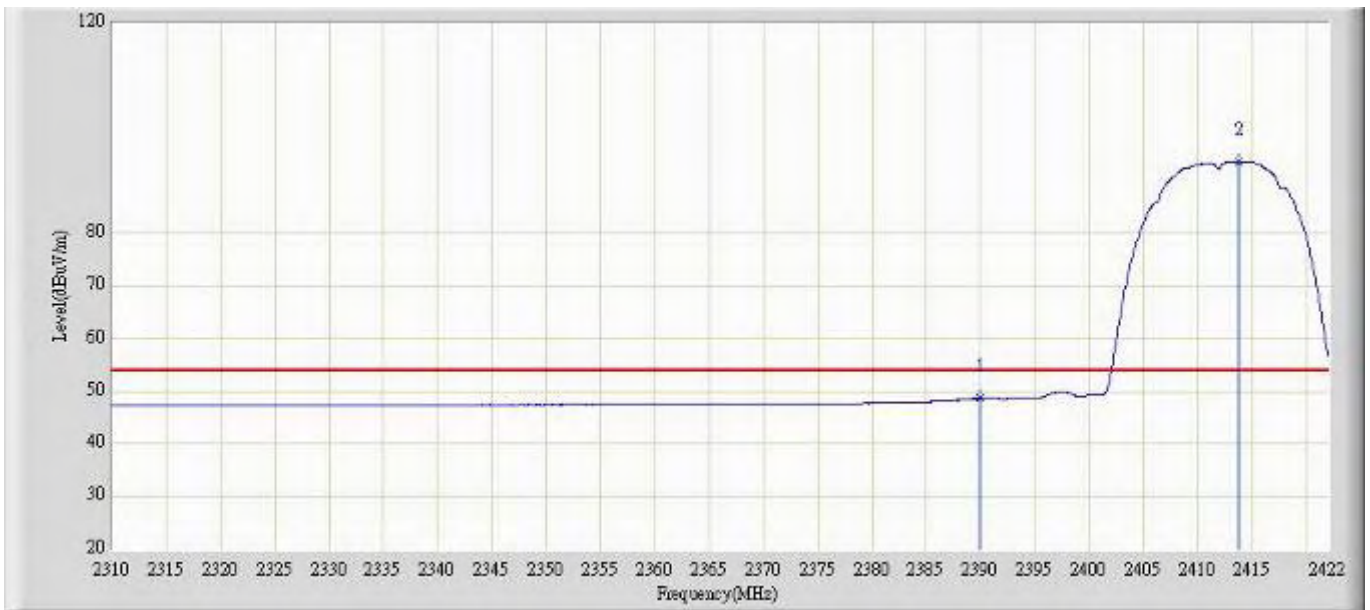


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.662	17.477	-5.338	54.000	31.185	AV
2	*	2413.768	93.581	62.400	39.581	54.000	31.181	AV

Profile: 11BS004R	Page No.: 3
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 11:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 0	

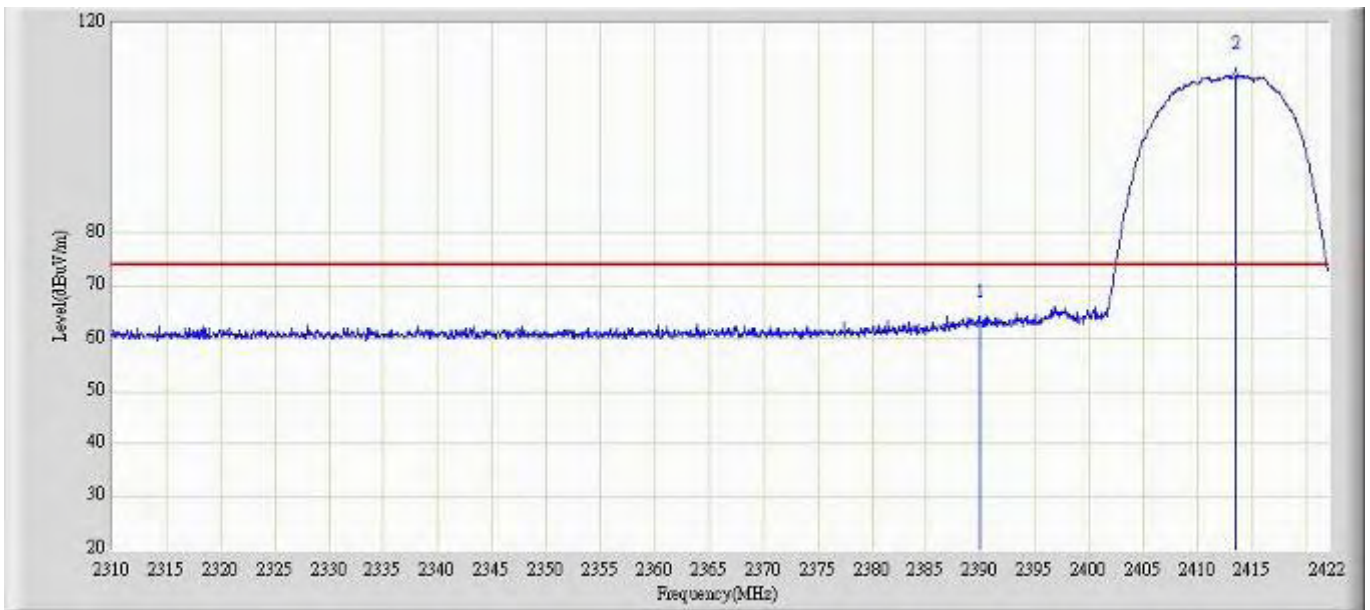

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	62.882	31.697	-11.118	74.000	31.185	PK
2	*	2413.544	110.015	78.834	36.015	74.000	31.181	PK


Profile: 11BS004R	Page No.: 4
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 11:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 0	

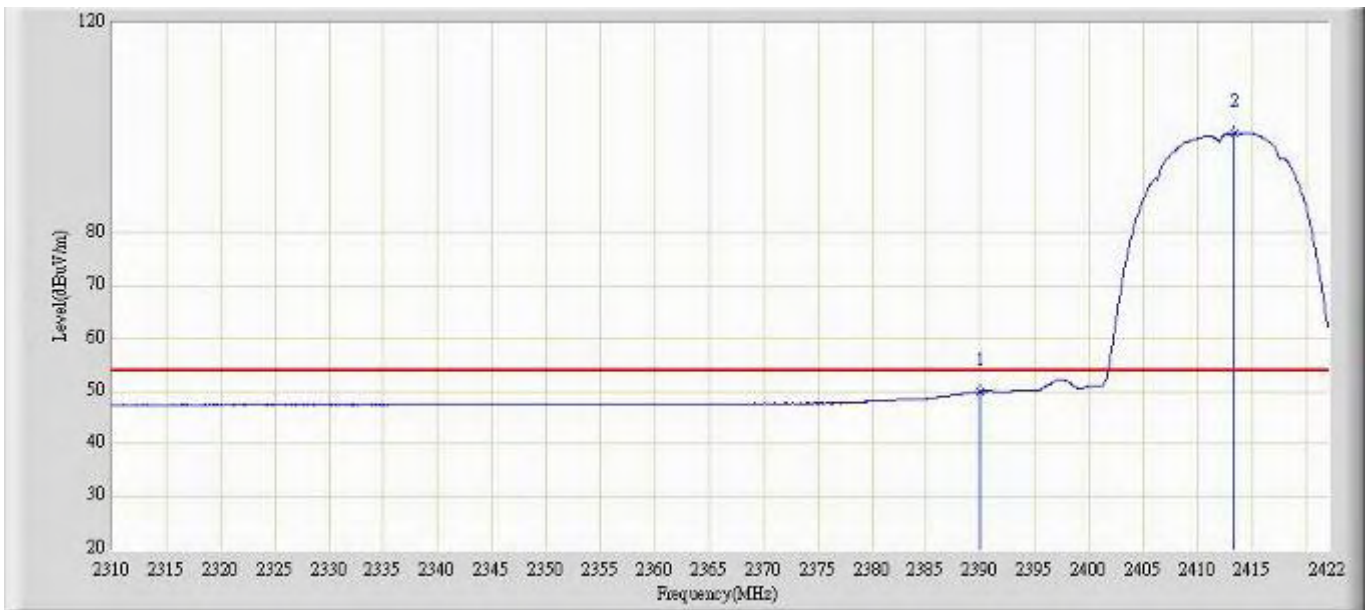

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.948	18.763	-4.052	54.000	31.185	AV
2	*	2413.432	98.905	67.724	44.905	54.000	31.181	AV




Profile: 11BS004R	Page No.: 5
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 11:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 0	

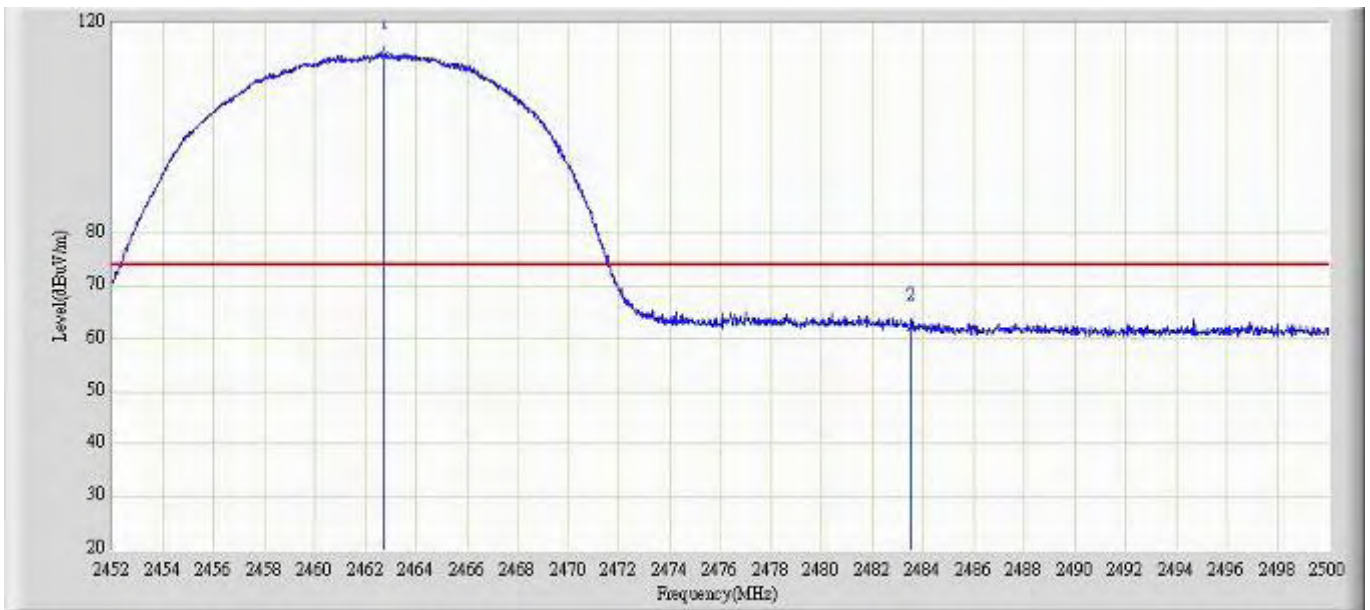


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.752	114.078	82.875	40.078	74.000	31.204	PK
2		2483.500	62.125	30.916	-11.875	74.000	31.209	PK

Profile: 11BS004R	Page No.: 6
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 11:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 0	

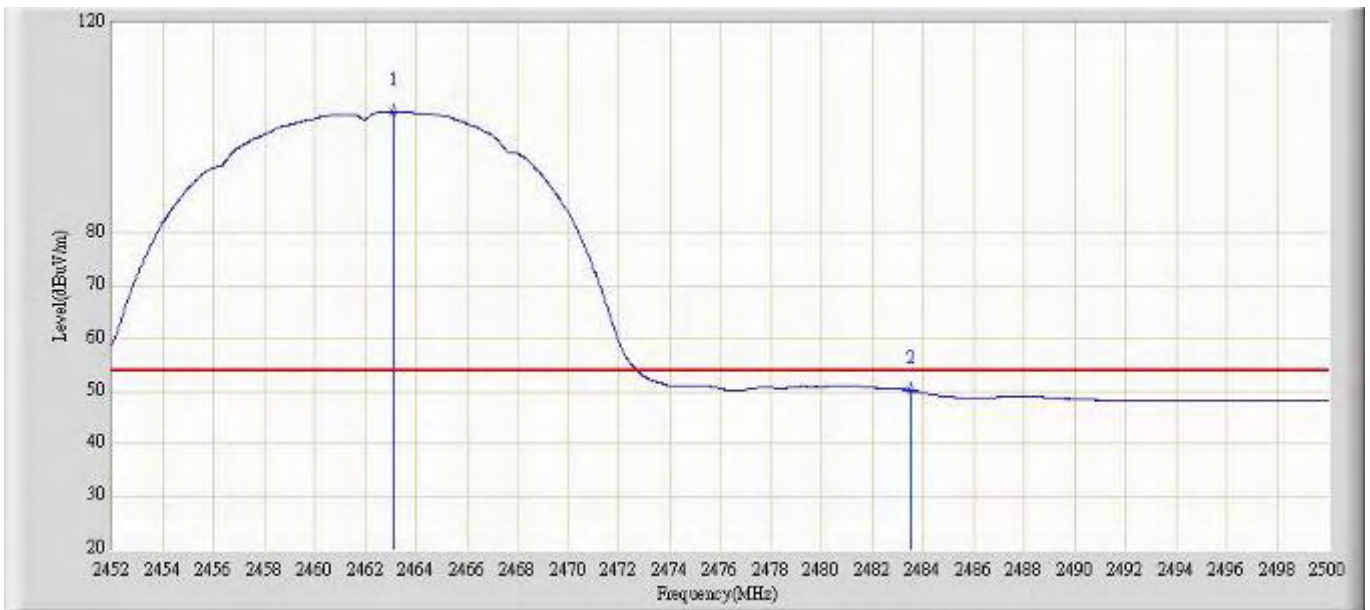


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.112	103.094	71.891	49.094	54.000	31.203	AV
2		2483.500	50.218	19.009	-3.782	54.000	31.209	AV

Profile: 11BS004R	Page No.: 7
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 11:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 0	

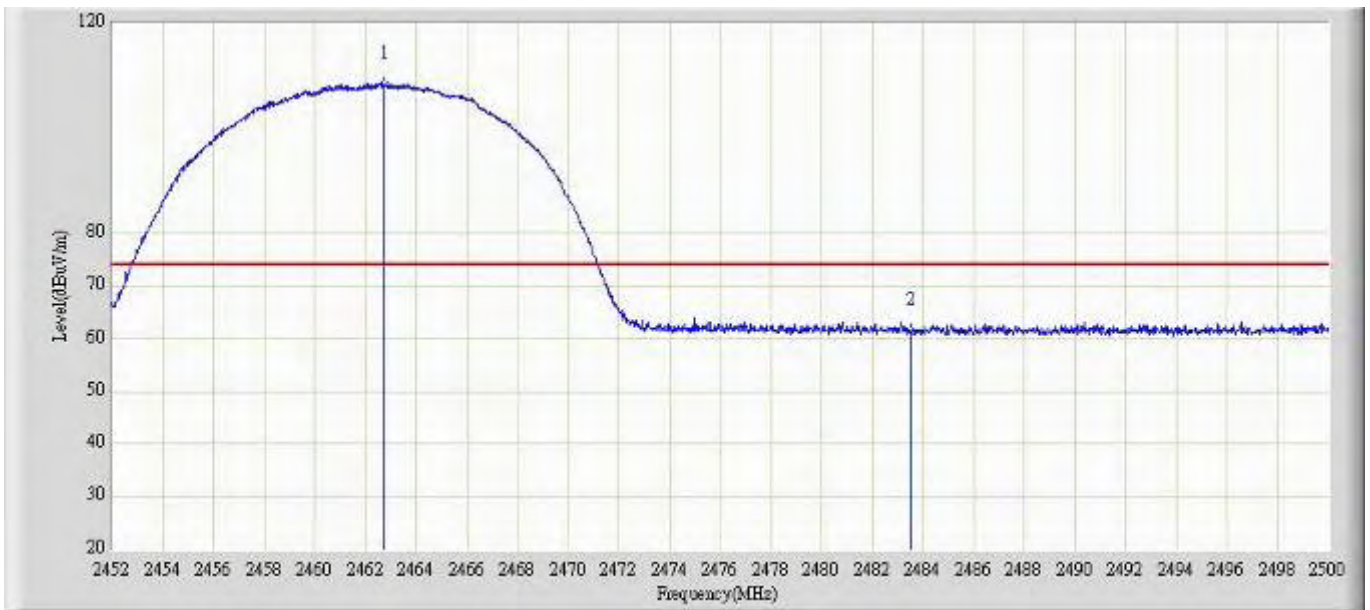


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.752	108.358	77.155	34.358	74.000	31.204	PK
2		2483.500	61.443	30.234	-12.557	74.000	31.209	PK

Profile: 11BS004R	Page No.: 8
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 0	

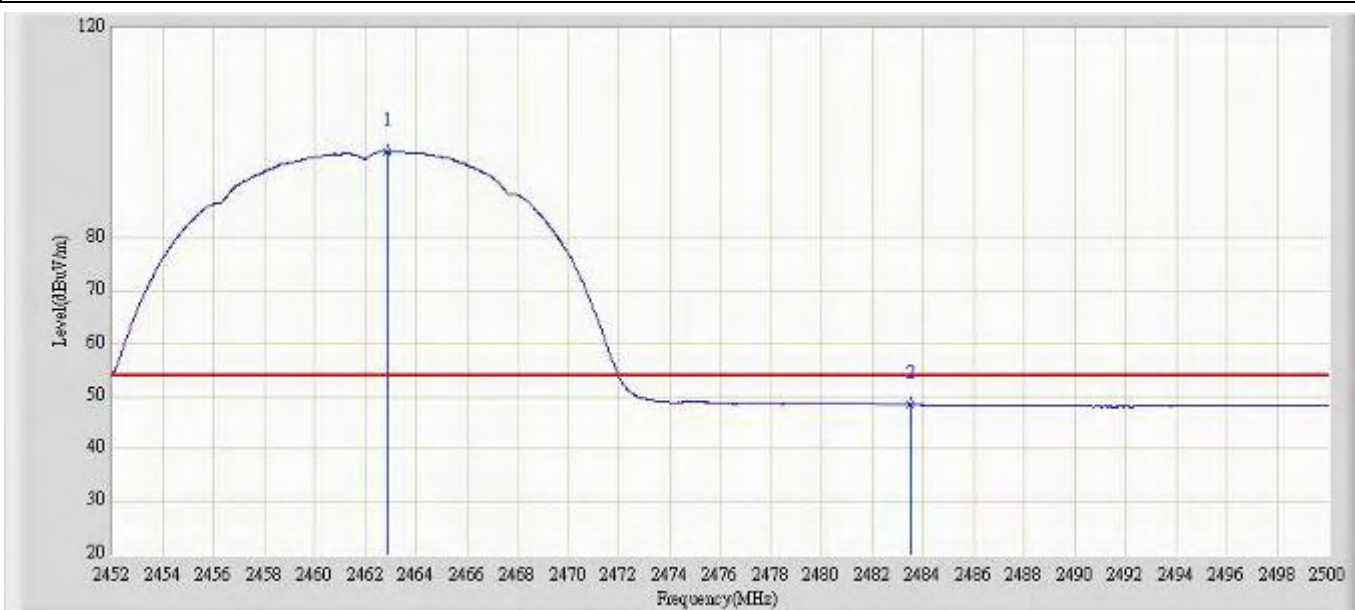


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.872	96.382	65.179	42.382	54.000	31.203	AV
2		2483.500	48.446	17.237	-5.554	54.000	31.209	AV

Profile: 11BS004R	Page No.: 9
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 1	

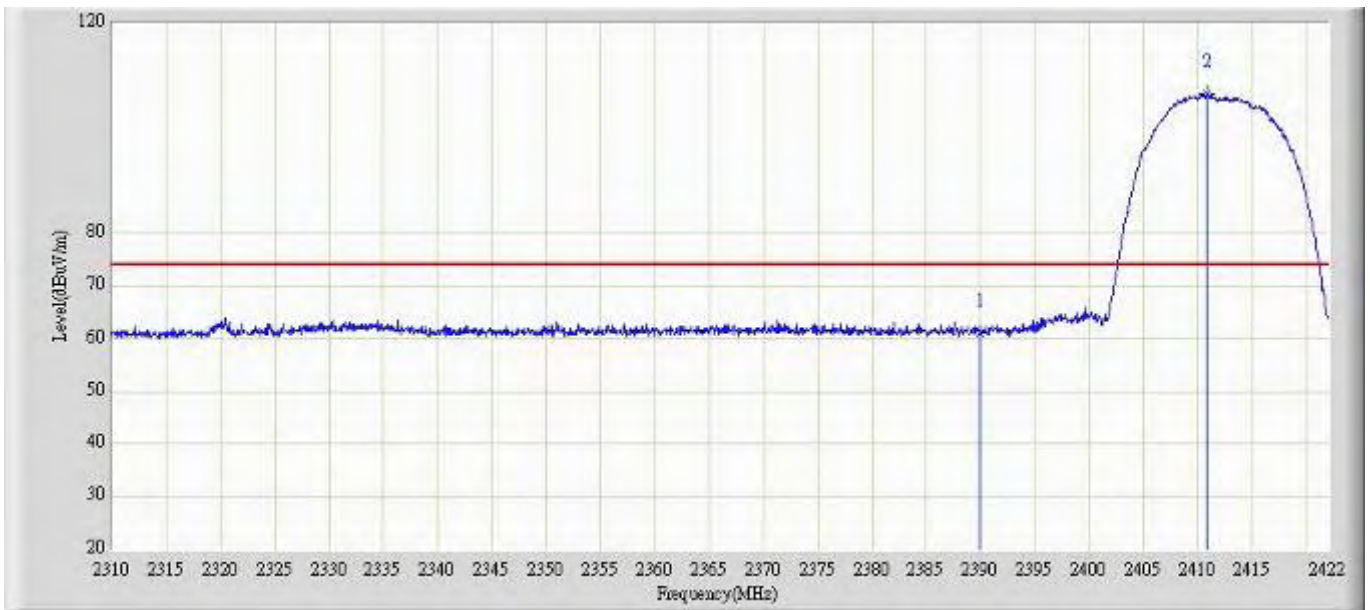


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.064	29.879	-12.936	74.000	31.185	PK
2	*	2410.800	106.491	75.311	32.491	74.000	31.180	PK

Profile: 11BS004R	Page No.: 10
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 1	

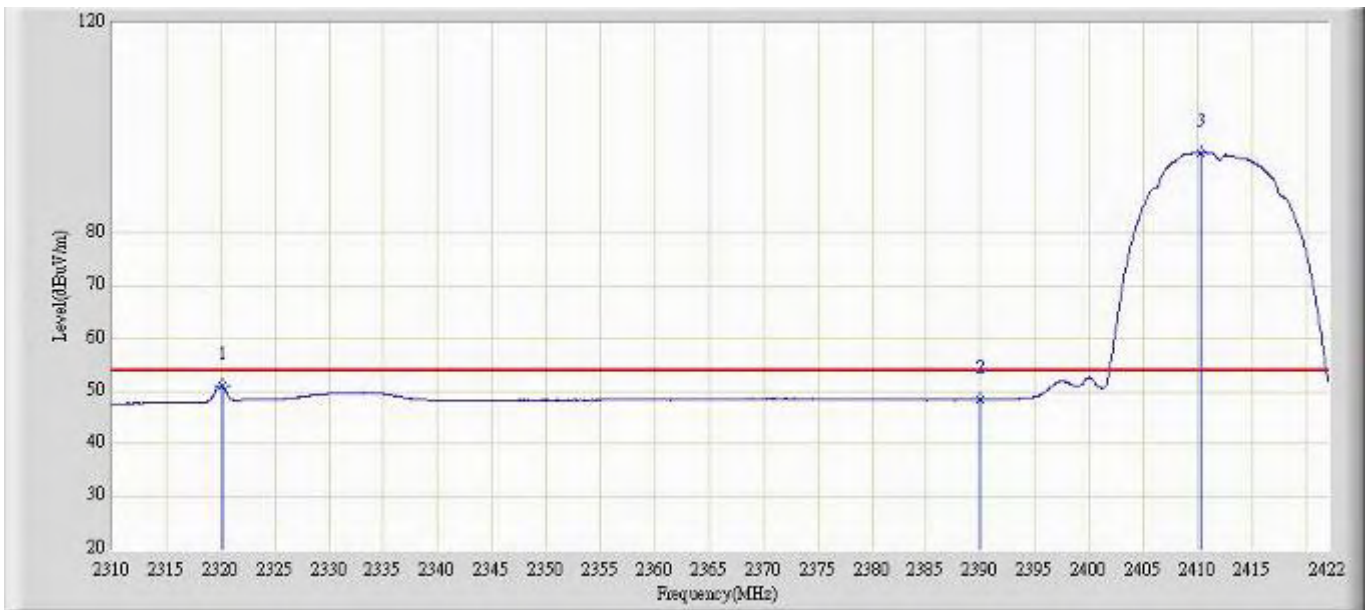


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2320.192	50.957	19.709	-3.043	54.000	31.248	AV
2		2390.000	48.493	17.308	-5.507	54.000	31.185	AV
3	*	2410.296	95.369	64.189	41.369	54.000	31.180	AV

Profile: 11BS004R	Page No.: 11
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 1	

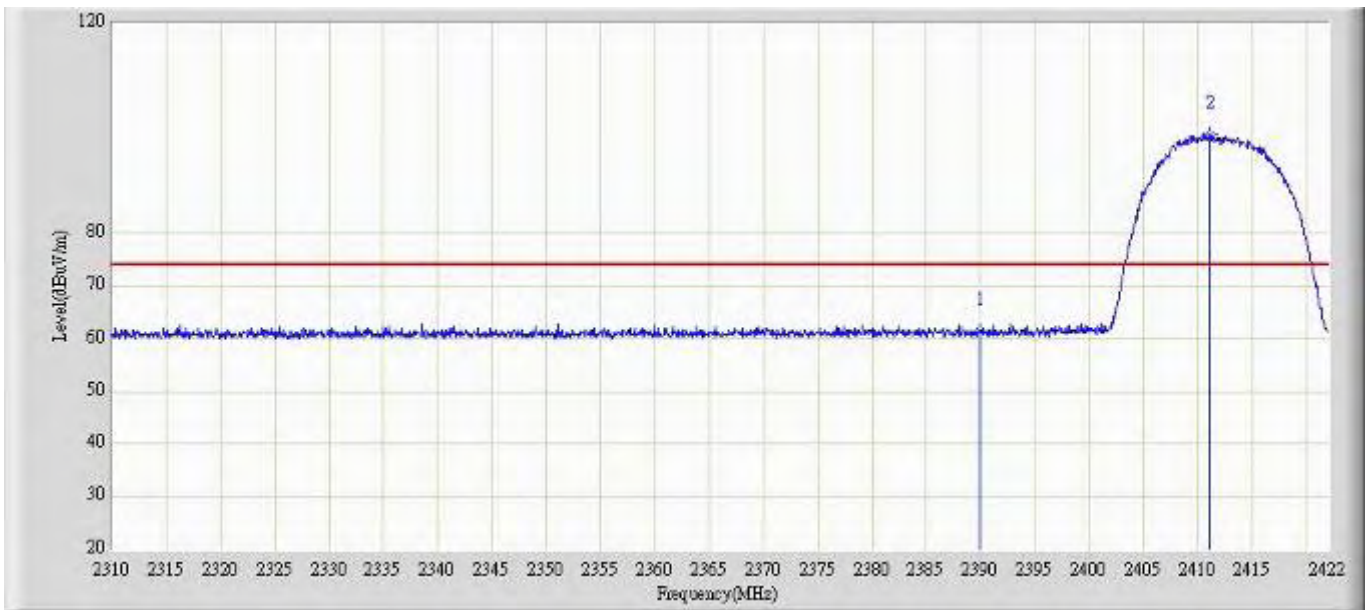

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.435	30.250	-12.565	74.000	31.185	PK
2	*	2411.192	98.824	67.644	24.824	74.000	31.180	PK


Profile: 11BS004R	Page No.: 12
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 1	

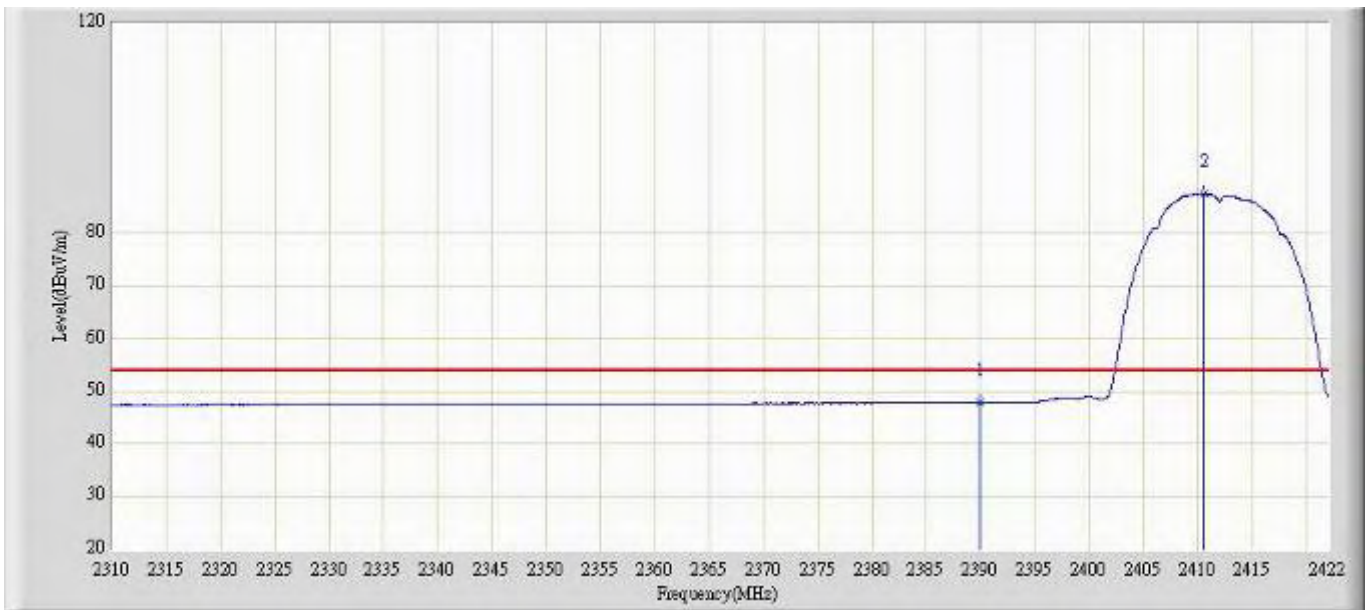

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	47.841	16.656	-6.159	54.000	31.185	AV
2	*	2410.576	87.550	56.370	33.550	54.000	31.180	AV




Profile: 11BS004R	Page No.: 13
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 1	

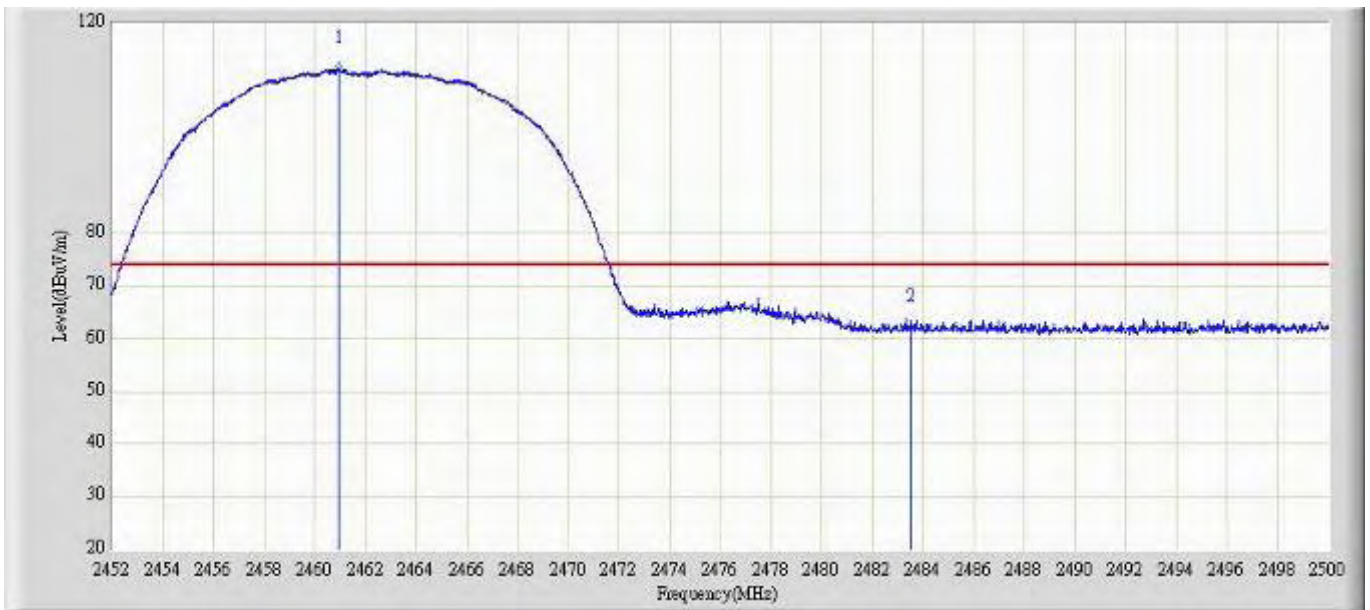


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2460.928	111.205	80.003	37.205	74.000	31.202	PK
2		2483.500	61.994	30.785	-12.006	74.000	31.209	PK

Profile: 11BS004R	Page No.: 14
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 1	

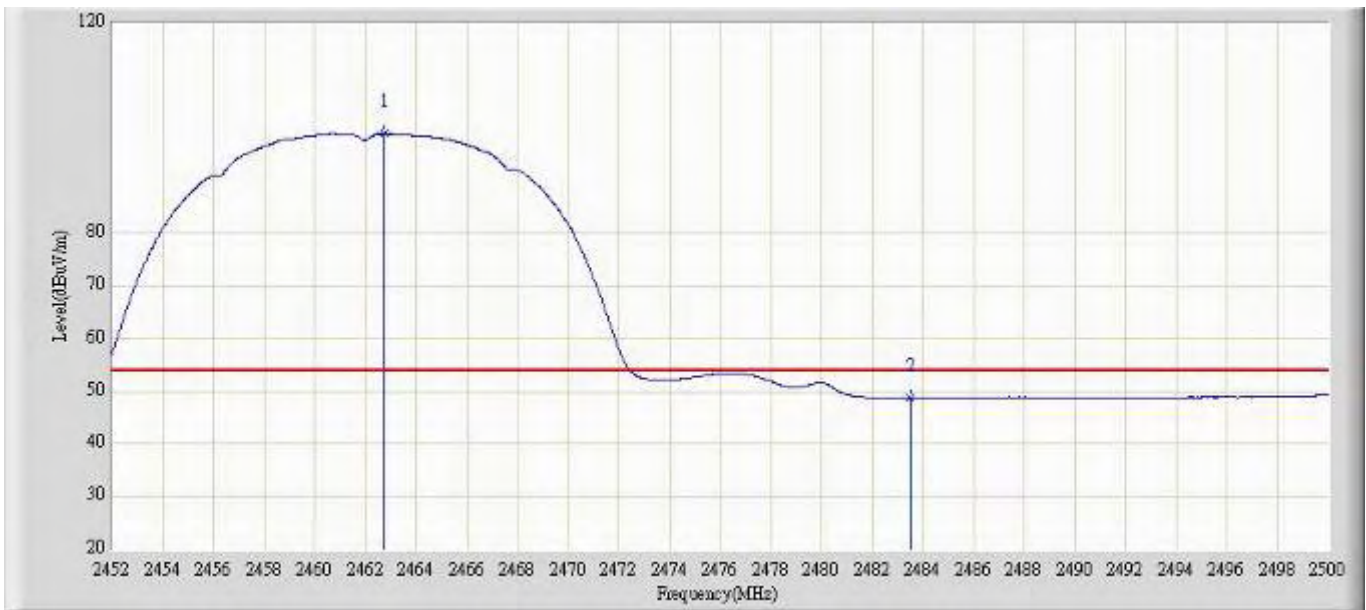


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.728	98.907	67.704	44.907	54.000	31.204	AV
2		2483.500	48.795	17.586	-5.205	54.000	31.209	AV

Profile: 11BS004R	Page No.: 15
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 1	

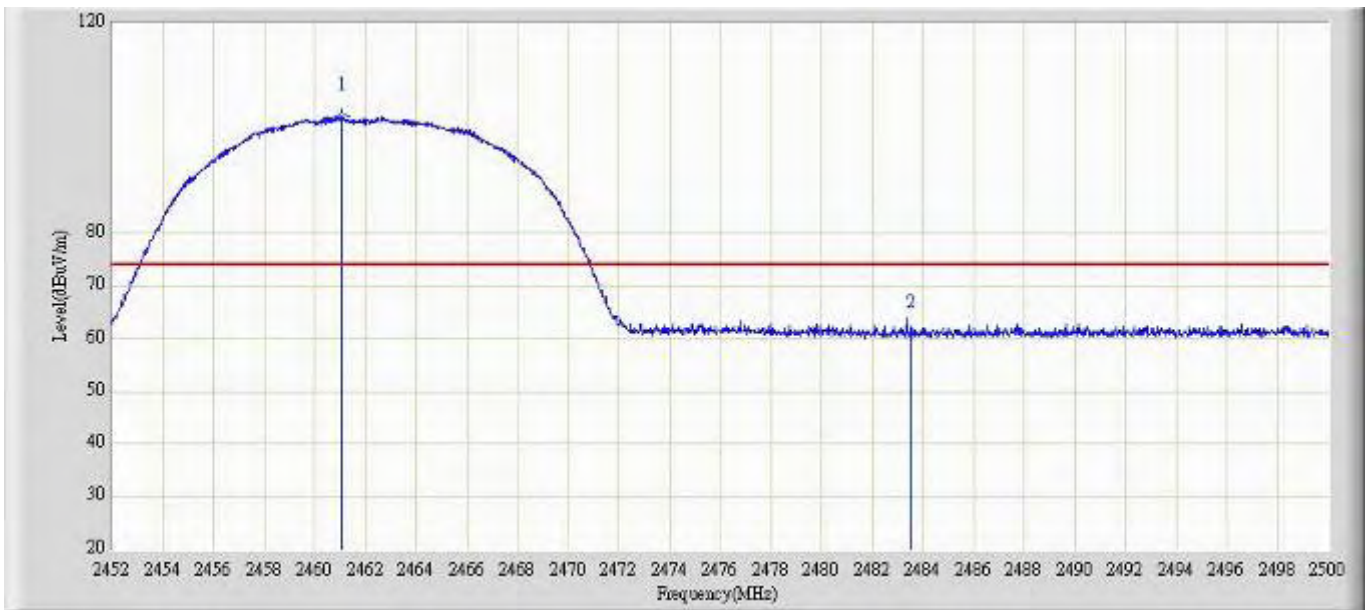


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.048	102.145	70.943	28.145	74.000	31.202	PK
2		2483.500	60.854	29.645	-13.146	74.000	31.209	PK

Profile: 11BS004R	Page No.: 16
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 1	

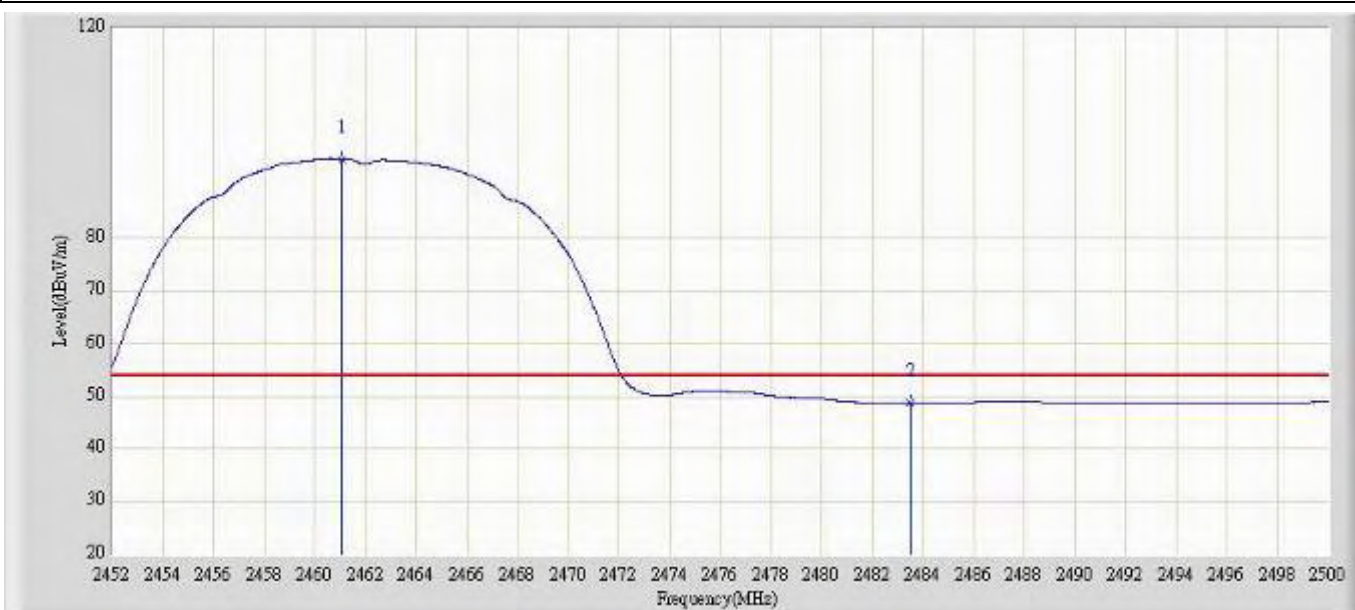


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.072	95.059	63.857	41.059	54.000	31.202	AV
2		2483.500	48.791	17.582	-5.209	54.000	31.209	AV

Profile: 11BS004R	Page No.: 17
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 2	

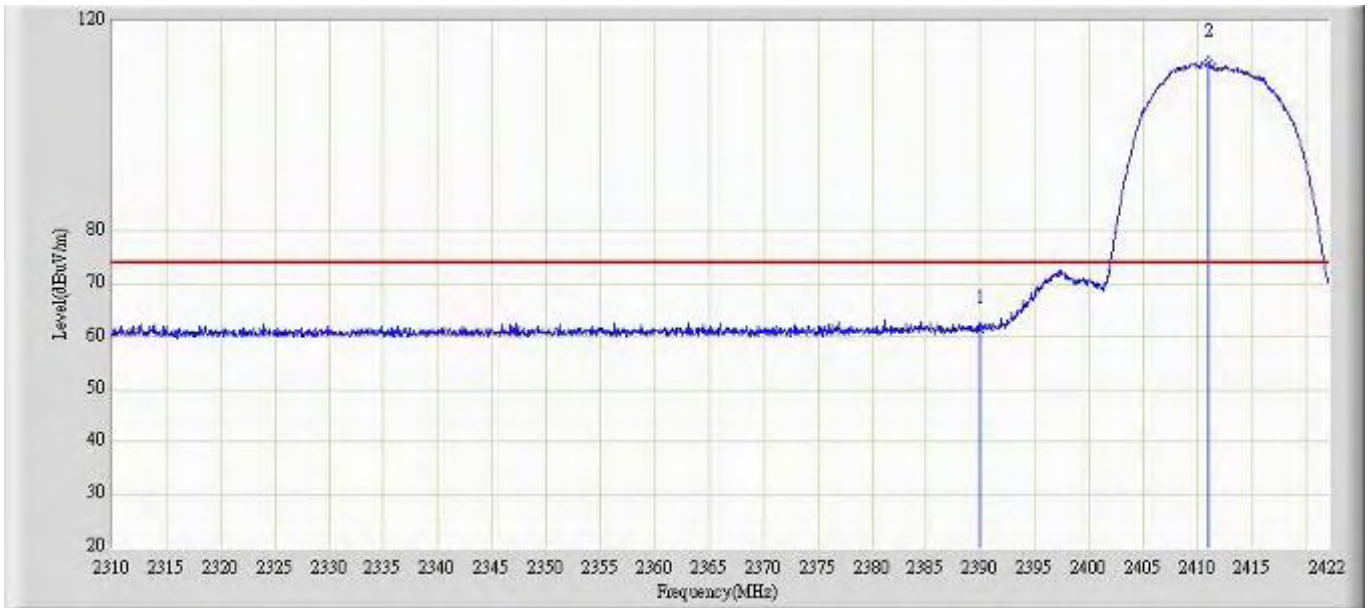


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.277	30.092	-12.723	74.000	31.185	PK
2	*	2410.968	112.003	80.823	38.003	74.000	31.180	PK

Profile: 11BS004R	Page No.: 18
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 2	

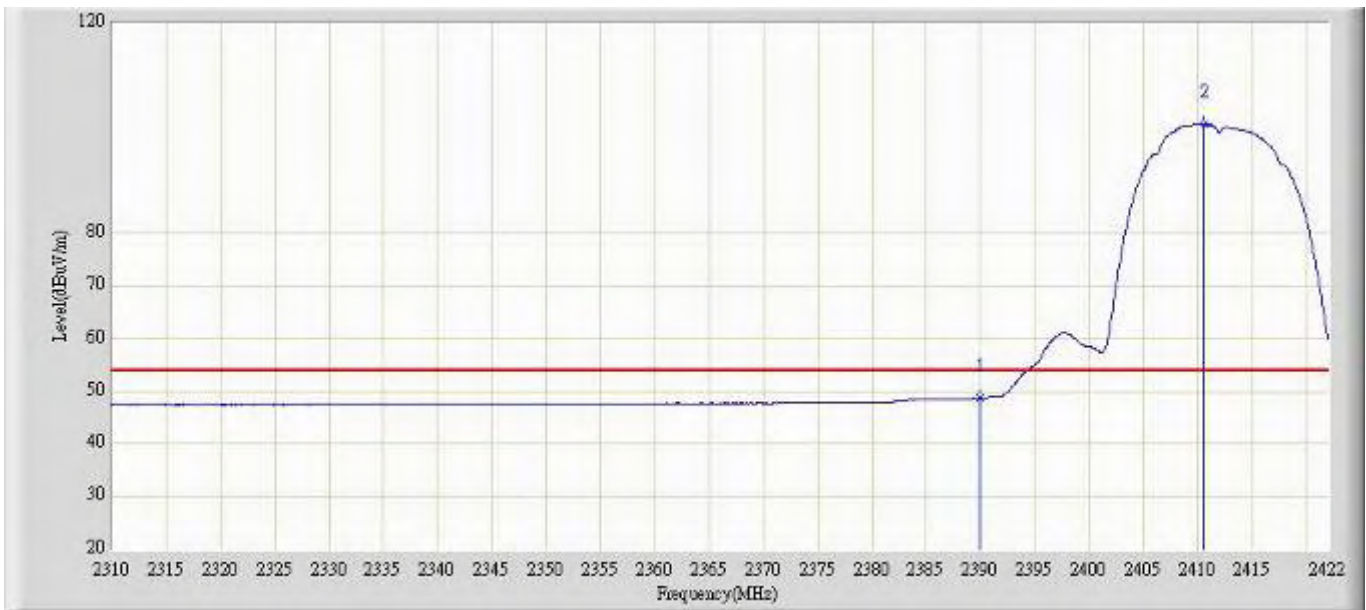


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.721	17.536	-5.279	54.000	31.185	AV
2	*	2410.632	100.735	69.555	46.735	54.000	31.180	AV

Profile: 11BS004R	Page No.: 19
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 2	

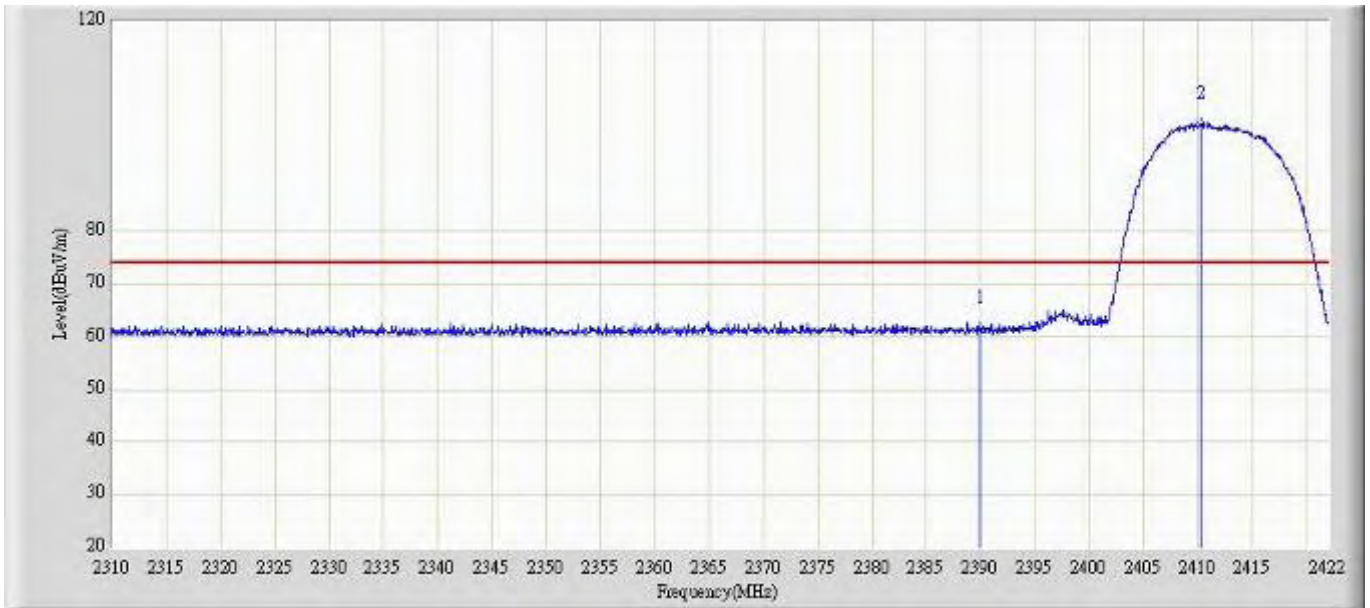

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.381	30.196	-12.619	74.000	31.185	PK
2	*	2410.296	100.299	69.119	26.299	74.000	31.180	PK


Profile: 11BS004R	Page No.: 20
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2412MHz by 802.11b Chain 2	

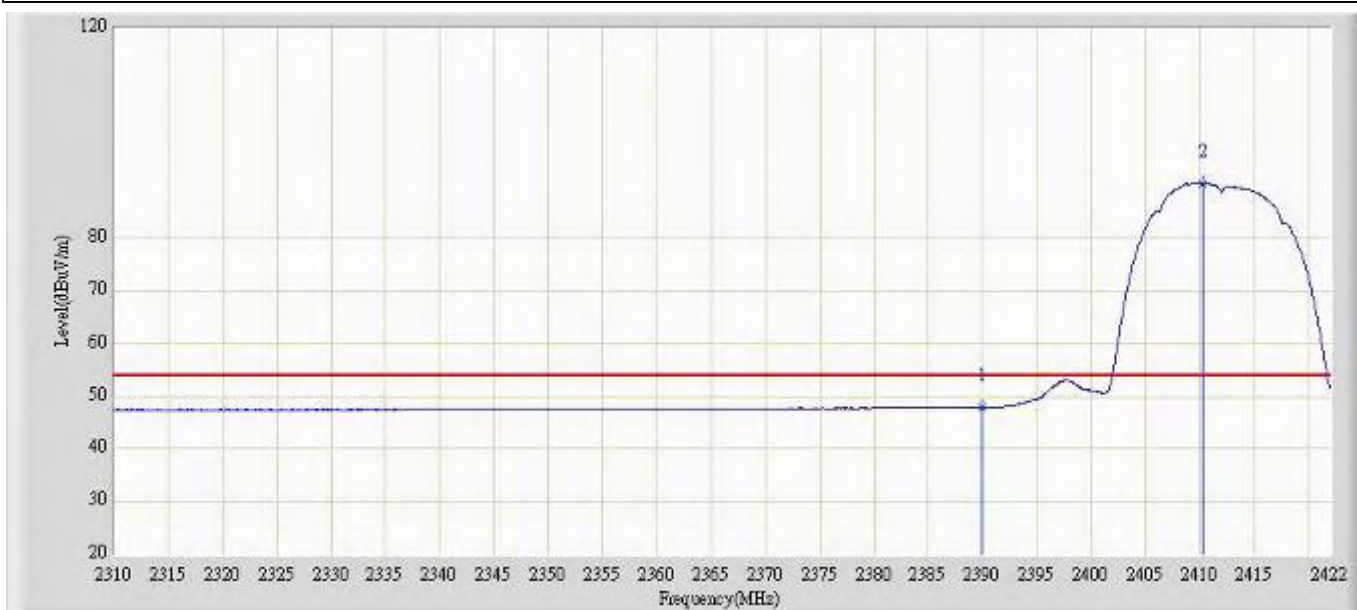

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	47.935	16.750	-6.065	54.000	31.185	AV
2	*	2410.296	90.510	59.330	36.510	54.000	31.180	AV




Profile: 11BS004R	Page No.: 21
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 2	

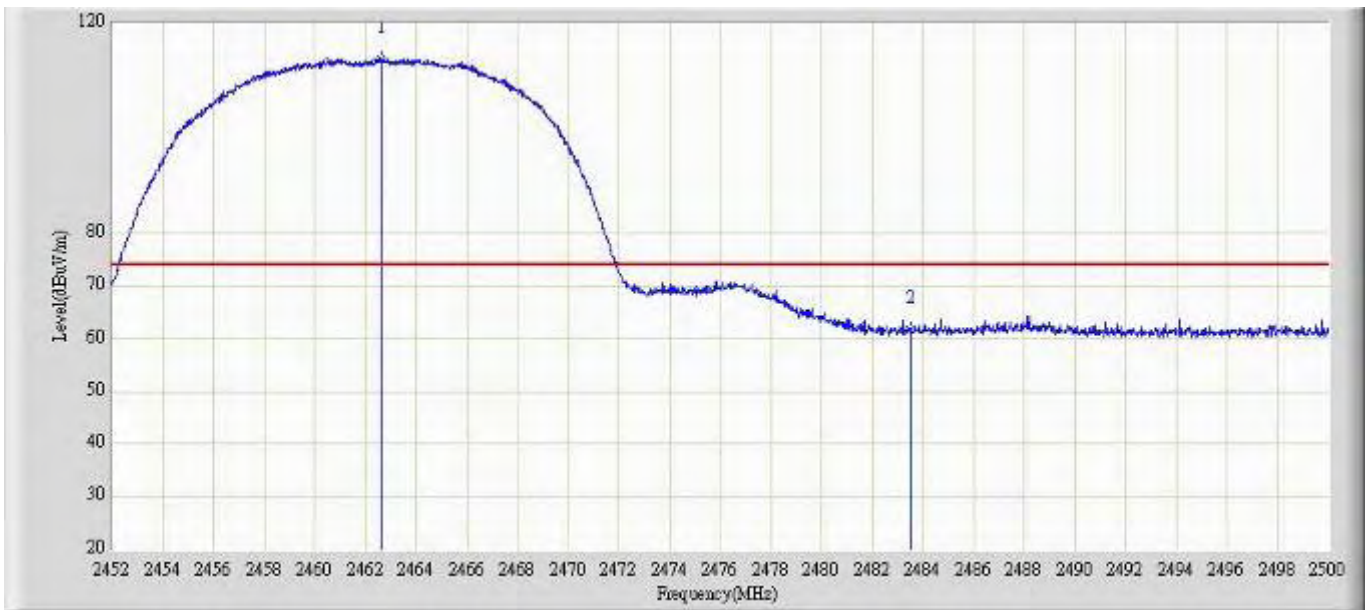


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.656	113.212	82.009	39.212	74.000	31.204	PK
2		2483.500	61.722	30.513	-12.278	74.000	31.209	PK

Profile: 11BS004R	Page No.: 22
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 2	

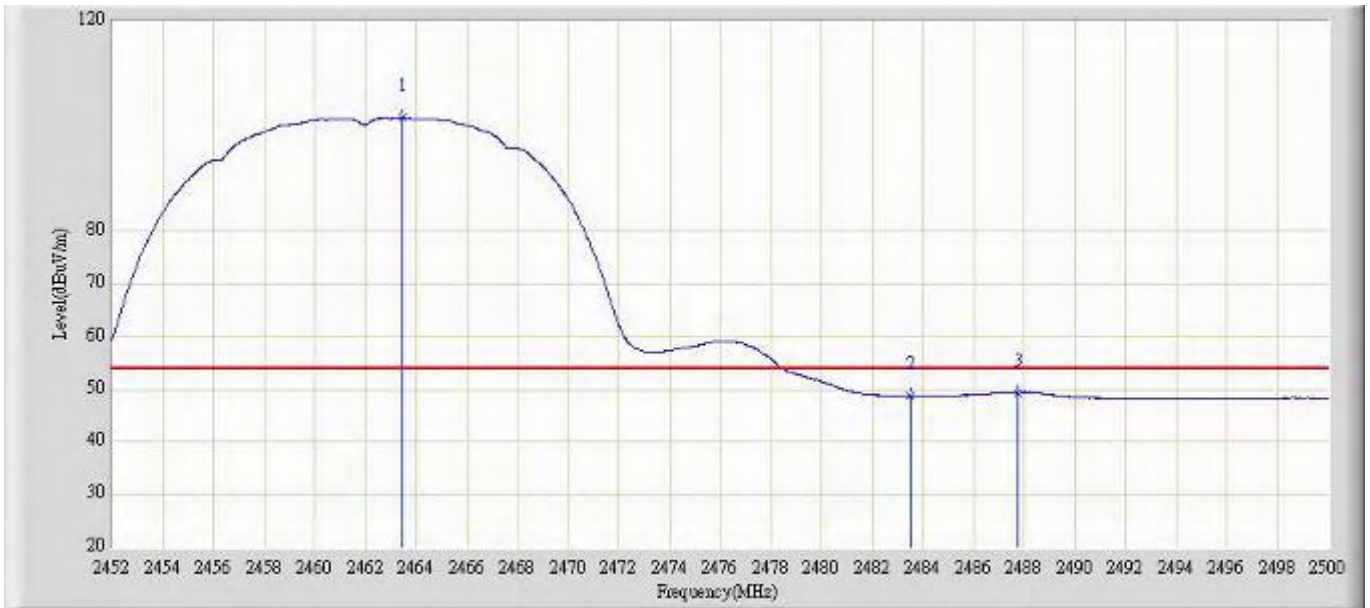


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.472	101.525	70.322	47.525	54.000	31.203	AV
2		2483.500	48.830	17.621	-5.170	54.000	31.209	AV
3		2487.736	49.441	18.229	-4.559	54.000	31.212	AV

Profile: 11BS004R	Page No.: 23
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 2	

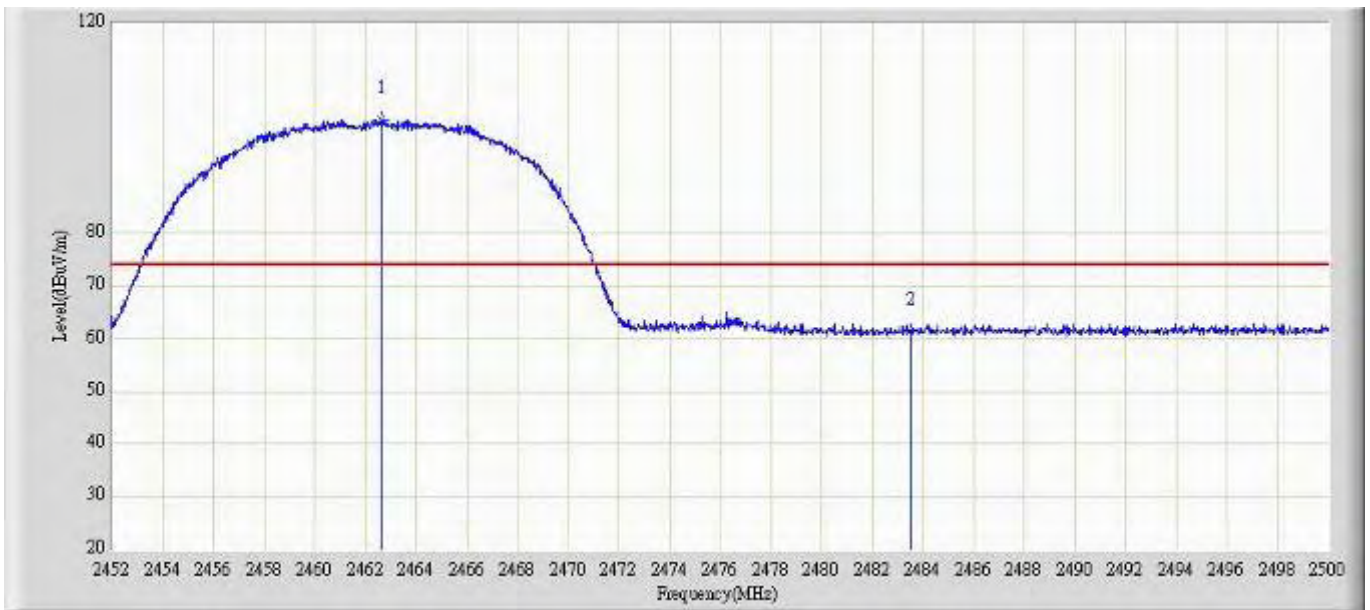


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.632	101.644	70.441	27.644	74.000	31.203	PK
2		2483.500	61.443	30.234	-12.557	74.000	31.209	PK

Profile: 11BS004R	Page No.: 24
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2462MHz by 802.11b Chain 2	

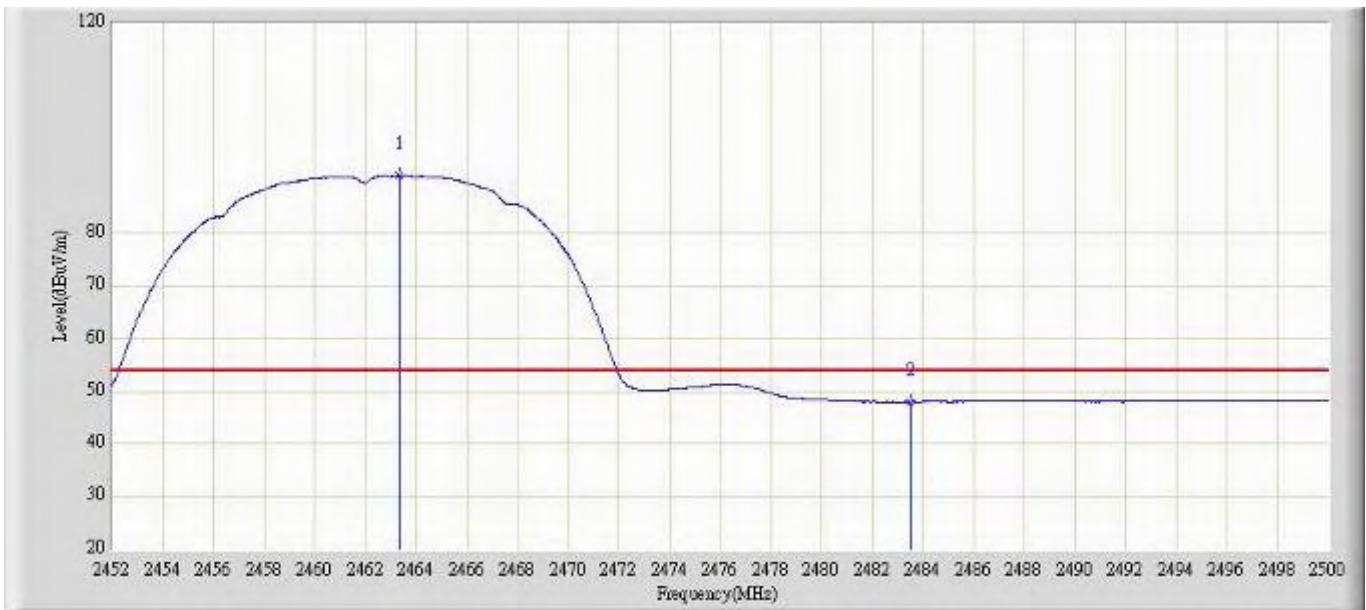


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.328	90.963	59.760	36.963	54.000	31.203	AV
2		2483.500	47.996	16.787	-6.004	54.000	31.209	AV

Profile: 11BS004R	Page No.: 25
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g Chain 0	

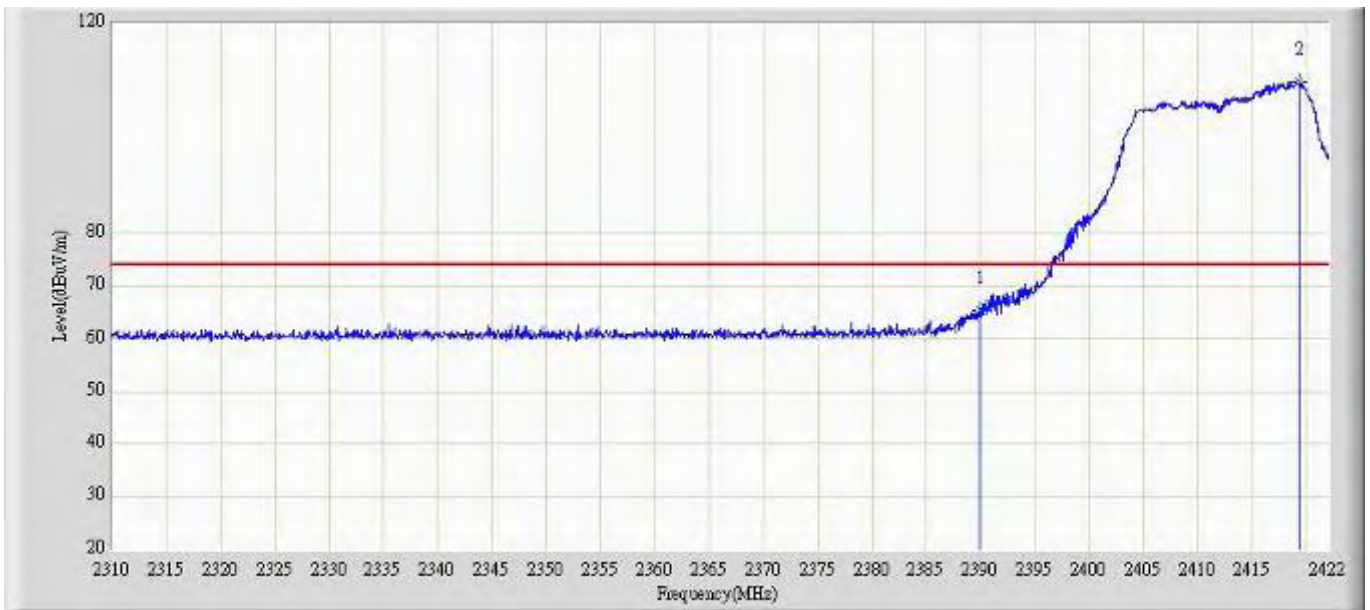


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	65.352	34.167	-8.648	74.000	31.185	PK
2	*	2419.368	108.718	77.535	34.718	74.000	31.183	PK

Profile: 11BS004R	Page No.: 26
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g Chain 0	

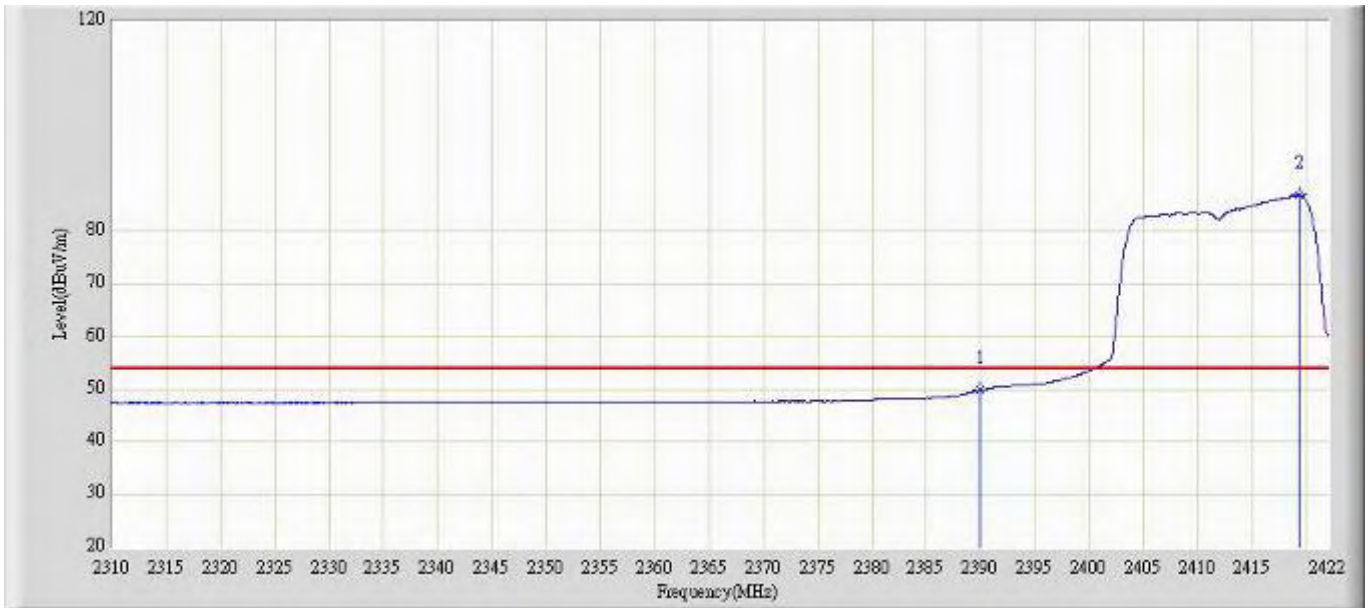


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.773	18.588	-4.227	54.000	31.185	AV
2	*	2419.312	86.892	55.709	32.892	54.000	31.183	AV

Profile: 11BS004R	Page No.: 27
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 13:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g Chain 0	

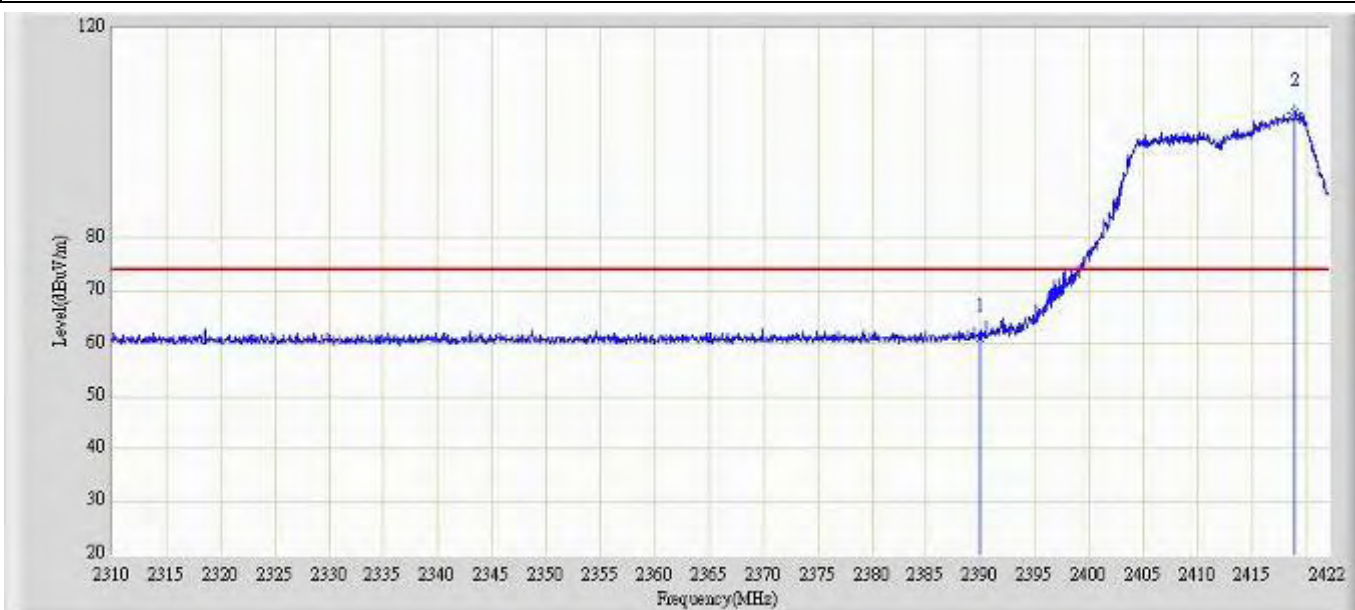

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.171	29.986	-12.829	74.000	31.185	PK
2	*	2418.976	103.861	72.678	29.861	74.000	31.183	PK


Profile: 11BS004R	Page No.: 28
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 14:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 2412MHz by 802.11g Chain 0	

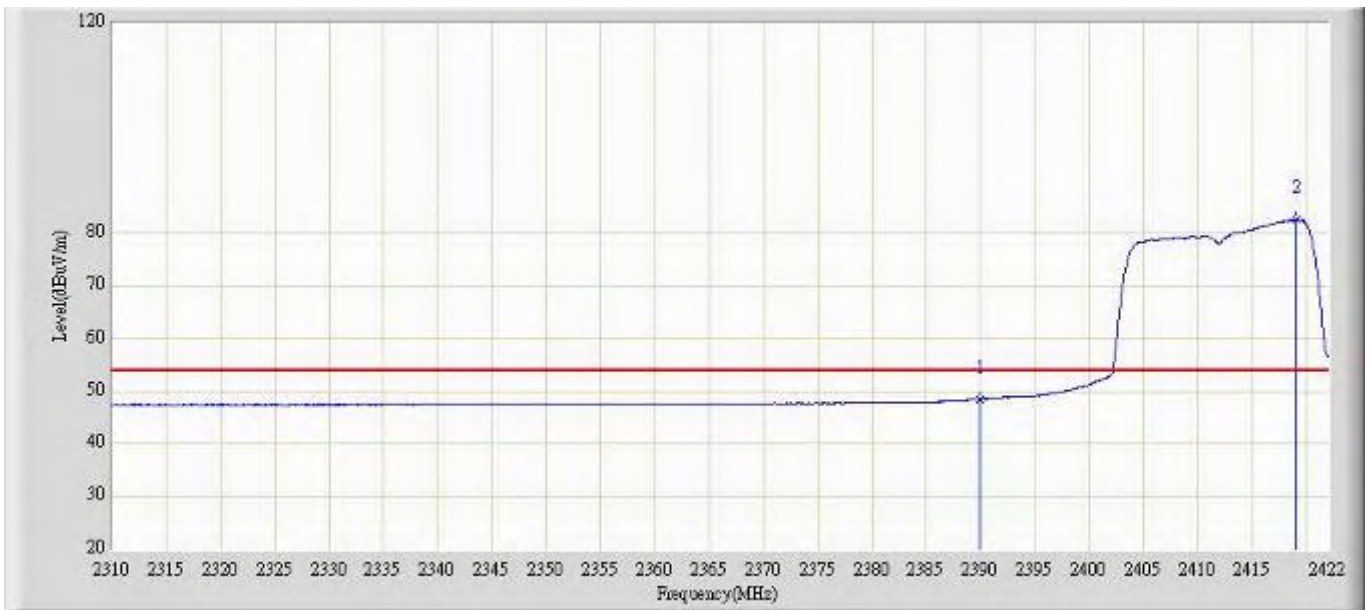

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.534	17.349	-5.466	54.000	31.185	AV
2	*	2419.144	82.673	51.490	28.673	54.000	31.183	AV




Profile: 11BS004R	Page No.: 29
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 14:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 2462MHz by 802.11g Chain 0	

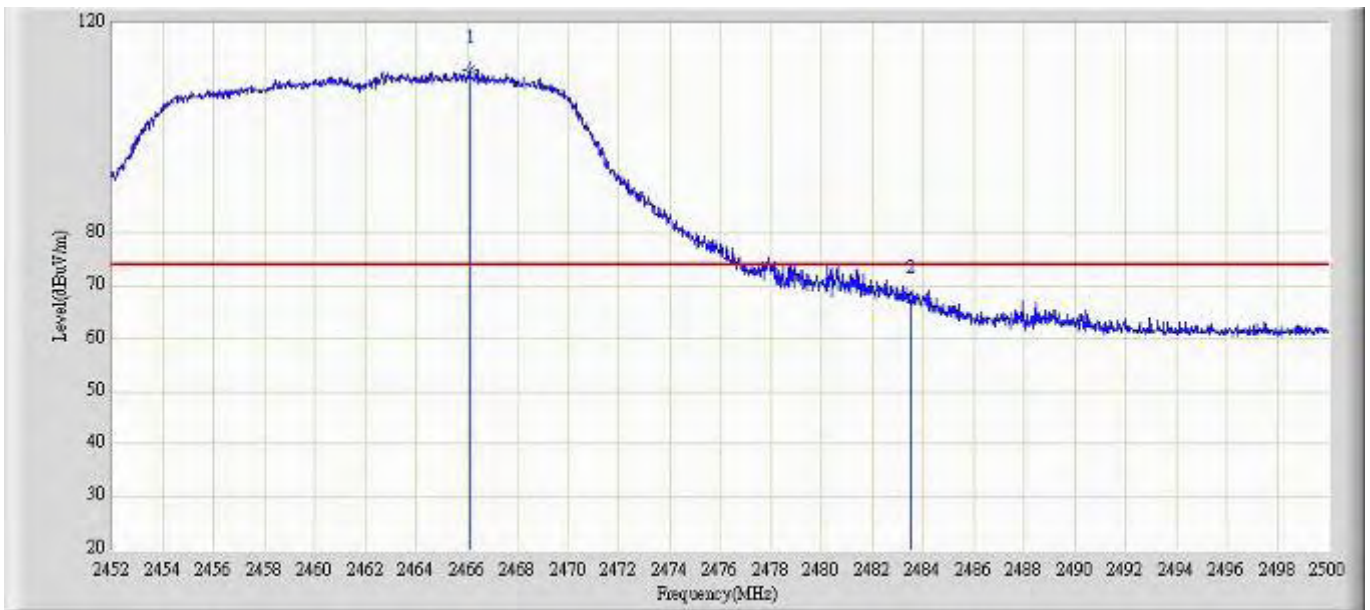


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2466.136	111.141	79.937	37.141	74.000	31.204	PK
2		2483.500	67.417	36.208	-6.583	74.000	31.209	PK

Profile: 11BS004R	Page No.: 30
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 14:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 2462MHz by 802.11g Chain 0	

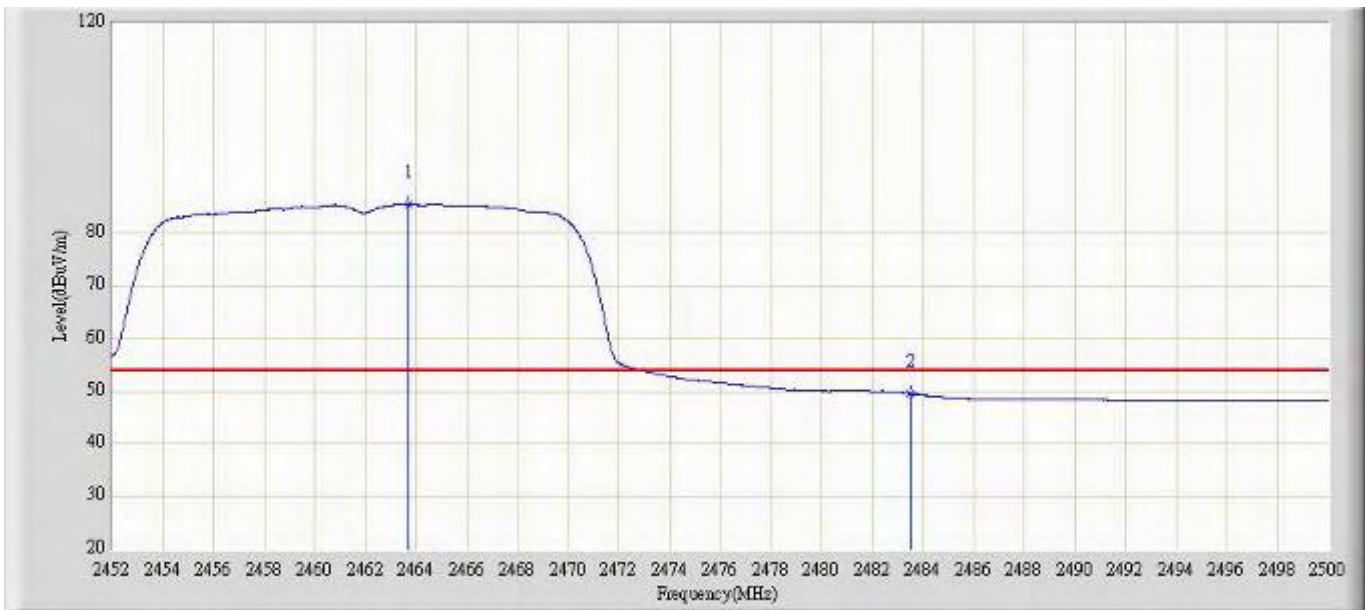


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.688	85.508	54.305	31.508	54.000	31.203	AV
2		2483.500	49.525	18.316	-4.475	54.000	31.209	AV

Profile: 11BS004R	Page No.: 31
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 14:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 2462MHz by 802.11g Chain 0	

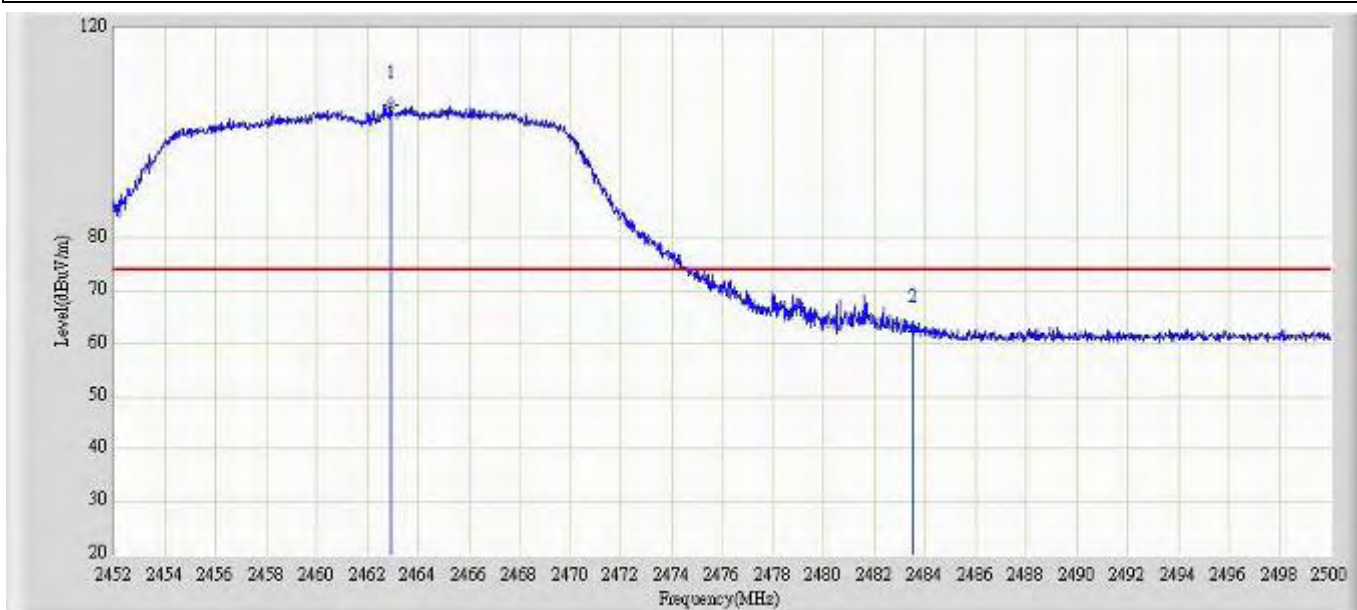

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.944	105.451	74.248	31.451	74.000	31.203	PK
2		2483.500	62.777	31.568	-11.223	74.000	31.209	PK

Profile: 11BS004R	Page No.: 32
Engineer: Jame	
Site: AC5	Time: 2011/11/15 - 14:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 2462MHz by 802.11g Chain 0	

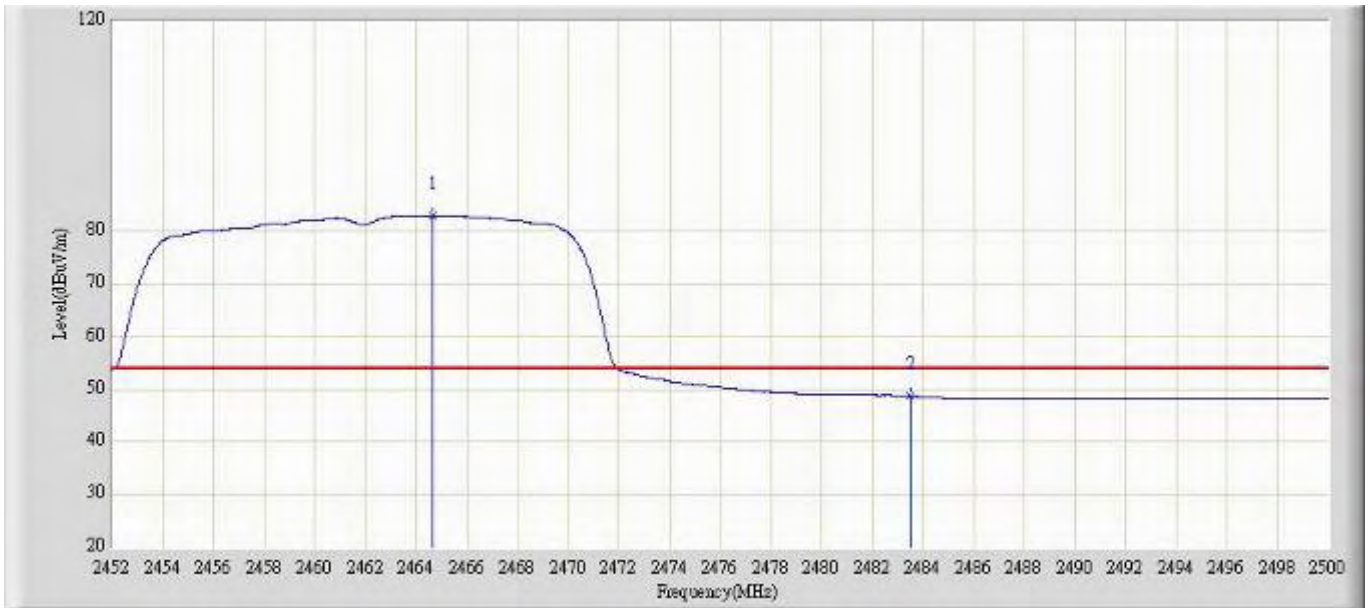

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.672	83.028	51.825	29.028	54.000	31.203	AV
2		2483.500	48.694	17.485	-5.306	54.000	31.209	AV