



Profile: 11BS004R	Page No.: 524
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5180MHz by 802.11a Chain 1	

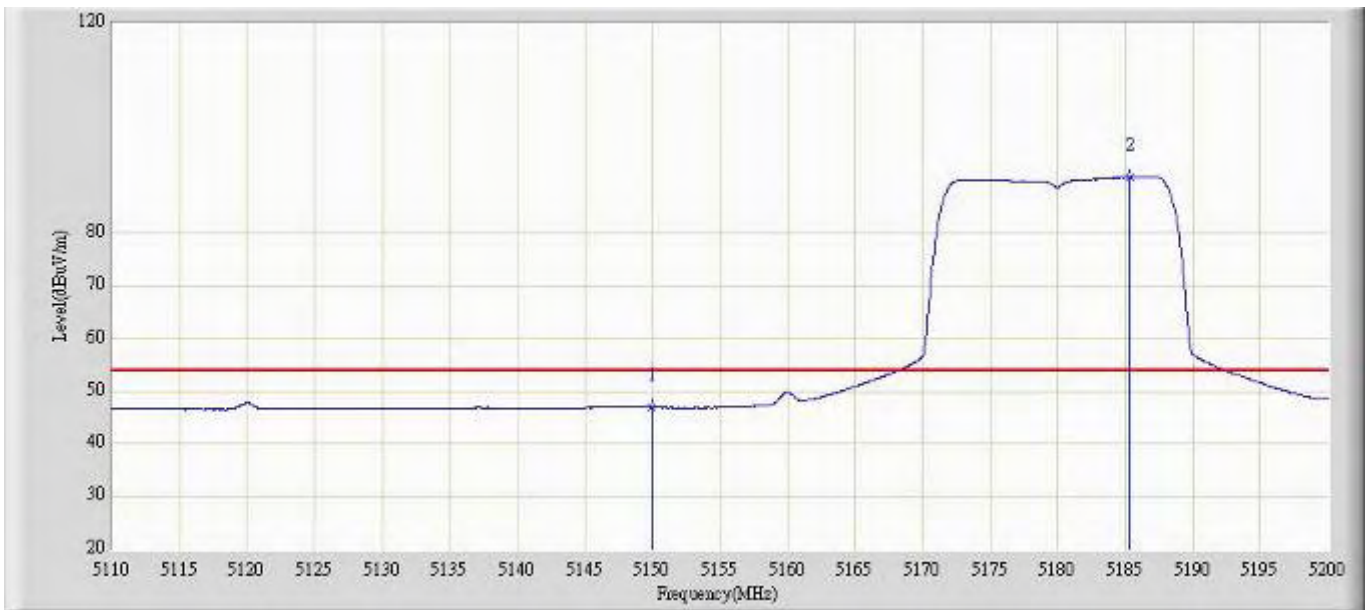


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.928	57.355	-7.072	54.000	-10.427	AV
2	*	5185.330	90.656	101.129	N/A	N/A	-10.472	AV

Profile: 11BS004R	Page No.: 525
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 1	

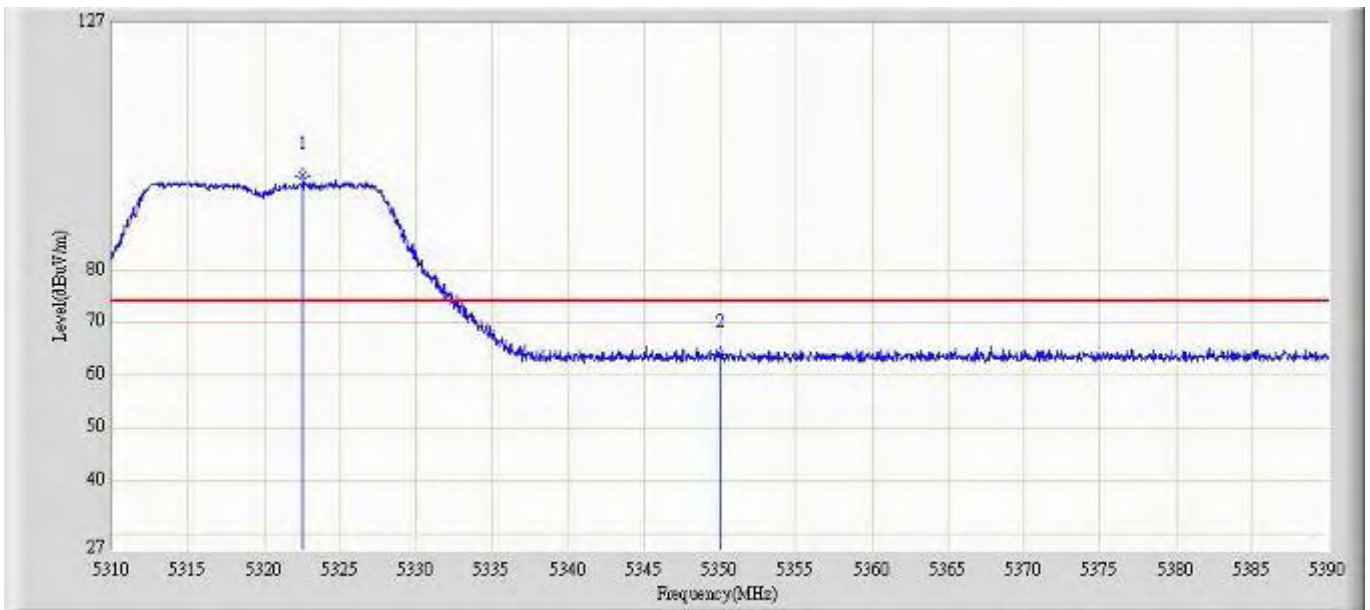


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5322.560	97.845	108.297	N/A	N/A	-10.453	PK
2		5350.000	63.956	74.455	-10.044	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 526
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 1	

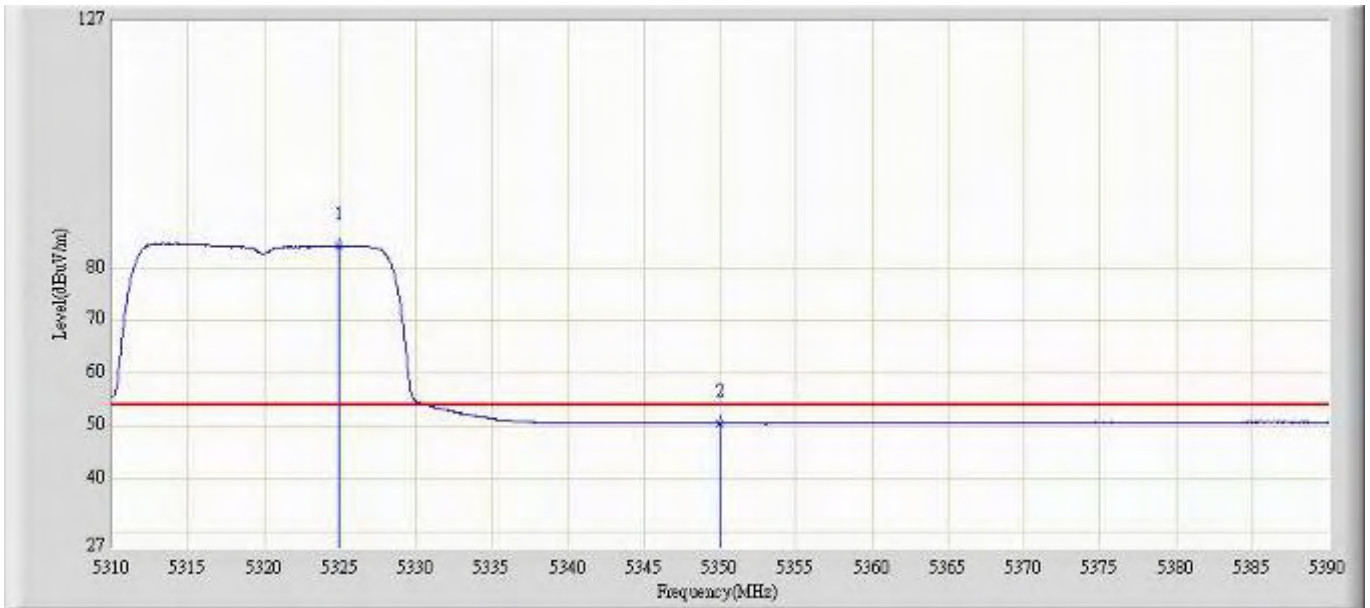


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.880	84.203	94.669	N/A	N/A	-10.465	AV
2		5350.000	50.529	61.028	-3.471	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 527
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 1	

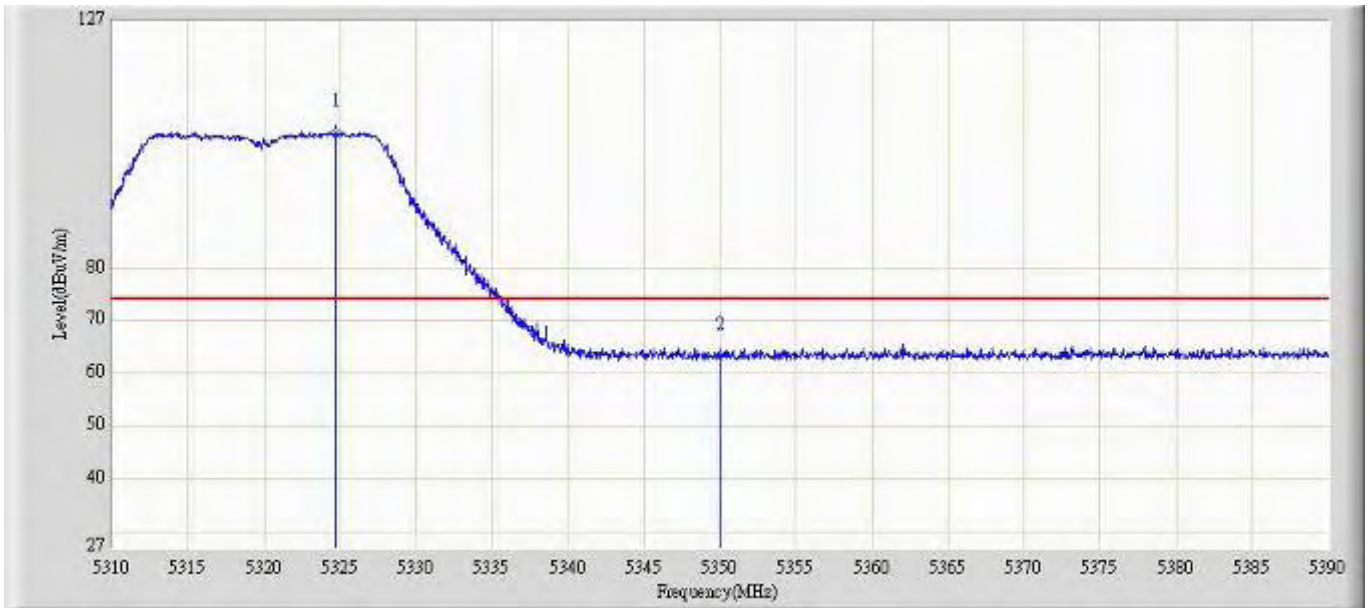


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.760	105.734	116.199	N/A	N/A	-10.465	PK
2		5350.000	63.309	73.808	-10.691	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 528
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 1	

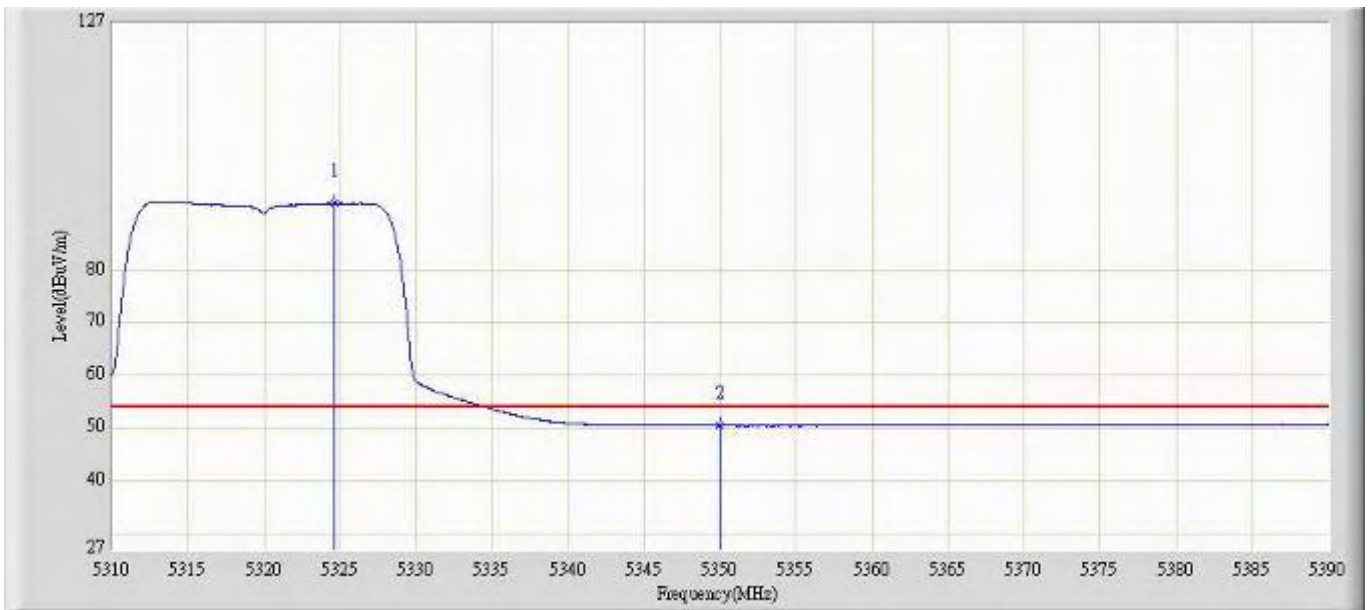


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.640	92.701	103.165	N/A	N/A	-10.464	AV
2		5350.000	50.482	60.981	-3.518	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 529
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 1	

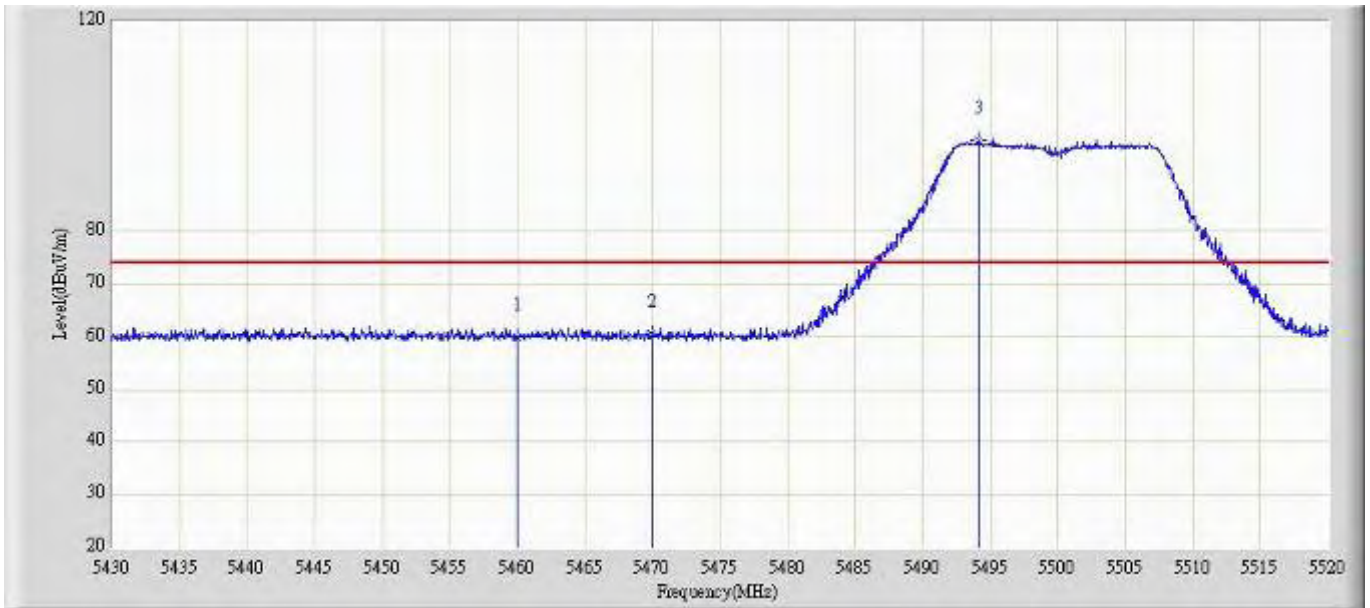


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	59.884	70.154	-14.116	74.000	-10.269	PK
2		5470.000	60.494	60.494	-27.806	88.300	-10.274	PK
3	*	5494.170	97.362	107.643	23.362	74.000	-10.281	PK

Profile: 11BS004R	Page No.: 530
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 1	

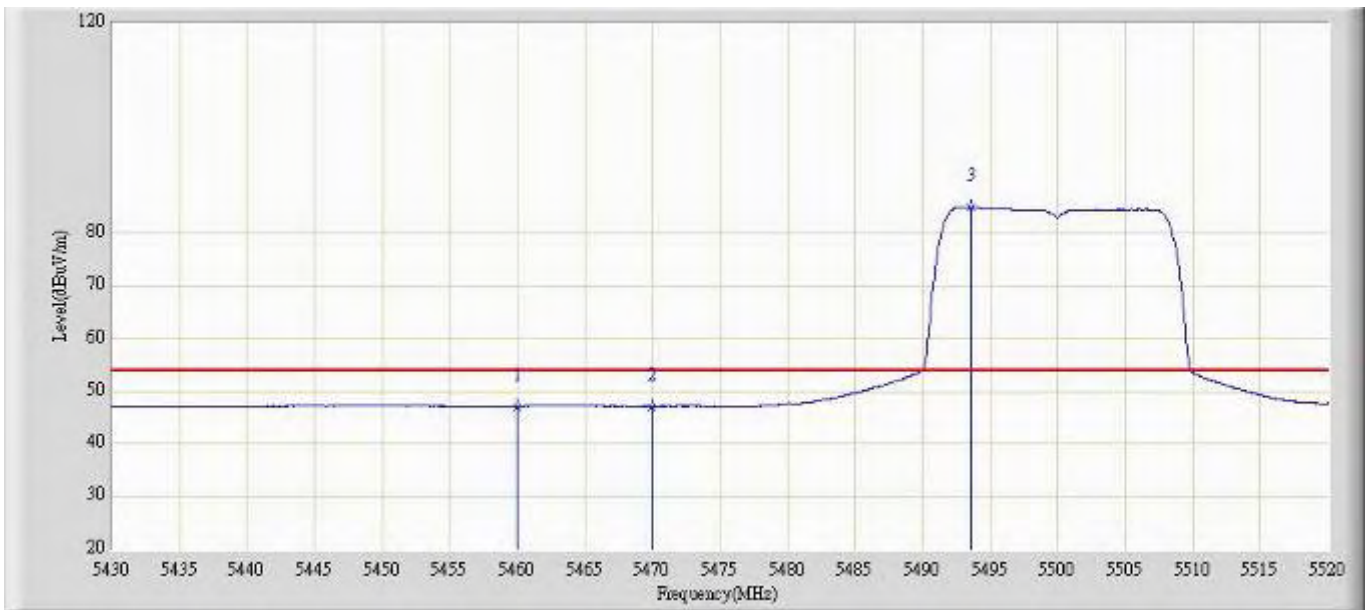


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.114	57.384	-6.886	54.000	-10.269	AV
2		5470.000	47.140	57.445	-21.160	68.300	-10.305	AV
3	*	5493.630	84.942	95.224	N/A	N/A	-10.282	AV

Profile: 11BS004R	Page No.: 531
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 1	

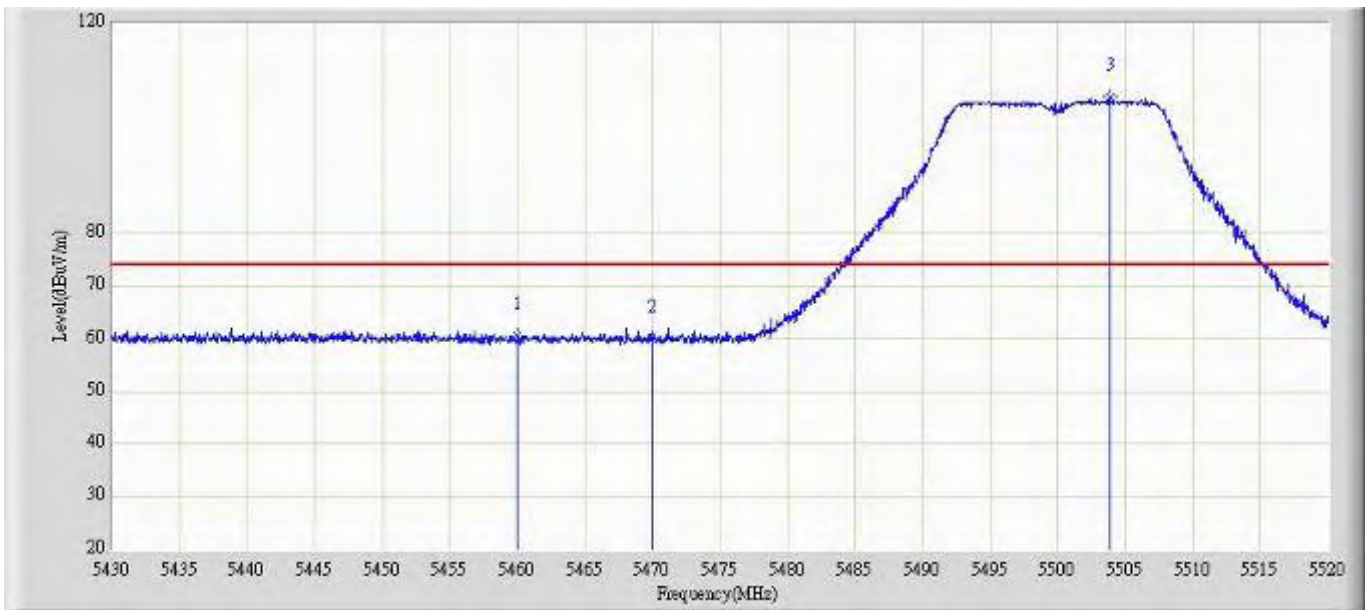


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.523	70.793	-13.477	74.000	-10.269	PK
2		5470.000	59.855	59.855	-28.445	88.300	-10.258	PK
3	*	5503.845	106.035	116.282	32.035	74.000	-10.246	PK

Profile: 11BS004R	Page No.: 532
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 1	

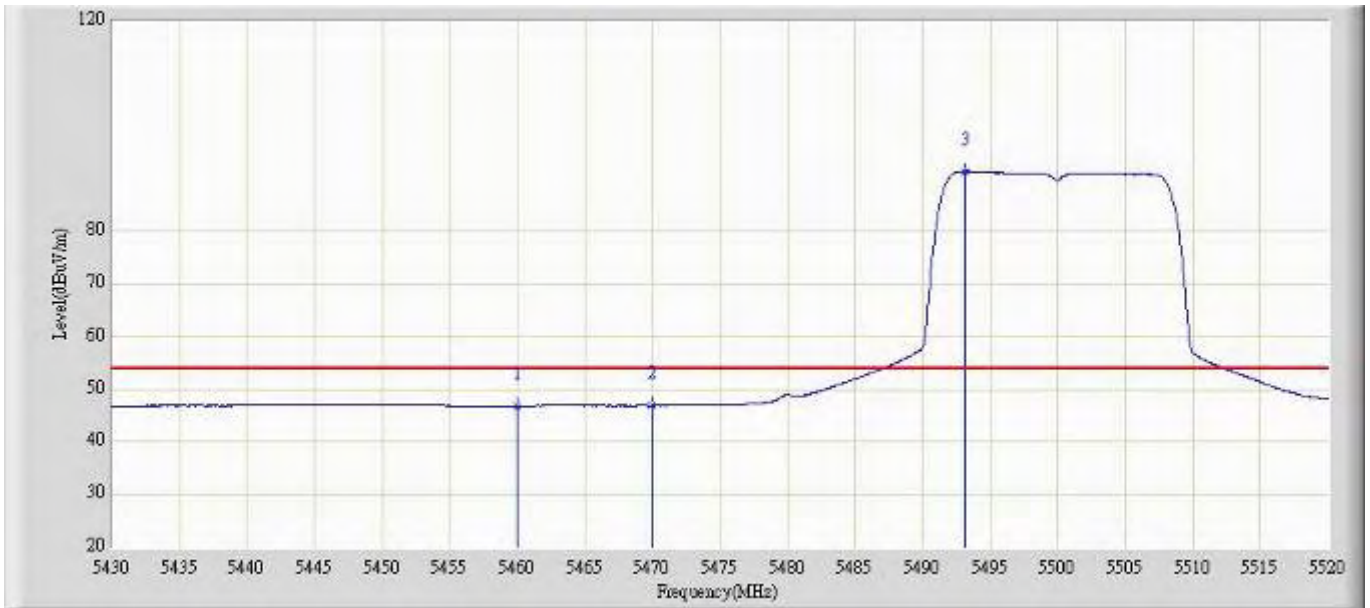


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	46.794	57.064	-7.206	54.000	-10.269	AV
2		5470.000	46.900	57.205	-21.400	68.300	-10.305	AV
3	*	5493.090	91.393	101.677	N/A	N/A	-10.284	AV

Profile: 11BS004R	Page No.: 533
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:11
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 1	

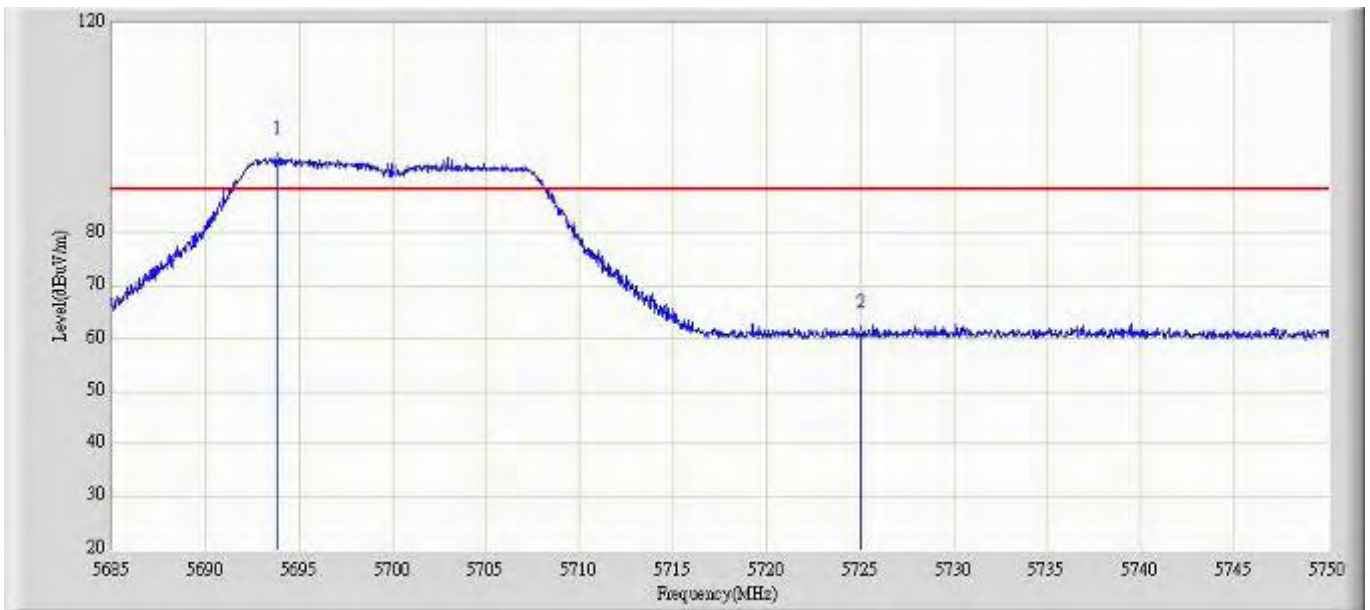


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.775	93.886	103.738	N/A	N/A	-9.851	PK
2		5725.000	60.808	70.582	-27.492	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 534
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:13
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 1	

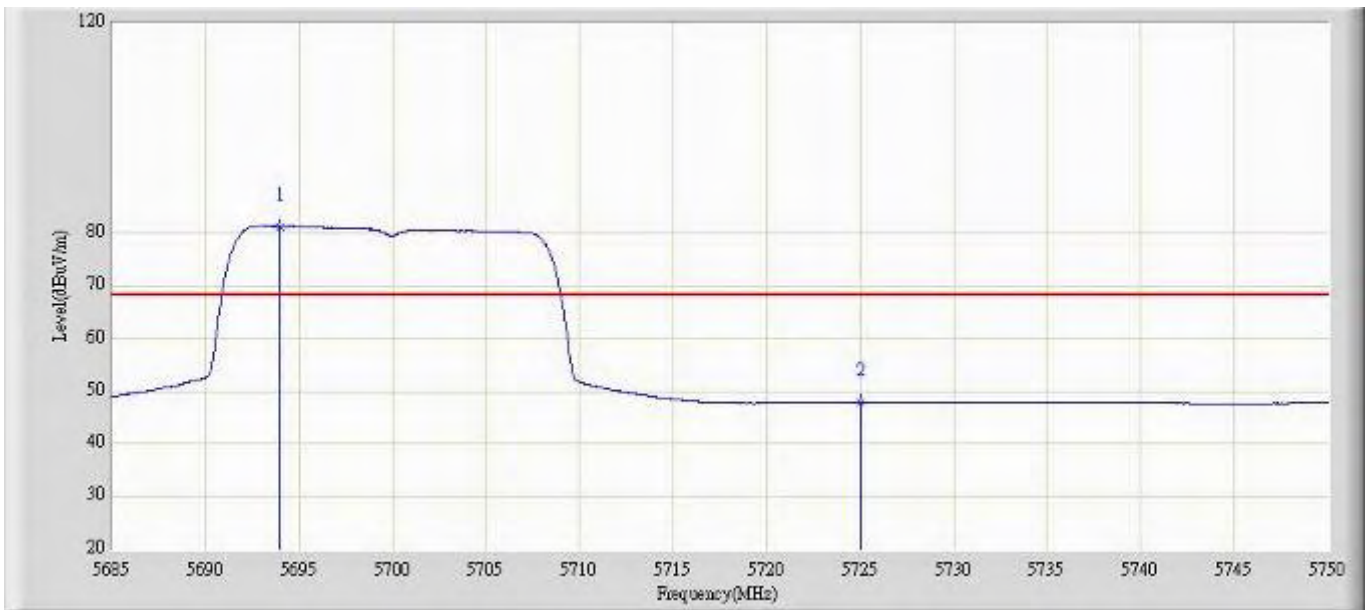


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.970	81.348	91.200	N/A	N/A	-9.853	AV
2		5725.000	47.821	57.595	-20.479	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 535
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:13
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 1	

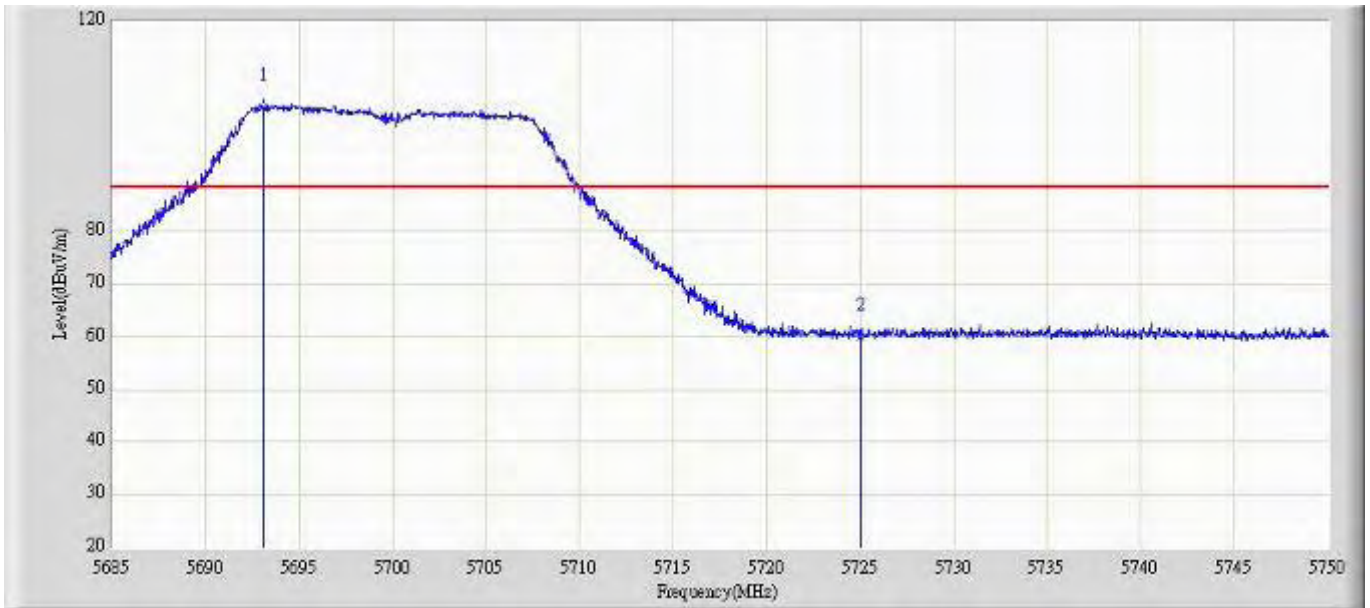


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.092	103.741	113.591	N/A	N/A	-9.849	PK
2		5725.000	60.077	69.851	-28.223	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 536
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:14
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 1	

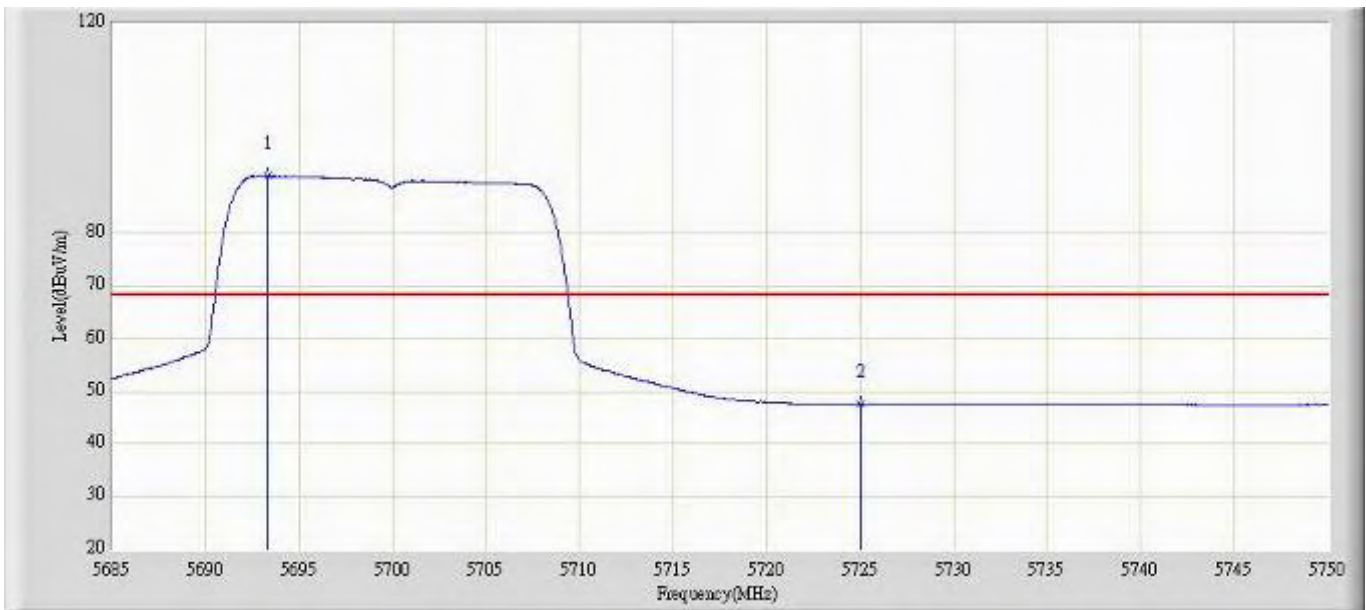


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.288	90.966	100.816	N/A	N/A	-9.851	AV
2		5725.000	47.540	57.314	-20.760	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 537
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5180MHz by 802.11a Chain 2	

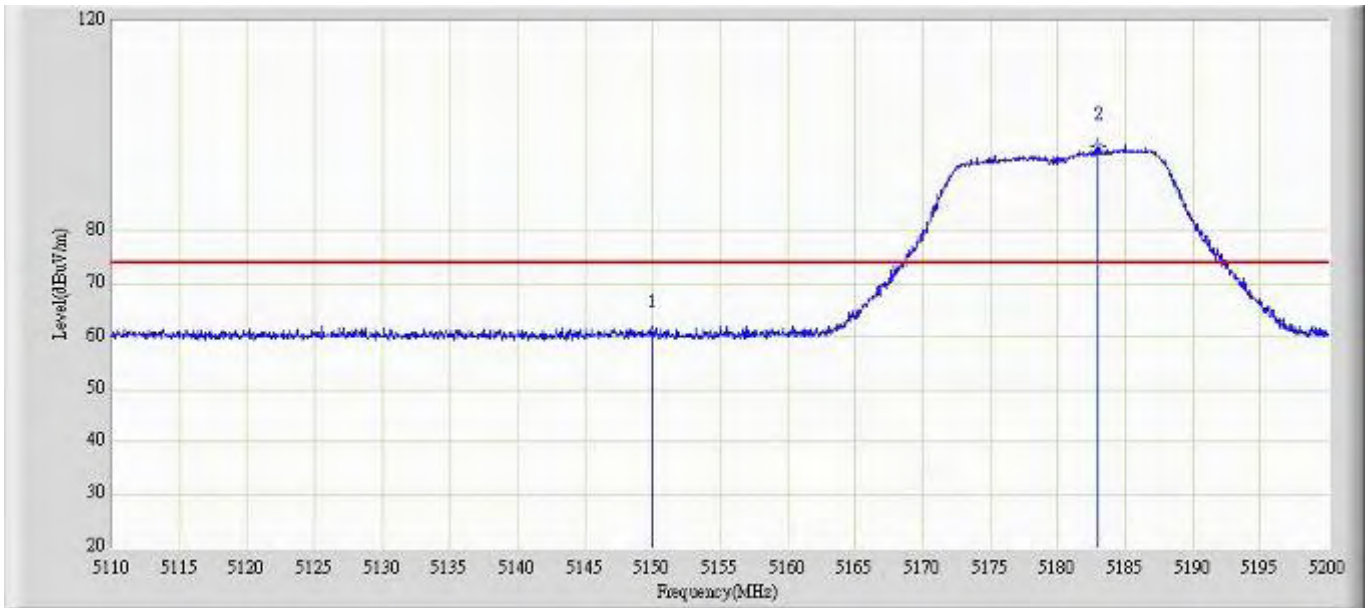


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.470	70.897	-13.530	74.000	-10.427	PK
2	*	5182.990	96.291	106.753	N/A	N/A	-10.462	PK

Profile: 11BS004R	Page No.: 538
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5180MHz by 802.11a Chain 2	

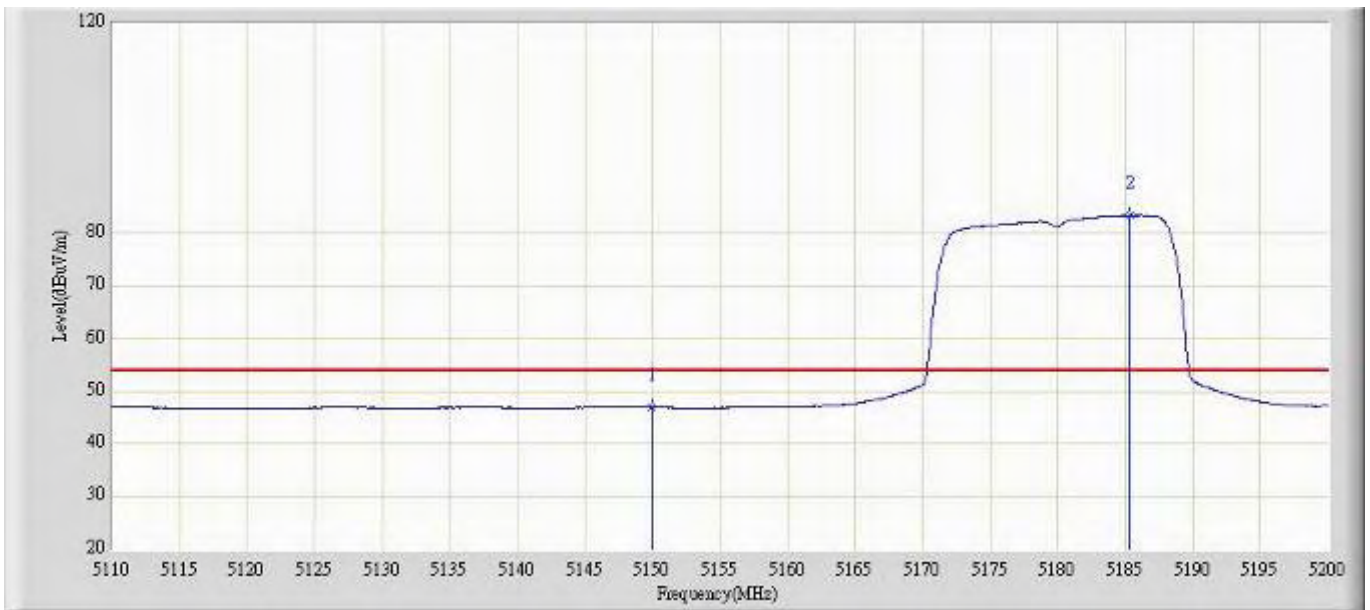


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.939	57.366	-7.061	54.000	-10.427	AV
2	*	5185.375	83.370	93.843	N/A	N/A	-10.472	AV

Profile: 11BS004R	Page No.: 539
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5180MHz by 802.11a Chain 2	

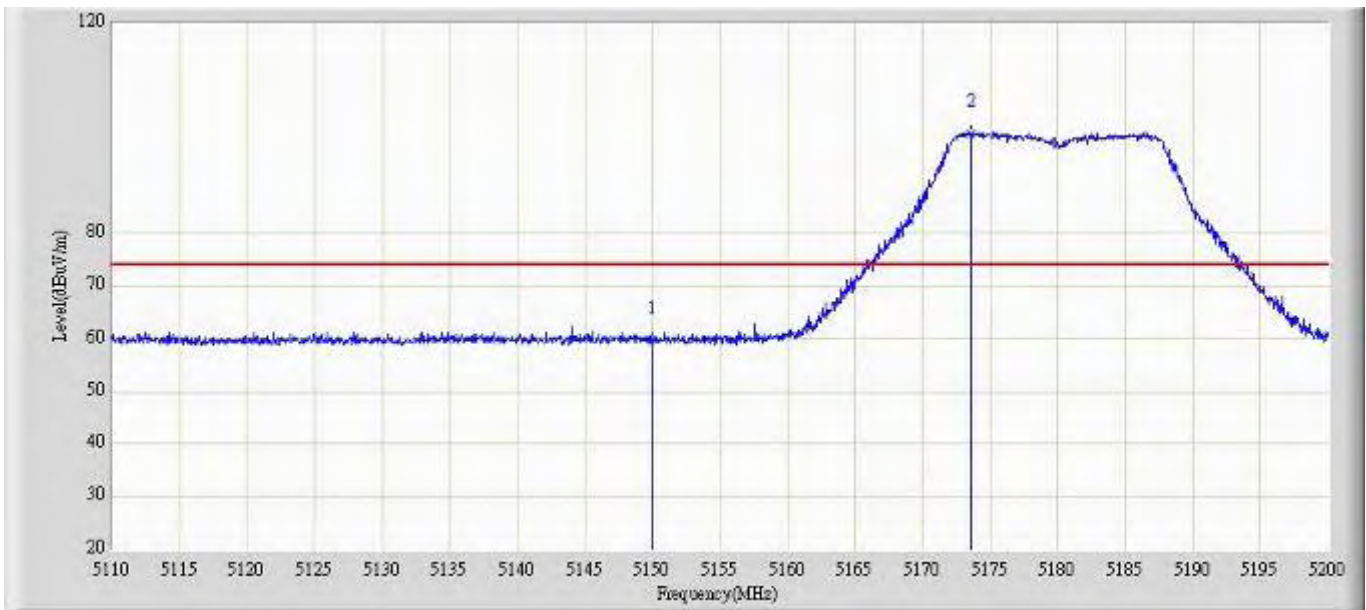


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.536	69.963	-14.464	74.000	-10.427	PK
2	*	5173.630	99.039	109.461	N/A	N/A	-10.423	PK

Profile: 11BS004R	Page No.: 540
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5180MHz by 802.11a Chain 2	

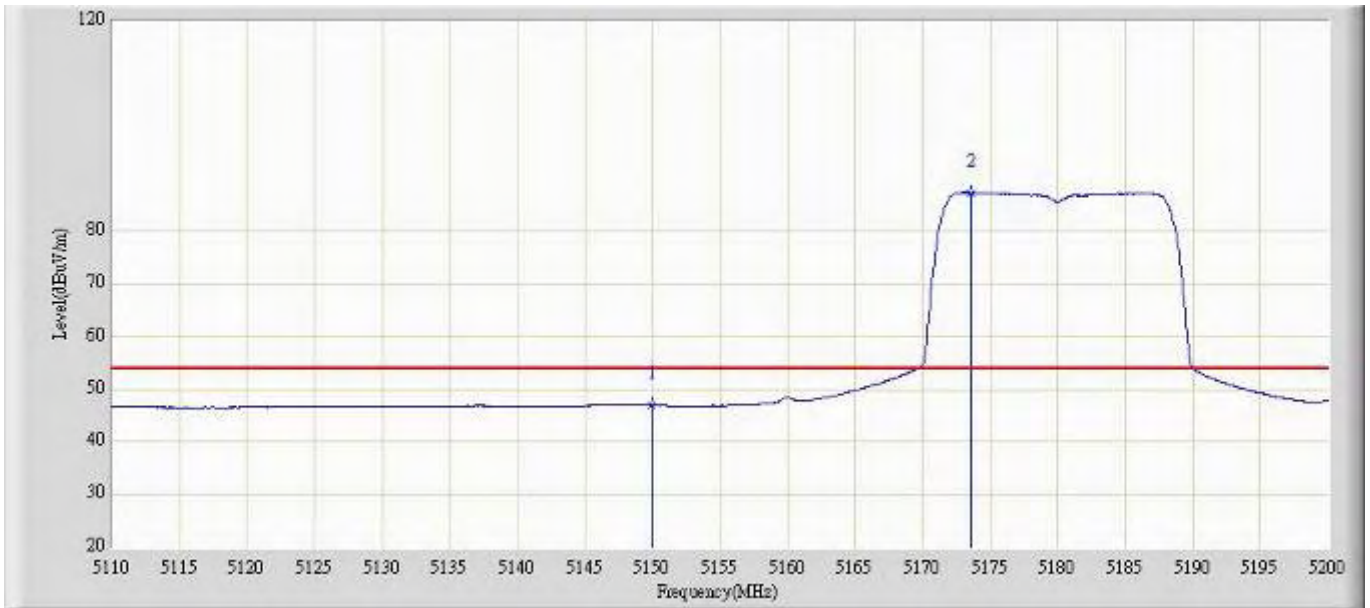


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.926	57.353	-7.074	54.000	-10.427	AV
2	*	5173.630	87.356	97.778	N/A	N/A	-10.423	AV

Profile: 11BS004R	Page No.: 541
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 2	

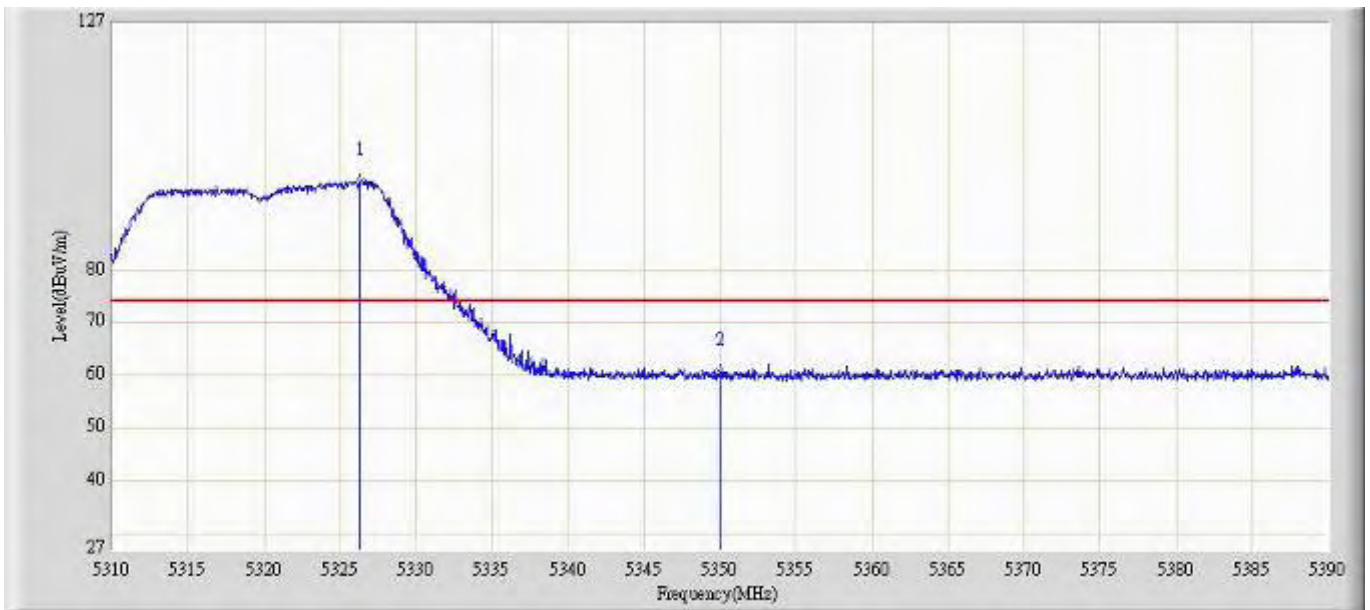


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5326.320	96.758	107.232	N/A	N/A	-10.473	PK
2		5350.000	60.616	71.115	-13.384	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 542
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 2	

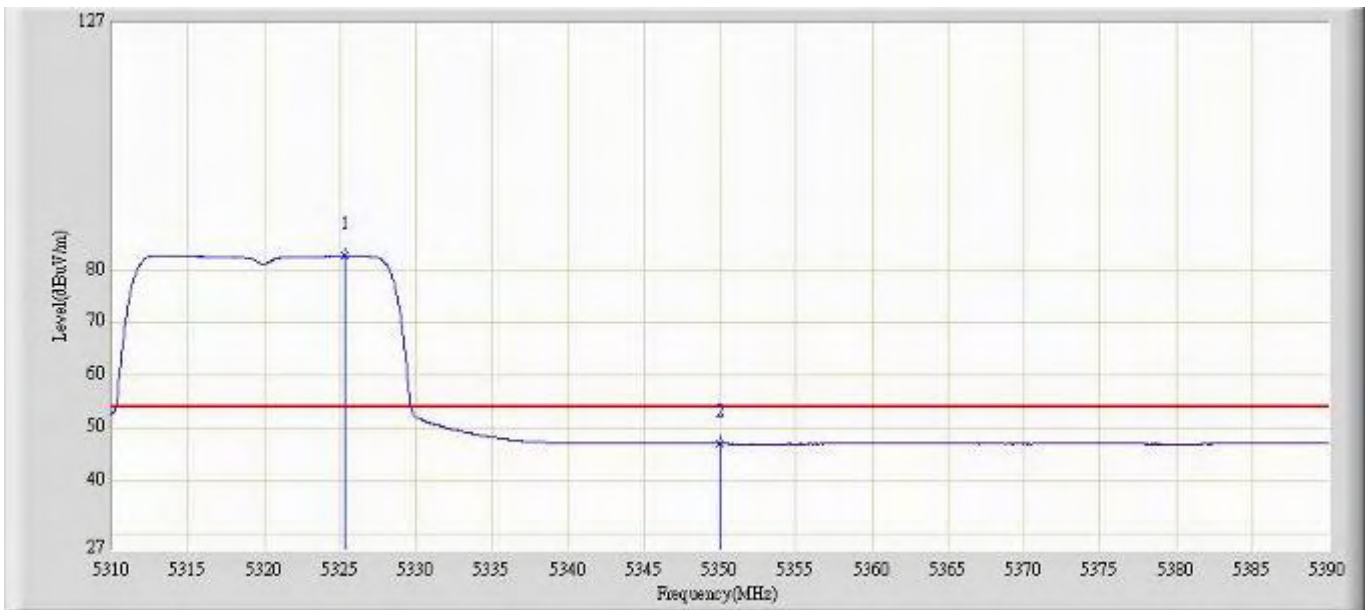


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.280	82.651	93.119	N/A	N/A	-10.468	AV
2		5350.000	46.990	57.489	-7.010	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 543
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 2	

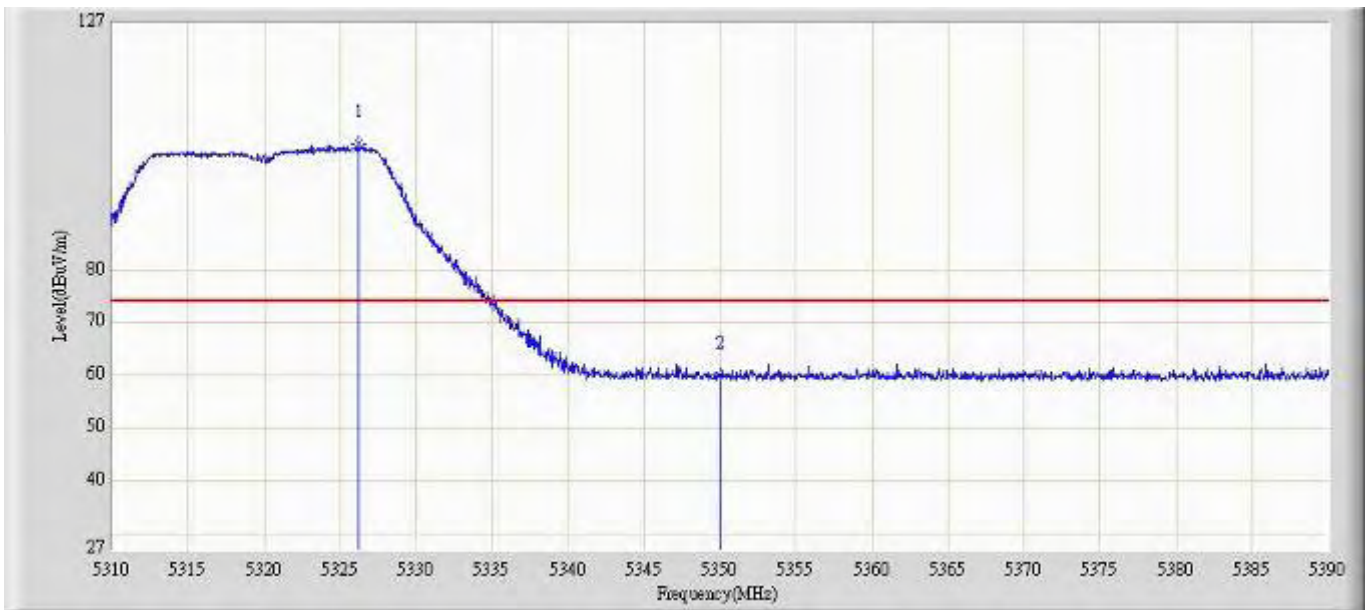


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5326.240	103.937	114.410	N/A	N/A	-10.473	PK
2		5350.000	60.041	70.540	-13.959	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 544
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5320MHz by 802.11a Chain 2	

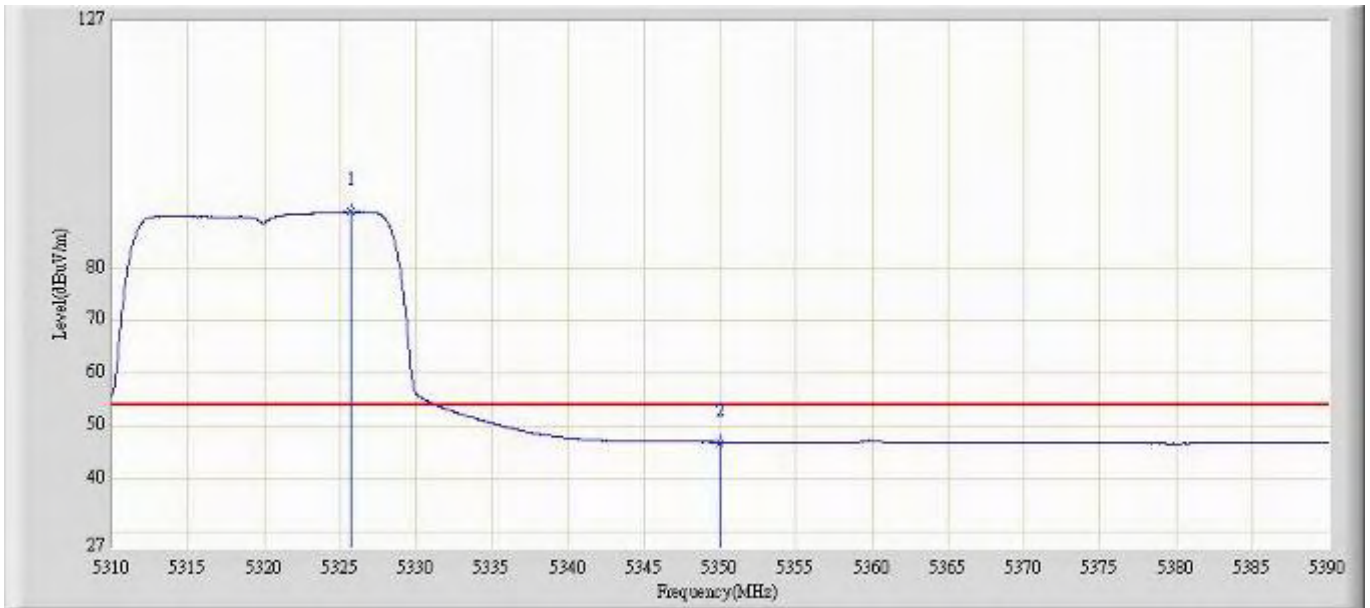


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.760	90.665	101.136	N/A	N/A	-10.470	AV
2		5350.000	46.934	57.433	-7.066	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 545
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 2	

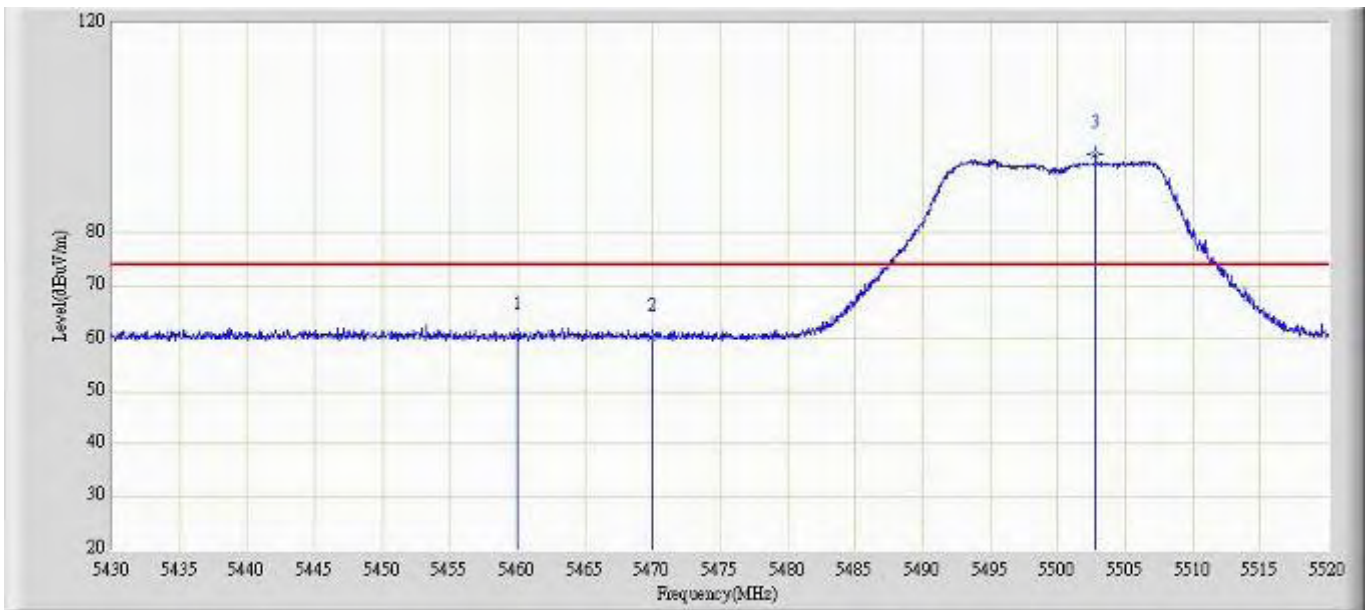


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.588	70.858	-13.412	74.000	-10.269	PK
2		5470.000	60.274	70.579	-28.026	88.300	-10.305	PK
3	*	5502.765	95.106	105.357	N/A	N/A	-10.251	PK

Profile: 11BS004R	Page No.: 546
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 2	

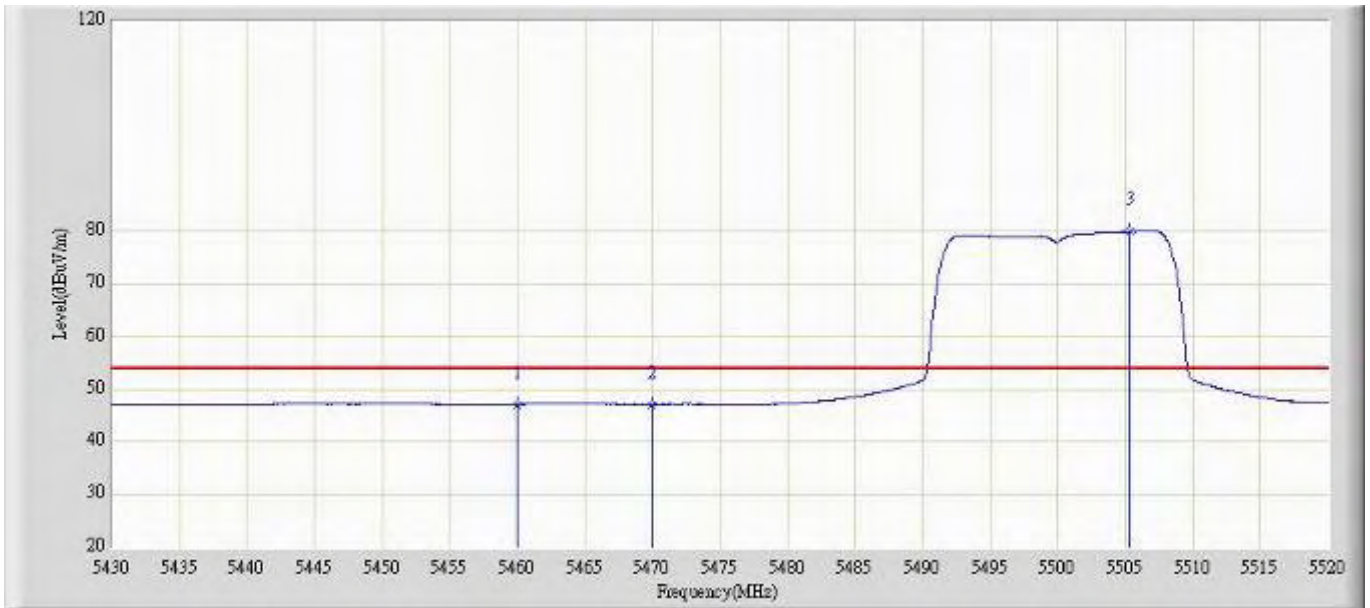


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.117	57.387	-6.883	54.000	-10.269	AV
2		5470.000	47.127	57.432	-21.173	68.300	-10.305	AV
3	*	5505.375	79.923	90.163	N/A	N/A	-10.240	AV

Profile: 11BS004R	Page No.: 547
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 2	

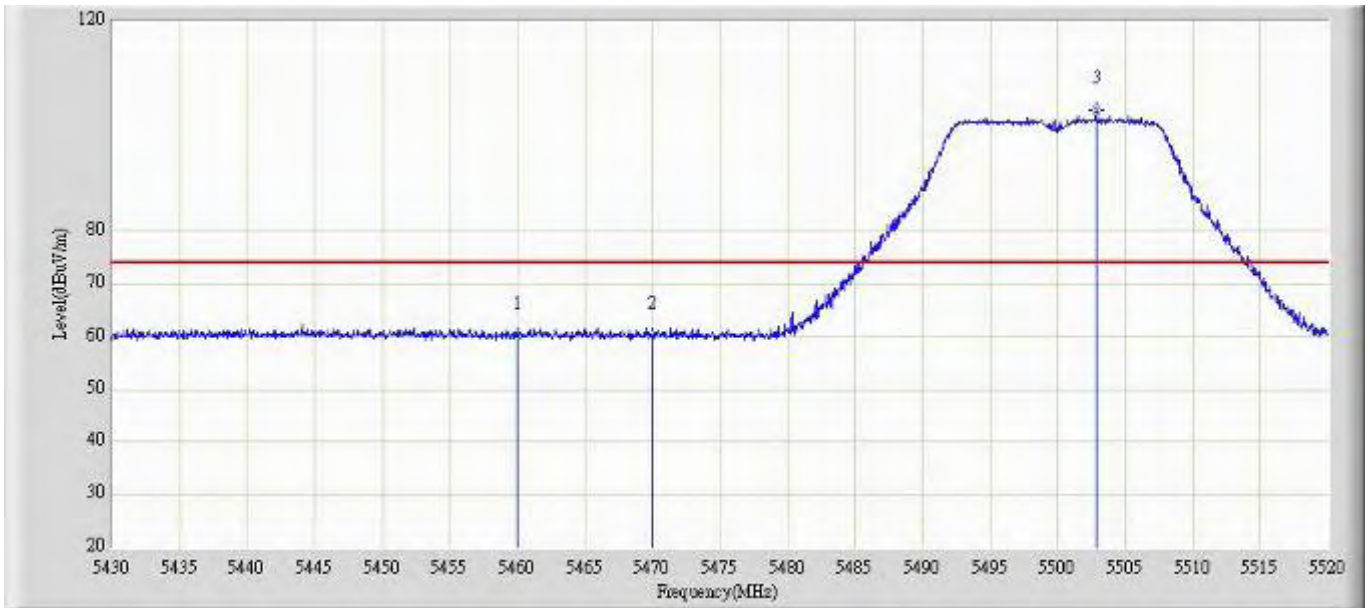


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.291	70.561	-13.709	74.000	-10.269	PK
2		5470.000	60.261	70.566	-28.039	88.300	-10.305	PK
3	*	5502.855	103.134	113.384	N/A	N/A	-10.250	PK

Profile: 11BS004R	Page No.: 548
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5500MHz by 802.11a Chain 2	

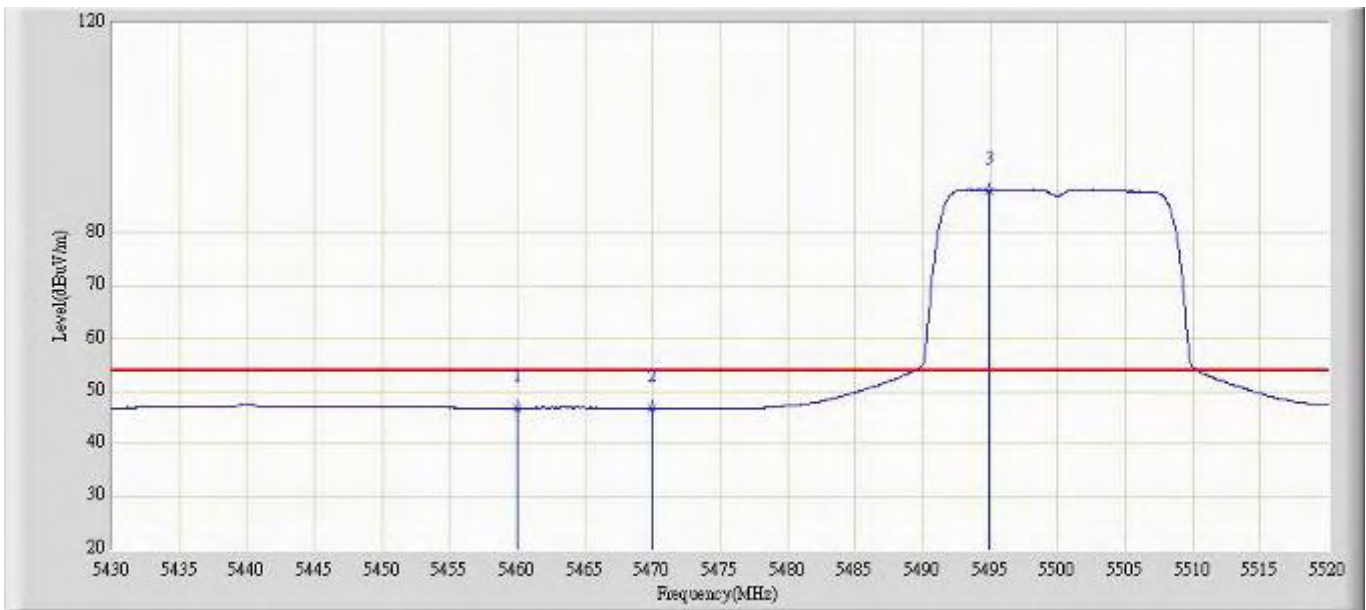


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	46.759	57.029	-7.241	54.000	-10.269	AV
2		5470.000	46.787	57.092	-21.513	68.300	-10.305	AV
3	*	5494.890	88.189	98.467	N/A	N/A	-10.278	AV

Profile: 11BS004R	Page No.: 549
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:36
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 2	

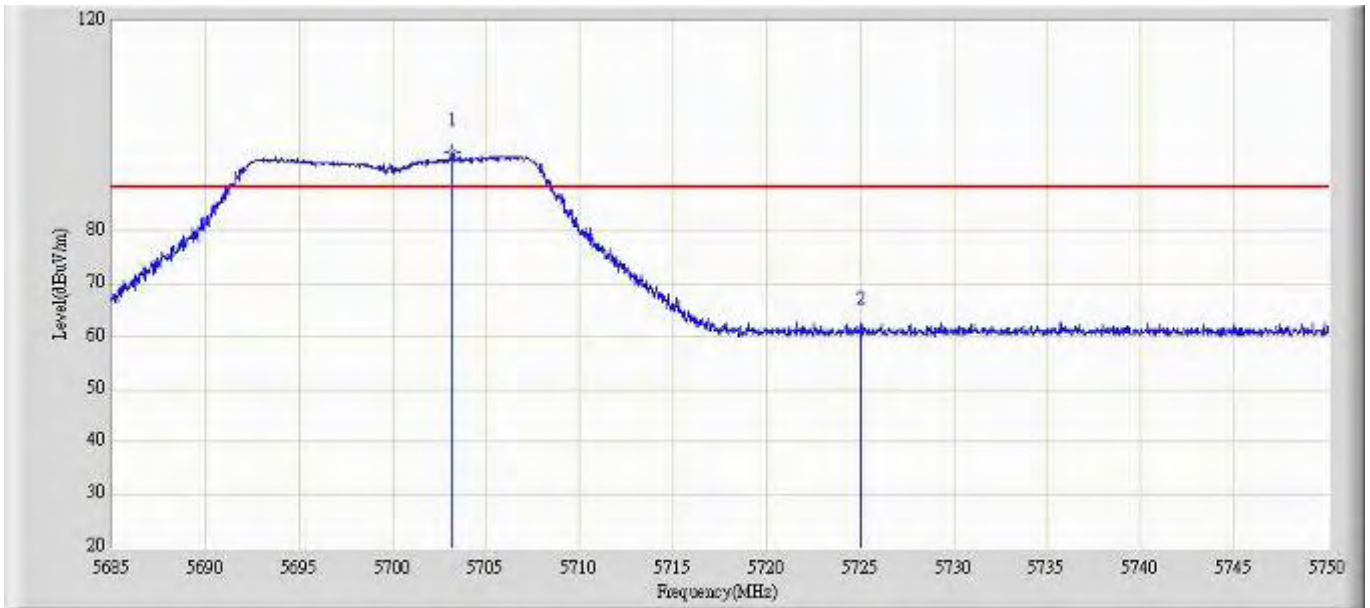


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5703.167	94.931	104.807	N/A	N/A	-9.876	PK
2		5725.000	61.015	70.789	-27.285	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 550
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:37
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 2	

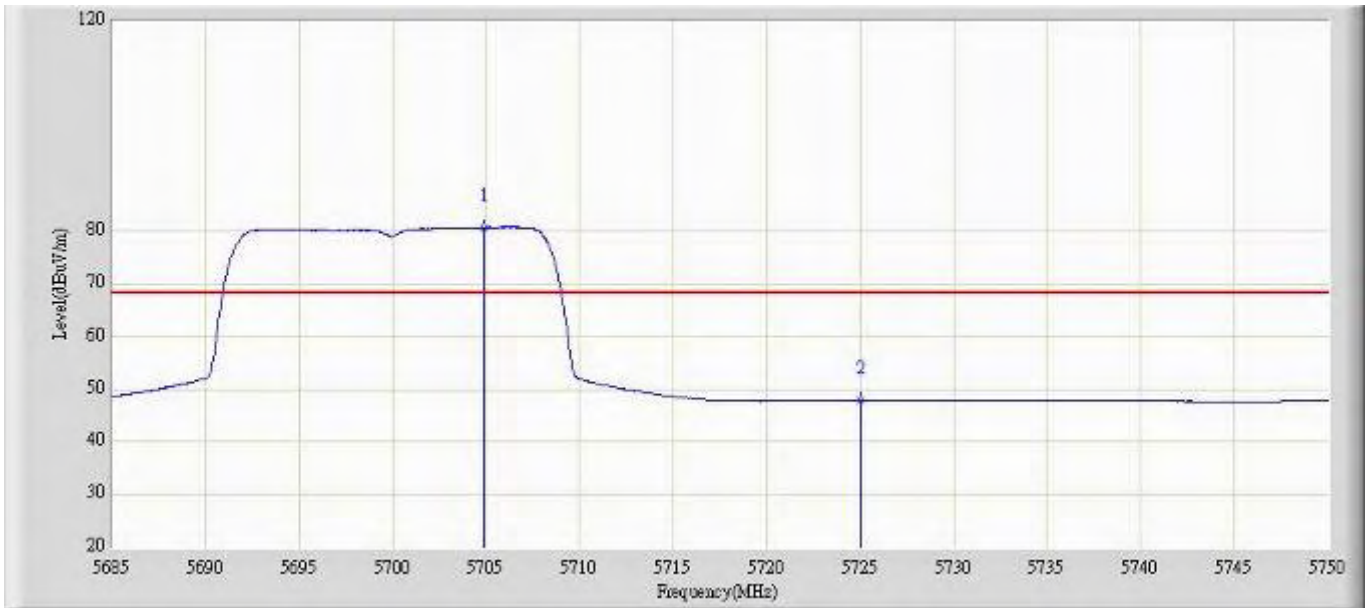


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5704.890	80.741	90.622	N/A	N/A	-9.880	AV
2		5725.000	47.805	57.579	-20.495	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 551
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:38
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 2	

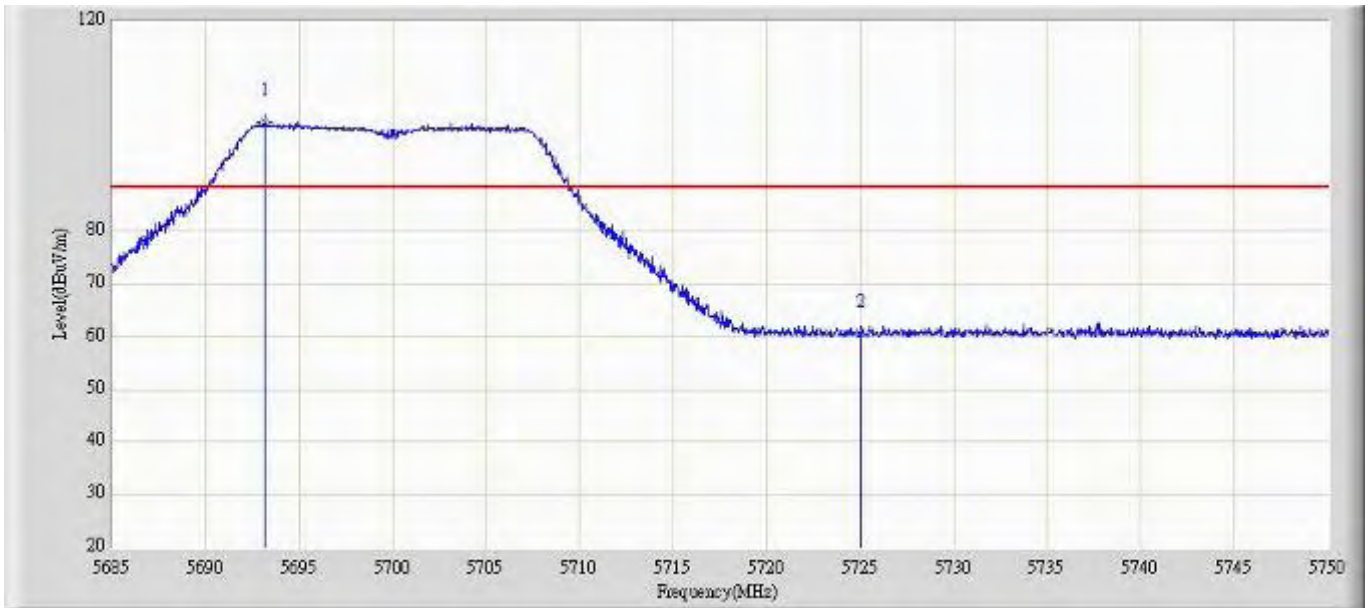


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.158	100.652	110.502	N/A	N/A	-9.851	PK
2		5725.000	60.537	70.311	-27.763	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 552
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:39
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 5700MHz by 802.11a Chain 2	

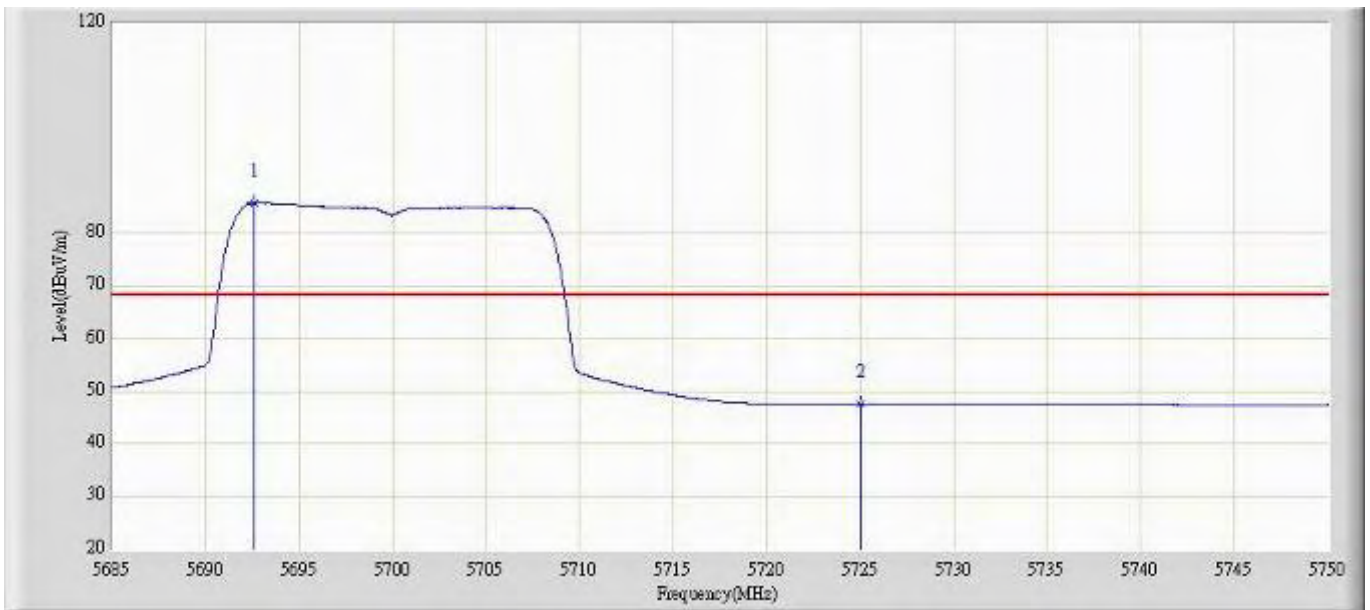


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.638	85.729	95.578	N/A	N/A	-9.849	AV
2		5725.000	47.547	57.321	-20.753	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 553
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0	

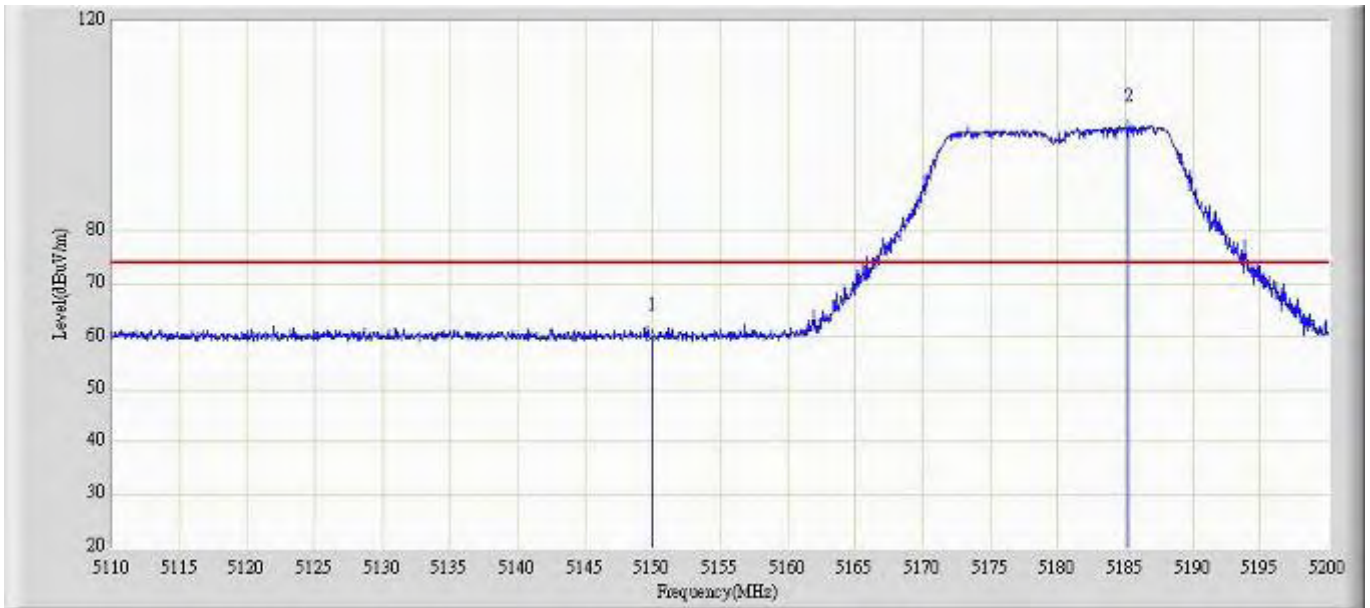


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.999	70.426	-14.001	74.000	-10.427	PK
2	*	5185.240	99.676	110.148	N/A	N/A	-10.472	PK

Profile: 11BS004R	Page No.: 554
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0	

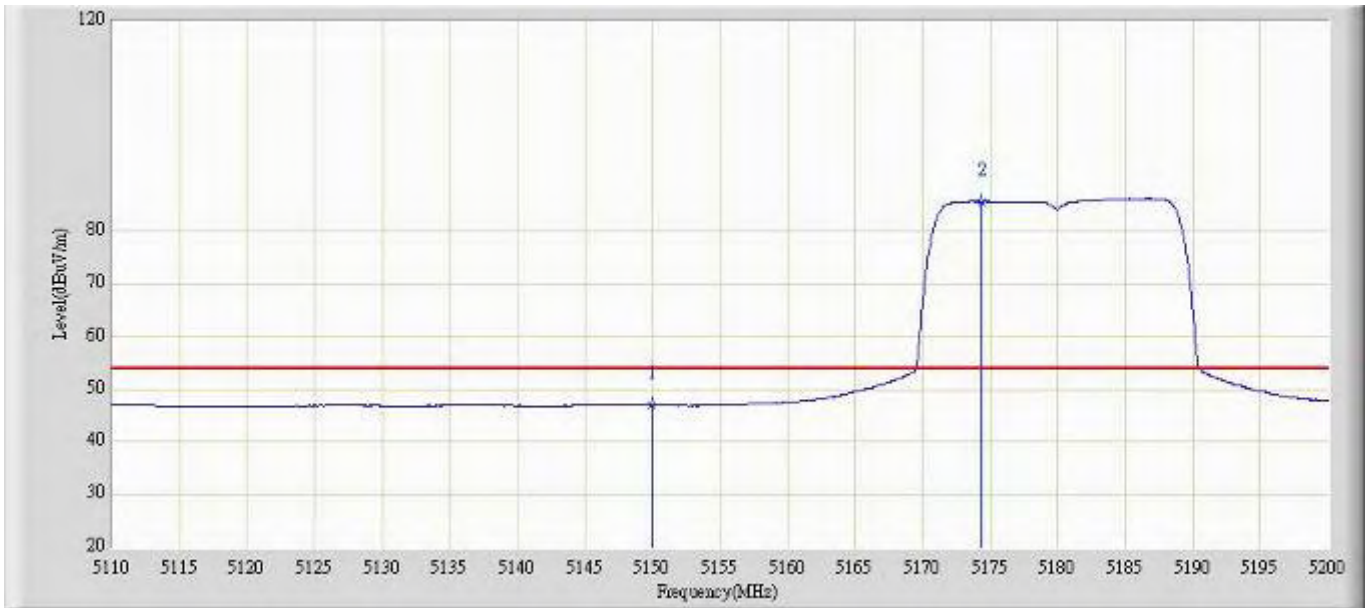


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.009	57.436	-6.991	54.000	-10.427	AV
2	*	5174.350	85.607	96.032	N/A	N/A	-10.425	AV

Profile: 11BS004R	Page No.: 555
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0	

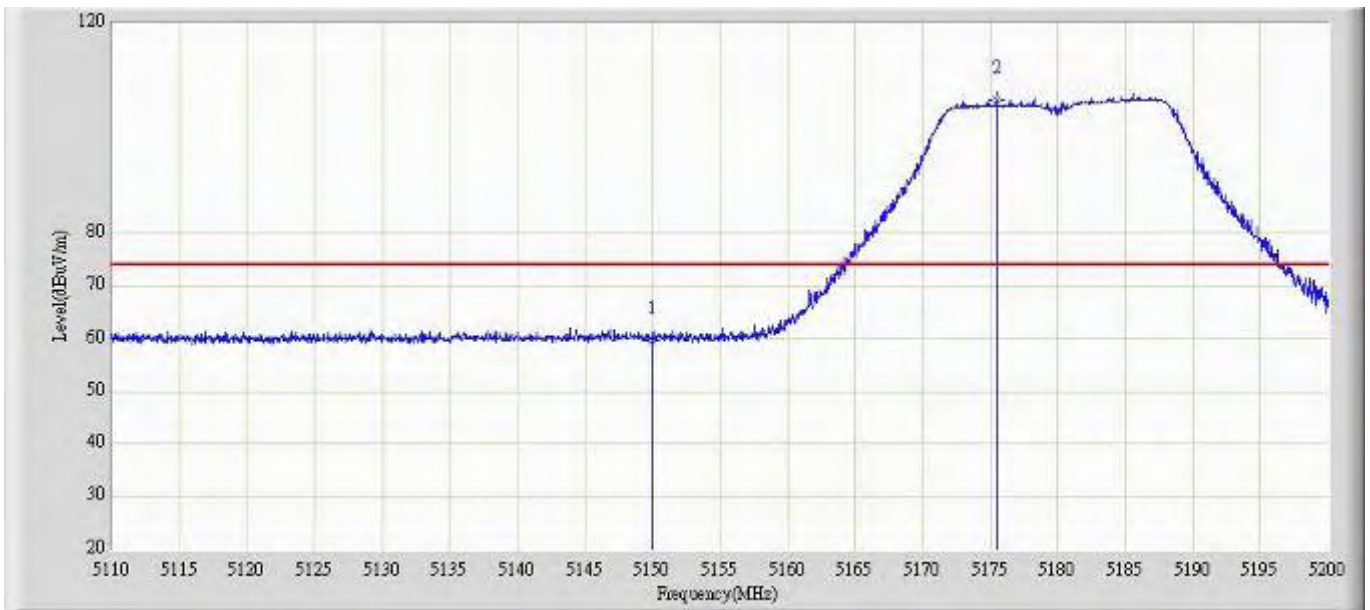


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.774	70.201	-14.226	74.000	-10.427	PK
2	*	5175.475	105.419	115.849	N/A	N/A	-10.430	PK

Profile: 11BS004R	Page No.: 556
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 11:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0	

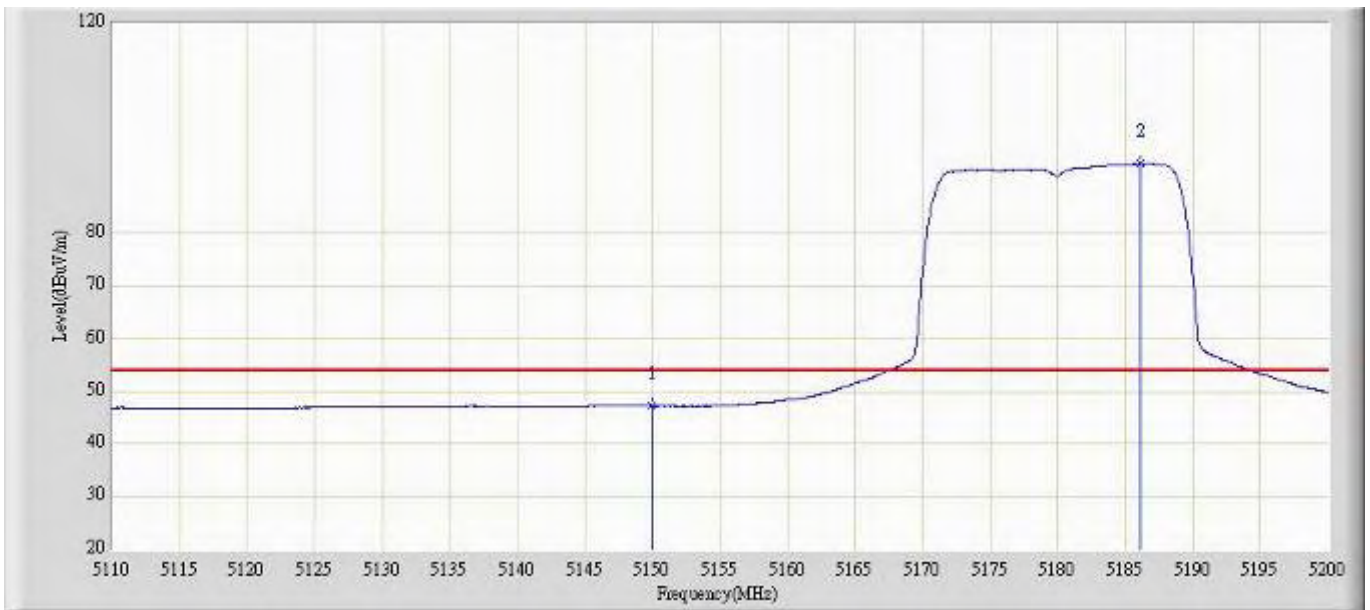


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.217	57.644	-6.783	54.000	-10.427	AV
2	*	5186.140	93.140	103.616	N/A	N/A	-10.476	AV

Profile: 11BS004R	Page No.: 557
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 12:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0	

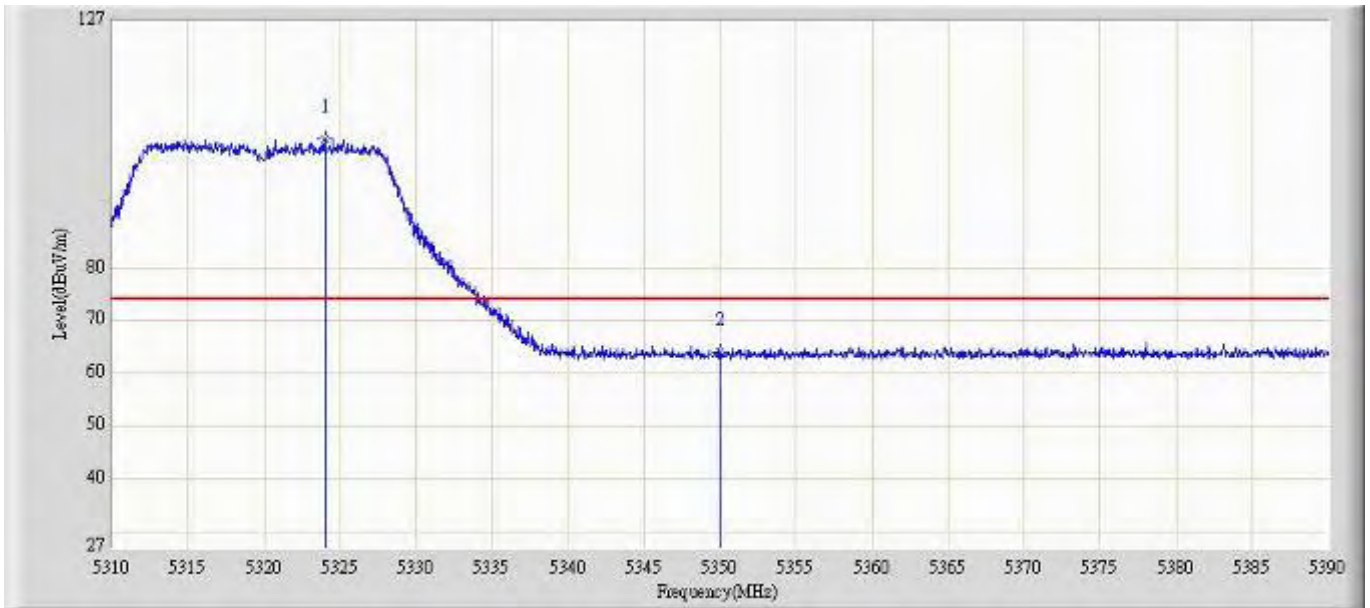


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.000	104.715	115.176	N/A	N/A	-10.461	PK
2		5350.000	64.174	74.673	-9.826	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 558
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 12:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0	

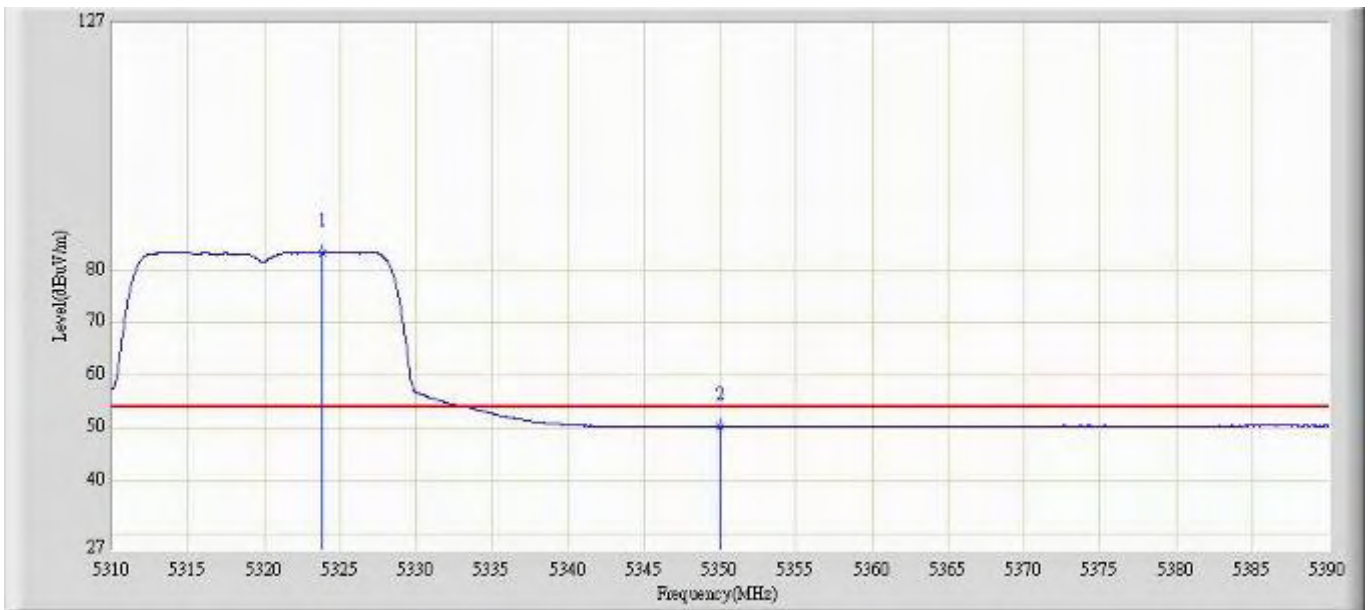


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.880	83.442	93.902	N/A	N/A	-10.460	AV
2		5350.000	50.242	60.741	-3.758	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 559
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0	

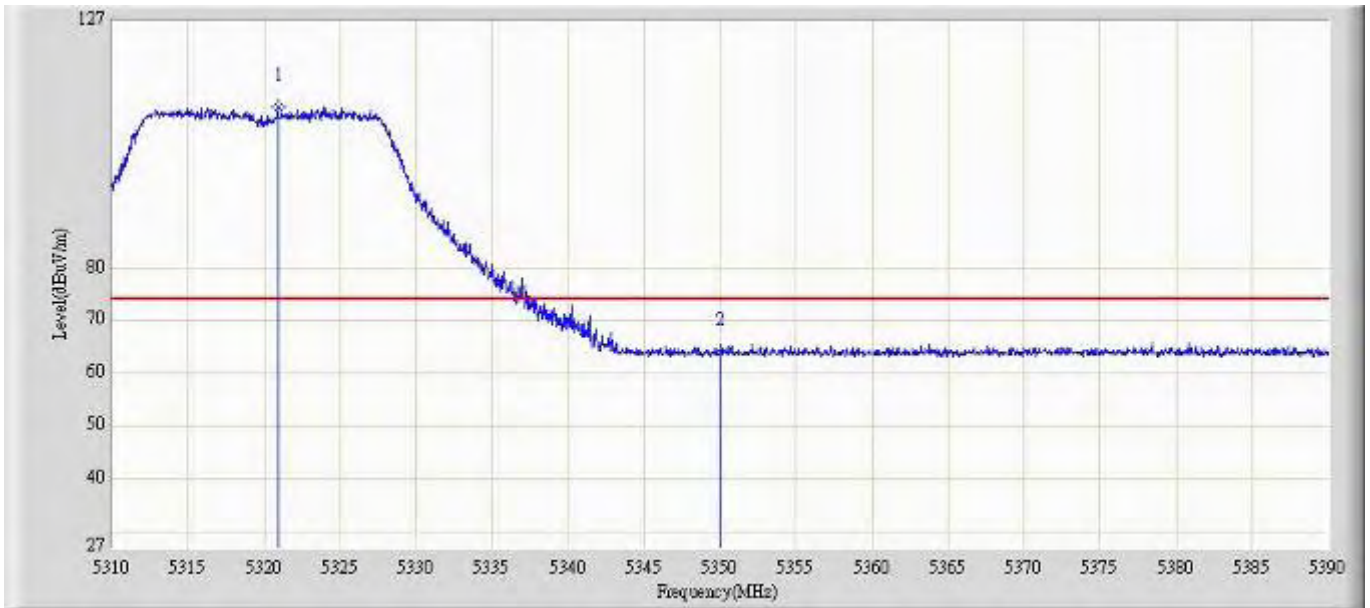


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5320.920	110.745	121.188	N/A	N/A	-10.444	PK
2		5350.000	63.928	74.427	-10.072	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 560
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0	

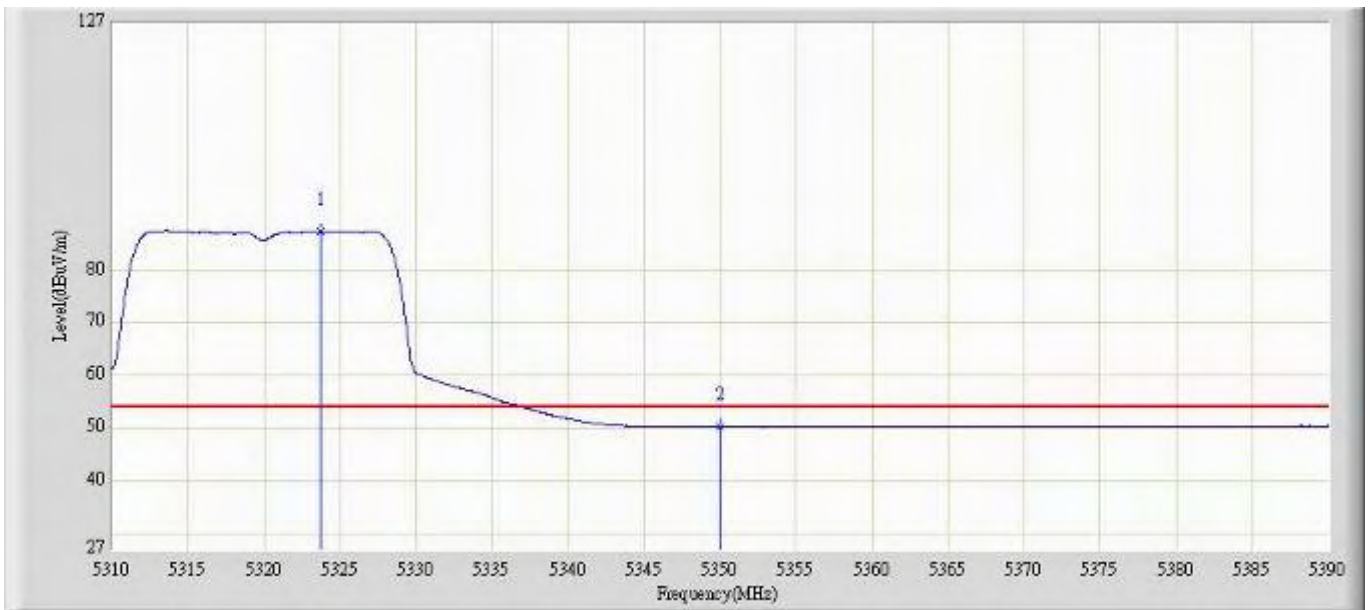


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.760	87.336	97.795	N/A	N/A	-10.459	AV
2		5350.000	50.182	60.681	-3.818	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 561
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0	

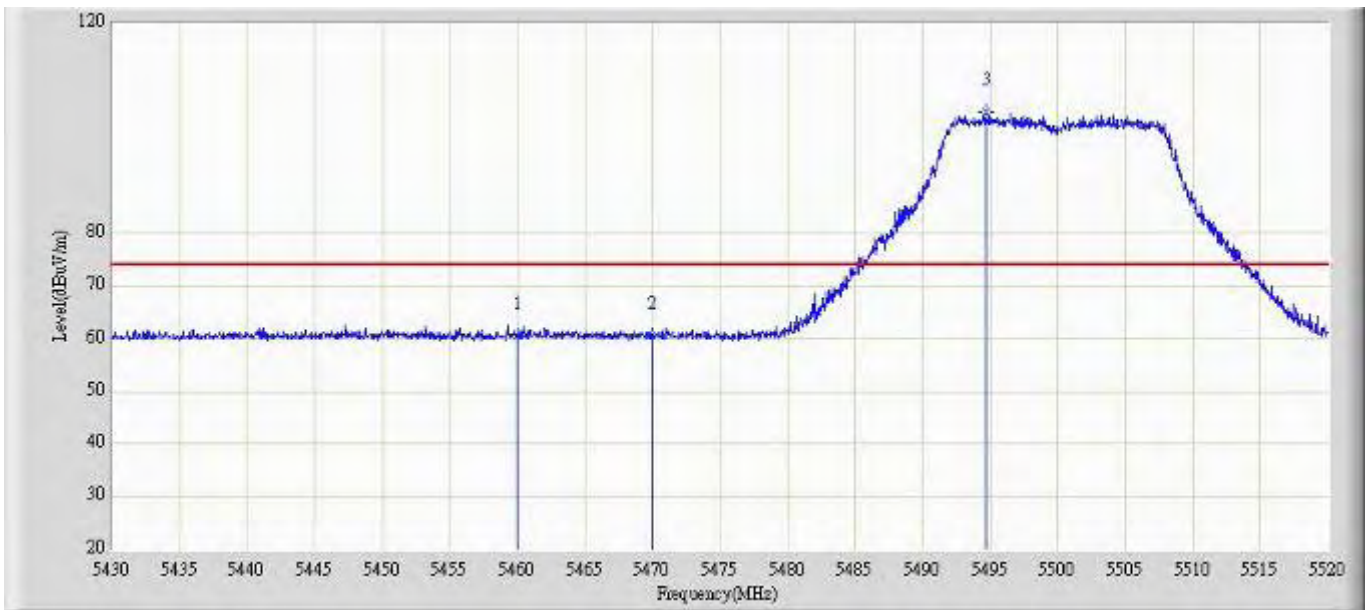


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.514	70.784	-13.486	74.000	-10.269	PK
2		5470.000	60.383	70.688	-27.917	88.300	-10.305	PK
3	*	5494.710	102.920	113.199	N/A	N/A	-10.279	PK

Profile: 11BS004R	Page No.: 562
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0	

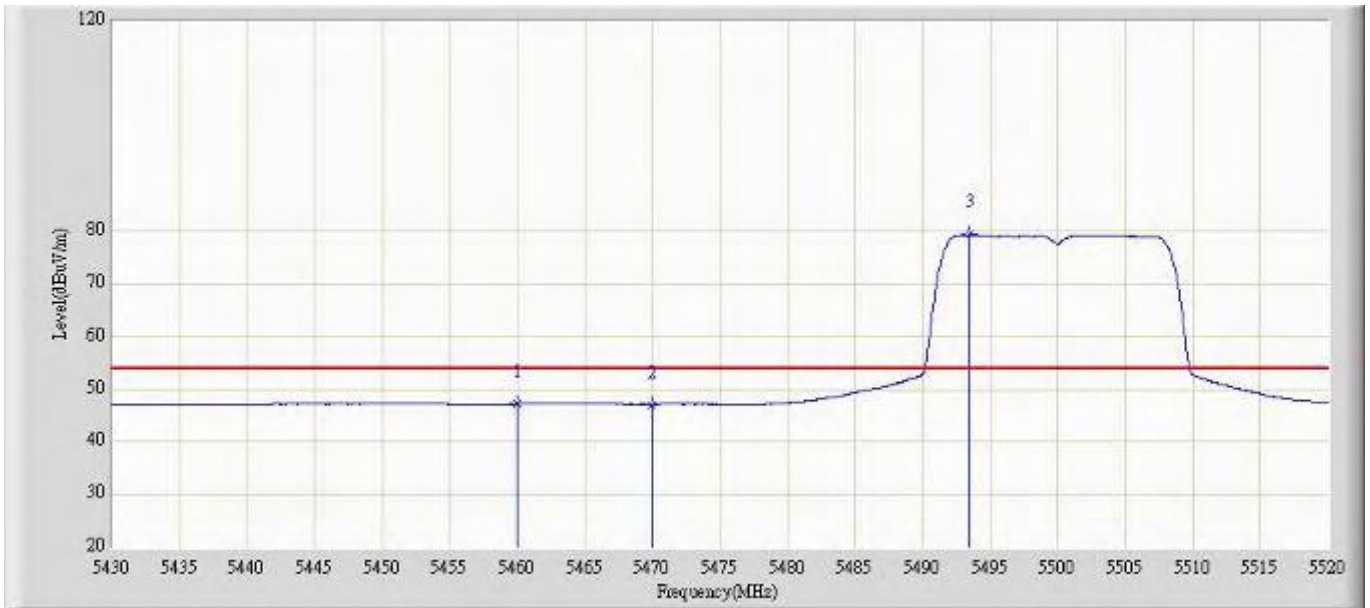


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.180	57.450	-6.820	54.000	-10.269	AV
2		5470.000	47.148	57.453	-21.152	68.300	-10.305	AV
3	*	5493.495	79.341	89.624	N/A	N/A	-10.284	AV

Profile: 11BS004R	Page No.: 563
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0	

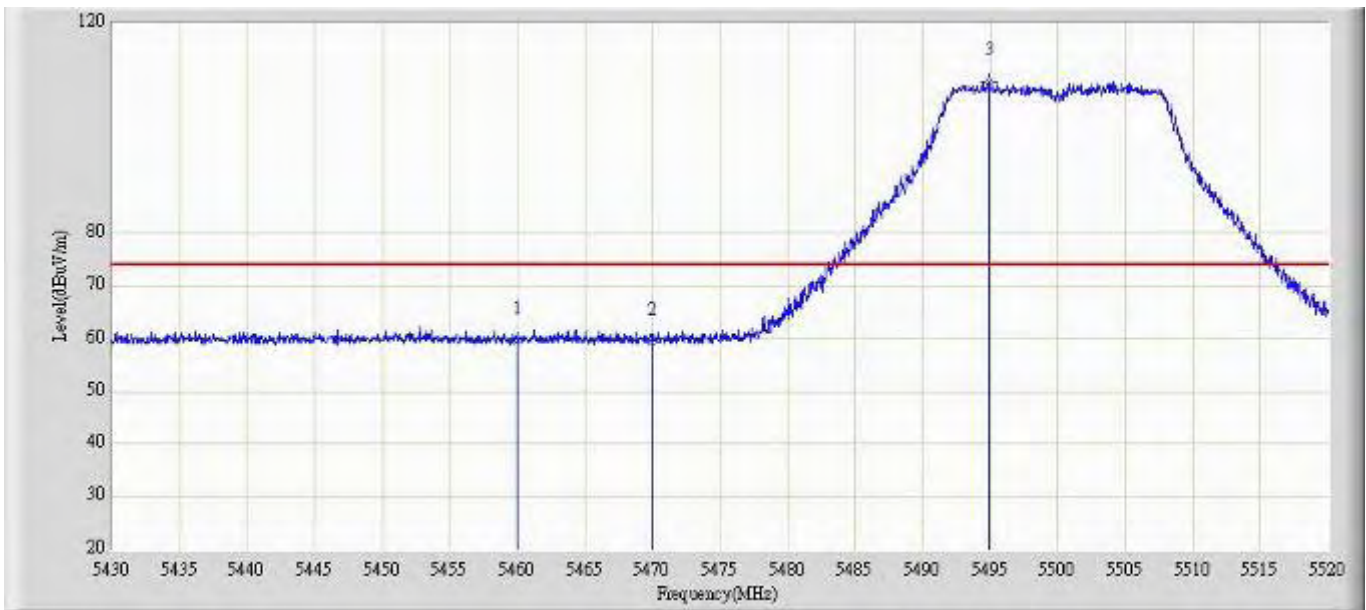


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	59.588	69.858	-14.412	74.000	-10.269	PK
2		5470.000	59.316	69.621	-28.984	88.300	-10.305	PK
3	*	5494.935	108.696	118.974	N/A	N/A	-10.278	PK

Profile: 11BS004R	Page No.: 564
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0	

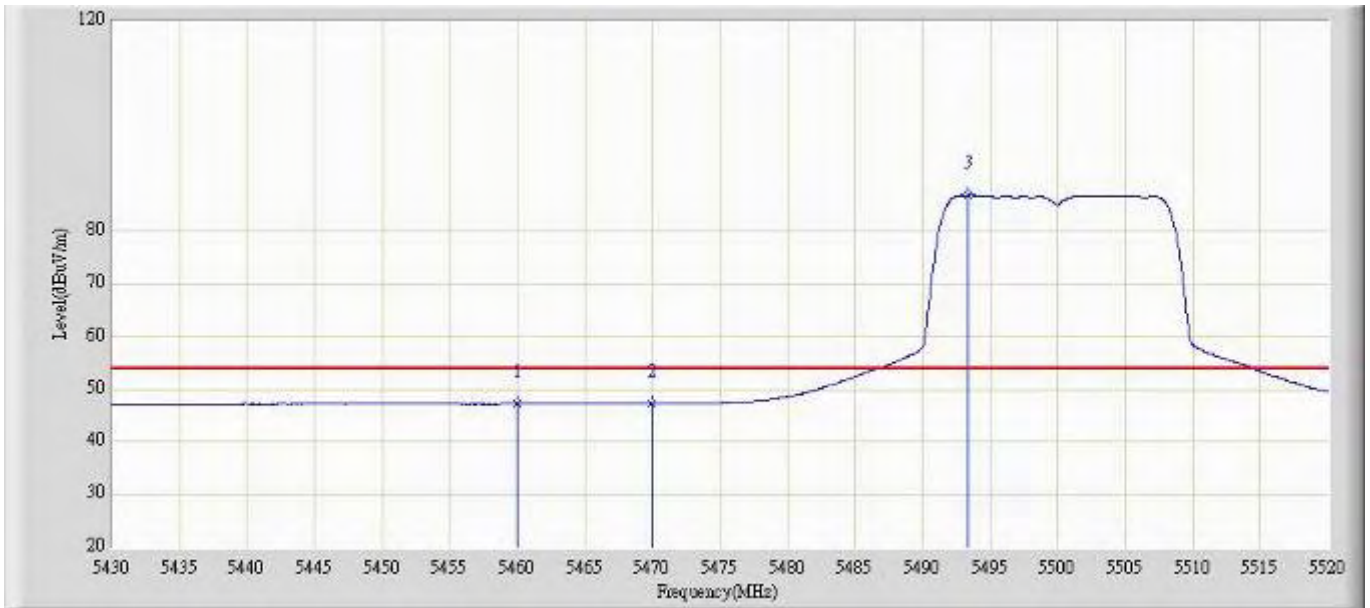


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.193	57.463	-6.807	54.000	-10.269	AV
2		5470.000	47.270	57.575	-21.030	68.300	-10.305	AV
3	*	5493.360	86.841	97.124	N/A	N/A	-10.283	AV

Profile: 11BS004R	Page No.: 565
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:11
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0	

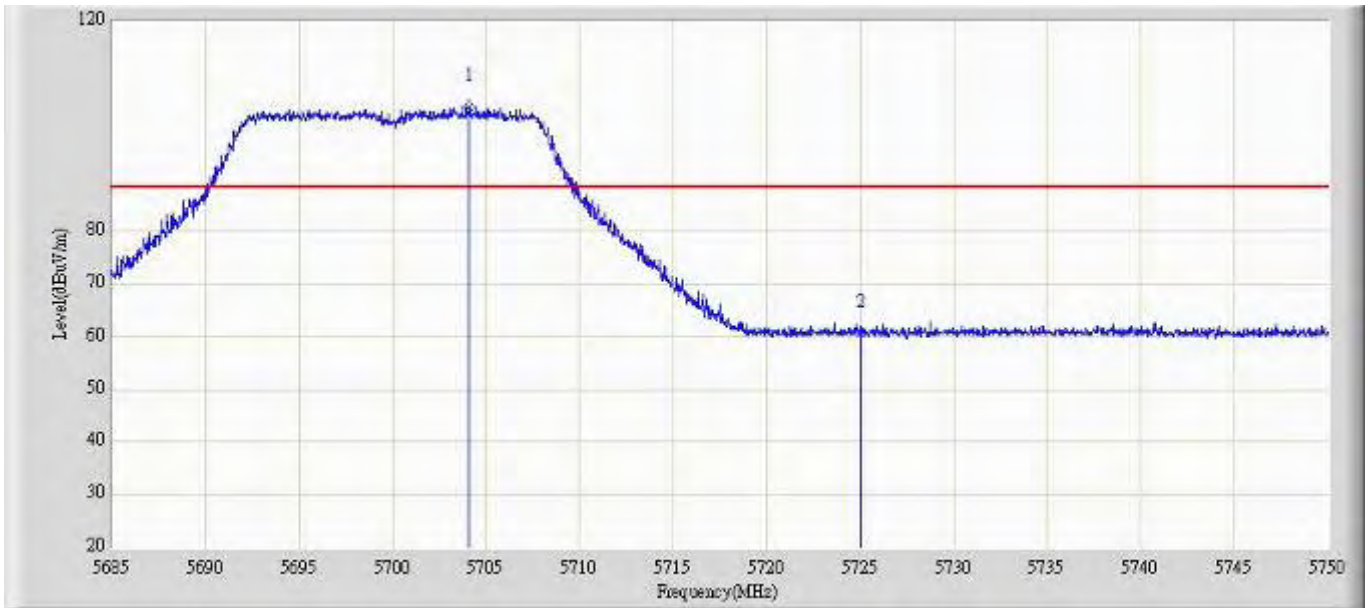


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5704.045	103.730	113.608	N/A	N/A	-9.878	PK
2		5725.000	60.626	70.400	-27.674	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 566
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:13
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0	

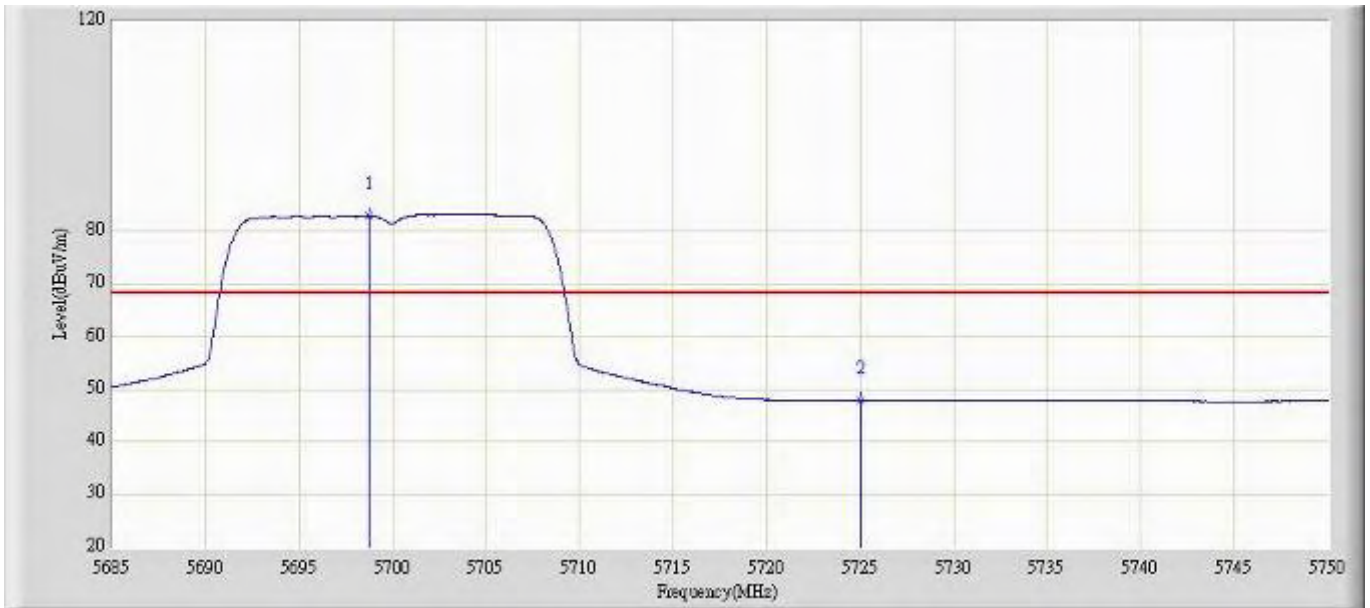


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.715	83.055	92.920	N/A	N/A	-9.864	AV
2		5725.000	47.822	57.596	-20.478	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 567
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:13
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0	

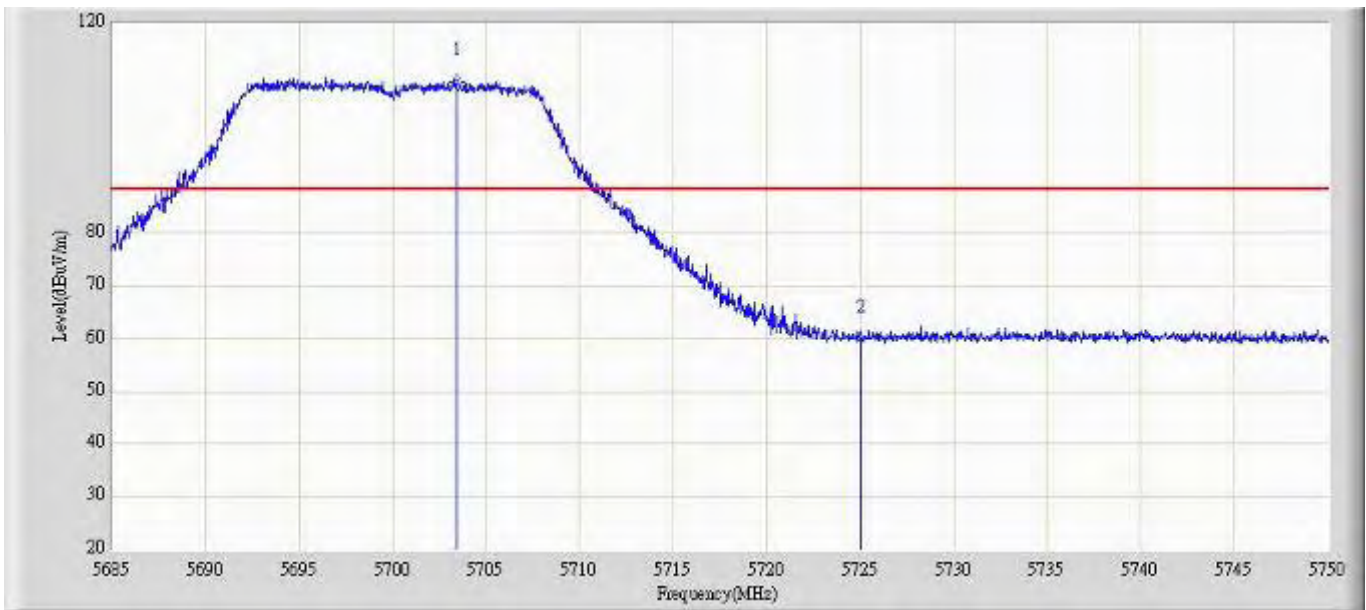


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5703.428	108.730	118.607	N/A	N/A	-9.876	PK
2		5725.000	60.074	69.848	-28.226	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 568
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:14
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0	

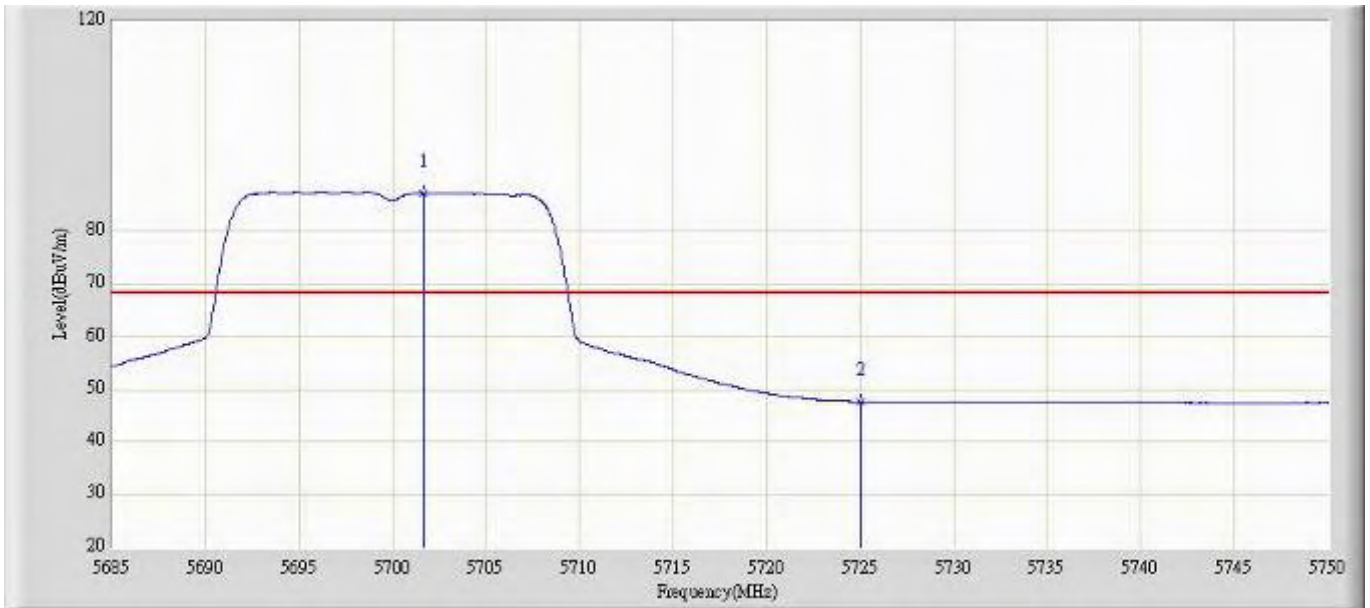


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5701.640	87.327	97.199	N/A	N/A	-9.872	AV
2		5725.000	47.694	57.468	-20.606	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 569
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 1	

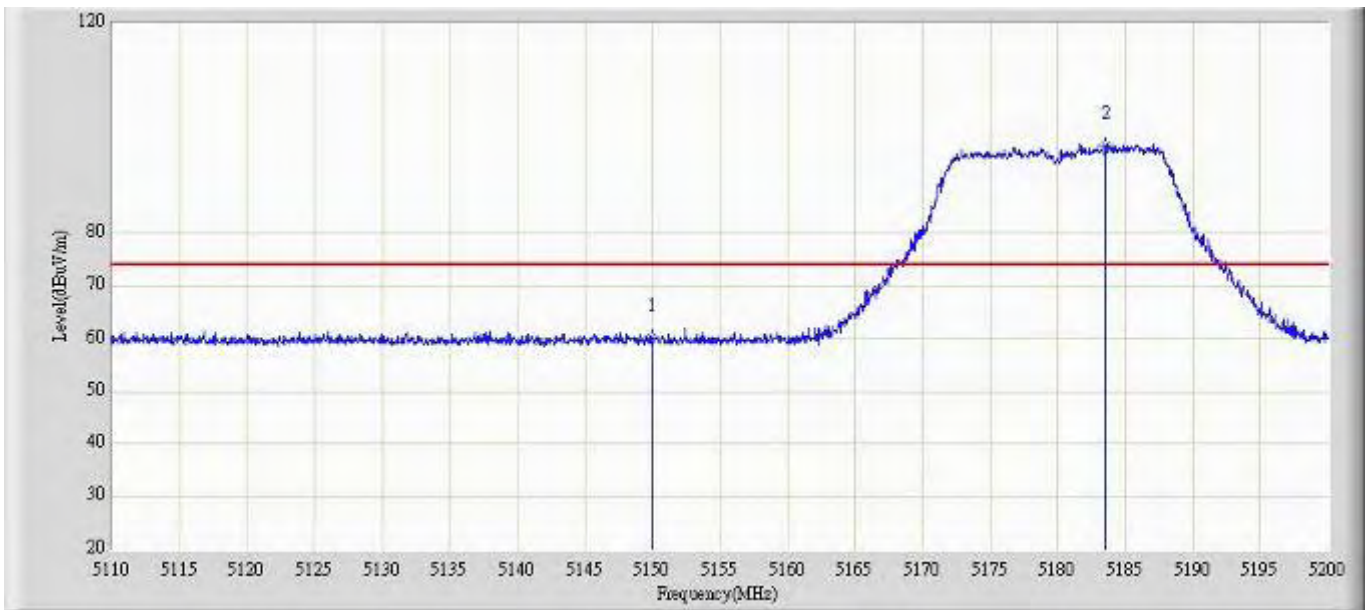


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.154	70.581	-13.846	74.000	-10.427	PK
2	*	5183.575	96.604	107.069	N/A	N/A	-10.465	PK

Profile: 11BS004R	Page No.: 570
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 1	

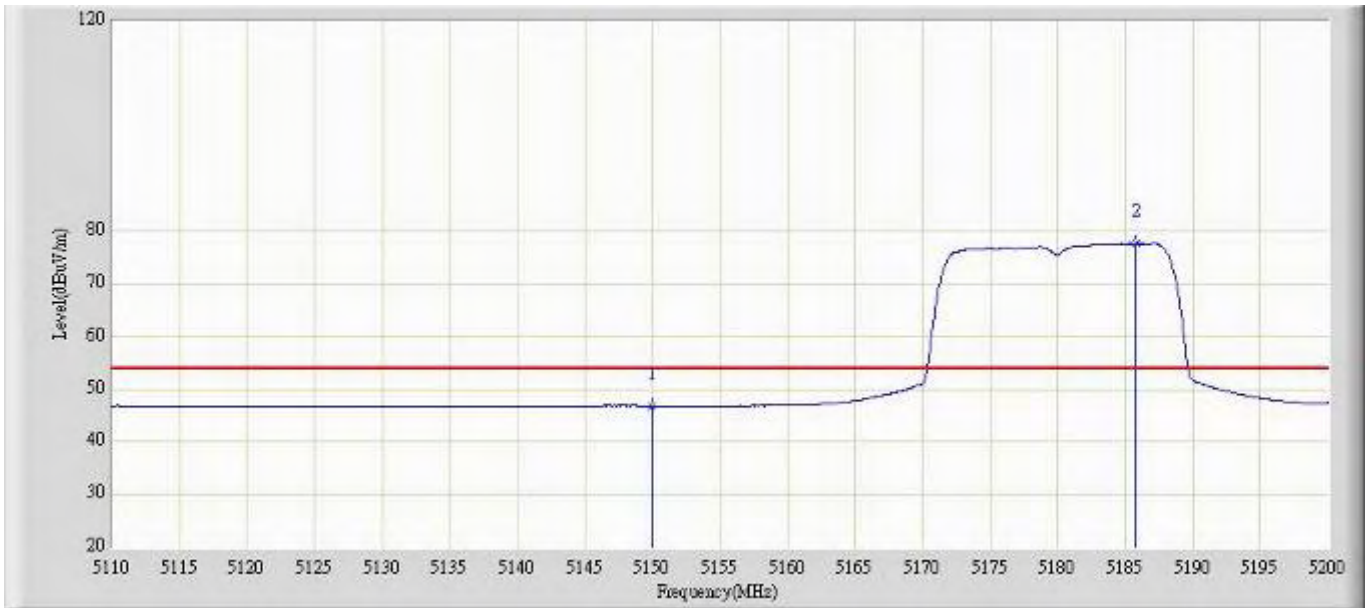


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.804	57.231	-7.196	54.000	-10.427	AV
2	*	5185.825	77.626	88.101	N/A	N/A	-10.475	AV

Profile: 11BS004R	Page No.: 571
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 1	

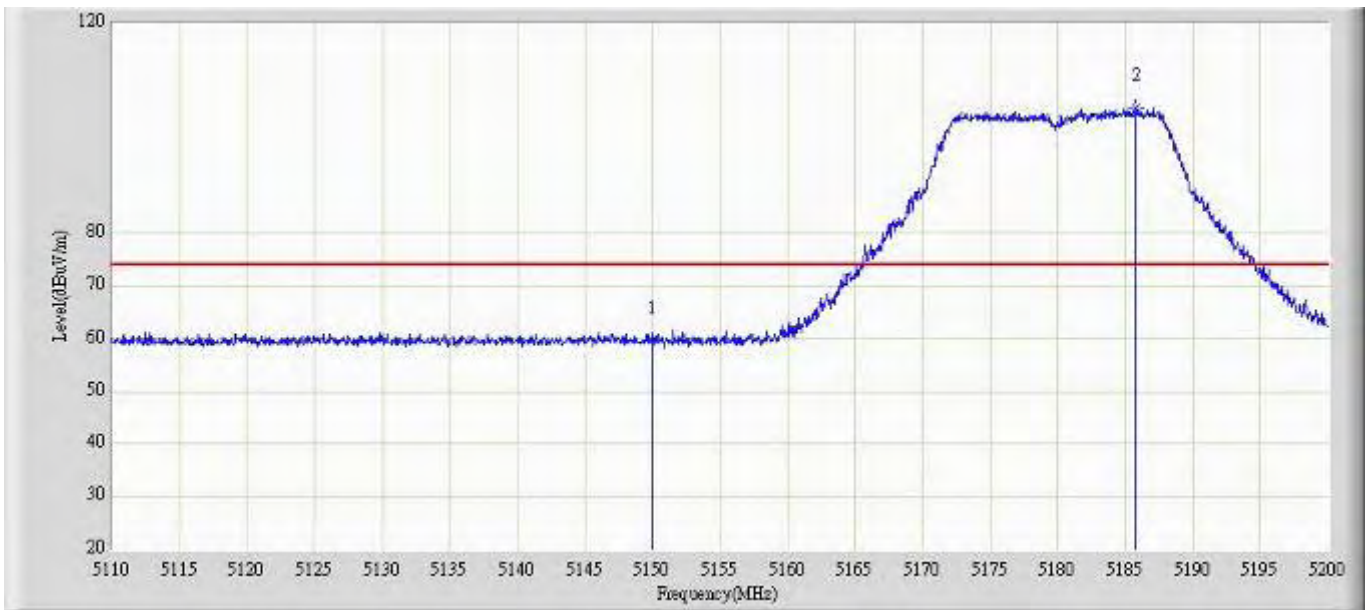


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.756	70.183	-14.244	74.000	-10.427	PK
2	*	5185.825	103.808	114.283	N/A	N/A	-10.475	PK

Profile: 11BS004R	Page No.: 572
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 1	

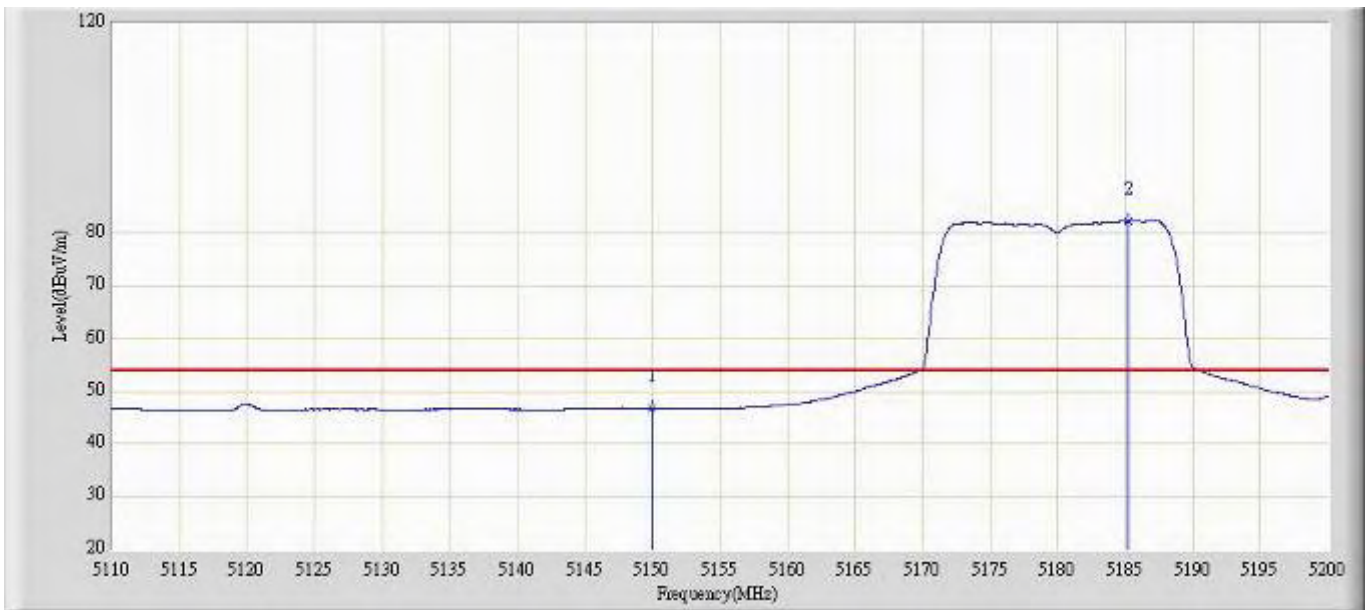


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.739	57.166	-7.261	54.000	-10.427	AV
2	*	5185.195	82.279	92.751	N/A	N/A	-10.472	AV

Profile: 11BS004R	Page No.: 573
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 1	

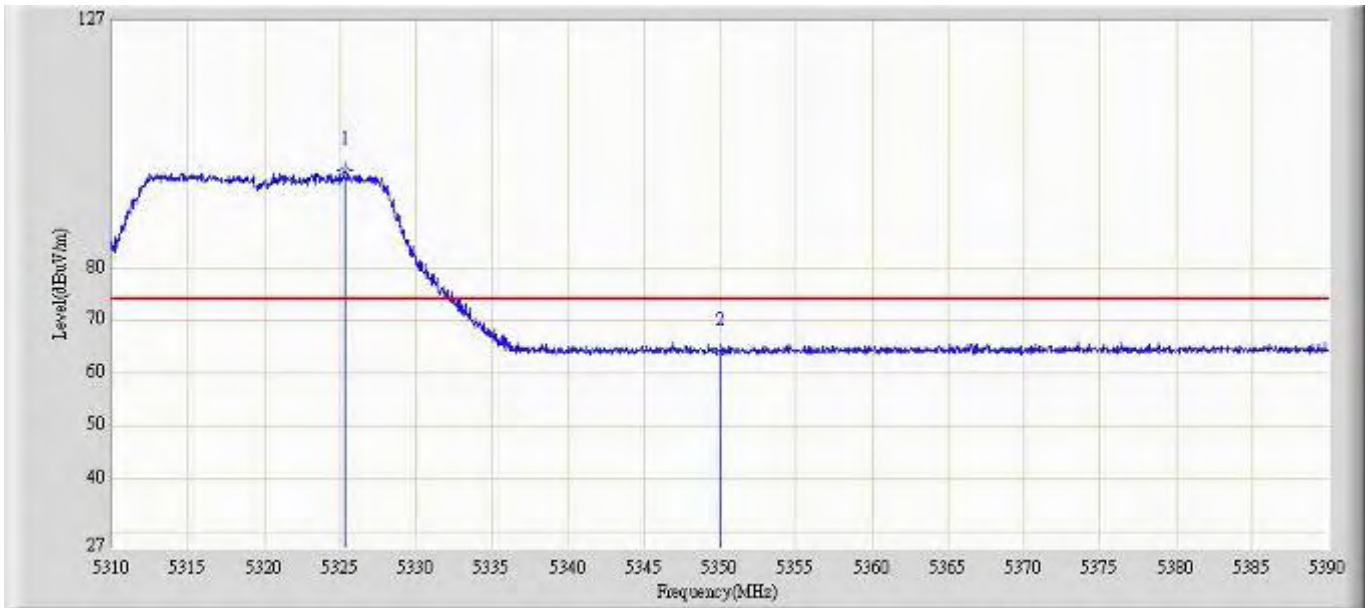


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.280	98.513	108.981	N/A	N/A	-10.468	PK
2		5350.000	64.035	74.534	-9.965	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 574
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 1	

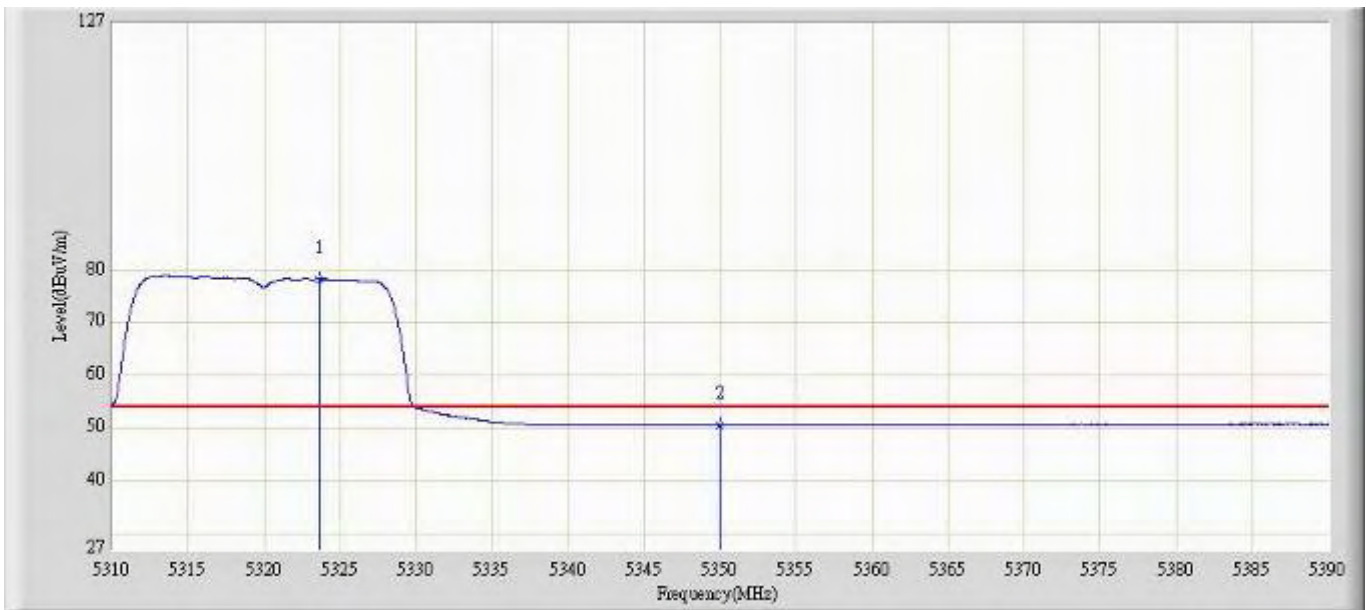


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.640	78.293	88.752	N/A	N/A	-10.459	AV
2		5350.000	50.500	60.999	-3.500	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 575
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 1	

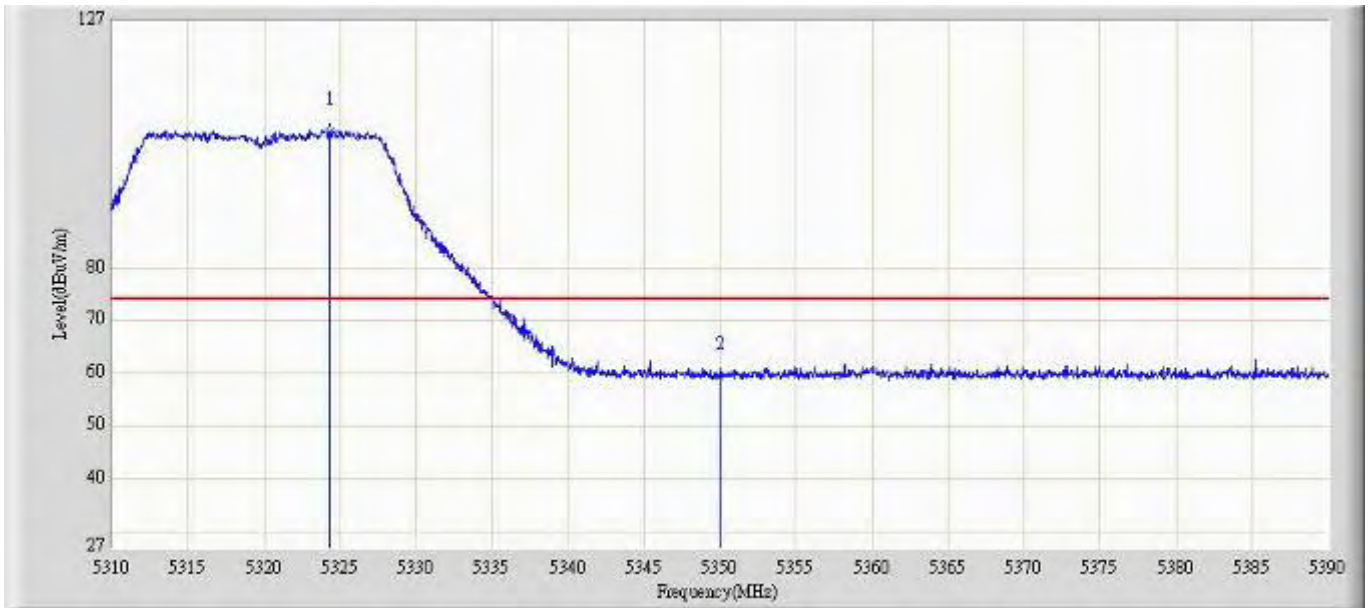


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.360	106.086	116.549	N/A	N/A	-10.463	PK
2		5350.000	59.388	69.887	-14.612	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 576
Engineer: Toms	
Site: AC5	Time: 2011/11/27 - 13:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 1	

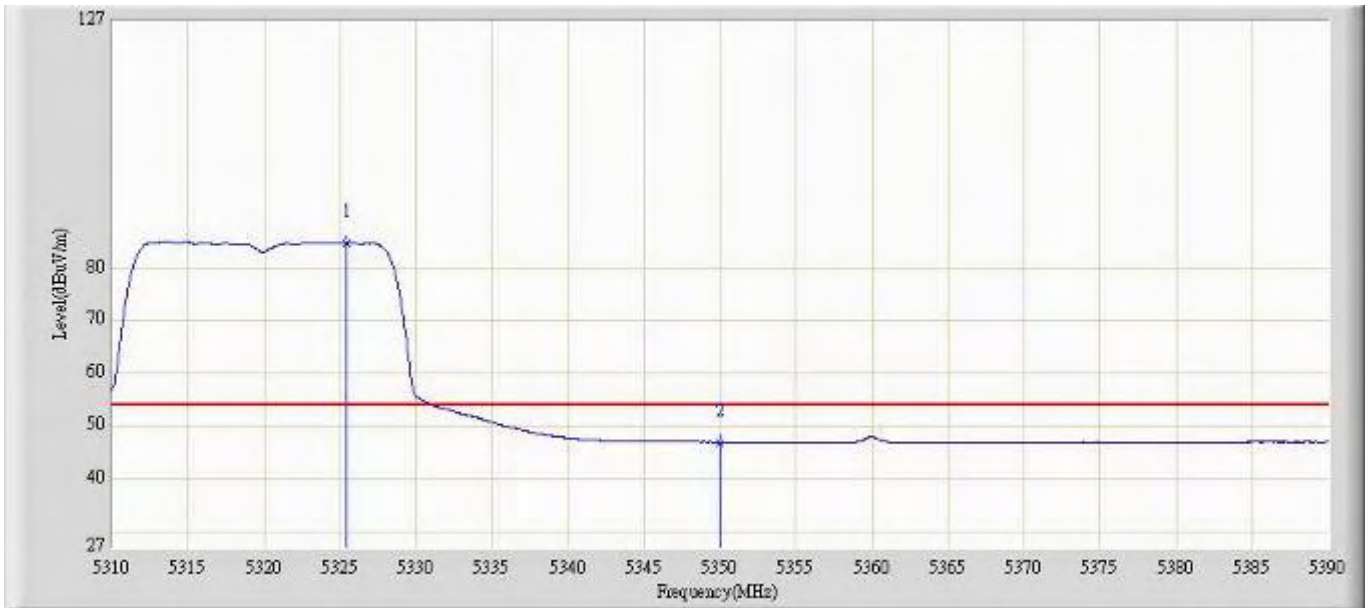


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.400	84.733	95.202	N/A	N/A	-10.468	AV
2		5350.000	46.917	57.416	-7.083	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 577
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 1	

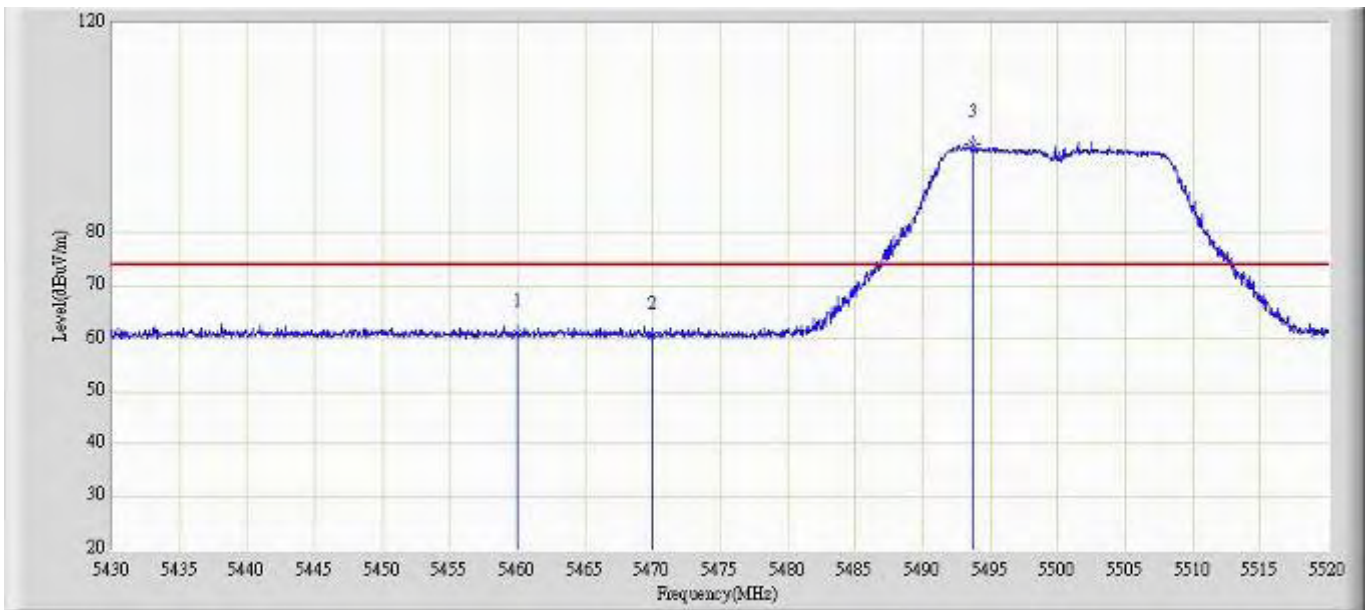


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.963	71.233	-13.037	74.000	-10.269	PK
2		5470.000	60.572	70.877	-27.728	88.300	-10.305	PK
3	*	5493.675	97.113	107.395	N/A	N/A	-10.282	PK

Profile: 11BS004R	Page No.: 578
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 1	

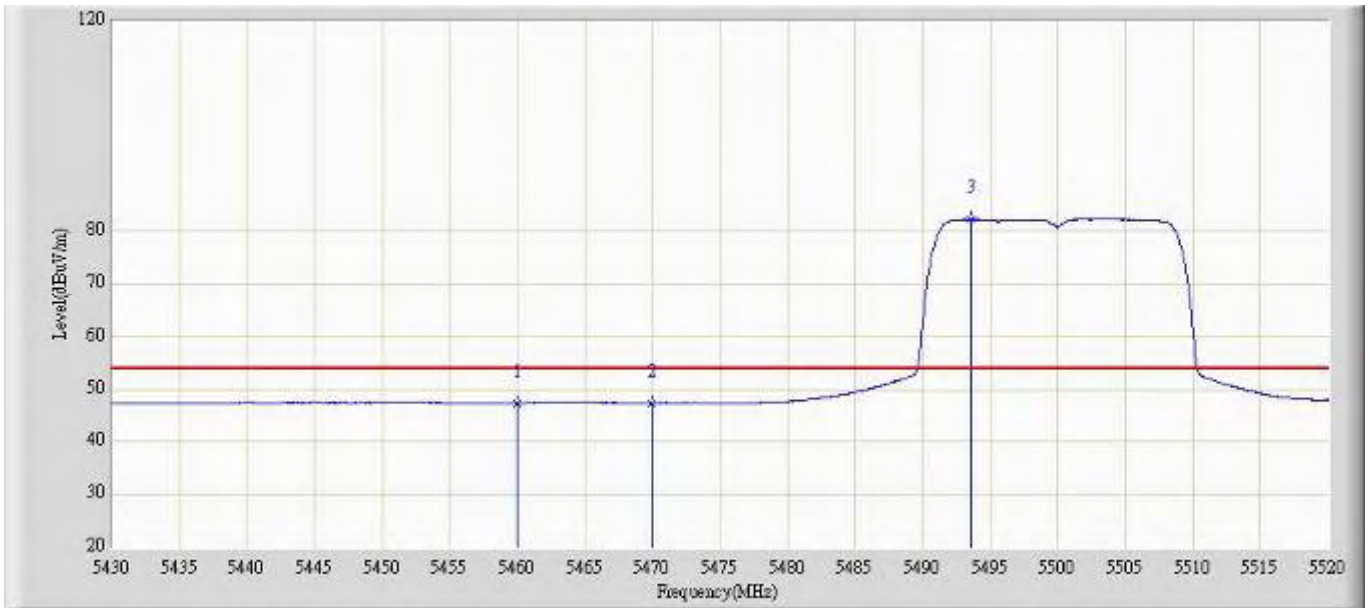


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.405	57.675	-6.595	54.000	-10.269	AV
2		5470.000	47.371	57.676	-20.929	68.300	-10.305	AV
3	*	5493.540	82.271	92.554	N/A	N/A	-10.283	AV

Profile: 11BS004R	Page No.: 579
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 1	

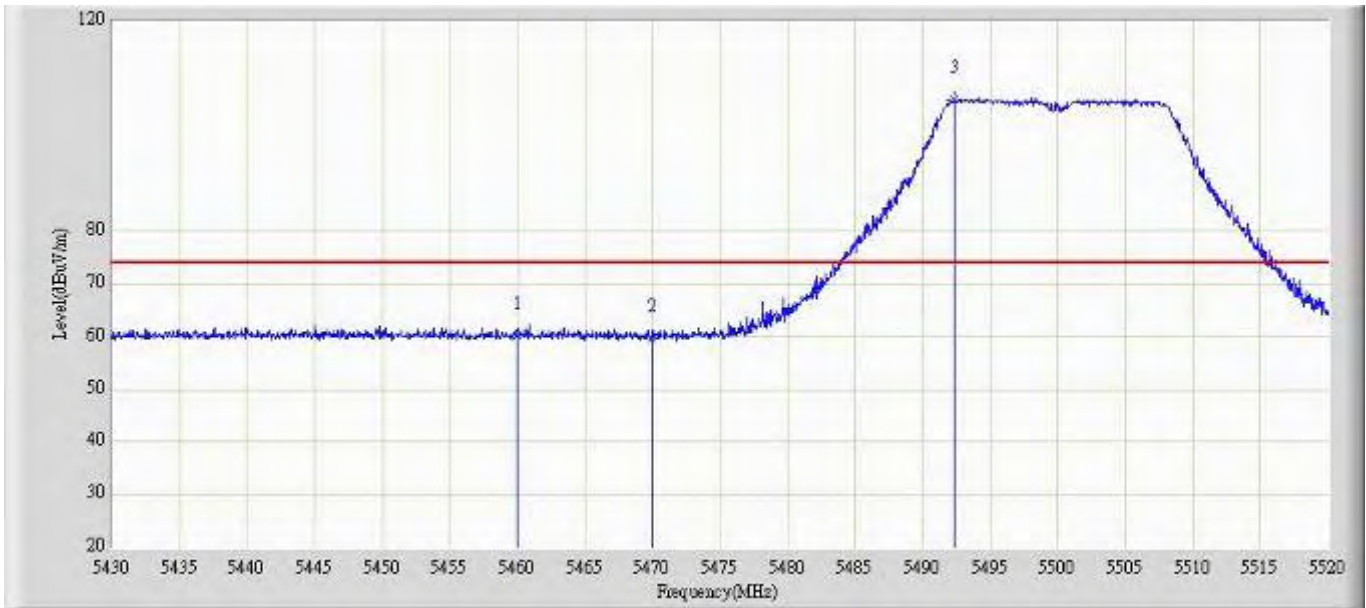


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.149	70.419	-13.851	74.000	-10.269	PK
2		5470.000	59.639	69.944	-28.661	88.300	-10.305	PK
3	*	5492.370	104.969	115.256	N/A	N/A	-10.287	PK

Profile: 11BS004R	Page No.: 580
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 1	

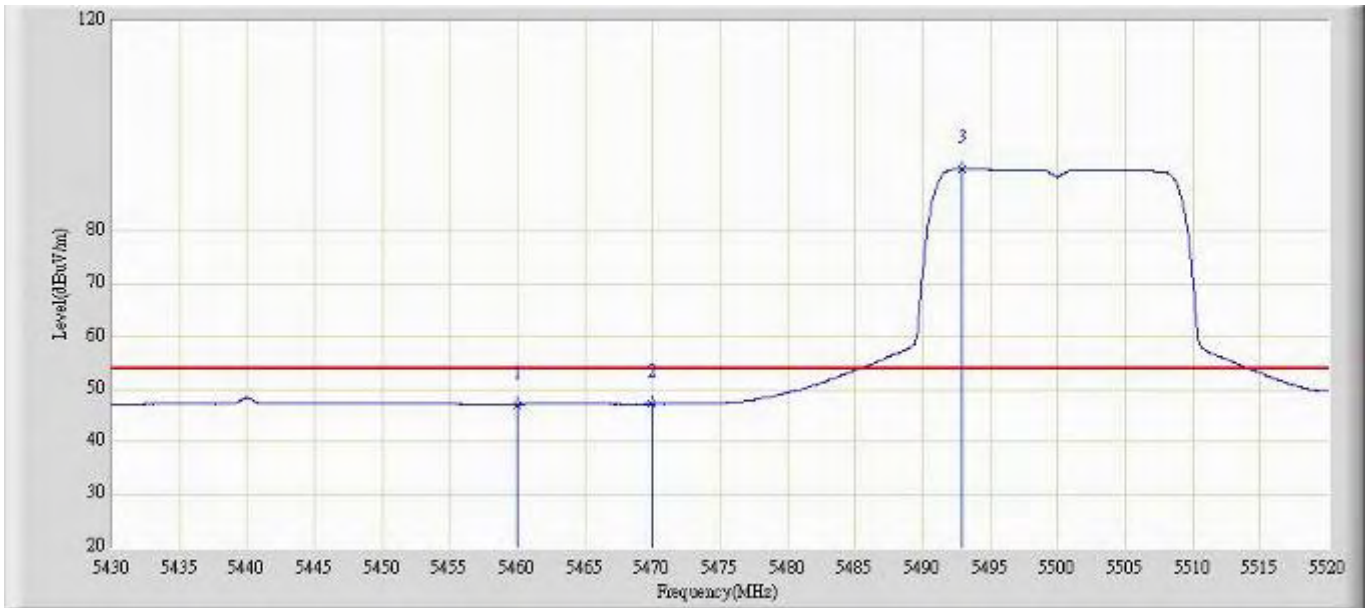


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.134	57.404	-6.866	54.000	-10.269	AV
2		5470.000	47.163	57.468	-21.137	68.300	-10.305	AV
3	*	5492.955	91.811	102.096	N/A	N/A	-10.284	AV

Profile: 11BS004R	Page No.: 581
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:47
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 1	

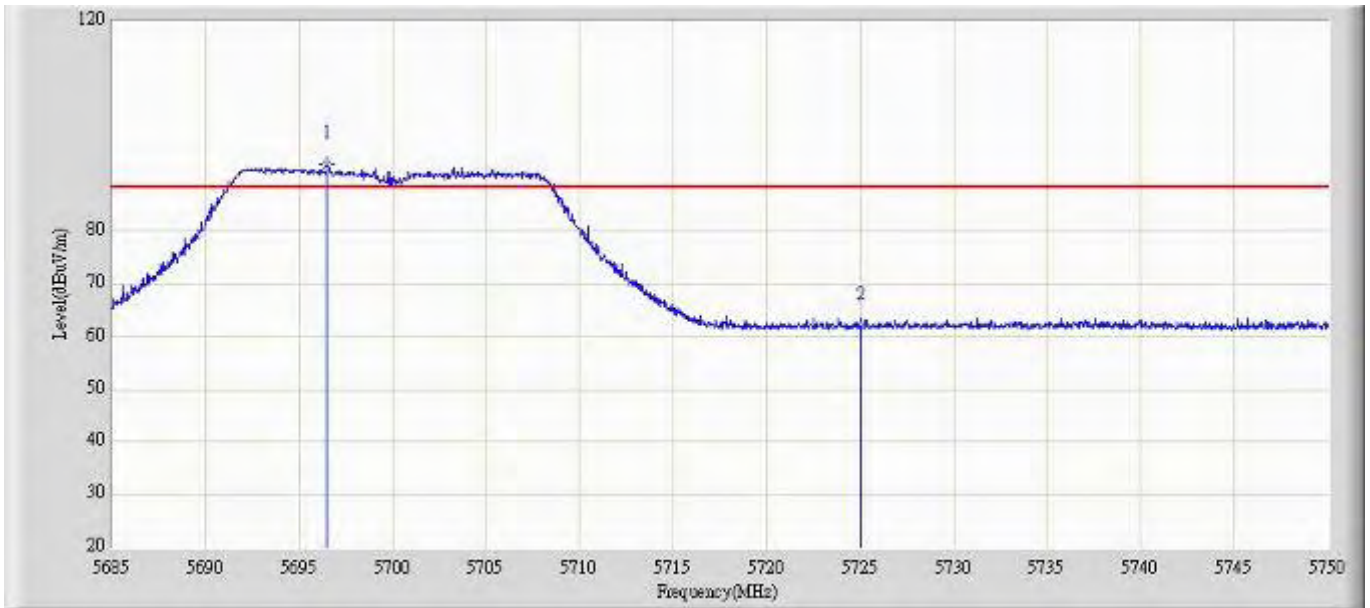


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5696.473	92.601	102.460	N/A	N/A	-9.859	PK
2		5725.000	62.042	71.816	-26.258	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 582
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:58
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 1	

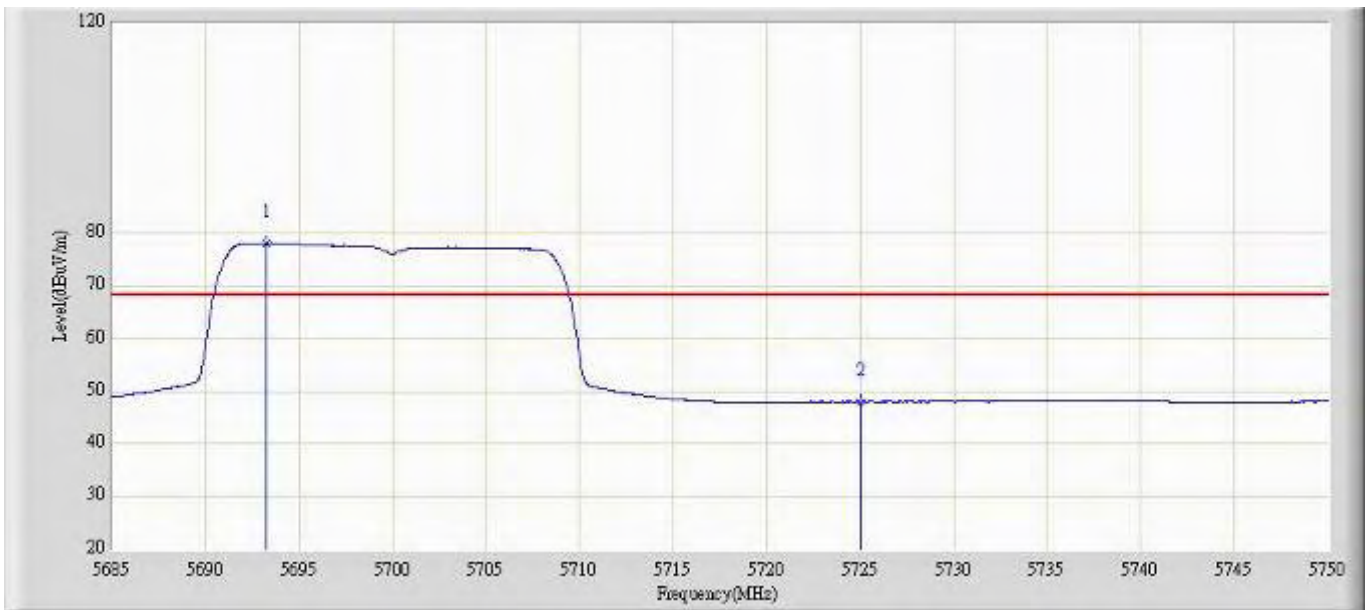


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.255	78.109	87.959	N/A	N/A	-9.851	AV
2		5725.000	48.003	57.777	-20.297	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 583
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:58
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 1	

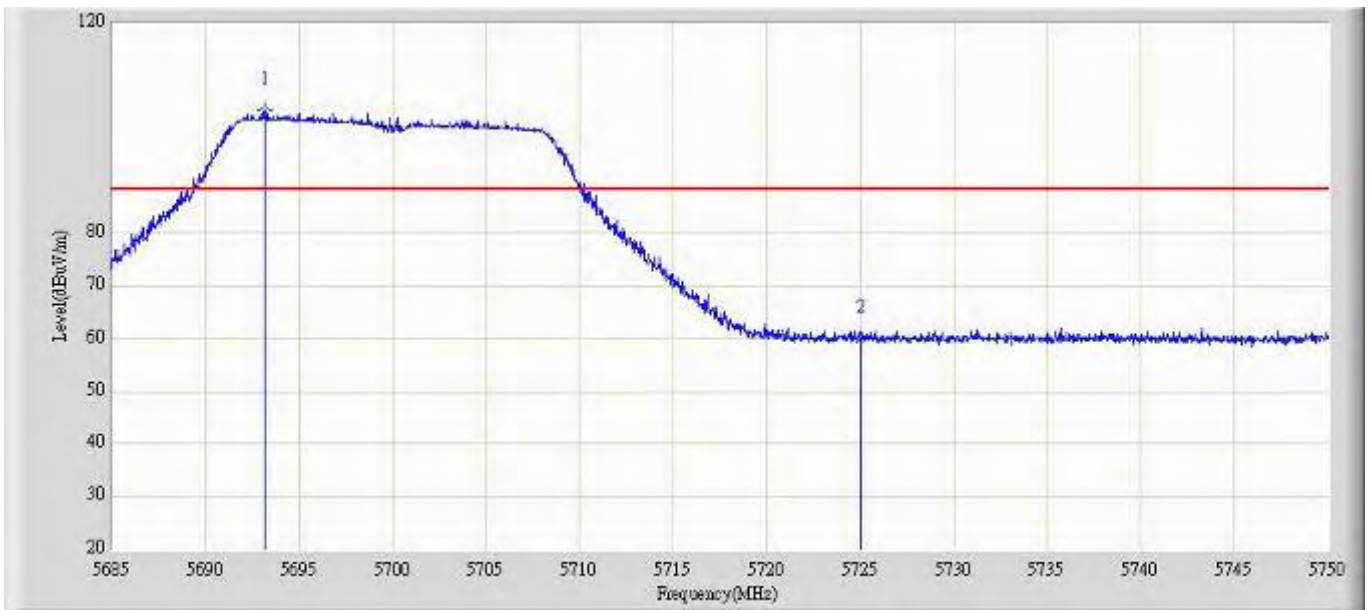


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.190	103.393	113.243	N/A	N/A	-9.851	PK
2		5725.000	59.952	69.726	-28.348	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 584
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 09:59
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 1	

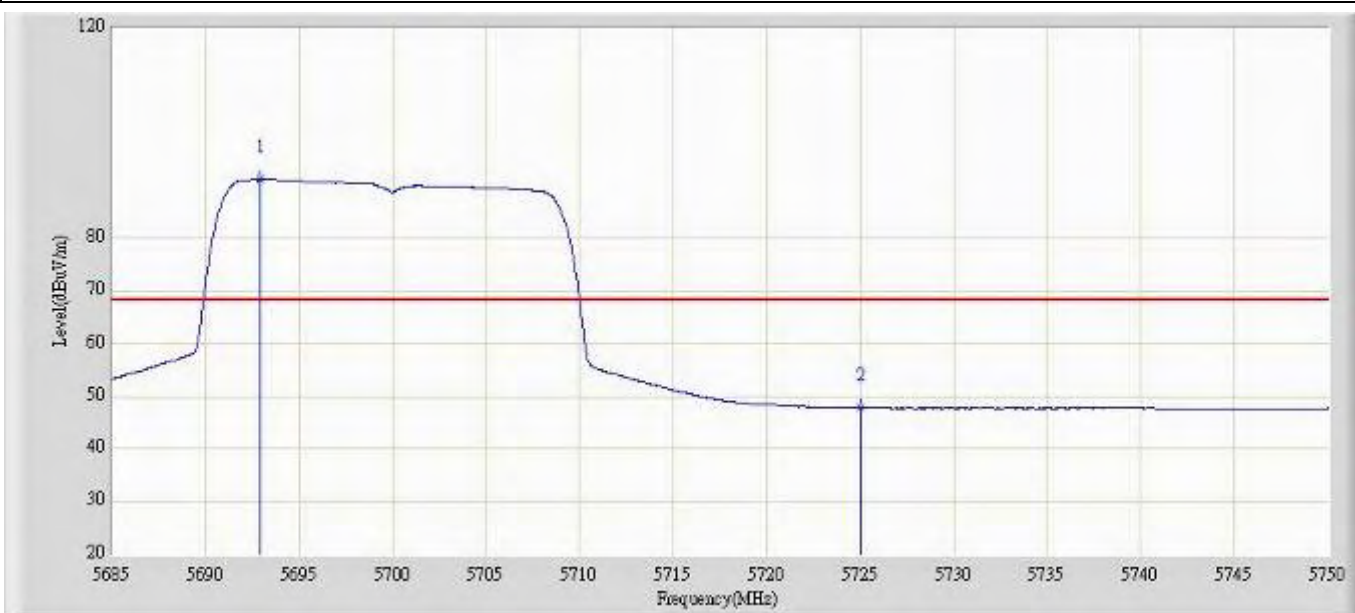


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.962	91.158	101.008	N/A	N/A	-9.849	AV
2		5725.000	47.811	57.585	-20.489	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 585
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 10:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 2	

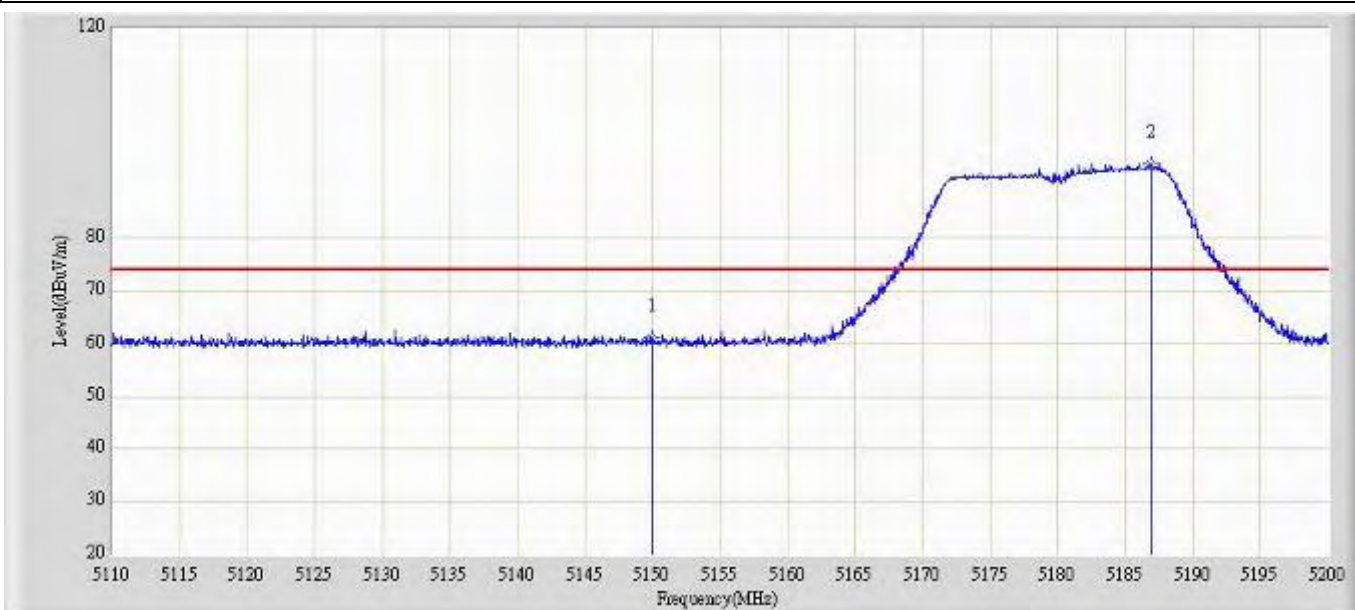


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	61.007	71.434	-12.993	74.000	-10.427	PK
2	*	5186.905	94.128	104.608	N/A	N/A	-10.480	PK

Profile: 11BS004R	Page No.: 586
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 10:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 2	

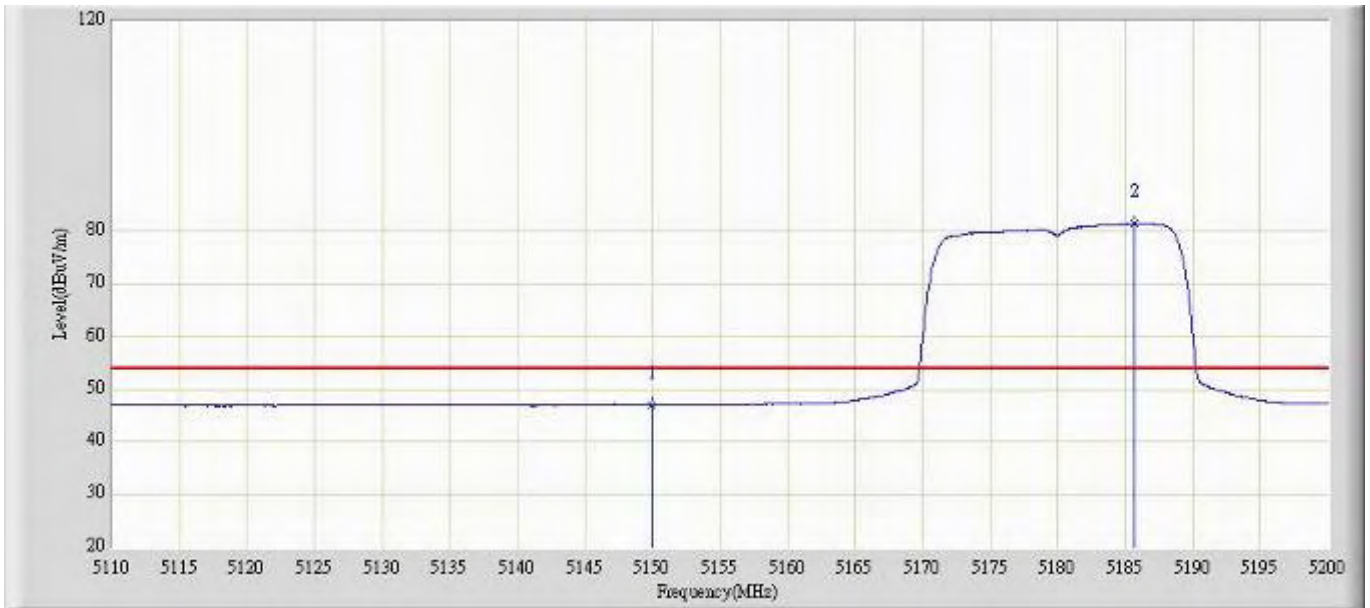


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.078	57.505	-6.922	54.000	-10.427	AV
2	*	5185.690	81.389	91.863	N/A	N/A	-10.474	AV

Profile: 11BS004R	Page No.: 587
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 10:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 2	

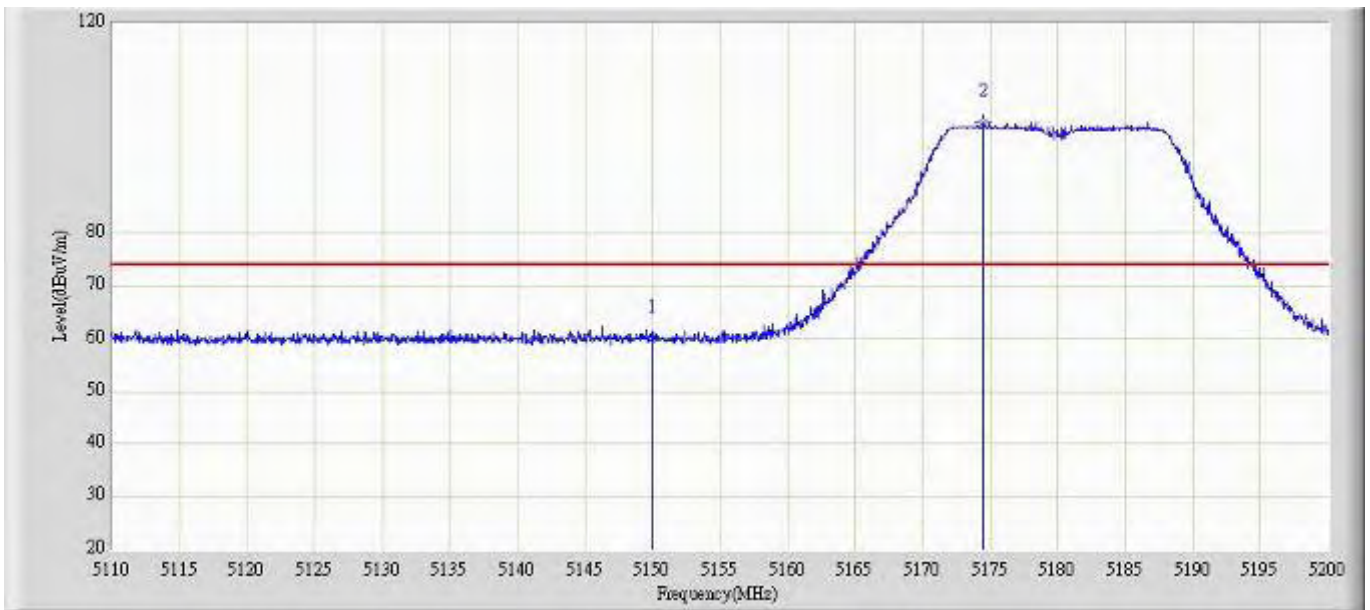


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.960	70.387	-14.040	74.000	-10.427	PK
2	*	5174.530	100.928	111.354	N/A	N/A	-10.426	PK

Profile: 11BS004R	Page No.: 588
Engineer: Toms	
Site: AC5	Time: 2011/11/28 - 10:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 2	

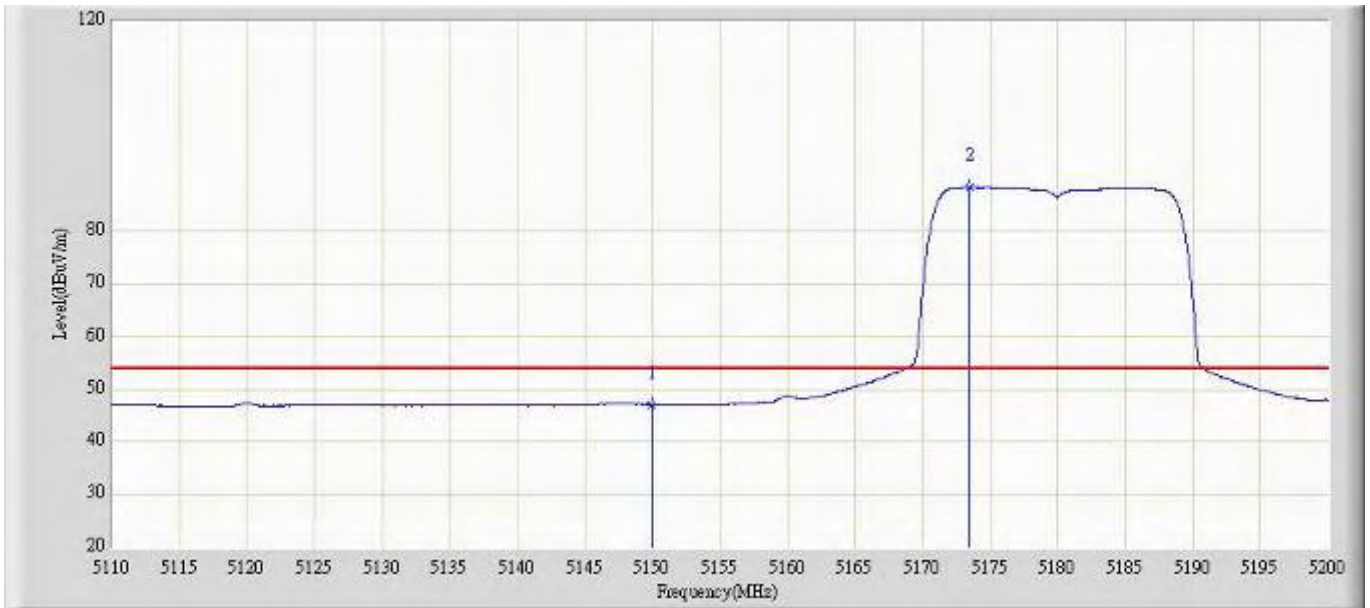


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.099	57.526	-6.901	54.000	-10.427	AV
2	*	5173.495	88.312	98.734	N/A	N/A	-10.422	AV

Profile: 11BS004R	Page No.: 589
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 2	

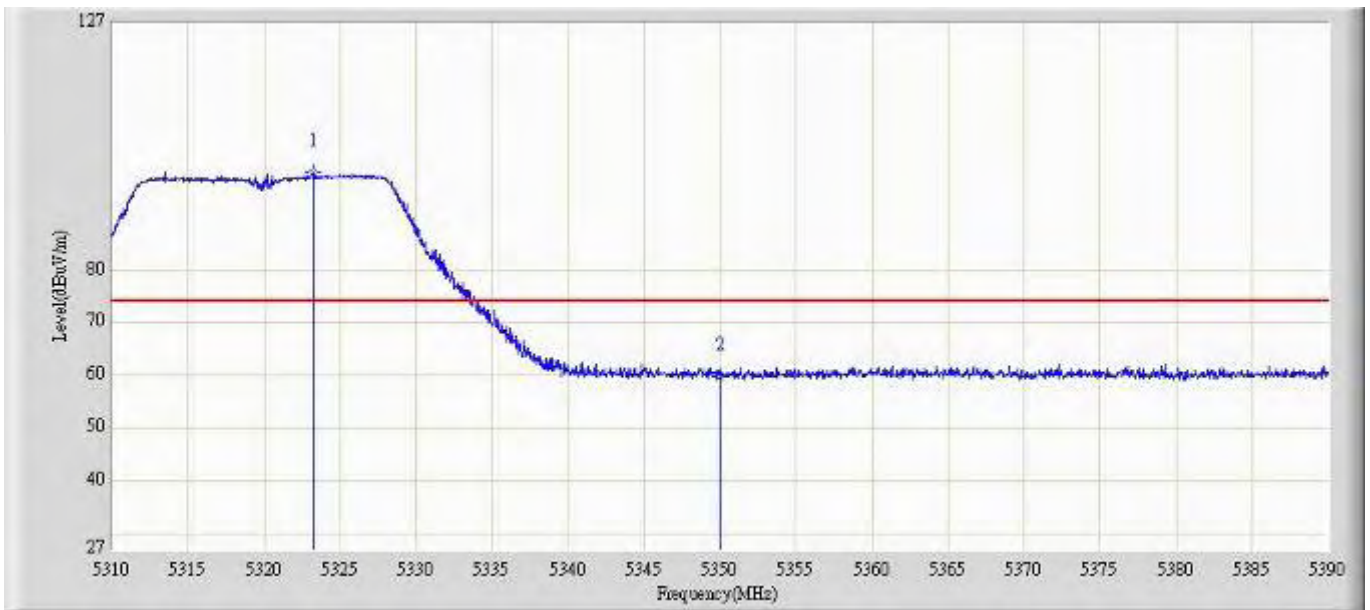


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.280	98.614	109.070	N/A	N/A	-10.457	PK
2		5350.000	59.753	70.252	-14.247	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 590
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 2	

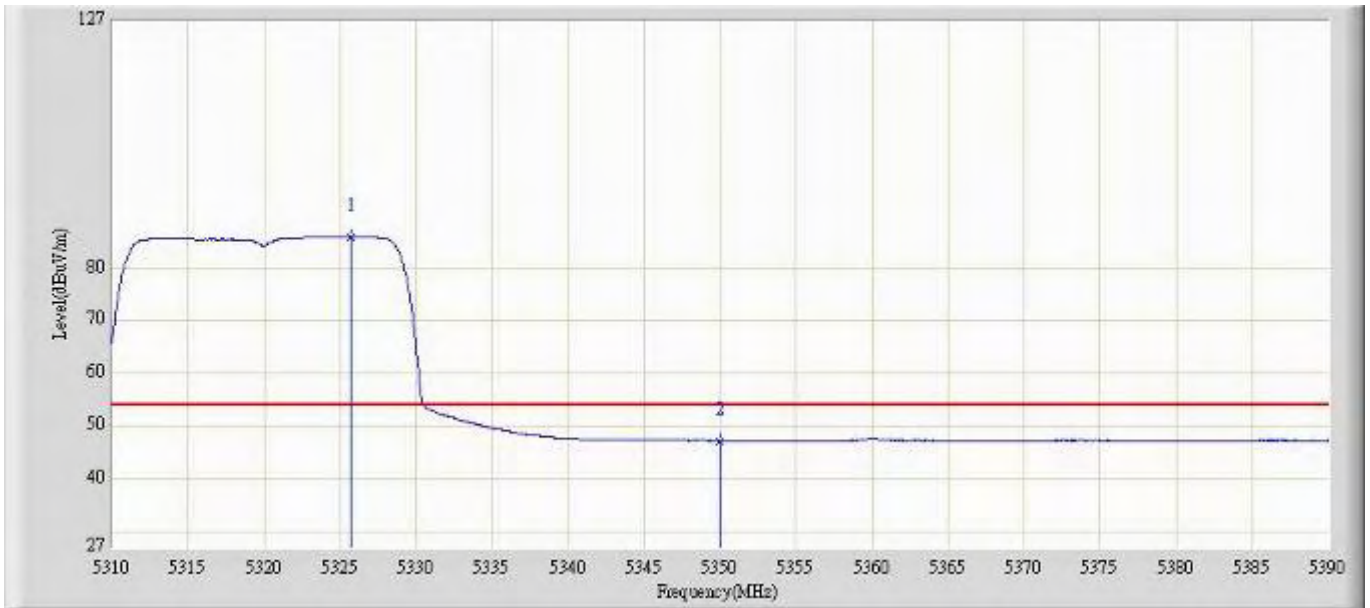


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.760	85.977	96.448	N/A	N/A	-10.470	AV
2		5350.000	47.190	57.689	-6.810	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 591
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 2	

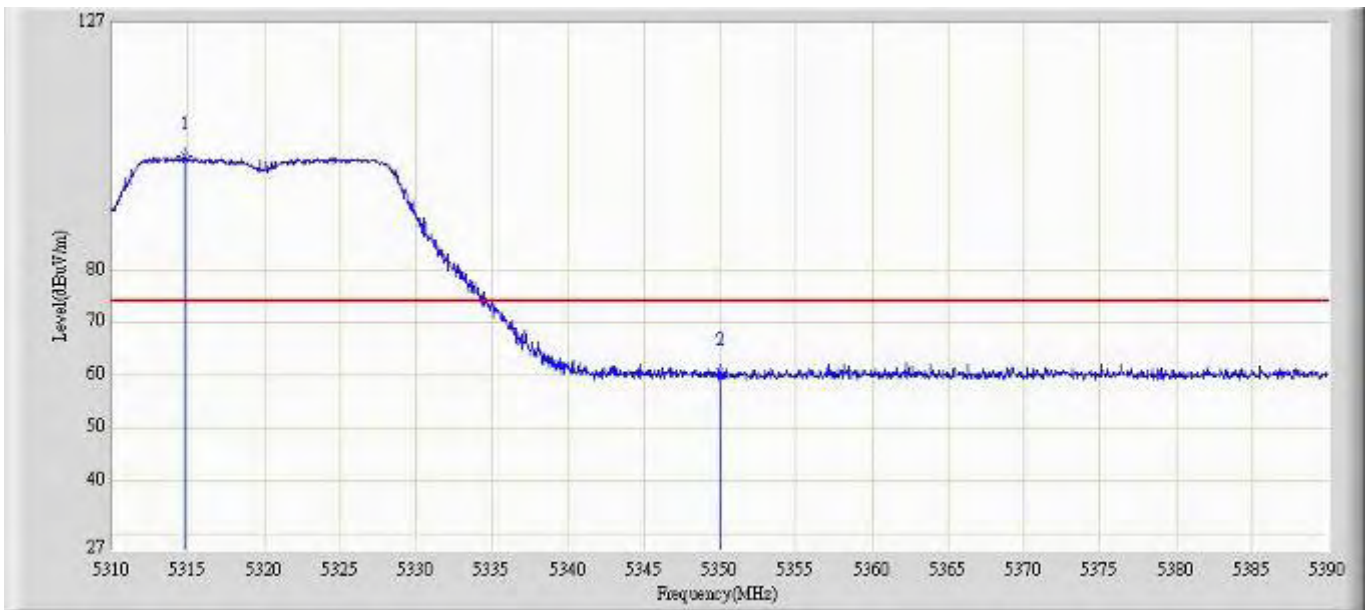


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5314.760	101.762	112.181	N/A	N/A	-10.419	PK
2		5350.000	60.751	71.250	-13.249	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 592
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 2	

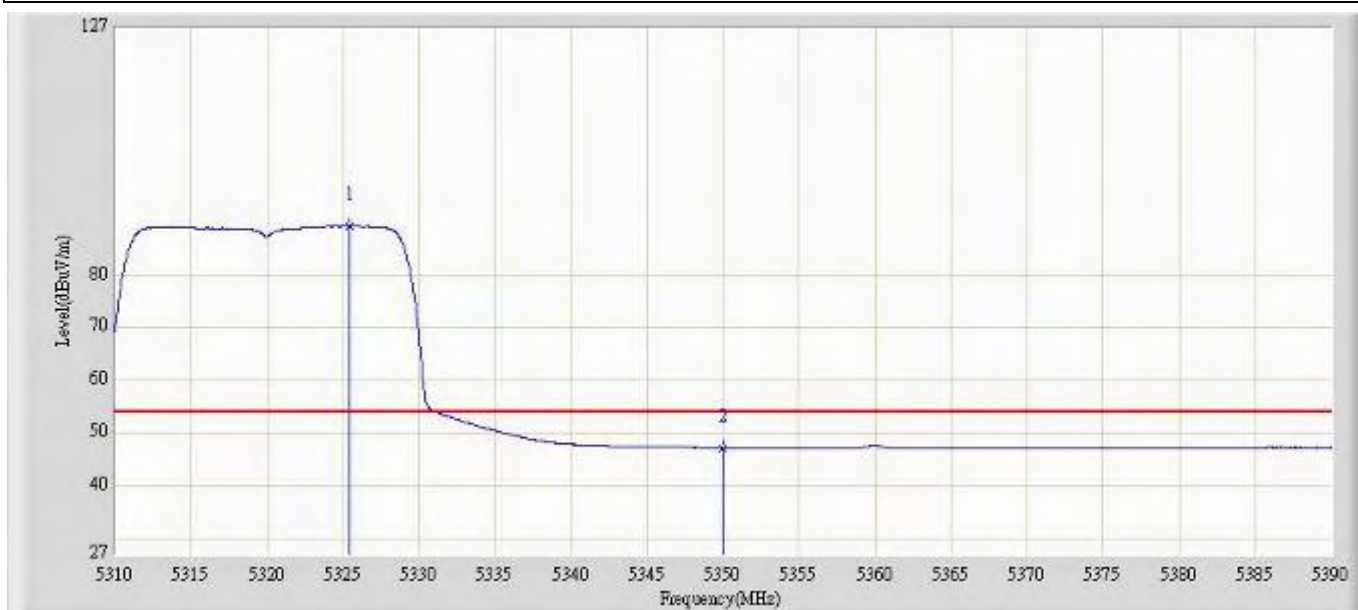


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.400	89.332	99.801	N/A	N/A	-10.468	AV
2		5350.000	47.167	57.666	-6.833	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 593
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 2	

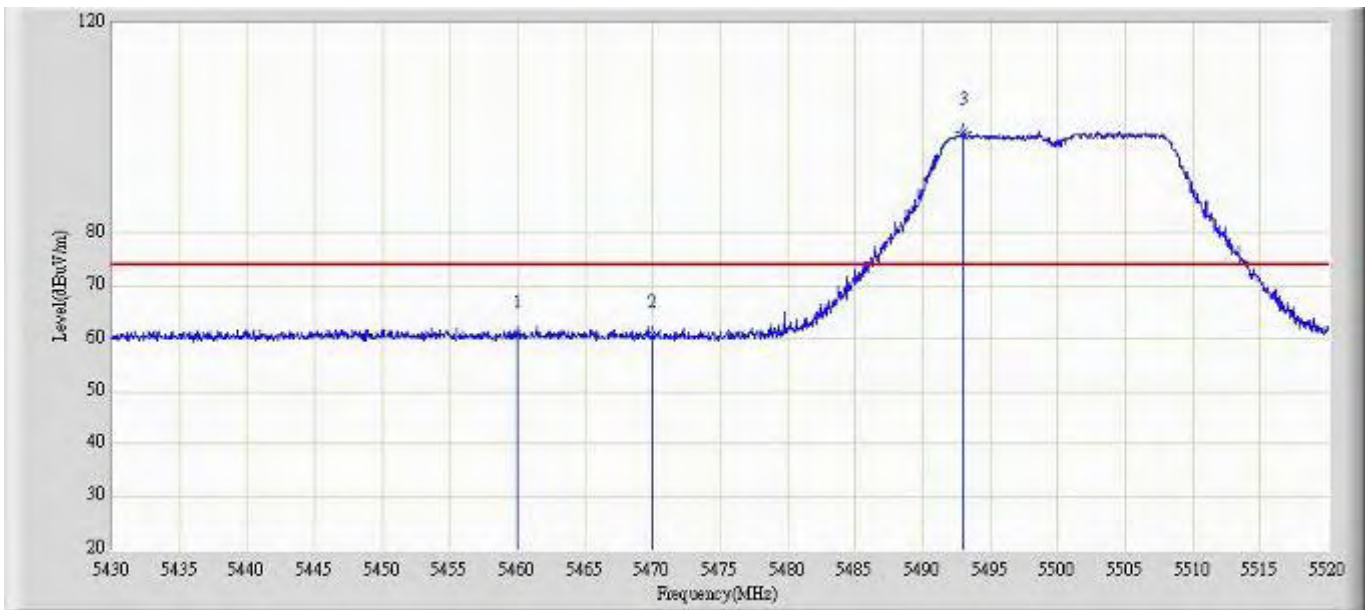


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.781	71.051	-13.219	74.000	-10.269	PK
2		5470.000	60.869	71.174	-27.431	88.300	-10.305	PK
3	*	5493.045	99.177	109.461	N/A	N/A	-10.284	PK

Profile: 11BS004R	Page No.: 594
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 2	

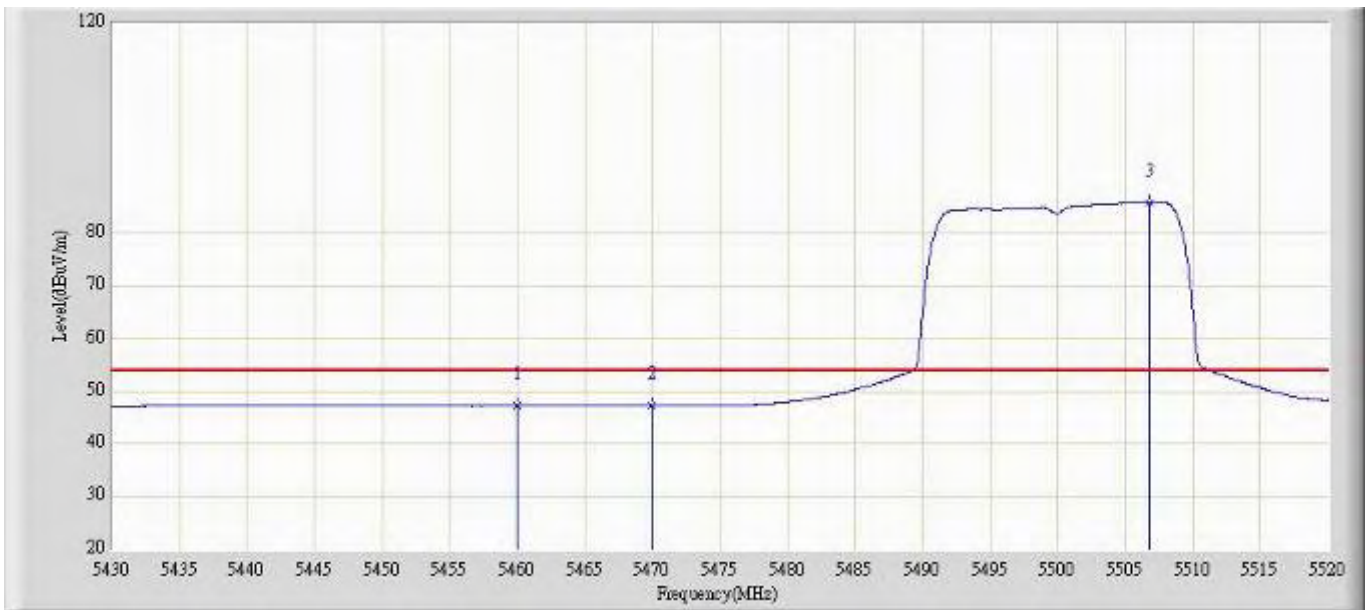


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.281	57.551	-6.719	54.000	-10.269	AV
2		5470.000	47.269	57.574	-21.031	68.300	-10.305	AV
3	*	5506.815	85.825	96.054	N/A	N/A	-10.229	AV

Profile: 11BS004R	Page No.: 595
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 2	

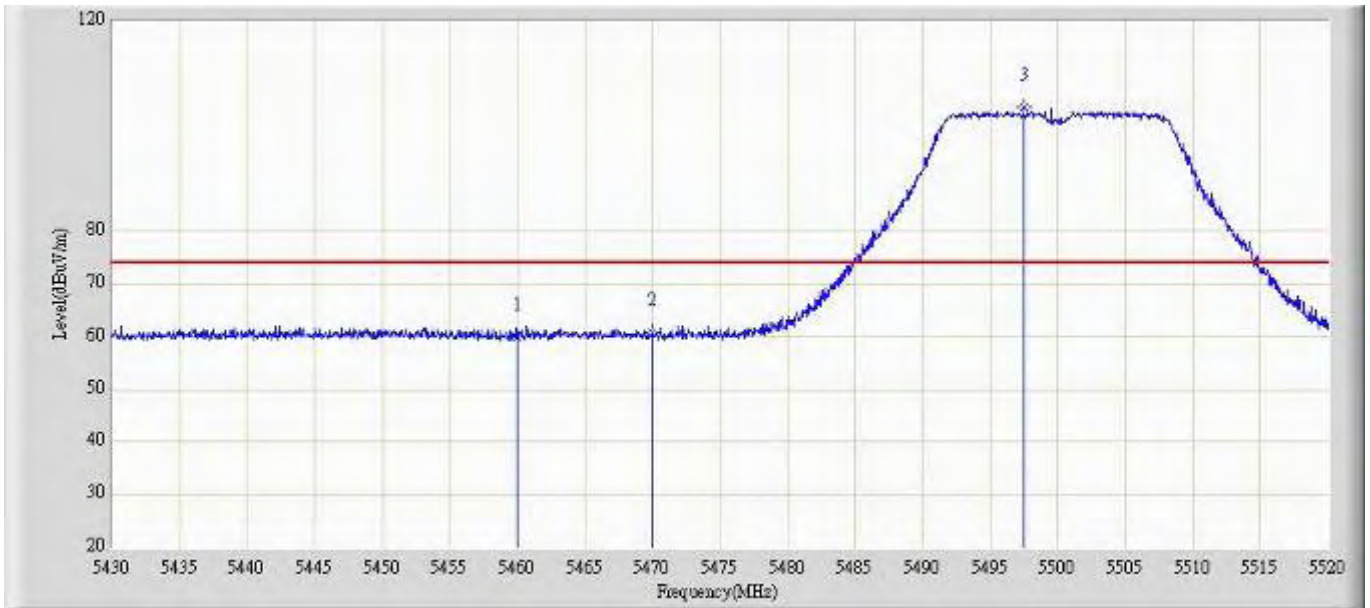


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.048	70.318	-13.952	74.000	-10.269	PK
2		5470.000	60.700	71.005	-27.600	88.300	-10.305	PK
3	*	5497.500	103.639	113.908	N/A	N/A	-10.269	PK

Profile: 11BS004R	Page No.: 596
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 2	

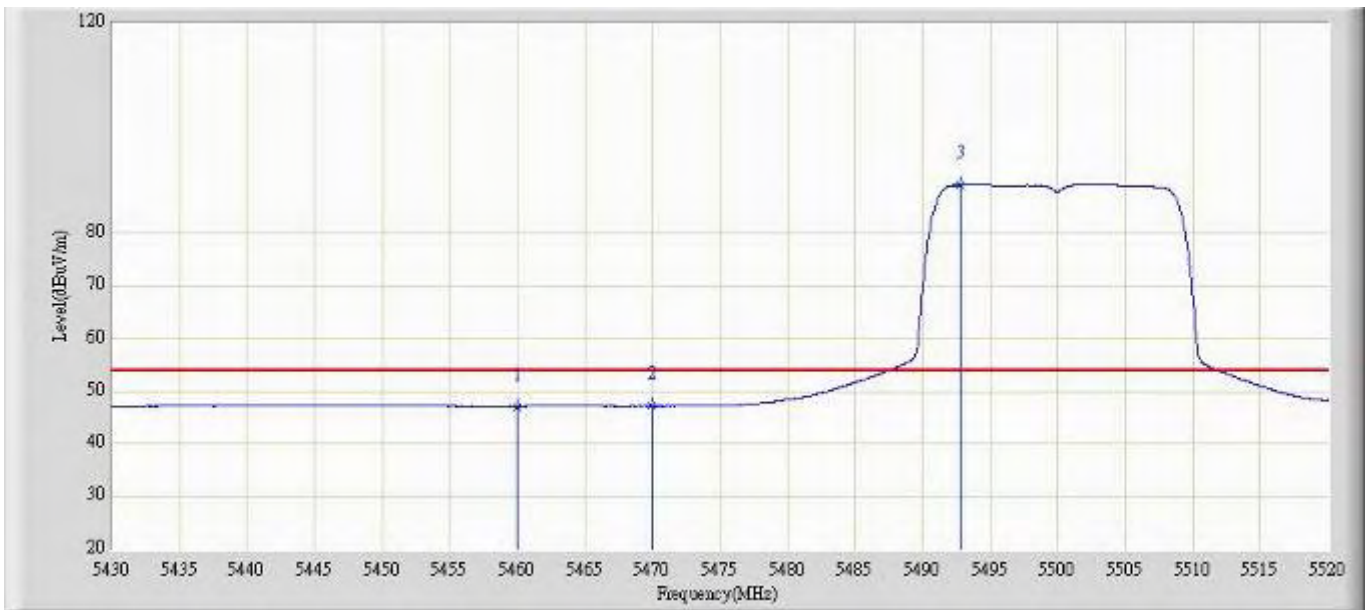


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.152	57.422	-6.848	54.000	-10.269	AV
2		5470.000	47.174	57.479	-21.126	68.300	-10.305	AV
3	*	5492.820	89.178	99.463	N/A	N/A	-10.285	AV

Profile: 11BS004R	Page No.: 597
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:16
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 2	

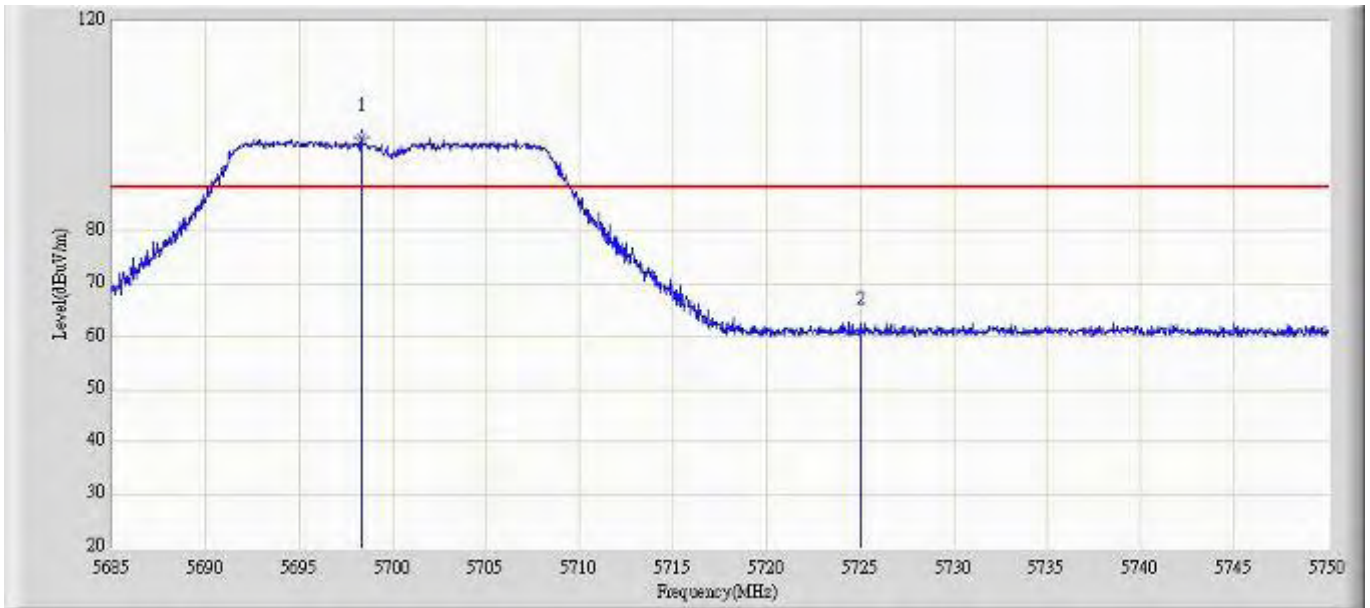


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.325	97.730	107.594	N/A	N/A	-9.864	PK
2		5725.000	60.980	70.754	-27.320	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 598
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:17
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 2	

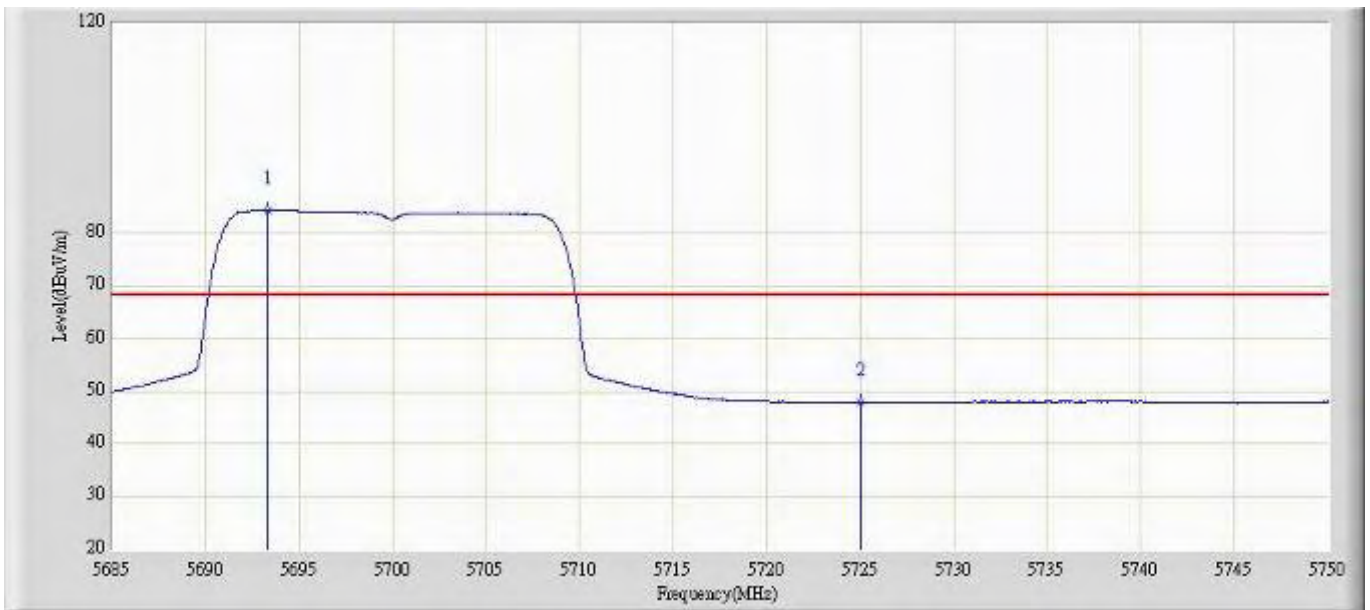


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.320	84.446	94.296	N/A	N/A	-9.851	AV
2		5725.000	47.943	57.717	-20.357	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 599
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:18
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 2	

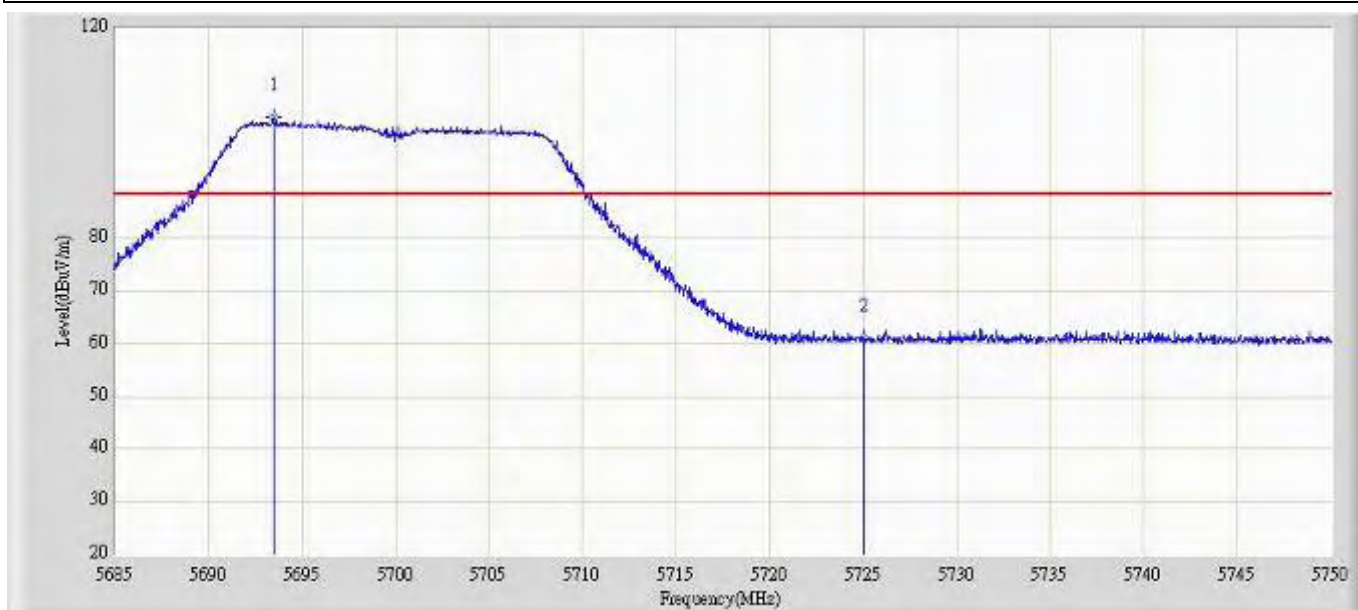


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.450	103.011	112.862	N/A	N/A	-9.850	PK
2		5725.000	60.976	70.750	-27.324	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 600
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:19
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 2	

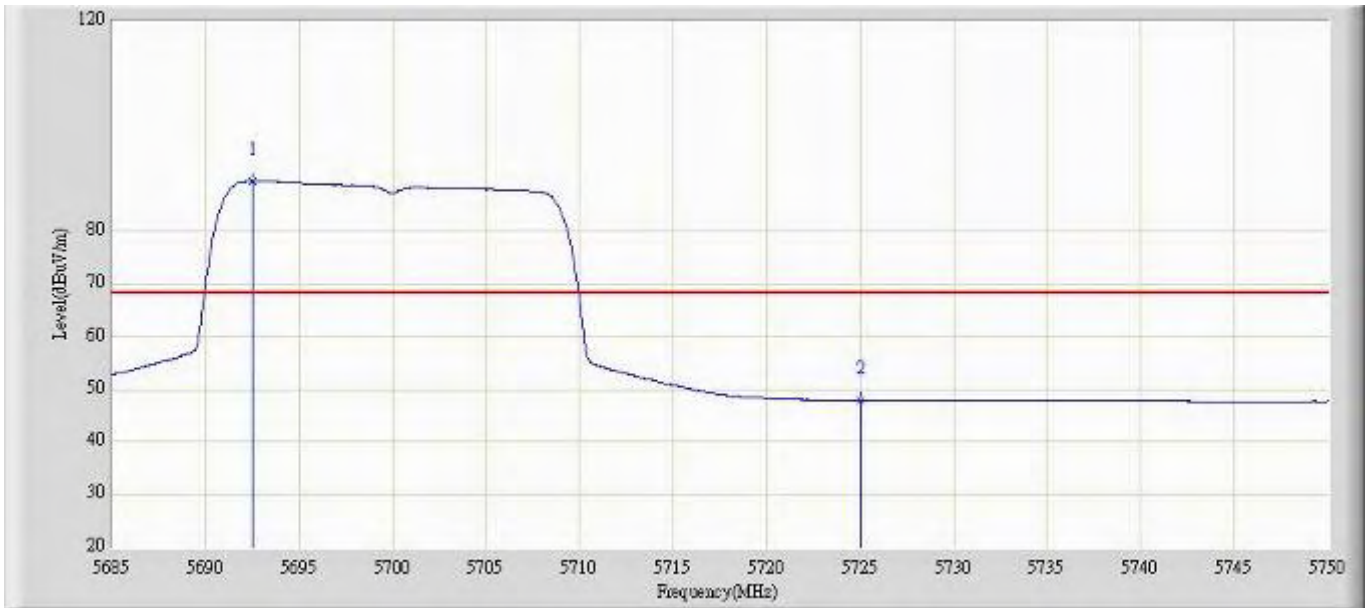


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.540	89.457	99.305	N/A	N/A	-9.849	AV
2		5725.000	47.882	57.656	-20.418	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 601
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1	

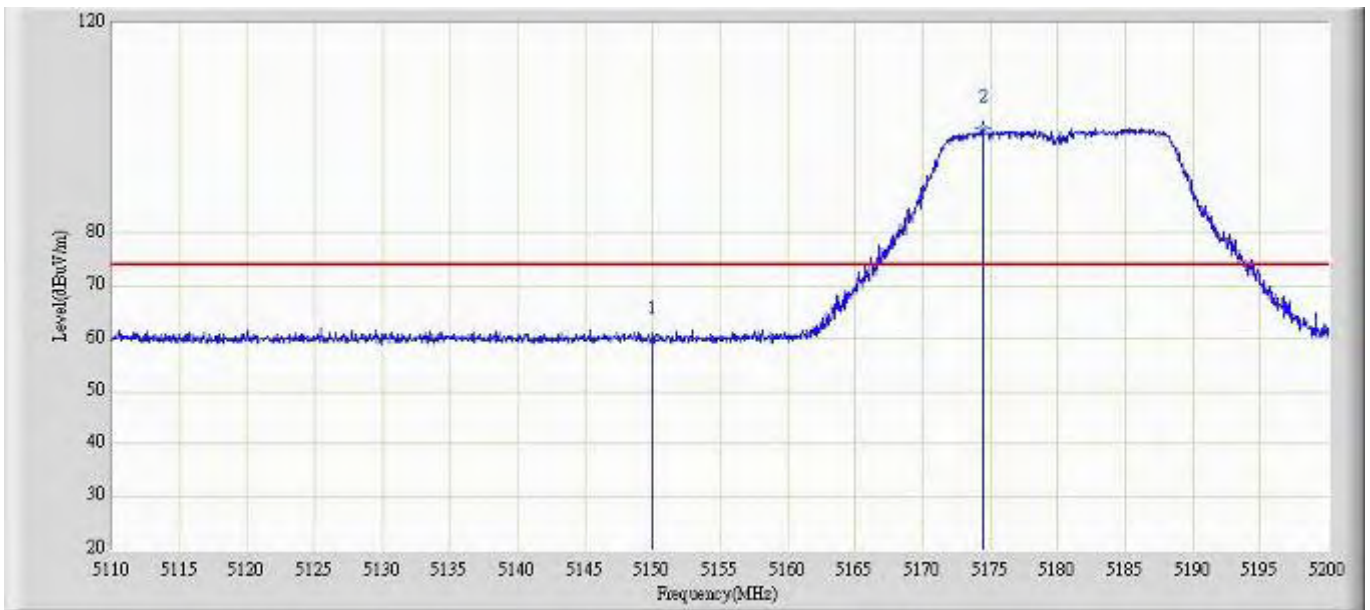


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.784	70.211	-14.216	74.000	-10.427	PK
2	*	5174.440	100.015	110.441	N/A	N/A	-10.425	PK

Profile: 11BS004R	Page No.: 602
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1	

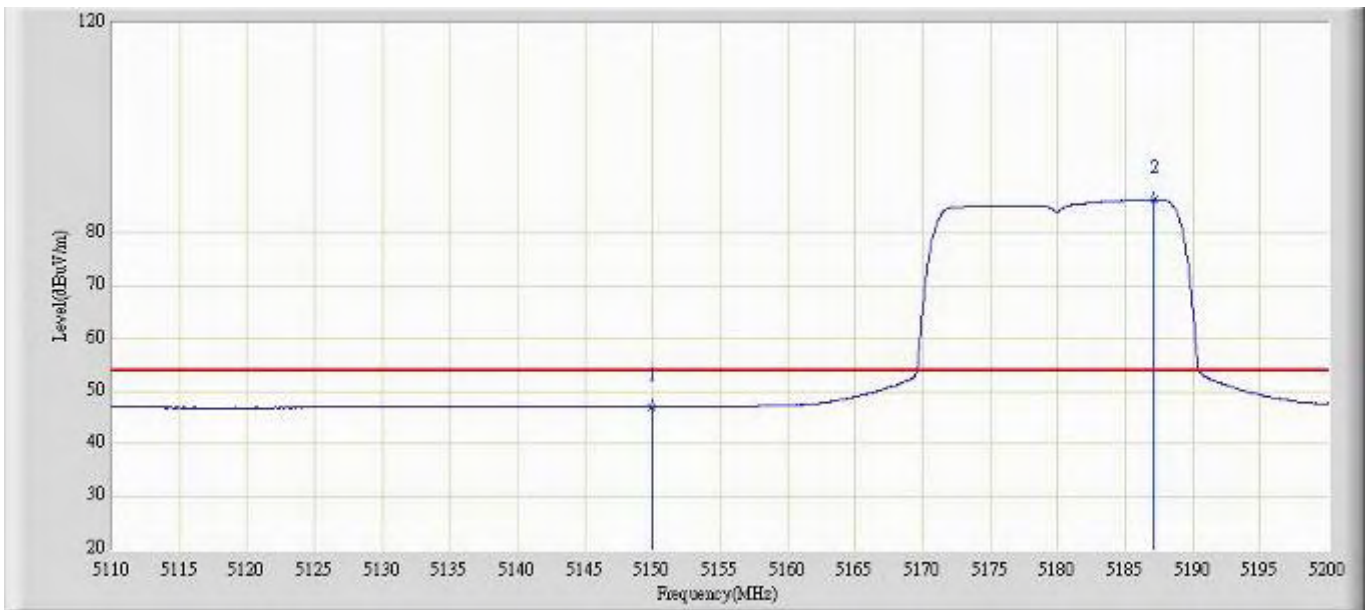


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.073	57.500	-6.927	54.000	-10.427	AV
2	*	5187.085	86.469	96.949	N/A	N/A	-10.481	AV

Profile: 11BS004R	Page No.: 603
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1	

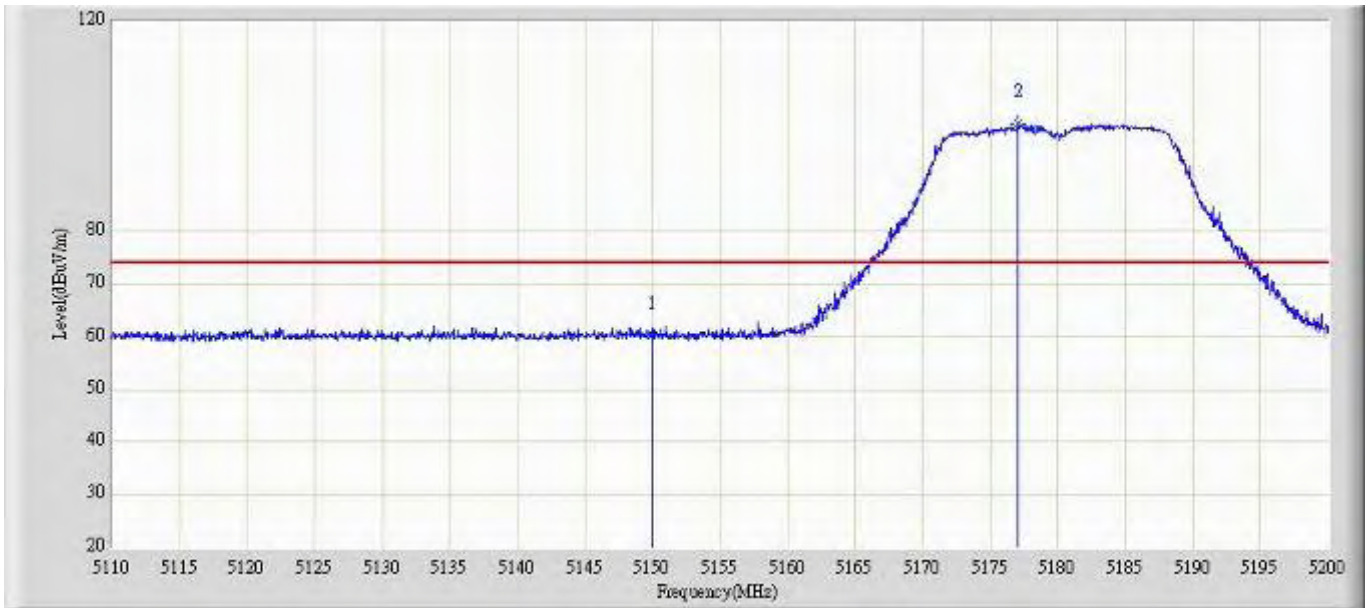


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.237	70.664	-13.763	74.000	-10.427	PK
2	*	5177.050	100.549	110.986	N/A	N/A	-10.437	PK

Profile: 11BS004R	Page No.: 604
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1	

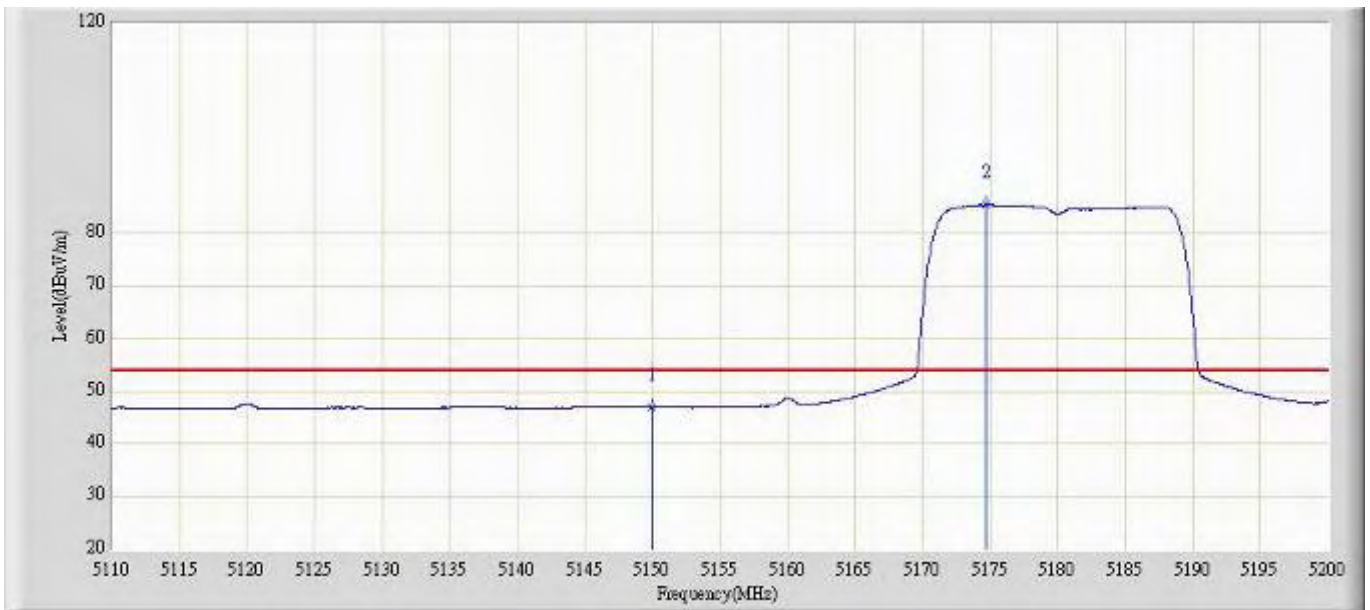


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.969	57.396	-7.031	54.000	-10.427	AV
2	*	5174.755	85.398	95.825	N/A	N/A	-10.427	AV

Profile: 11BS004R	Page No.: 605
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1	

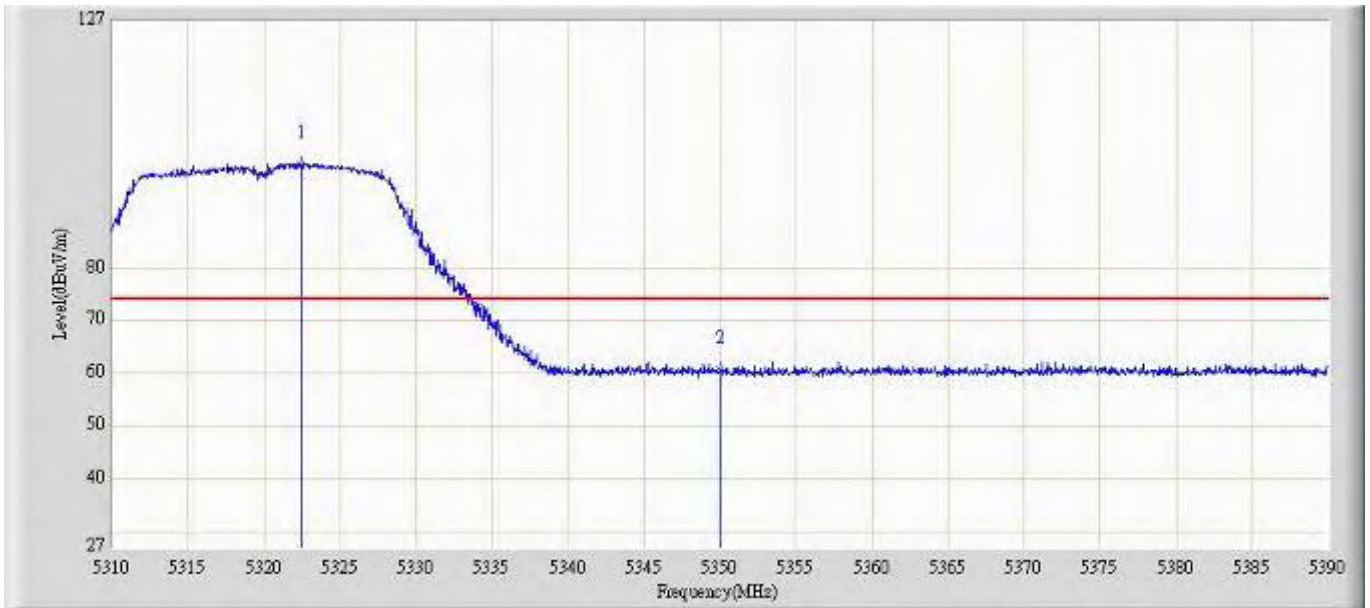


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5322.440	99.829	110.281	N/A	N/A	-10.452	PK
2		5350.000	60.520	71.019	-13.480	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 606
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1	

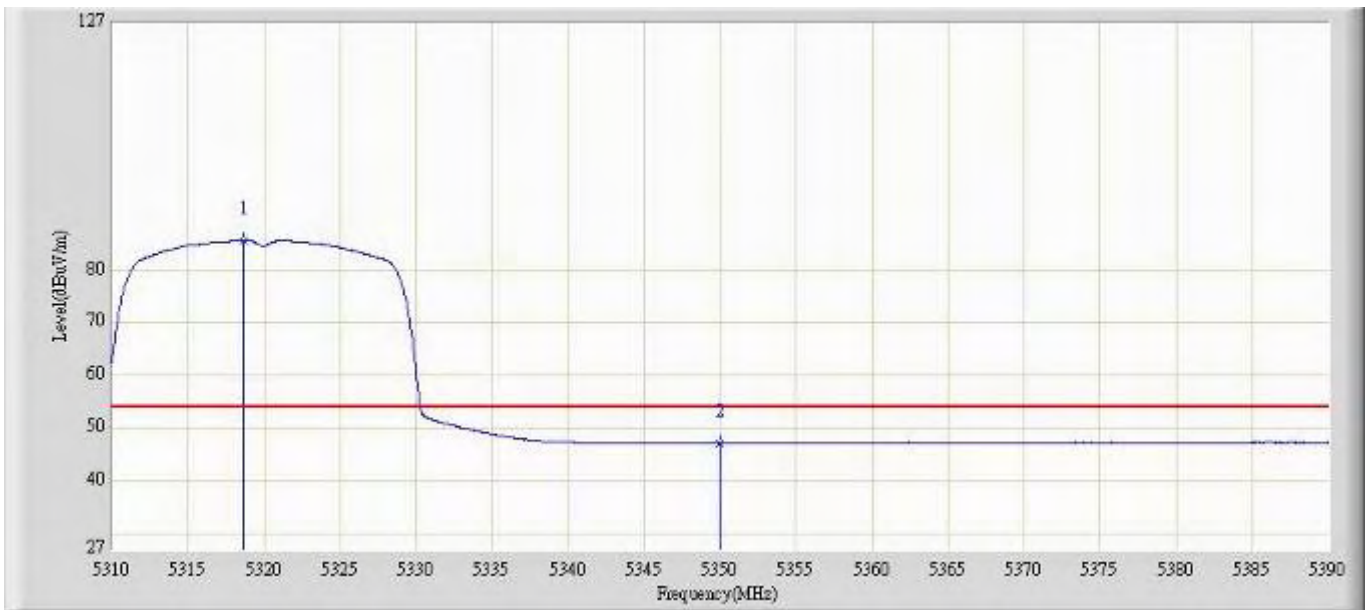


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5318.680	85.659	96.089	N/A	N/A	-10.430	AV
2		5350.000	47.117	57.616	-6.883	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 607
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1	

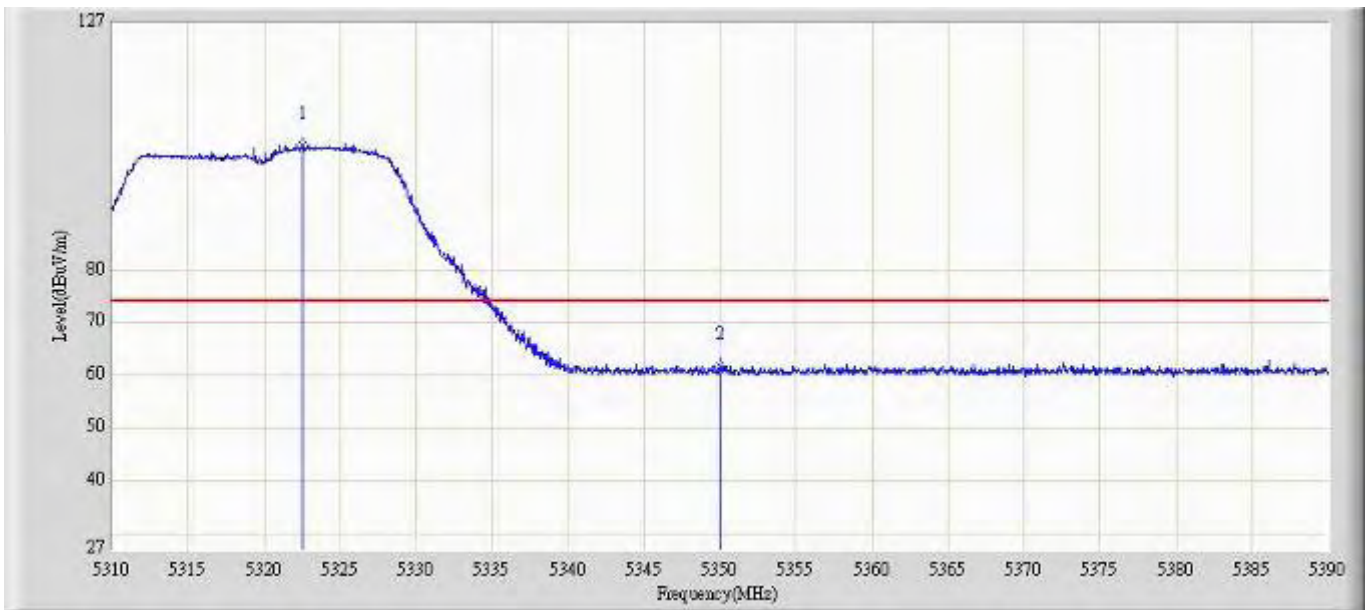


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5322.560	103.733	114.185	N/A	N/A	-10.453	PK
2		5350.000	61.781	72.280	-12.219	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 608
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1	

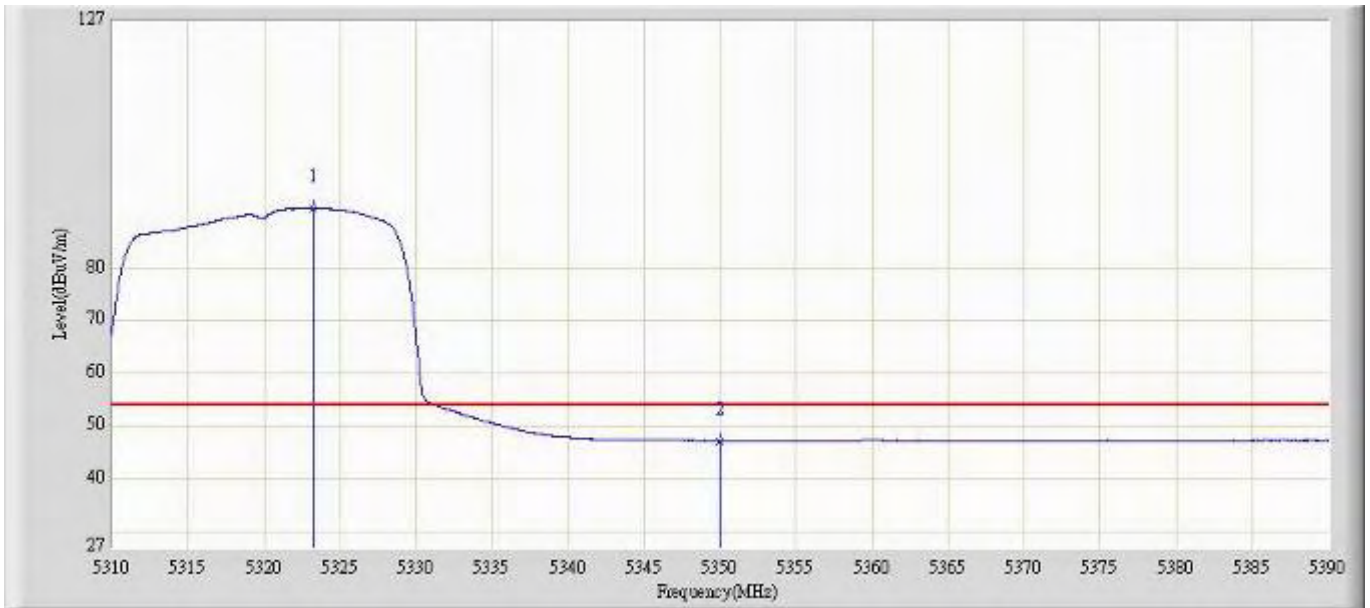


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.280	91.337	101.793	N/A	N/A	-10.457	AV
2		5350.000	47.189	57.688	-6.811	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 609
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1	

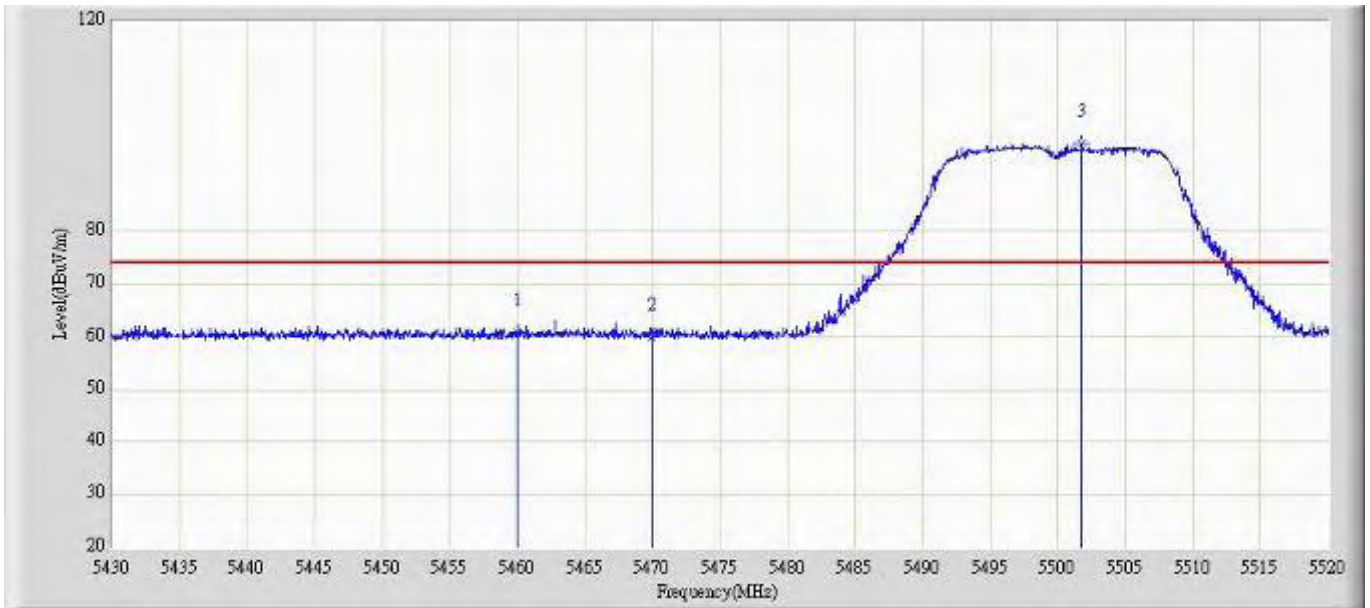


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.664	70.934	-13.336	74.000	-10.269	PK
2		5470.000	59.876	70.181	-28.424	88.300	-10.305	PK
3	*	5501.775	96.720	106.974	N/A	N/A	-10.254	PK

Profile: 11BS004R	Page No.: 610
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1	

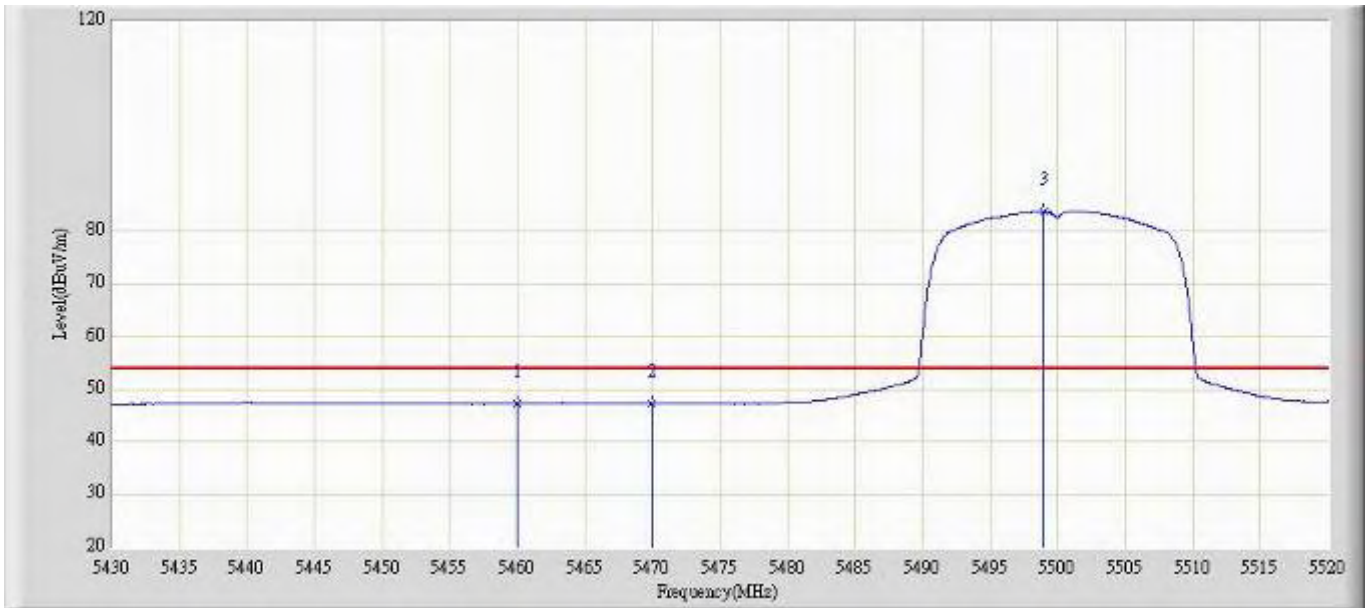


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.303	57.573	-6.697	54.000	-10.269	AV
2		5470.000	47.259	57.564	-21.041	68.300	-10.305	AV
3	*	5498.940	83.836	94.100	N/A	N/A	-10.264	AV

Profile: 11BS004R	Page No.: 611
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1	

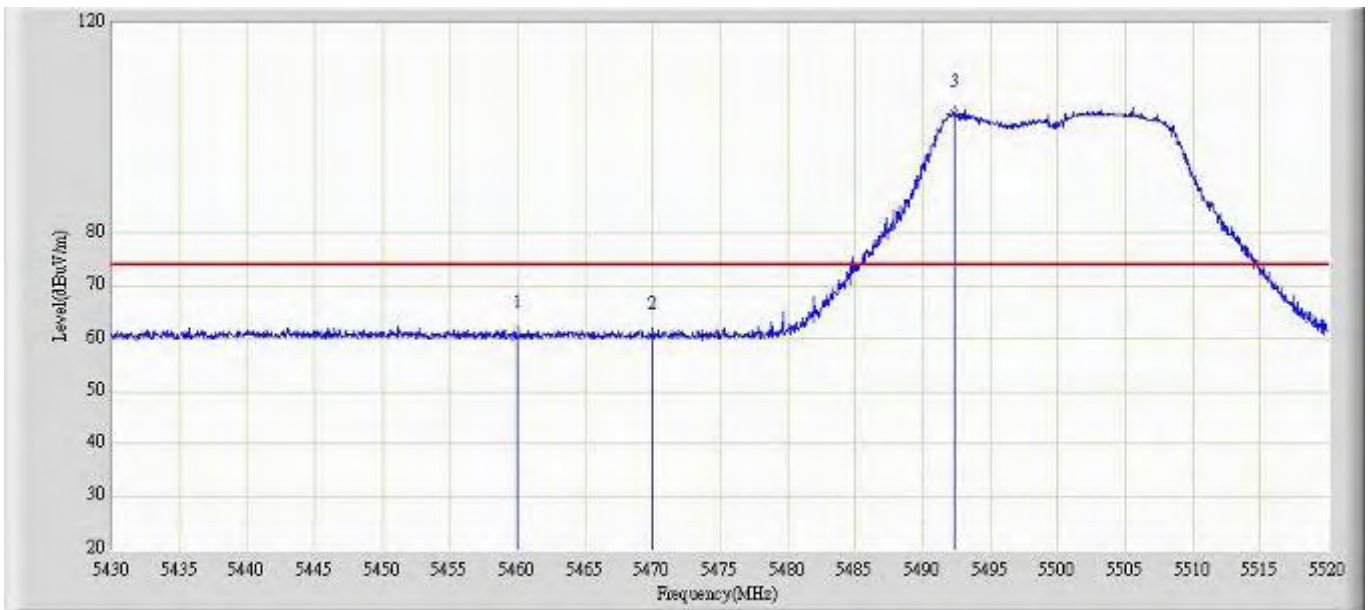


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.709	70.979	-13.291	74.000	-10.269	PK
2		5470.000	60.471	70.776	-27.829	88.300	-10.305	PK
3	*	5492.370	102.636	112.923	N/A	N/A	-10.287	PK

Profile: 11BS004R	Page No.: 612
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1	

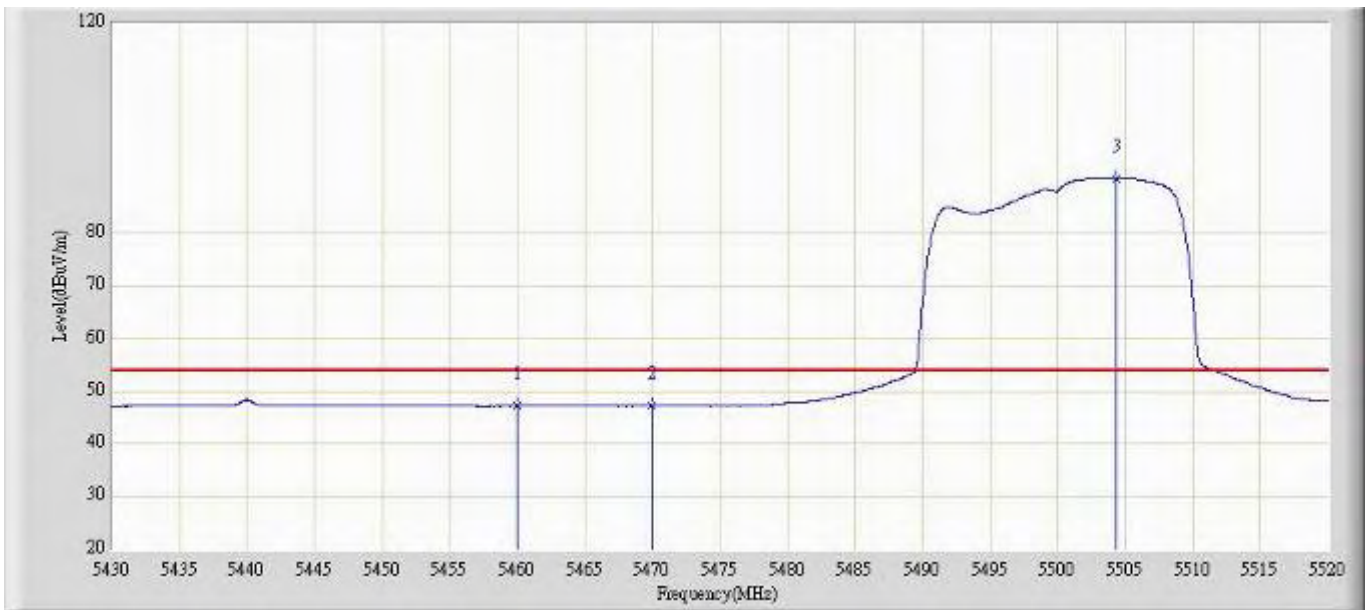


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.207	57.477	-6.793	54.000	-10.269	AV
2		5470.000	47.173	57.478	-21.127	68.300	-10.305	AV
3	*	5504.295	90.513	100.758	N/A	N/A	-10.245	AV

Profile: 11BS004R	Page No.: 613
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:41
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1	

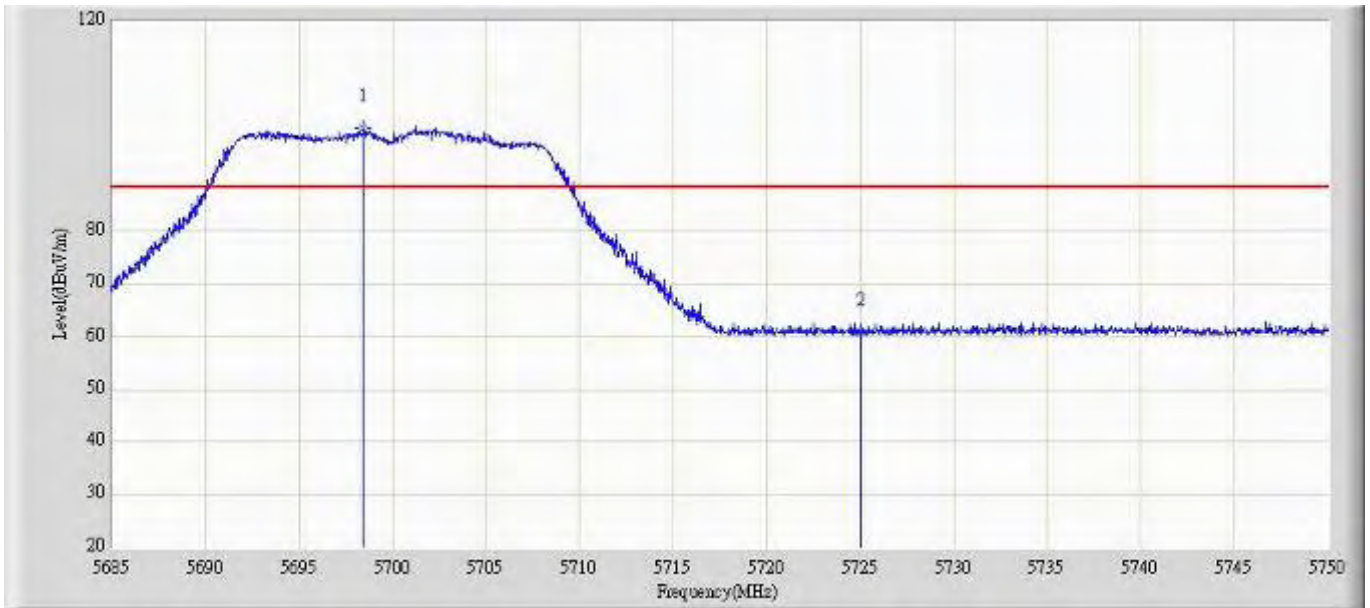


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.422	99.455	109.319	N/A	N/A	-9.864	PK
2		5725.000	60.768	70.542	-27.532	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 614
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:43
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1	

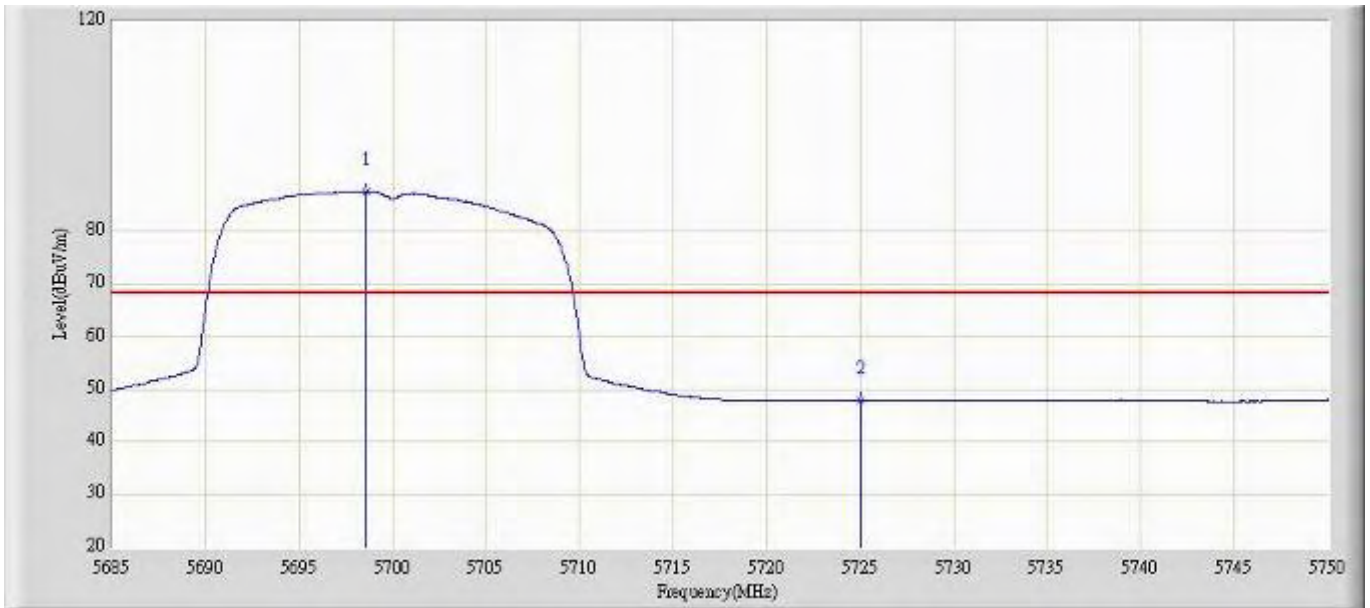


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.618	87.617	97.481	N/A	N/A	-9.864	AV
2		5725.000	47.874	57.648	-20.426	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 615
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:43
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1	

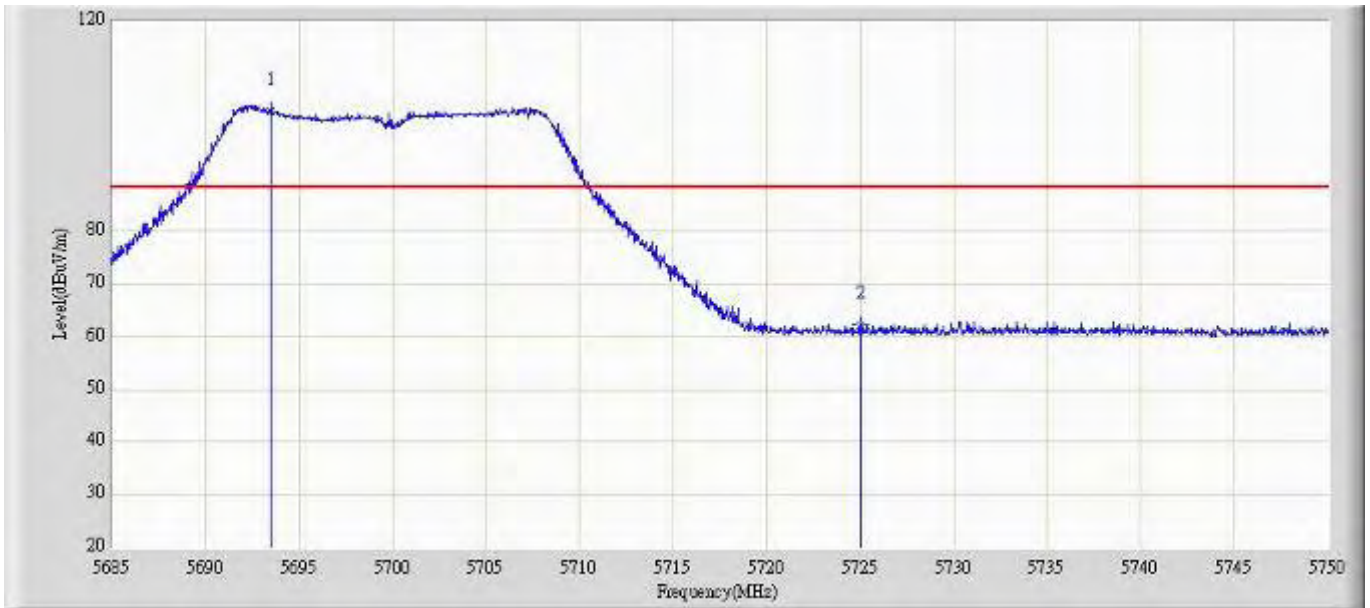


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.450	102.631	112.482	N/A	N/A	-9.850	PK
2		5725.000	62.319	72.093	-25.981	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 616
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 19:45
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1+2	

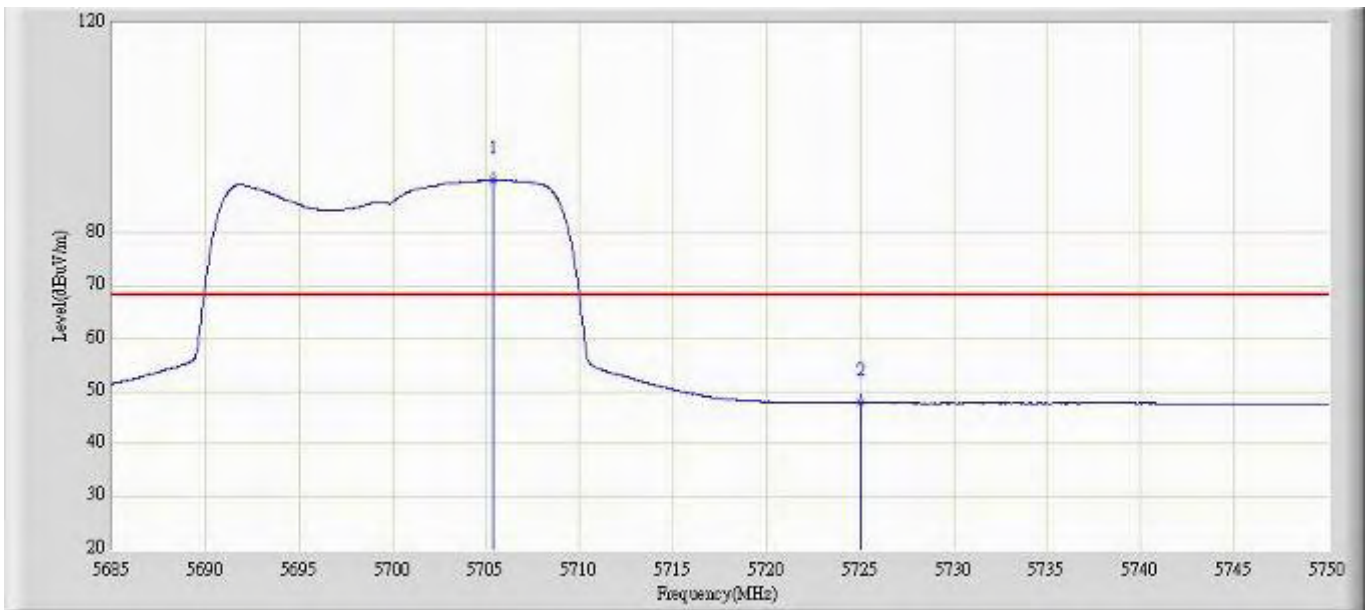


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5705.377	90.093	99.975	N/A	N/A	-9.881	AV
2		5725.000	47.812	57.586	-20.488	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 617
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1+2	

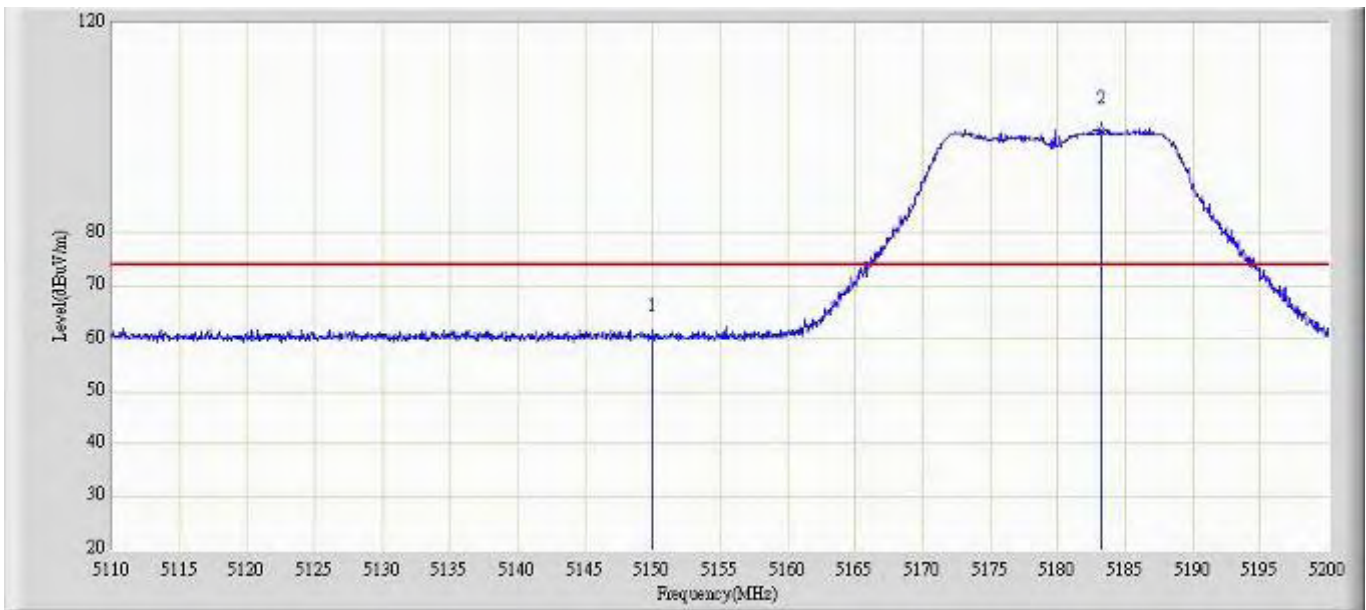


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.132	70.559	-13.868	74.000	-10.427	PK
2	*	5183.260	99.740	110.204	N/A	N/A	-10.463	PK

Profile: 11BS004R	Page No.: 618
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1+2	

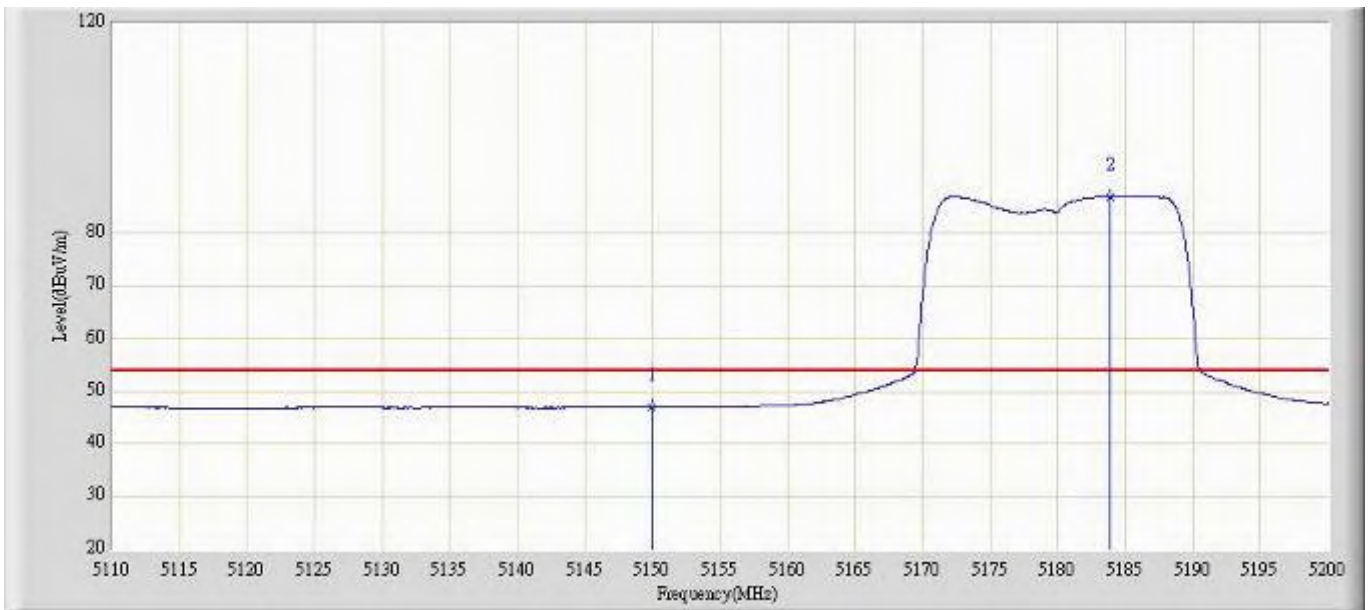


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.008	57.435	-6.992	54.000	-10.427	AV
2	*	5183.845	87.017	97.483	N/A	N/A	-10.466	AV

Profile: 11BS004R	Page No.: 619
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1+2	

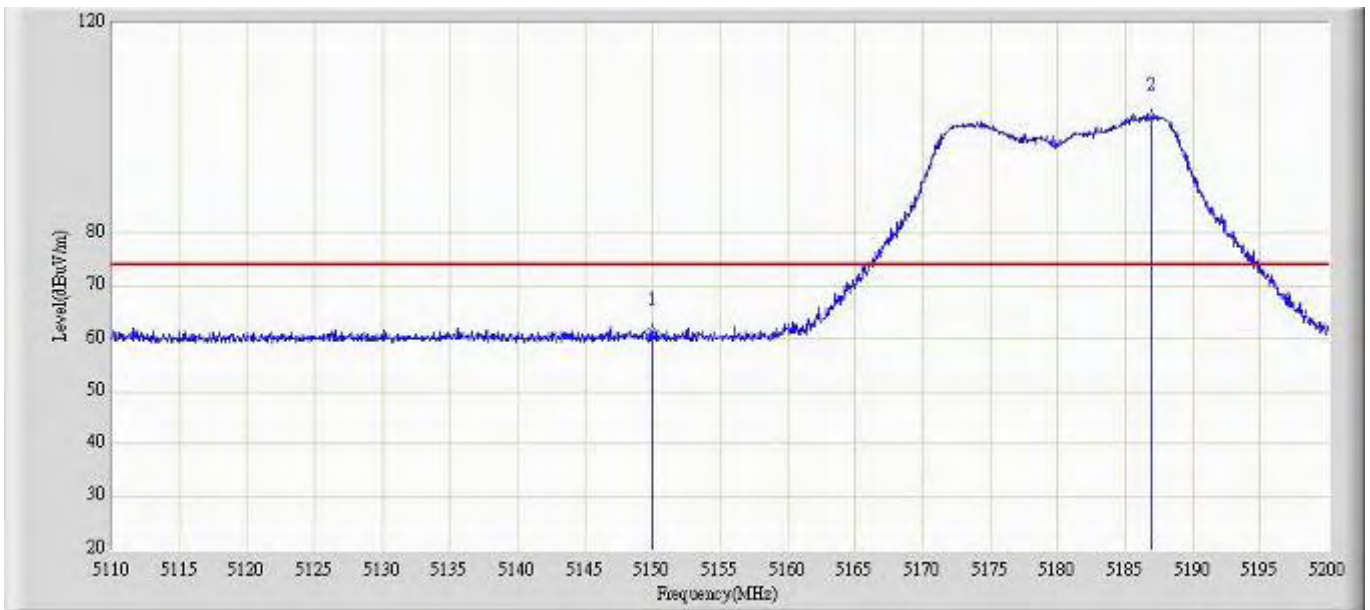


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	61.285	71.712	-12.715	74.000	-10.427	PK
2	*	5186.860	102.162	112.641	N/A	N/A	-10.480	PK

Profile: 11BS004R	Page No.: 620
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11n20(MHz) Chain 0+1+2	

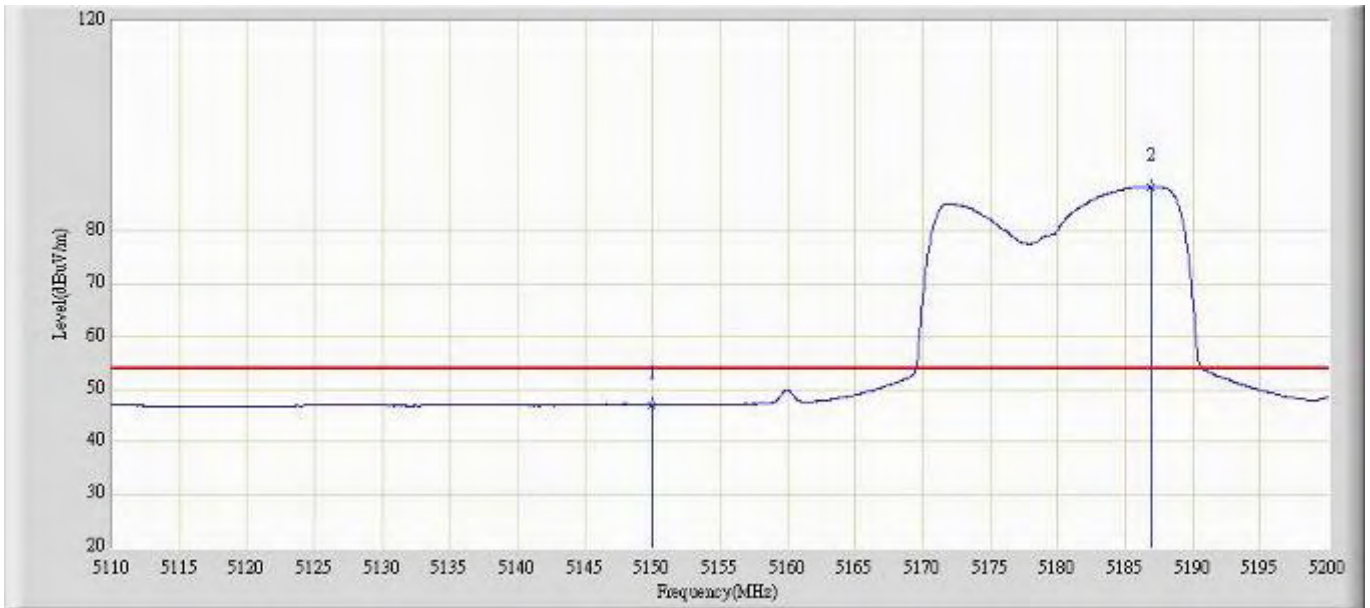


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.078	57.505	-6.922	54.000	-10.427	AV
2	*	5186.950	88.532	99.012	N/A	N/A	-10.480	AV

Profile: 11BS004R	Page No.: 621
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1+2	

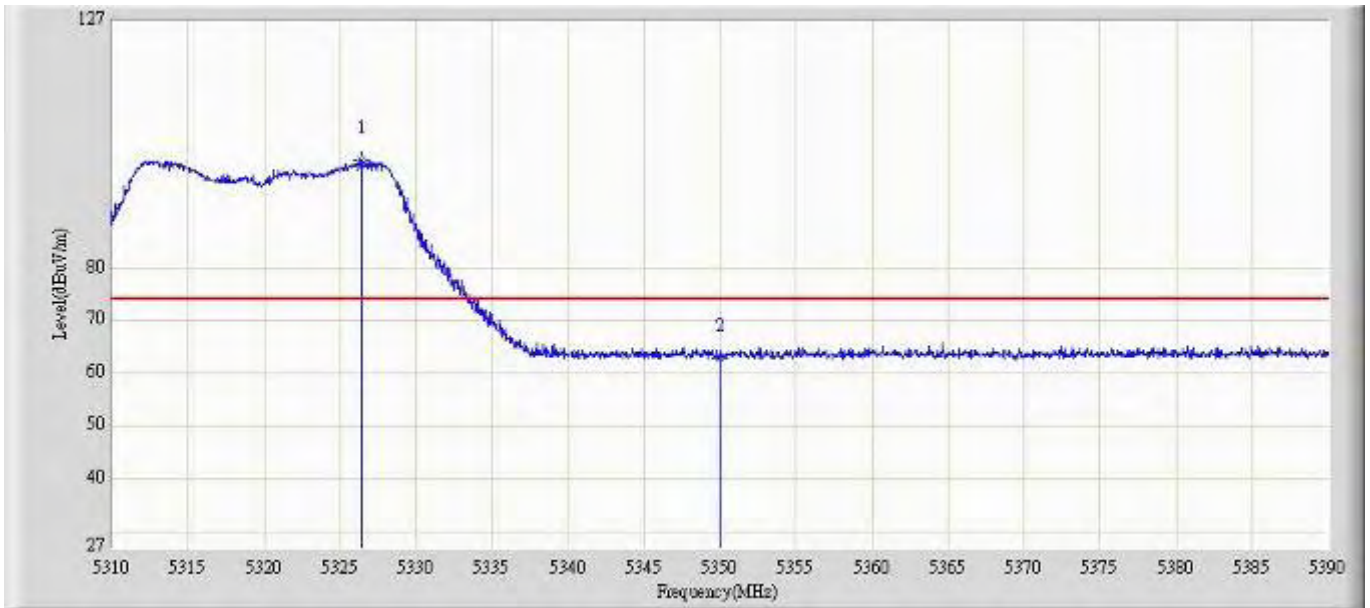


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5326.400	100.583	111.057	N/A	N/A	-10.474	PK
2		5350.000	62.862	73.361	-11.138	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 622
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1+2	

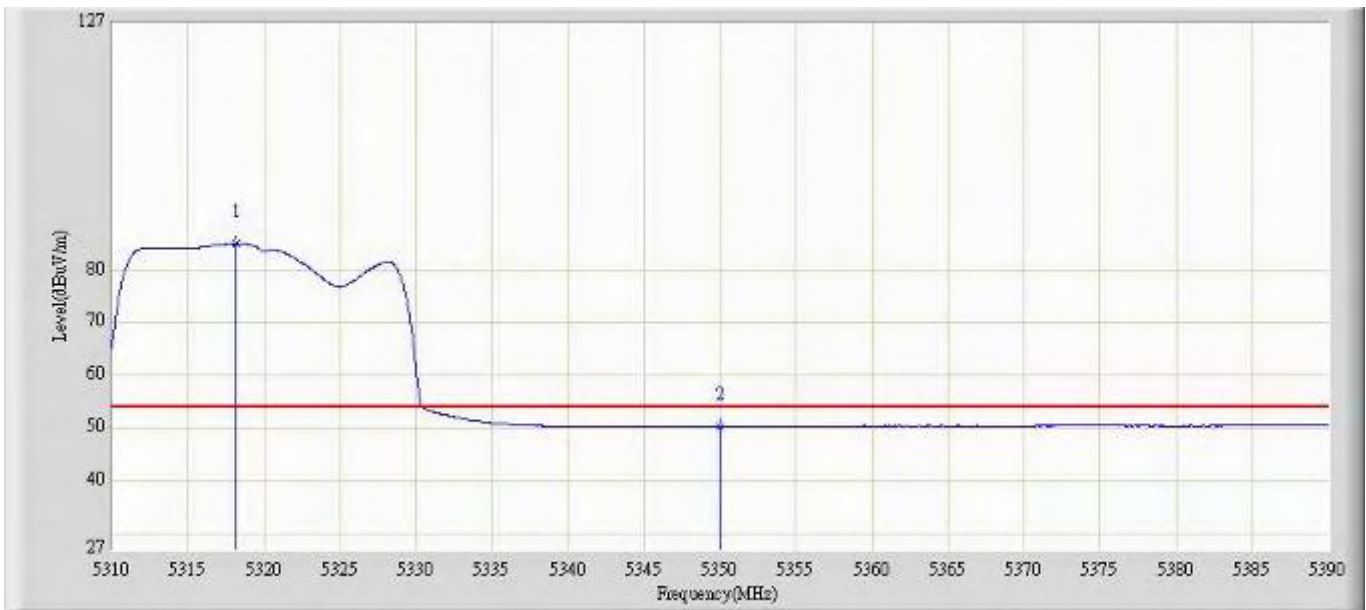


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5318.160	84.935	95.362	N/A	N/A	-10.427	AV
2		5350.000	50.298	60.797	-3.702	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 623
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1+2	

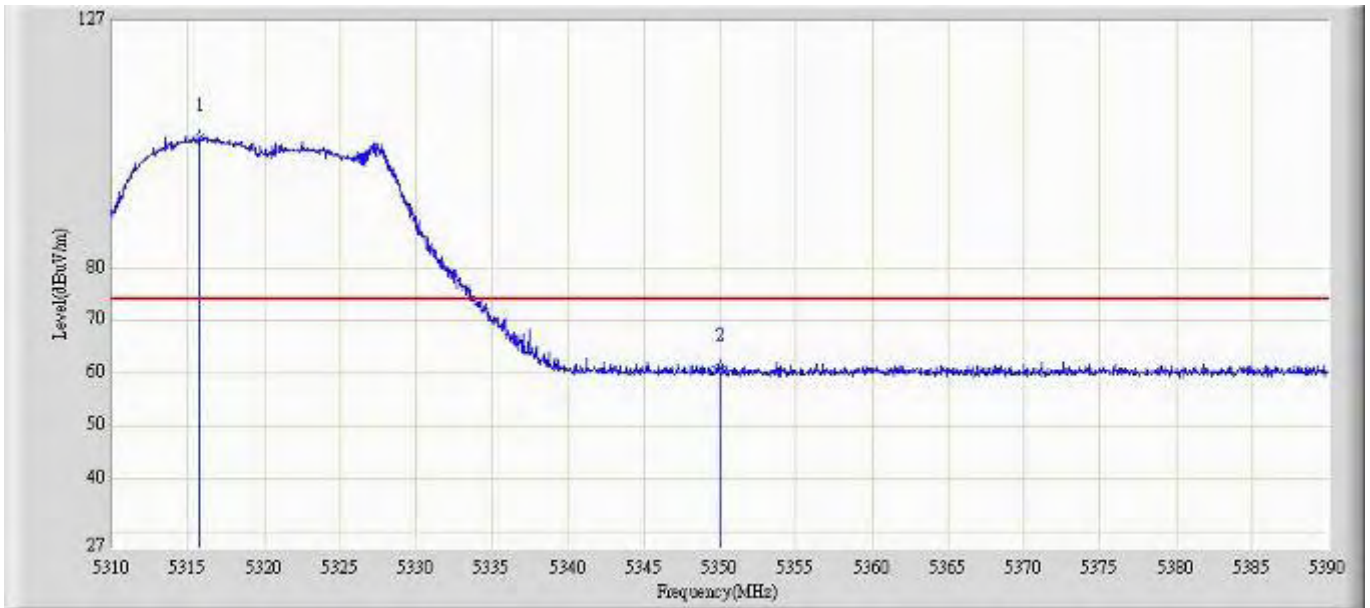


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.760	104.814	115.235	N/A	N/A	-10.421	PK
2		5350.000	61.190	71.689	-12.810	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 624
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11n20(MHz) Chain 0+1+2	

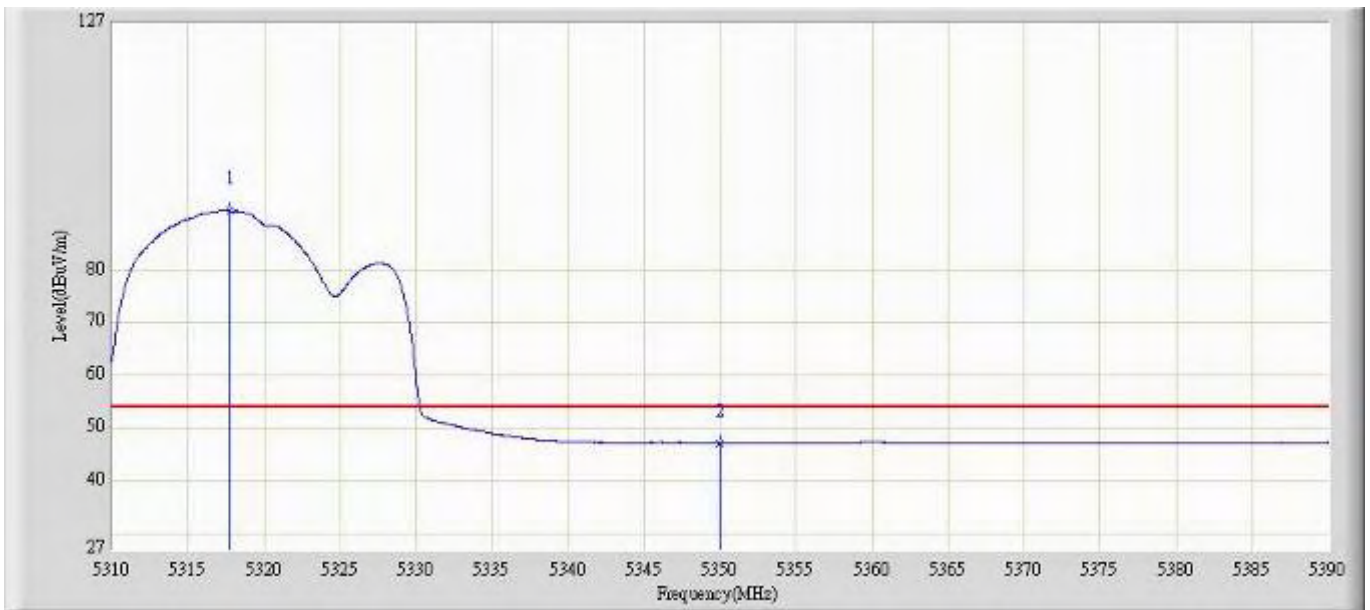


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5317.800	91.258	101.684	N/A	N/A	-10.426	AV
2		5350.000	47.158	57.657	-6.842	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 625
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1+2	

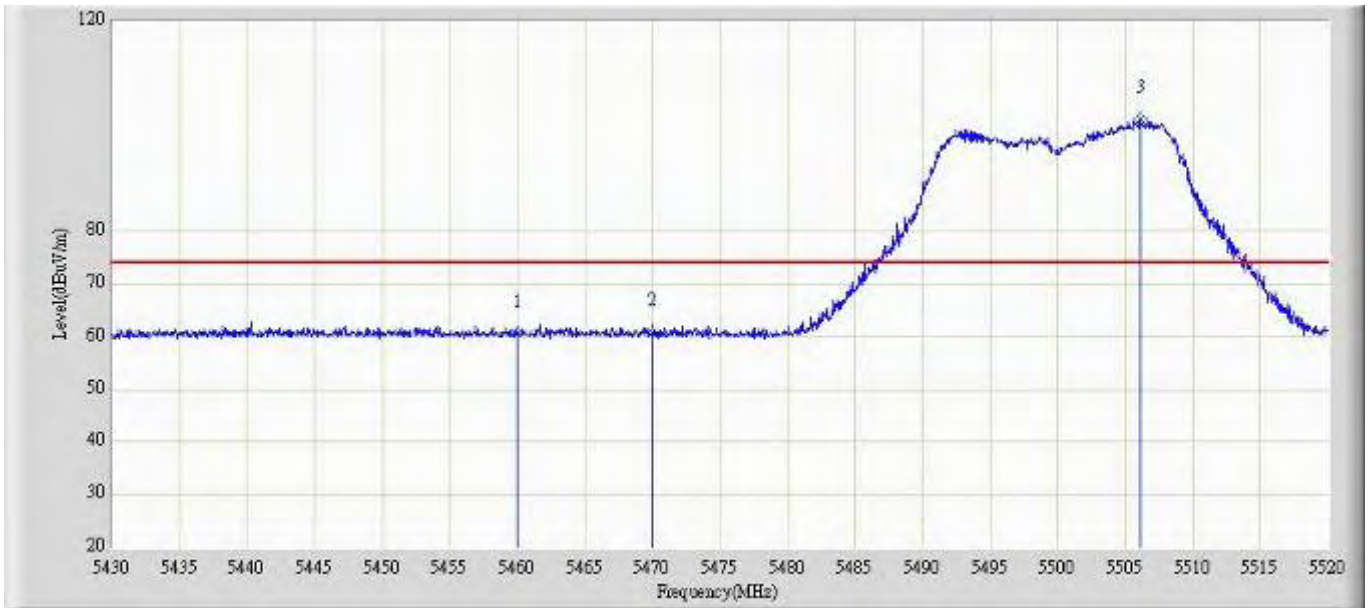


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.510	70.780	-13.490	74.000	-10.269	PK
2		5470.000	60.745	71.050	-27.555	88.300	-10.305	PK
3	*	5506.095	101.236	111.470	N/A	N/A	-10.234	PK

Profile: 11BS004R	Page No.: 626
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1+2	

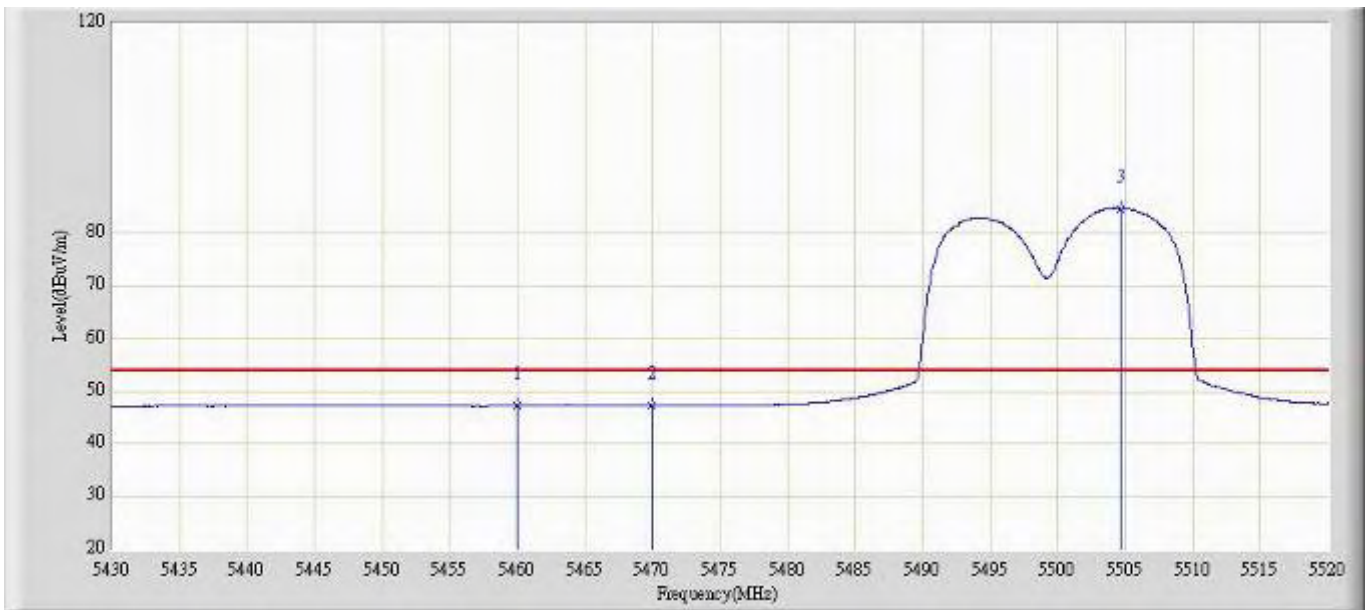


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.278	57.548	-6.722	54.000	-10.269	AV
2		5470.000	47.244	57.549	-21.056	68.300	-10.305	AV
3	*	5504.610	84.775	95.019	N/A	N/A	-10.244	AV

Profile: 11BS004R	Page No.: 627
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1+2	

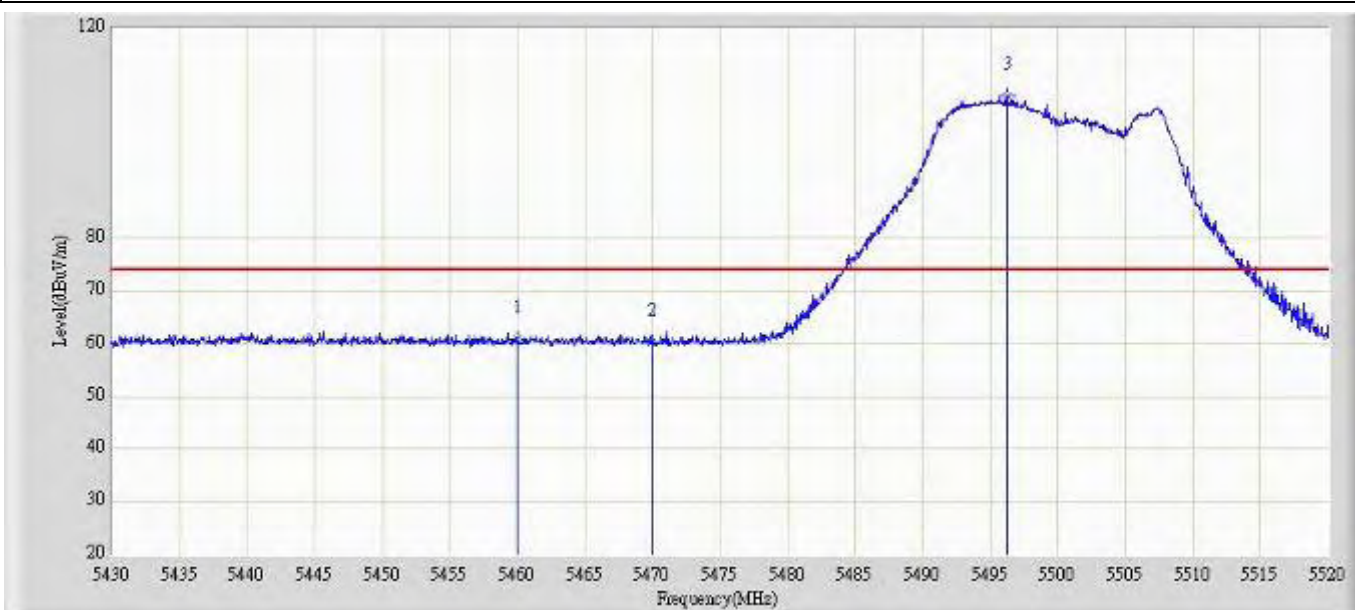


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.870	71.140	-13.130	74.000	-10.269	PK
2		5470.000	60.366	70.671	-27.934	88.300	-10.305	PK
3	*	5496.240	106.990	117.263	N/A	N/A	-10.273	PK

Profile: 11BS004R	Page No.: 628
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11n20(MHz) Chain 0+1+2	

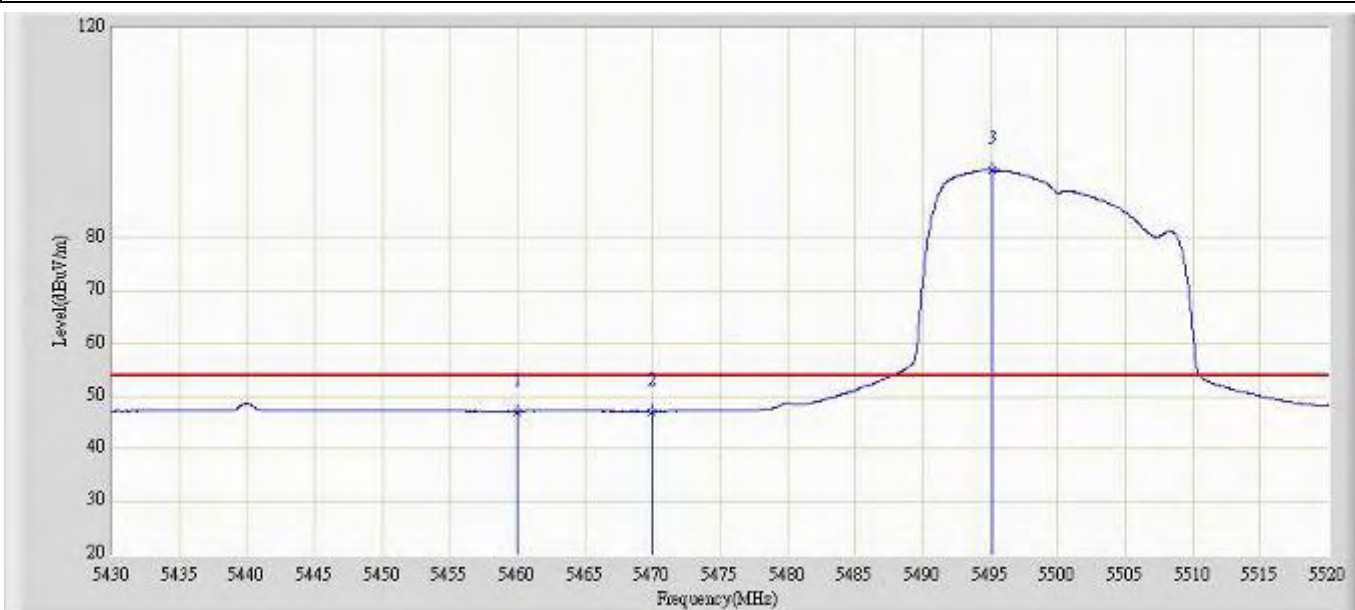


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.148	57.418	-6.852	54.000	-10.269	AV
2		5470.000	47.139	57.444	-21.161	68.300	-10.305	AV
3	*	5495.160	92.937	103.214	N/A	N/A	-10.278	AV

Profile: 11BS004R	Page No.: 629
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:27
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1+2	

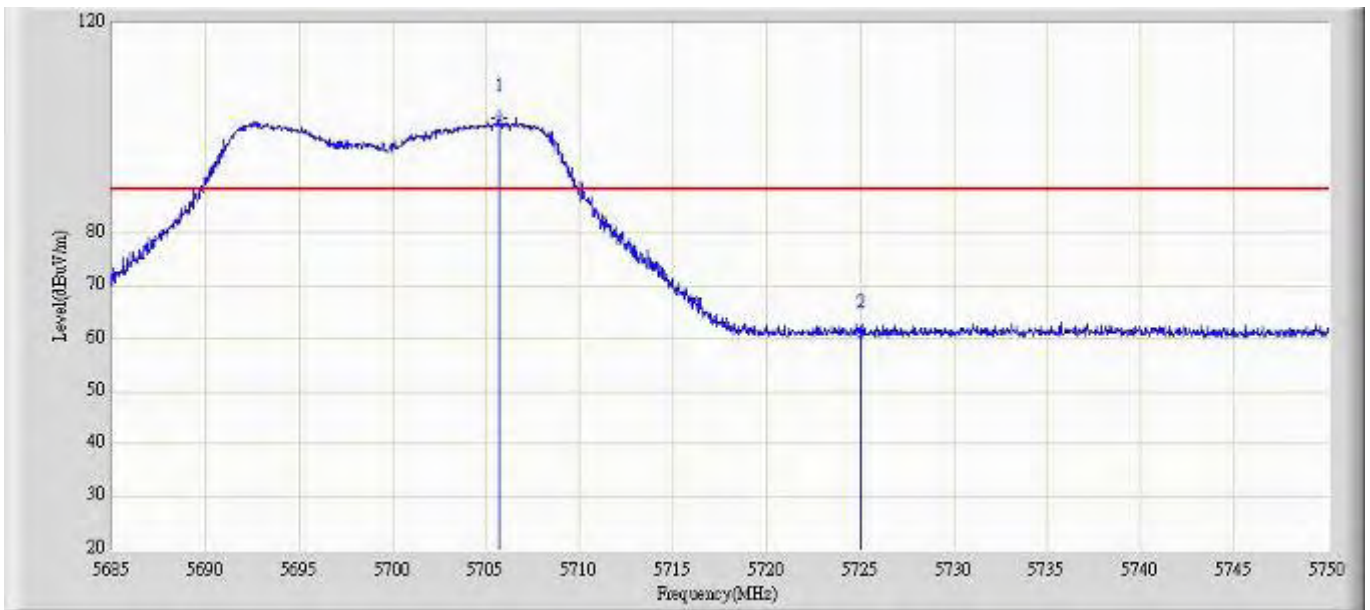


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5705.670	102.012	111.895	N/A	N/A	-9.882	PK
2		5725.000	60.941	70.715	-27.359	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 630
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:29
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1+2	

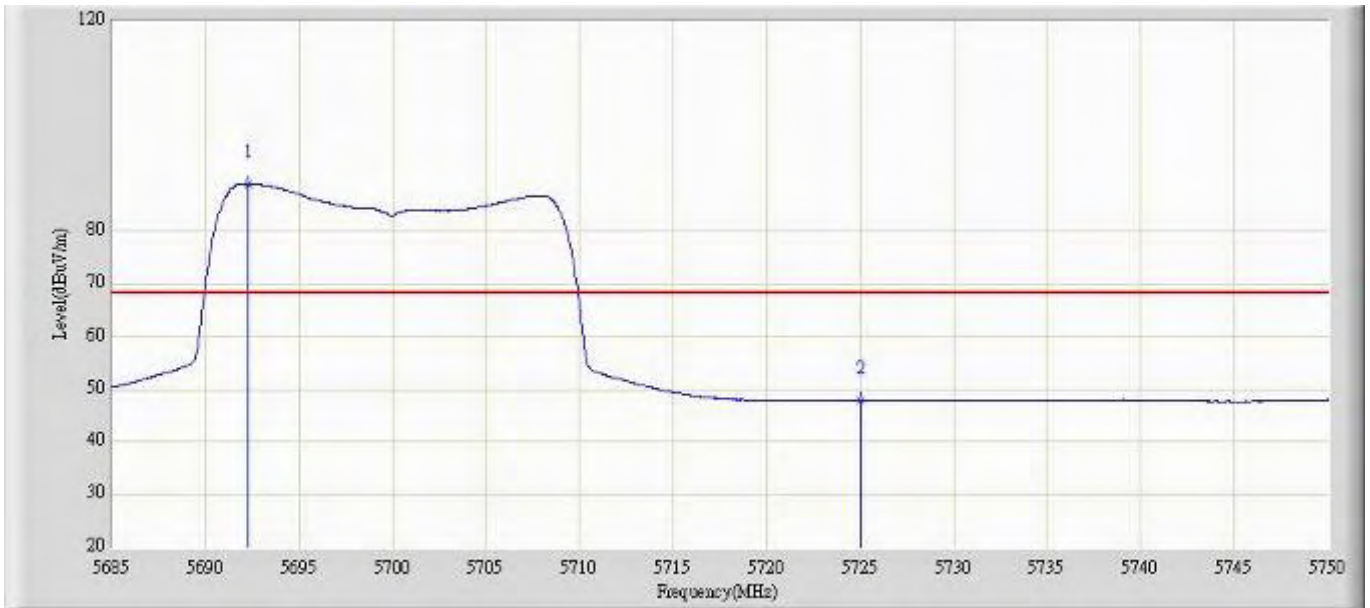


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.312	89.101	98.949	N/A	N/A	-9.847	AV
2		5725.000	47.875	57.649	-20.425	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 631
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:30
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1+2	

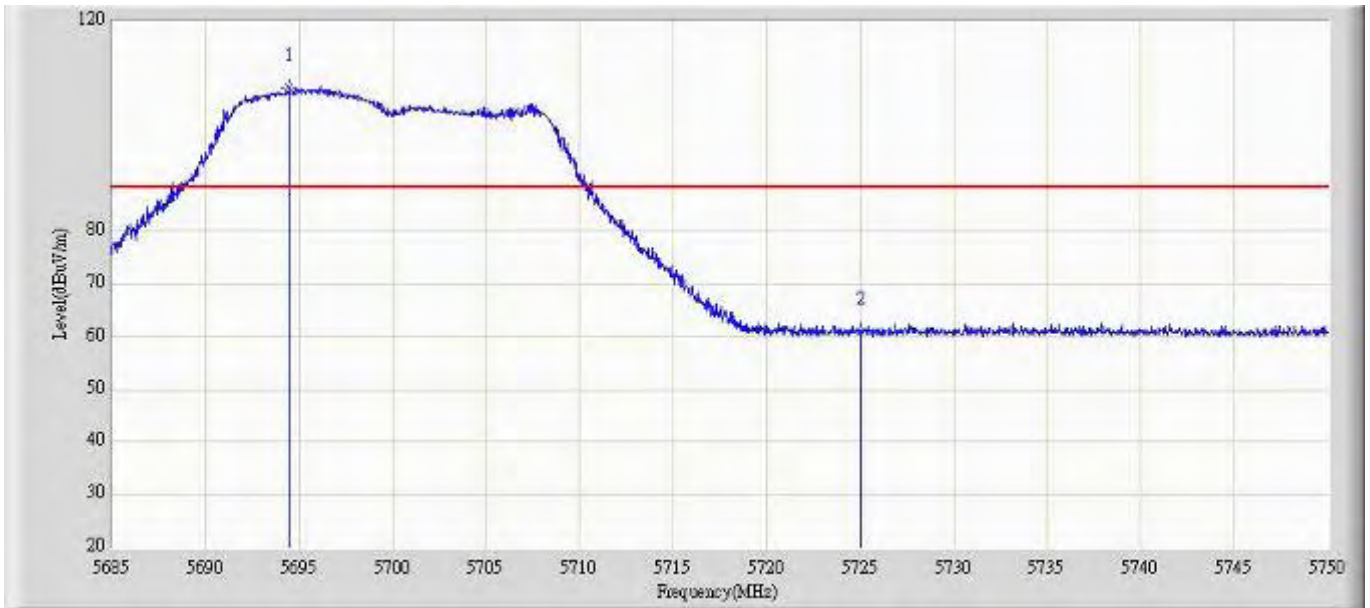


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.458	107.384	117.237	N/A	N/A	-9.853	PK
2		5725.000	60.964	70.738	-27.336	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 632
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:32
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11n20(MHz) Chain 0+1+2	

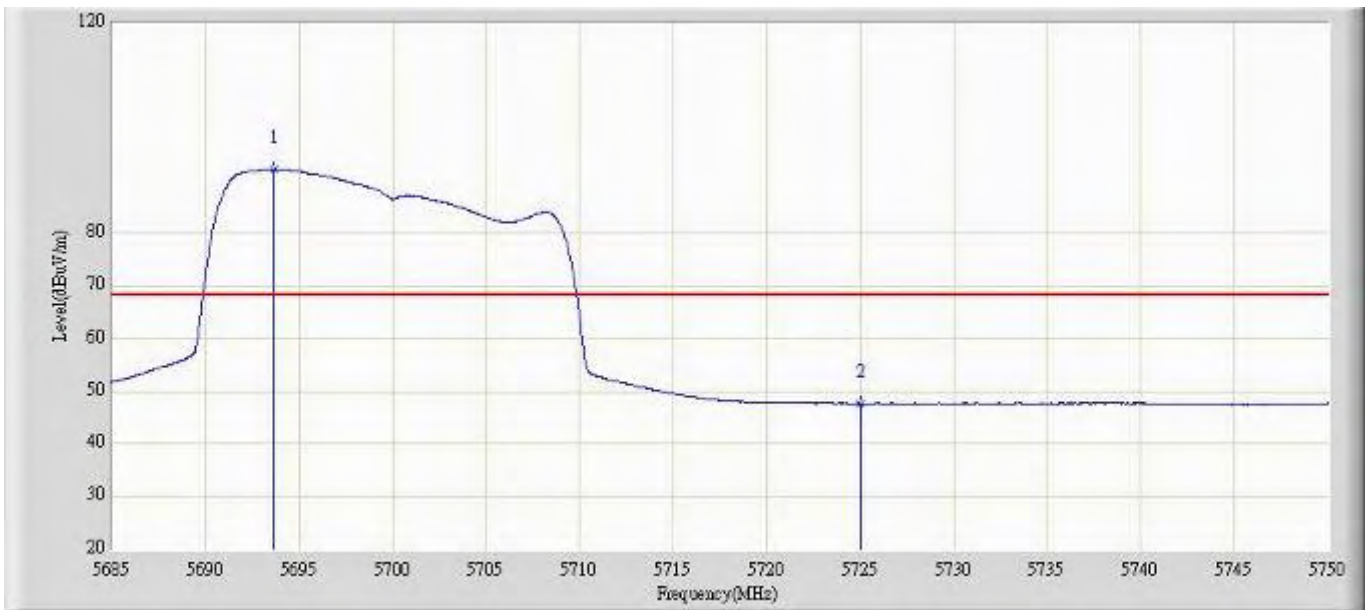


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.645	92.094	101.945	N/A	N/A	-9.851	AV
2		5725.000	47.694	57.468	-20.606	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 633
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0	

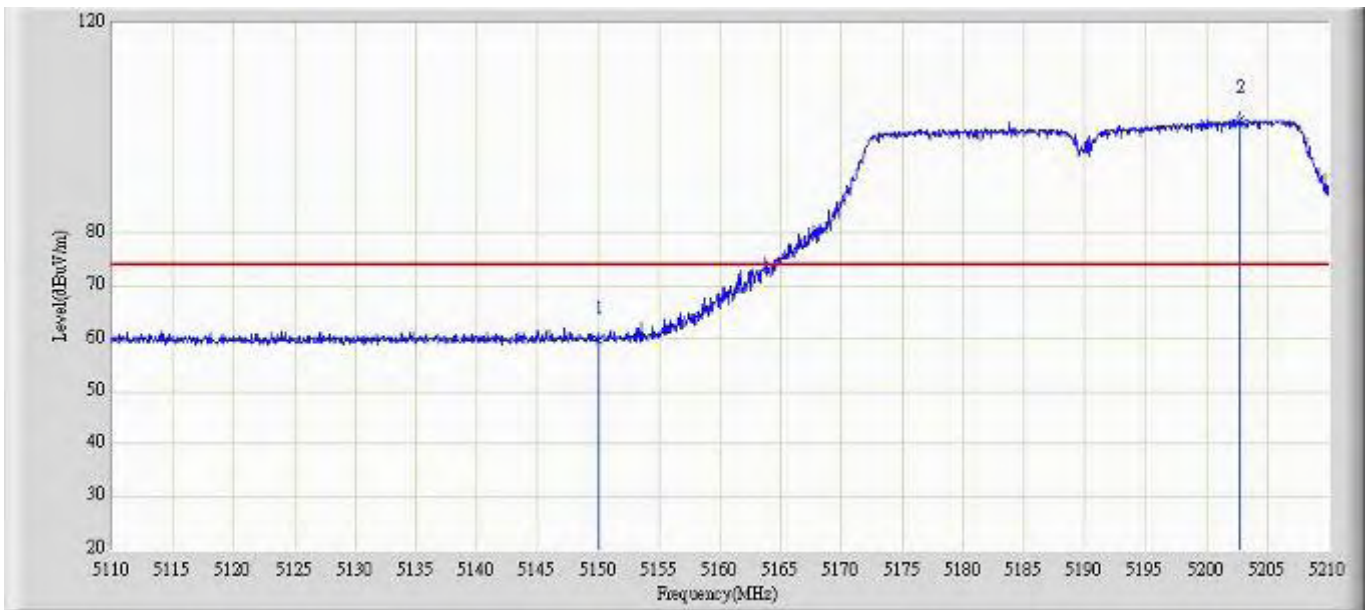


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.722	70.149	-14.278	74.000	-10.427	PK
2	*	5202.800	101.638	112.152	N/A	N/A	-10.514	PK

Profile: 11BS004R	Page No.: 634
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0	

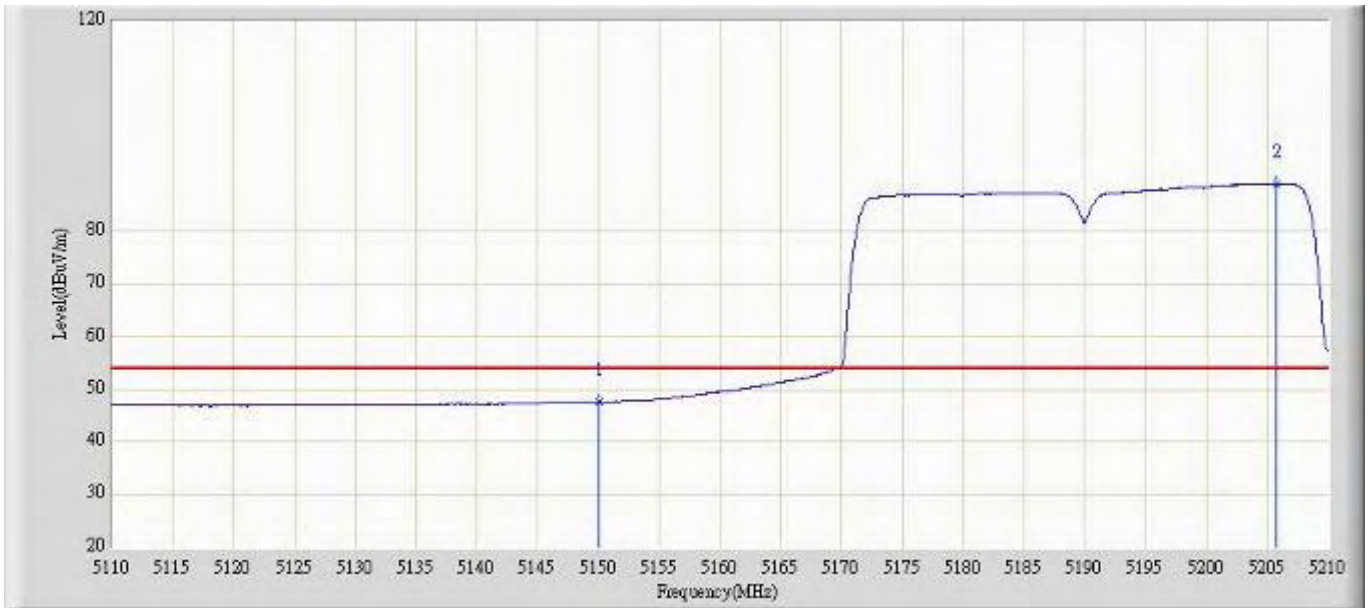


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.631	58.058	-6.369	54.000	-10.427	AV
2	*	5205.750	88.993	99.492	N/A	N/A	-10.499	AV

Profile: 11BS004R	Page No.: 635
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0	

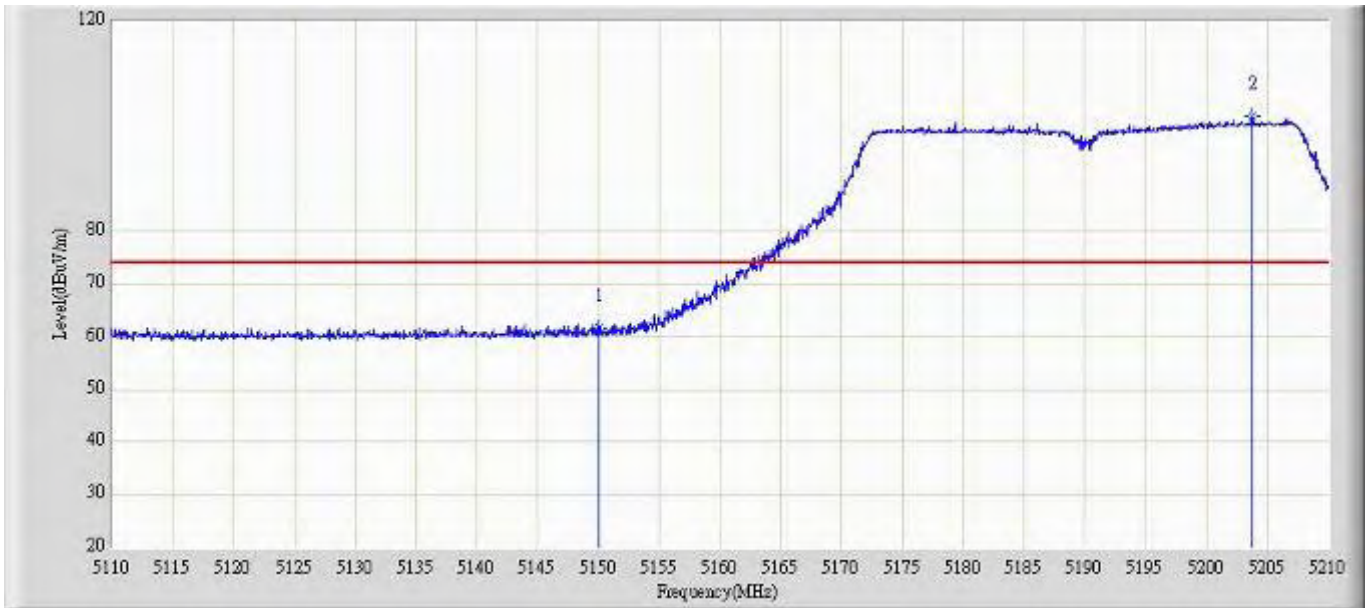


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	61.523	71.950	-12.477	74.000	-10.427	PK
2	*	5203.800	101.951	112.460	N/A	N/A	-10.509	PK

Profile: 11BS004R	Page No.: 636
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0	

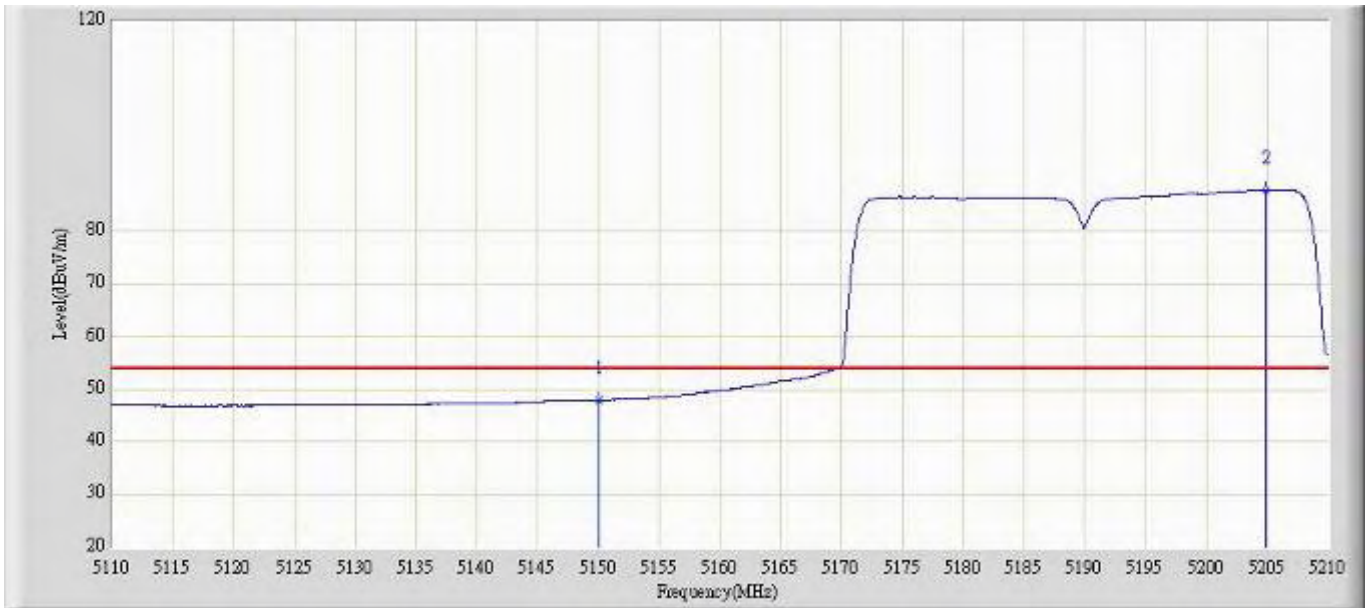


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.959	58.386	-6.041	54.000	-10.427	AV
2	*	5204.950	87.688	98.191	N/A	N/A	-10.503	AV

Profile: 11BS004R	Page No.: 637
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0	

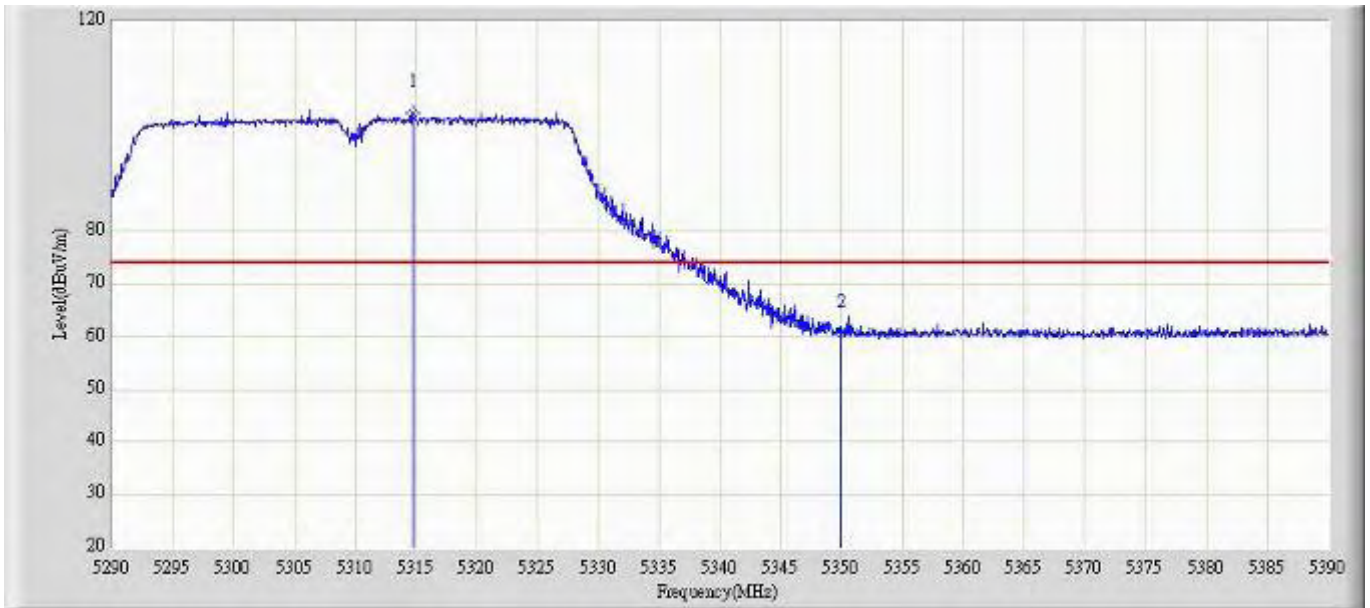


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5314.700	102.353	112.772	N/A	N/A	-10.418	PK
2		5350.000	60.518	71.017	-13.482	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 638
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0	

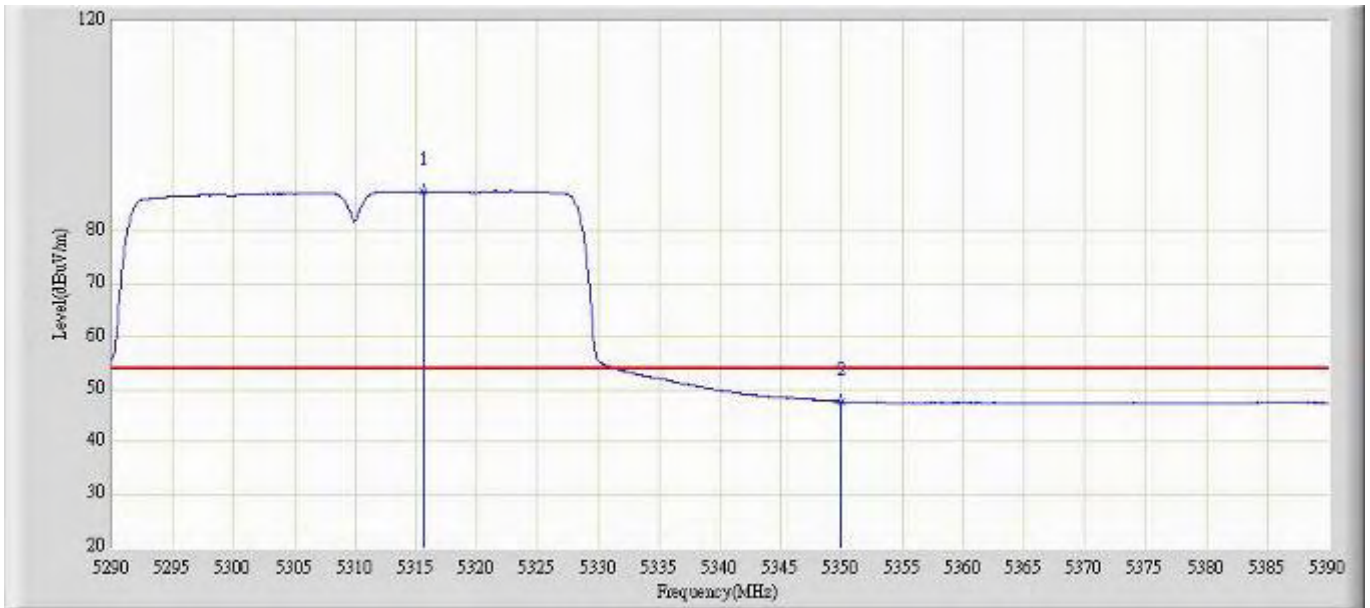


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.600	87.516	97.937	N/A	N/A	-10.420	AV
2		5350.000	47.687	58.186	-6.313	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 639
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0	

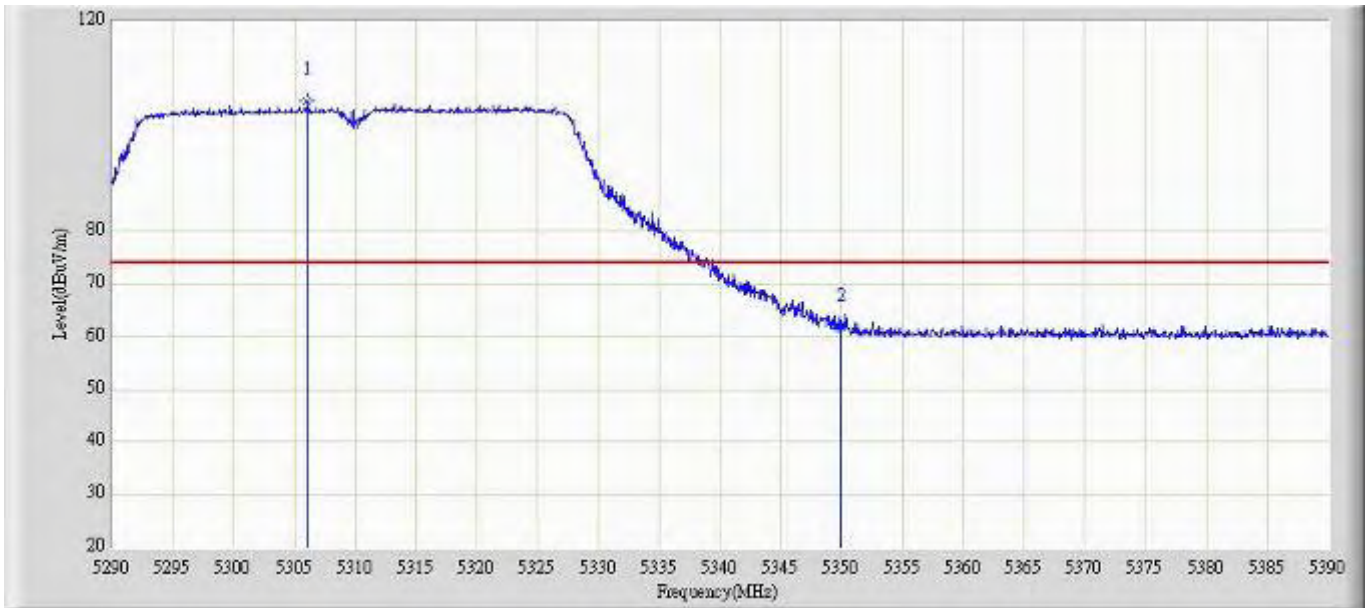


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5306.100	104.672	115.070	N/A	N/A	-10.398	PK
2		5350.000	61.580	72.079	-12.420	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 640
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0	

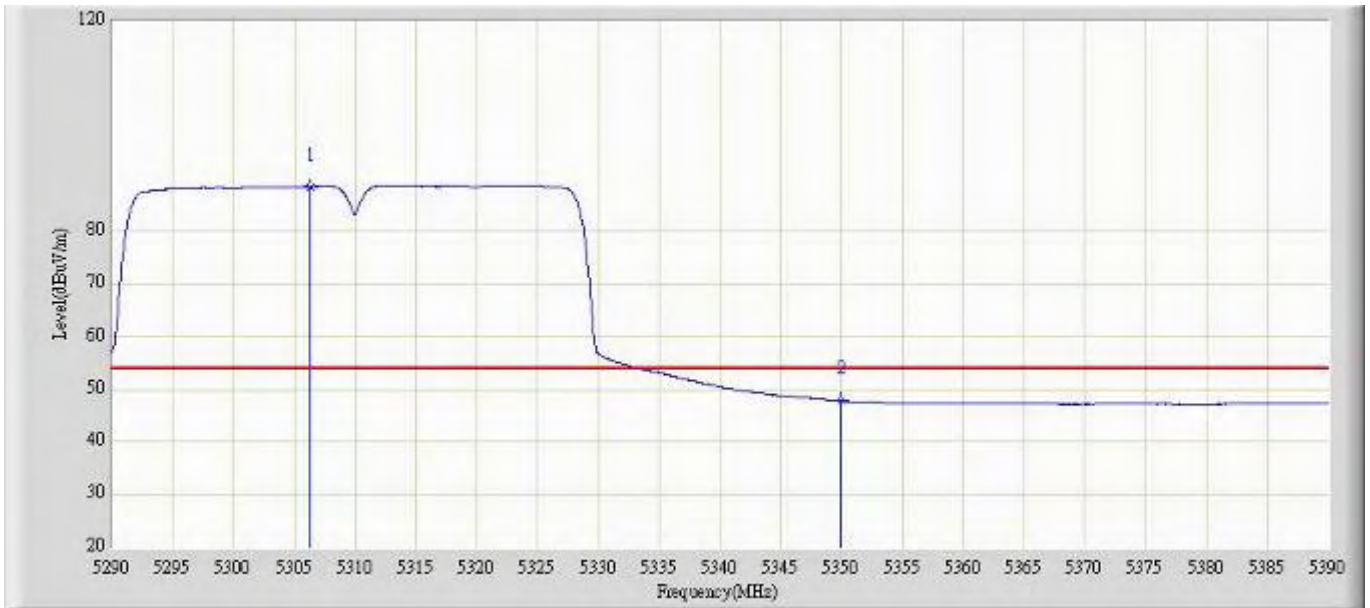


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5306.300	88.482	98.881	N/A	N/A	-10.399	AV
2		5350.000	47.768	58.267	-6.232	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 641
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0	

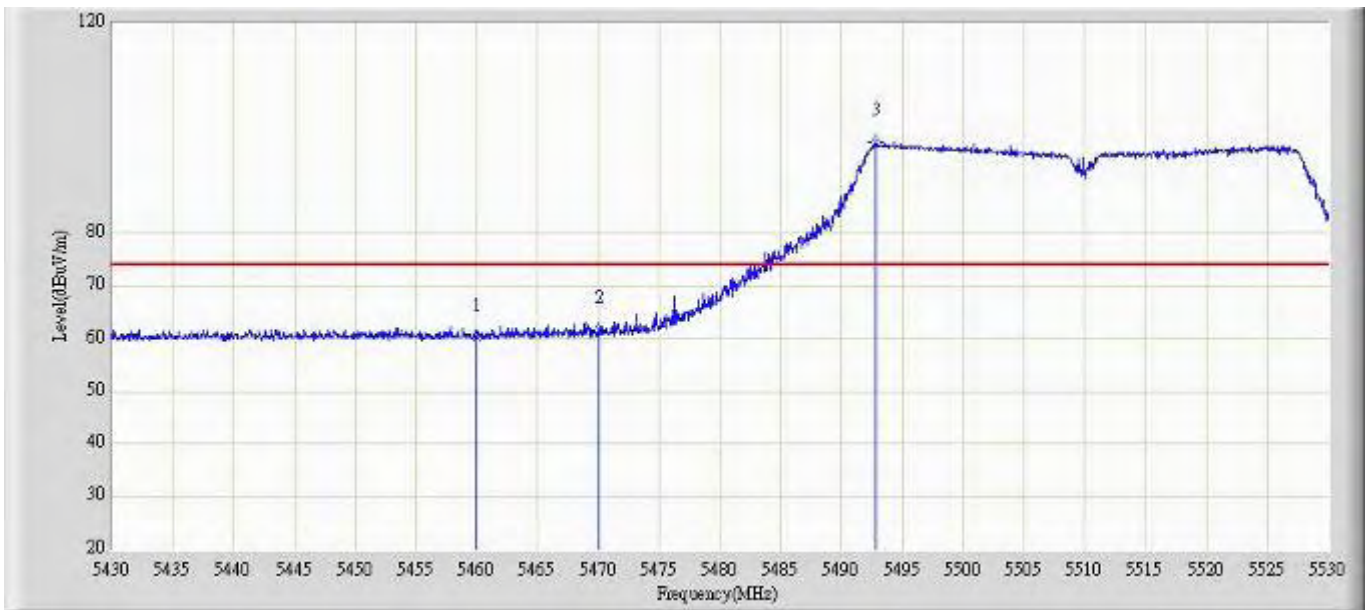


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.255	70.525	-13.745	74.000	-10.269	PK
2		5470.000	61.600	71.905	-26.700	88.300	-10.305	PK
3	*	5492.800	97.336	107.621	N/A	N/A	-10.285	PK

Profile: 11BS004R	Page No.: 642
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0	

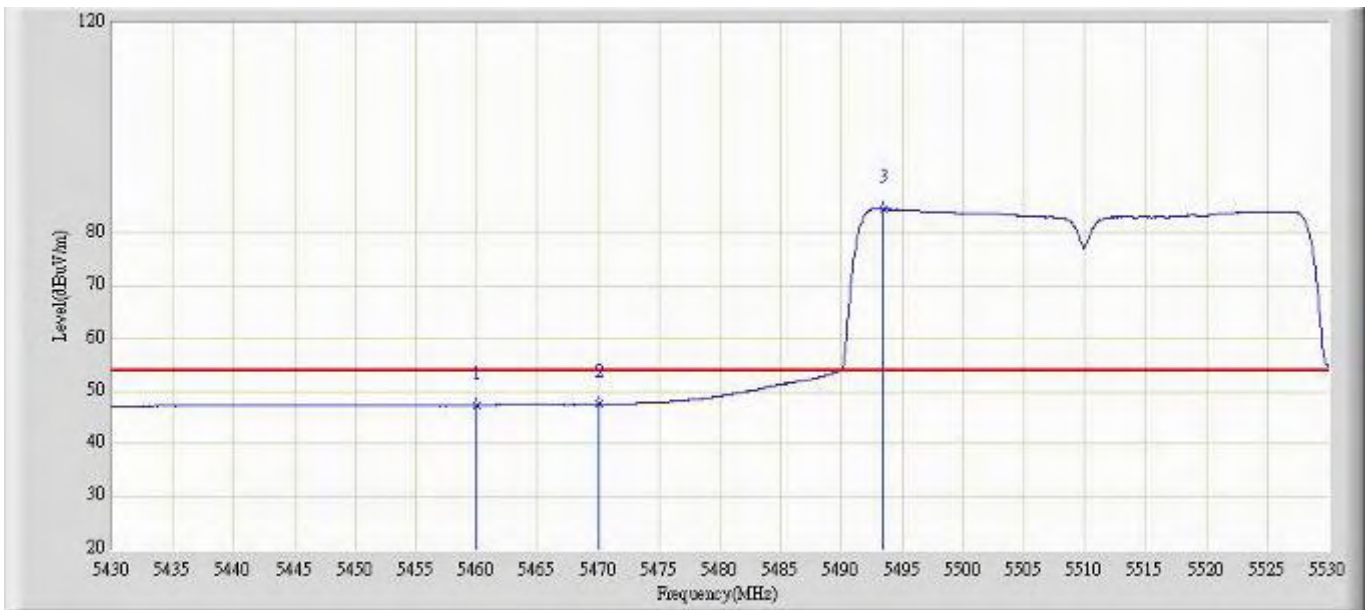


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.311	57.581	-6.689	54.000	-10.269	AV
2		5470.000	47.492	57.797	-20.808	68.300	-10.305	AV
3	*	5493.400	84.618	94.901	N/A	N/A	-10.283	AV

Profile: 11BS004R	Page No.: 643
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0	

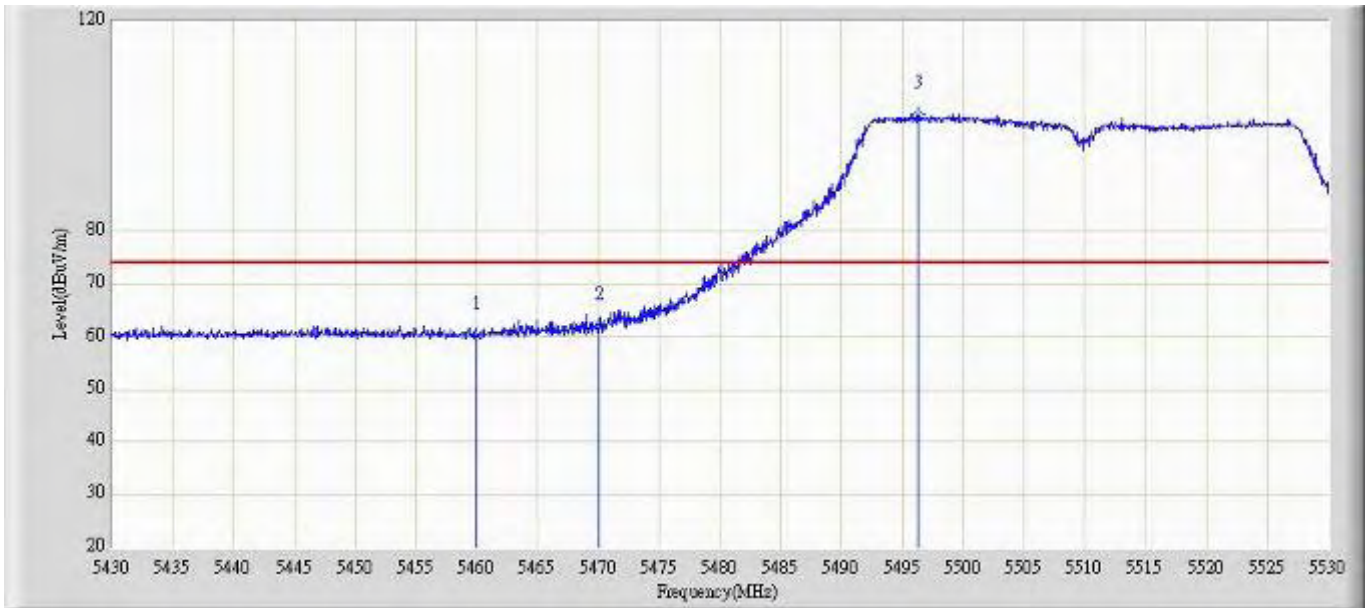


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.339	70.609	-13.661	74.000	-10.269	PK
2		5470.000	62.027	72.332	-26.273	88.300	-10.305	PK
3	*	5496.300	102.175	112.448	N/A	N/A	-10.273	PK

Profile: 11BS004R	Page No.: 644
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0	

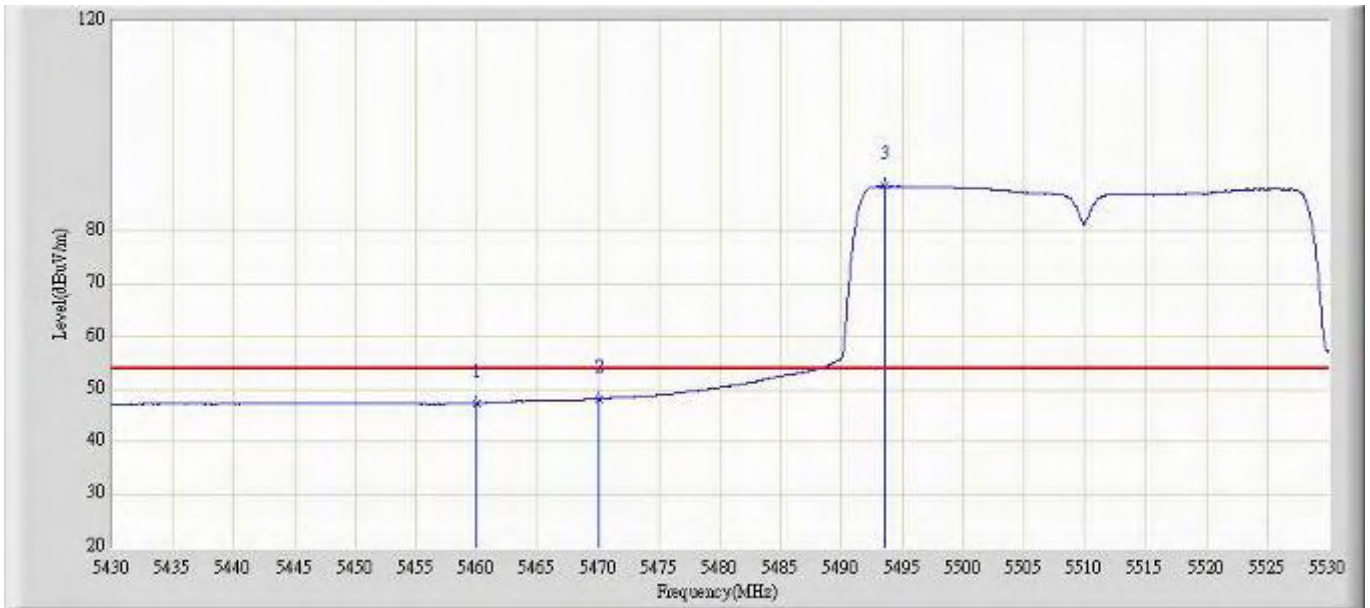


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.342	57.612	-6.658	54.000	-10.269	AV
2		5470.000	48.167	58.472	-20.133	68.300	-10.305	AV
3	*	5493.550	88.548	98.831	N/A	N/A	-10.283	AV

Profile: 11BS004R		Page No.: 943	
Engineer: Toms			
Site: AC5		Time: 2011/12/29 - 22:20	
Limit: FCC_Part15.407_RE(3m)		Margin: 0	
Probe: BBHA9120D_499(1-18GHz)		Polarity: Vertical	
EUT: Wireless LAN access Point		Power: AC 120V/60Hz	
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0			

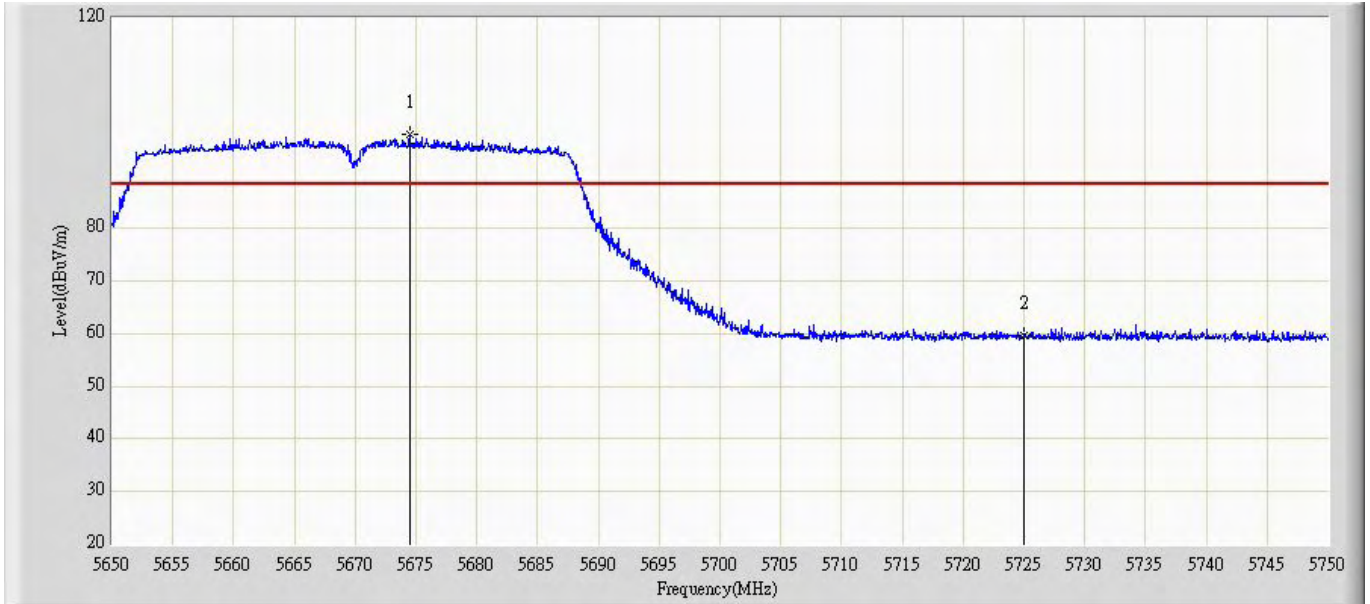


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5674.500	97.803	107.631	N/A	N/A	-9.828	PK
2			5725.000	59.689	69.463	-28.611	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 944
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:22
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0	

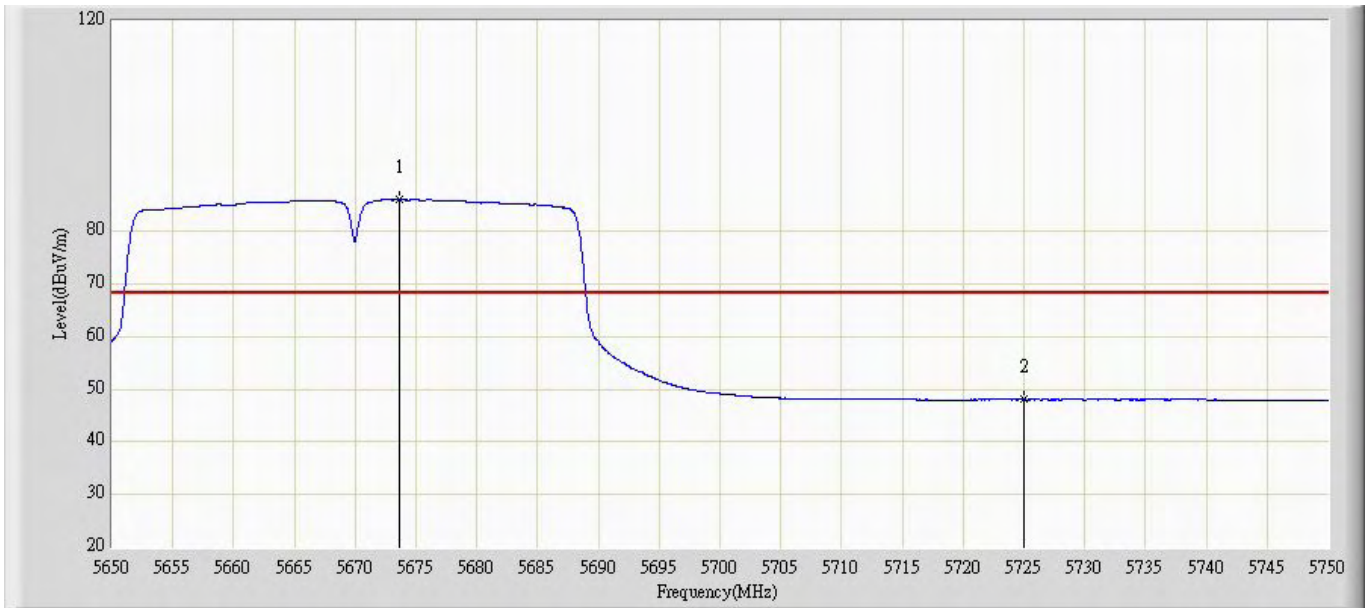


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.600	86.055	95.885	N/A	N/A	-9.829	AV
2			5725.000	48.069	57.843	-20.231	68.300	-9.774	AV

Profile: 11BS004R		Page No.: 941	
Engineer: Toms			
Site: AC5		Time: 2011/12/29 - 22:17	
Limit: FCC_Part15.407_RE(3m)		Margin: 0	
Probe: BBHA9120D_499(1-18GHz)		Polarity: Horizontal	
EUT: Wireless LAN access Point		Power: AC 120V/60Hz	
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0			

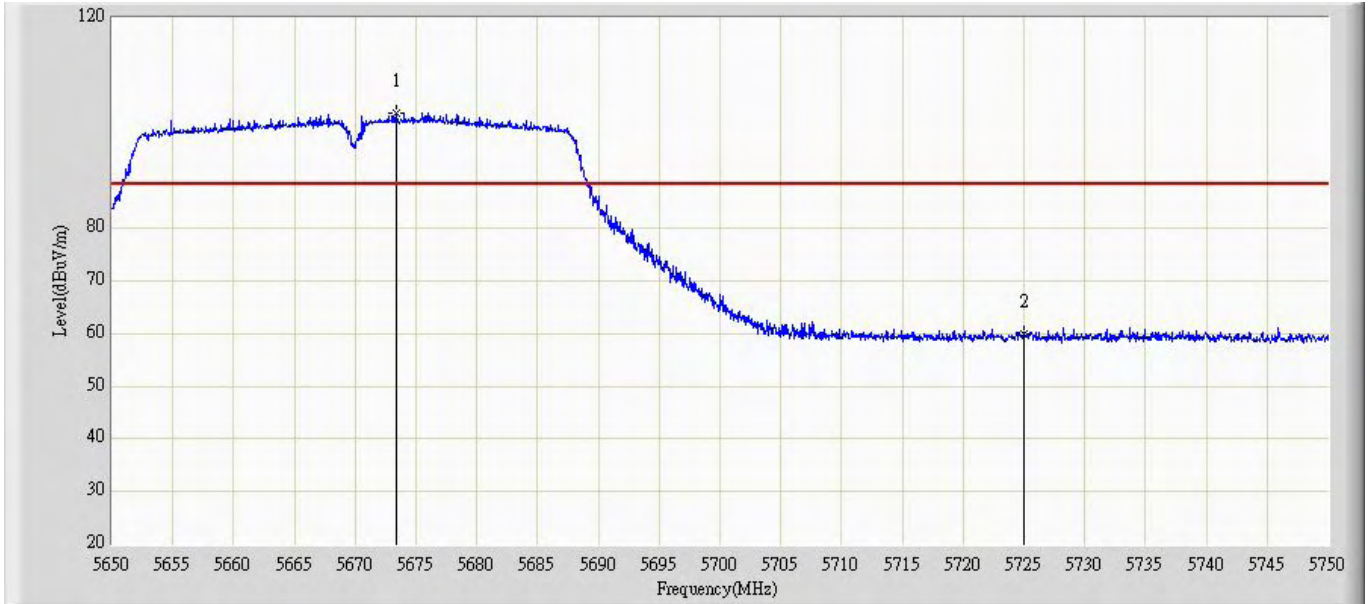


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.350	102.038	111.869	N/A	N/A	-9.831	PK
2			5725.000	60.031	69.805	-28.269	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 942
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:20
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0	

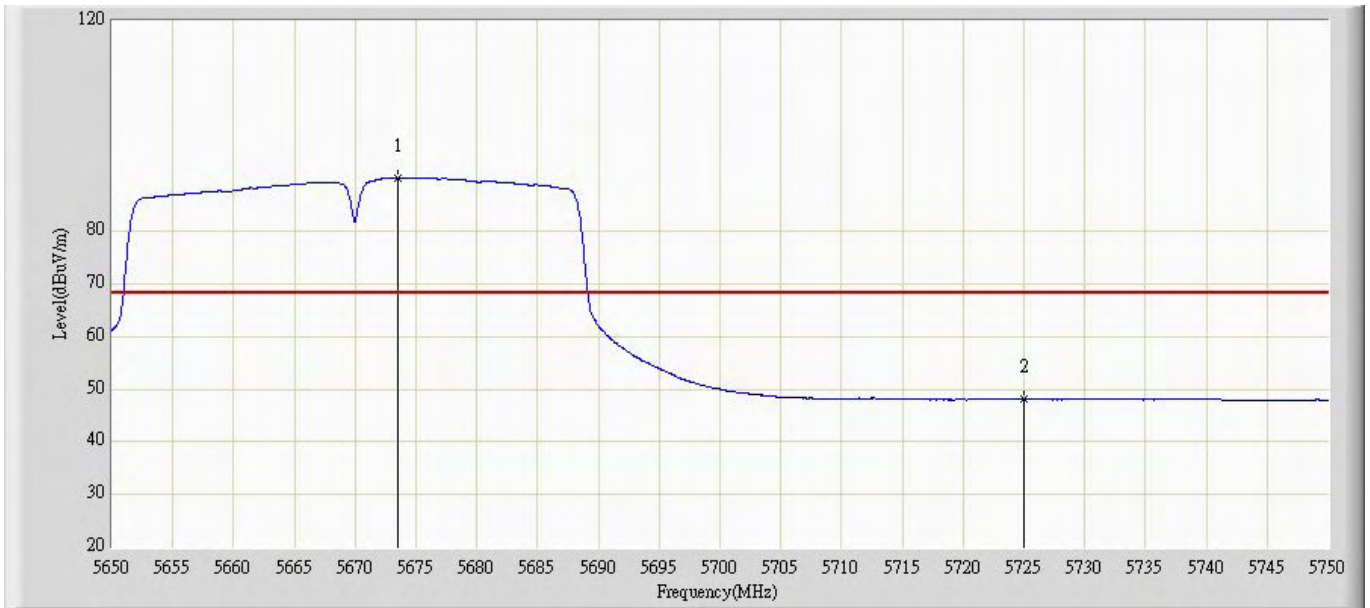


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.450	90.125	99.955	N/A	N/A	-9.830	AV
2			5725.000	48.079	57.853	-20.221	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 645
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 1	

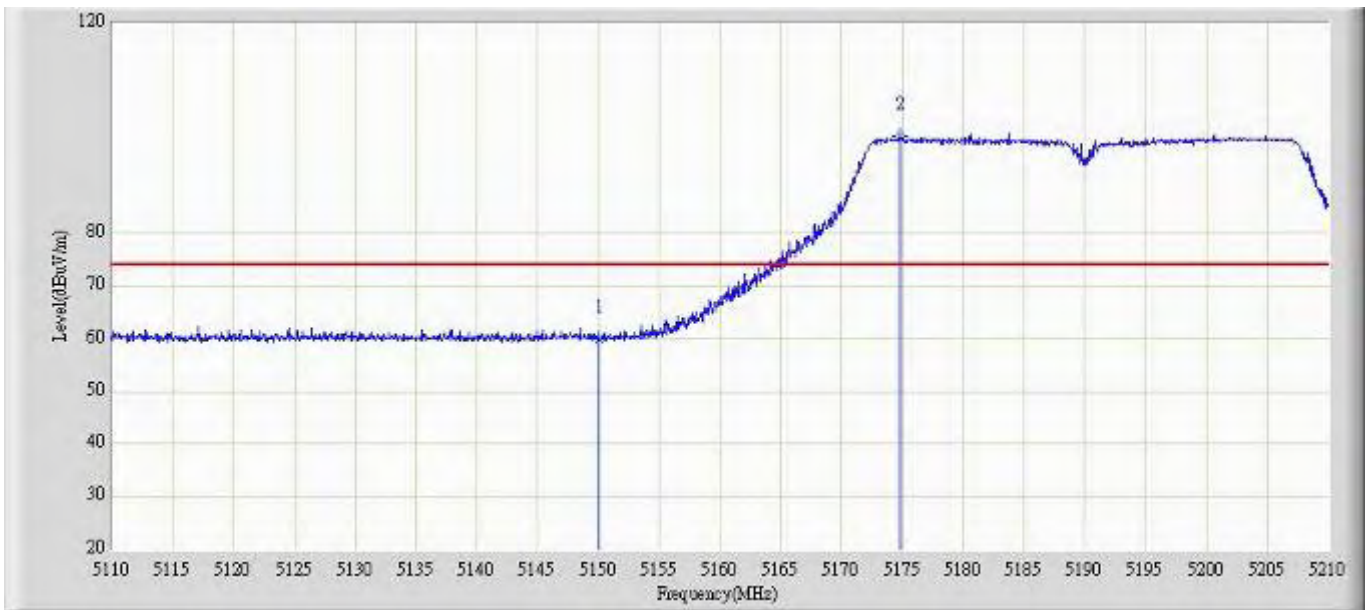


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.970	70.397	-14.030	74.000	-10.427	PK
2	*	5174.750	98.459	108.886	N/A	N/A	-10.427	PK

Profile: 11BS004R	Page No.: 646
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 1	

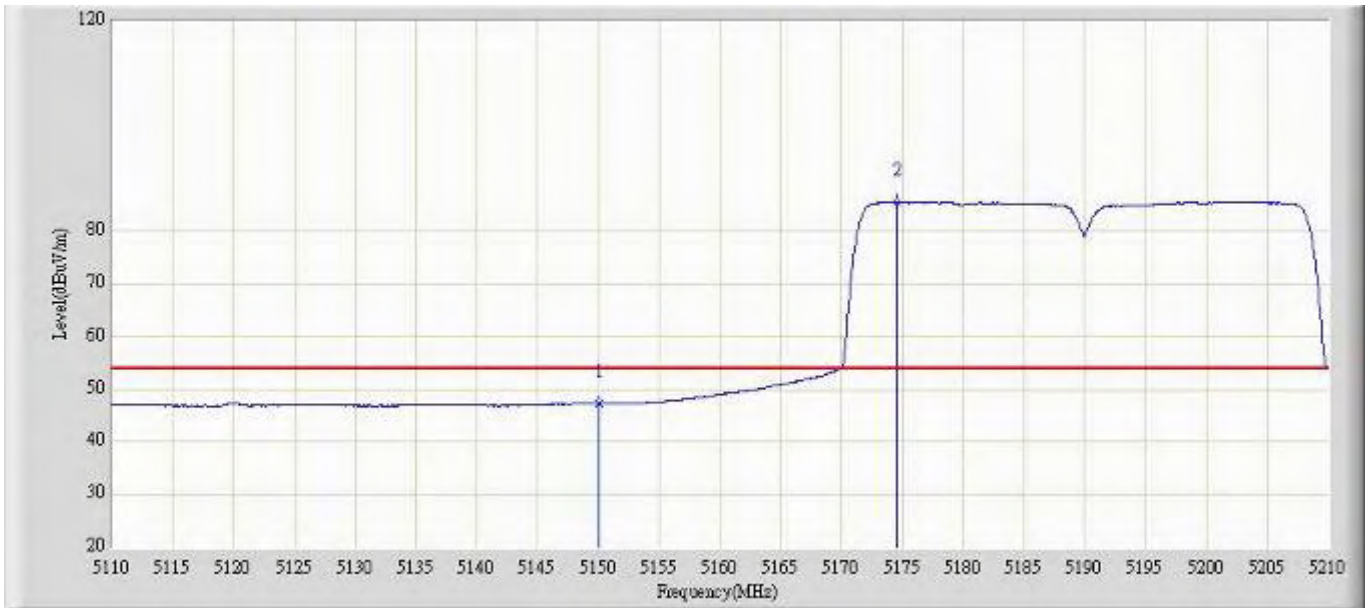


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.206	57.633	-6.794	54.000	-10.427	AV
2	*	5174.500	85.605	96.031	N/A	N/A	-10.426	AV

Profile: 11BS004R	Page No.: 647
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 1	

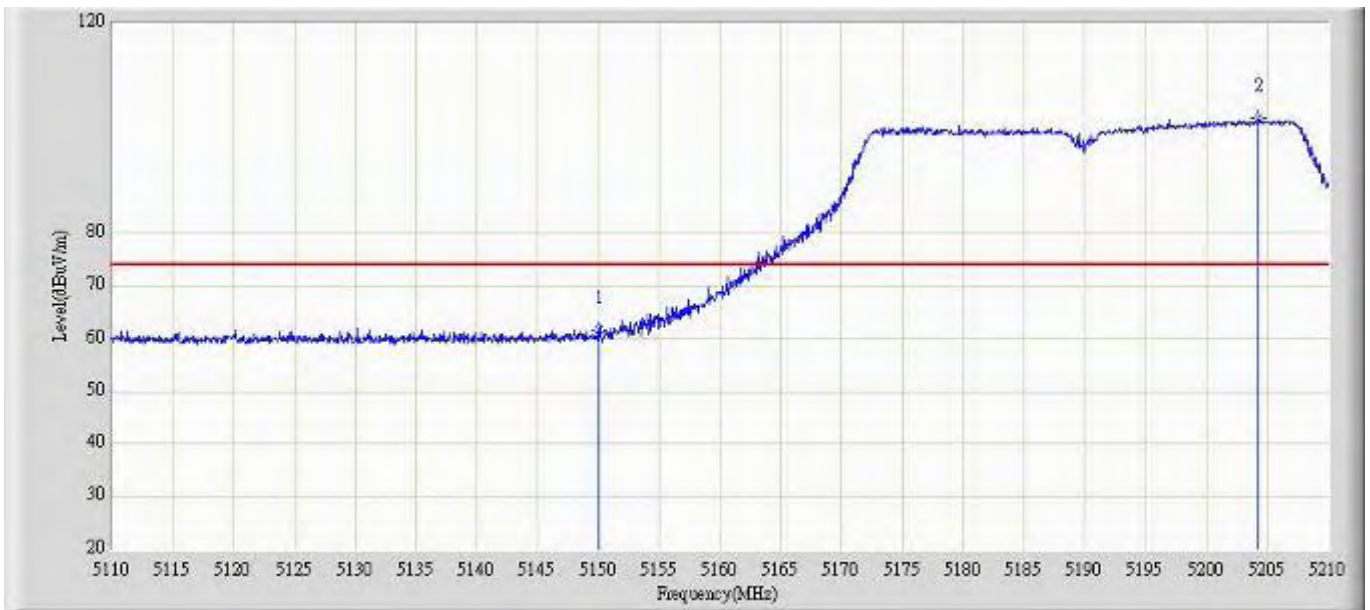


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	61.628	72.055	-12.372	74.000	-10.427	PK
2	*	5204.300	101.960	112.466	N/A	N/A	-10.506	PK

Profile: 11BS004R	Page No.: 648
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 1	

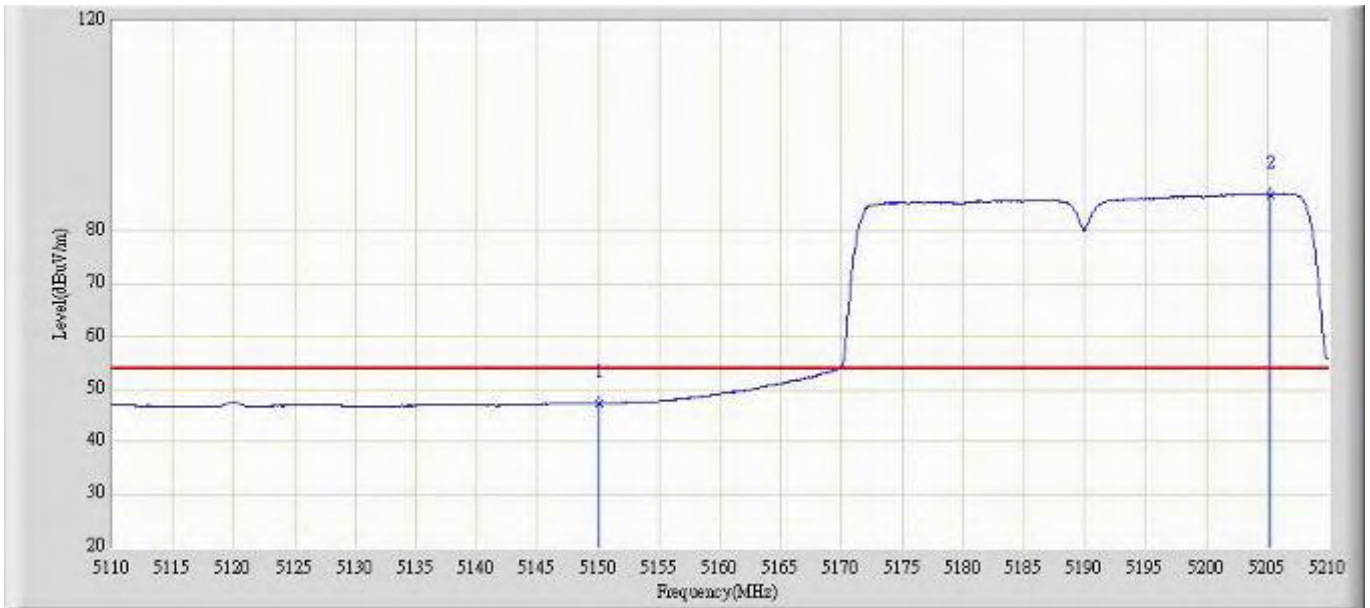


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.353	57.780	-6.647	54.000	-10.427	AV
2	*	5205.300	86.928	97.429	N/A	N/A	-10.501	AV

Profile: 11BS004R	Page No.: 649
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 1	

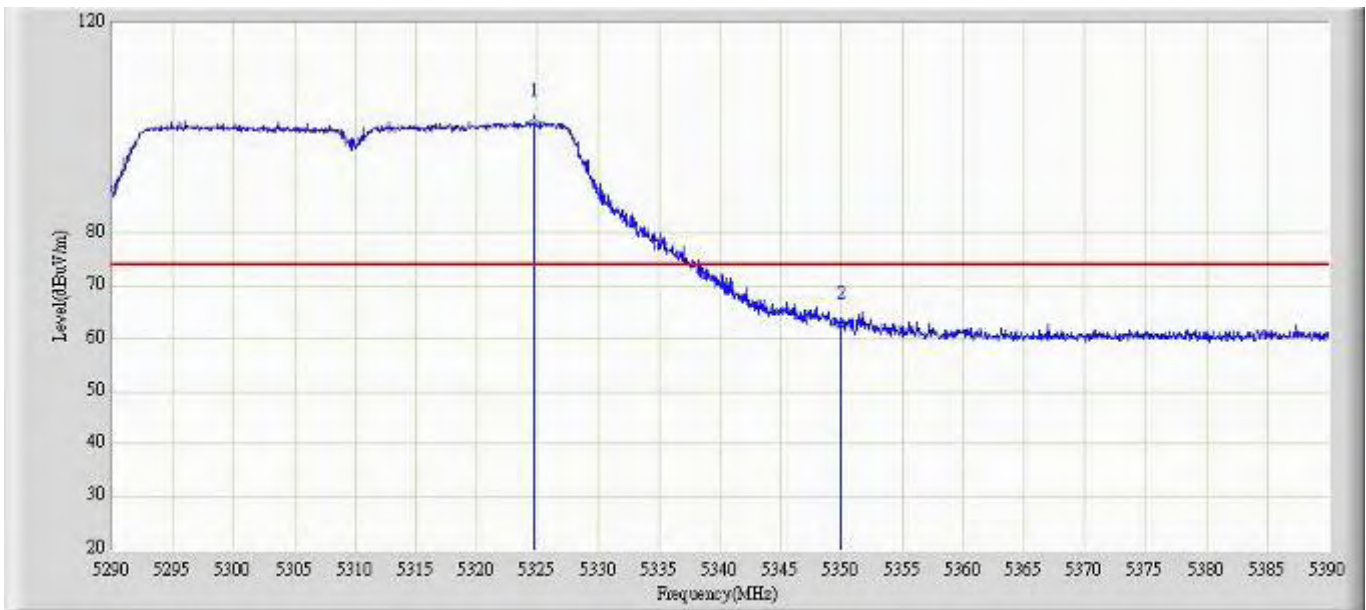


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.750	100.917	111.382	N/A	N/A	-10.465	PK
2		5350.000	62.663	73.162	-11.337	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 650
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 1	

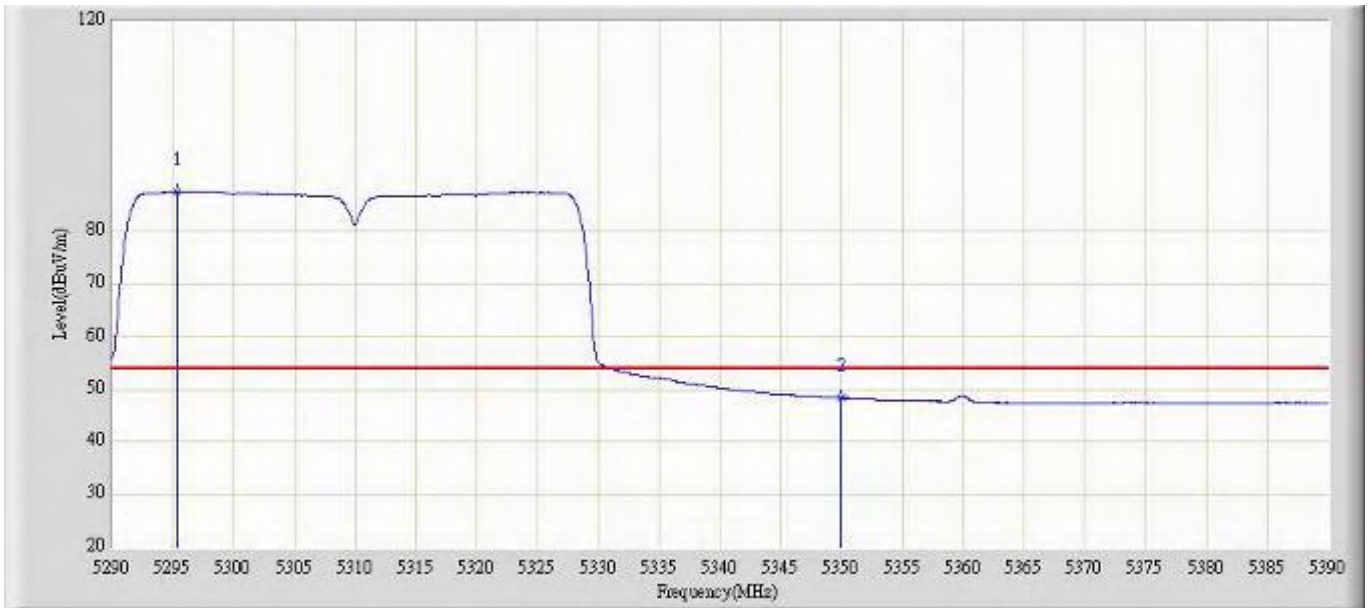


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5295.400	87.393	97.806	N/A	N/A	-10.412	AV
2		5350.000	48.334	58.833	-5.666	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 651
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 1	

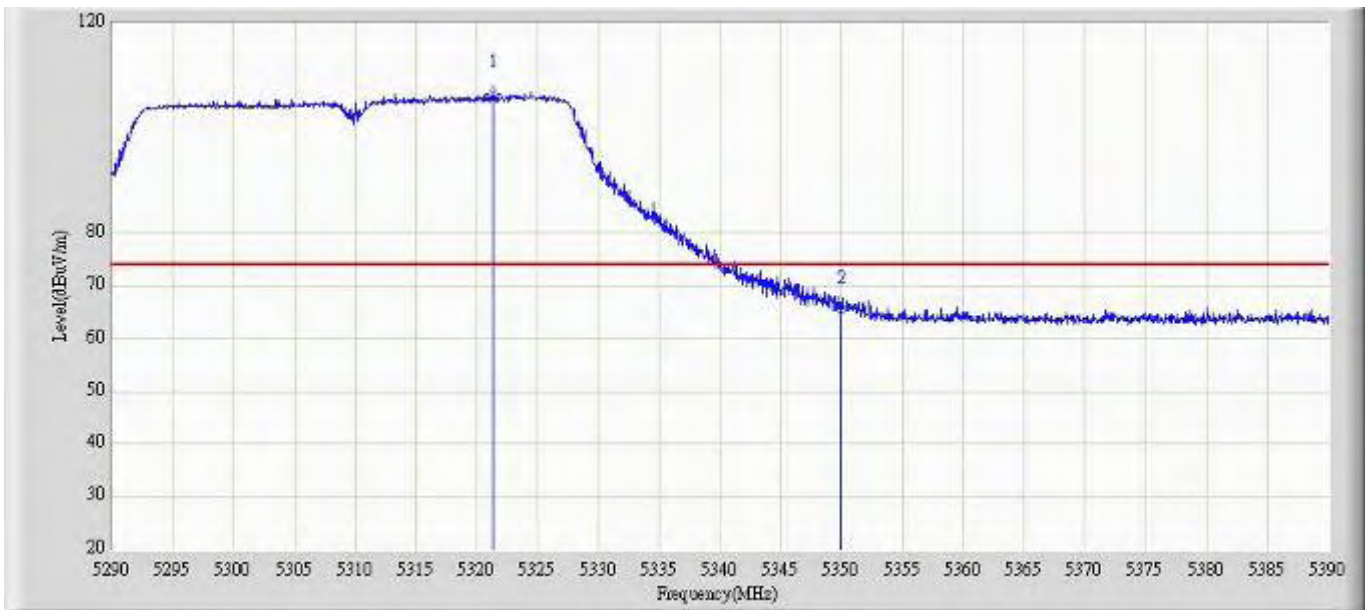


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5321.400	106.602	117.048	N/A	N/A	-10.446	PK
2		5350.000	65.478	75.977	-8.522	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 652
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 20:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 1	

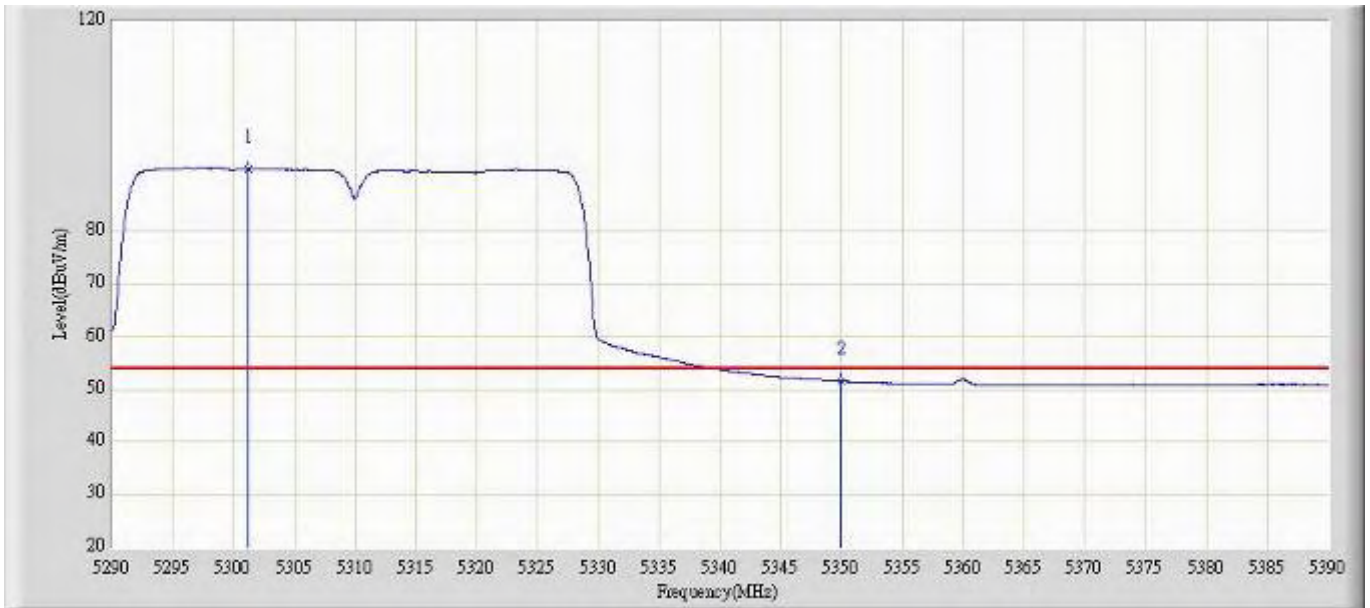


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5301.250	91.902	102.289	N/A	N/A	-10.387	AV
2		5350.000	51.529	62.028	-2.471	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 653
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 1	

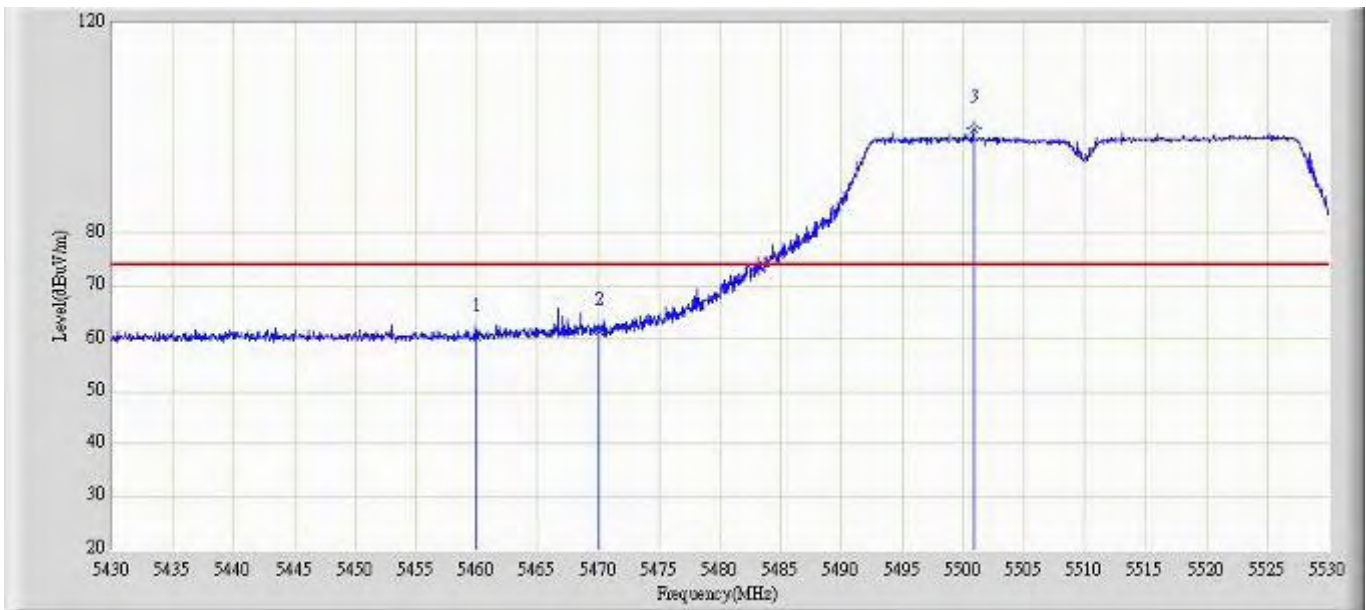


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.194	70.464	-13.806	74.000	-10.269	PK
2		5470.000	61.439	71.744	-26.861	88.300	-10.305	PK
3	*	5500.850	99.950	110.207	N/A	N/A	-10.258	PK

Profile: 11BS004R	Page No.: 654
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 1	

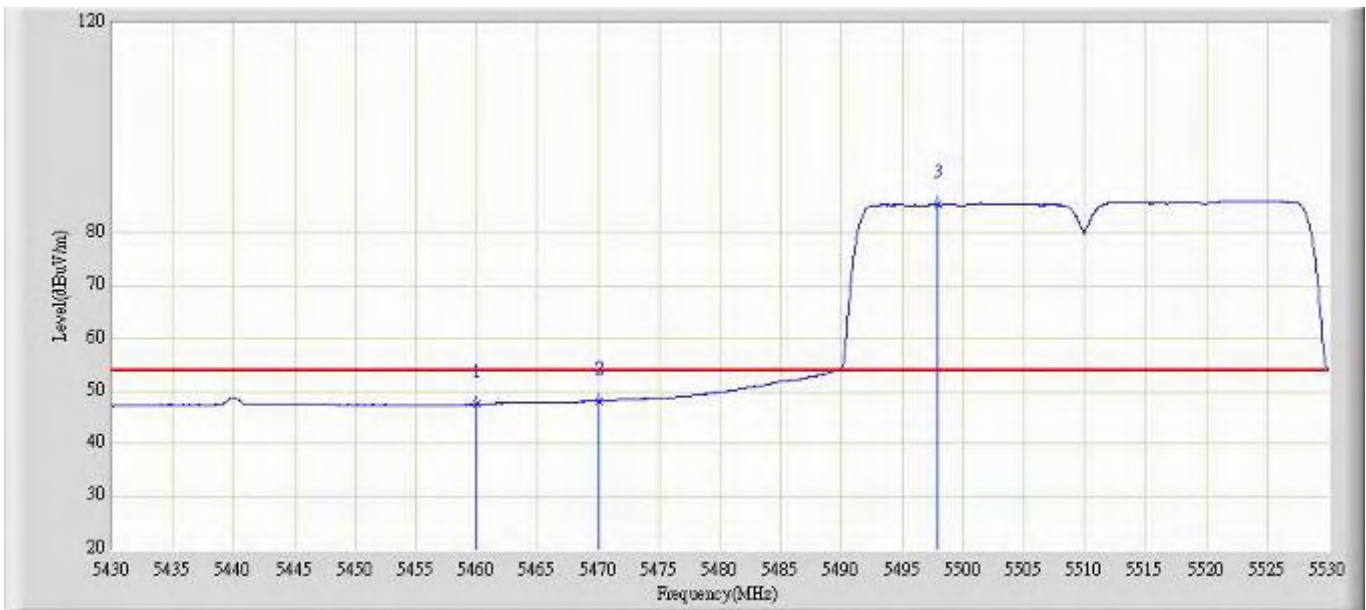


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.492	57.762	-6.508	54.000	-10.269	AV
2		5470.000	48.137	58.442	-20.163	68.300	-10.305	AV
3	*	5497.900	85.376	95.643	N/A	N/A	-10.267	AV

Profile: 11BS004R	Page No.: 655
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 1	

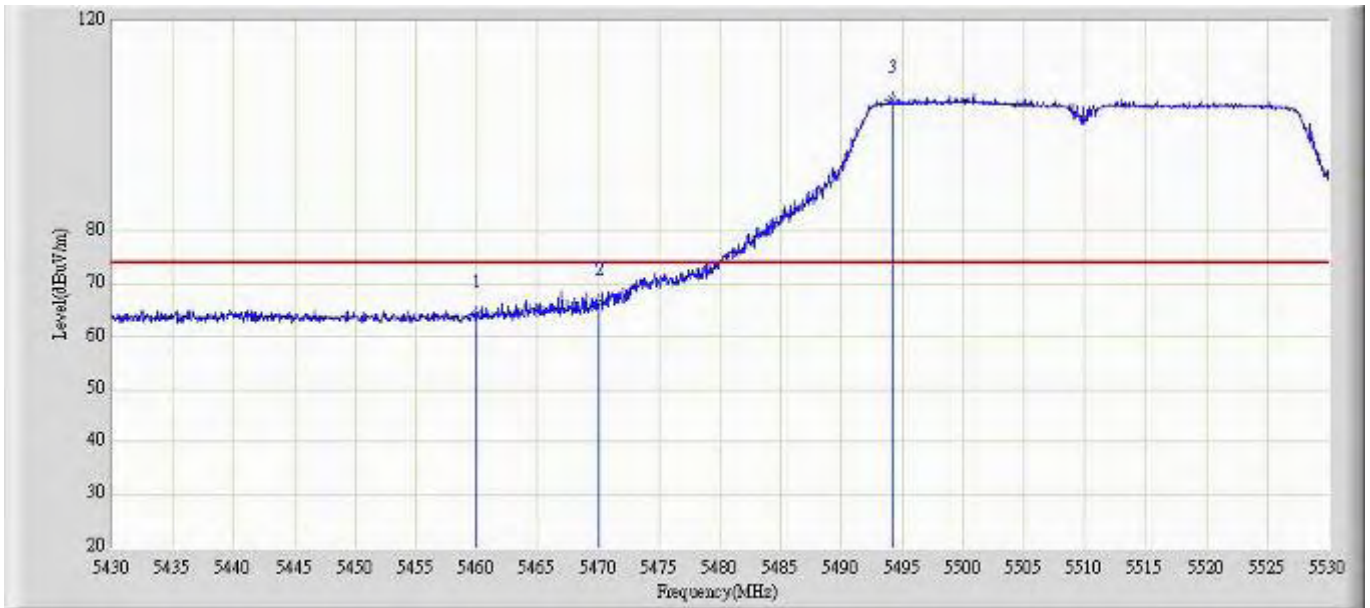


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	64.326	74.596	-9.674	74.000	-10.269	PK
2		5470.000	66.418	76.723	-21.882	88.300	-10.305	PK
3	*	5494.150	105.117	115.398	N/A	N/A	-10.281	PK

Profile: 11BS004R	Page No.: 656
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 1	

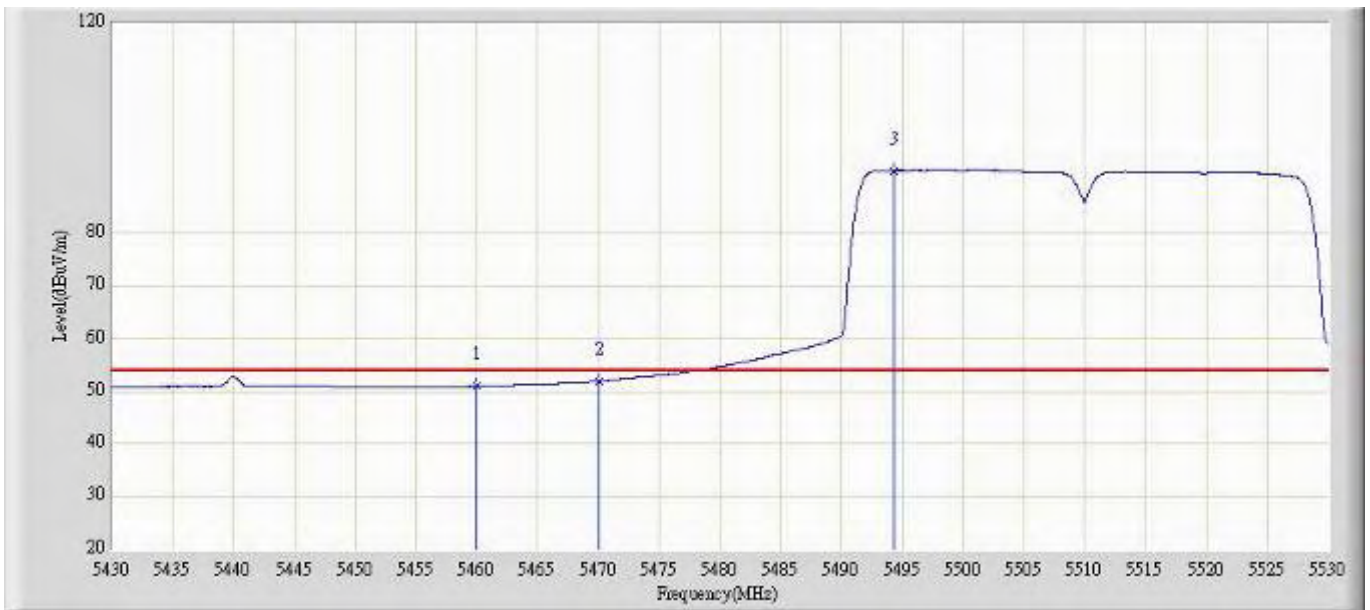


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	50.908	61.178	-3.092	54.000	-10.269	AV
2		5470.000	51.931	62.236	-16.369	68.300	-10.305	AV
3	*	5494.350	91.925	102.205	N/A	N/A	-10.280	AV

Profile: 11BS004R	Page No.: 945
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:23
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 1	

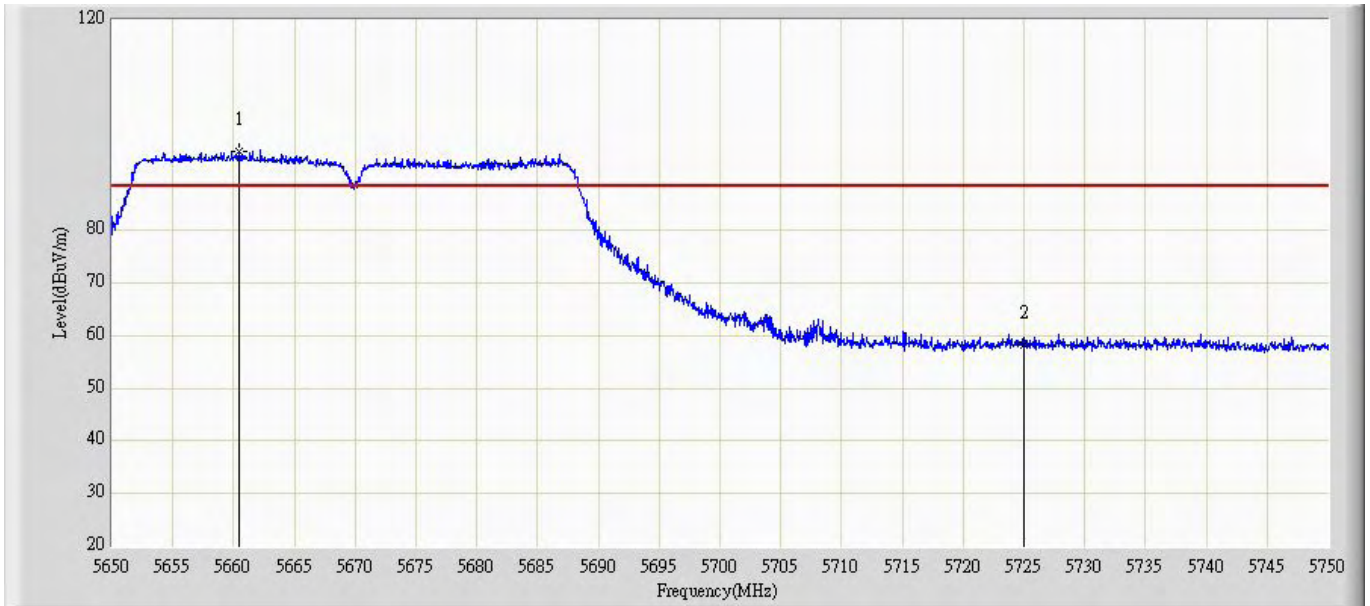


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5660.400	95.116	104.981	N/A	N/A	-9.865	PK
2			5725.000	58.161	67.935	-30.139	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 946
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:24
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 1	

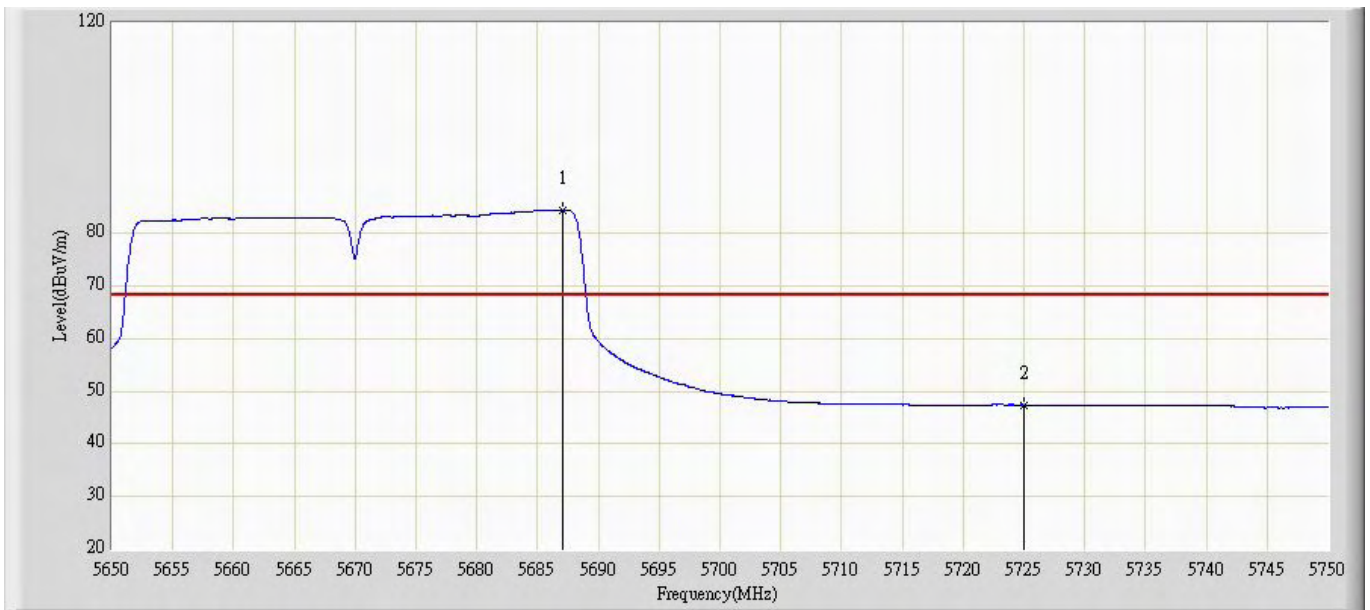


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5687.050	84.450	94.291	N/A	N/A	-9.842	AV
2			5725.000	47.399	57.173	-20.901	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 947
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:24
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 1	

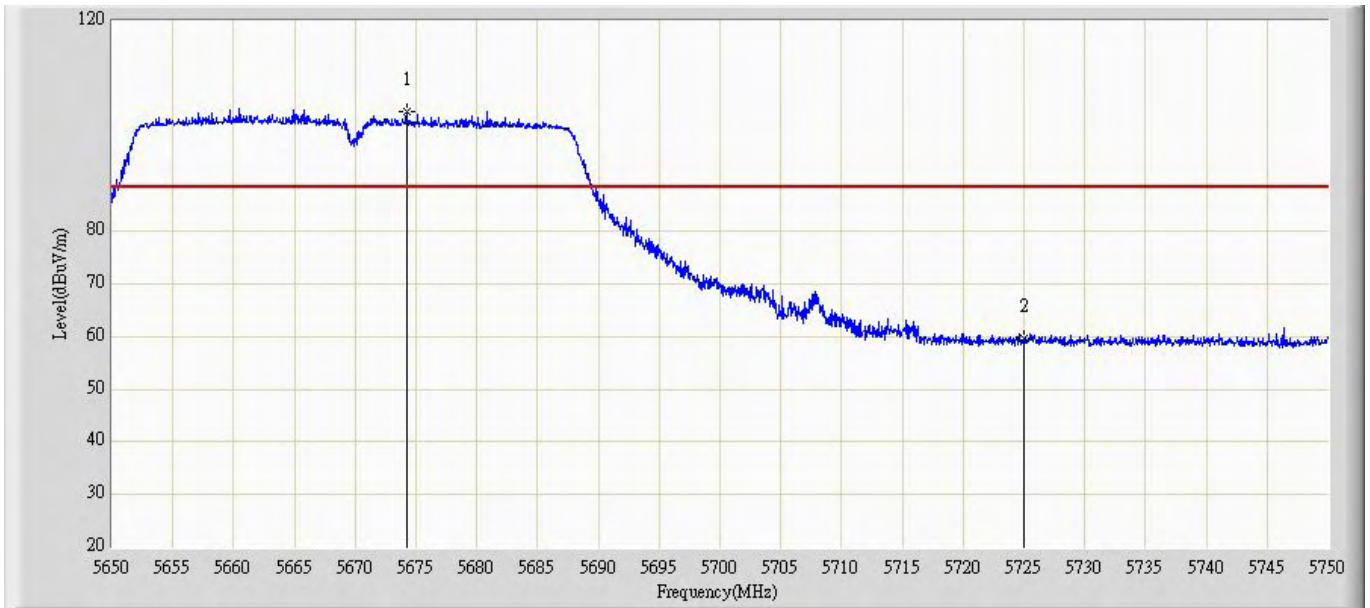


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5674.200	102.892	112.720	N/A	N/A	-9.828	PK
2			5725.000	59.517	69.291	-28.783	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 948
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:25
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 1	

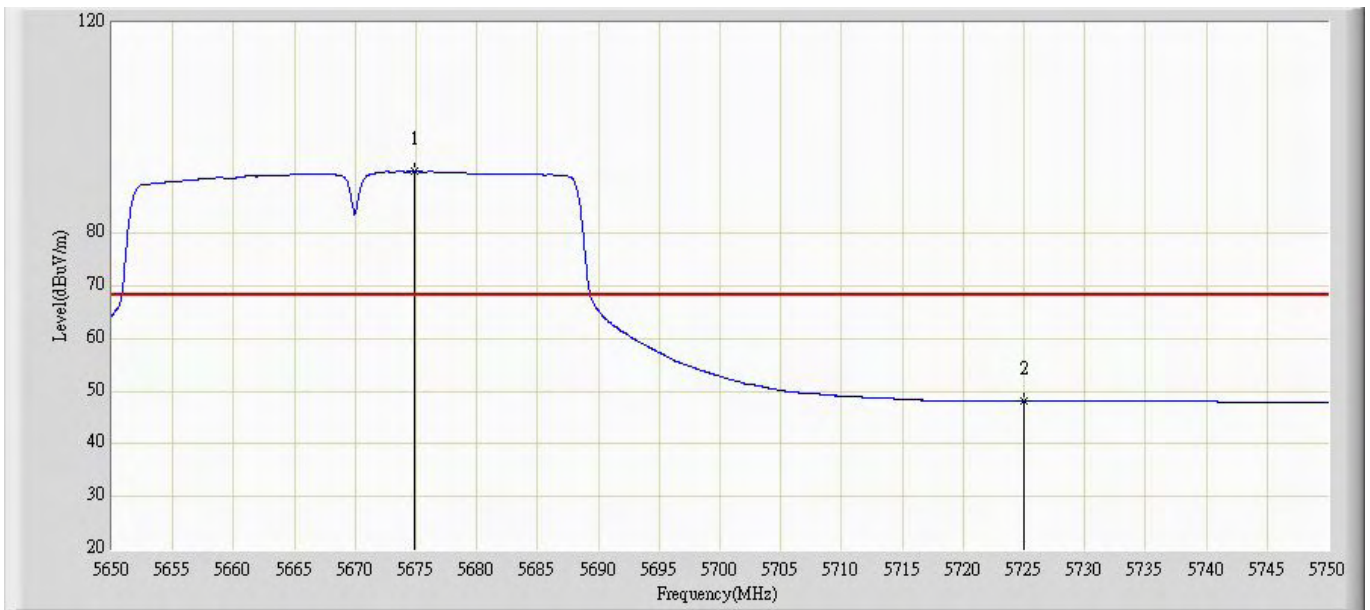


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5674.850	91.744	101.571	N/A	N/A	-9.826	AV
2			5725.000	48.158	57.932	-20.142	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 657
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 2	

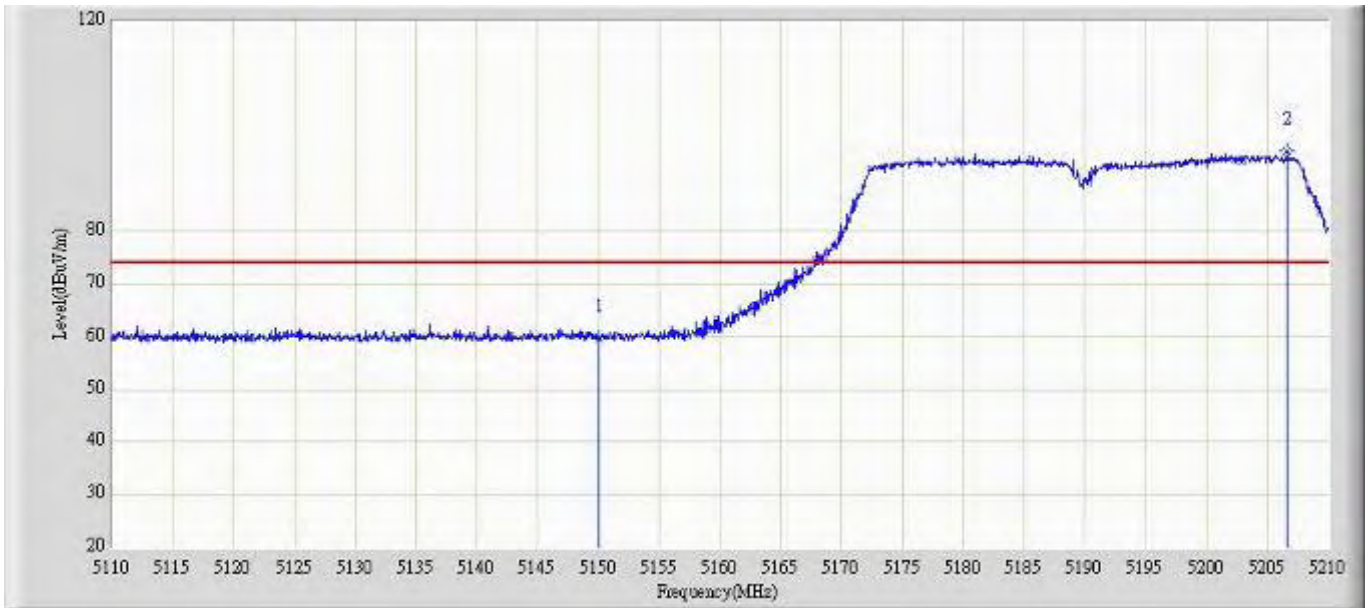


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.583	70.010	-14.417	74.000	-10.427	PK
2	*	5206.650	95.352	105.846	N/A	N/A	-10.494	PK

Profile: 11BS004R	Page No.: 658
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 2	

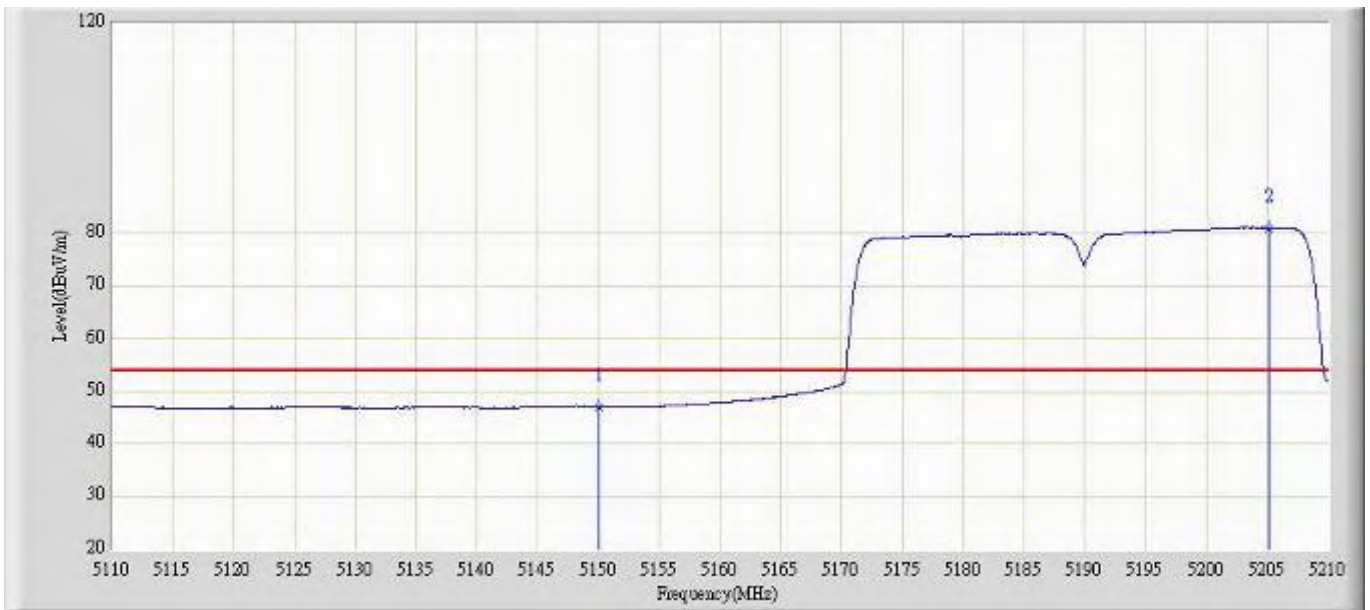


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.047	57.474	-6.953	54.000	-10.427	AV
2	*	5205.100	81.038	91.540	N/A	N/A	-10.502	AV

Profile: 11BS004R	Page No.: 659
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 2	

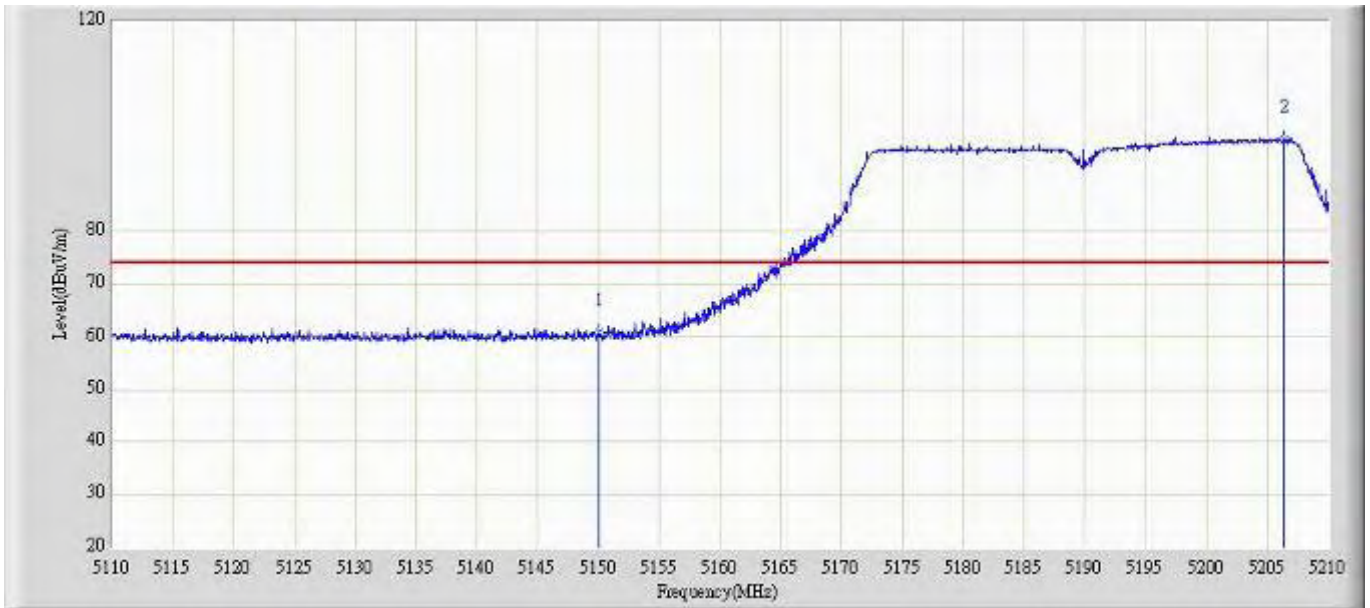


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.810	71.237	-13.190	74.000	-10.427	PK
2	*	5206.450	97.625	108.120	N/A	N/A	-10.495	PK

Profile: 11BS004R	Page No.: 660
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 2	

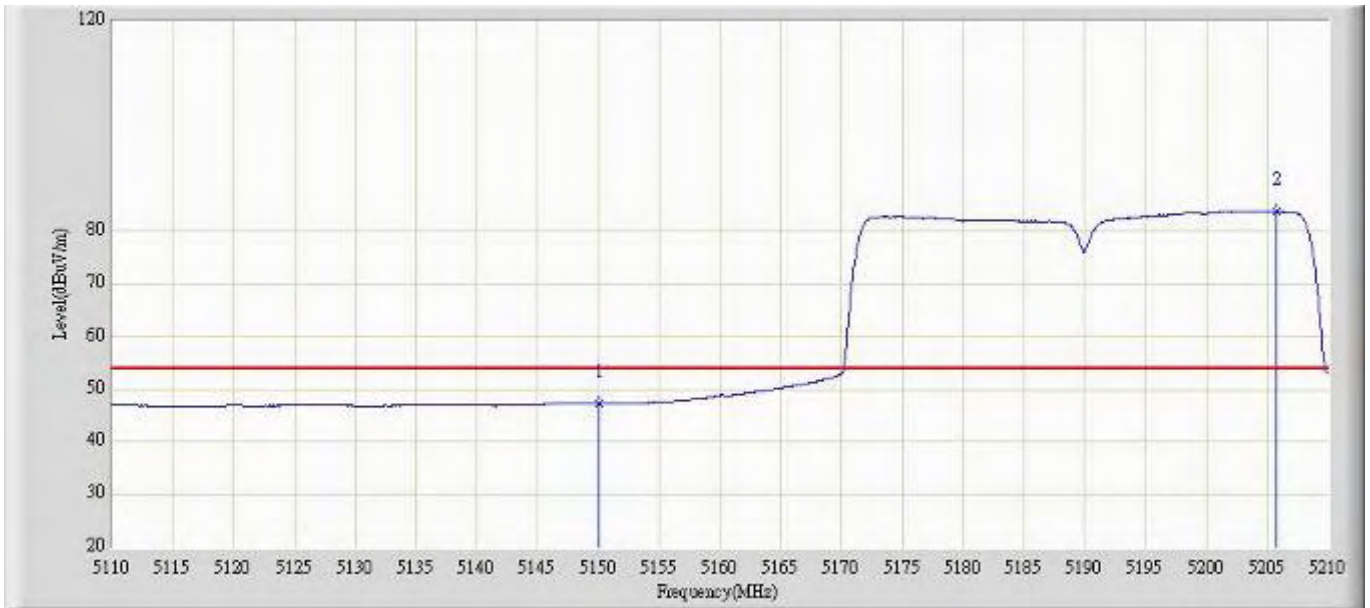


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.263	57.690	-6.737	54.000	-10.427	AV
2	*	5205.750	83.713	94.212	N/A	N/A	-10.499	AV

Profile: 11BS004R	Page No.: 661
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 2	

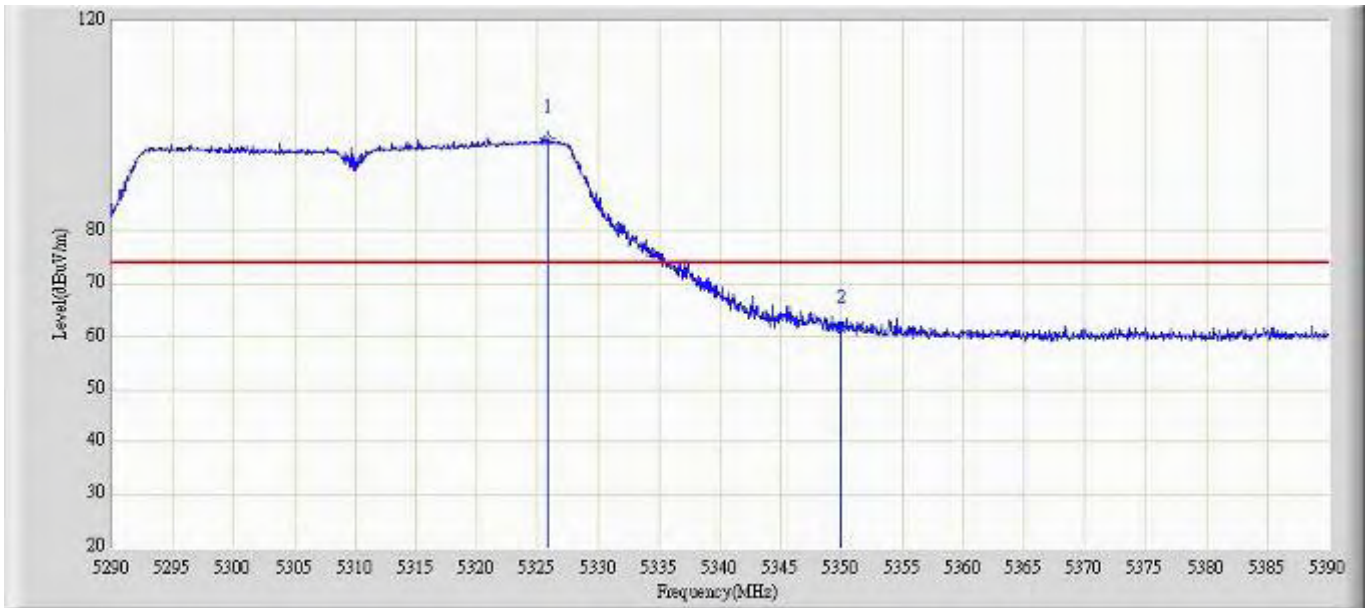


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.800	97.674	108.145	N/A	N/A	-10.470	PK
2		5350.000	61.486	71.985	-12.514	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 662
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 2	

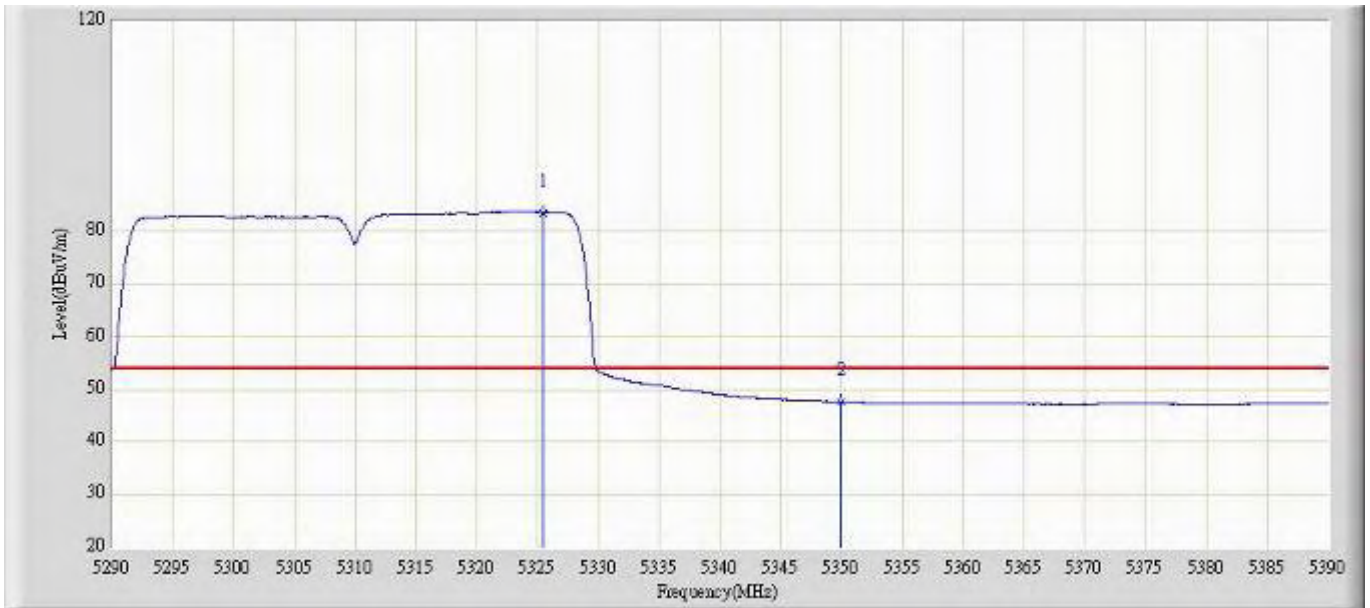


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.400	83.624	94.093	N/A	N/A	-10.468	AV
2		5350.000	47.575	58.074	-6.425	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 663
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 2	

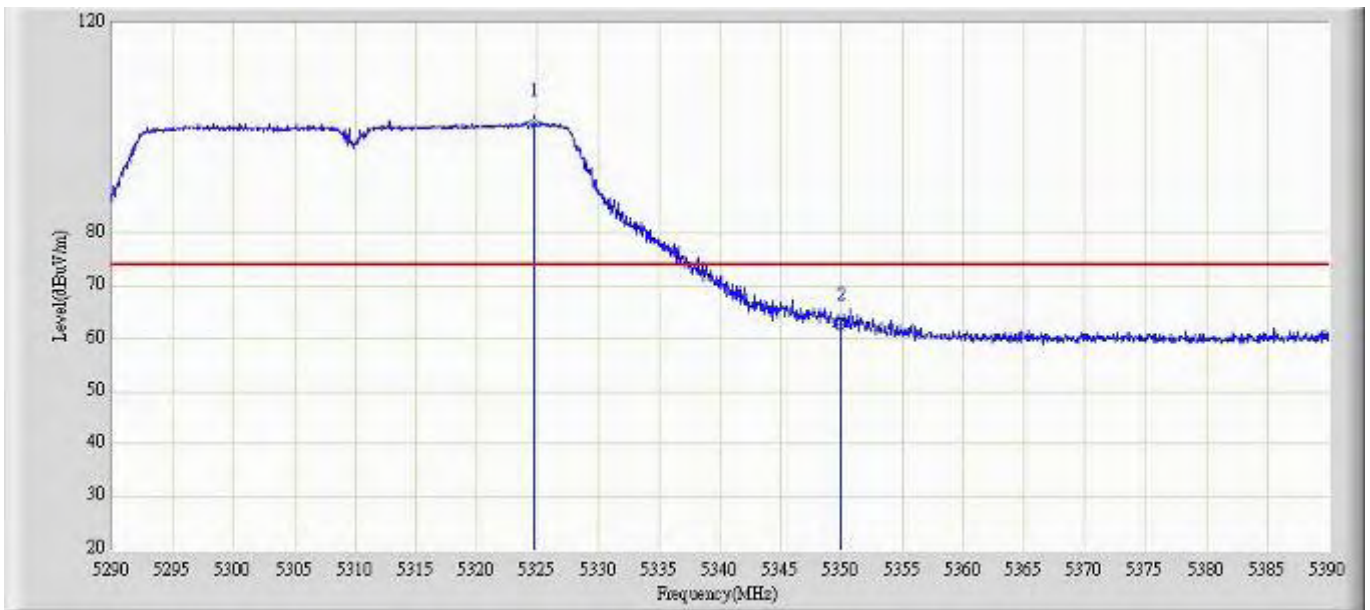


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.700	100.956	111.421	N/A	N/A	-10.464	PK
2		5350.000	62.284	72.783	-11.716	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 664
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 2	

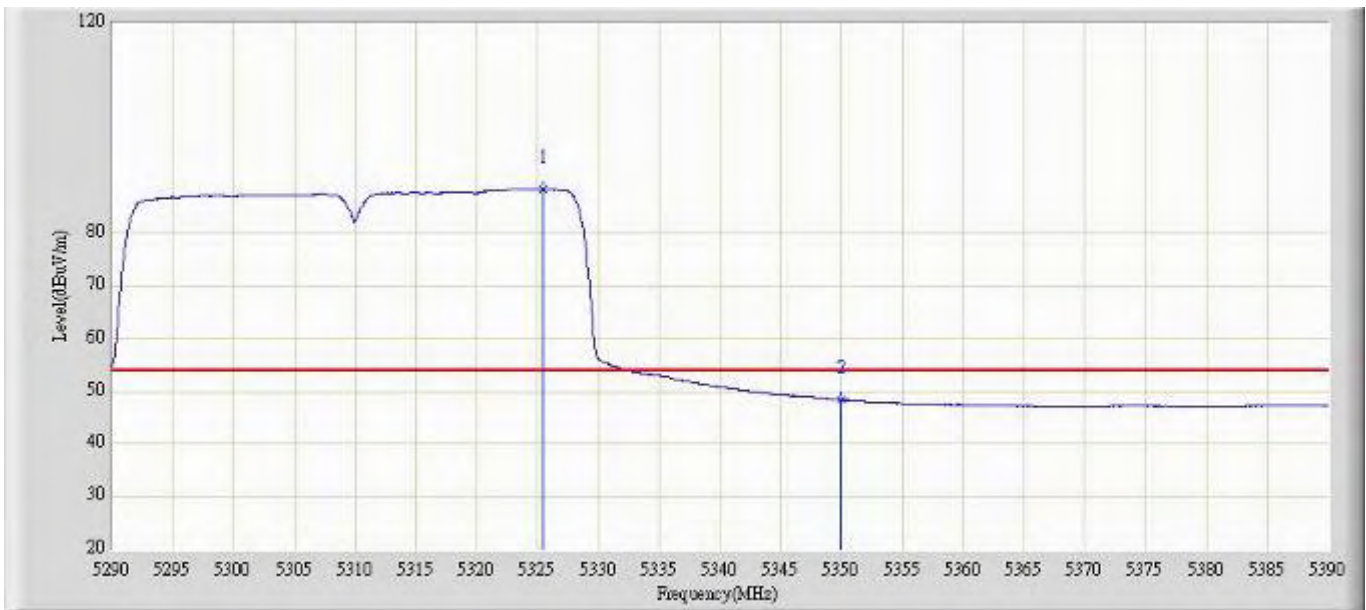


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.400	88.368	98.837	N/A	N/A	-10.468	AV
2		5350.000	48.335	58.834	-5.665	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 665
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 2	

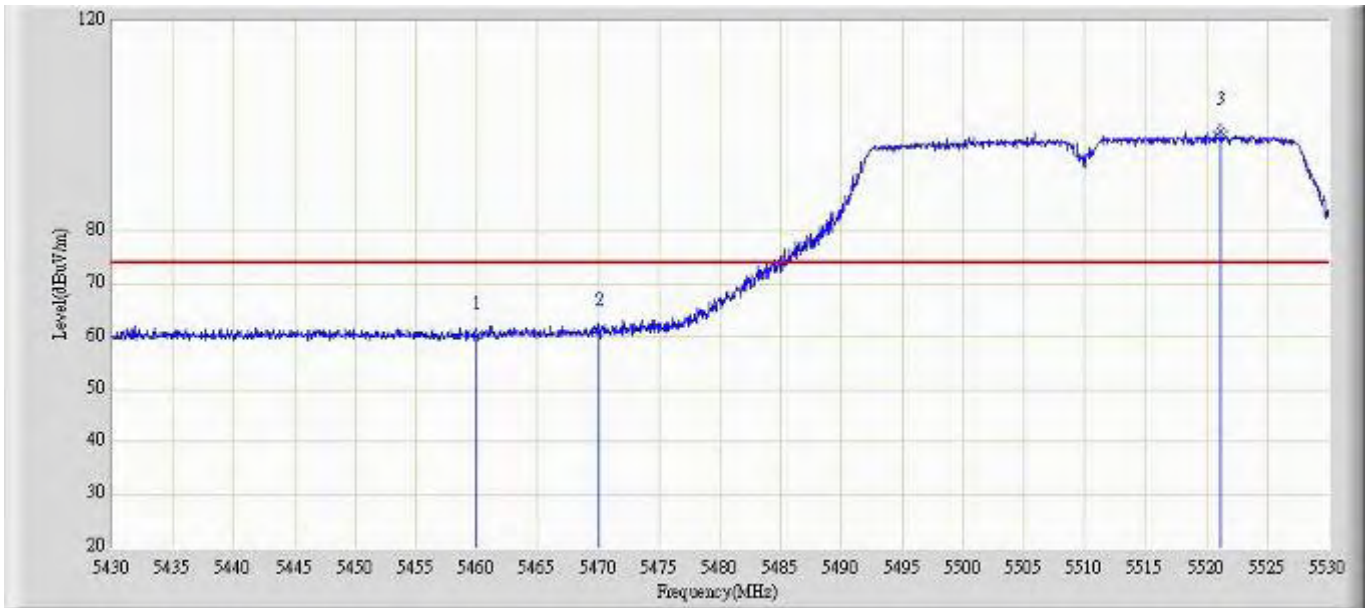


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.091	70.361	-13.909	74.000	-10.269	PK
2		5470.000	60.731	71.036	-27.569	88.300	-10.305	PK
3	*	5521.200	99.037	109.154	N/A	N/A	-10.117	PK

Profile: 11BS004R	Page No.: 666
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 2	

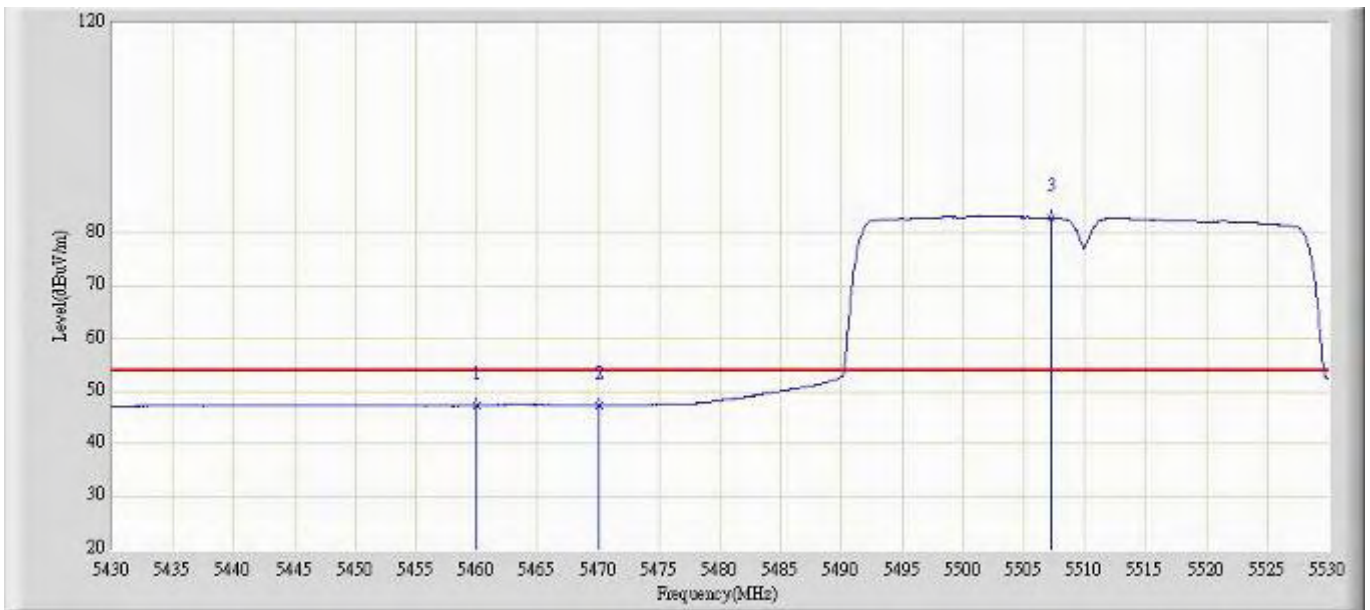


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.273	57.543	-6.727	54.000	-10.269	AV
2		5470.000	47.381	57.686	-20.919	68.300	-10.305	AV
3	*	5507.250	83.012	93.237	N/A	N/A	-10.225	AV

Profile: 11BS004R	Page No.: 667
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 2	

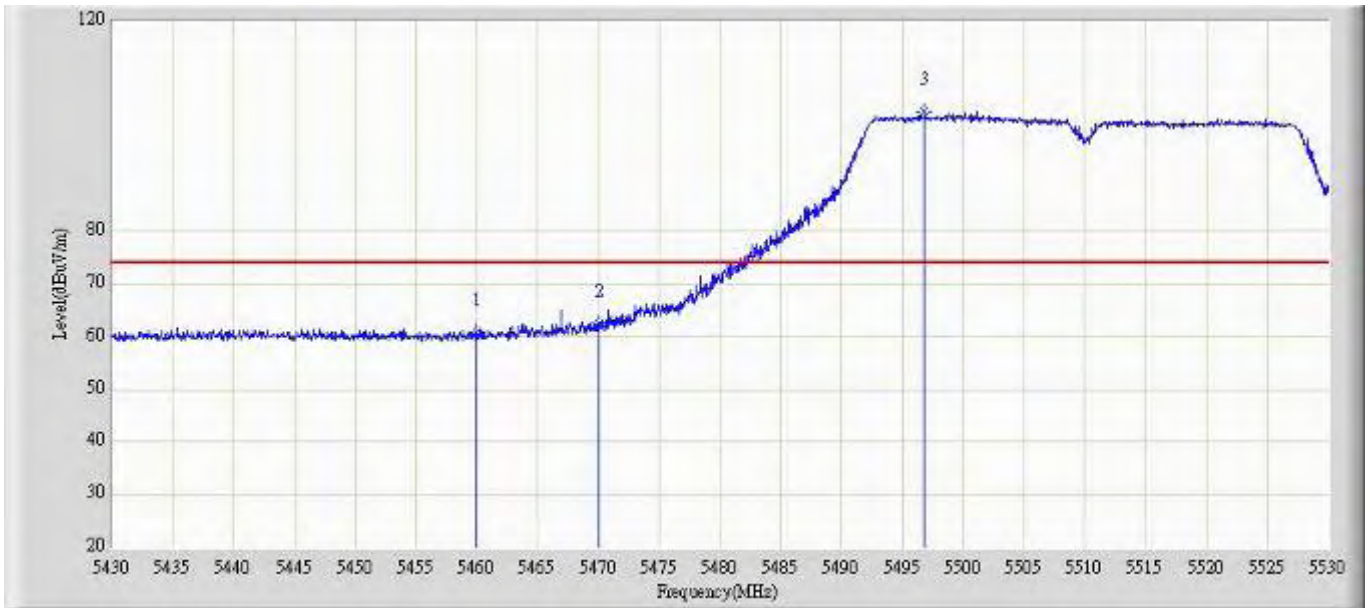


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.727	70.997	-13.273	74.000	-10.269	PK
2		5470.000	62.473	72.778	-25.827	88.300	-10.305	PK
3	*	5496.850	102.651	112.922	N/A	N/A	-10.271	PK

Profile: 11BS004R	Page No.: 668
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 2	

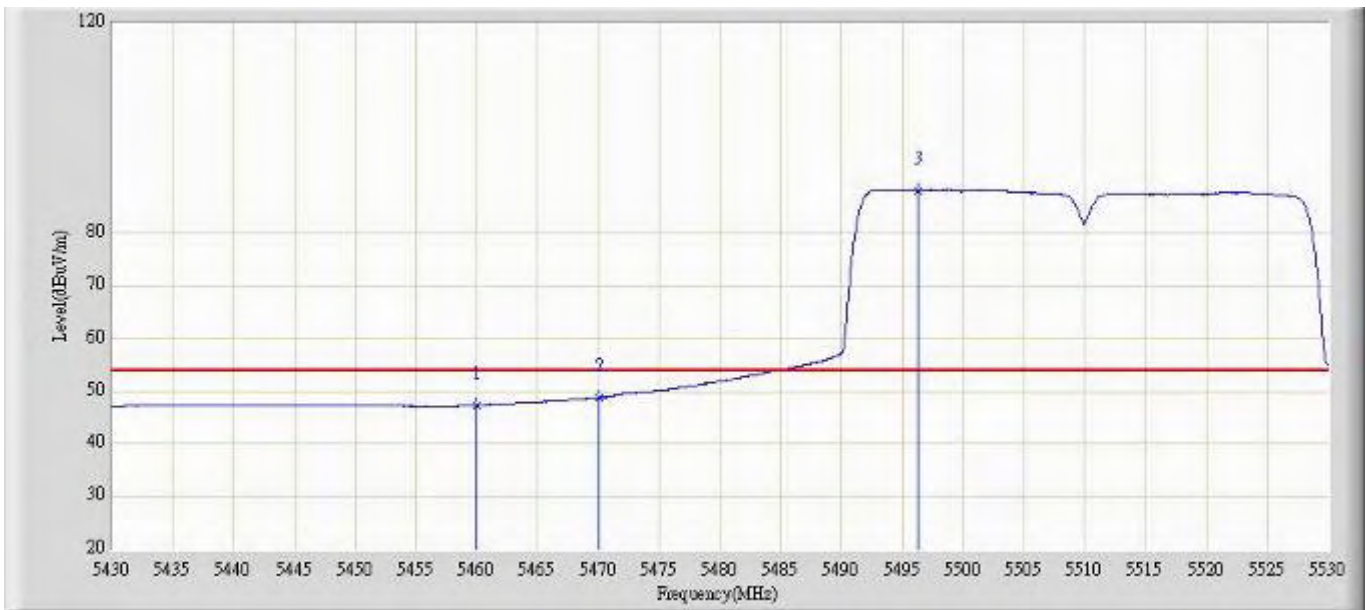


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.343	57.613	-6.657	54.000	-10.269	AV
2		5470.000	48.803	59.108	-19.497	68.300	-10.305	AV
3	*	5496.350	88.177	98.450	N/A	N/A	-10.273	AV

Profile: 11BS004R	Page No.: 951
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:28
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 2	

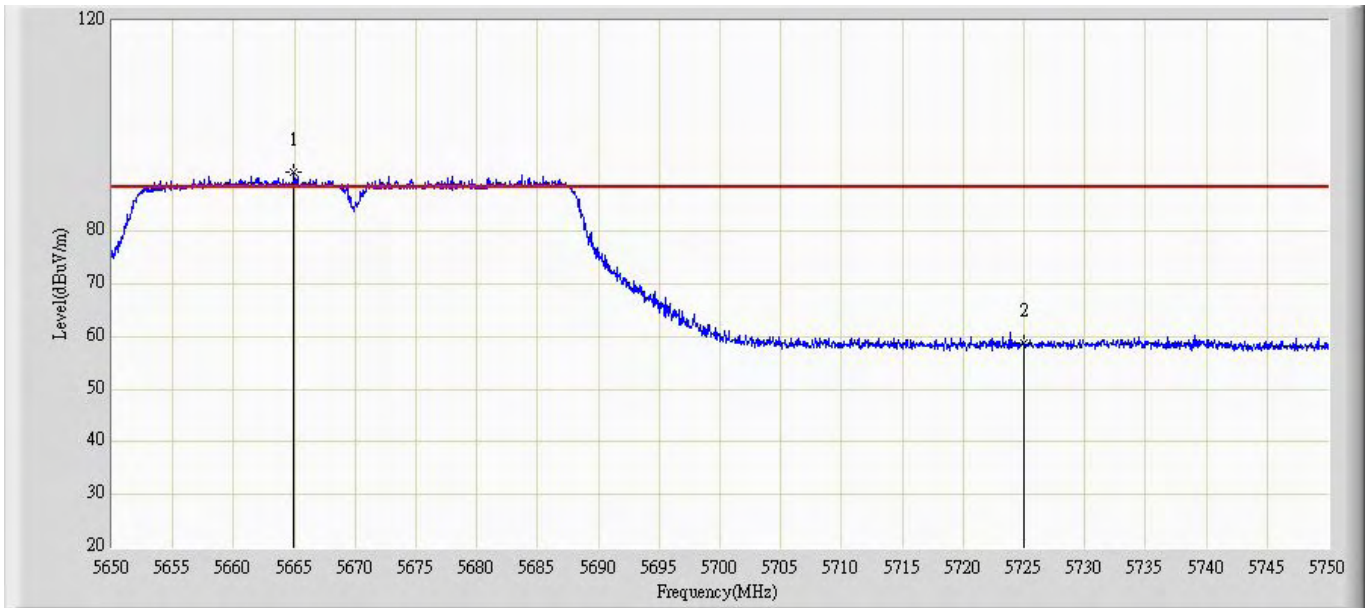


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5664.950	91.311	101.164	N/A	N/A	-9.853	PK
2			5725.000	58.725	68.499	-29.575	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 952
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:29
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 2	

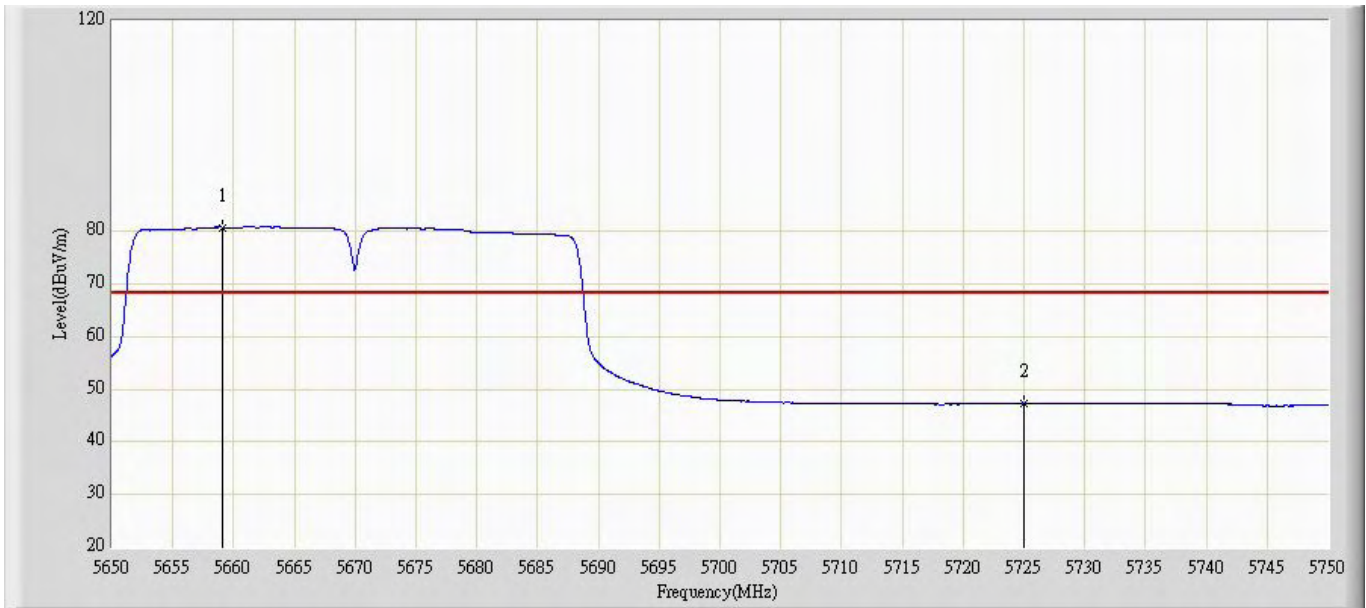


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5659.100	80.734	90.602	N/A	N/A	-9.869	AV
2			5725.000	47.318	57.092	-20.982	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 949
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:26
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 2	

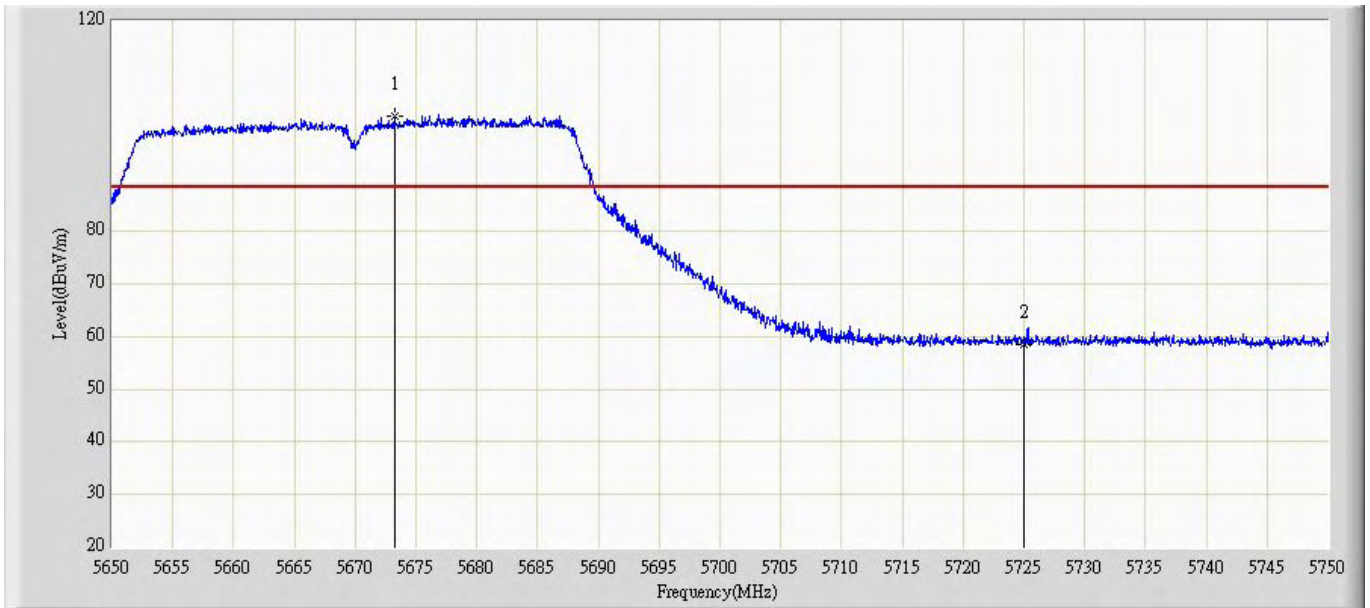


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.250	101.936	111.767	N/A	N/A	-9.831	PK
2			5725.000	58.469	68.243	-29.831	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 950
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:27
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 2	

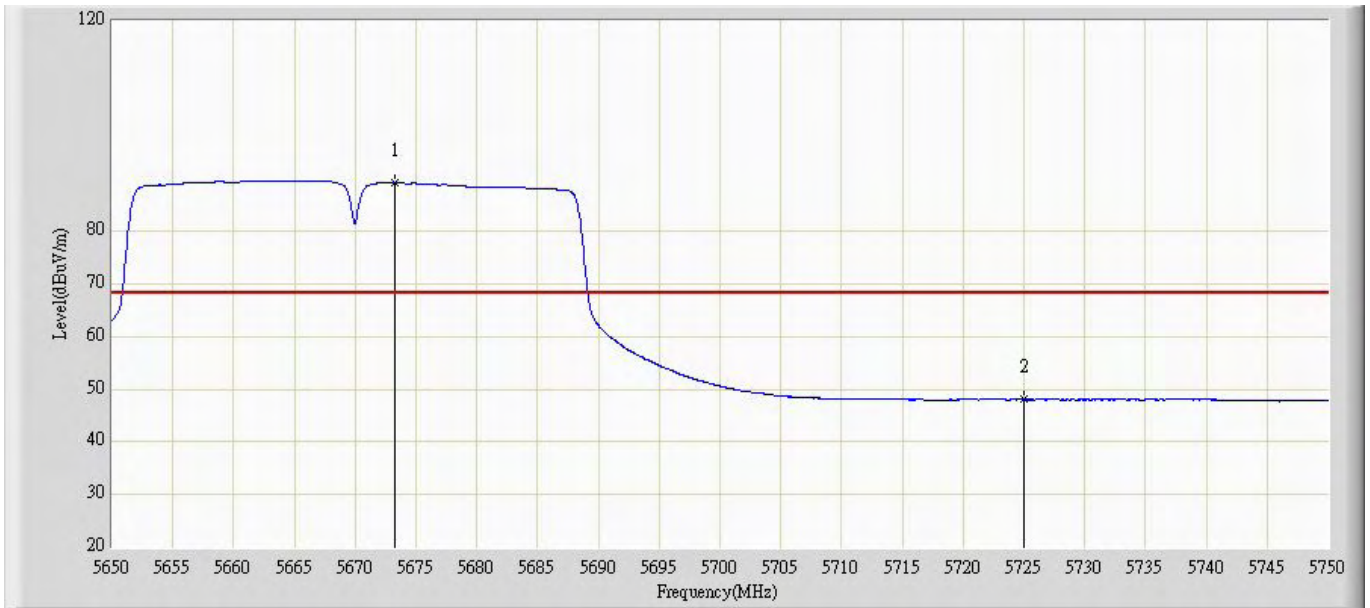


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.300	89.238	99.069	N/A	N/A	-9.831	AV
2			5725.000	48.025	57.799	-20.275	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 669
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1	

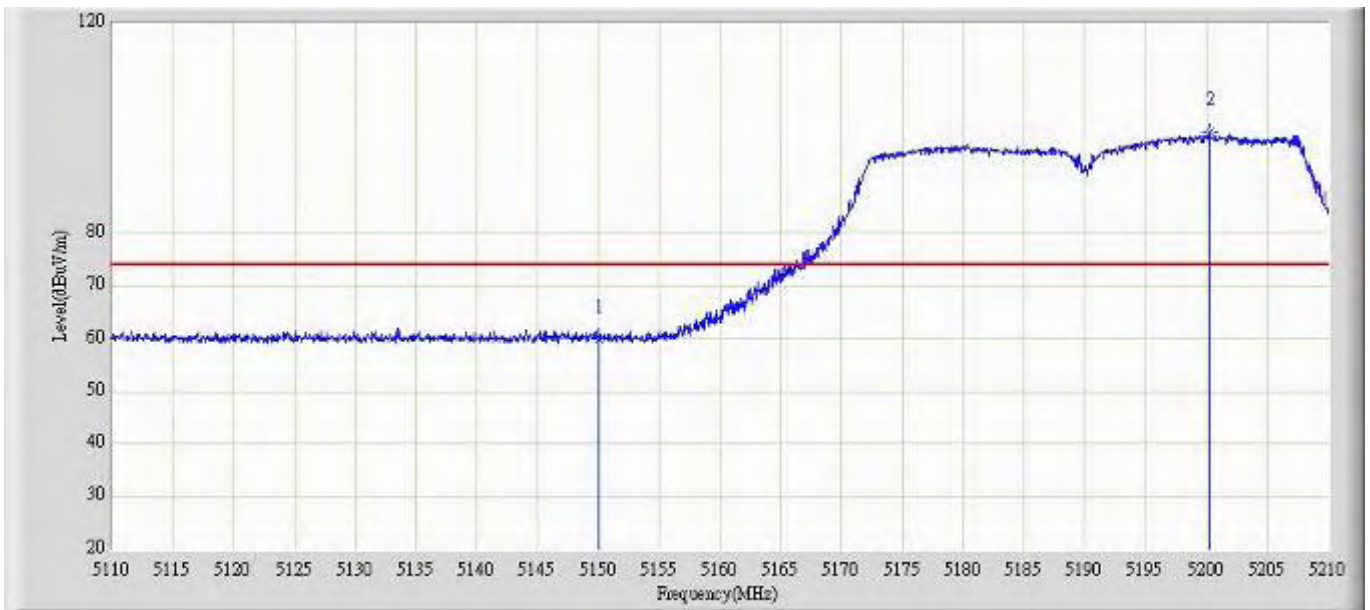


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.814	70.241	-14.186	74.000	-10.427	PK
2	*	5200.300	99.230	109.757	N/A	N/A	-10.527	PK

Profile: 11BS004R	Page No.: 670
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1	

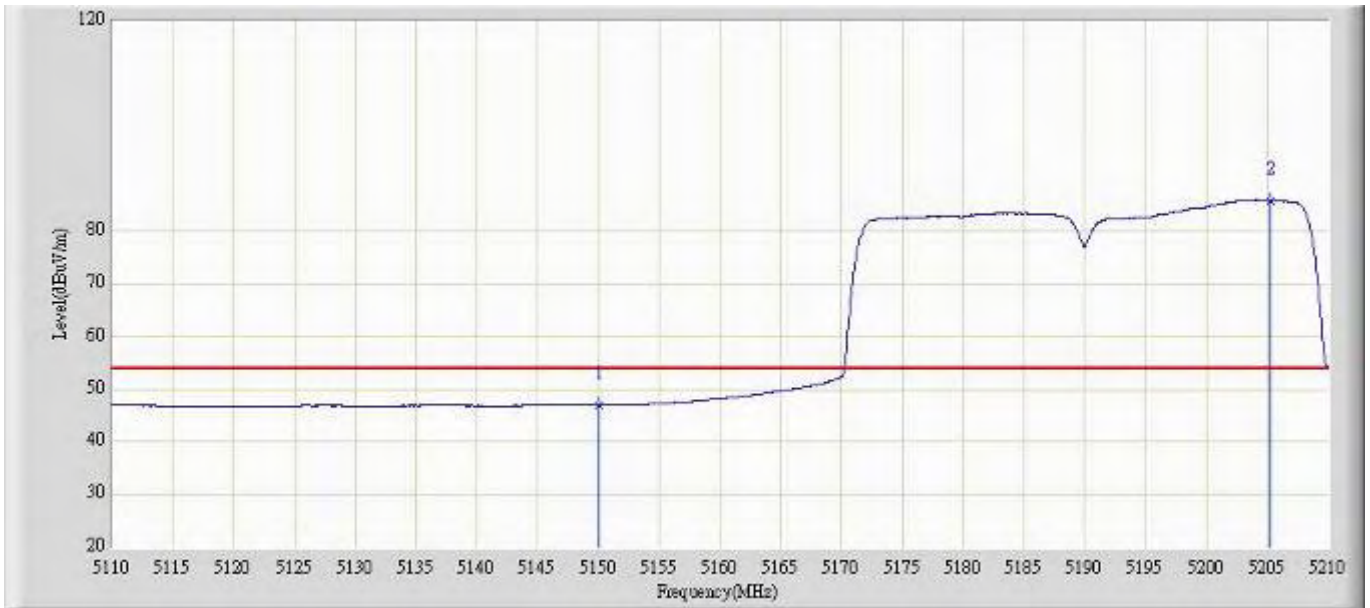


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.065	57.492	-6.935	54.000	-10.427	AV
2	*	5205.300	85.887	96.388	N/A	N/A	-10.501	AV

Profile: 11BS004R	Page No.: 671
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1	

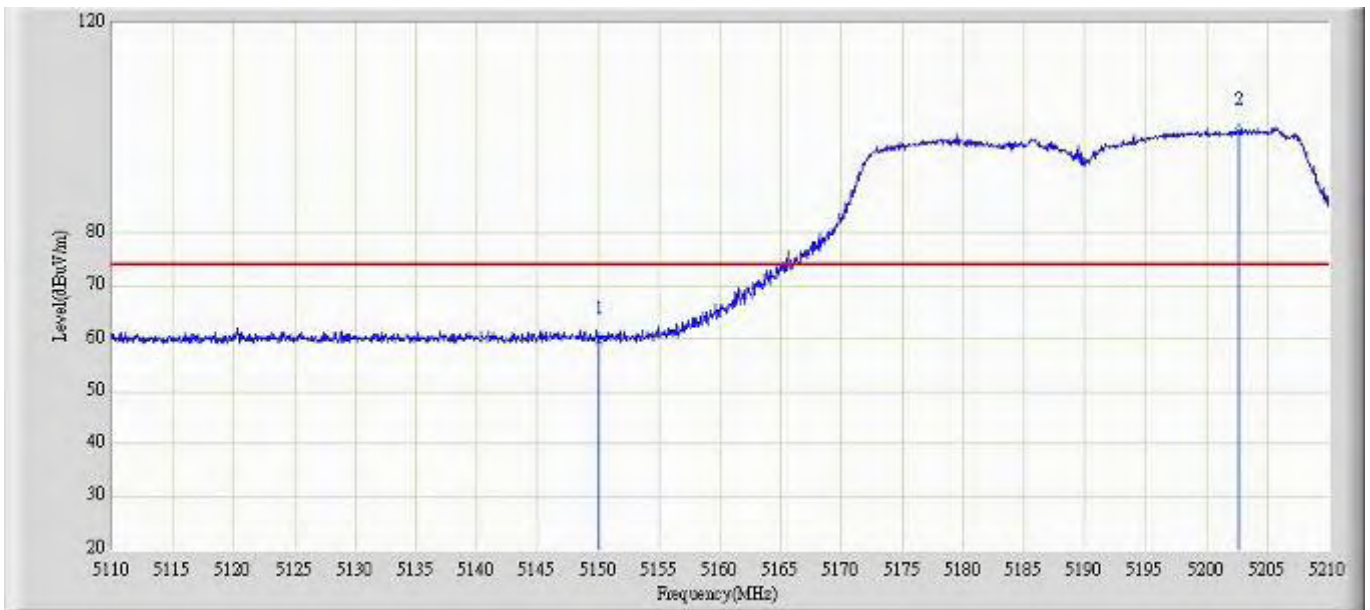


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.652	70.079	-14.348	74.000	-10.427	PK
2	*	5202.650	99.355	109.869	N/A	N/A	-10.514	PK

Profile: 11BS004R	Page No.: 672
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1	

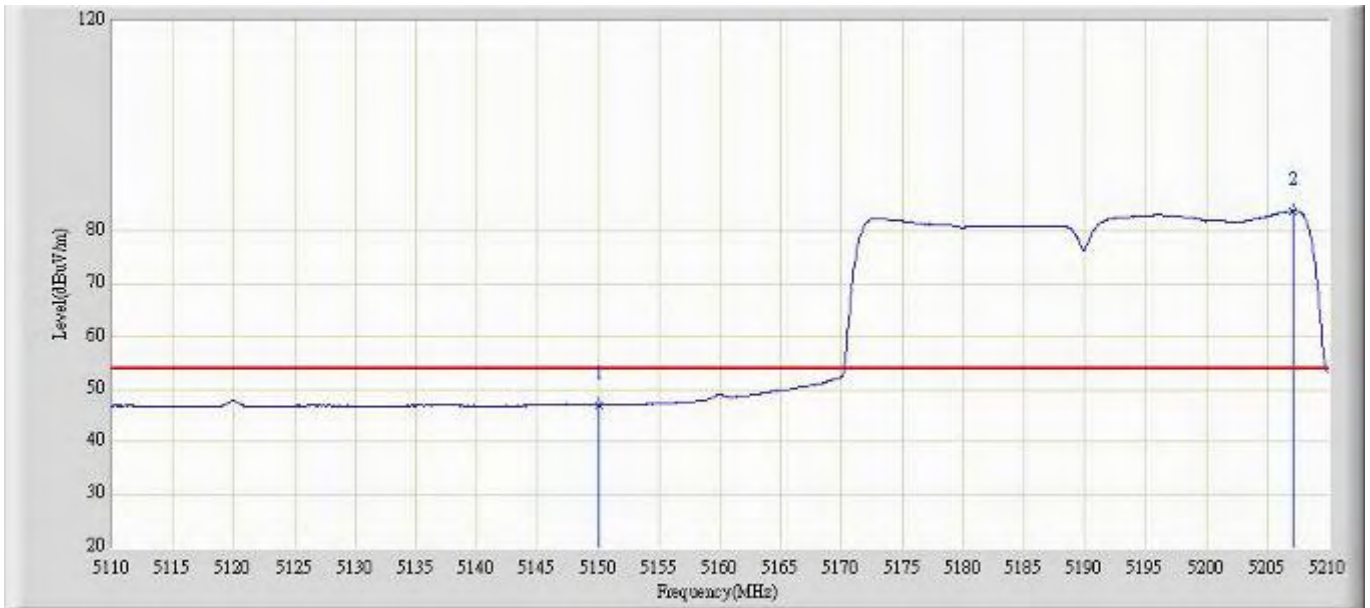


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.072	57.499	-6.928	54.000	-10.427	AV
2	*	5207.150	83.900	94.391	N/A	N/A	-10.491	AV

Profile: 11BS004R	Page No.: 673
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1	

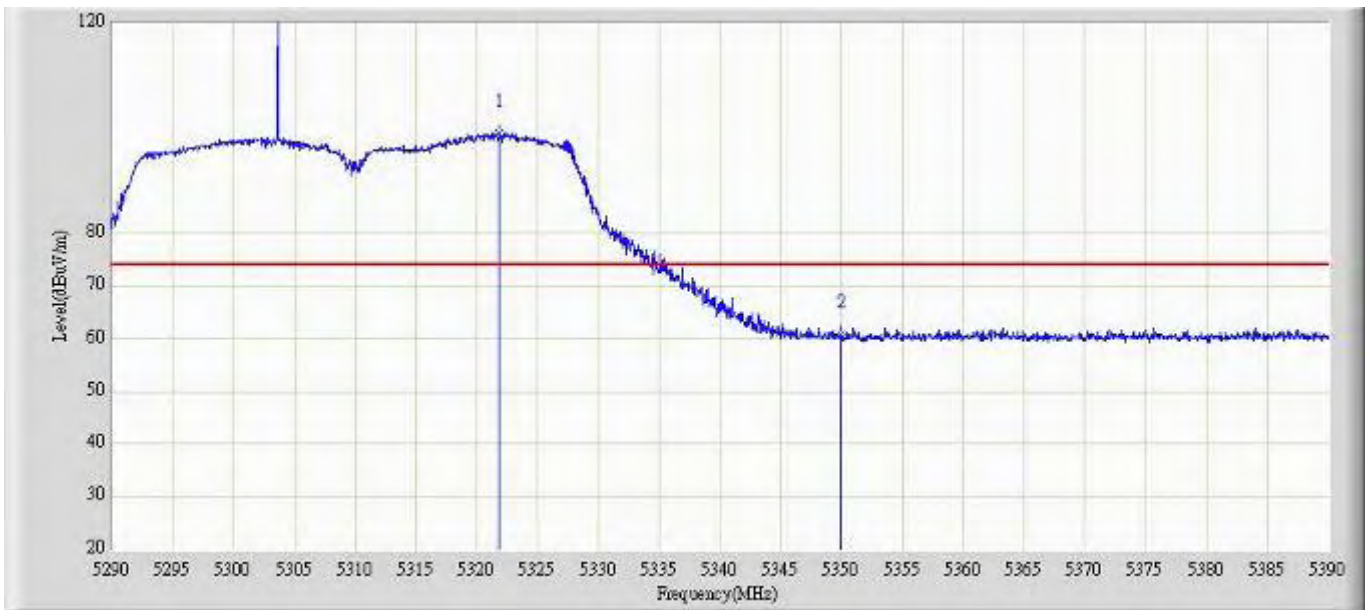


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5321.900	99.038	109.487	N/A	N/A	-10.449	PK
2		5350.000	60.678	71.177	-13.322	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 674
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1	

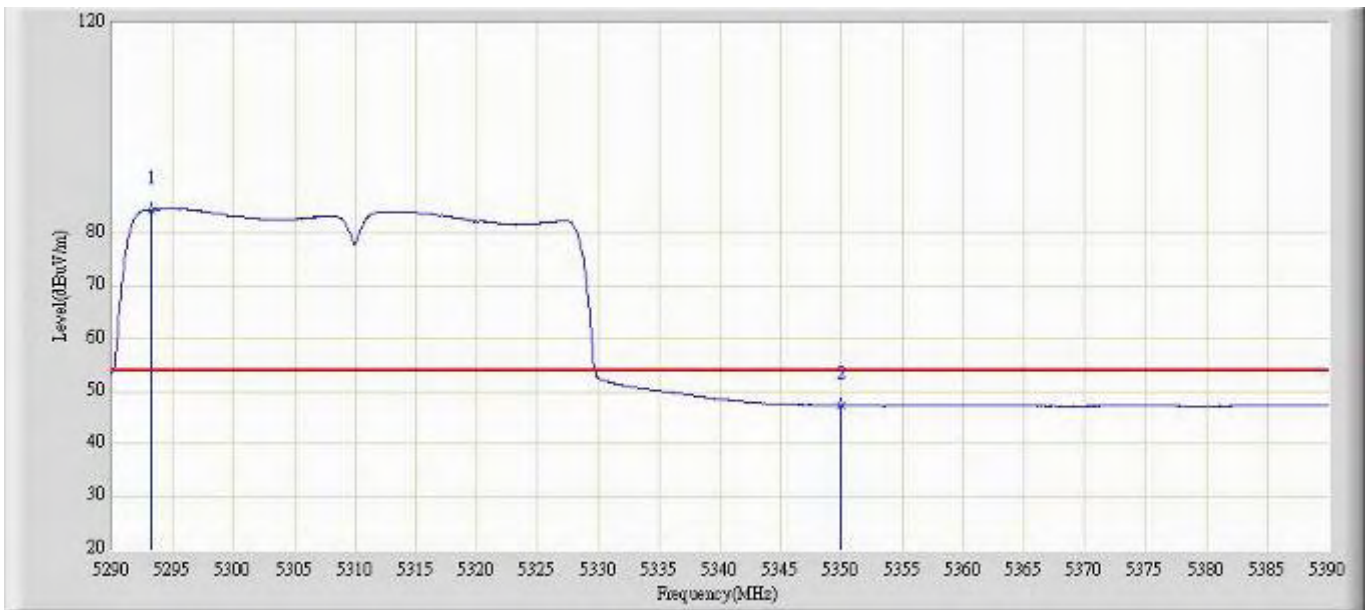


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5293.200	84.448	94.871	N/A	N/A	-10.423	AV
2		5350.000	47.258	57.757	-6.742	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 675
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1	

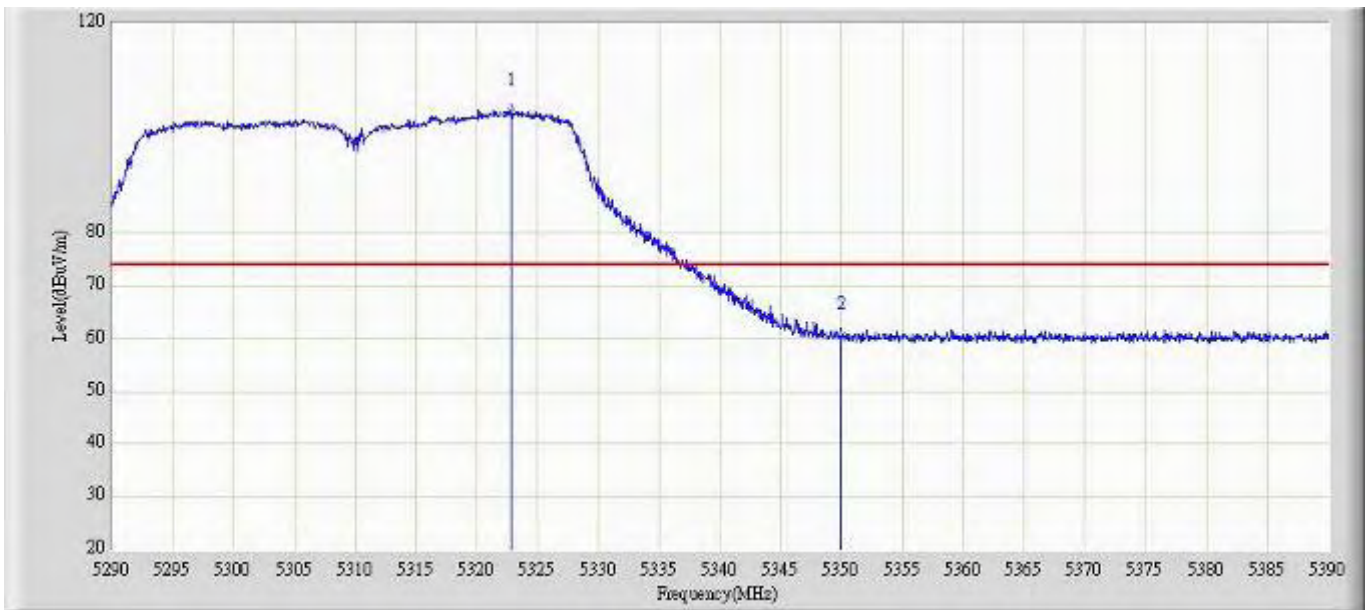


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5322.800	103.096	113.550	N/A	N/A	-10.454	PK
2		5350.000	60.393	70.892	-13.607	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 676
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1	

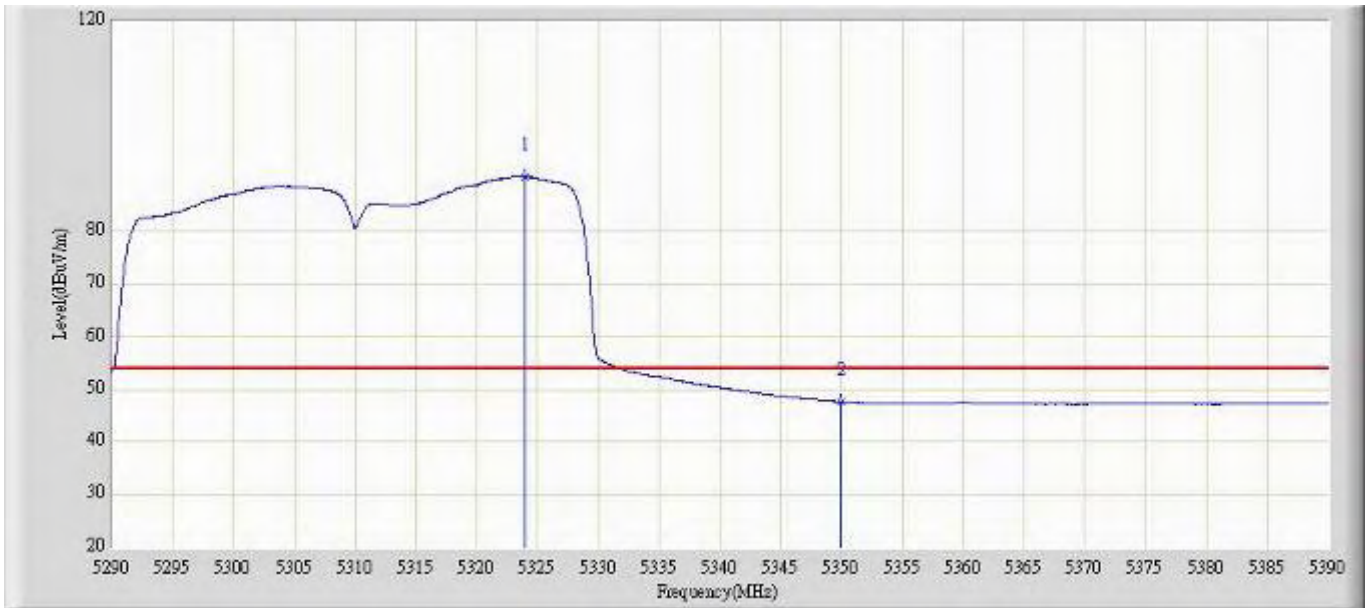


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.900	90.351	100.811	N/A	N/A	-10.460	AV
2		5350.000	47.627	58.126	-6.373	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 677
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1	

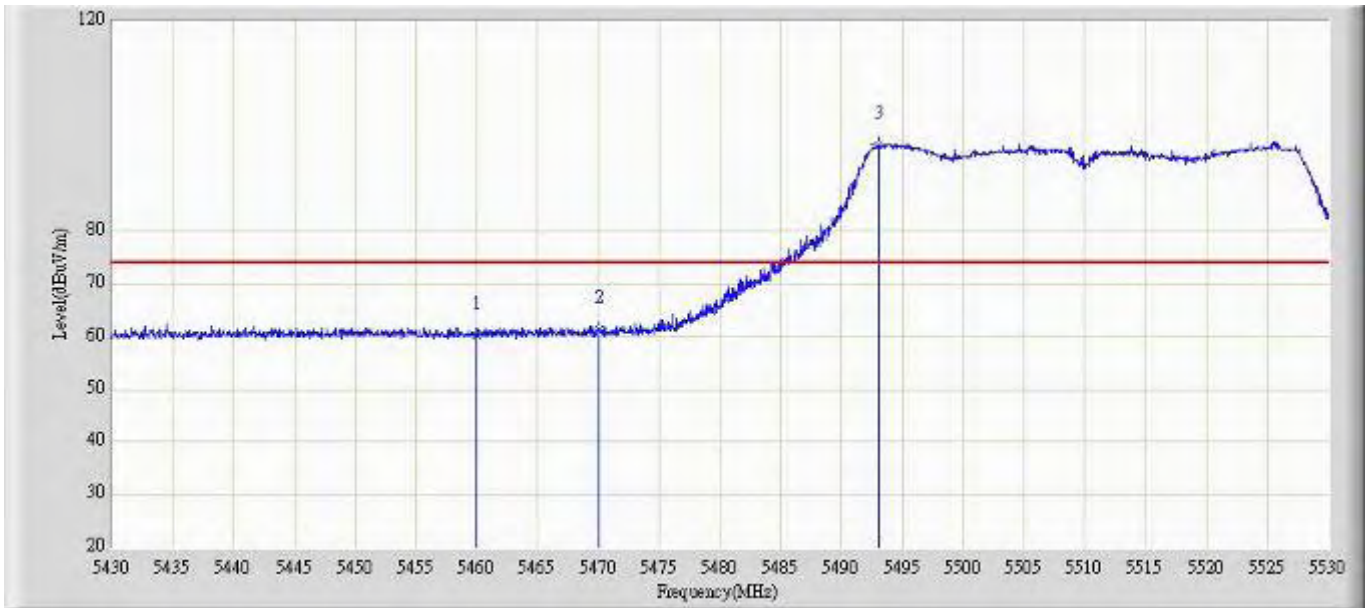


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.321	70.591	-13.679	74.000	-10.269	PK
2		5470.000	61.393	71.698	-26.907	88.300	-10.305	PK
3	*	5493.100	96.425	106.709	N/A	N/A	-10.284	PK

Profile: 11BS004R	Page No.: 678
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1	

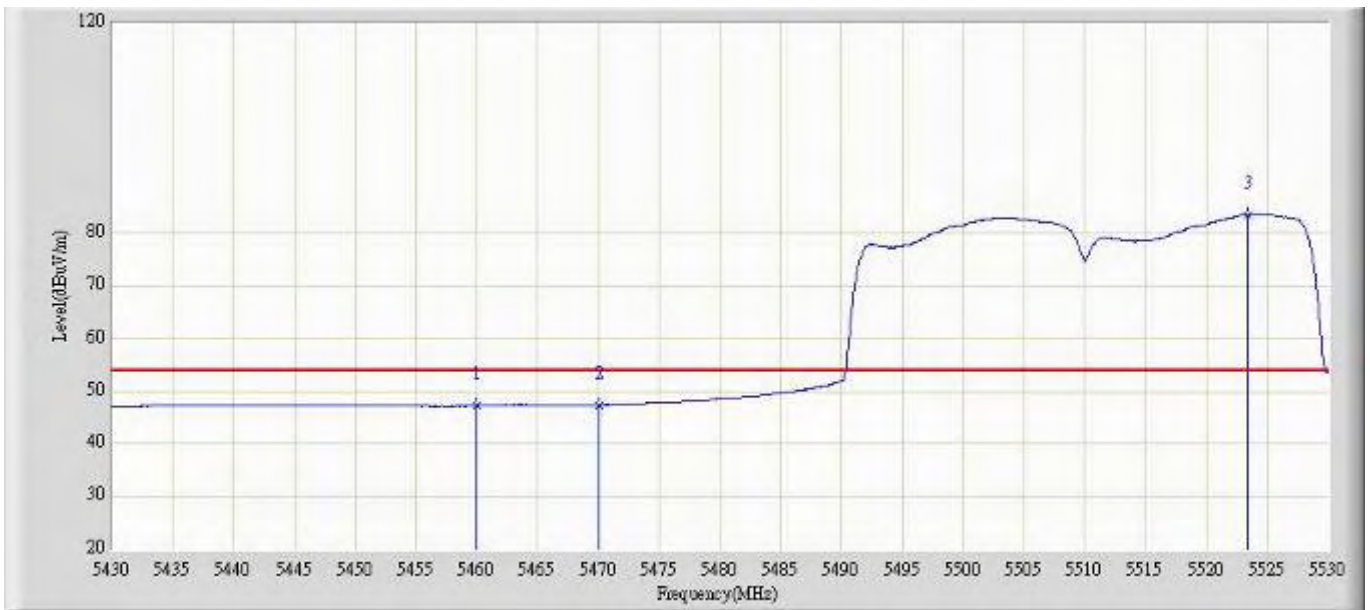


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.225	57.495	-6.775	54.000	-10.269	AV
2		5470.000	47.388	57.693	-20.912	68.300	-10.305	AV
3	*	5523.400	83.548	93.661	N/A	N/A	-10.113	AV

Profile: 11BS004R	Page No.: 679
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1	

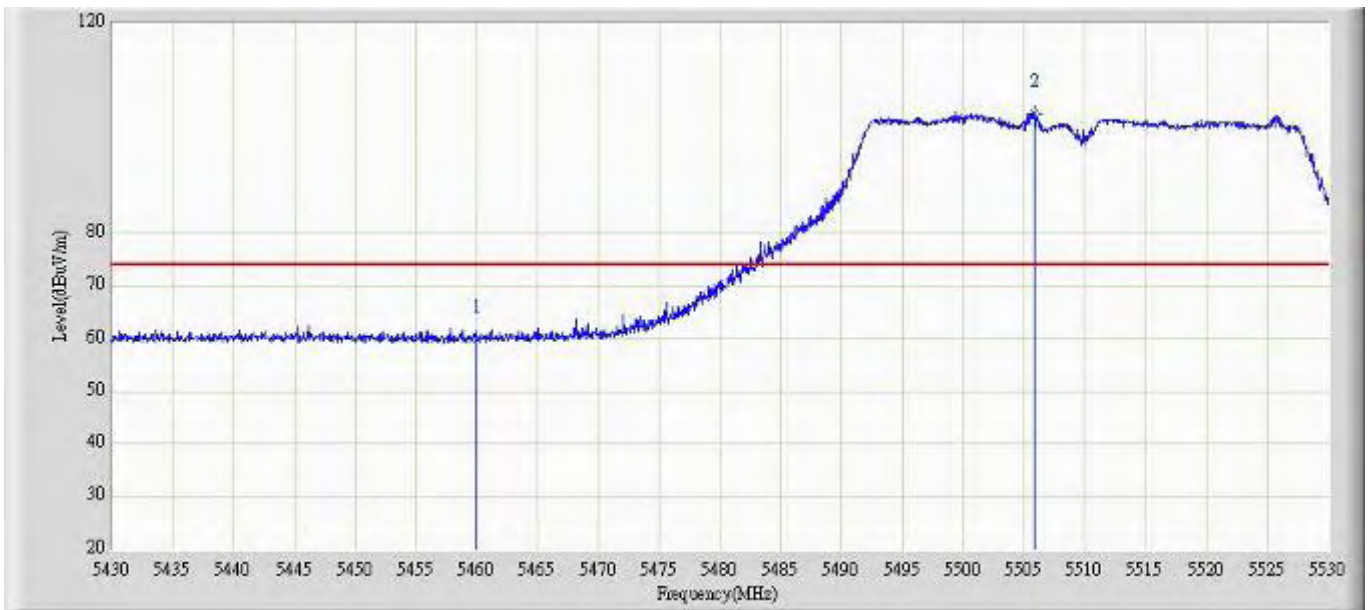


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.055	70.325	-13.945	74.000	-10.269	PK
2	*	5505.850	102.771	113.007	N/A	N/A	-10.235	PK

Profile: 11BS004R	Page No.: 680
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1	

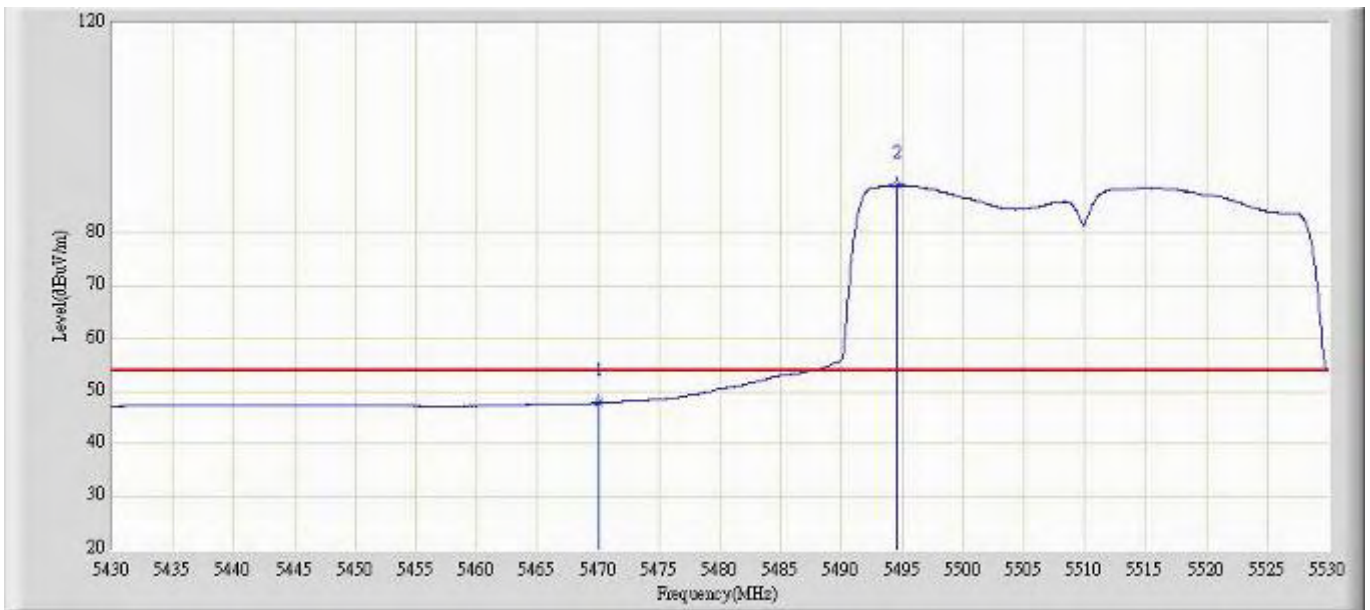


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5470.000	47.785	58.090	-6.215	54.000	-10.305	AV
2	*	5494.600	89.127	99.406	N/A	N/A	-10.278	AV

Profile: 11BS004R	Page No.: 953
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:30
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1	

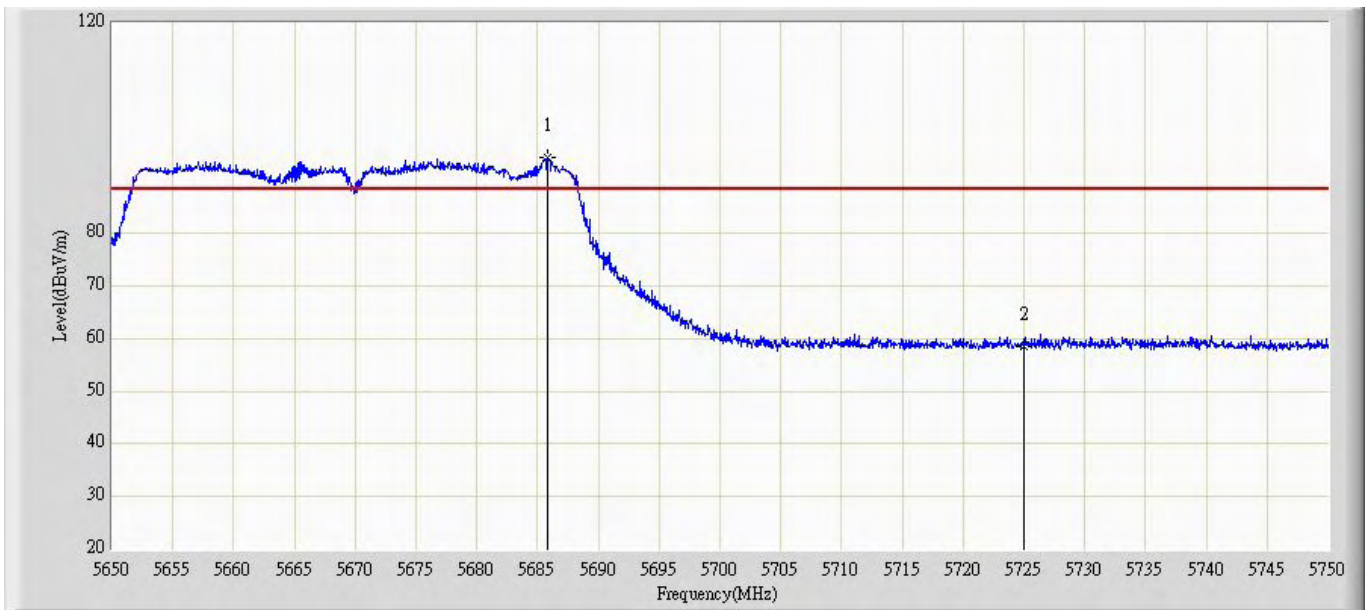


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5685.800	94.311	104.150	N/A	N/A	-9.840	PK
2			5725.000	58.516	68.290	-29.784	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 954
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:31
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1	

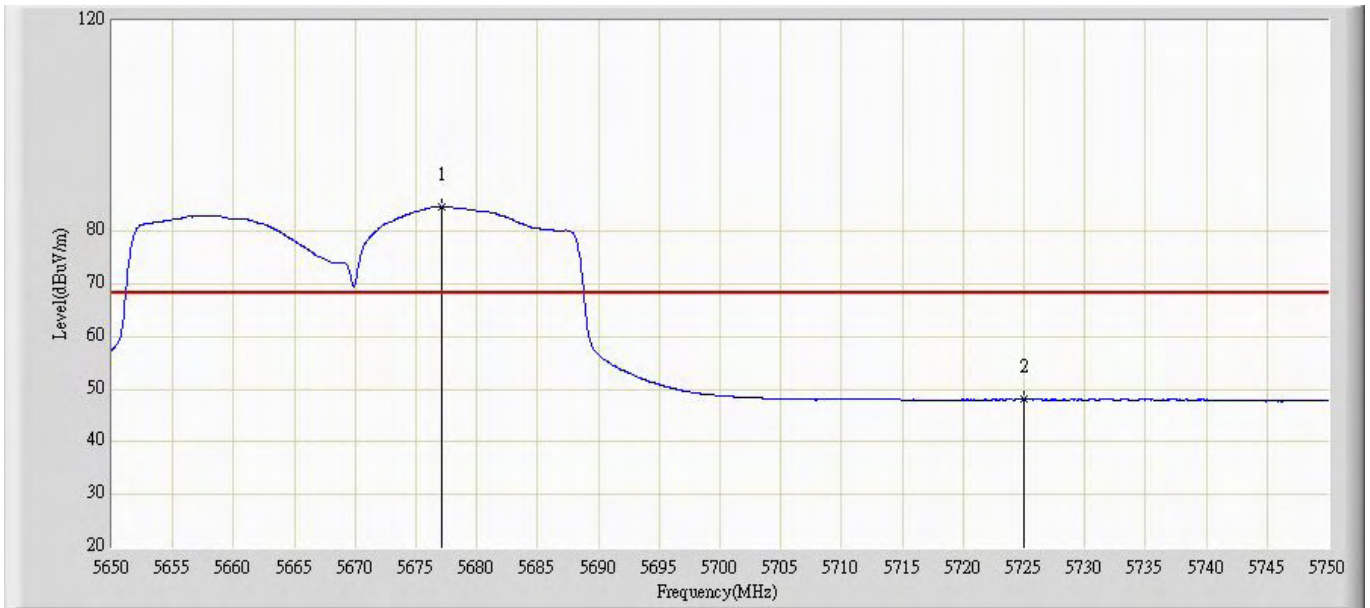


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5677.150	84.654	94.483	N/A	N/A	-9.829	AV
2			5725.000	48.040	57.814	-20.260	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 955
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:31
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1	

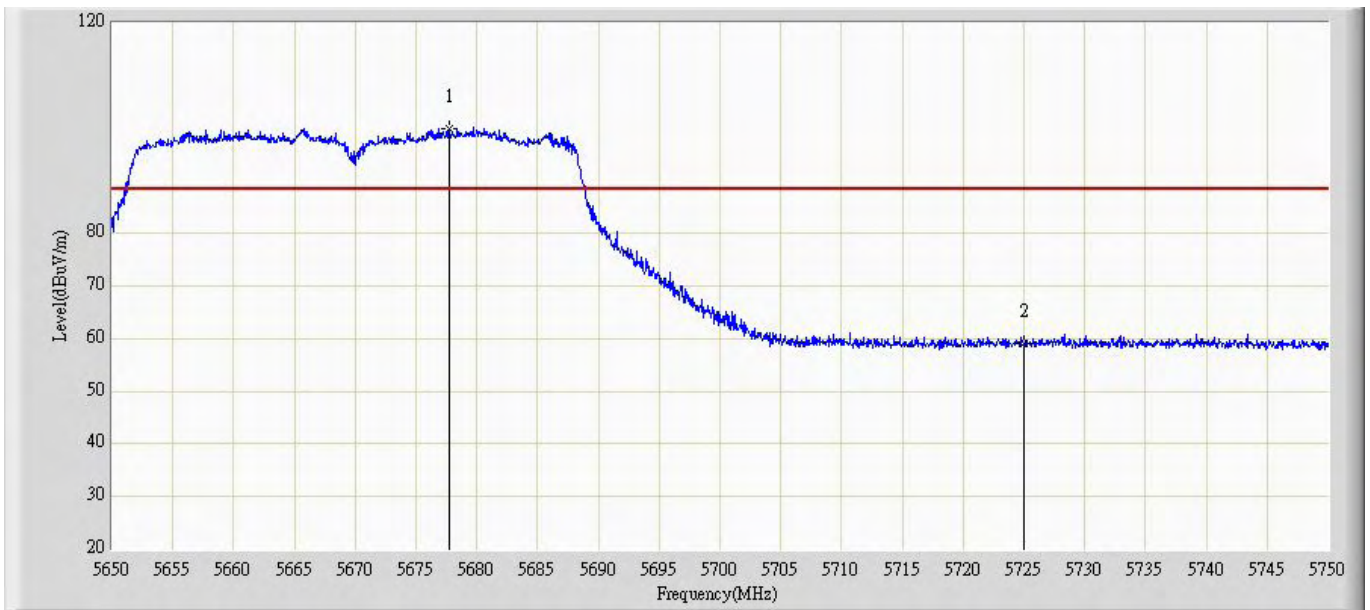


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5677.700	99.920	109.749	N/A	N/A	-9.830	PK
2			5725.000	59.101	68.875	-29.199	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 956
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:33
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1	

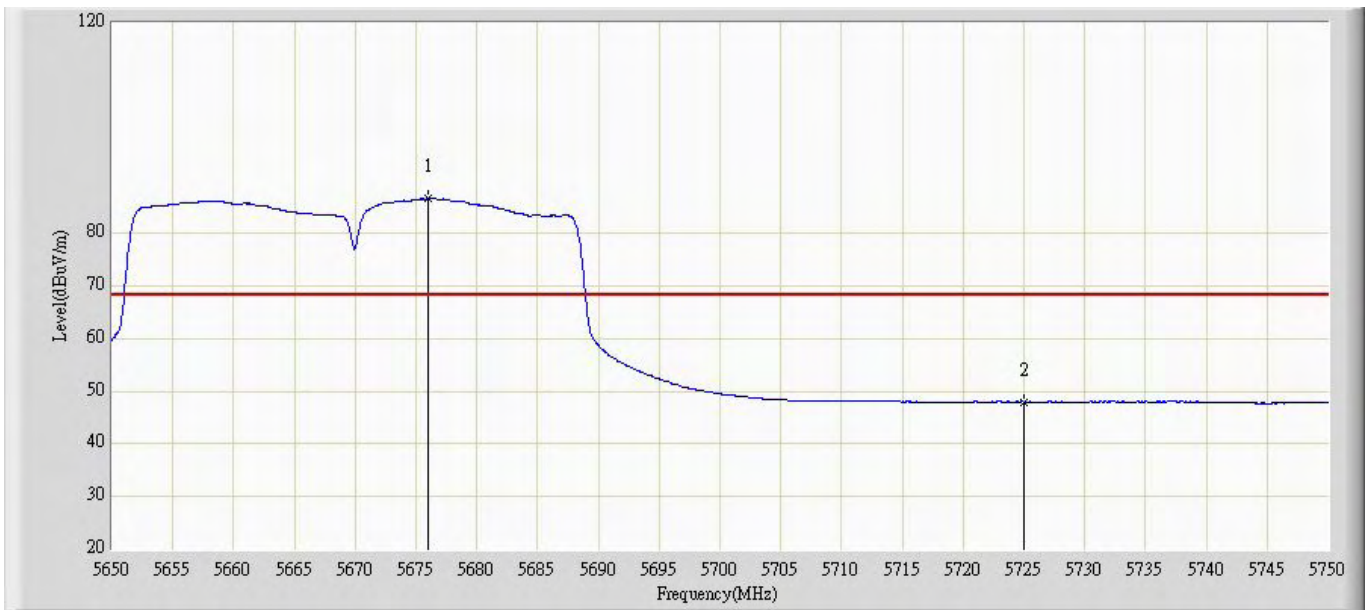


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5676.000	86.660	96.487	N/A	N/A	-9.828	AV
2			5725.000	47.996	57.770	-20.304	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 681
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1+2	

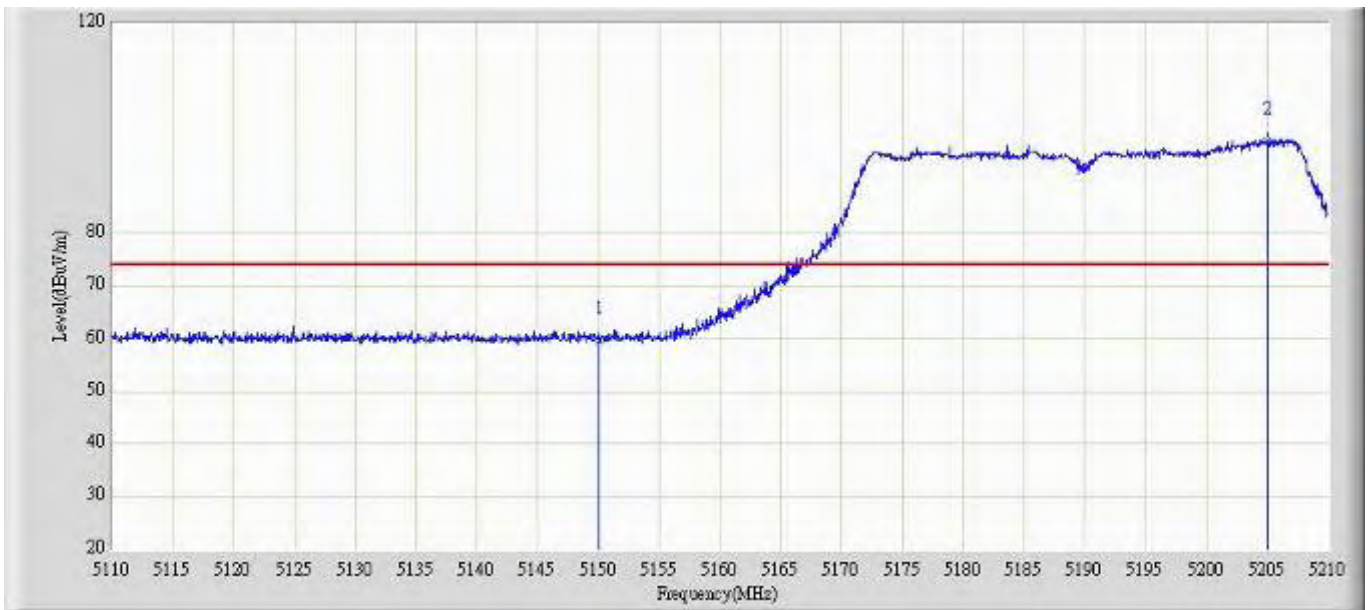


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	59.717	70.144	-14.283	74.000	-10.427	PK
2	*	5205.000	97.556	108.058	N/A	N/A	-10.503	PK

Profile: 11BS004R	Page No.: 682
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1+2	

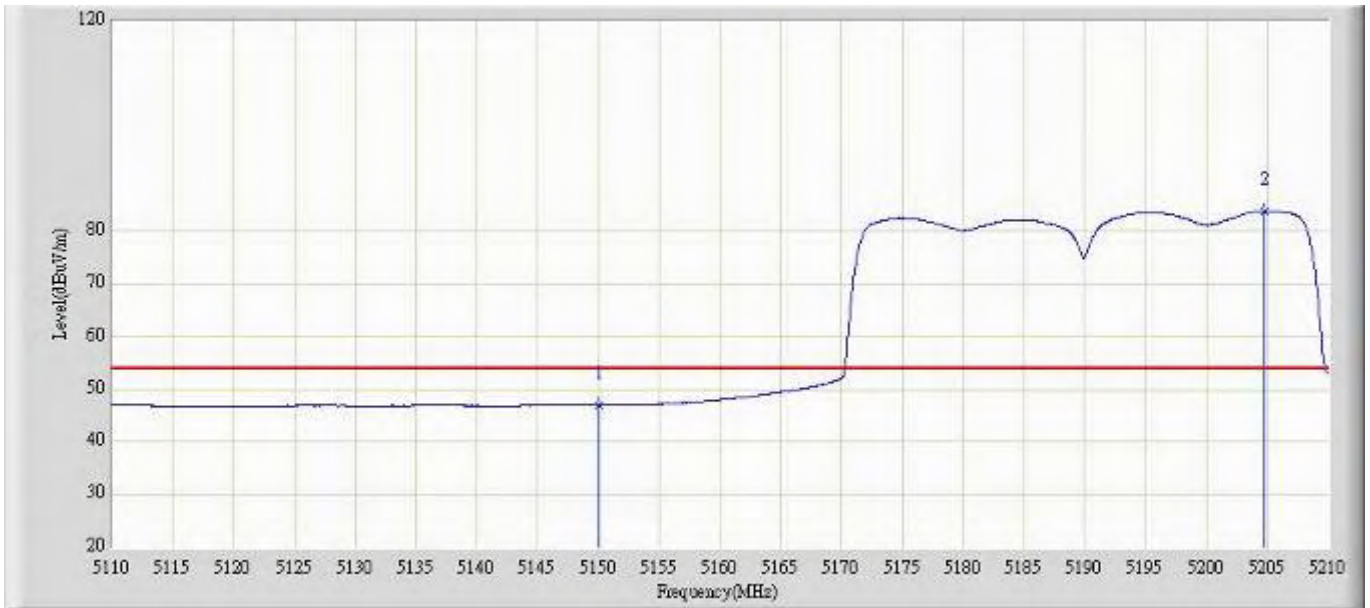


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.044	57.471	-6.956	54.000	-10.427	AV
2	*	5204.800	83.874	94.377	N/A	N/A	-10.504	AV

Profile: 11BS004R	Page No.: 683
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1+2	

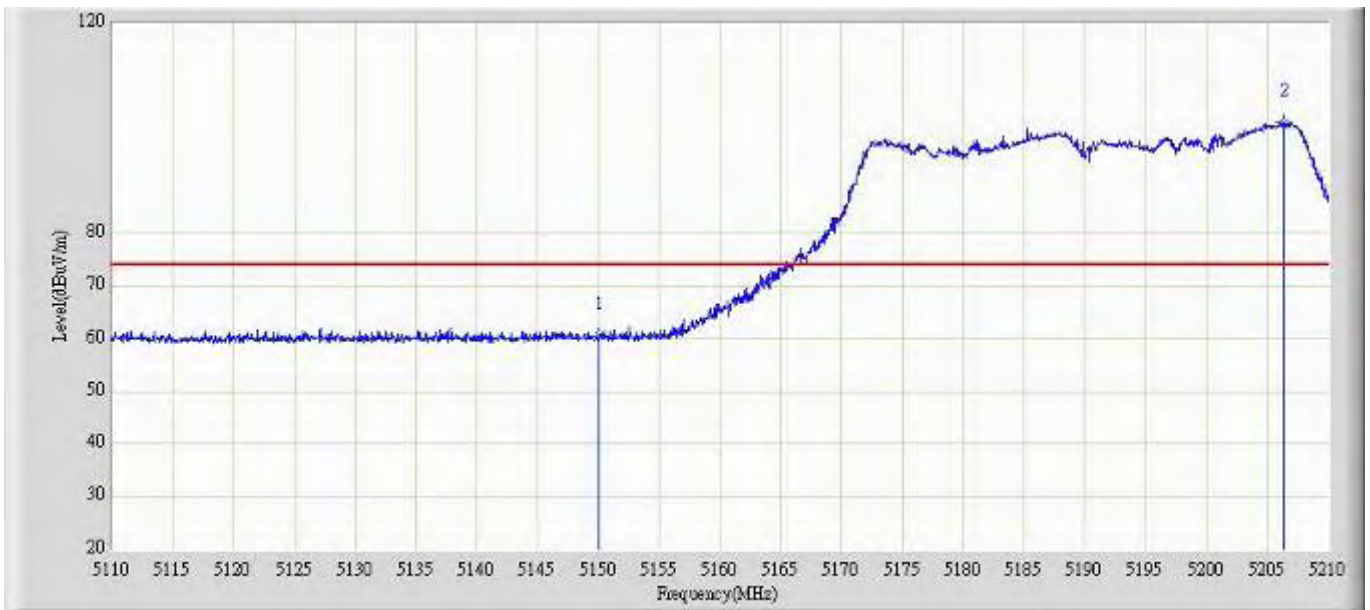


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.659	71.086	-13.341	74.000	-10.427	PK
2	*	5206.450	100.985	111.480	N/A	N/A	-10.495	PK

Profile: 11BS004R	Page No.: 684
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40(MHz) Chain 0+1+2	

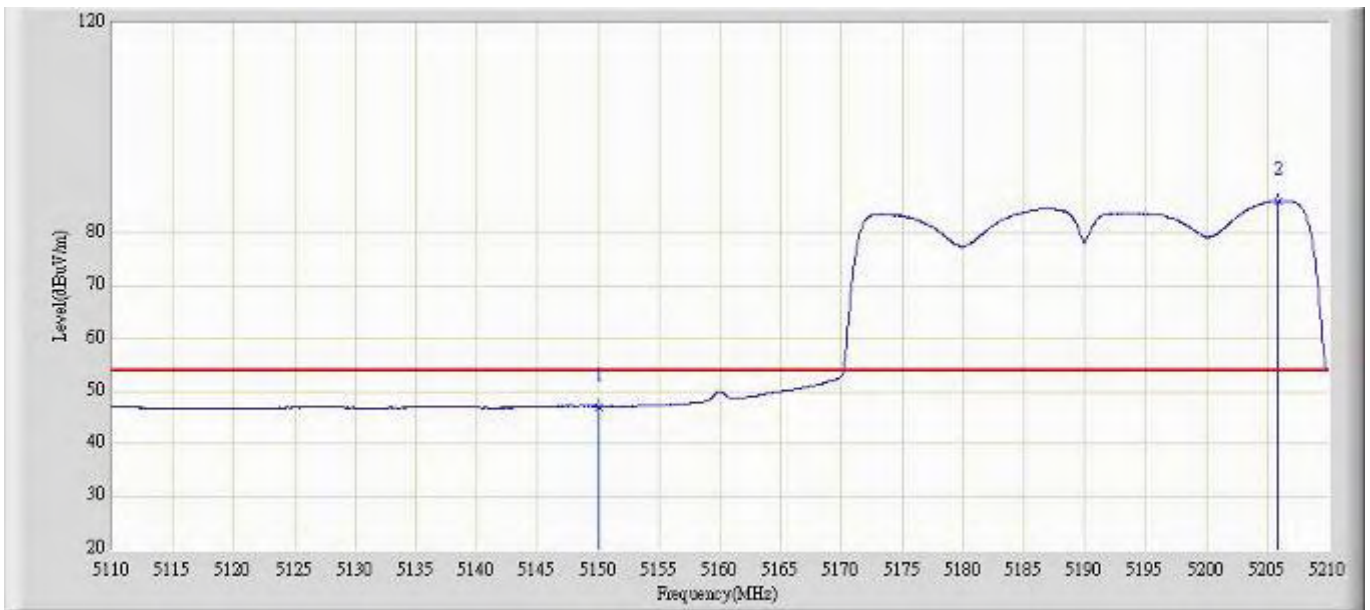


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.086	57.513	-6.914	54.000	-10.427	AV
2	*	5205.900	86.228	96.726	N/A	N/A	-10.498	AV

Profile: 11BS004R	Page No.: 685
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1+2	

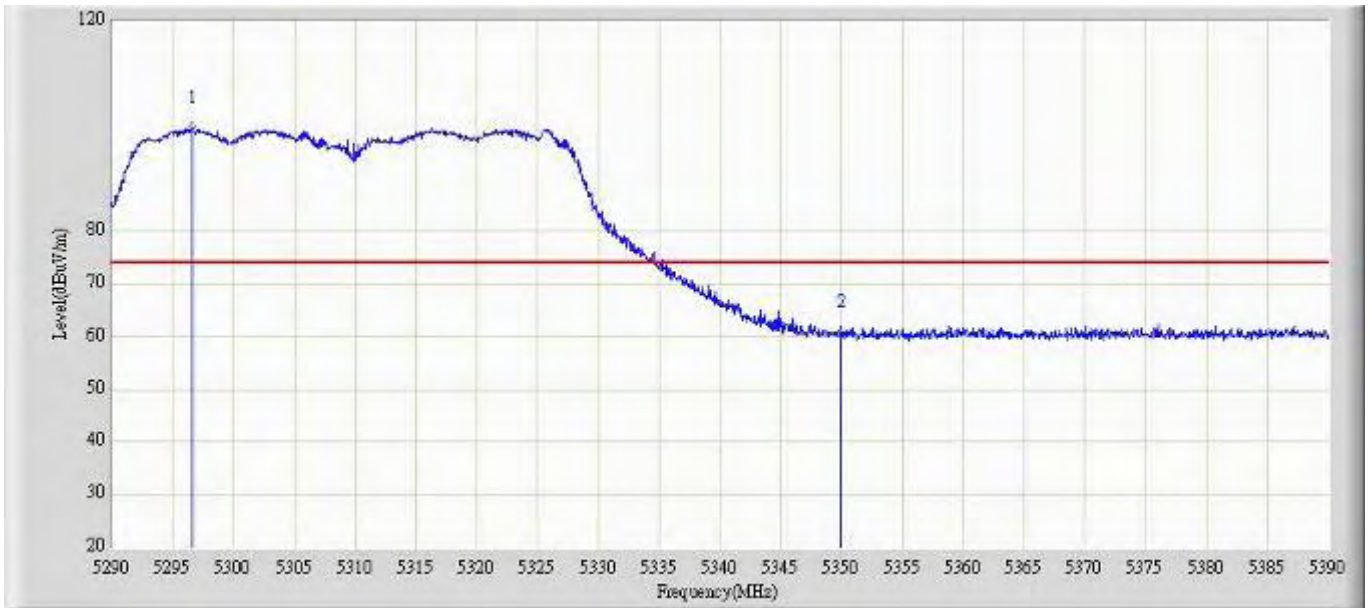


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5296.650	99.285	109.692	N/A	N/A	-10.406	PK
2		5350.000	60.634	71.133	-13.366	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 686
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1+2	

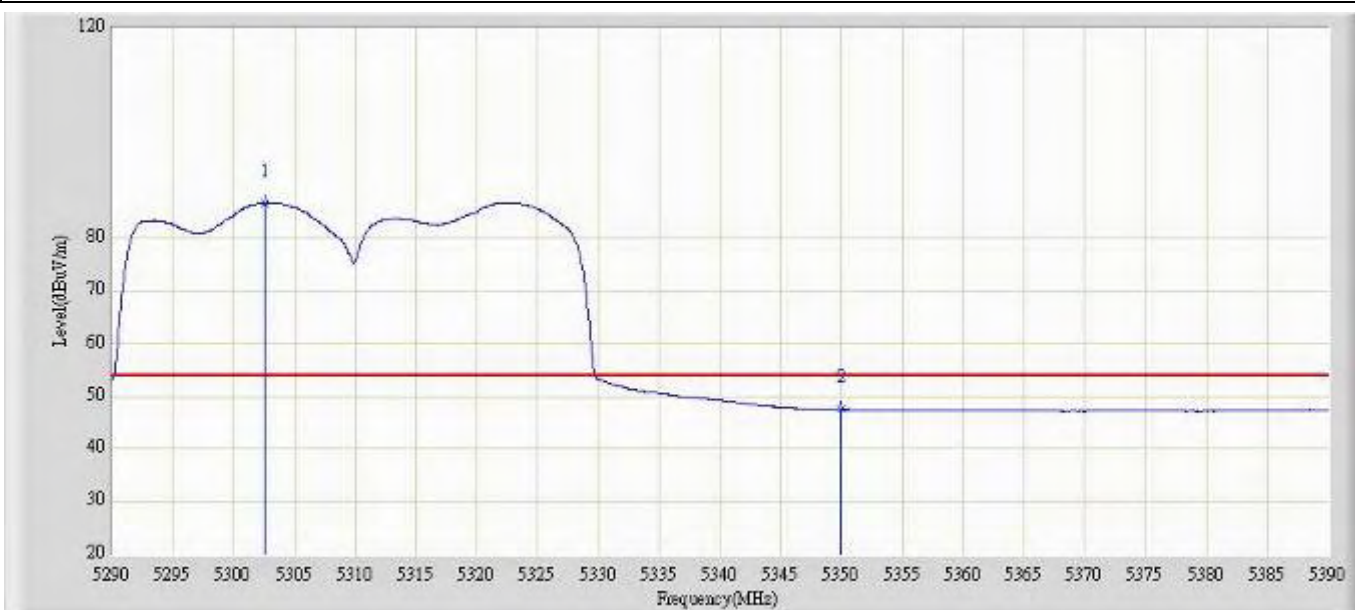


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5302.550	86.744	97.134	N/A	N/A	-10.390	AV
2		5350.000	47.463	57.962	-6.537	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 687
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1+2	

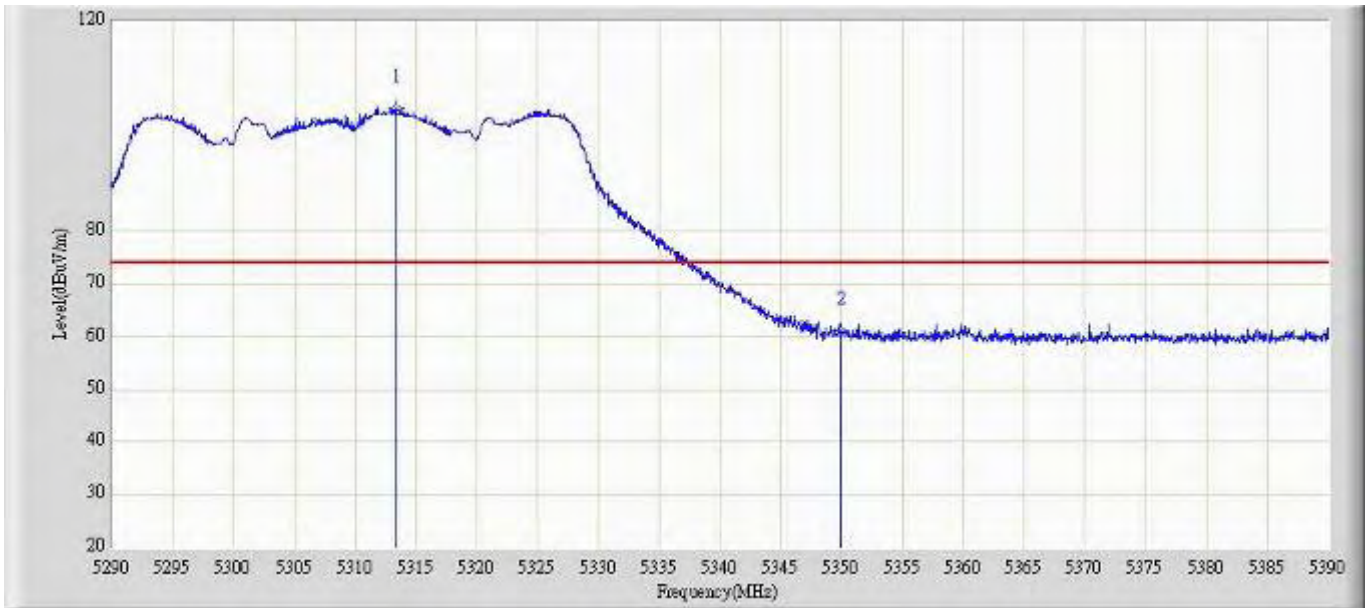


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5313.350	103.428	113.843	N/A	N/A	-10.415	PK
2		5350.000	61.008	71.507	-12.992	74.000	-10.498	PK

Profile: 11BS004R	Page No.: 688
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40(MHz) Chain 0+1+2	

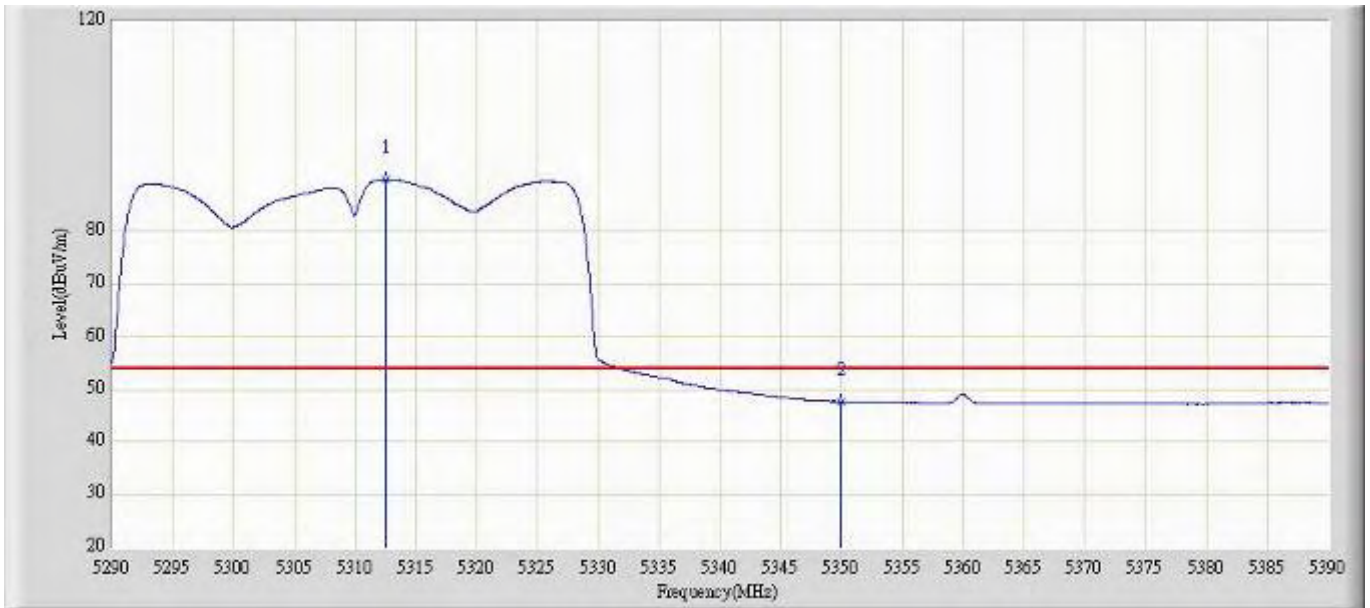


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5312.500	89.877	100.290	N/A	N/A	-10.413	AV
2		5350.000	47.664	58.163	-6.336	54.000	-10.498	AV

Profile: 11BS004R	Page No.: 689
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1+2	

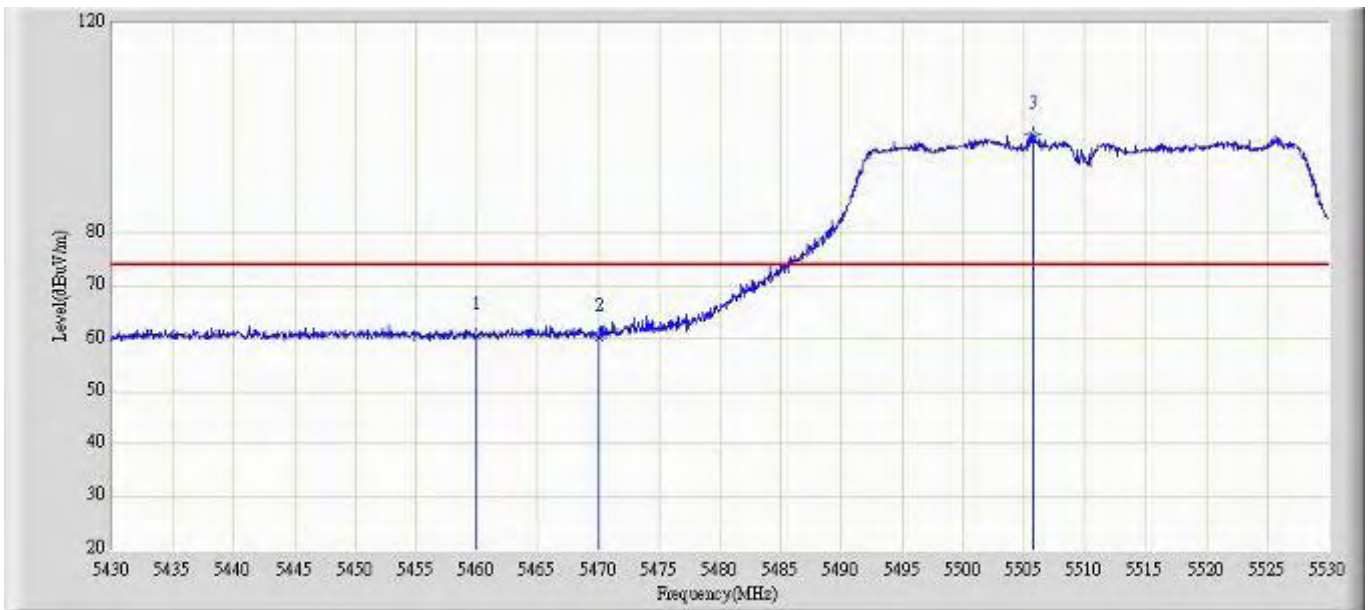


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.525	70.795	-13.475	74.000	-10.269	PK
2		5470.000	60.263	70.568	-28.037	88.300	-10.305	PK
3	*	5505.800	98.754	108.991	N/A	N/A	-10.237	PK

Profile: 11BS004R	Page No.: 690
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1+2	

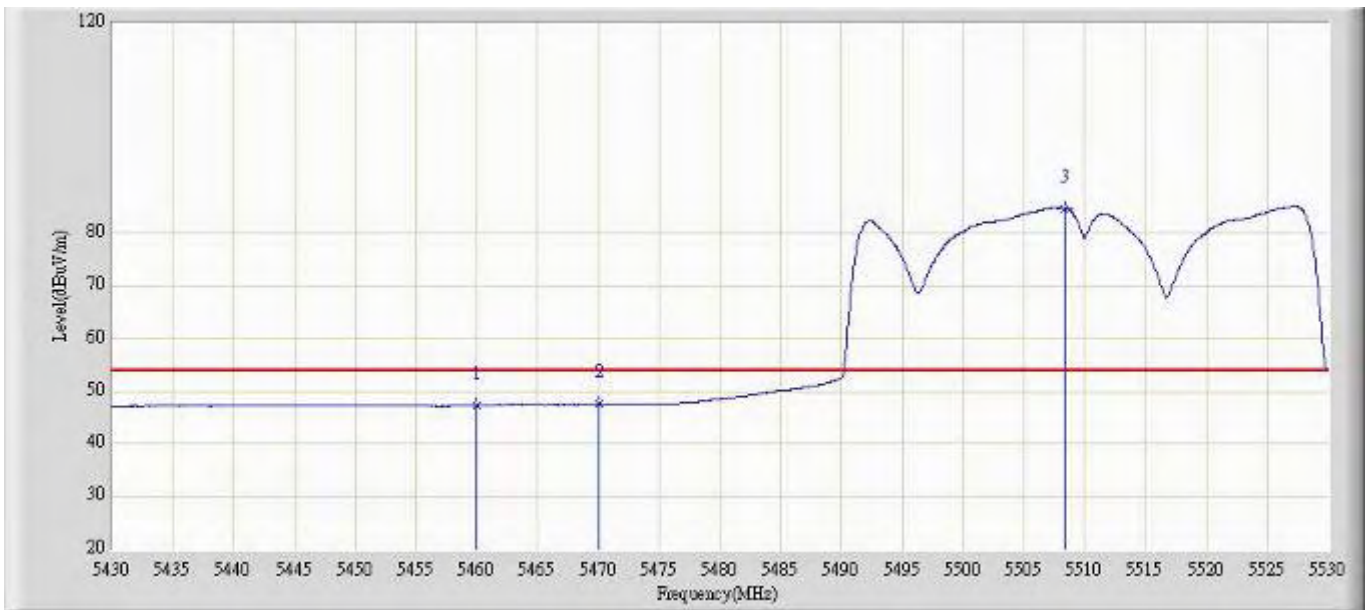


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.254	57.524	-6.746	54.000	-10.269	AV
2		5470.000	47.542	57.847	-20.758	68.300	-10.305	AV
3	*	5508.350	84.776	94.993	N/A	N/A	-10.217	AV

Profile: 11BS004R	Page No.: 691
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1+2	

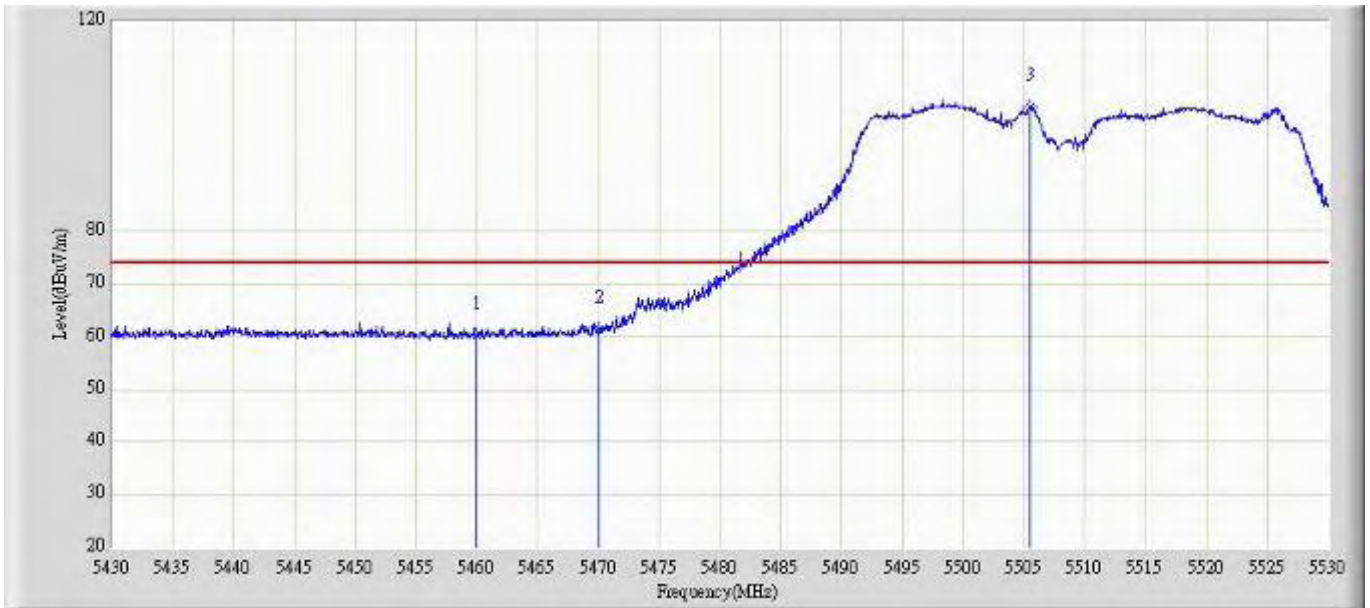


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	60.371	70.641	-13.629	74.000	-10.269	PK
2		5470.000	61.413	71.718	-26.887	88.300	-10.305	PK
3	*	5505.500	103.763	114.002	N/A	N/A	-10.239	PK

Profile: 11BS004R	Page No.: 692
Engineer: Toms	
Site: AC5	Time: 2011/11/29 - 21:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40(MHz) Chain 0+1+2	

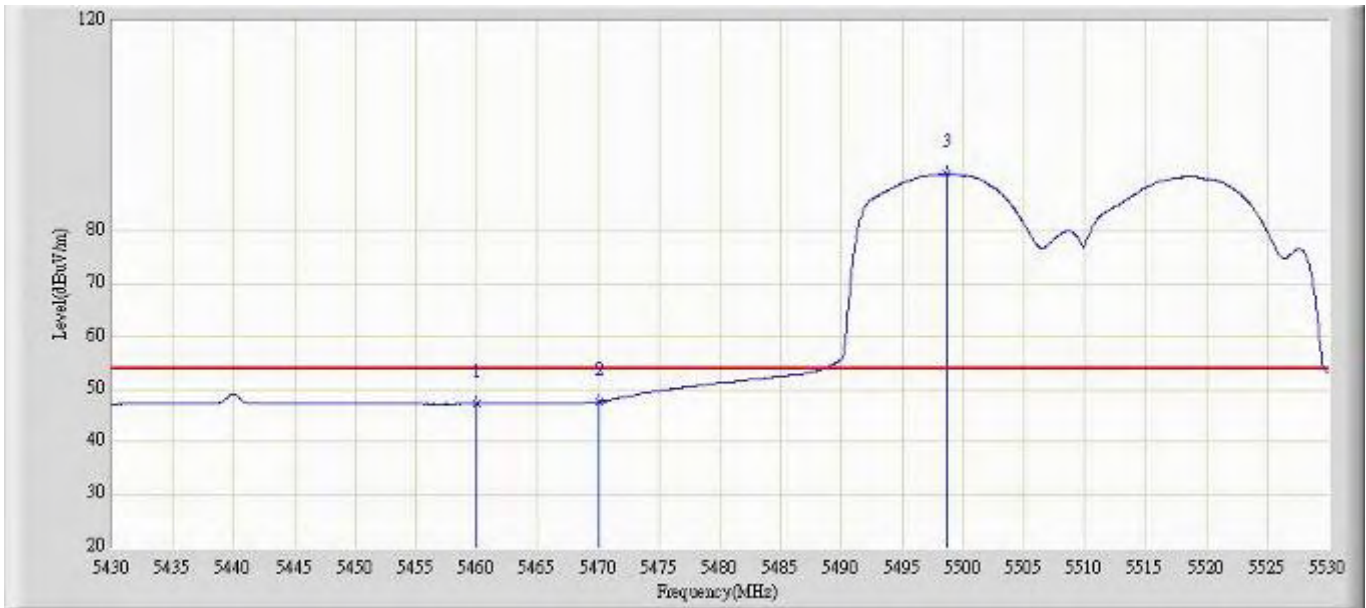


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.209	57.479	-6.791	54.000	-10.269	AV
2		5470.000	47.636	57.941	-20.664	68.300	-10.305	AV
3	*	5498.700	90.919	101.184	N/A	N/A	-10.264	AV

Profile: 11BS004R	Page No.: 959
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:36
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1+2	

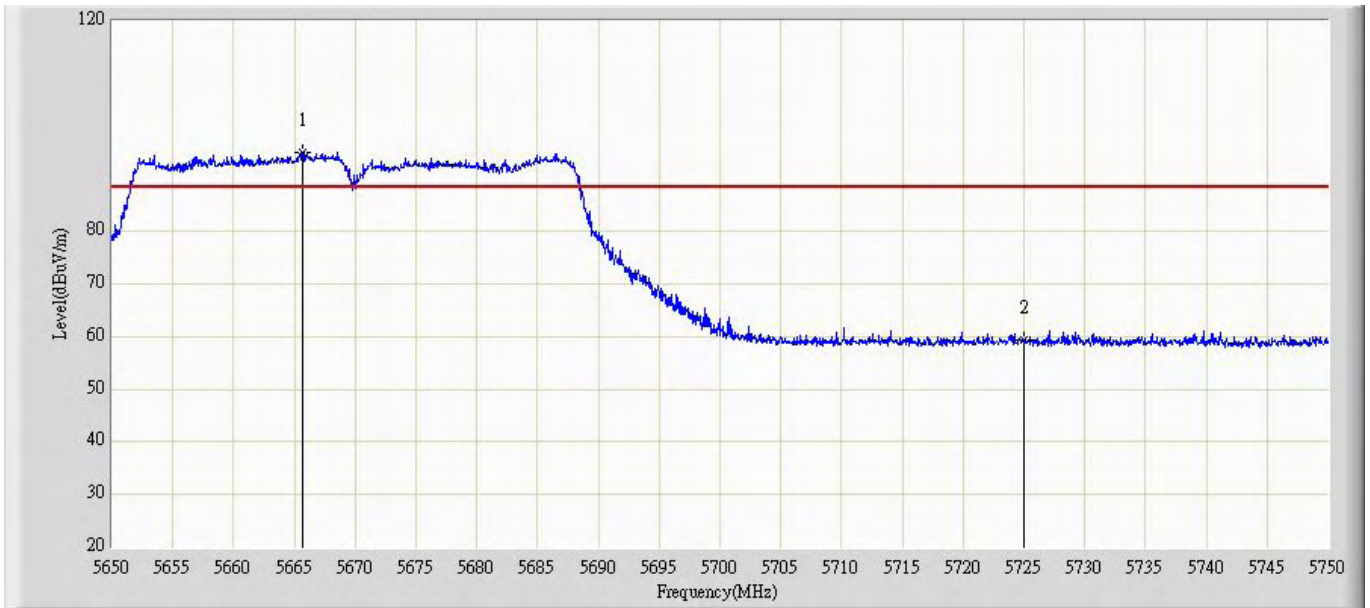


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5665.700	95.029	104.880	N/A	N/A	-9.851	PK
2			5725.000	59.503	69.277	-28.797	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 960
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:37
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Vertical
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1+2	

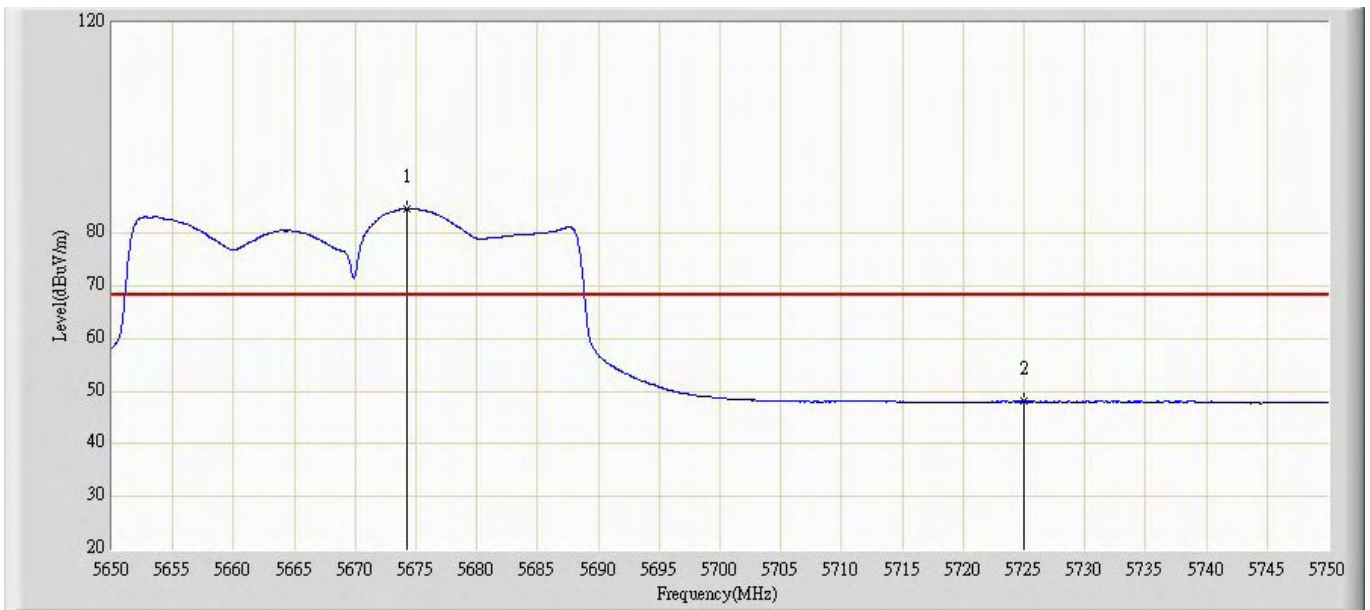


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5674.200	84.566	94.394	N/A	N/A	-9.828	AV
2			5725.000	48.031	57.805	-20.269	68.300	-9.774	AV

Profile: 11BS004R	Page No.: 957
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:33
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1+2	

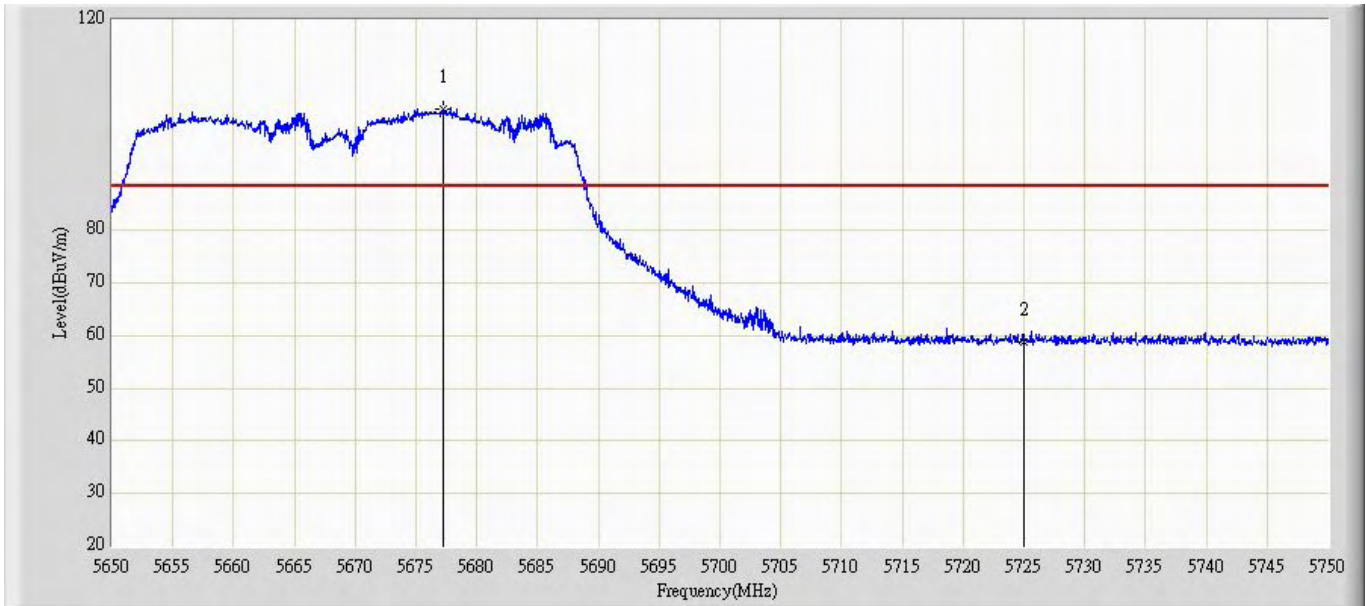

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5677.250	102.911	112.740	N/A	N/A	-9.829	PK
2			5725.000	58.654	68.428	-29.646	88.300	-9.774	PK

Profile: 11BS004R	Page No.: 958
Engineer: Toms	
Site: AC5	Time: 2011/12/29 - 22:35
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Wireless LAN access Point	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5670MHz by 802.11n40(MHz) Chain 0+1+2	

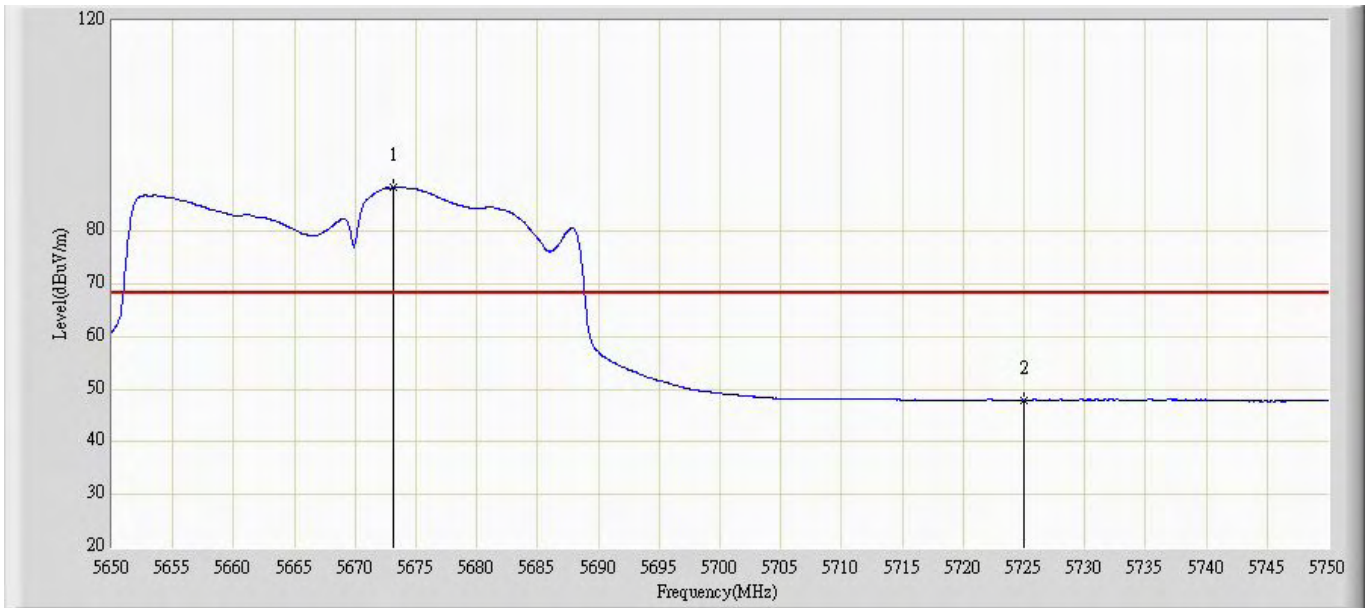

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5673.100	88.250	98.081	N/A	N/A	-9.831	AV
2			5725.000	47.995	57.769	-20.305	68.300	-9.774	AV

11. Frequency Stability


11.1. Test Equipment

Frequency Stability / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2012.04.30
AC Power Supply	IDRC	CF-500TP	979422	2012.09.22
DC Power Supply	IDRC	CD-035-020PR	977272	2012.09.22
Programmable Temperature & Humidity Chamber	Gaoyu	TH-1P-B	WIT-05121302	2012.01.19
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2012.05.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2. Test Setup

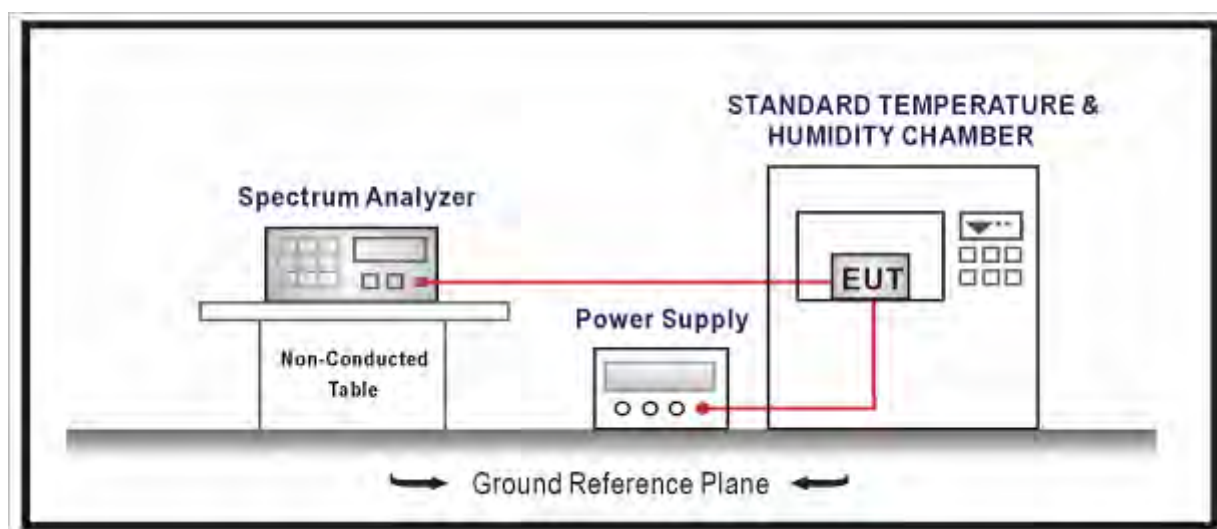

11.3. Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

11.4. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

11.5. Uncertainty

The measurement uncertainty is defined as ± 100 Hz

11.6. Test Result

Product	:	Wireless LAN access Point
Test Item	:	Frequency Stability
Test Site	:	TR-8
Test Mode	:	Carrier Transmit

Operating Frequency: 5180MHz					
Temp (°C)	Voltage (AC)	Frequency Tolerance (ppm)			
		0 minutes	2 minutes	5 minutes	10 minutes
-10	102	2.45	2.45	2.49	2.48
	120	2.03	2.03	2.01	2.01
	138	2.24	2.22	2.21	2.17
20	102	2.45	2.45	2.49	2.48
	120	2.02	2.02	2.01	2.00
	138	2.23	2.21	2.21	2.18
55	102	2.38	2.37	2.37	2.36
	120	2.03	2.02	2.01	2.00
	138	2.28	2.25	2.25	2.23