


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 5


Vertical

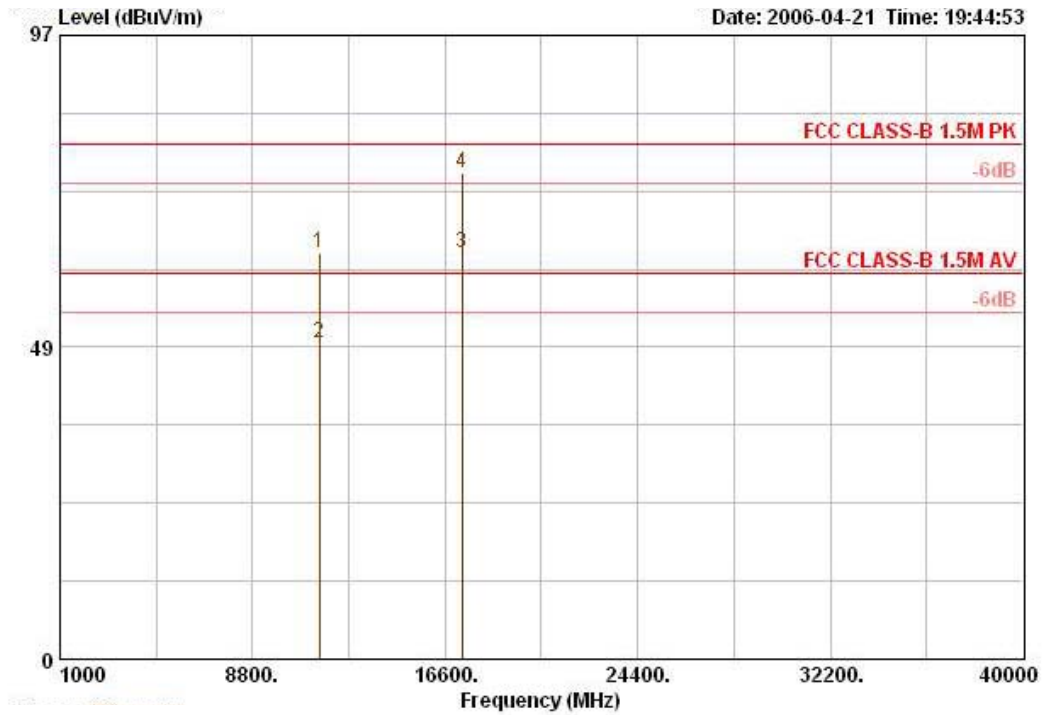

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11516.320	63.22	-16.78	80.00	39.20	7.01	35.10	52.10	PEAK		100	243
2	11518.800	49.12	-10.88	60.00	39.20	7.01	35.11	38.02	AVERAGE		100	243
3	17274.320	63.12			41.07	17.90	35.01	39.16	AVERAGE		106	226
4 !	17274.320	75.68	-4.32	80.00	41.07	17.90	35.01	51.71	PEAK		106	226

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


Horizontal

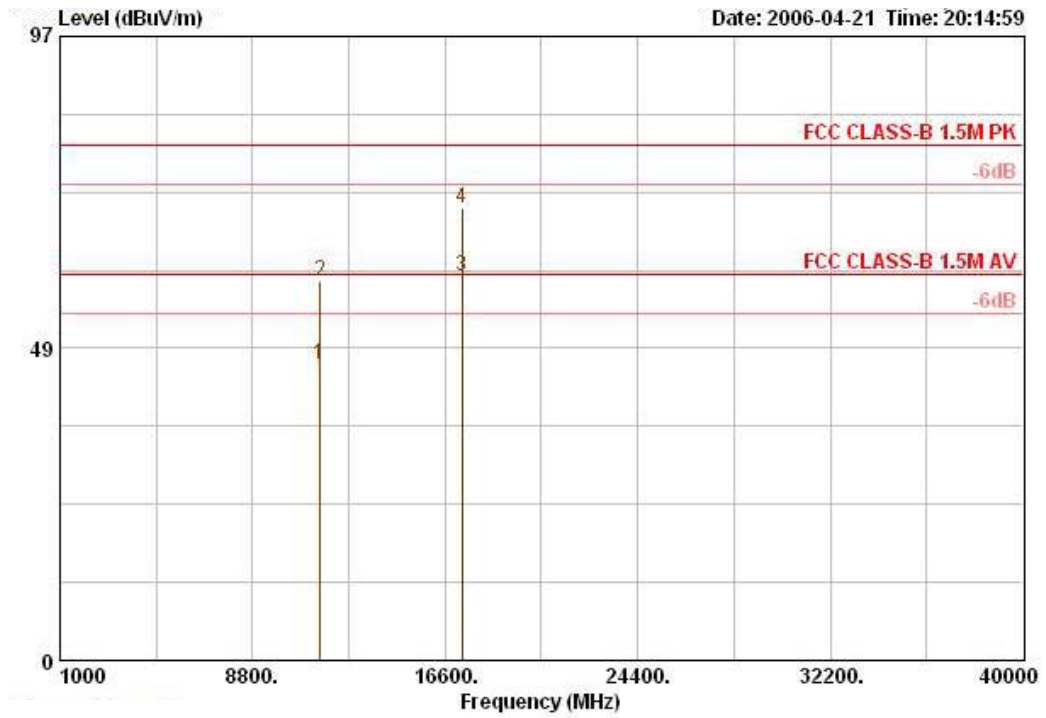

	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1	11518.120	45.91	-14.09	60.00	39.20	7.01	35.10	34.80	AVERAGE	108	299
2	11524.120	58.99	-21.01	80.00	39.20	7.01	35.11	47.89	PEAK	108	299
3 !	17270.440	59.79	-0.21	60.00	41.07	17.90	35.01	35.82	AVERAGE	118	14
4	17270.440	70.31	-9.69	80.00	41.07	17.90	35.01	46.34	PEAK	118	16

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 5


Vertical

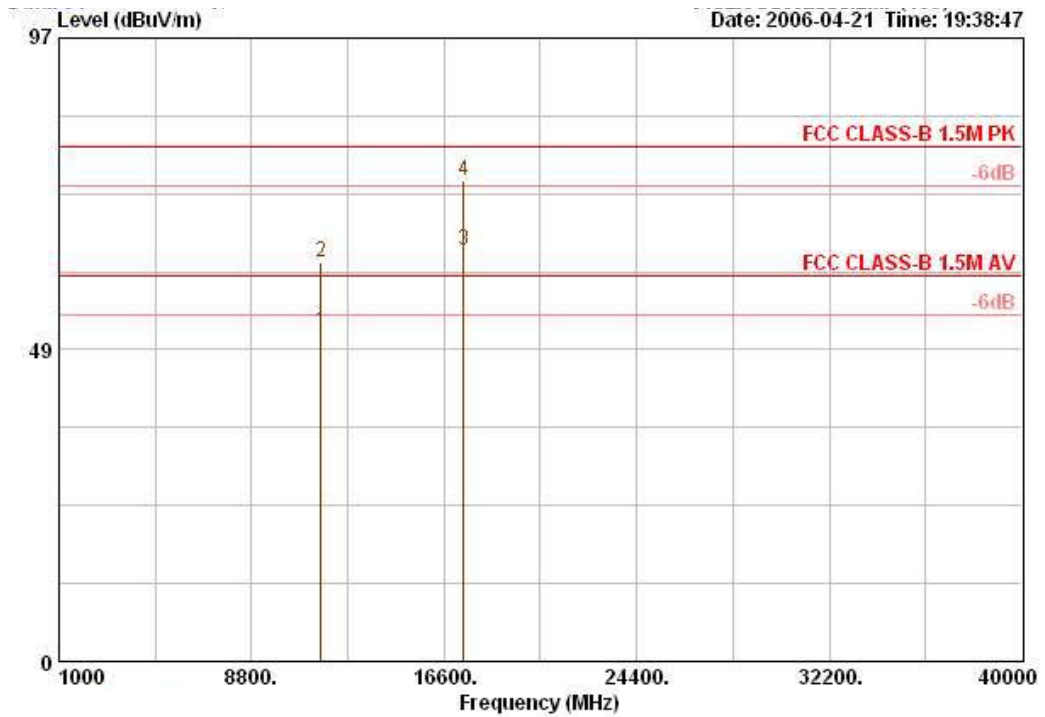

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11600.560	51.22	-8.78	60.00	39.22	7.10	35.14	40.03	AVERAGE		123	242
2	11600.560	62.03	-17.97	80.00	39.22	7.10	35.14	50.85	PEAK		123	242
3	17397.300	64.07			41.66	17.16	35.06	40.31	AVERAGE		100	235
4 !	17397.300	74.88	-5.12	80.00	41.66	17.16	35.06	51.12	PEAK		100	235

Note: Item 3 is on an un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

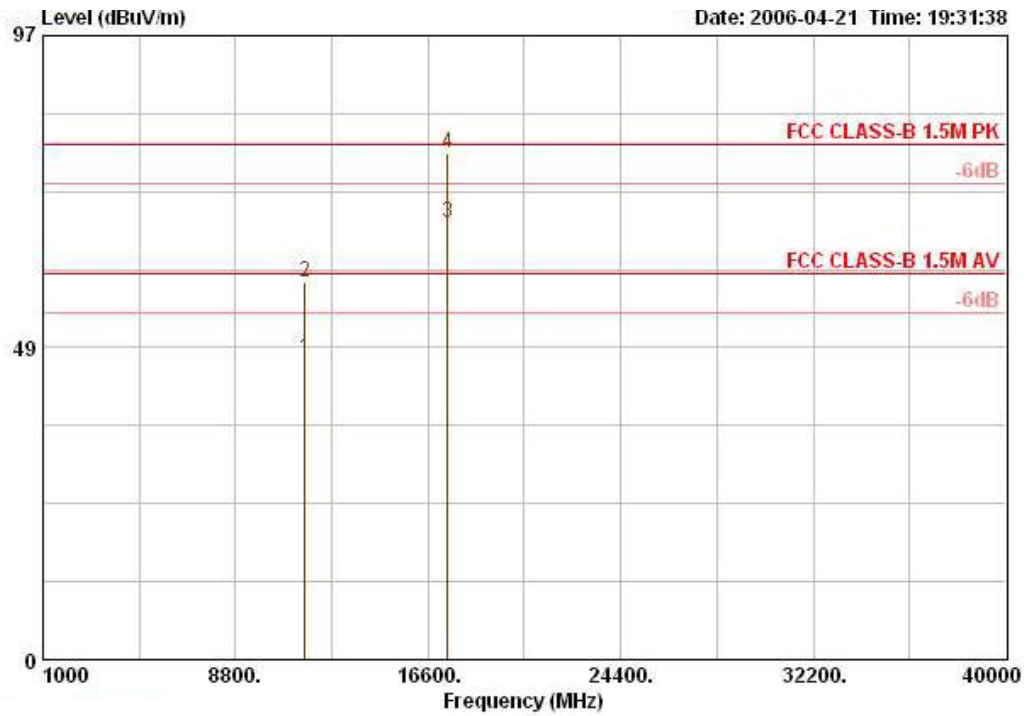

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11598.000	46.86	-13.14	60.00	39.22	7.10	35.14	35.68	AVERAGE	109	299
2	11598.000	58.66	-21.34	80.00	39.22	7.10	35.14	47.48	PEAK	109	299
3	17393.700	67.90			41.59	17.16	35.06	44.22	AVERAGE	123	246
4 !	17393.700	78.71	-1.29	80.00	41.59	17.16	35.06	55.02	PEAK	123	246

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 6

Vertical

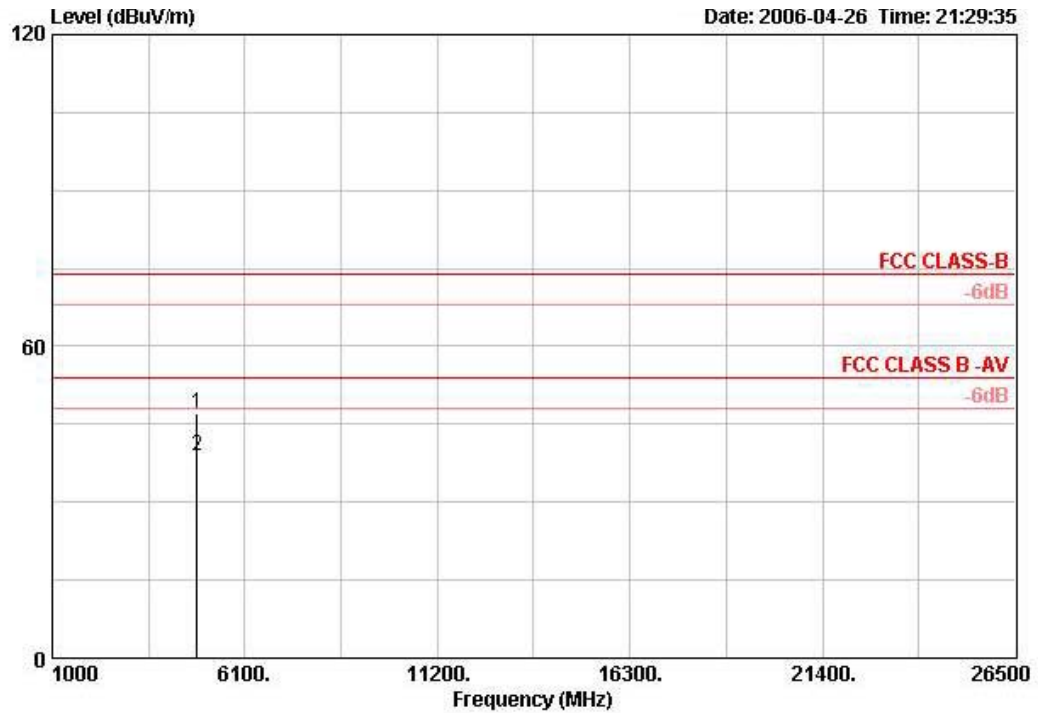

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4823.890	47.20	-26.80	74.00	45.23	32.83	4.30	35.16	PEAK	VERTICAL	3
2	4824.020	39.06	-14.94	54.00	37.10	32.83	4.30	35.16	AVERAGE	VERTICAL	3


Horizontal

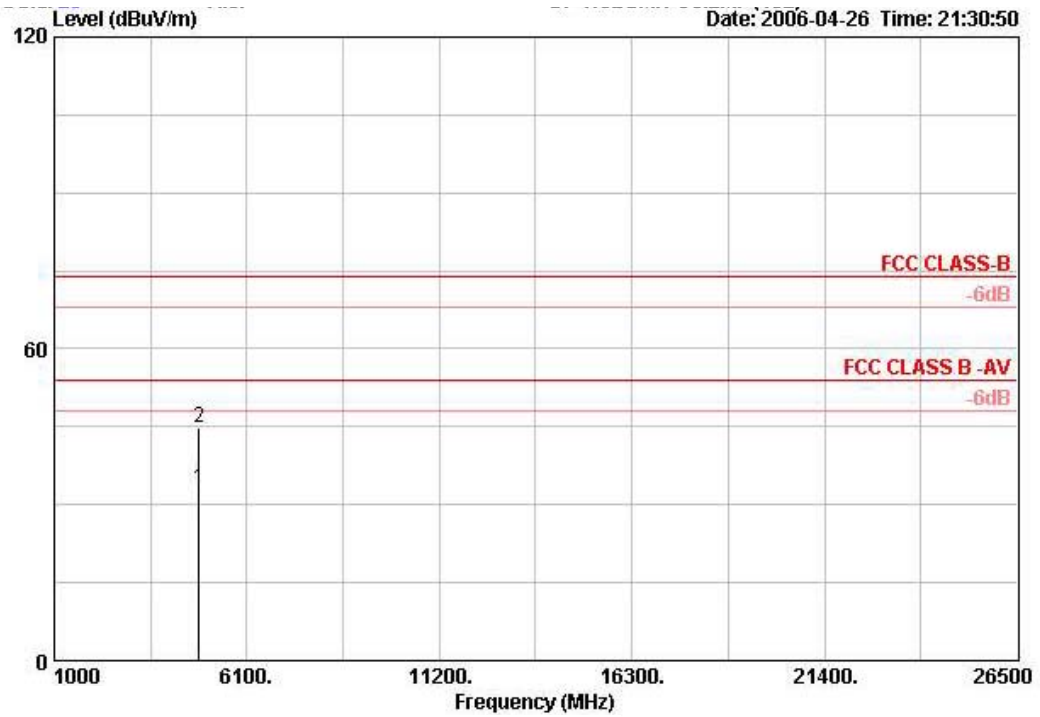

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor			m
			dB	dBuV/m	dBuV	dB/m	dB	dB			
1	4823.996	33.03	-20.97	54.00	31.07	32.83	4.30	35.16	AVERAGE	HORIZONTAL	3
2	4824.262	44.89	-29.11	74.00	42.92	32.83	4.30	35.16	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 6

Vertical

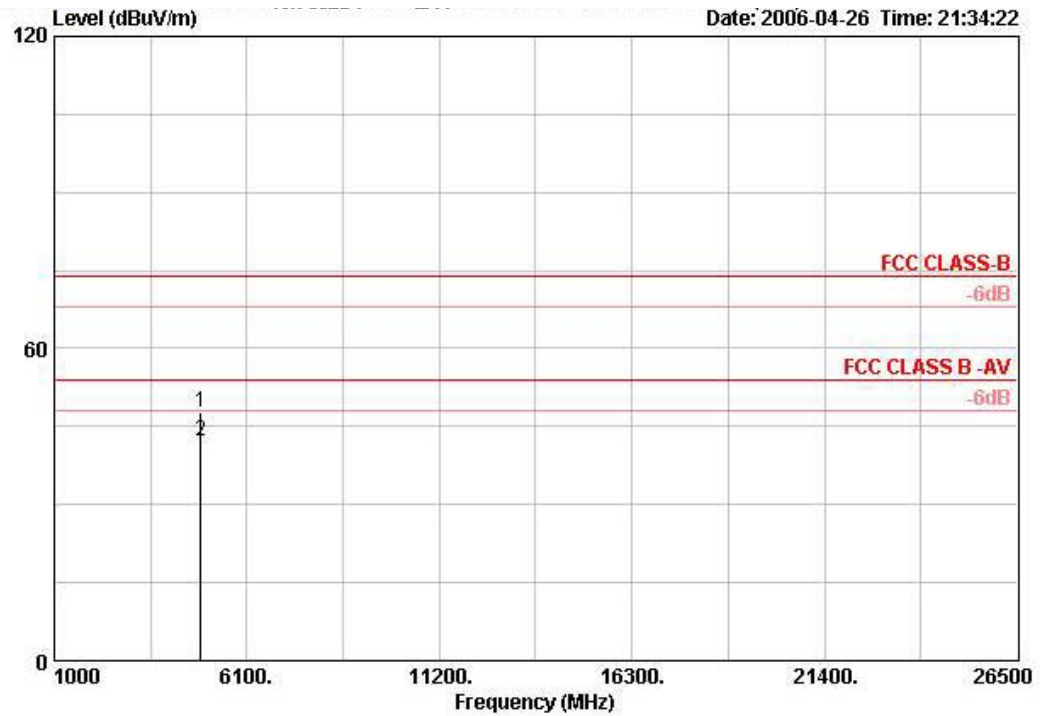

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4873.922	47.67	-26.33	74.00	45.64	32.88	4.30	35.15	PERK	VERTICAL	3
2	4873.944	42.31	-11.69	54.00	40.29	32.88	4.30	35.15	AVERAGE	VERTICAL	3


Horizontal

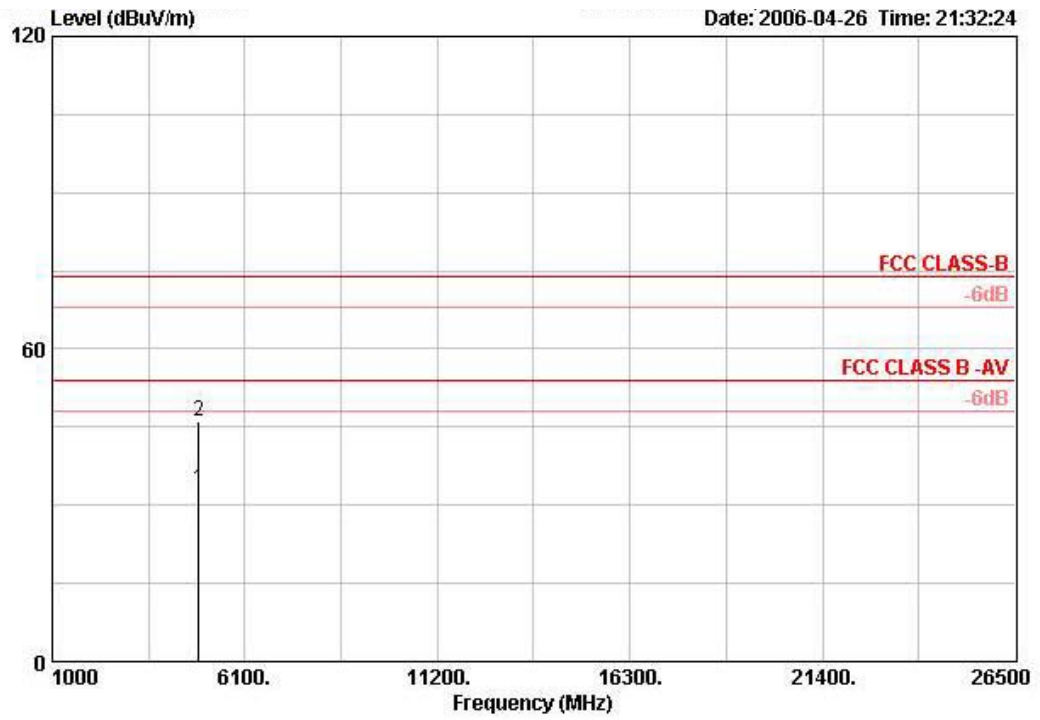

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	4874.068	33.02	-20.98	54.00	31.00	32.88	4.30	35.15 AVERAGE	HORIZONTAL	3
2	4874.080	46.09	-27.91	74.00	44.06	32.88	4.30	35.15 PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 6

Vertical

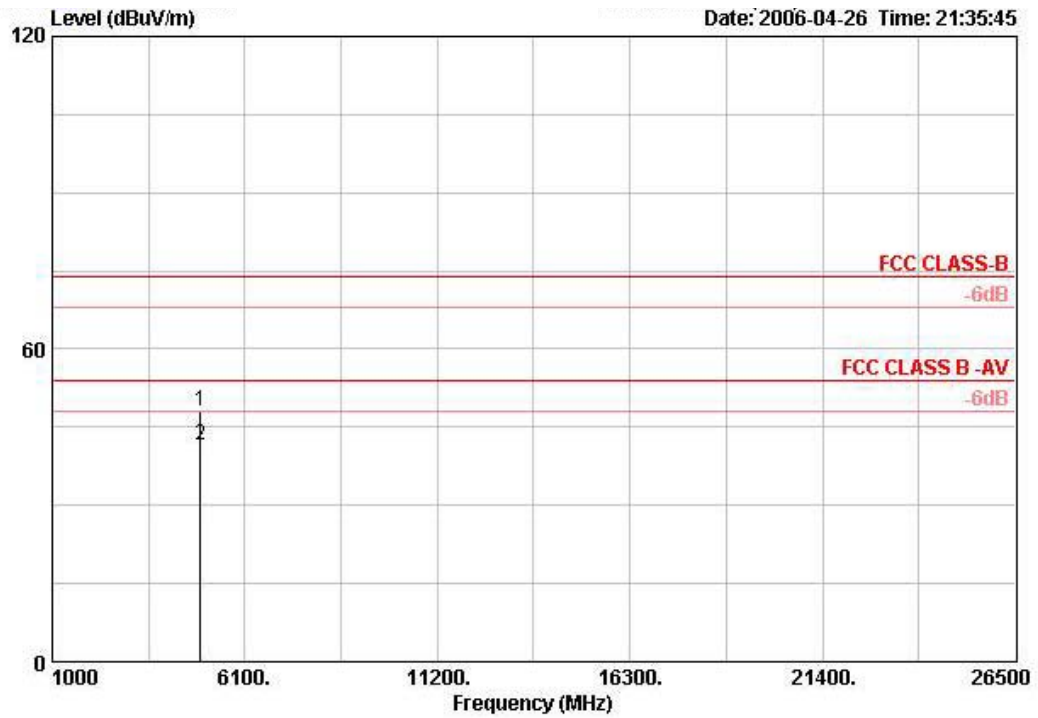

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Loss	Factor	Remark		m
			dB	dBUV/m	dBuV	dB	dB			
1	4924.040	48.11	-25.89	74.00	46.02	32.93	4.30	35.14 PERK	VERTICAL	3
2	4924.052	41.44	-12.56	54.00	39.35	32.93	4.30	35.14 AVERAGE	VERTICAL	3


Horizontal

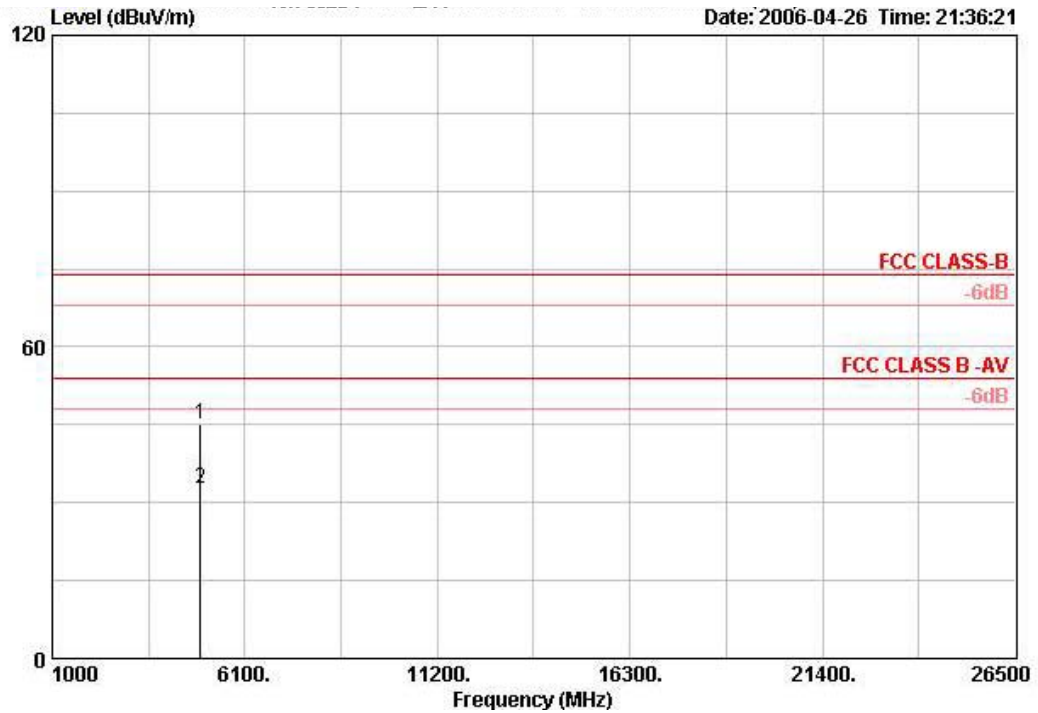

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4924.050	45.10	-28.90	74.00	43.01	32.93	4.30	35.14	PEAK	HORIZONTAL	3
2	4924.352	32.57	-21.43	54.00	30.48	32.93	4.30	35.14	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 6

Vertical

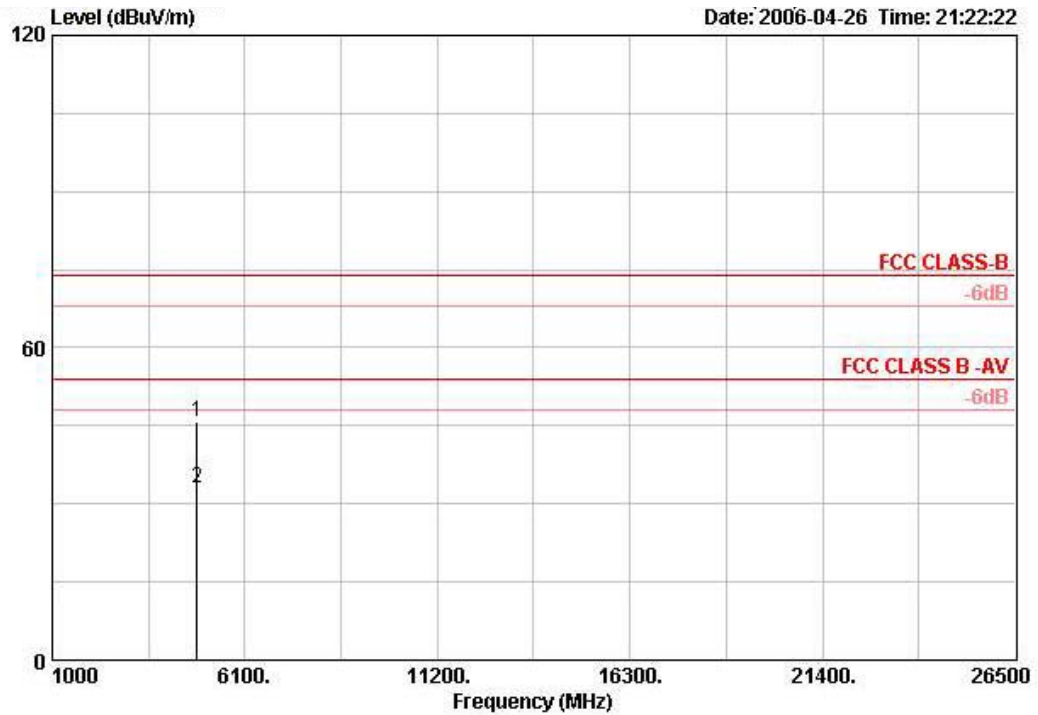

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4823.000	45.81	-28.19	74.00	43.84	32.83	4.30	35.16	PEAK	VERTICAL	3
2	4824.770	33.06	-20.94	54.00	31.10	32.83	4.30	35.16	AVERAGE	VERTICAL	3


Horizontal

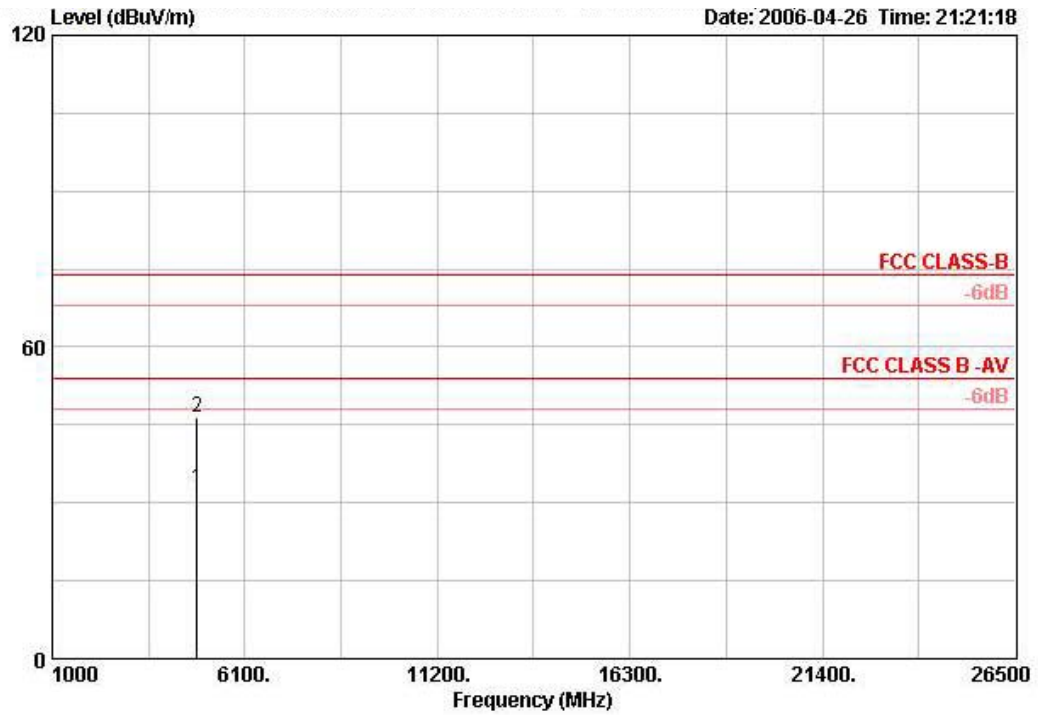

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4823.490	32.82	-21.18	54.00	30.86	32.83	4.30	35.16	AVERAGE	HORIZONTAL	3
2	4826.140	46.45	-27.55	74.00	44.48	32.83	4.30	35.16	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 6

Vertical

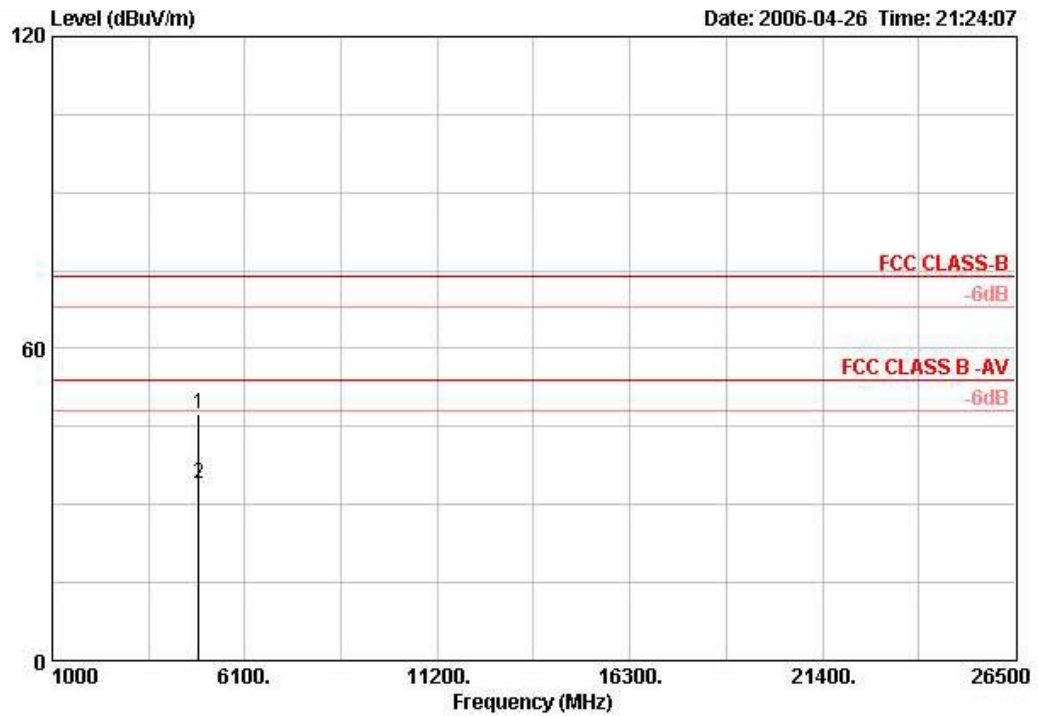

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4873.798	47.57	-26.43	74.00	45.55	32.88	4.30	35.15	PEAK	VERTICAL	3
2	4873.856	34.13	-19.87	54.00	32.10	32.88	4.30	35.15	AVERAGE	VERTICAL	3


Horizontal

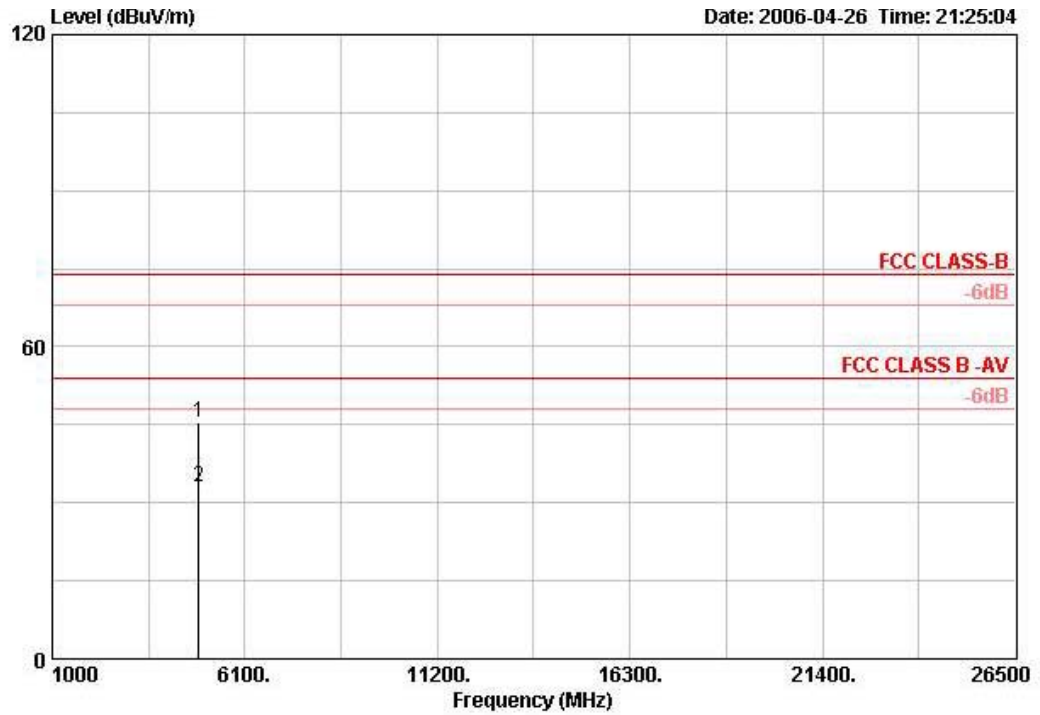

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4873.918	45.37	-28.63	74.00	43.34	32.88	4.30	35.15	PEAK	HORIZONTAL	3
2	4874.422	32.88	-21.12	54.00	30.86	32.88	4.30	35.15	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 6

Vertical

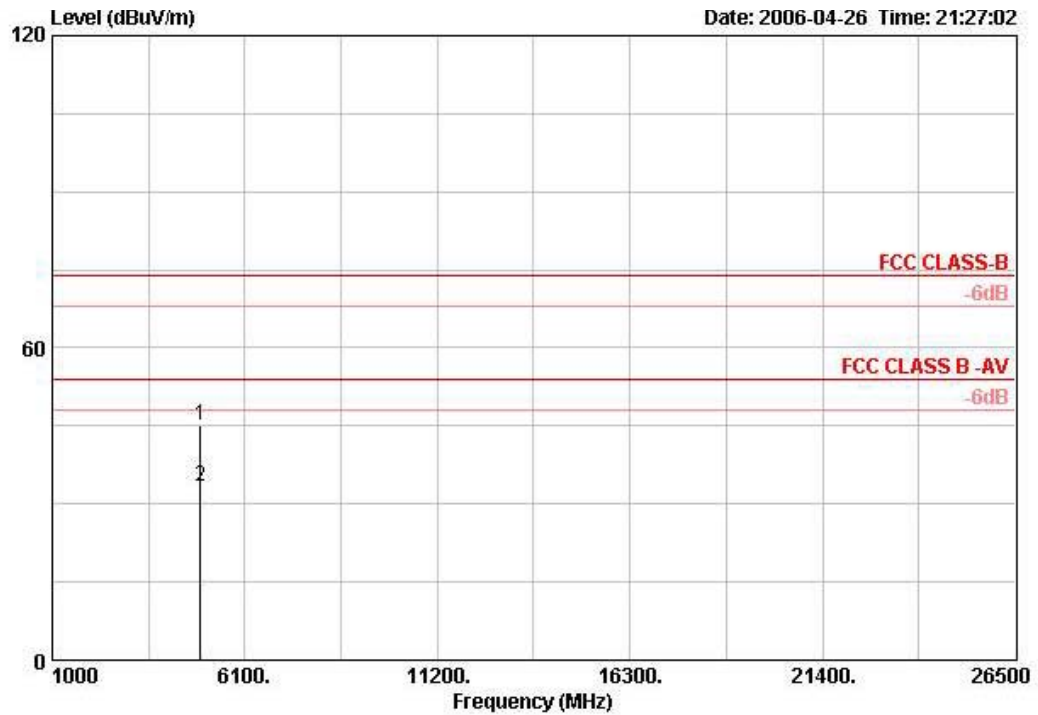

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4924.210	45.06	-28.94	74.00	42.97	32.93	4.30	35.14	PEAK	VERTICAL	3
2	4924.372	33.29	-20.71	54.00	31.20	32.93	4.30	35.14	AVERAGE	VERTICAL	3


Horizontal

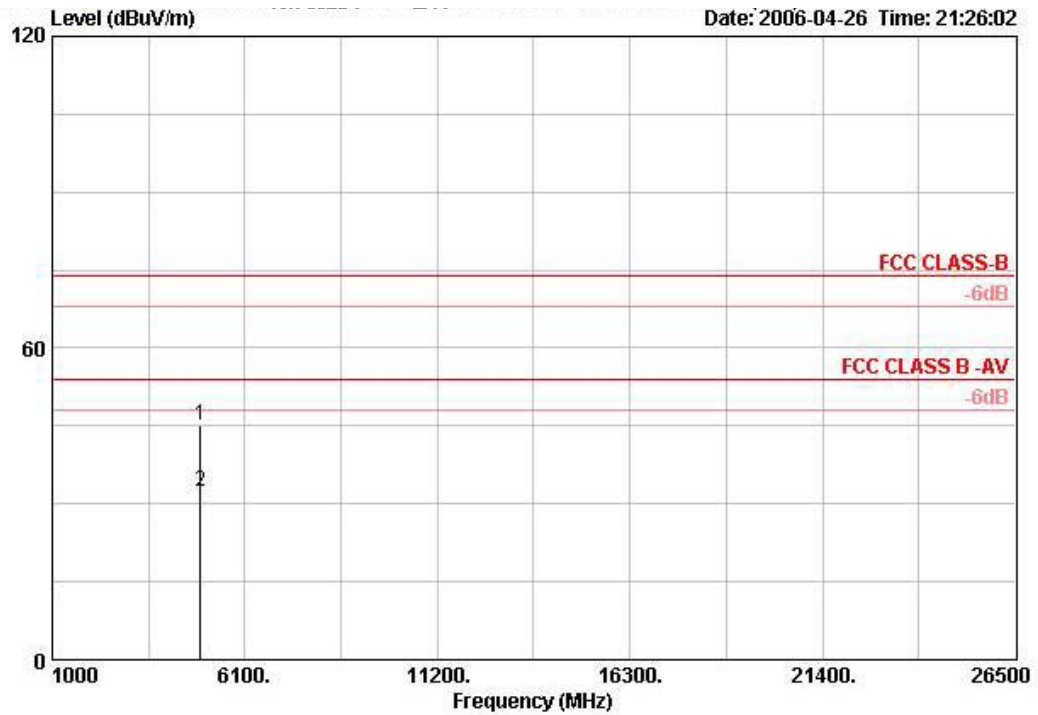

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4923.720	45.06	-28.94	74.00	42.98	32.93	4.30	35.14	PEAK	HORIZONTAL	3
2	4924.460	32.47	-21.53	54.00	30.38	32.93	4.30	35.14	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 6

Vertical

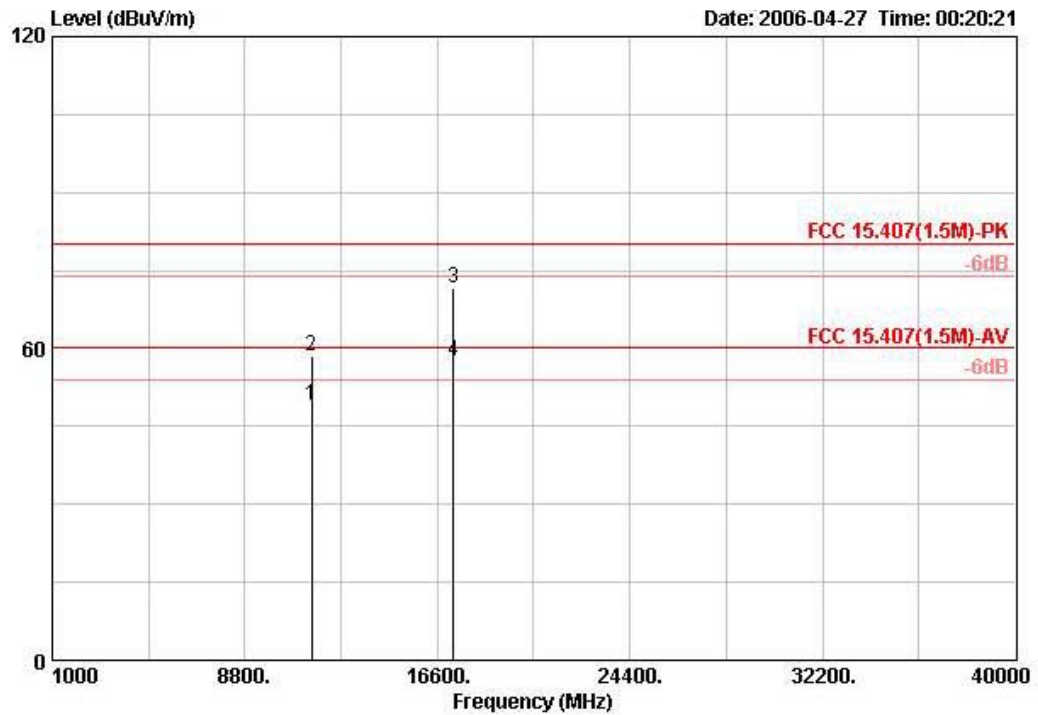

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11491.400	49.07	-10.93	60.00	37.71	38.69	7.65	34.98	AVERAGE	VERTICAL	3
2	11491.400	58.51	-21.49	80.00	47.15	38.69	7.65	34.98	PEAK	VERTICAL	3
3	17234.480	71.60	-8.40	80.00	55.19	42.47	8.87	34.92	PEAK	VERTICAL	3
4 !	17235.300	57.66	-2.34	60.00	41.25	42.47	8.87	34.92	AVERAGE	VERTICAL	3


Horizontal

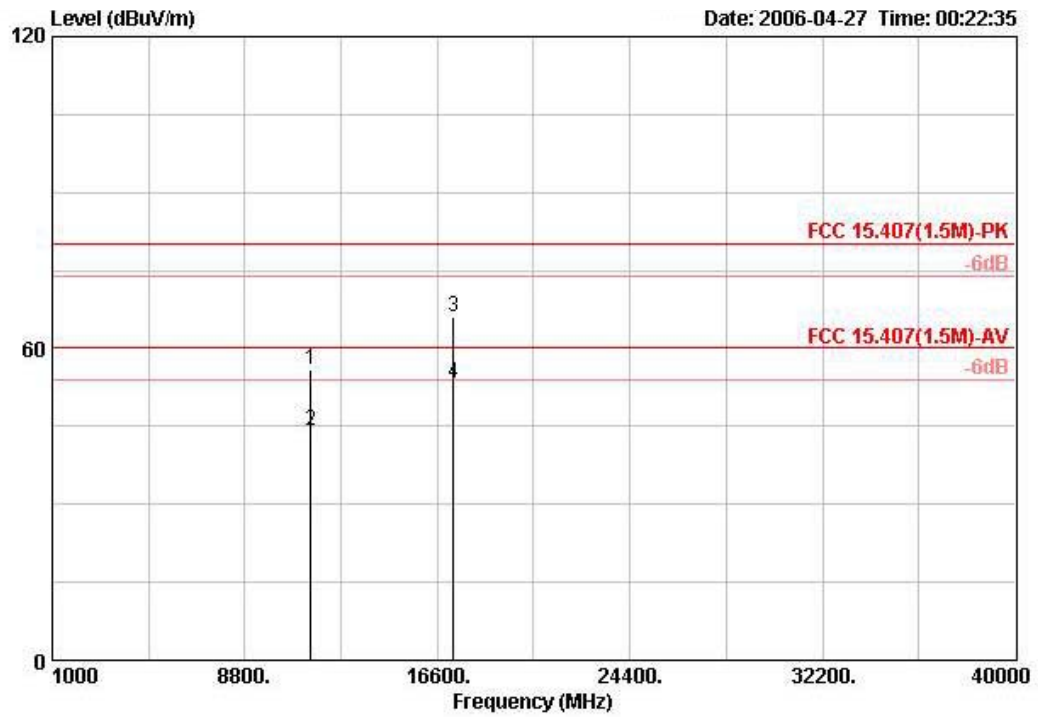

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11486.600	55.84	-24.16	80.00	44.48	38.69	7.66	34.98	PEAK	HORIZONTAL	3
2	11488.700	44.03	-15.97	60.00	32.67	38.69	7.66	34.98	AVERAGE	HORIZONTAL	3
3	17233.720	66.07	-13.93	80.00	49.65	42.47	8.87	34.92	PEAK	HORIZONTAL	3
4	17235.100	53.36	-6.64	60.00	36.95	42.47	8.87	34.92	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 6

Vertical

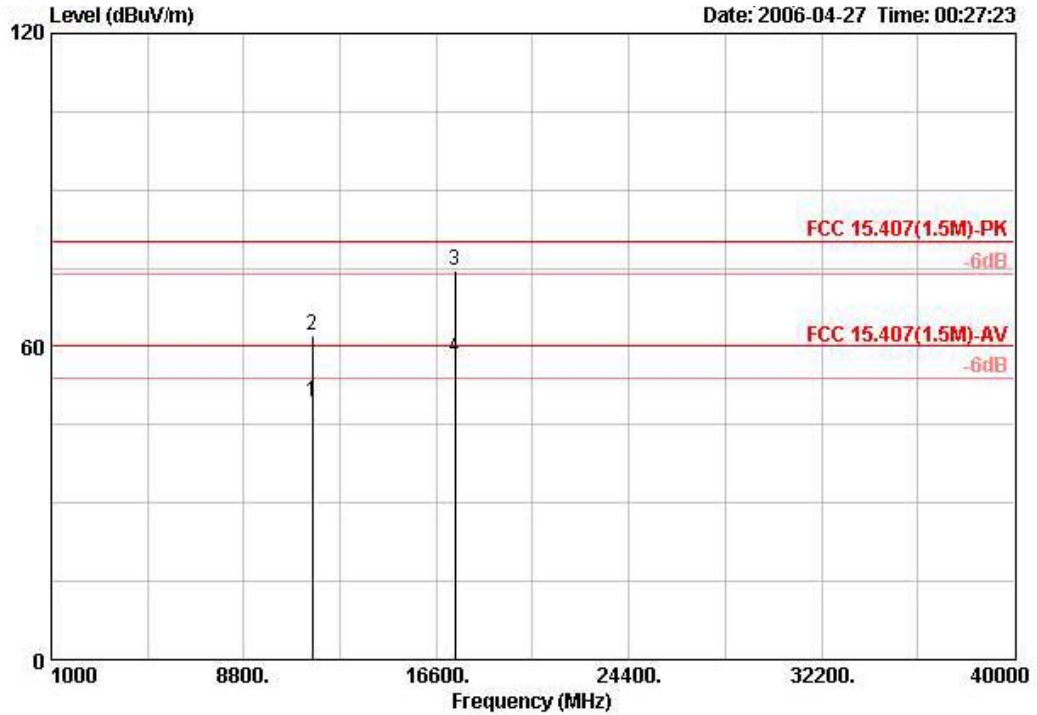

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11569.240	49.51	-10.49	60.00	38.03	38.81	7.67	35.00	AVERAGE	VERTICAL	3
2	11571.400	62.24	-17.76	80.00	50.77	38.81	7.67	35.00	PEAK	VERTICAL	3
3 !	17350.820	74.49	-5.51	80.00	57.53	43.05	8.86	34.96	PEAK	VERTICAL	3
4 !	17353.820	57.88	-2.12	60.00	40.92	43.05	8.86	34.96	AVERAGE	VERTICAL	3


Horizontal

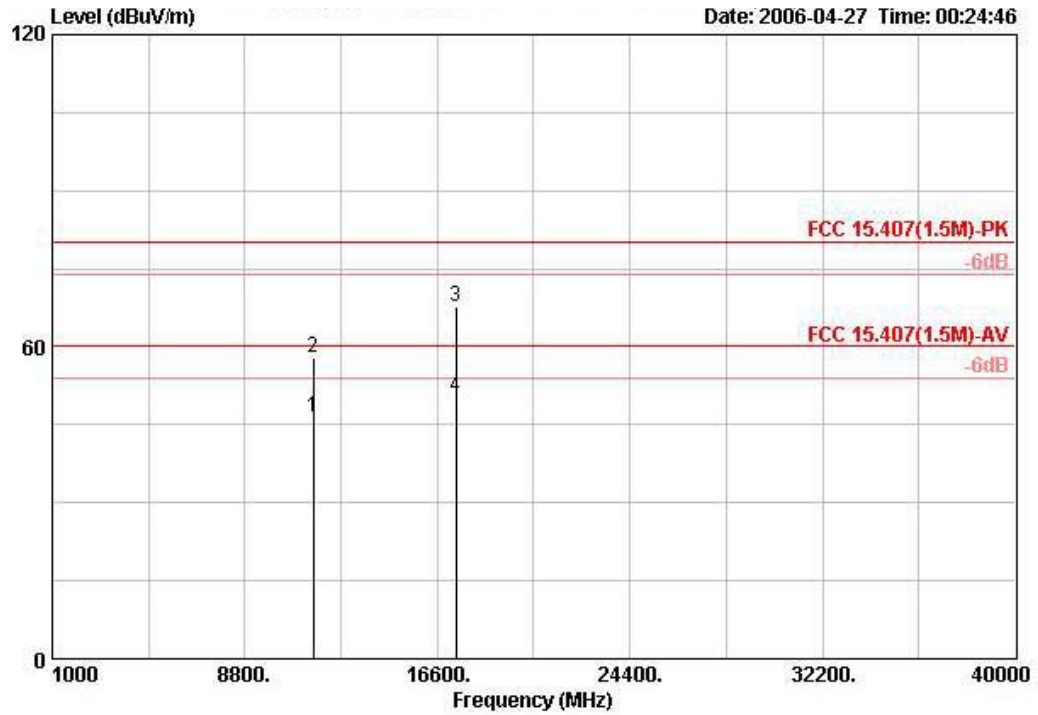

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11567.780	46.48	-13.52	60.00	35.01	38.81	7.66	35.00	AVERAGE	HORIZONTAL	3
2	11568.420	58.04	-21.96	80.00	46.56	38.81	7.67	35.00	PEAK	HORIZONTAL	3
3	17352.500	67.82	-12.18	80.00	50.86	43.05	8.86	34.96	PEAK	HORIZONTAL	3
4	17355.040	50.21	-9.79	60.00	33.25	43.05	8.86	34.96	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 6

Vertical

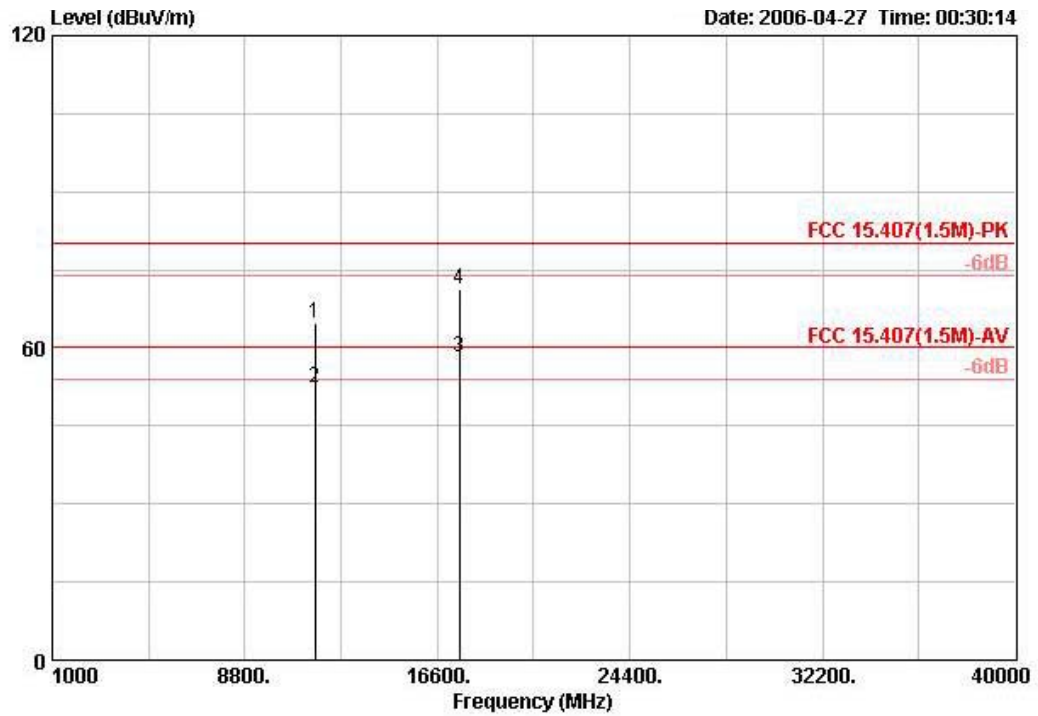

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11650.620	64.81	-15.19	80.00	53.18	38.95	7.69	35.01	PEAK	VERTICAL	3
2	11650.680	52.39	-7.61	60.00	40.77	38.95	7.69	35.01	AVERAGE	VERTICAL	3
3	17474.060	58.27	-1.73	60.00	40.79	43.63	8.85	35.00	AVERAGE	VERTICAL	3
4	17474.060	71.22	-8.78	80.00	53.74	43.63	8.85	35.00	PEAK	VERTICAL	3


Horizontal

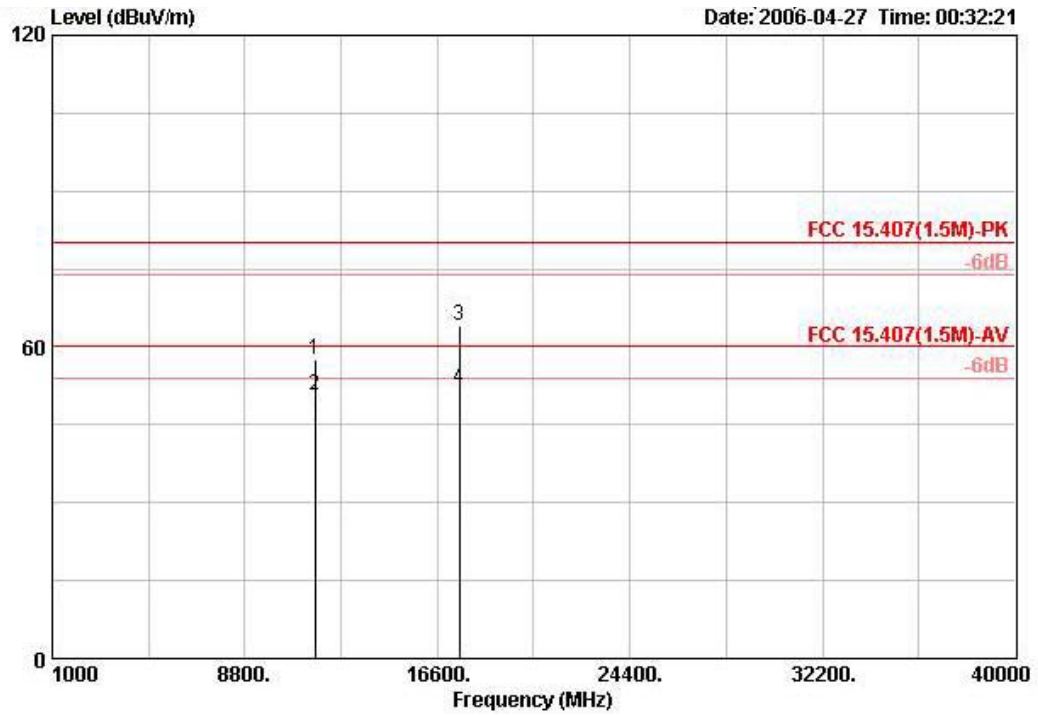

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1 !	11652.000	57.69	-2.31	60.00	46.07	38.95	7.69	35.01	AVERAGE	HORIZONTAL	3
2	11652.000	50.77	-29.23	80.00	39.15	38.95	7.69	35.01	PEAK	HORIZONTAL	3
3	17474.060	63.98	-16.02	80.00	46.50	43.63	8.85	35.00	PEAK	HORIZONTAL	3
4	17474.060	51.98	-8.02	60.00	34.50	43.63	8.85	35.00	AVERAGE	HORIZONTAL	3

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 6


Vertical

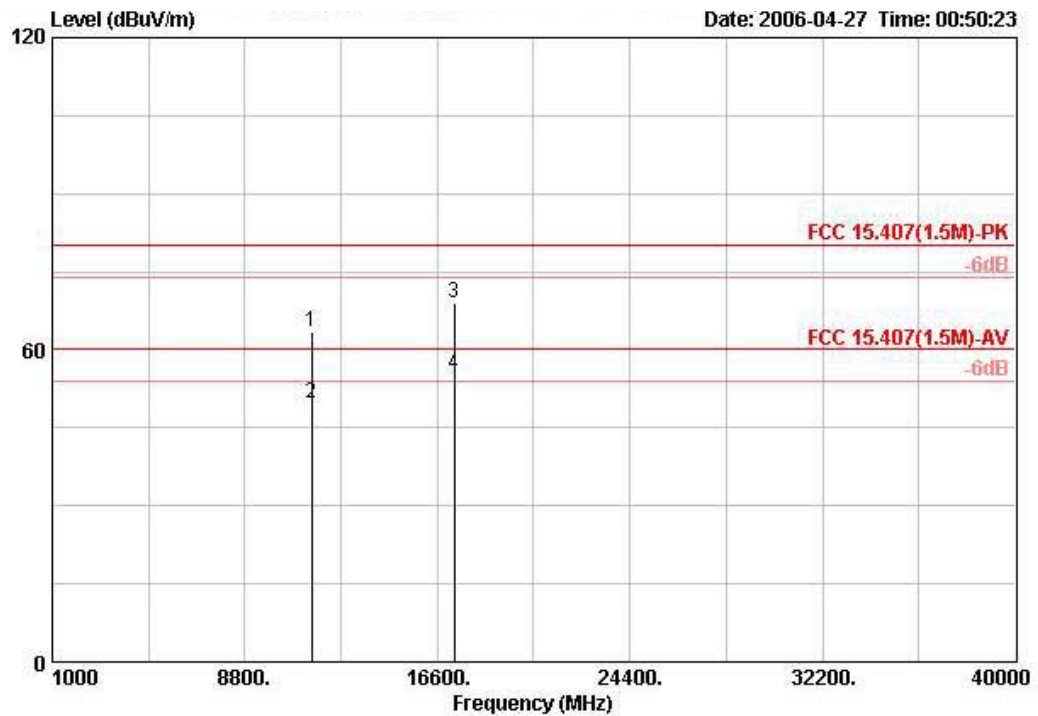

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11515.280	63.49	-16.51	80.00	52.11	38.73	7.65	35.00	PEAK	VERTICAL	3
2	11516.580	49.68	-10.32	60.00	38.30	38.73	7.65	35.00	AVERAGE	VERTICAL	3
3	17281.520	68.84	-10.32	60.00	52.18	42.72	8.87	34.93	AVERAGE	VERTICAL	3
4 !	17281.960	55.36	-4.64	60.00	38.71	42.72	8.87	34.94	AVERAGE	VERTICAL	3

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


Horizontal

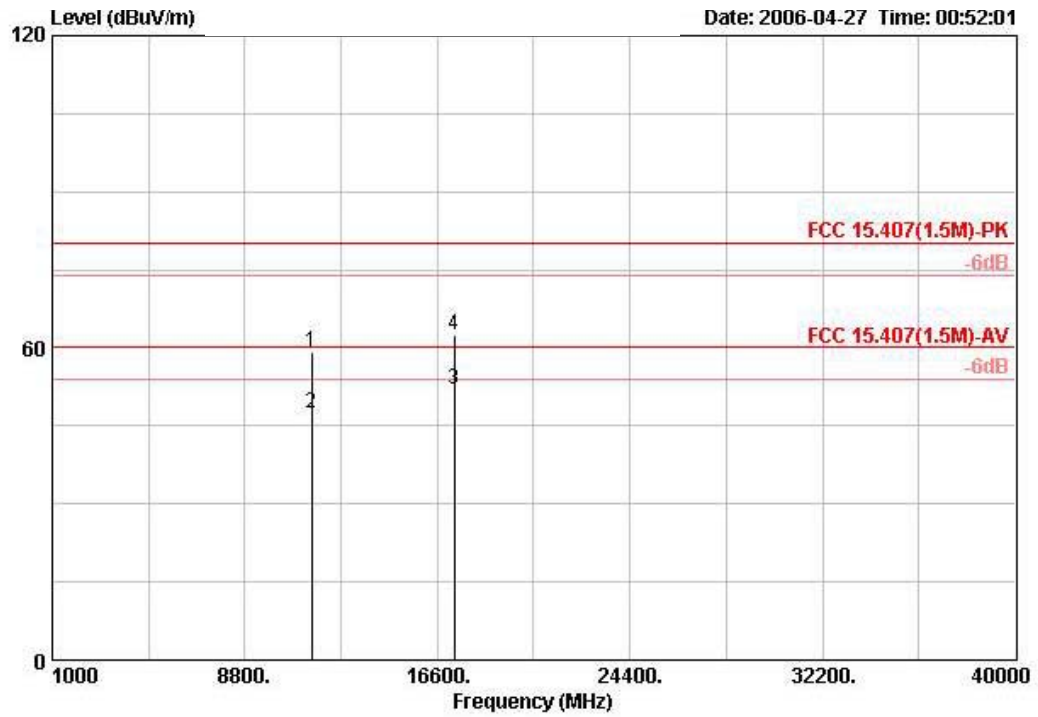

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11517.600	59.25	-20.75	80.00	47.87	38.73	7.65	35.00	PEAK	HORIZONTAL	3
2	11517.600	47.41	-12.59	60.00	36.03	38.73	7.65	35.00	AVERAGE	HORIZONTAL	3
3	17281.520	52.06	-7.94	60.00	35.41	42.72	8.87	34.93	AVERAGE	HORIZONTAL	3
4	17281.520	62.49	-17.51	80.00	45.83	42.72	8.87	34.93	PEAK	HORIZONTAL	3

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 6

Vertical

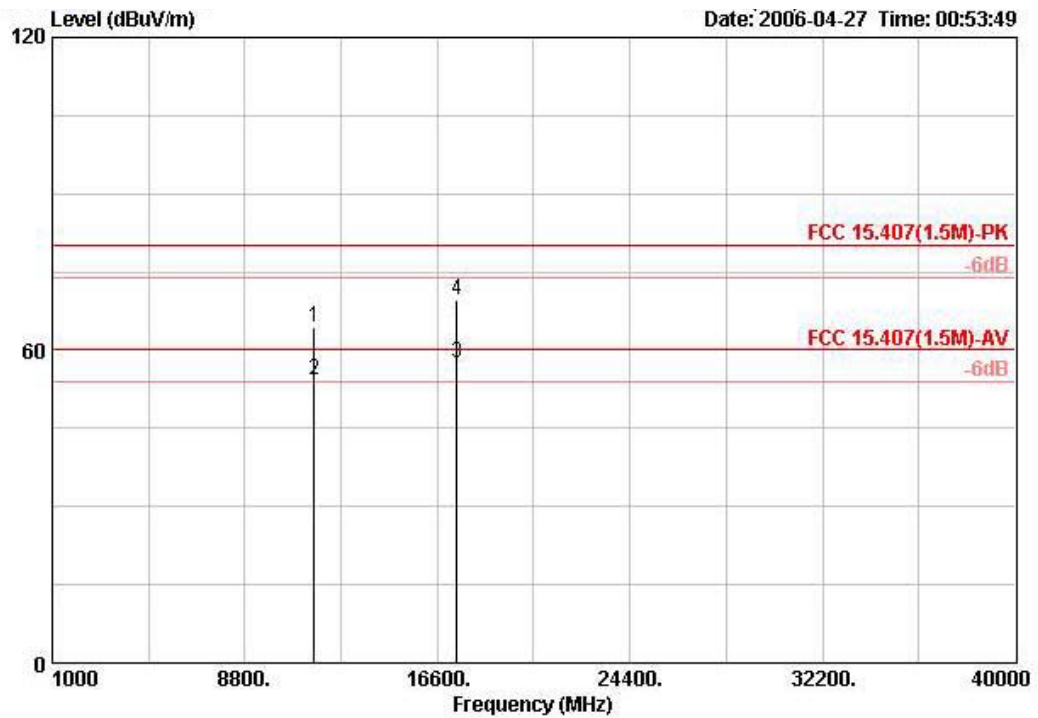

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11599.860	64.31	-15.69	80.00	52.78	38.87	7.67	35.01	PEAK	VERTICAL	3
2 !	11599.860	54.40	-5.60	60.00	42.87	38.87	7.67	35.01	AVERAGE	VERTICAL	3
3 !	17397.260	57.51	-2.49	60.00	40.32	43.30	8.86	34.97	AVERAGE	VERTICAL	3
4	17397.260	69.51	-10.49	80.00	52.32	43.30	8.86	34.97	PEAK	VERTICAL	3