



Horizontal

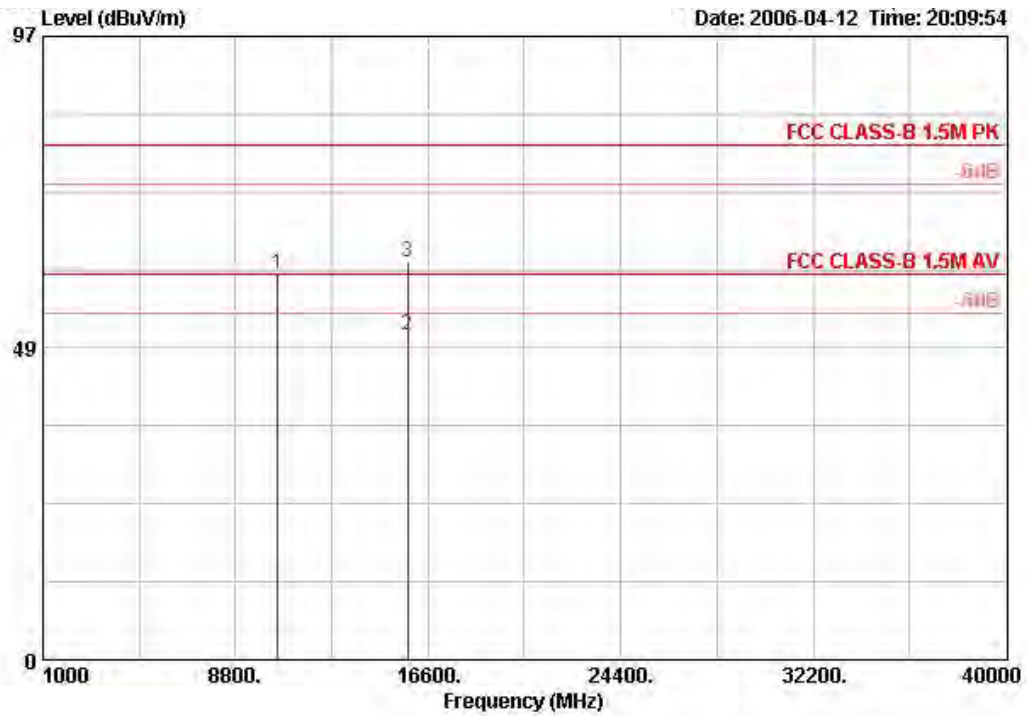

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10522.080	60.00	-20.00	80.00	39.49	5.93	35.40	49.98	PEAK	127	241
2 @	15778.200	50.45	-9.55	60.00	37.81	9.45	35.53	38.71	AVERAGE	116	242
3 @	15778.200	61.72	-18.28	80.00	37.81	9.45	35.53	49.98	PEAK	116	242


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 64 / Ant. 1

Vertical

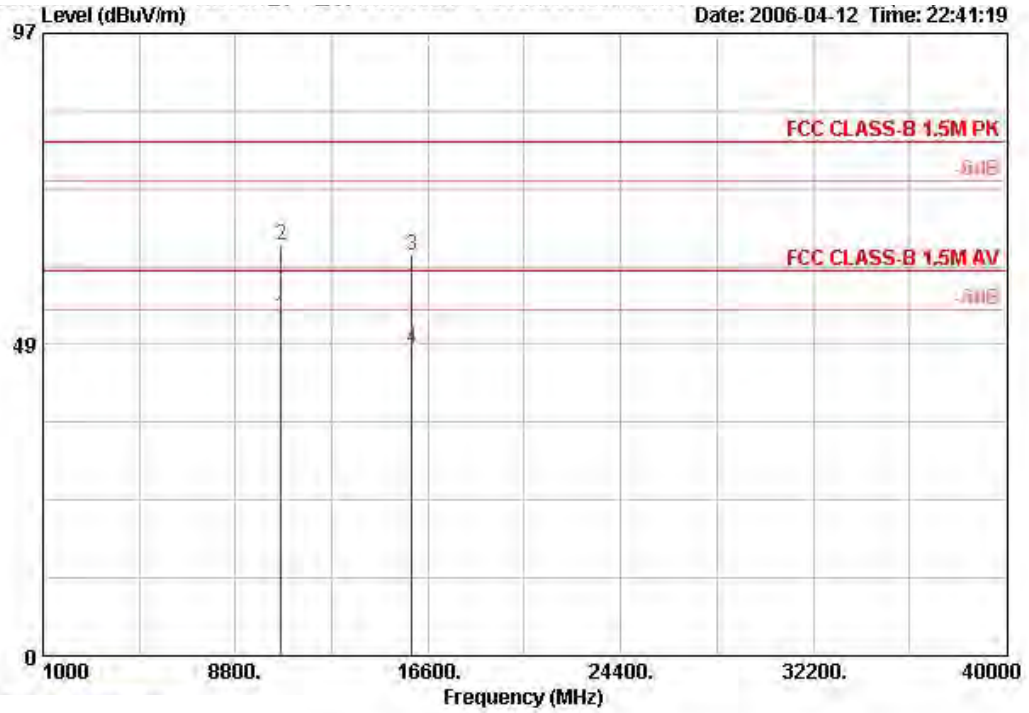

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10639.560	52.98	-7.02	60.00	39.42	6.03	35.32	42.85	AVERAGE	100	267
2 @	10639.560	64.09	-15.91	80.00	39.42	6.03	35.32	53.96	PEAK	100	267
3 @	15959.040	62.44	-17.56	80.00	37.55	9.62	35.42	50.69	PEAK	117	240
4 @	15959.040	47.74	-12.26	60.00	37.55	9.62	35.42	35.99	AVERAGE	117	240


Horizontal

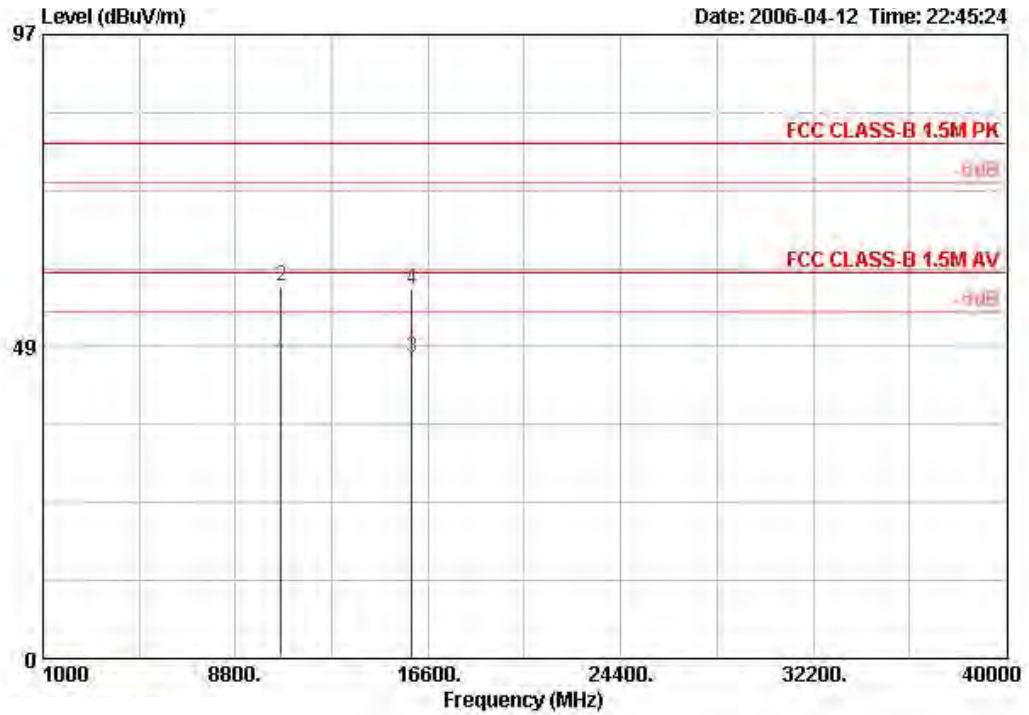

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1 @	10639.200	45.98	-14.02	60.00	39.42		6.03	35.32	35.85	AVERAGE	129	243
2 @	10639.200	57.95	-22.05	80.00	39.42		6.03	35.32	47.82	PEAK	129	243
3 @	15959.040	46.81	-13.19	60.00	37.55		9.62	35.42	35.06	AVERAGE	117	240
4 @	15959.040	57.30	-22.70	80.00	37.55		9.62	35.42	45.55	PEAK	117	240


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 42 / Ant. 1

Vertical

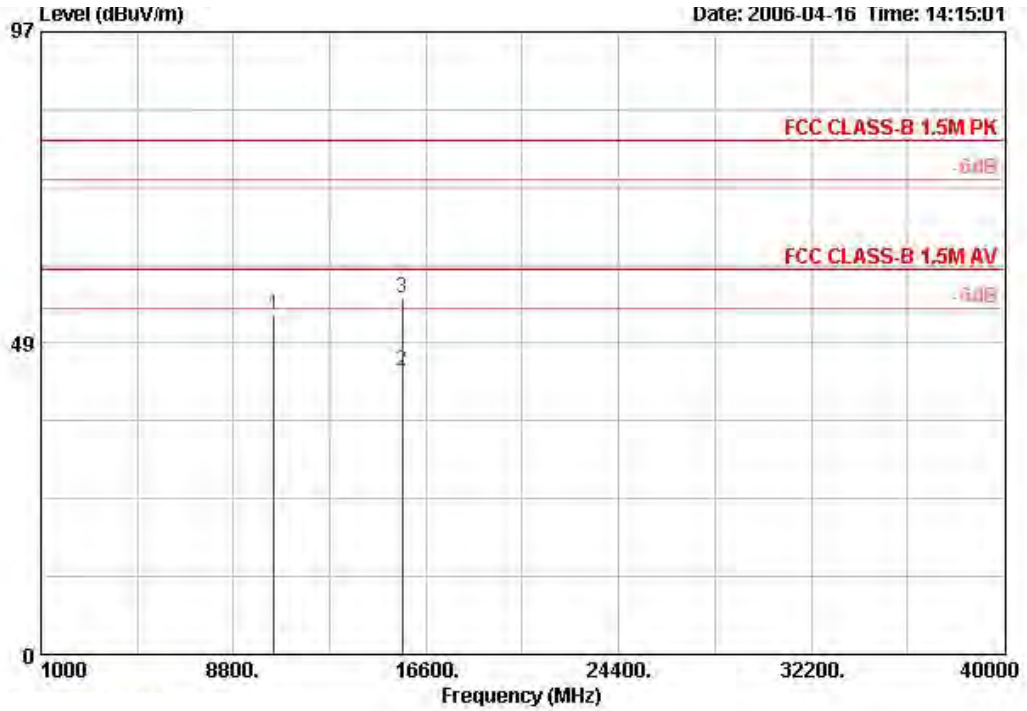

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10423.700	52.96	-27.04	80.00	39.40	5.86	35.48	43.17	PEAK	115	230
2 @	15631.300	44.20	-15.80	60.00	38.01	9.32	35.62	32.49	AVERAGE	109	231
3 @	15631.300	55.43	-24.57	80.00	38.01	9.32	35.62	43.73	PEAK	109	231


Horizontal

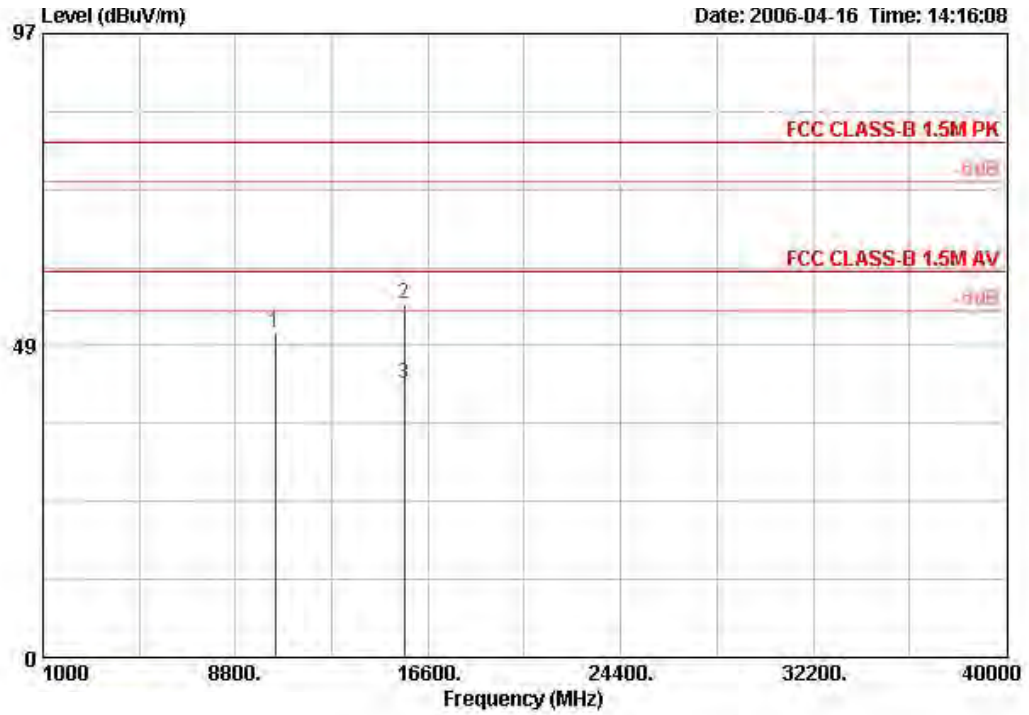

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line	Factor	Loss	Level	Pos	Pos			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV	cm	deg			
1 @	10421.200	50.42	-29.58	80.00	39.40	5.86	35.50	40.66	PEAK	117	233
2 @	15631.800	55.06	-24.94	80.00	38.01	9.32	35.62	43.35	PEAK	117	235
3 @	15640.800	42.46	-17.54	60.00	38.01	9.32	35.62	30.75	AVERAGE	117	235


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 50 / Ant. 1

Vertical

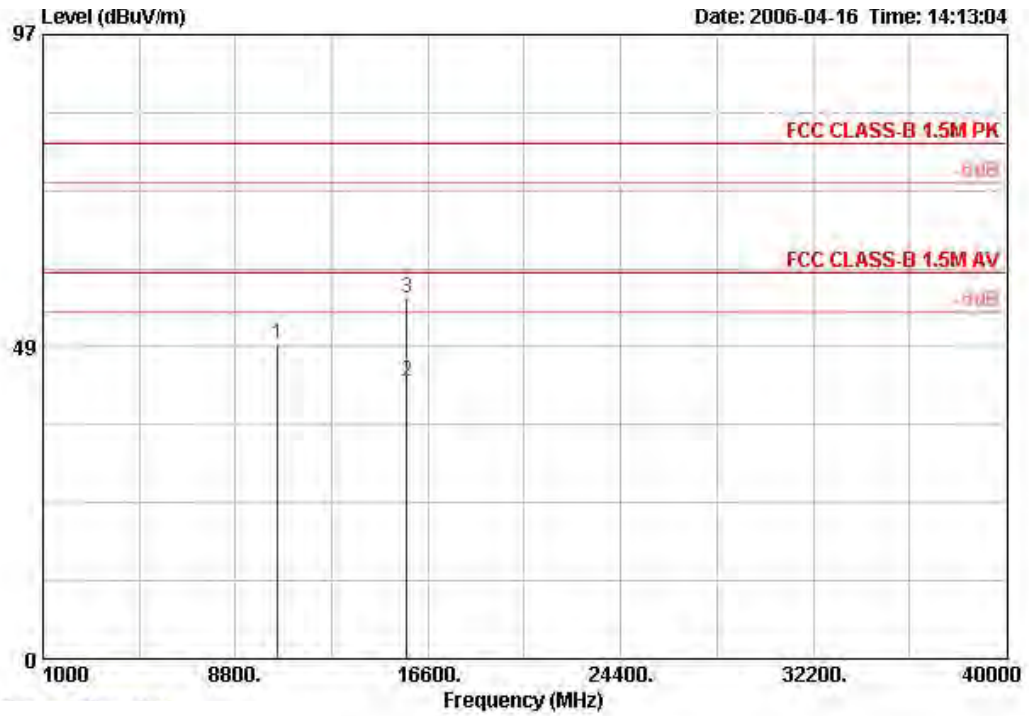

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10498.000	48.92	-31.08	80.00	39.50	5.93	35.43	38.92	PEAK	115	230
2 @	15746.100	43.19	-16.81	60.00	37.86	9.42	35.56	31.46	AVERAGE	100	231
3 @	15748.800	55.99	-24.01	80.00	37.84	9.42	35.56	44.29	PEAK	100	231


Horizontal

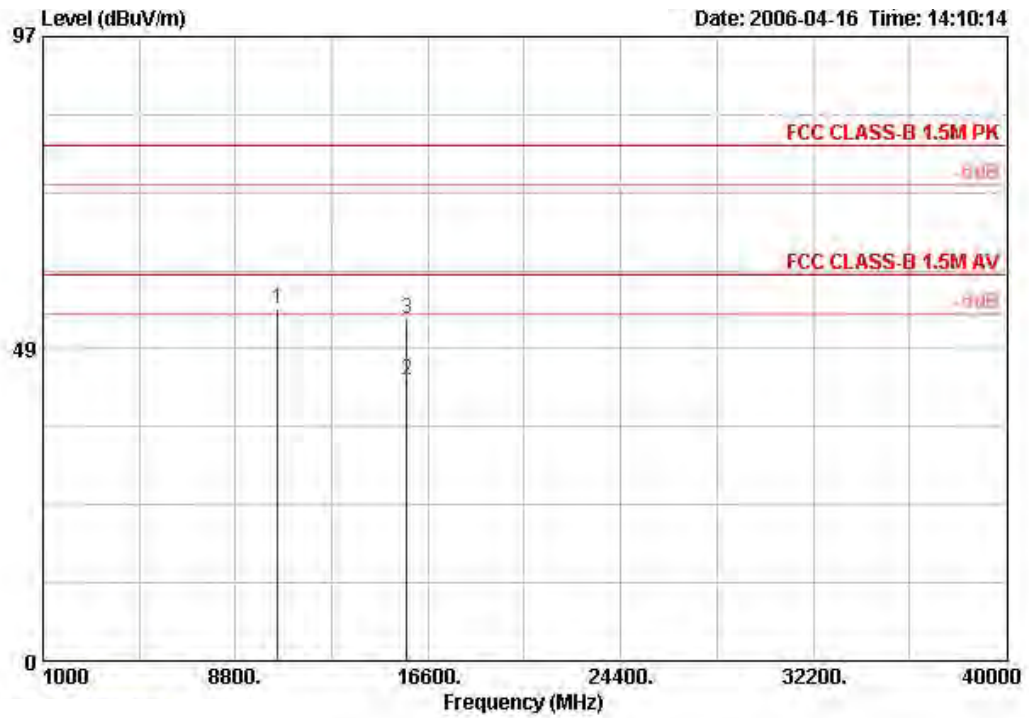

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10499.300	54.72	-25.28	80.00	39.50	5.93	35.40	44.69	PEAK	116	210
2 @	15748.800	43.74	-16.26	60.00	37.84	9.42	35.56	32.04	AVERAGE	118	270
3 @	15748.800	53.07	-26.93	80.00	37.84	9.42	35.56	41.37	PEAK	118	270

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 58 / Ant. 1


Vertical

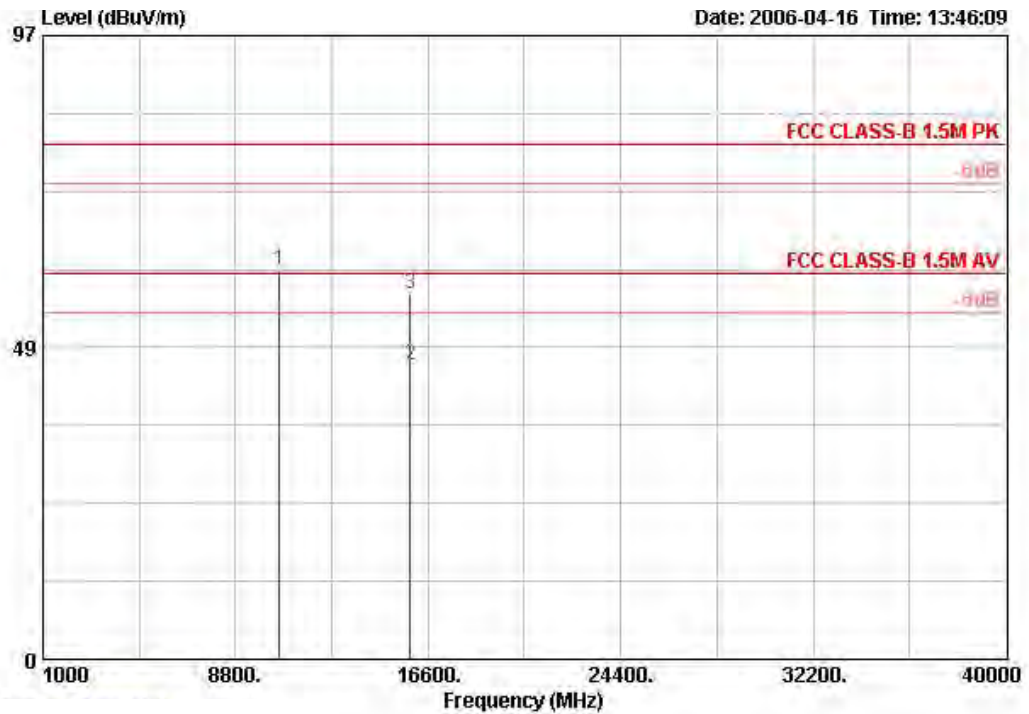

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10577.500	60.43			39.46	6.00	35.35	50.32	PEAK	105	211
2 @	15867.200	45.66	-14.34	60.00	37.67	9.52	35.48	33.95	AVERAGE	124	274
3 @	15867.200	56.87	-23.13	80.00	37.67	9.52	35.48	45.16	PEAK	124	274

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBuV/m at 1.5m).

Horizontal

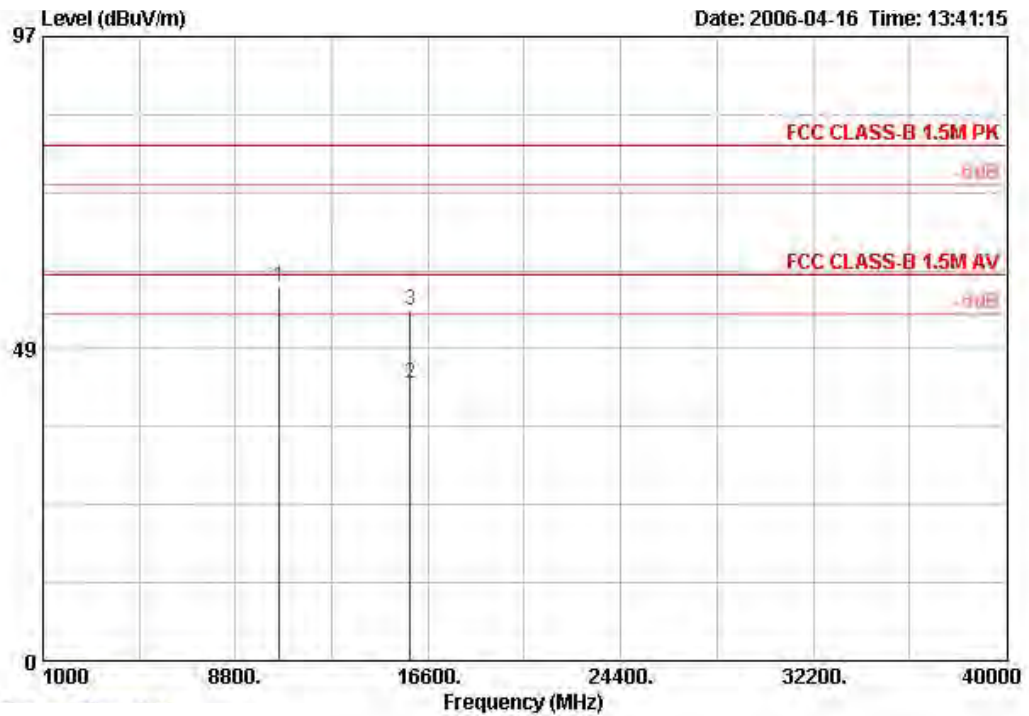

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	10577.200	58.05	-21.95	80.00	39.46	6.00	35.35	47.94	PEAK	108	211
2 @	15867.800	43.18	-16.82	60.00	37.67	9.52	35.48	31.47	AVERAGE	116	233
3 @	15867.800	54.38	-25.62	80.00	37.67	9.52	35.48	42.67	PEAK	116	233

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 36 / Ant. 2

Vertical

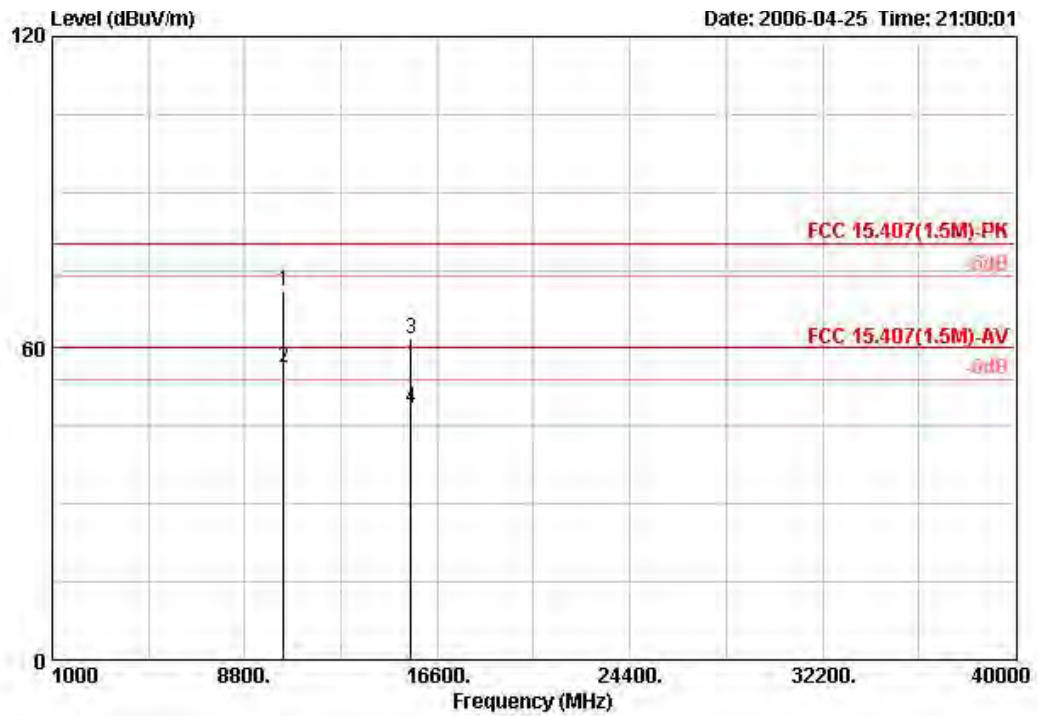

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10360.640	70.92	-9.08	80.00	59.84	38.53	7.67	35.12	PEAK	VERTICAL	3
2	10361.320	56.10	-3.90	60.00	45.01	38.53	7.67	35.12	AVERAGE	VERTICAL	3
3	15539.640	61.91	-18.09	80.00	50.70	38.06	8.43	35.28	PEAK	VERTICAL	3
4	15539.640	48.36	-11.64	60.00	37.15	38.06	8.43	35.28	AVERAGE	VERTICAL	3

Horizontal

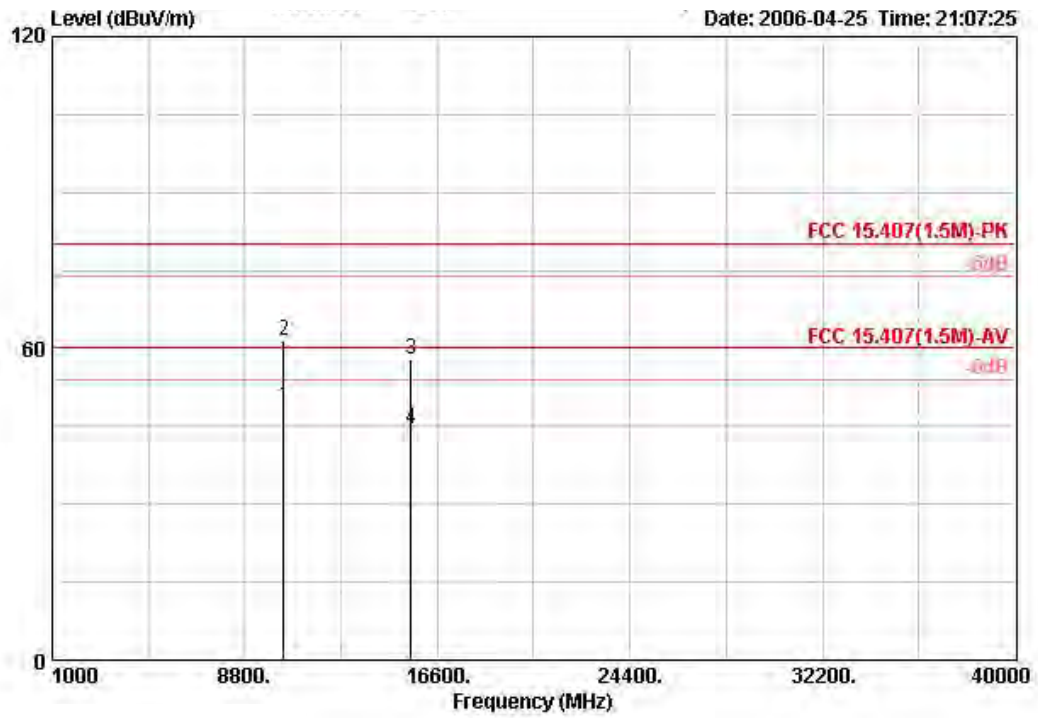


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10358.800	48.65	-11.35	60.00	37.56	38.53	7.67	35.12	AVERAGE	HORIZONTAL	3
2	10359.360	61.44	-18.56	80.00	50.36	38.53	7.67	35.12	PEAK	HORIZONTAL	3
3	15532.680	57.76	-22.24	80.00	46.57	38.06	8.42	35.28	PEAK	HORIZONTAL	3
4	15540.760	44.53	-15.47	60.00	33.32	38.06	8.43	35.28	AVERAGE	HORIZONTAL	3




Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 52 / Ant. 2

Vertical

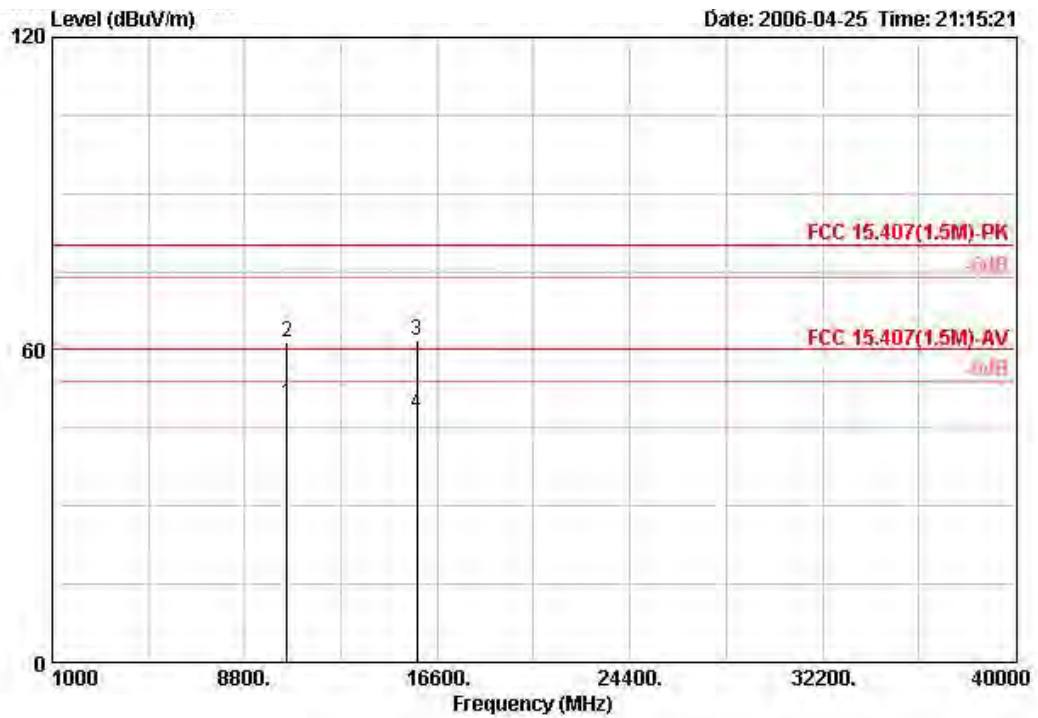

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10519.400	49.58	-10.42	60.00	38.64	38.11	7.75	34.93	AVERAGE	VERTICAL	3
2	10520.360	61.58	-18.42	80.00	50.65	38.11	7.75	34.93	PEAK	VERTICAL	3
3	15777.720	61.87	-18.13	80.00	50.98	37.77	8.50	35.37	PEAK	VERTICAL	3
4	15779.320	47.68	-12.32	60.00	36.79	37.77	8.50	35.37	AVERAGE	VERTICAL	3


Horizontal

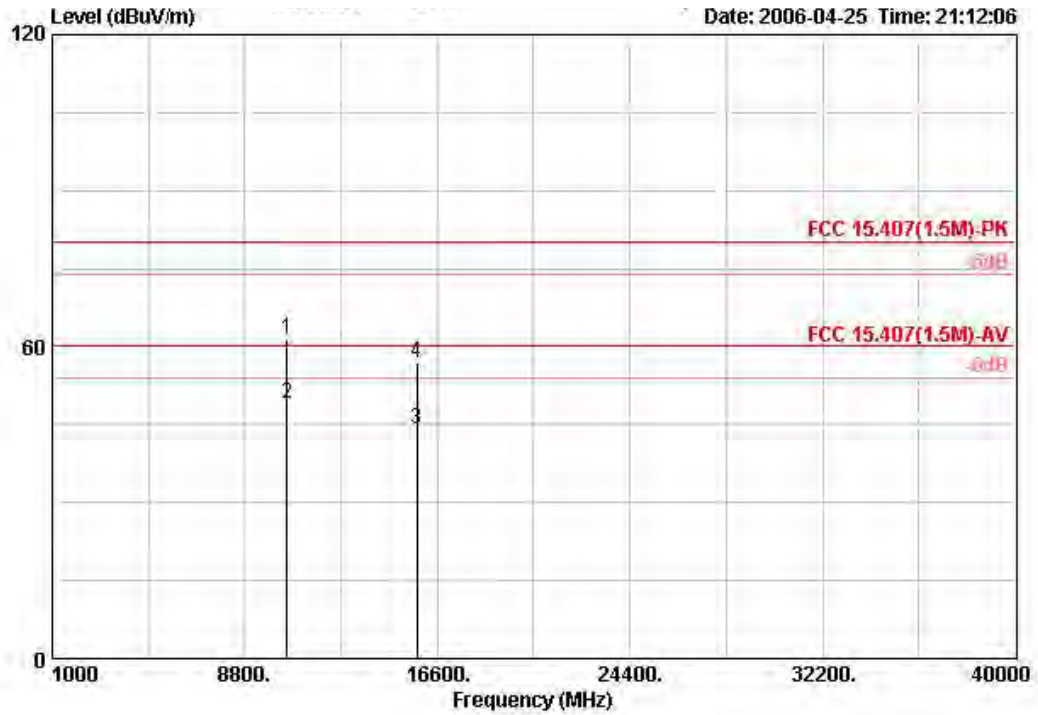

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10515.360	61.33	-18.67	80.00	50.40	38.11	7.75	34.93	PEAK	HORIZONTAL	3
2	10519.680	48.93	-11.07	60.00	37.99	38.11	7.75	34.93	AVERAGE	HORIZONTAL	3
3	15780.200	44.14	-15.86	60.00	33.25	37.77	8.50	35.37	AVERAGE	HORIZONTAL	3
4	15783.880	56.89	-23.11	80.00	46.01	37.75	8.50	35.37	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 64 / Ant. 2

Vertical

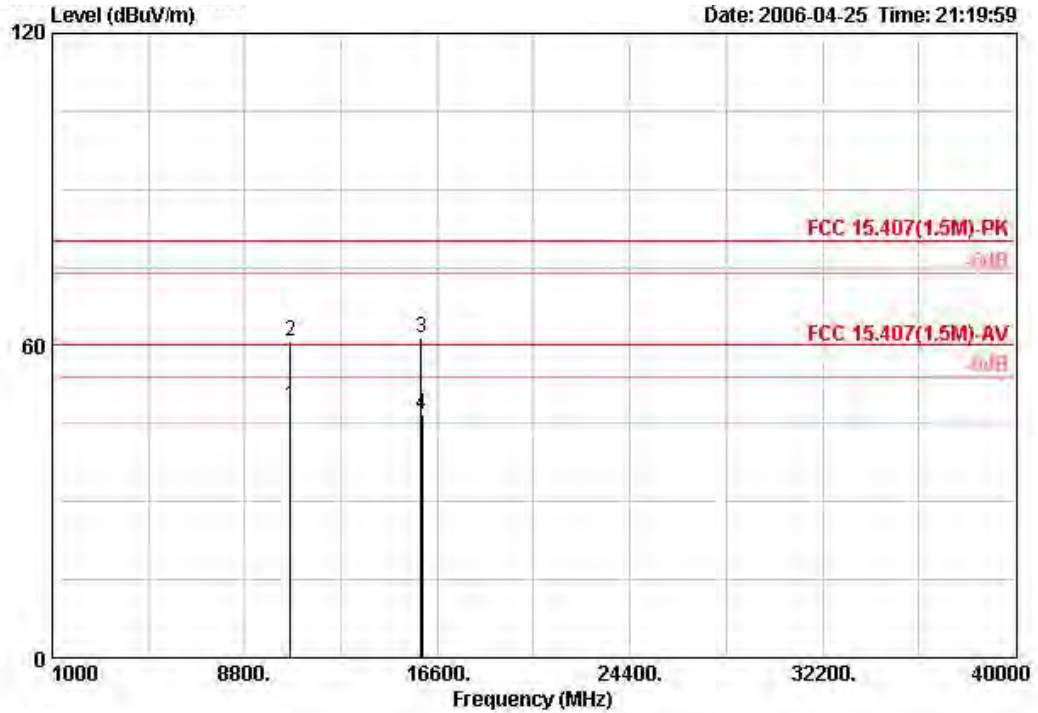

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	10641.160	48.41	-11.59	60.00	37.34	38.21	7.74	34.88	AVERAGE	VERTICAL	3
2	10646.760	60.84	-19.16	80.00	49.77	38.21	7.74	34.88	PEAK	VERTICAL	3
3	15954.880	61.47	-18.53	80.00	50.81	37.54	8.54	35.43	PEAK	VERTICAL	3
4	15963.160	46.91	-13.09	60.00	36.26	37.54	8.55	35.44	AVERAGE	VERTICAL	3


Horizontal

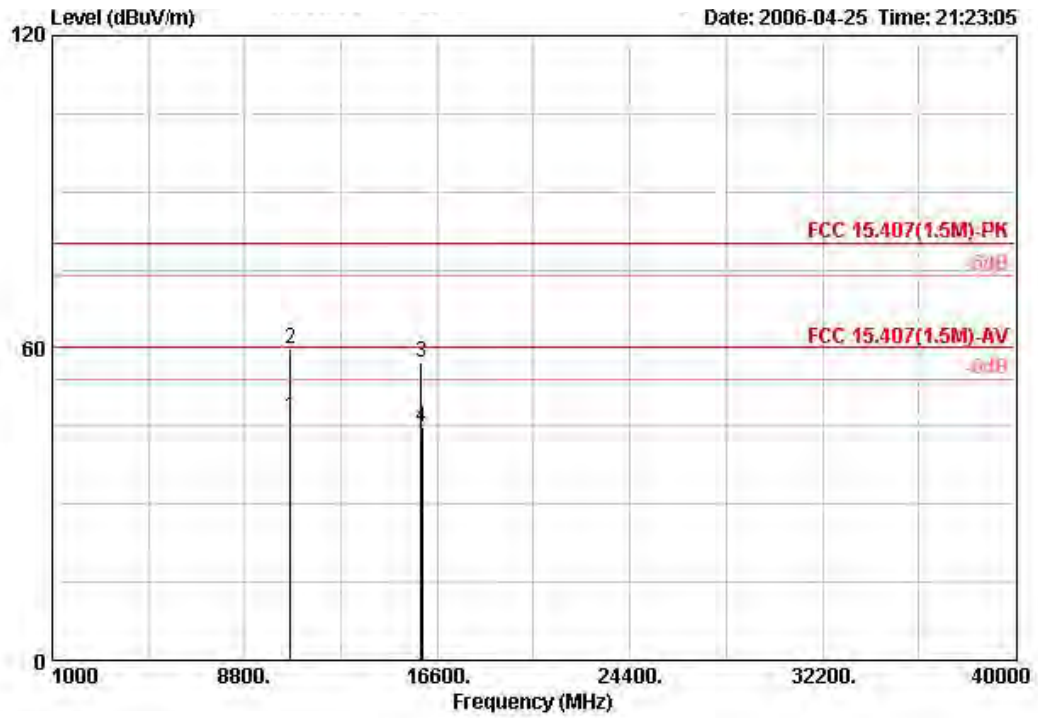

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m	
1	10643.440	46.78	-13.22	60.00	35.71	38.21	7.74	34.88	AVERAGE	HORIZONTAL	3
2	10648.720	59.89	-20.11	80.00	48.80	38.22	7.74	34.88	PEAK	HORIZONTAL	3
3	15954.160	57.13	-22.87	80.00	46.48	37.54	8.54	35.43	PEAK	HORIZONTAL	3
4	15960.760	44.73	-15.27	60.00	34.07	37.54	8.55	35.44	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 42 / Ant. 2

Vertical

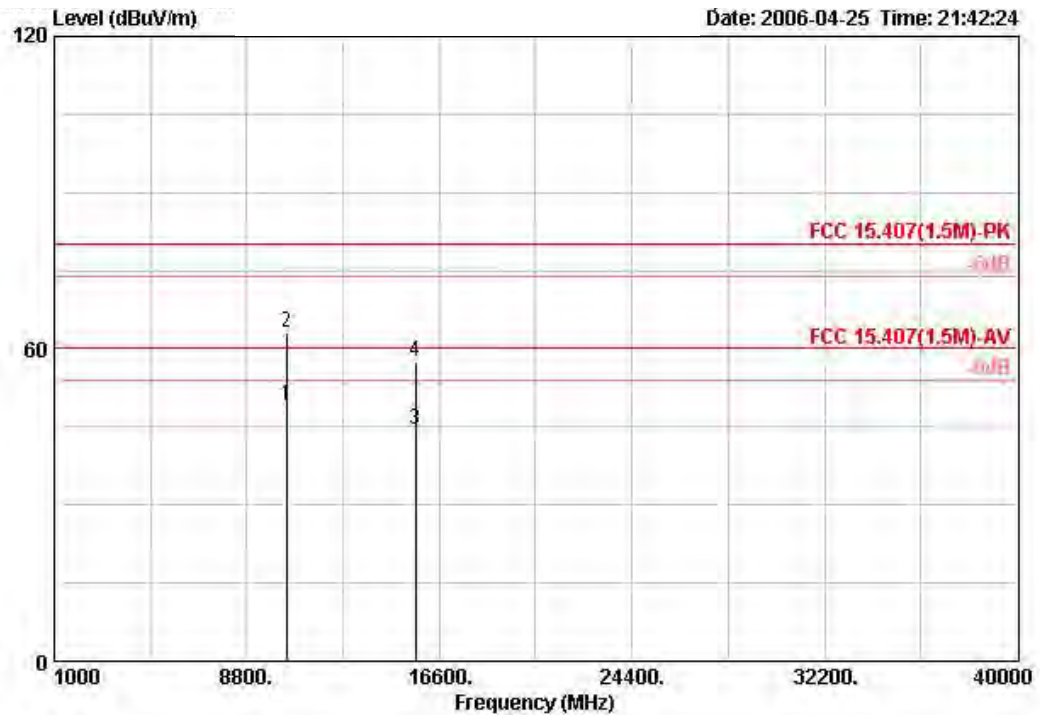

	Ereg	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10419.000	49.08	-10.92	60.00	38.05	38.37	7.71	35.05	AVERAGE	VERTICAL	3
2	10422.040	63.24	-16.76	80.00	52.21	38.37	7.71	35.05	PEAK	VERTICAL	3
3	15623.520	44.56	-15.44	60.00	33.46	37.96	8.45	35.31	AVERAGE	VERTICAL	3
4	15624.720	57.63	-22.37	80.00	46.54	37.96	8.45	35.32	PEAK	VERTICAL	3


Horizontal

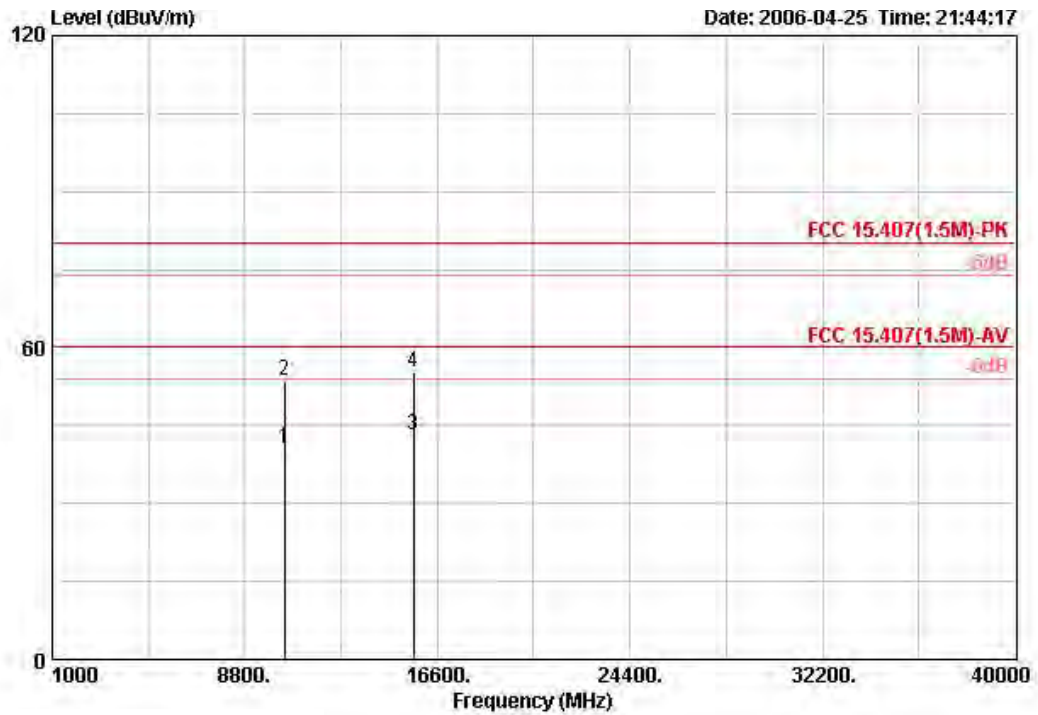

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10420.520	40.38	-19.62	60.00	29.36	38.37	7.71	35.05	AVERAGE	HORIZONTAL	3
2	10421.960	53.62	-26.38	80.00	42.60	38.37	7.71	35.05	PEAK	HORIZONTAL	3
3	15622.760	43.01	-16.99	60.00	31.91	37.96	8.45	35.31	AVERAGE	HORIZONTAL	3
4	15623.680	55.25	-24.75	80.00	44.15	37.96	8.45	35.31	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 50 / Ant. 2

Vertical

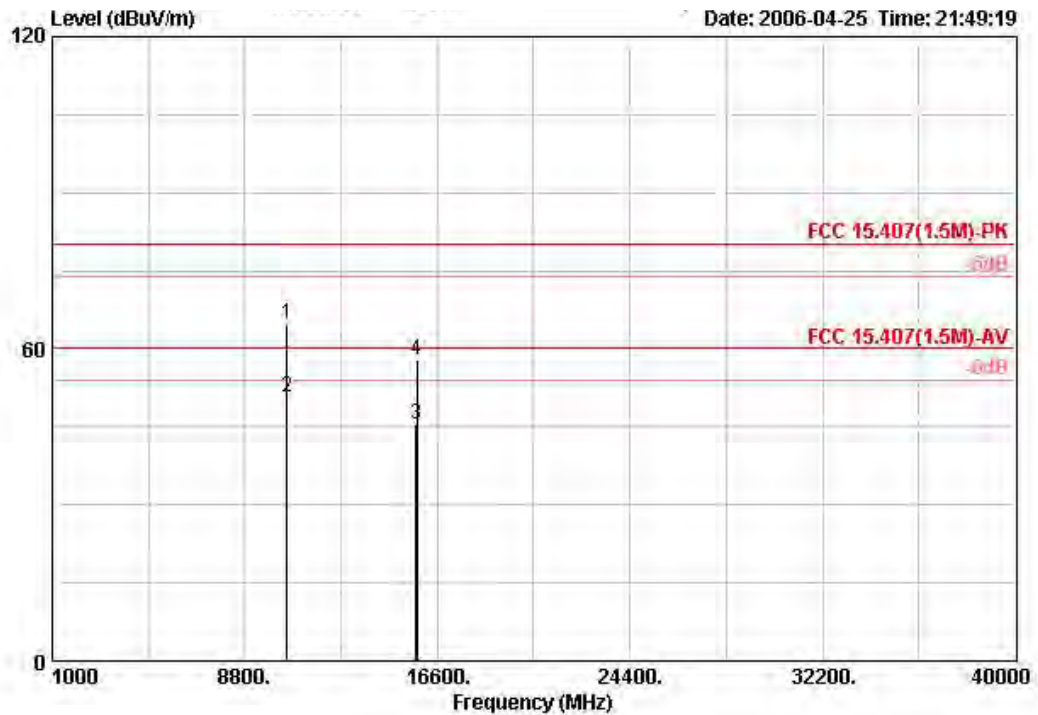

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	10494.920	64.68	-15.32	80.00	53.79	38.10	7.75	34.96	PEAK	VERTICAL	3
2	10496.280	50.69	-9.31	60.00	39.80	38.10	7.75	34.96	AVERAGE	VERTICAL	3
3	15751.520	45.41	-14.59	60.00	34.49	37.79	8.48	35.35	AVERAGE	VERTICAL	3
4	15757.840	57.75	-22.25	80.00	46.83	37.79	8.48	35.36	PEAK	VERTICAL	3


Horizontal

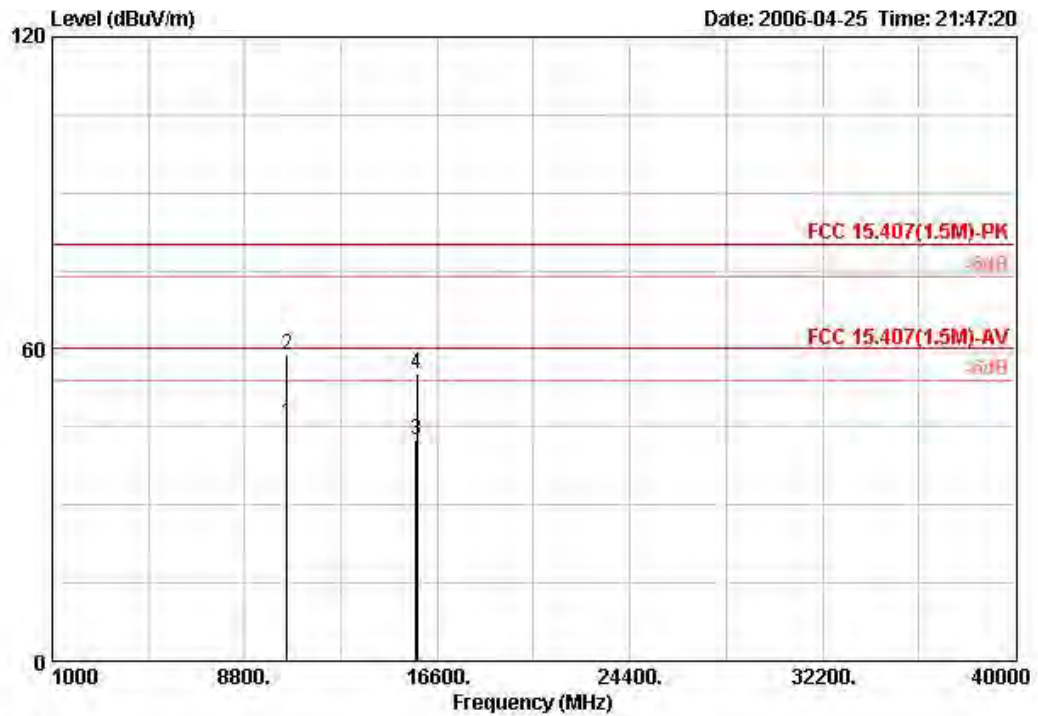

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Po1/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	10500.720	45.89	-14.11	60.00	34.97	38.10	7.75	34.93	AVERAGE	HORIZONTAL	3
2	10500.720	58.97	-21.03	80.00	48.04	38.10	7.75	34.93	PEAK	HORIZONTAL	3
3	15753.520	42.62	-17.38	60.00	31.71	37.79	8.48	35.36	AVERAGE	HORIZONTAL	3
4	15756.520	55.19	-24.81	80.00	44.28	37.79	8.48	35.36	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 58 / Ant. 2

Vertical

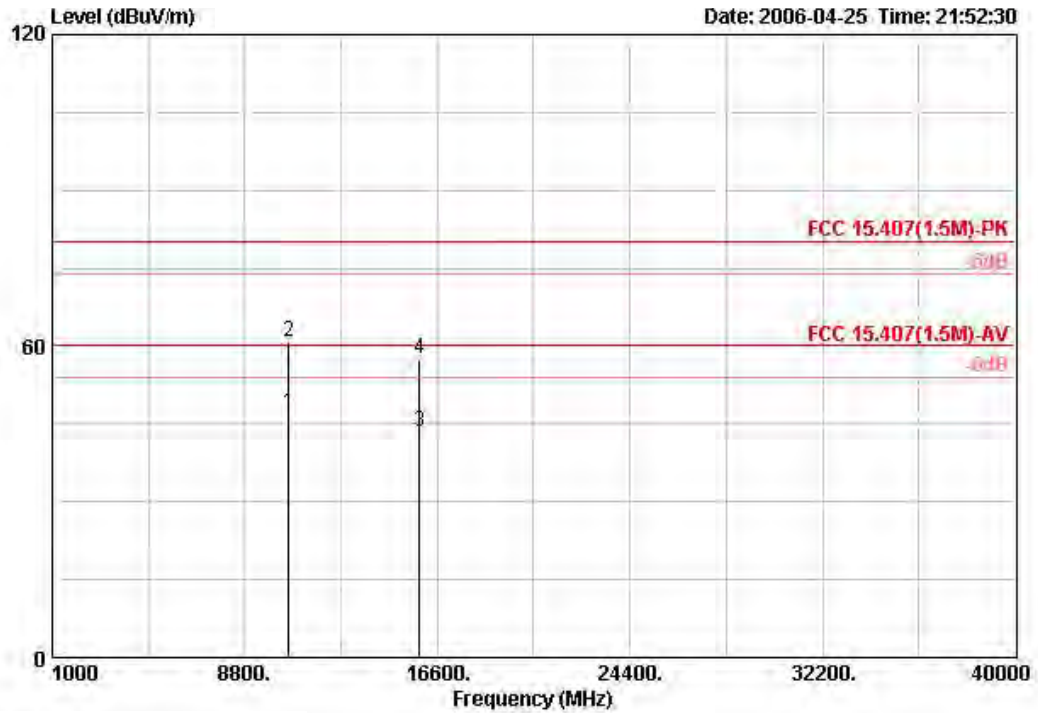

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	10580.000	47.17	-12.83	60.00	36.09	38.21	7.74	34.88	AVERAGE	VERTICAL	3
2	10580.000	60.88	-19.12	80.00	49.80	38.22	7.74	34.88	PEAK	VERTICAL	3
3	15870.000	43.47	-16.53	60.00	32.79	37.56	8.54	35.43	AVERAGE	VERTICAL	3
4	15870.000	57.39	-22.61	80.00	46.74	37.54	8.55	35.44	PEAK	VERTICAL	3

Horizontal

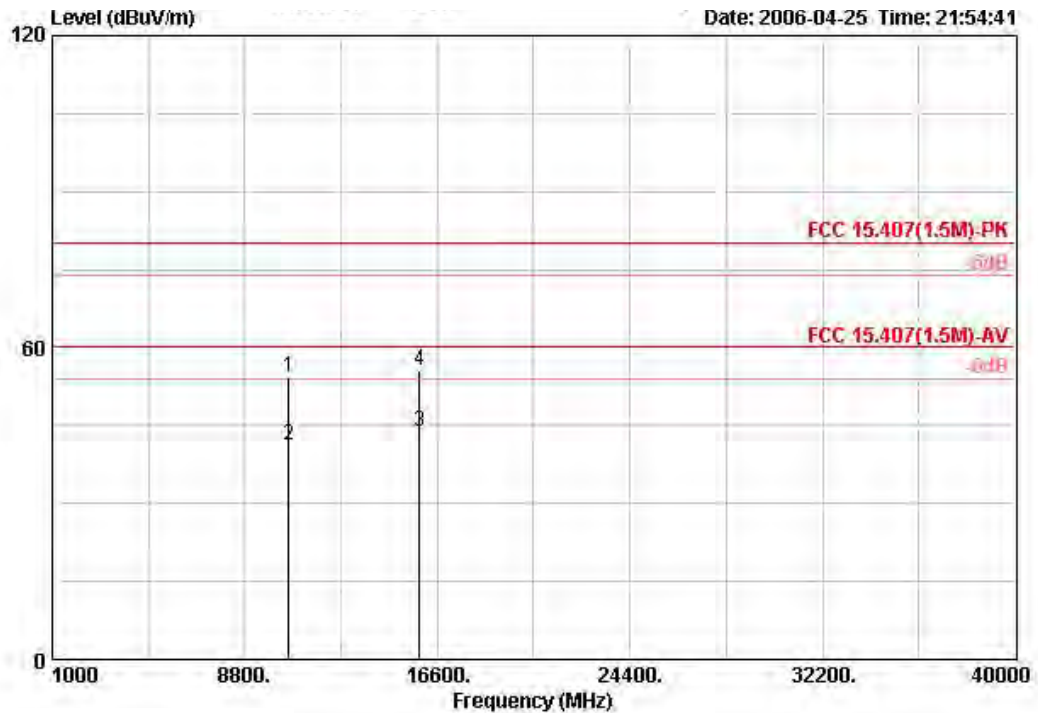

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Pol/Phase	Distance	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m	
1	10580.000	54.29	-25.71	80.00	43.22	38.21	7.74	34.88	PEAK	HORIZONTAL	3
2	10580.000	41.17	-18.83	60.00	30.10	38.21	7.74	34.88	AVERAGE	HORIZONTAL	3
3	15870.000	43.76	-16.24	60.00	33.11	37.54	8.54	35.44	AVERAGE	HORIZONTAL	3
4	15870.000	55.68	-24.32	80.00	45.03	37.54	8.55	35.44	PEAK	HORIZONTAL	3

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 36 / Ant. 4


Vertical

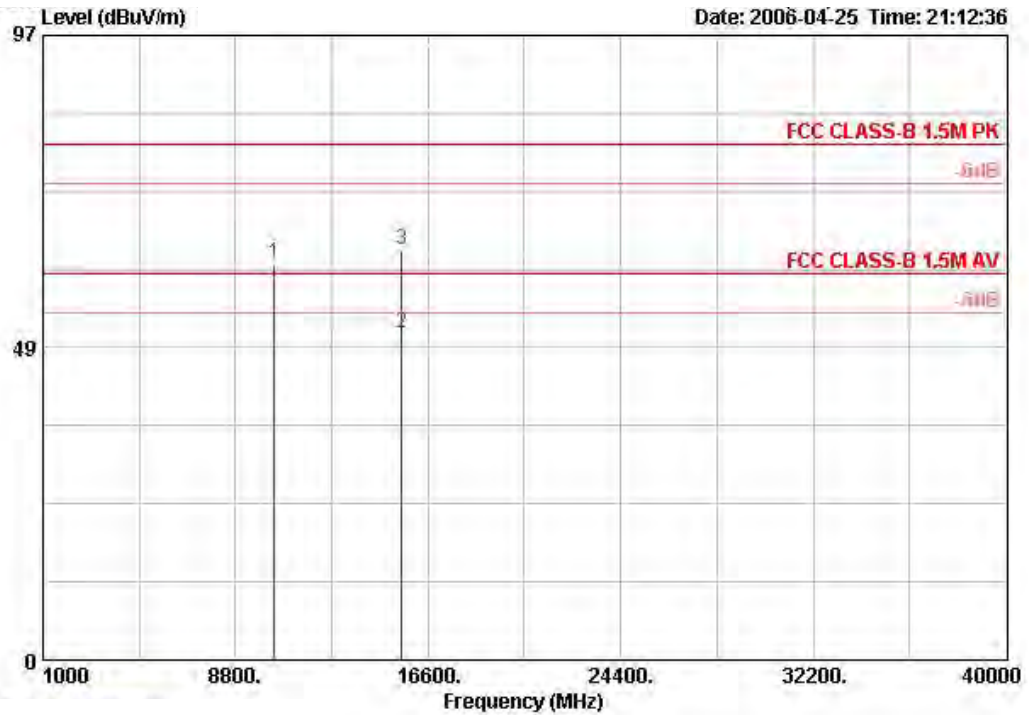

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg		
1	10362.080	61.62		39.34	5.80	35.55	52.04	PEAK	117 321	
2	15541.280	50.82	-9.18	60.00	38.15	9.26	35.68	39.09	AVERAGE	130 255
3	15541.280	63.65	-16.35	80.00	38.15	9.26	35.68	51.93	PEAK	130 255

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBuV/m at 1.5m).

Horizontal

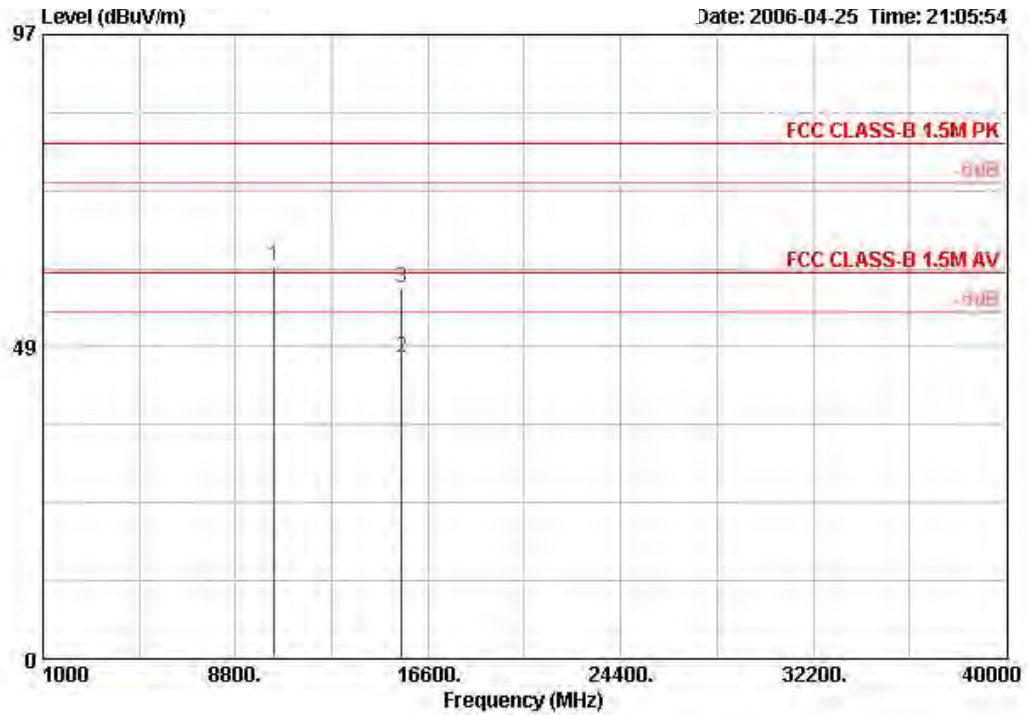


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	10360.920	61.15			39.34	5.80	35.55	51.56	PEAK	111	236
2	15541.800	46.90	-13.10	60.00	38.15	9.26	35.68	35.17	AVERAGE	128	300
3	15541.800	57.58	-22.42	80.00	38.15	9.26	35.68	45.86	PEAK	128	300

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBUV/m at 1.5m).

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 52 / Ant. 4


Vertical

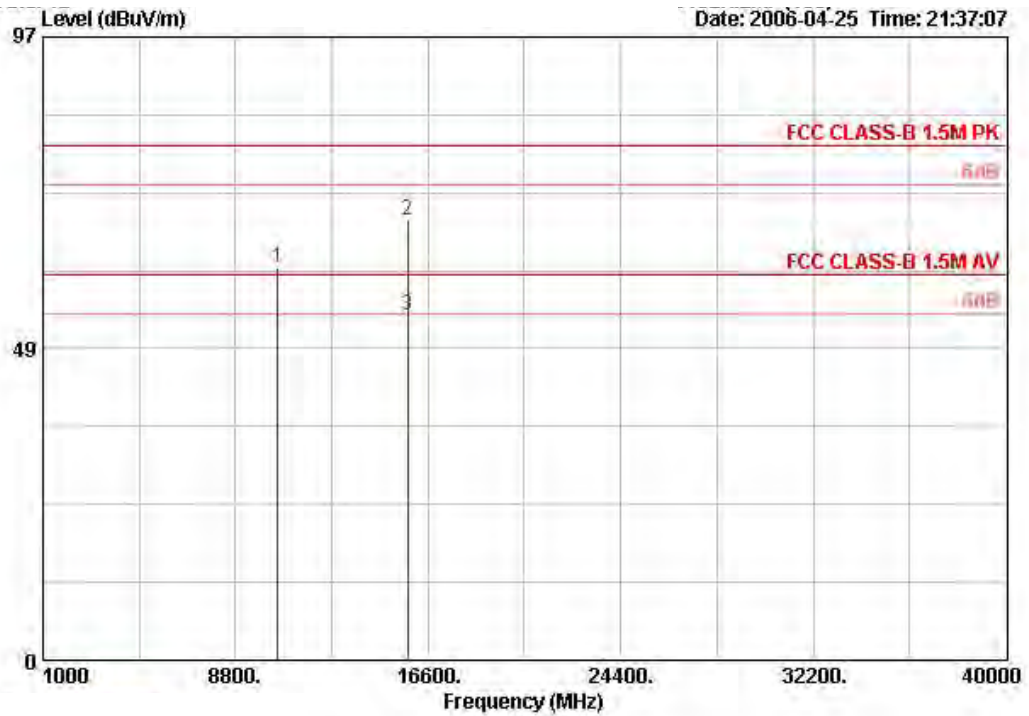

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	10518.760	61.01			39.49	5.93	35.40	50.99	PEAK	114	320
2	15780.880	68.57	-11.43	80.00	37.81	9.45	35.53	56.83	PEAK	130	255
3	15781.640	53.65	-6.35	60.00	37.79	9.45	35.53	41.93	AVERAGE	130	255

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBUV/m at 1.5m).

Horizontal

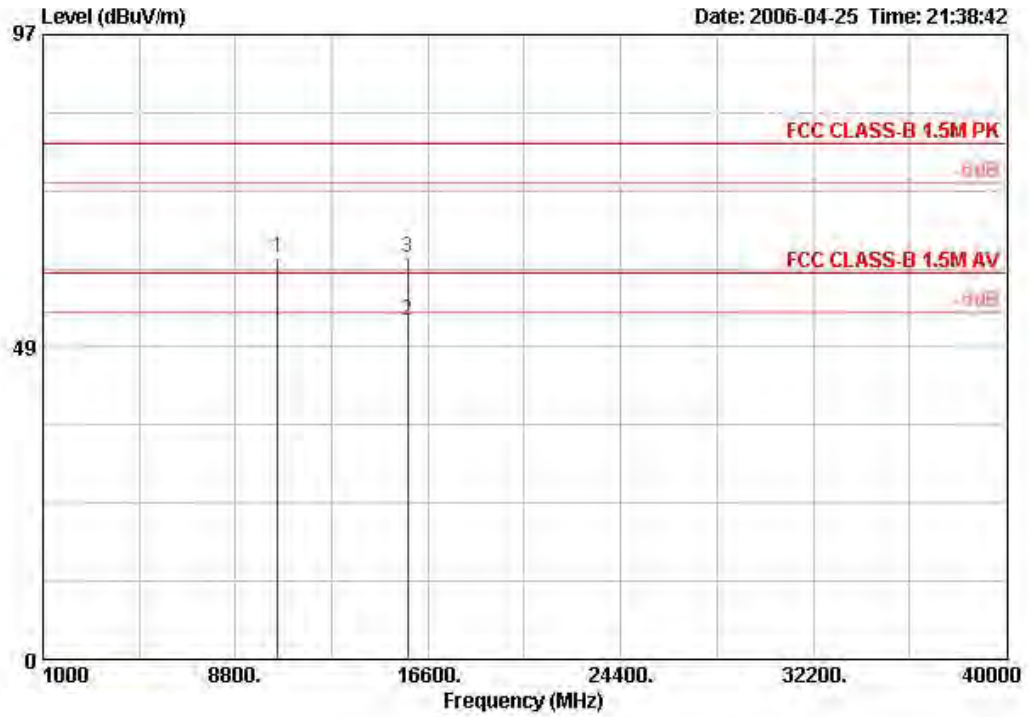


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	10518.720	62.44			39.49	5.93	35.40	52.42	PEAK	119	268
2	15777.040	52.63	-7.37	60.00	37.81	9.45	35.54	40.91	AVERAGE	120	247
3	15777.040	62.34	-17.66	80.00	37.81	9.45	35.54	50.61	PEAK	120	247

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBuV/m at 1.5m).


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 64 / Ant. 4

Vertical

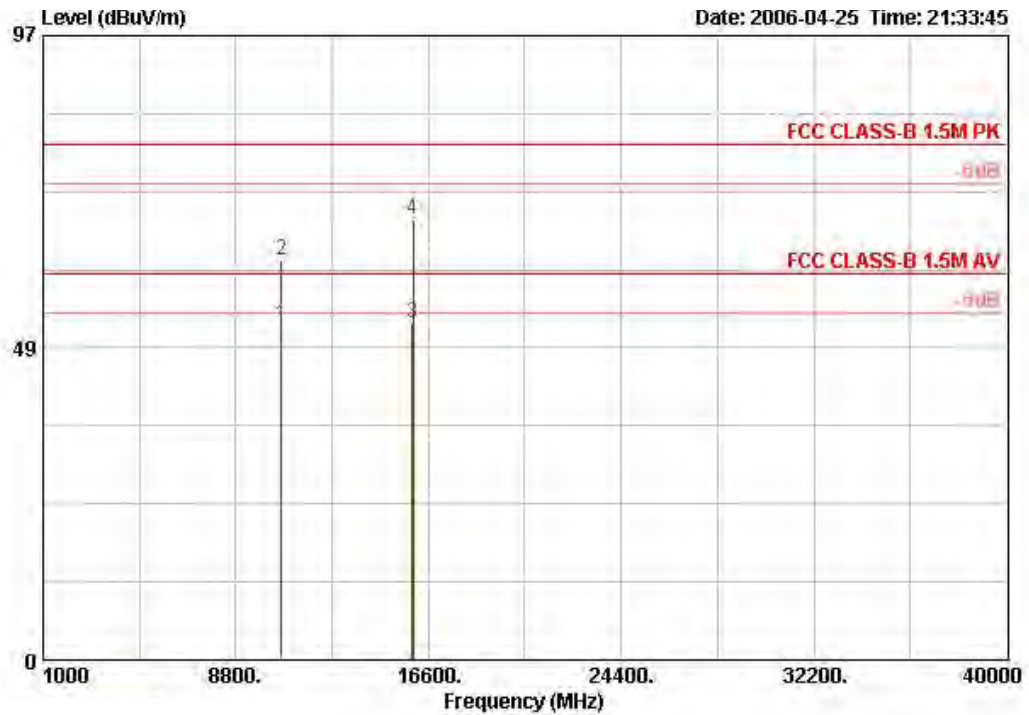

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	10639.520	51.96	-8.04	60.00	39.42	6.03	35.32	41.83	AVERAGE		114	320
2	10639.520	62.21	-17.79	80.00	39.42	6.03	35.32	52.07	PEAK		114	320
3	15959.120	52.37	-7.63	60.00	37.55	9.62	35.42	40.62	AVERAGE		130	255
4	15967.280	68.44	-11.56	80.00	37.55	9.62	35.42	56.69	PEAK		130	255


Horizontal

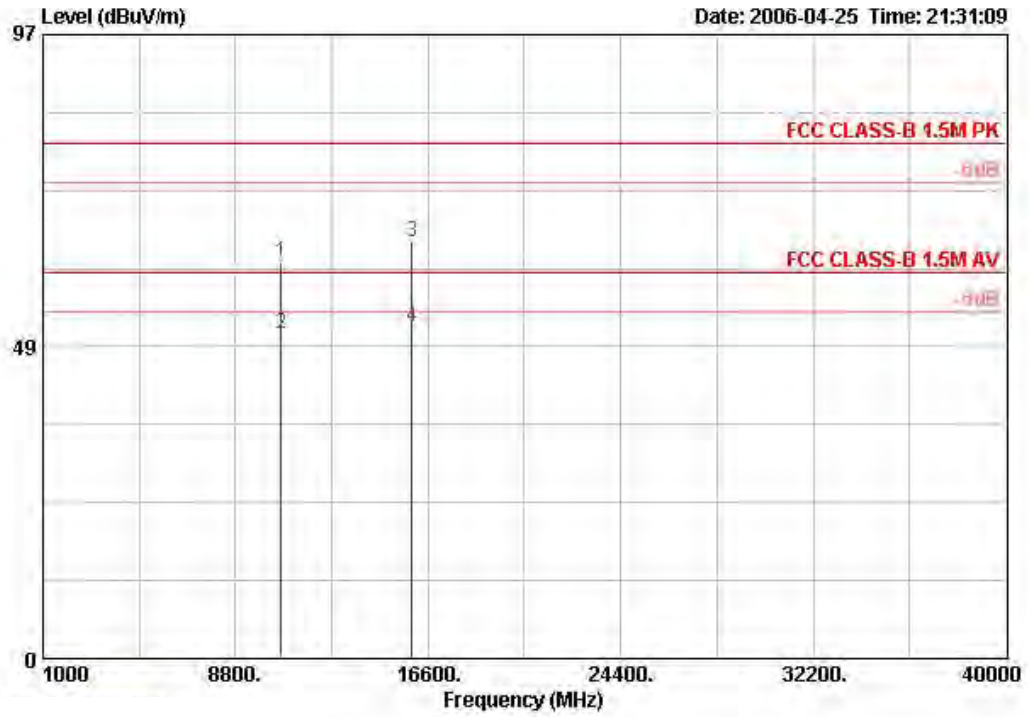

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	10641.120	61.48	-18.52	80.00	39.42	6.03	35.32	51.35	PEAK	119	265
2	10641.120	50.40	-9.60	60.00	39.42	6.03	35.32	40.27	Average	119	265
3	15959.600	64.69	-15.31	80.00	37.55	9.62	35.42	52.94	PEAK	120	247
4	15959.600	51.58	-8.42	60.00	37.55	9.62	35.42	39.83	AVERAGE	120	247

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 42 / Ant. 4


Vertical

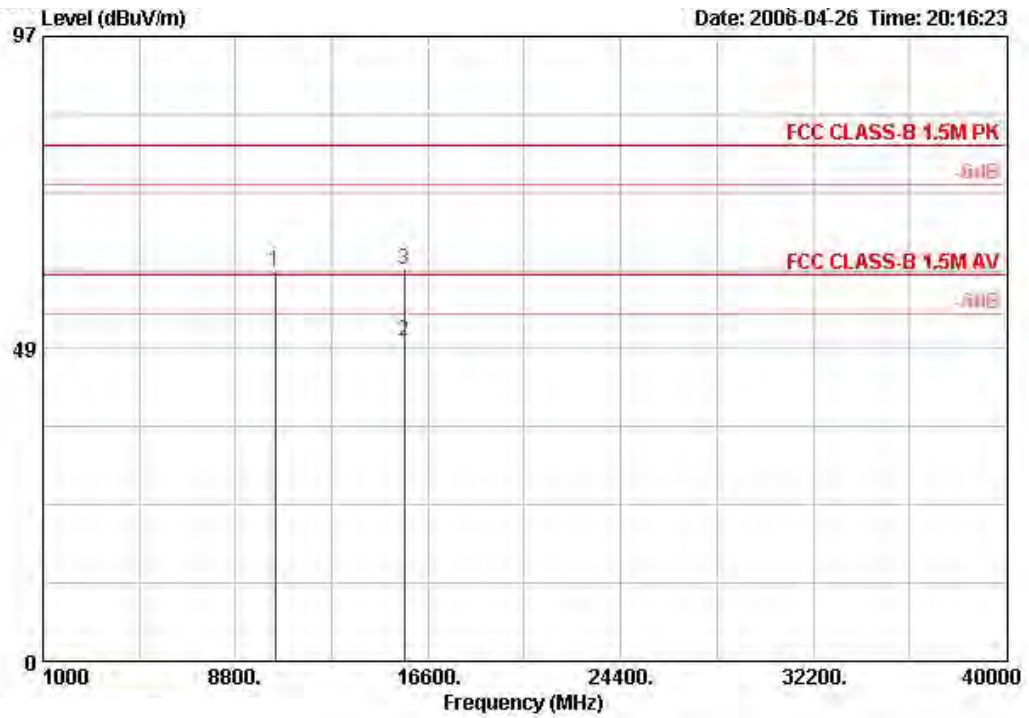

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	10422.000	60.53			39.40	5.86	35.50	50.77	PEAK	100	278
2	15624.440	49.75	-10.25	60.00	38.03	9.32	35.62	38.02	AVERAGE	123	257
3	15636.840	60.78	-19.22	80.00	38.01	9.32	35.62	49.07	PEAK	123	257

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBUV/m at 1.5m).

Horizontal

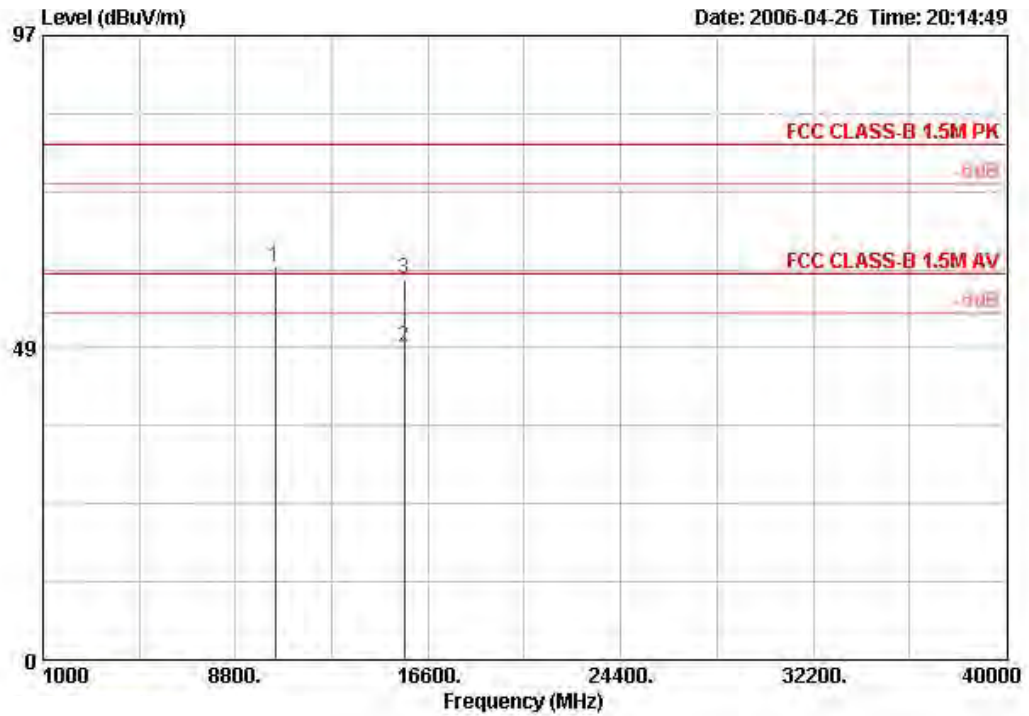


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	10420.760	61.00			39.40	5.86	35.50	51.24	PEAK	124	208
2	15635.200	48.64	-11.36	60.00	38.01	9.32	35.62	36.93	AVERAGE	121	245
3	15635.200	59.13	-20.87	80.00	38.01	9.32	35.62	47.42	PEAK	121	245

Note: Item 1 is on un-restricted band, so the limit is the EIRP of -27dBm/MHz (74.25 dBUV/m at 1.5m).

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 50 / Ant. 4

Vertical

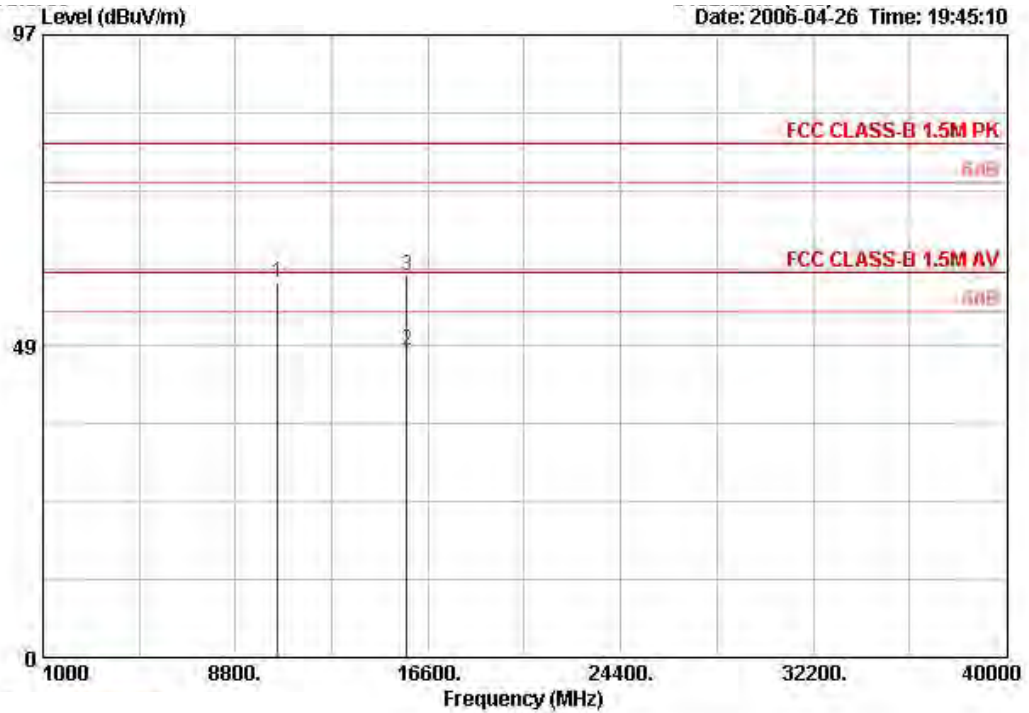

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV		cm	deg
1	10497.500	58.45	-21.55	80.00	39.50	5.93	35.43	48.44 PEAK	100	278
2	15750.900	47.72	-12.28	60.00	37.84	9.42	35.56	36.02 AVERAGE	123	257
3	15750.900	59.36	-20.64	80.00	37.84	9.42	35.56	47.66 PEAK	123	257