



<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 1 / Ant. 2

Vertical

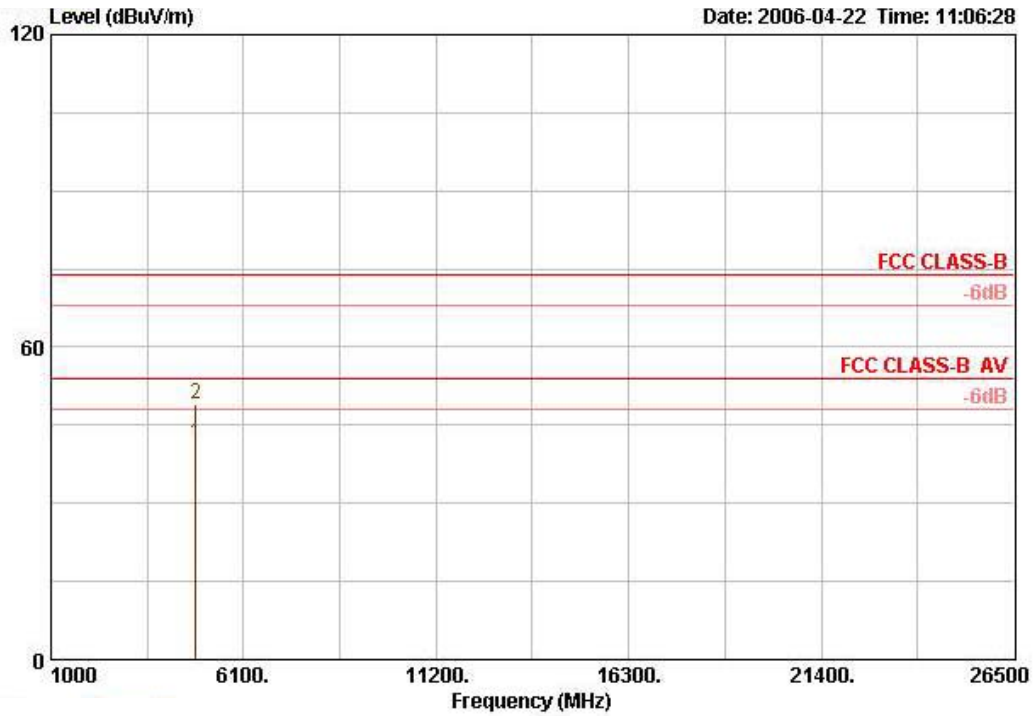

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4824.010	41.37	-12.63	54.00	33.22	4.68	35.10	38.57 AVERAGE	143	207
2	4824.014	49.16	-24.84	74.00	33.22	4.68	35.10	46.36 PEAK	143	207


Horizontal

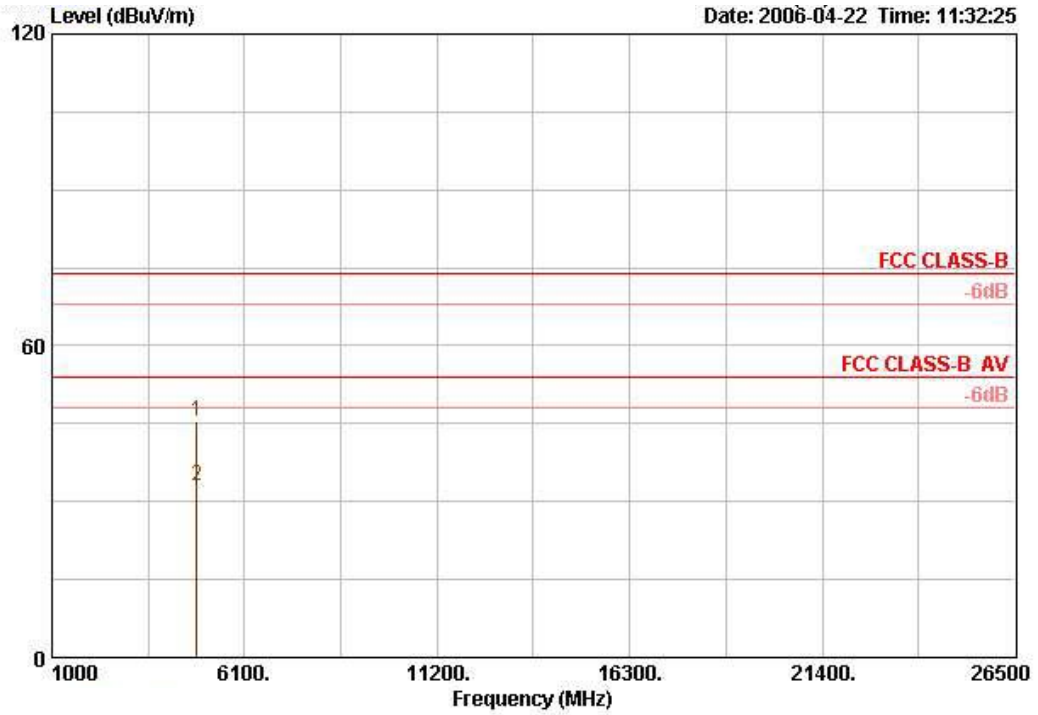

	Freq	Level	Over Limit	Antenna Line	Cable Factor	Preamp Loss	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4823.960	45.57	-28.43	74.00	33.22	4.68	35.10	42.77 PEAK	100	323
2	4824.028	33.07	-20.93	54.00	33.22	4.68	35.10	30.27 AVERAGE	100	323


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 6 / Ant. 2

Vertical

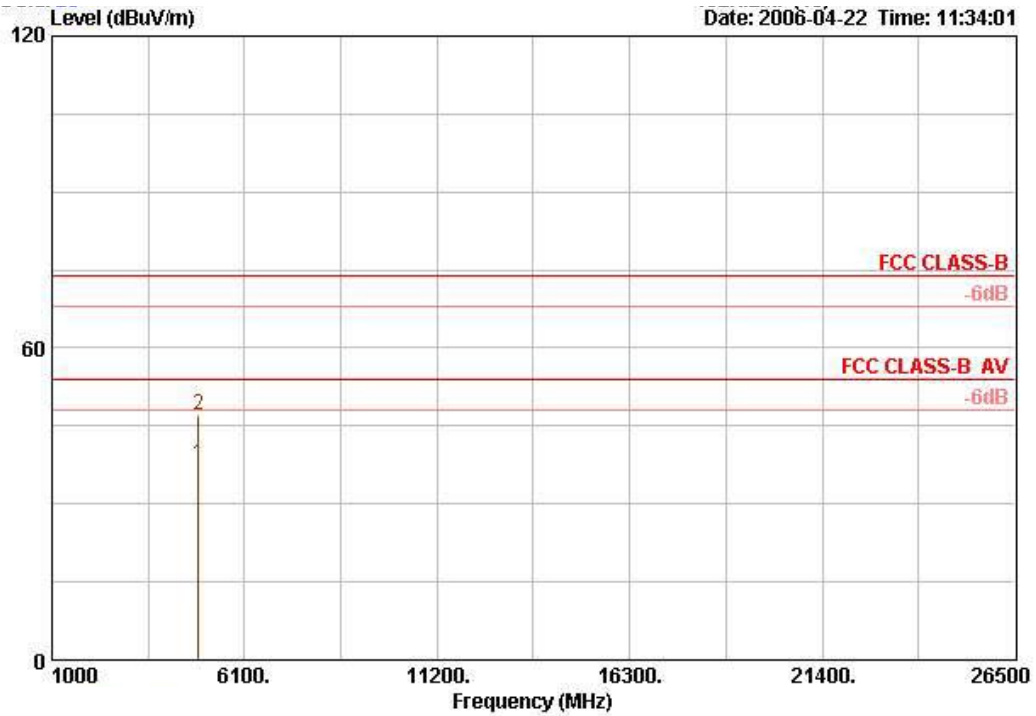

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.960	37.47	-16.53	54.00	33.33	4.69	35.10	34.54	AVERAGE	100	323
2	4873.960	47.10	-26.90	74.00	33.33	4.69	35.10	44.17	PEAK	100	323


Horizontal

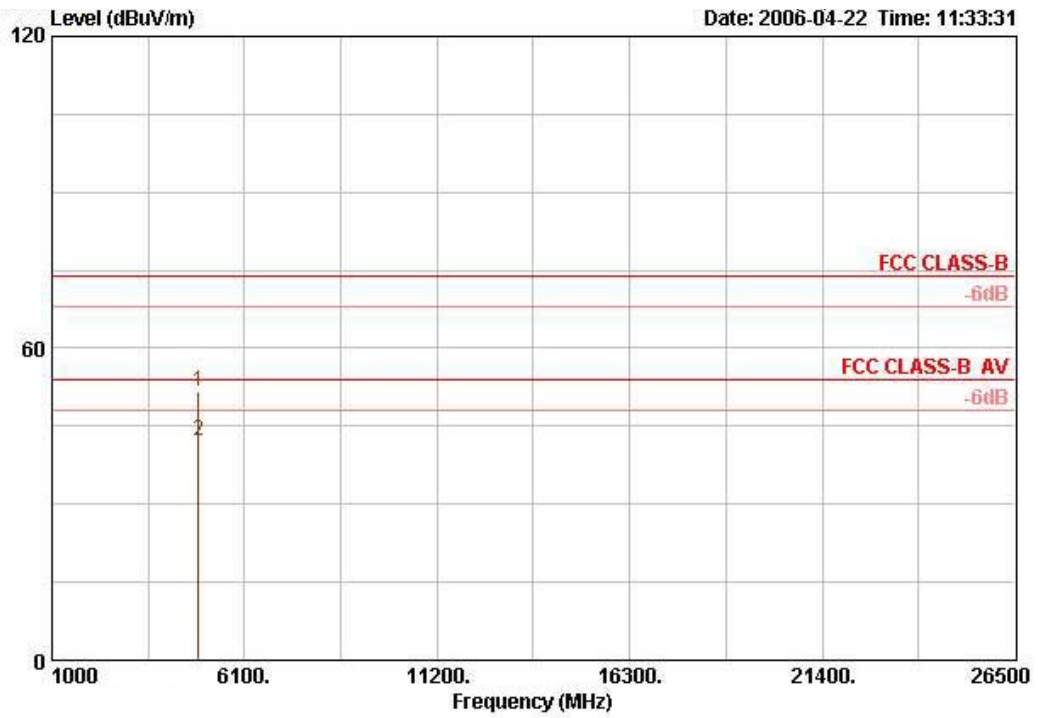

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4873.960	51.70	-22.30	74.00	33.33		4.69	35.10	48.77	PEAK	100	323
2	4873.960	42.29	-11.71	54.00	33.33		4.69	35.10	39.36	AVERAGE	100	323


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 11 / Ant. 2

Vertical

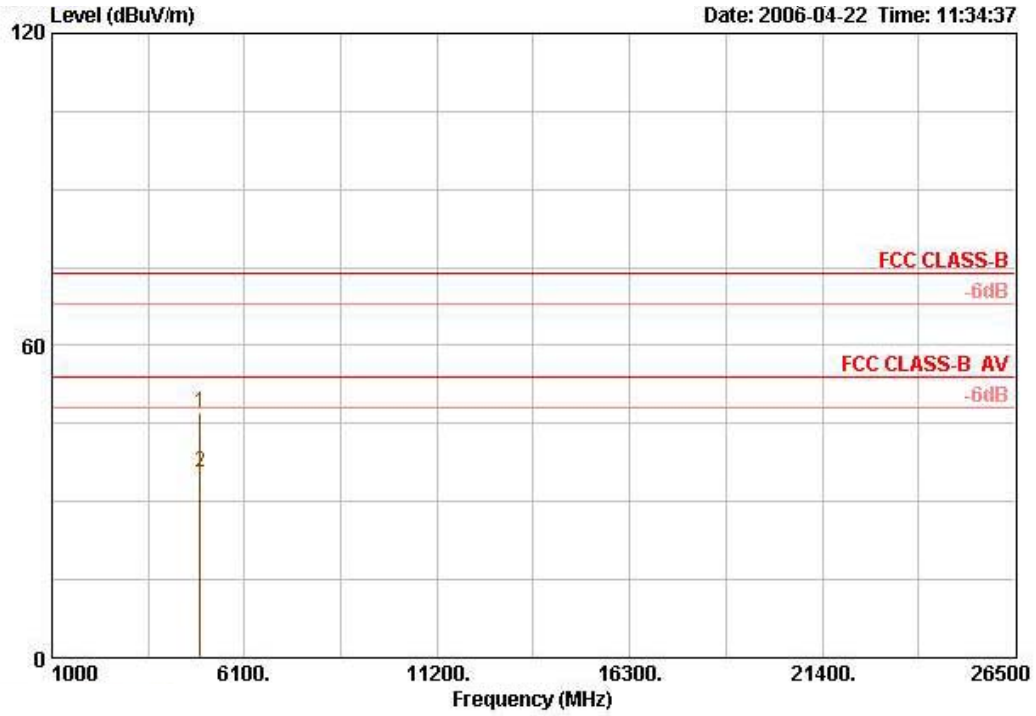

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dB	dBUV		cm	deg
1	4924.808	46.94	-27.06	74.00	33.45	4.73	35.10	43.86	PEAK		100	323
2	4924.808	35.71	-18.29	54.00	33.45	4.73	35.10	32.64	AVERAGE		100	323


Horizontal

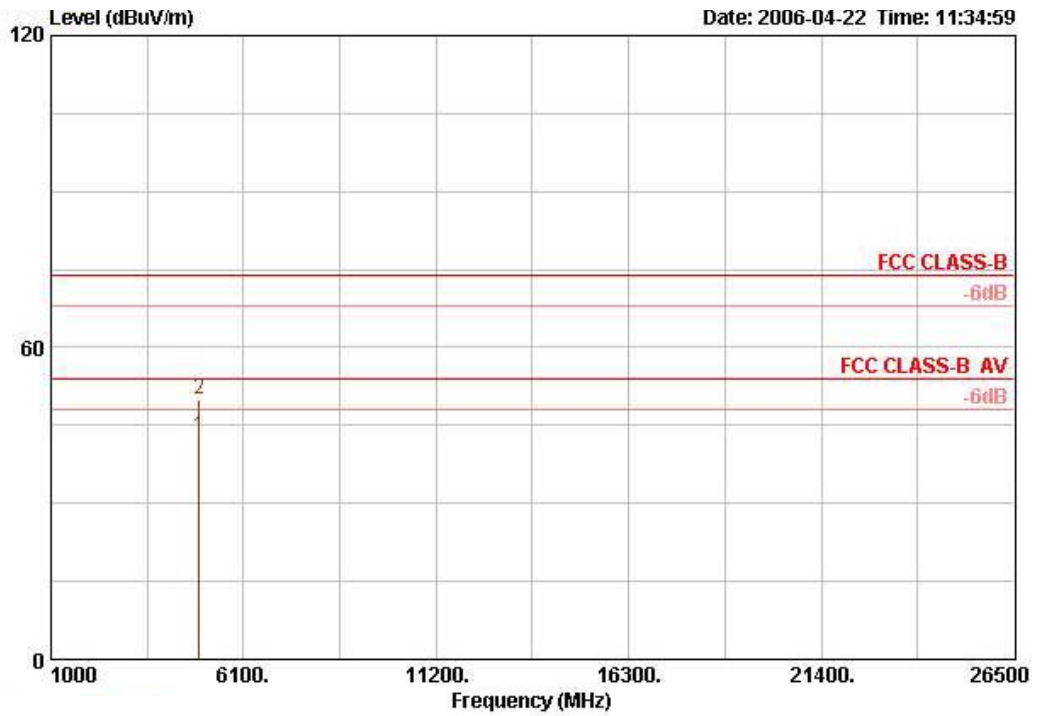

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4924.808	42.73	-11.27	54.00	33.45	4.73	35.10	39.65 AVERAGE	100	323
2	4924.808	50.13	-23.87	74.00	33.45	4.73	35.10	47.05 PEAK	100	323


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 1 / Ant. 2

Vertical

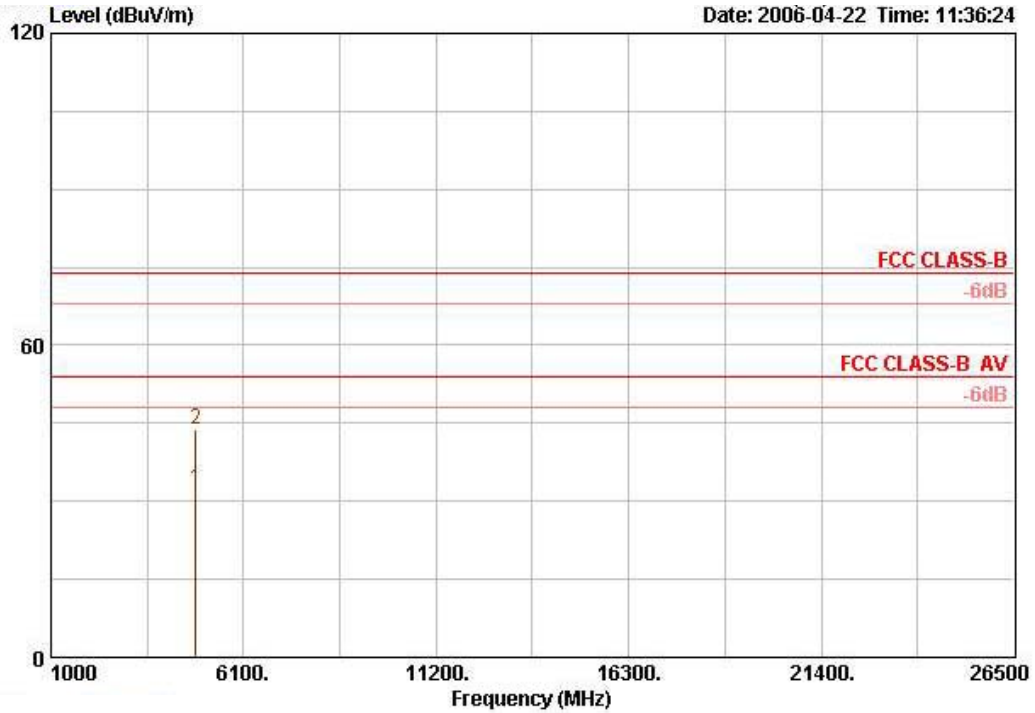

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4823.380	32.42	-21.58	54.00	33.22	4.68	35.10	29.63	AVERAGE	100	323
2	4823.380	43.84	-30.16	74.00	33.22	4.68	35.10	41.05	PEAK	100	323

Horizontal

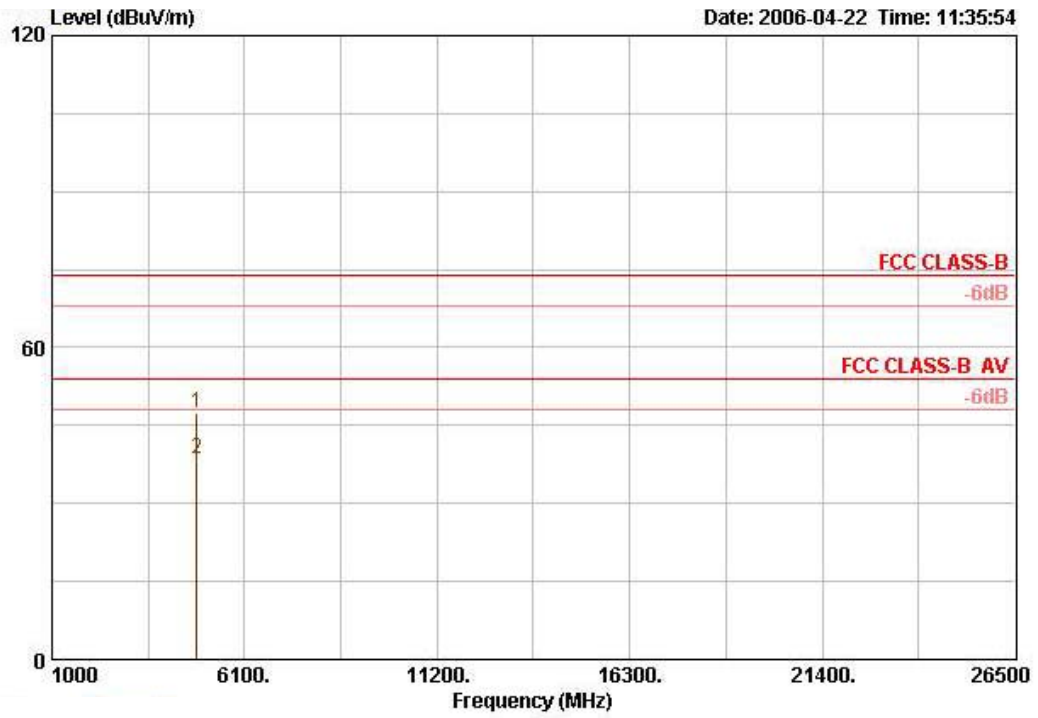


	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1	4823.380	47.52	-26.48	74.00	33.22	4.68	35.10	44.72	PEAK	100	323
2	4823.380	38.71	-15.29	54.00	33.22	4.68	35.10	35.91	AVERAGE	100	323




<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 6 / Ant. 2

Vertical

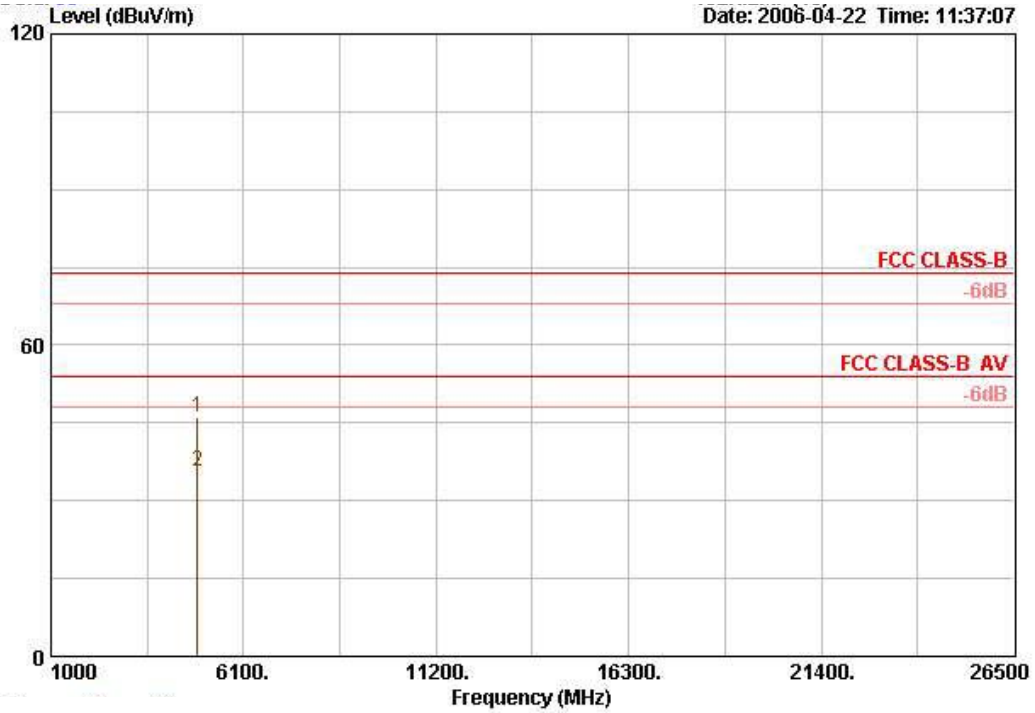

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table		
Freq	Level	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.924	46.13	-27.87	74.00	33.33	4.69	35.10	43.20 PEAK	100	323
2	4873.924	35.73	-18.27	54.00	33.33	4.69	35.10	32.80 AVERAGE	100	323

Horizontal

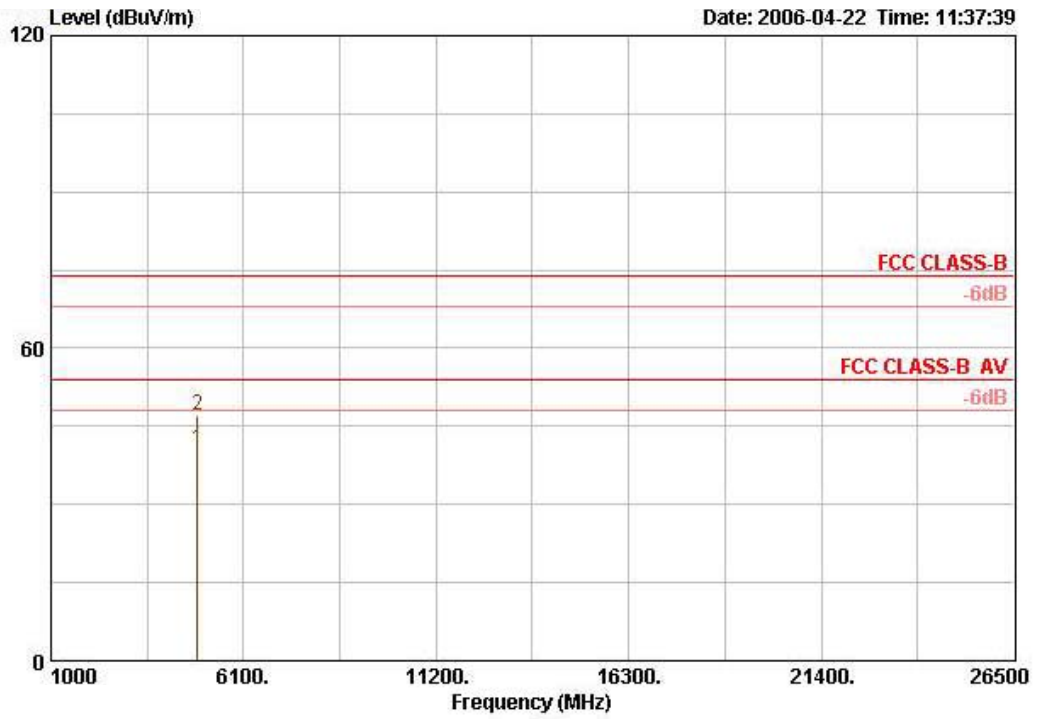


	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4873.924	40.60	-13.40	54.00	33.33		4.69	35.10	37.67	AVERAGE	100	323
2	4873.924	46.96	-27.04	74.00	33.33		4.69	35.10	44.04	PEAK	100	323




<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 11 / Ant. 2

Vertical

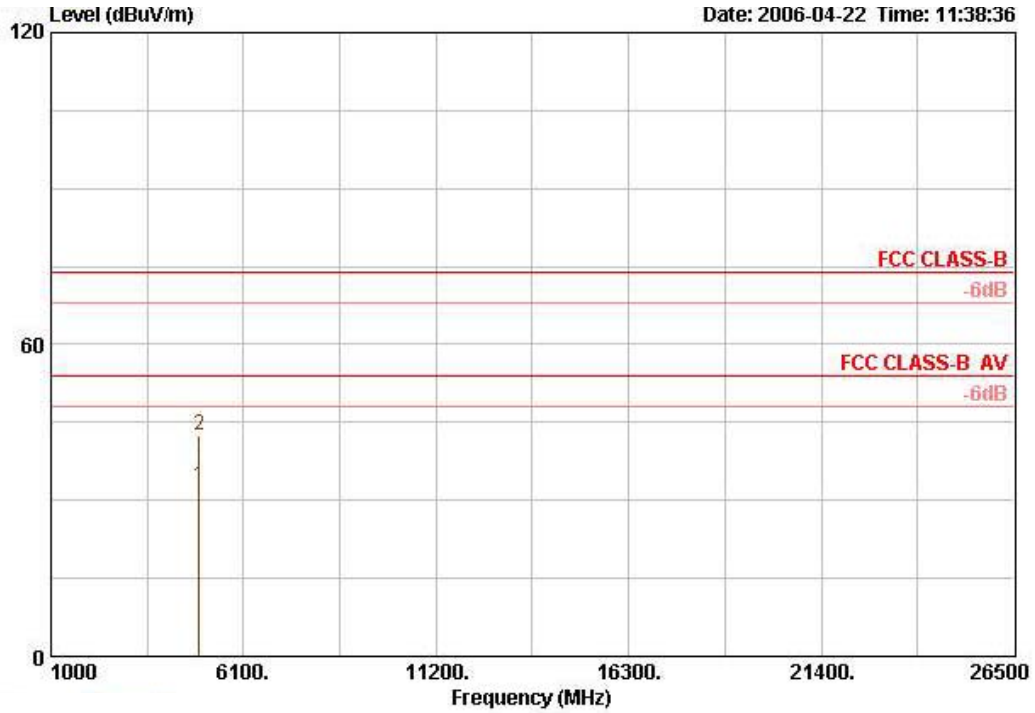

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4924.104	32.74	-21.26	54.00	33.45	4.73	35.10	29.67	AVERAGE	100	323
2	4924.104	42.52	-31.48	74.00	33.45	4.73	35.10	39.45	PEAK	100	323


Horizontal

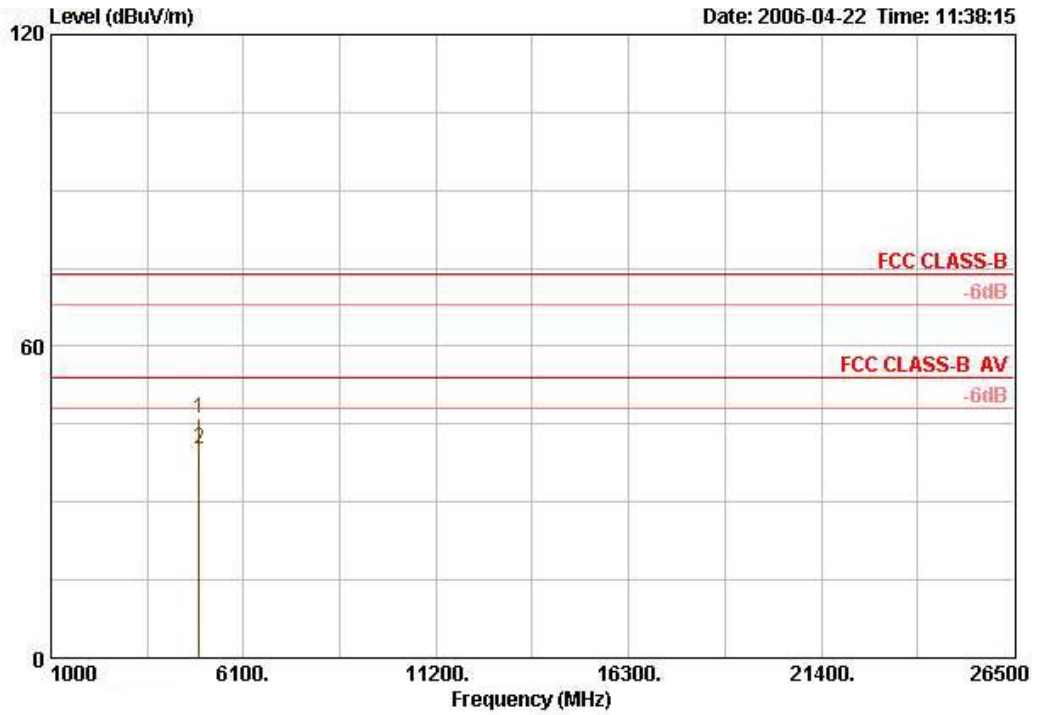

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4924.104	46.11	-27.89	74.00	33.45		4.73	35.10	43.04	PEAK	100	323
2	4924.104	40.31	-13.69	54.00	33.45		4.73	35.10	37.23	AVERAGE	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 2

Vertical

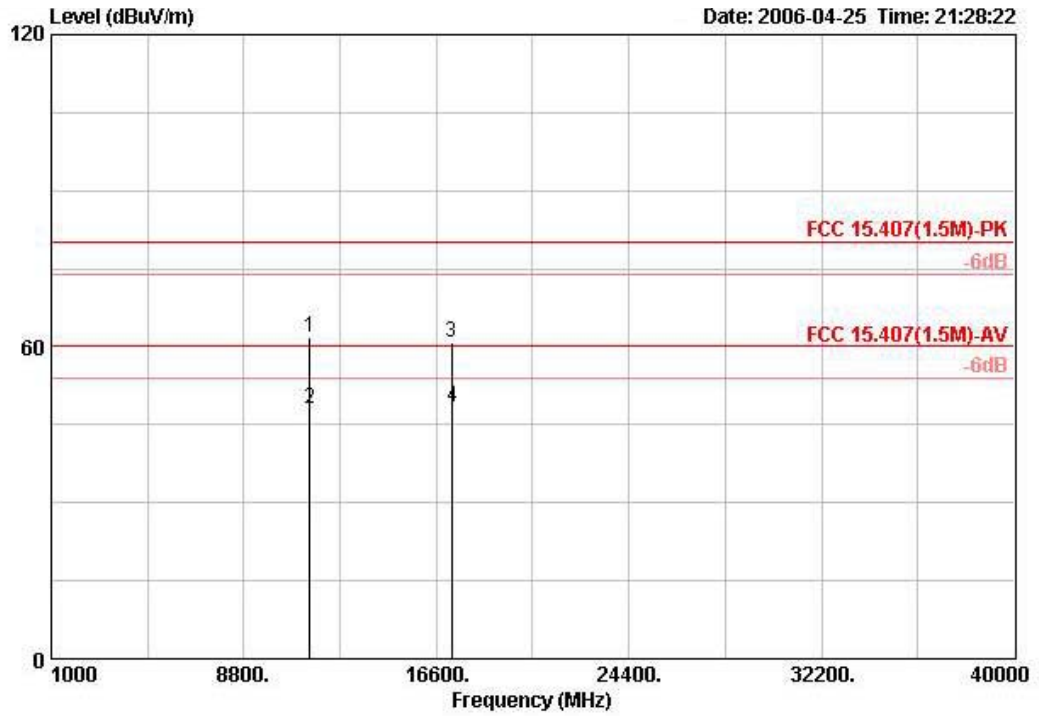

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11483.800	61.65	-18.35	80.00	50.28	38.69	7.66	34.98	PEAK	VERTICAL	3
2	11487.320	48.19	-11.81	60.00	36.83	38.69	7.66	34.98	AVERAGE	VERTICAL	3
3	17229.400	60.84	-19.16	80.00	44.41	42.47	8.87	34.91	PEAK	VERTICAL	3
4	17236.520	48.52	-11.48	60.00	32.11	42.47	8.87	34.92	AVERAGE	VERTICAL	3


Horizontal

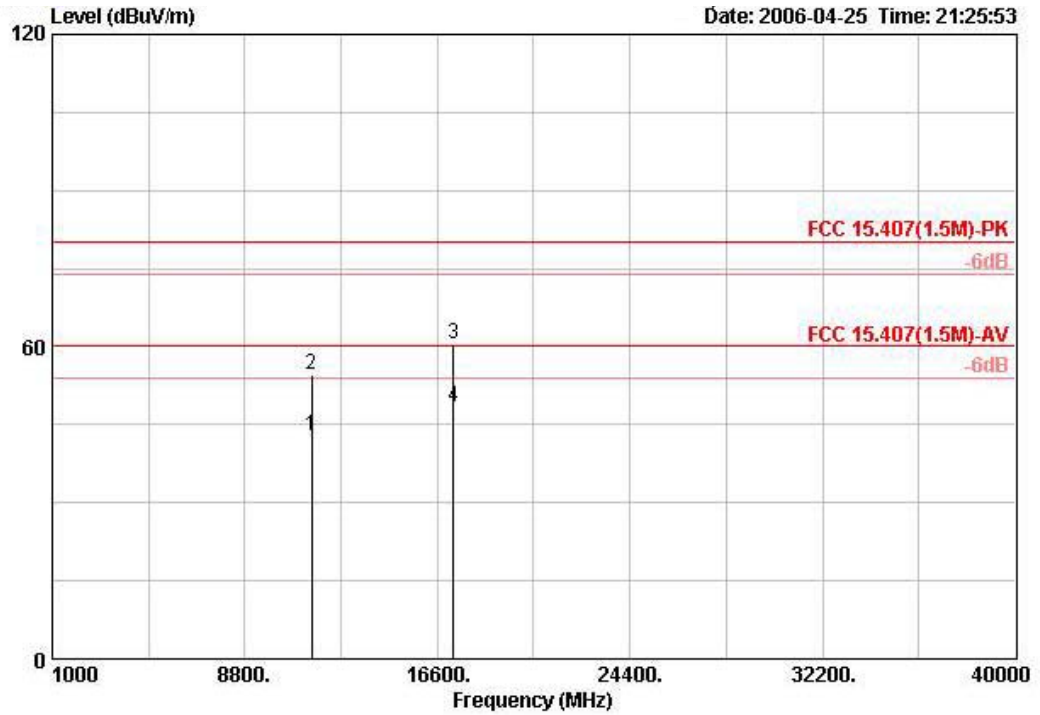

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11489.640	42.67	-17.33	60.00	31.31	38.69	7.66	34.98	AVERAGE	HORIZONTAL	3
2	11491.640	54.55	-25.45	80.00	43.19	38.69	7.65	34.98	PEAK	HORIZONTAL	3
3	17233.520	60.40	-19.60	80.00	43.98	42.47	8.87	34.92	PEAK	HORIZONTAL	3
4	17240.880	48.29	-11.71	60.00	31.88	42.47	8.87	34.92	AVERAGE	HORIZONTAL	3


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Channel 157 / Ant. 2

Vertical

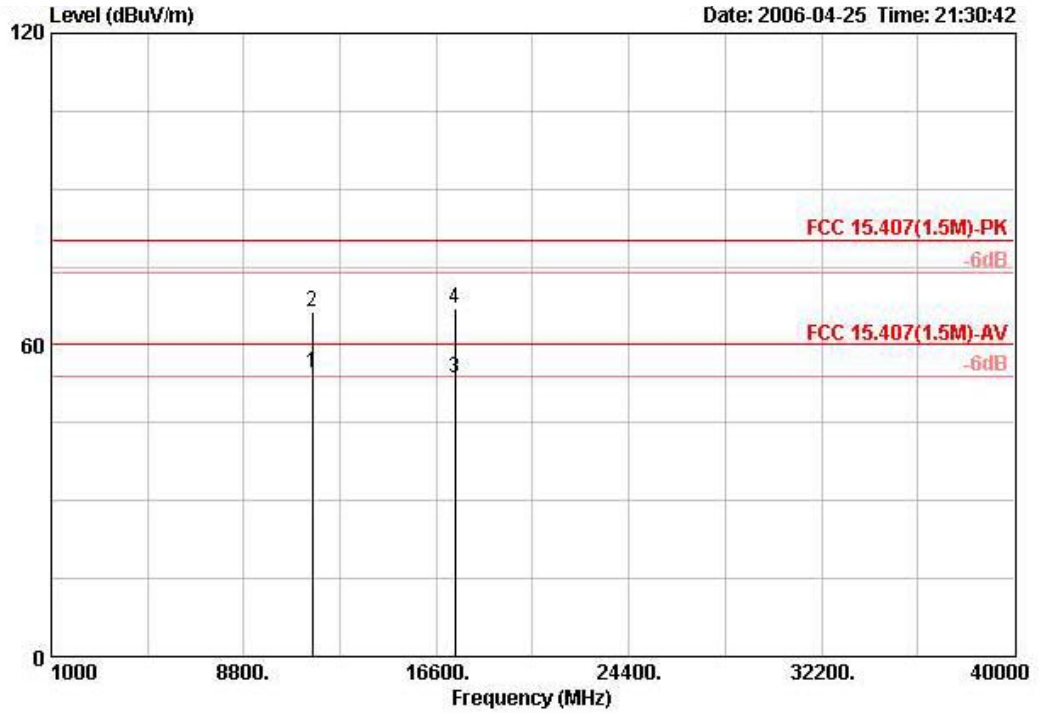

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	11570.640	54.62	-5.38	60.00	43.14	38.81	7.67	35.00	AVERAGE	VERTICAL	3
2	11570.840	66.40	-13.60	80.00	54.92	38.81	7.67	35.00	PEAK	VERTICAL	3
3	17358.760	53.75	-6.25	60.00	36.81	43.05	8.86	34.97	AVERAGE	VERTICAL	3
4	17360.240	66.93	-13.07	80.00	49.98	43.05	8.86	34.97	PEAK	VERTICAL	3

Horizontal

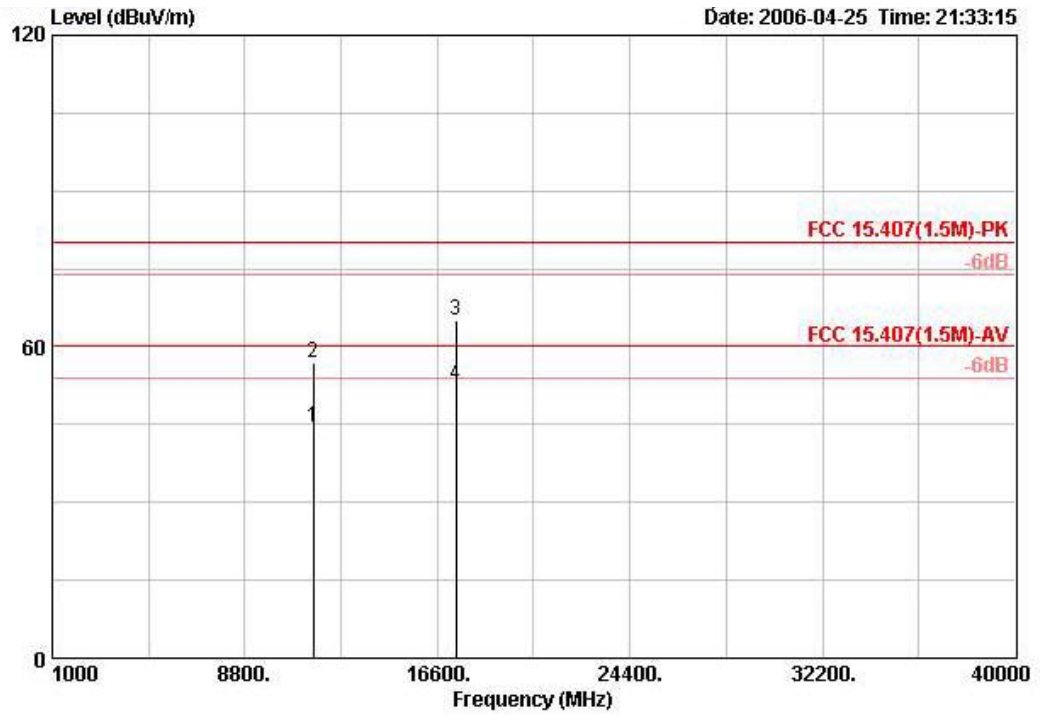


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11570.560	44.54	-15.46	60.00	33.06	38.81	7.67	35.00	AVERAGE	HORIZONTAL	3
2	11570.880	56.89	-23.11	80.00	45.41	38.81	7.67	35.00	PEAK	HORIZONTAL	3
3	17357.280	65.00	-15.00	80.00	48.04	43.05	8.86	34.96	PEAK	HORIZONTAL	3
4	17357.800	52.62	-7.38	60.00	35.67	43.05	8.86	34.96	AVERAGE	HORIZONTAL	3




<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Channel 165 / Ant. 2

Vertical

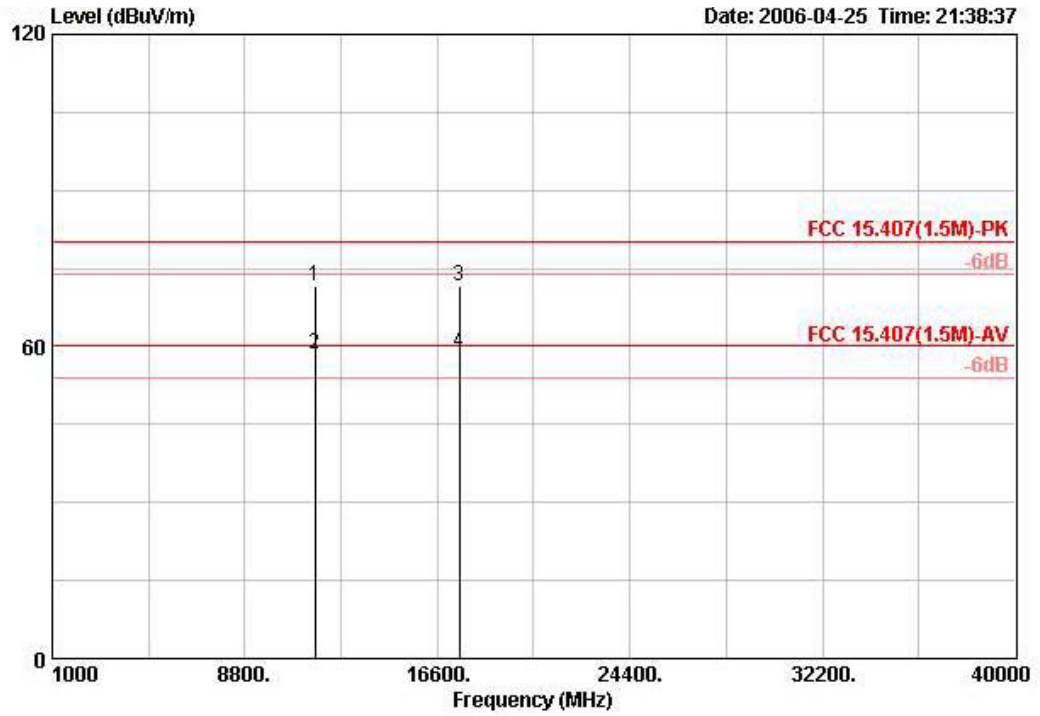

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11645.280	71.54	-8.46	80.00	59.94	38.92	7.69	35.01	PEAK	VERTICAL	3
2 !	11649.760	58.58	-1.42	60.00	46.98	38.92	7.69	35.01	AVERAGE	VERTICAL	3
3	17474.000	71.54	-8.46	80.00	54.05	43.63	8.85	35.00	PEAK	VERTICAL	3
4 !	17474.040	58.88	-1.12	60.00	41.40	43.63	8.85	35.00	AVERAGE	VERTICAL	3


Horizontal

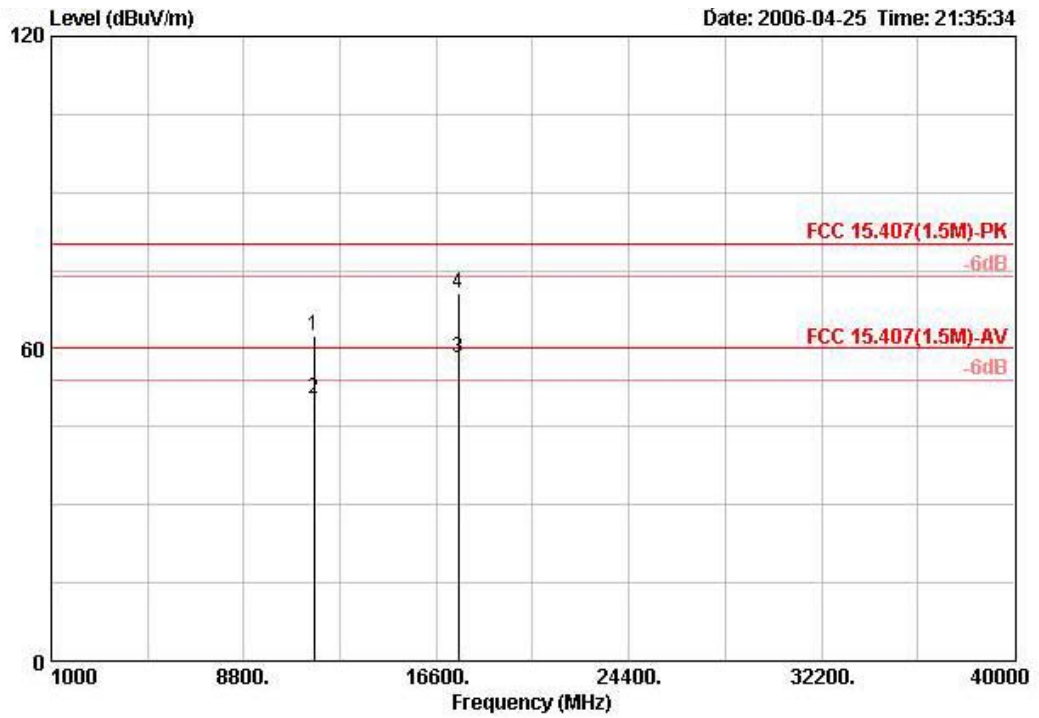

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11647.880	62.54	-17.46	80.00	50.95	38.92	7.69	35.01	PEAK	HORIZONTAL	3
2	11649.520	50.36	-9.64	60.00	38.76	38.92	7.69	35.01	AVERAGE	HORIZONTAL	3
3 !	17474.400	58.32	-1.68	60.00	40.83	43.63	8.85	35.00	AVERAGE	HORIZONTAL	3
4	17476.880	70.76	-9.24	80.00	53.27	43.63	8.85	35.00	PEAK	HORIZONTAL	3


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Turbo Channel 152 / Ant. 2

Vertical

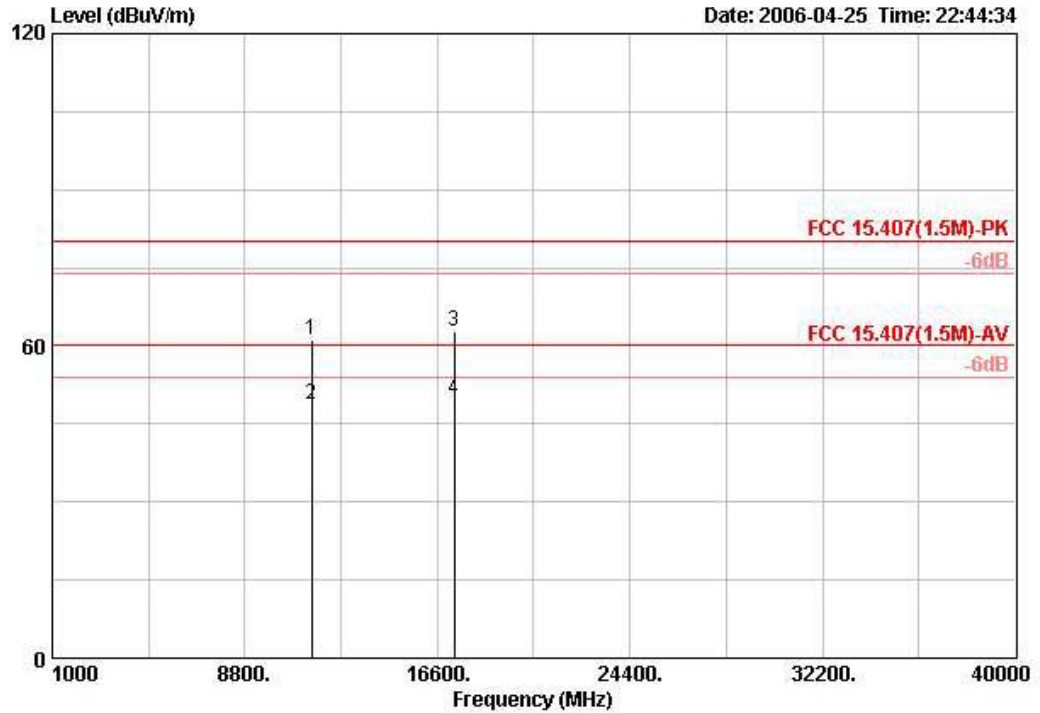

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11522.400	60.99	-19.01	80.00	49.61	38.73	7.65	35.00	PEAK	VERTICAL	3
2	11522.960	48.56	-11.44	60.00	37.18	38.73	7.65	35.00	AVERAGE	VERTICAL	3
3	17282.440	62.76	-17.24	80.00	46.11	42.72	8.87	34.94	PEAK	VERTICAL	3
4	17284.800	49.79	-10.21	60.00	33.14	42.72	8.87	34.94	AVERAGE	VERTICAL	3


Horizontal

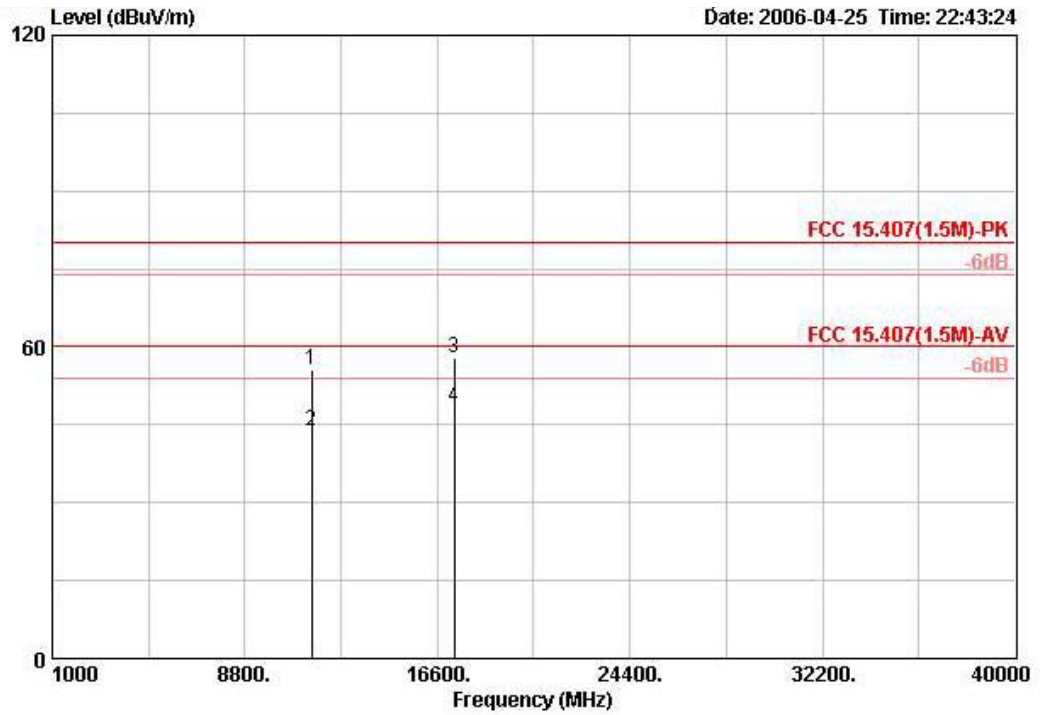

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11521.440	55.64	-24.36	80.00	44.26	38.73	7.65	35.00	PEAK	HORIZONTAL	3
2	11522.400	43.66	-16.34	60.00	32.28	38.73	7.65	35.00	AVERAGE	HORIZONTAL	3
3	17278.960	57.93	-22.07	80.00	41.28	42.72	8.87	34.93	PEAK	HORIZONTAL	3
4	17281.080	48.55	-11.45	60.00	31.90	42.72	8.87	34.93	AVERAGE	HORIZONTAL	3


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Turbo Channel 160 / Ant. 2

Vertical

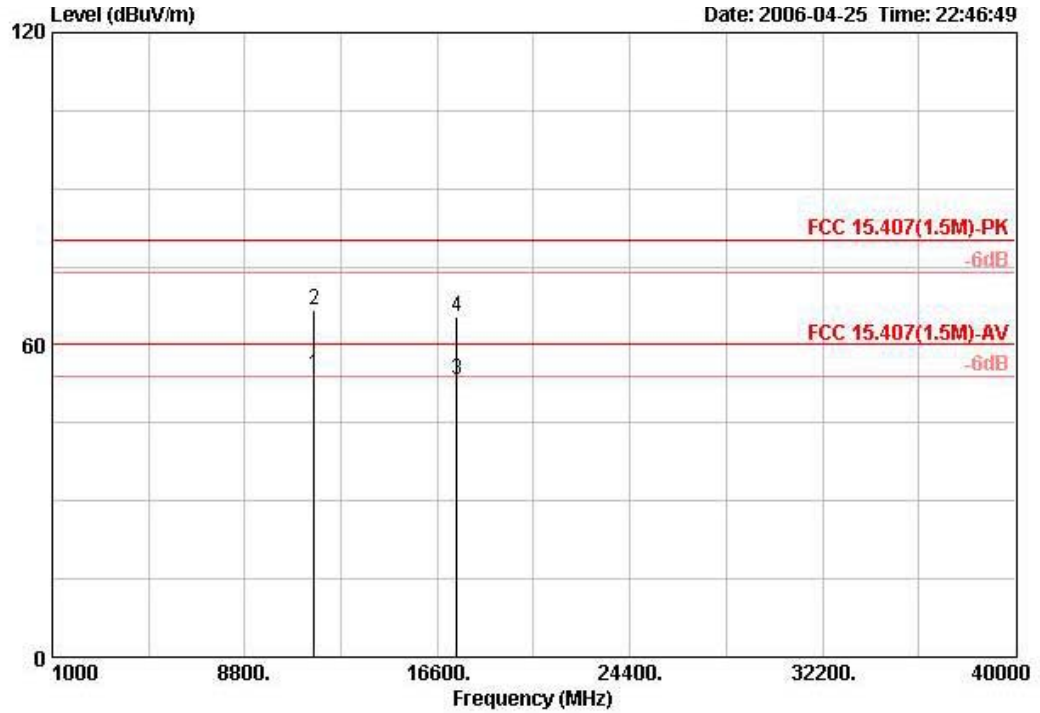

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	11601.400	54.28	-5.72	60.00	42.75	38.87	7.67	35.01	AVERAGE	VERTICAL	3
2	11602.520	66.64	-13.36	80.00	55.11	38.87	7.67	35.01	PEAK	VERTICAL	3
3	17396.800	53.40	-6.60	60.00	36.21	43.30	8.86	34.97	AVERAGE	VERTICAL	3
4	17400.280	65.52	-14.48	80.00	48.33	43.30	8.86	34.97	PEAK	VERTICAL	3

Horizontal

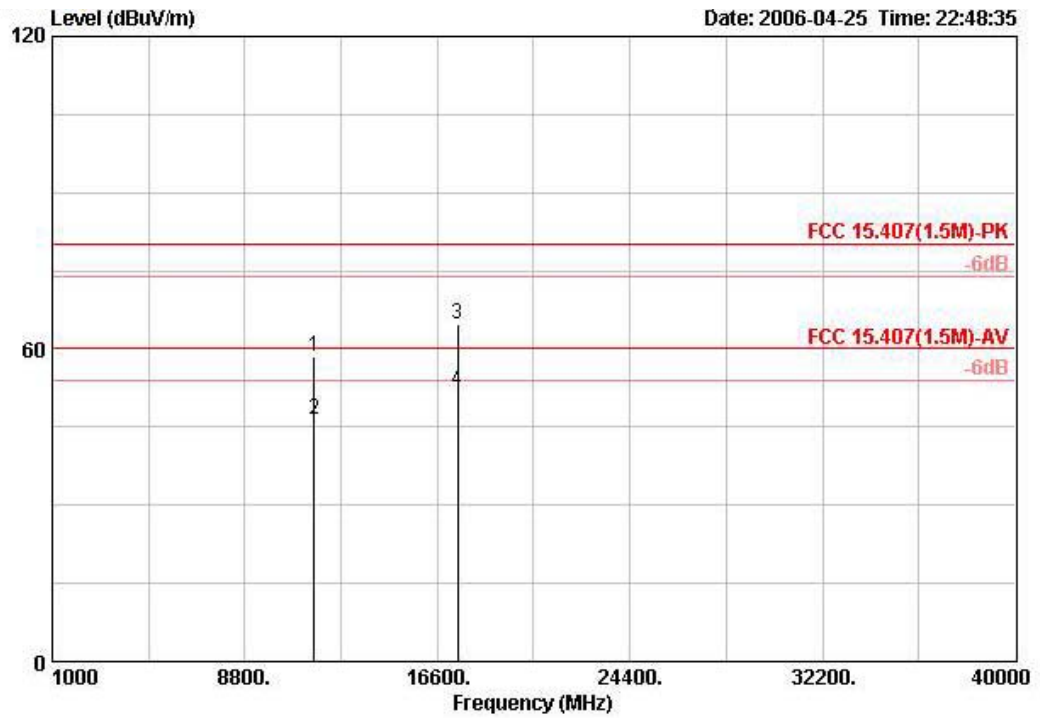

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	11597.680	58.44	-21.56	80.00	46.94	38.84	7.67	35.01	PEAK	HORIZONTAL	3
2	11603.760	46.37	-13.63	60.00	34.84	38.87	7.67	35.01	AVERAGE	HORIZONTAL	3
3	17407.560	64.77	-15.23	80.00	47.58	43.30	8.86	34.97	PEAK	HORIZONTAL	3
4	17408.760	52.05	-7.95	60.00	34.86	43.30	8.86	34.97	AVERAGE	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 1 / Ant. 3

Vertical

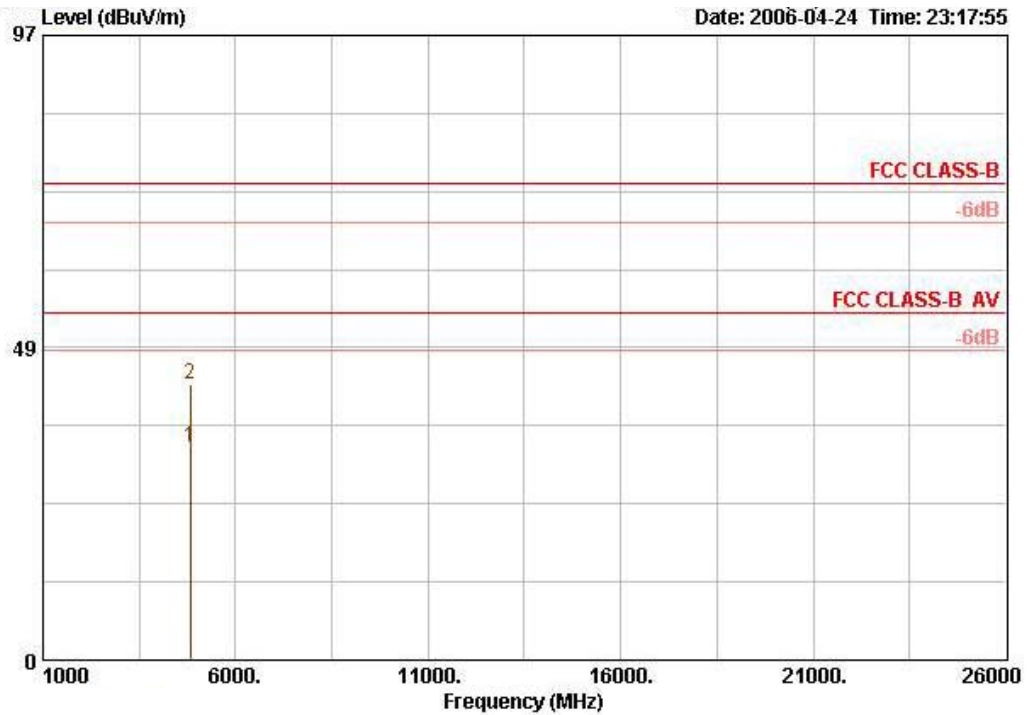

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4818.400	32.99	-21.01	54.00	33.22	4.68	35.10	30.20	AVERAGE		100	8
2	4818.400	42.78	-31.22	74.00	33.22	4.68	35.10	39.98	PEAK		100	8

Horizontal

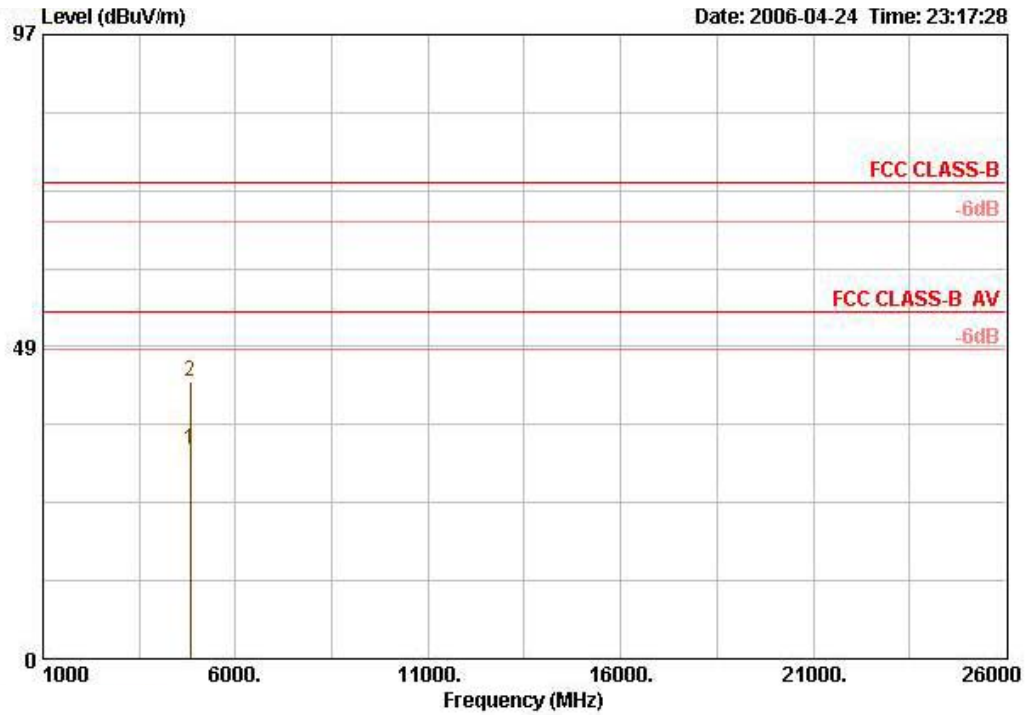


	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.400	32.58	-21.42	54.00	33.22	4.68	35.10	29.79	AVERAGE	100	12
2	4818.400	43.07	-30.93	74.00	33.22	4.68	35.10	40.27	PEAK	100	12




<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 6 / Ant. 3

Vertical

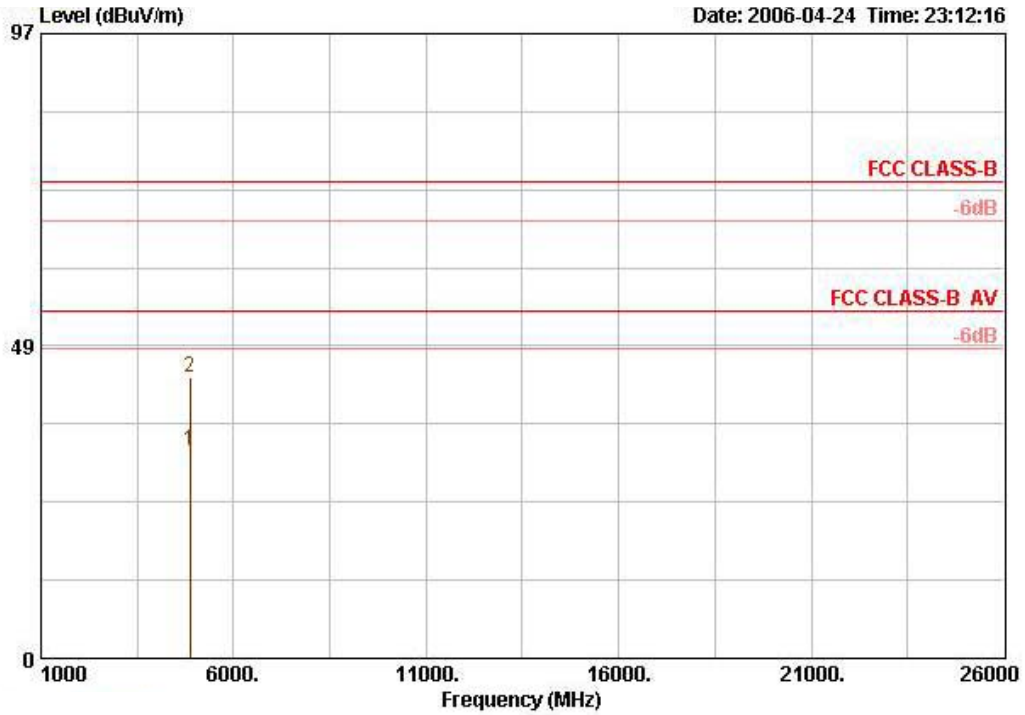

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV	cm	deg
1	4878.320	32.28	-21.72	54.00	33.33	4.69	35.10	29.36 AVERAGE	100	16
2	4878.320	43.60	-30.40	74.00	33.33	4.69	35.10	40.67 PEAK	100	16


Horizontal

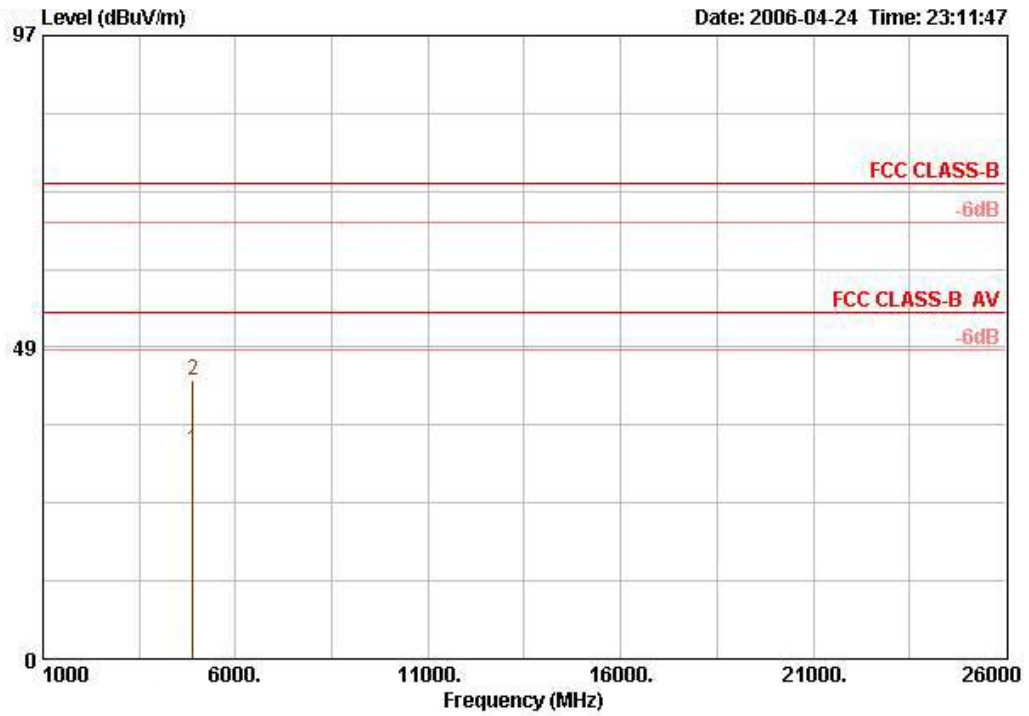

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4880.160	32.54	-21.46	54.00	33.33	4.69	35.10	29.62	AVERAGE	102	26
2	4880.160	43.39	-30.61	74.00	33.33	4.69	35.10	40.46	PEAK	102	26


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 11 / Ant. 3

Vertical

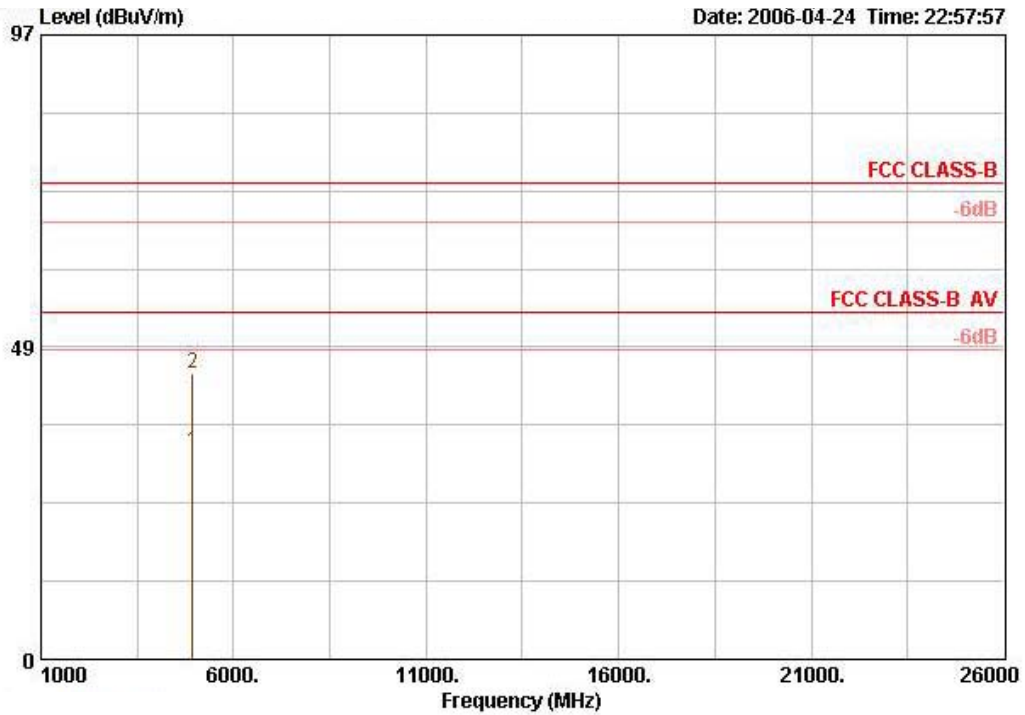

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4929.280	32.19	-21.81	54.00	33.45	4.73	35.10	29.11	AVERAGE	100	8
2	4929.280	44.43	-29.57	74.00	33.45	4.73	35.10	41.36	PEAK	100	8


Horizontal

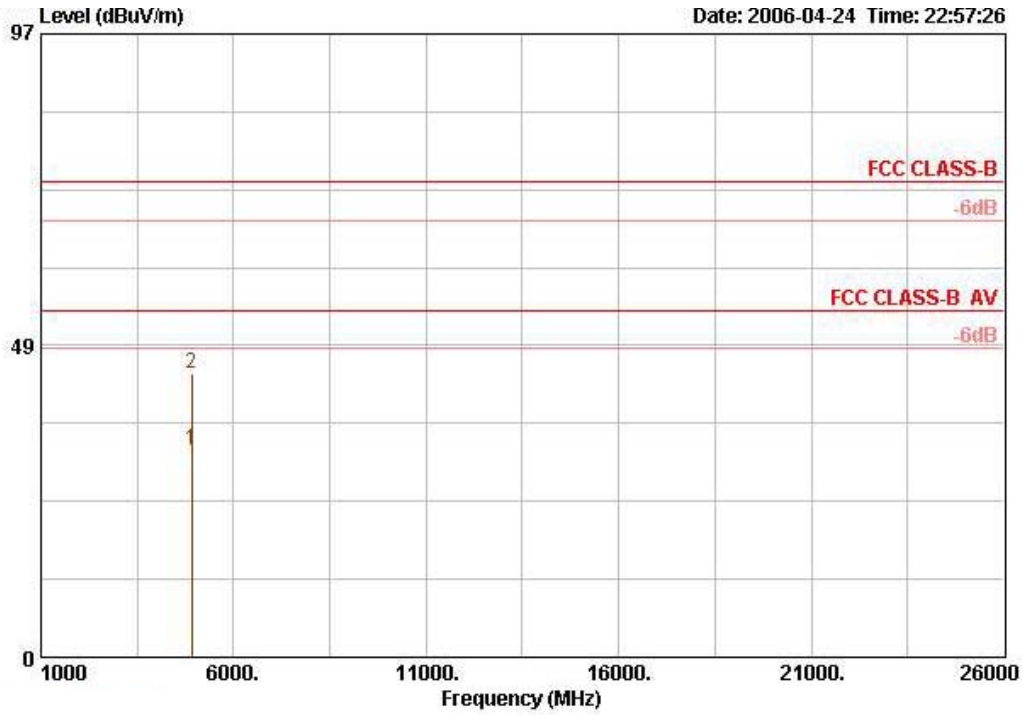

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4917.960	32.26	-21.74	54.00	33.41		4.71	35.10	29.24	AVERAGE	107	9
2	4917.960	44.05	-29.95	74.00	33.41		4.71	35.10	41.03	PEAK	107	9


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 1 / Ant. 3

Vertical

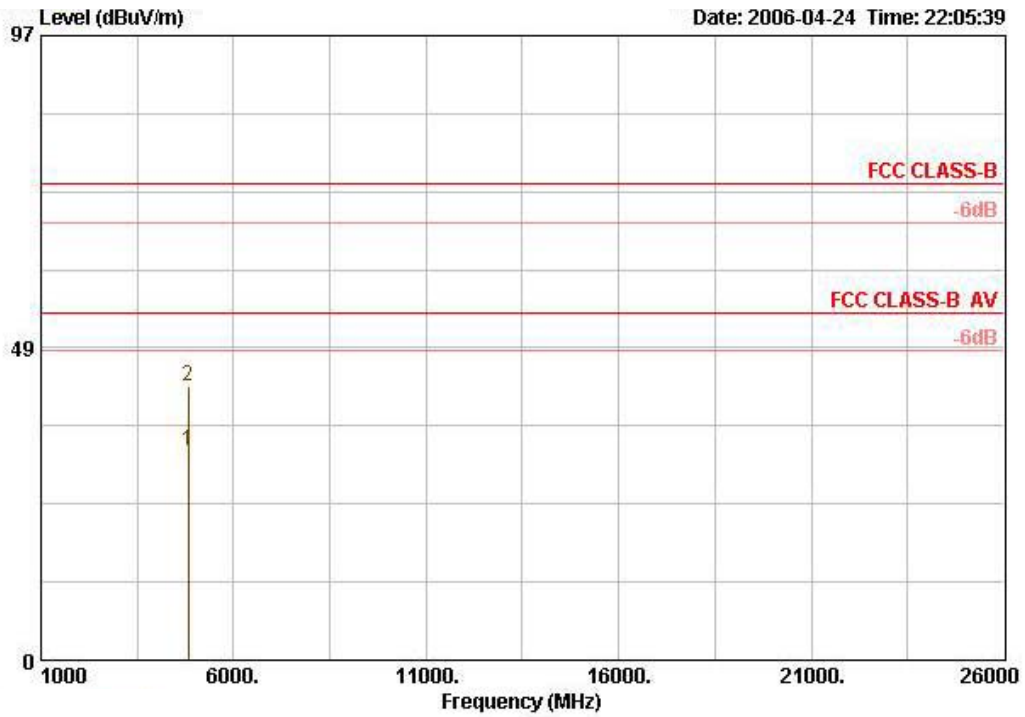

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4831.560	32.53	-21.47	54.00	33.22	4.68	35.10	29.74	AVERAGE		100	0
2	4831.560	42.48	-31.52	74.00	33.22	4.68	35.10	39.69	PEAK		100	0


Horizontal

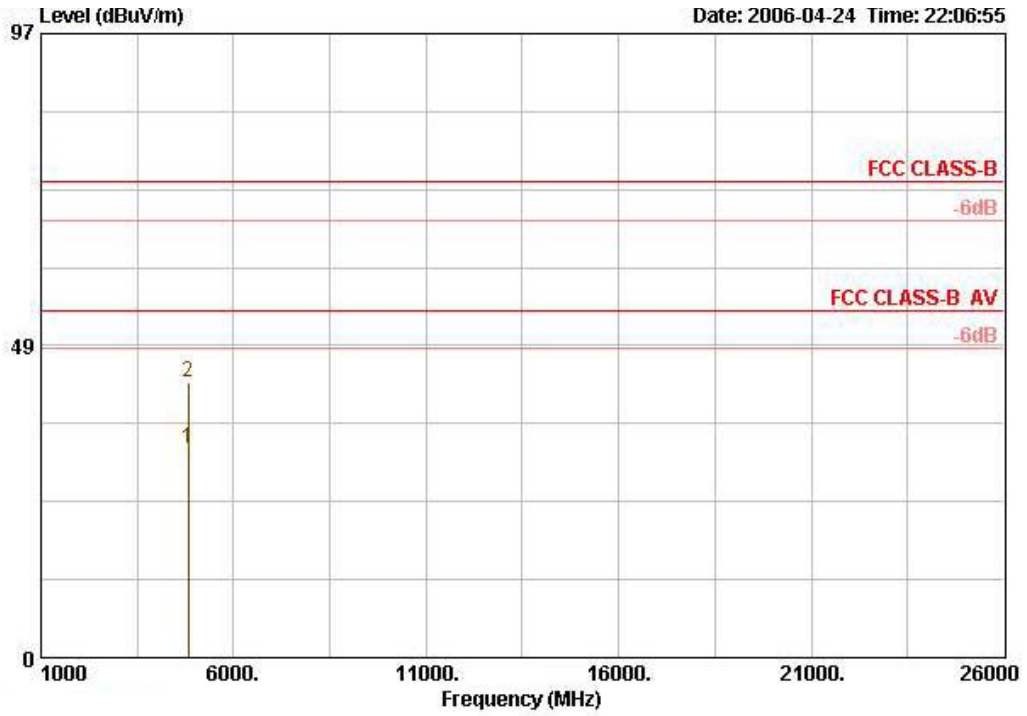

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV		cm	deg
1	4831.560	32.51	-21.49	54.00	33.22	4.68	35.10	29.72 AVERAGE	100	0
2	4831.560	42.85	-31.15	74.00	33.22	4.68	35.10	40.06 PEAK	100	0


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 6 / Ant. 3

Vertical

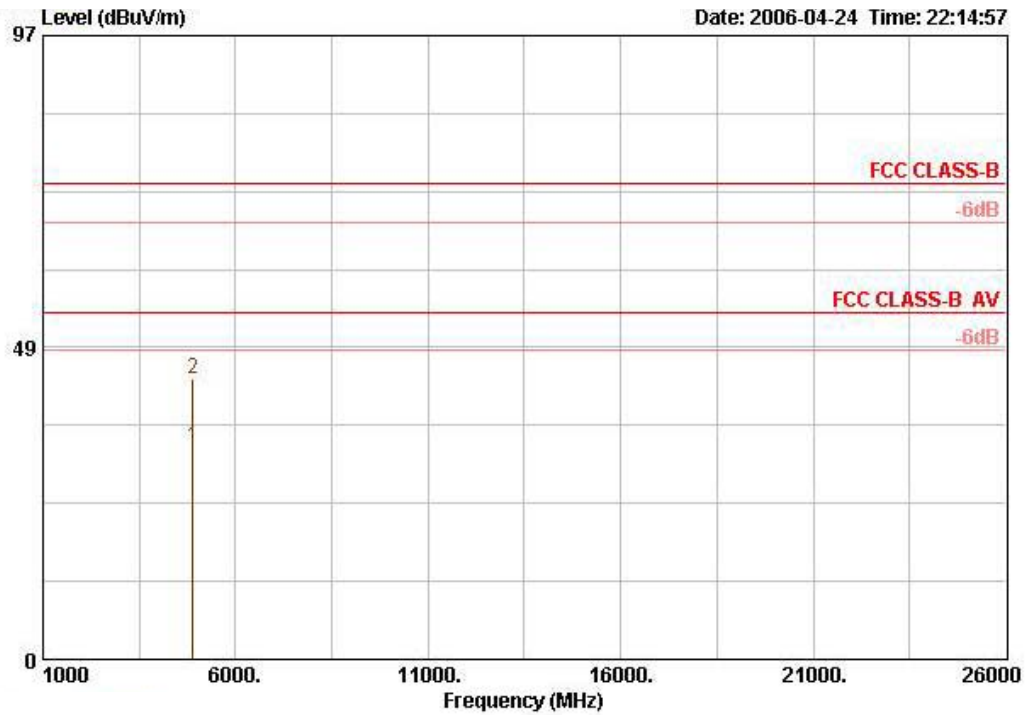

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4881.400	33.09	-20.91	54.00	33.33	4.71	35.10	30.15	AVERAGE	100	6
2	4881.400	43.66	-30.34	74.00	33.33	4.71	35.10	40.71	PEAK	100	6

Horizontal

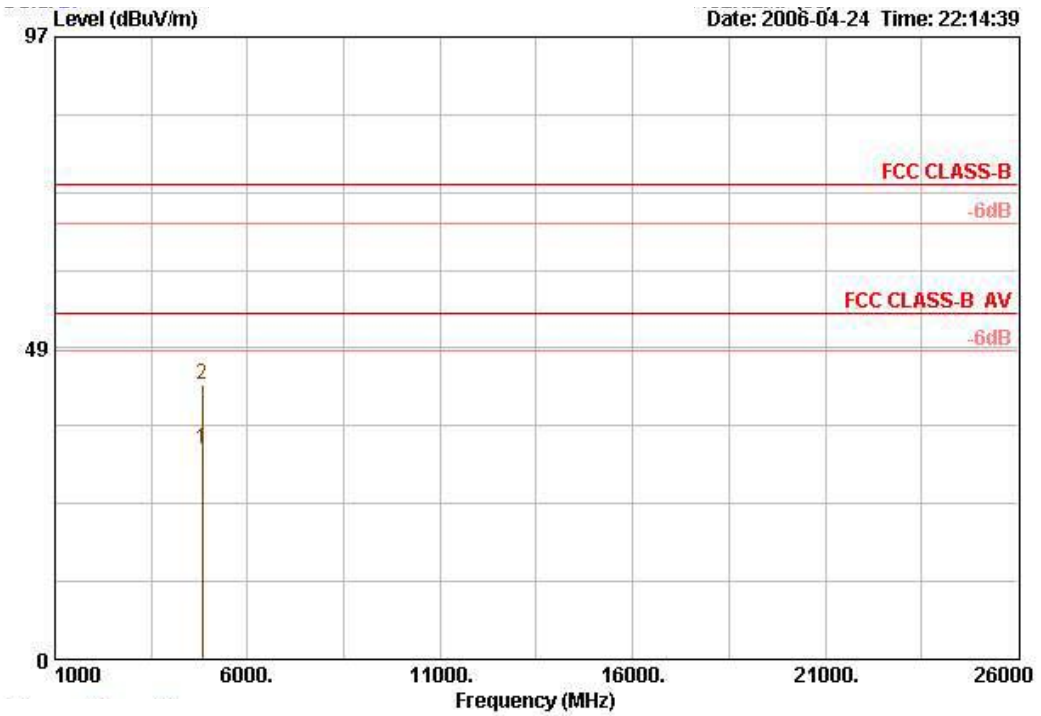


	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4830.800	32.68	-21.32	54.00	33.22		4.68	35.10	29.89	AVERAGE	100	6
2	4830.800	42.91	-31.09	74.00	33.22		4.68	35.10	40.11	PEAK	100	6




<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11g Channel 11 / Ant. 3

Vertical

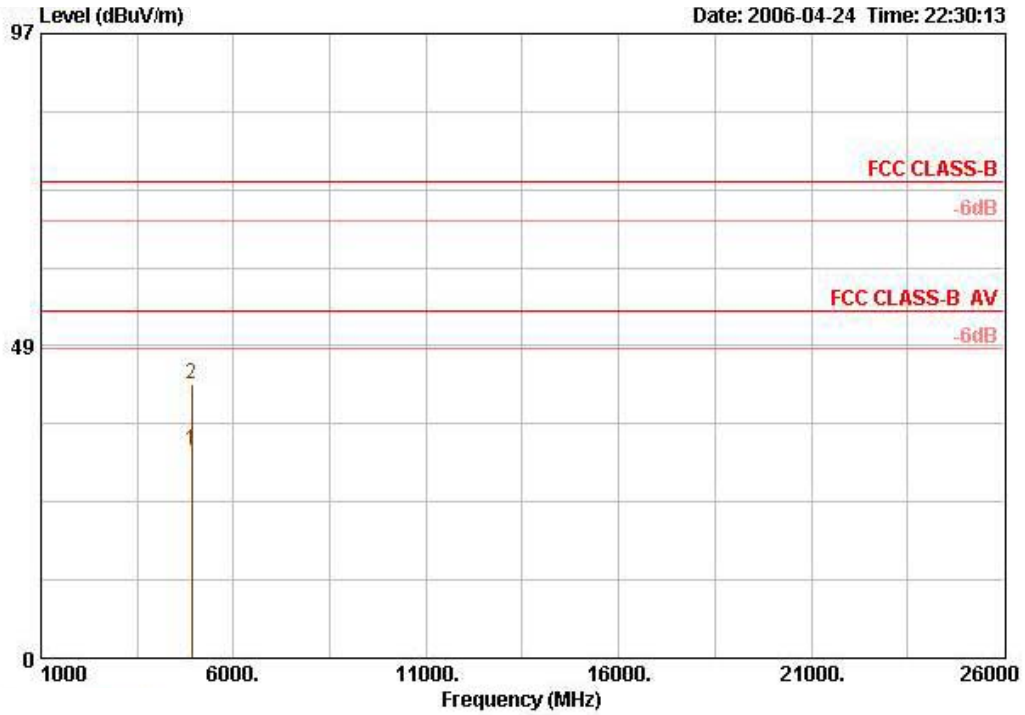

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dB	dBUV		cm	deg
1	4917.000	32.25	-21.75	54.00	33.41	4.71	35.10	29.23	AVERAGE		100	0
2	4917.000	42.62	-31.38	74.00	33.41	4.71	35.10	39.60	PEAK		100	0


Horizontal

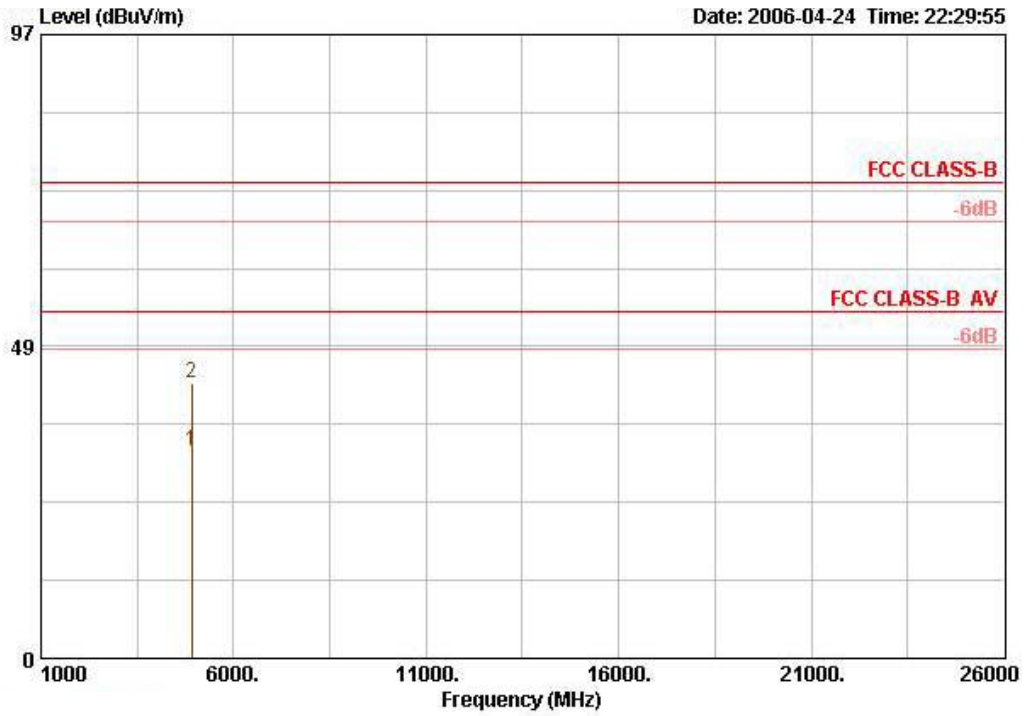

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV			cm	deg
1	4917.000	32.28	-21.72	54.00	33.41	4.71	35.10	29.26	AVERAGE		100	0
2	4917.000	42.86	-31.14	74.00	33.41	4.71	35.10	39.84	PEAK		100	0

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Channel 149 / Ant. 3


Vertical

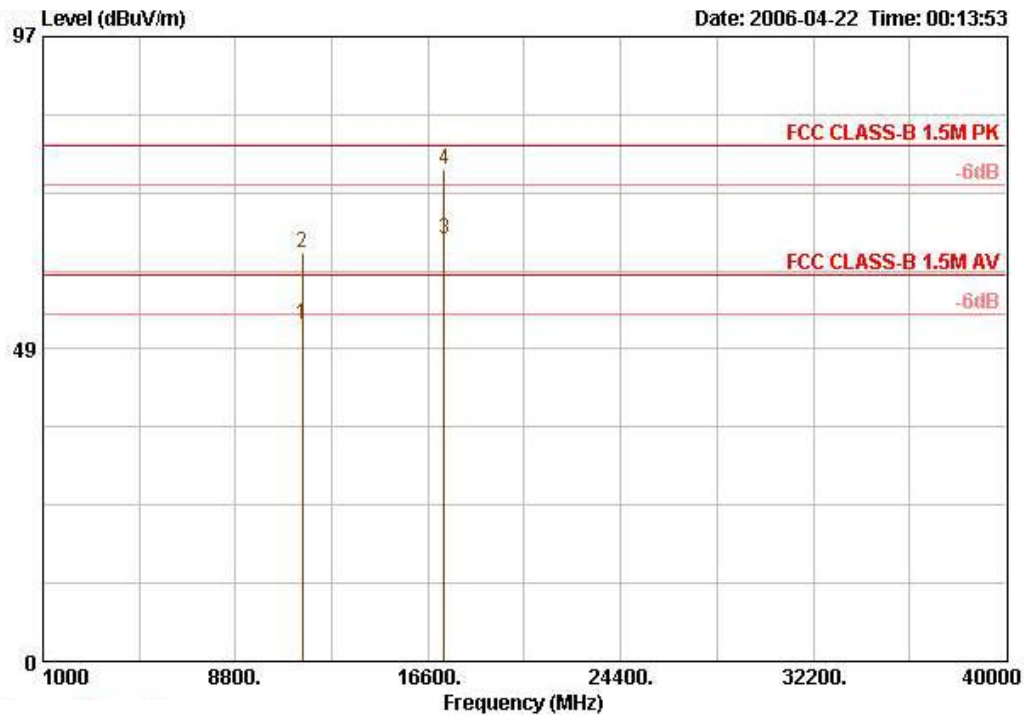

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line Factor	Loss Factor	Loss Factor	Level Remark	Pos	Pos			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV	cm	deg			
1	11489.560	52.37	-7.63	60.00	39.20	6.96	35.10	41.31	AVERAGE	119	276
2	11489.560	63.57	-16.43	80.00	39.20	6.96	35.10	52.51	PEAK	119	276
4 !	17237.000	76.50			40.93	18.15	35.00	52.42	PEAK	100	250

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(136.79dBuV/m)

Horizontal

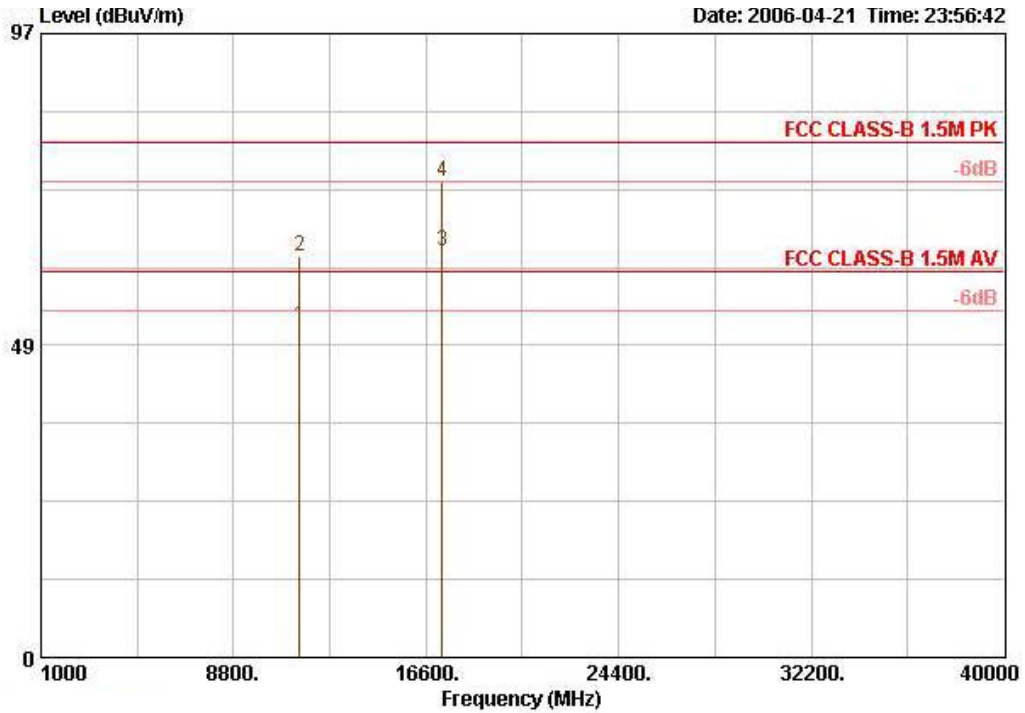


	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11483.200	51.44	-8.56	60.00	39.20	6.96	35.10	40.38	AVERAGE		107	327
2	11483.200	62.47	-17.53	80.00	39.20	6.96	35.10	51.41	PEAK		107	327
4 !	17236.200	74.13			40.93	18.15	35.00	50.05	PEAK		123	261

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (136.79dBUV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 3


Vertical

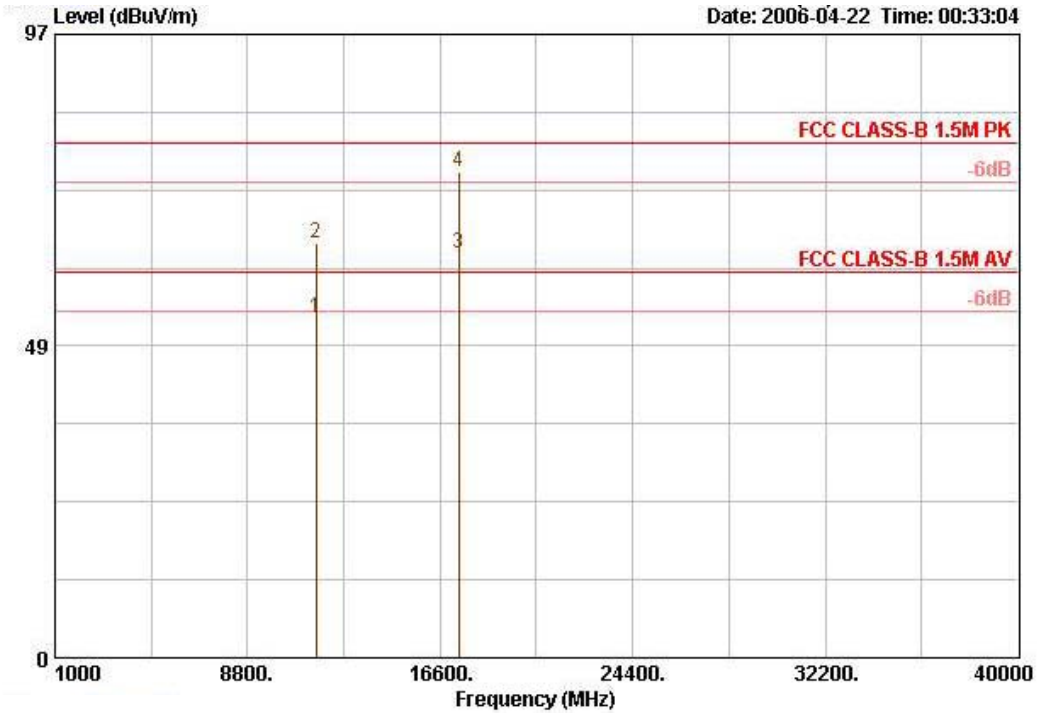

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	11568.900	52.84	-7.16	60.00	39.21	7.06	35.12	41.69	AVERAGE	114	273
2	11568.900	64.52	-15.48	80.00	39.21	7.06	35.12	53.37	PEAK	114	273
4 !	17352.200	75.48			41.44	17.41	35.04	51.67	PEAK	113	251

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(135.42dBUV/m)

Horizontal

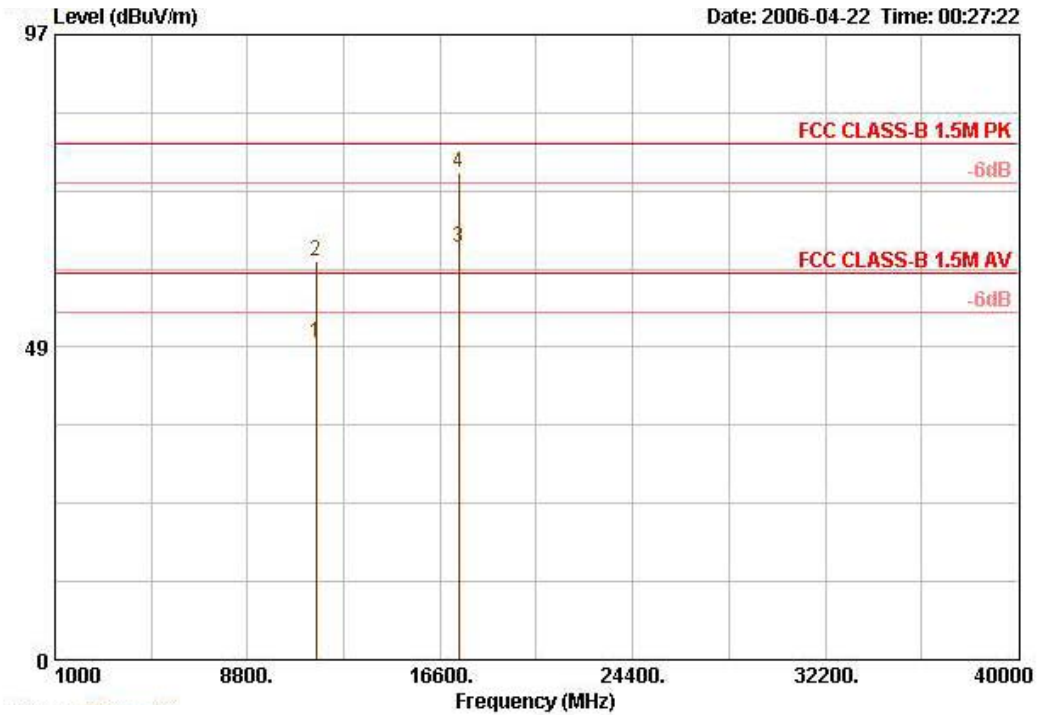


	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m		dB	dB	dBUV		cm	deg
1	11569.900	49.22	-10.78	60.00	39.21	7.06	35.13	38.09	AVERAGE		110	244
2	11569.900	61.80	-18.20	80.00	39.21	7.06	35.13	50.67	PEAK		110	244
4 !	17352.600	75.72			41.44	17.41	35.04	51.92	PEAK		120	249

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(135.42dBUV/m)

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Channel 165 / Ant. 3


Vertical

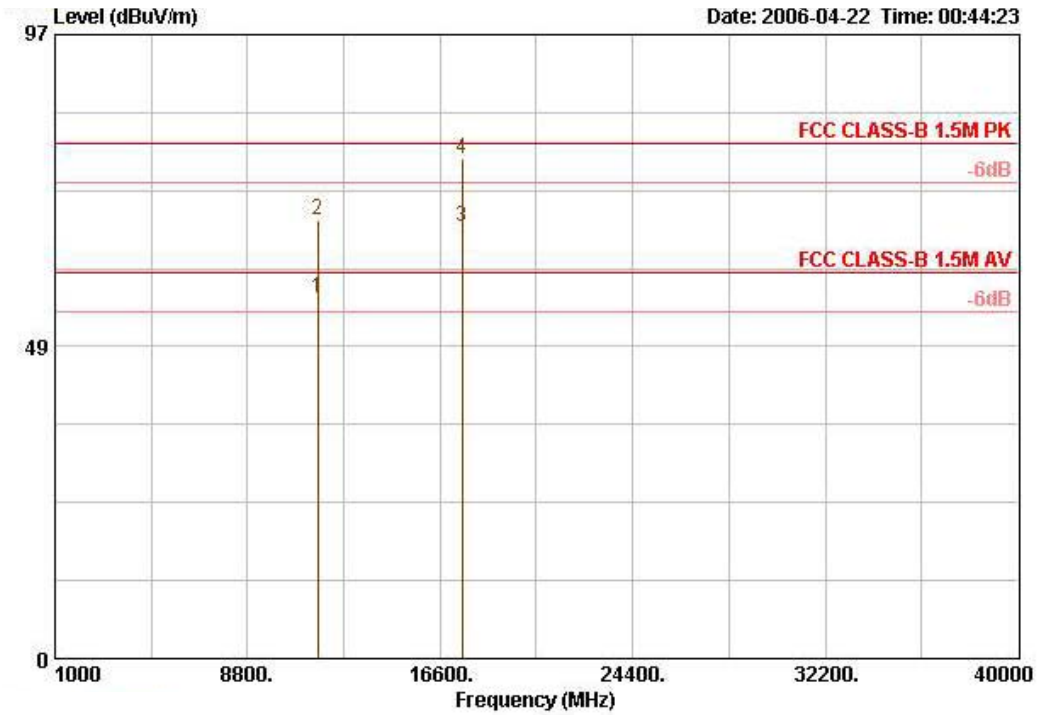

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1 !	11651.300	56.08	-3.92	60.00	39.23	7.15	35.16	44.86	AVERAGE		125	294
2	11651.300	68.10	-11.90	80.00	39.23	7.15	35.16	56.88	PEAK		125	294
4 !	17474.000	77.66			41.95	16.66	35.09	54.13	PEAK		130	286

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(134.94dBuV/m)

Horizontal

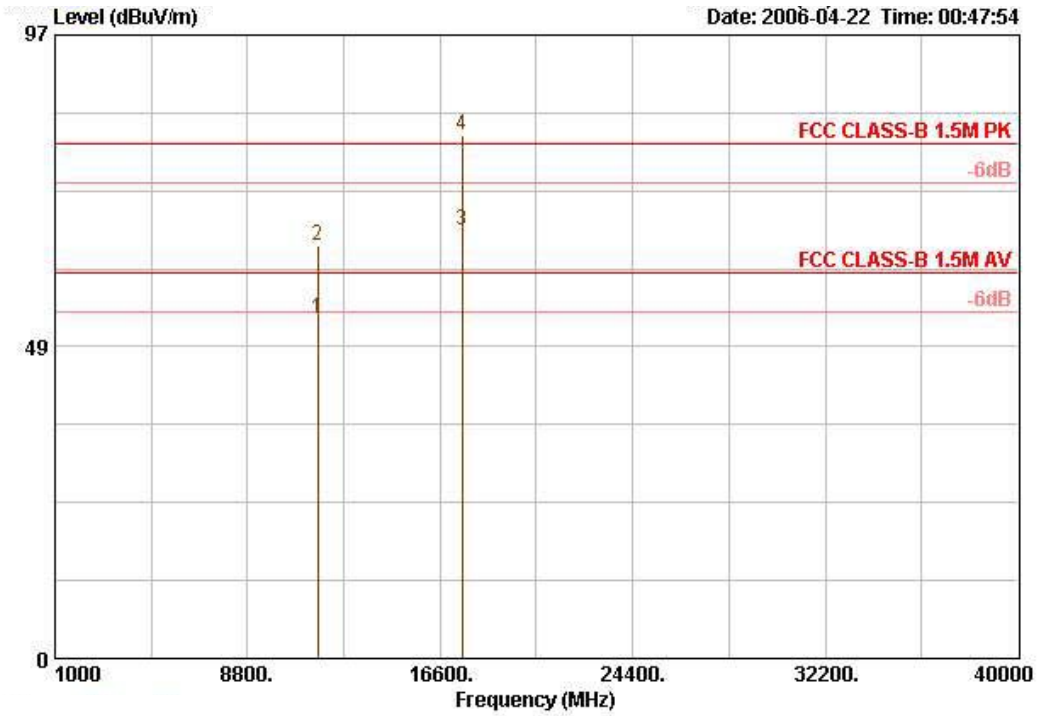


	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table		
Freq	Level	Limit	Line	Loss	Factor	Level	Remark	Pos	Pos		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg		
1	11650.300	52.78	-7.22	60.00	39.23	7.15	35.16	41.57	AVERAGE	118	246
2	11650.300	64.13	-15.87	80.00	39.23	7.15	35.16	52.92	PEAK	118	246
4 @	17487.500	81.31			42.03	16.42	35.10	57.97	PEAK	120	249

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (134.94dBuV/m)



<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Turbo Channel 152 / Ant. 3


Vertical

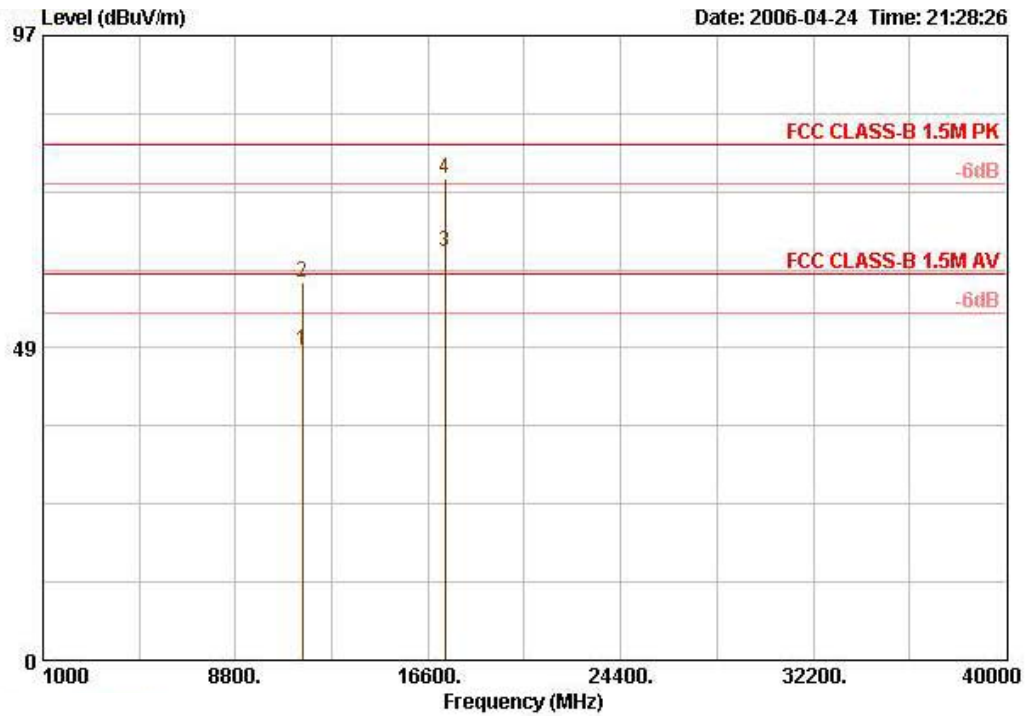

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11520.600	47.97	-12.03	60.00	39.20	7.01	35.11	36.87	AVERAGE		100	244
2	11520.600	58.56	-21.44	80.00	39.20	7.01	35.11	47.46	PEAK		100	244
4 !	17281.000	74.71			41.15	17.90	35.01	50.67	PEAK		100	239

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (130.51dBuV/m)

Horizontal

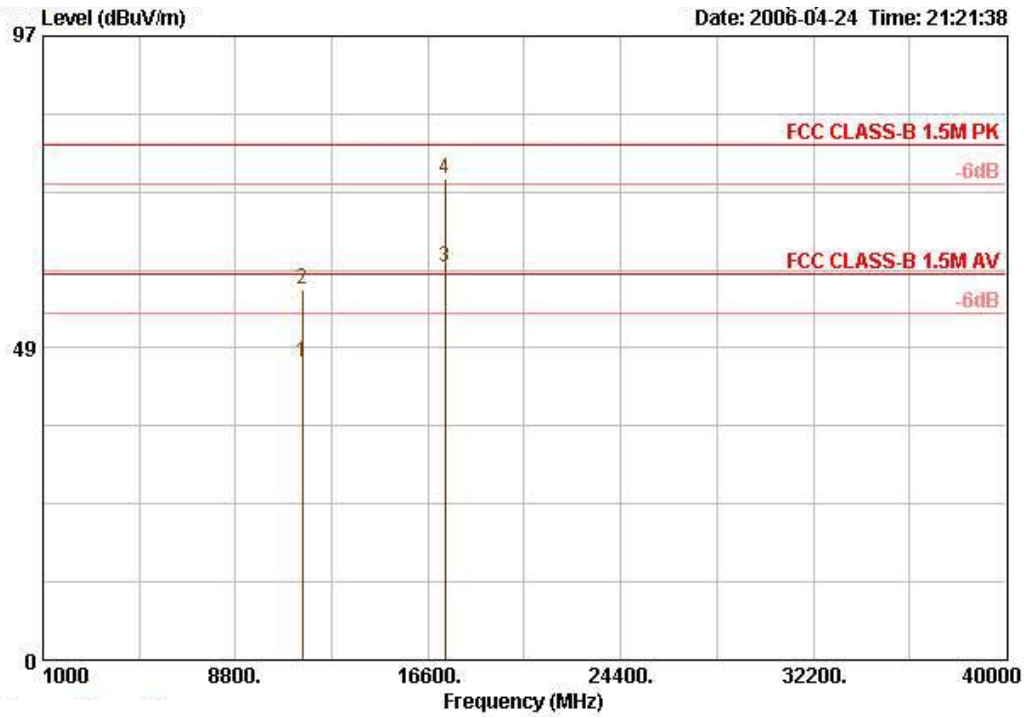


	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11520.800	46.27	-13.73	60.00	39.20	7.01	35.11	35.11	35.17	AVERAGE	107	328
2	11520.800	57.63	-22.37	80.00	39.20	7.01	35.11	35.11	46.53	PEAK	107	328
4 !	17282.320	74.75			41.15	17.90	35.02	35.02	50.72	PEAK	122	250

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (130.51dBuV/m)

<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11a Turbo Channel 160 / Ant. 3


Vertical

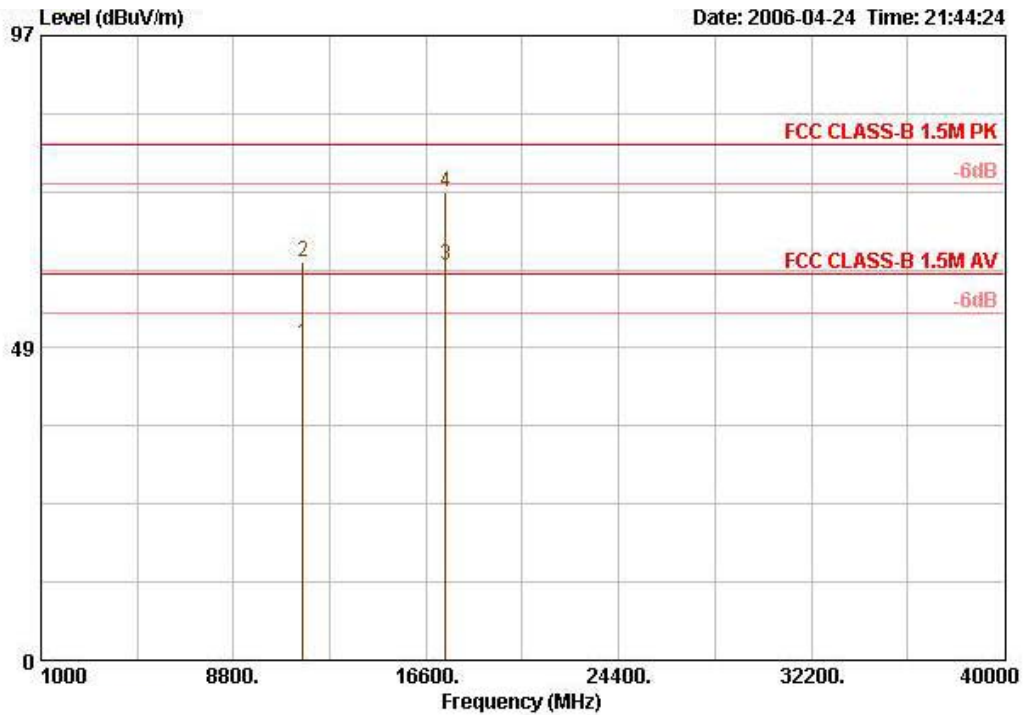

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11599.900	49.25	-10.75	60.00	39.22	7.10	35.14	38.07	AVERAGE	111	243
2	11599.900	61.96	-18.04	80.00	39.22	7.10	35.14	50.78	PEAK	111	243
4	17387.700	72.80			41.59	17.16	35.06	49.11	PEAK	103	238

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (129.60dBuV/m)

Horizontal

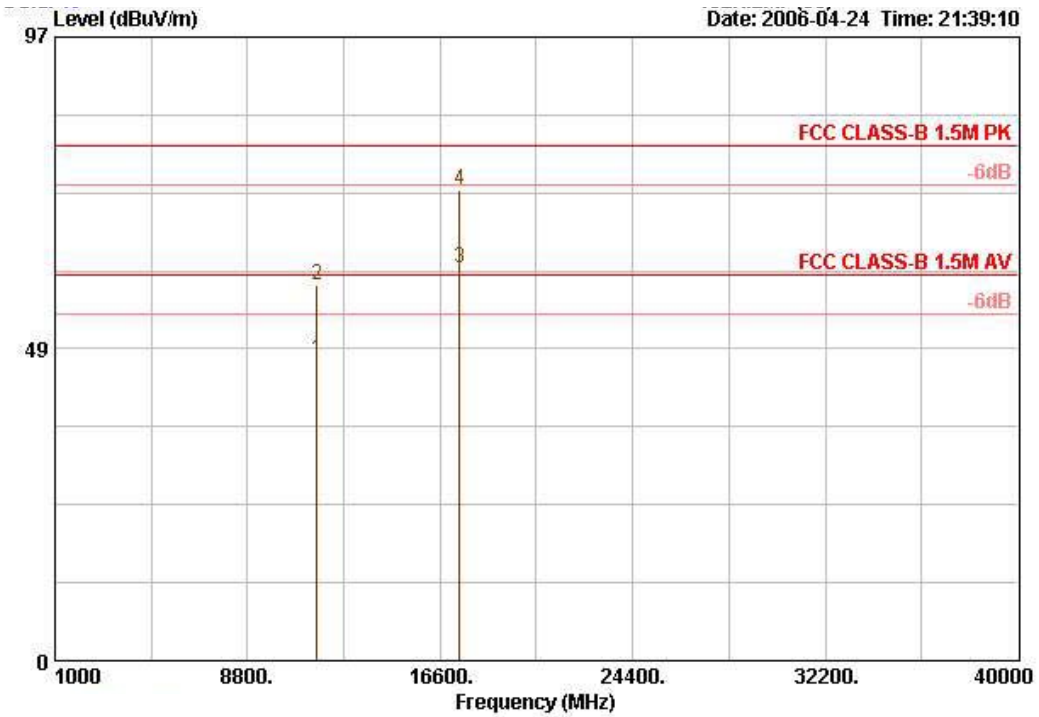

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11598.300	46.78	-13.22	60.00	39.22	7.10	35.14	35.60	AVERAGE		110	242
2	11598.300	58.40	-21.60	80.00	39.22	7.10	35.14	47.22	PEAK		110	242
4	17393.100	73.16			41.59	17.16	35.06	49.47	PEAK		119	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (129.60dBuV/m)

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b Channel 1 / Ant. 4

Vertical

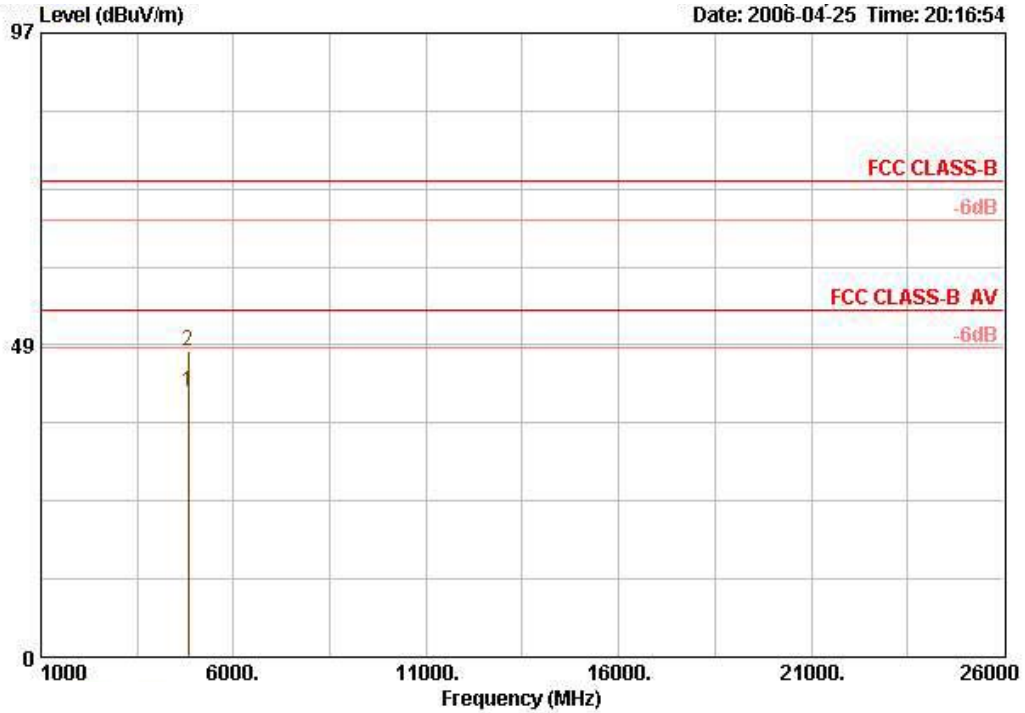

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4824.000	41.14	-12.86	54.00	33.22	4.68	35.10	38.35	AVERAGE		134	283
2	4824.000	47.61	-26.39	74.00	33.22	4.68	35.10	44.82	PEAK		134	283

Horizontal

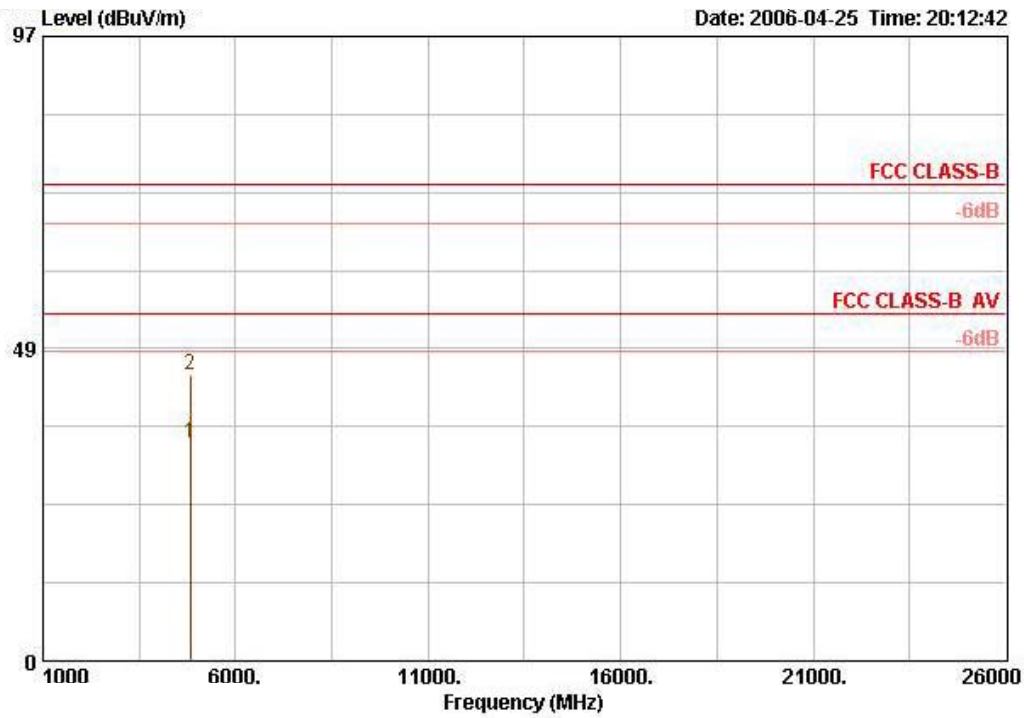

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4824.120	33.80	-20.20	54.00	33.22		4.68	35.10	31.00	AVERAGE	133	268
2	4824.120	44.49	-29.51	74.00	33.22		4.68	35.10	41.69	PEAK	133	268