



Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 4

Vertical

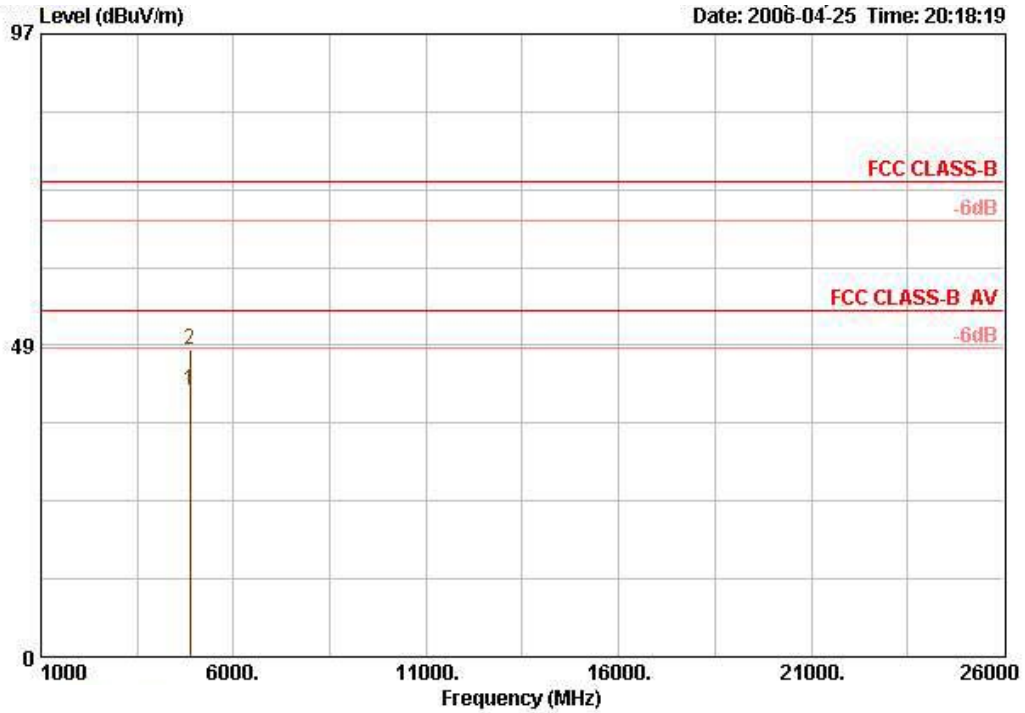

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4874.080	41.53	-12.47	54.00	33.33		4.69	35.10	38.60	AVERAGE	131	277
2	4874.080	47.93	-26.07	74.00	33.33		4.69	35.10	45.00	PEAK	131	277


Horizontal

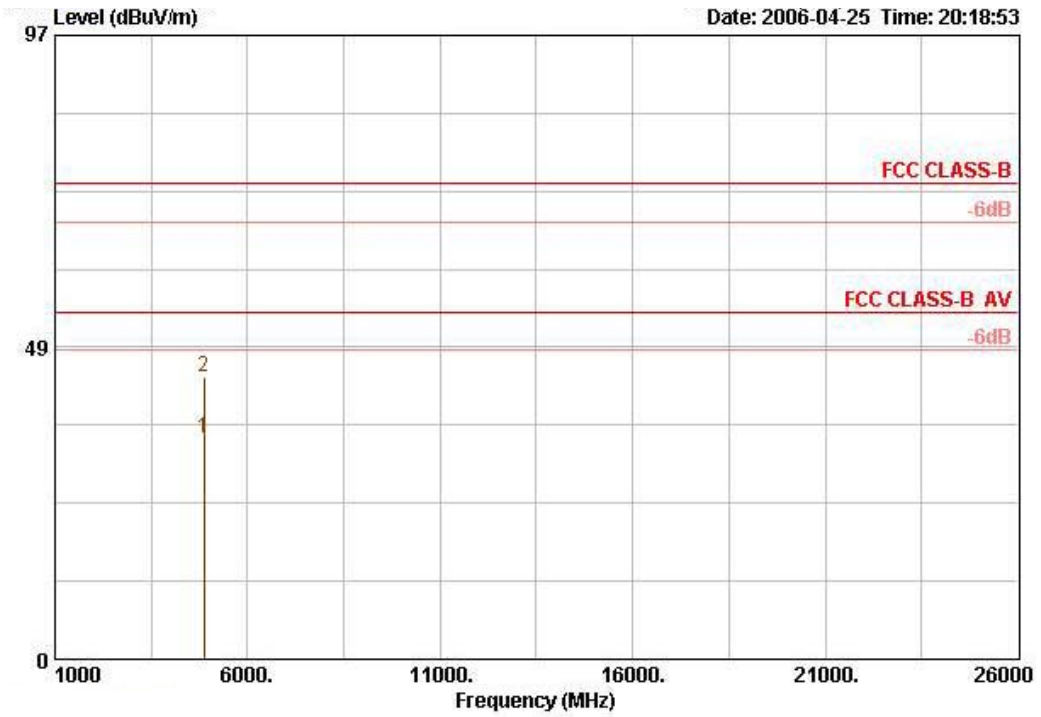

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4874.080	34.40	-19.60	54.00	33.33		4.69	35.10	31.47	AVERAGE	133	268
2	4874.080	43.93	-30.07	74.00	33.33		4.69	35.10	41.01	PEAK	133	268


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 4

Vertical

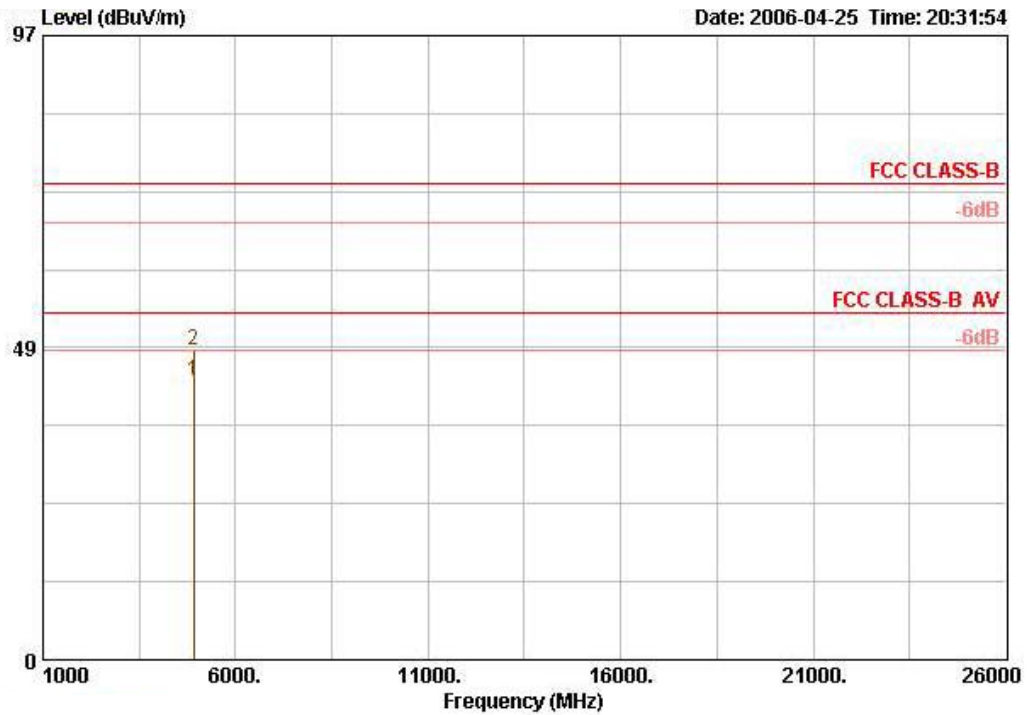

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV		cm	deg
1	4924.000	43.23	-10.77	54.00	33.45	4.73	35.10	40.16 AVERAGE	131	277
2	4924.000	48.08	-25.92	74.00	33.45	4.73	35.10	45.00 PEAK	131	277


Horizontal

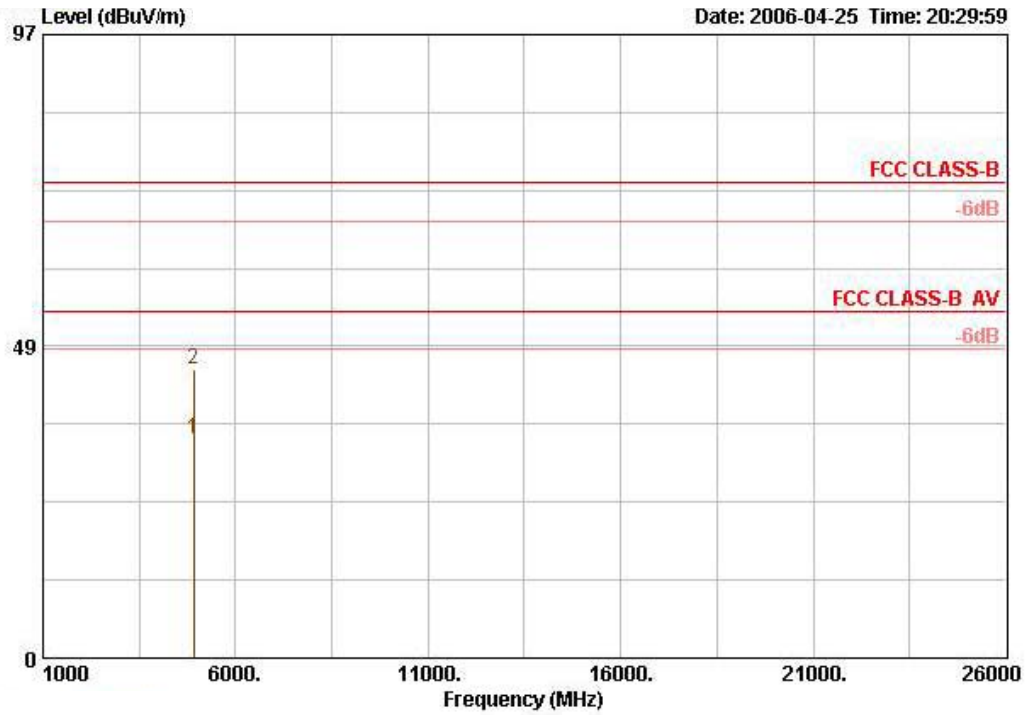

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4923.920	34.07	-19.93	54.00	33.45		4.73	35.10	31.00	AVERAGE	133	268
2	4923.920	44.98	-29.02	74.00	33.45		4.73	35.10	41.91	PEAK	133	268


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 4

Vertical

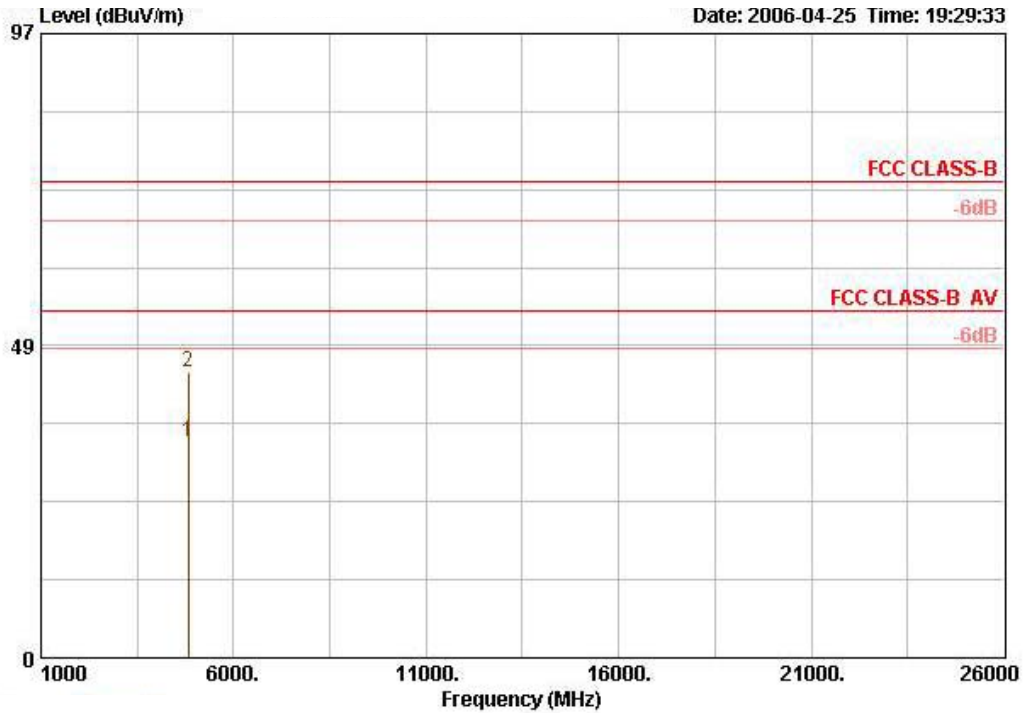

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.200	33.60	-20.40	54.00	33.22	4.68	35.10	30.81	AVERAGE	101	94
2	4818.200	44.48	-29.52	74.00	33.22	4.68	35.10	41.69	PEAK	101	87

Horizontal

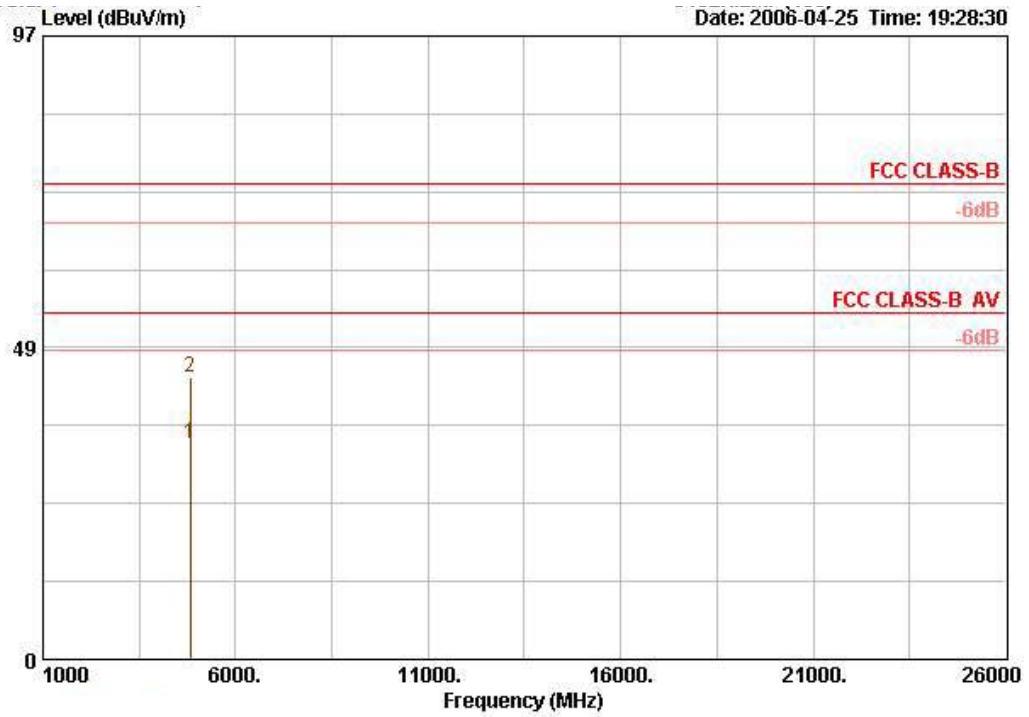


	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4817.560	33.47	-20.53	54.00	33.22	4.68	35.10	30.67	AVERAGE		109	360
2	4817.560	43.90	-30.10	74.00	33.22	4.68	35.10	41.11	PEAK		109	360




Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 4

Vertical

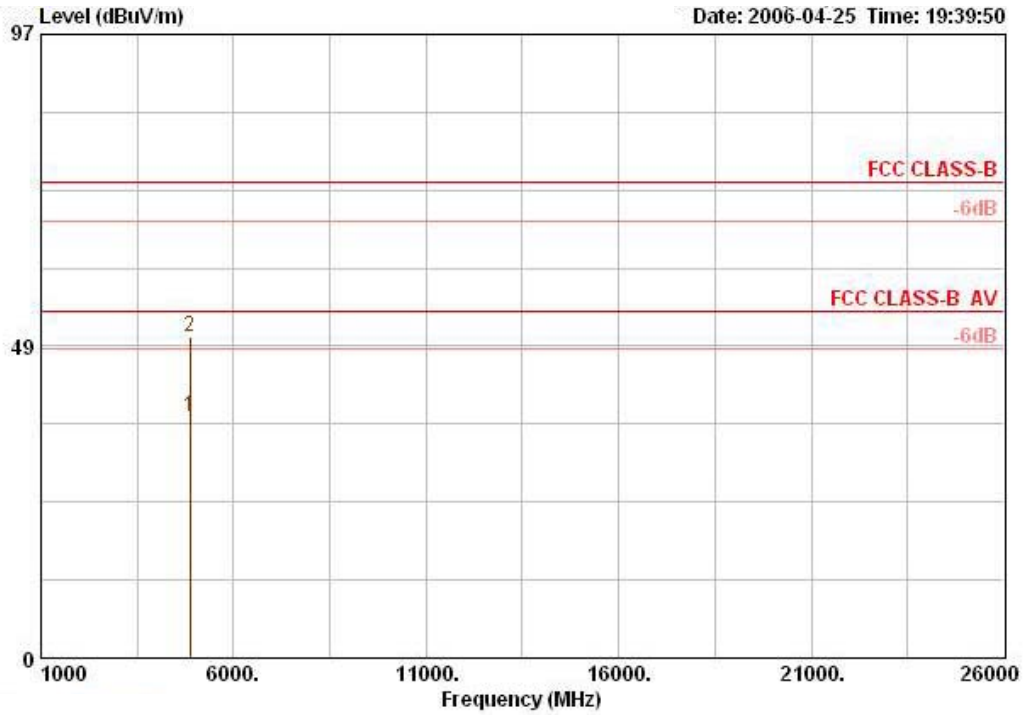

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1 @	4879.000	37.50	-16.50	54.00	33.33	4.69	35.10	34.57	AVERAGE		113	2
2	4879.000	49.93	-24.07	74.00	33.33	4.69	35.10	47.01	PEAK		113	1

Horizontal

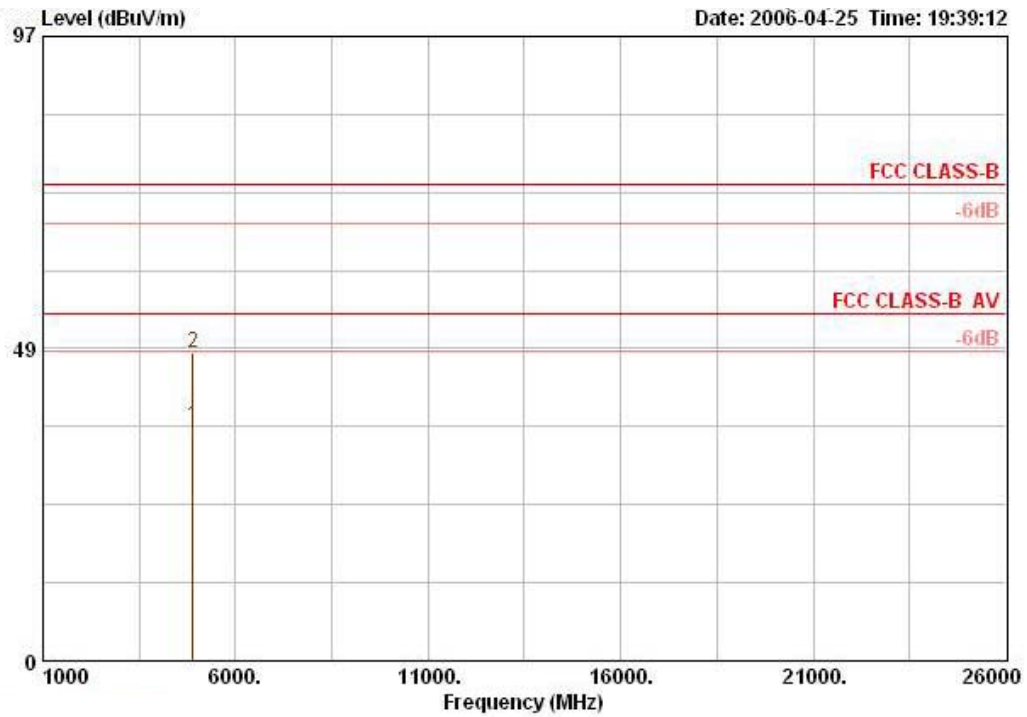


	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV			cm	deg
1	4893.200	36.43	-17.57	54.00	33.37	4.71	35.10	33.45	AVERAGE		100	52
2	4893.200	47.85	-26.15	74.00	33.37	4.71	35.10	44.87	PEAK		100	52




Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 4

Vertical

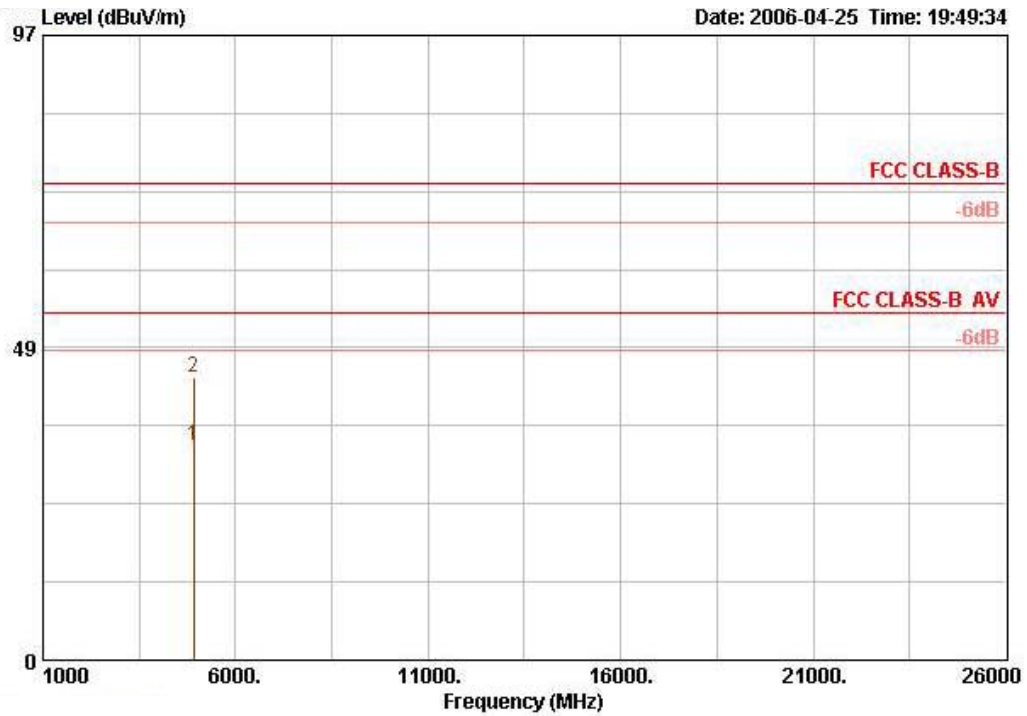

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4916.600	33.33	-20.67	54.00	33.41	4.71	35.10	30.31	AVERAGE		100	27
2	4916.600	43.93	-30.07	74.00	33.41	4.71	35.10	40.91	PEAK		100	27


Horizontal

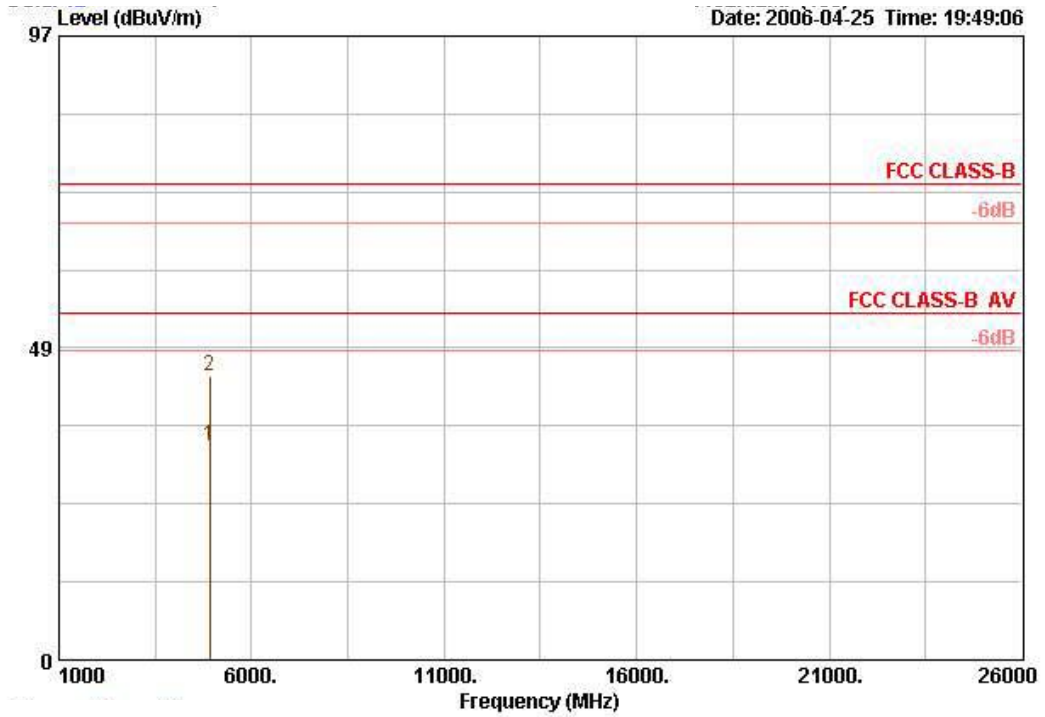

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4916.600	33.21	-20.79	54.00	33.41	4.71	35.10	30.19	AVERAGE		122	27
2	4916.600	44.16	-29.84	74.00	33.41	4.71	35.10	41.14	PEAK		122	27

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 4


Vertical

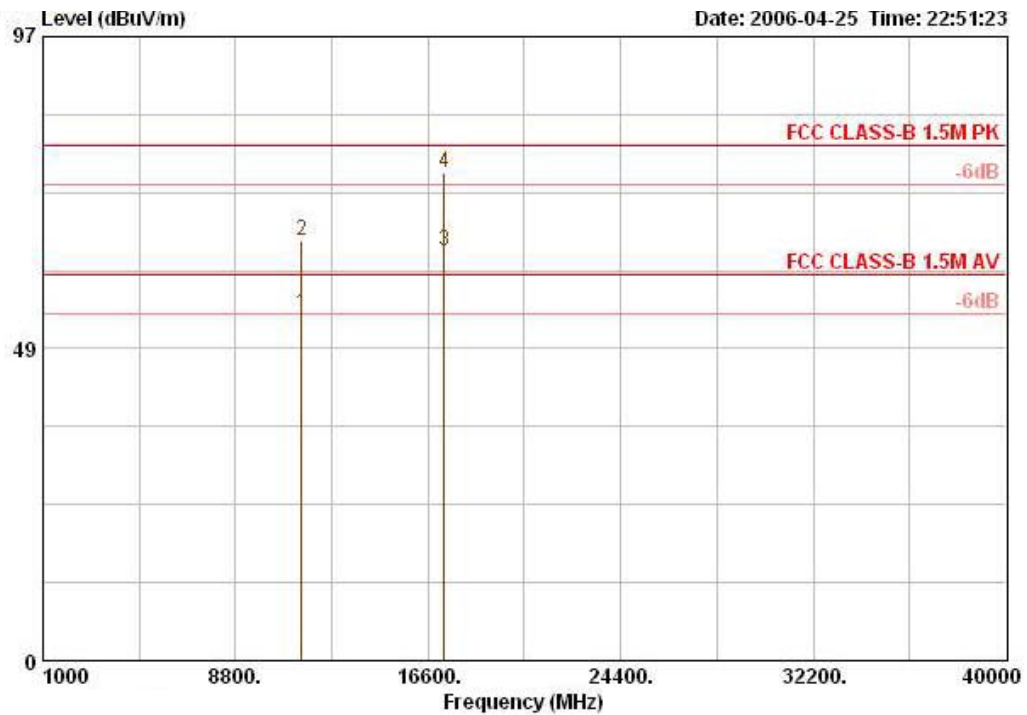

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1 !	11488.240	54.03	-5.97	60.00	39.20	6.96	35.10	42.97	AVERAGE		131	228
2	11488.240	65.18	-14.82	80.00	39.20	6.96	35.10	54.12	Peak		131	228
4 !	17234.840	75.89			40.93	18.15	35.00	51.82	PEAK		132	290

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (123.78dBuV/m)

Horizontal

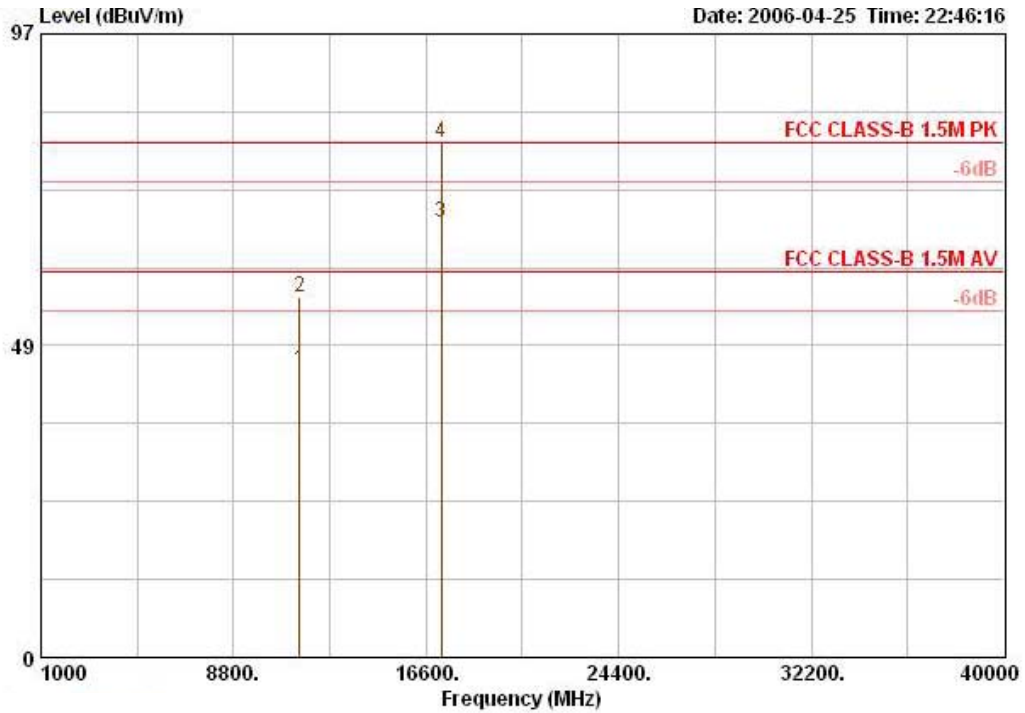


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11488.440	44.71	-15.29	60.00	39.20	6.96	35.10	33.65	AVERAGE	123	5
2	11488.440	55.91	-24.09	80.00	39.20	6.96	35.10	44.85	PEAK	123	5
4	17232.200	80.17			40.93	18.15	35.00	56.10	PEAK	128	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (123.78dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 4


Vertical

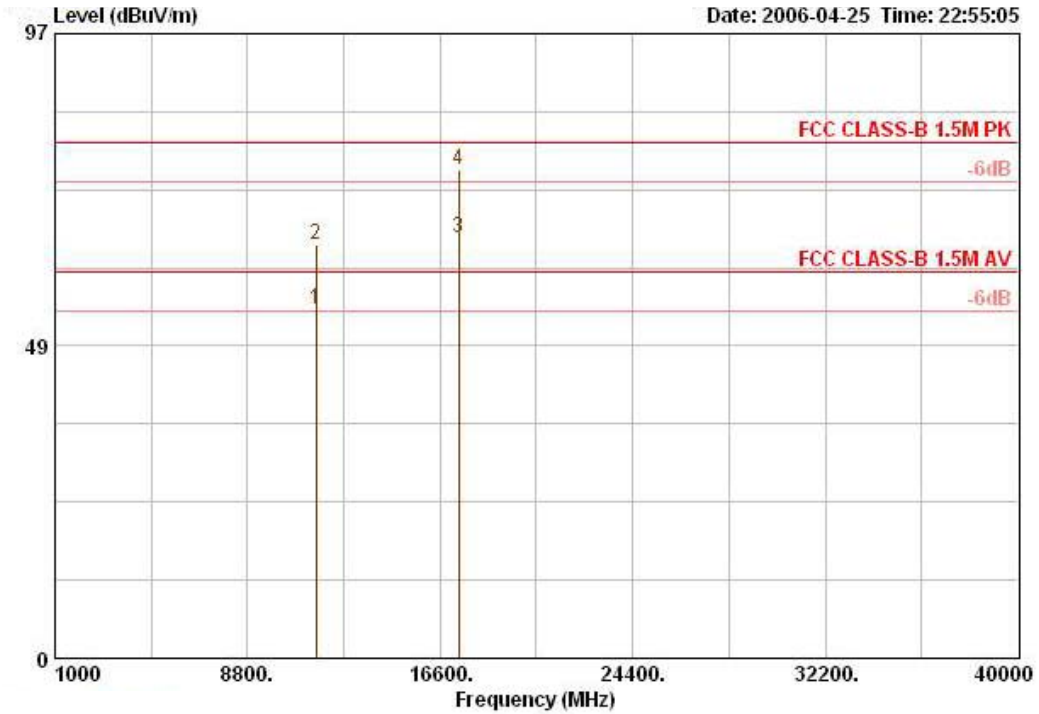

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1 !	11569.080	54.17	-5.83	60.00	39.21	7.06	35.12	43.02	AVERAGE		125	229
2	11569.080	64.11	-15.89	80.00	39.21	7.06	35.12	52.97	PEAK		125	229
4 !	17353.920	75.76			41.44	17.41	35.04	51.95	PEAK		144	290

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (121.85dBuV/m)

Horizontal

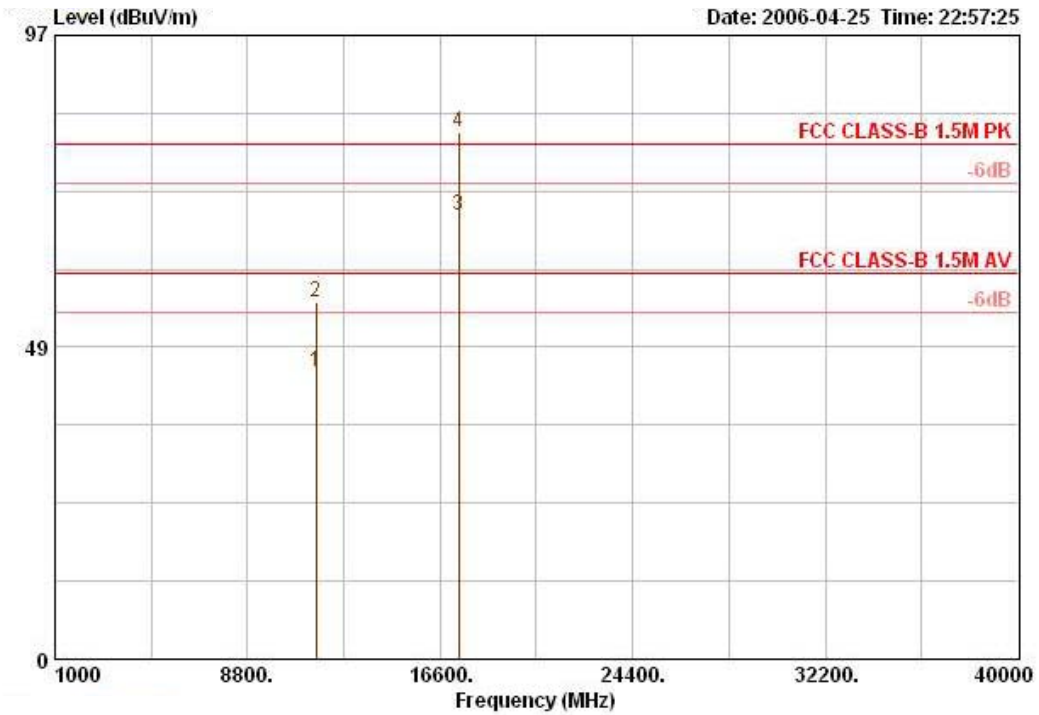


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11568.360	44.66	-15.34	60.00	39.21	7.06	35.12	33.51	AVERAGE	125	40
2	11568.360	55.50	-24.50	80.00	39.21	7.06	35.12	44.35	PEAK	125	40
4	17360.400	81.91			41.44	17.41	35.05	58.11	PEAK	128	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(121.85dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 4


Vertical

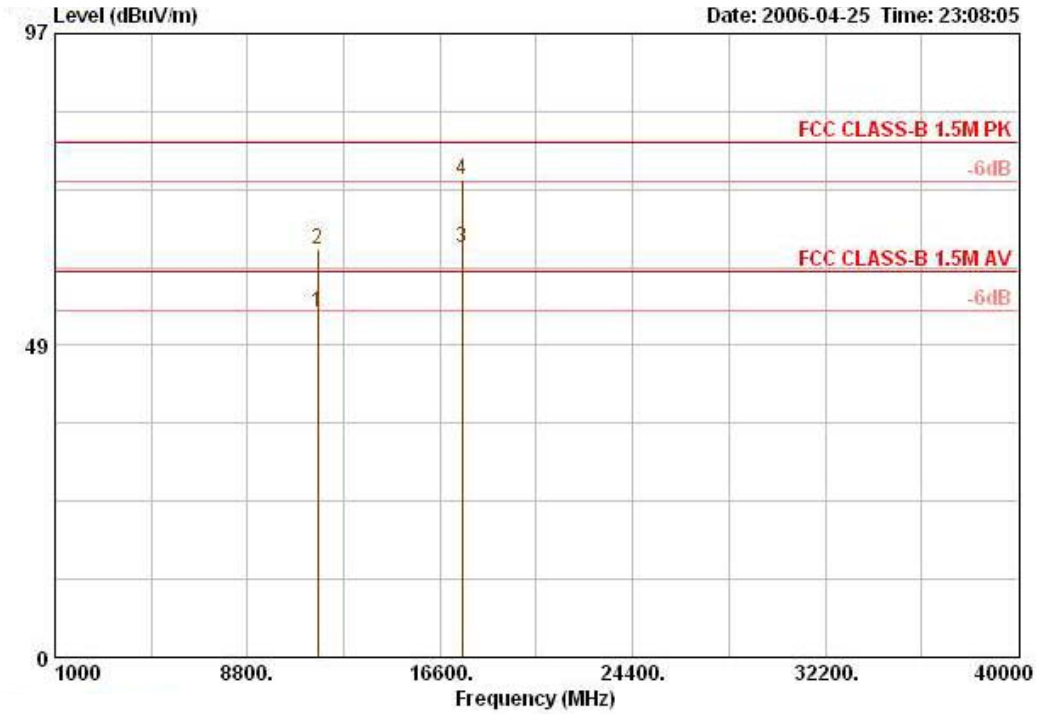

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11659.080	53.65	-6.35	60.00	39.21	7.06	35.12	42.50	AVERAGE	125	240
2	11659.080	63.39	-16.61	80.00	39.21	7.06	35.12	52.24	PEAK	125	240
4 !	17483.200	74.15			41.44	17.41	35.04	50.34	PEAK	144	284

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (122.92dBuV/m)

Horizontal

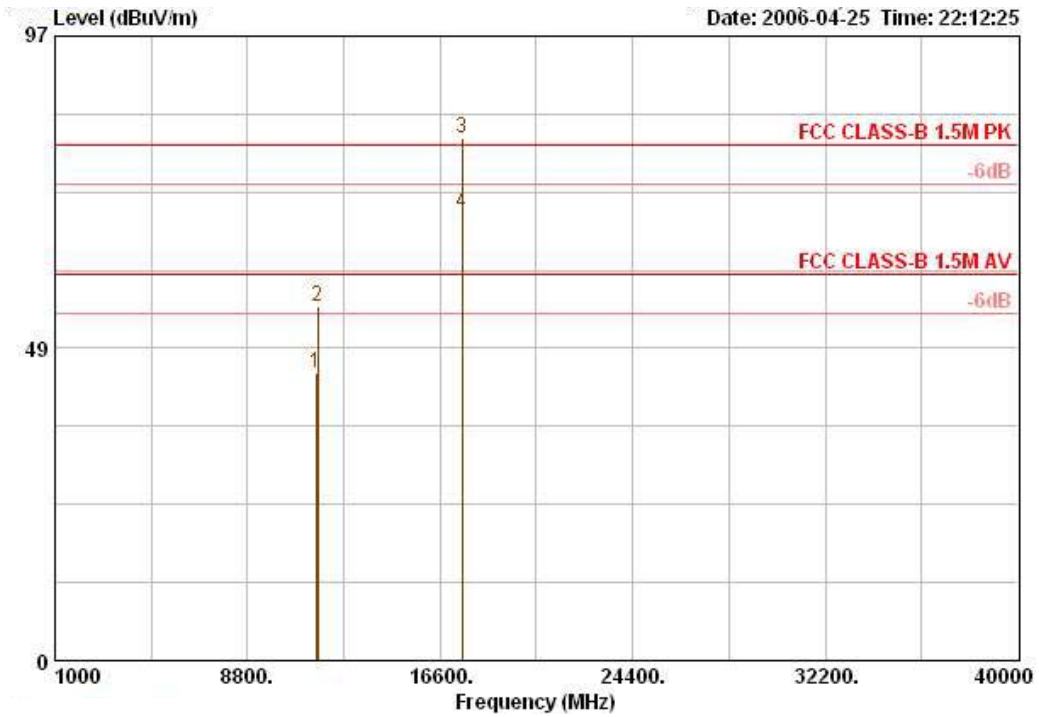


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11560.360	44.57	-15.43	60.00	39.21	7.06	35.12	33.42	AVERAGE	125	50
2	11650.360	55.03	-24.97	80.00	39.21	7.06	35.12	43.88	PEAK	125	50
4	17475.920	69.59			41.44	17.41	35.04	45.79	AVERAGE	128	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (122.92dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 4


Vertical

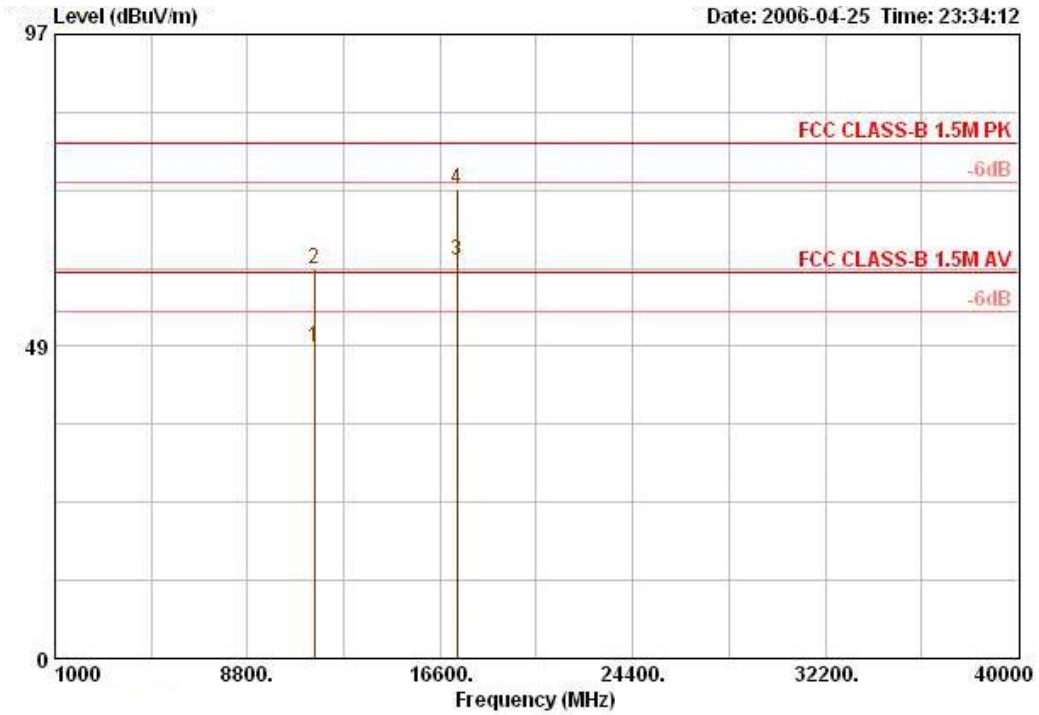

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line	Loss	Factor	Level	Pos	Pos			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV	cm	deg			
1	11519.000	48.44	-11.56	60.00	39.20	7.01	35.11	37.34	AVERAGE	125	240
2	11519.000	60.51	-19.49	80.00	39.20	7.01	35.11	49.41	PEAK	125	240
4	17275.520	72.93			41.07	17.90	35.01	48.97	PEAK	142	284

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (120.15dBuV/m)

Horizontal

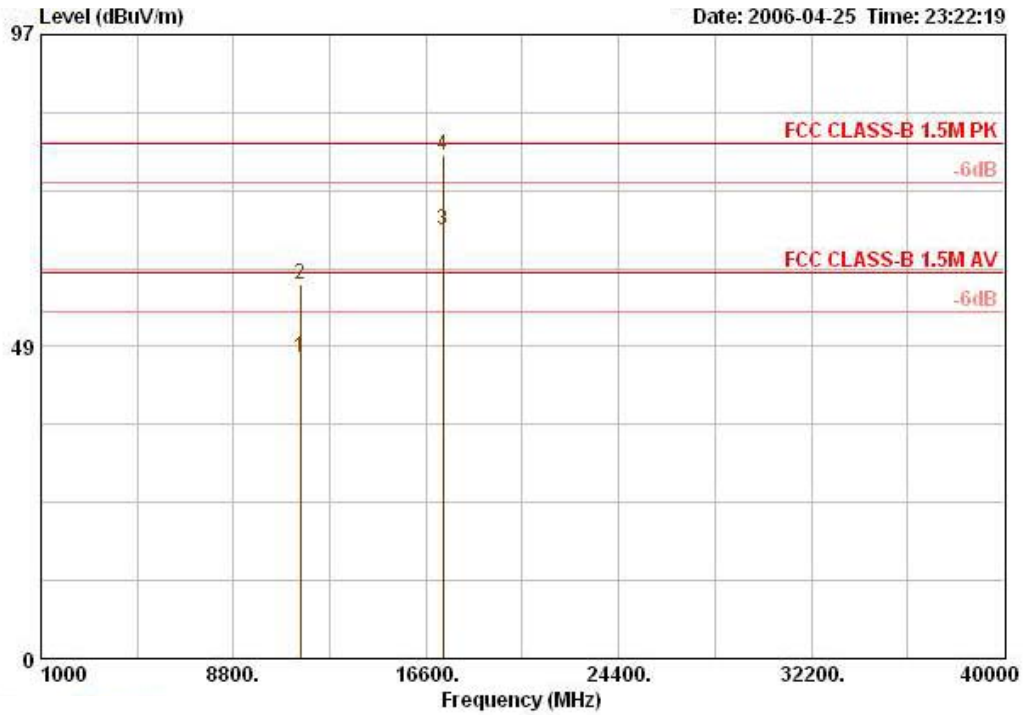


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11519.040	46.68	-13.32	60.00	39.20	7.01	35.11	35.57	AVERAGE	134	196
2	11519.040	58.10	-21.90	80.00	39.20	7.01	35.11	47.00	PEAK	134	196
4 !	17274.880	78.16			41.07	17.90	35.01	54.19	PEAK	128	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (120.15dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 4


Vertical

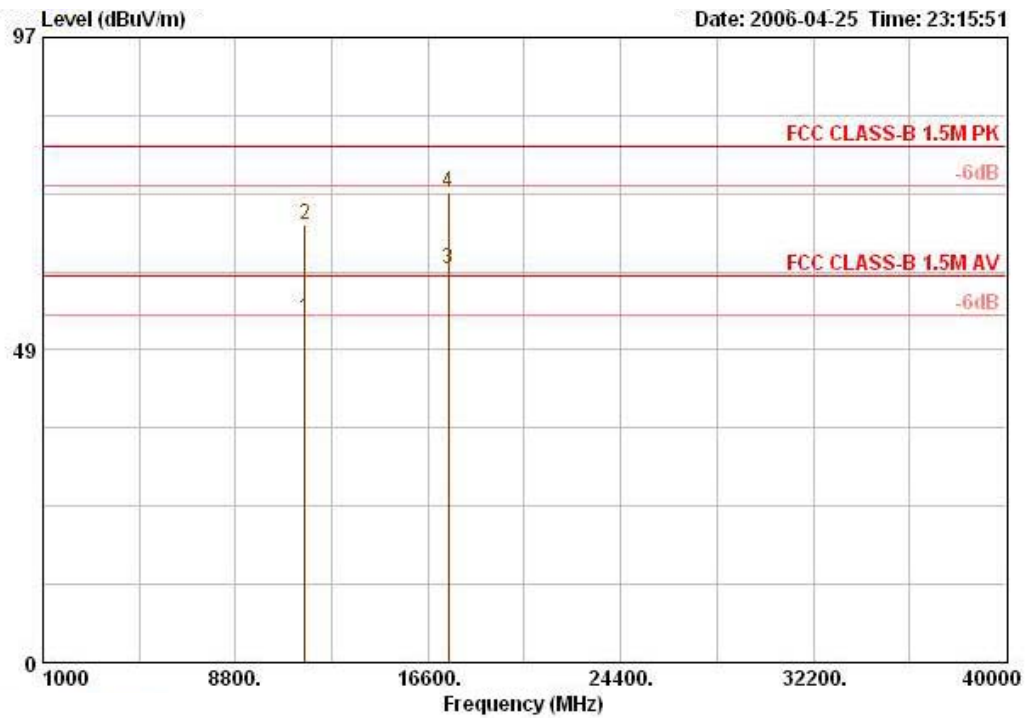

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11599.700	53.48	-6.52	60.00	39.22	7.10	35.14	42.30	AVERAGE		125	240
2	11613.700	67.96	-12.04	80.00	39.22	7.10	35.14	56.78	PEAK		125	240
4	17413.200	72.86			41.66	16.91	35.07	49.36	PEAK		144	284

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (119.79dBuV/m)

Horizontal

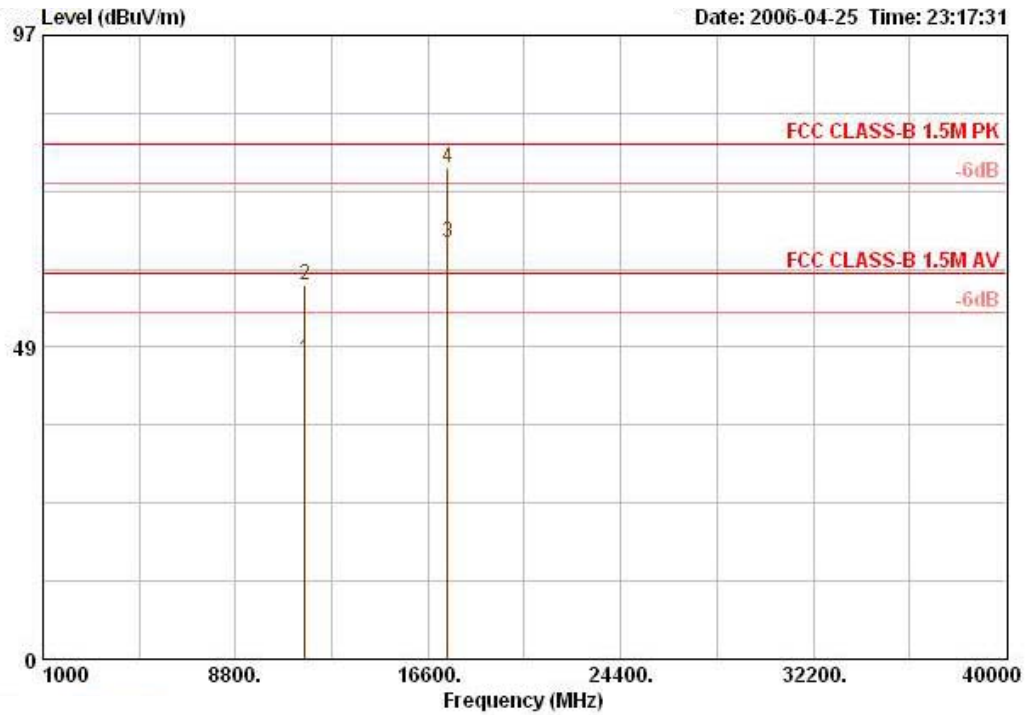

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11603.500	46.49	-13.51	60.00	39.22	7.10	35.14	35.31	AVERAGE		127	142
2	11603.500	58.24	-21.76	80.00	39.22	7.10	35.14	47.06	PEAK		127	142
4 !	17385.100	76.28			41.59	17.16	35.06	52.59	PEAK		128	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (119.79dBuV/m)

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 5

Vertical

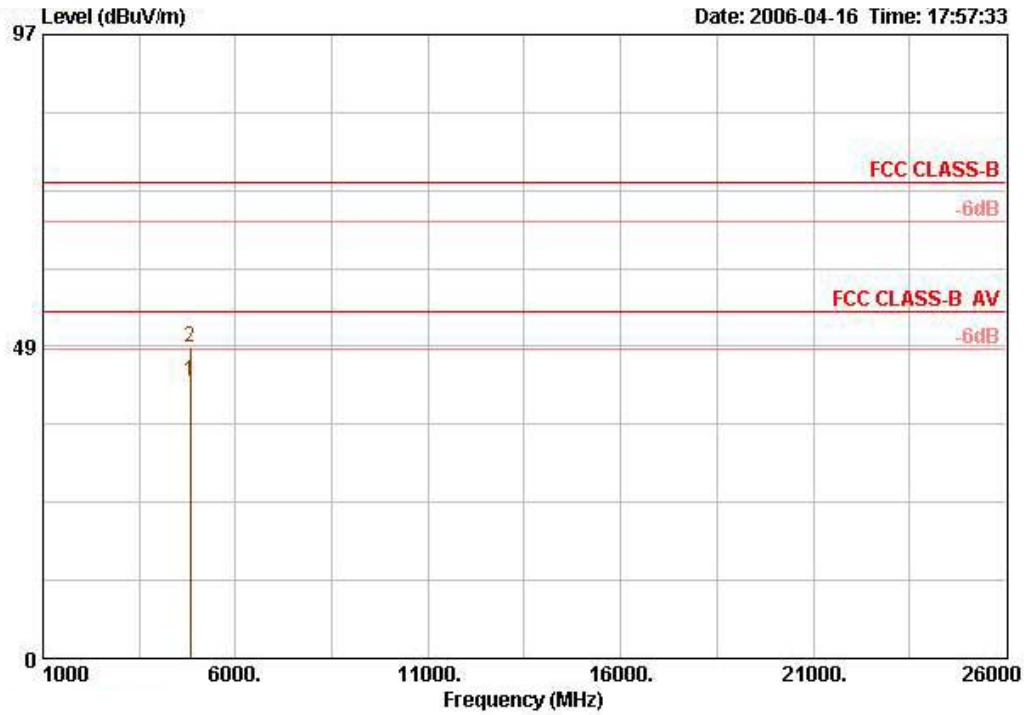

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4824.000	43.09	-10.91	54.00	33.22	4.68	35.10	40.29	AVERAGE		172	299
2	4824.000	48.45	-25.55	74.00	33.22	4.68	35.10	45.65	PEAK		172	299


Horizontal

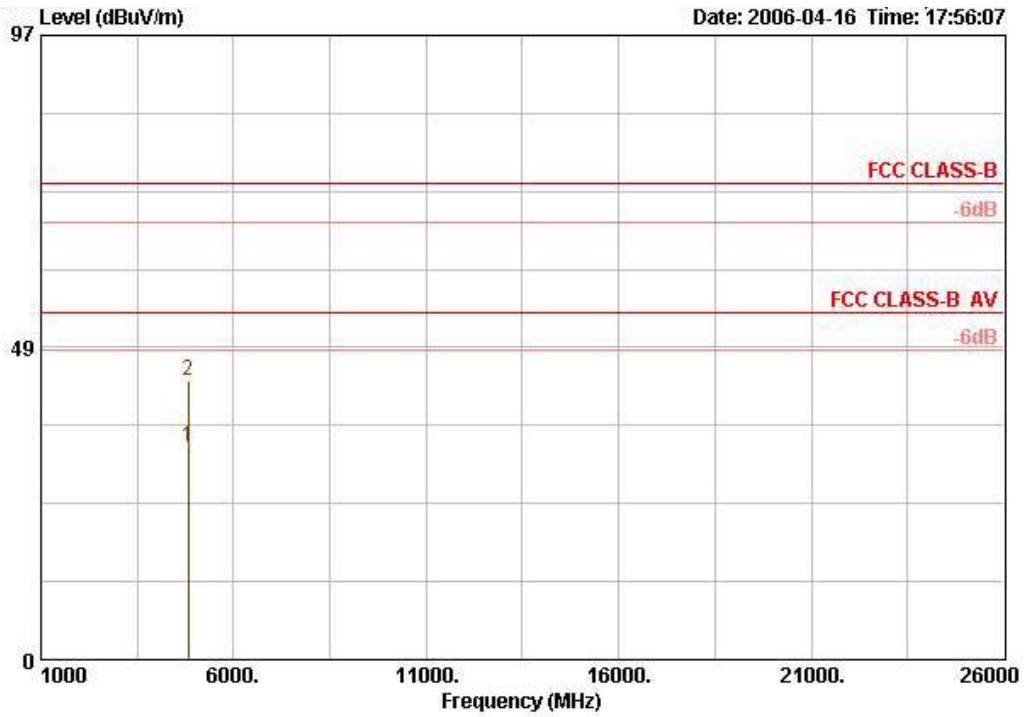

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4824.000	33.16	-20.84	54.00	33.22	4.68	35.10	30.37	AVERAGE		100	240
2	4824.000	43.41	-30.59	74.00	33.22	4.68	35.10	40.61	PEAK		100	240


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 5

Vertical

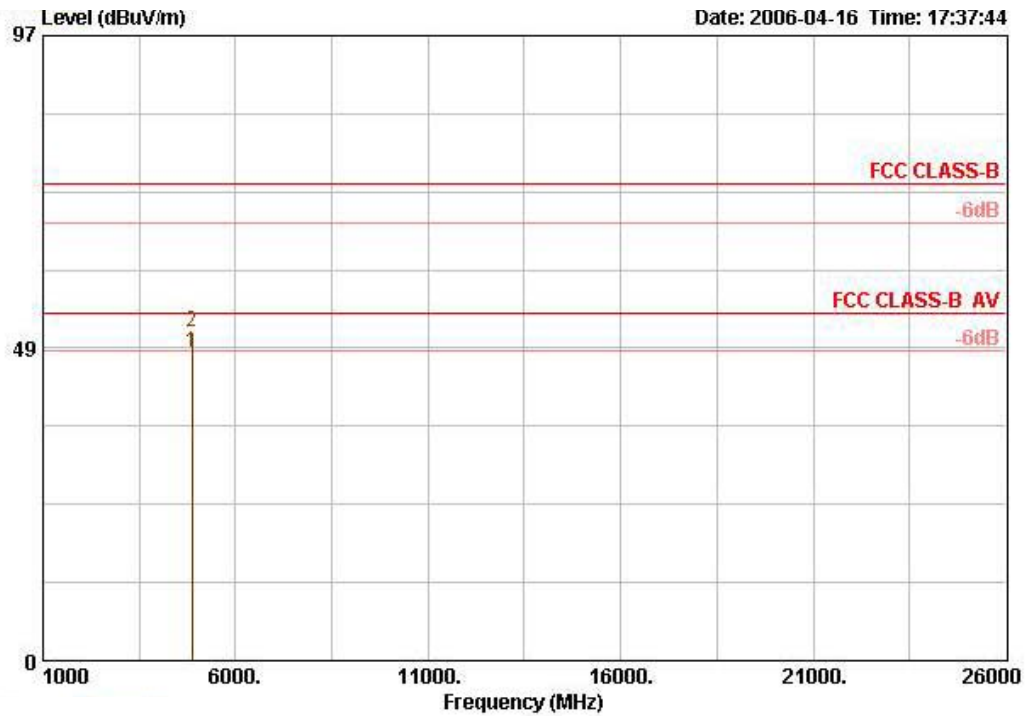

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4874.040	47.81	-6.19	54.00	33.33	4.69	35.10	44.88	AVERAGE	162	258
2	4874.040	50.96	-23.04	74.00	33.33	4.69	35.10	48.03	PEAK	162	258


Horizontal

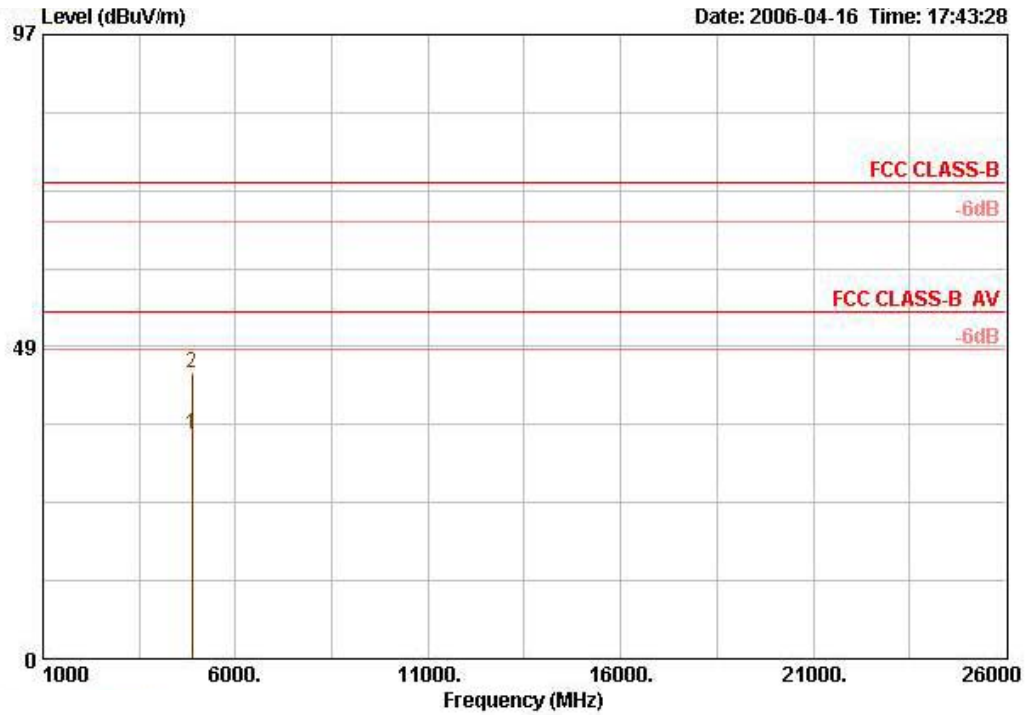

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.960	34.88	-19.12	54.00	33.33	4.69	35.10	31.95	AVERAGE	100	240
2	4873.960	44.40	-29.60	74.00	33.33	4.69	35.10	41.47	PEAK	100	240


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 5

Vertical

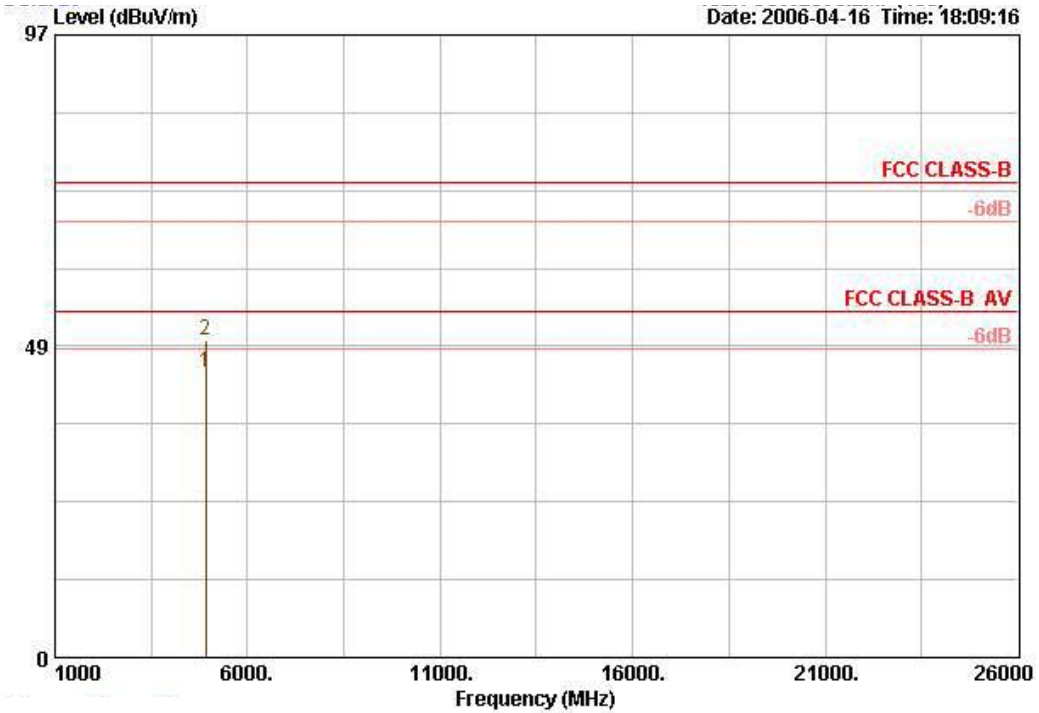

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4924.080	44.50	-9.50	54.00	33.45	4.73	35.10	41.42	AVERAGE	172	299
2	4924.080	49.32	-24.68	74.00	33.45	4.73	35.10	46.25	PEAK	172	299


Horizontal

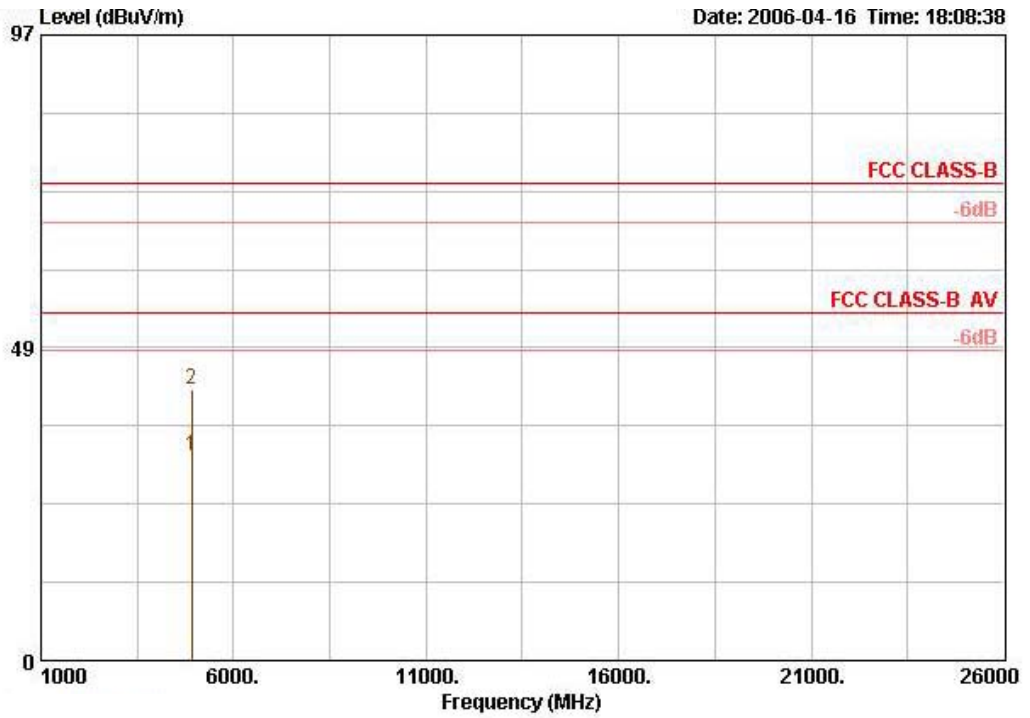

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4924.080	31.59	-22.41	54.00	33.45	4.73	35.10	28.52	AVERAGE		100	240
2	4924.080	42.13	-31.87	74.00	33.45	4.73	35.10	39.06	PEAK		100	240


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 5

Vertical

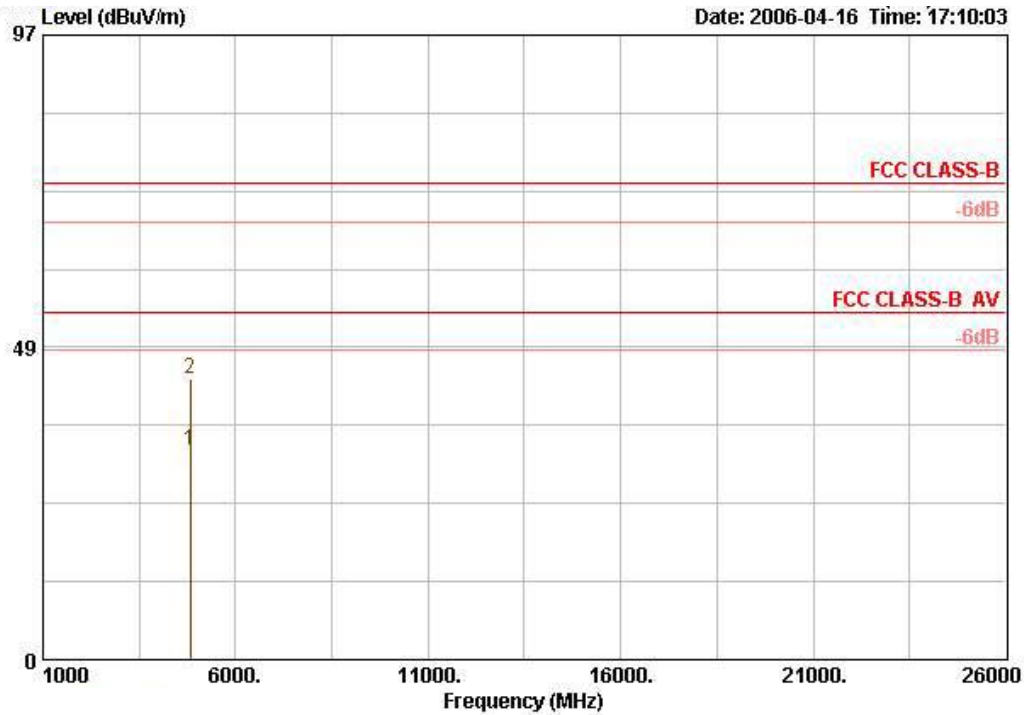

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4818.120	32.59	-21.41	54.00	33.22	4.68	35.10	29.80	AVERAGE		100	30
2	4818.120	43.73	-30.27	74.00	33.22	4.68	35.10	40.93	PEAK		100	30


Horizontal

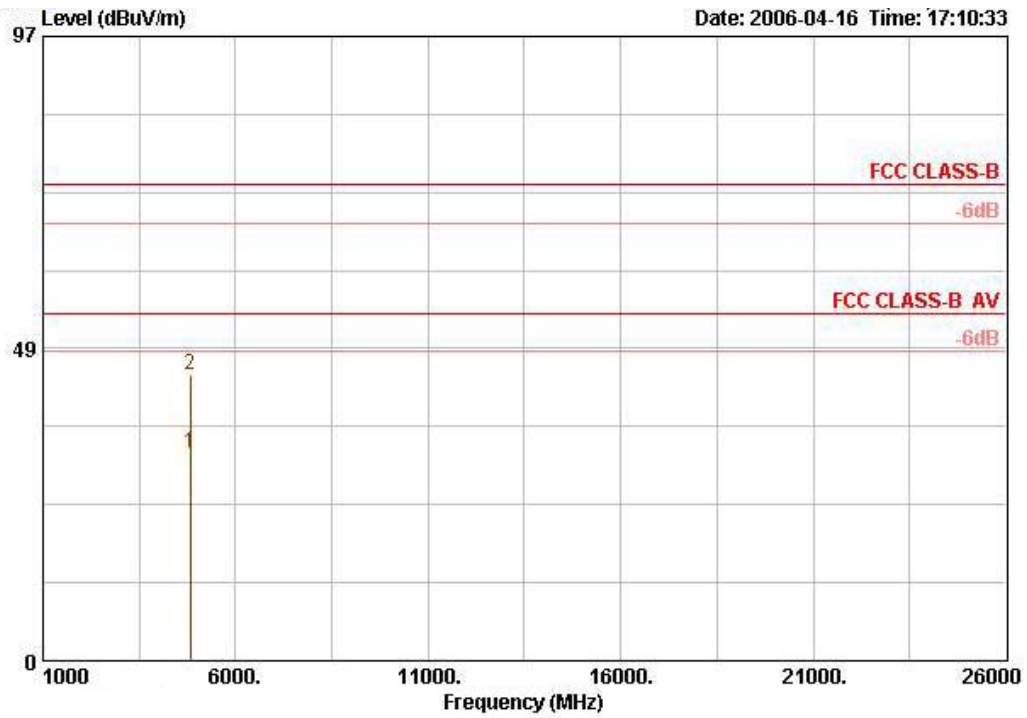

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	4818.120	32.17	-21.83	54.00	33.22		4.68	35.10	29.37	AVERAGE	100	18
2	4818.120	44.43	-29.57	74.00	33.22		4.68	35.10	41.63	PEAK	100	18


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 5

Vertical

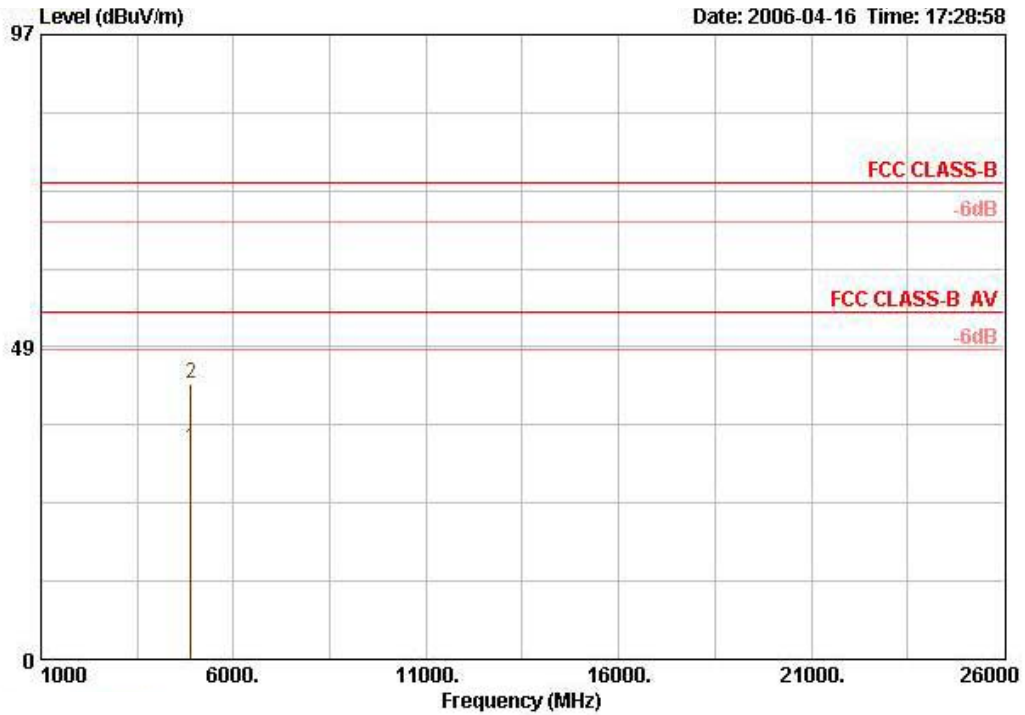

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4880.300	32.71	-21.29	54.00	33.33	4.69	35.10	29.79	AVERAGE		100	14
2	4880.300	42.71	-31.29	74.00	33.33	4.69	35.10	39.78	PEAK		100	14


Horizontal

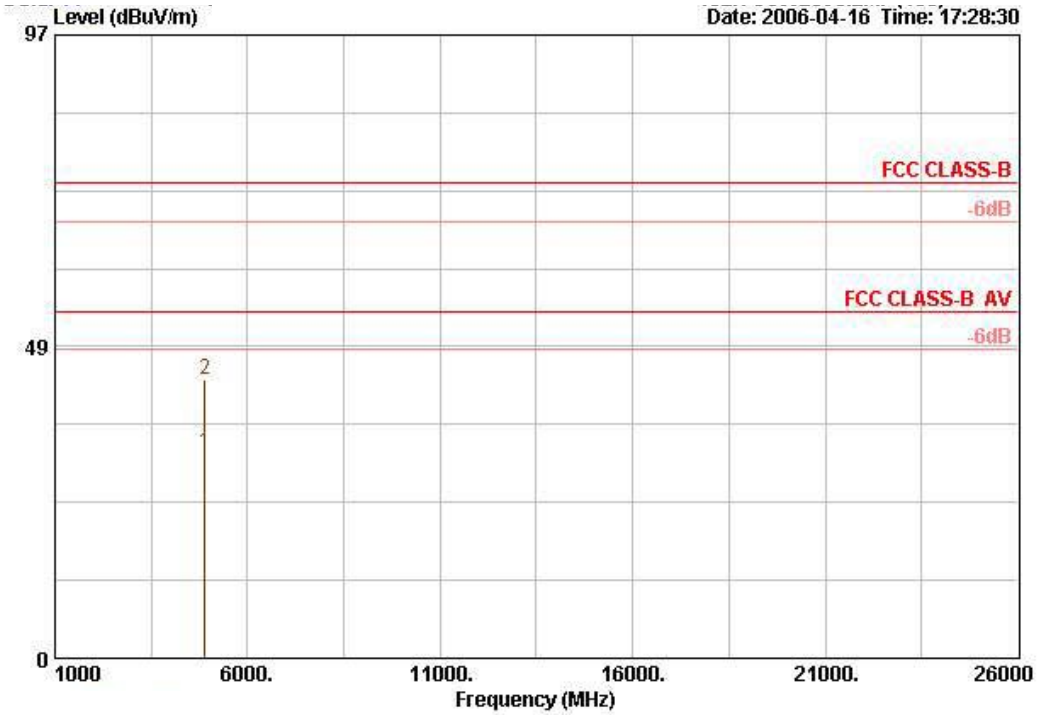

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4880.200	31.95	-22.05	54.00	33.33	4.69	35.10	29.03	AVERAGE	100	23
2	4880.200	43.26	-30.74	74.00	33.33	4.69	35.10	40.33	PEAK	100	23


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 5

Vertical

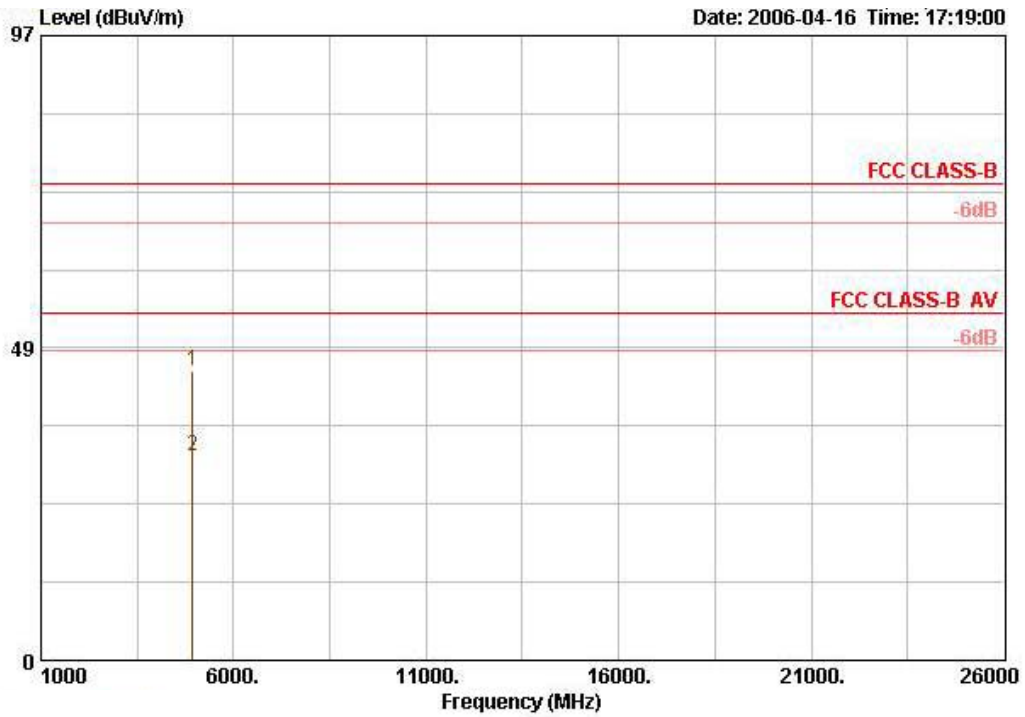

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4927.120	45.02	-28.98	74.00	33.45	4.73	35.10	41.94	PEAK		100	8
2	4927.440	31.72	-22.28	54.00	33.45	4.73	35.10	28.65	AVERAGE		100	8


Horizontal

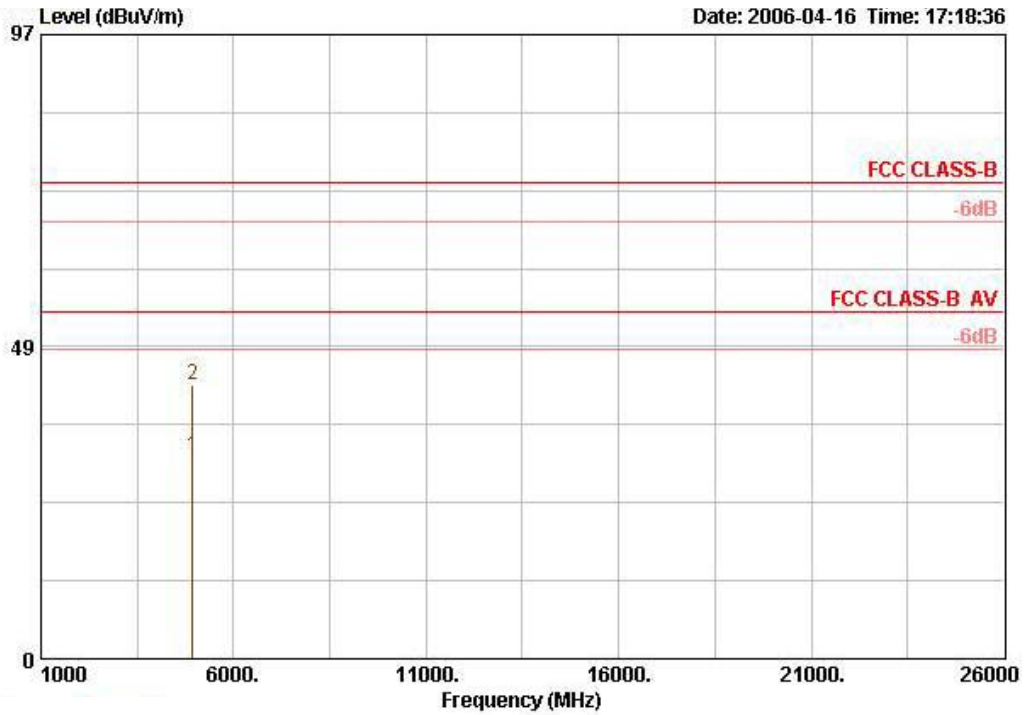

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV		cm	deg
1	4929.760	31.54	-22.46	54.00	33.45	4.73	35.10	28.47 AVERAGE	100	0
2	4929.760	42.42	-31.58	74.00	33.45	4.73	35.10	39.35 PEAK	100	0

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 5


Vertical

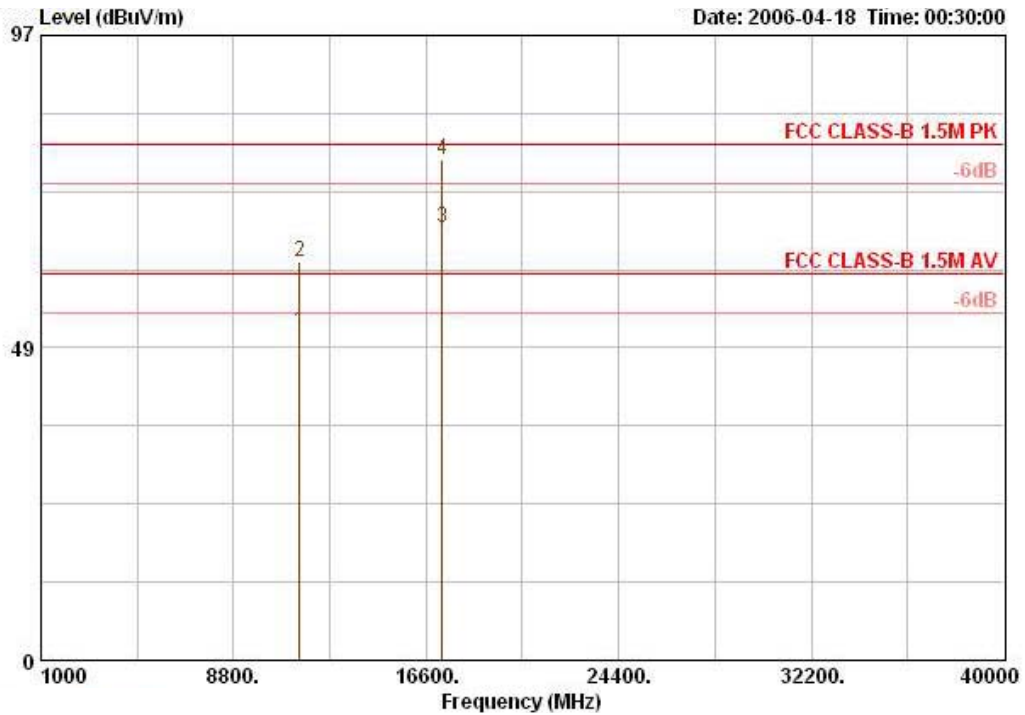

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11489.160	50.88	-9.12	60.00	39.20	6.96	35.10	39.82	AVERAGE		103	245
2	11489.160	61.92	-18.08	80.00	39.20	6.96	35.10	50.86	PEAK		103	245
4 !	17233.240	77.77			40.93	18.15	35.00	53.69	PEAK		103	226

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (126.52dBuV/m)

Horizontal

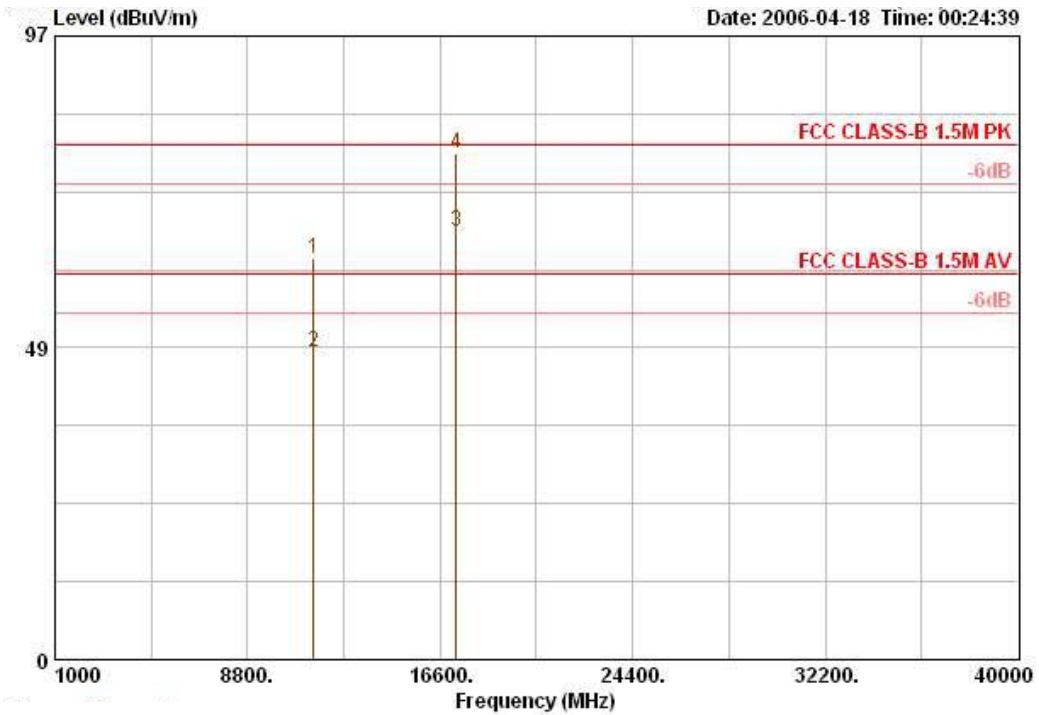


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11481.000	62.42	-17.58	80.00	39.20	6.96	35.10	51.36	PEAK	100	297
2	11489.160	47.87	-12.13	60.00	39.20	6.96	35.10	36.81	AVERAGE	100	297
4 !	17233.920	78.74			40.93	18.15	35.00	54.67	PEAK	121	250

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (126.52dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 5


Vertical

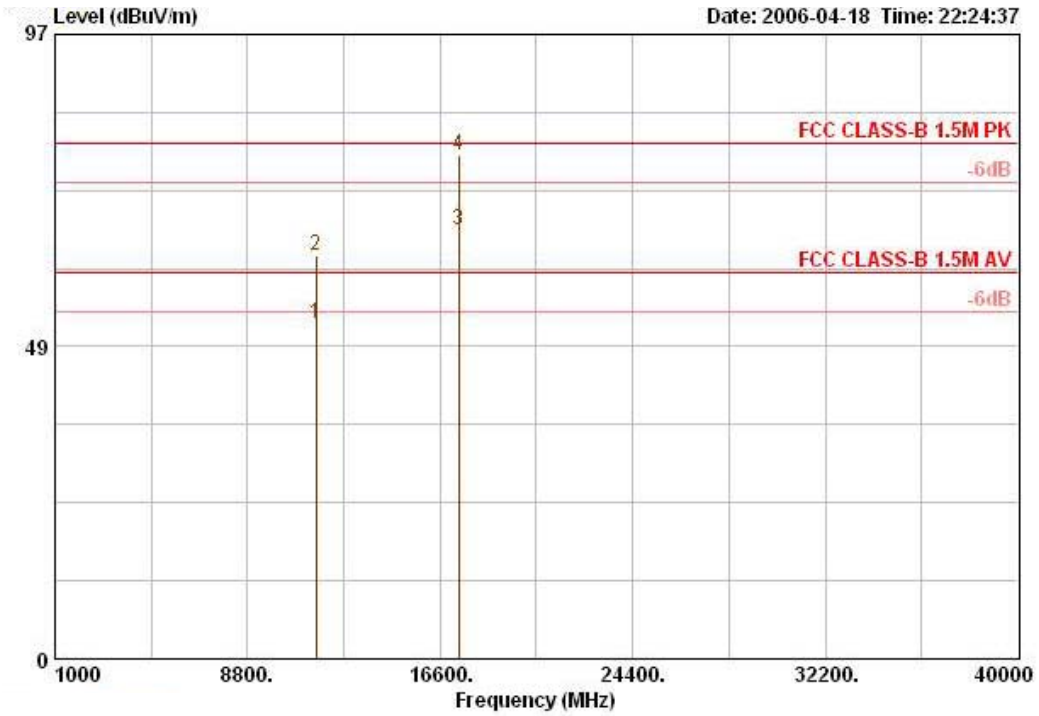

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	11569.680	52.03	-7.97	60.00	39.21	7.06	35.12	40.88	AVERAGE		111	247
2	11569.680	62.70	-17.30	80.00	39.21	7.06	35.12	51.55	PEAK		111	247
4 !	17354.360	78.23			41.44	17.41	35.04	54.42	PEAK		102	226

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (125.69dBuV/m)

Horizontal

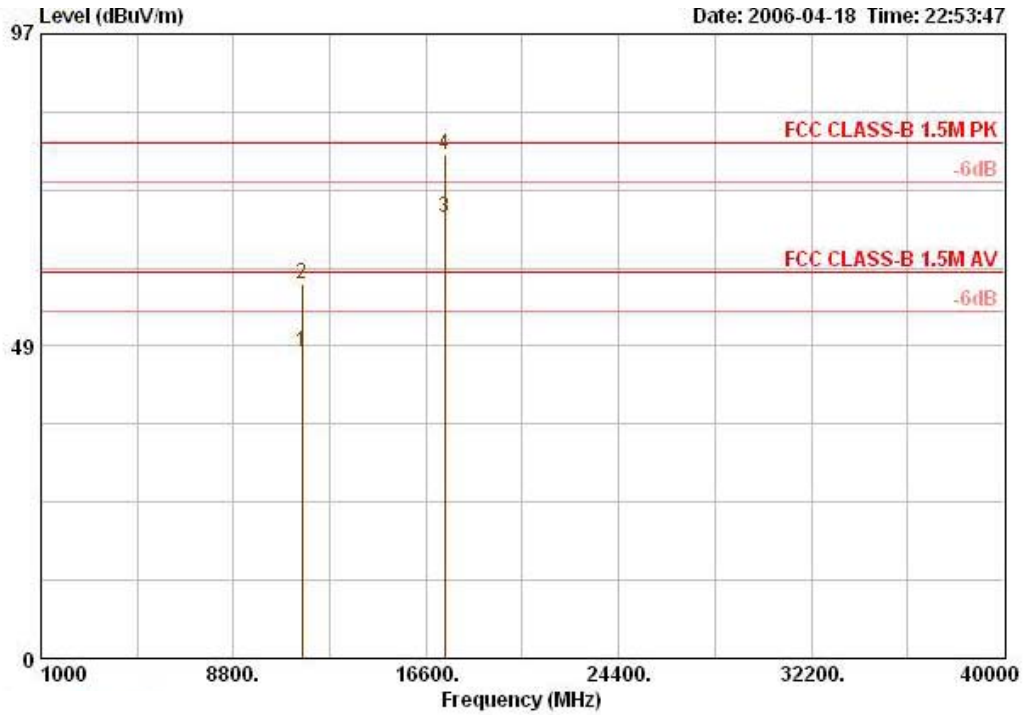


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11572.000	47.46	-12.54	60.00	39.21	7.06	35.13	36.32	AVERAGE	100	297
2 !	11572.000	58.04	-1.96	60.00	39.21	7.06	35.13	46.90	AVERAGE	100	297
4 !	17360.200	78.17			41.44	17.41	35.05	54.37	PEAK	123	250

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (125.69dBuV/m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 5


Vertical

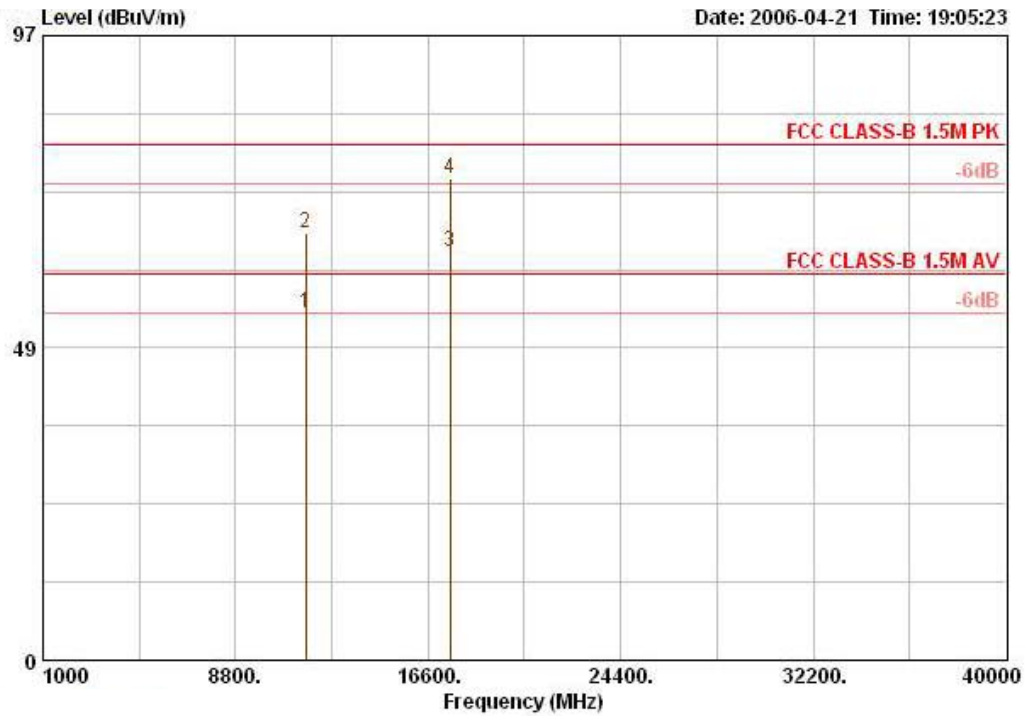

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11649.920	53.96	-6.04	60.00	39.23	7.15	35.16	42.75	AVERAGE	106	247
2	11649.920	66.22	-13.78	80.00	39.23	7.15	35.16	55.00	PEAK	106	247
4 !	17474.680	74.76			41.95	16.66	35.09	51.23	PEAK	100	234

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (126.41dBuV/m)

Horizontal

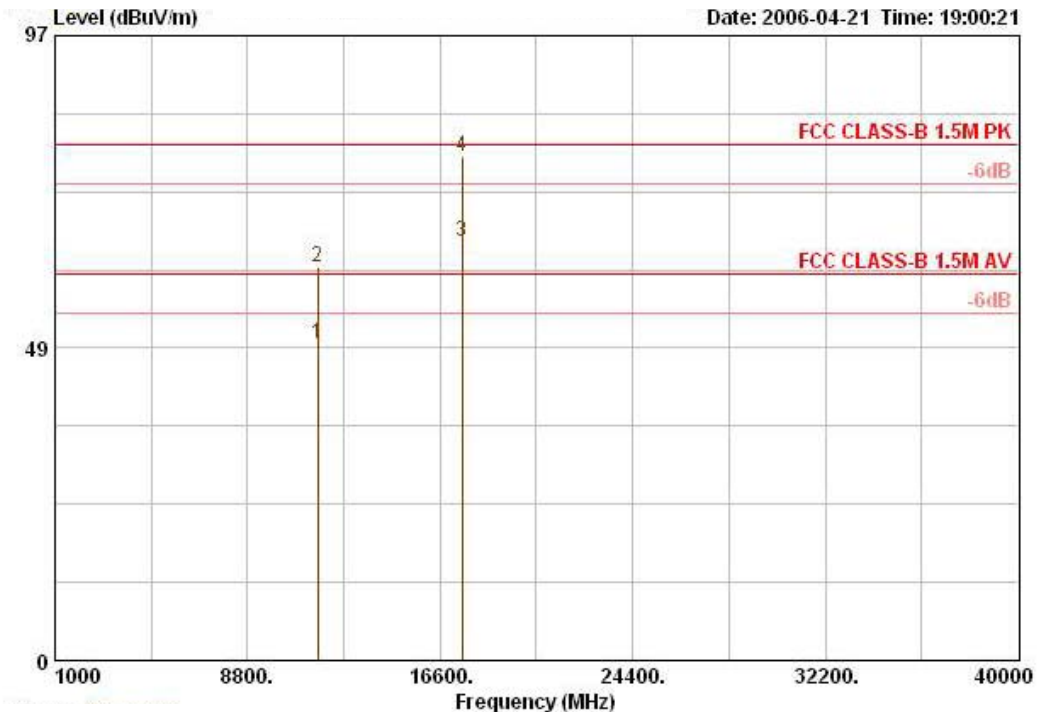


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11649.600	49.26	-10.74	60.00	39.23	7.15	35.16	38.04	AVERAGE	108	305
2	11649.600	60.95	-19.05	80.00	39.23	7.15	35.16	49.74	PEAK	108	305
4 !	17474.680	78.22			41.95	16.66	35.09	54.70	PEAK	121	242

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (126.41dBuV/m)



Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 5


Vertical

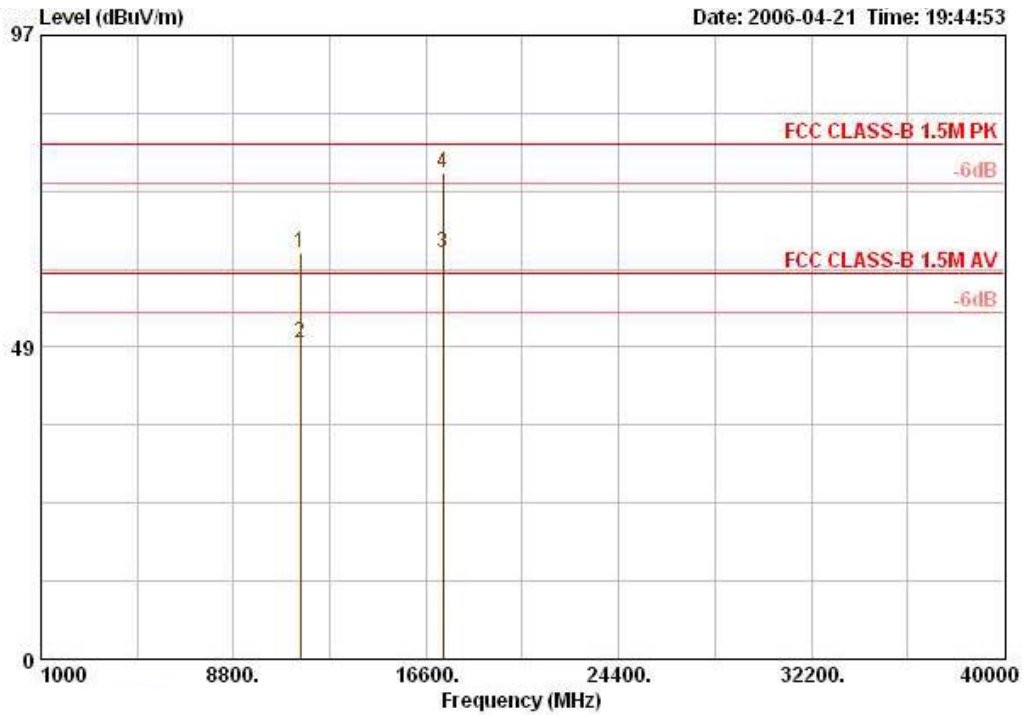

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11516.320	63.22	-16.78	80.00	39.20	7.01	35.10	52.10	PEAK		100	243
2	11518.800	49.12	-10.88	60.00	39.20	7.01	35.11	38.02	AVERAGE		100	243
4 !	17274.320	75.68			41.07	17.90	35.01	51.71	PEAK		106	226

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (123.80dBuV/m)


Horizontal

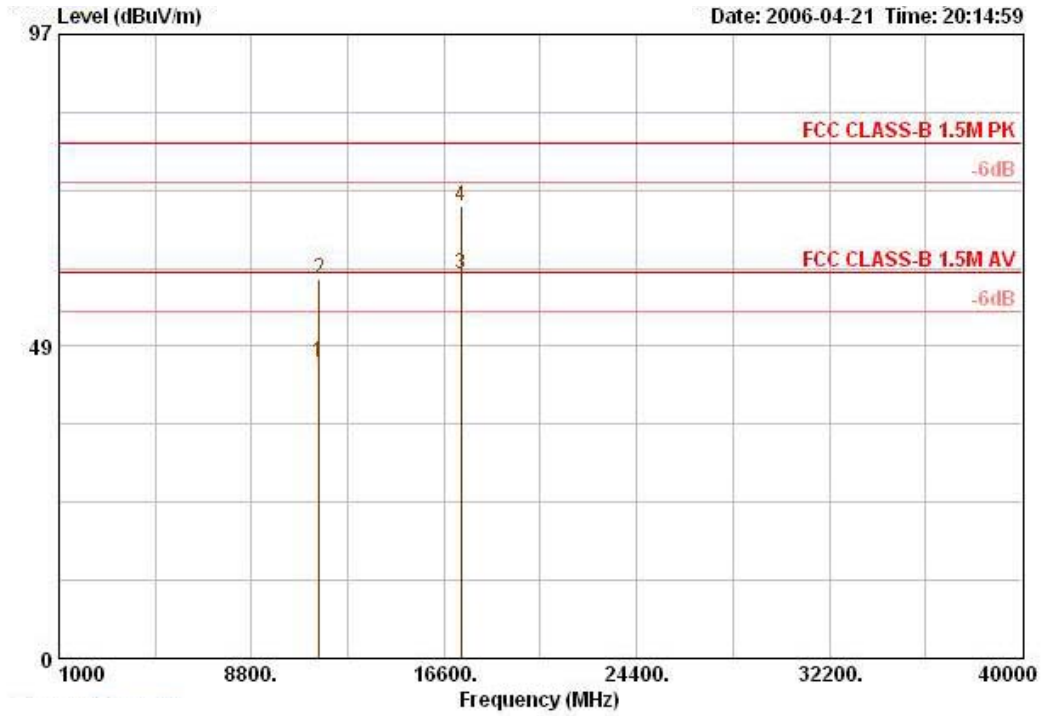

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp	Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dB	dBuV		cm	deg
1	11518.120	45.91	-14.09	60.00	39.20	7.01	35.10	34.80	AVERAGE	108	299		
2	11524.120	58.99	-21.01	80.00	39.20	7.01	35.11	47.89	PEAK	108	299		
3 !	17270.440	59.79	-0.21	60.00	41.07	17.90	35.01	35.82	AVERAGE	118	14		
4	17270.440	70.31	-9.69	80.00	41.07	17.90	35.01	46.34	PEAK	118	16		

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 5


Vertical

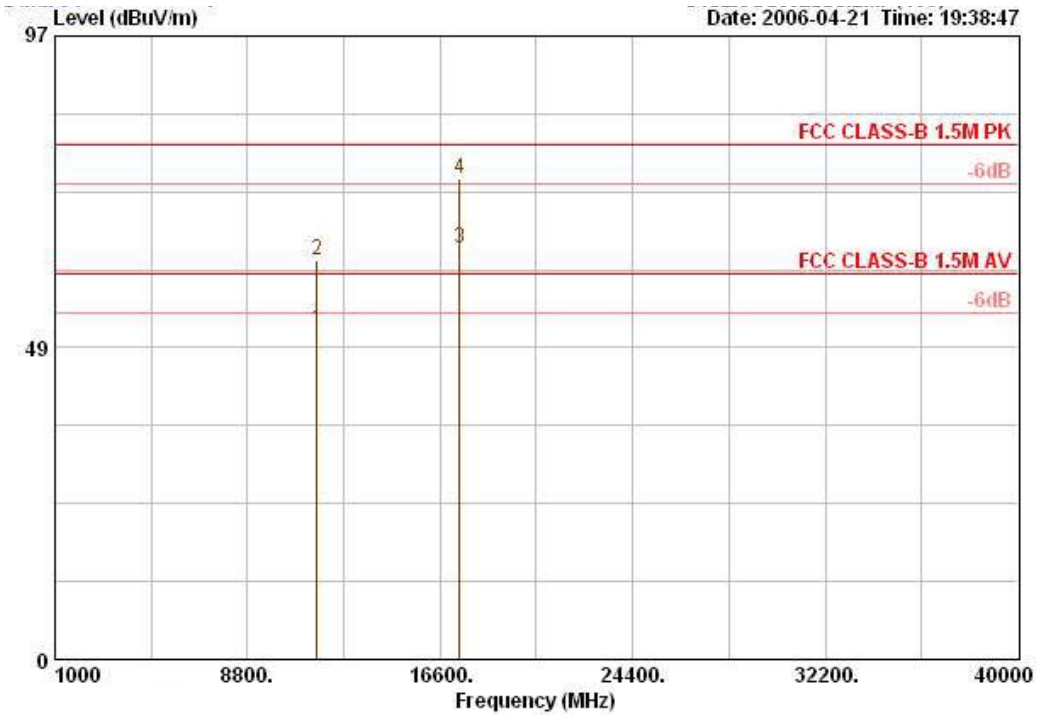

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11600.560	51.22	-8.78	60.00	39.22	7.10	35.14	40.03	AVERAGE	123	242
2	11600.560	62.03	-17.97	80.00	39.22	7.10	35.14	50.85	PEAK	123	242
4 !	17397.300	74.88			41.66	17.16	35.06	51.12	PEAK	100	235

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (124.93dBuV/m)

Horizontal

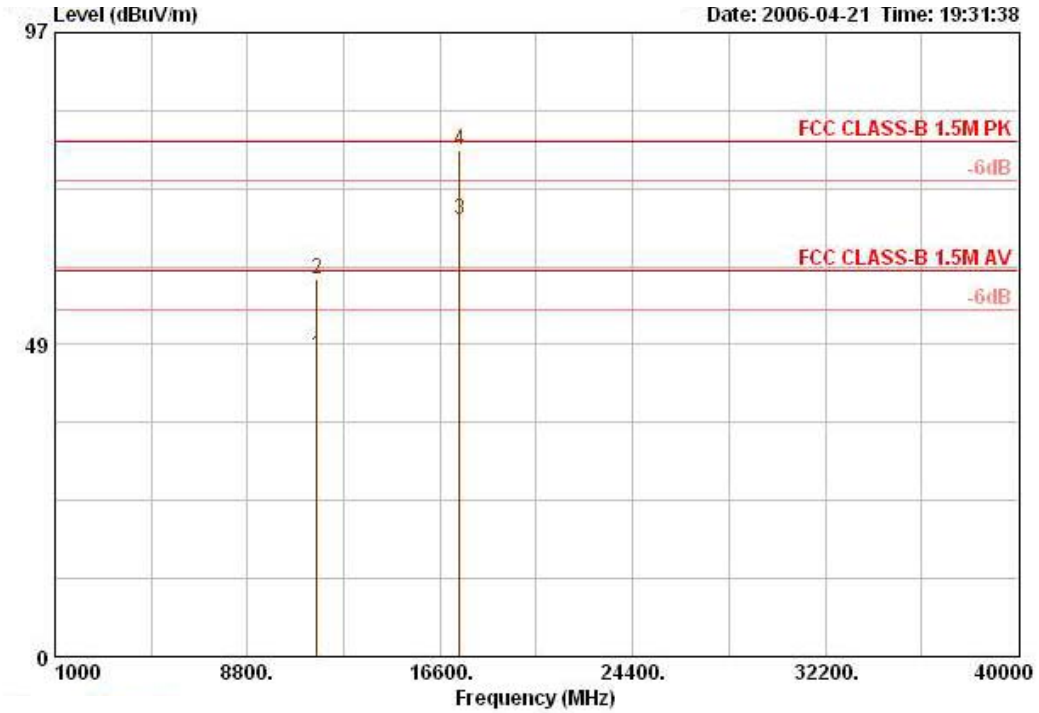

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11598.000	46.86	-13.14	60.00	39.22	7.10	35.14	35.68	AVERAGE		109	299
2	11598.000	58.66	-21.34	80.00	39.22	7.10	35.14	47.48	PEAK		109	299
4 !	17393.700	78.71			41.59	17.16	35.06	55.02	PEAK		123	246

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (124.93dBuV/m)

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 6

Vertical

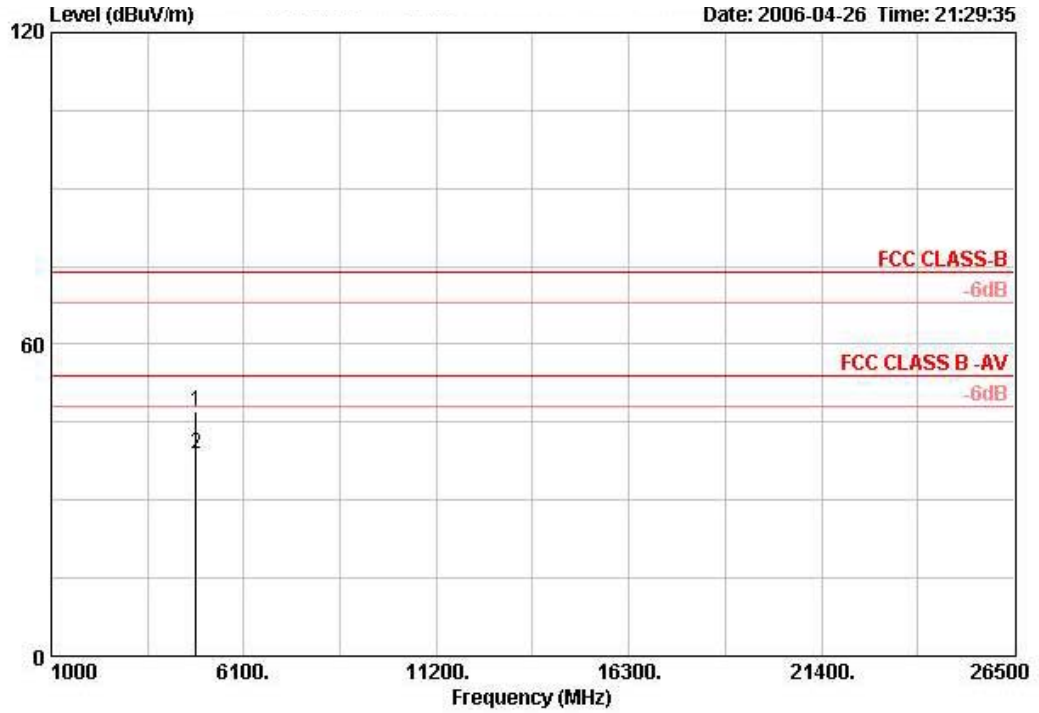

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4823.890	47.20	-26.80	74.00	45.23	32.83	4.30	35.16	PEAK	VERTICAL	3
2	4824.020	39.06	-14.94	54.00	37.10	32.83	4.30	35.16	AVERAGE	VERTICAL	3

Horizontal

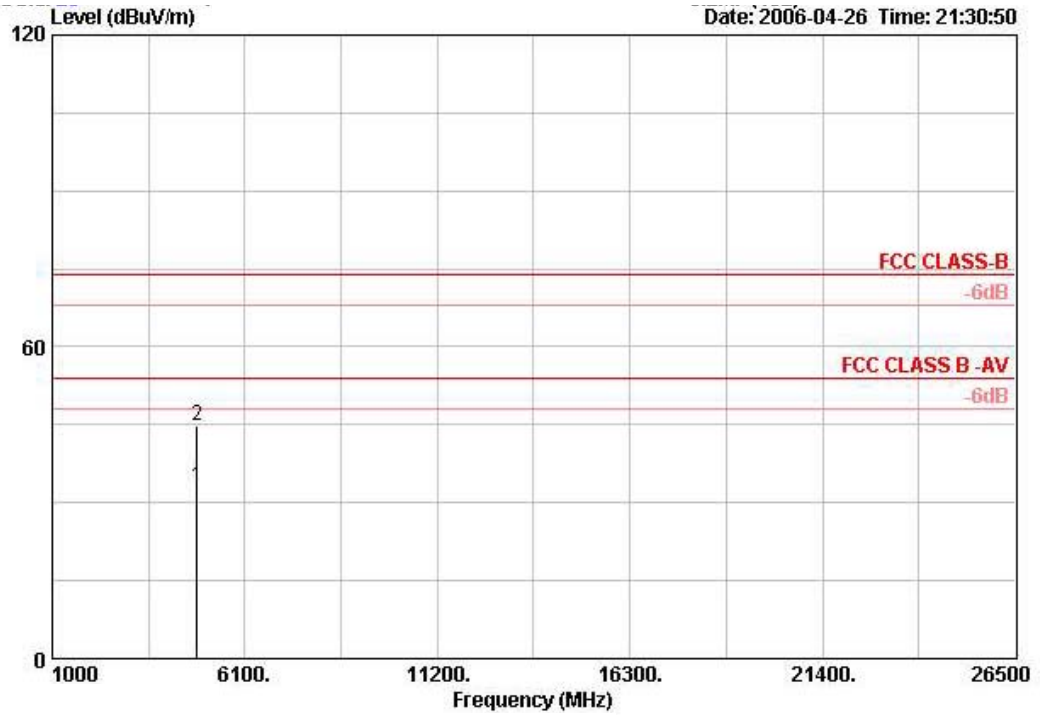


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4823.996	33.03	-20.97	54.00	31.07	32.83	4.30	35.16	AVERAGE	HORIZONTAL	3
2	4824.262	44.89	-29.11	74.00	42.92	32.83	4.30	35.16	PEAK	HORIZONTAL	3




Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 6

Vertical

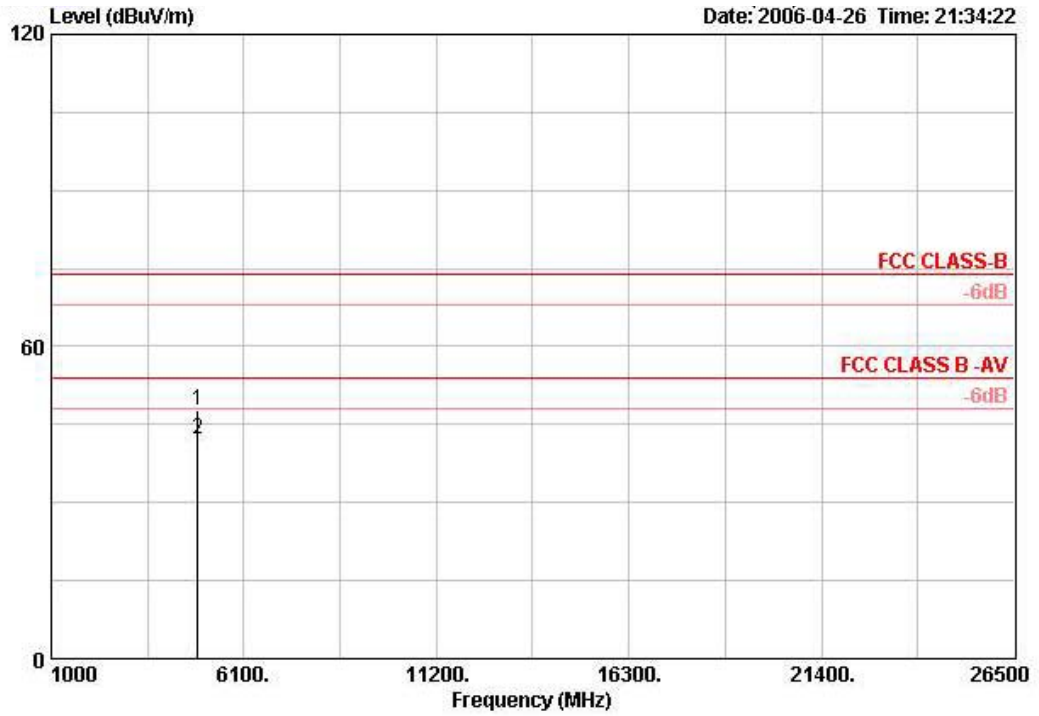

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	4873.922	47.67	-26.33	74.00	45.64	32.88	4.30	35.15 PEAK	VERTICAL	3
2	4873.944	42.31	-11.69	54.00	40.29	32.88	4.30	35.15 AVERAGE	VERTICAL	3

Horizontal

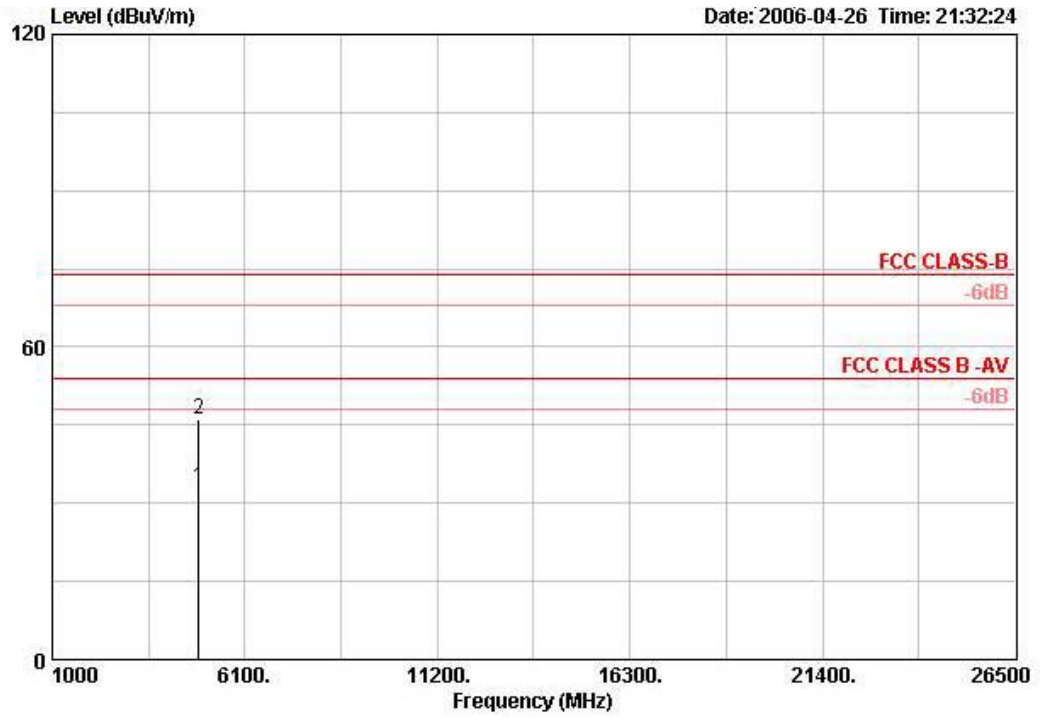

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	4874.068	33.02	-20.98	54.00	31.00	32.88	4.30	35.15	AVERAGE	HORIZONTAL	3
2	4874.080	46.09	-27.91	74.00	44.06	32.88	4.30	35.15	PEAK	HORIZONTAL	3