



***Specific Absorption Rate (SAR) Test Report***  
for  
**3Com Corporation**  
on the  
**3Com Wireless 11n USB Adapter**  
**Model Number: WL-600**

Test Report: TS08020045-EME  
Issue date: Feb. 18, 2008

Total No of Pages Contained in this Report: 122



Accredited for testing to FCC Part 15

Project Engineer: Jimmie Liu	
Reviewed by: Kevin Chen	

Review Date: Feb. 18, 2008

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, Taiwan Ltd.



## Table of Contents

1.0 General information .....	3
1.1 Client Information.....	3
1.2 Equipment under test (EUT).....	4
1.3 Test plan reference.....	4
1.4 Modifications required for compliance.....	4
1.5 Test configuration .....	5
1.5.1 Support equipment & EUT antenna position .....	5
1.5.2 Test Condition .....	6
2.0 SAR Evaluation.....	8
2.1 SAR Limits .....	8
2.2 Configuration Photographs .....	9
2.3 SAR measurement system .....	19
2.4 SAR measurement system validation .....	21
2.4.1 System Validation result .....	22
2.4.2 System Performance Check result.....	24
2.5 Test Result.....	26
3.0 Test Equipment .....	28
3.1 Equipment List.....	28
3.2 Tissue Simulating Liquid.....	29
3.2.1 Body Tissue Simulating Liquid for evaluation test.....	29
3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration .....	30
4.0 Measurement Uncertainty .....	31
5.0 WARNING LABEL INFORMATION - USA .....	33
6.0 REFERENCES.....	34
7.0 Document Revision Record .....	35
APPENDIX A - SAR Evaluation Data .....	36
APPENDIX B - Photographs.....	97
APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration Data.....	99



## 1.0 General information

The device was tested at the Intertek Testing Services facility in Hsinchu, Taiwan. The maximum output power declared by the 3Com Corporation.

EUT model # WL-600 was evaluated accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01) and meet the SAR requirement, the phantom employed was the box phantom of 2mm thick in one wall. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be  $\pm 20.6\%$ , the dosimetry assessment system INDEXSAR SARA2 was used.

In summary, the maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Position (worst case)	SAR <sub>1g</sub> , W/kg
2mm thick box phantom wall	802.11b middle channel EUT lei bottom 00mm to phantom	0.518 W/kg

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for body configurations.

## 1.1 Client Information

The WL-600 has been tested at the request of:

**Applicant:**                    **3Com Corporation**  
**350 Campus Drive, Marlborough, MA 01752-3064, USA**



## 1.2 Equipment under test (EUT)

### Product Descriptions:

<b>Equipment</b>	<b>3Com Wireless 11n USB Adapter</b>		
<b>Trade Name</b>	3COM	<b>Model No:</b>	WL-600
<b>FCC ID</b>	O9C-WL600	<b>S/N No.</b>	Not Labeled
<b>Category</b>	Portable	<b>RF Exposure</b>	Uncontrolled Environment
<b>Frequency Band</b>	2412 – 2462 MHz	<b>System</b>	802.11b/g/n

<b>EUT Antenna Description</b>			
<b>Type</b>	PCB antenna	<b>Configuration</b>	Fixed
<b>Dimensions</b>	24.5mm length	<b>Gain</b>	-1.31 dBi
<b>Location</b>	Embedded		

**Use of Product :** 3Com Wireless 11n USB Adapter

**Manufacturer:** 3Com Corporation

**Production is planned:**  Yes,  No

**EUT receive date:** Jun. 25, 2007

**EUT status:** Normal operating condition

**Test start date:** Jul. 18, 2007

**Test end date:** Jul. 18, 2007

## 1.3 Test plan reference

FCC Rule: Part 2.1093, FCC's OET Bulletin 65, Supplement C (Edition 01-01) and IEEE 1528

## 1.4 Modifications required for compliance


The EUT has no modifications during test.

### 1.5 Test configuration

Please refer to section 2.2 figure 2 ~ 19

#### 1.5.1 Support equipment & EUT antenna position

Support Equipment				
Item #	Equipment	Brand	Model No.	S/N
1	Notebook PC	IBM	1860	L3WM796
2	Notebook PC	HP	OmniBook XE3	TW20705468
3	Notebook PC	DELL	PP05L	CN-5G5152-48643-498-6810

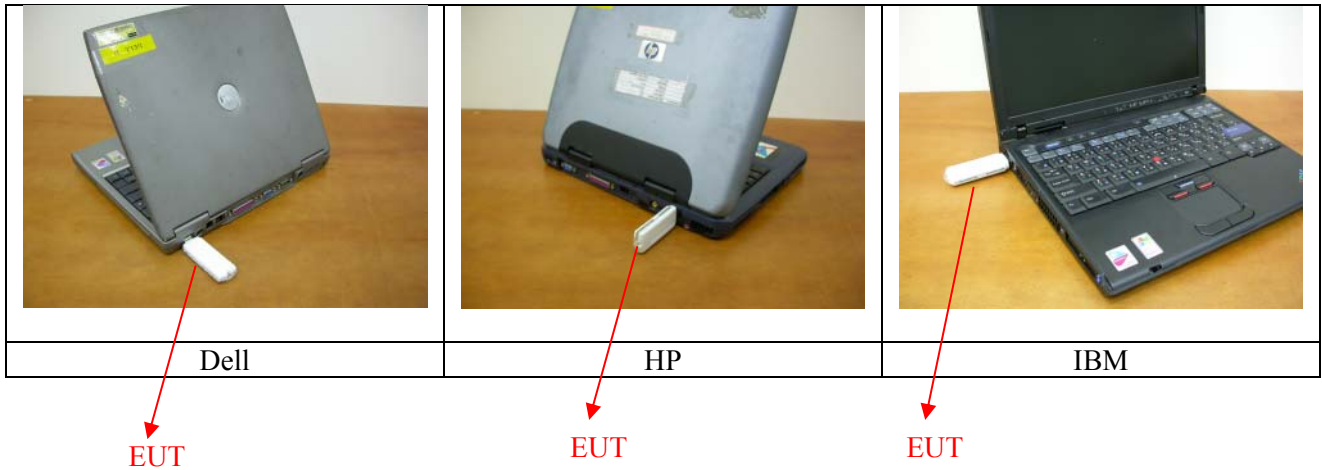

### 1.5.2 Test Condition

During tests the worst-case data (max RF coupling) was determined with following conditions:

Notebook (Dell, HP, IBM)

Usage	Operates with a portable computer	Distance between antenna axis at the joint and the liquid surface:	Laptop is touching the Phantom in bottom position, separating 0mm and 15mm in rear position.	
<b>Simulating human Head/ Body</b>	Body	<b>EUT Battery</b>	Device is powered from host computer through battery.	
<b>802.11b Conducted output Power</b>	<b>Channel</b>	<b>Frequency MHz</b>	<b>Before SAR Test (dBm)</b>	<b>After SAR Test (dBm)</b>
	Low Channel - 1	2412	20.45	-
	Mid Channel - 6	2437	20.13	20.14
	High Channel- 11	2462	20.11	-
<b>802.11g Conducted output Power</b>	<b>Channel</b>	<b>Frequency MHz</b>	<b>Before SAR Test (dBm)</b>	<b>After SAR Test (dBm)</b>
	Low Channel – 1	2412	25.85	-
	Mid Channel – 6	2437	25.68	25.67
	High Channel- 11	2462	25.65	-
<b>802.11n HT20 Conducted output Power</b>	<b>Channel</b>	<b>Frequency MHz</b>	<b>Before SAR Test (dBm)</b>	<b>After SAR Test (dBm)</b>
	Low Channel – 1	2412	21.43	-
	Mid Channel – 6	2437	21.53	21.53
	High Channel- 11	2462	21.82	-
<b>802.11n HT40 Conducted output Power</b>	<b>Channel</b>	<b>Frequency MHz</b>	<b>Before SAR Test (dBm)</b>	<b>After SAR Test (dBm)</b>
	Low Channel – 3	2422	20.37	-
	Mid Channel – 6	2437	20.45	20.44
	High Channel- 9	2452	20.53	-

The spatial peak SAR values were assessed for lowest, middle and highest operating channels, defined by the manufacturer.

The conducted output power was measured before and after the test using a wideband peak power meter.

Plug the EUT into Notebook PC, then run the test program "QA.exe" under windows OS, which provide by manufacturer.

The EUT was transmitted continuously during the test.

The EUT contains 802.11b, 802.11g and 802.11n functions, after verify, the maximum of output power was occurred at 1Mbps data rate in 802.11b function, 6Mbps data rate in 802.11g function, 6.5Mbps data rate in 802.11n HT20 function and 13Mbps data rate in 802.11n HT40 function. All the test data were performed under the above transmission rate.



## 2.0 SAR Evaluation

The evaluation of the result analysis was based on software: SARA2 Version 2.41VPM (Virtual Probe Miniaturization).

## 2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

<b>EXPOSURE (General Population/Uncontrolled Exposure environment)</b>	<b>SAR (W/kg)</b>
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00



## 2.2 Configuration Photographs

### SAR Measurement Test Setup


**Figure 1: Test System**



Test Equipment: Notebook (Dell)


**SAR Measurement Test Setup**

**Figure 2: Bottom side of Laptop facing phantom touching**

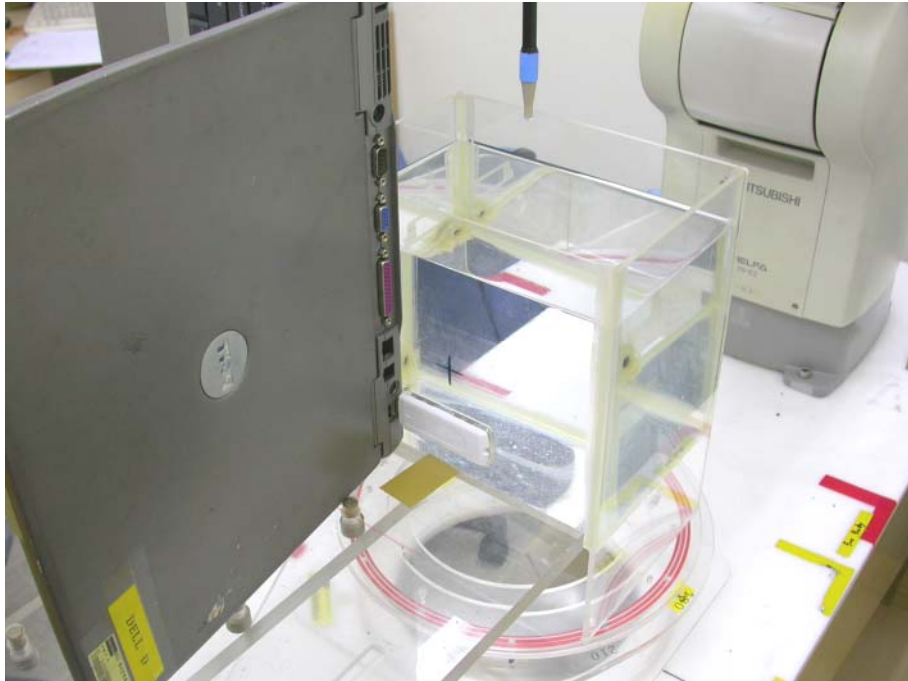

**SAR Measurement Test Setup**

**Figure 3: Bottom side of Laptop facing phantom touching-Zoom in**

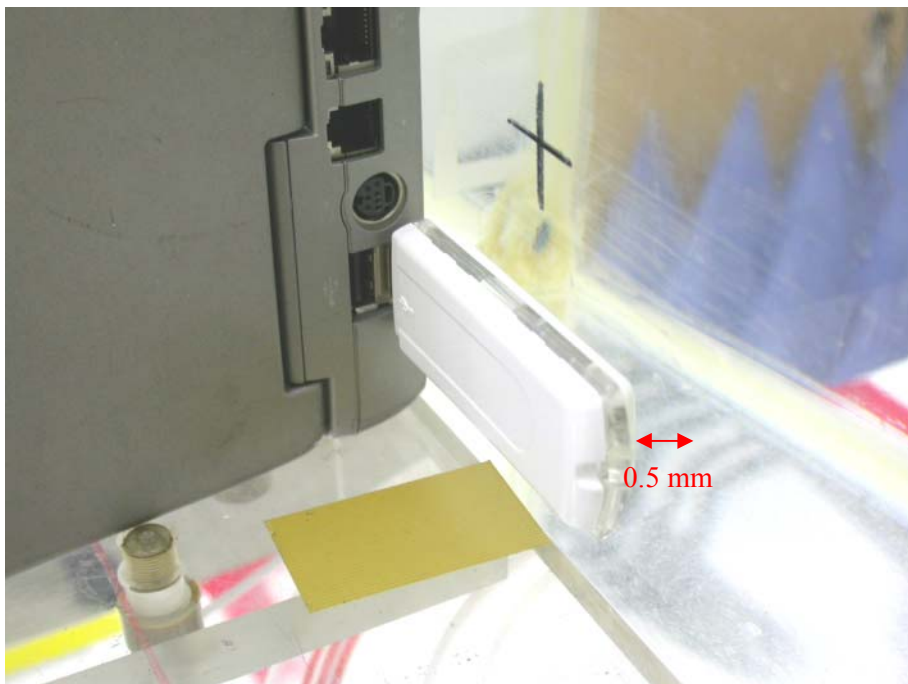


### SAR Measurement Test Setup

**Figure 4: EUT rear to phantom, 15 mm separation**




**Figure 5: EUT rear to phantom, 15 mm separation-Zoom in**

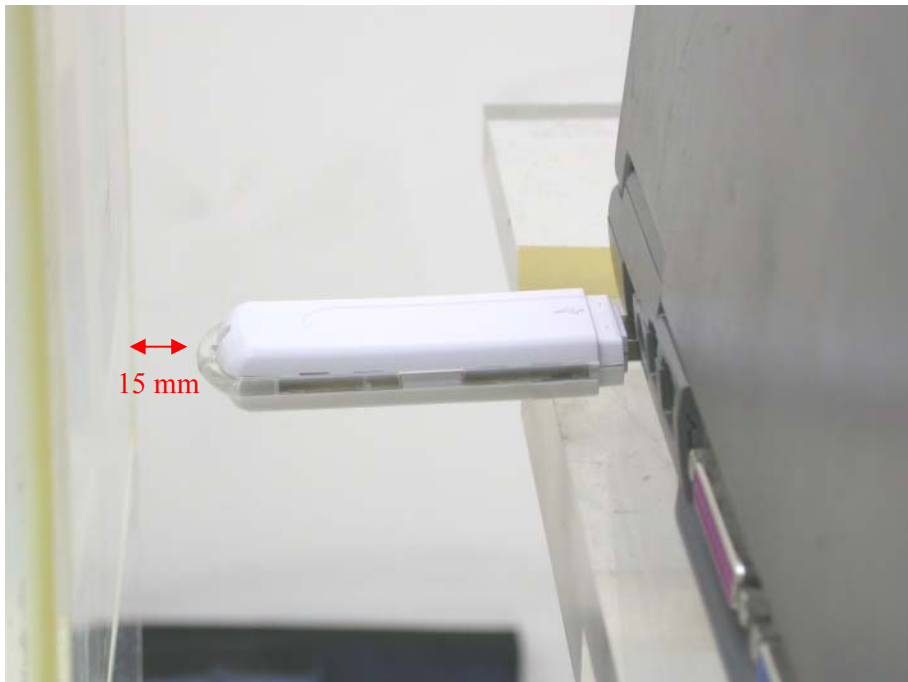

**SAR Measurement Test Setup**

**Figure 6: EUT perpendicular to phantom, 0 mm separation**

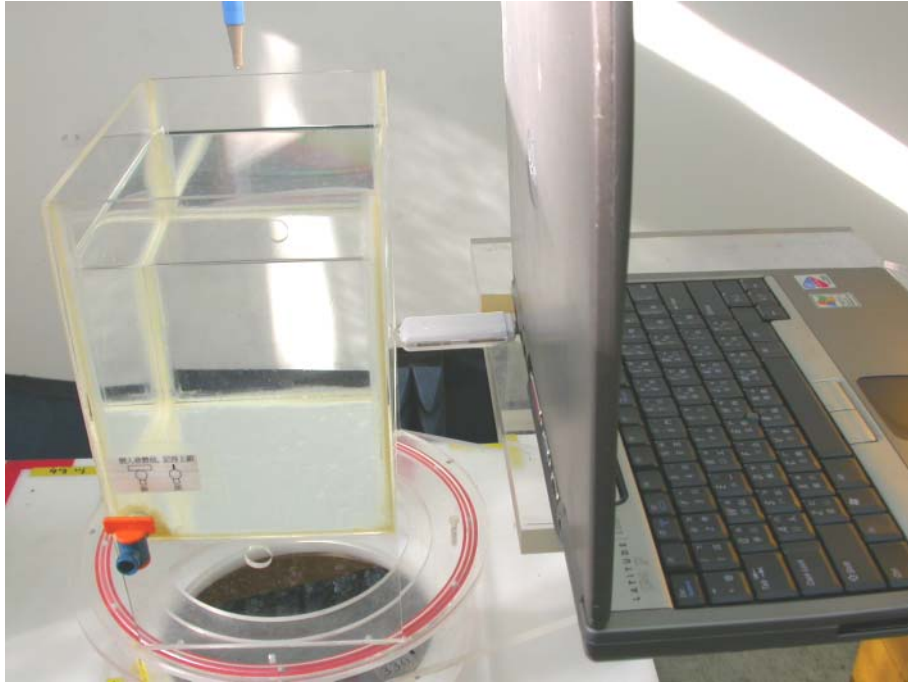


**Figure 7: EUT perpendicular to phantom, 0 mm separation-Zoom in**



Test Equipment: Notebook (HP)


**SAR Measurement Test Setup**

**Figure 8: Bottom side of Laptop facing phantom touching**

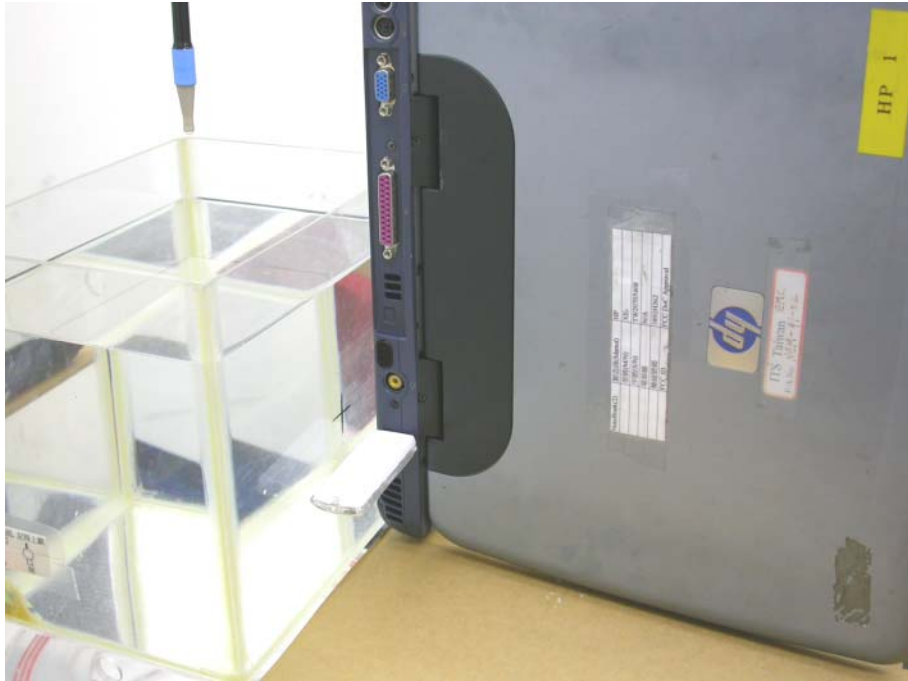

**SAR Measurement Test Setup**


**Figure 9: Bottom side of Laptop facing phantom touching-Zoom in**

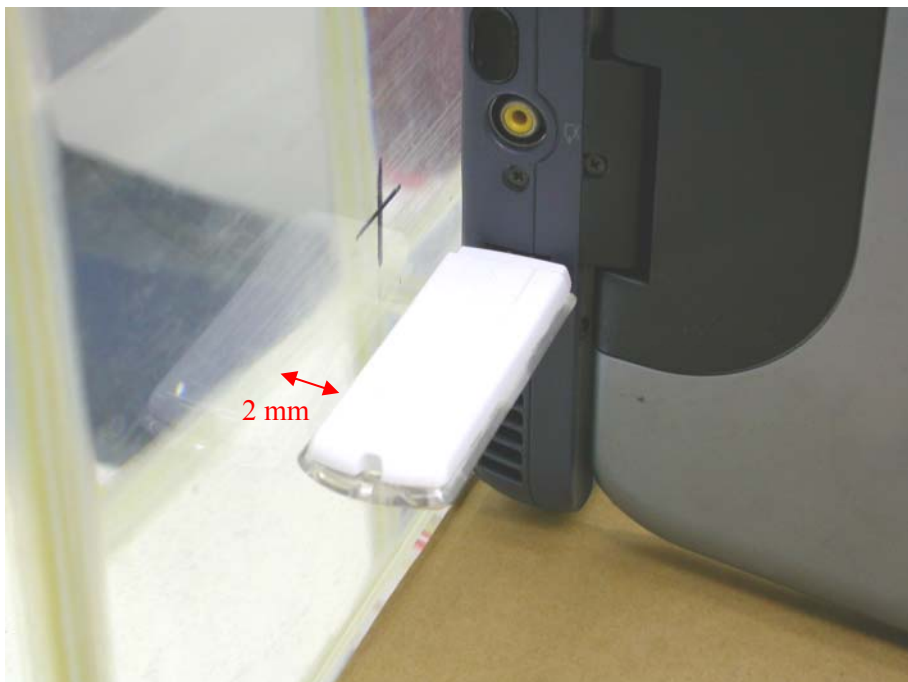



**SAR Measurement Test Setup**

**Figure 10: EUT rear to phantom, 15 mm separation**

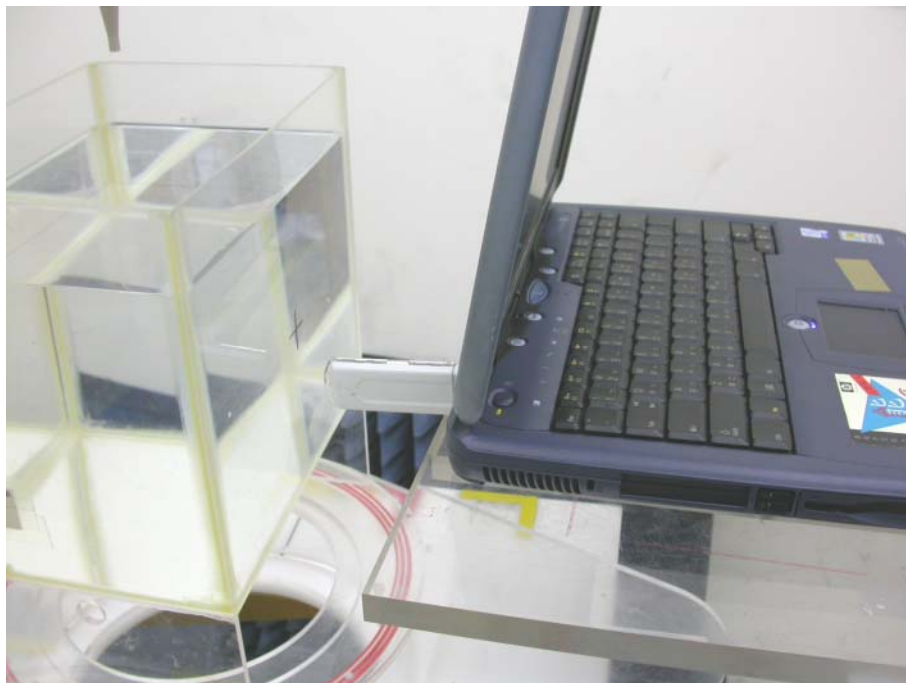


**Figure 11: EUT rear to phantom, 15 mm separation-Zoom in**



**SAR Measurement Test Setup**

**Figure 12: EUT perpendicular to phantom, 0 mm separation**

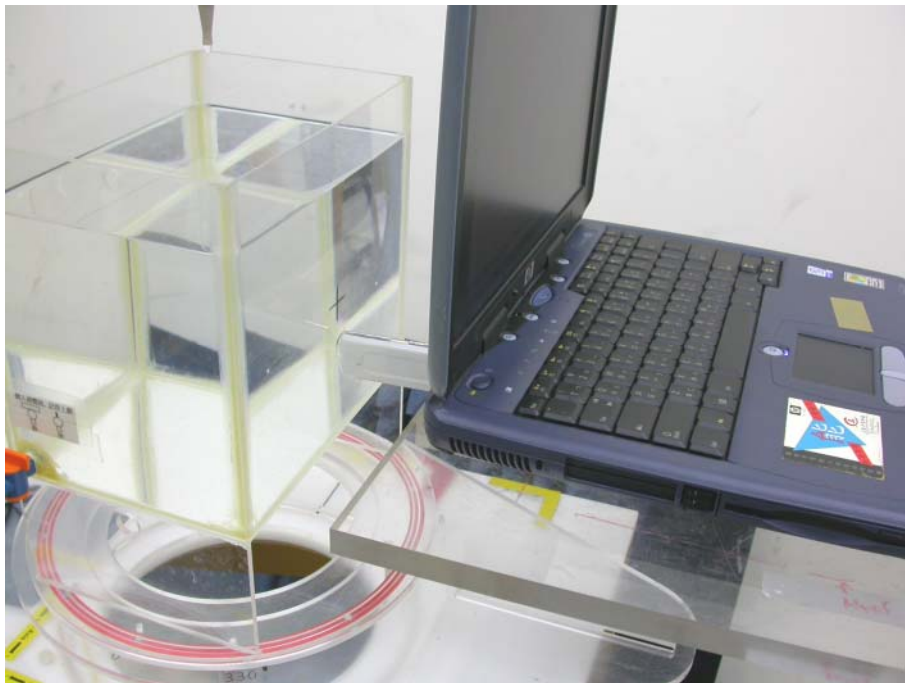

**Figure 13: EUT perpendicular to phantom, 0 mm separation-Zoom in**



Test Equipment: Notebook (IBM)


### SAR Measurement Test Setup

Figure 14: Bottom side of Laptop facing phantom touching



### SAR Measurement Test Setup

Figure 15: Bottom side of Laptop facing phantom touching-Zoom in

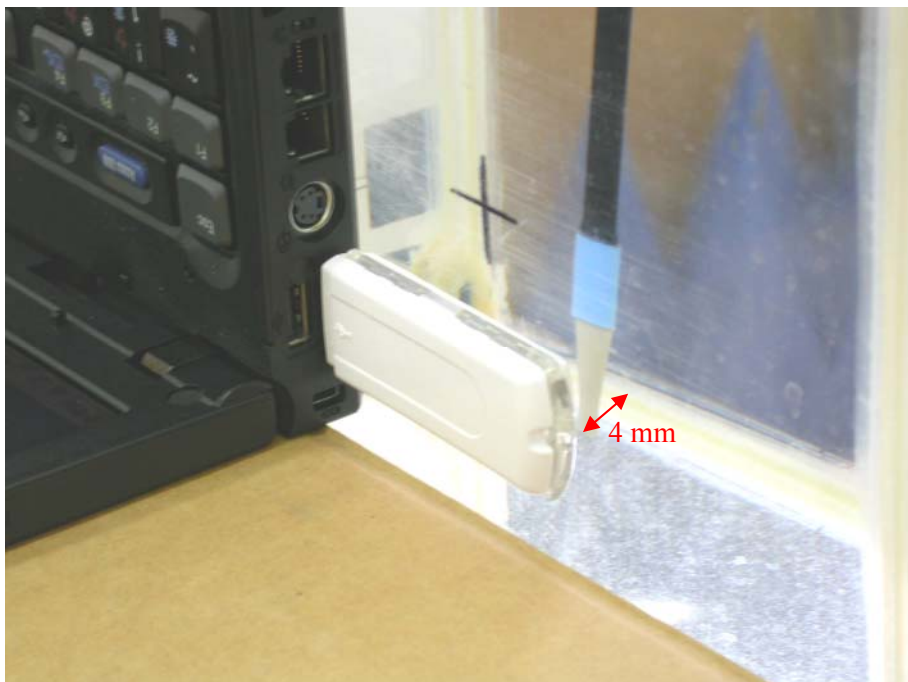




**SAR Measurement Test Setup**

**Figure 16: EUT rear to phantom, 15 mm separation**



**Figure 17: EUT rear to phantom, 15 mm separation-Zoom in**

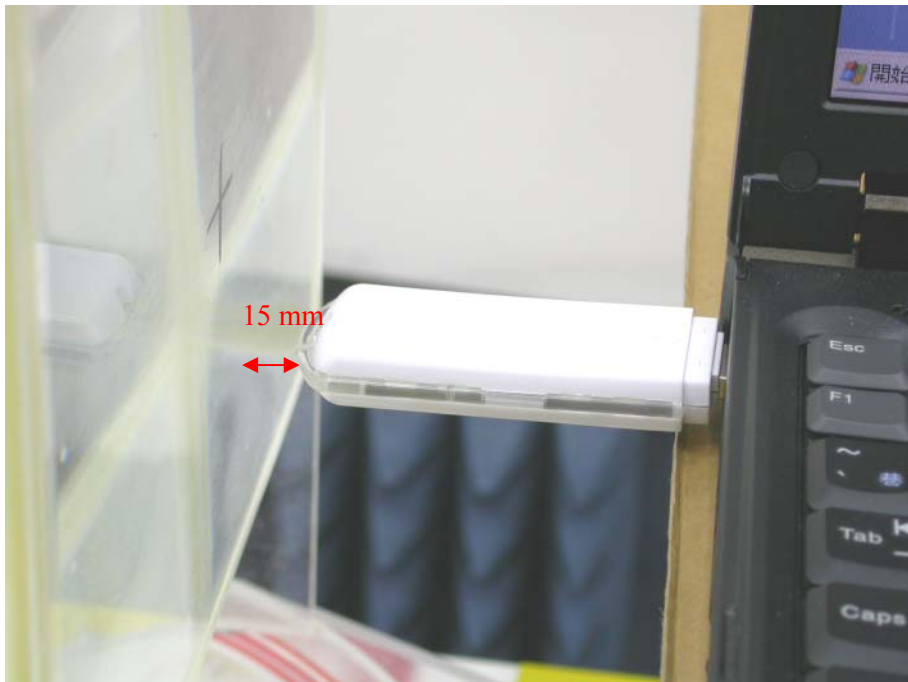

### SAR Measurement Test Setup

**Figure 18: EUT perpendicular to phantom, 0 mm separation**



**Figure 19: EUT perpendicular to phantom, 0 mm separation-Zoom in**



## 2.3 SAR measurement system

### Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

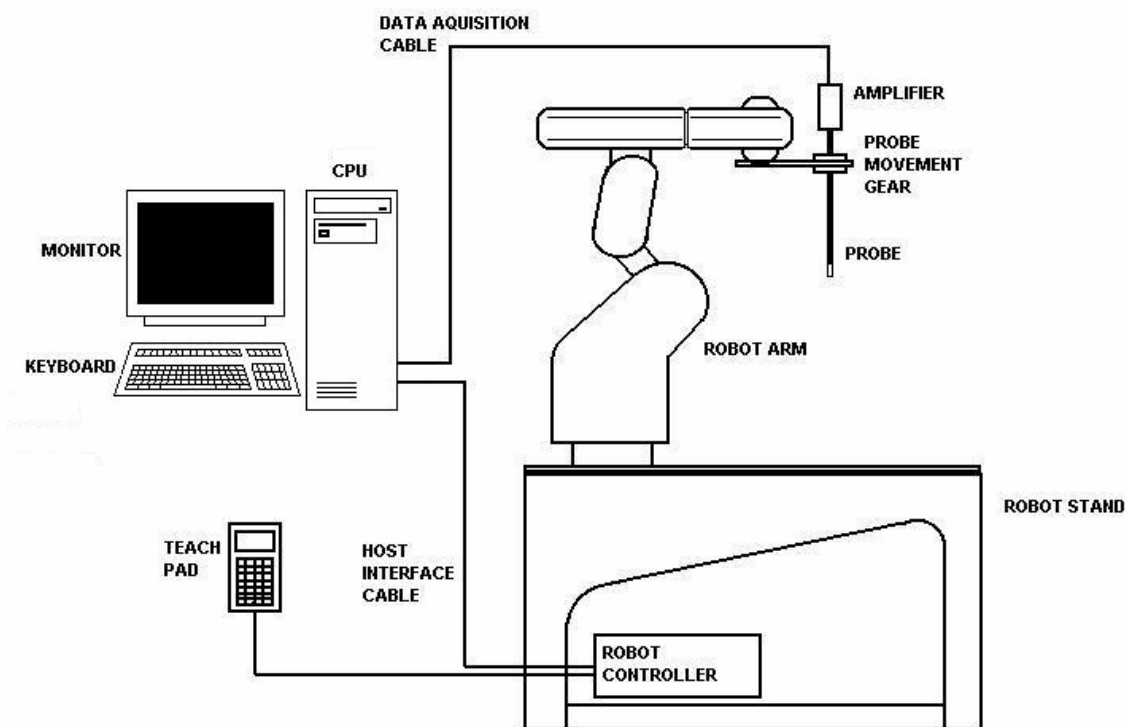


Figure 1: Schematic diagram of the SAR measurement system

The position and digitized shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitized using a Mitutoyo CMM machine to a precision of 0.02mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell. In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan central at that point to determine volume averaged SAR level.

The first 2 measurements points in a direction perpendicular to the surface of the phantom during the zoom scan and closest to the phantom surface, were only 3.5mm and the probe is kept at greater than half a diameter from the surface.

The probe presentation angle has a minor effect on SAR results at frequencies within the IEEE1528 range but that the effects become more marked with bigger probes and at higher frequencies. Indexsar have implemented a correction scheme based on the VPM theory.

Implications of this approach are that the +/- 30 degrees to the surface normal criterion does not obviate variations in probe sensitivity with probe presentation angle because the relevance angle is to the local field-gradient direction and not the surface normal. Effects are small at IEEE1528 frequencies and can be assessed or corrected using VPM dependent on frequency of testing.

Boundary effect compensation is a new opportunity that can be corrected for if appropriate measurements have been made during the waveguide probe calibrations. Indexsar have responded to this opportunity by modifying the waveguide measurements for probes calibrated now and by building a correction scheme into the software.

## 2.4 SAR measurement system validation

Prior to the assessment, the system was verified to the  $\pm 10\%$  of the specifications by using the system validation equipments. The validation was performed at 2450 MHz on then bottom side of box phantom.

### Procedures

The SAR evaluation was performed with the following procedures:

- a. The SAR distribution was measured at the exposed side of the bottom of the box phantom and was measured at a distance of 15 mm for 300 ~ 1000 MHz and 10 mm for 1000 ~ 3000 MHz from the inner surface of the shell. The feed power was 1/5W.
- b. The dimension for this cube is 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
  - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 5 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - ii) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
  - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

The test scans procedure for system validation also applies to the general scan procedure except for the set-up position. For general scan, the EUT was placed at the side of phantom. For validation scan, the standard dipole antenna was placed at the bottom of phantom



**2.4.1 System Validation result**

<b>System Validation (2450 MHz Body)</b>				
<b>Frequency MHz</b>	<b>Operating Mode</b>	<b>Target SAR<sub>1g</sub> (W/kg)</b>	<b>Measured SAR<sub>1g</sub> (W/kg)</b>	<b>Deviation (±10%)</b>
2450	CW	51.377	49.61	-3.44 %

Please see the plot below:

<b>Date:</b>	2007/7/17	<b>Position:</b>	Bottom of the phantom
<b>Filename:</b>	2450 Validation.txt	<b>Phantom:</b>	HeadBox1-val..csv
<b>Device Tested:</b>	2450 Validation	<b>Head Rotation:</b>	0
<b>Antenna:</b>	2450 dipole	<b>Test Frequency:</b>	2450MHz
<b>Shape File:</b>	none.csv	<b>Power Level:</b>	23 dBm/ CW

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries</b>	-																
<b>Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM
<b>Crest Factor =</b>	<b>1</b>

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.761	0.772

**Change during Scan (%)** 1.52

**Max E-field (V/m):** 62.42

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	9.922	4.629

<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	-1.3	0.0	-221.9

**Normalized to an input power of 1W  
 Averaged over 1 cm<sup>3</sup> (1g) of tissue  
 49.61 W/kg**



**2.4.2 System Performance Check result**

<b>System performance check (2450 MHz Body)</b>				
<b>Frequency MHz</b>	<b>Operating Mode</b>	<b>Target SAR<sub>1g</sub> (W/kg)</b>	<b>Measured SAR<sub>1g</sub> (W/kg)</b>	<b>Deviation (±10%)</b>
2450	CW	51.377	49.61	-3.44 %

Please see the plot below:



<b>Date:</b>	2007/7/17	<b>Position:</b>	Bottom of the phantom
<b>Filename:</b>	2450 Validation.txt	<b>Phantom:</b>	HeadBox1-val..csv
<b>Device Tested:</b>	2450 Validation	<b>Head Rotation:</b>	0
<b>Antenna:</b>	2450 dipole	<b>Test Frequency:</b>	2450MHz
<b>Shape File:</b>	none.csv	<b>Power Level:</b>	23 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries</b>	-																
<b>Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM
<b>Crest Factor =</b>	<b>1</b>

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.761	0.772

**Change during Scan (%)** 1.52

**Max E-field (V/m):** 62.42

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	9.922	4.629

**Location of Max (mm):**

<b>X</b>	<b>Y</b>	<b>Z</b>
-1.3	0.0	-221.9

**Normalized to an input power of 1W  
 Averaged over 1 cm<sup>3</sup> (1g) of tissue  
 49.61 W/kg**



## 2.5 Test Result

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

### Measurement Results

<b>Trade Name:</b>	3Com	<b>Model No.:</b>	WL-600
<b>Serial No.:</b>	Not Labeled	<b>Test Engineer:</b>	Marx Yan
<b>TEST CONDITIONS</b>			
<b>Ambient Temperature</b>	23 °C	<b>Relative Humidity</b>	50 %
<b>Test Signal Source</b>	-	<b>Signal Modulation</b>	802.11b/g/n
<b>Output Power Before SAR Test</b>	See section 1.5.2	<b>Output Power After SAR Test</b>	See section 1.5.2
<b>Test Duration</b>	23 min. each scan	<b>Number of Battery Change</b>	0

For Notebook (Dell)

<b>EUT Position</b>						
<b>Channel (MHz)</b>	<b>Operating Mode</b>	<b>Crest Factor</b>	<b>Description</b>	<b>Distance (mm)</b>	<b>Measured SAR<sub>1g</sub> (W/kg)</b>	<b>Plot Number</b>
2437	802.11b	1	Perpendicular to phantom	0	0.056	1
2437	802.11g	1	Perpendicular to phantom	0	0.046	2
2437	802.11n HT20	1	Perpendicular to phantom	0	0.055	3
2437	802.11n HT40	1	Perpendicular to phantom	0	0.047	4
2437	802.11b	1	Perpendicular to phantom	15	0.017	5
2437	802.11g	1	Perpendicular to phantom	15	0.015	6
2437	802.11n HT20	1	Perpendicular to phantom	15	0.018	7
2437	802.11n HT40	1	Perpendicular to phantom	15	0.015	8
2437	802.11b	1	Bottom to phantom	0	0.278	9
2437	802.11g	1	Bottom to phantom	0	0.206	10
2437	802.11n HT20	1	Bottom to phantom	0	0.288	11
2437	802.11n HT40	1	Bottom to phantom	0	0.239	12

For Notebook (HP)

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR <sub>1g</sub> (W/kg)	Plot Number
2437	802.11b	1	Perpendicular to phantom	0	0.073	13
2437	802.11g	1	Perpendicular to phantom	0	0.053	14
2437	802.11n HT20	1	Perpendicular to phantom	0	0.077	15
2437	802.11n HT40	1	Perpendicular to phantom	0	0.055	16
2437	802.11n HT20	1	Perpendicular to phantom	15	0.016	17
2437	802.11b	1	Bottom to phantom	0	0.518	18
2437	802.11g	1	Bottom to phantom	0	0.386	19
2437	802.11n HT20	1	Bottom to phantom	0	0.110	20
2437	802.11n HT40	1	Bottom to phantom	0	0.113	21

For Notebook (IBM)

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR <sub>1g</sub> (W/kg)	Plot Number
2437	802.11b	1	Perpendicular to phantom	0	0.074	22
2437	802.11g	1	Perpendicular to phantom	0	0.055	23
2437	802.11n HT20	1	Perpendicular to phantom	0	0.066	24
2437	802.11n HT40	1	Perpendicular to phantom	0	0.054	25
2437	802.11b	1	Perpendicular to phantom	15	0.018	26
2437	802.11b	1	Bottom to phantom	0	0.293	27
2437	802.11g	1	Bottom to phantom	0	0.218	28
2437	802.11n HT20	1	Bottom to phantom	0	0.287	29
2437	802.11n HT40	1	Bottom to phantom	0	0.237	30

Note: 1. Configuration at middle channel with more than -3dB of applicable limit.



### 3.0 Test Equipment

#### 3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the INDEXSAR SARA2 SYSTEM.

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	Intertek ID No.	LAST CAL. DATE
Balanced Validation dipole	2450MHz	EC381-4	05/12/2007
Controller	Mitsubishi CR-E116	EP320-1	N/A
Robot	Mitsubishi RV-E2	EP320-2	N/A
	Repeatability: ± 0.04mm; Number of Axes: 6		
E-Field Probe	IXP-050 (S/N 0149)	EC356	03/2007
	Frequency Range: 450MHz ~ 2450MHz Probe outer diameter: 5.2 mm; Length: 350 mm; Distance between the probe tip and the dipole center: 2.7 mm		
Data Acquisition	SARA2	N/A	N/A
	Processor: Pentium 4; Clock speed: 1.5GHz; OS: Windows XP; I/O: two RS232; Software: SARA2 Ver. 2.41VPM (Virtual Probe Minaturisation)		
Phantom	2mm wall thickness box phantom	N/A	N/A
	Shell Material: clear Perspex; Thickness: 2 ± 0.1 mm; Capacity: 152.5 x 225.5 x 200 (W x L x D) mm <sup>3</sup> ; Dielectric constant: less than 2.85 above 500MHz;		
Device holder	Material: clear Perspex; Dielectric constant: less than 2.85 above 500MHz	N/A	N/A
Simulated Tissue	Mixture	N/A	7/17/2007
	Please see section 3.2 for details		
Wideband Peak Power Meter/ Sensor	Anritsu ML2487A with MA2491A power sensor	EC396	11/13/2006
	Frequency Range: 100MHz~18GHz		
RF Power Meter	Boonton 4231A with 51011-EMC power sensor	EC359	03/21/2007
	Frequency Range: 0.03 to 8 GHz, <24dBm		
Vector Network Analyzer	HP 8753B HP 85046A	EC375	09/20/2006
	Frequency Range: 300k to 3GHz		
Signal Generator	R&S SMR27	EC354	11/15/2006
	Frequency Range: 10M to 27GHz, <120dBuV		

### 3.2 Tissue Simulating Liquid

The head and body tissue parameters should be used to test operating frequency band of transmitters. When a transmission band overlaps with one of the target frequencies, the tissue dielectric parameters of the tissue medium at the middle of a device transmission band should be within  $\pm 5\%$  of the parameters specified at that target frequency.


#### 3.2.1 Body Tissue Simulating Liquid for evaluation test

Body Ingredients Frequency (2.45 GHz)	
DGBE (Dilethylene Glycol Butyl Ether)	26.7%
Salt	0.04%
Water	73.2%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Frequency (MHz)	Temp. ( )	$\epsilon_r$ / Relative Permittivity			$\sigma$ / Conductivity (mho/m)			$\rho$ *(kg/m <sup>3</sup> )
		measured	target	( $\pm 5\%$ )	measured	target	( $\pm 5\%$ )	
2450	23.2	53.15	52.7	0.85%	1.96	1.95	0.51%	1000

\* Worst-case assumption

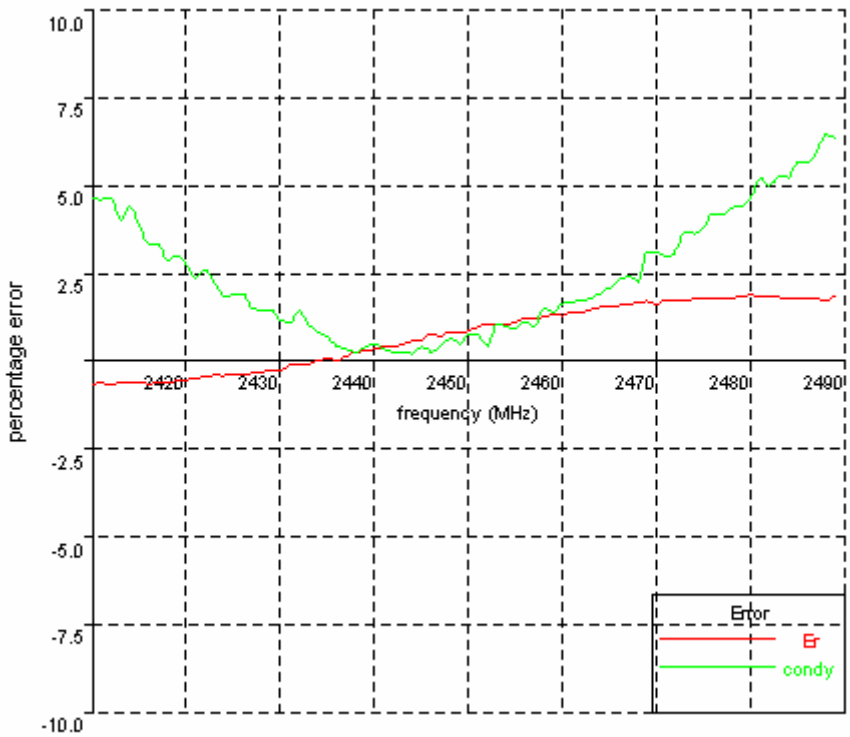



### **3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration**

Probe calibration factors and dipole antenna calibration are included in Appendix C.

#### 4.0 Measurement Uncertainty

The uncertainty budget has been determined for the INDEXSAR SARA2 measurement system according to IEEE P1528 documents [3] and is given in the following table. The extended uncertainty (95% confidence level) was assessed to be 20.6 % for SAR measurement, and the extended uncertainty (95% confidence level) was assessed to be 20.2 % for system performance check.

Table 1 Exposure Assessment Uncertainty  
**Example of measurement uncertainty assessment SAR measurement**

a	b			c	d	e			f	g	h	i
Uncertainty Component	Sec.	Tol. (+/-)		Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g		
		(dB)		(%)								
<b>Measurement System</b>												
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50	
Axial Isotropy	E2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0	0.00	0.00	
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	1	6.30	6.30	
Boundary effect	E2.3		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31	
Linearity	E2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	1	0.53	0.53	
System Detection Limits	E2.5		1	1.00	R	$\sqrt{3}$	1.73	1	1	0.58	0.58	
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00	
Response time	E2.7		0	0.00	R	$\sqrt{3}$	1.73	1	1	0.00	0.00	
Integration time	E2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	1	0.81	0.81	
RF Ambient Conditions	E6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73	
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	1	0.35	0.35	
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73	
SAR Evaluation Algorithms	E5		8	8.00	R	$\sqrt{3}$	1.73	1	1	4.62	4.62	
<b>Test Sample Related</b>												
Test Sample Positioning	E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00	
Device Holder Uncertainty	E4.1		2	2.00	N	1	1.00	1	1	2.00	2.00	
Output Power Variation	6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	1	2.89	2.89	
<b>Phantom and Tissue Parameters</b>												
Phantom Uncertainty (shape and thickness)	E3.1		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31	
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	0.43	1.85	1.24	
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47	
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	0.49	1.73	1.41	
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54	
Combined standard uncertainty					<b>RSS</b>					10.5	10.3	
Expanded uncertainty	(95% Confidence Level)				k=2					<b>20.6</b>	<b>20.3</b>	

Table 2 System Check (Verification)  
**Example of measurement uncertainty assessment for system performance check**

a	b	c			d	e	f	g	h	i	
Uncertainty Component	Sec.	Tol. (+/-)			Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g
		(dB)		(%)							
<b>Measurement System</b>											
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50
Axial Isotropy	E2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0	0.00	0.00
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	1	6.30	6.30
Boundary effect	E2.3		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Linearity	E2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	1	0.53	0.53
System Detection Limits	E2.5		1	1.00	R	$\sqrt{3}$	1.73	1	1	0.58	0.58
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00
Response time	E2.7		0	0.00	R	$\sqrt{3}$	1.73	1	1	0.00	0.00
Integration time	E2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	1	0.81	0.81
RF Ambient Conditions	E6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	1	0.35	0.35
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
SAR Evaluation Algorithms	E5		8	8.00	R	$\sqrt{3}$	1.73	1	1	4.62	4.62
<b>Dipole</b>											
Dipole axis to liquid distance	8, E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00
Input power and SAR drift measurement	8, 6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	1	2.89	2.89
<b>Phantom and Tissue Parameters</b>											
Phantom Uncertainty (thickness)	E3.1		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	0.43	1.85	1.24
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	0.49	1.73	1.41
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54
Combined standard uncertainty					<b>RSS</b>					10.3	10.1
Expanded uncertainty	(95% Confidence Level)				k=2					<b>20.2</b>	<b>19.9</b>



## **5.0 WARNING LABEL INFORMATION - USA**

See user manual.

## 6.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1999
- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Supplement C to OET Bulletin 65, Washington, D.C. 20554, 1997
- [3] IEEE Standards Coordinating Committee 34, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", IEEE Std 1528<sup>TM</sup>-2003
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 2 November 2005.
- [5] IEC 62209-1 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)



**7.0 Document Revision Record**

<b>Revision/ Job Number</b>	<b>Writer Initials</b>	<b>Date</b>	<b>Change</b>
TS08020045-EME	S.L	Feb. 18, 2008	Original document

## APPENDIX A - SAR Evaluation Data

**Power drift:** Power drift is the measurement of power drift of the device over one complete SAR scan.

To assess the drift of the power of the device under test, a SAR measurement was made in the middle of the zoom scan volume at the start of the scan and a measurement at this point was then also made after the measurement scan. The difference between the two measurements should be less than 5%.

Plot #1(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_Dell_per0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

0.00 0.02 0.04 0.06 0.08  
SAR (W/kg)

### ZOOM SCAN RESULTS:

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.017	0.019

**Change during Scan (%):** 2.18

**Max E-field (V/m):** 6.17

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.056	0.031


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-15.0	-157.0

Plot #1(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

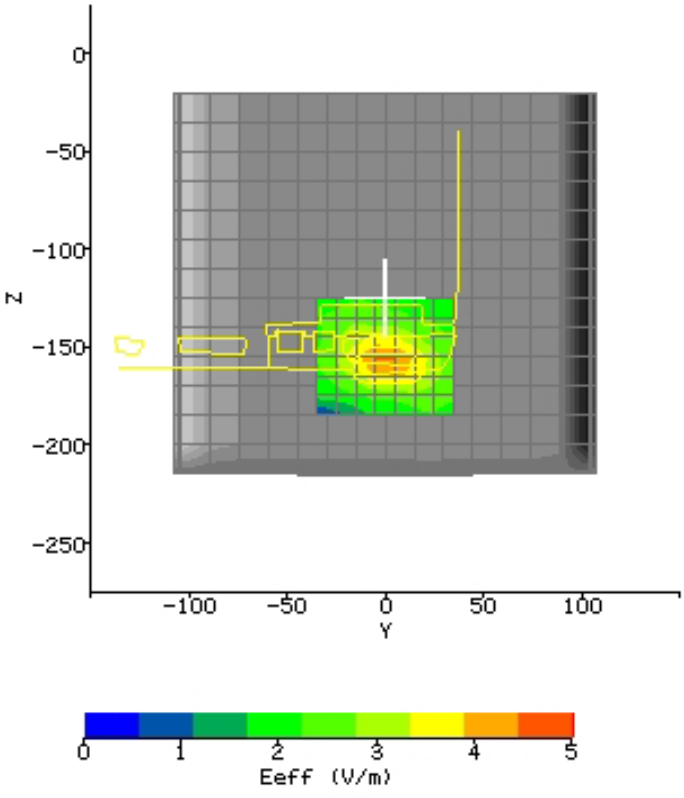

Plot #2(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_Dell_per0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.016	0.016

**Change during Scan (%):** 1.50

**Max E-field (V/m):** 5.54

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.046	0.025


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-16.0	-157.0

Plot #2(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

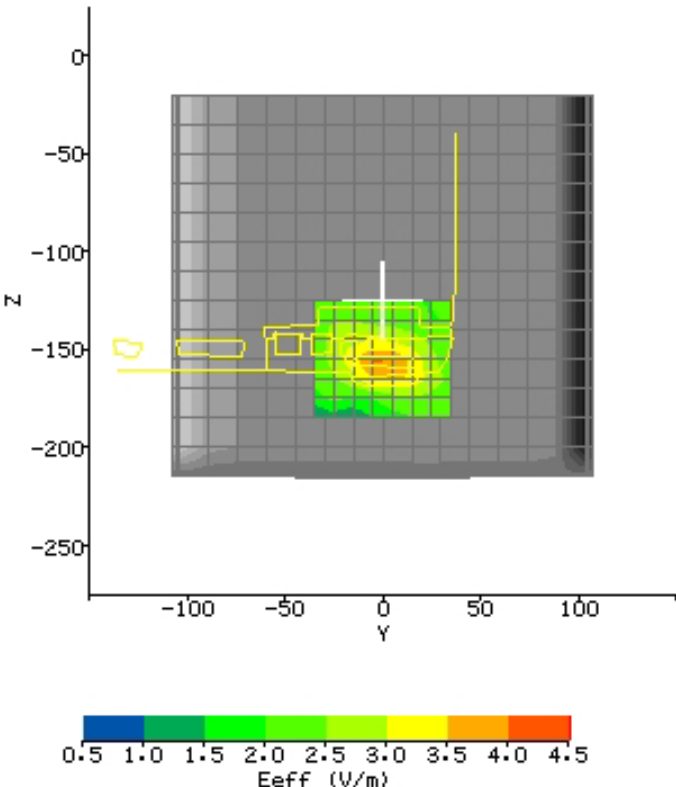



Plot #3(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_Dell_per0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.021	0.019

**Change during Scan (%):** -2.92

**Max E-field (V/m):** 6.00

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.055	0.030

**Location of Max (mm):**


<b>X</b>	<b>Y</b>	<b>Z</b>
78.1	-24.0	-156.0

Plot #3(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

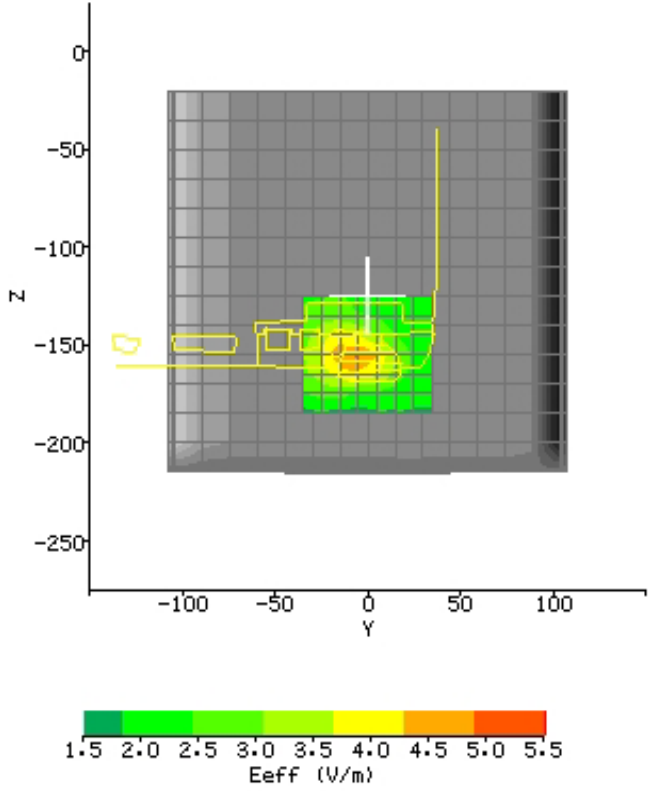

Plot #4(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_Dell_per0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

0.00 0.01 0.02 0.03 0.04 0.05 0.06  
SAR (W/kg)

### ZOOM SCAN RESULTS:

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.017	0.019

**Change during Scan (%):** 2.14

**Max E-field (V/m):** 5.51

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.047	0.026


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-25.0	-155.0

Plot #4(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

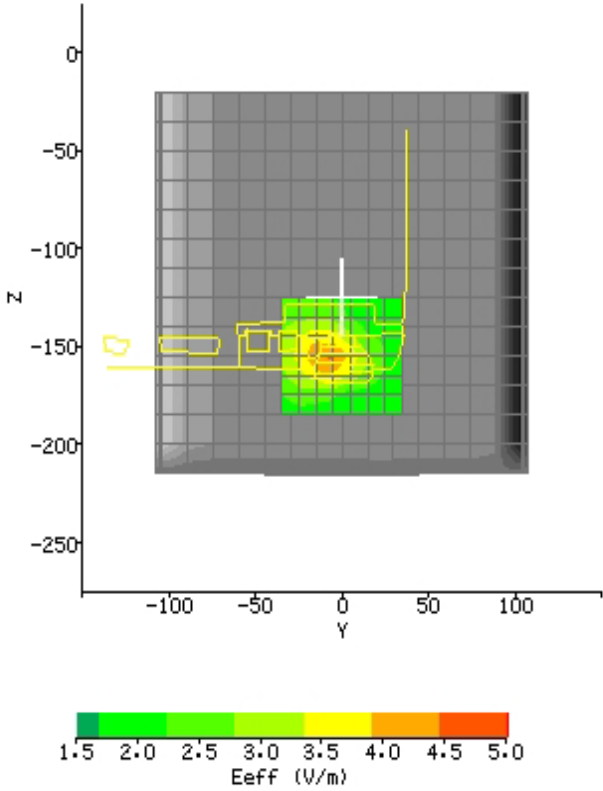

Plot #5(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_Dell_per15_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

0.004 0.008 0.012 0.016 0.020  
SAR (W/kg)

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.011	0.011

**Change during Scan (%):** 0

**Max E-field (V/m):** 3.10

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.017	0.013


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-24.0	-157.8

Plot #5(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

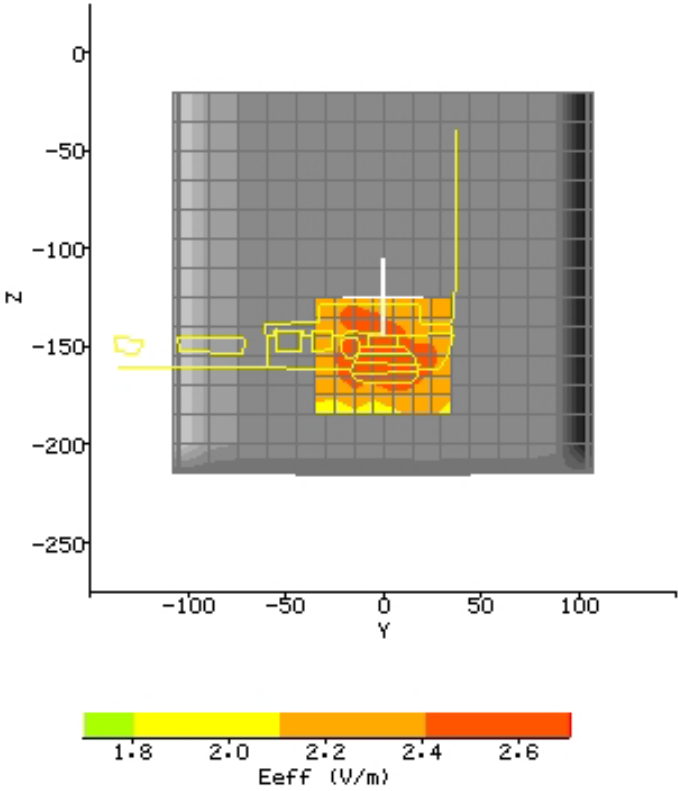

Plot #6(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_Dell_per15_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.011	0.011

**Change during Scan (%):** 0

**Max E-field (V/m):** 2.96

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.015	0.012


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-27.0	-158.3

Plot #6(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

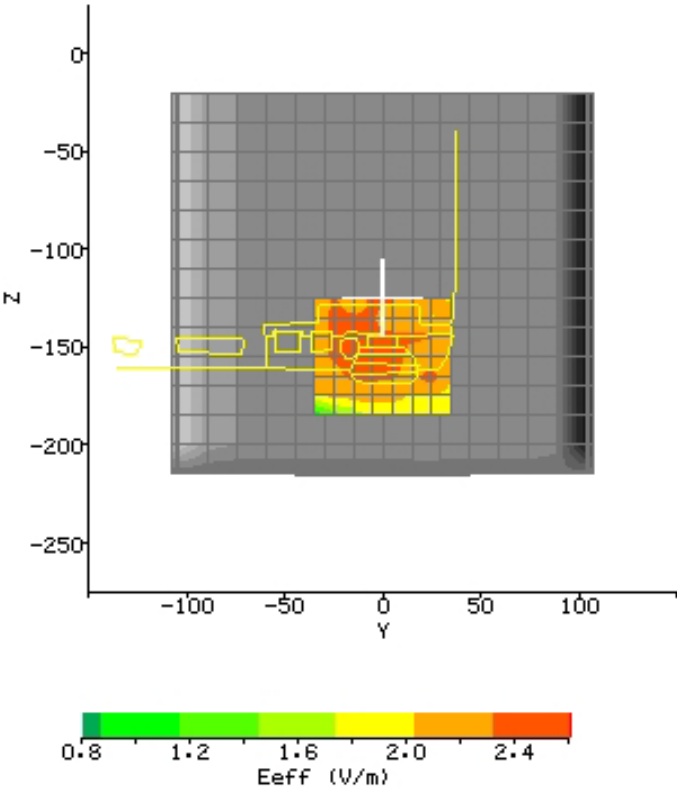



Plot #7(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_Dell_per15_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.011	0.011

**Change during Scan (%):** 0

**Max E-field (V/m):** 3.24

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.018	0.013


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-23.0	-155.8

Plot #7(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

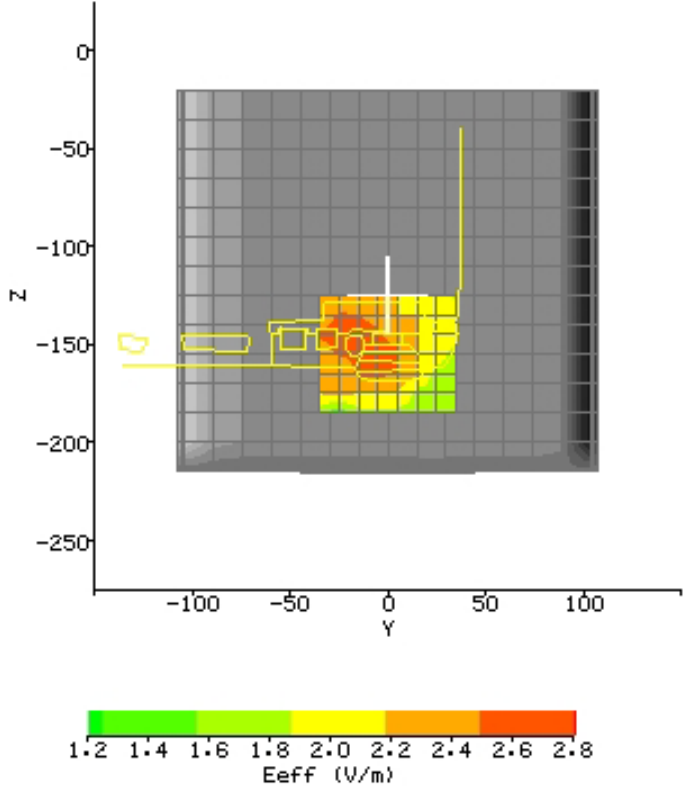

Plot #8(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_Dell_per15_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-per.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.008	0.008

**Change during Scan (%):** 0

**Max E-field (V/m):** 2.97

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.015	0.012


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-31.0	-152.1

Plot #8(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-185.0	-125.0	6.0

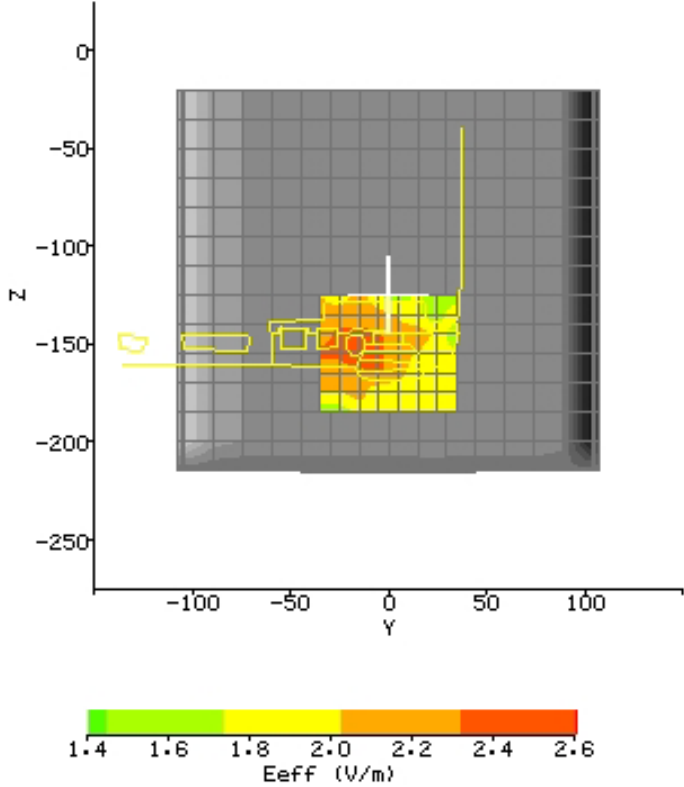

Plot #9(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_Dell_bot0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_Dell-bot.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

0.00 0.05 0.10 0.15 0.20 0.25 0.30 0.35  
SAR (W/kg)

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.071	0.073

**Change during Scan (%):** 2.00

**Max E-field (V/m):** 13.31

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.278	0.151


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	3.0	-163.1

Plot #9(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-190.0	-130.0	6.0

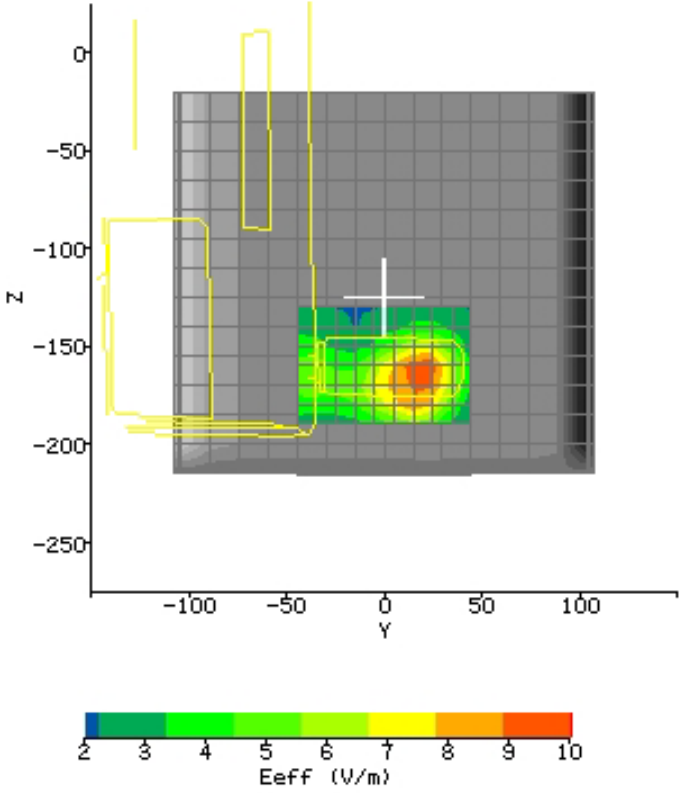

Plot #10(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_Dell_bot0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_Dell-bot.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.052	0.054

**Change during Scan (%):** 3.04

**Max E-field (V/m):** 11.47

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.206	0.113


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	3.0	-163.1

Plot #10(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-190.0	-130.0	6.0

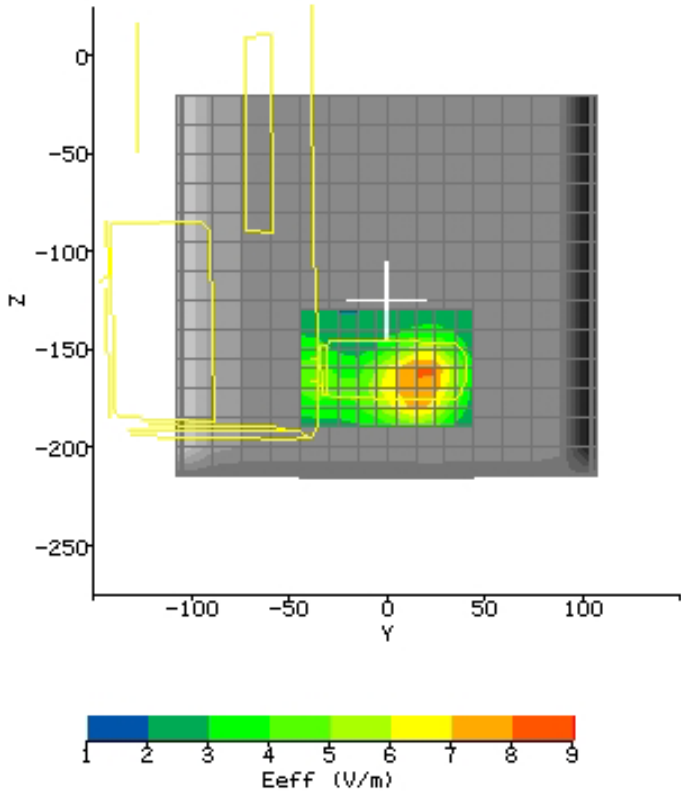




Plot #11(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_Dell_bot0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-bot.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

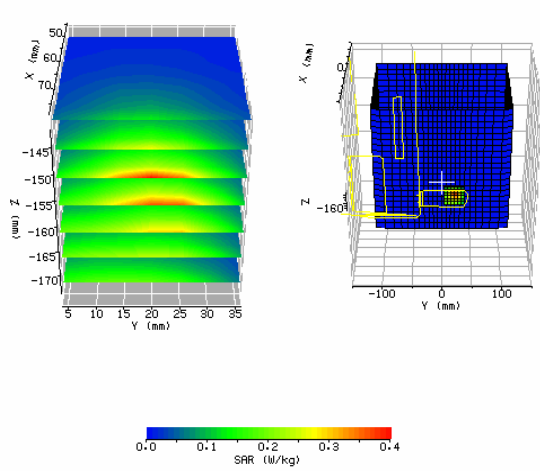

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.081	0.076

**Change during Scan (%):** -3.19

**Max E-field (V/m):** 14.14

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.288	0.146


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	4.0	-156.2

Plot #11(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-190.0	-130.0	6.0

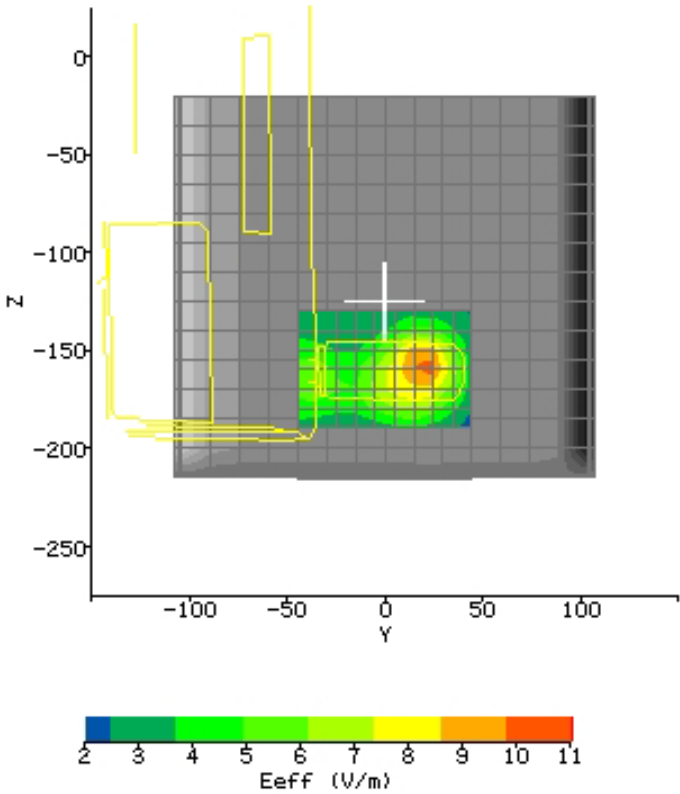

Plot #12(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_Dell_bot0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_Dell-bot.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.068	0.066

**Change during Scan (%):** -2.34

**Max E-field (V/m):** 12.81

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.239	0.121

**Location of Max (mm):**


<b>X</b>	<b>Y</b>	<b>Z</b>
78.1	4.0	-156.2

Plot #12(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-190.0	-130.0	6.0

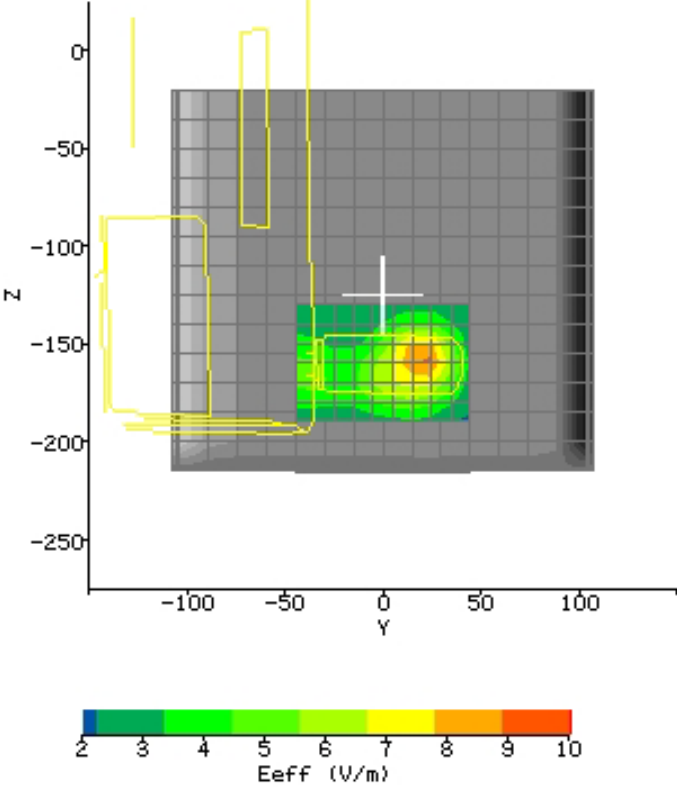

Plot #13(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_HP_per0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_HP-per.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.024	0.020

**Change during Scan (%):** -2.43

**Max E-field (V/m):** 7.01

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.073	0.038


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-21.0	-159.1

Plot #13(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-130.0	6.0

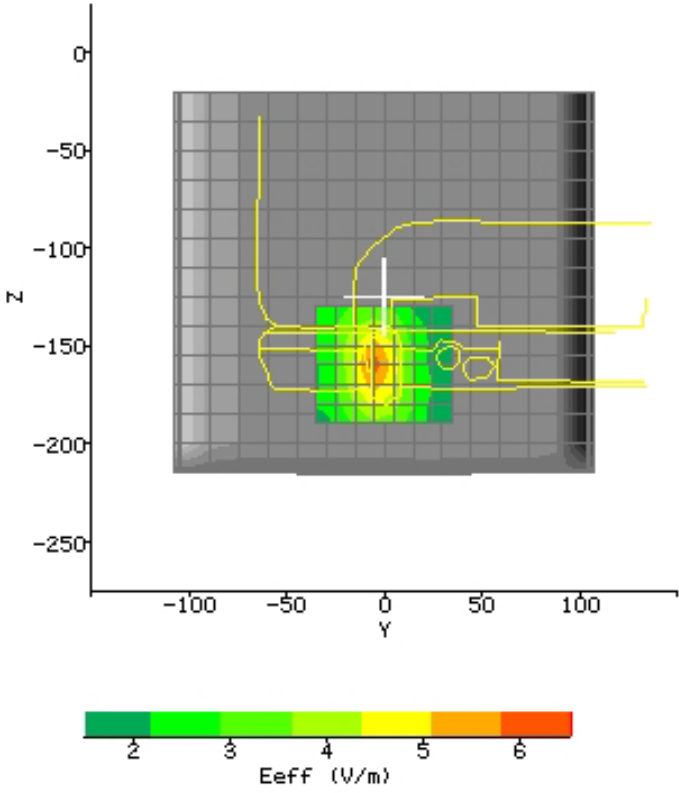

Plot #14(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_HP_per0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_HP-per.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.016	0.014

**Change during Scan (%):** -2.42

**Max E-field (V/m):** 5.93

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.053	0.028


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-21.0	-159.0

Plot #14(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-130.0	6.0

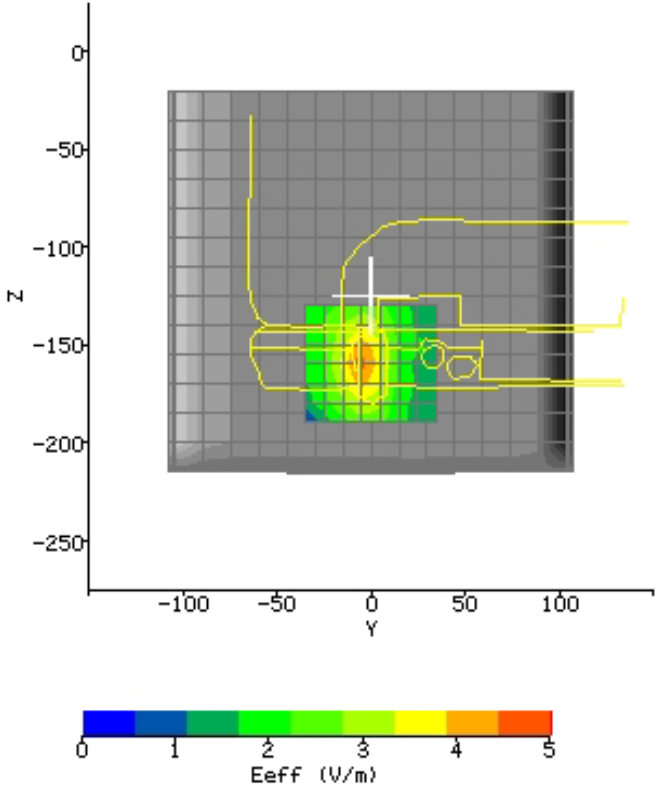



Plot #15(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_HP_per0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_HP-per.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.022	0.022

**Change during Scan (%):** 0

**Max E-field (V/m):** 7.20

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.077	0.040


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-20.0	-150.0

Plot #15(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-130.0	6.0

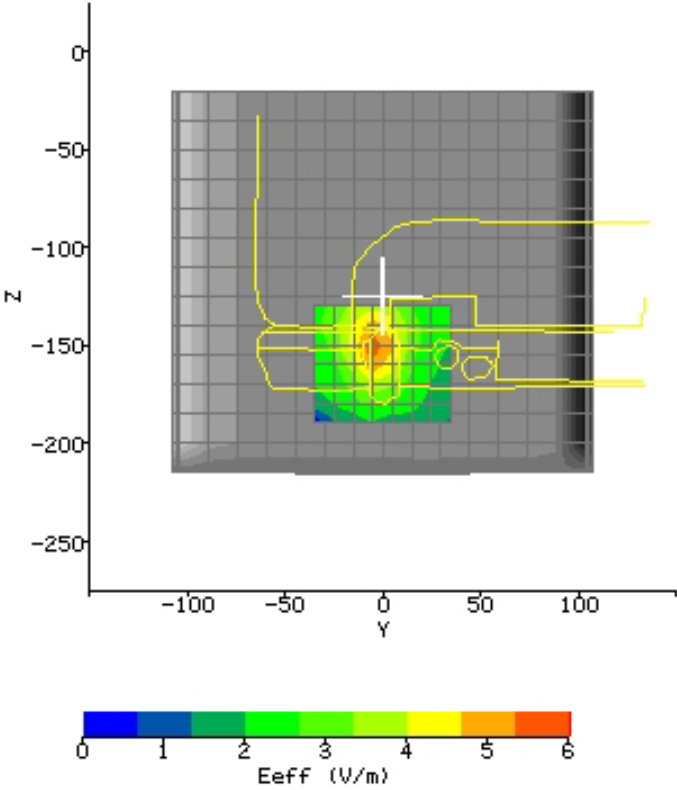

Plot #16(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_HP_per0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_HP-per.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.017	0.017

**Change during Scan (%):** 0

**Max E-field (V/m):** 6.10

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.055	0.029


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-20.0	-150.0

Plot #16(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-130.0	6.0

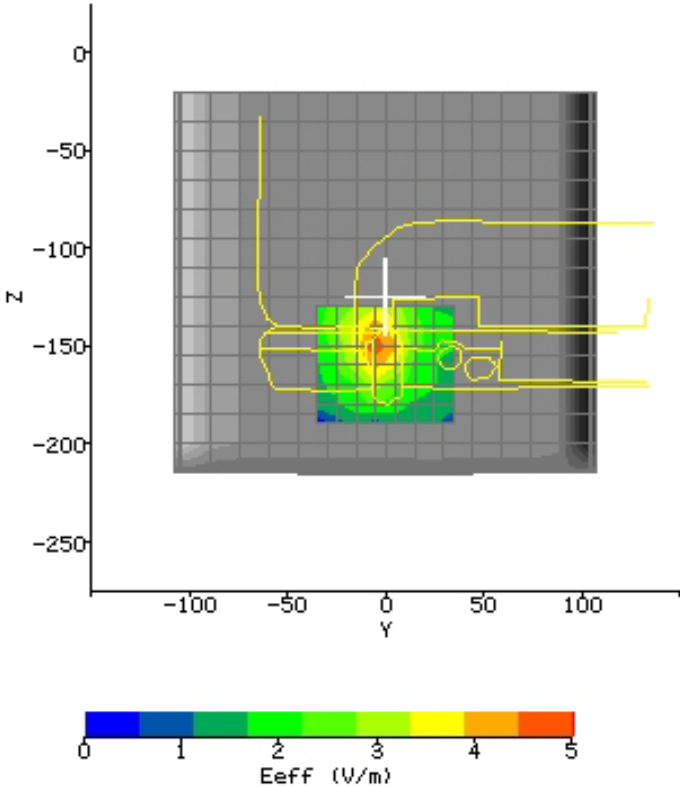

Plot #17(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_HP_per15_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_HP-per.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.005	0.006

**Change during Scan (%):** 3.27

**Max E-field (V/m):** 3.12

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.016	0.010


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-23.0	-141.8

Plot #17(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-180.0	-120.0	6.0

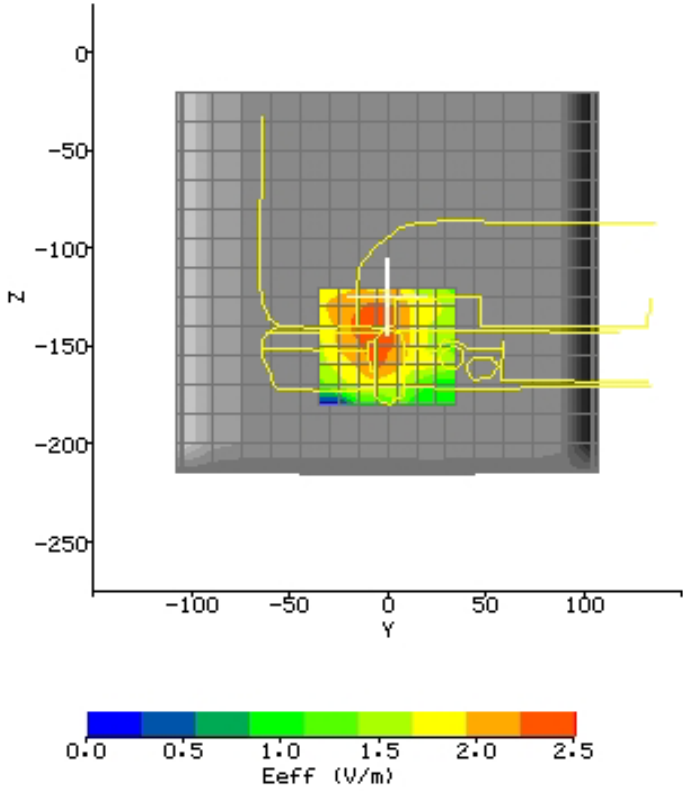

Plot #18(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_HP_bot0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_HP-bot.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.149	0.149

**Change during Scan (%):** 0

**Max E-field (V/m):** 19.70

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.518	0.240


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-36.0	-155.1

Plot #18(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	30.0	8.0
Z	-180.0	-120.0	6.0

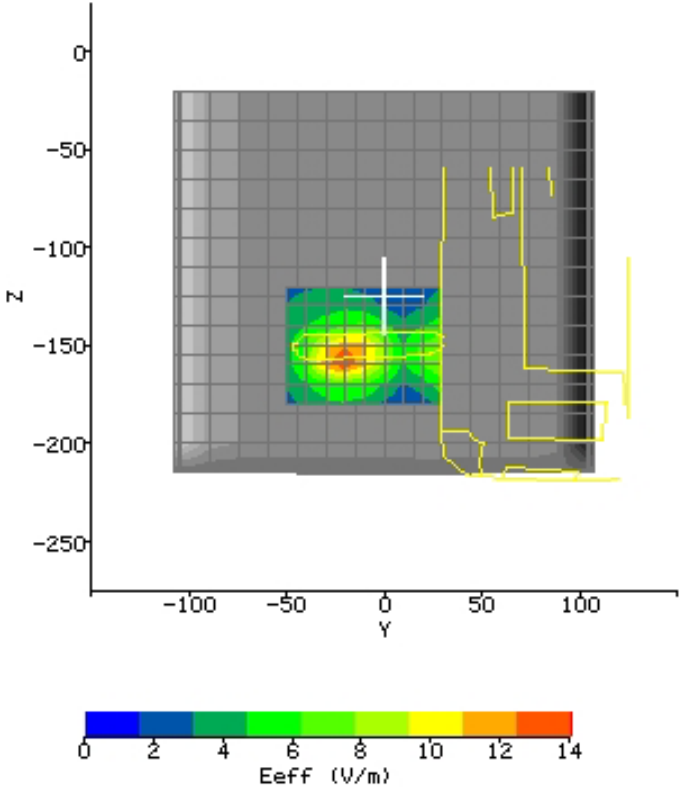



Plot #19(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_HP_bot0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_HP-bot.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.114	0.111

**Change during Scan (%):** -2.87

**Max E-field (V/m):** 17.04

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.386	0.179


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-36.0	-155.1

Plot #19(1/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	30.0	8.0
Z	-180.0	-120.0	6.0

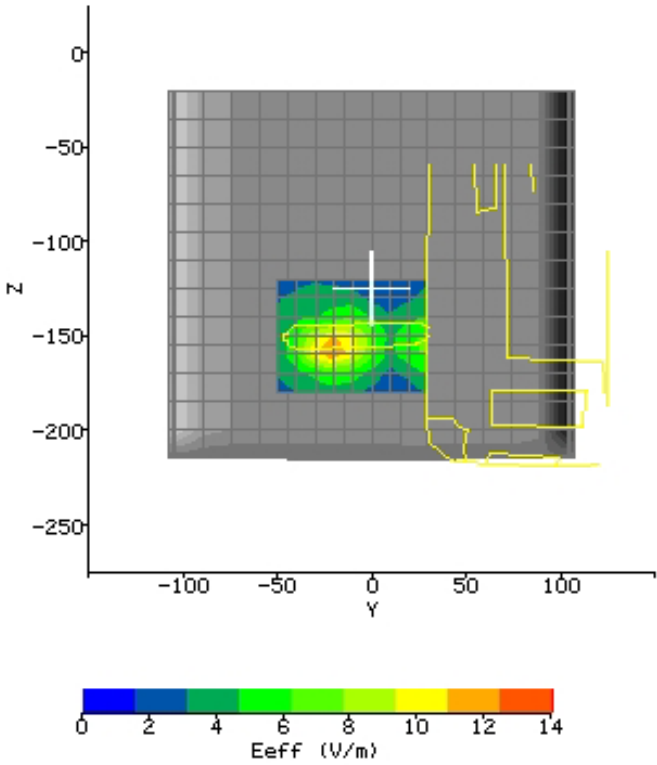

Plot #20(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_HP_bot0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_HP-bot.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <td></td> <td><b>X</b></td> <td><b>Y</b></td> <td><b>Z</b></td> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		<b>X</b>	<b>Y</b>	<b>Z</b>	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		<b>X</b>	<b>Y</b>	<b>Z</b>													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.035	0.035

**Change during Scan (%):** 0

**Max E-field (V/m):** 8.54

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.110	0.059


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-36.0	-155.2

Plot #20(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	30.0	8.0
Z	-180.0	-120.0	6.0

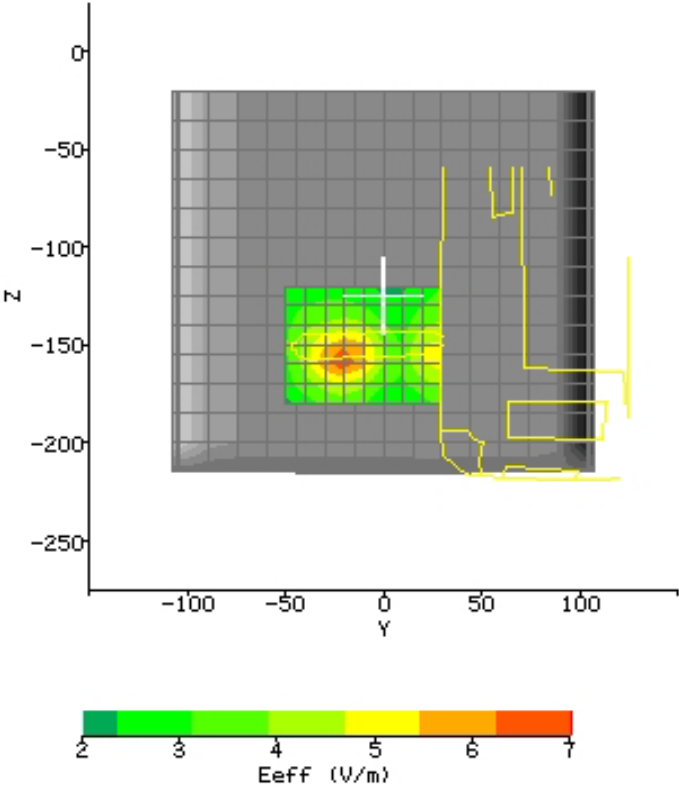

Plot #21(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_HP_bot0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_HP-bot.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.035	0.034

**Change during Scan (%):** -2.69

**Max E-field (V/m):** 8.81

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.113	0.059


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-36.0	-155.2

Plot #21(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	30.0	8.0
Z	-180.0	-120.0	6.0

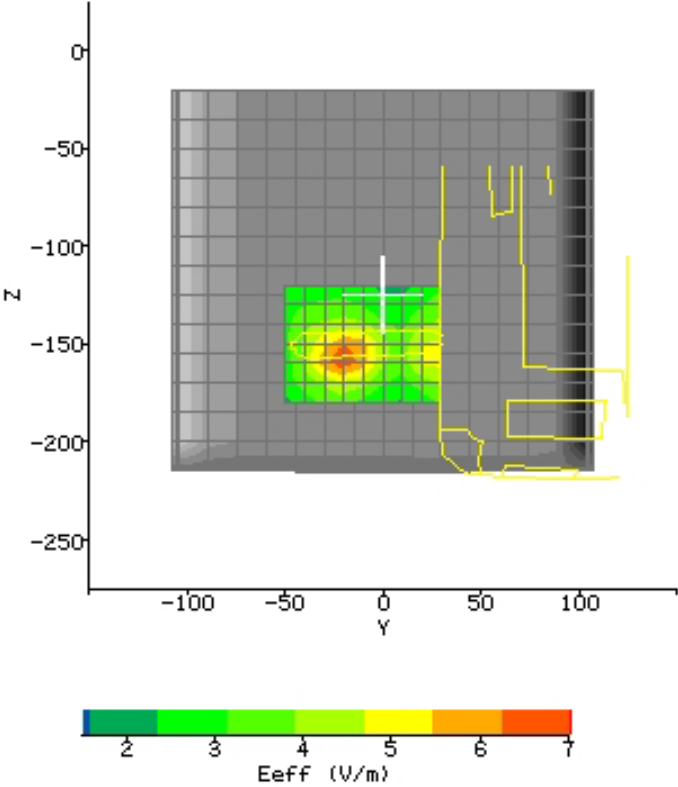

Plot #22(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_IBM_per0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_IBM-per.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.025	0.024

**Change during Scan (%):** -2.79

**Max E-field (V/m):** 6.98

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.074	0.039

**Location of Max (mm):**


<b>X</b>	<b>Y</b>	<b>Z</b>
78.1	-18.0	-152.0

Plot #22(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

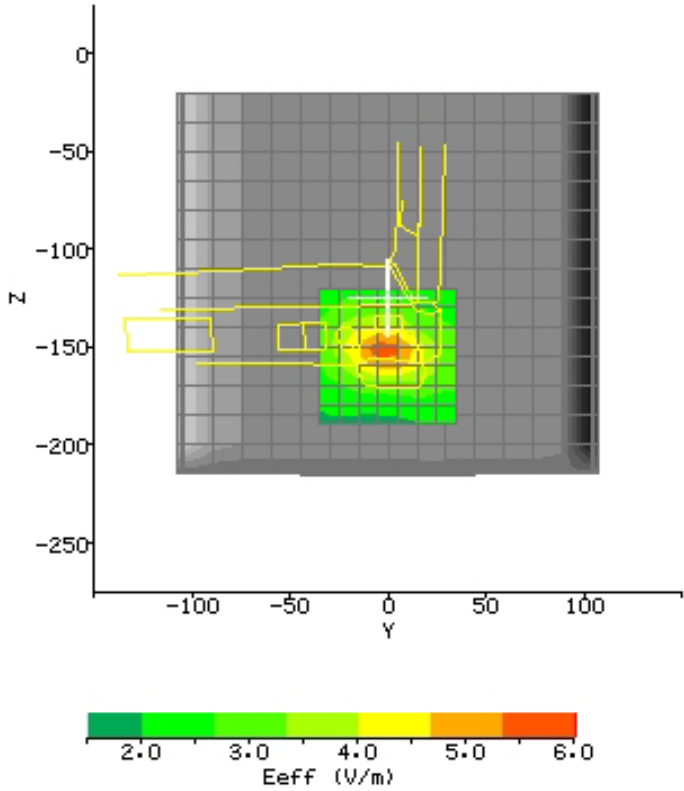



Plot #23(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_IBM_per0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_IBM-per.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.017	0.017

**Change during Scan (%):** 0

**Max E-field (V/m):** 6.04

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.055	0.030


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-17.0	-152.0

Plot #23(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

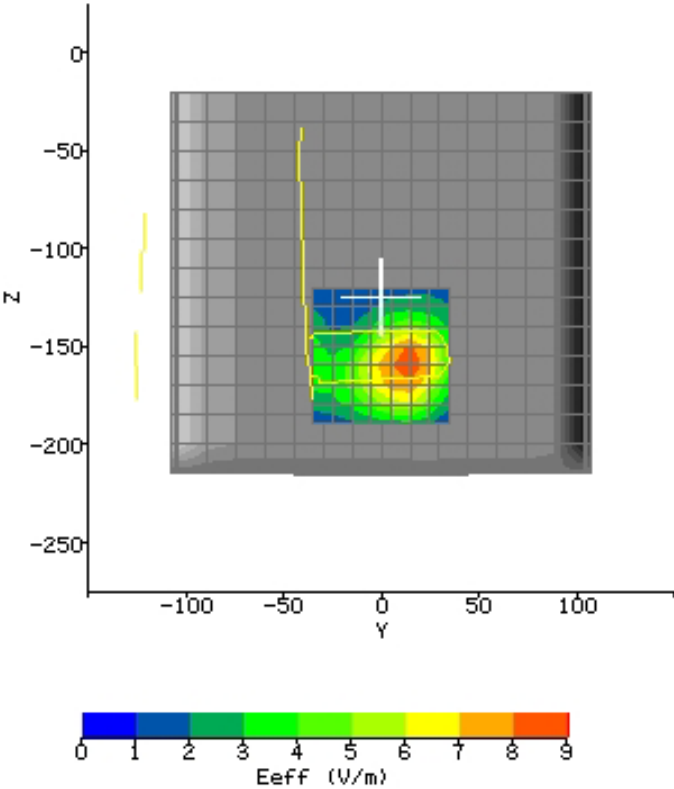

Plot #24(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_IBM_per0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_IBM-per.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.020	0.020

**Change during Scan (%):** 0

**Max E-field (V/m):** 6.63

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.066	0.036

**Location of Max (mm):**


<b>X</b>	<b>Y</b>	<b>Z</b>
78.0	-21.0	-151.0

Plot #24(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

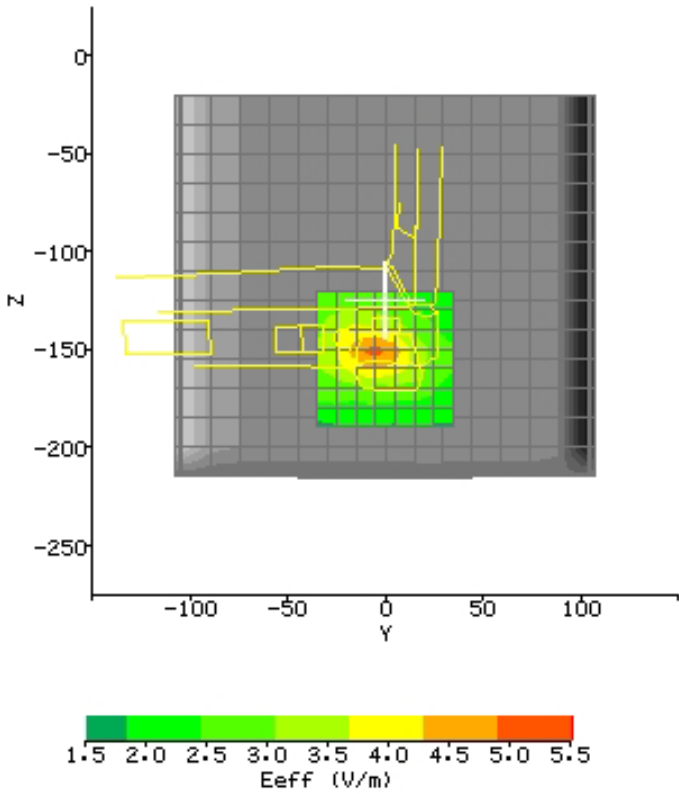

Plot #25(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 0mm to phantom
<b>Filename:</b>	WL-600_IBM_per0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_IBM-per.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.019	0.019

**Change during Scan (%):** 0

**Max E-field (V/m):** 5.98

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.054	0.030


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-23.0	-151.0

Plot #25(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

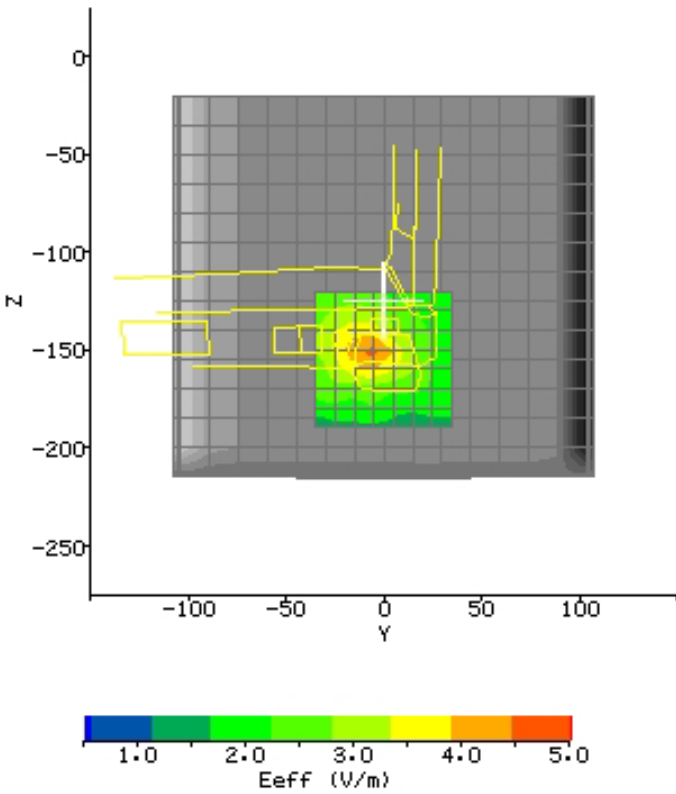

Plot #26(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Perpendicular 15mm to phantom
<b>Filename:</b>	WL-600_IBM_per15_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_IBM-per.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.011	0.009

**Change during Scan (%):** -3.09

**Max E-field (V/m):** 3.35

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.018	0.013


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-20.0	-150.2

Plot #26(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

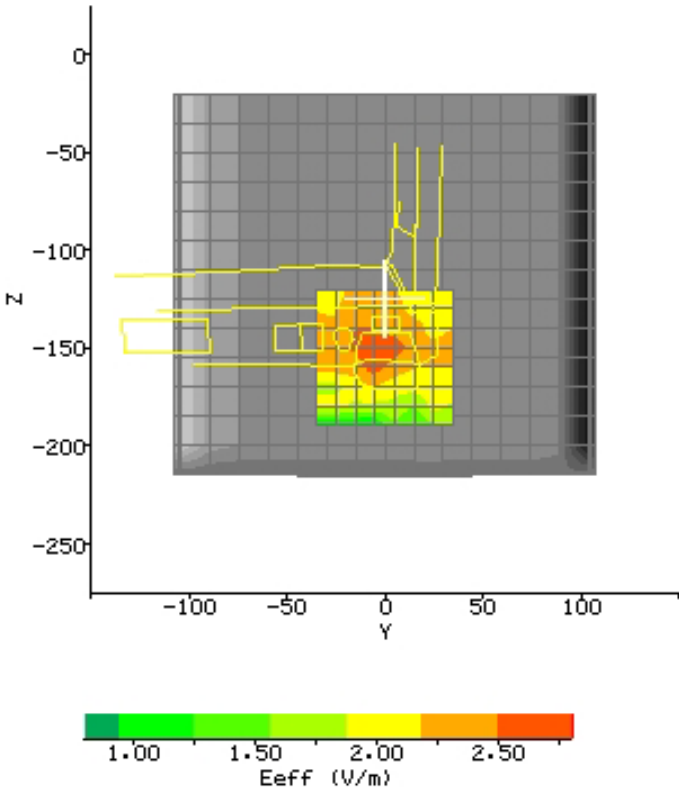



Plot #27(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_IBM_bot0_11b-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11b_2437 MHz
<b>Shape File:</b>	WL-600_IBM-bot.csv	<b>Power Level:</b>	20.13 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.074	0.073

**Change during Scan (%):** -1.91

**Max E-field (V/m):** 13.66

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.293	0.157


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-2.0	-157.1

Plot #27(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

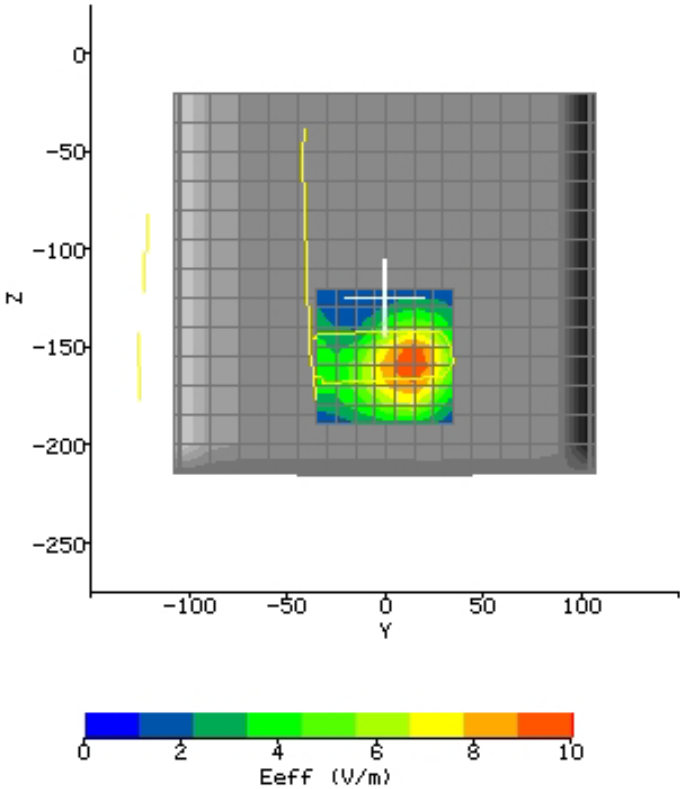

Plot #28(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_IBM_bot0_11g-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11g_2437 MHz
<b>Shape File:</b>	WL-600_IBM-bot.csv	<b>Power Level:</b>	25.68 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.055	0.054

**Change during Scan (%):** -2.57

**Max E-field (V/m):** 11.86

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.218	0.117


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-2.0	-157.2

Plot #28(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

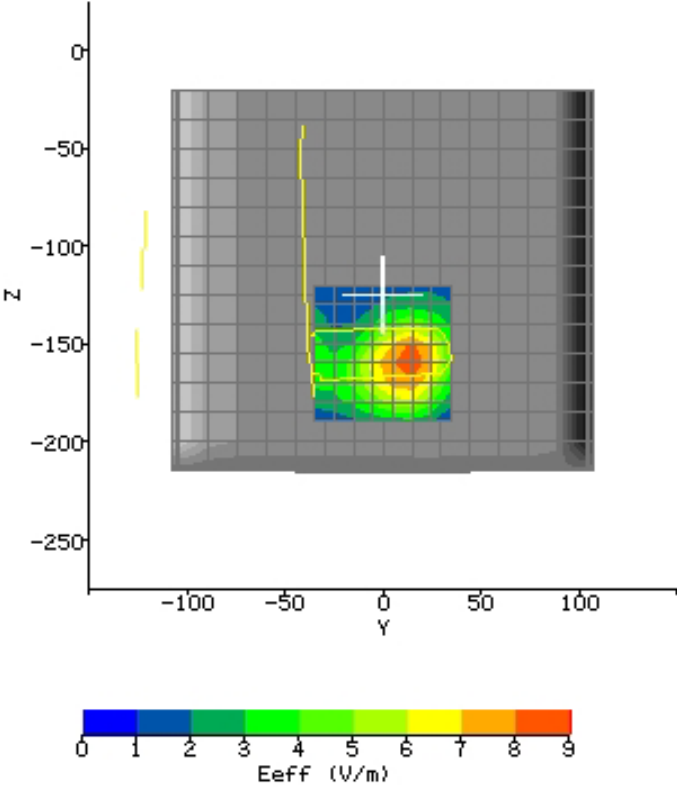


Plot #29(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_IBM_bot0_11n-20M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-20M_2437 MHz
<b>Shape File:</b>	WL-600_IBM-bot.csv	<b>Power Level:</b>	21.53 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </tbody> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

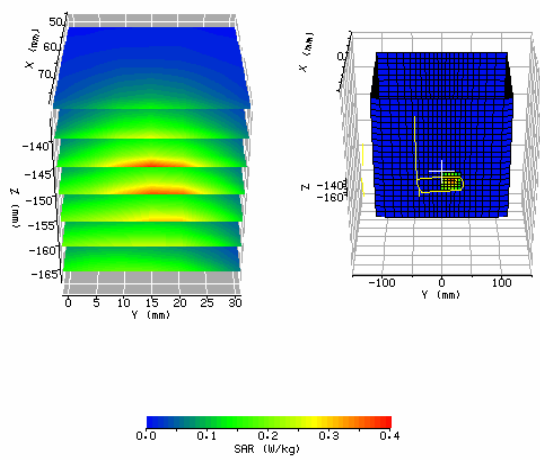

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.079	0.078

**Change during Scan (%):** -2.00

**Max E-field (V/m):** 13.93

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.287	0.148


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-1.0	-150.2

Plot #29(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

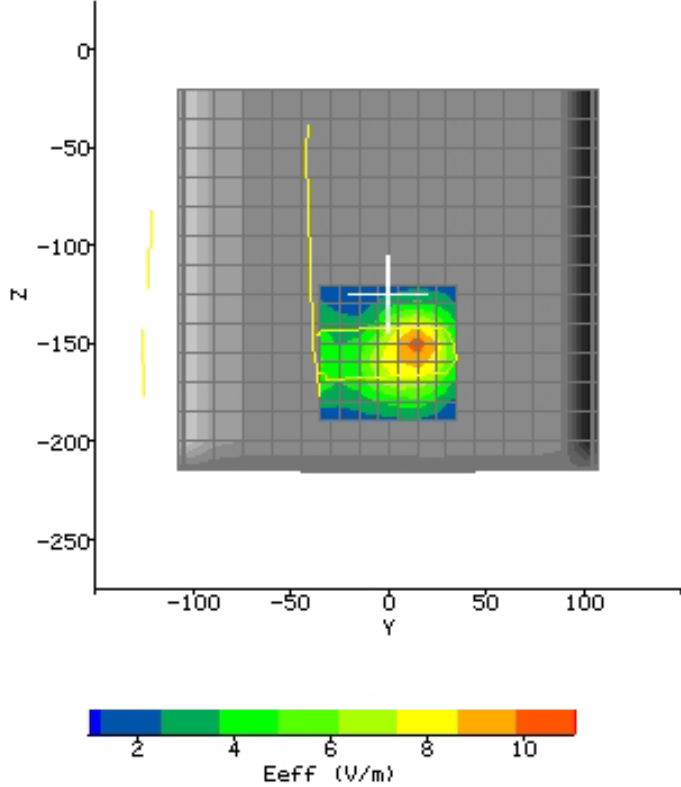


Plot #30(1/2)

<b>Date:</b>	2007/7/18	<b>Position:</b>	Bottom 0mm to phantom
<b>Filename:</b>	WL-600_IBM_bot0_11n-40M-ch6.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	WL-600	<b>Head Rotation:</b>	0
<b>Antenna:</b>	Printed Antenna	<b>Test Frequency:</b>	11n-40M_2437 MHz
<b>Shape File:</b>	WL-600_IBM-bot.csv	<b>Power Level:</b>	20.45 dBm

<b>Probe:</b>	0149																
<b>Cal File:</b>	SN0149_2450_CW_BODY																
<b>Cal Factors:</b>	<table border="1"> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td><b>Air</b></td> <td>367</td> <td>427</td> <td>405</td> </tr> <tr> <td><b>DCP</b></td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td><b>Lin</b></td> <td>.539</td> <td>.539</td> <td>.539</td> </tr> </table>		X	Y	Z	<b>Air</b>	367	427	405	<b>DCP</b>	20	20	20	<b>Lin</b>	.539	.539	.539
		X	Y	Z													
	<b>Air</b>	367	427	405													
	<b>DCP</b>	20	20	20													
<b>Lin</b>	.539	.539	.539														
<b>Amp Gain:</b>	2																
<b>Averaging:</b>	1																
<b>Batteries Replaced:</b>	-																

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450 MHz Body
<b>Conductivity:</b>	1.9648
<b>Relative Permittivity:</b>	53.152
<b>Liquid Temp (deg C):</b>	23
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	55
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.41VPM

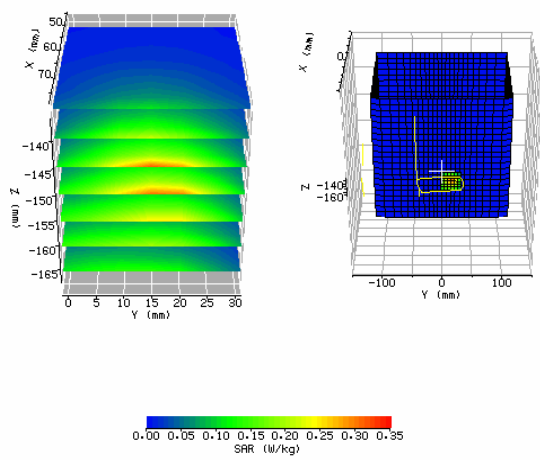

**ZOOM SCAN RESULTS:**

<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
	0.066	0.065

**Change during Scan (%):** -2.39

**Max E-field (V/m):** 12.58

<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
	0.237	0.120


<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-1.0	-150.2

Plot #30(2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-190.0	-120.0	7.0

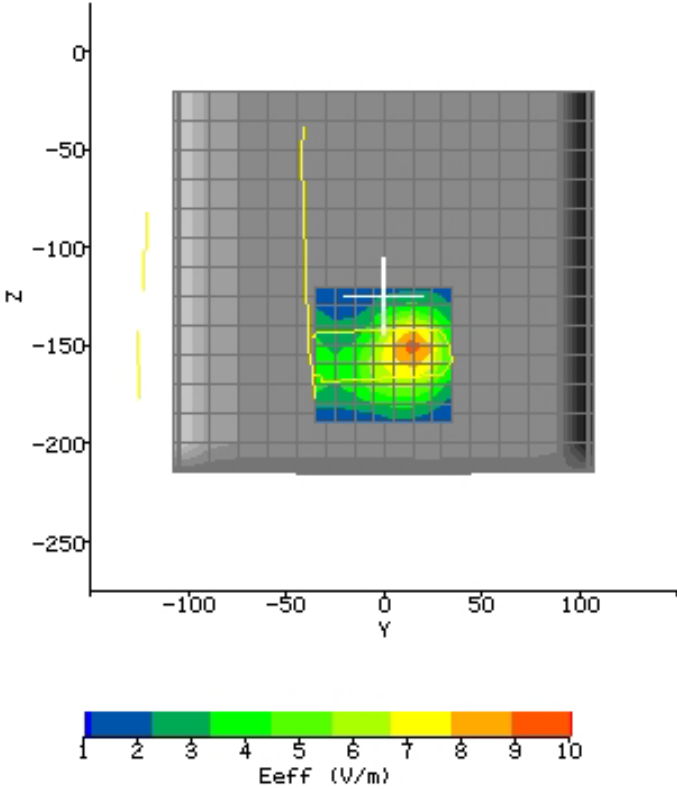



**APPENDIX B - Photographs**







**APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna  
Calibration Data**




IMMERSIBLE SAR PROBE

CALIBRATION REPORT

Part Number: IXP – 050

S/N 0149

March 2007

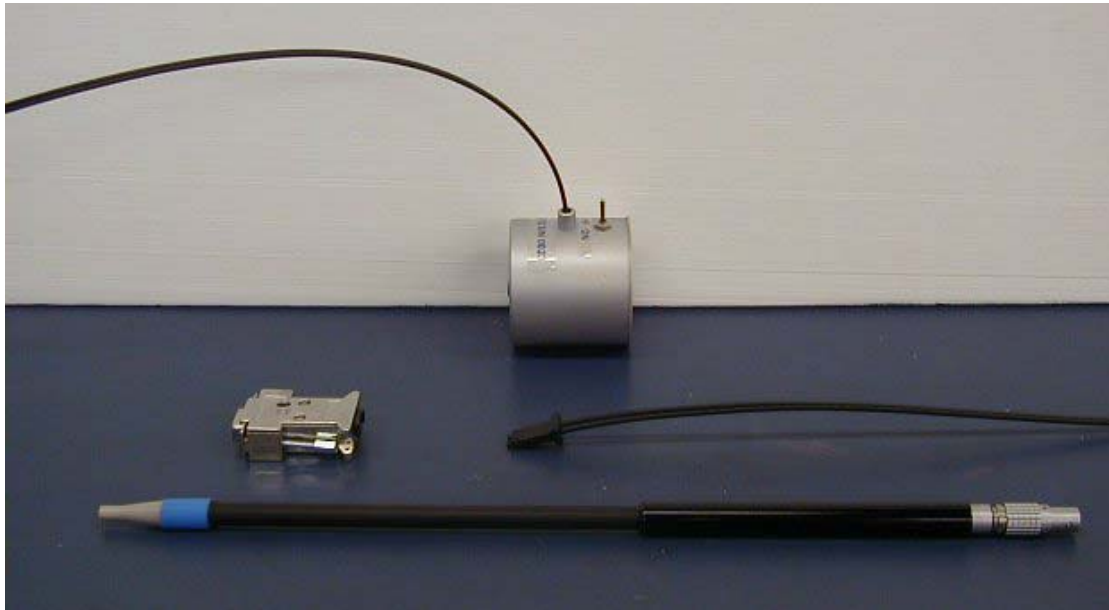

Indexsar Limited  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5BG  
Tel: +44 (0) 1306 632 870  
Fax: +44 (0) 1306 631 834  
e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)



**Indexsar Limited**  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5BG  
**Tel: +44 (0) 1306 632 870**  
**Fax: +44 (0) 1306 631 834**  
**e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)**  
Calibration Certificate 0703/0149  
Dosimetric E-field Probe

Type: **IXP-050**

Manufacturer: **IndexSAR, UK**

Serial Number: **0149**

Place of Calibration: **IndexSAR, UK**

***IndexSAR Limited hereby declares that the IXP-050 Probe named above has been calibrated for conformity to the IEEE 1528 and CENELEC EN 50361 standards on the date shown below.***

Date of Initial Calibration: **7<sup>th</sup> March 2007**

***The probe named above will require a calibration check on the date shown below.***

Next Calibration Date: **March 2008**

***The calibration was carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.***

Calibrated By:

Handwritten signature of A. Brinklow in black ink.

Approved By:

Handwritten signature of M.J. Mann in black ink.

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.

## INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0149) and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of CENELEC [1] and IEEE [2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

### CALIBRATION PROCEDURE

#### 1. Objectives

The calibration process comprises four stages

Determination of the channel sensitivity factors which optimise the probe's overall rotational isotropy in 1800MHz brain fluid

Determination of the channel sensitivity factors and angular offset of the X channel which together optimise the probe's spherical isotropy in 1800MHz brain fluid

Numerical combination of the two sets of channel sensitivity factors to give both acceptable rotational isotropy and acceptable spherical isotropy values

At each frequency of interest, application of these channel sensitivity factors to model the exponential decay of SAR in a waveguide fluid cell, and hence derive the liquid conversion factors at that frequency

#### 2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{o/p}$  is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are V\*200).

In turn, measurements of E-field are determined using the following equation (where output voltages are also in units of V\*200):

$$\begin{aligned} E_{liq}^2 \text{ (V/m)} = & U_{linx} * \text{Air Factor}_x * \text{Liq Factor}_x \\ & + U_{liny} * \text{Air Factor}_y * \text{Liq Factor}_y \\ & + U_{linz} * \text{Air Factor}_z * \text{Liq Factor}_z \end{aligned} \quad (3)$$

Here, "Air Factor" represents each channel's sensitivity, while "Liq Factor" represents the

enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

### 3. Selecting channel sensitivity factors to optimise isotropic response

After manufacture, the first stage of the calibration process is to balance the three channels' Air Factor values, thereby optimising the probe's overall axial response ("rotational isotropy").

To do this, a 1800MHz waveguide containing head-fluid simulant is selected. Like all waveguides used during probe calibration, this particular waveguide contains two distinct sections: an air-filled launcher section, and a liquid cell section, separated by a dielectric matching window designed to minimise reflections at the air-liquid interface.

The waveguide stands in an upright position and the liquid cell section is filled with 1800MHz brain fluid to within 10 mm of the open end. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects.

During the measurement, a  $TE_{01}$  mode is launched into the waveguide by means of an N-type-to-waveguide adapter. The probe is then lowered vertically into the liquid until the tip is exactly 10mm above the centre of the dielectric window. This particular separation ensures that the probe is operating in a part of the waveguide where boundary corrections are not necessary.

Care must also be taken that the probe tip is centred while rotating.

The exact power applied to the input of the waveguide during this stage of the probe calibration is immaterial since only relative values are of interest while the probe rotates. However, the power must be sufficiently above the noise floor and free from drift.

The dedicated Indexsar calibration software rotates the probe in 10 degree steps about its axis, and at each position, an Indexsar 'Fast' amplifier samples the probe channels 500 times per second for 0.4 s. The raw  $U_{o/p}$  data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable.  $U_{linx}$ ,  $U_{liny}$  and  $U_{linz}$  are derived from the raw  $U_{o/p}$  values and written to an Excel template.

Once data have been collected from a full probe rotation, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the rotational isotropy. This automated approach to optimisation removes the effect of human bias.

Figure 5 represents the output from each diode sensor as a function of probe rotation angle.

### 4. Measurement of Spherical Isotropy

The setup for measuring the probe's spherical isotropy is shown in Figure 2.

A box phantom containing 1800MHz head fluid is irradiated by a vertically-polarised, tuned dipole, mounted to the side of the phantom on the robot's seventh axis. During calibration, the spherical response is generated by rotating the probe about its axis in 20 degree steps and changing the dipole polarisation in 10 degree steps.

By using the VPM technique discussed below, an allowance can also be made for the effect of E-field gradient across the probe's spatial extent. This permits values for the probe's effective tip radius and X-channel angular offset to be modelled until the overall spherical isotropy figure is optimised.

The dipole is connected to a signal generator and amplifier via a directional coupler and power meter. As with the determination of rotational isotropy, the absolute power level is not important as long as it is stable.

The probe is positioned within the fluid so that its sensors are at the same vertical height as the centre of the source dipole. The line joining probe to dipole should be perpendicular to the phantom wall, while the horizontal separation between the two should be small enough for VPM corrections to be applicable, without encroaching near the boundary layer of the phantom wall. VPM corrections require a knowledge of the fluid skin depth. This is measured during the calibration by recording the E-field strength while systematically moving the probe away from the dipole in 2mm steps over a 20mm range.

The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format, a representative image of which is shown in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

5. Determination of Conversion (“Liquid”) Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with height above a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance (*z*) from the dielectric separator is given by Equation 4:

$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \tag{4}$$

Here, the density  $\rho$  is conventionally assumed to be 1000 kg/m<sup>3</sup>, *ab* is the cross-sectional area of the waveguide, and *P<sub>f</sub>* and *P<sub>b</sub>* are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $\delta$  (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[ \text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_o(\sigma + j\omega\epsilon_o\epsilon_r)} \right\} \right]^{-1} \tag{5}$$

where  $\sigma$  is the conductivity of the tissue-simulant liquid in S/m,  $\epsilon_r$  is its relative permittivity, and  $\omega$  is the radial frequency (rad/s). Values for  $\sigma$  and  $\epsilon_r$  are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].  $\sigma$  and  $\epsilon_r$  are both temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at 22 ± 2.0°C; if this is not possible, the values of  $\sigma$  and  $\epsilon_r$  should reflect the actual



temperature. Values employed for calibration are listed in the tables below.

By ensuring the liquid height in the waveguide is at least three penetration depths, reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 835/900MHz, 1800/1900MHz, 2450MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

During calibration, the probe is lowered carefully until it is just touching the cross-sectional centre of the dielectric window. 200 samples are then taken and written to an Excel template file before moving the probe vertically upwards. This cycle is repeated 150 times. The vertical separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 0.2mm steps at low frequency, through 0.1mm at 2450MHz, down to 0.05mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimises the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.

For 450 MHz calibrations, a slightly different technique must be used — the equatorial response of the probe-under-test is compared with the equivalent response of a probe whose 450MHz characteristics have already been determined by NPL. The conversion factor of the probe-under-test can then be deduced.

#### VPM (Virtual Probe Miniaturisation)

SAR probes with 3 diode-sensors in an orthogonal arrangement are designed to display an isotropic response when exposed to a uniform field. However, the probes are ordinarily used for measurements in non-uniform fields and isotropy is not assured when the field gradients are significant compared to the dimensions of the tip containing the three orthogonally-arranged dipole sensors.

It becomes increasingly important to assess the effects of field gradients on SAR probe readings when higher frequencies are being used. For Indexsar IXP-050 probes, which are of 5mm tip diameter, field gradient effects are minor at GSM frequencies, but are major above 5GHz. Smaller probes are less affected by field gradients and so probes, which are significantly less than 5mm diameter, would be better for applications above 5GHz.

The IndexSAR report IXS0223 describes theoretical and experimental studies to evaluate the issues associated with the use of probes at arbitrary angles to surfaces and field directions. Based upon these studies, the procedures and uncertainty analyses referred to in P1528 are addressed for the full range of probe presentation angles.

In addition, generalized procedures for correcting for the finite size of immersible SAR probes are developed. Use of these procedures enables application of schemes for virtual probe miniaturization (VPM) – allowing probes of a specific size to be used where physically-

smaller probes would otherwise be required.

Given the typical dimensions of 3-channel SAR probes presently available, use of the VPM technique extends the satisfactory measurement range to higher frequencies.


#### CALIBRATION FACTORS MEASURED FOR PROBE S/N 0149

*The probe was calibrated at 450, 900, 1800, 1900, 2450 MHz in liquid samples representing brain and body liquid at these frequencies. In addition, the calibration factors for 2500 MHz were estimated using extrapolation.*

*The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.*

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 8).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

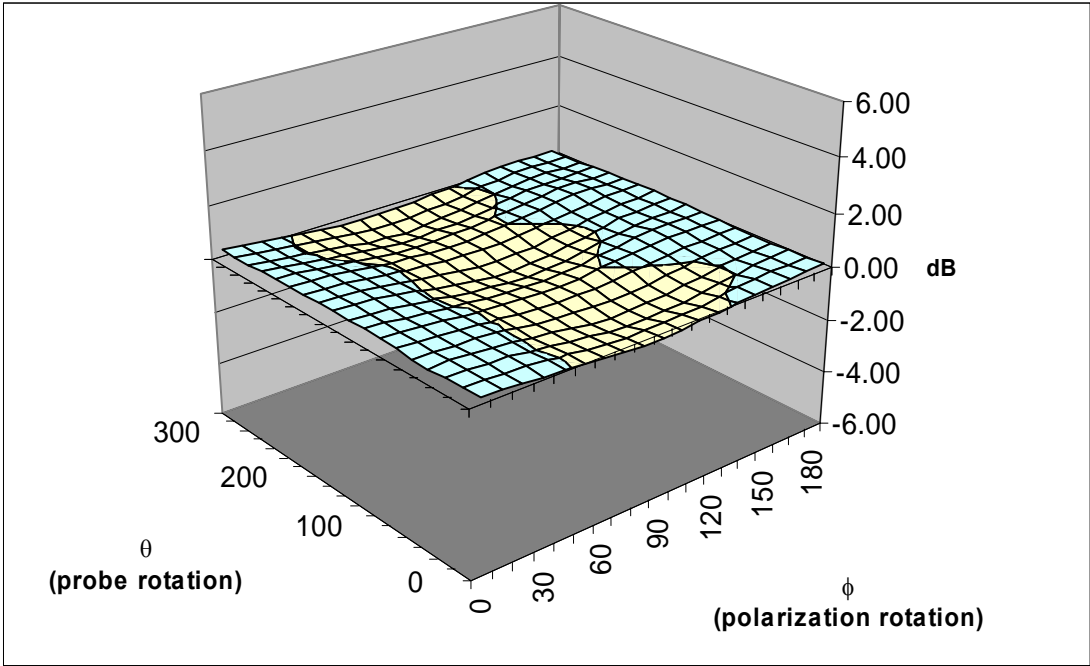

**Surface Isotropy diagram of IXP-050 Probe S/N 0149 at 1800MHz after VPM** (rotational isotropy axial +/-0.10dB, spherical isotropy +/-0.37dB)

Probe tip radius 1.25  
 X Ch. Angle to red dot -0.9

Frequency	Head		Body	
	Bdy. Corr. – f(0)	Bdy. Corr. – d(mm)	Bdy. Corr. – f(0)	Bdy. Corr. – d(mm)
<b>450</b>	-	-	-	-
<b>900</b>	0.97	1.4	1.47	1.1
<b>1800</b>	1.07	1.3	0.89	1.5
<b>1900</b>	1.03	1.4	0.87	1.6
<b>2450</b>	0.95	1.4	0.65	1.9
<b>2500</b>	0.94 <sup>†</sup>	1.4 <sup>†</sup>	0.64 <sup>†</sup>	1.9 <sup>†</sup>

<sup>†</sup> Estimated by extrapolation



SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0149

Spherical isotropy measured at 900MHz	0.37	(+/-) dB
---------------------------------------	------	----------

	X	Y	Z	
Air Factors	367	427	405	(V*200)
CW DCPs	20	20	20	(V*200)

Freq (MHz)	Axial Isotropy		SAR ConvF		Notes
	(+/- dB)		(liq/air)		
	Head	Body	Head	Body	
450	-	-	0.372	0.372	1,3
900	-	-	0.351	0.353	1,2
1800	0.10	-	0.412	0.468	1,2
1900	-	-	0.426	0.473	1,2
2450	-	-	0.472	0.539	1,2
2500	-	-	0.475 <sup>†</sup>	0.545 <sup>†</sup>	4

<sup>†</sup> Estimated by extrapolation

Notes	
1)	Calibrations done at 22°C +/-2°C
2)	Waveguide calibration
3)	Transfer calibration against NPL reference probe
4)	Estimated by extrapolation

PROBE SPECIFICATIONS

Indexsar probe 0149, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

Dimensions	S/N 0149	CENELEC [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

Dynamic range	S/N 0149	CENELEC [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to > 100 W/kg on representative probes	>100	>100	100

Isotropy (measured at 900MHz)	S/N 0149	CENELEC [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB)	0.10 (See table above)	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.37	1.0	0.50

Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
Chemical resistance	Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.

## REFERENCES

[1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.

[2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.



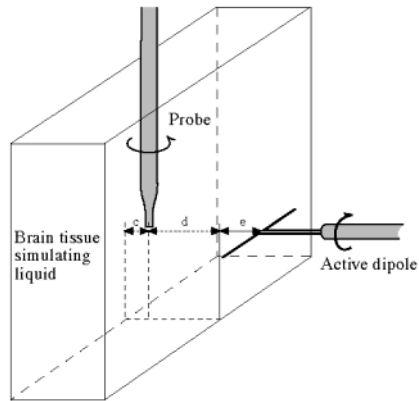


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

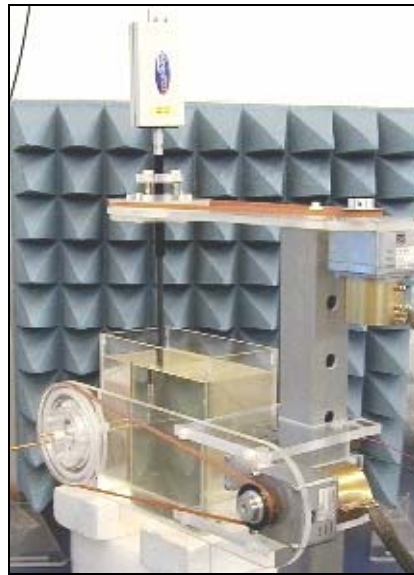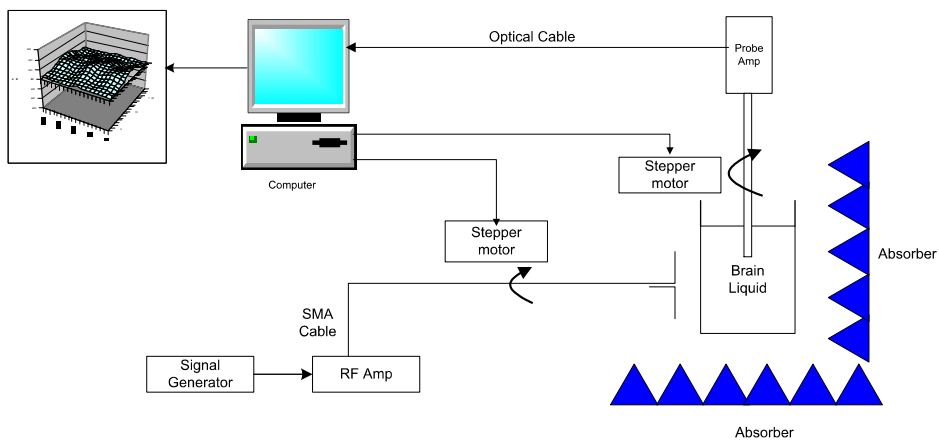

**Figure 2. Schematic diagram of the test geometry used for isotropy determination**

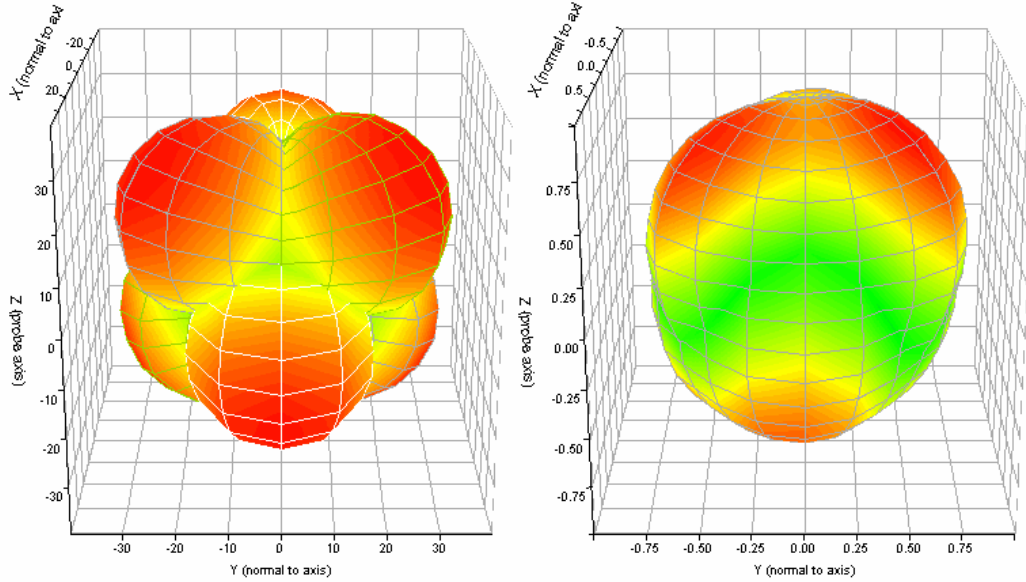


Figure 3. Graphical representation of the probe’s response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For probe S/N 0149, this range is (+/-) 0.37dB.

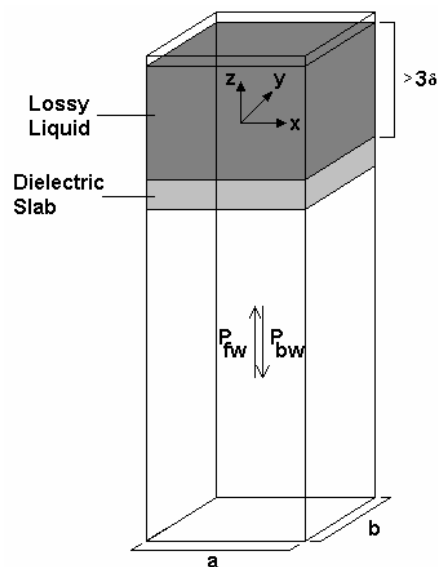




Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

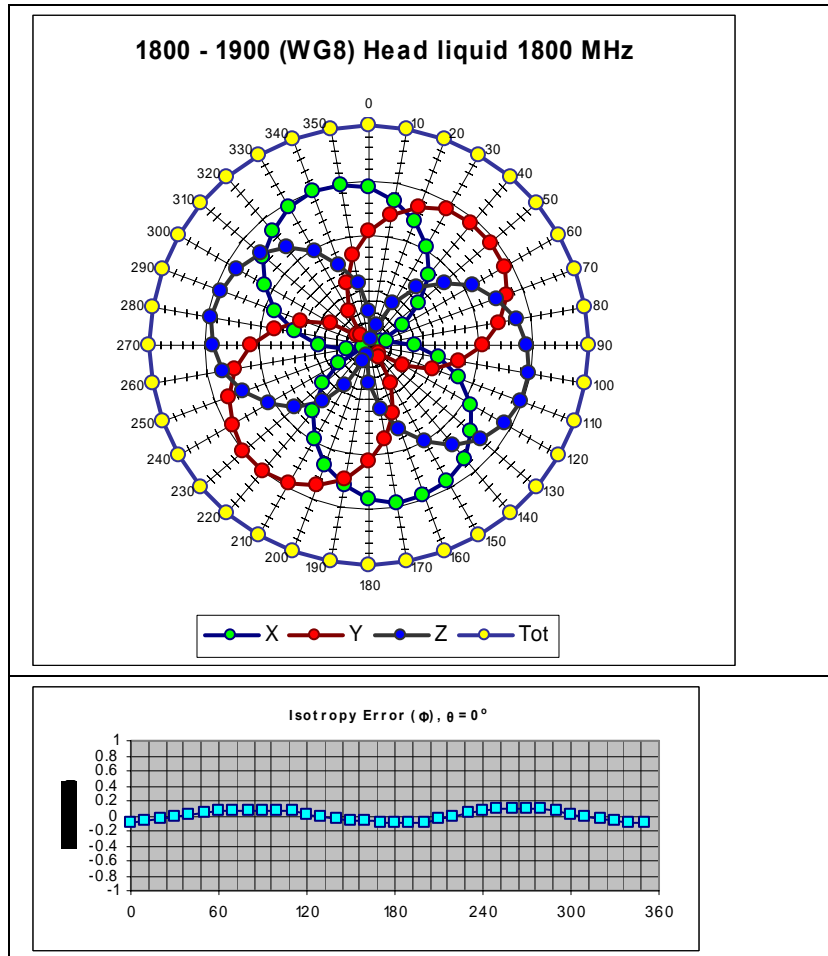


Figure 5. The rotational isotropy of probe S/N 0149 obtained by rotating the probe in a liquid-filled waveguide at 1800 MHz.

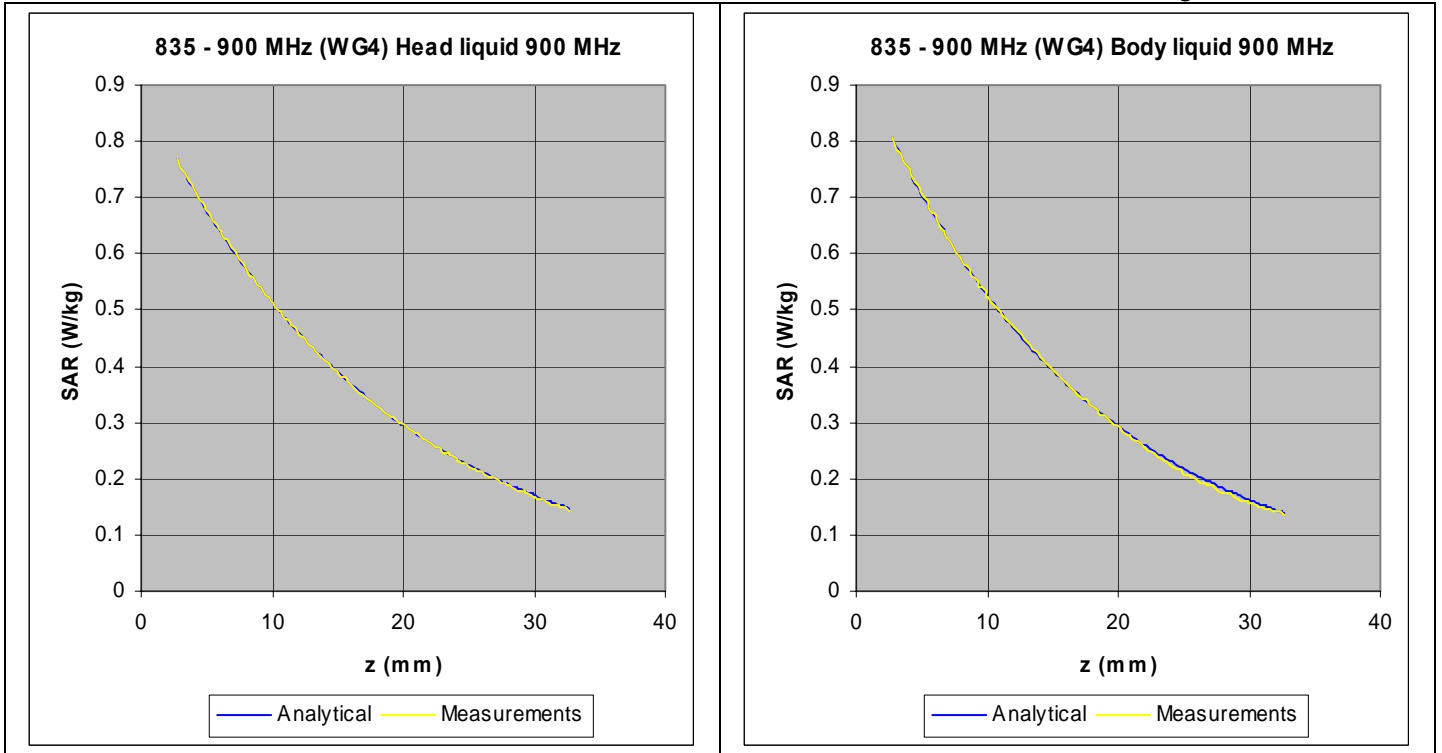
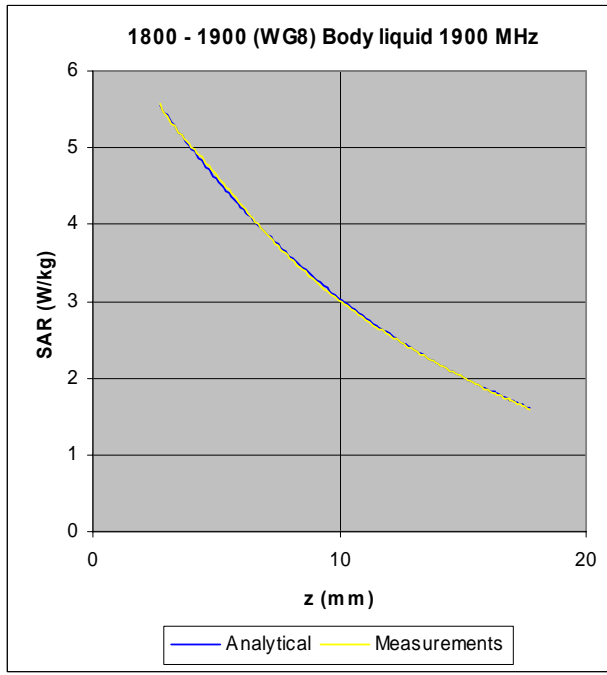
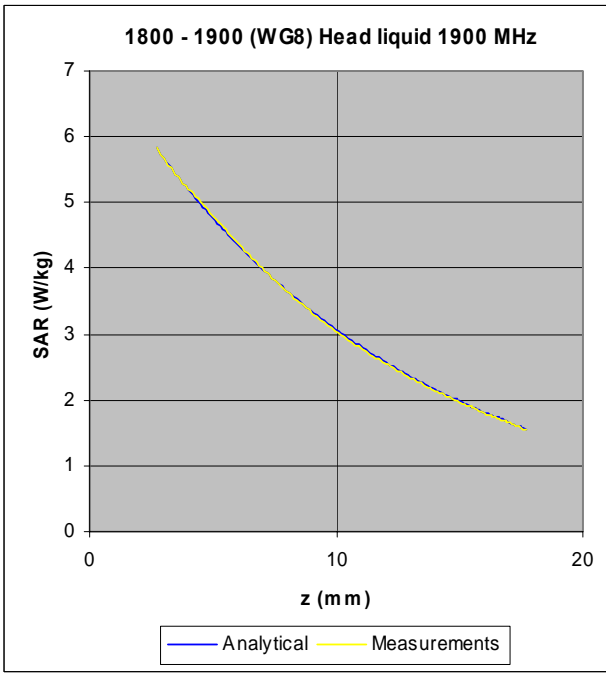
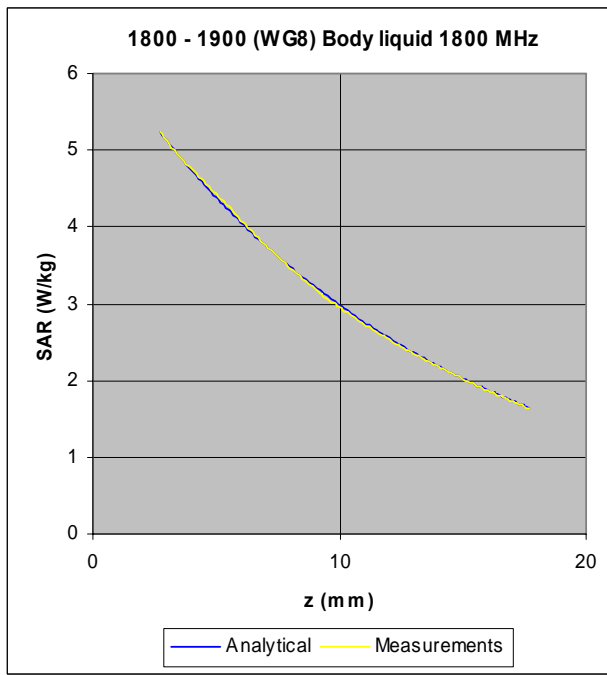
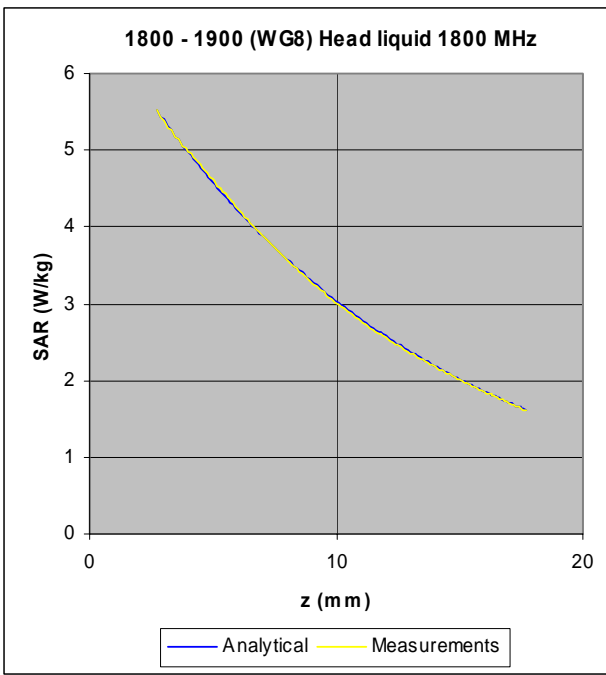


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.



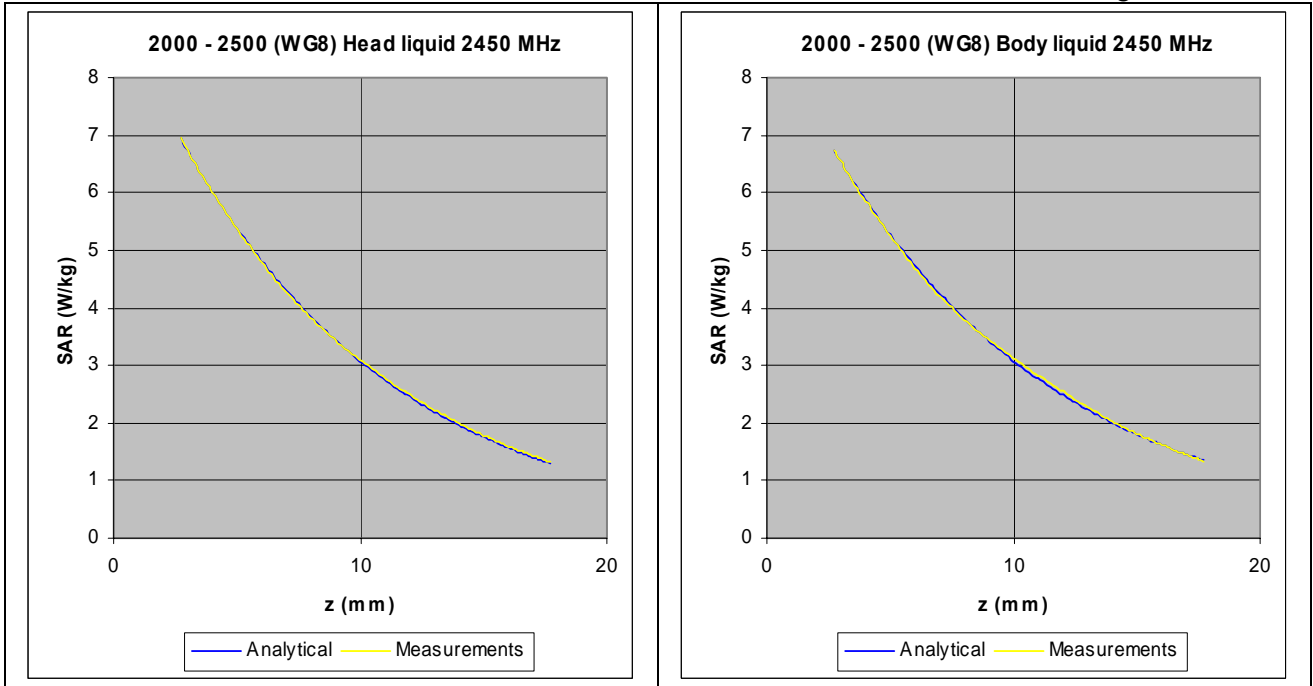


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

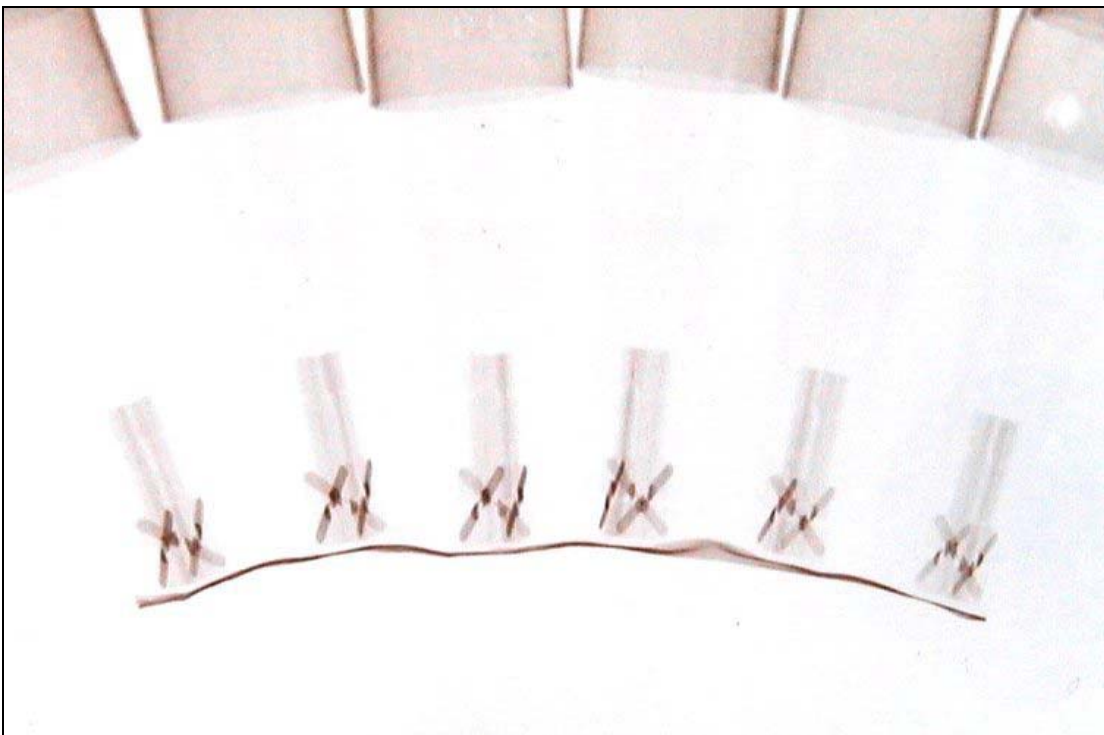


Figure 8: X-ray positive image of 5mm probes

*Table indicating the dielectric parameters of the liquids used for calibrations at each frequency*



<i>Liquid used</i>	<i>Relative permittivity (measured)</i>	<i>Conductivity (S/m) (measured)</i>
<i>450 MHz BRAIN</i>	<i>45.32</i>	<i>0.88</i>
<i>450 MHz BODY</i>	<i>56.03</i>	<i>0.77</i>
<i>900 MHz BRAIN</i>	<i>41.12</i>	<i>0.97</i>
<i>900 MHz BODY</i>	<i>48.73</i>	<i>1.12</i>
<i>1800 MHz BRAIN</i>	<i>38.42</i>	<i>1.38</i>
<i>1800 MHz BODY</i>	<i>54.64</i>	<i>1.54</i>
<i>1900 MHz BRAIN</i>	<i>38.00</i>	<i>1.47</i>
<i>1900 MHz BODY</i>	<i>54.33</i>	<i>1.64</i>
<i>2450 MHz BRAIN</i>	<i>38.90</i>	<i>1.89</i>
<i>2450 MHz BODY</i>	<i>53.45</i>	<i>2.11</i>




**Report No. SN0048\_2450**  
**12<sup>th</sup> May 2007**

**INDEXSAR**  
**2450MHz validation Dipole**  
**Type IXD-245 S/N 0048**

Performance measurements

Ian Bridger

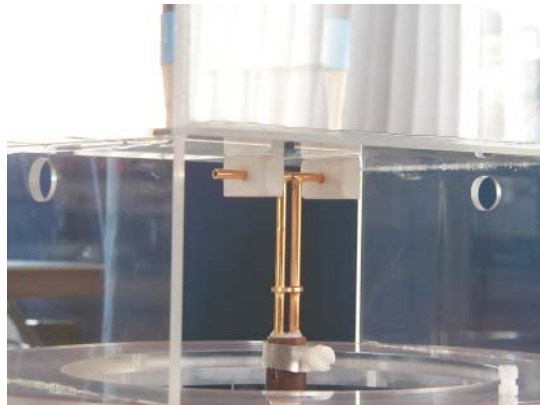

**Indexsar, Oakfield House, Cudworth Lane,**  
**Newdigate, Surrey RH5 5BG. UK.**  
Tel: +44 (0) 1306 632 870 Fax: +44 (0) 1306 631 834  
e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)

## 1. Measurement Conditions

Measurements were performed using a box-shaped phantom made of PMMA with dimensions designed to meet the accuracy criteria for reasonably-sized phantoms that do not have liquid capacities substantially in excess of the volume of liquid required to fill the Indexsar upright SAM phantoms used for SAR testing of handsets against the ear.

An Anritsu MS4623B vector network analyser was used for the return loss measurements. The dipole was placed in a special holder made of low-permittivity, low-loss materials. This holder enables the dipole to be positioned accurately in the centre of the base of the Indexsar box-phantom used for flat-surface testing and validation checks.

The validation dipoles are supplied with special spacers made from a low-permittivity, low-loss foam material. These spacers are fitted to the dipole arms to ensure that, when the dipole is offered up to the phantom surface, the spacing between the dipole and the liquid surface is accurately aligned according to the guidance in the relevant standards documentation. The spacers are rectangular with a central hole equal to the dipole arm diameter and dimensioned so that the longer side can be used to ensure a spacing of 15mm from the liquid in the phantom (for tests at 900 MHz and below) and the shorter side can be used for tests at 1800MHz and above to ensure a spacing of 10mm from the liquid in the phantom. The spacers are made on a CNC milling machine with an accuracy of 1/40<sup>th</sup> mm but they may suffer wear and tear and need to be replaced periodically. The material used is Rohacell, which has a relative permittivity of approx. 1.05 and a negligible loss tangent.

The apparatus supplied by Indexsar for dipole validation tests thus includes:

Balanced dipoles for each frequency required are dimensioned according to the guidelines given in IEEE 1528 [1]. The dipoles are made from semi-rigid 50 Ohm co-ax, which is joined by soldering and is gold-plated subsequently. The constructed dipoles are easily deformed, if mis-handled, and periodic checks need to be made of their symmetry.

Rohacell foam spacers designed for presenting the dipoles to 2mm thick PMMA box phantoms. These components also suffer wear and tear and should be replaced when the central hole is a loose-fit on the dipole arms or if the edges are too worn to ensure accurate alignment. The standard spacers are dimensioned for use with 2mm wall thickness (additional spacers are available for 4mm wall thickness).

## 2. SAR Measurement


A SAR validation check is performed with the box-phantom located on the SARA2 phantom support base on the SARA2 robot system. Tests are then conducted at a feed power level of approx. 0.25W. The actual power level is recorded and used to normalise the results obtained to the standard input power conditions of 1W (forward power). The ambient temperature is 22°C +/- 1°C and the relative humidity is around 32% during the measurements.

The phantom is filled with a 2450MHz body liquid using a recipe from [1], which has the following electrical parameters (measured using an Indexsar DiLine kit) at 2450MHz:

Relative Permittivity	<b>53.22</b>
Conductivity	<b>1.91 S/m</b>

The SARA2 software version 2.36 VPM is used with Indexsar IXP\_050 probe Serial Number 0171 previously calibrated using waveguides.

The 3D measurements made using the dipole at the bottom of the phantom box is shown below:

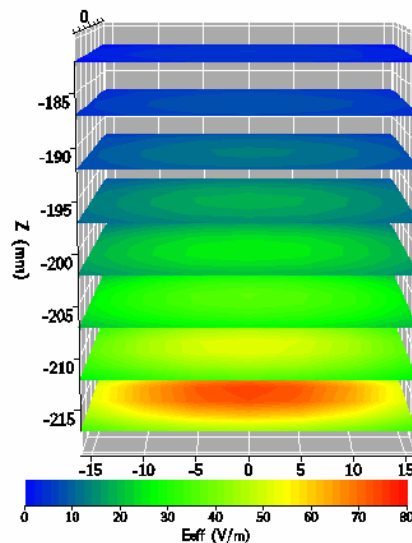

The results, normalised to an input power of 1W (forward power) are typically:

Averaged over 1 cm <sup>3</sup> (1g) of tissue	<b>51.377 W/kg</b>
Averaged over 10cm <sup>3</sup> (10g) of tissue	<b>23.892 W/kg</b>

These results can be compared with Table 8.1 in [1]. The agreement is within 10%.





#### 4. Dipole handling

The dipoles are made from standard, copper-sheathed coaxial cable. In assembly, the sections are joined using ordinary soft-soldering. This is necessary to avoid excessive heat input in manufacture, which would destroy the polythene dielectric used for the cable. The consequence of the construction material and the assembly technique is that the dipoles are fragile and can be deformed by rough handling. Conversely, they can be straightened quite easily as described in this report.

If a dipole is suspected of being deformed, a normal workshop lathe can be used as an alignment jig to restore the symmetry. To do this, the dipole is first placed in the headstock of the lathe (centred on the plastic or brass spacers) and the headstock is rotated by hand (do NOT use the motor). A marker (lathe tool or similar) is brought up close to the end of one dipole arm and then the headstock is rotated by 0.5 rev. to check the opposing arm. If they are not balanced, judicious deformation of the arms can be used to restore the symmetry.

If a dipole has a failed solder joint, the dipole can be fixed down in such a way that the arms are co-linear and the joint re-soldered with a reasonably-powerful electrical soldering iron. Do not use gas soldering irons. After such a repair, electrical tests must be performed as described below.

Please note that, because of their construction, the dipoles are short-circuited for DC signals.

#### 5. Tuning the dipole

The dipole dimensions are based on calculations that assumed specific liquid dielectric properties. If the liquid dielectric properties are somewhat different, the dipole tuning will also vary. A pragmatic way of accounting for variations in liquid properties is to 'tune' the dipole (by applying minor variations to its effective length). For this purpose, Indexsar can supply short brass tube lengths to extend the length of the dipole and thus 'tune' the dipole. It cannot be made shorter without removing a bit from the arm. An alternative way to tune the dipole is to use copper shielding tape to extend the effective length of the dipole. Do both arms equally.

It should be possible to tune a dipole as described, whilst in place in the measurement position as long as the user has access to a VNA for determining the return loss.

#### 6. References

IEEE Std 1528-2003. IEEE recommended practice for determining the peak spatial-average specific absorption rate (SAR) in the human body due to wireless communications devices: Measurement Techniques - Description