




Channel 40 (5200MHz) - Chain A

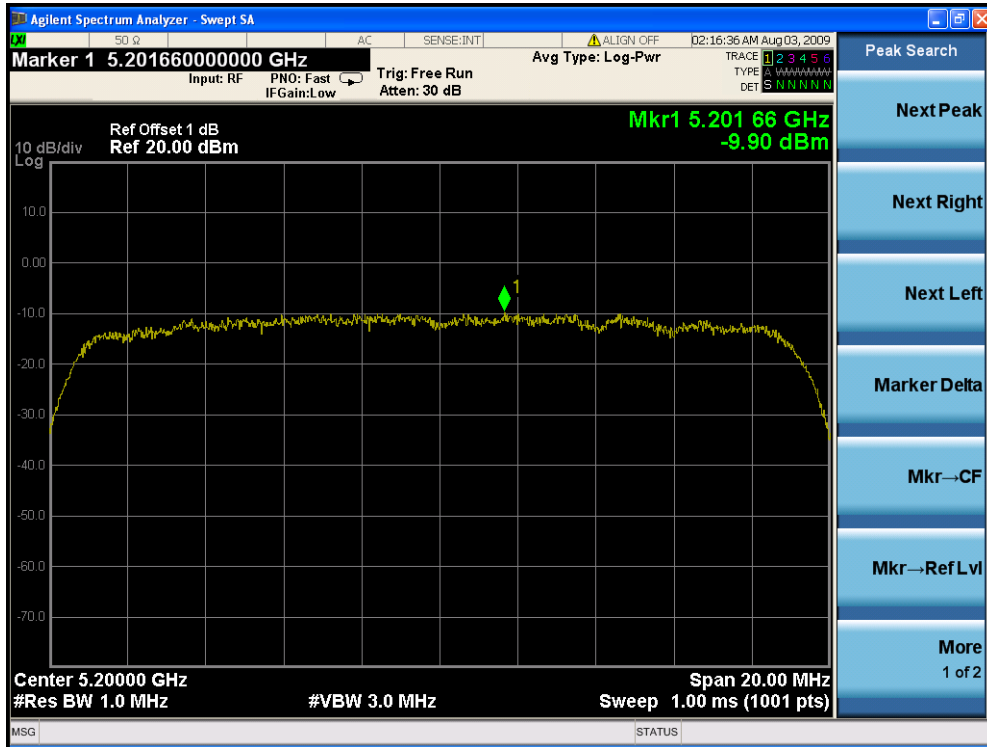


Channel 48 (5240MHz) - Chain A

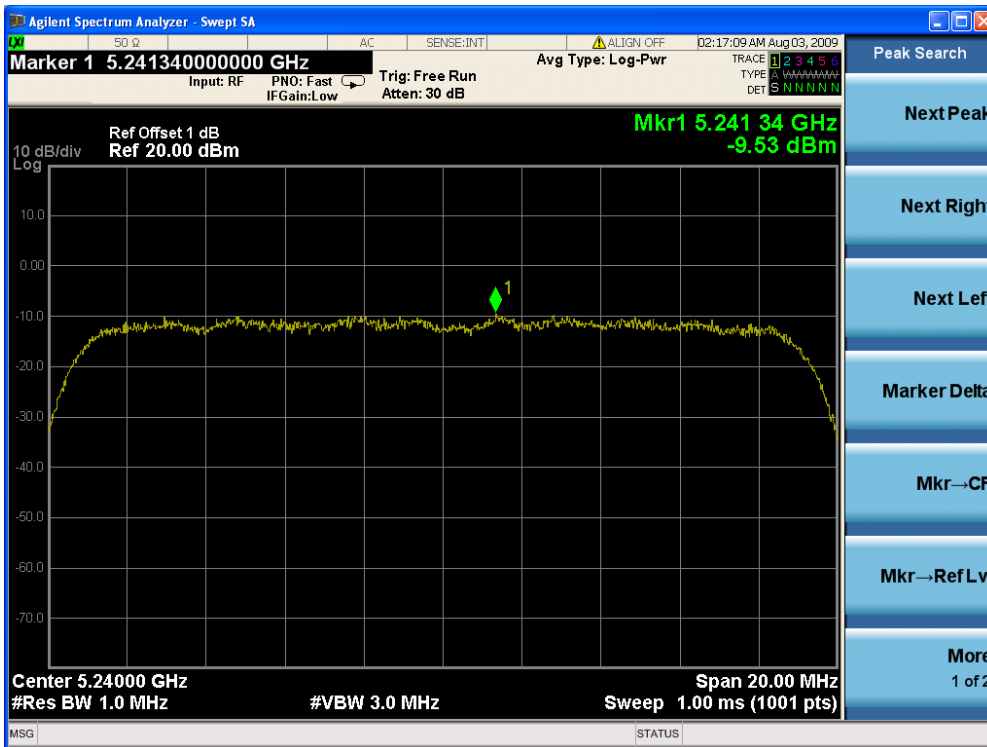


Channel 52 (5260MHz) - Chain A

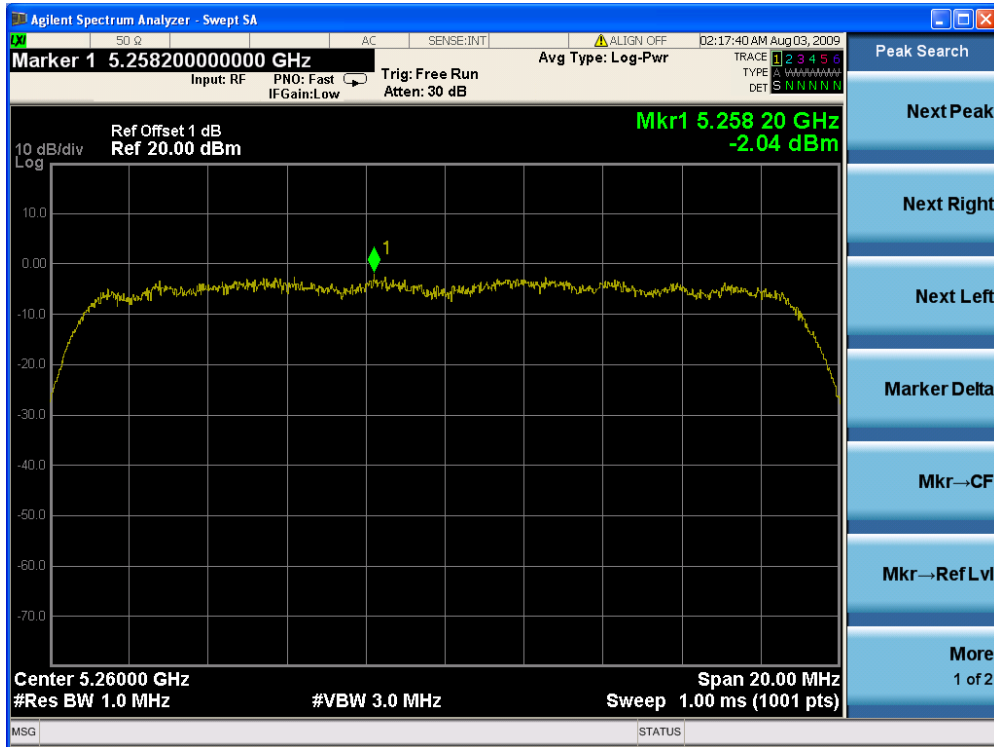


Channel 60 (5300MHz) - Chain A

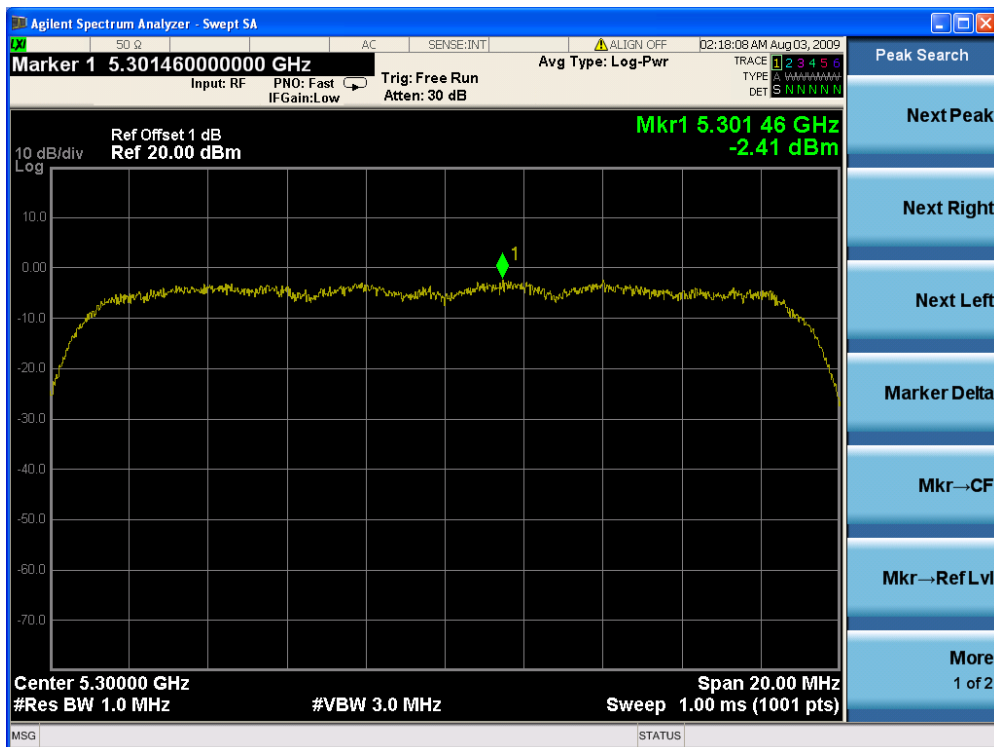


Channel 64 (5320MHz) - Chain A

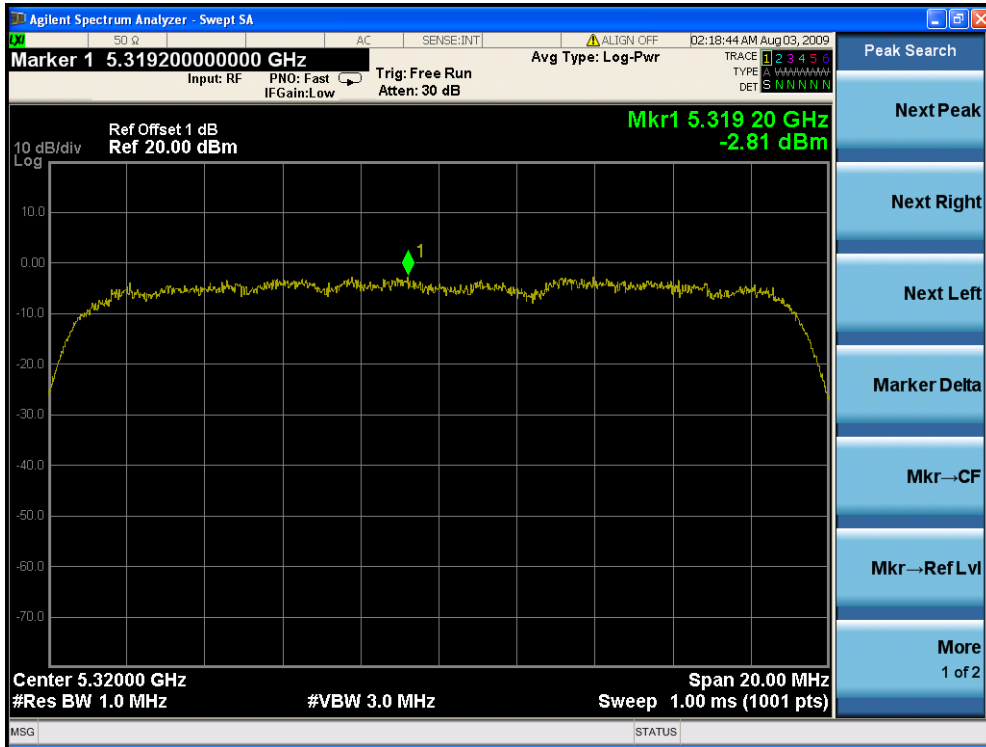


Channel 100 (5500MHz) - Chain A

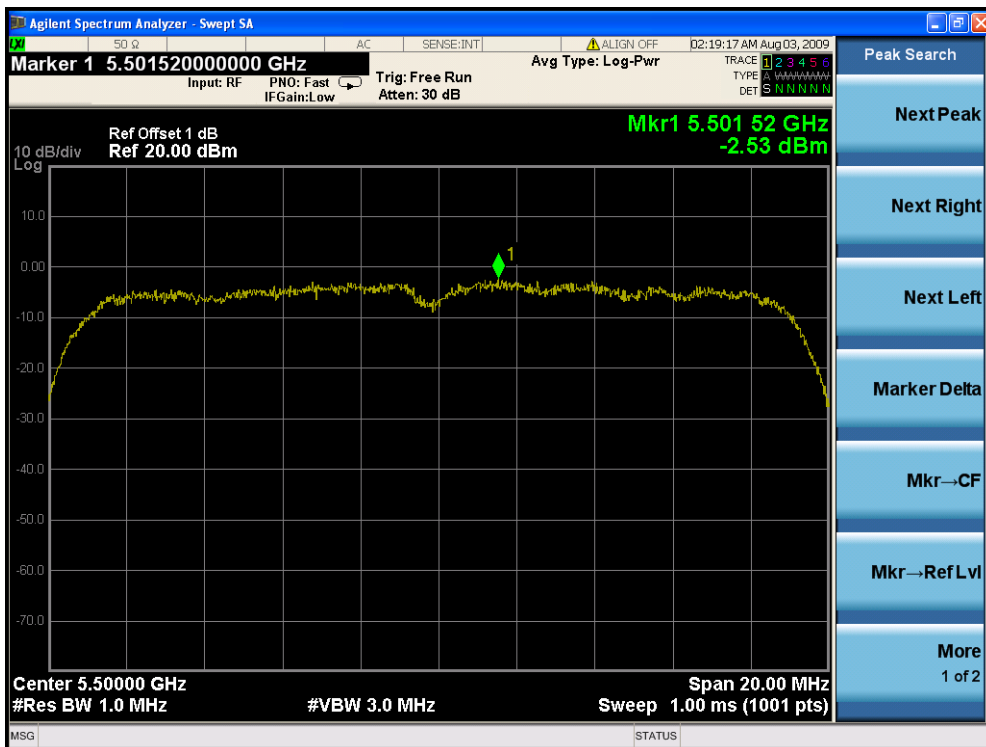


Channel 120 (5600MHz) - Chain A

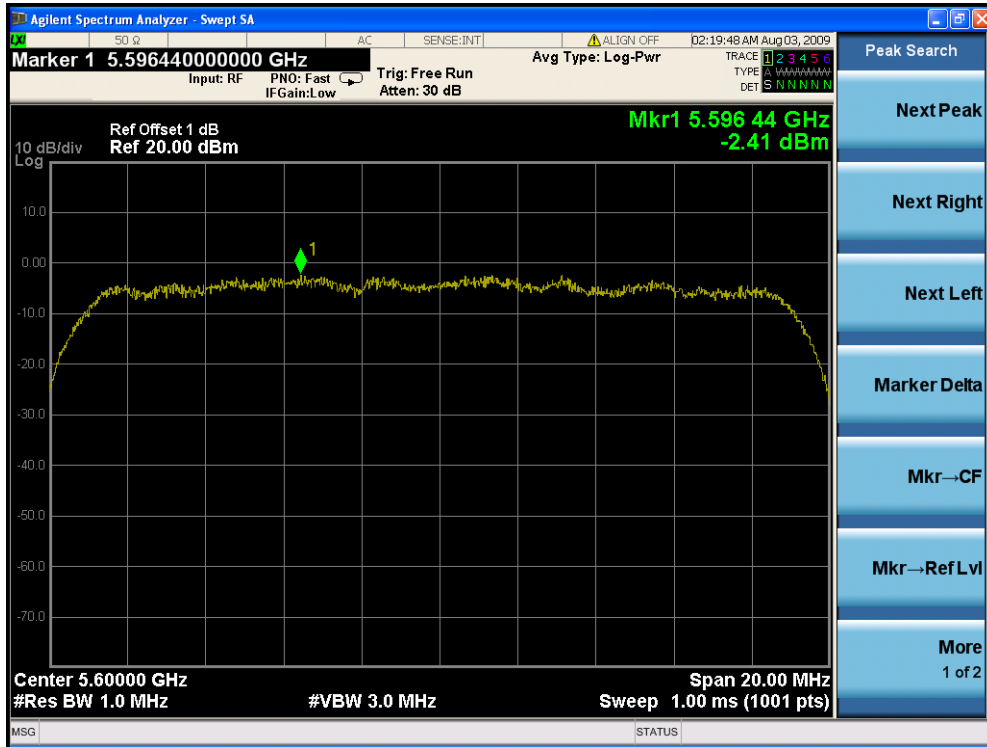


Channel 140 (5700MHz) - Chain A

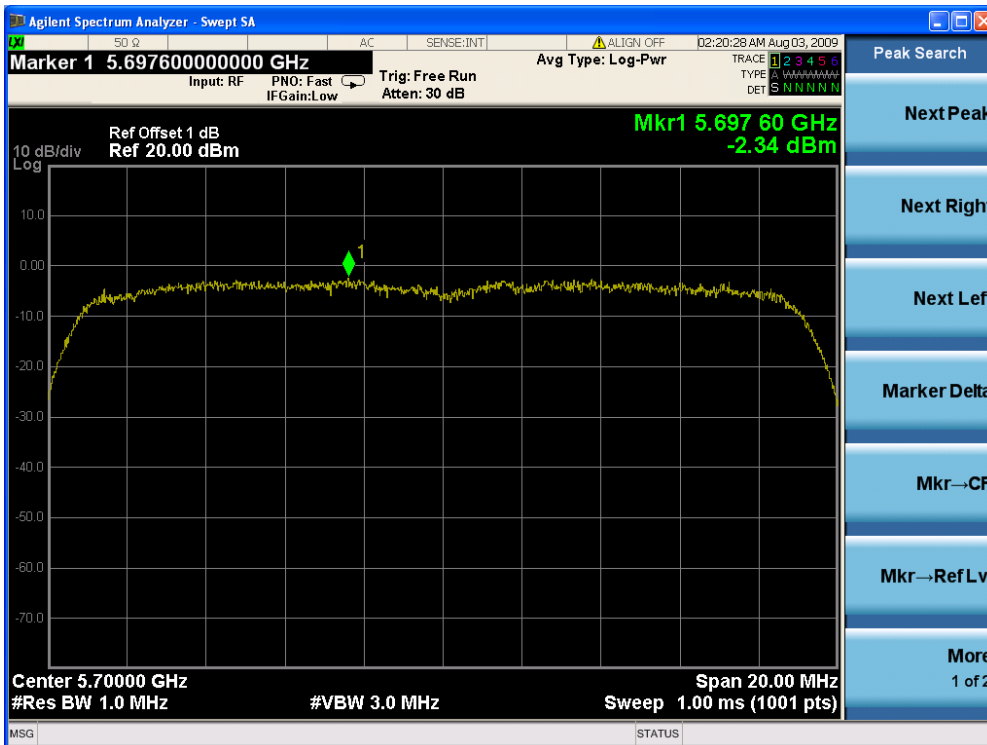


Channel 36 (5180MHz) - Chain C

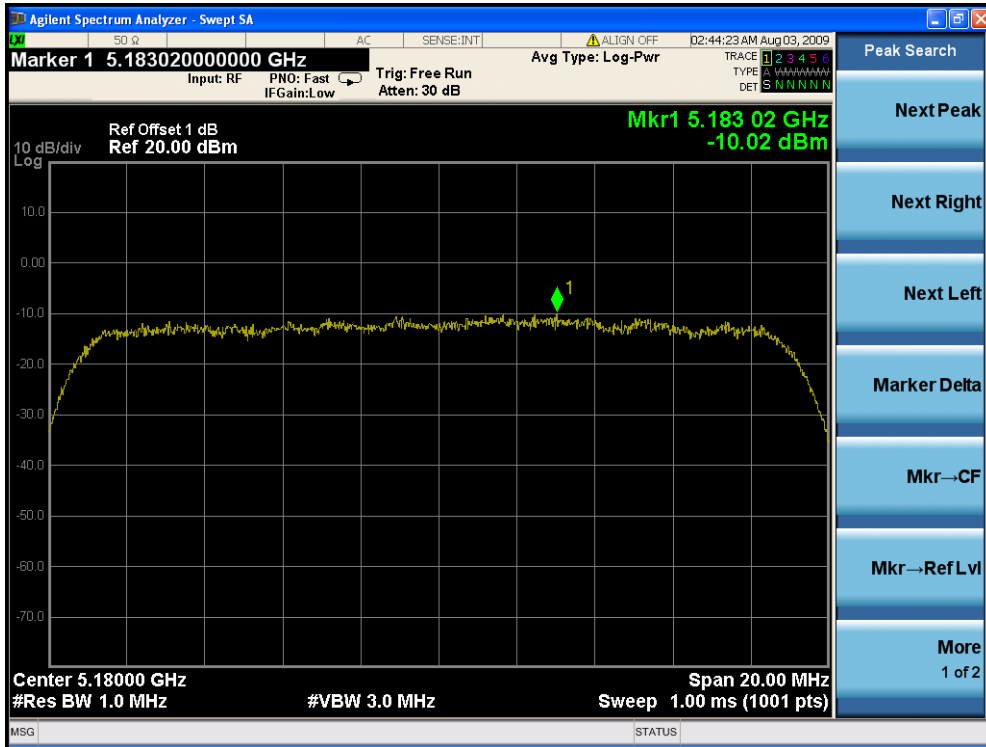

Channel 40 (5200MHz) - Chain C

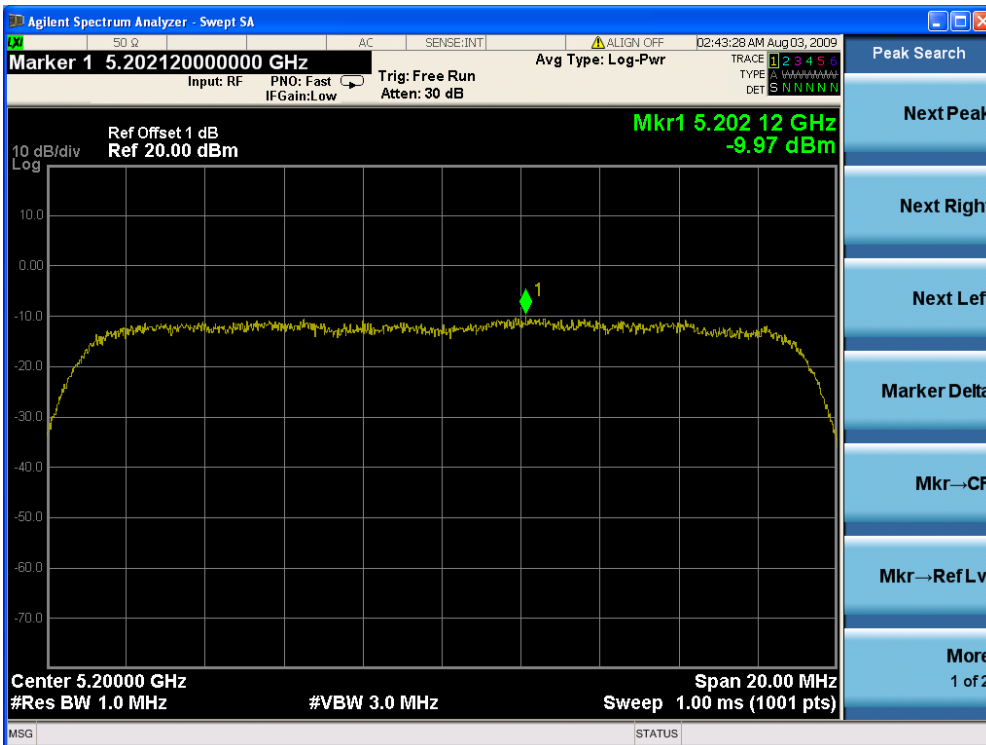


Channel 48 (5240MHz) - Chain C

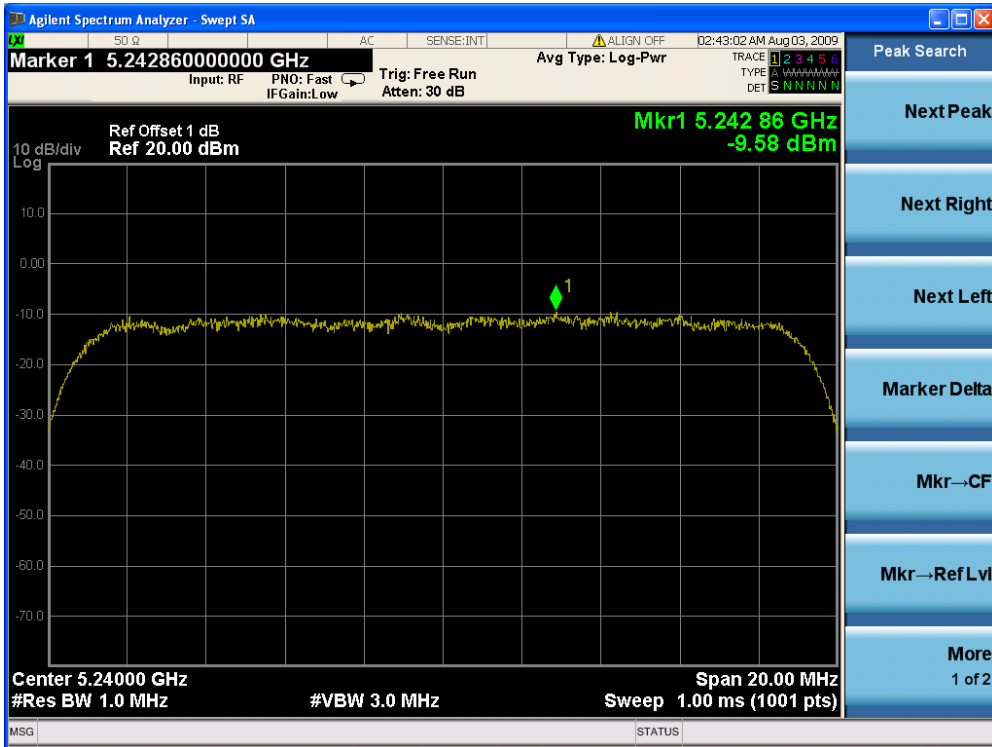


Channel 52 (5260MHz) - Chain C




Channel 60 (5300MHz) - Chain C

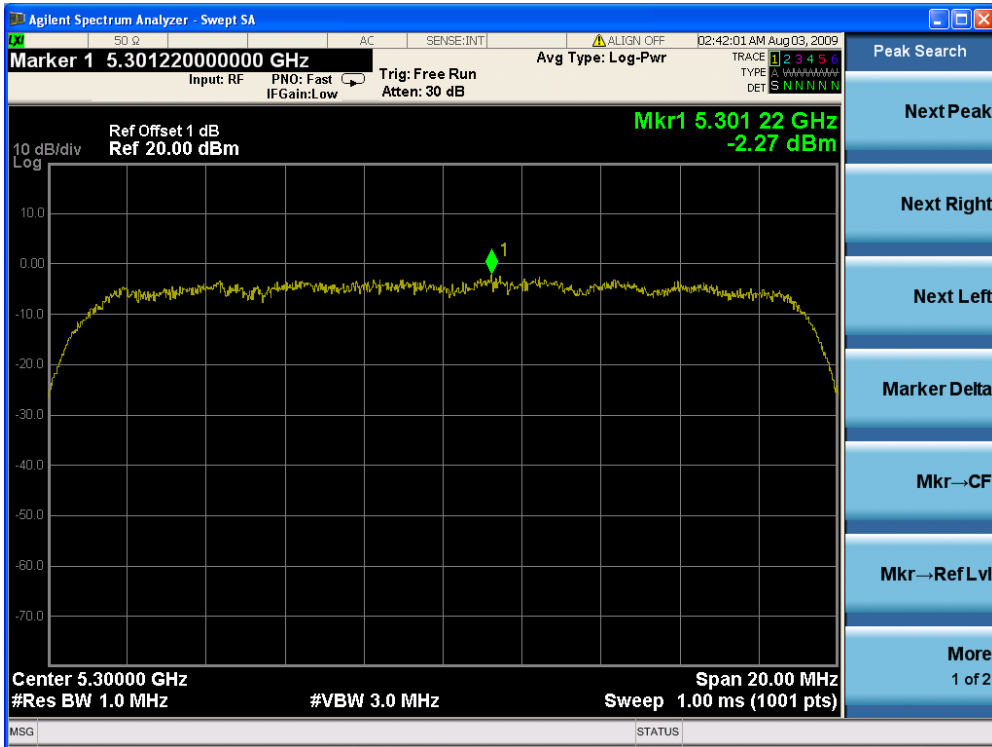


Channel 64 (5320MHz) - Chain C

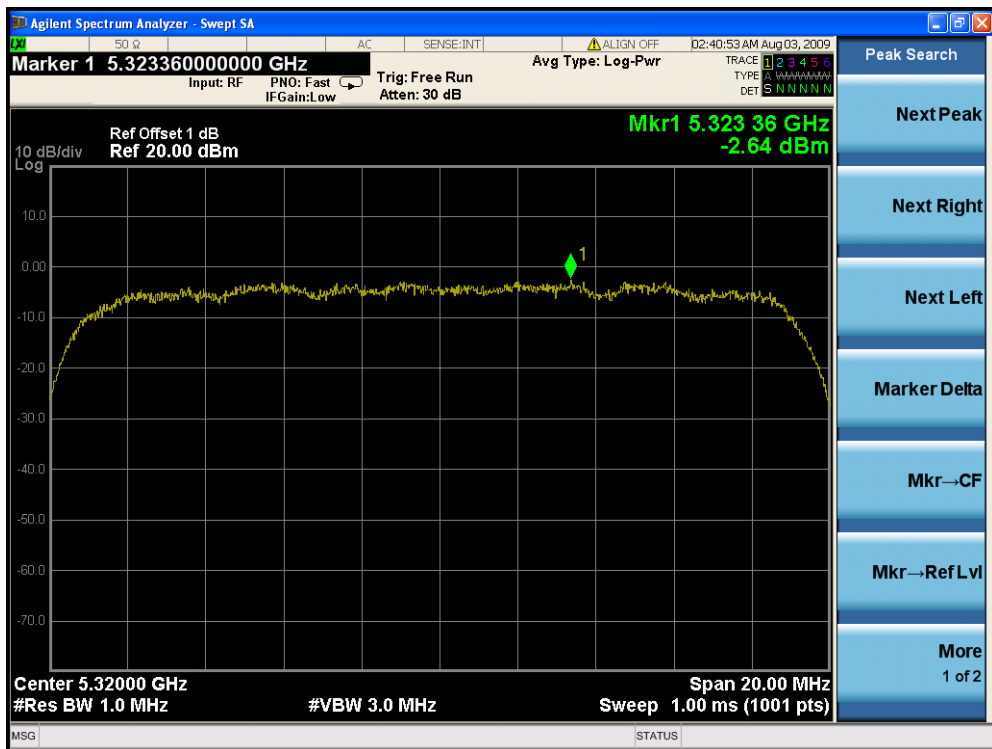

Channel 100 (5500MHz) - Chain C

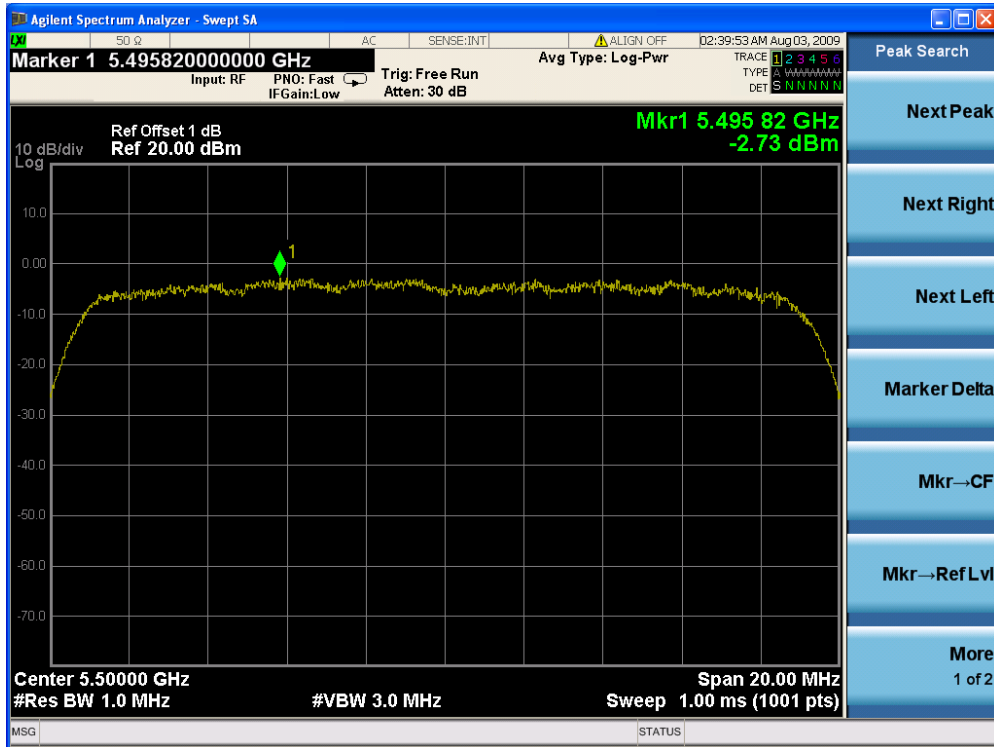


Channel 120 (5600MHz) - Chain C

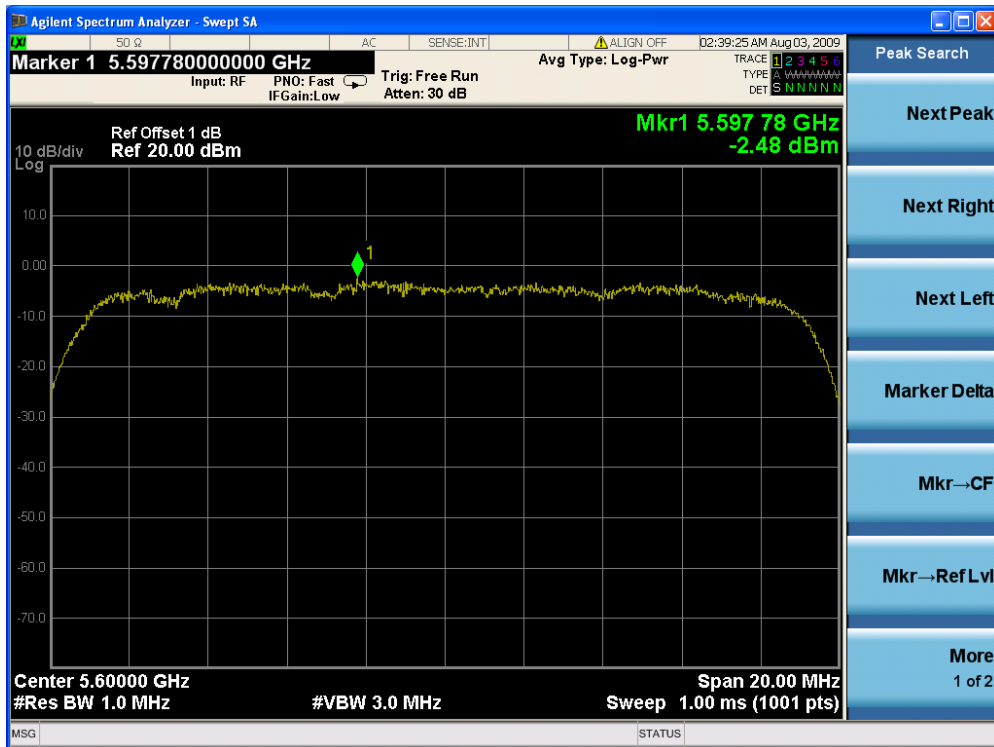



Channel 140 (5700MHz) - Chain C

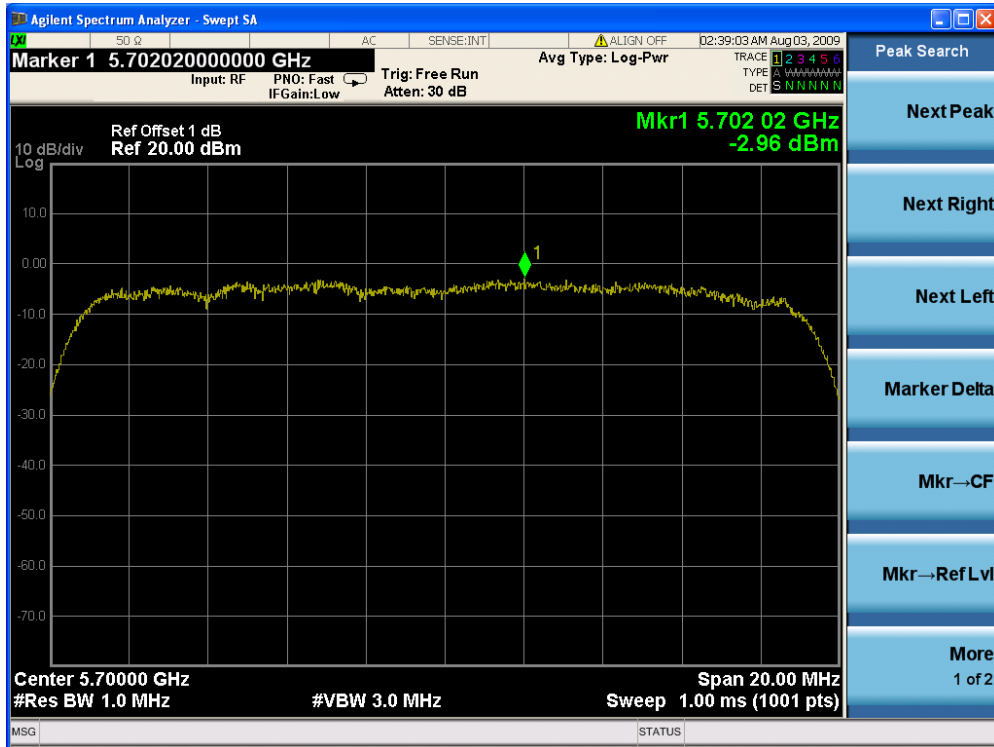


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 2: Transmit by 802.11n (20MHz Bandwidth) (Chain B+C)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
36	5180	N/A	-9.75	-10.72	-7.20	4	Pass
40	5200	N/A	-9.38	-9.99	-6.66	4	Pass
48	5240	N/A	-9.40	-9.35	-6.36	4	Pass
52	5260	N/A	-2.58	-2.98	0.23	11	Pass
60	5300	N/A	-2.63	-2.65	0.37	11	Pass
64	5320	N/A	-2.36	-2.63	0.52	11	Pass
100	5500	N/A	-2.84	-2.57	0.31	11	Pass
120	5600	N/A	-1.83	-2.45	0.88	11	Pass
140	5700	N/A	-2.46	-3.24	0.18	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -1.26dBm.


**Channel 36 (5180MHz) - Chain B**

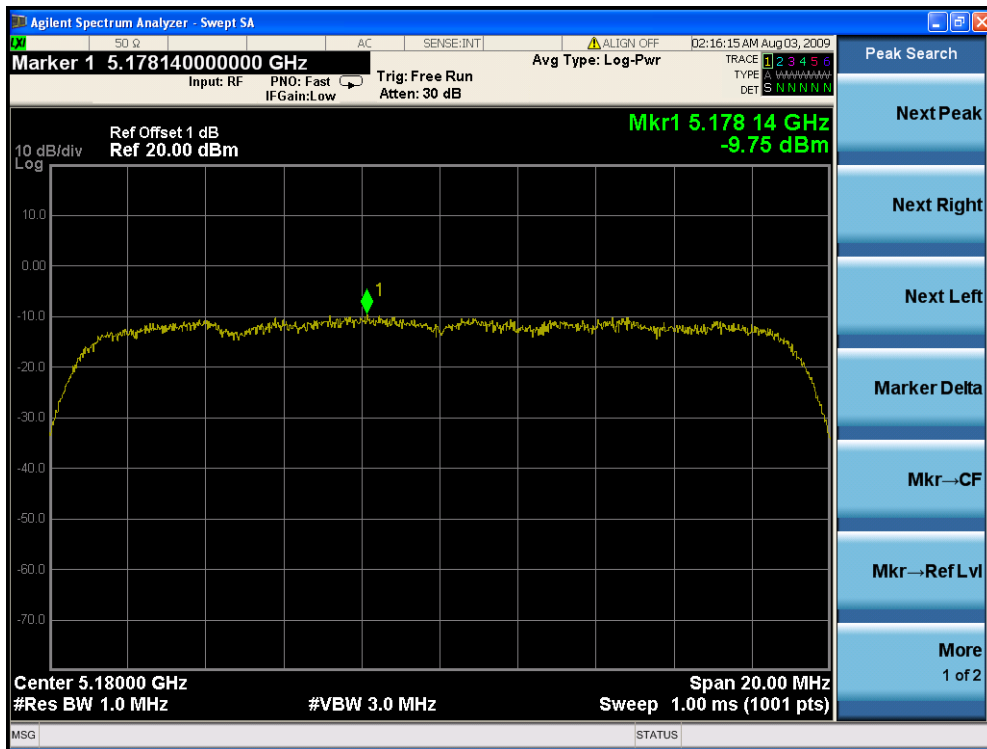


Channel 40 (5200MHz) - Chain B

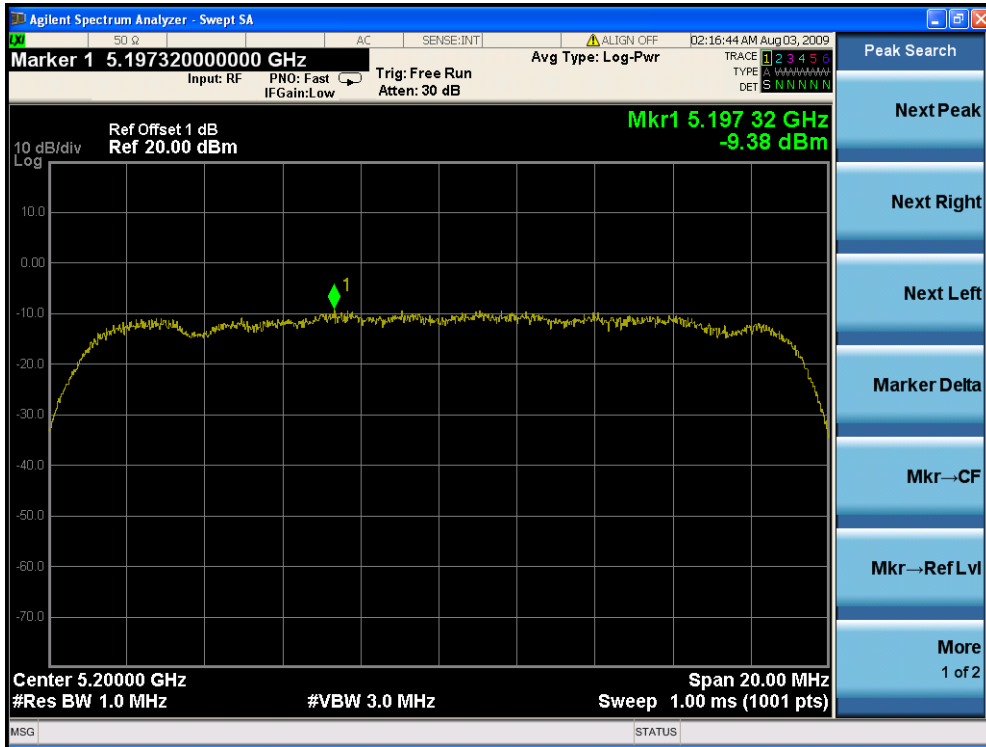


Channel 48 (5240MHz) - Chain B

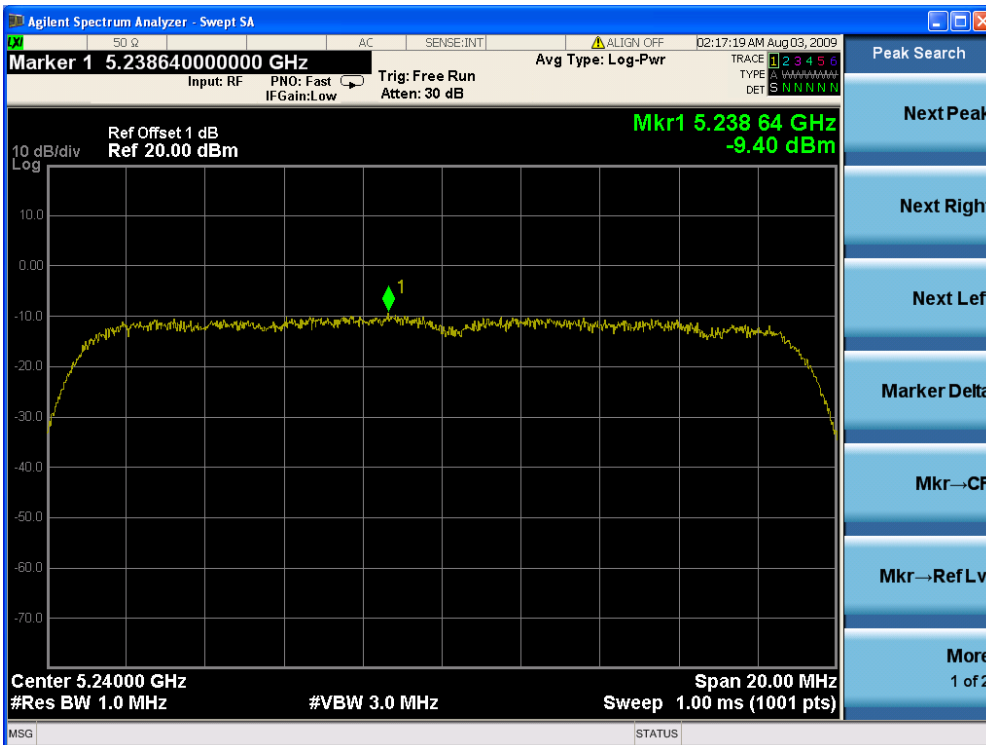


Channel 52 (5260MHz) - Chain B

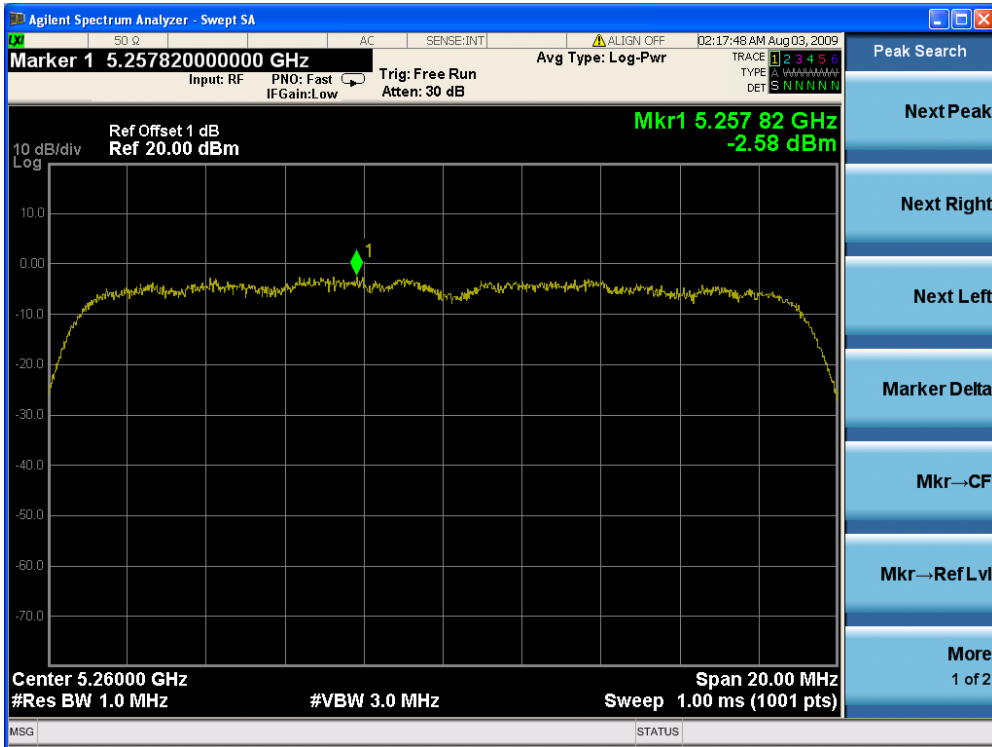


Channel 60 (5300MHz) - Chain B

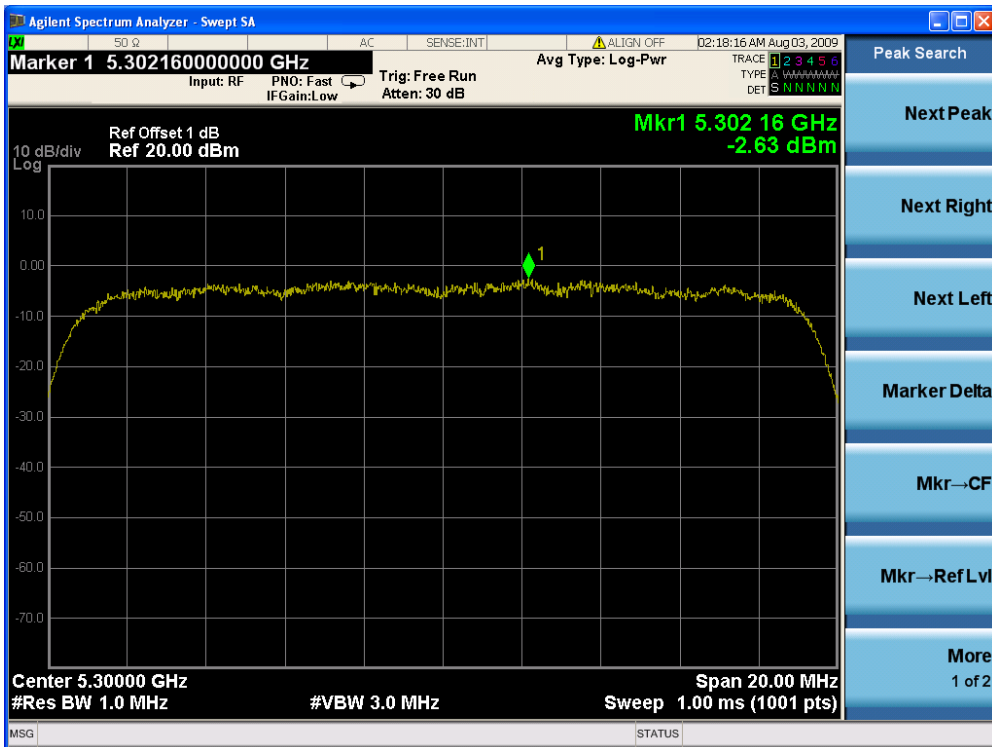


Channel 64 (5320MHz) - Chain B

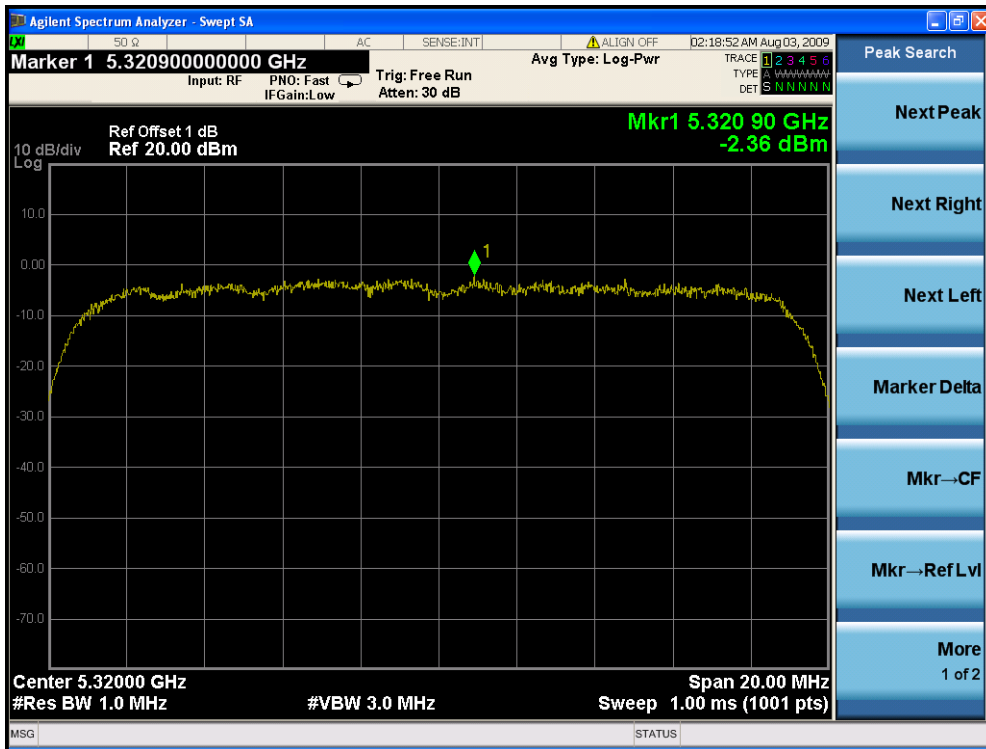


Channel 100 (5500MHz) - Chain B

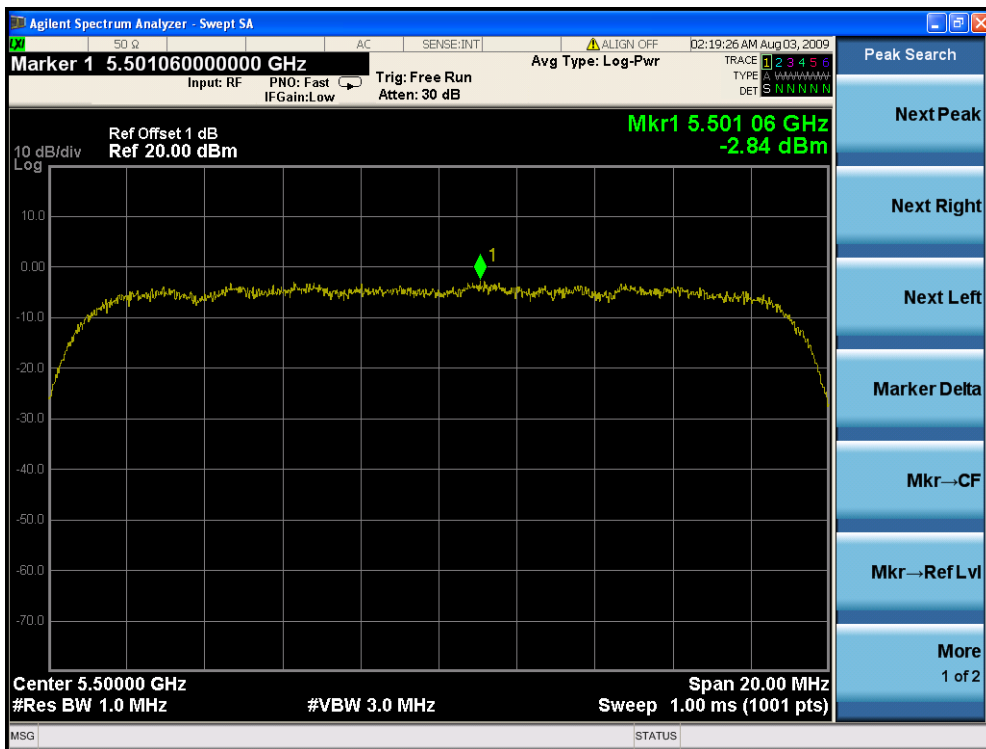


Channel 120 (5600MHz) - Chain B

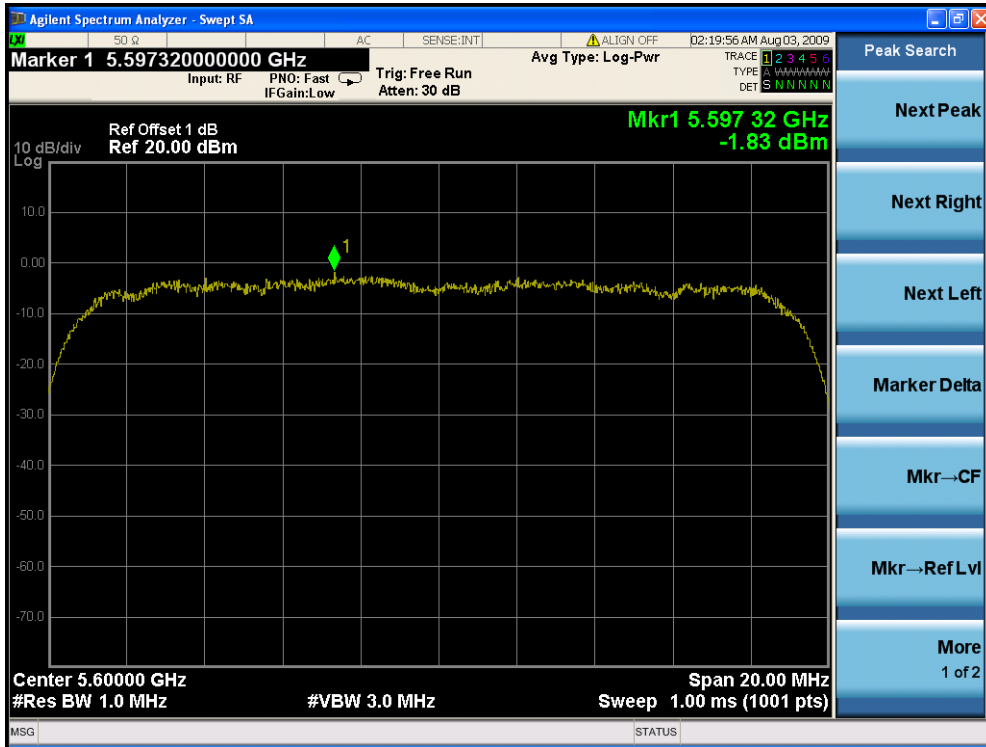


Channel 140 (5700MHz) - Chain B

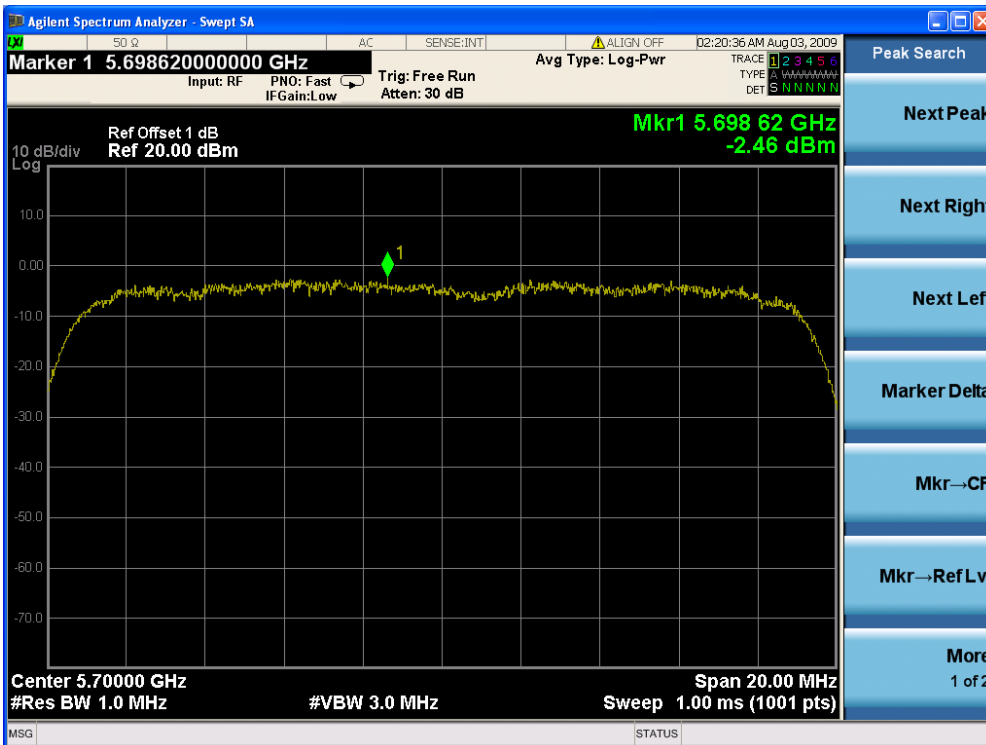


Channel 36 (5180MHz) - Chain C

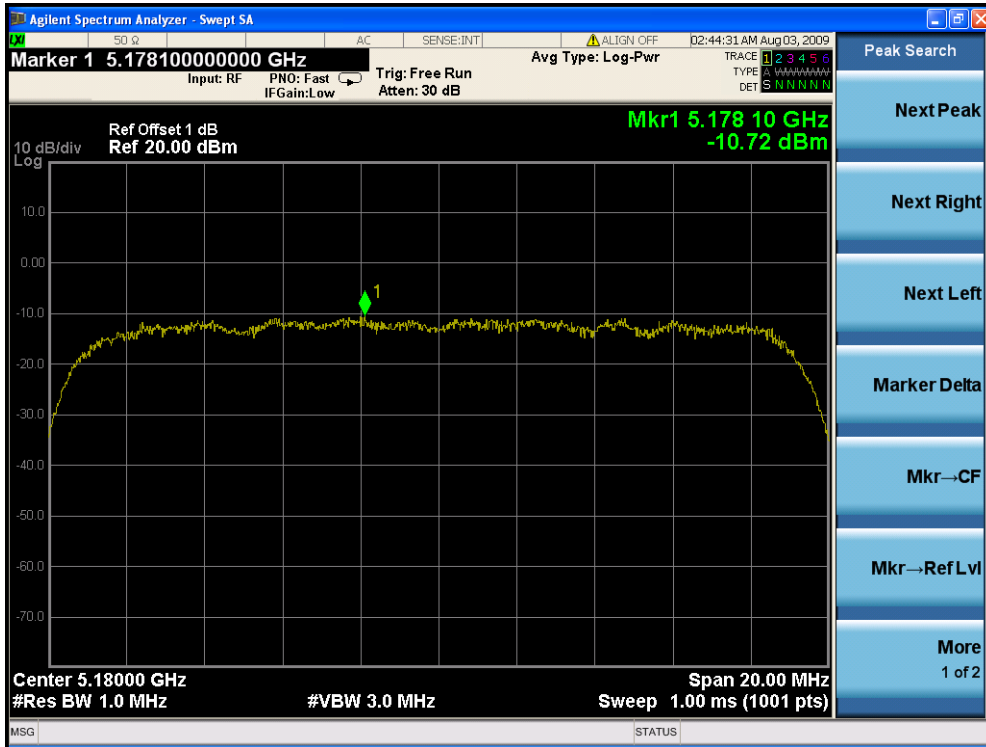

Channel 40 (5200MHz) - Chain C

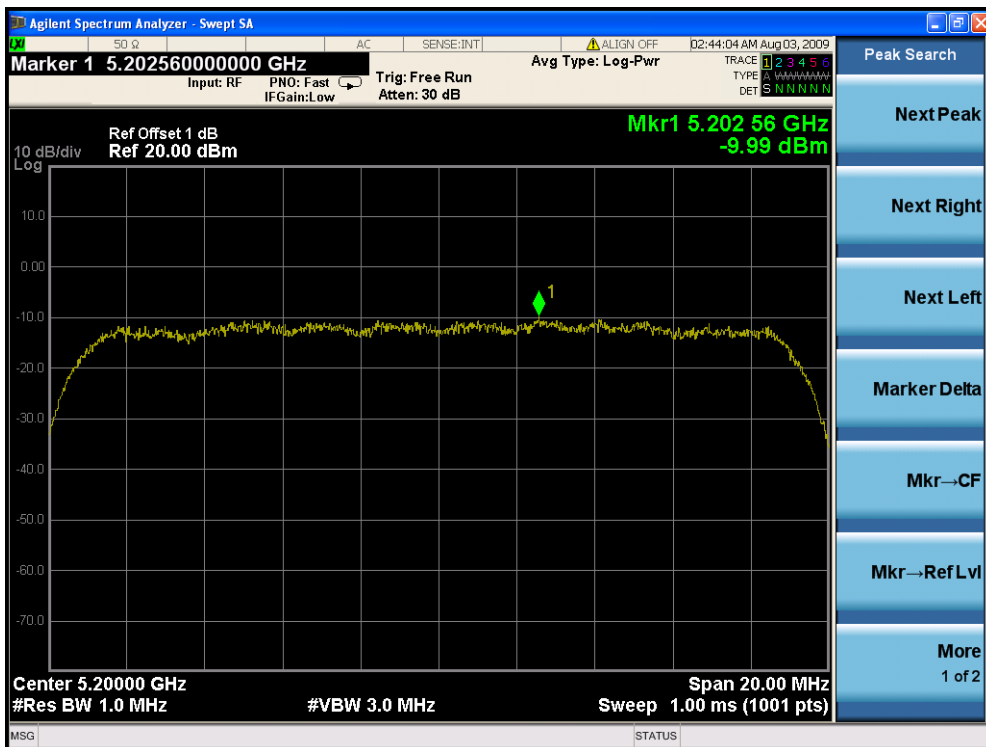

Channel 48 (5240MHz) - Chain C

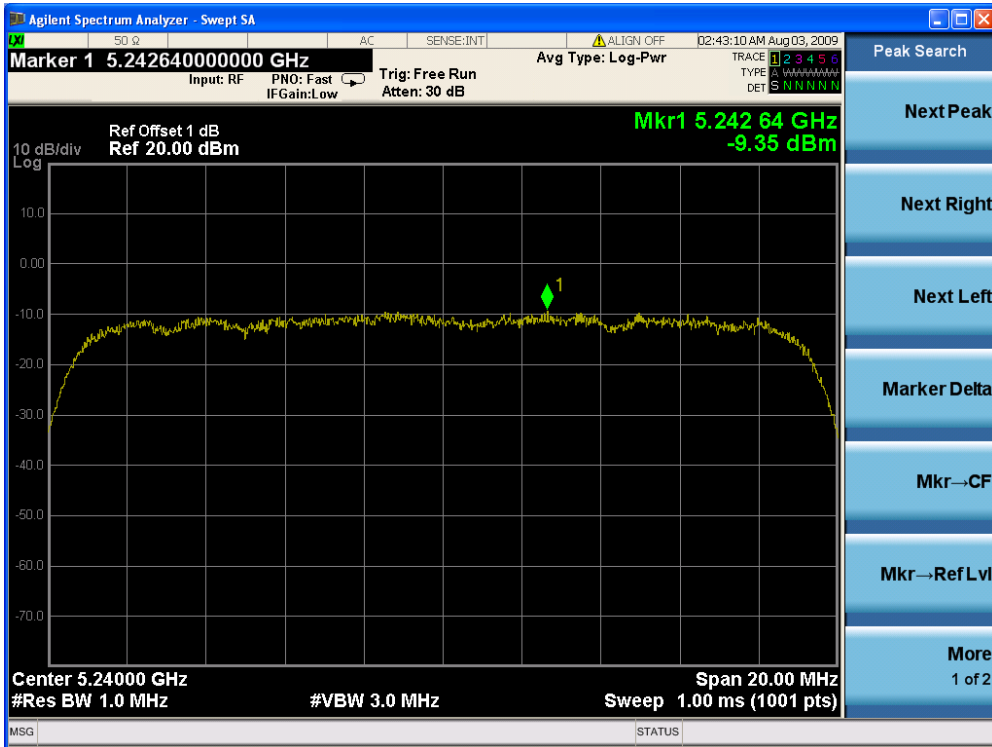


Channel 52 (5260MHz) - Chain C







Channel 60 (5300MHz) - Chain C

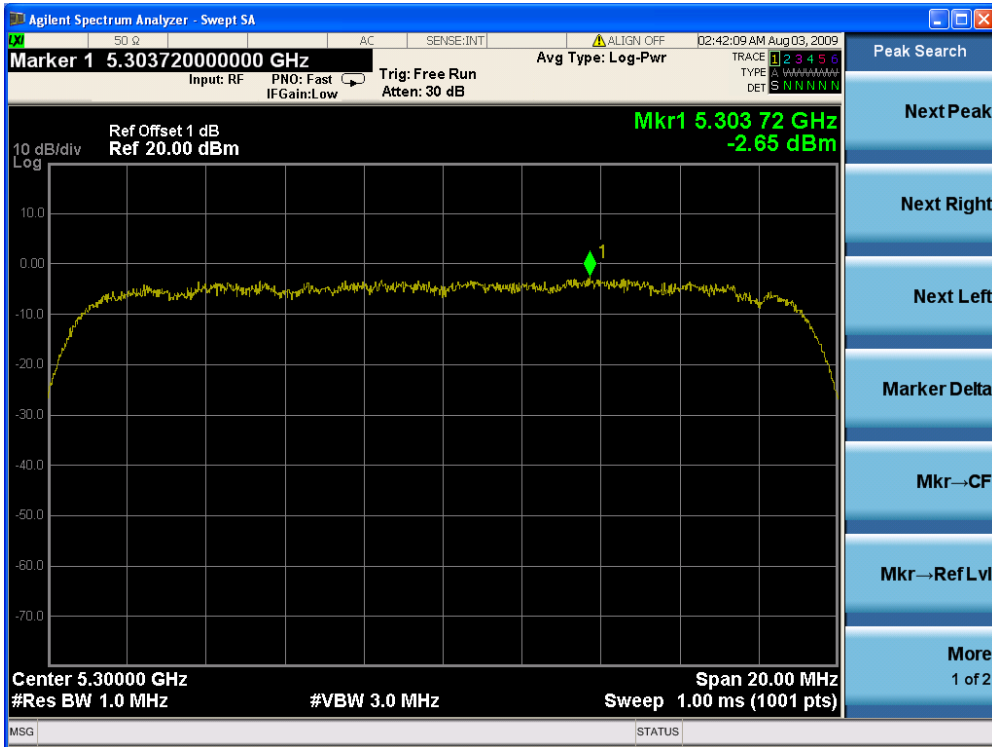


Channel 64 (5320MHz) - Chain C

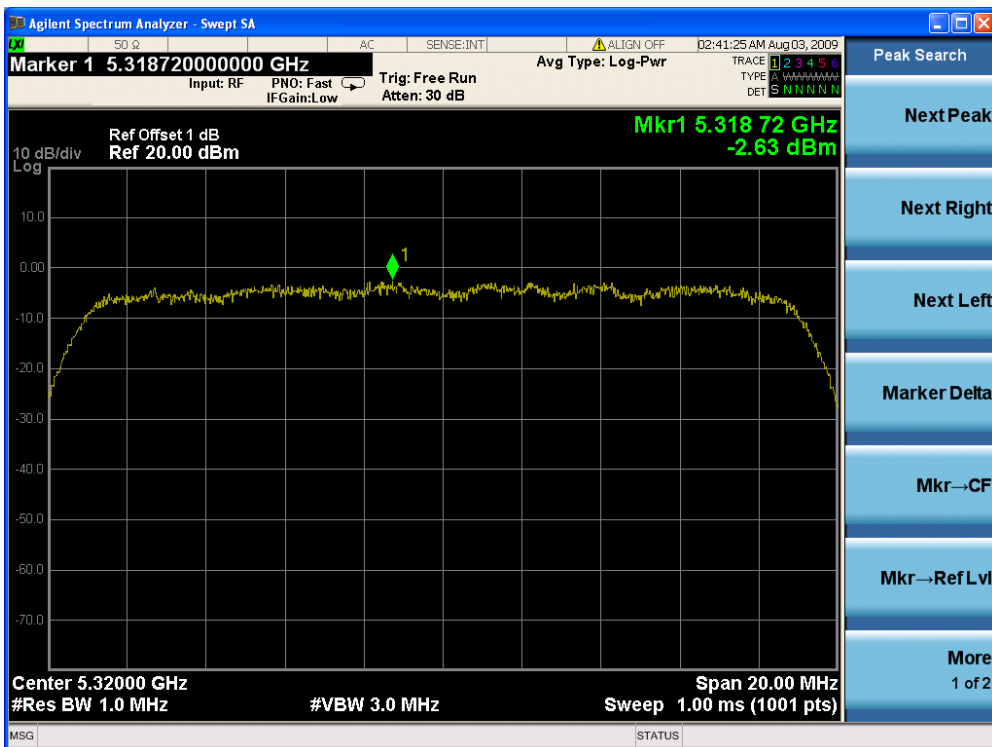


Channel 100 (5500MHz) - Chain C

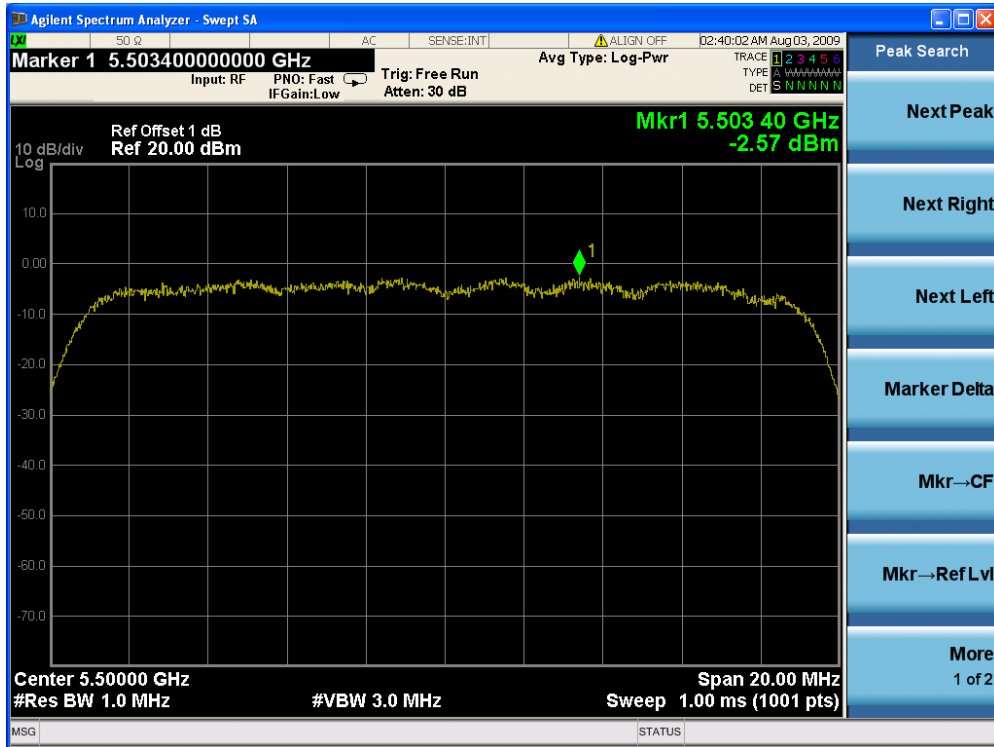

Channel 120 (5600MHz) - Chain C

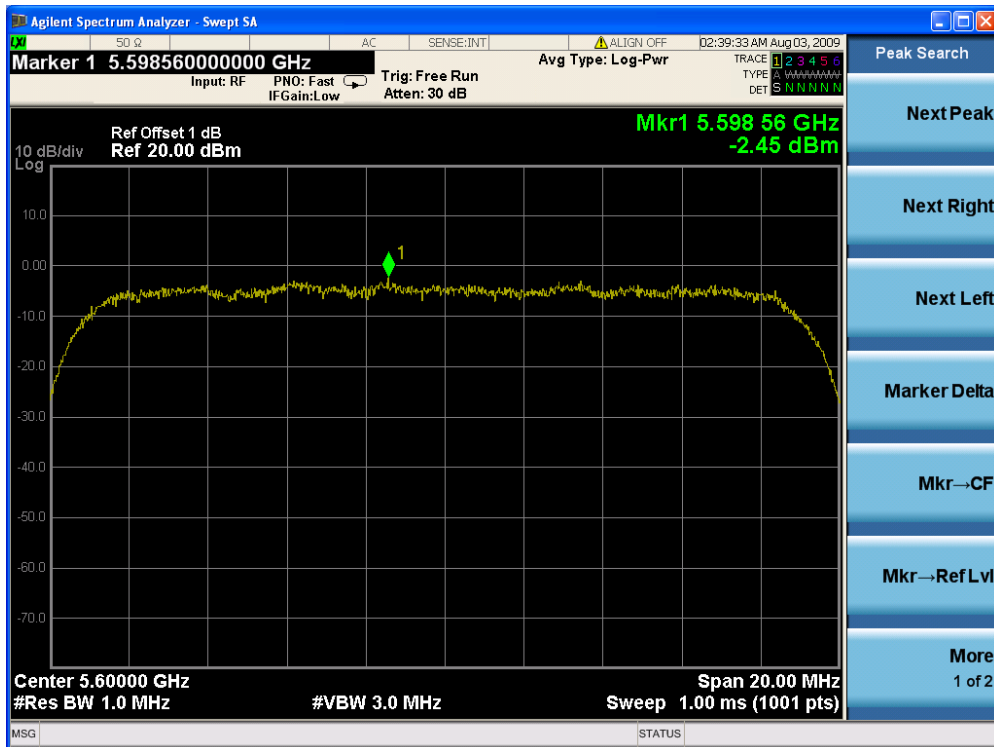

Channel 140 (5700MHz) - Chain C

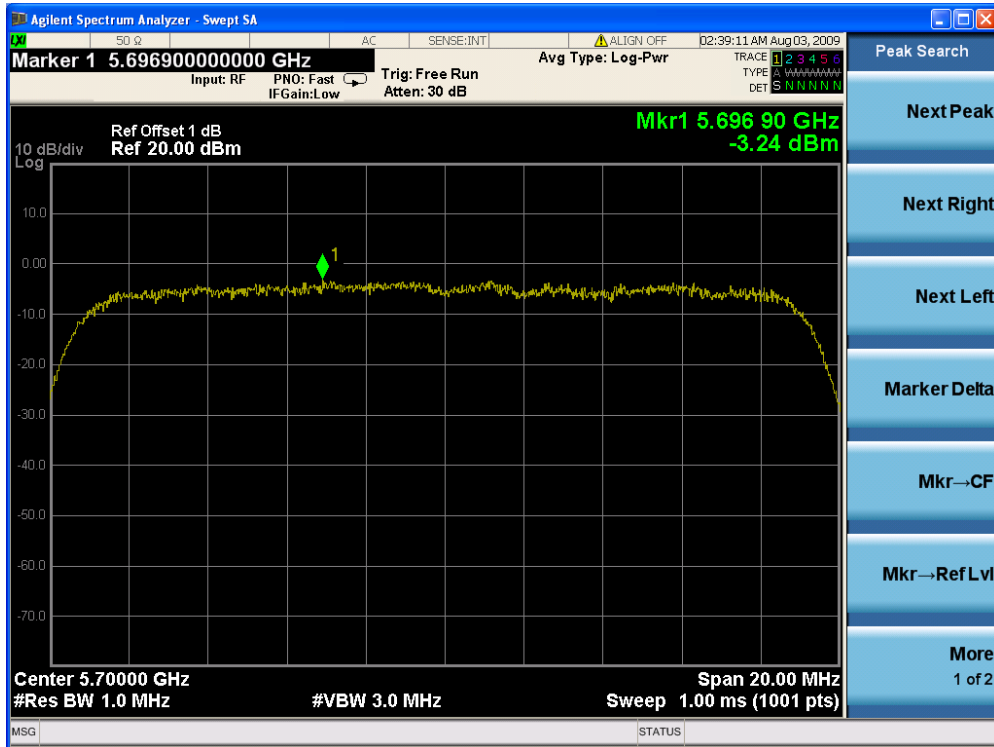


Product	:	Wireless LAN Access Point
Test Item	:	Peak Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11n (20MHz Bandwidth) (Chain A+B+C)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
36	5180	-10.56	-11.76	-11.52	-6.477	4	Pass
40	5200	-10.50	-11.61	-11.43	-6.381	4	Pass
48	5240	-10.66	-11.91	-9.77	-5.922	4	Pass
52	5260	-3.63	-3.98	-3.50	1.073	11	Pass
60	5300	-3.23	-3.88	-3.89	1.116	11	Pass
64	5320	-3.22	-2.90	-3.81	1.477	11	Pass
100	5500	-3.82	-5.43	-4.57	0.214	11	Pass
120	5600	-3.58	-4.48	-3.67	0.880	11	Pass
140	5700	-3.43	-3.03	-4.51	1.158	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -0.822dBm.


### Channel 36 (5180MHz) - Chain A

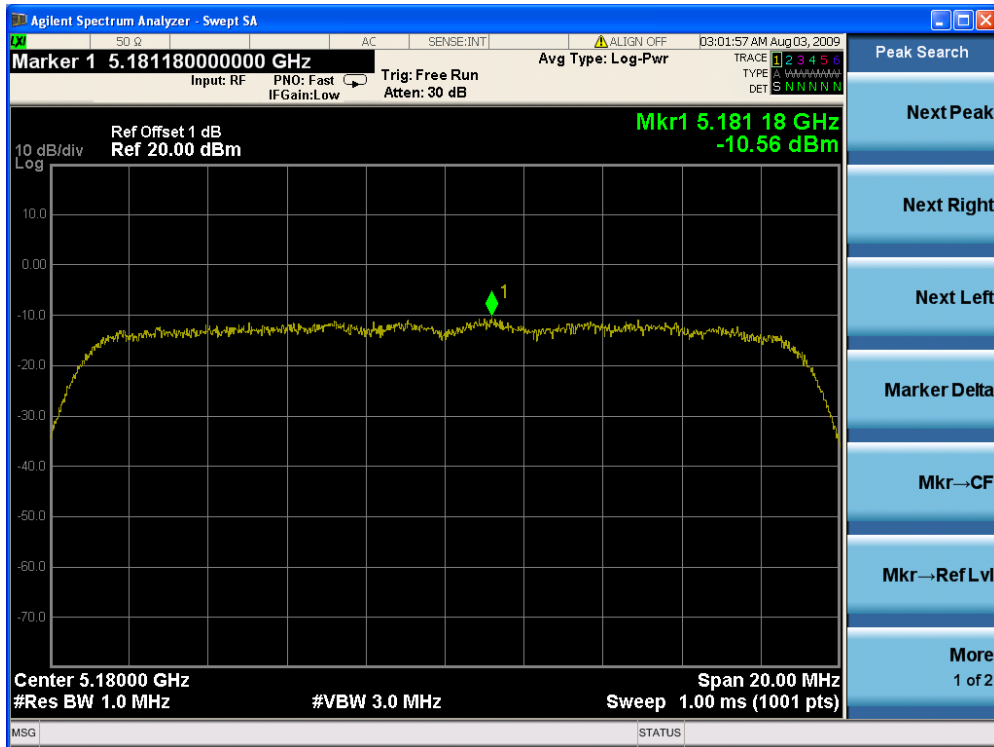


Channel 40 (5200MHz) - Chain A

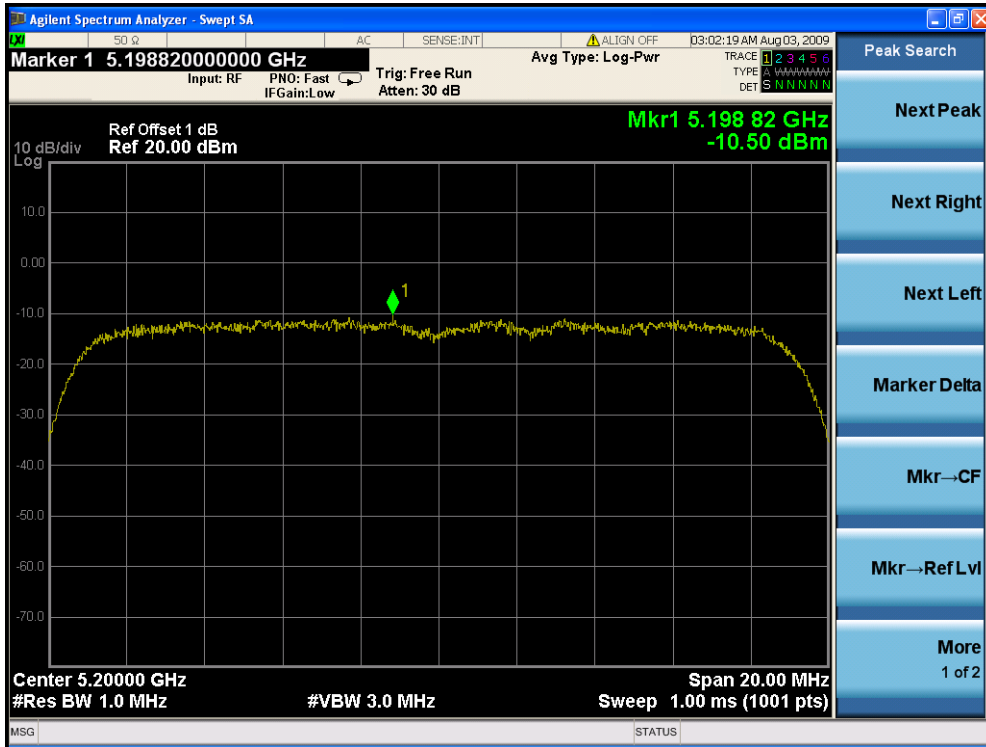


Channel 48 (5240MHz) - Chain A

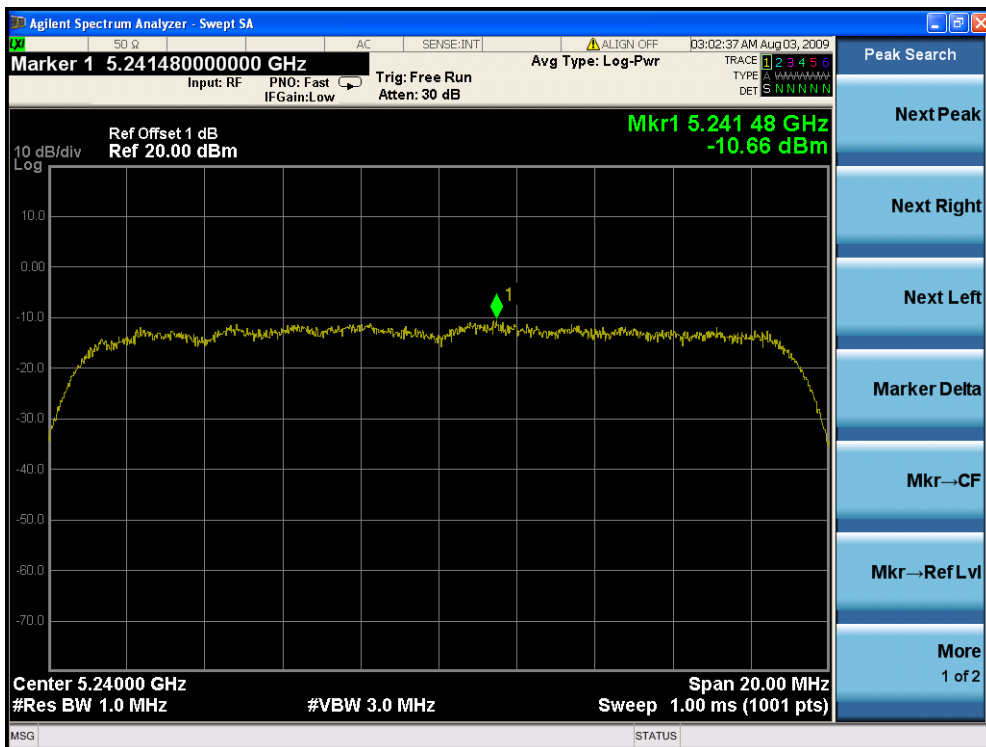

Channel 52 (5260MHz) - Chain A

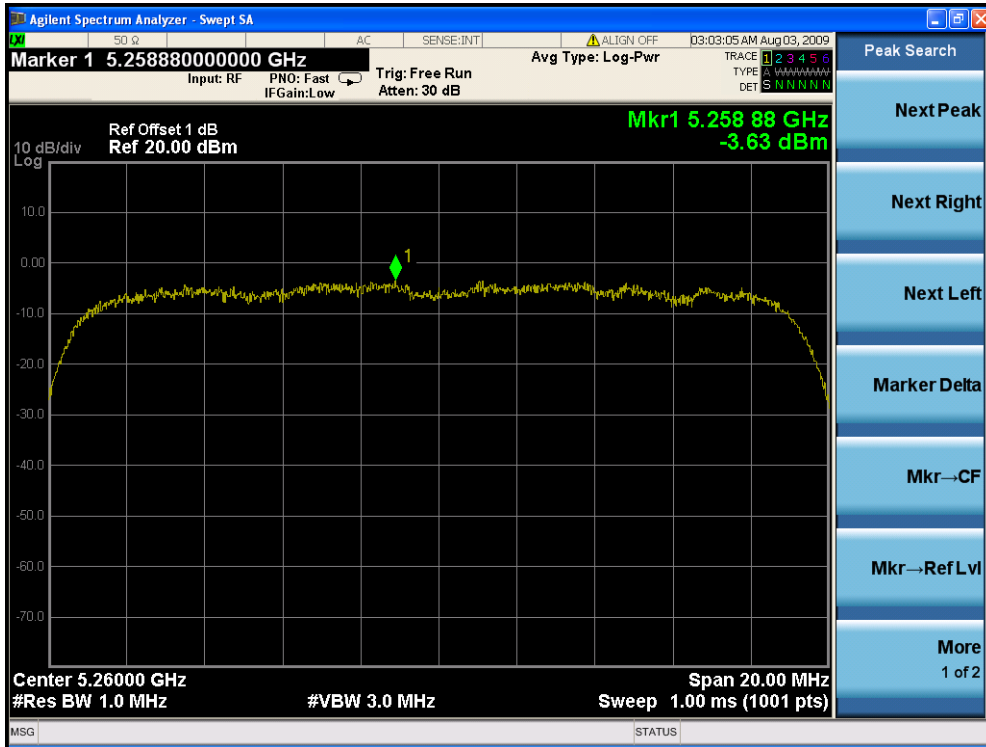


Channel 60 (5300MHz) - Chain A

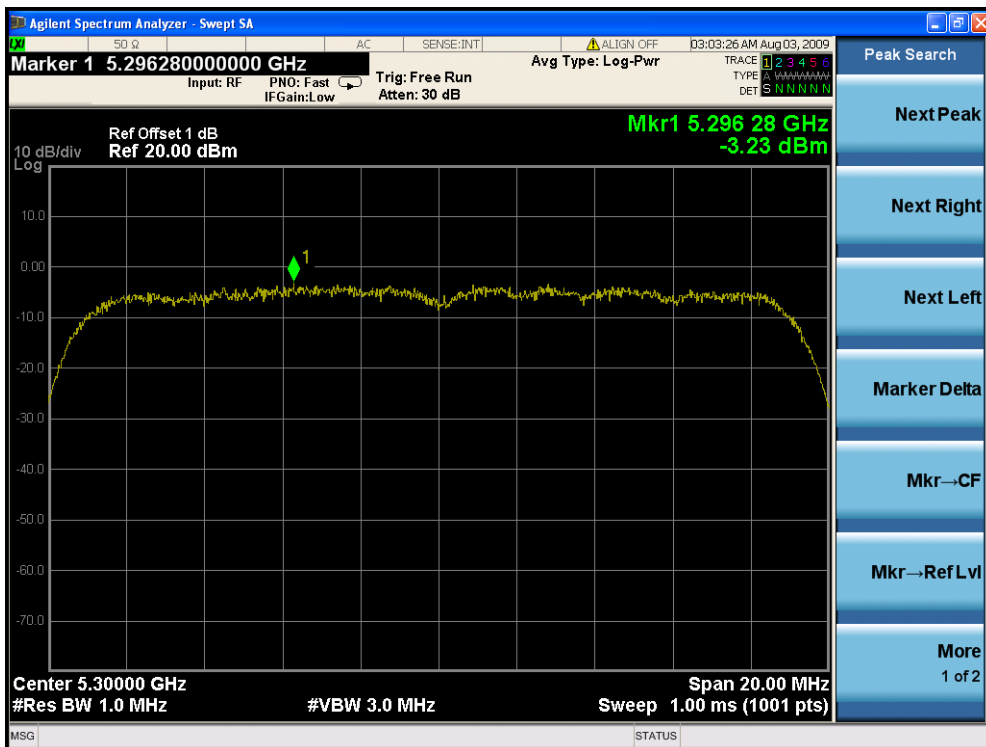


Channel 64 (5320MHz) - Chain A




Channel 100 (5500MHz) - Chain A

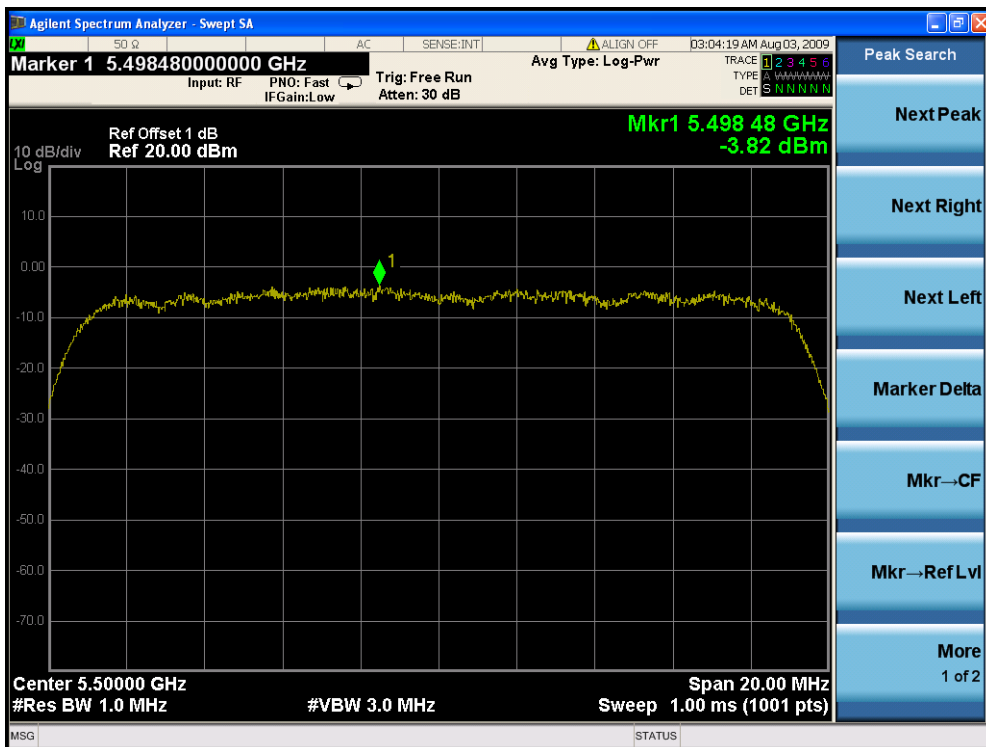

Channel 120 (5600MHz) - Chain A

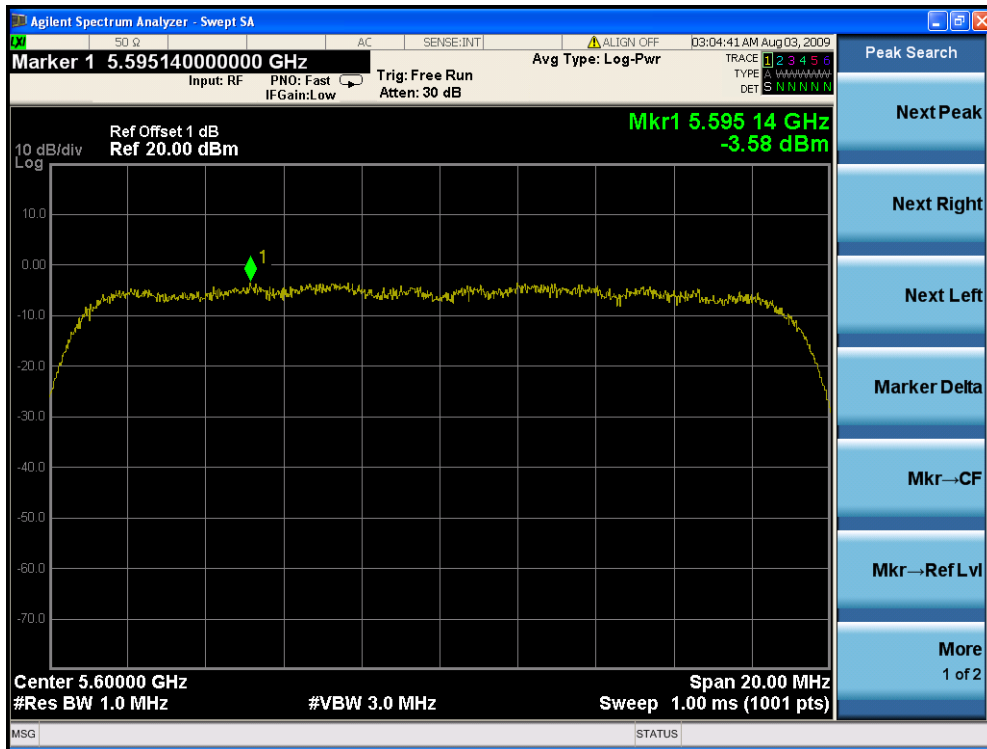


Channel 140 (5700MHz) - Chain A

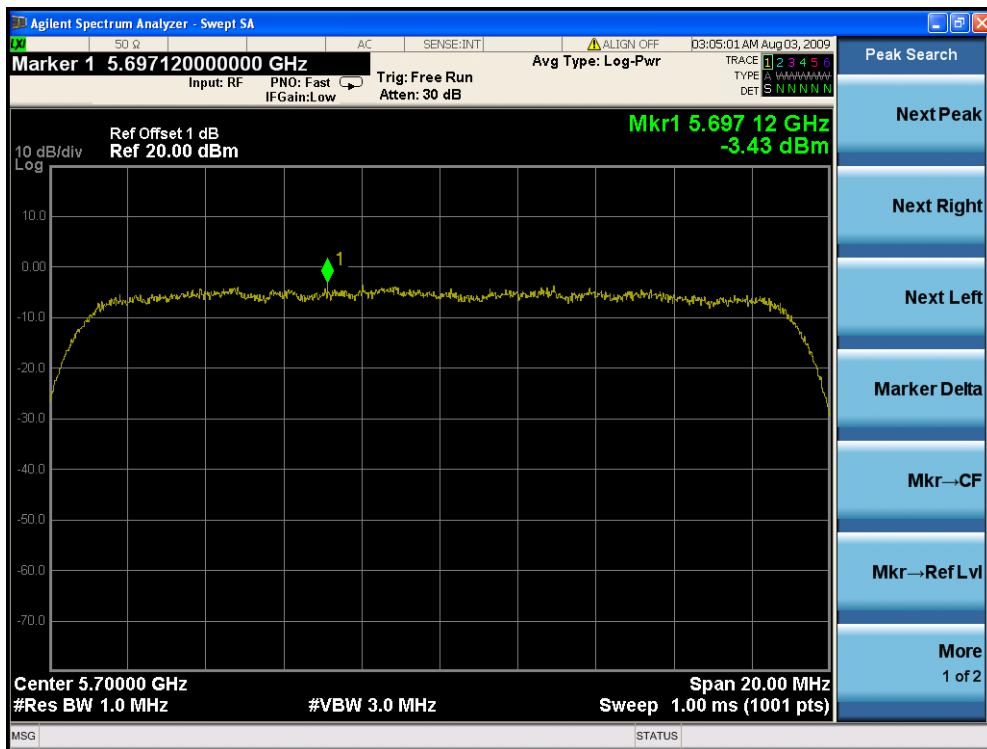





### Channel 36 (5180MHz) - Chain B

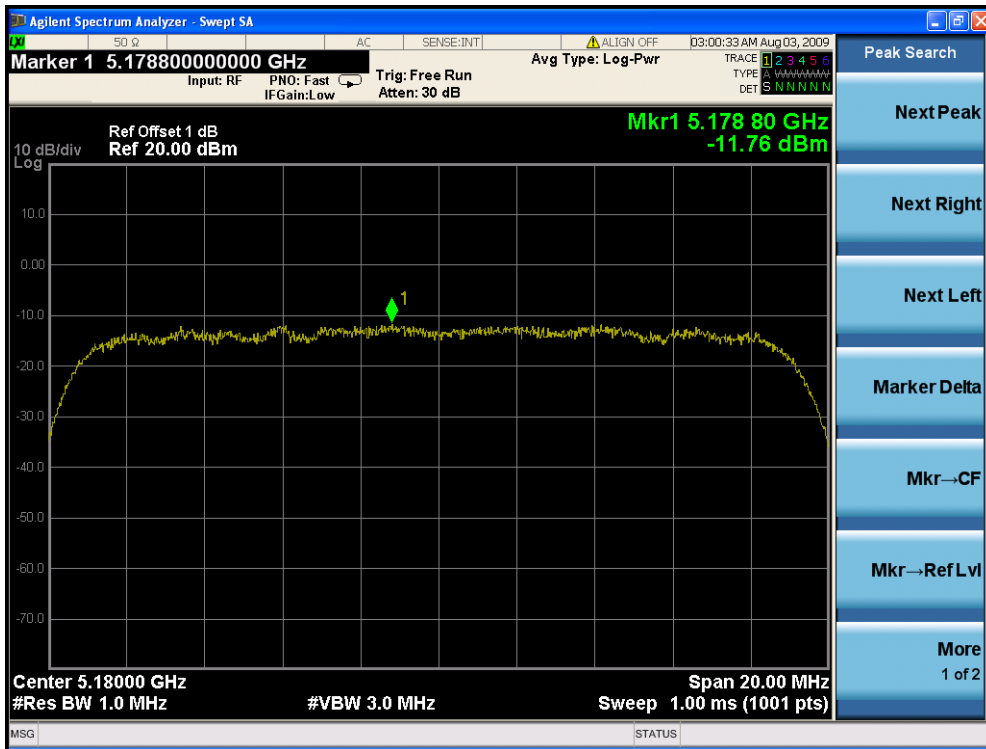


### Channel 40 (5200MHz) - Chain B

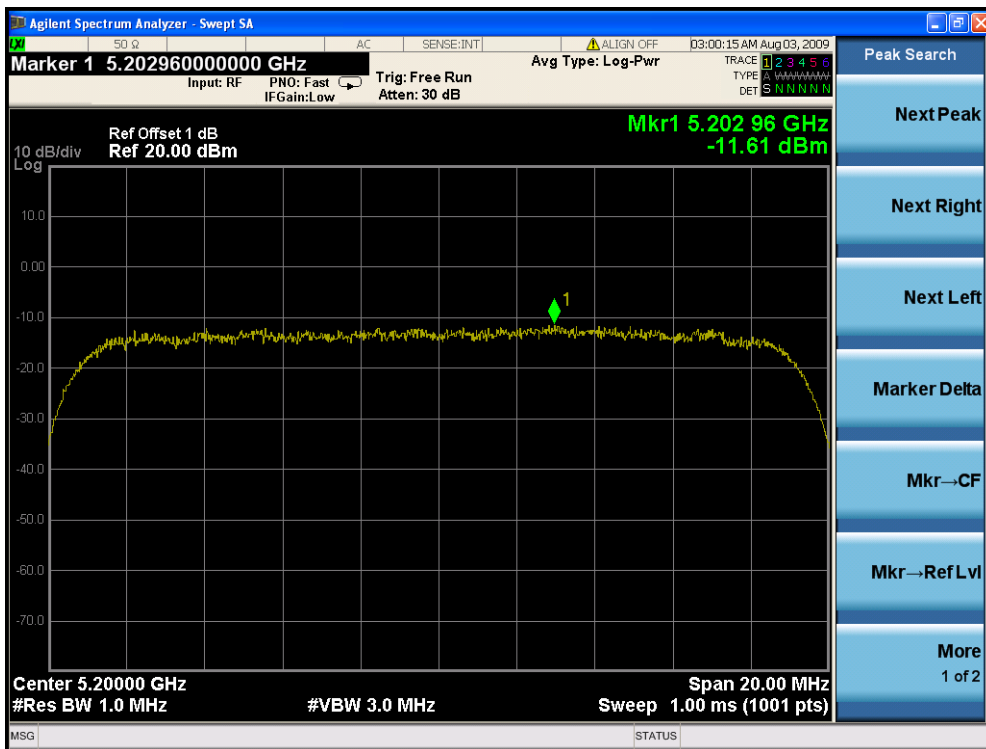


Channel 48 (5240MHz) - Chain B

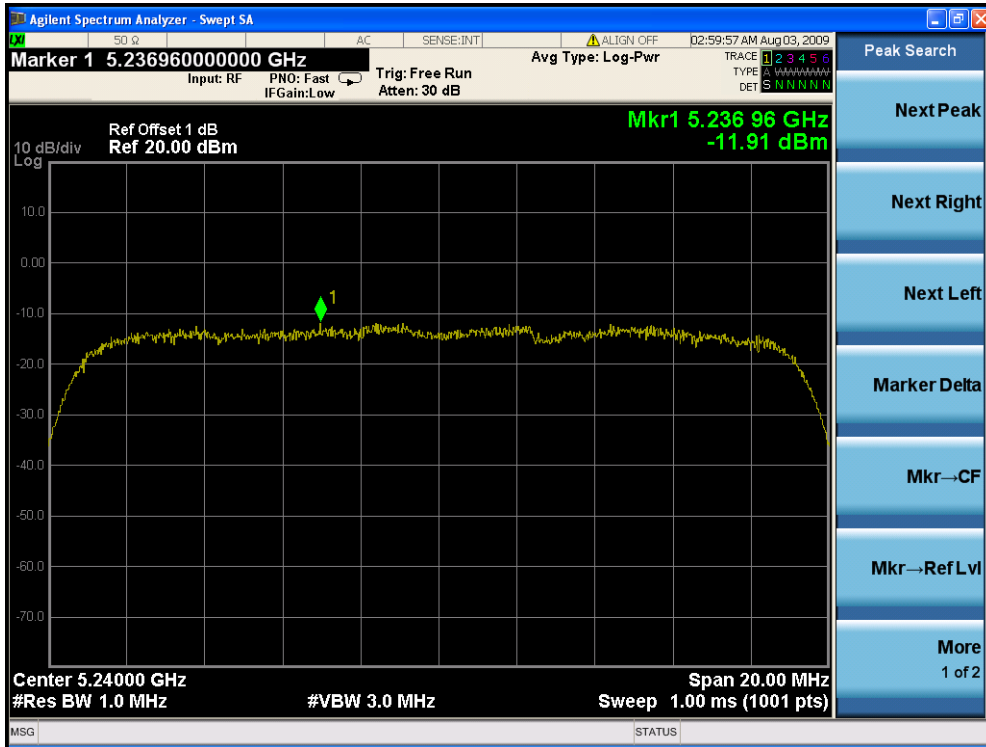


Channel 52 (5260MHz) - Chain B

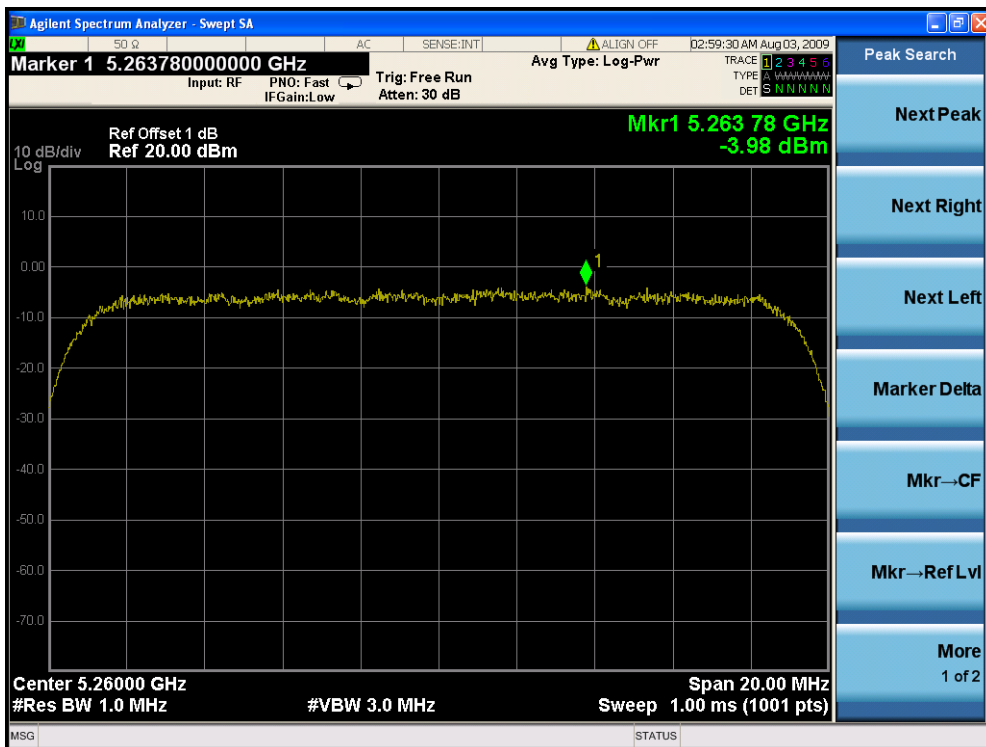


Channel 60 (5300MHz) - Chain B

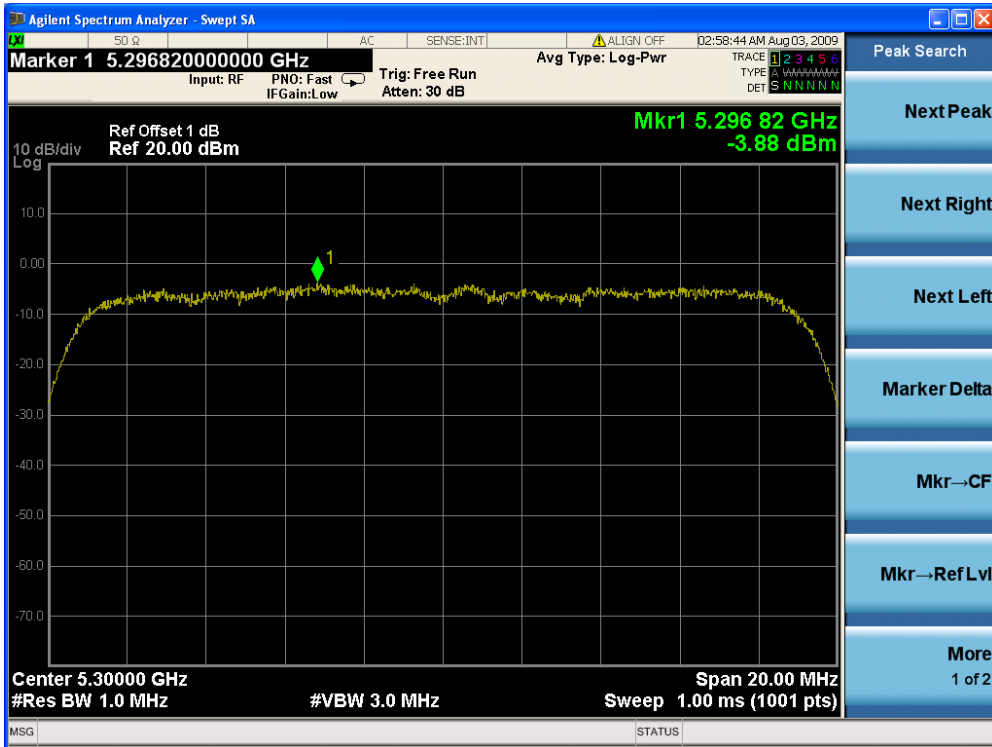


Channel 64 (5320MHz) - Chain B

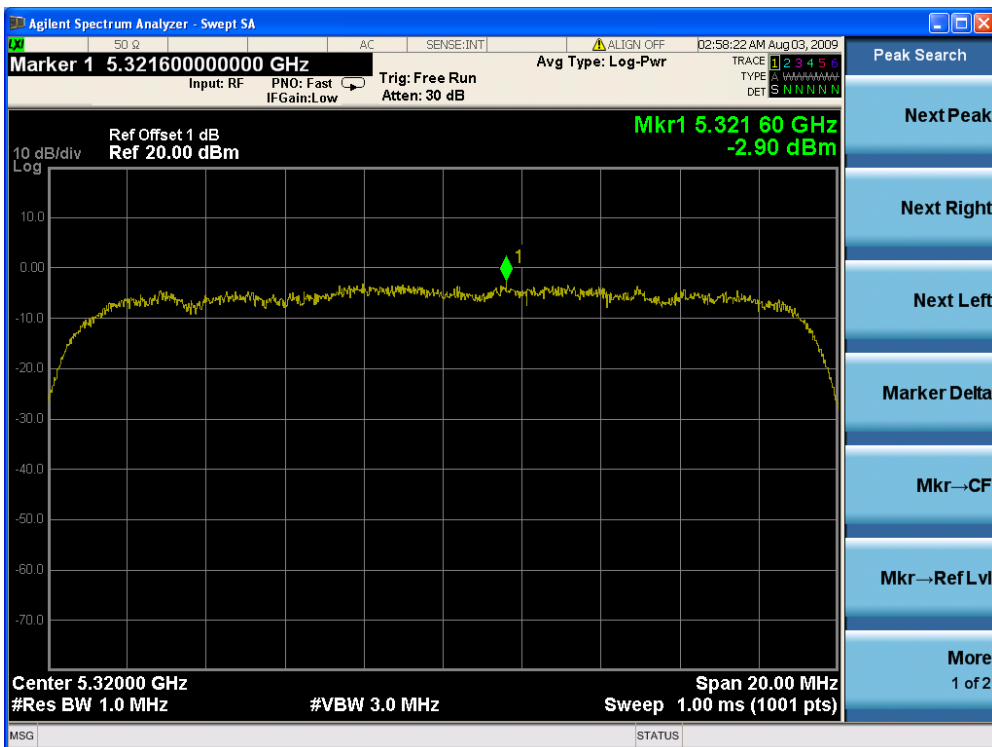


Channel 100 (5500MHz) - Chain B

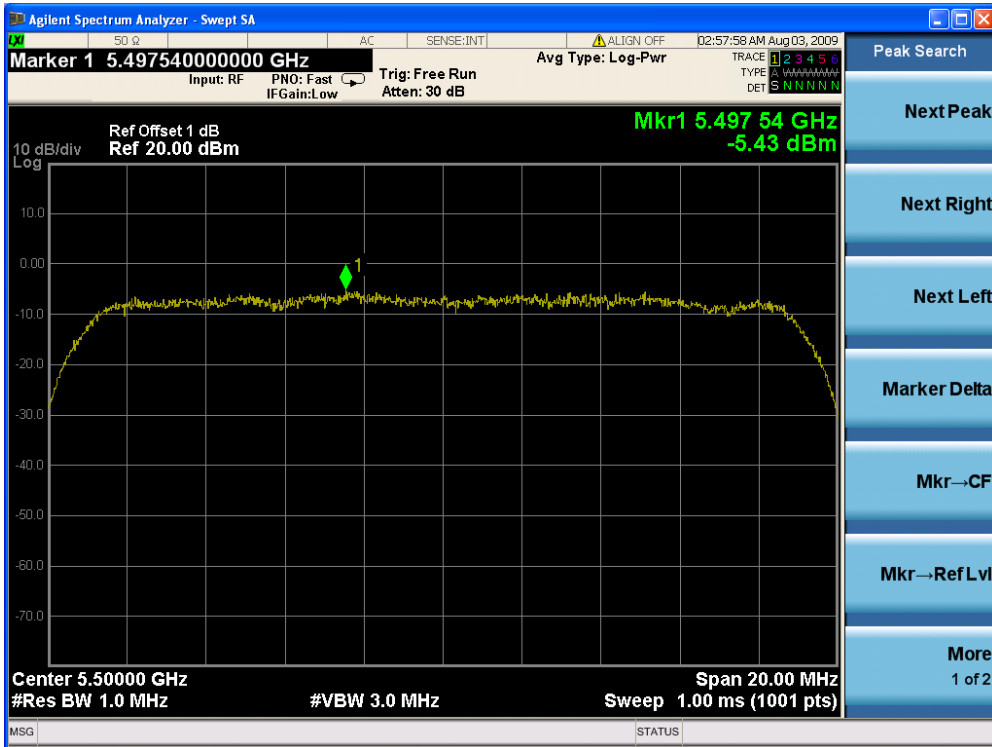

Channel 120 (5600MHz) - Chain B

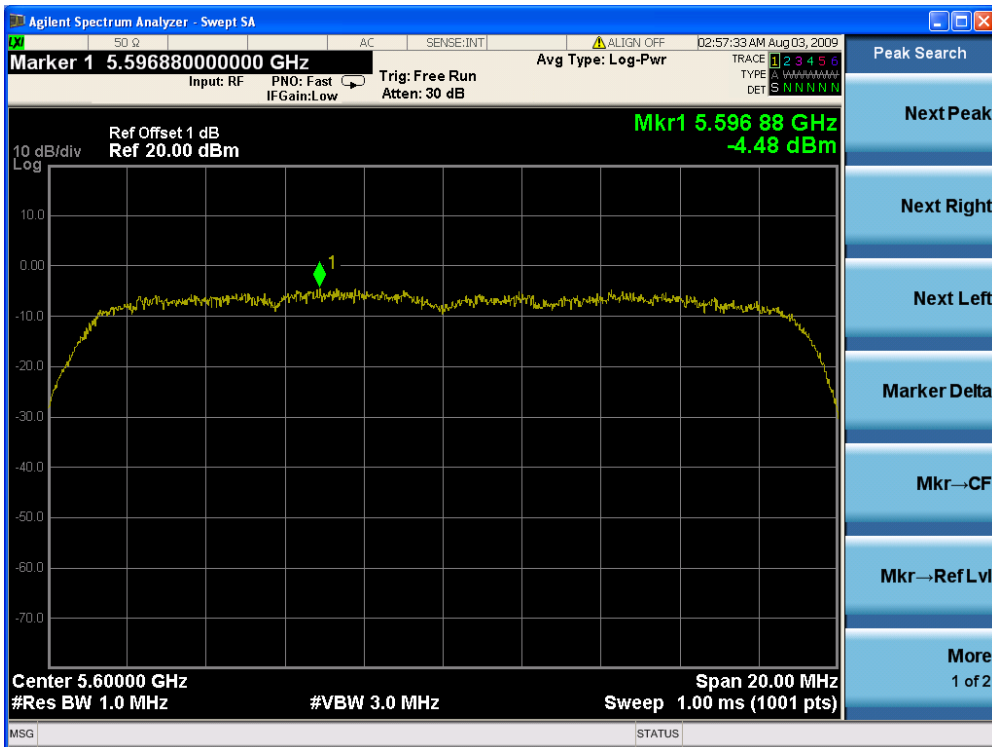

Channel 140 (5700MHz) - Chain B

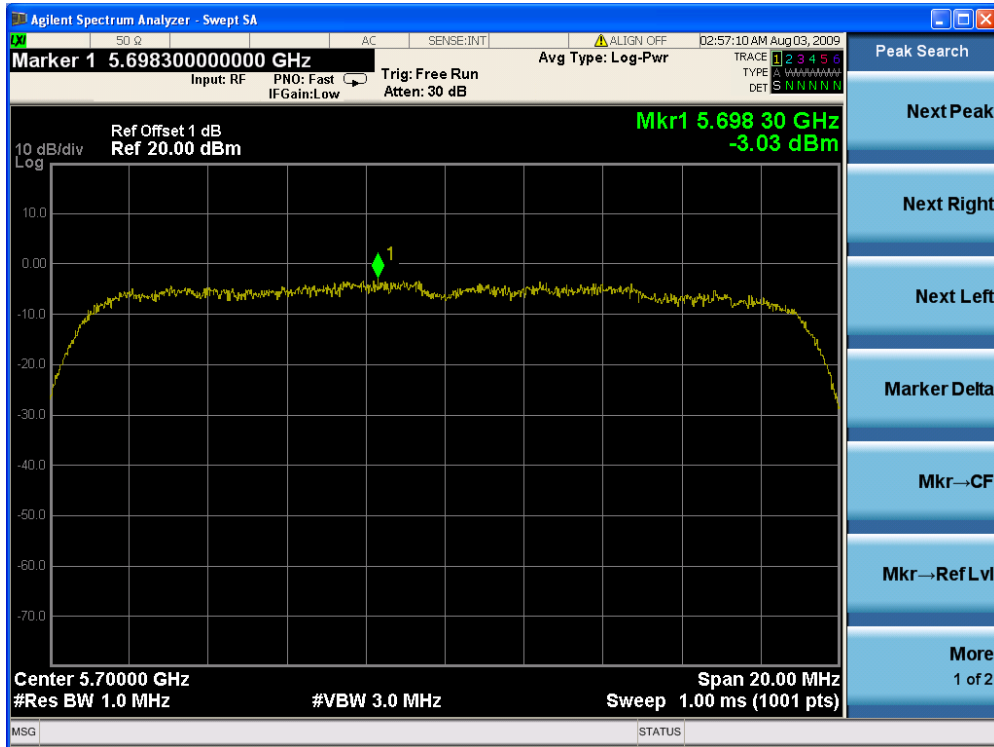


Channel 36 (5180MHz) - Chain C



Channel 40 (5200MHz) - Chain C




Channel 48 (5240MHz) - Chain C

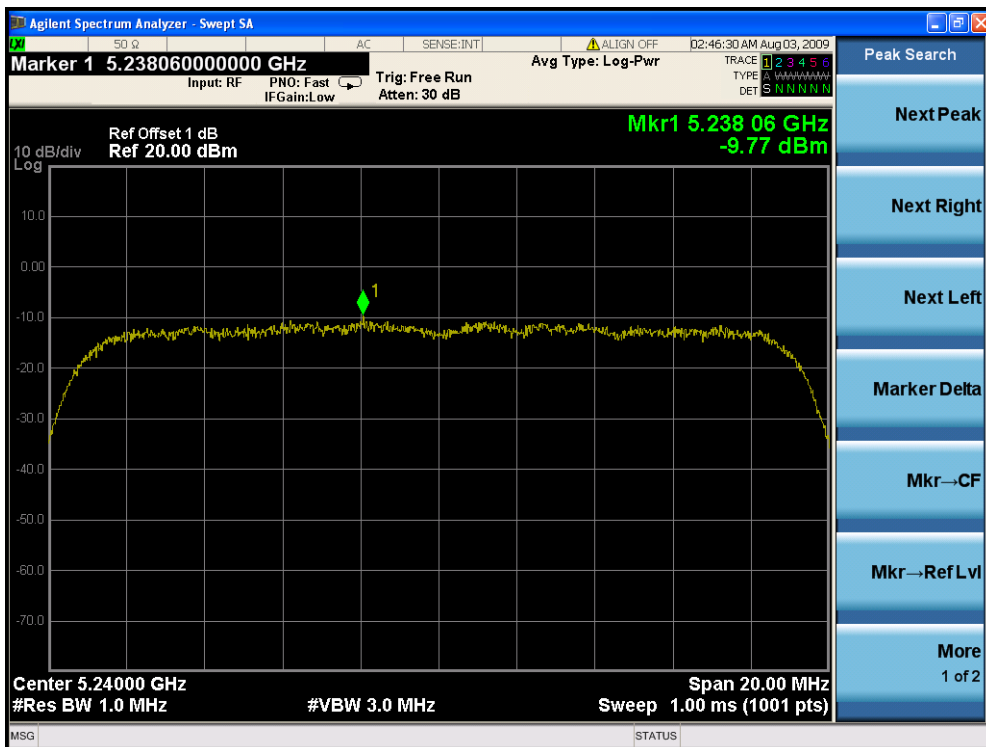


Channel 52 (5260MHz) - Chain C




Channel 60 (5300MHz) - Chain C

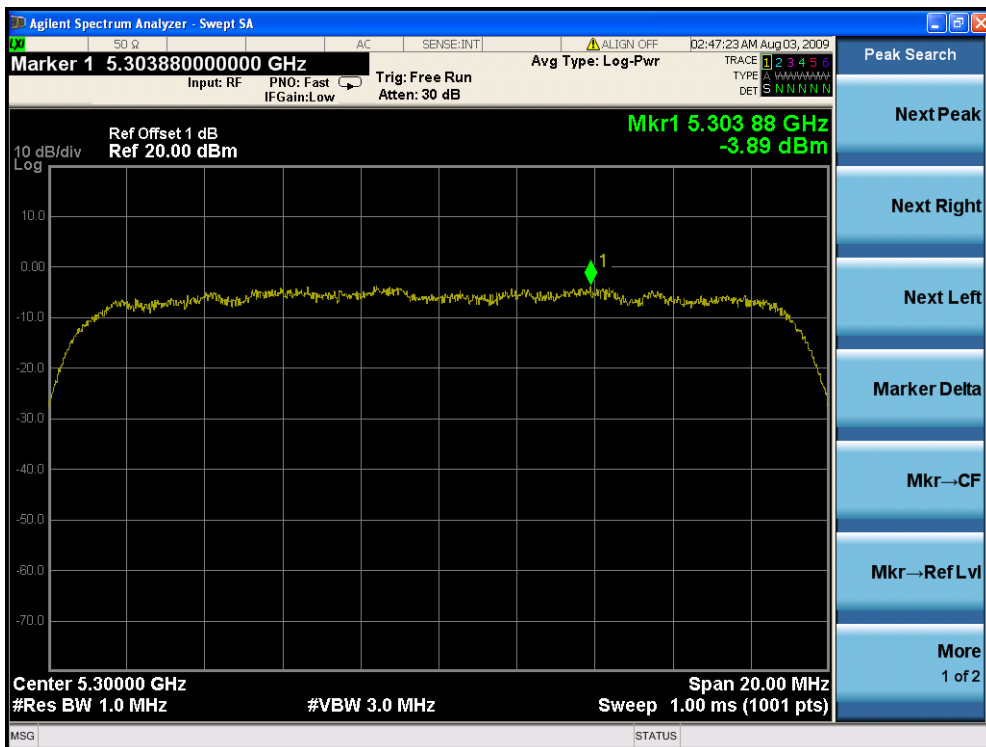

Channel 64 (5320MHz) - Chain C

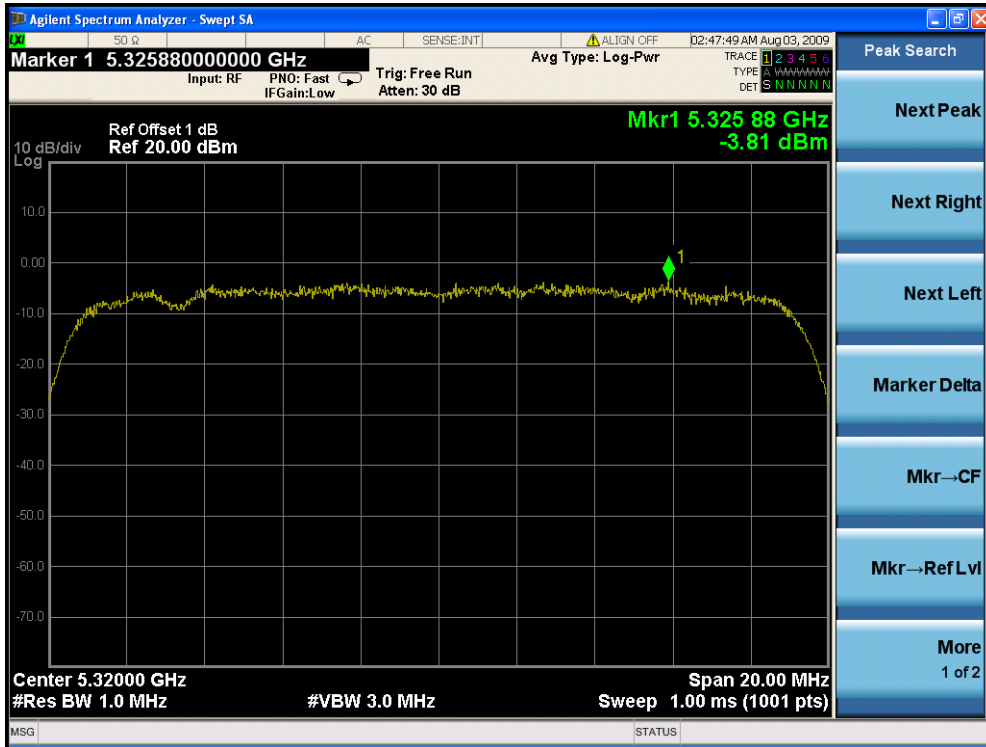


Channel 100 (5500MHz) - Chain C

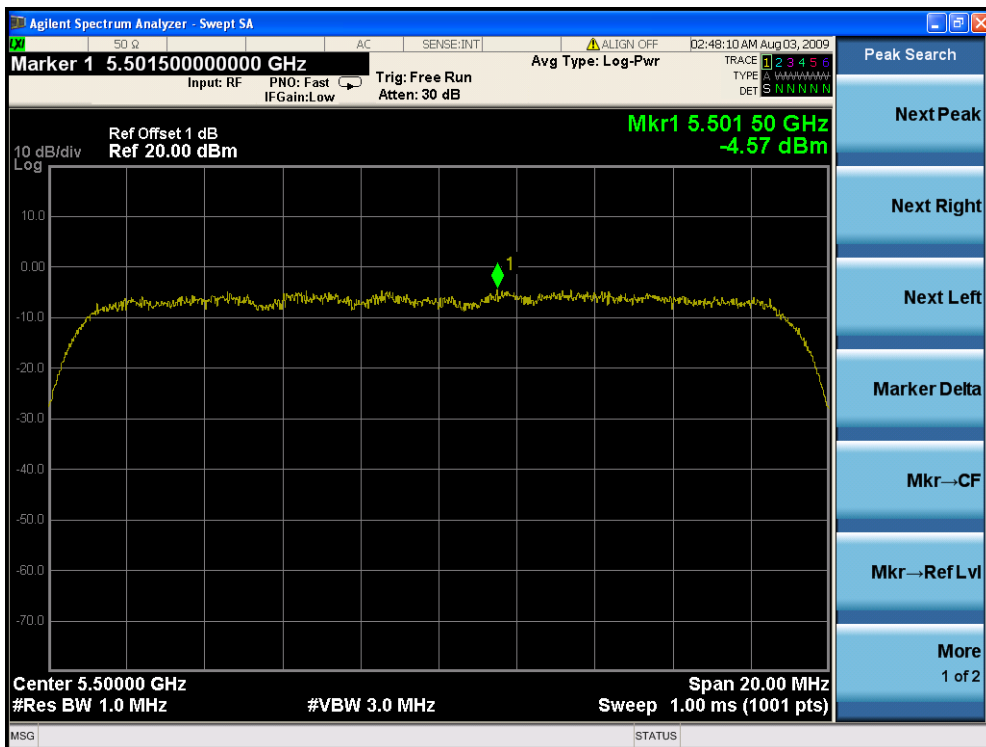




Channel 120 (5600MHz) - Chain C

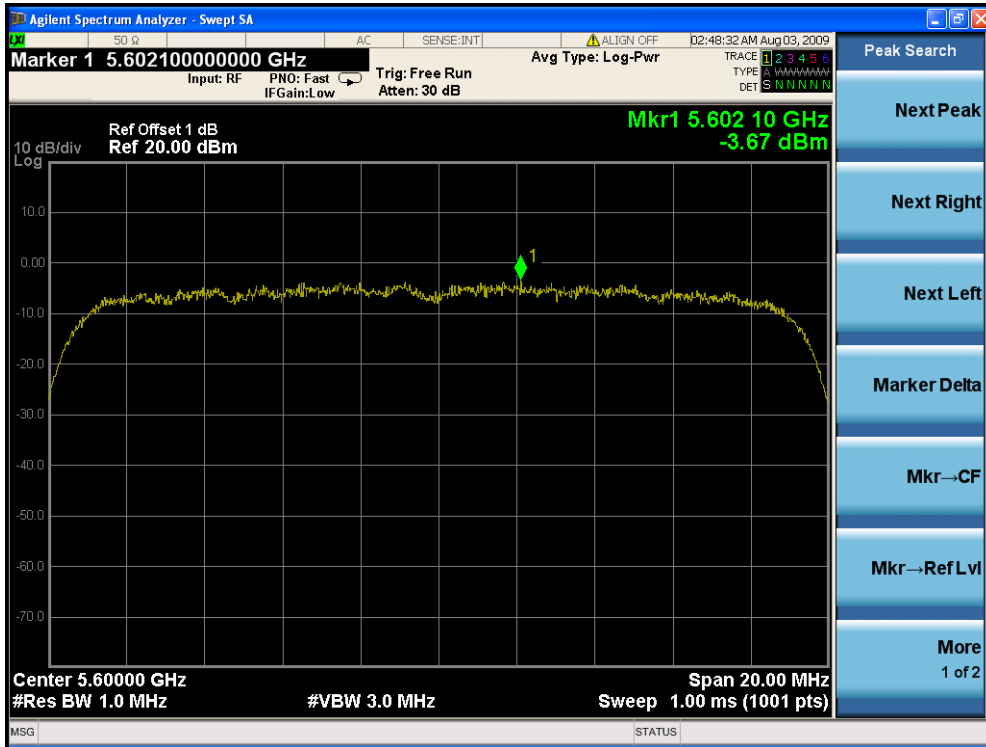

Channel 140 (5700MHz) - Chain C

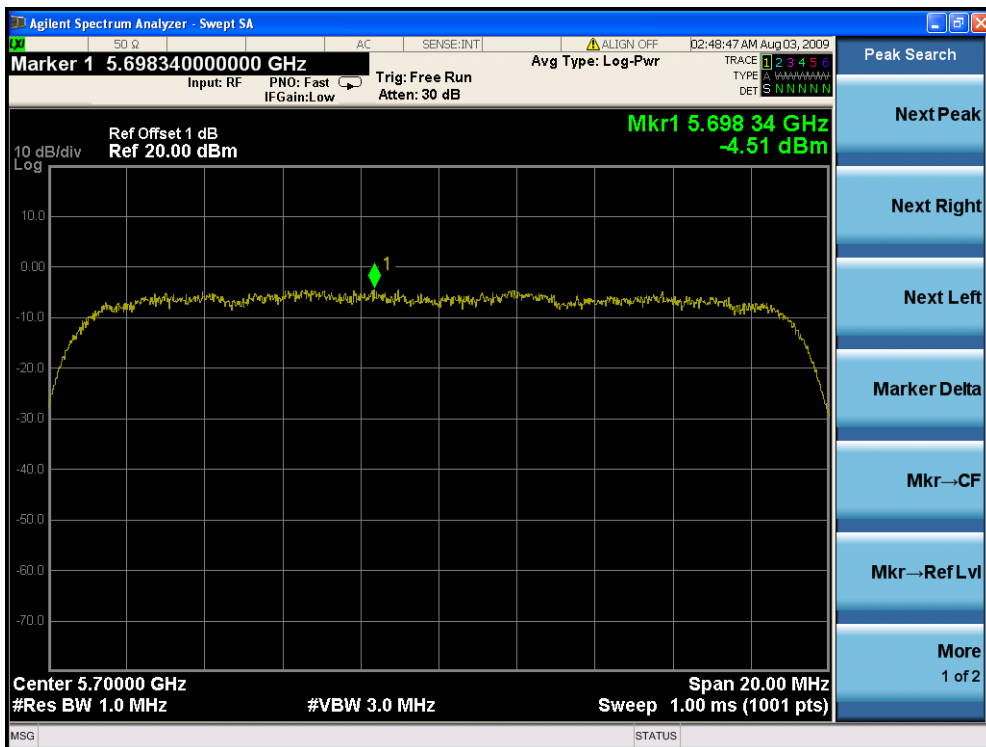


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain A)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
38	5190	-12.10	N/A	N/A	-12.10	4	Pass
46	5230	-11.83	N/A	N/A	-11.83	4	Pass
54	5270	-4.29	N/A	N/A	-4.29	11	Pass
62	5310	-5.14	N/A	N/A	-5.14	11	Pass
102	5510	-3.40	N/A	N/A	-3.40	11	Pass
118	5590	-1.24	N/A	N/A	-1.24	11	Pass
134	5670	-2.36	N/A	N/A	-2.36	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -6.73dBm.


### Channel 38 (5190MHz)

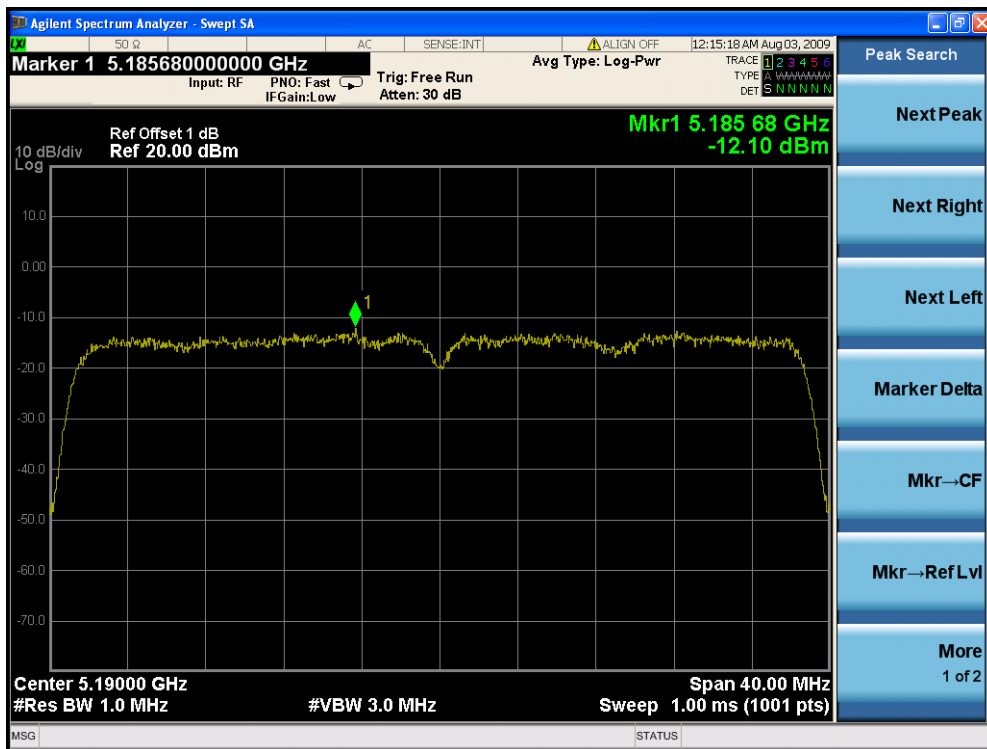


Channel 46 (5230MHz)




Channel 54 (5270MHz)

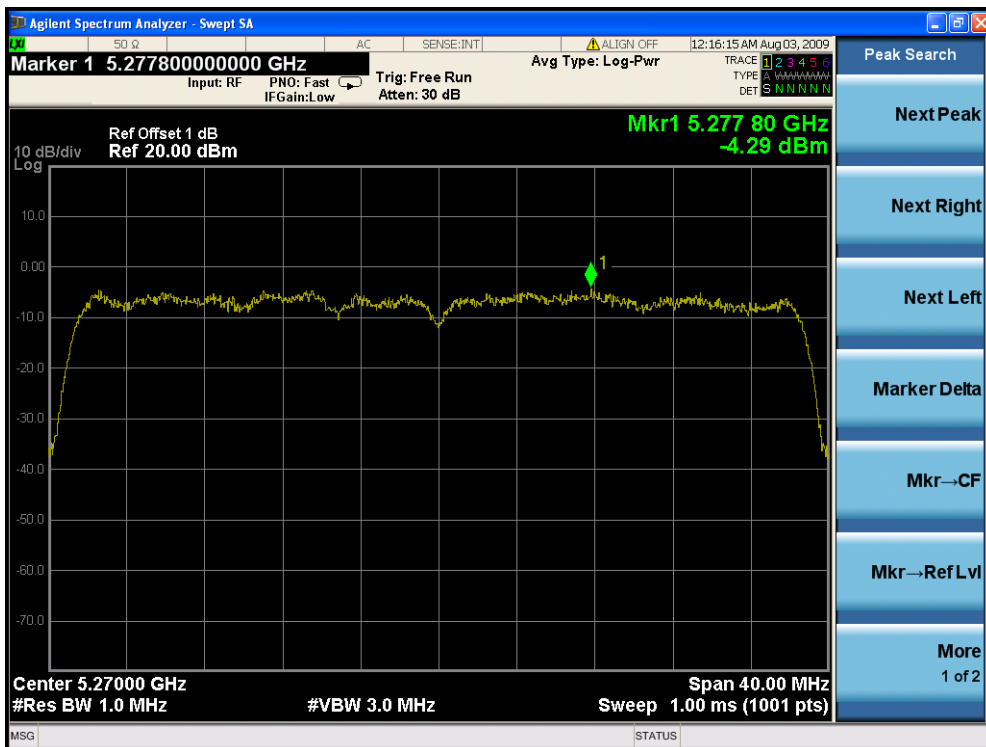


Channel 62 (5310MHz)

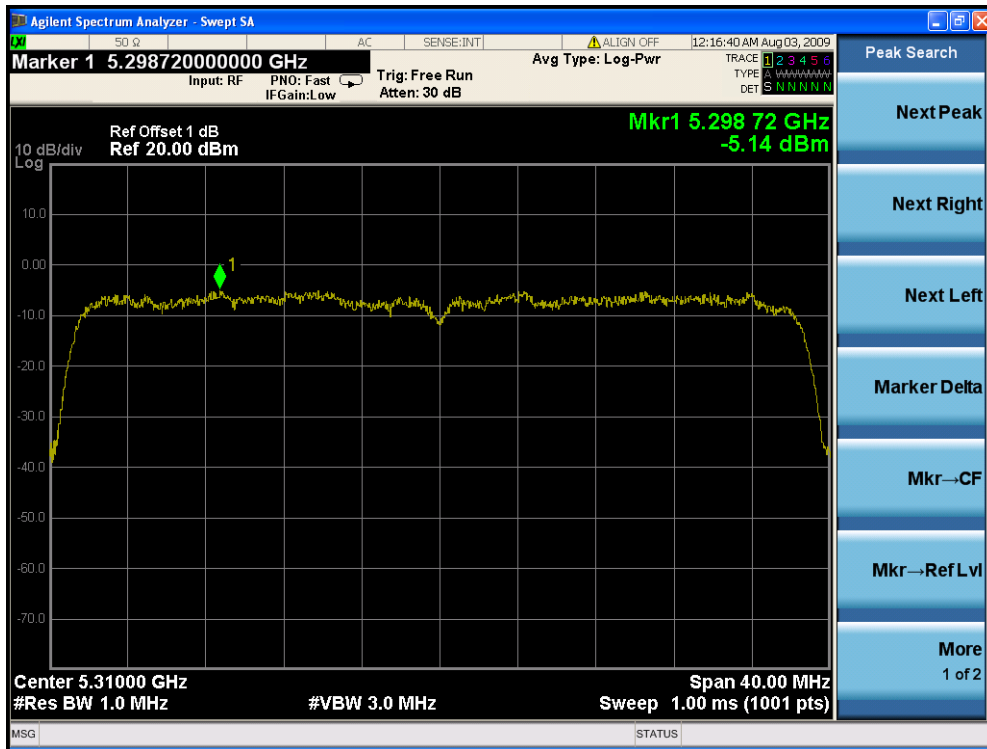


Channel 102 (5510MHz)

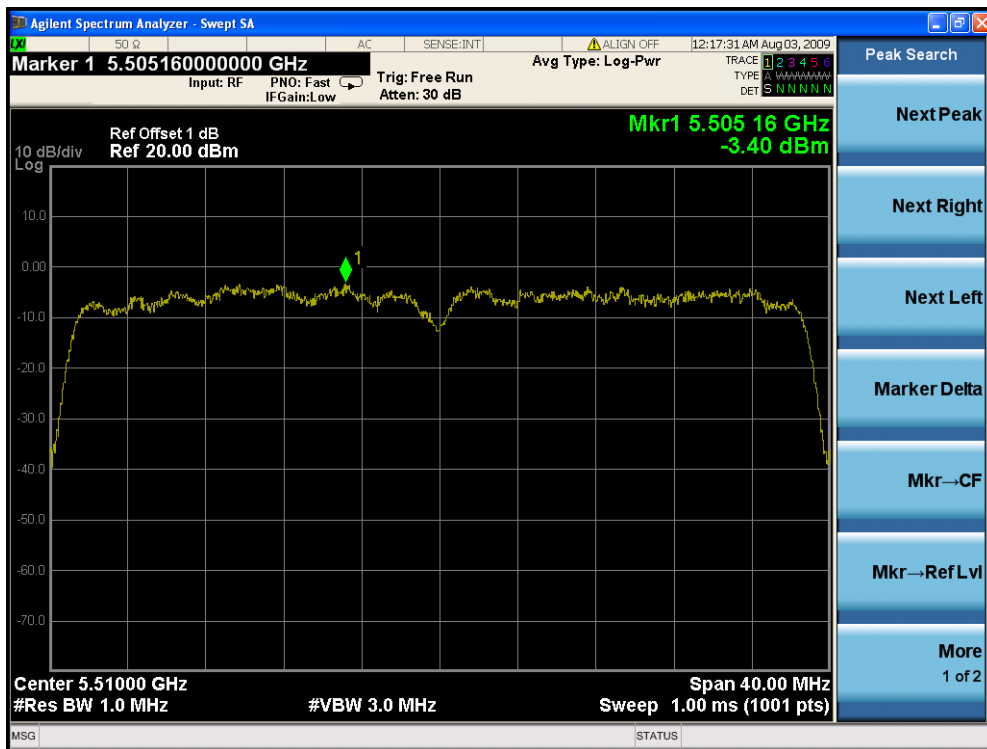

### Channel 118 (5590MHz)

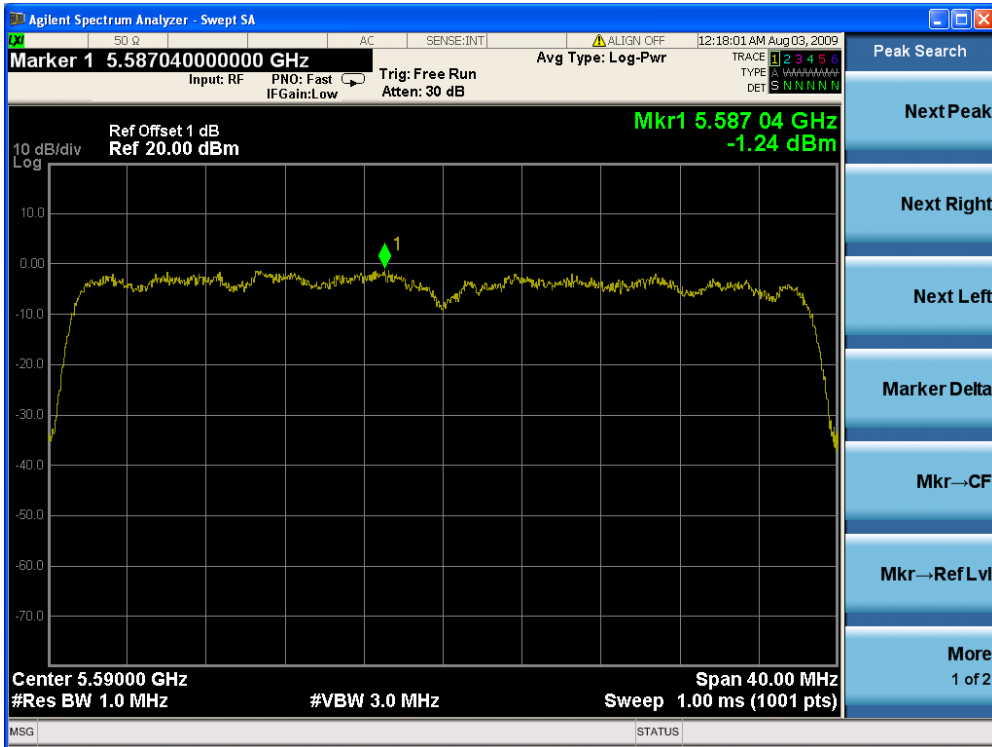

### Channel 134 (5670MHz)

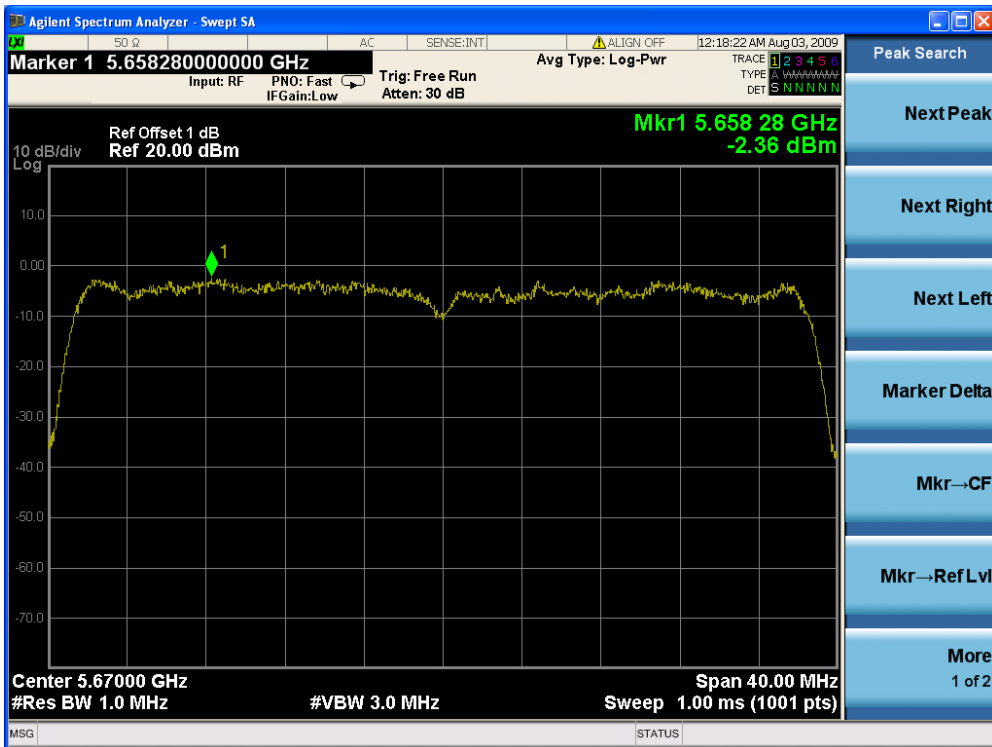


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain B)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
38	5190	N/A	-11.89	N/A	-11.89	4	Pass
46	5230	N/A	-12.63	N/A	-12.63	4	Pass
54	5270	N/A	-4.28	N/A	-4.28	11	Pass
62	5310	N/A	-3.44	N/A	-3.44	11	Pass
102	5510	N/A	-3.83	N/A	-3.83	11	Pass
118	5590	N/A	-2.40	N/A	-2.40	11	Pass
134	5670	N/A	-2.89	N/A	-2.89	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -6.79dBm.


**Channel 38 (5190MHz)**

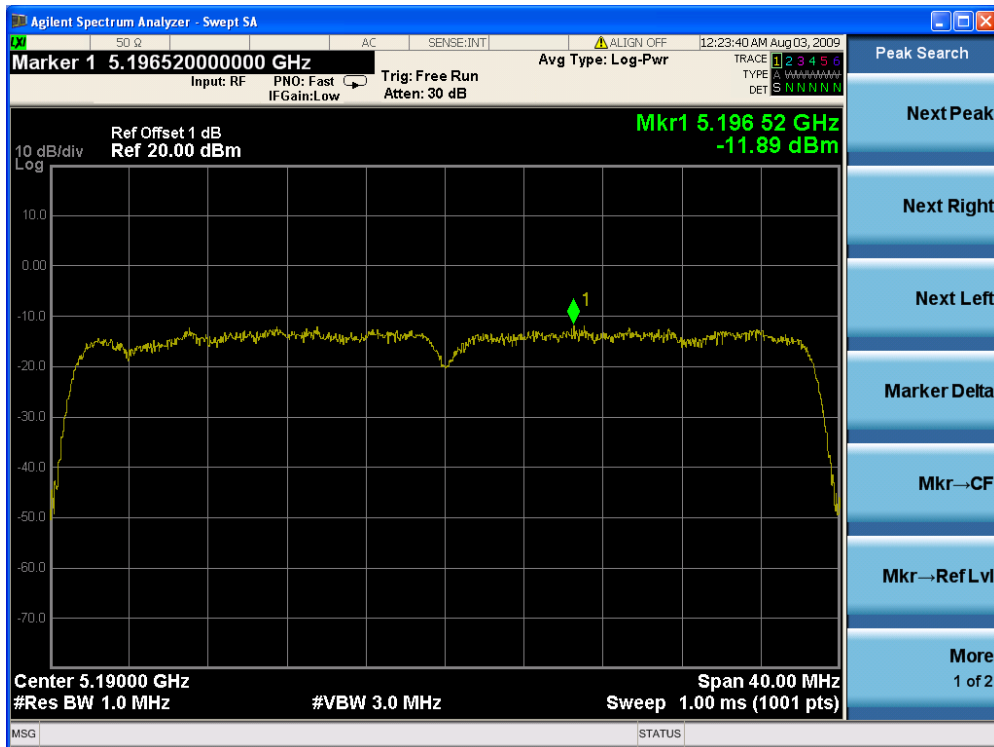


Channel 46 (5230MHz)

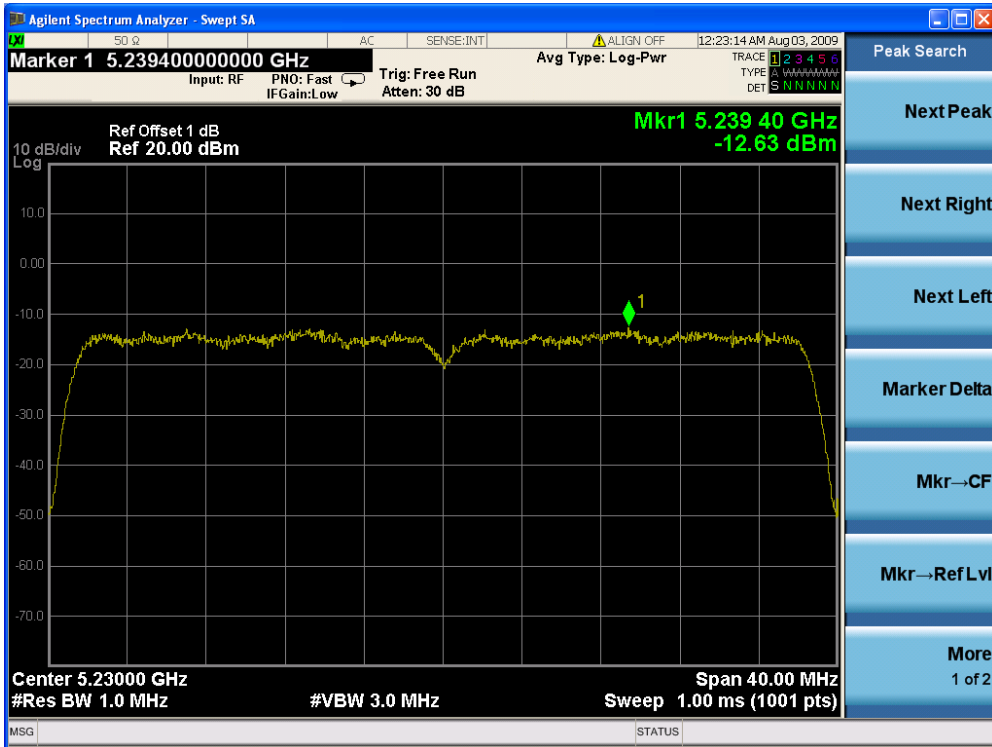

Channel 54 (5270MHz)

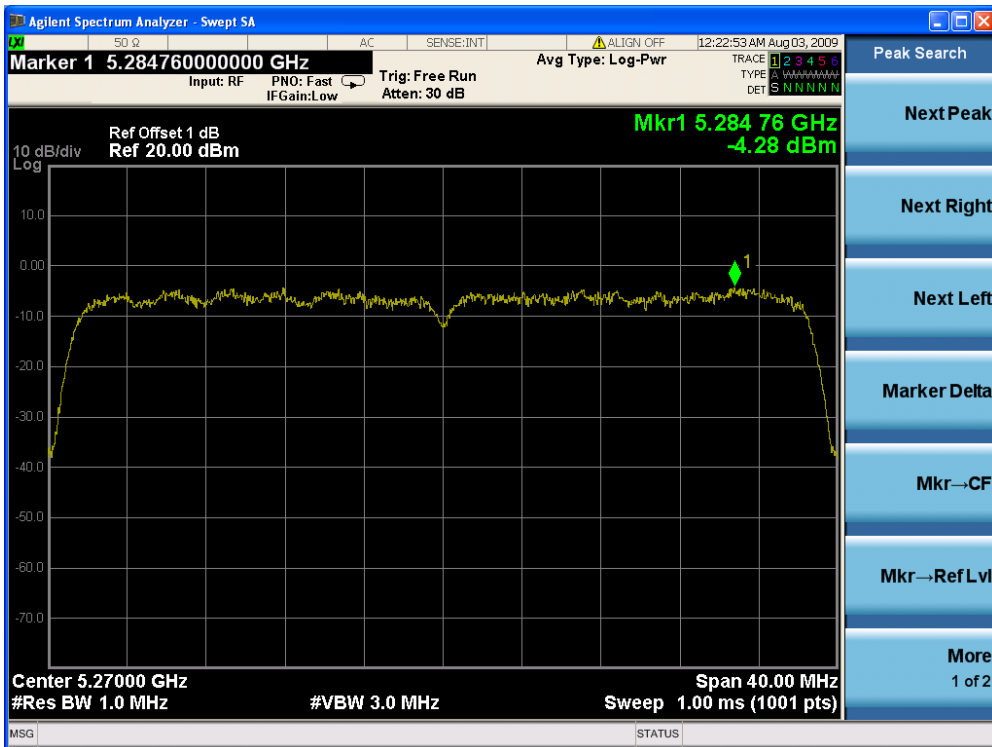

Channel 62 (5310MHz)

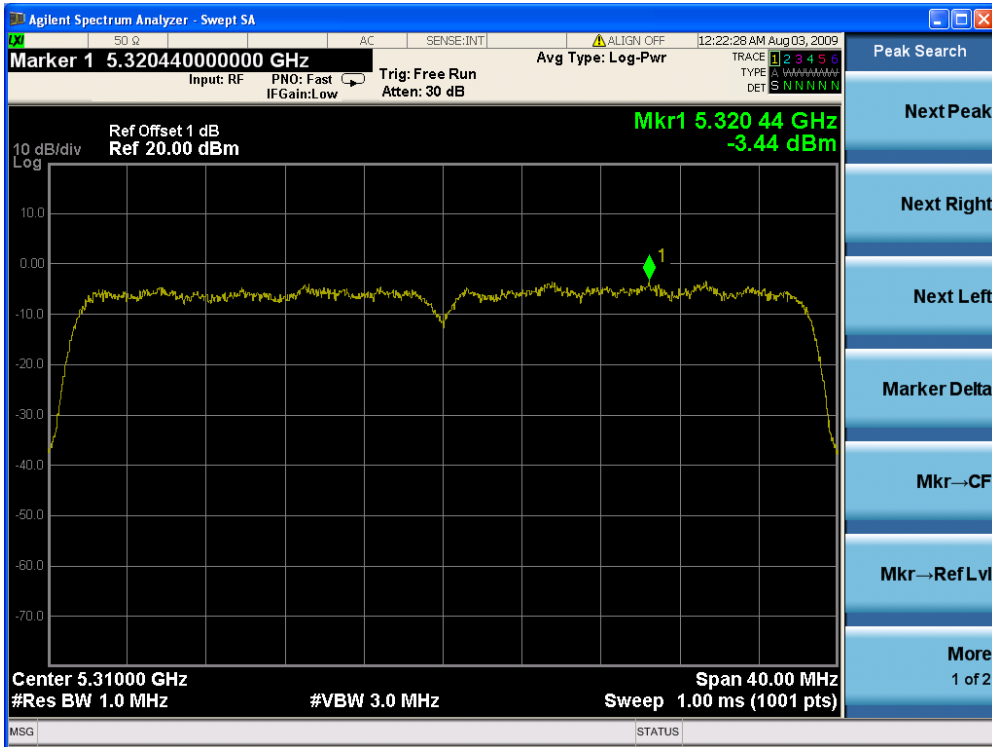


Channel 102 (5510MHz)






Channel 118 (5590MHz)

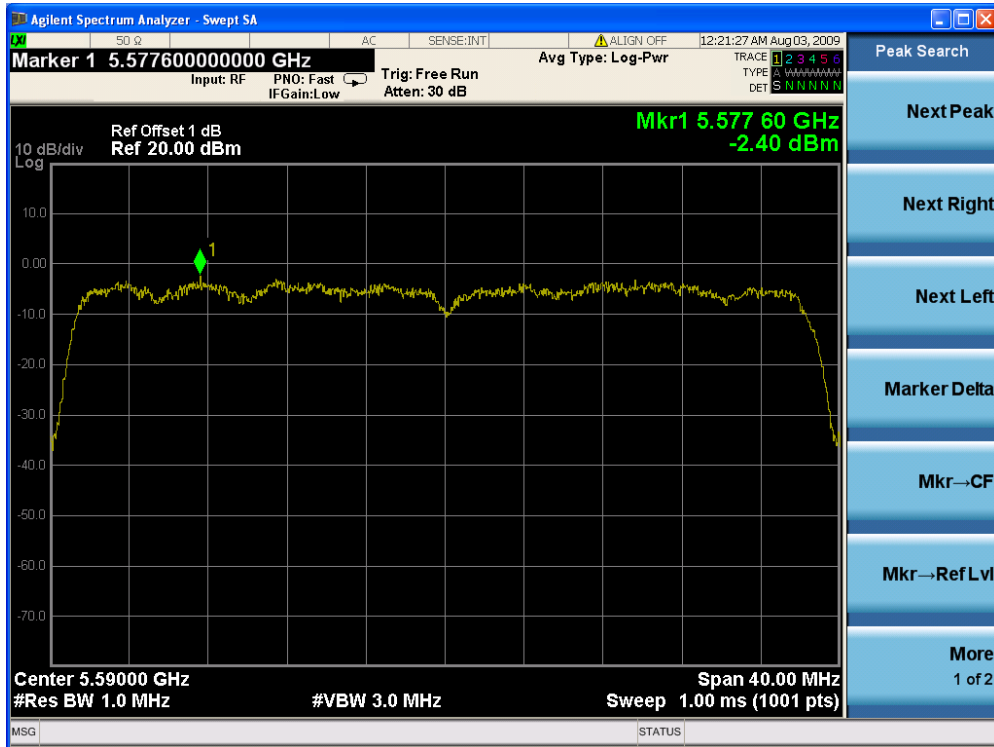

Channel 134 (5670MHz)

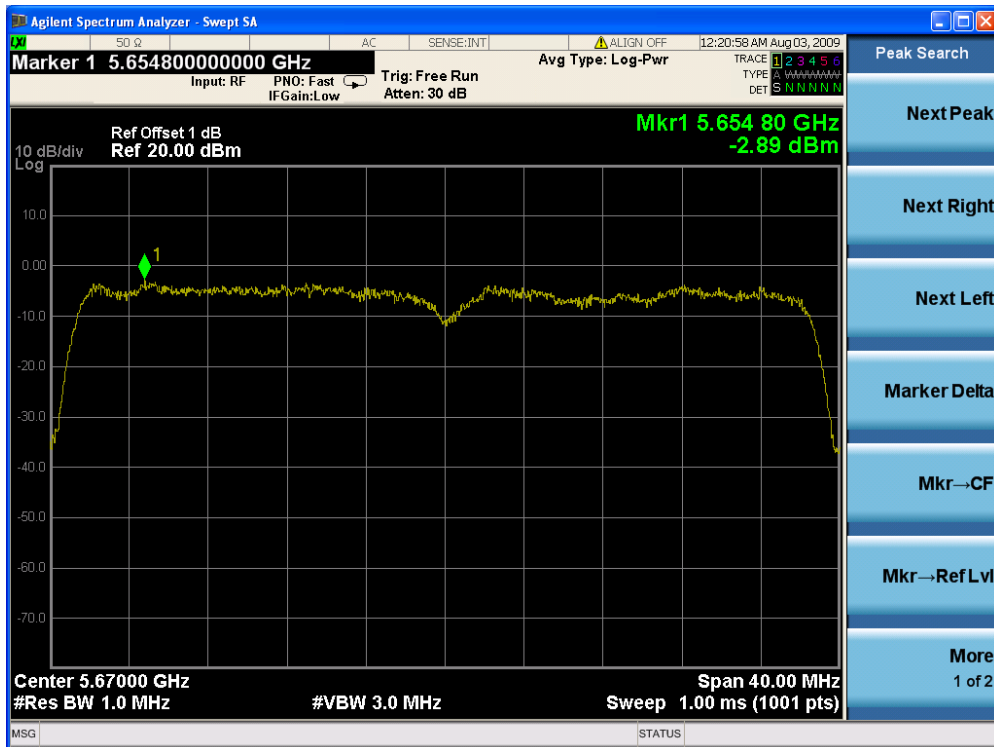


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain C)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
38	5190	N/A	N/A	-11.98	-11.98	4	Pass
46	5230	N/A	N/A	-11.99	-11.99	4	Pass
54	5270	N/A	N/A	-5.24	-5.24	11	Pass
62	5310	N/A	N/A	-4.81	-4.81	11	Pass
102	5510	N/A	N/A	-4.14	-4.14	11	Pass
118	5590	N/A	N/A	-2.08	-2.08	11	Pass
134	5670	N/A	N/A	-2.41	-2.41	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -6.88dBm.


### Channel 38 (5190MHz)

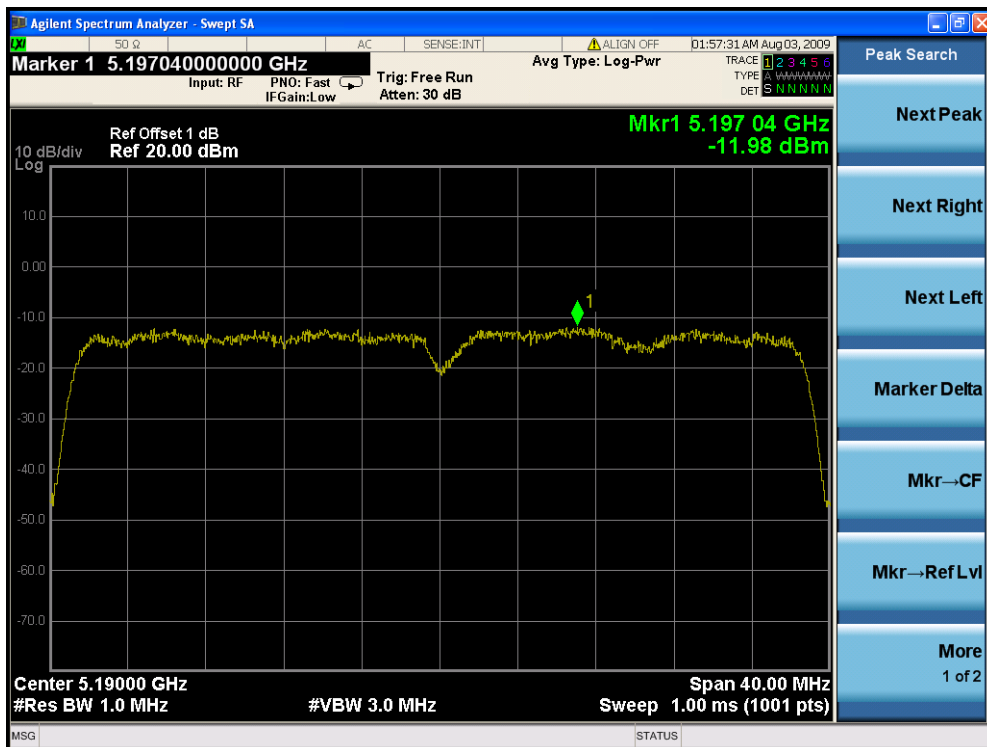

Channel 46 (5230MHz)

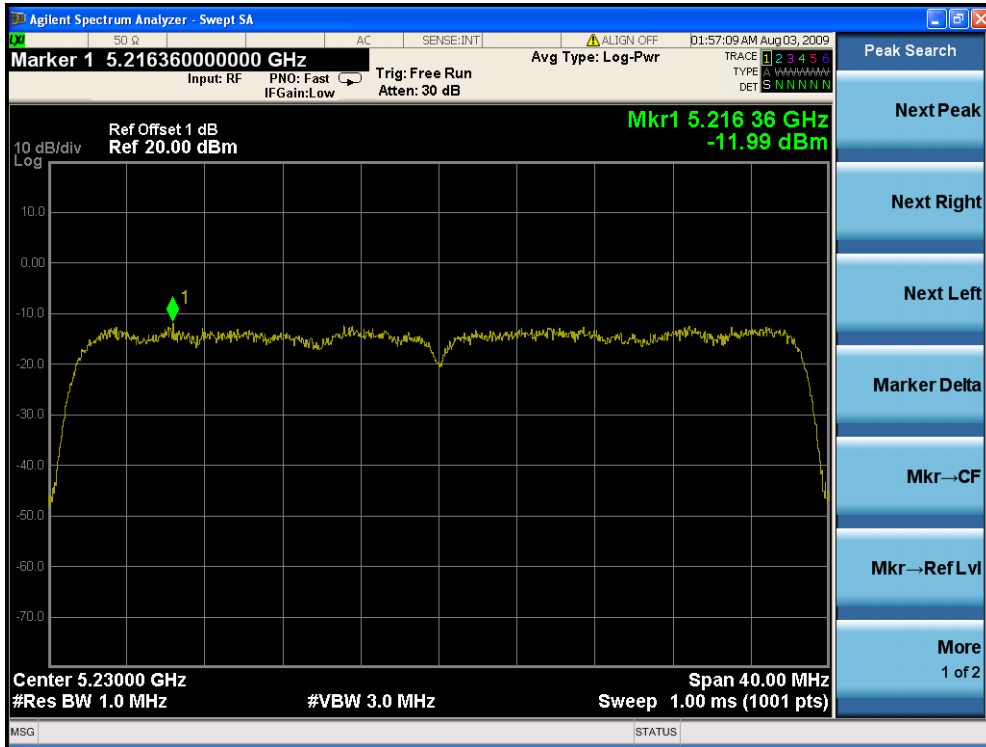


Channel 54 (5270MHz)

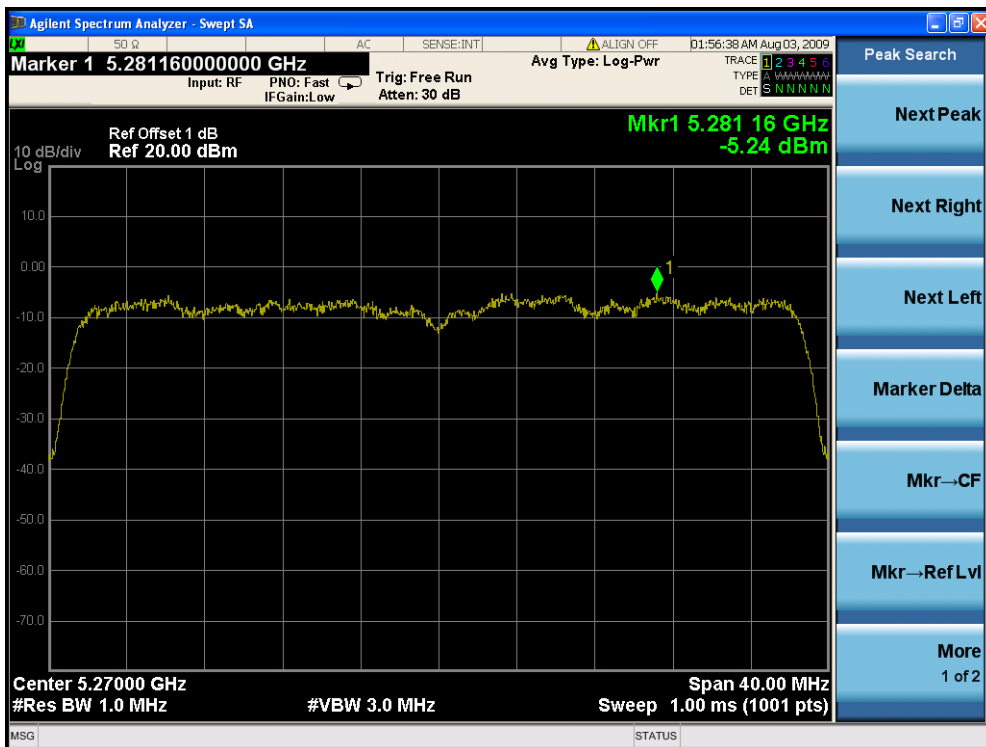


Channel 62 (5310MHz)




Channel 102 (5510MHz)

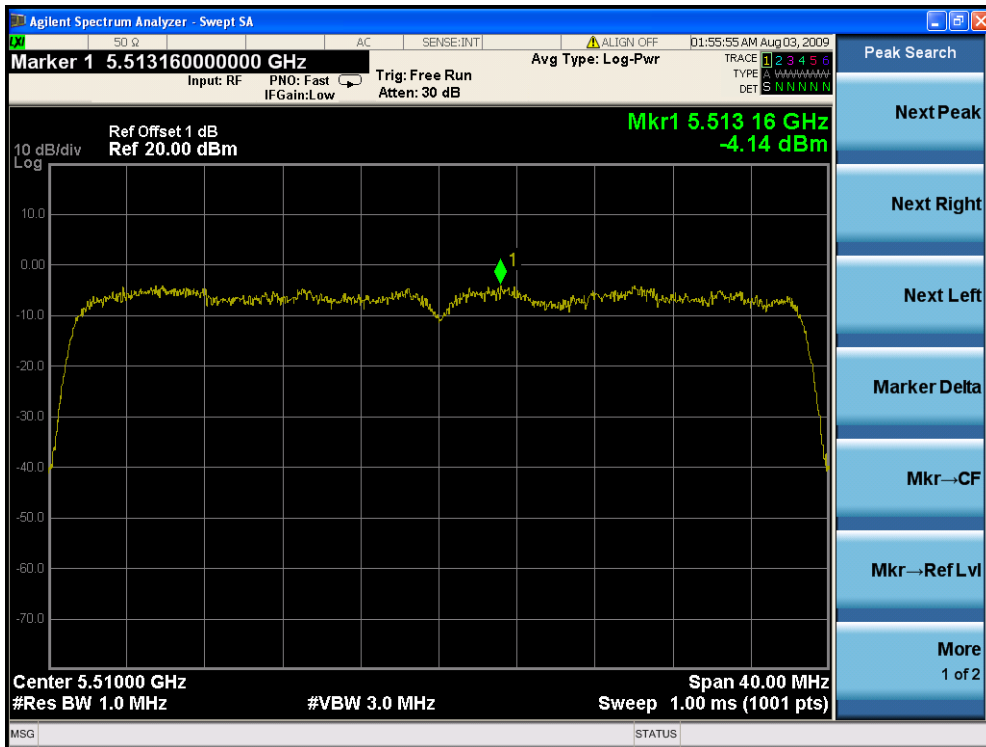

Channel 118 (5590MHz)

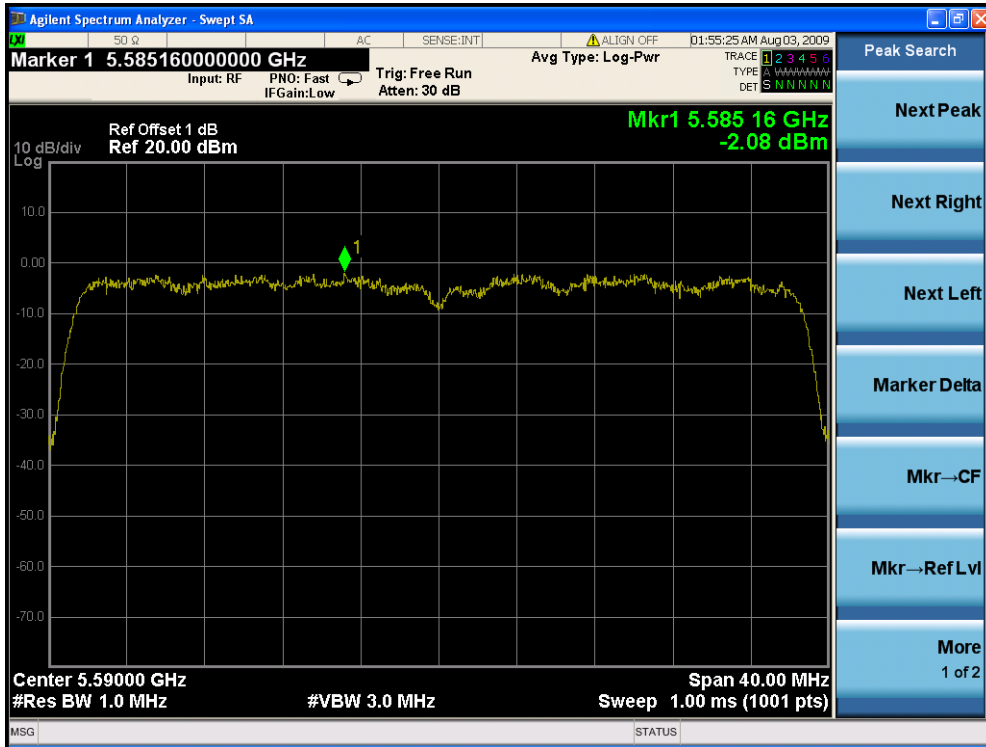

Channel 134 (5670MHz)

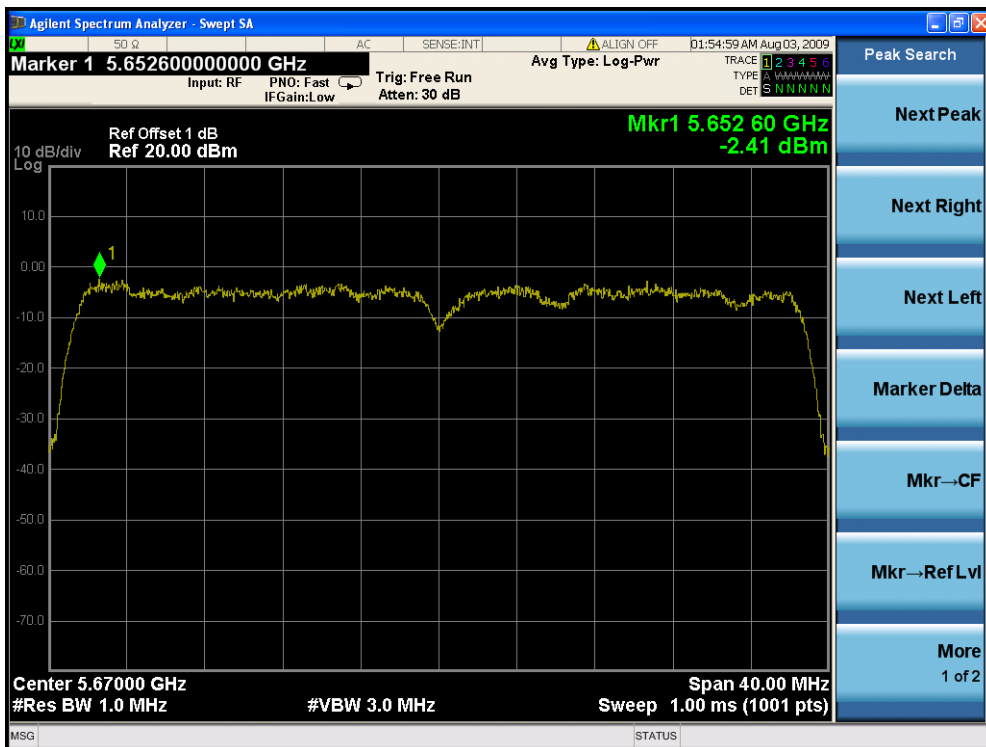


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain A+B)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
38	5190	-14.65	-15.81	N/A	-12.18	4	Pass
46	5230	-15.05	-16.64	N/A	-12.76	4	Pass
54	5270	-8.12	-7.96	N/A	-5.03	11	Pass
62	5310	-7.73	-8.29	N/A	-4.99	11	Pass
102	5510	-7.62	-9.93	N/A	-5.61	11	Pass
118	5590	-7.71	-9.39	N/A	-5.46	11	Pass
134	5670	-7.57	-8.04	N/A	-4.79	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -7.08dBm.


### Channel 38 (5190MHz) - Chain A

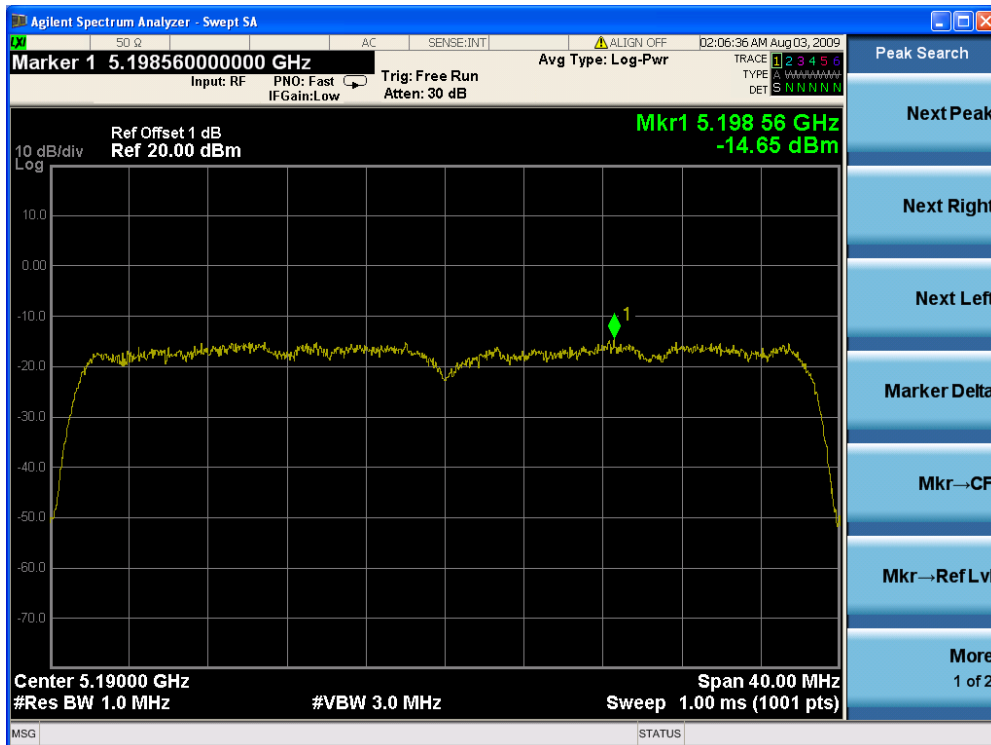


Channel 46 (5230MHz) - Chain A

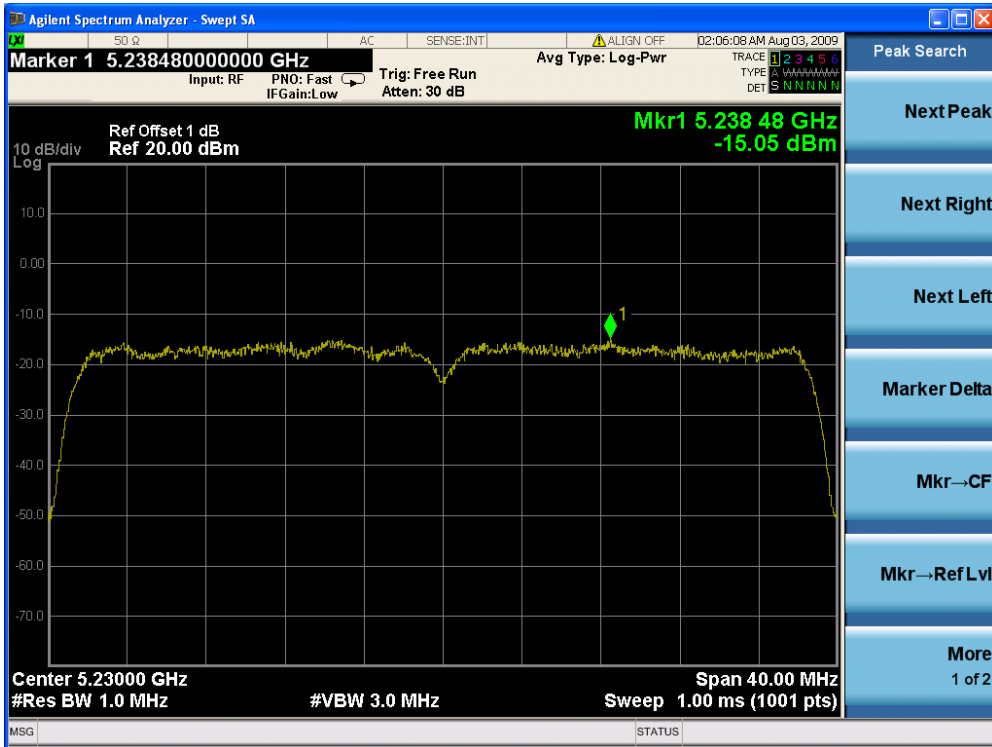


Channel 54 (5270MHz) - Chain A

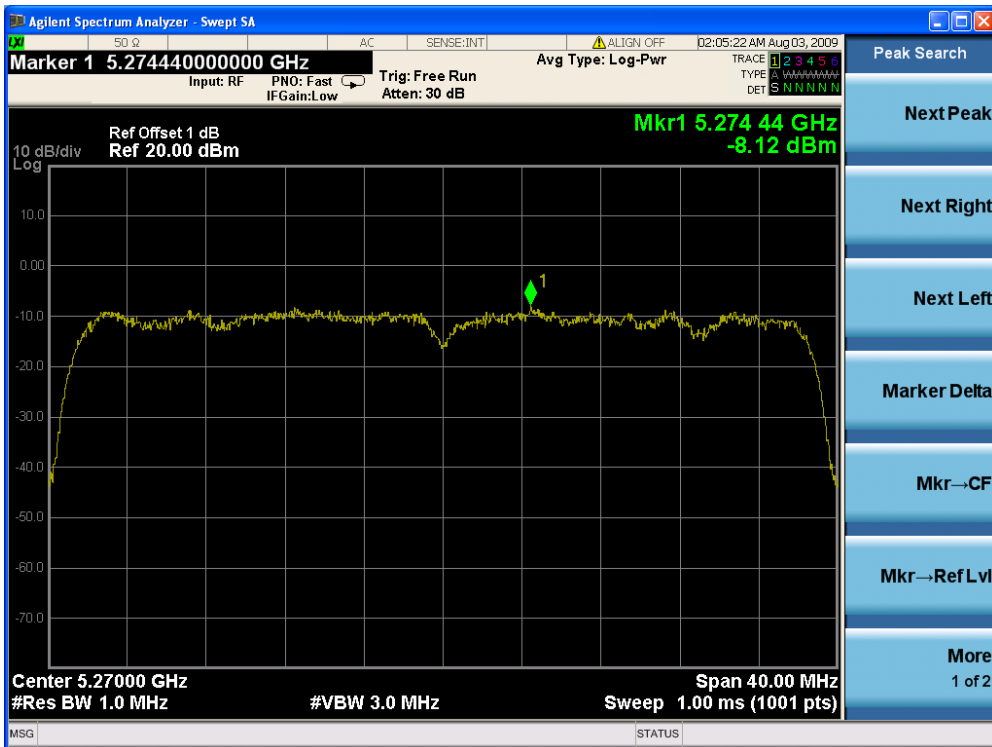

Channel 62 (5310MHz) - Chain A

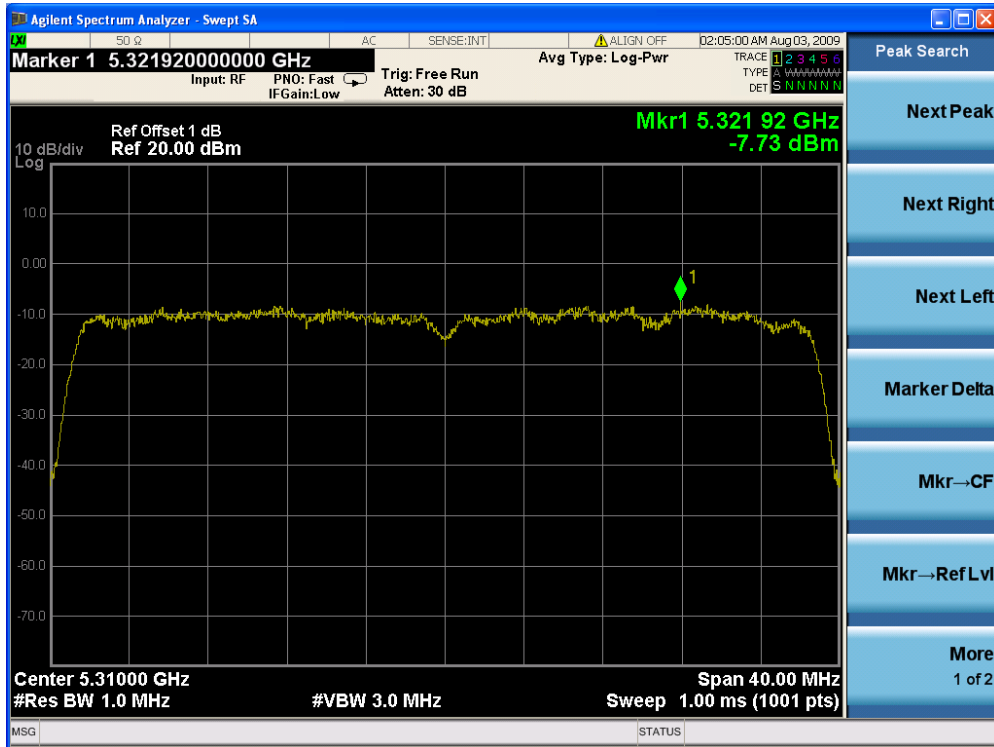


Channel 102 (5510MHz) - Chain A

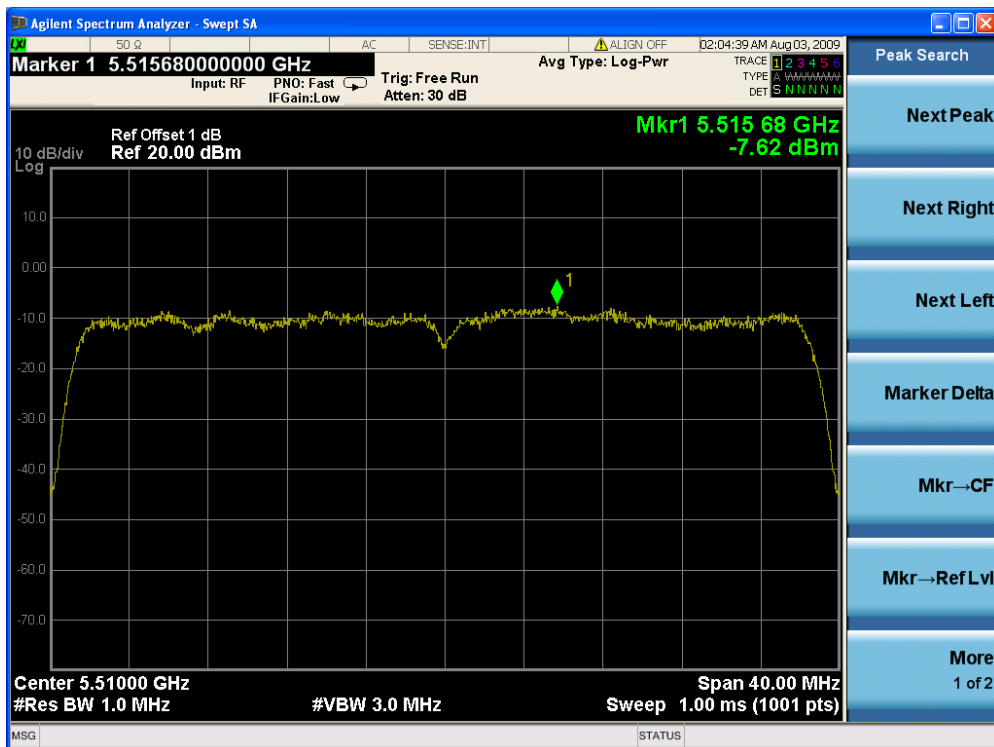





Channel 118 (5590MHz) - Chain A

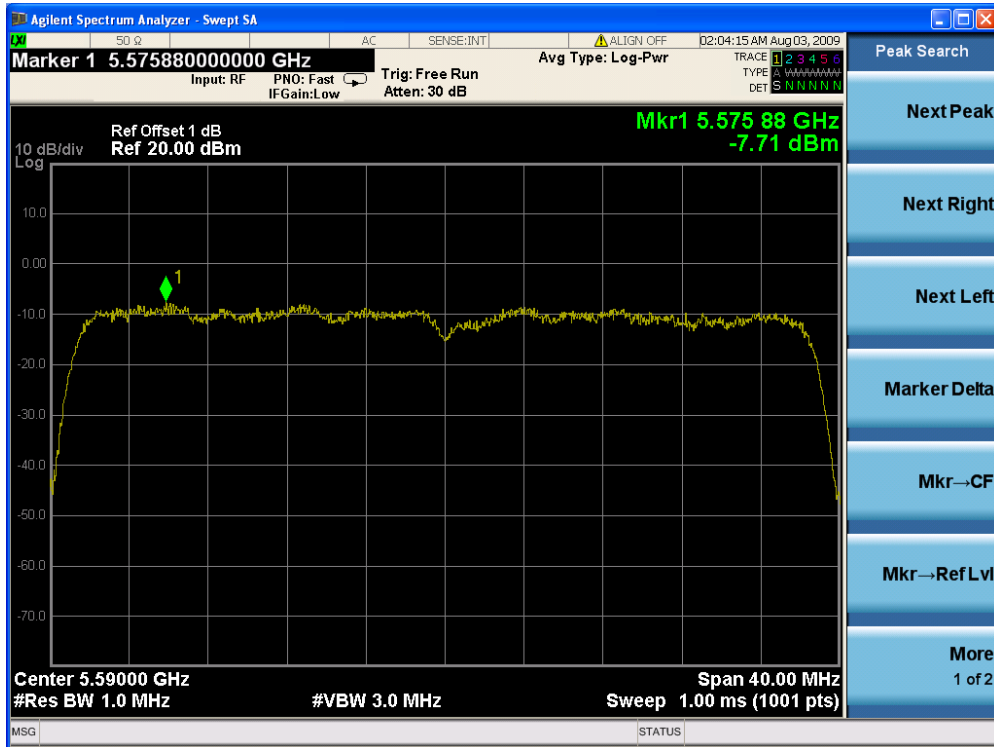


Channel 134 (5670MHz) - Chain A

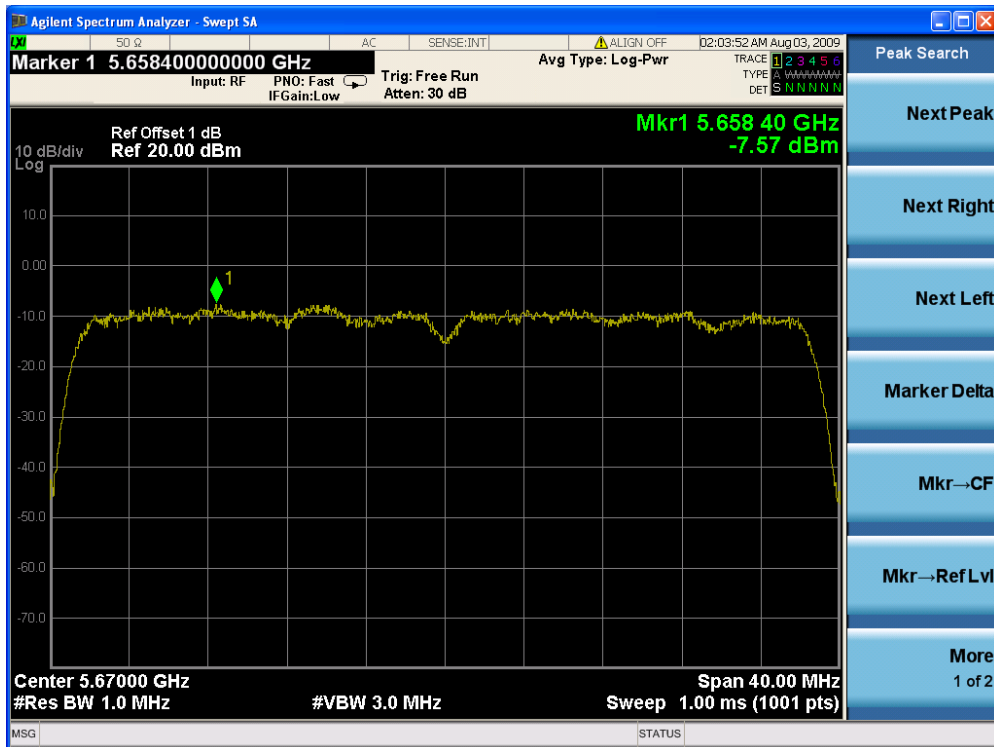


Channel 38 (5190MHz) - Chain B

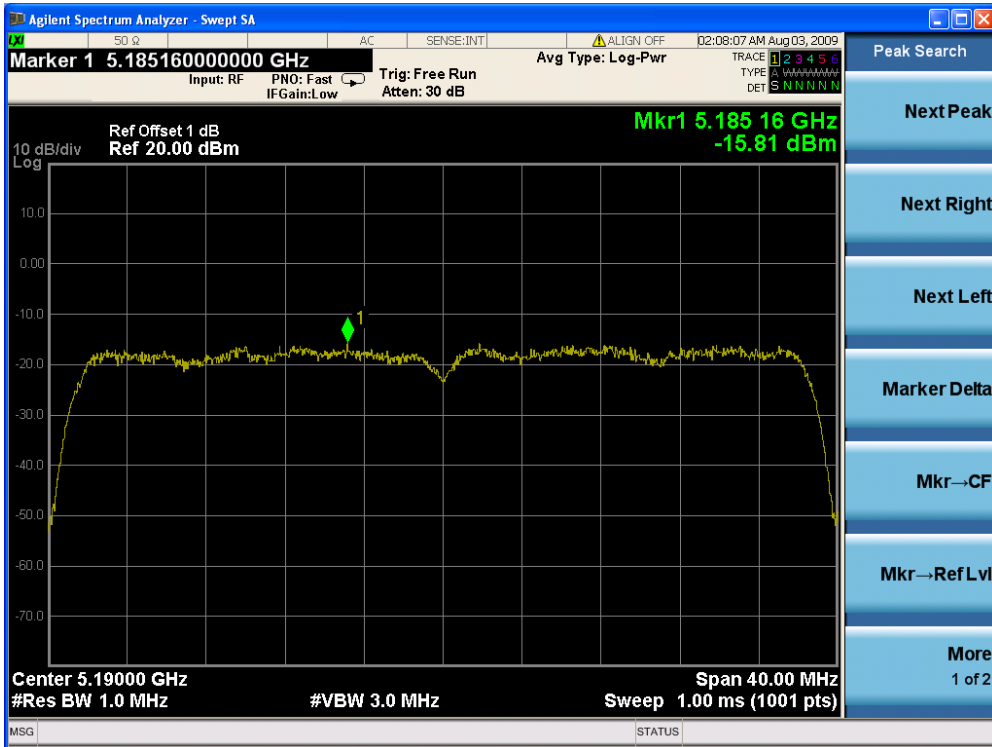


Channel 46 (5230MHz) - Chain B

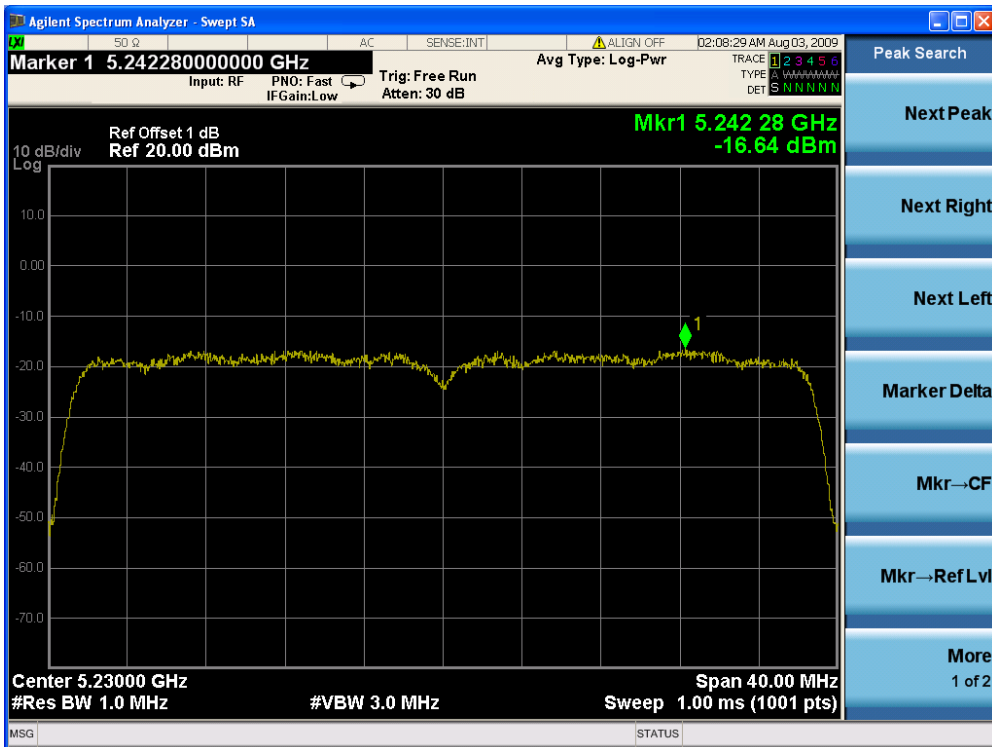


### Channel 54 (5270MHz) - Chain B

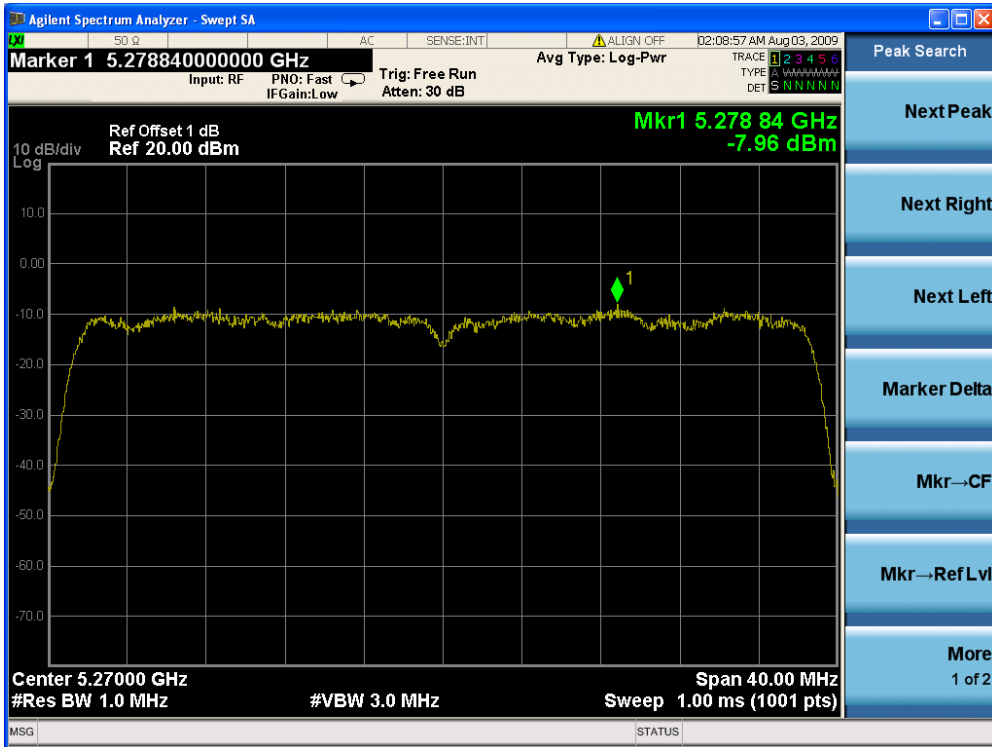


### Channel 62 (5310MHz) - Chain B

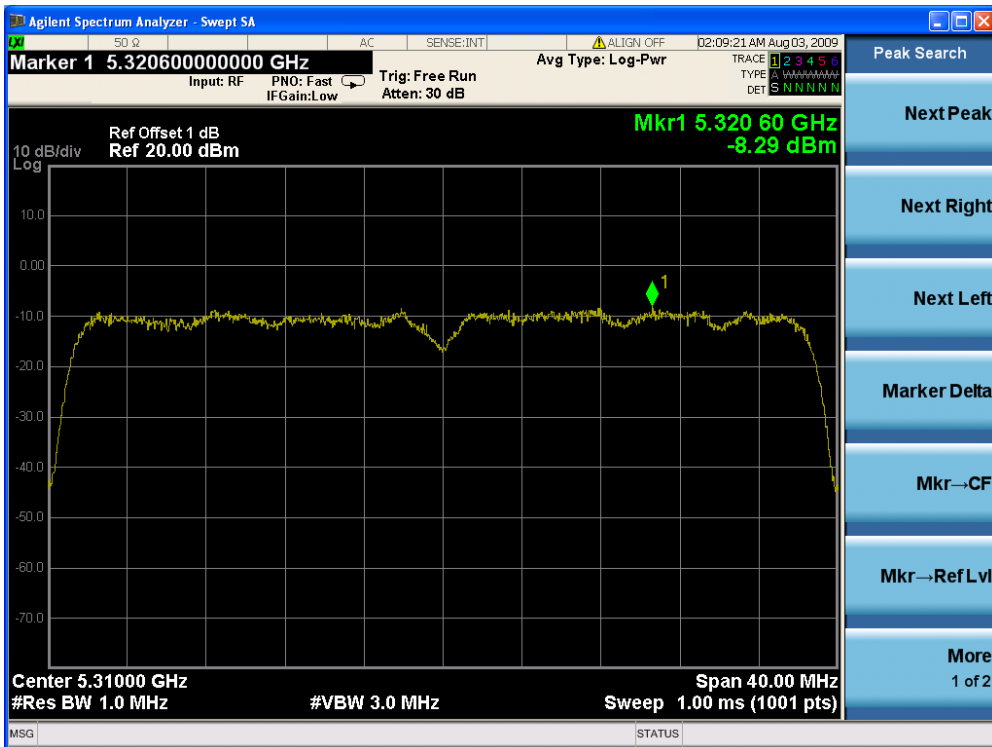


Channel 102 (5510MHz) - Chain B

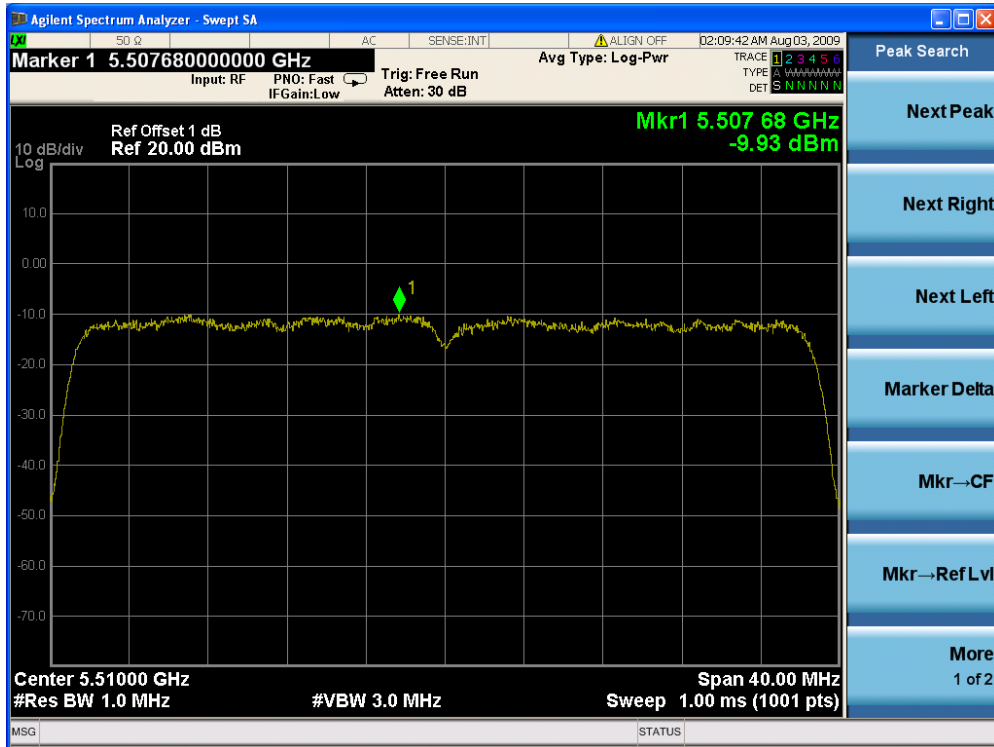

Channel 118 (5590MHz) - Chain B

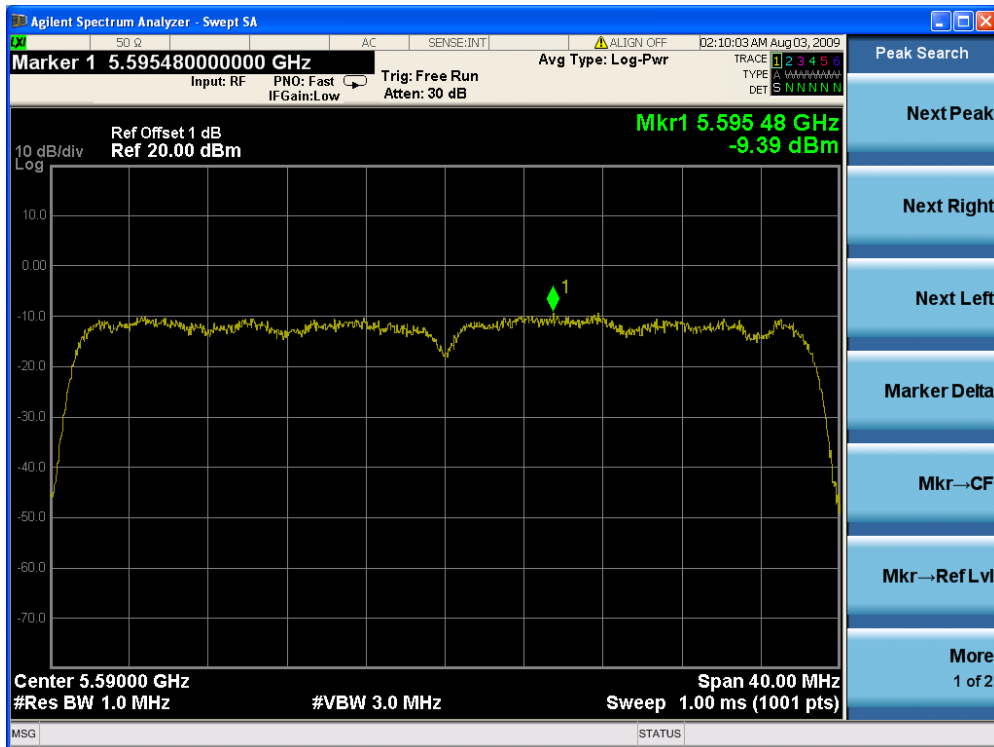

Channel 134 (5670MHz) - Chain B

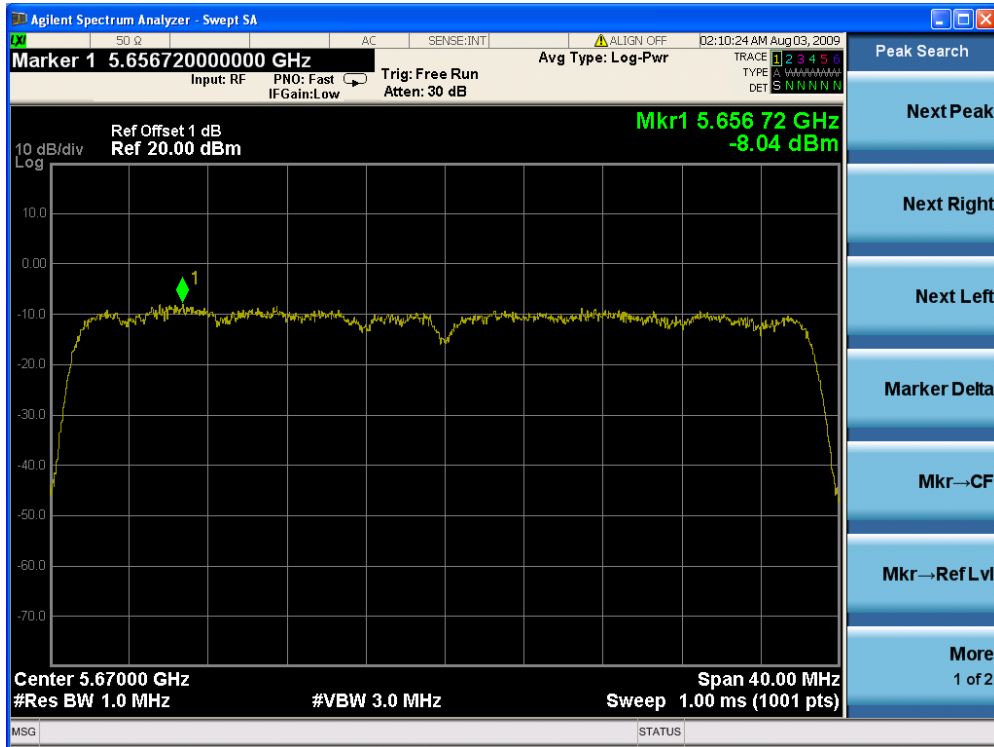


Product	: Wireless LAN Access Point
Test Item	: Peak Power Spectral Density
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain A+C)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)			Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain A	Chain B	Chain C			
38	5190	-14.42	N/A	-15.94	-12.10	4	Pass
46	5230	-14.37	N/A	-15.36	-11.83	4	Pass
54	5270	-8.52	N/A	-8.60	-5.55	11	Pass
62	5310	-7.90	N/A	-8.08	-4.98	11	Pass
102	5510	-7.88	N/A	-7.32	-4.58	11	Pass
118	5590	-7.97	N/A	-9.16	-5.51	11	Pass
134	5670	-7.45	N/A	-7.80	-4.61	11	Pass

Note: the maximum EIRP spectrum density for 5150~5250MHz band is -6.73dBm.

### Channel 38 (5190MHz) - Chain A

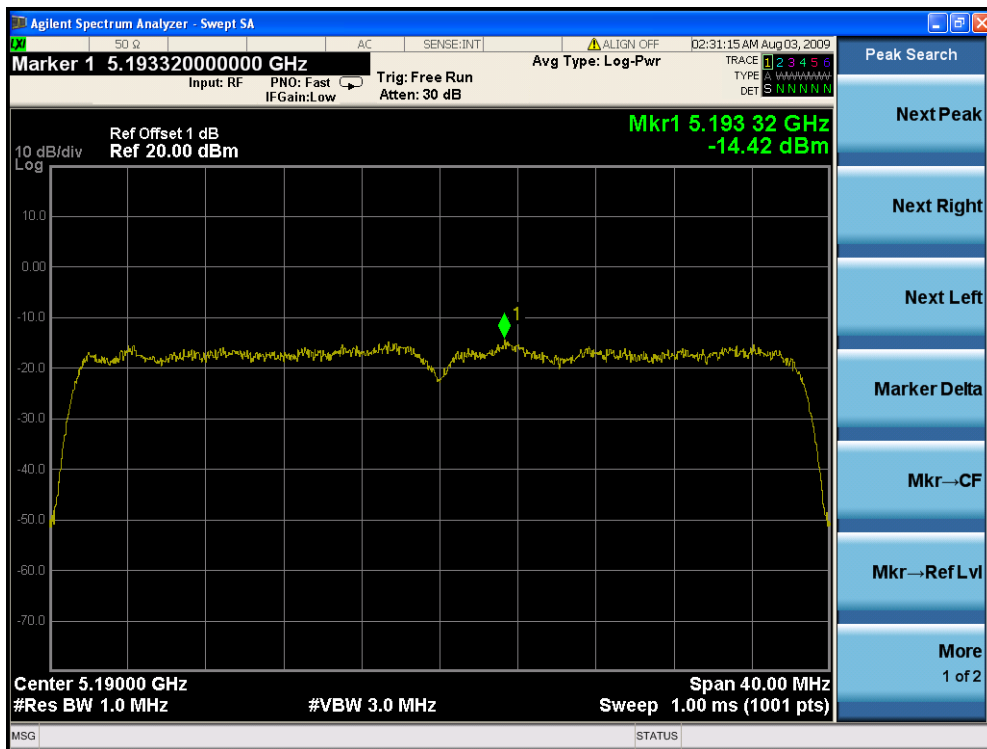

Channel 46 (5230MHz) - Chain A

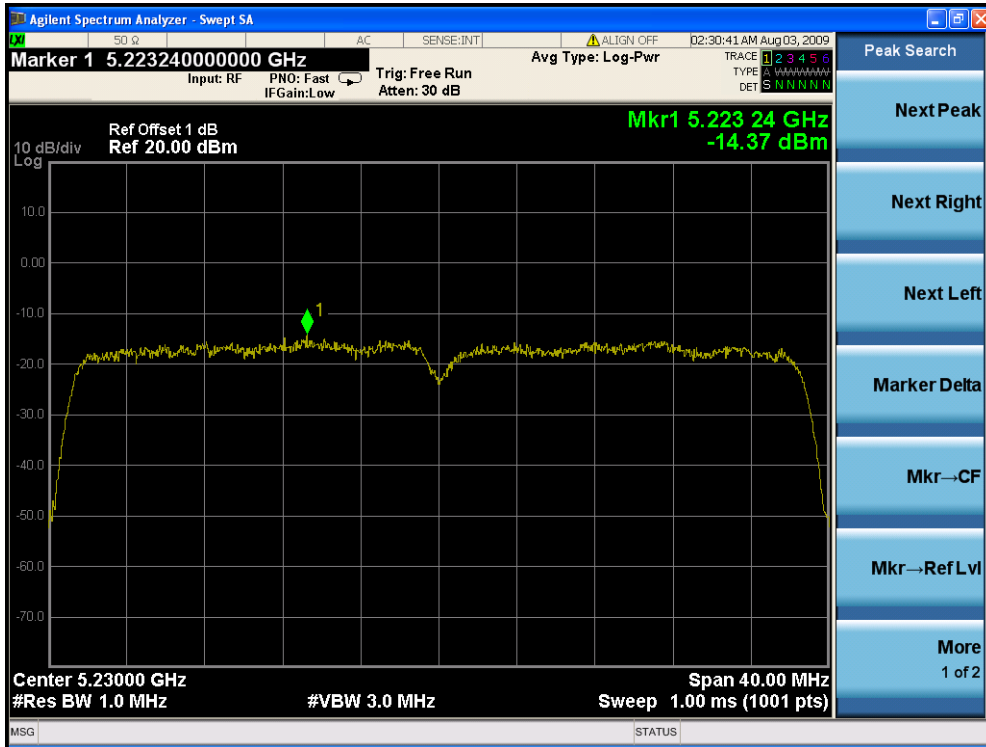

Channel 54 (5270MHz) - Chain A

