



4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




4.4.7 TEST RESULTS (Mode 1)

802.11a OFDM modulation

EUT	Bridging kit - 802.11a	MODEL	WL-464
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 62%RH, 960hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	7.88	13	PASS
4	5240	8.11	13	PASS
5	5260	7.19	13	PASS
8	5320	7.88	13	PASS

CH1

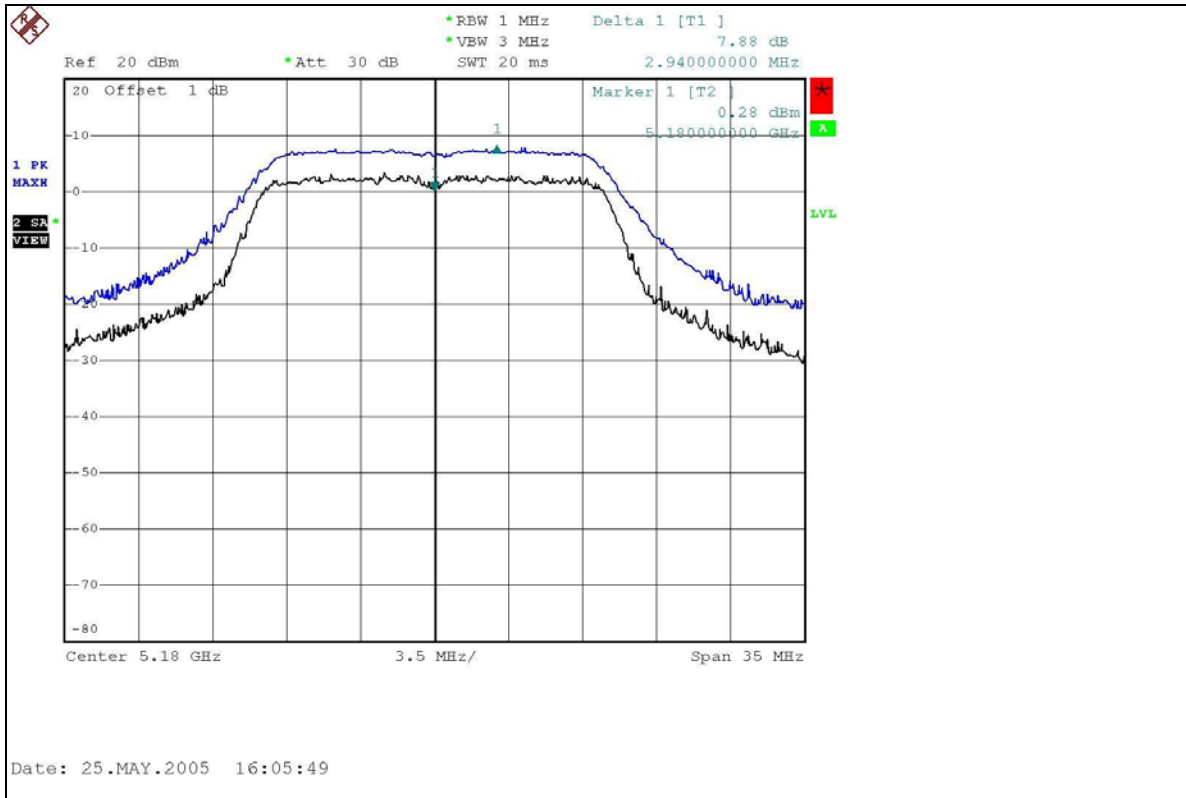



CH8

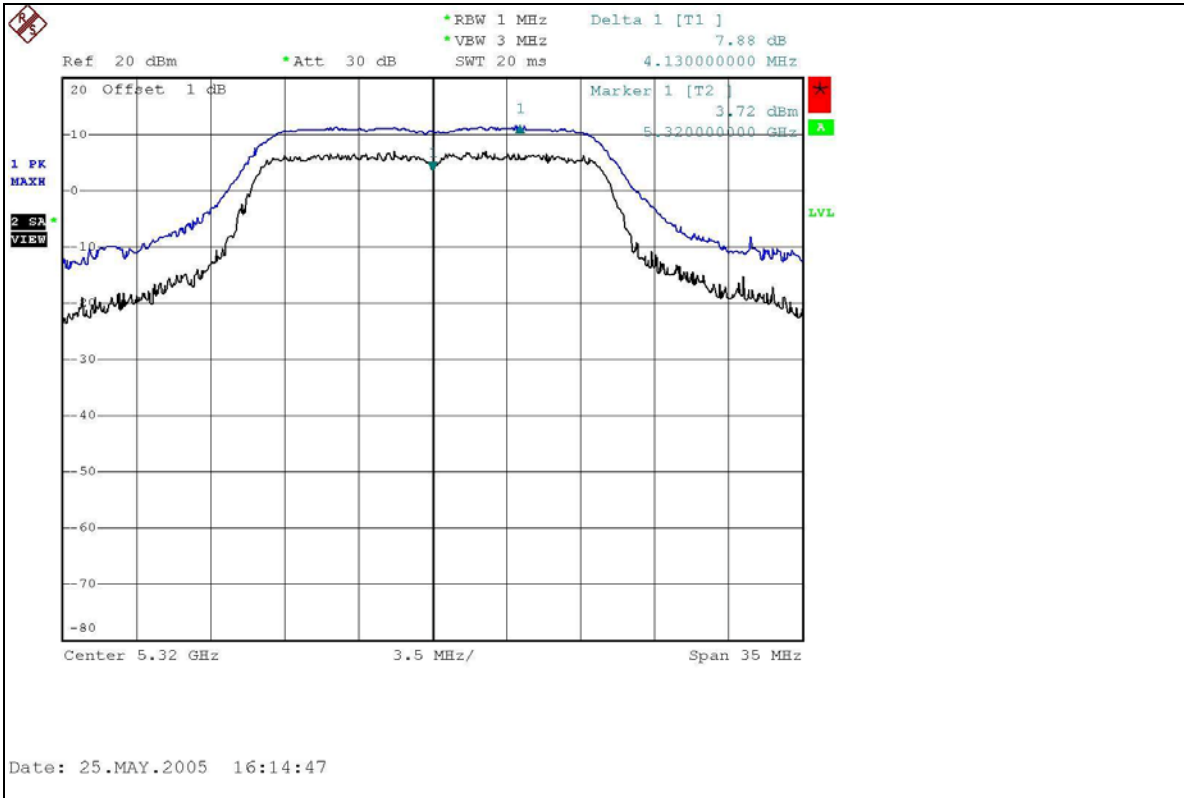




802.11a Turbo OFDM modulation

EUT	Bridging kit - 802.11a	MODEL	WL-464
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 62%RH, 960hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	8.29	13	PASS
2	5250	8.90	13	PASS
3	5290	8.81	13	PASS

CH1

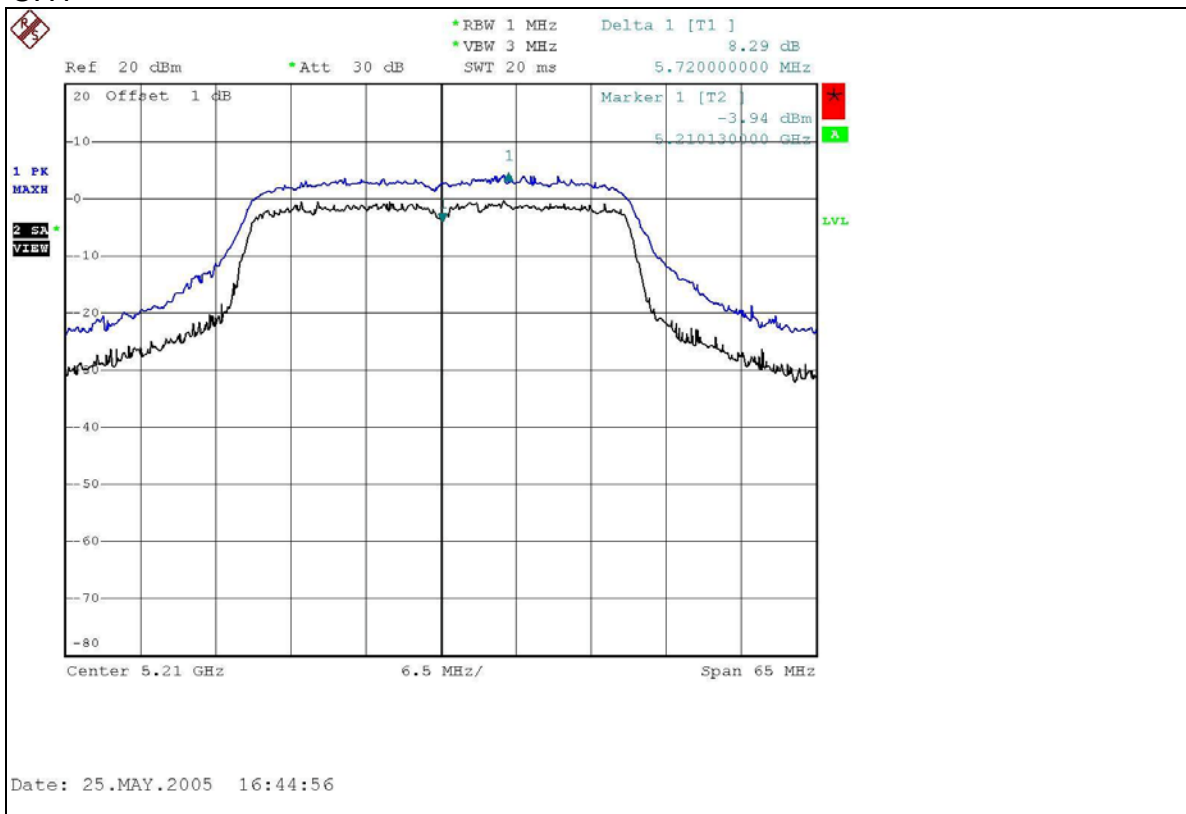




CH2

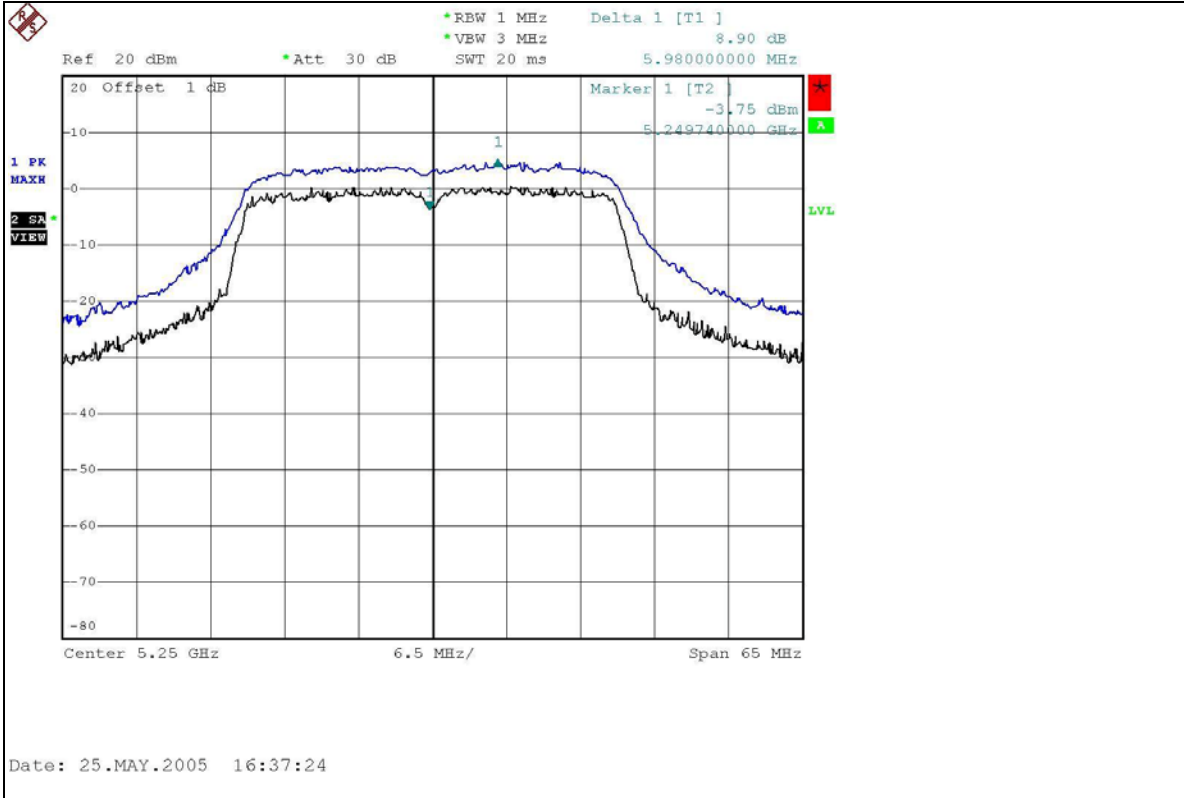

CH3

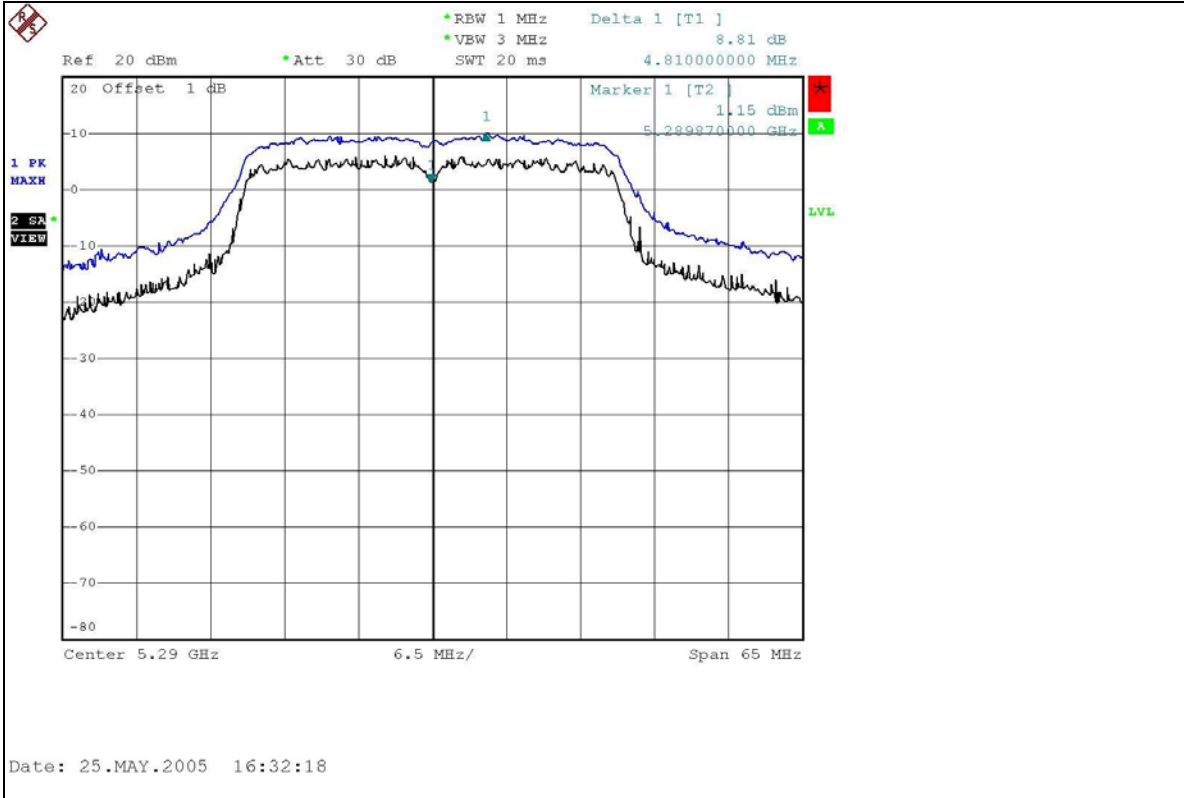




4.4.8 TEST RESULTS (Mode 2)

802.11a OFDM modulation

EUT	Bridging kit - 802.11a	MODEL	WL-464
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 62%RH, 960hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	7.36	13	PASS
4	5240	7.83	13	PASS
5	5260	7.27	13	PASS
8	5320	7.27	13	PASS

CH1

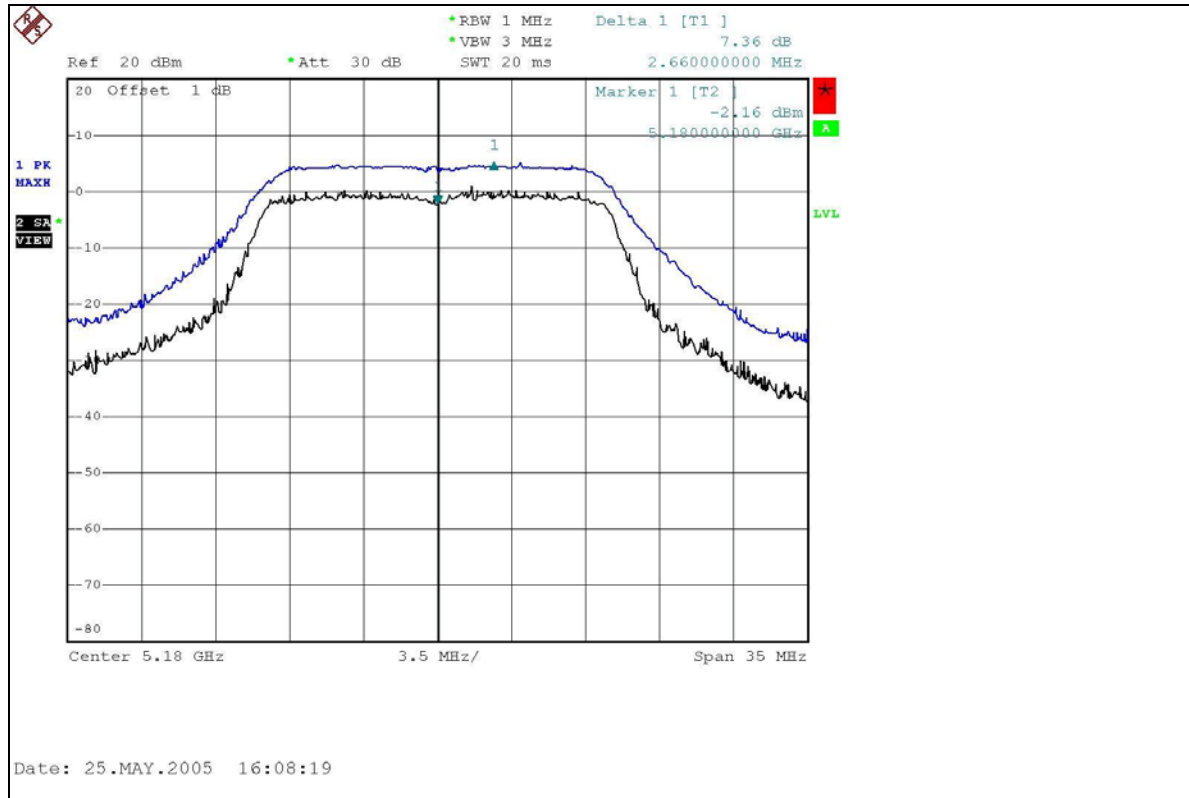




CH4

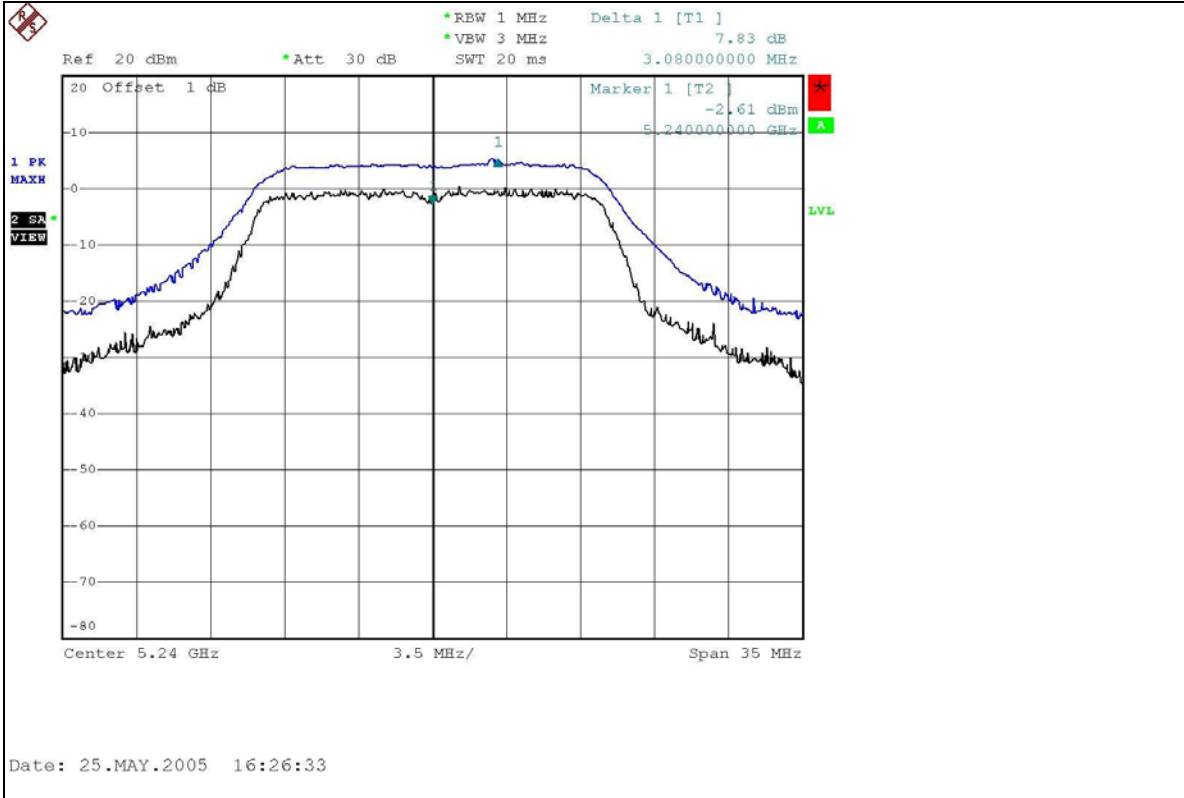


CH5

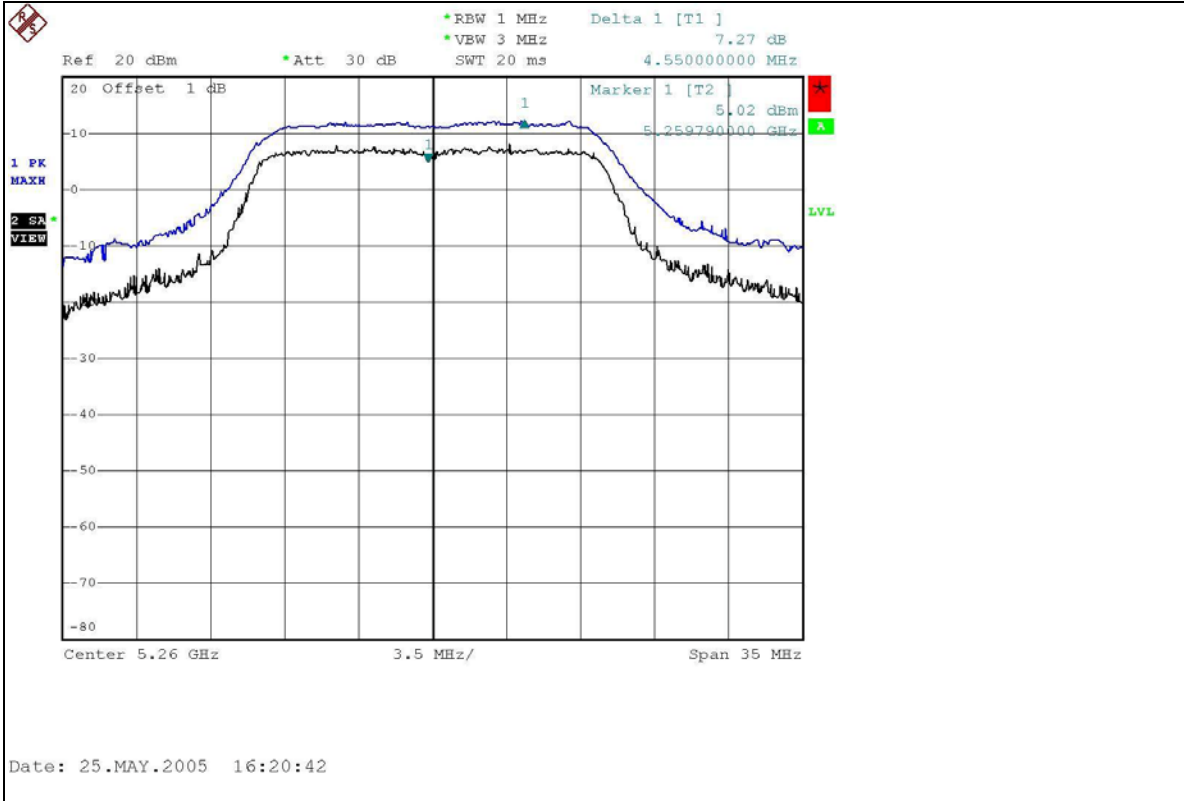



CH8

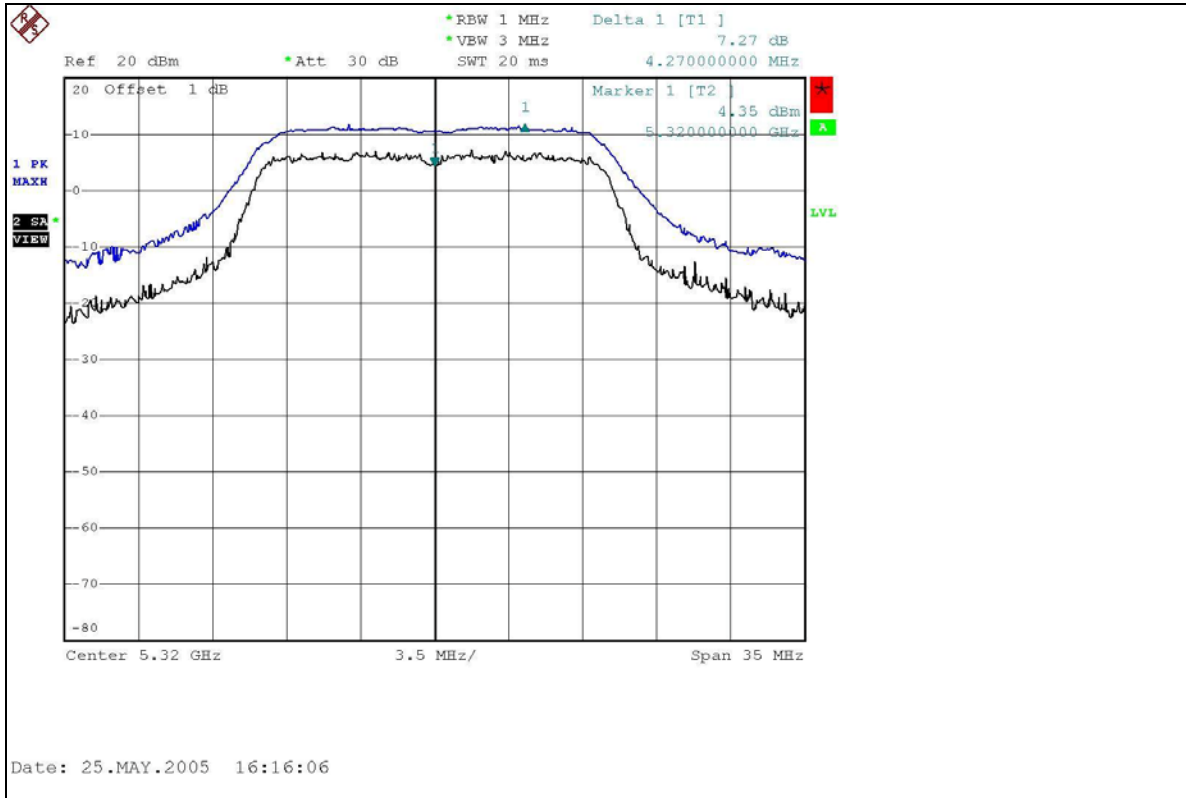




802.11a Turbo OFDM modulation

EUT	Bridging kit - 802.11a	MODEL	WL-464
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 62%RH, 960hPa
TESTED BY	Rex Huang		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	9.34	13	PASS
2	5250	9.93	13	PASS
3	5290	8.40	13	PASS

CH1

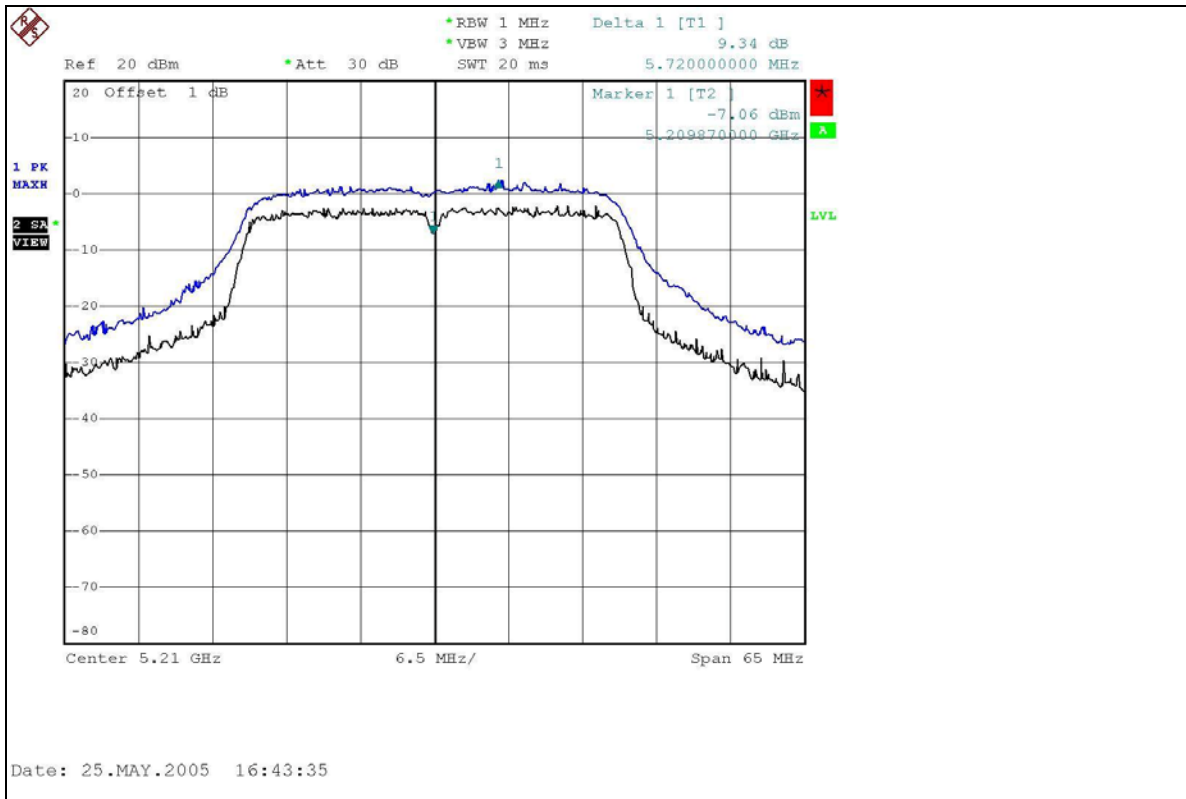



CH2

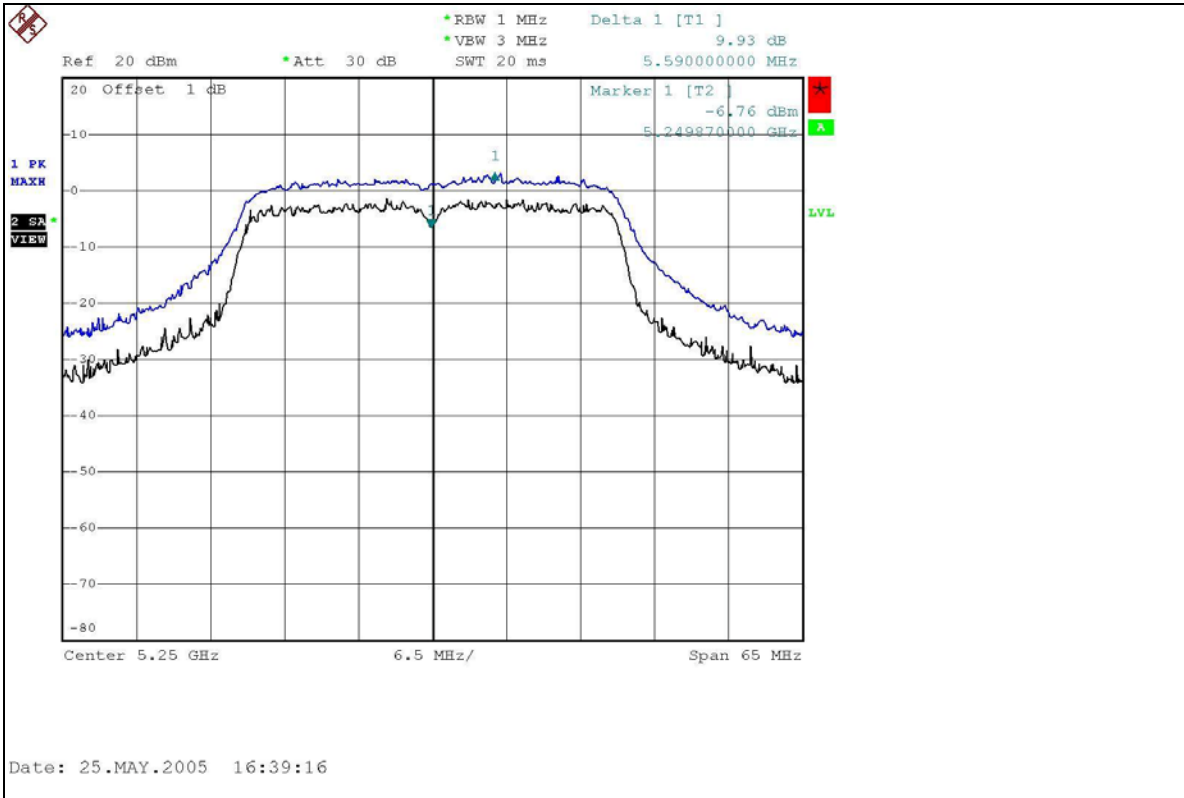

CH3

