

 **WIB** ready



LISTED
4FD1



LISTED I.T.E. for Use in Hazardous Locations

Class 1 Div 2 Group ABCD
Temp T4a Ta -40C to +60C

FCC ID: 09P-905UL


IC: 3957A-905UL

250mA 9.30V ---

S/N **0212 111 0172**

MODEL **905U-L-R N. America**

Designed & Manufactured in Australia by:

 **ELPRO Technologies Pty Ltd**
www.elprotech.com




M4x5mm





9. PHOTOGRAPHS


905U-LT External views

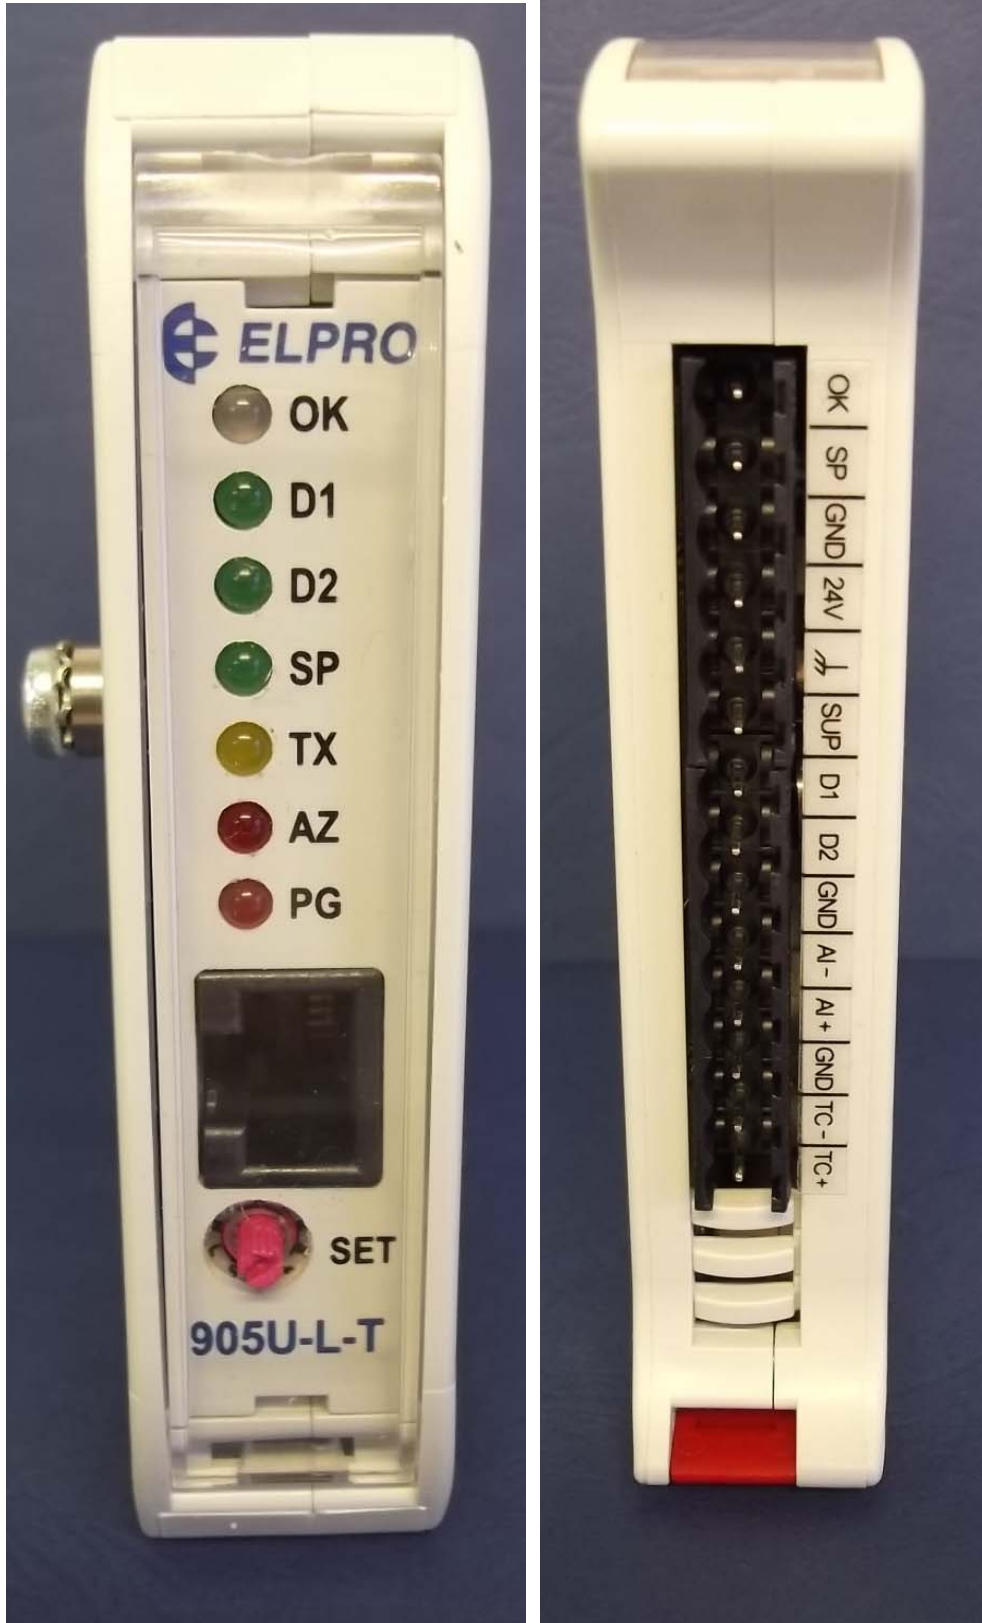

905U-LR External views

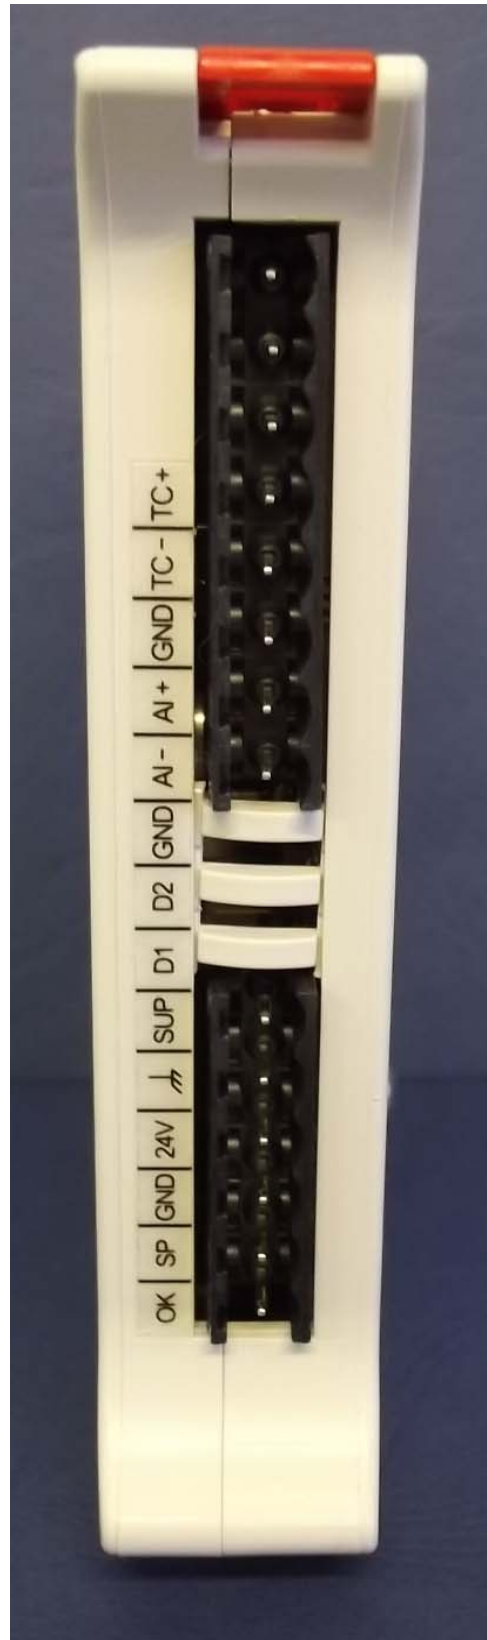

Antenna: CC20 Yagi with 20 metre coax cable

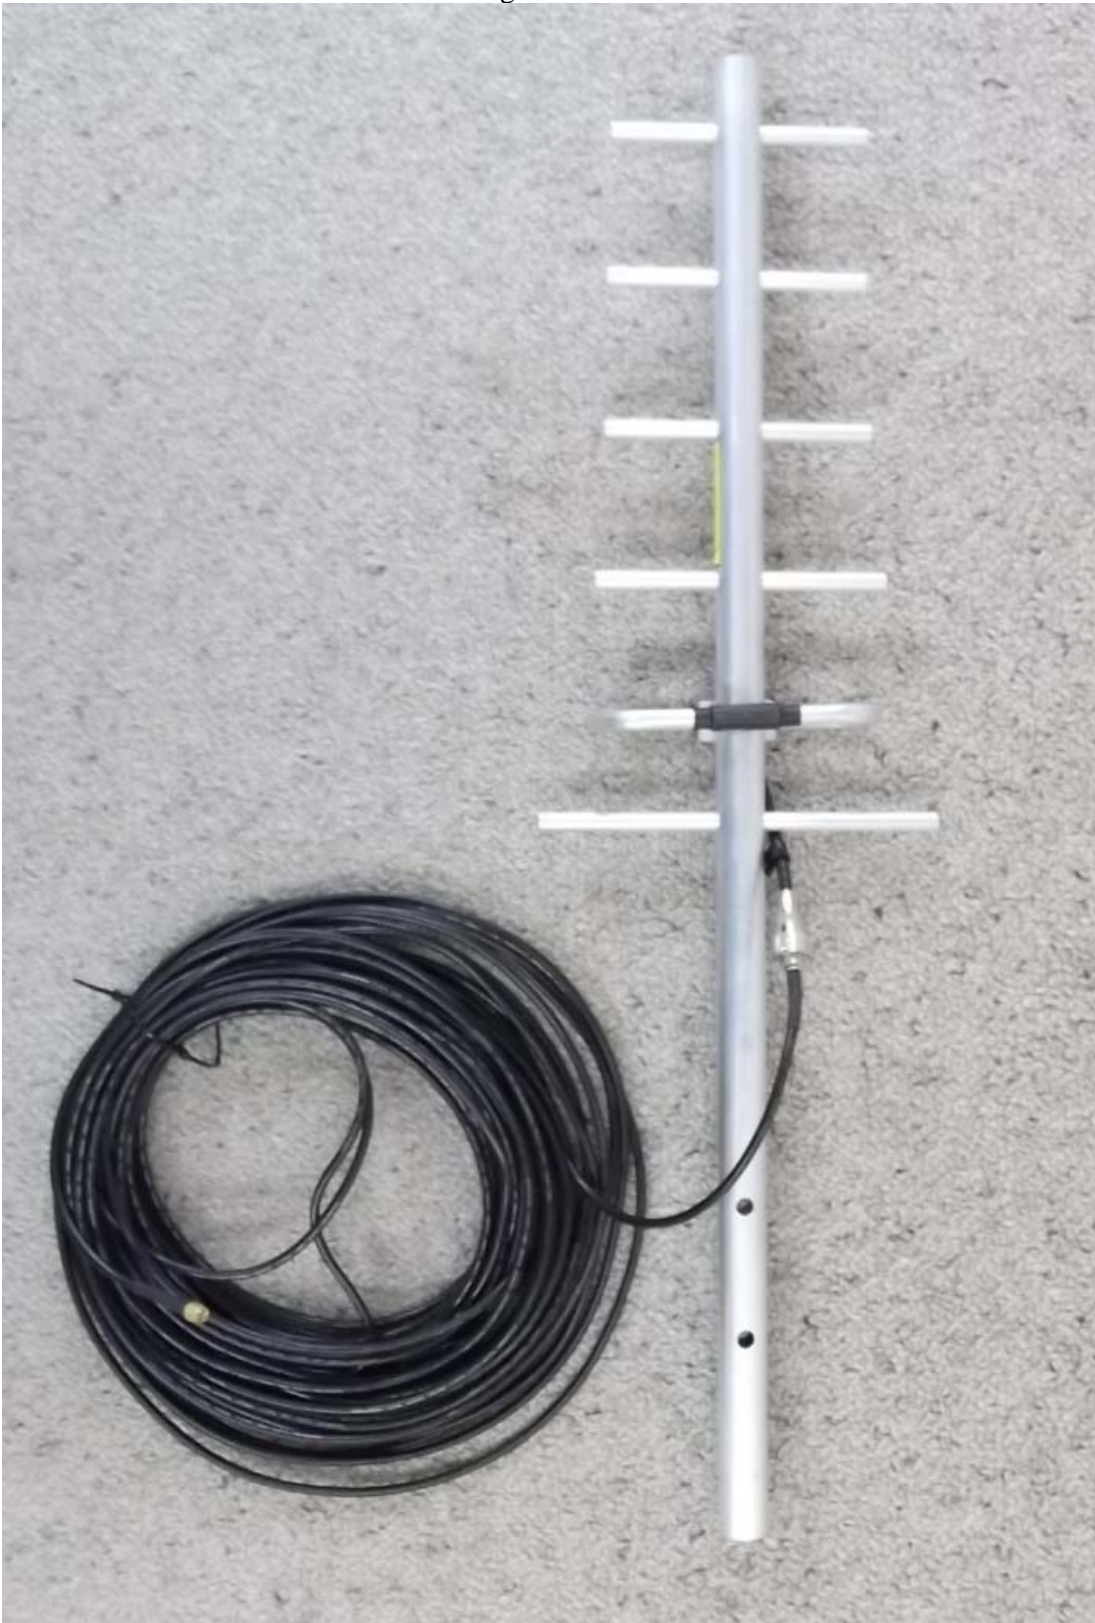

Antenna: CC10 Collinear with 10 metre coax cable



WARNING! EXPLOSION HAZARD
DO NOT DISCONNECT WHILE CIRCUIT IS LIVE UNLESS
AREA IS KNOWN TO BE NON HAZARDOUS

This Device complies with Part 15 of the FCC Rules.
This device complies with RSS-210.

Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation

 **WIB** ready

 **LISTED**  **N16**
4FD1
I.T.E. for Use in Hazardous Locations
Class 1 Div 2 Group ABCD
Temp T4a Ta -40C to +60C
FCC ID: 09P-905UL
IC: 3957A-905UL 600mA 9 - 30 V ---
S/N **0212 111 0406**
MODEL **905U-L-T N. America**
Designed & Manufactured in Australia by:
 **ELPRO Technologies Pty Ltd**
www.elprotech.com

M4x5mm