



FCC Test Report

APPLICANT : Spireon Inc
EQUIPMENT : GPS tracker
BRAND NAME : Flex2-M
MODEL NAME : Flex2-M
FCC ID : O9YFLF2M
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on May 08, 2020 and testing was completed on Jun. 05, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location	7
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system	9
2.4. EUT Operation Test Setup	9
3. TEST RESULT	10
3.1. Test of Radiated Emission Measurement	10
4. LIST OF MEASURING EQUIPMENT	15
5. UNCERTAINTY OF EVALUATION	16
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC050828	Rev. 01	Initial issue of report	Jul. 21, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.33 dB at 39.70 MHz for Quasi-Peak

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Spireon Inc

9724 Kingston Pike, Suite 800 Knoxville, TN37922, United States

1.2. Manufacturer

Asiatelco Technologies Co.

#289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	GPS tracker
Brand Name	Flex2-M
Model Name	Flex2-M
FCC ID	O9YFLF2M
EUT supports Radios application	LTE/GNSS
IMEI Code	Radiation: 865284042582605
HW Version	2.0.0
SW Version	B1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz GNSS : 1559 MHz ~ 1610 MHz
Antenna Type	WWAN : PIFA Antenna GNSS: Internal ceramic Antenna
Type of Modulation	LTE: QPSK / 16QAM GNSS : BPSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
Radiated Emissions	Mode 1: Cat M1 Band12 RX (Middle) +DC12V Mode 2: Cat M1 Band13 RX (Middle) +DC24V + GNSS
Remark: 1. The worst case of RE is mode 1; only the test data of this mode is reported. 2. Pre-scanned Middle channel for LTE Band 12/13, the worst channel was recorded in this report.	

2.2.Connection Diagram of Test System

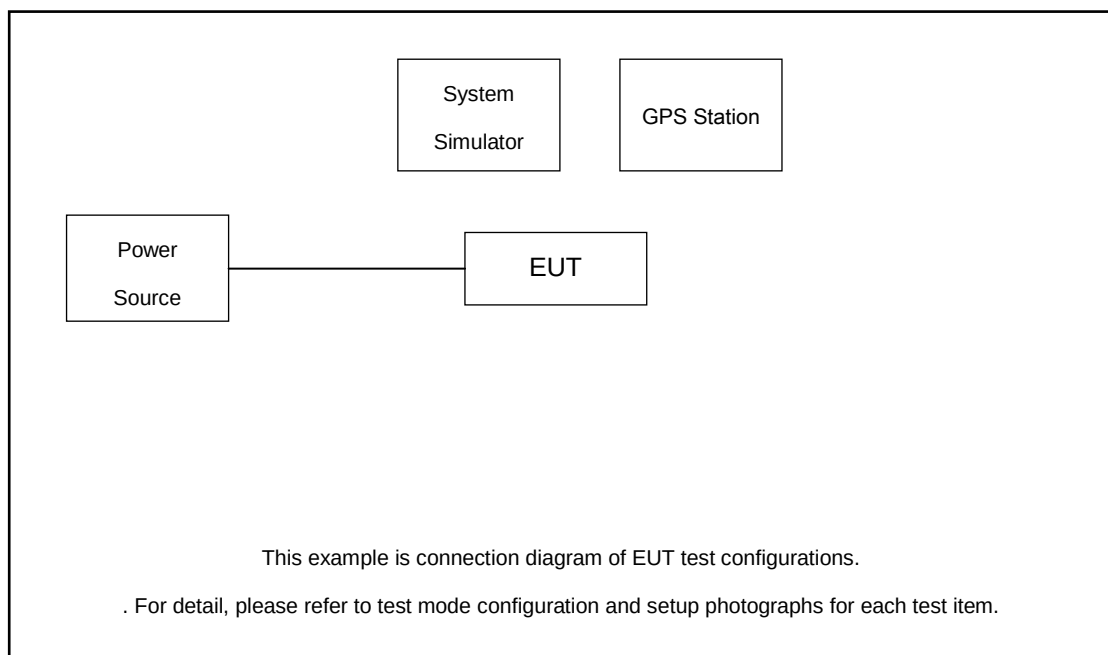

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	GNSS Station	RACELOGIC	KS141204JCGS07	N/A	N/A	Unshielded,1.8m
3.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded,1.2m

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing, and is in continuous receiving mode by setting system simulator's paging reorganization.

3. Test Result

3.1. Test of Radiated Emission Measurement

3.1.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.1.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

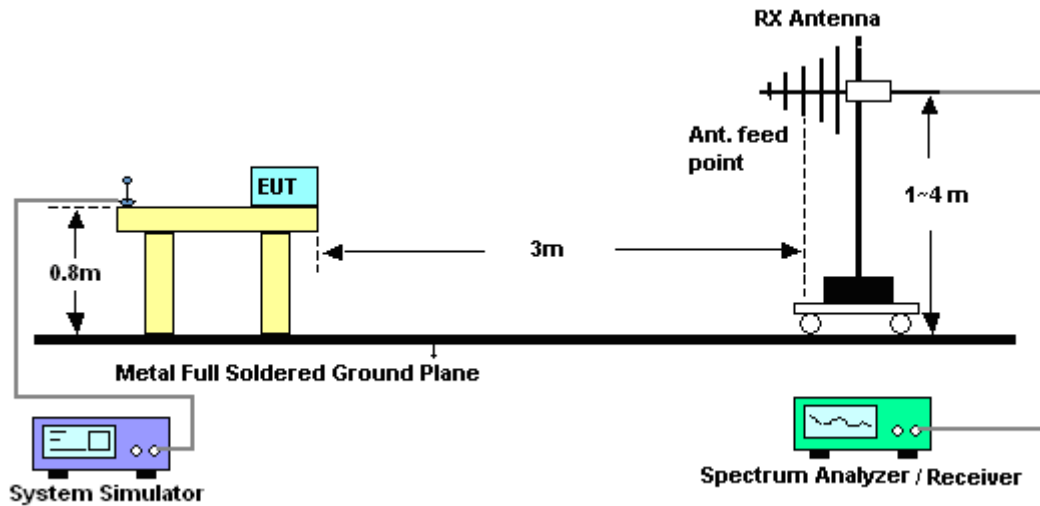


For radiated emissions above 1GHz

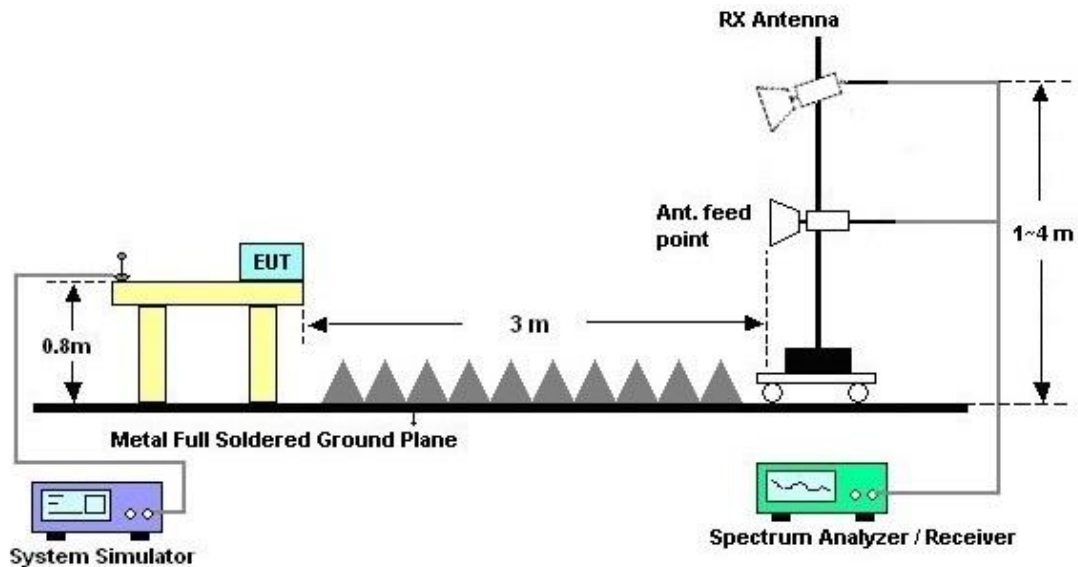




3.1.5. Test Result of Radiated Emission

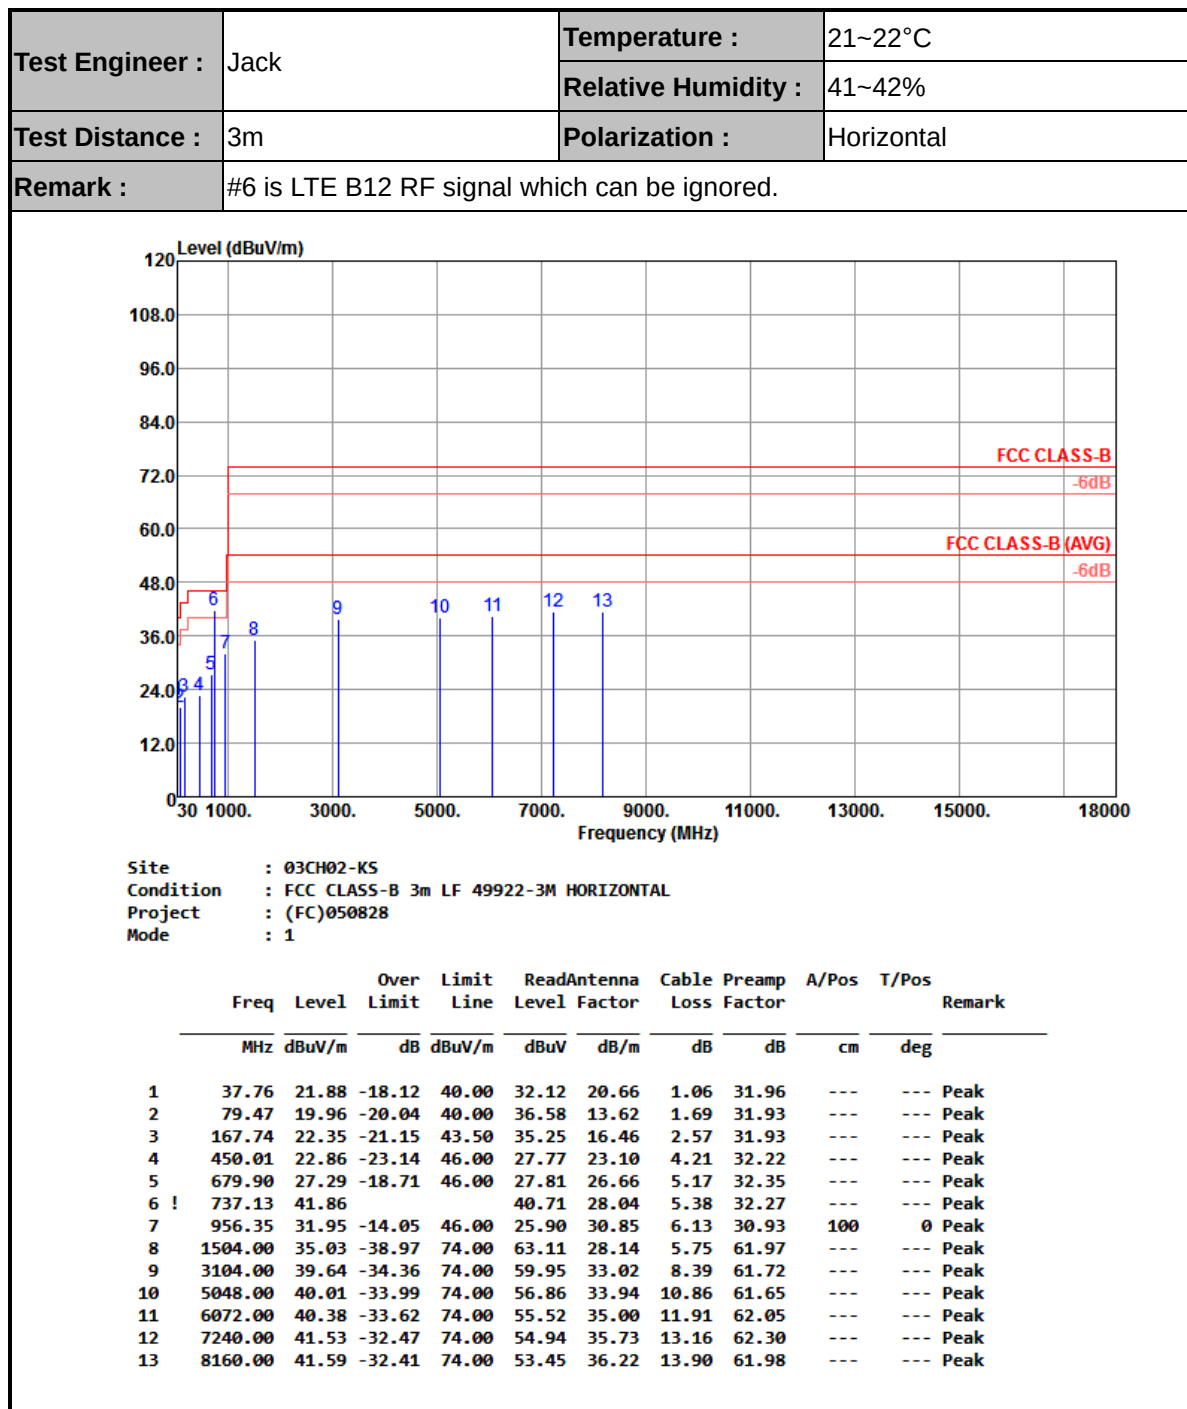



Test Engineer :	Jack	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is LTE B12 RF signal which can be ignored.		

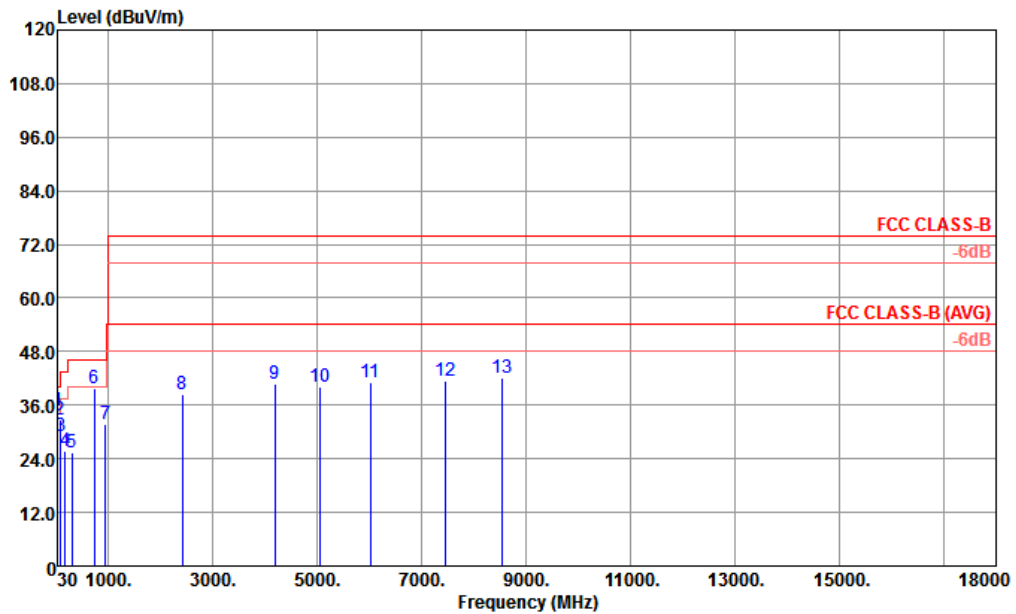

Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL
Project : (FC)050828
Mode : 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
			dB	dBuV/m	dBuV	dB/m	dB	dB		
1 !	39.70	34.67	-5.33	40.00	45.84	19.70	1.09	31.96	100	320 QP
2	79.47	32.64	-7.36	40.00	49.26	13.62	1.69	31.93	---	Peak
3	96.93	29.17	-14.33	43.50	43.30	15.84	1.96	31.93	---	Peak
4	182.29	25.82	-17.68	43.50	39.21	15.84	2.68	31.91	---	Peak
5	312.27	25.42	-20.58	46.00	34.30	19.62	3.52	32.02	---	Peak
6	737.13	39.64			38.49	28.04	5.38	32.27	---	Peak
7	952.47	31.88	-14.12	46.00	25.84	30.88	6.12	30.96	---	Peak
8	2424.00	38.40	-35.60	74.00	61.32	31.43	7.45	61.80	---	Peak
9	4200.00	40.76	-33.24	74.00	58.67	33.78	9.91	61.60	---	Peak
10	5072.00	40.01	-33.99	74.00	56.78	33.99	10.90	61.66	---	Peak
11	6024.00	41.11	-32.89	74.00	56.31	34.98	11.88	62.06	---	Peak
12	7472.00	41.42	-32.58	74.00	54.20	36.17	13.46	62.41	---	Peak
13	8536.00	42.01	-31.99	74.00	53.34	36.48	14.27	62.08	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Aug. 06, 2019	Jun. 05, 2020	Aug. 05, 2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44G,MAX 30dB	Oct. 18, 2019	Jun. 05, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 30, 2019	Jun. 05, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Nov. 10, 2019	Jun. 05, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jun. 05, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jun. 05, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2019	Jun. 05, 2020	Aug. 05, 2020	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 18, 2019	Jun. 05, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jun. 05, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 05, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 05, 2020	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------