

FCC Test Report

(PART 22)

Report No.: RF190415C07

FCC ID: O9YJKS3

Test Model: JKS3A

Series Model: ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S
(Refer to section 3.1 for detail)

Received Date: Apr. 15, 2019

Test Date: May 10 ~ May 21, 2019

Issued Date: Jun. 11, 2019

Applicant: Spireon Inc

Address: 9724 Kingstone Pike, suite 800, Knoxville, Tennessee, USA, 37922

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location : No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	26
4.2.1 Limits of Modulation Characteristics	26
4.2.2 Test Setup	26
4.2.3 Test Procedure	26
4.2.4 Test Results	26
4.3 Frequency Stability Measurement	27
4.3.1 Limits of Frequency Stability Measurement	27
4.3.2 Test Procedure	27
4.3.3 Test Setup	27
4.3.4 Test Results	28
4.4 Occupied Bandwidth Measurement	33
4.4.1 Test Procedure	33
4.4.2 Test Setup	33
4.4.3 Test Result	34
4.5 Band Edge Measurement	37
4.5.1 Limits of Band Edge Measurement	37
4.5.2 Test Setup	37
4.5.3 Test Procedures	37
4.5.4 Test Results	38
4.6 Peak to Average Ratio	43
4.6.1 Limits of Peak to Average Ratio Measurement	43
4.6.2 Test Setup	43
4.6.3 Test Procedures	43
4.6.4 Test Results	44
4.7 Conducted Spurious Emissions	47
4.7.1 Limits of Conducted Spurious Emissions Measurement	47
4.7.2 Test Setup	47
4.7.3 Test Procedure	47
4.7.4 Test Results	48
4.8 Radiated Emission Measurement	53
4.8.1 Limits of Radiated Emission Measurement	53
4.8.2 Test Procedure	53
4.8.3 Deviation from Test Standard	53
4.8.4 Test Setup	54
4.8.5 Test Results	55

5 Pictures of Test Arrangements.....	73
Appendix – Information of the Testing Laboratories	74

Release Control Record

Issue No.	Description	Date Issued
RF190415C07	Original Release	Jun. 11, 2019

1 Certificate of Conformity

Product: GPS Tracker

Brand: Spireon

Test Model: JKS3A

Series Model: ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S (Refer to section 3.1 for detail)

Sample Status: Engineering Sample

Applicant: Spireon Inc

Test Date: May 10 ~ May 21, 2019

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



, Date: Jun. 11, 2019

Lena Wang / Specialist

Approved by :



, Date: Jun. 11, 2019

Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 22.913 (d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -24.47 dB at 1663.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator WORKEN	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
LTE Wireless Communication Test Set Keysight	E7515A	MY57270629	Feb. 22, 2019	Feb. 22, 2020
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	GPS Tracker	
Brand	Spireon	
Test Model	JKS3A	
Series Model	ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S	
Status of EUT	Engineering Sample	
Power Supply Rating	12 Vdc (adapter) 3.7 Vdc (battery)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE 26 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 26 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 26 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 26 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 15 MHz)	831.5 ~ 841.5 MHz
Max. ERP Power	LTE 26 (Channel Bandwidth: 1.4 MHz)	341.19 mW
	LTE 26 (Channel Bandwidth: 3 MHz)	340.41 mW
	LTE 26 (Channel Bandwidth: 5 MHz)	354.81 mW
	LTE 26 (Channel Bandwidth: 10 MHz)	360.58 mW
	LTE 26 (Channel Bandwidth: 15 MHz)	363.08 mW
Emission Designator	LTE 26 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE 26 (Channel Bandwidth: 3 MHz)	1M10G7D
	LTE 26 (Channel Bandwidth: 5 MHz)	1M10G7D
	LTE 26 (Channel Bandwidth: 10 MHz)	1M09G7D
	LTE 26 (Channel Bandwidth: 15 MHz)	1M11G7D
Antenna Type	PIFA Antenna with 1.4 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. All models are listed as below. Model JKS3A is the representative for final test.


Brand	Model	Difference
Spireon	JKS3A	With Battery; With Buzzer
	ATS100M-YZ-V	
	ATS100M-YZ-S	
	JKS3B	With Battery; Without Buzzer
	ATS100M-Y-V	
	ATS100M-Y-S	
	JKS3C	Without Battery; With Buzzer
	ATS100M-Z-V	
	ATS100M-Z-S	
	JKS3D	Without Battery; Without Buzzer
	ATS100M-V	
ATS100M-S		

2. The EUT uses following adapter. (For support unit only)

Brand	Chanel Well Technology
Model	CAP012121
Input Power	100-240 Vac, 47~63 Hz, 0.35 A
Output Power	12 Vdc, 1.0 A
Power Line	2.25m non-shuelded DC power cable without core

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

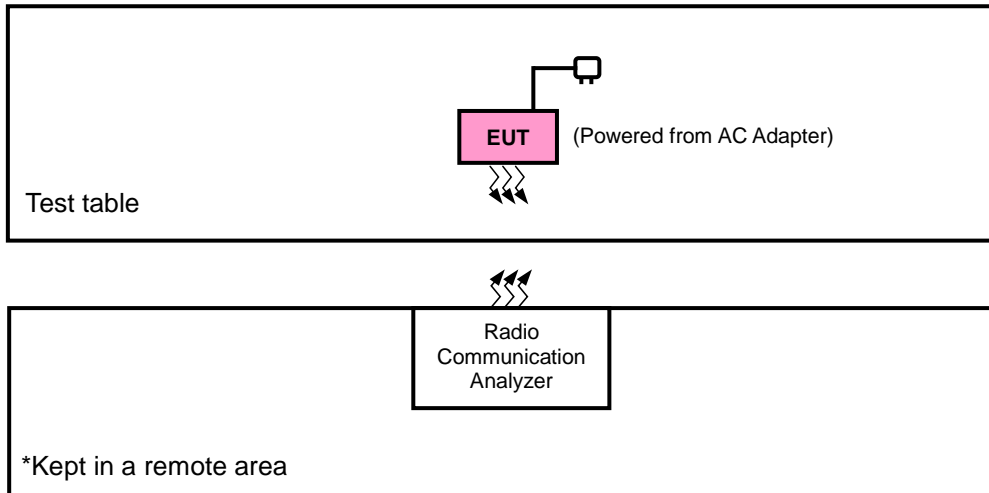

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Radio Communication Analyzer	ANRITSU	MT8821C	6201502978	N/A
2.	Adapter	Chanel Well Technology	CAP012121	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	2.25m

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items 1 acted as communication partners to transfer data.
3. Items 2 was provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 26	Y-plane	Y-axis

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	ERP	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
-	Modulation Characteristics	26865 to 26965	26915	15 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
-	Frequency Stability	26797 to 27033	26797, 27033	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		26805 to 27025	26805, 27025	3 MHz	QPSK	1 RB / 0 RB Offset		
		26815 to 27015	26815, 27015	5 MHz	QPSK	1 RB / 0 RB Offset		
		26840 to 26990	26840, 26990	10 MHz	QPSK	1 RB / 0 RB Offset		
		26865 to 26965	26865, 26965	15 MHz	QPSK	1 RB / 0 RB Offset		
-	Occupied Bandwidth	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset		
-	Band Edge	26797 to 27033	26797	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			27033	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		26805 to 27025	26805	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			27025	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			27015	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			26990	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		26865 to 26965	26865	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			26965	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		-	Peak to Average Ratio	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Conducted Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.7 Vdc	Thomas Wei
Modulation Characteristics	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Band Edge	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei, Getaz Yang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

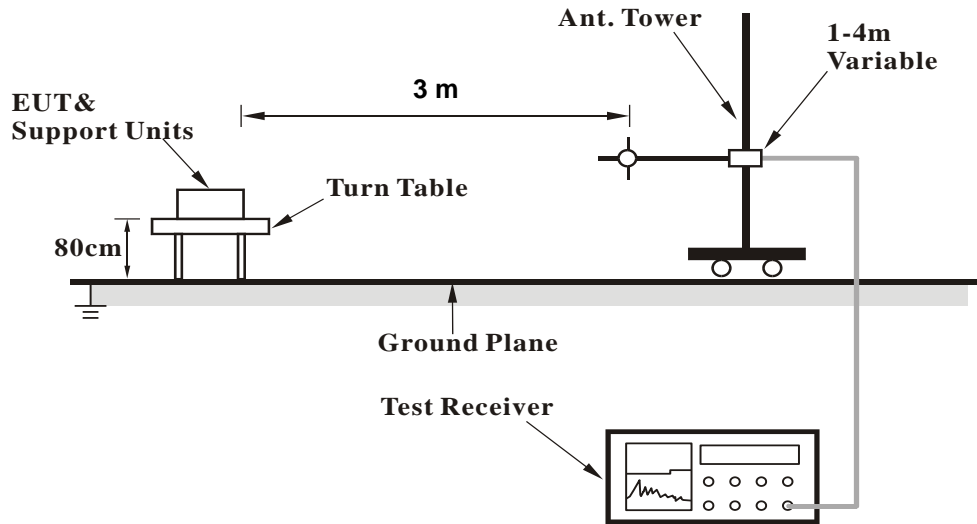


<Radiated Emission above 1 GHz>

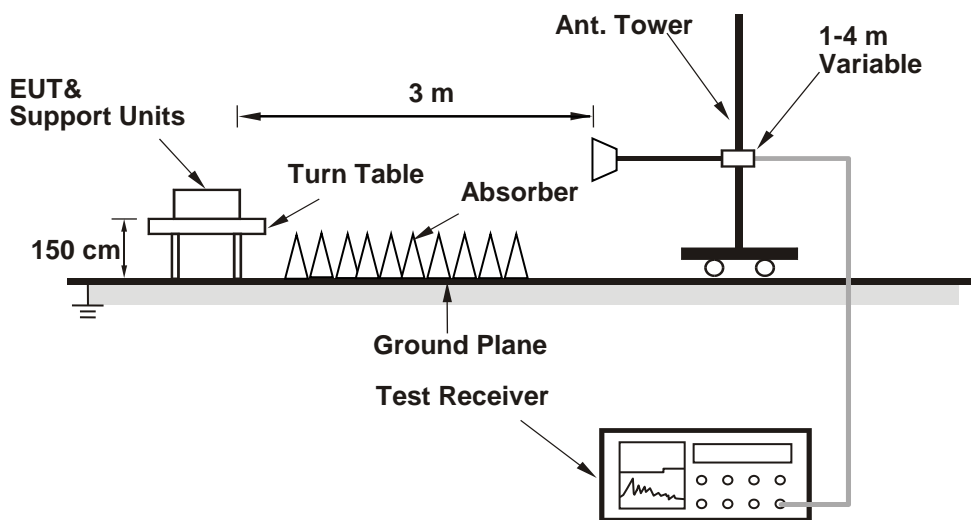

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:

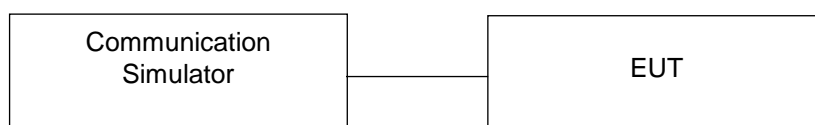

4.1.4 Test Results

Conducted Output Power (dBm)

eMTC	Band 26	Region(s):	FCC	Power:	Class 3	23	Tolerance:	2.7
------	---------	------------	-----	--------	---------	----	------------	-----

maximum:	24.72
----------	-------

BW(MHz):	1.4
----------	-----

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration				Initial of Power	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26797	824.7	8797	876.5	QPSK	1	0	0	-85	23.8
					QPSK	1	5	0	-85	23.66
					QPSK	3	3	0	-85	23.32
					QPSK	6	0	0	-85	23.23
					16QAM	1	0	0	-85	23.46
					16QAM	1	5	0	-85	23.42
					16QAM	3	0	0	-85	23.42
					16QAM	5	0	0	-85	23.42
Mid Range	26915	836.5	8915	888.3	QPSK	1	0	0	-85	23.66
					QPSK	1	5	0	-85	23.4
					QPSK	3	3	0	-85	23.55
					QPSK	6	0	0	-85	23.4
					16QAM	1	0	0	-85	23.36
					16QAM	1	5	0	-85	23.38
					16QAM	3	0	0	-85	23.6
					16QAM	5	0	0	-85	23.55
High Range	27033	848.3	9033	900.1	QPSK	1	0	0	-85	23.65
					QPSK	1	5	0	-85	23.62
					QPSK	3	3	0	-85	23.46
					QPSK	6	0	0	-85	23.77
					16QAM	1	0	0	-85	23.51
					16QAM	1	5	0	-85	23.56
					16QAM	3	0	0	-85	23.39
					16QAM	5	0	0	-85	23.59

BW(MHz):	3
----------	---

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration				Initial of Power	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26805	825.5	8805	876.5	QPSK	1	0	0	-85	23.96
					QPSK	1	5	0	-85	23.85
					QPSK	1	0	1	-85	23.44
					QPSK	1	5	1	-85	23.44

					QPSK	3	3	0	-85	23.59
					QPSK	3	3	1	-85	23.65
					QPSK	6	0	0	-85	23.53
					QPSK	6	0	1	-85	23.51
					16QAM	1	0	0	-85	23.55
					16QAM	1	5	0	-85	23.58
					16QAM	1	0	1	-85	23.71
					16QAM	1	5	1	-85	23.58
					16QAM	3	0	0	-85	23.49
					16QAM	3	3	1	-85	23.54
					16QAM	5	0	0	-85	23.69
					16QAM	5	0	1	-85	23.77
Mid Range	26915	836.5	8915	887.5	QPSK	1	0	0	-85	23.57
					QPSK	1	5	0	-85	23.67
					QPSK	1	0	1	-85	23.65
					QPSK	1	5	1	-85	23.65
					QPSK	3	3	0	-85	23.92
					QPSK	3	3	1	-85	23.61
					QPSK	6	0	0	-85	23.62
					QPSK	6	0	1	-85	23.62
					16QAM	1	0	0	-85	23.66
					16QAM	1	5	0	-85	23.64
					16QAM	1	0	1	-85	23.49
					16QAM	1	5	1	-85	23.61
					16QAM	3	0	0	-85	23.5
					16QAM	3	3	1	-85	23.67
High Range	27025	847.5	9025	-4	16QAM	5	0	0	-85	23.69
					16QAM	5	0	1	-85	23.34
					QPSK	1	0	0	-85	23.48
					QPSK	1	5	0	-85	23.57
					QPSK	1	0	1	-85	23.61
					QPSK	1	5	1	-85	23.51
					QPSK	3	3	0	-85	23.67
					QPSK	3	3	1	-85	23.45
					QPSK	6	0	0	-85	23.73
					QPSK	6	0	1	-85	24.12
					16QAM	1	0	0	-85	24.17
					16QAM	1	5	0	-85	23.77
					16QAM	1	0	1	-85	23.75
					16QAM	1	5	1	-85	23.76
16QAM	3	0	0	-85	23.95					

					16QAM	3	3	1	-85	23.92
					16QAM	5	0	0	-85	23.68
					16QAM	5	0	1	-85	23.82

BW(MHz): 5

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration				Initial of Power		EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)		
Low Range	26815	826.5	8815	876.5	QPSK	1	0	0	-85	24.16		
					QPSK	1	5	0	-85	24.03		
					QPSK	1	0	1	-85	23.69		
					QPSK	1	5	1	-85	23.68		
					QPSK	1	0	3	-85	23.86		
					QPSK	1	5	3	-85	23.77		
					QPSK	3	0	0	-85	23.78		
					QPSK	3	3	3	-85	23.71		
					QPSK	6	0	0	-85	23.75		
					QPSK	6	0	1	-85	23.8		
					QPSK	6	0	3	-85	23.97		
					16QAM	1	0	0	-85	23.8		
					16QAM	1	5	0	-85	23.76		
					16QAM	1	0	1	-85	23.72		
					16QAM	1	5	1	-85	23.91		
					16QAM	1	0	3	-85	23.93		
					16QAM	1	5	3	-85	23.83		
					16QAM	3	0	0	-85	24		
					16QAM	3	3	3	-85	23.95		
					16QAM	5	0	0	-85	23.85		
16QAM	5	0	1	-85	24.15							
16QAM	5	0	3	-85	23.79							
Mid Range	26915	836.5	8915	886.5	QPSK	1	0	0	-85	24.21		
					QPSK	1	5	0	-85	23.77		
					QPSK	1	0	1	-85	23.94		
					QPSK	1	5	1	-85	23.91		
					QPSK	1	0	3	-85	23.76		
					QPSK	1	5	3	-85	23.86		
					QPSK	3	0	0	-85	23.74		
					QPSK	3	3	3	-85	23.94		
					QPSK	6	0	0	-85	23.98		
					QPSK	6	0	1	-85	23.62		
					QPSK	6	0	3	-85	23.88		

High Range	27015	846.5	9015	896.5	16QAM	1	0	0	-85	23.72
					16QAM	1	5	0	-85	23.95
					16QAM	1	0	1	-85	23.93
					16QAM	1	5	1	-85	23.69
					16QAM	1	0	3	-85	23.99
					16QAM	1	5	3	-85	23.74
					16QAM	3	0	0	-85	23.83
					16QAM	3	3	3	-85	24.11
					16QAM	5	0	0	-85	24.47
					16QAM	5	0	1	-85	24.02
					16QAM	5	0	3	-85	23.96
					QPSK	1	0	0	-85	24.24
					QPSK	1	5	0	-85	24.15
					QPSK	1	0	1	-85	23.94
					QPSK	1	5	1	-85	24.08
	QPSK	1	0	3	-85	24.08				
	QPSK	1	5	3	-85	24.09				
	QPSK	3	0	0	-85	24.11				
	QPSK	3	3	3	-85	23.78				
	QPSK	6	0	0	-85	23.87				
	QPSK	6	0	1	-85	23.92				
	QPSK	6	0	3	-85	23.97				
	16QAM	1	0	0	-85	24.22				
	16QAM	1	5	0	-85	23.93				
	16QAM	1	0	1	-85	23.92				
	16QAM	1	5	1	-85	23.97				
	16QAM	1	0	3	-85	24.02				
	16QAM	1	5	3	-85	23.98				
	16QAM	3	0	0	-85	24.11				
	16QAM	3	3	3	-85	24.12				
16QAM	5	0	0	-85	23.99					
16QAM	5	0	1	-85	24.1					
16QAM	5	0	3	-85	24.16					

BW(MHz): 10

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration				EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Initial of Power	
Low Range	26840	829	8840	879	QPSK	1	0	0	-85	24.25

					QPSK	1	5	0	-85	24.17
					QPSK	1	0	3	-85	23.83
					QPSK	1	5	3	-85	23.81
					QPSK	1	0	7	-85	23.93
					QPSK	1	5	7	-85	23.93
					QPSK	4	0	0	-85	23.96
					QPSK	4	2	7	-85	23.86
					QPSK	6	0	0	-85	23.88
					QPSK	6	0	7	-85	23.87
					16QAM	1	0	0	-85	24.08
					16QAM	1	5	0	-85	23.9
					16QAM	1	0	3	-85	23.9
					16QAM	1	5	3	-85	23.84
					16QAM	1	0	7	-85	24.07
					16QAM	1	5	7	-85	24.09
					16QAM	4	2	0	-85	23.98
					16QAM	4	2	7	-85	24.08
					16QAM	5	0	0	-85	24.07
					16QAM	5	0	7	-85	23.95
					QPSK	1	0	0	-85	24.24
					QPSK	1	5	0	-85	23.97
					QPSK	1	0	3	-85	23.98
					QPSK	1	5	3	-85	23.99
					QPSK	1	0	7	-85	24
					QPSK	1	5	7	-85	23.96
					QPSK	4	0	0	-85	23.85
					QPSK	4	2	7	-85	24.03
					QPSK	6	0	0	-85	23.86
					QPSK	6	0	7	-85	23.98
					16QAM	1	0	0	-85	24.07
					16QAM	1	5	0	-85	23.73
					16QAM	1	0	3	-85	24.05
					16QAM	1	5	3	-85	23.86
					16QAM	1	0	7	-85	24.07
					16QAM	1	5	7	-85	24.01
					16QAM	4	2	0	-85	23.85
					16QAM	4	2	7	-85	24.09
					16QAM	5	0	0	-85	23.82
					16QAM	5	0	7	-85	24.01
High Range	26990	844	8990	894	QPSK	1	0	0	-85	24.63
					QPSK	1	5	0	-85	24.11

					QPSK	1	5	7	-85	24.05
					QPSK	1	0	3	-85	24.1
					QPSK	1	5	3	-85	24.37
					QPSK	1	0	7	-85	24.3
					QPSK	4	0	0	-85	24.11
					QPSK	4	2	7	-85	24.18
					QPSK	6	0	0	-85	24.24
					QPSK	6	0	7	-85	24.25
					16QAM	1	0	0	-85	24.24
					16QAM	1	5	0	-85	23.92
					16QAM	1	0	3	-85	24.02
					16QAM	1	5	3	-85	24.01
					16QAM	1	0	7	-85	24.14
					16QAM	1	5	7	-85	24.15
					16QAM	4	2	0	-85	24.15
					16QAM	4	2	7	-85	24.09
					16QAM	5	0	0	-85	24.11
					16QAM	5	0	7	-85	24.11

BW(MHz): 15

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Test Configuration			Initial of Power		EUT	
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Low Range	26865	831.5	8865	881.5	QPSK	1	0	0	-85	24.41	
					QPSK	1	5	0	-85	24.33	
					QPSK	1	0	5	-85	23.95	
					QPSK	1	5	5	-85	23.94	
					QPSK	1	0	11	-85	24.07	
					QPSK	1	5	11	-85	24.04	
					QPSK	3	0	0	-85	24.07	
					QPSK	3	3	11	-85	23.97	
					QPSK	6	0	0	-85	24.03	
					QPSK	6	0	11	-85	24.03	
					16QAM	1	0	0	-85	24.23	
					16QAM	1	5	0	-85	24.04	
					16QAM	1	0	5	-85	23.99	
					16QAM	1	5	5	-85	24	
					16QAM	1	0	11	-85	24.16	
					16QAM	1	5	11	-85	24.21	

					16QAM	3	0	0	-85	24.07
					16QAM	3	3	11	-85	24.19
					16QAM	5	0	0	-85	24.21
					16QAM	5	0	11	-85	24.11
Mid Range	26915	836.5	8915	886.5	QPSK	1	0	0	-85	24.38
					QPSK	1	5	0	-85	24.11
					QPSK	1	0	5	-85	24.1
					QPSK	1	5	5	-85	24.09
					QPSK	1	0	11	-85	24.13
					QPSK	1	5	11	-85	24.11
					QPSK	3	0	0	-85	24.01
					QPSK	3	3	11	-85	24.12
					QPSK	6	0	0	-85	23.98
					QPSK	6	0	11	-85	24.13
					16QAM	1	0	0	-85	24.22
					16QAM	1	5	0	-85	23.85
					16QAM	1	0	5	-85	24.14
					16QAM	1	5	5	-85	24.01
					16QAM	1	0	11	-85	24.16
					16QAM	1	5	11	-85	24.15
					16QAM	3	0	0	-85	23.97
					16QAM	3	3	11	-85	24.21
					16QAM	5	0	0	-85	23.98
					16QAM	5	0	11	-85	24.14
High Range	26965	841.5	8965	891.5	QPSK	1	0	0	-85	24.72
					QPSK	1	5	11	-85	24.21
					QPSK	1	0	5	-85	24.21
					QPSK	1	5	5	-85	24.22
					QPSK	1	0	11	-85	24.48
					QPSK	1	5	11	-85	24.42
					QPSK	3	0	0	-85	24.2
					QPSK	3	3	11	-85	24.33
					QPSK	6	0	0	-85	24.35
					QPSK	6	0	11	-85	24.35
					16QAM	1	0	0	-85	24.33
					16QAM	1	5	0	-85	24.02
					16QAM	1	0	5	-85	24.16
					16QAM	1	5	5	-85	24.17
					16QAM	1	0	11	-85	24.23
					16QAM	1	5	11	-85	24.24
					16QAM	3	0	0	-85	24.24

					16QAM	3	3	11	-85	24.21
					16QAM	5	0	0	-85	24.25
					16QAM	5	0	11	-85	24.26

ERP Power (dBm)

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26797	824.7	-5.72	32.62	24.75	298.54	H
	26915	836.5	-5.28	32.52	25.09	322.85	
	27033	848.3	-5.17	32.65	25.33	341.19	
	26797	824.7	-12.63	32.76	17.98	62.81	V
	26915	836.5	-13.10	32.39	17.14	51.76	
	27033	848.3	-12.91	32.54	17.48	55.98	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	26797	824.7	-6.72	32.62	23.75	237.14	H
	26915	836.5	-6.53	32.52	23.84	242.10	
	27033	848.3	-6.45	32.65	24.05	254.10	
	26797	824.7	-14.90	32.76	15.71	37.24	V
	26915	836.5	-14.47	32.39	15.77	37.76	
	27033	848.3	-14.17	32.54	16.22	41.88	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26805	825.5	-5.62	32.62	24.85	305.49	H
	26915	836.5	-5.28	32.52	25.09	322.85	
	27025	847.5	-5.18	32.65	25.32	340.41	
	26805	825.5	-13.55	32.76	17.06	50.82	V
	26915	836.5	-13.05	32.39	17.19	52.36	
	27025	847.5	-12.83	32.54	17.56	57.02	
Channel Bandwidth: 3 MHz / 16QAM							
Y	26805	825.5	-6.84	32.62	23.63	230.67	H
	26915	836.5	-6.39	32.52	23.98	250.03	
	27025	847.5	-6.31	32.65	24.19	262.42	
	26805	825.5	-14.83	32.76	15.78	37.84	V
	26915	836.5	-14.35	32.39	15.89	38.82	
	27025	847.5	-14.05	32.54	16.34	43.05	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26815	826.5	-5.51	32.62	24.96	313.33	H
	26915	836.5	-5.14	32.52	25.23	333.43	
	27015	846.5	-5.00	32.65	25.50	354.81	
	26815	826.5	-13.52	32.76	17.09	51.17	V
	26919	836.5	-13.04	32.39	17.20	52.48	
	27015	846.5	-12.82	32.54	17.57	57.15	
Channel Bandwidth: 5 MHz / 16QAM							
Y	26815	826.5	-6.71	32.62	23.76	237.68	H
	26915	836.5	-6.33	32.52	24.04	253.51	
	27015	846.5	-6.24	32.65	24.26	266.69	
	26815	826.5	-14.65	32.76	15.96	39.45	V
	26919	836.5	-14.17	32.39	16.07	40.46	
	27015	846.5	-13.95	32.54	16.44	44.06	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26840	829.0	-5.43	32.62	25.04	319.15	H
	26915	836.5	-5.03	32.52	25.34	341.98	
	26990	844.0	-4.93	32.65	25.57	360.58	
	26840	829.0	-13.43	32.76	17.18	52.24	V
	26919	836.5	-12.94	32.39	17.30	53.70	
	26990	844.0	-12.76	32.54	17.63	57.94	
Channel Bandwidth: 10 MHz / 16QAM							
Y	26840	829.0	-6.56	32.62	23.91	246.04	H
	26915	836.5	-6.17	32.52	24.20	263.03	
	26990	844.0	-6.04	32.65	24.46	279.25	
	26840	829.0	-14.59	32.76	16.02	39.99	V
	26919	836.5	-14.07	32.39	16.17	41.40	
	26990	844.0	-13.81	32.54	16.58	45.50	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26865	831.5	-5.36	32.62	25.11	324.34	H
	26915	836.5	-5.00	32.52	25.37	344.35	
	26965	841.5	-4.90	32.65	25.60	363.08	
	26865	831.5	-13.39	32.76	17.22	52.72	V
	26915	836.5	-12.89	32.39	17.35	54.33	
	26965	841.5	-12.68	32.54	17.71	59.02	
Channel Bandwidth: 15 MHz / 16QAM							
Y	26865	831.5	-6.44	32.62	24.03	252.93	H
	26915	836.5	-6.07	32.52	24.30	269.15	
	26965	841.5	-5.97	32.65	24.53	283.79	
	26865	831.5	-14.48	32.76	16.13	41.02	V
	26915	836.5	-13.98	32.39	16.26	42.27	
	26965	841.5	-13.71	32.54	16.68	46.56	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

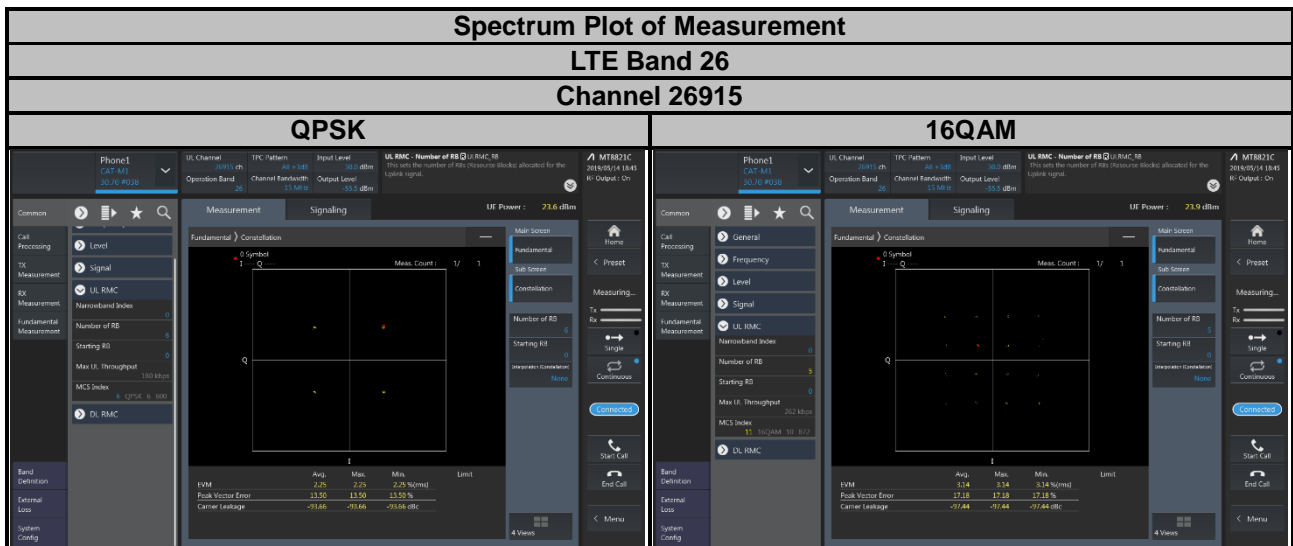

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

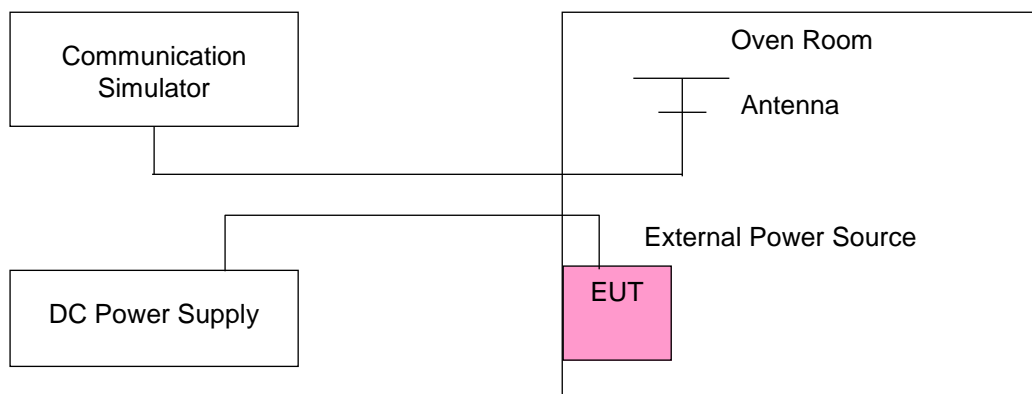

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.145	824.700002	0.003	848.300000	0.003	2.5
3.7	824.700002	0.002	848.300000	0.003	2.5
4.225	824.700003	0.004	848.300000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	824.700004	0.005	848.300000	0.002	2.5
-30	824.700002	0.002	848.300000	0.002	2.5
-20	824.700002	0.002	848.300000	0.001	2.5
-10	824.700002	0.002	848.300000	0.001	2.5
0	824.700002	0.002	848.300000	0.004	2.5
10	824.699999	-0.001	848.300000	-0.003	2.5
20	824.699997	-0.003	848.300000	-0.002	2.5
30	824.699998	-0.002	848.300000	-0.003	2.5
40	824.699997	-0.004	848.300000	-0.001	2.5
50	824.699998	-0.002	848.300000	-0.003	2.5
60	824.699999	-0.002	848.300000	-0.001	2.5
70	824.699998	-0.002	848.300000	-0.005	2.5
75	824.699998	-0.002	848.300000	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.145	824.700001	0.001	848.300000	0.002	2.5
3.7	824.700002	0.003	848.300000	0.002	2.5
4.225	824.700002	0.003	848.300000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	824.700004	0.004	848.300000	0.004	2.5
-30	824.700004	0.005	848.300000	0.003	2.5
-20	824.700004	0.004	848.300000	0.002	2.5
-10	824.700004	0.005	848.300000	0.002	2.5
0	824.700004	0.005	848.300000	0.003	2.5
10	824.699998	-0.003	848.300000	-0.001	2.5
20	824.699998	-0.003	848.300000	-0.005	2.5
30	824.699997	-0.004	848.300000	-0.003	2.5
40	824.699998	-0.003	848.300000	-0.001	2.5
50	824.699998	-0.002	848.300000	-0.003	2.5
60	824.699999	-0.002	848.300000	-0.001	2.5
70	824.699999	-0.002	848.300000	-0.002	2.5
75	824.699998	-0.002	848.300000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.145	824.700001	0.001	848.300000	0.003	2.5
3.7	824.700003	0.003	848.300000	0.005	2.5
4.225	824.700001	0.001	848.300000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	824.700004	0.004	848.300000	0.003	2.5
-30	824.700002	0.002	848.300000	0.001	2.5
-20	824.700002	0.003	848.300000	0.001	2.5
-10	824.700002	0.003	848.300000	0.001	2.5
0	824.700003	0.004	848.300000	0.001	2.5
10	824.699998	-0.002	848.300000	-0.004	2.5
20	824.699997	-0.004	848.300000	-0.003	2.5
30	824.699996	-0.005	848.300000	-0.004	2.5
40	824.699997	-0.004	848.300000	-0.003	2.5
50	824.699998	-0.003	848.300000	-0.001	2.5
60	824.699998	-0.003	848.300000	-0.004	2.5
70	824.699997	-0.004	848.300000	-0.002	2.5
75	824.699996	-0.005	848.300000	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.145	824.700002	0.003	848.300000	0.004	2.5
3.7	824.700003	0.003	848.300000	0.001	2.5
4.225	824.700003	0.004	848.300000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	824.700002	0.002	848.300000	0.005	2.5
-30	824.700004	0.004	848.300000	0.003	2.5
-20	824.700003	0.003	848.300000	0.004	2.5
-10	824.700001	0.002	848.300000	0.001	2.5
0	824.700002	0.003	848.300000	0.002	2.5
10	824.699999	-0.001	848.300000	-0.004	2.5
20	824.699997	-0.003	848.300000	-0.001	2.5
30	824.699998	-0.003	848.300000	-0.002	2.5
40	824.699997	-0.004	848.300000	-0.002	2.5
50	824.699999	-0.001	848.300000	-0.001	2.5
60	824.699997	-0.003	848.300000	-0.002	2.5
70	824.699997	-0.003	848.300000	-0.002	2.5
75	824.699998	-0.002	848.300000	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.145	824.700003	0.003	848.300000	0.002	2.5
3.7	824.700002	0.002	848.300000	0.003	2.5
4.225	824.700001	0.001	848.300000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	824.700004	0.004	848.300000	0.001	2.5
-30	824.700004	0.004	848.300000	0.004	2.5
-20	824.700002	0.002	848.300000	0.004	2.5
-10	824.700004	0.005	848.300000	0.003	2.5
0	824.700002	0.003	848.300000	0.003	2.5
10	824.699996	-0.005	848.300000	-0.003	2.5
20	824.699998	-0.003	848.300000	-0.002	2.5
30	824.699996	-0.005	848.300000	-0.005	2.5
40	824.699999	-0.001	848.300000	-0.005	2.5
50	824.699998	-0.002	848.300000	-0.002	2.5
60	824.699996	-0.005	848.300000	-0.004	2.5
70	824.699999	-0.001	848.300000	-0.003	2.5
75	824.699997	-0.003	848.300000	-0.001	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

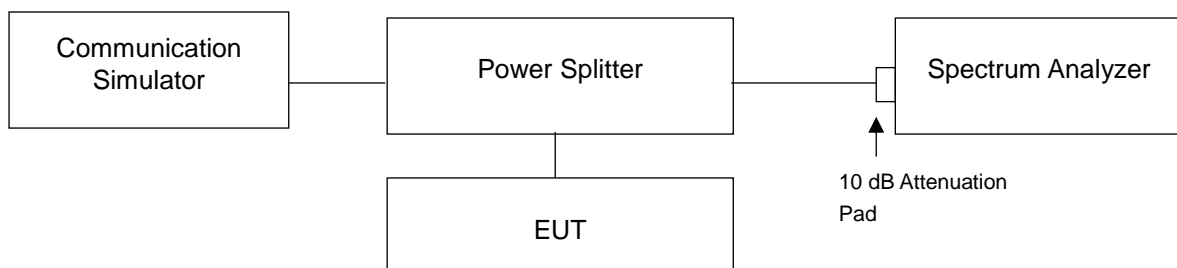


4.4.3 Test Result

LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26797	824.7	1.0917	0.9134	1.241	1.077
26915	836.5	1.0909	0.9127	1.243	1.065
27033	848.3	1.0917	0.9134	1.244	1.079
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26805	825.5	1.0970	0.9213	1.325	1.146
26915	836.5	1.0977	0.9215	1.326	1.140
27025	847.5	1.0966	0.9209	1.320	1.155

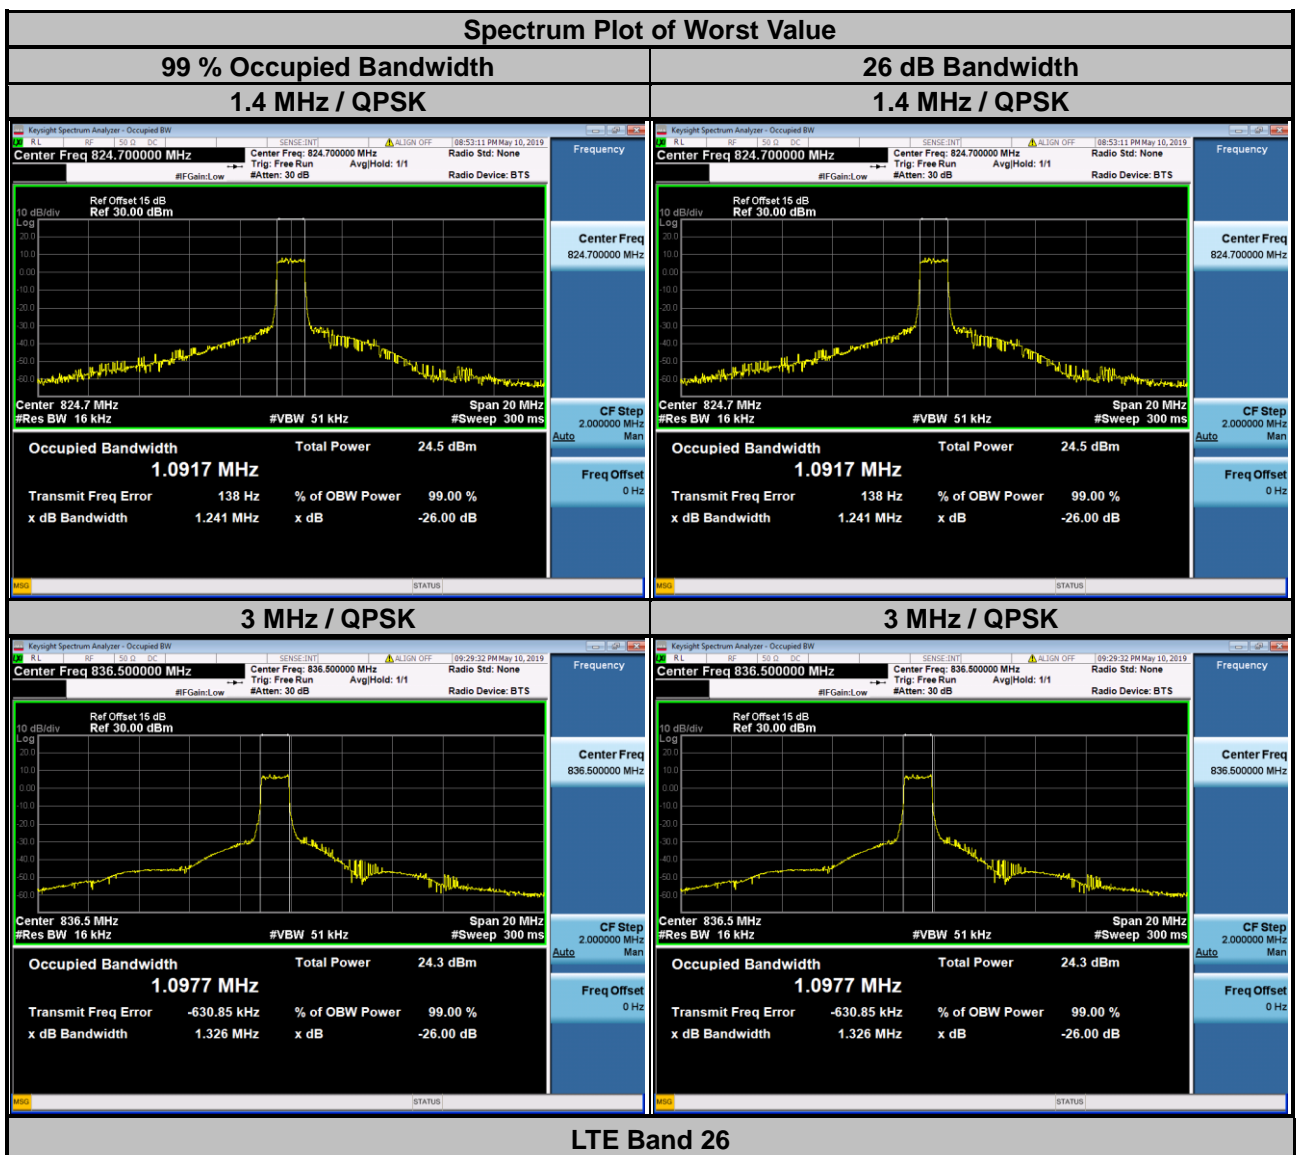


Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26815	826.5	1.0983	0.9185	1.321	1.150
26915	836.5	1.0956	0.9198	1.306	1.148
27015	846.5	1.0964	0.9201	1.299	1.159

Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26840	829.0	1.0932	0.9159	1.383	1.242
26915	836.5	1.0932	0.9161	1.371	1.240
26990	844.0	1.0937	0.9164	1.376	1.239

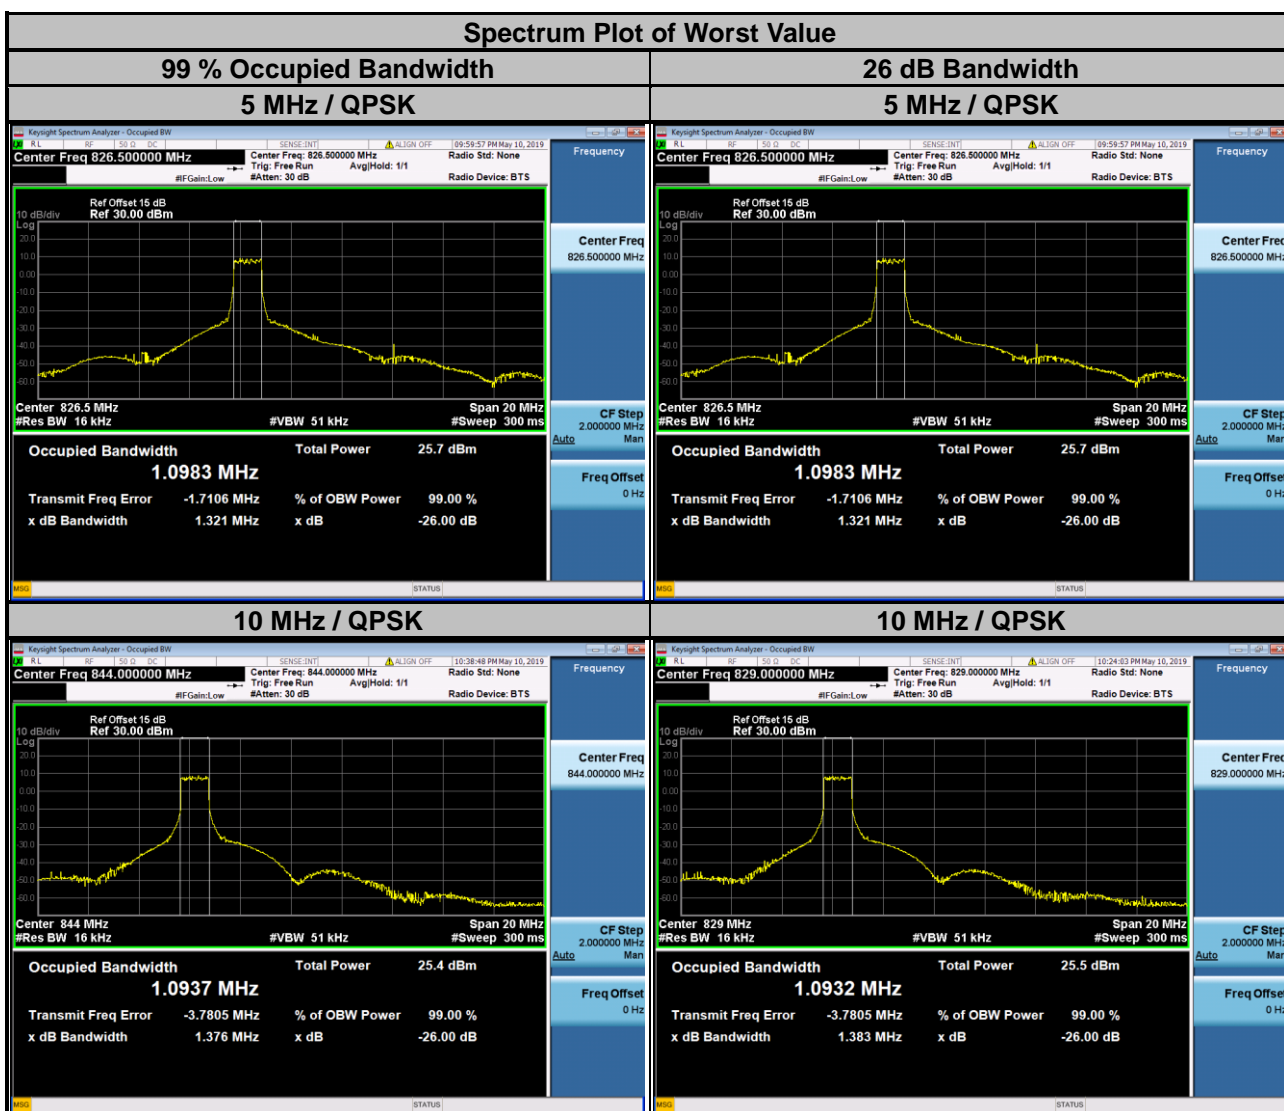

LTE Band 26					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26865	831.5	1.1059	0.9156	1.429	1.216
26915	836.5	1.1063	0.9267	1.441	1.286
26965	841.5	1.1054	0.9268	1.435	1.288

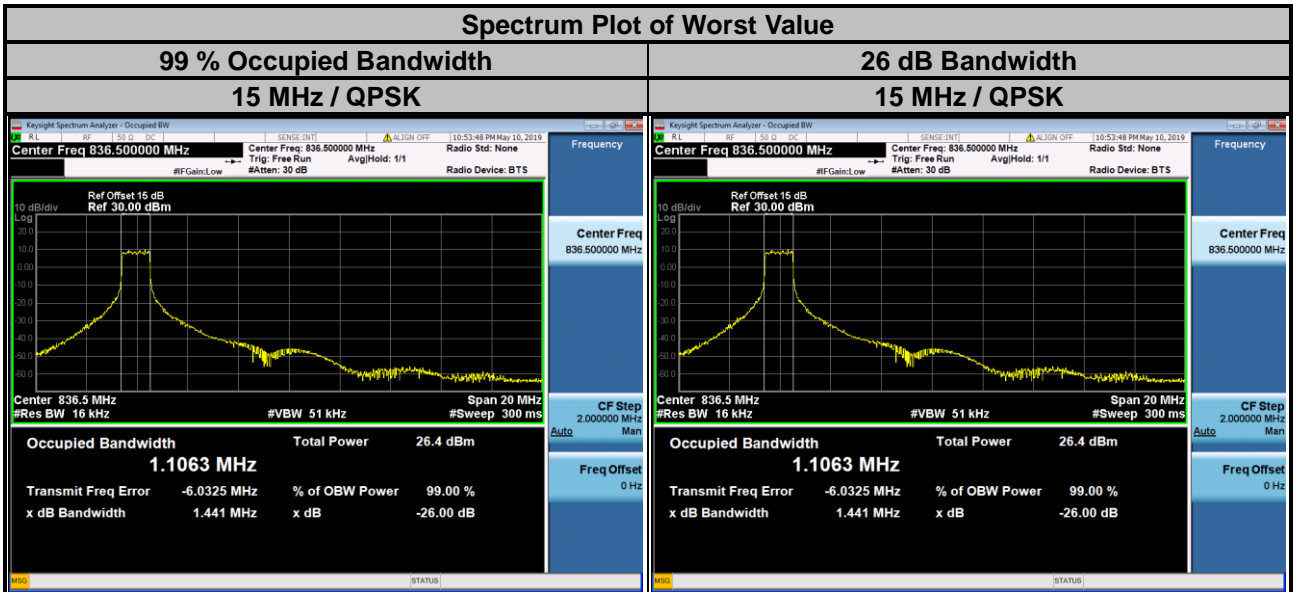


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

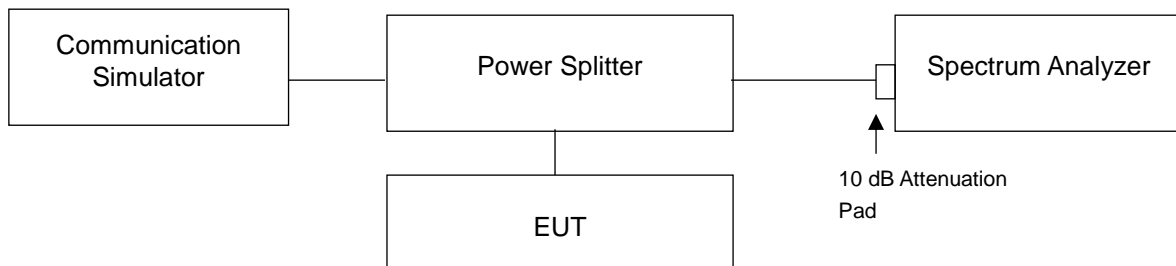


4.5.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 15 MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

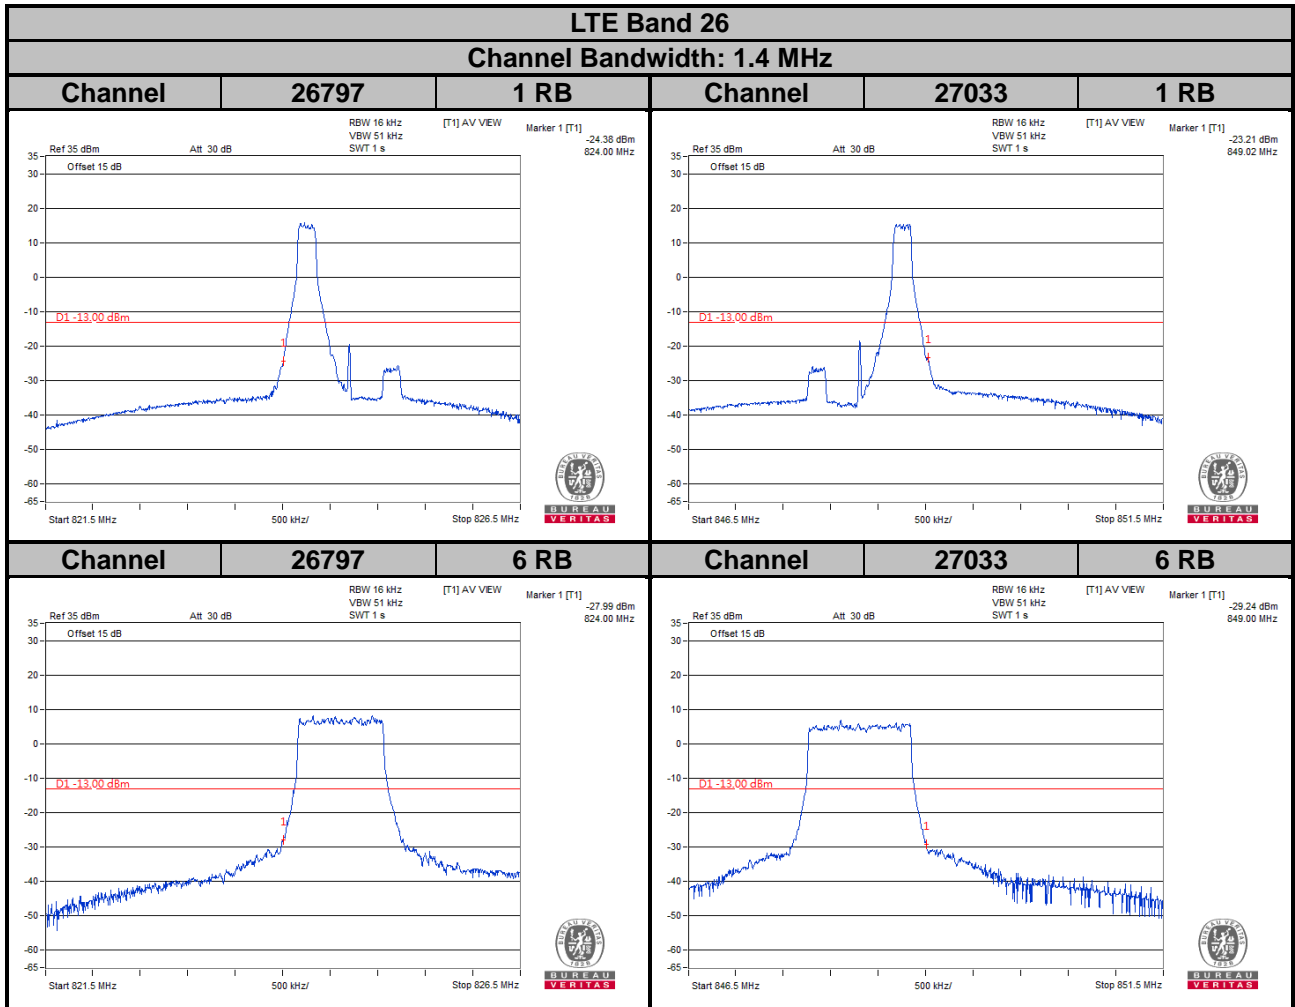



LTE Band 26
Channel Bandwidth: 3 MHz

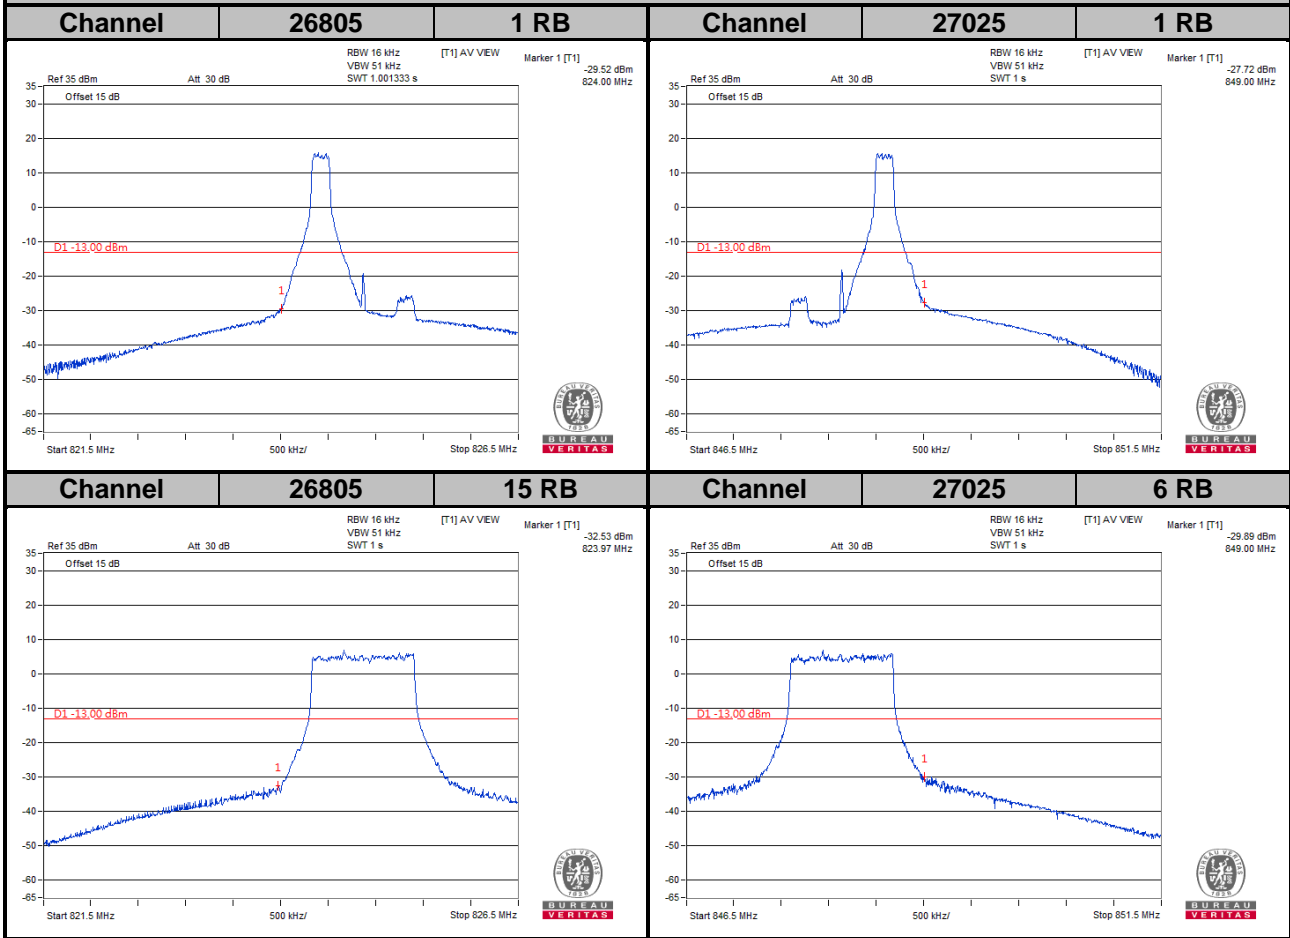



LTE Band 26
Channel Bandwidth: 5 MHz

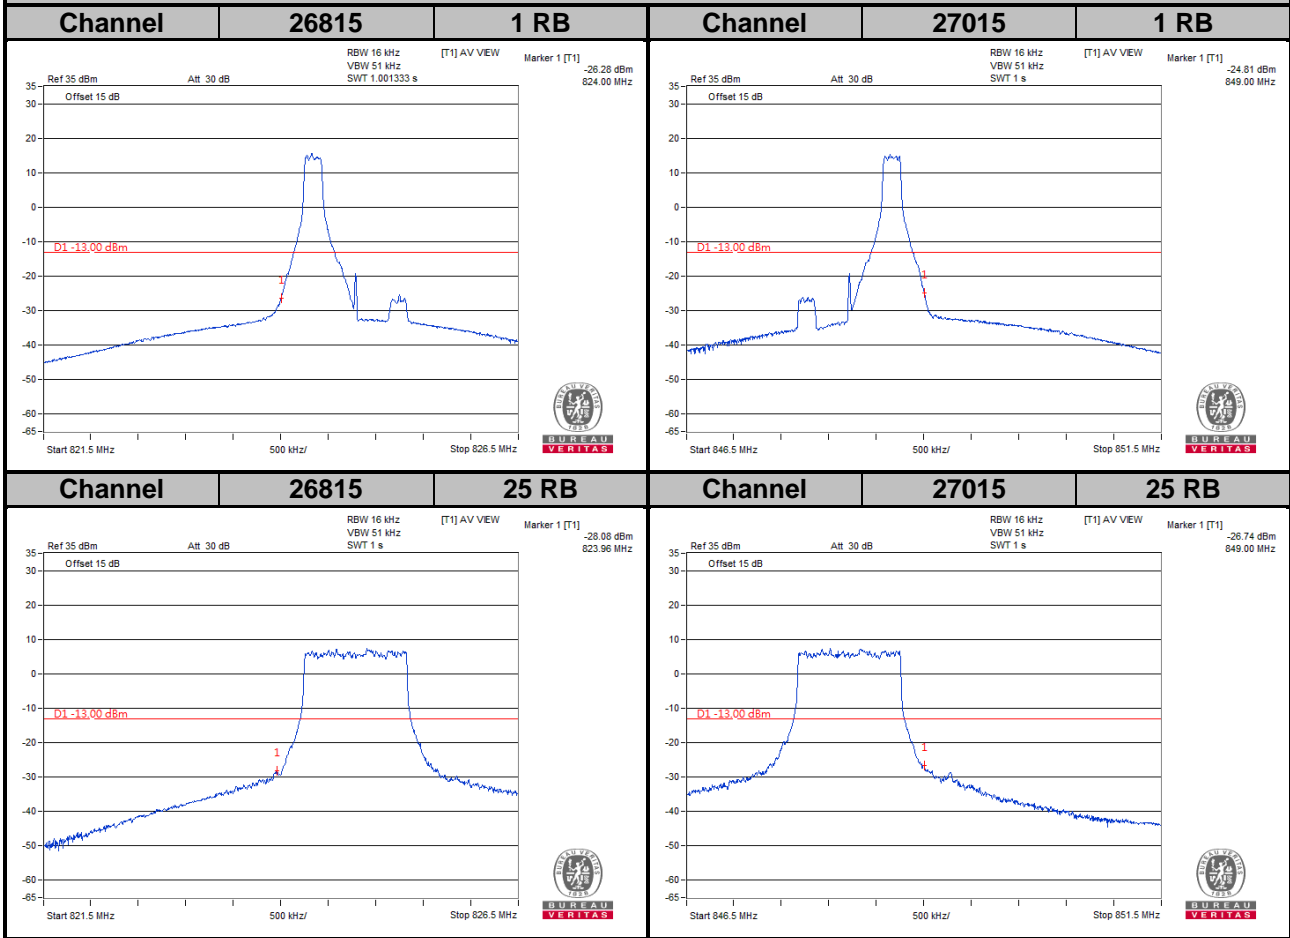

LTE Band 26
Channel Bandwidth: 10 MHz

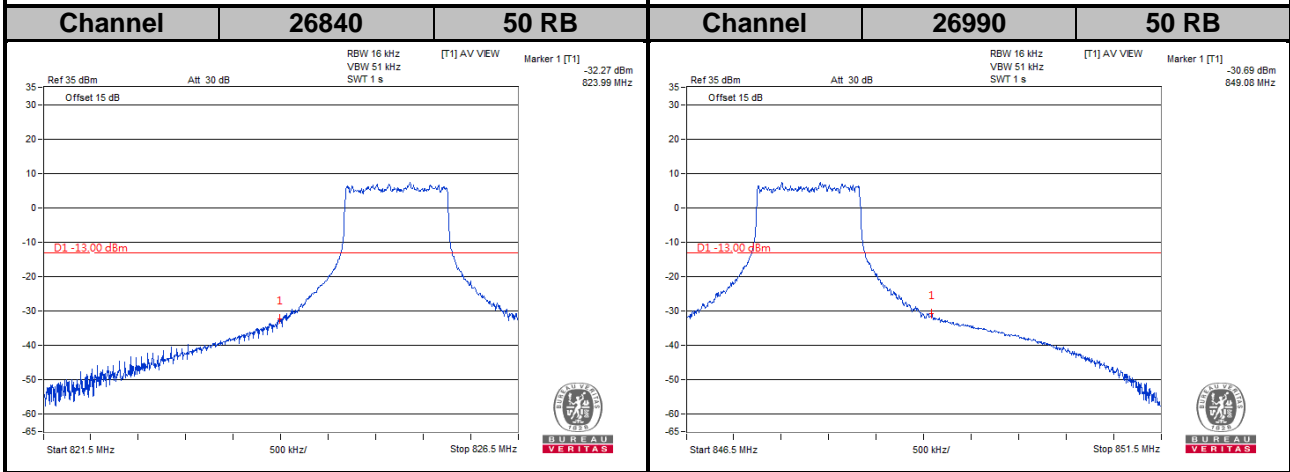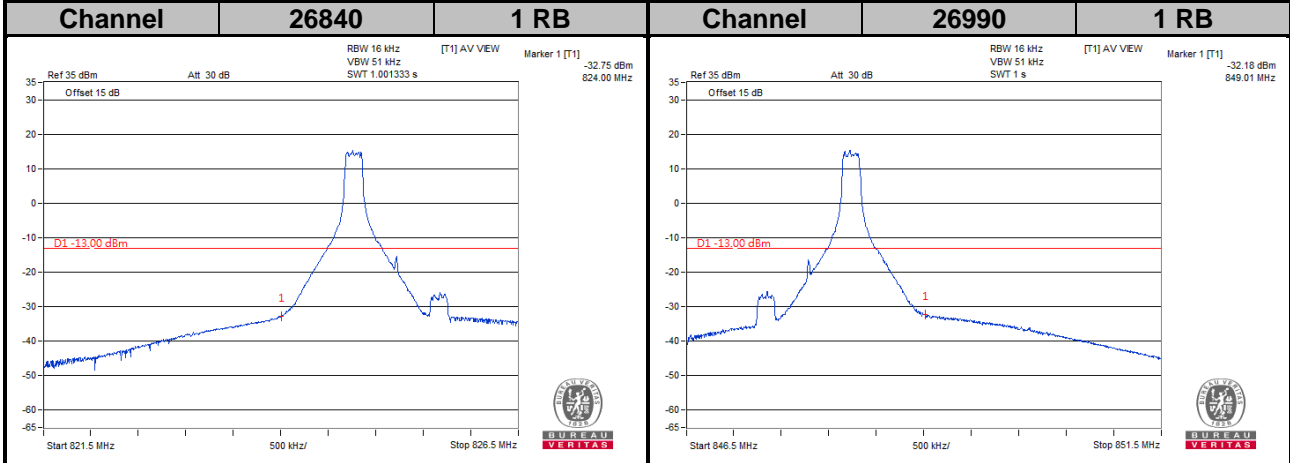

LTE Band 26
Channel Bandwidth: 15 MHz

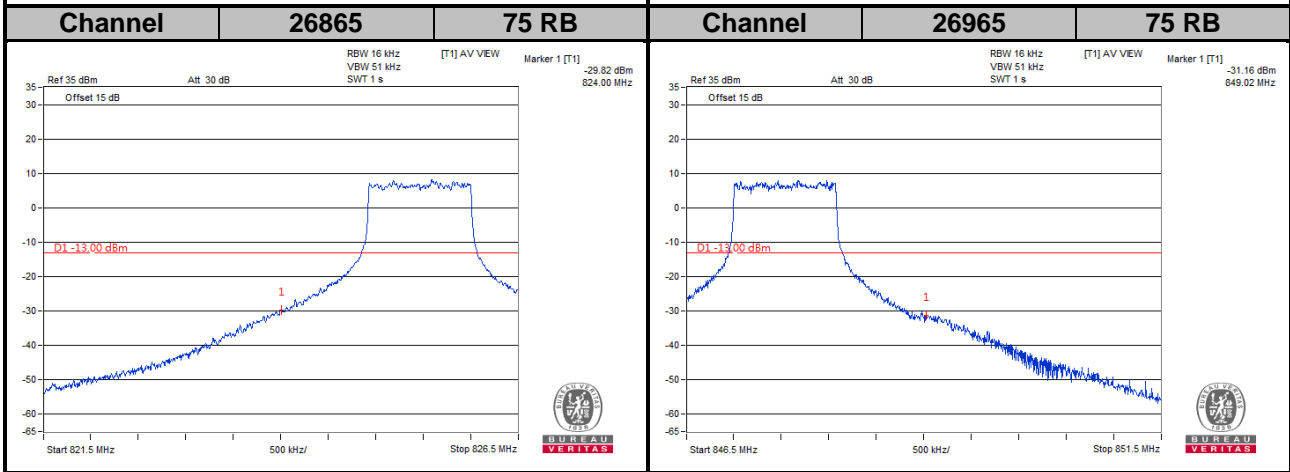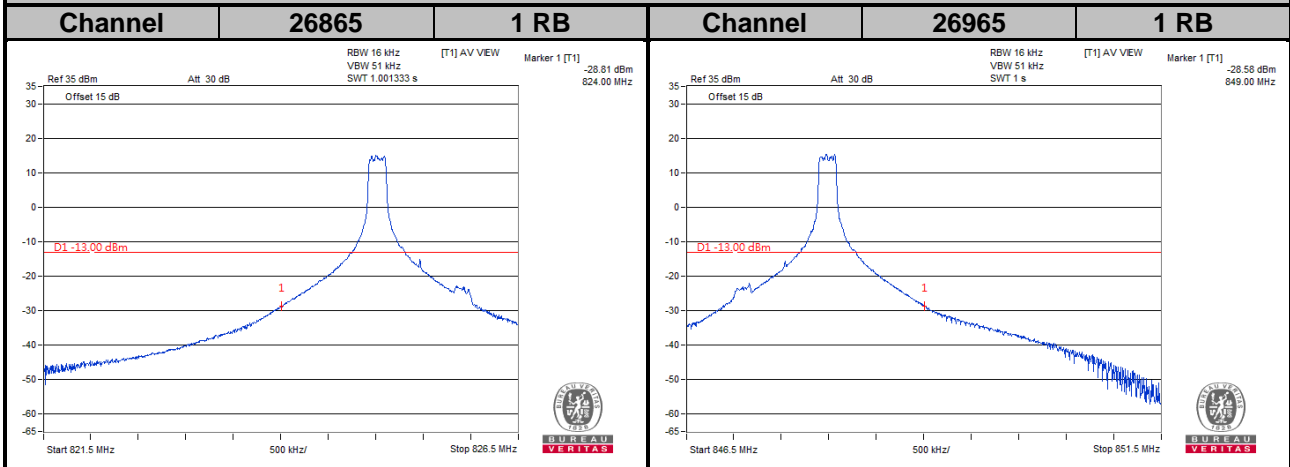


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

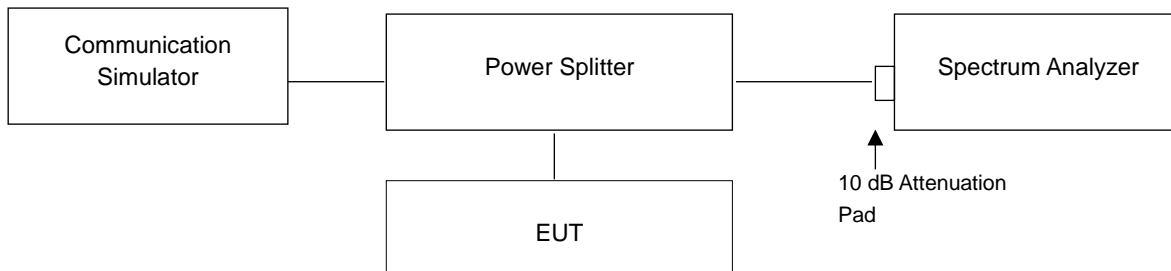


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 26							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26797	824.7	4.33	5.38	26805	825.5	4.29	5.39
26915	836.5	4.42	5.46	26915	836.5	4.39	5.43
27033	848.3	4.39	5.44	27025	847.5	4.33	5.42

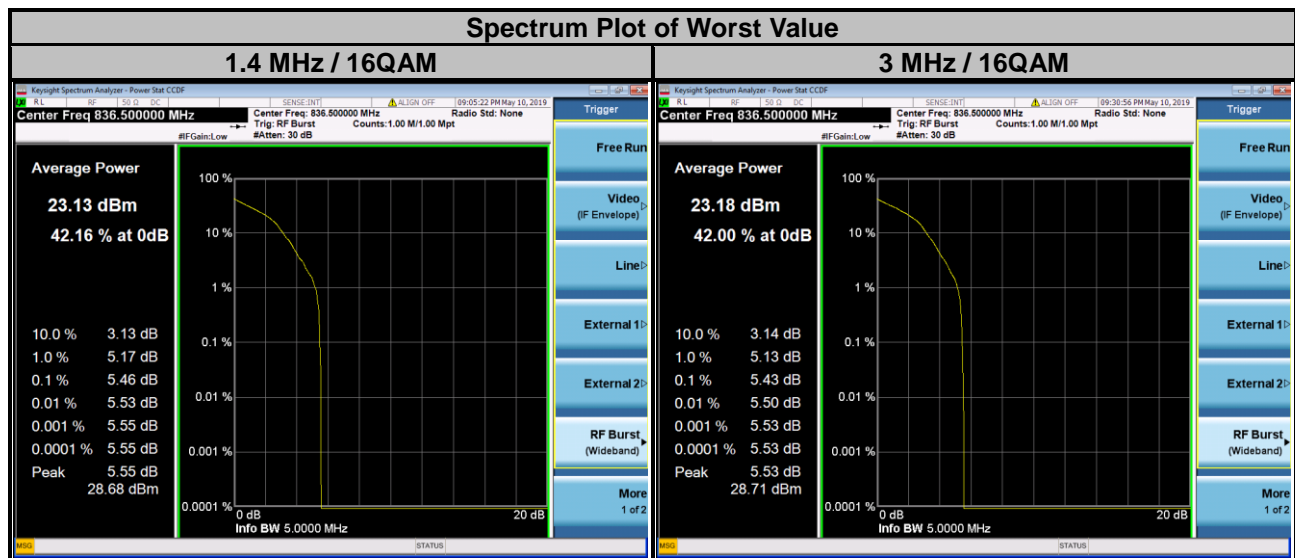

LTE Band 26							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26815	826.5	4.44	4.85	26840	829.0	4.42	4.84
26915	836.5	4.53	4.98	26915	836.5	4.53	5.01
27015	846.5	4.51	4.93	26990	844.0	4.50	4.90

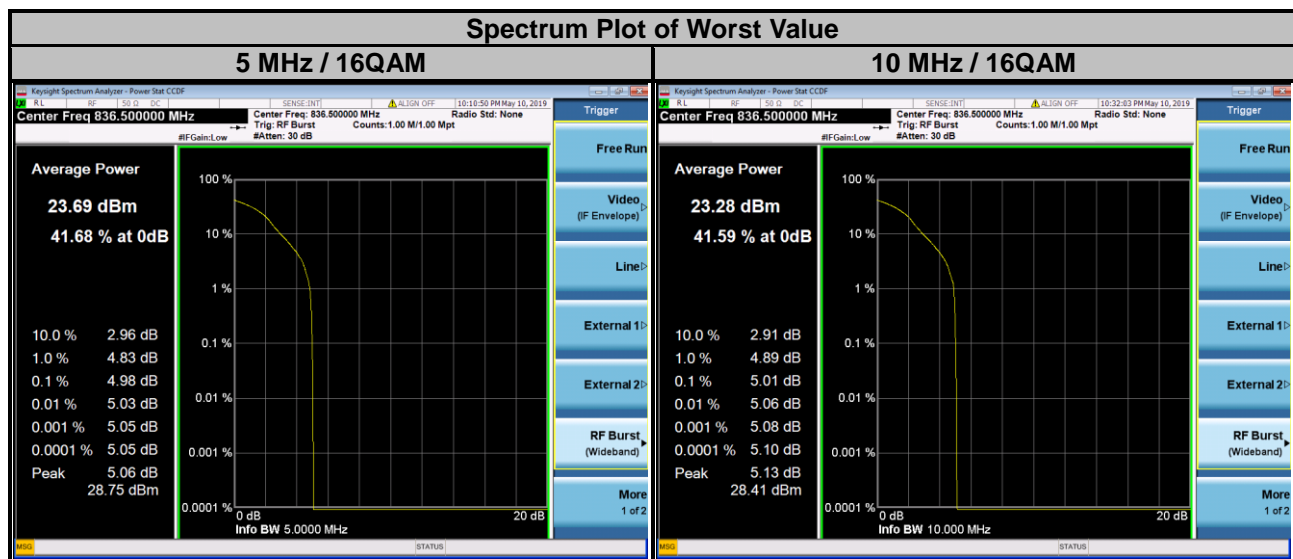

LTE Band 26			
Channel Bandwidth: 15 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM
26865	831.5	4.41	4.41
26915	836.5	4.47	4.89
26965	841.5	4.50	4.90

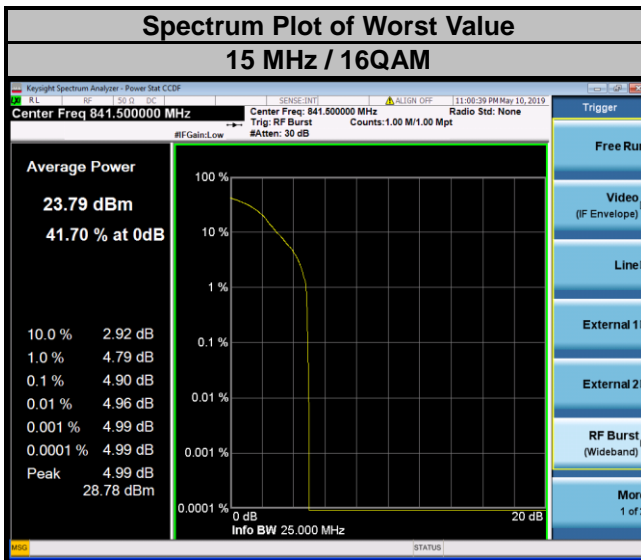


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

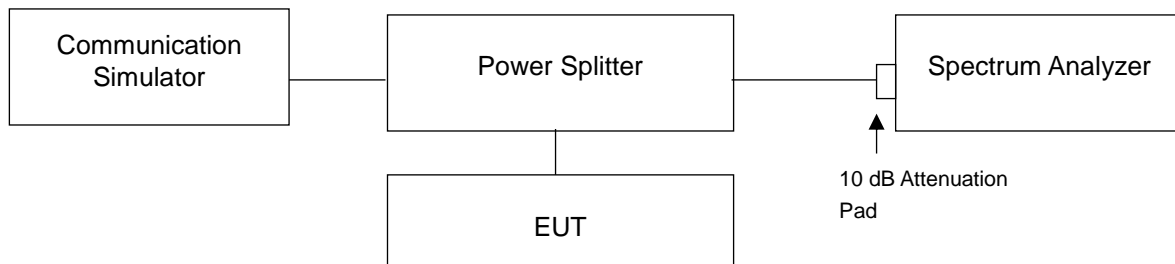

4.7.3 Test Procedure



- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results


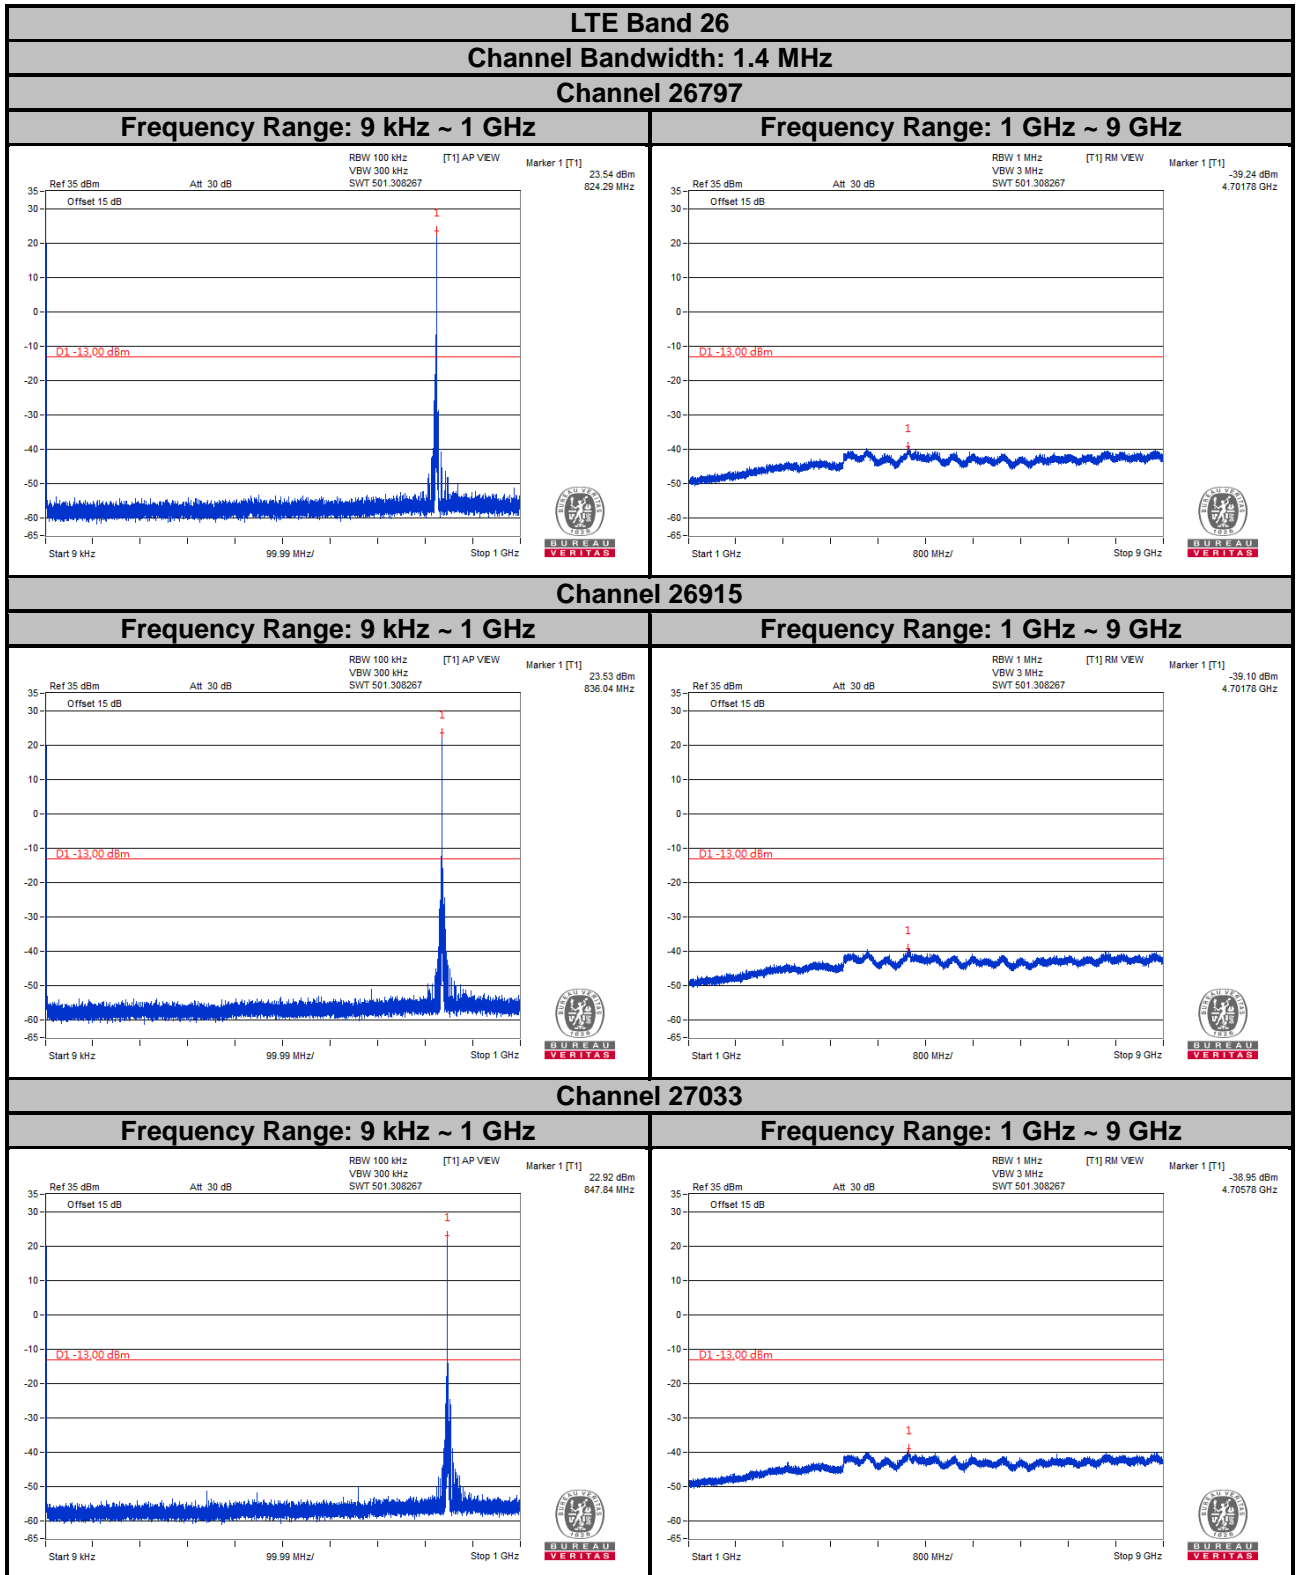


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 26
Channel Bandwidth: 3 MHz
Channel 26805

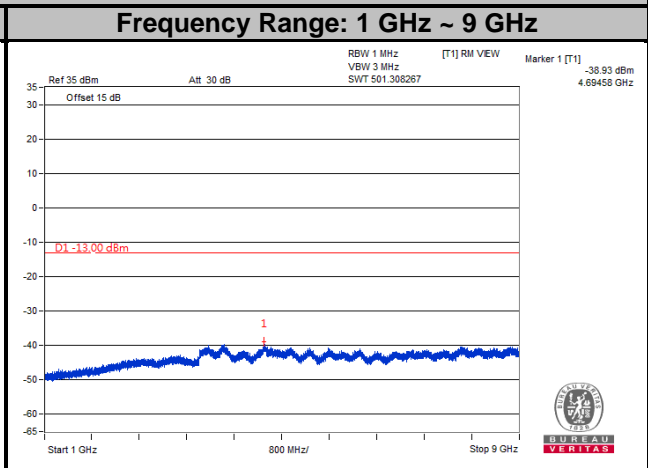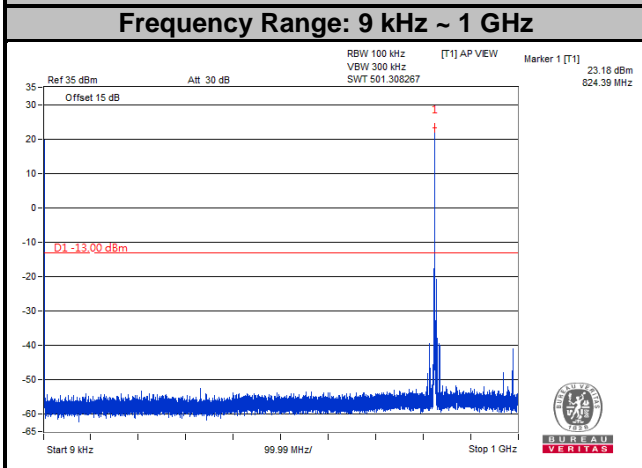

Channel 26915

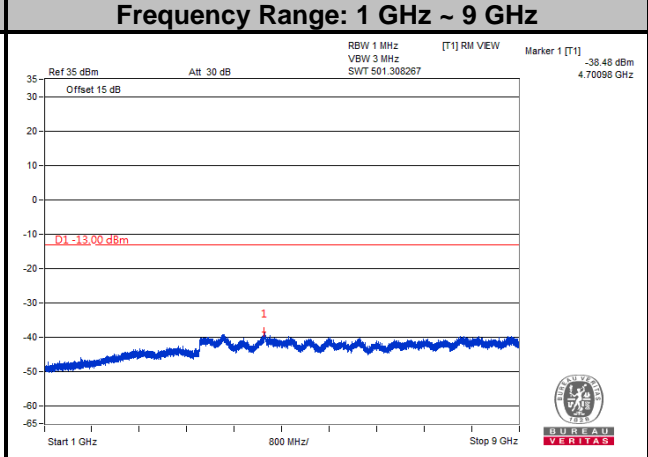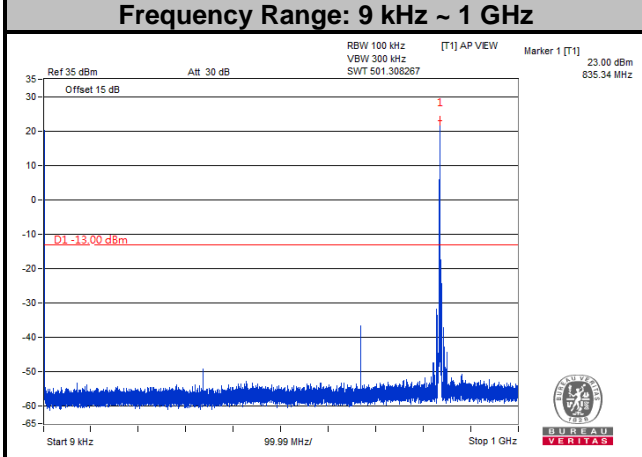


Channel 27025

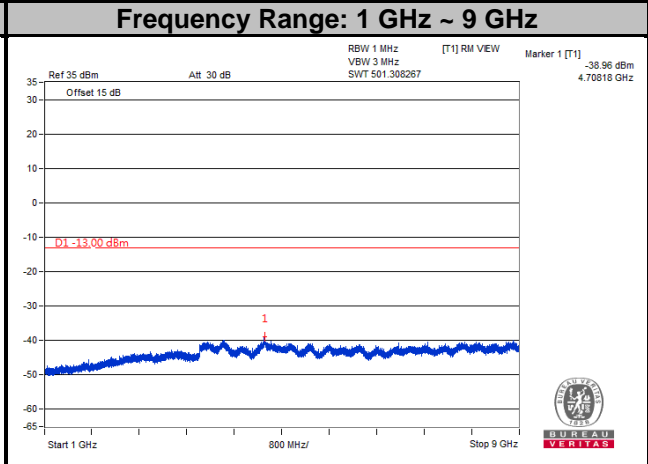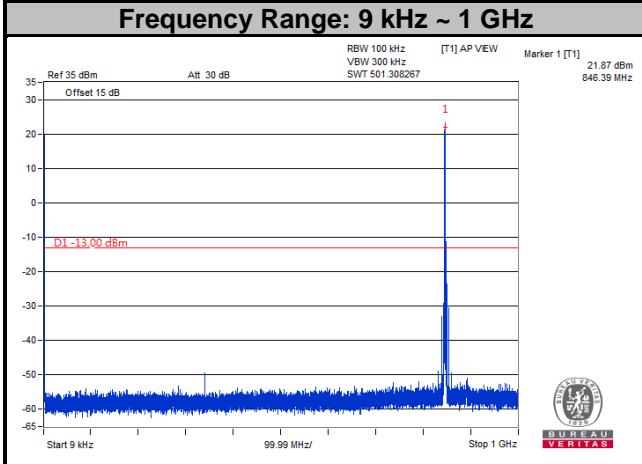


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26
Channel Bandwidth: 5 MHz


Channel 26815

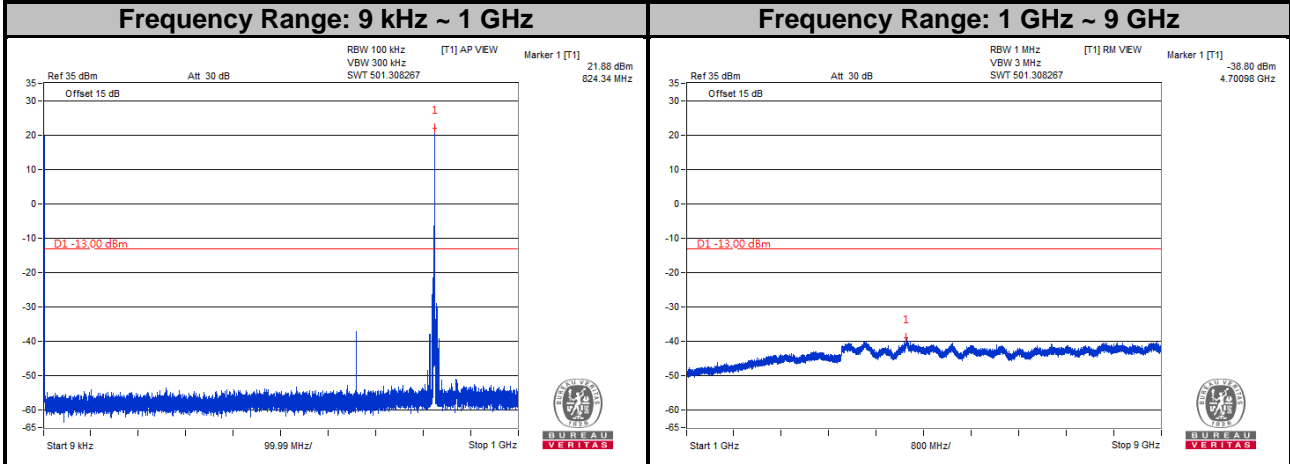

Channel 26915


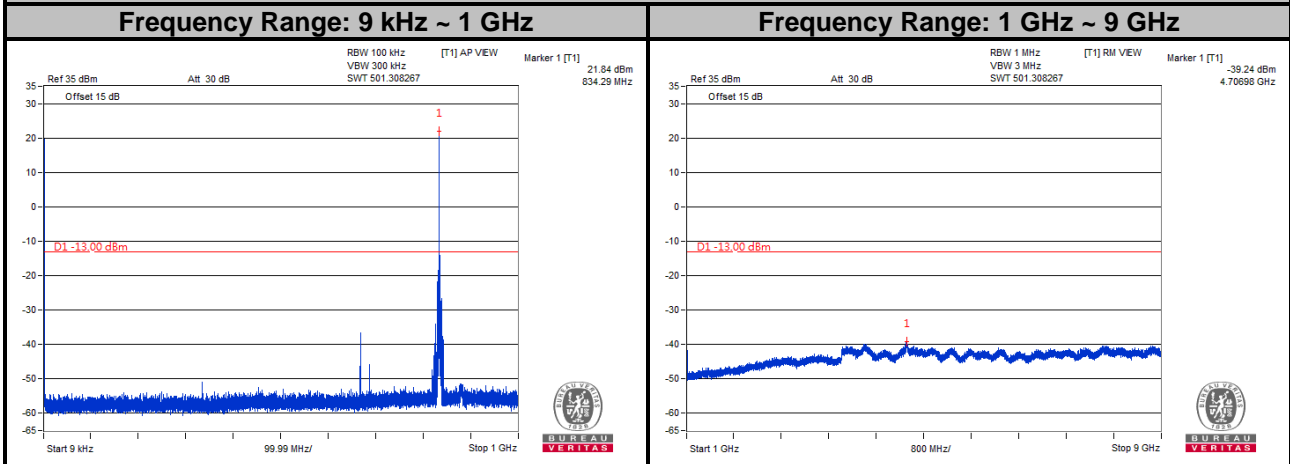


Channel 27015


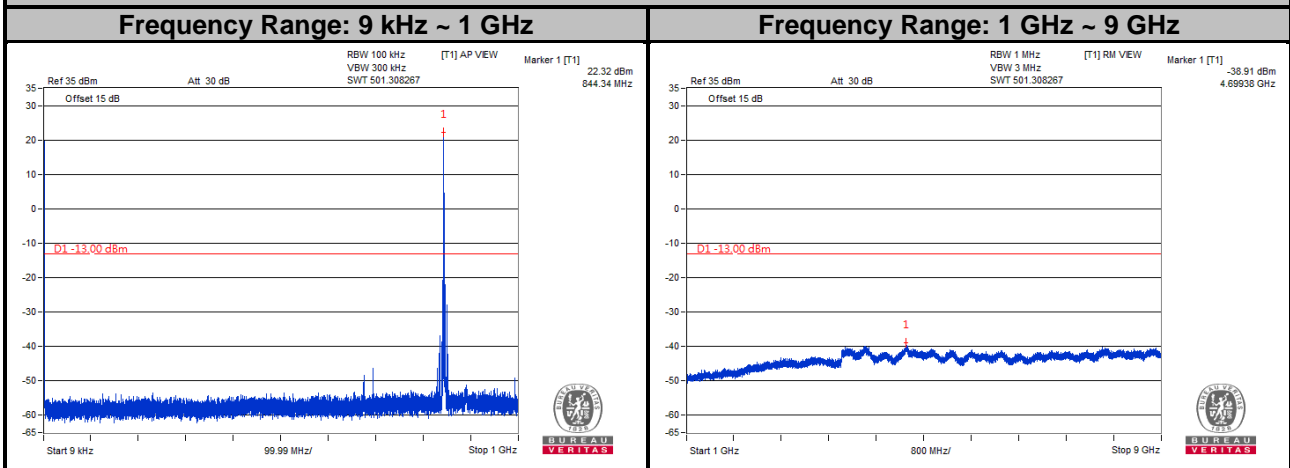


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 26
Channel Bandwidth: 10 MHz
Channel 26840

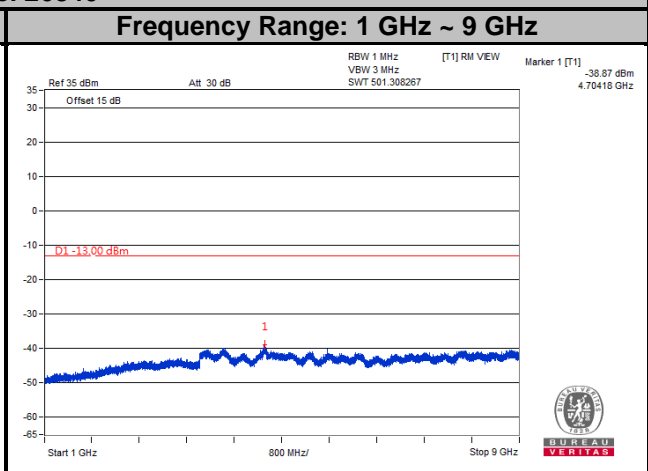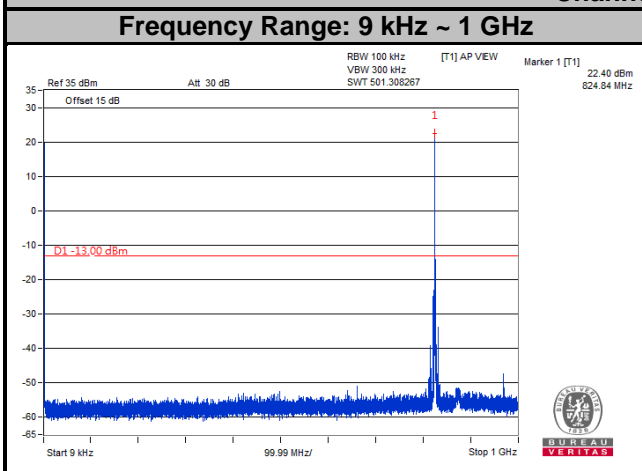

Channel 26915

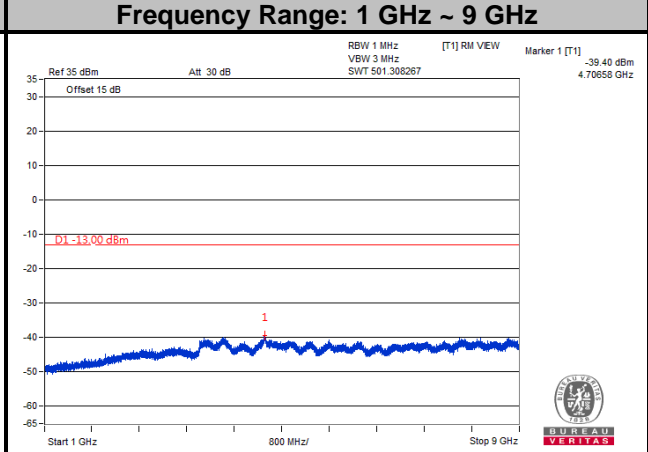
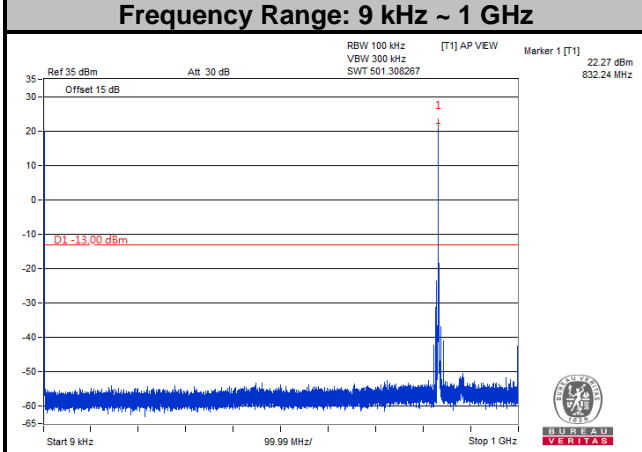


Channel 26990

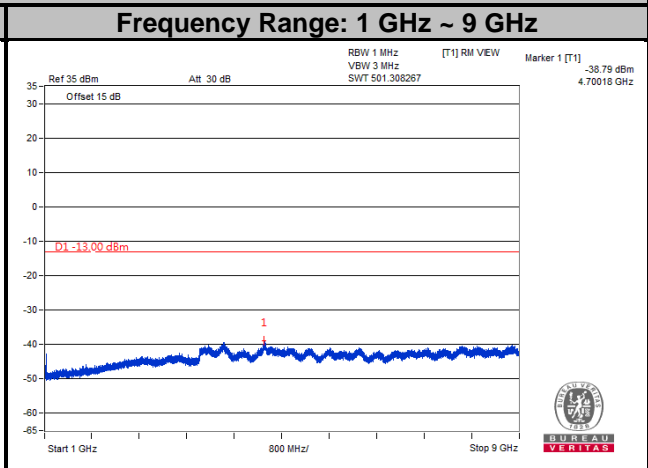
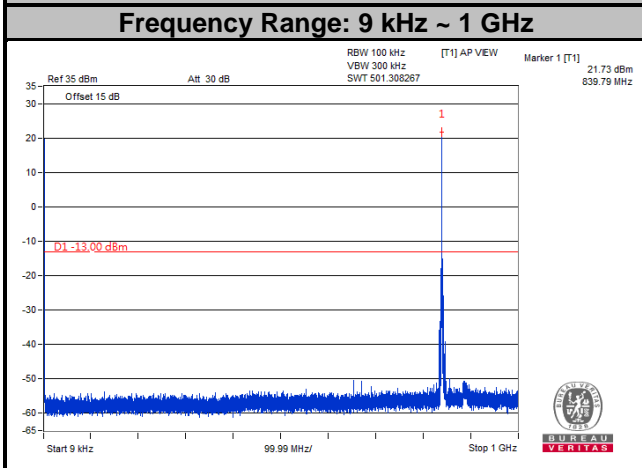


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 26
Channel Bandwidth: 15 MHz
Channel 26865

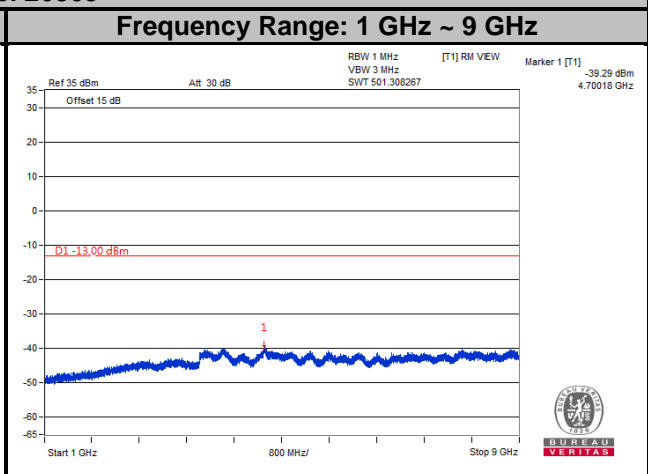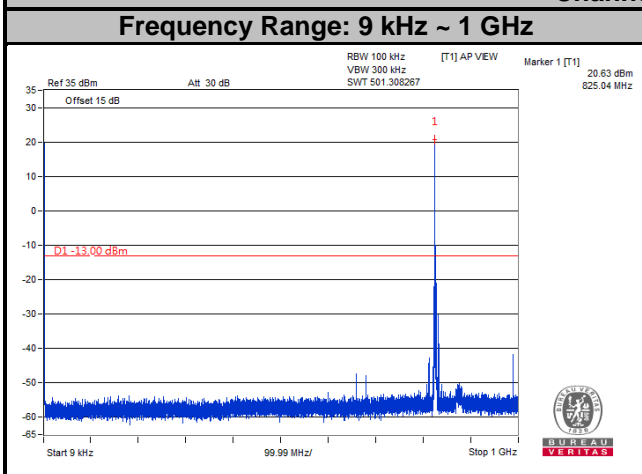

Channel 26915

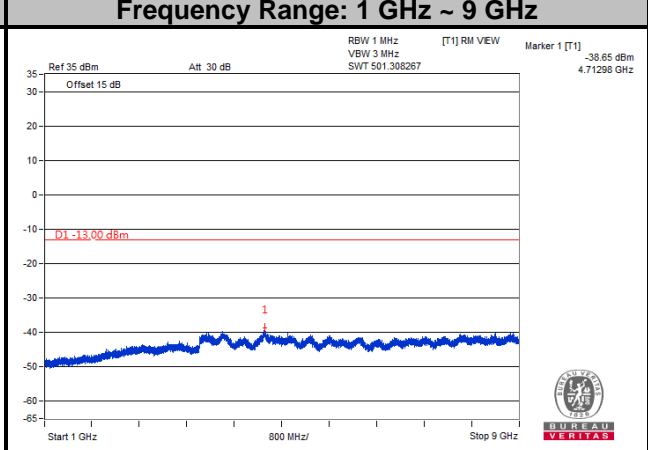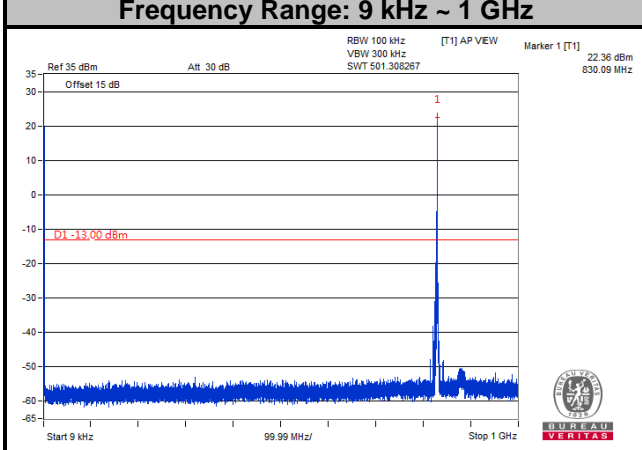

Channel 26965

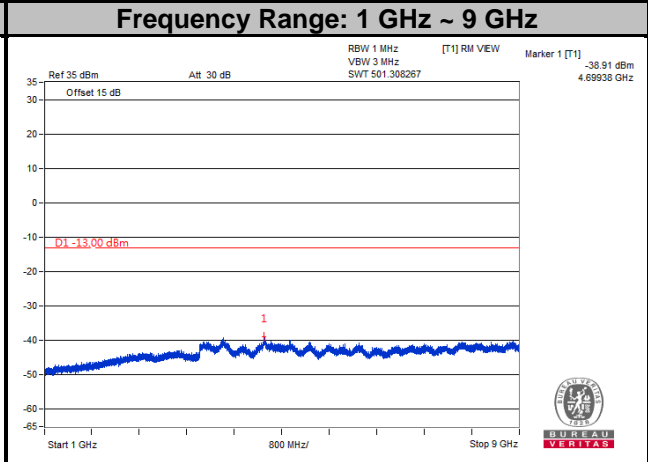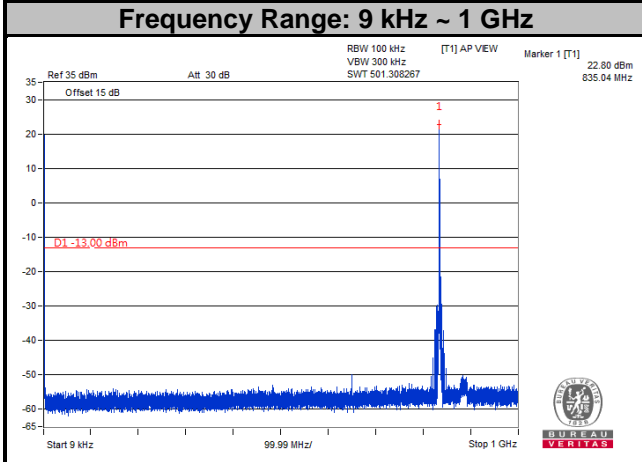

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

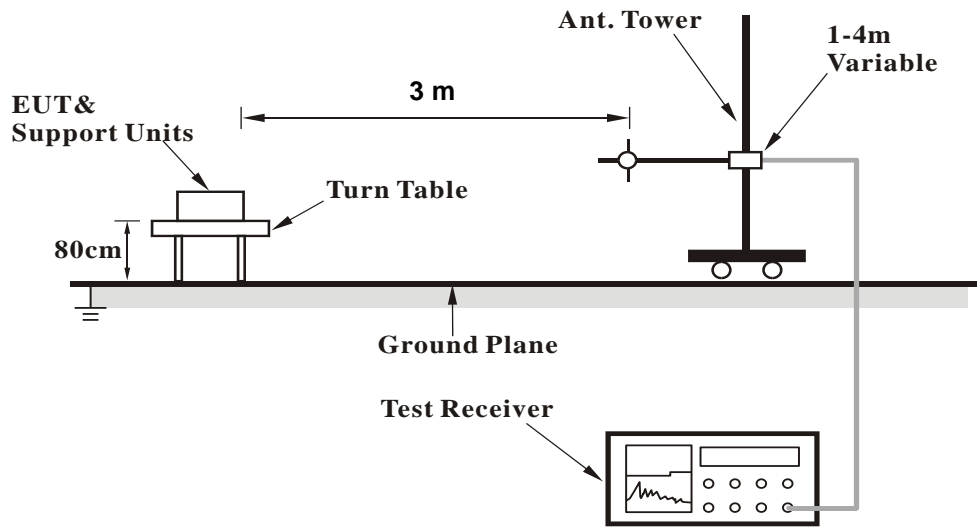

<Radiated Emission above 1 GHz>

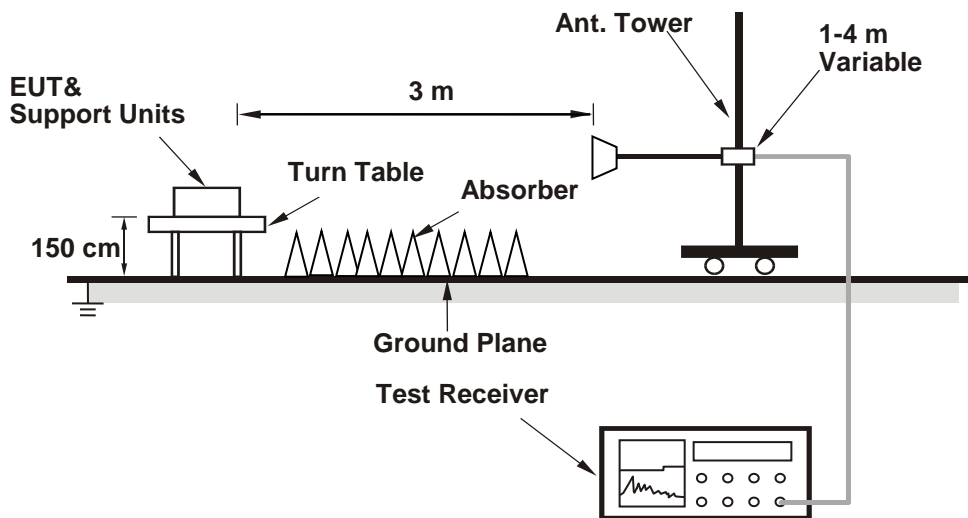

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 26

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

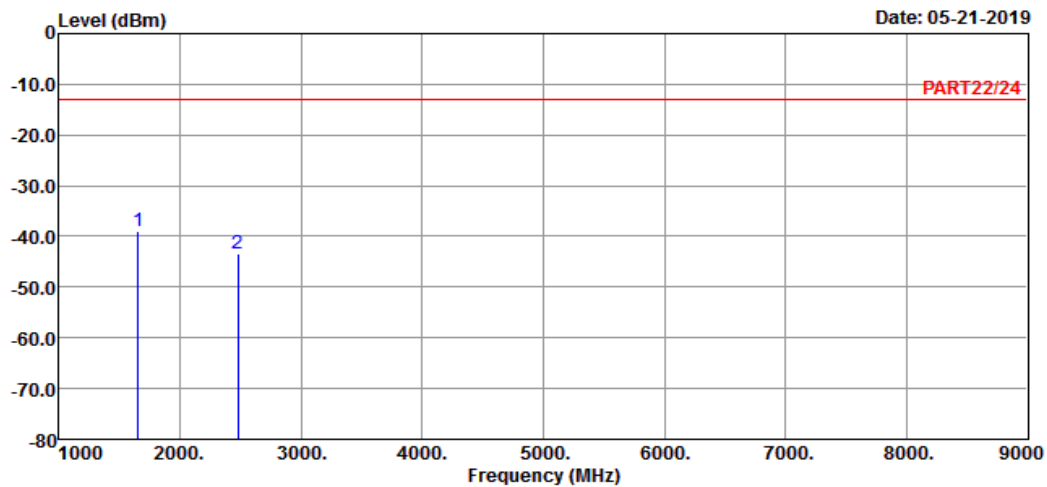

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1649.40	-38.92	-25.18	-13.00	-13.74	-25.92	Peak
2	2474.10	-43.33	-33.31	-13.00	-10.02	-30.33	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

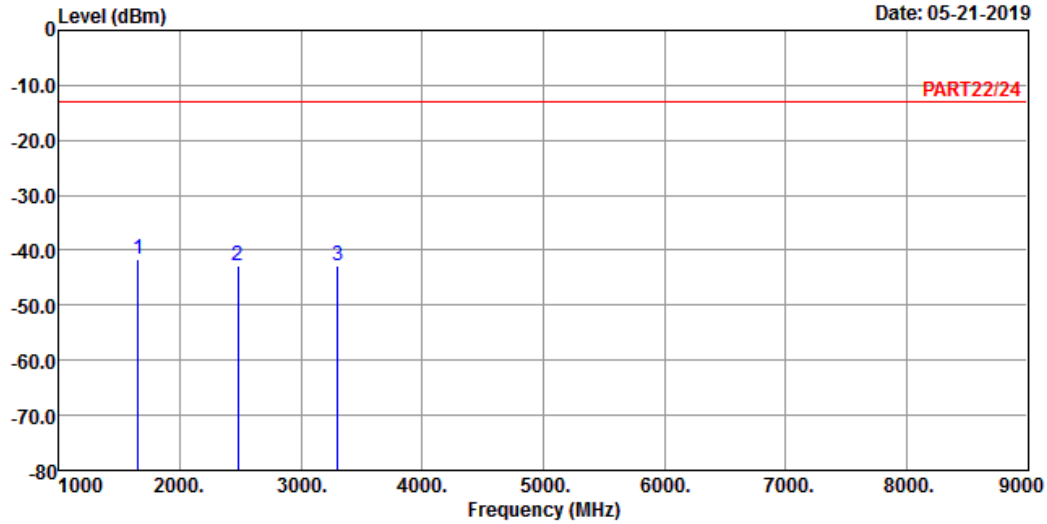

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1649.40	-41.58	-27.84	-13.00	-13.74	-28.58	Peak
2	2474.10	-42.88	-32.86	-13.00	-10.02	-29.88	Peak
3	3298.80	-42.76	-33.90	-13.00	-8.86	-29.76	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

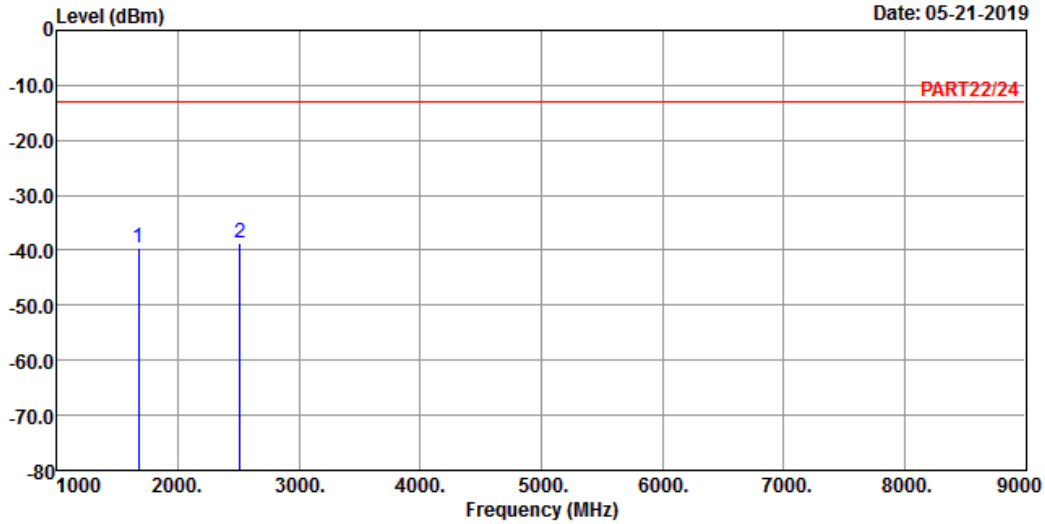

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-39.54	-25.64	-13.00	-13.90	-26.54	Peak
2 pp	2509.50	-38.58	-28.50	-13.00	-10.08	-25.58	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

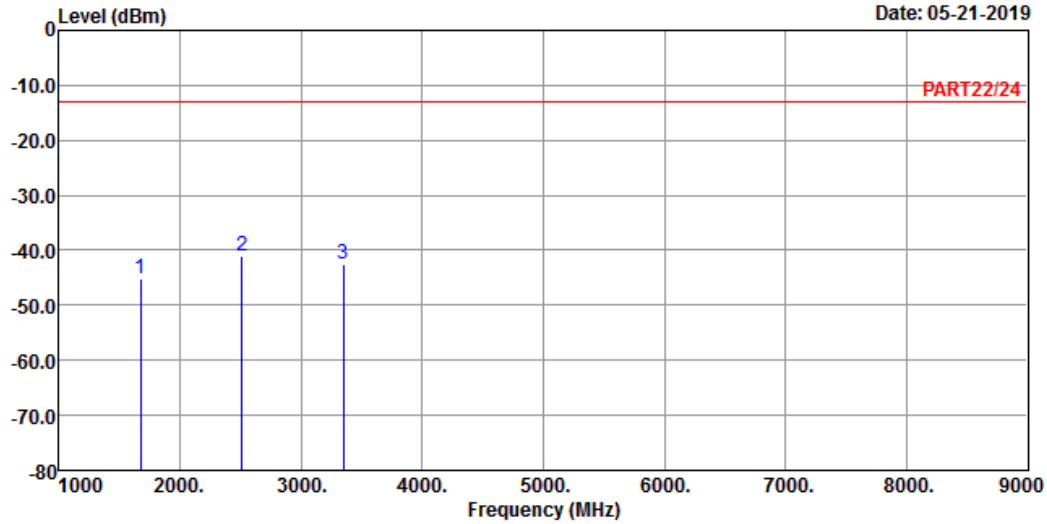

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-45.02	-31.12	-13.00	-13.90	-32.02	Peak
2	2509.50	-40.99	-30.91	-13.00	-10.08	-27.99	Peak
3	3346.00	-42.58	-33.82	-13.00	-8.76	-29.58	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

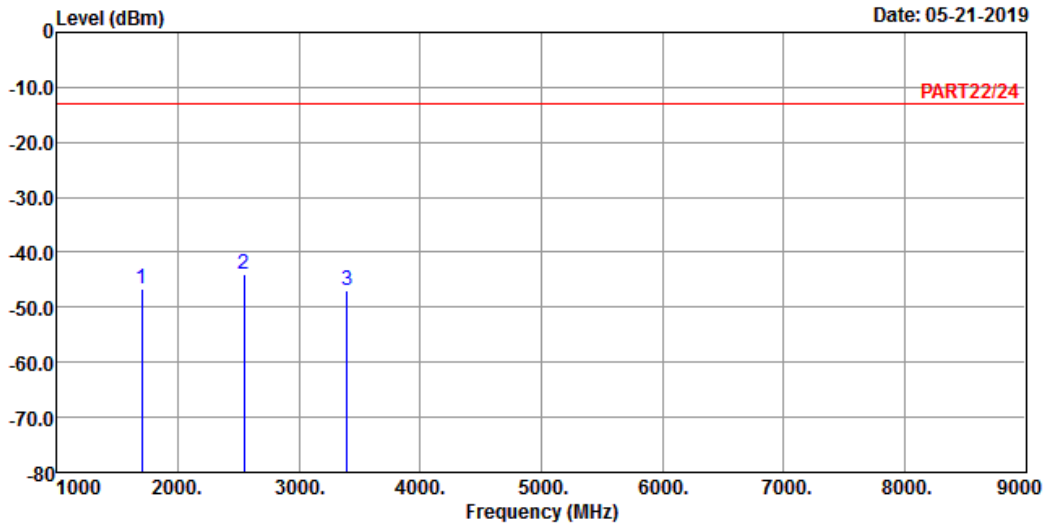

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1696.60	-46.69	-32.67	-13.00	-14.02	-33.69	Peak
2 pp	2544.90	-43.95	-33.89	-13.00	-10.06	-30.95	Peak
3	3393.20	-46.92	-38.32	-13.00	-8.60	-33.92	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

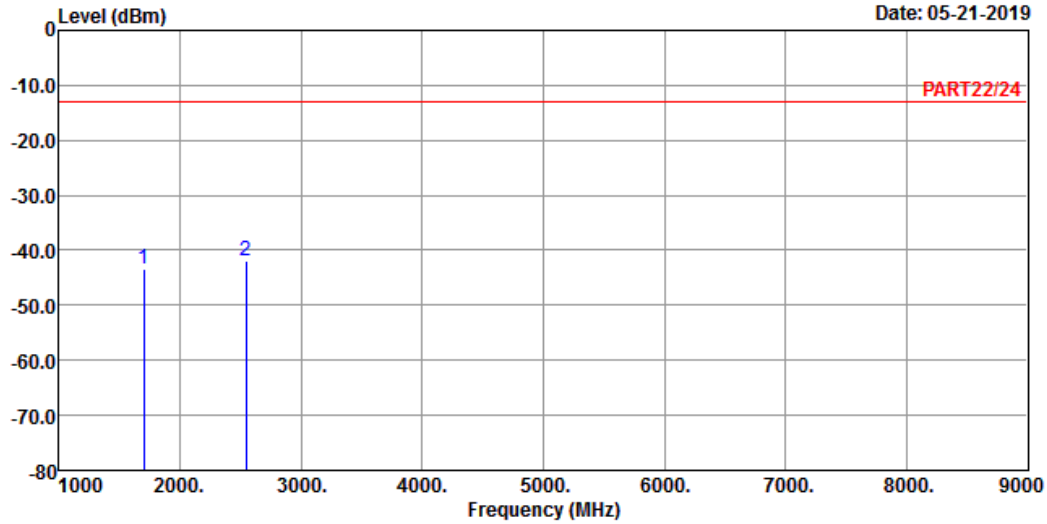

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1696.60	-43.43	-29.41	-13.00	-14.02	-30.43	Peak
2	2544.90	-41.91	-31.85	-13.00	-10.06	-28.91	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

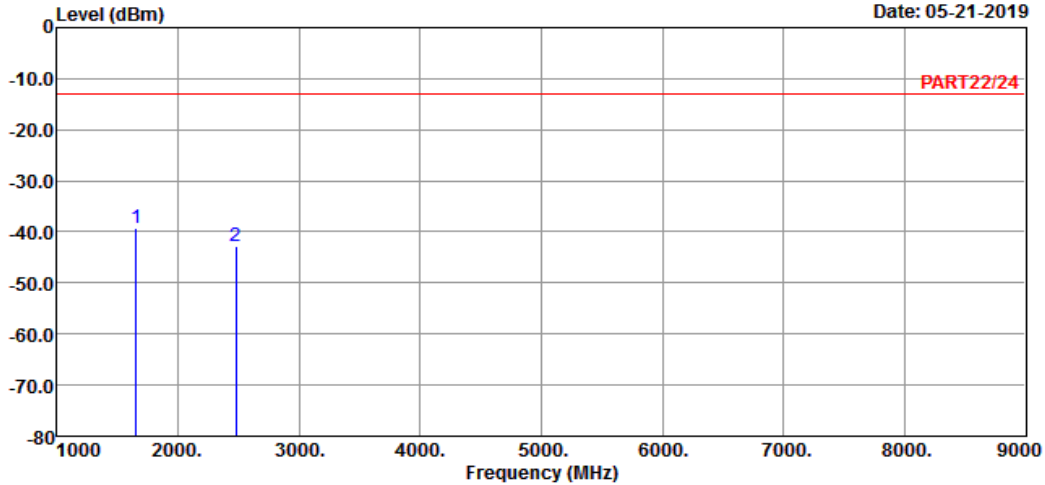

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH
Tested by: Thomas Wei

	Freq	Level	Read	Limit	Over	Remark	
	MHz	dBm	Level	Line	Factor	Limit	
			dBm	dBm	dB	dB	
1	pp 1653.00	-39.37	-25.60	-13.00	-13.77	-26.37	Peak
2	2479.50	-42.68	-32.65	-13.00	-10.03	-29.68	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

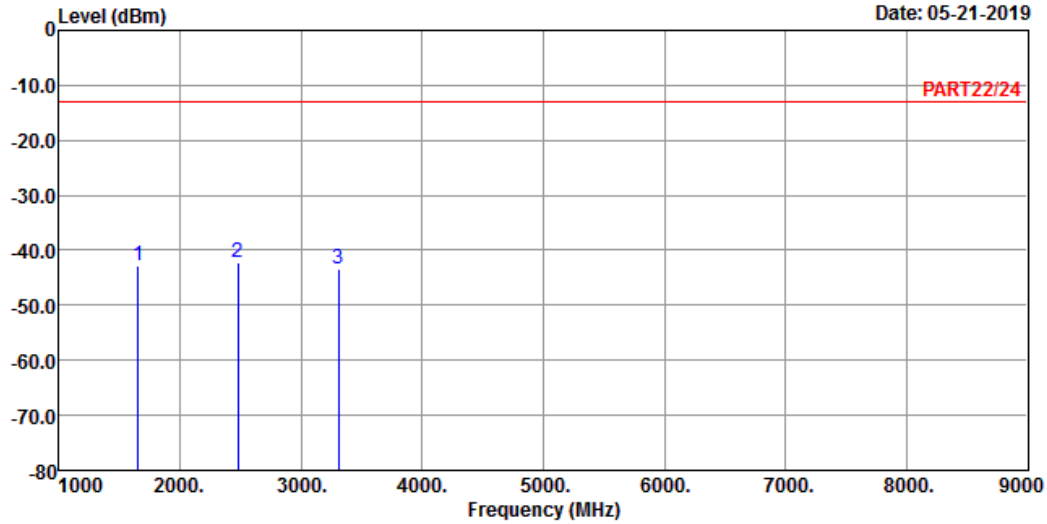

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1653.00	-42.93	-29.16	-13.00	-13.77	-29.93	Peak
2	2479.50	-42.13	-32.10	-13.00	-10.03	-29.13	Peak
3	3306.00	-43.46	-34.57	-13.00	-8.89	-30.46	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

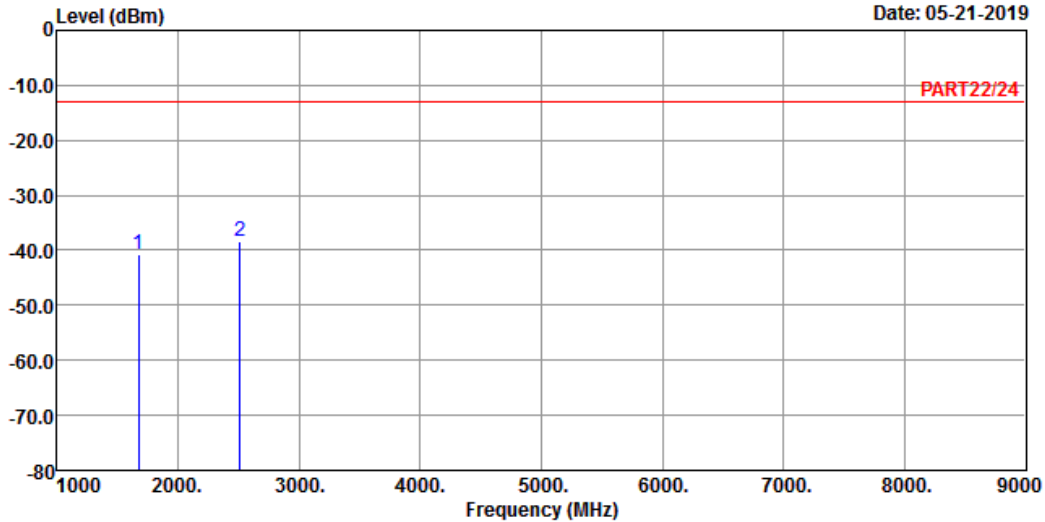

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	dB	
1	1673.00	-40.65	-26.75	-13.00	-13.90	-27.65	Peak	
2 pp	2509.50	-38.24	-28.16	-13.00	-10.08	-25.24	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

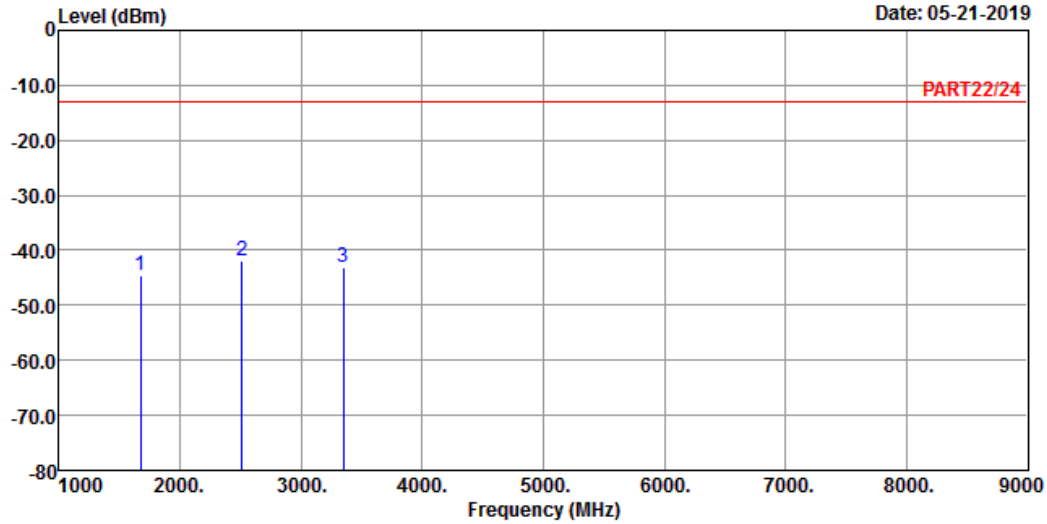

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-44.49	-30.59	-13.00	-13.90	-31.49	Peak
2	2509.50	-41.78	-31.70	-13.00	-10.08	-28.78	Peak
3	3346.00	-43.12	-34.36	-13.00	-8.76	-30.12	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

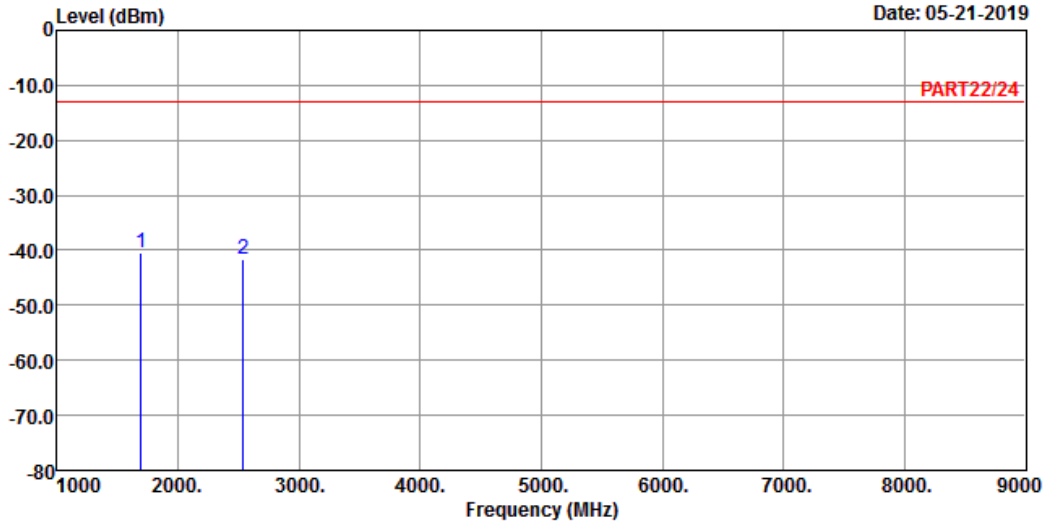

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_5M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	dB	
1 pp	1693.00	-40.40	-26.38	-13.00	-14.02	-27.40	Peak	
2	2539.50	-41.62	-31.56	-13.00	-10.06	-28.62	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

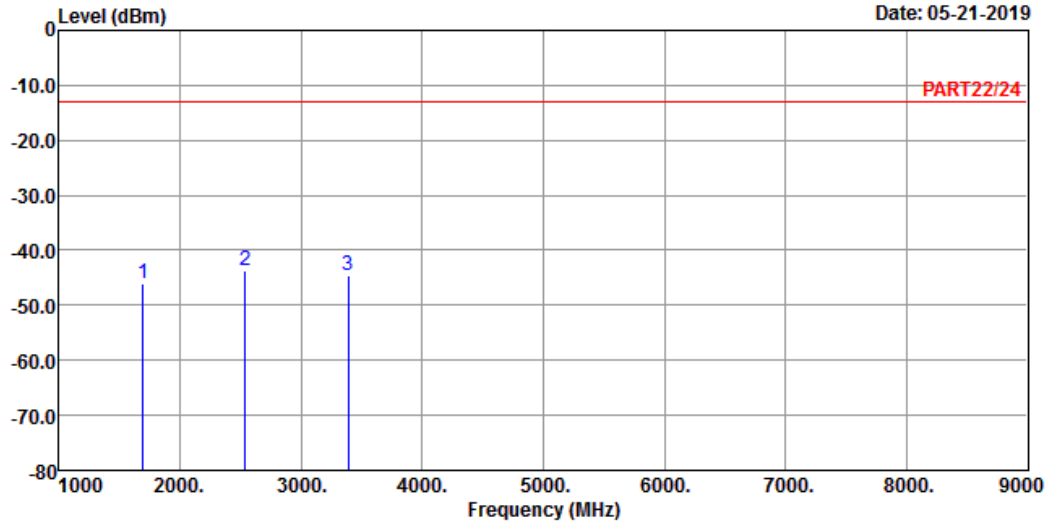

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : Cat-M1 Band 26 QPSK_5M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.00	-45.91	-31.89	-13.00	-14.02	-32.91	Peak
2	2539.50	-43.84	-33.78	-13.00	-10.06	-30.84	Peak
3	3386.00	-44.55	-35.92	-13.00	-8.63	-31.55	Peak


Channel Bandwidth: 15 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

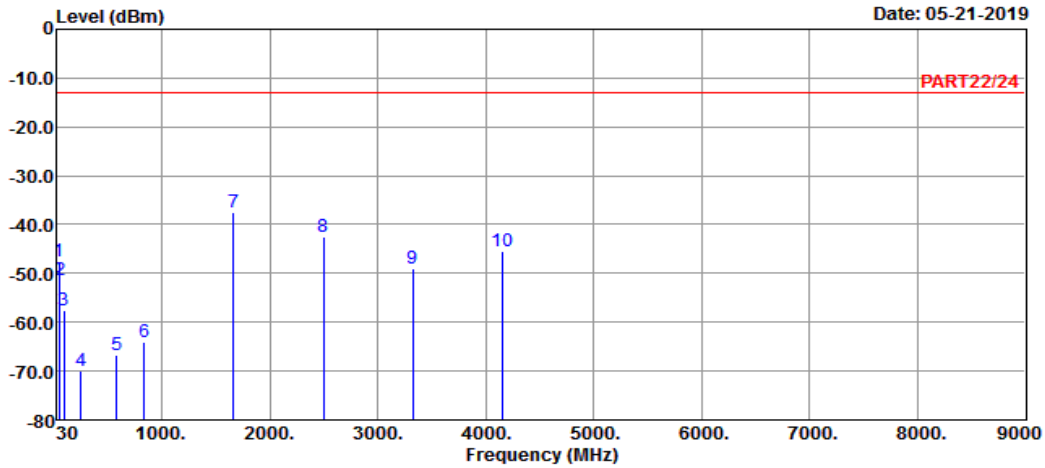

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_15M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read	Limit	Over		
	MHz	dBm	Level	Line	Factor	Limit	Remark
			dBm	dBm	dB	dB	
1	43.77	-47.47	-46.00	-13.00	-1.47	-34.47	Peak
2	52.95	-51.48	-45.67	-13.00	-5.81	-38.48	Peak
3	95.61	-57.63	-46.85	-13.00	-10.78	-44.63	Peak
4	248.97	-69.98	-63.95	-13.00	-6.03	-56.98	Peak
5	580.70	-66.63	-65.07	-13.00	-1.56	-53.63	Peak
6	836.90	-63.97	-64.37	-13.00	0.40	-50.97	Peak
7 pp	1663.00	-37.47	-23.64	-13.00	-13.83	-24.47	Peak
8	2494.50	-42.60	-32.54	-13.00	-10.06	-29.60	Peak
9	3326.00	-49.01	-40.18	-13.00	-8.83	-36.01	Peak
10	4157.50	-45.44	-39.58	-13.00	-5.86	-32.44	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 05-21-2019

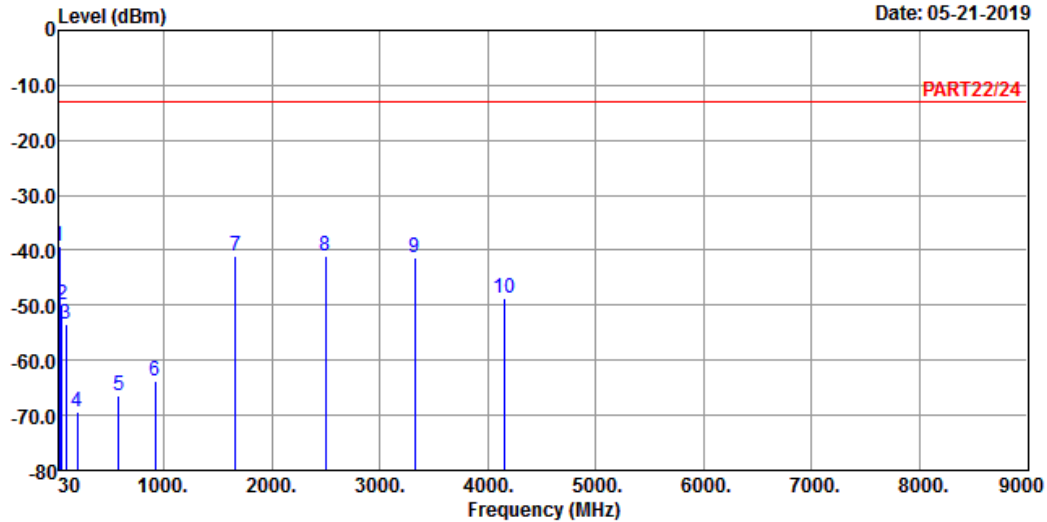

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_15M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	31.62	-39.23	-38.63	-13.00	-0.60	-26.23	Peak
2	52.95	-49.87	-44.06	-13.00	-5.81	-36.87	Peak
3	95.07	-53.29	-42.45	-13.00	-10.84	-40.29	Peak
4	198.21	-69.32	-61.49	-13.00	-7.83	-56.32	Peak
5	582.80	-66.49	-65.01	-13.00	-1.48	-53.49	Peak
6	921.60	-63.78	-64.88	-13.00	1.10	-50.78	Peak
7	1663.00	-40.99	-27.16	-13.00	-13.83	-27.99	Peak
8	2494.50	-40.99	-30.93	-13.00	-10.06	-27.99	Peak
9	3326.00	-41.42	-32.59	-13.00	-8.83	-28.42	Peak
10	4157.50	-48.65	-42.79	-13.00	-5.86	-35.65	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

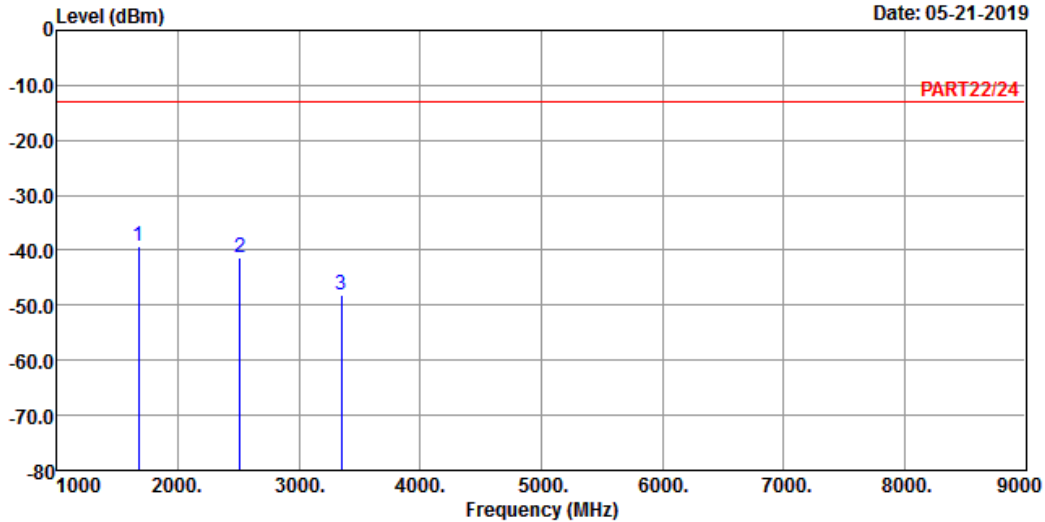

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_15M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB	
1 pp	1673.00	-39.22	-25.32	-13.00	-13.90	-26.22	Peak	
2	2509.50	-41.31	-31.23	-13.00	-10.08	-28.31	Peak	
3	3346.00	-48.20	-39.44	-13.00	-8.76	-35.20	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

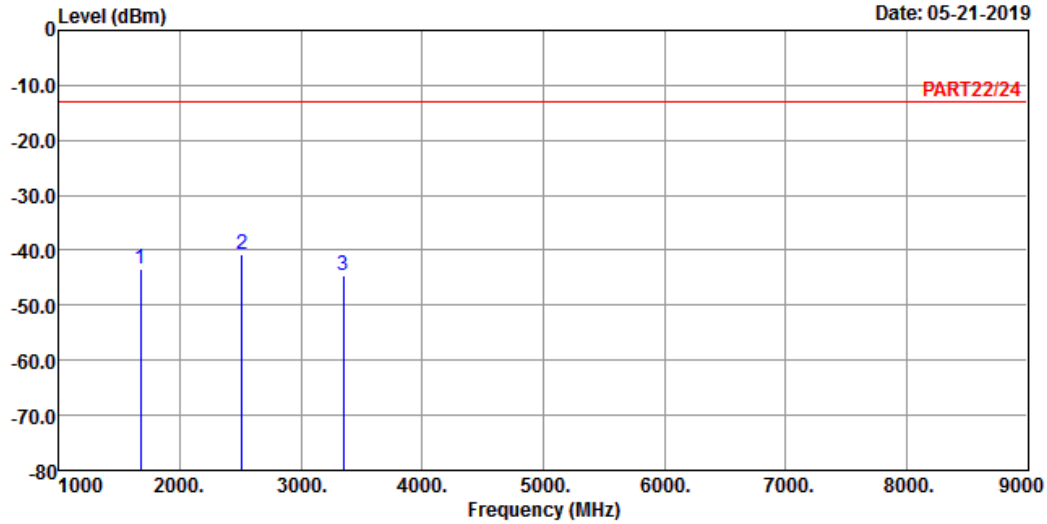

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : Cat-M1 Band 26 QPSK_15M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-43.34	-29.44	-13.00	-13.90	-30.34	Peak
2	pp 2509.50	-40.62	-30.54	-13.00	-10.08	-27.62	Peak
3	3346.00	-44.45	-35.69	-13.00	-8.76	-31.45	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

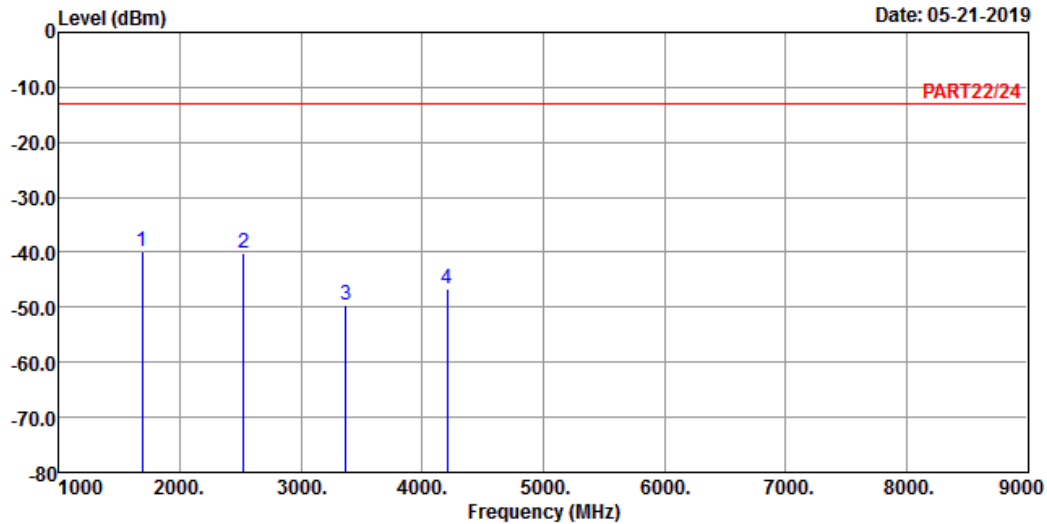

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_15M Link_H-CH

Tested by: Getaz Yang

	Read	Limit	Over				
Freq	Level	Level	Line	Factor	Limit	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1 pp	1683.00	-39.81	-25.85	-13.00	-13.96	-26.81	Peak
2	2524.50	-40.20	-30.13	-13.00	-10.07	-27.20	Peak
3	3366.00	-49.73	-41.03	-13.00	-8.70	-36.73	Peak
4	4207.50	-46.62	-41.04	-13.00	-5.58	-33.62	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

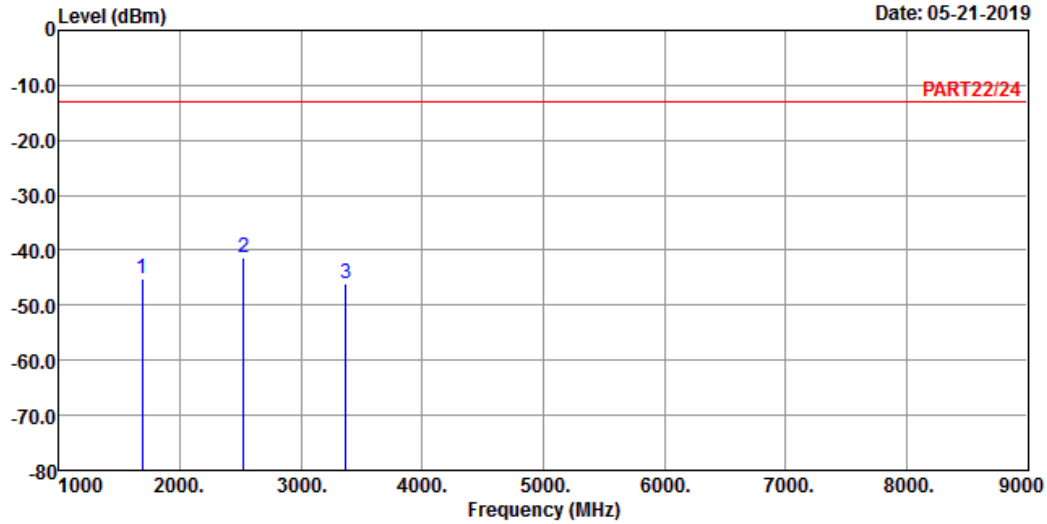

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : Cat-M1 Band 26 QPSK_15M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1683.00	-45.22	-31.26	-13.00	-13.96	-32.22	Peak
2	pp 2524.50	-41.32	-31.25	-13.00	-10.07	-28.32	Peak
3	3366.00	-46.16	-37.46	-13.00	-8.70	-33.16	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---