

# FCC Test Report

## (PART 90S)

**Report No.:** RF190415C07-3

**FCC ID:** O9YJKS3

**Test Model:** JKS3A

**Series Model:** ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S  
(Refer to section 3.1 for detail)

**Received Date:** Apr. 15, 2019

**Test Date:** May 13 ~ May 21, 2019

**Issued Date:** Jun. 11, 2019

**Applicant:** Spireon Inc

**Address:** 9724 Kingstone Pike, suite 800, Knoxville, Tennessee, USA, 37922

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City  
33383, Taiwan (R.O.C)

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement.....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results .....	15
4.2 Modulation Characteristics Measurement .....	22
4.2.1 Limits of Modulation Characteristics.....	22
4.2.2 Test Setup.....	22
4.2.3 Test Procedure .....	22
4.2.4 Test Results .....	22
4.3 Frequency Stability Measurement .....	23
4.3.1 Limits of Frequency Stability Measurement .....	23
4.3.2 Test Procedure .....	23
4.3.3 Test Setup.....	23
4.3.4 Test Results .....	24
4.4 Occupied Bandwidth Measurement.....	28
4.4.1 Limits of Occupied Bandwidth Measurement.....	28
4.4.2 Test Procedure .....	28
4.4.3 Test Setup.....	28
4.4.4 Test Results .....	29
4.5 Emission Mask Measurement.....	31
4.5.1 Limits of Emission Mask Measurement .....	31
4.5.2 Test Setup.....	31
4.5.3 Test Procedures.....	31
4.5.4 Test Results .....	32
4.6 Conducted Spurious Emissions .....	40
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	40
4.6.2 Test Setup.....	40
4.6.3 Test Procedure .....	40
4.6.4 Test Results .....	41
4.7 Radiated Emission Measurement.....	45
4.7.1 Limits of Radiated Emission Measurement .....	45
4.7.2 Test Procedure .....	45
4.7.3 Deviation from Test Standard .....	45
4.7.4 Test Setup.....	46
4.7.5 Test Results .....	47
<b>5 Pictures of Test Arrangements.....</b>	<b>61</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>62</b>

### Release Control Record

Issue No.	Description	Date Issued
RF190415C07-3	Original Release	Jun. 11, 2019

## 1 Certificate of Conformity

**Product:** GPS Tracker

**Brand:** Spireon

**Test Model:** JKS3A

**Series Model:** ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S (Refer to section 3.1 for detail)

**Sample Status:** Engineering Sample

**Applicant:** Spireon Inc

**Test Date:** May 13 ~ May 21, 2019

**Standards:** FCC Part 90, Subpart I, S  
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Jun. 11, 2019

Lena Wang / Specialist

**Approved by :**  , **Date:** Jun. 11, 2019

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 90.210	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -24.10 dB at 2457.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-8000&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
LTE Wireless Communication Test Set Keysight	E7515A	MY57270629	Feb. 22, 2019	Feb. 22, 2020
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	GPS Tracker	
<b>Brand</b>	Spireon	
<b>Test Model</b>	JKS3A	
<b>Series Model</b>	ATS100M-YZ-V, ATS100M-YZ-S, JKS3B, ATS100M-Y-V, ATS100M-Y-S, JKS3C, ATS100M-Z-V, ATS100M-Z-S, JKS3D, ATS100M-V, ATS100M-S	
<b>Status of EUT</b>	Engineering Sample	
<b>Power Supply Rating</b>	12 Vdc (adapter) 3.7 Vdc (battery)	
<b>Modulation Type</b>	LTE	QPSK, 16QAM
<b>Frequency Range</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
<b>Emission Designator</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	1M10G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	1M10G7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	1M09G7D
<b>Max. ERP Power</b>	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	309.74 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	309.74 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	314.05 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	316.96 mW
<b>Antenna Type</b>	PIFA Antenna with 1.4 dBi gain	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

- All models are listed as below. Model JKS3A is the representative for final test.


Brand	Model	Difference
Spireon	JKS3A	With Battery; With Buzzer
	ATS100M-YZ-V	
	ATS100M-YZ-S	
	JKS3B	With Battery; Without Buzzer
	ATS100M-Y-V	
	ATS100M-Y-S	
	JKS3C	Without Battery; With Buzzer
	ATS100M-Z-V	
	ATS100M-Z-S	
	JKS3D	
	ATS100M-V	Without Battery; Without Buzzer
	ATS100M-S	

2. The EUT uses following adapter. (For support unit only)

Brand	Chanel Well Technology
Model	CAP012121
Input Power	100-240 Vac, 47~63 Hz, 0.35 A
Output Power	12 Vdc, 1.0 A
Power Line	2.25m non-shielded DC power cable without core

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

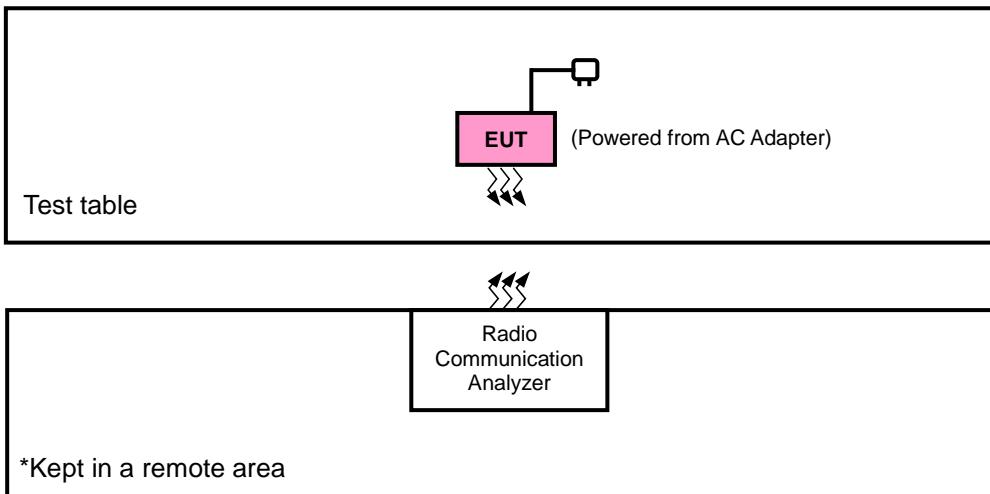

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Radio Communication Analyzer	ANRITSU	MT8821C	6201502978	N/A
2.	Adapter	Chanel Well Technology	CAP012121	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	2.25m

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items 1 acted as communication partners to transfer data.
3. Item 2 was provided by client.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 26	Y-plane	X-axis

**LTE Band 26**

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	26740	26740	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset

**Note:**

- This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
- For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

**Test Condition:**

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.7 Vdc	Thomas Wei
Frequency Stability	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Emission Mask	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Band Edge	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	3.7 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 90**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**KDB 971168 D02 Misc Rev Approv License Devices v02r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

LTE Band 26

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P\text{ power} = E.I.P.R\text{ power} - 2.15\text{ dB}$ .


##### **Conducted Power Measurement:**

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


#### 4.1.3 Test Setup

##### EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

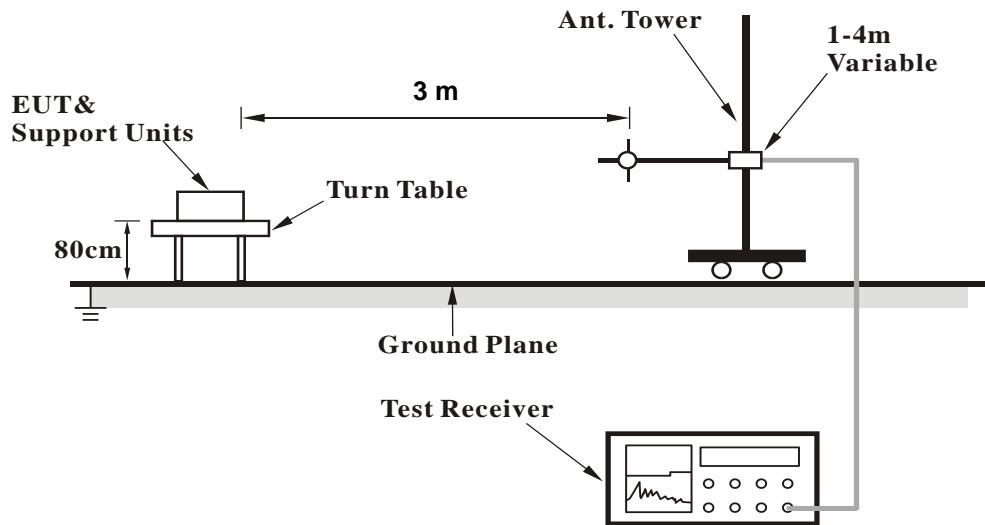

<Radiated Emission above 1 GHz>

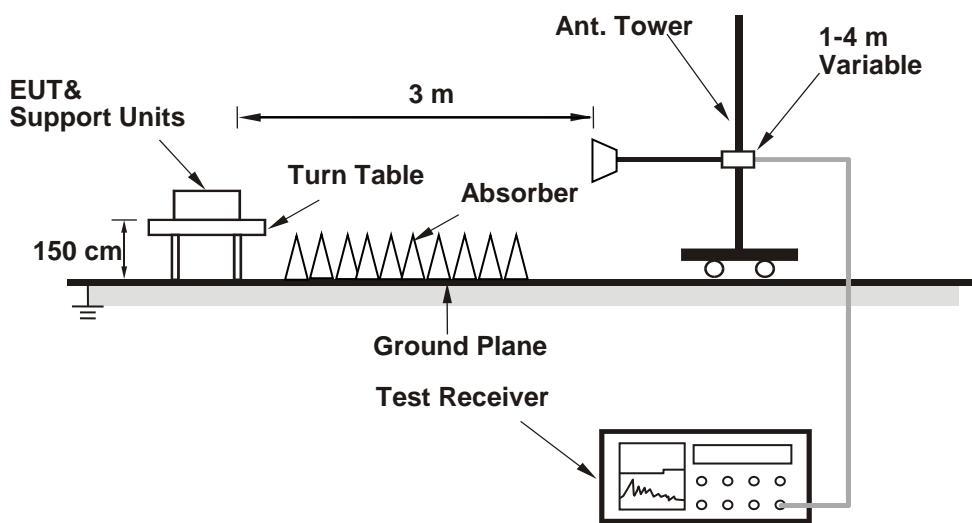

For the actual test configuration, please refer to the attached file (Test Setup Photo).

##### Conducted Power Measurement:



#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

eMTC	Band 26	Region(s): FCC	Power : Class 3	23	Tolerance : 2.7	maximum: 24.46
------	---------	----------------	-----------------	----	-----------------	----------------

BW(MHz): 1.4

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	Test Configuration		Initial of Power	EUT						
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)				
Low Range	26697	814.7	8697	876.5	QPSK	1	0	0	-85	23.74				
					QPSK	1	5	0	-85	23.75				
					QPSK	3	3	0	-85	23.42				
					QPSK	6	0	0	-85	23.35				
					16QAM	1	0	0	-85	23.46				
					16QAM	1	5	0	-85	23.48				
					16QAM	3	0	0	-85	23.45				
					16QAM	5	0	0	-85	23.37				
Mid Range	26740	819	8740	880.8	QPSK	1	0	0	-85	23.44				
					QPSK	1	5	0	-85	23.4				
					QPSK	3	3	0	-85	23.68				
					QPSK	6	0	0	-85	23.44				
					16QAM	1	0	0	-85	23.44				
					16QAM	1	5	0	-85	23.44				
					16QAM	3	0	0	-85	23.64				
	26783	823.3	8783	885.1	16QAM	5	0	0	-85	23.59				
					QPSK	1	0	0	-85	23.63				
					QPSK	1	5	0	-85	23.61				
					QPSK	3	3	0	-85	23.45				
					QPSK	6	0	0	-85	23.73				
					16QAM	1	0	0	-85	23.55				
					16QAM	1	5	0	-85	23.37				
High Range					16QAM	3	0	0	-85	23.5				
					16QAM	5	0	0	-85	23.43				

BW(MHz): 3

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	Test Configuration		Initial of Power	EUT		
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26705	815.5	8705	876.5	QPSK	1	0	0	-85	23.94
					QPSK	1	5	0	-85	23.8
					QPSK	1	0	1	-85	23.4

					QPSK	1	5	1	-85	23.37
					QPSK	3	3	0	-85	23.48
					QPSK	3	3	1	-85	23.5
					QPSK	6	0	0	-85	23.58
					QPSK	6	0	1	-85	23.44
					16QAM	1	0	0	-85	23.51
					16QAM	1	5	0	-85	23.55
					16QAM	1	0	1	-85	23.71
					16QAM	1	5	1	-85	23.55
					16QAM	3	0	0	-85	23.4
					16QAM	3	3	1	-85	23.51
					16QAM	5	0	0	-85	23.68
					16QAM	5	0	1	-85	23.64
					QPSK	1	0	0	-85	23.53
					QPSK	1	5	0	-85	23.73
					QPSK	1	0	1	-85	23.75
					QPSK	1	5	1	-85	23.64
					QPSK	3	3	0	-85	23.87
					QPSK	3	3	1	-85	23.58
					QPSK	6	0	0	-85	23.59
					QPSK	6	0	1	-85	23.6
					16QAM	1	0	0	-85	23.57
					16QAM	1	5	0	-85	23.62
					16QAM	1	0	1	-85	23.57
					16QAM	1	5	1	-85	23.65
					16QAM	3	0	0	-85	23.55
					16QAM	3	3	1	-85	23.6
					16QAM	5	0	0	-85	23.7
					16QAM	5	0	1	-85	23.34
					QPSK	1	0	0	-85	23.51
					QPSK	1	5	0	-85	23.66
					QPSK	1	0	1	-85	23.7
					QPSK	1	5	1	-85	23.42
					QPSK	3	3	0	-85	23.74
					QPSK	3	3	1	-85	23.53
					QPSK	6	0	0	-85	23.69
					QPSK	6	0	1	-85	23.51
					16QAM	1	0	0	-85	24.18
					16QAM	1	5	0	-85	23.63
					16QAM	1	0	1	-85	23.74
					16QAM	1	5	1	-85	23.67

					16QAM	3	0	0	-85	23.96
					16QAM	3	3	1	-85	23.91
					16QAM	5	0	0	-85	23.72
					16QAM	5	0	1	-85	23.79
BW(MHz):	5									
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	Test Configuration				Initial of Power	EUT
					Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26715	816.5	8715	876.5	QPSK	1	0	0	-85	24.06
					QPSK	1	5	0	-85	23.99
					QPSK	1	0	1	-85	23.56
					QPSK	1	5	1	-85	23.65
					QPSK	1	0	3	-85	23.66
					QPSK	1	5	3	-85	23.66
					QPSK	3	0	0	-85	23.72
					QPSK	3	3	3	-85	23.56
					QPSK	6	0	0	-85	23.6
					QPSK	6	0	1	-85	23.59
					QPSK	6	0	3	-85	23.9
					16QAM	1	0	0	-85	24.01
					16QAM	1	5	0	-85	23.57
					16QAM	1	0	1	-85	23.55
					16QAM	1	5	1	-85	23.76
					16QAM	1	0	3	-85	23.8
					16QAM	1	5	3	-85	23.66
					16QAM	3	0	0	-85	23.76
					16QAM	3	3	3	-85	23.77
					16QAM	5	0	0	-85	23.76
					16QAM	5	0	1	-85	23.93
					16QAM	5	0	3	-85	23.8
Mid Range	26740	819	8740	879	QPSK	1	0	0	-85	24.12
					QPSK	1	5	0	-85	23.74
					QPSK	1	0	1	-85	23.73
					QPSK	1	5	1	-85	23.79
					QPSK	1	0	3	-85	23.63
					QPSK	1	5	3	-85	23.77
					QPSK	3	0	0	-85	23.59
					QPSK	3	3	3	-85	23.8
					QPSK	6	0	0	-85	23.82

High Range	26765	821.5	8765	881.5	QPSK	6	0	1	-85	23.48
					QPSK	6	0	3	-85	23.72
					16QAM	1	0	0	-85	24.45
					16QAM	1	5	0	-85	23.78
					16QAM	1	0	1	-85	23.78
					16QAM	1	5	1	-85	23.61
					16QAM	1	0	3	-85	23.78
					16QAM	1	5	3	-85	23.62
					16QAM	3	0	0	-85	23.76
					16QAM	3	3	3	-85	24.12
					16QAM	5	0	0	-85	24.43
					16QAM	5	0	1	-85	23.77
					16QAM	5	0	3	-85	23.81
					QPSK	1	0	0	-85	24.27
					QPSK	1	5	0	-85	24.06
					QPSK	1	0	1	-85	23.76
					QPSK	1	5	1	-85	23.99
					QPSK	1	0	3	-85	23.91
					QPSK	1	5	3	-85	23.97
					QPSK	3	0	0	-85	23.92
					QPSK	3	3	3	-85	23.62
					QPSK	6	0	0	-85	23.85
					QPSK	6	0	1	-85	23.83
					QPSK	6	0	3	-85	23.83
					16QAM	1	0	0	-85	24.25
					16QAM	1	5	0	-85	23.82
					16QAM	1	0	1	-85	23.84
					16QAM	1	5	1	-85	23.85
					16QAM	1	0	3	-85	23.94
					16QAM	1	5	3	-85	23.99
					16QAM	3	0	0	-85	23.87
					16QAM	3	3	3	-85	23.81
					16QAM	5	0	0	-85	24.01
					16QAM	5	0	1	-85	24.16
					16QAM	5	0	3	-85	24.05

BW(MHz):	10
----------	----

	N <sub>UL</sub>		N <sub>DL</sub>		Test Configuration	Initial of Power	EUT
--	-----------------	--	-----------------	--	--------------------	------------------	-----

Test Frequency ID		Frequency of Uplink [MHz]		Frequency of Downlink [MHz]	Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Mid Range	26740	819	8740	879	QPSK	1	0	0	-85	24.46
					QPSK	1	5	0	-85	23.98
					QPSK	1	0	3	-85	23.9
					QPSK	1	5	3	-85	23.99
					QPSK	1	0	7	-85	24.21
					QPSK	1	5	7	-85	24.16
					QPSK	4	0	0	-85	23.97
					QPSK	4	2	7	-85	24.08
					QPSK	6	0	0	-85	24.15
					QPSK	6	0	7	-85	24.12
					16QAM	1	0	0	-85	24.04
					16QAM	1	5	0	-85	23.74
					16QAM	1	0	3	-85	23.9
					16QAM	1	5	3	-85	23.97
					16QAM	1	0	7	-85	23.98
					16QAM	1	5	7	-85	23.99
					16QAM	4	2	0	-85	23.98
					16QAM	4	2	7	-85	23.93
					16QAM	5	0	0	-85	24.04
					16QAM	5	0	7	-85	24.03

**ERP Power (dBm)**

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26697	814.7	-5.11	32.01	24.75	298.54	H
	26740	819.0	-5.05	32.11	24.91	309.74	
	26783	823.3	-5.94	32.32	24.23	264.85	
	26697	814.7	-11.92	32.54	18.47	70.31	V
	26740	819.0	-11.83	32.51	18.53	71.29	
	26783	823.3	-12.03	32.51	18.33	68.08	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	26697	814.7	-6.37	32.01	23.49	223.36	H
	26740	819.0	-6.36	32.11	23.60	229.09	
	26783	823.3	-7.20	32.32	22.97	198.15	
	26697	814.7	-13.16	32.54	17.23	52.84	V
	26740	819.0	-13.05	32.51	17.31	53.83	
	26783	823.3	-13.31	32.51	17.05	50.70	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26705	815.5	-5.08	32.02	24.79	301.30	H
	26740	819.0	-5.05	32.11	24.91	309.74	
	26775	822.5	-5.79	32.18	24.24	265.46	
	26705	815.5	-11.78	32.5	18.57	71.94	V
	26740	819.0	-11.70	32.51	18.66	73.45	
	26775	822.5	-11.93	32.47	18.39	69.02	
Channel Bandwidth: 3 MHz / 16QAM							
Y	26705	815.5	-6.33	32.02	23.54	225.94	H
	26740	819.0	-6.24	32.11	23.72	235.50	
	26775	822.5	-6.97	32.18	23.06	202.30	
	26705	815.5	-13.03	32.5	17.32	53.95	V
	26740	819.0	-12.92	32.51	17.44	55.46	
	26775	822.5	-13.12	32.47	17.20	52.48	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26715	816.5	-5.07	32.04	24.82	303.39	H
	26740	819.0	-4.99	32.11	24.97	314.05	
	26765	821.5	-5.34	31.79	24.30	269.15	
	26715	816.5	-11.76	32.52	18.61	72.61	V
	26740	819.0	-11.66	32.51	18.70	74.13	
	26765	821.5	-11.58	32.17	18.44	69.82	
Channel Bandwidth: 5 MHz / 16QAM							
Y	26715	816.5	-6.20	32.04	23.69	233.88	H
	26740	819.0	-6.12	32.11	23.84	242.10	
	26765	821.5	-6.46	31.79	23.18	207.97	
	26715	816.5	-12.89	32.52	17.48	55.98	V
	26740	819.0	-12.73	32.51	17.63	57.94	
	26765	821.5	-12.64	32.17	17.38	54.70	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	26740	819.0	-4.95	32.11	25.01	316.96	H
	26740	819.0	-11.60	32.51	18.76	75.16	V
Channel Bandwidth: 10 MHz / 16QAM							
Y	26740	819.0	-5.97	32.11	23.99	250.61	H
	26740	819.0	-12.65	32.51	17.71	59.02	V


Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A


### 4.2.2 Test Setup

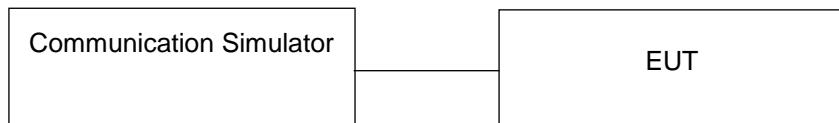

### 4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

### 4.2.4 Test Results

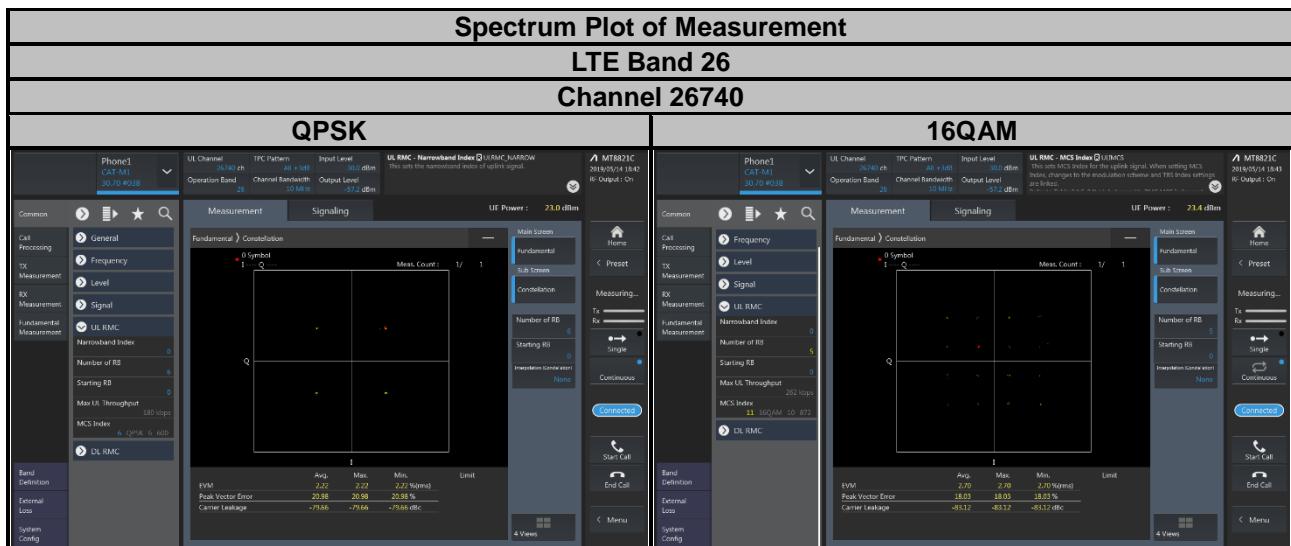

## 4.3 Frequency Stability Measurement

### 4.3.1 Limits of Frequency Stability Measurement

LTE Band 26


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.3.3 Test Setup

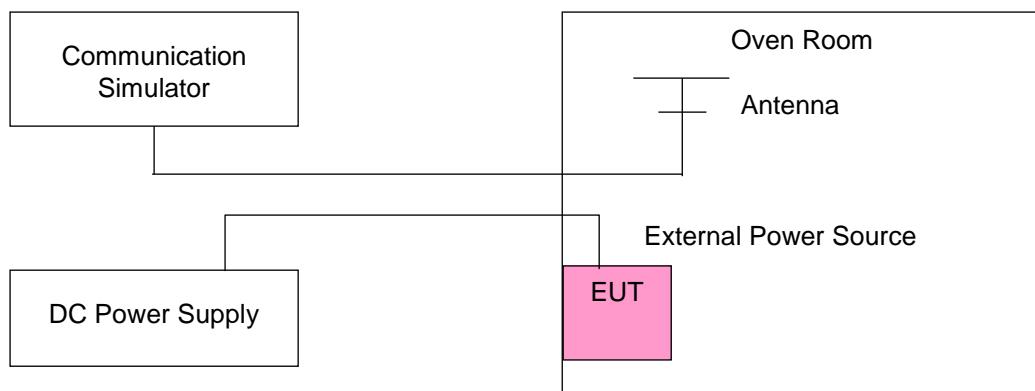

#### 4.3.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.83.145	814.700004	0.005	823.300000	0.004	2.5	
3.7	814.700001	0.002	823.300000	0.005	2.5	
4.225	814.700003	0.004	823.300000	0.005	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-40	814.700002	0.002	823.300000	0.003	2.5	
-30	814.700002	0.002	823.300000	0.003	2.5	
-20	814.700003	0.004	823.300000	0.002	2.5	
-10	814.700002	0.003	823.300000	0.004	2.5	
0	814.700001	0.001	823.300000	0.002	2.5	
10	814.699999	-0.002	823.300000	-0.002	2.5	
20	814.699999	-0.001	823.300000	-0.002	2.5	
30	814.699996	-0.005	823.300000	-0.002	2.5	
40	814.699997	-0.004	823.300000	-0.004	2.5	
50	814.699997	-0.004	823.300000	-0.004	2.5	
60	814.699997	-0.003	823.300000	-0.004	2.5	
70	814.699998	-0.003	823.300000	-0.003	2.5	
75	814.699996	-0.004	823.300000	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.83.145	814.700002	0.002	823.300000	0.003	2.5	
3.7	814.700002	0.002	823.300000	0.002	2.5	
4.225	814.700003	0.004	823.300000	0.004	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-40	814.700002	0.003	823.300000	0.004	2.5	
-30	814.700002	0.003	823.300000	0.002	2.5	
-20	814.700002	0.003	823.300000	0.003	2.5	
-10	814.700004	0.004	823.300000	0.003	2.5	
0	814.700003	0.003	823.300000	0.005	2.5	
10	814.699998	-0.003	823.300000	-0.005	2.5	
20	814.699999	-0.002	823.300000	-0.003	2.5	
30	814.699998	-0.003	823.300000	-0.003	2.5	
40	814.699999	-0.001	823.300000	-0.003	2.5	
50	814.699996	-0.005	823.300000	-0.002	2.5	
60	814.699999	-0.002	823.300000	-0.004	2.5	
70	814.699998	-0.002	823.300000	-0.003	2.5	
75	814.699997	-0.004	823.300000	-0.004	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.83.145	814.700003	0.003	823.300000	0.003	2.5	
3.7	814.700002	0.003	823.300000	0.002	2.5	
4.225	814.700004	0.005	823.300000	0.002	2.5	

Note: The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-40	814.700001	0.001	823.300000	0.002	2.5	
-30	814.700003	0.003	823.300000	0.003	2.5	
-20	814.700003	0.003	823.300000	0.005	2.5	
-10	814.700004	0.004	823.300000	0.004	2.5	
0	814.700001	0.001	823.300000	0.004	2.5	
10	814.699998	-0.003	823.300000	-0.003	2.5	
20	814.699997	-0.003	823.300000	-0.004	2.5	
30	814.699997	-0.003	823.300000	-0.003	2.5	
40	814.699998	-0.002	823.300000	-0.004	2.5	
50	814.699996	-0.004	823.300000	-0.002	2.5	
60	814.699999	-0.001	823.300000	-0.005	2.5	
70	814.699998	-0.003	823.300000	-0.002	2.5	
75	814.699996	-0.005	823.300000	-0.004	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)	
	Channel Bandwidth: 10 MHz			
	Frequency (MHz)	Frequency Error (ppm)		
3.83.145	814.700004	0.005	2.5	
3.7	814.700003	0.004	2.5	
4.225	814.700002	0.003	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.7 Vdc to 4.225 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26		Limit (ppm)	
	Channel Bandwidth: 10 MHz			
	Frequency (MHz)	Frequency Error (ppm)		
-40	814.700004	0.005	2.5	
-30	814.700002	0.003	2.5	
-20	814.700004	0.005	2.5	
-10	814.700003	0.004	2.5	
0	814.700003	0.004	2.5	
10	814.699997	-0.004	2.5	
20	814.699997	-0.003	2.5	
30	814.699998	-0.003	2.5	
40	814.699998	-0.003	2.5	
50	814.699997	-0.004	2.5	
60	814.699997	-0.003	2.5	
70	814.699997	-0.004	2.5	
75	814.699997	-0.004	2.5	

## 4.4 Occupied Bandwidth Measurement


### 4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.2 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.4.3 Test Setup

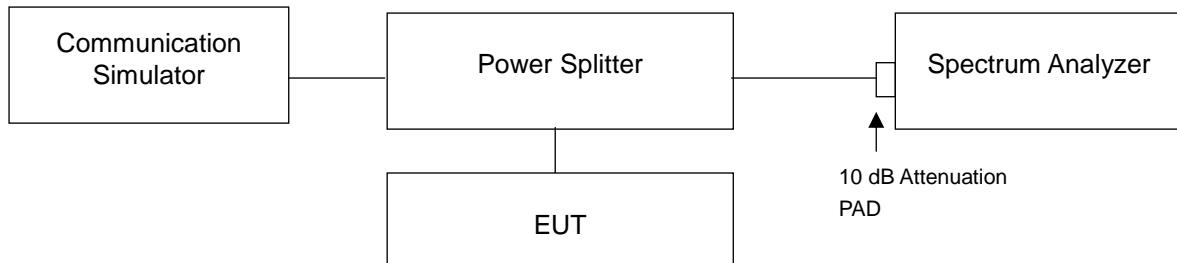

#### 4.4.4 Test Results


LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26697	814.7	1.0903	0.9128	1.240	1.062
26740	819.0	1.0913	0.9121	1.241	1.066
26783	823.3	1.0915	0.9132	1.241	1.064
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26705	815.5	1.0970	0.9181	1.325	1.141
26740	819.0	1.0922	0.9207	1.325	1.144
26775	822.5	1.0952	0.9199	1.323	1.143

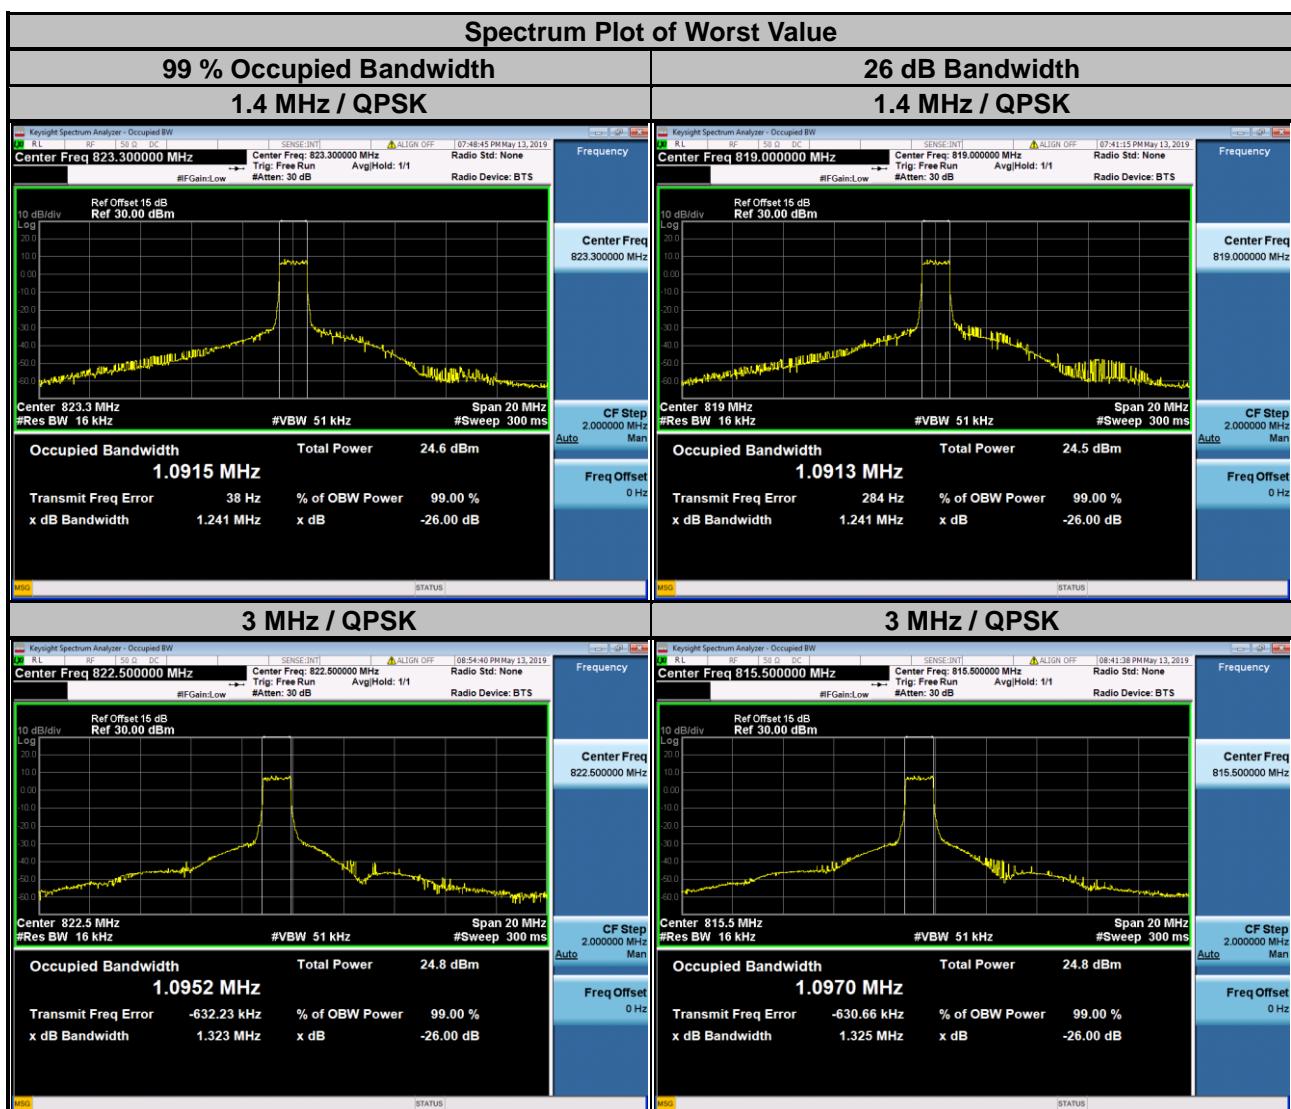

LTE Band 26					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26715	816.5	1.0937	0.9128	1.302	1.153
26740	819.0	1.0956	0.9181	1.295	1.149
26765	821.5	1.0953	0.9201	1.287	1.149

Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26740	819.0	1.0937	0.9160	1.371	1.238

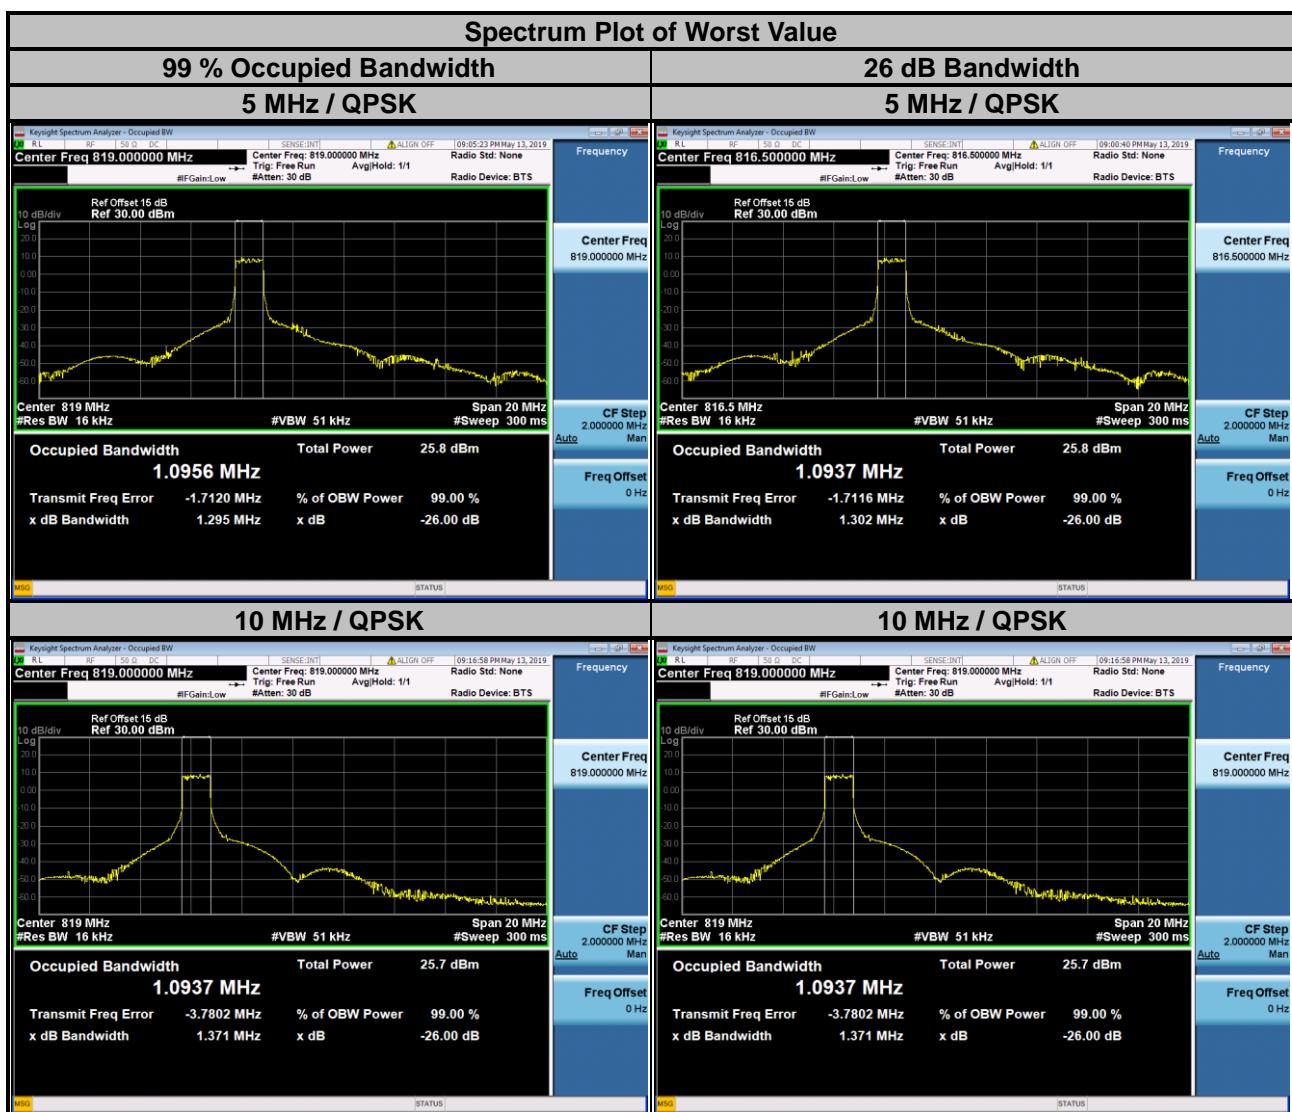

## 4.5 Emission Mask Measurement

### 4.5.1 Limits of Emission Mask Measurement


#### LTE Band 26

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10\log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.


### 4.5.2 Test Setup

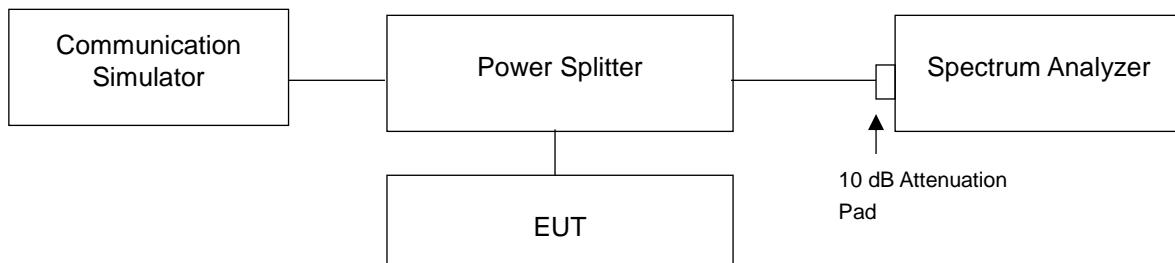

### 4.5.3 Test Procedures


- The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the test plot.


## 4.5.4 Test Results

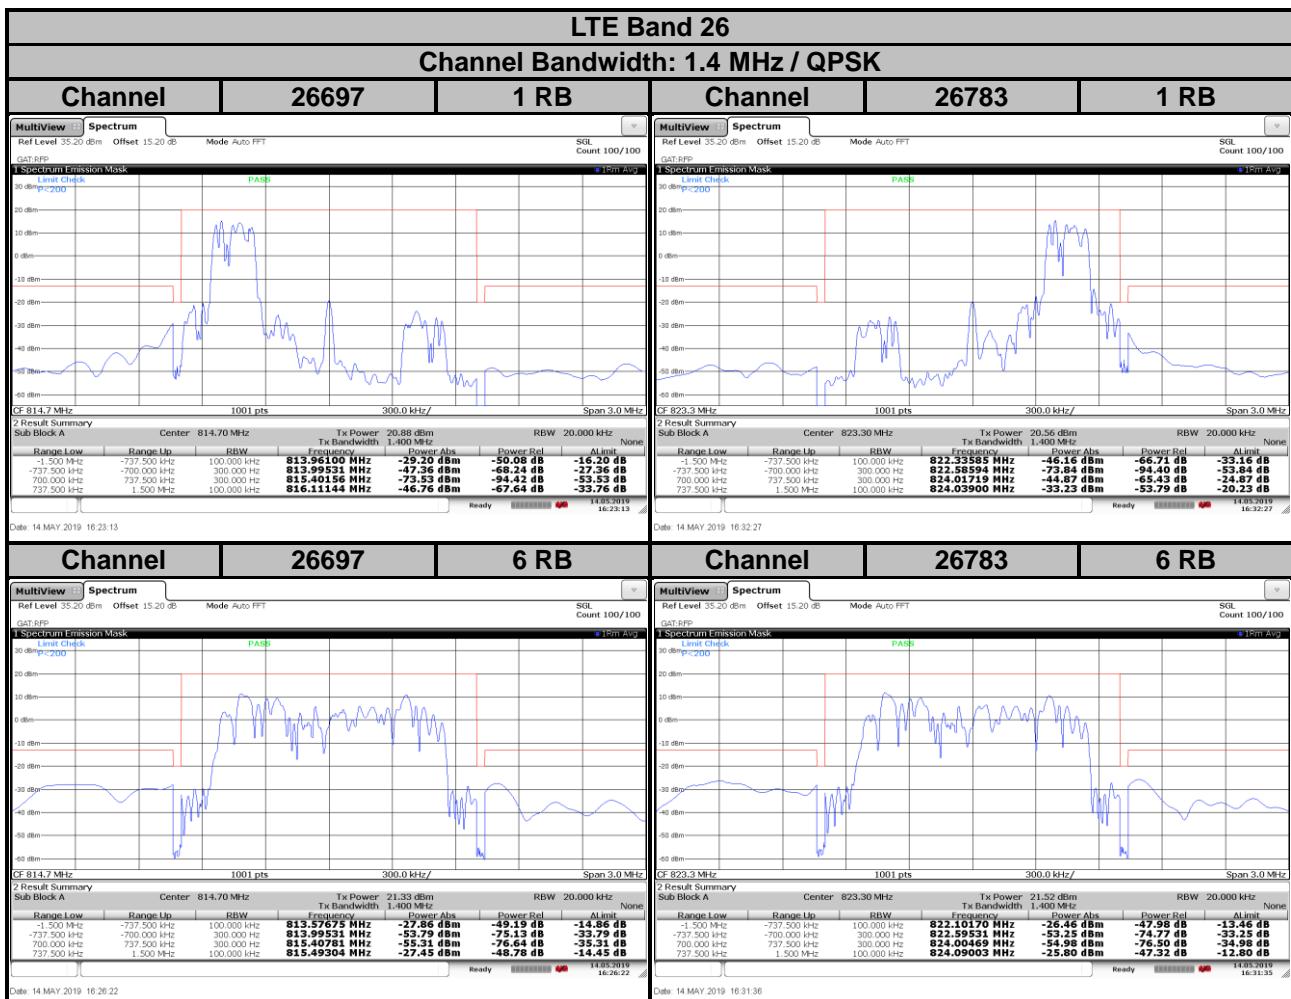



## LTE Band 26


Channel Bandwidth: 1.4 MHz / 16QAM

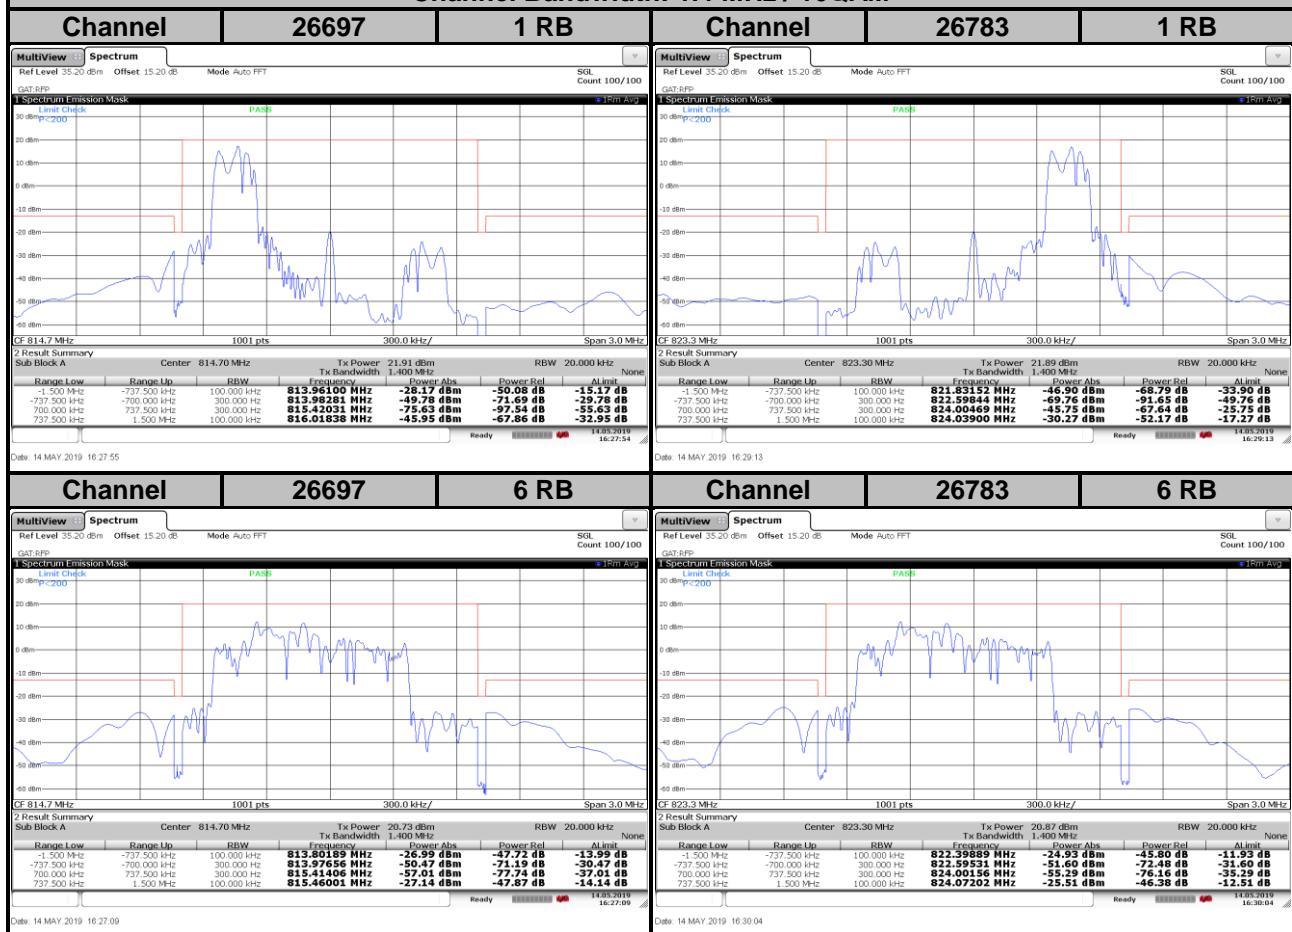


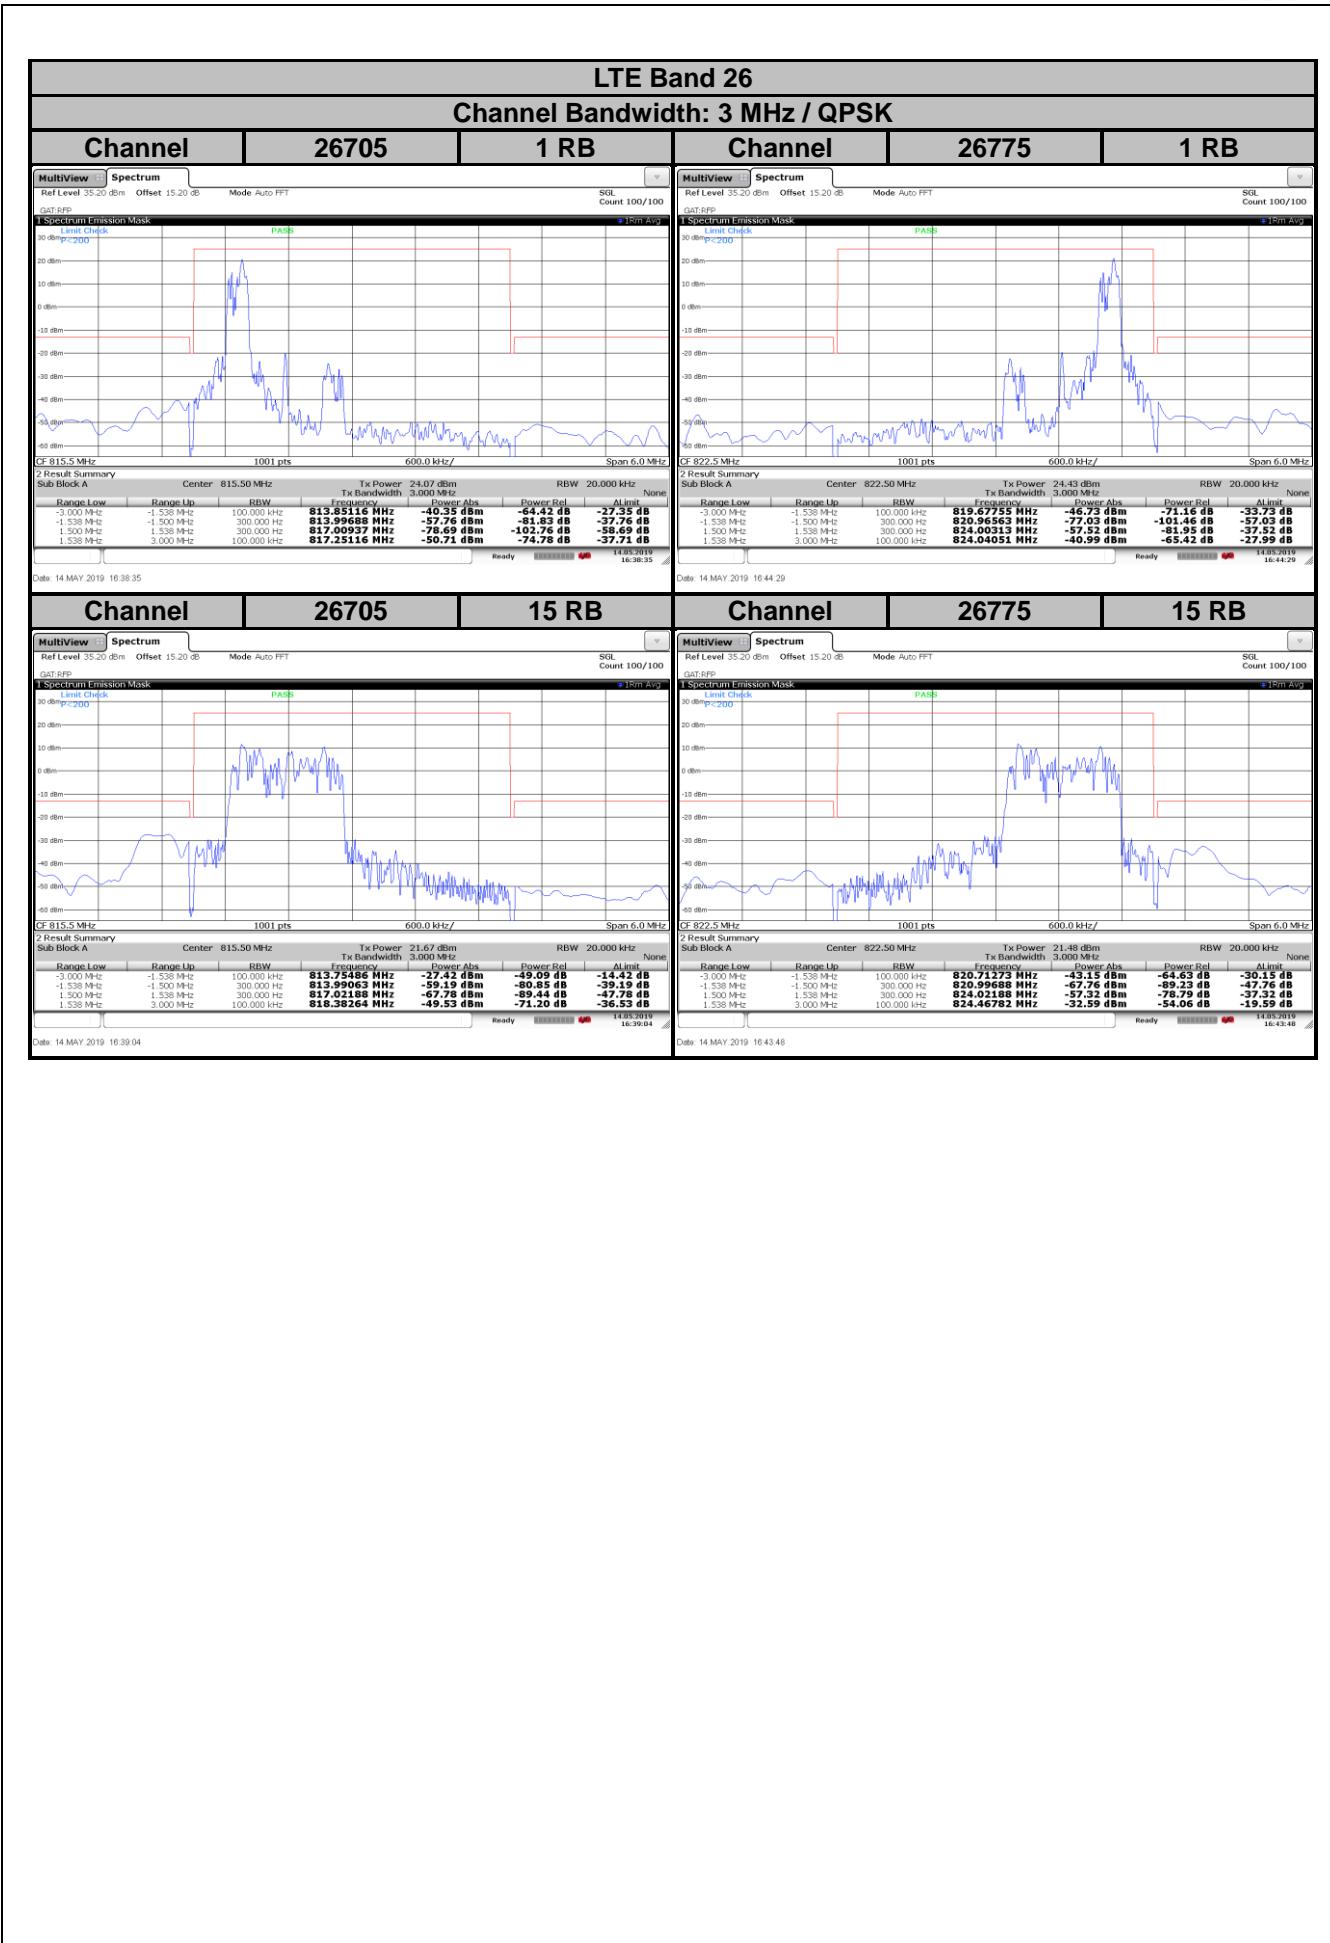


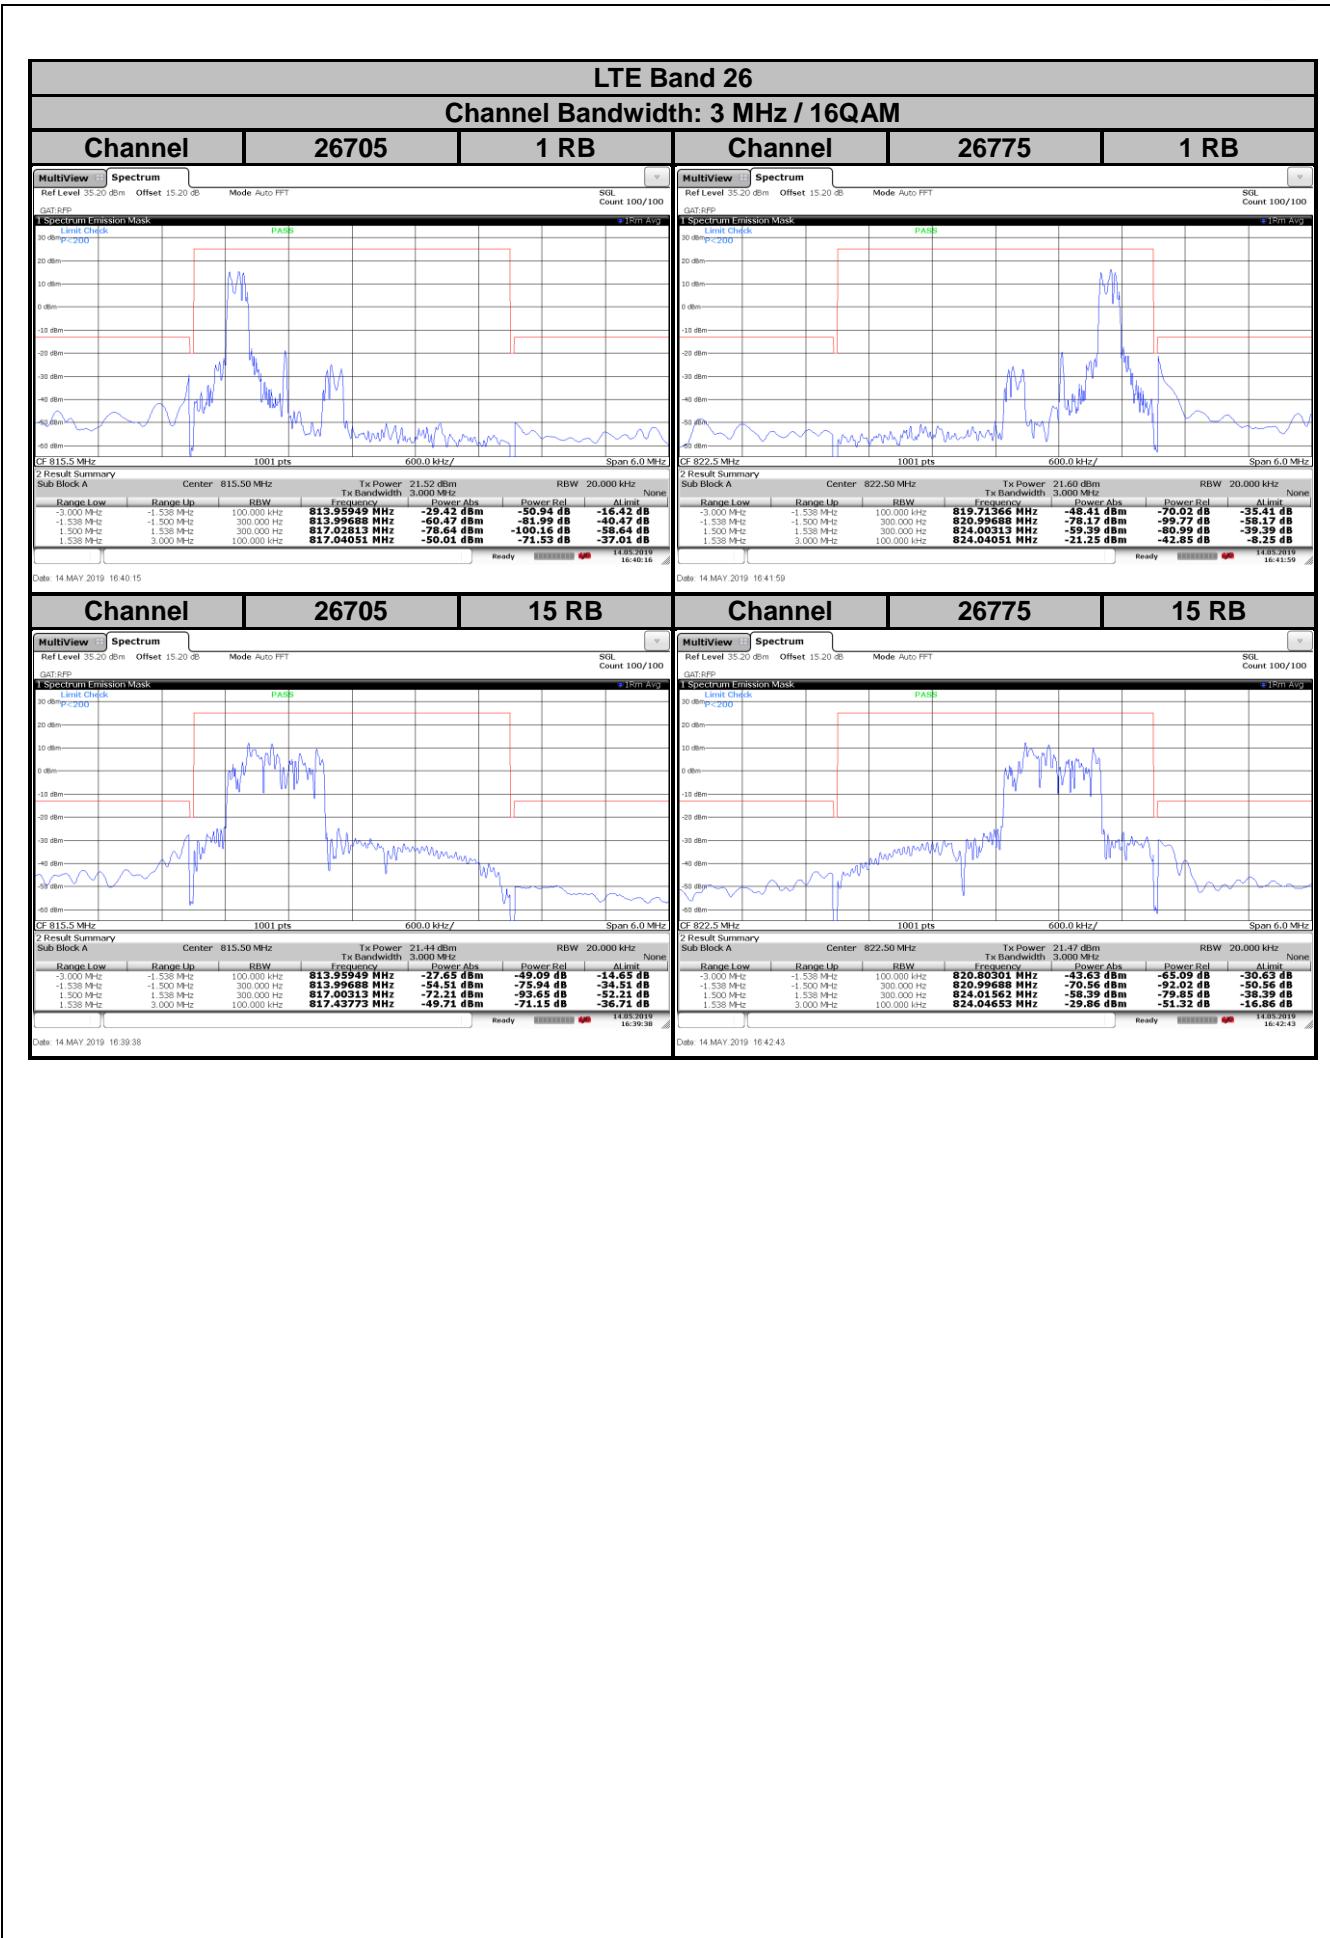

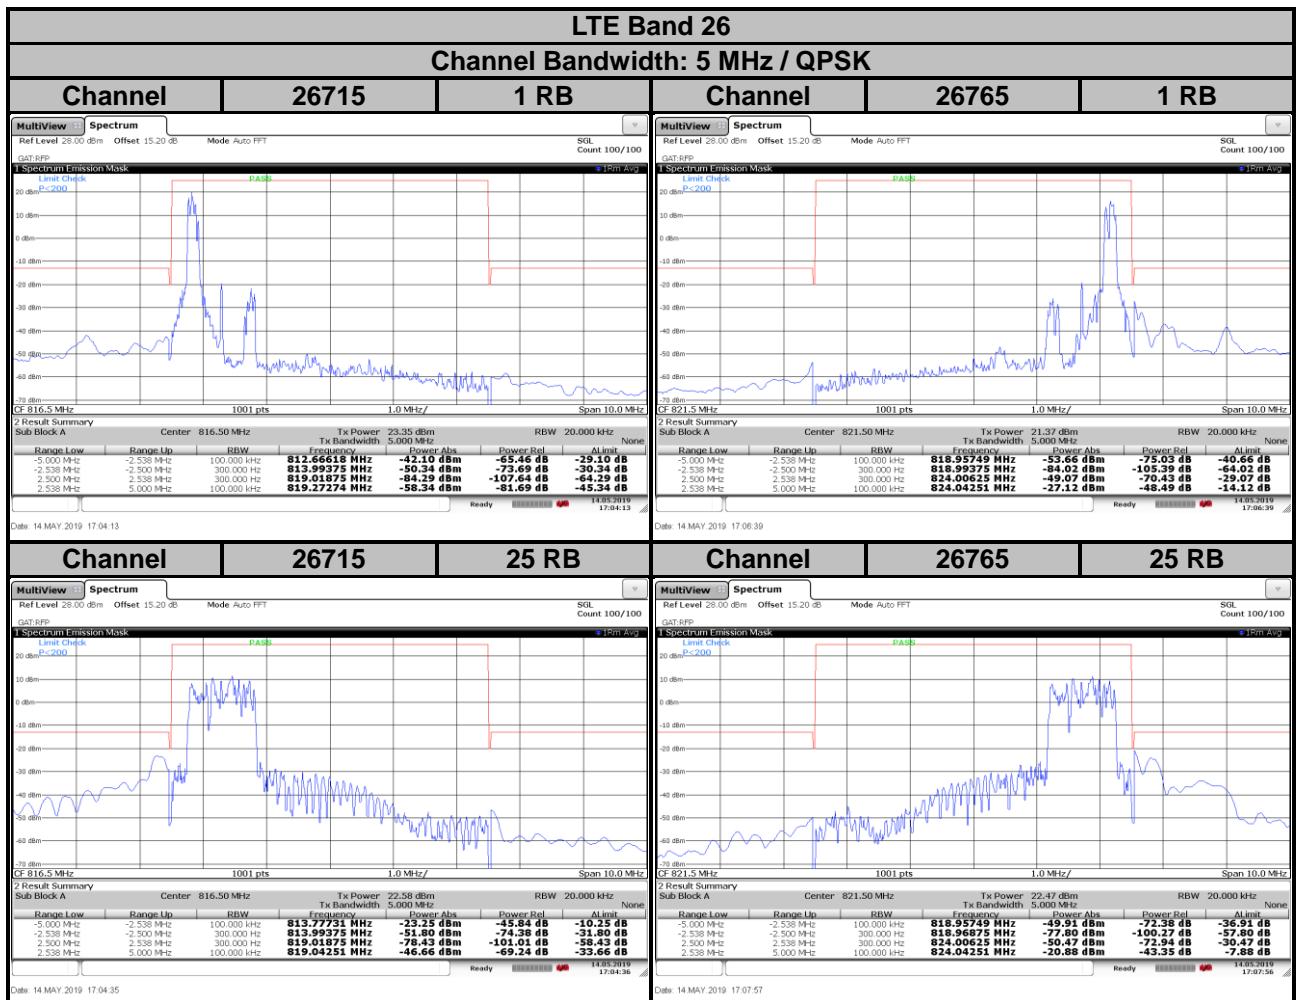

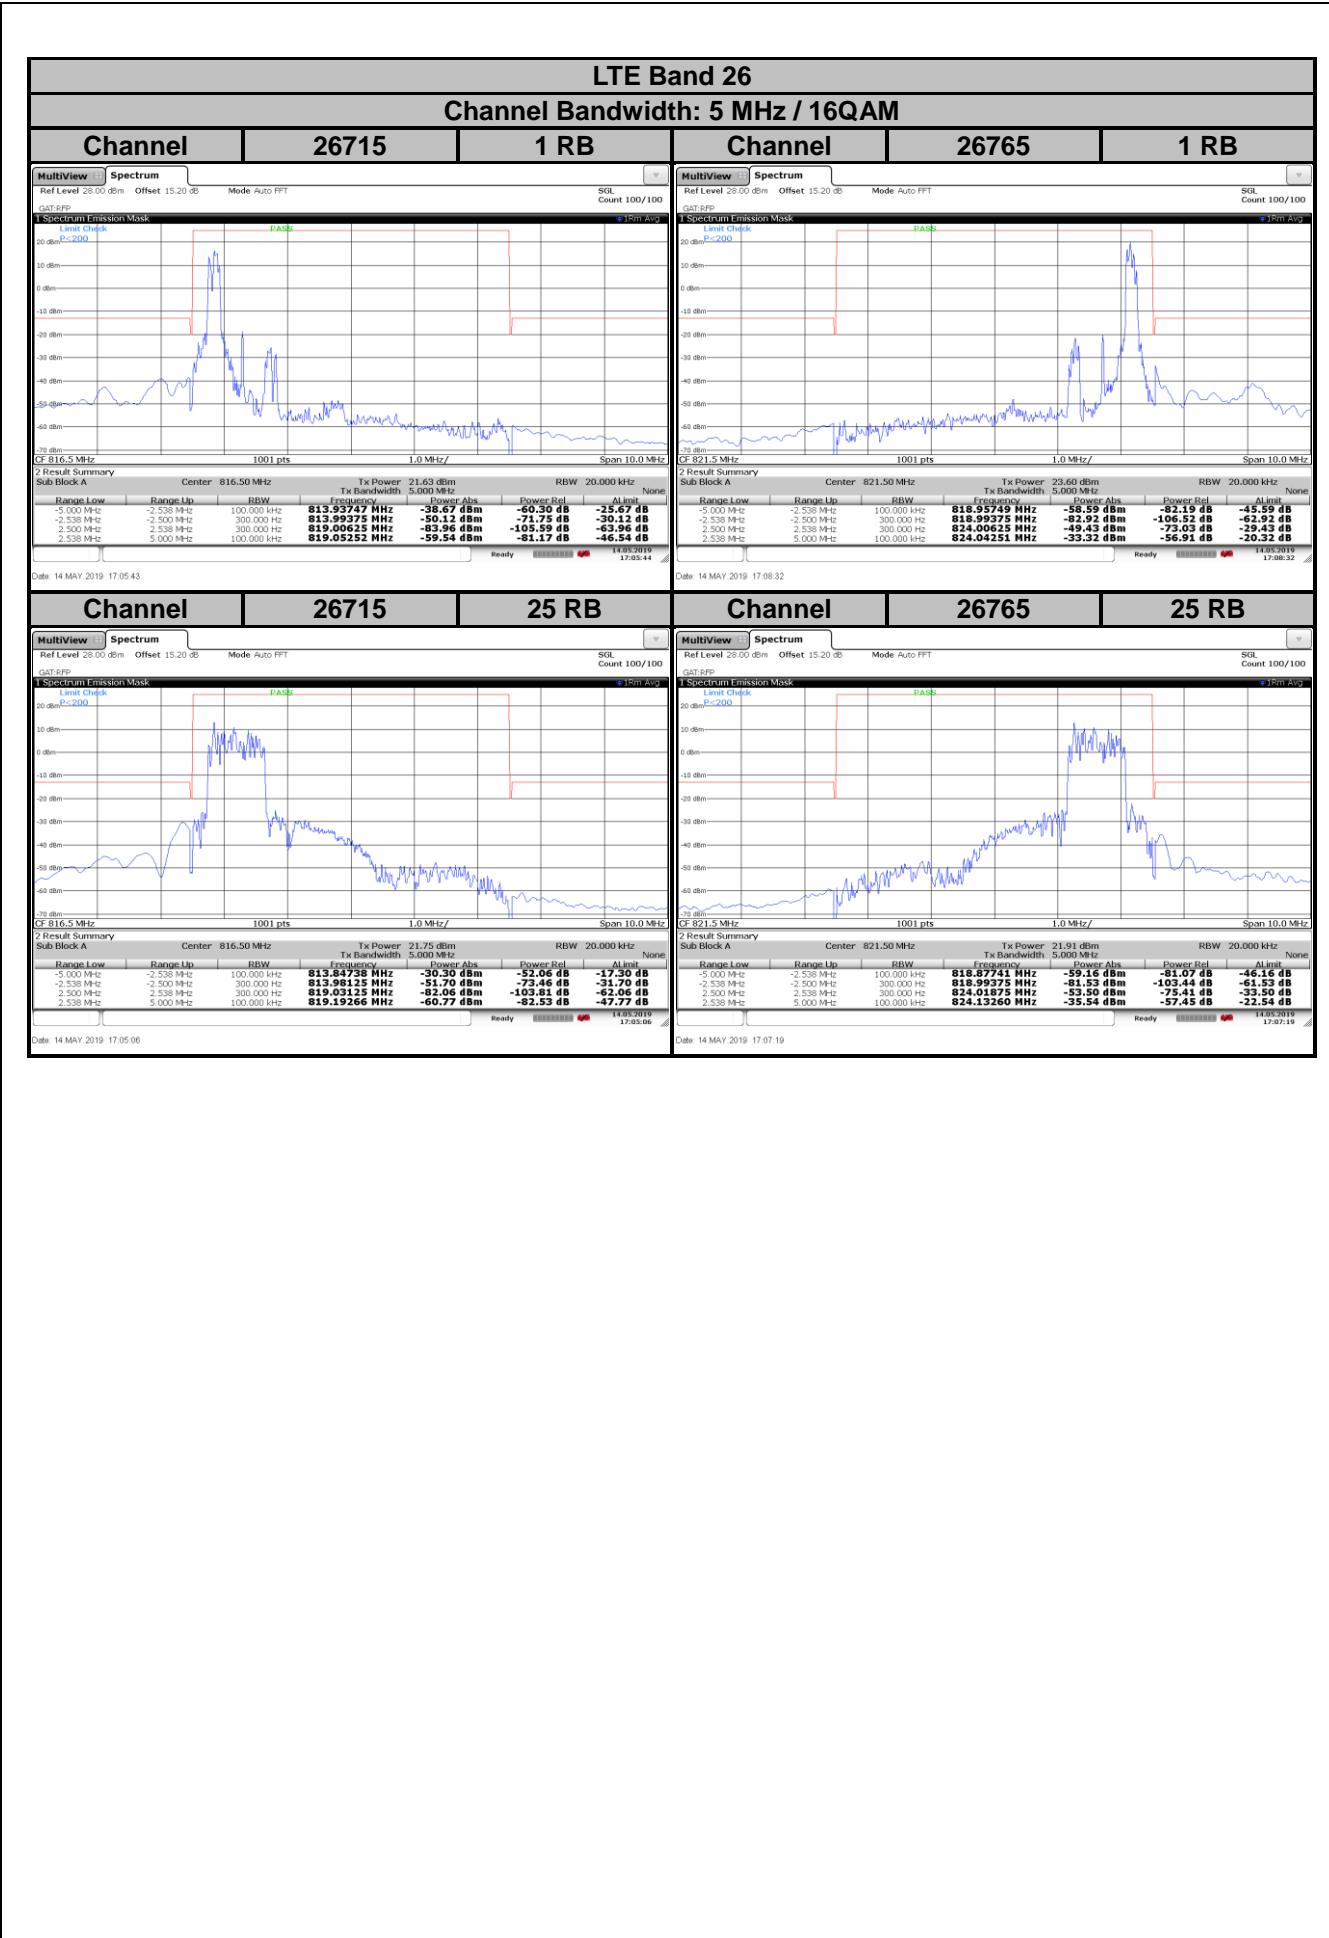

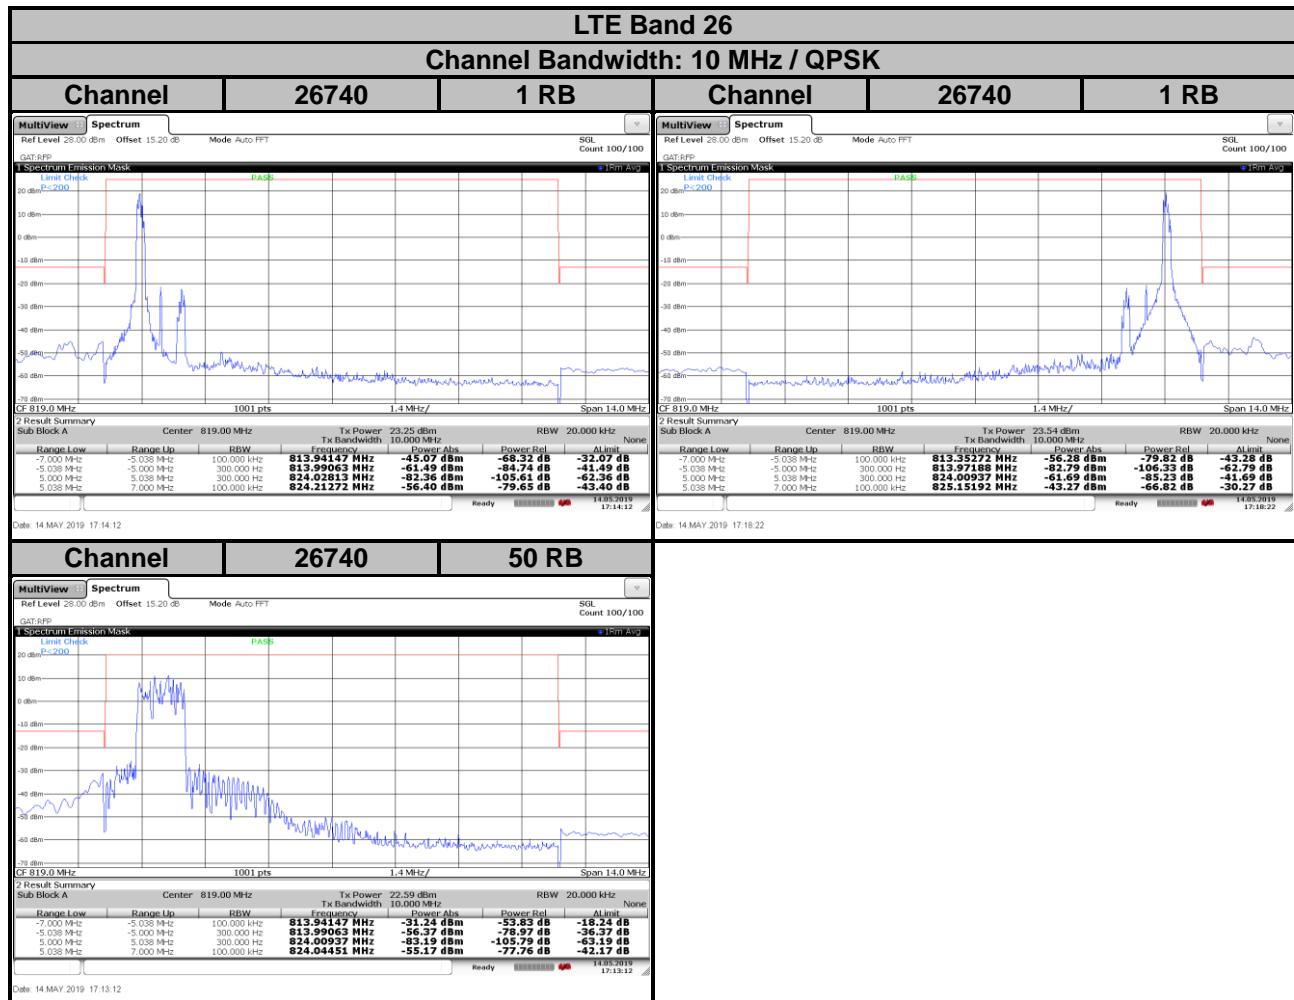

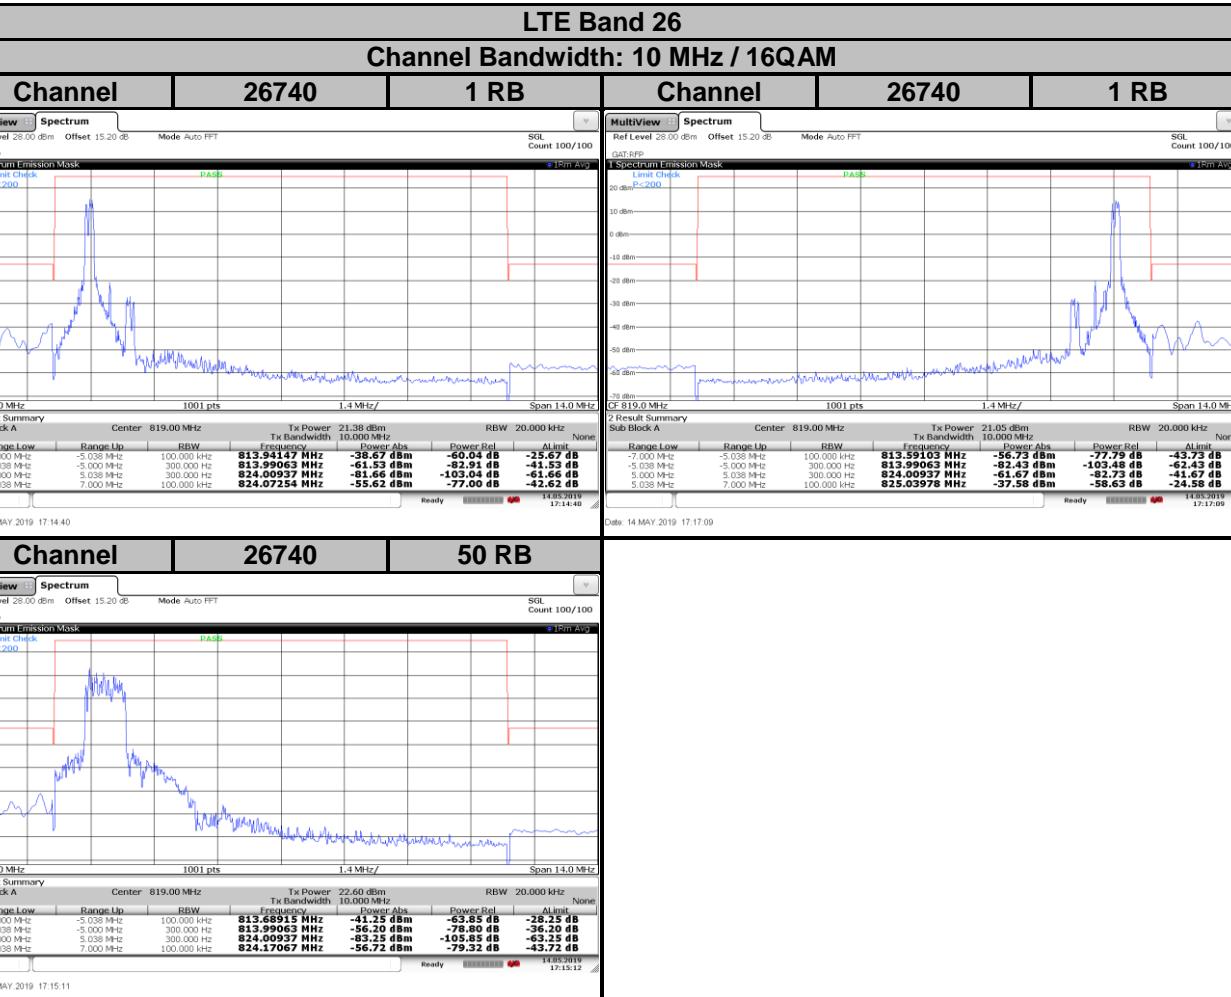


## 4.6 Conducted Spurious Emissions

### 4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.


### 4.6.2 Test Setup

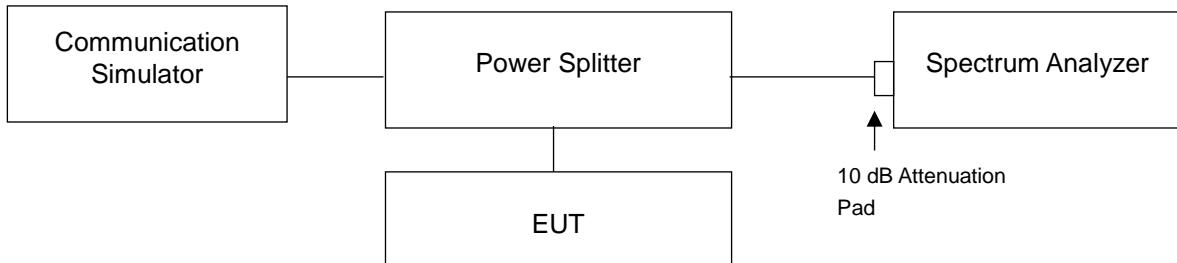


### 4.6.3 Test Procedure

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- c. Measuring frequency range is from 1 GHz to 8 / 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.


#### 4.6.4 Test Results

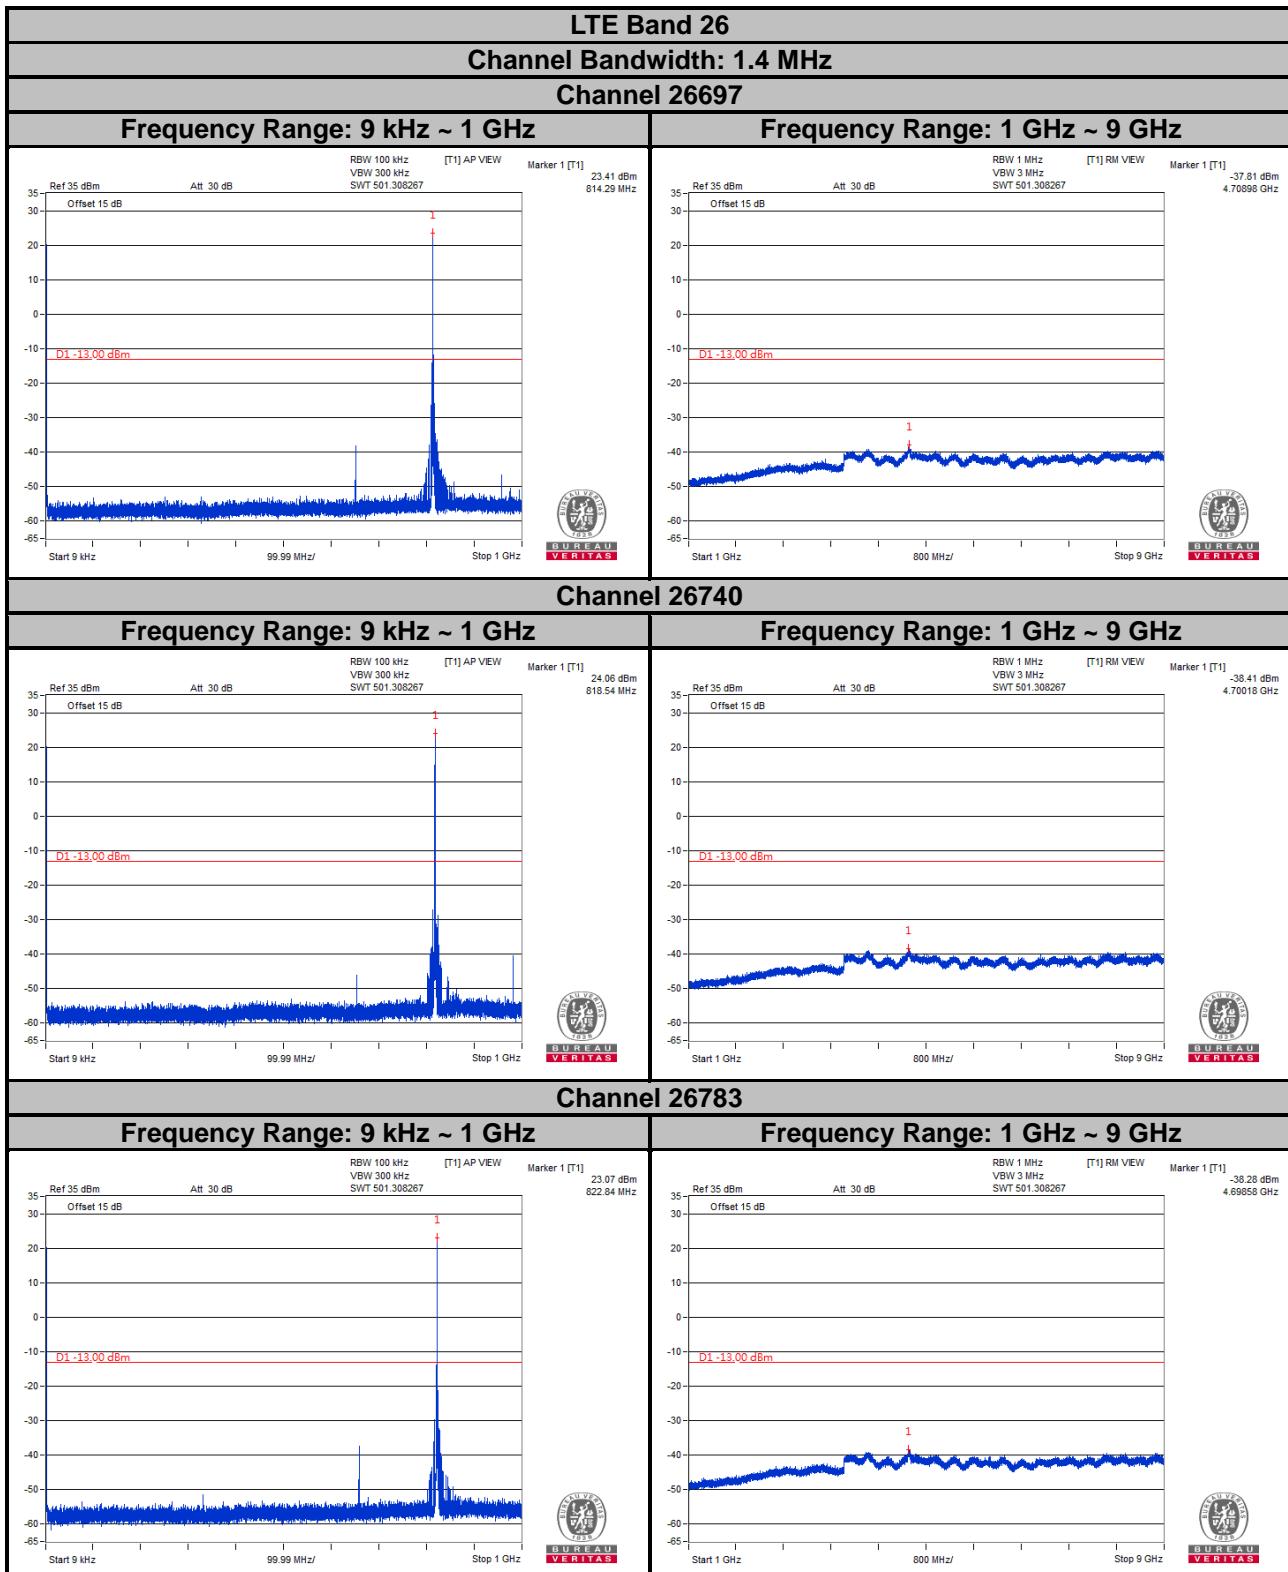


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

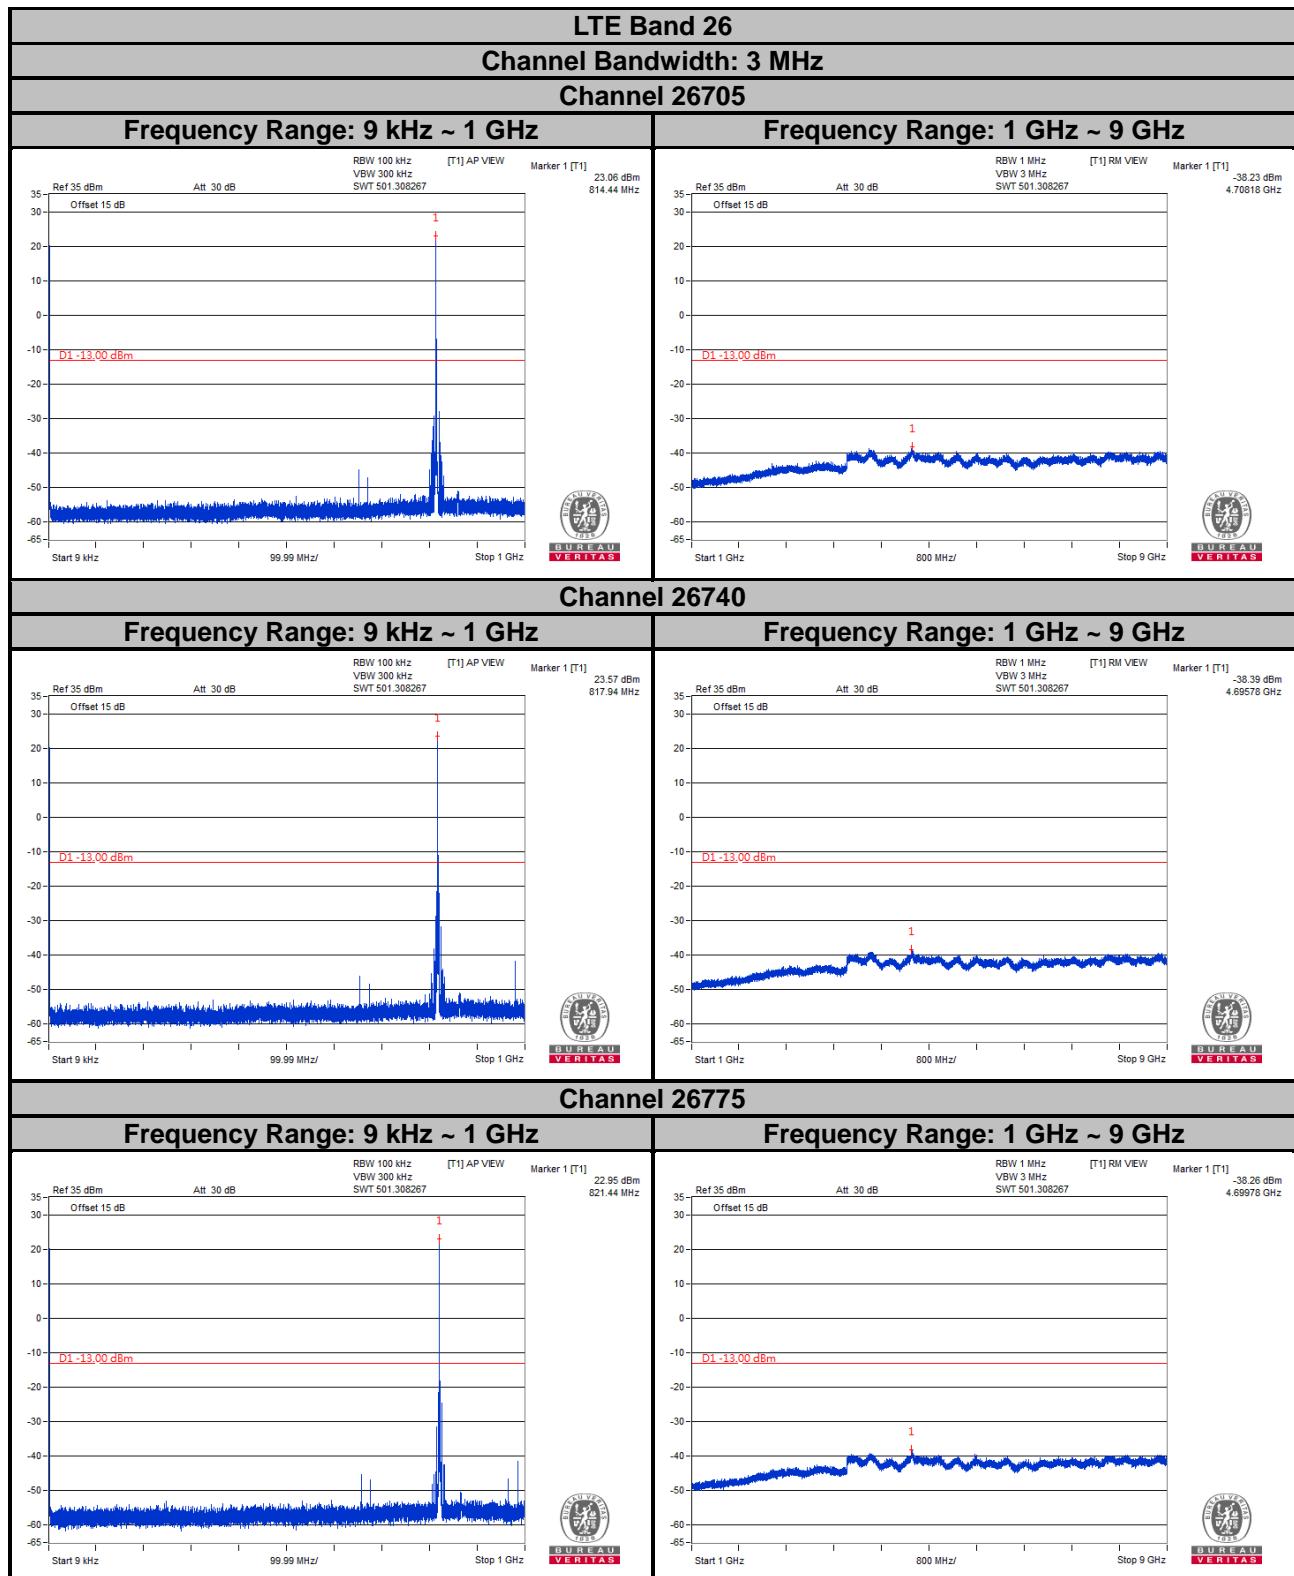

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

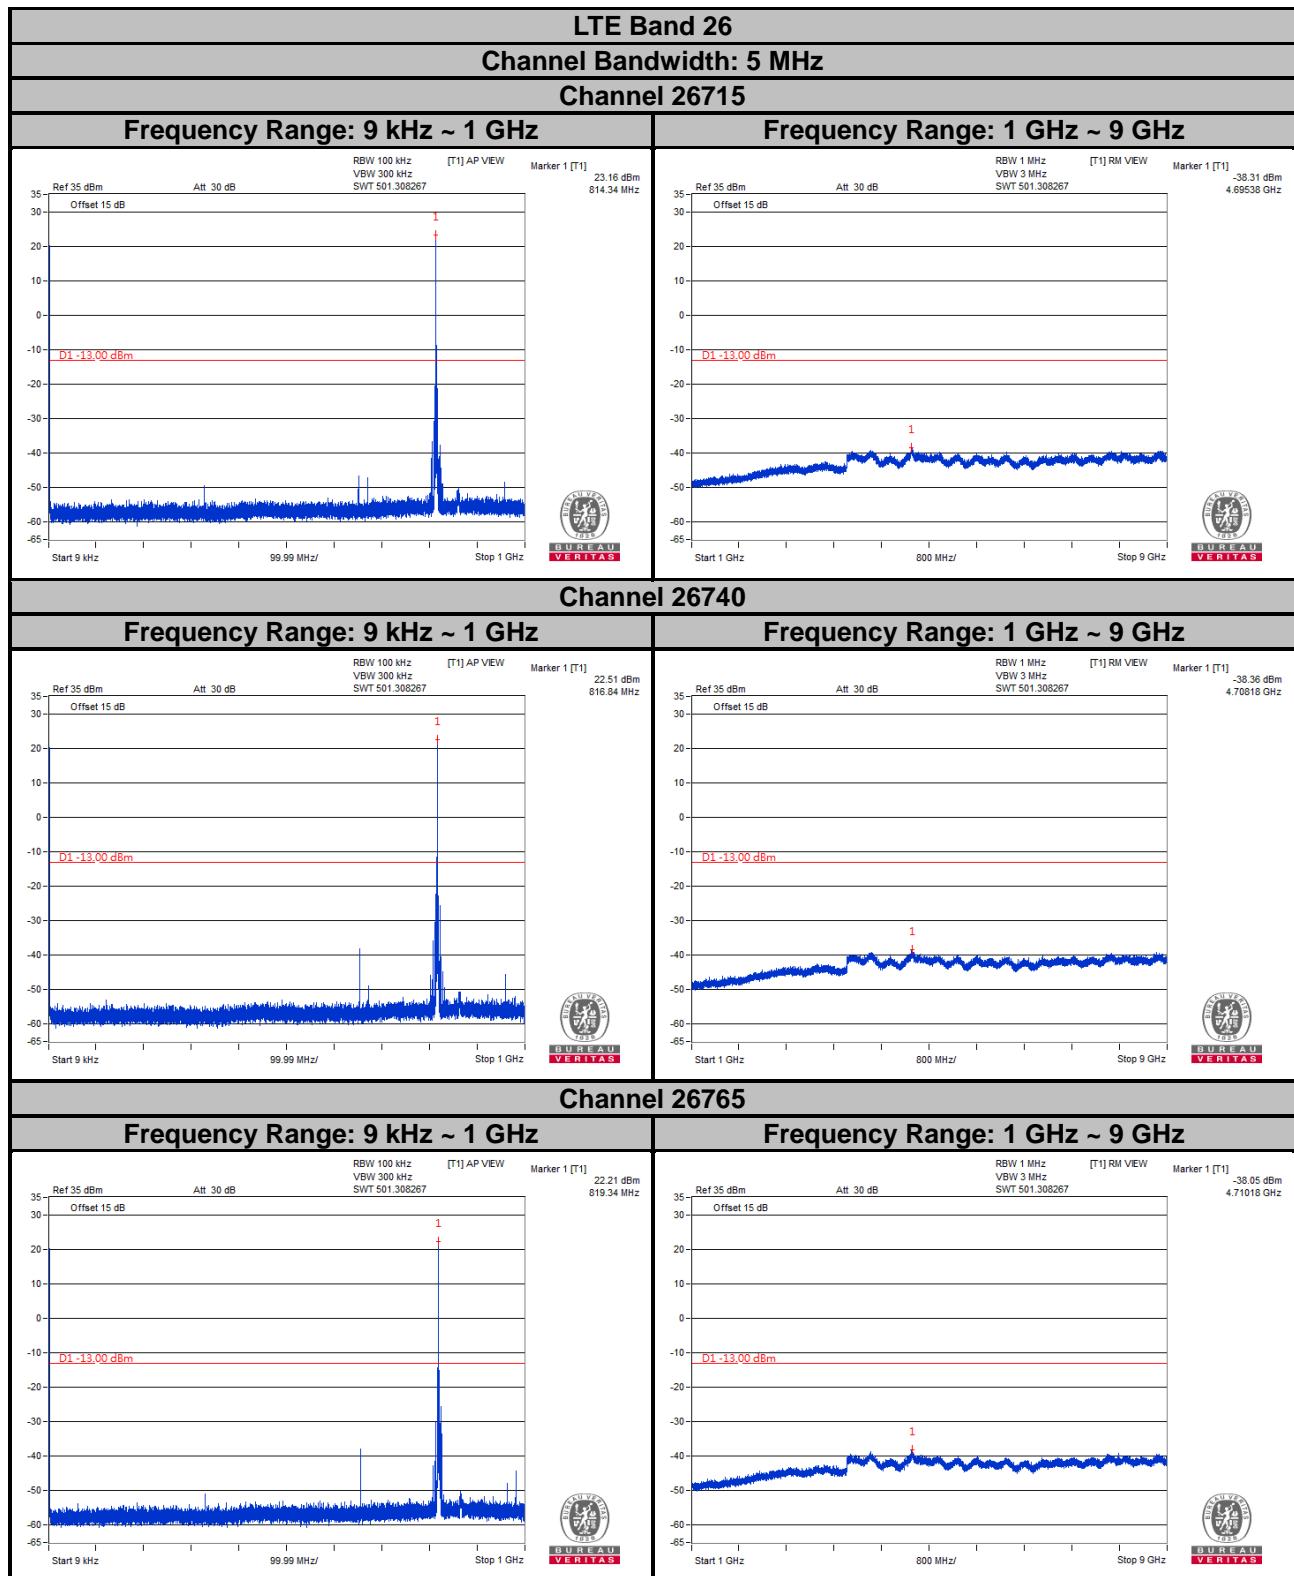

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

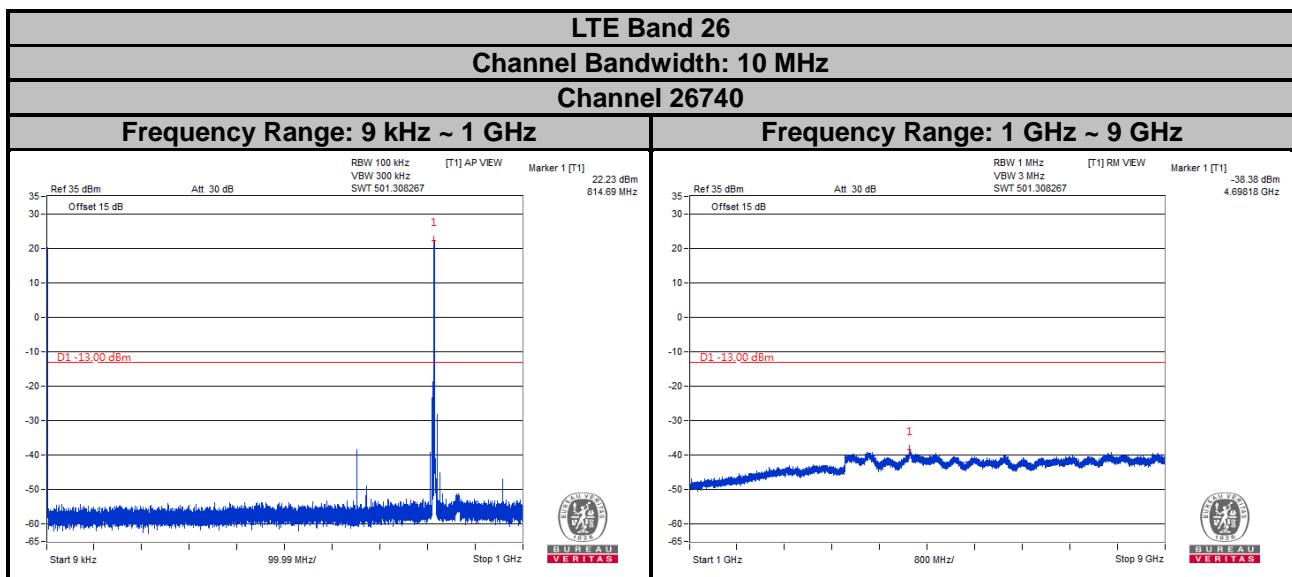

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

## 4.7 Radiated Emission Measurement

### 4.7.1 Limits of Radiated Emission Measurement

(1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emission is equal to -13 dBm.

### 4.7.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.7.3 Deviation from Test Standard


No deviation.

#### 4.7.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

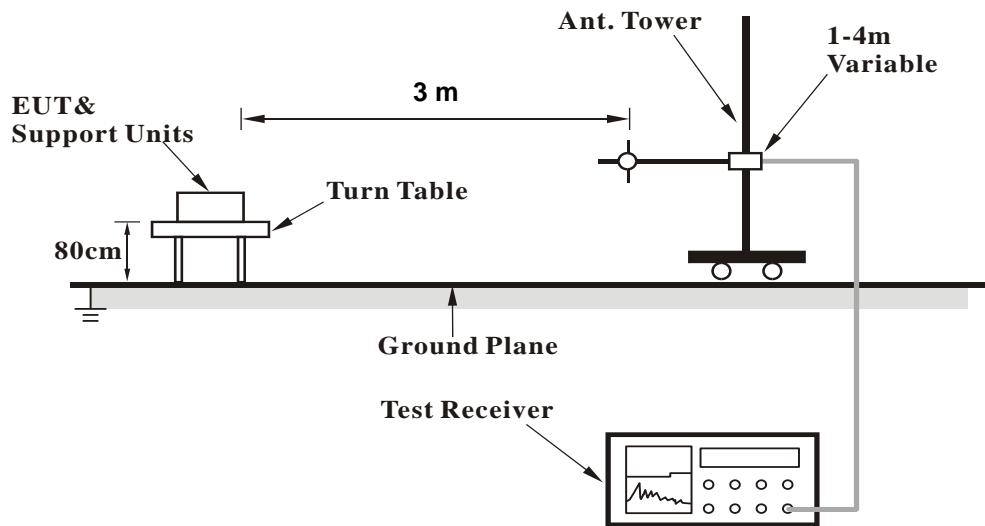

##### <Radiated Emission above 1 GHz>

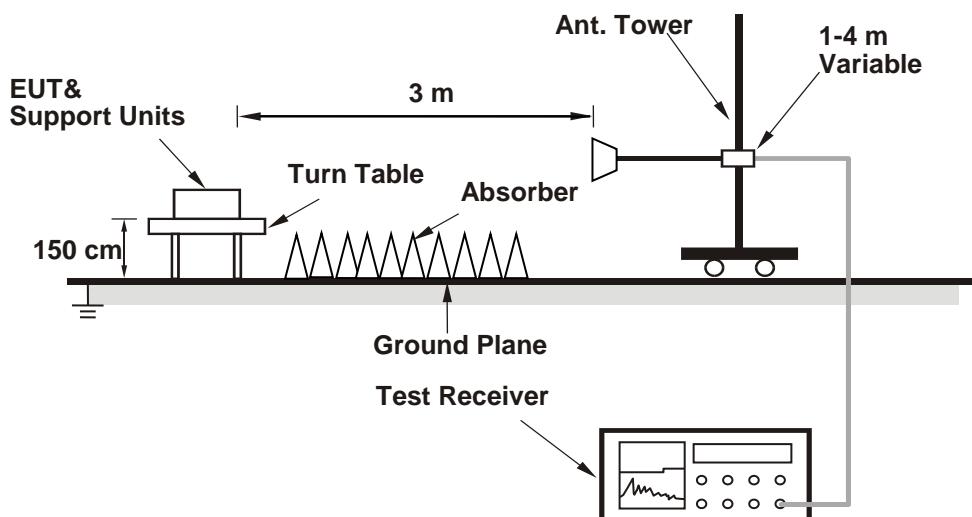

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.7.5 Test Results

##### LTE Band 26


Channel Bandwidth: 1.4 MHz / QPSK

Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

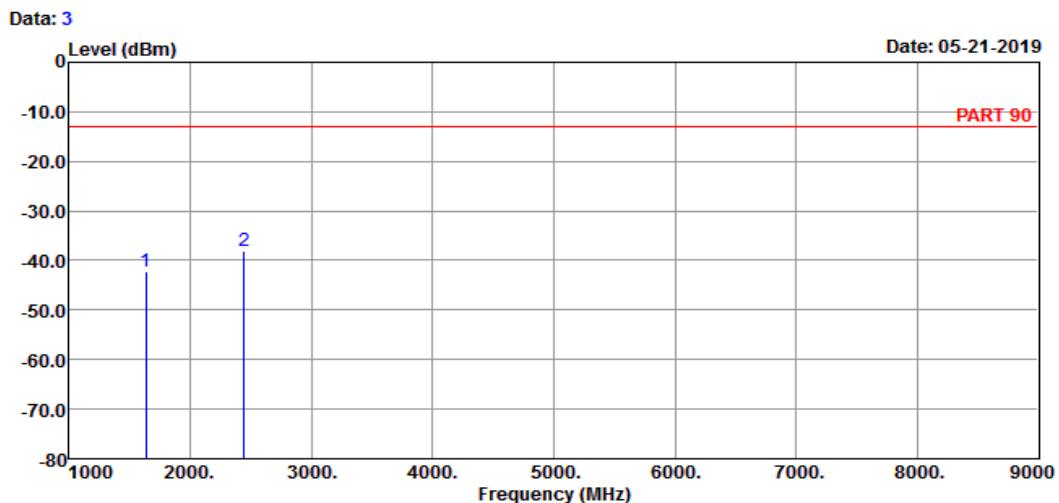

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_L-CH

Tested by: Thomas Wei


Freq	Level	Read	Limit	Over		
		Line	Factor	Limit	Remark	
MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-42.16	-27.37	-13.00	-14.79	-29.16 Peak
2 pp	2444.10	-38.06	-27.62	-13.00	-10.44	-25.06 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

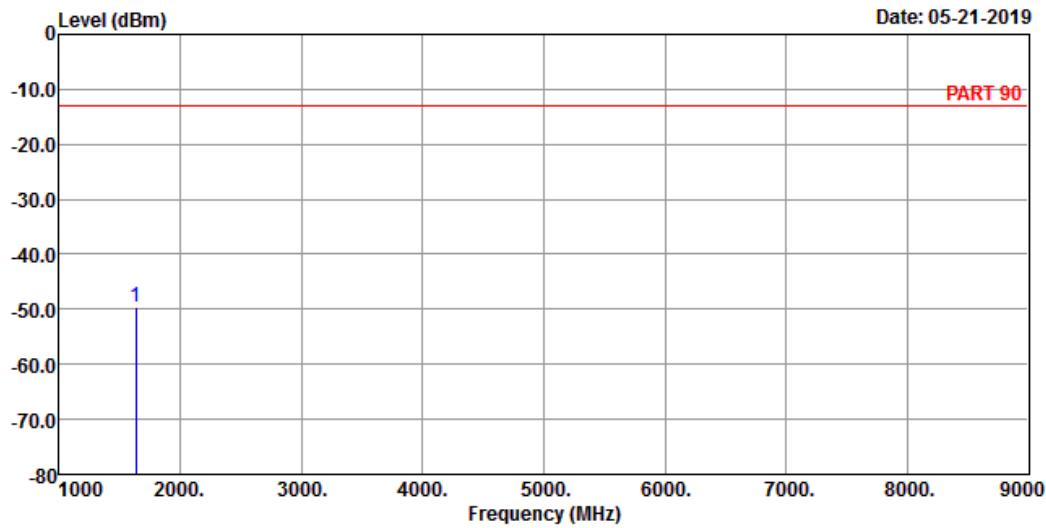

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_L-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Line Factor	Over Limit	Over Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1629.40 -49.58 -34.79 -13.00 -14.79 -36.58 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

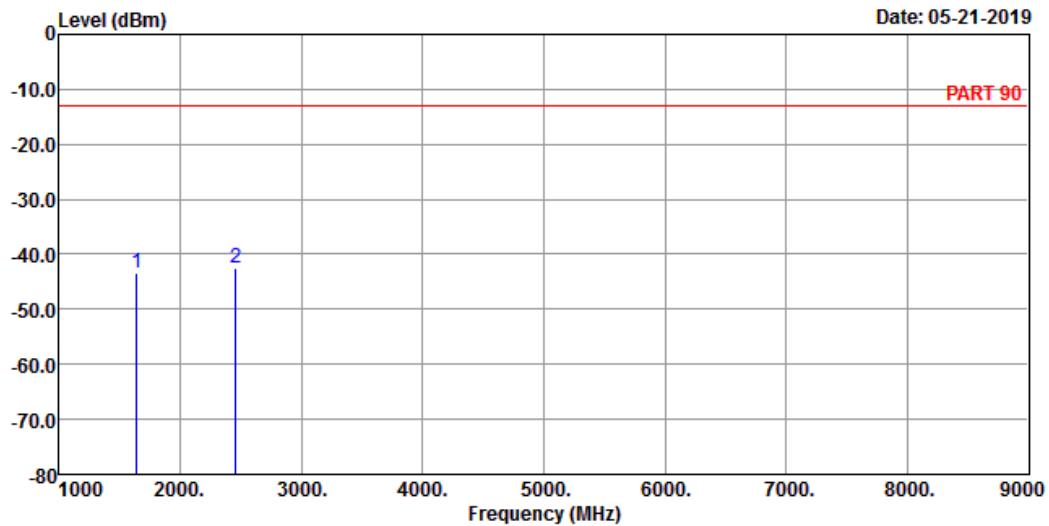

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_M-CH

Tested by: Thomas Wei


	Freq	Read Level	Limit Level	Over Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	
1	1638.00	-43.31	-28.52	-13.00	-14.79	-30.31 Peak
2 pp	2457.00	-42.48	-32.04	-13.00	-10.44	-29.48 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

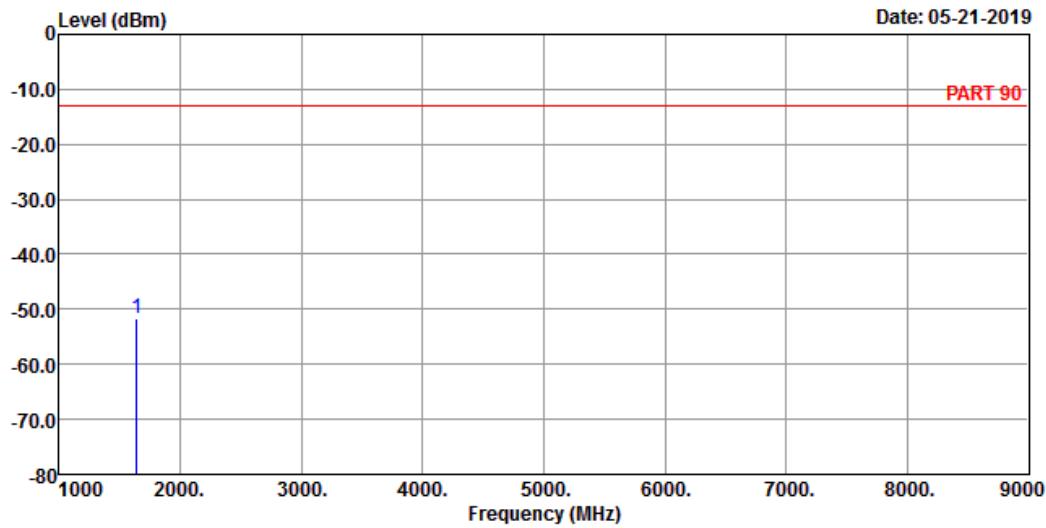

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_M-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Line Factor	Over Limit	Over Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1638.00 -51.59 -36.80 -13.00 -14.79 -38.59 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

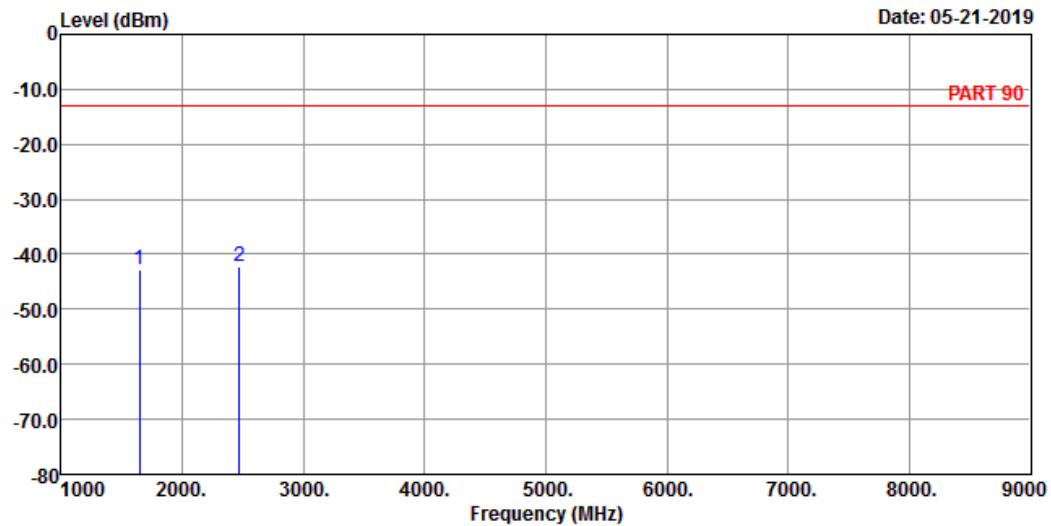

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_H-CH

Tested by: Thomas Wei


	Read Freq	Level MHz	Limit dBm	Over Line Factor	Over Limit	Remark
1	1646.60	-42.94	-28.21	-13.00	-14.73	-29.94 Peak
2 pp	2469.90	-42.17	-31.73	-13.00	-10.44	-29.17 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

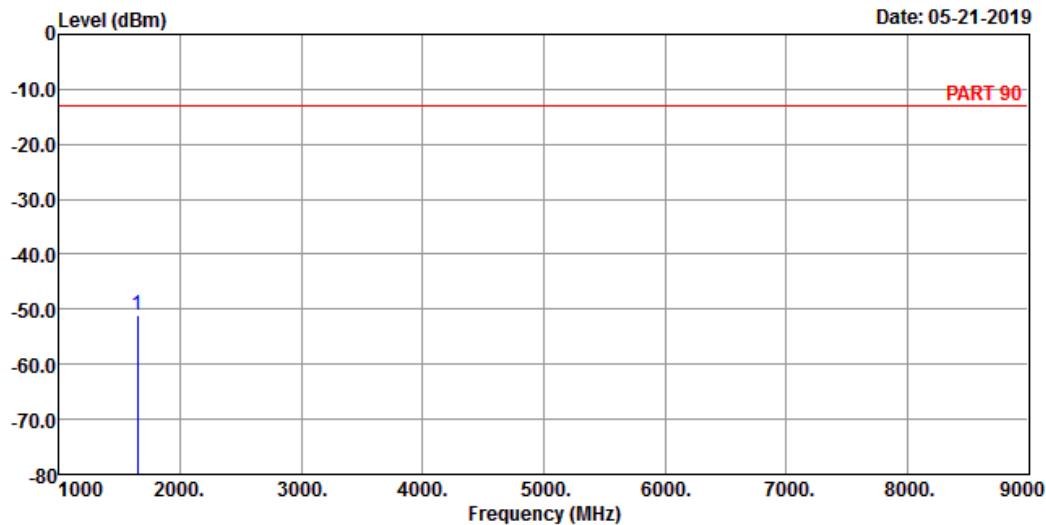

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_1.4M Link\_H-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Line Factor	Over Limit	Over Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1646.60 -50.99 -36.26 -13.00 -14.73 -37.99 Peak


Channel Bandwidth: 5 MHz / QPSK  
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

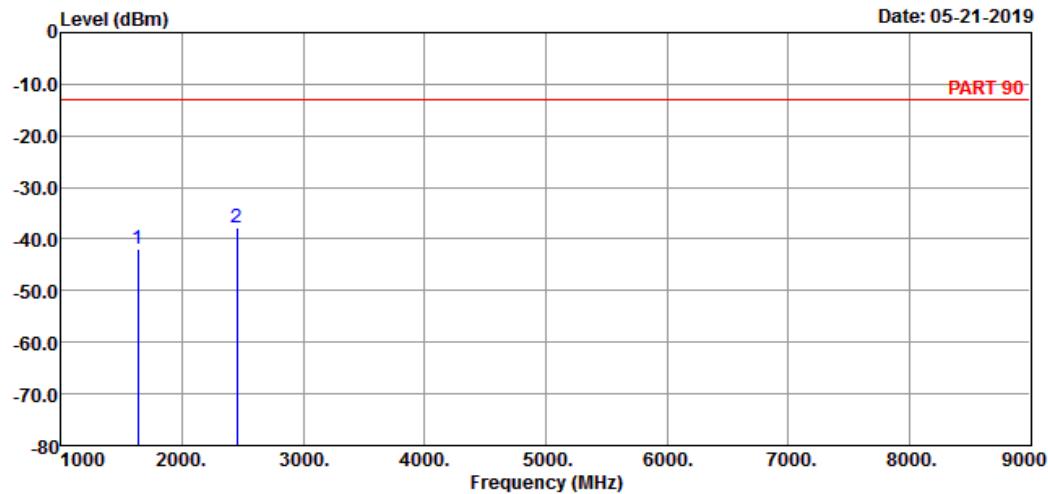

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_L-CH

Tested by: Thomas Wei


	Freq	Read Level	Limit Level	Over Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	
1	1633.00	-42.06	-27.27	-13.00	-14.79	-29.06 Peak
2 pp	2449.50	-37.91	-27.47	-13.00	-10.44	-24.91 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

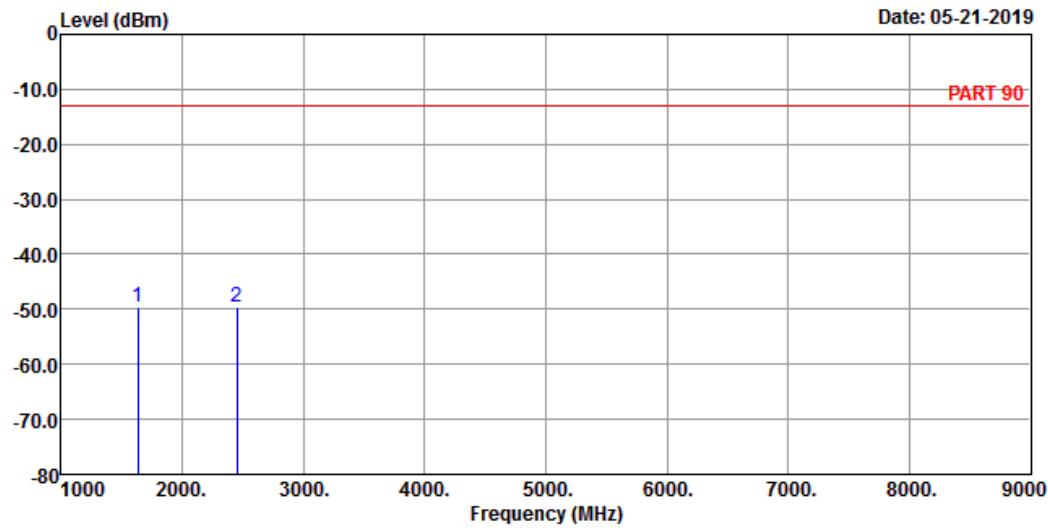

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_L-CH

Tested by: Thomas Wei

	Freq	Read Level	Limit Level	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB
1	1633.00	-49.71	-34.92	-13.00	-14.79	-36.71 Peak
2 pp	2449.50	-49.53	-39.09	-13.00	-10.44	-36.53 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

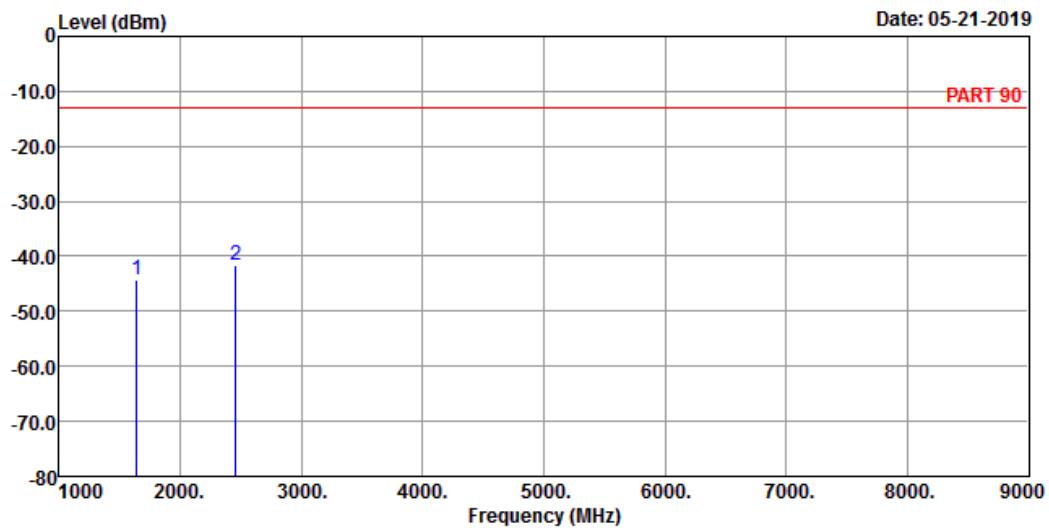

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_M-CH

Tested by: Thomas Wei


	Freq	Read Level	Limit Level	Over Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	
1	1638.00	-44.28	-29.49	-13.00	-14.79	-31.28 Peak
2 pp	2457.00	-41.66	-31.22	-13.00	-10.44	-28.66 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

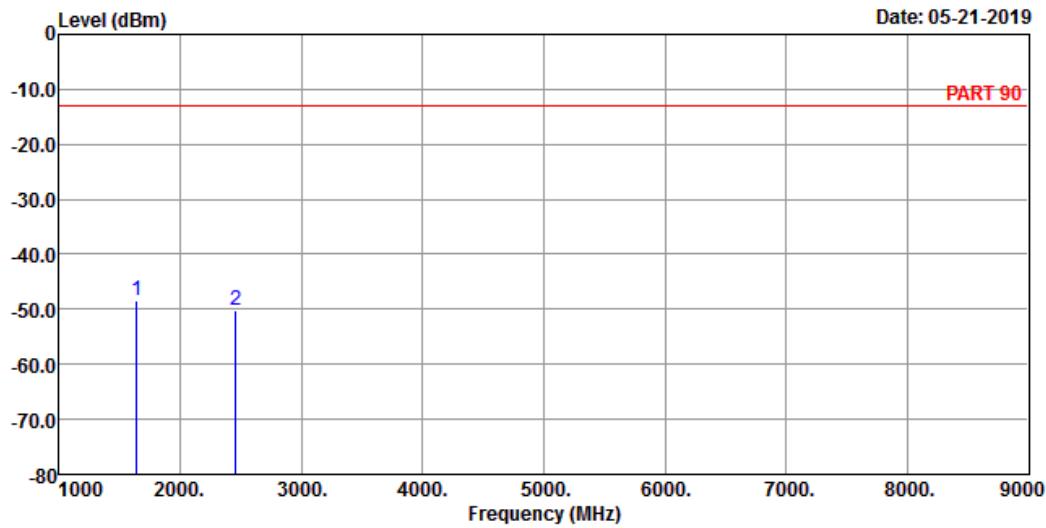

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_M-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Line Factor	Over Limit	Over Remark	
MHz	dBm	dBm	dBm	dB	dB	
1 pp	1638.00	-48.52	-33.73	-13.00	-14.79	-35.52 Peak
2	2457.00	-50.12	-39.68	-13.00	-10.44	-37.12 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

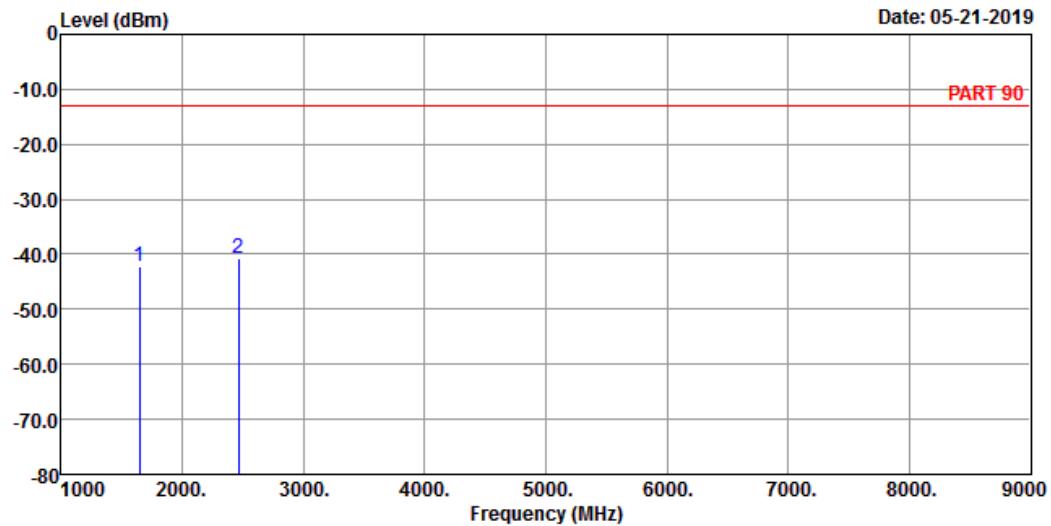

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_H-CH

Tested by: Thomas Wei


	Freq	Read Level	Limit Level	Over Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	
1	1643.00	-42.33	-27.60	-13.00	-14.73	-29.33 Peak
2 pp	2464.50	-40.79	-30.35	-13.00	-10.44	-27.79 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

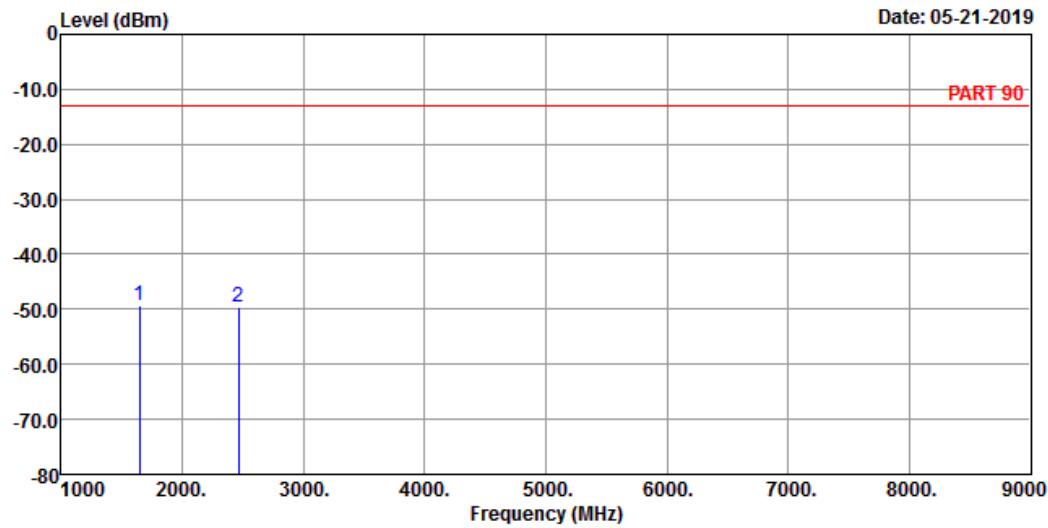

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_5M Link\_H-CH

Tested by: Thomas Wei


Freq	Read Level	Limit Level	Line Factor	Over Limit	Over Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp	1643.00	-49.31	-34.58	-13.00	-14.73 -36.31 Peak
2	2464.50	-49.73	-39.29	-13.00	-10.44 -36.73 Peak

**Channel Bandwidth: 10 MHz / QPSK**
**Middle Channel**


Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

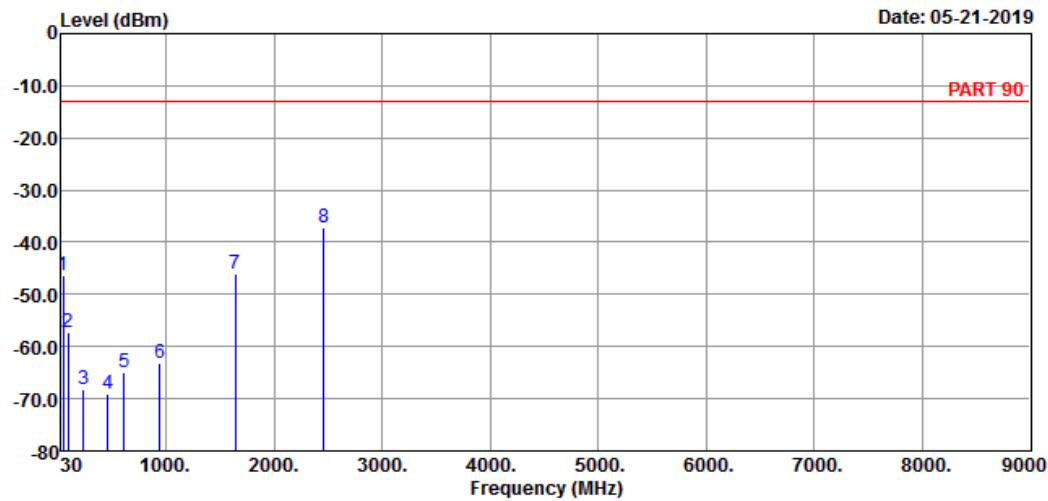

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK\_10M Link\_M-CH

Tested by: Thomas Wei


	Freq	Read Level	Limit Level	Over Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB
1	43.58	-46.41	-44.94	-13.00	-1.47	-33.41 Peak
2	95.96	-57.30	-46.52	-13.00	-10.78	-44.30 Peak
3	234.67	-68.31	-61.69	-13.00	-6.62	-55.31 Peak
4	459.71	-69.13	-63.76	-13.00	-5.37	-56.13 Peak
5	611.03	-65.09	-64.31	-13.00	-0.78	-52.09 Peak
6	944.71	-63.17	-64.85	-13.00	1.68	-50.17 Peak
7	1638.00	-45.94	-31.15	-13.00	-14.79	-32.94 Peak
8 pp	2457.00	-37.10	-26.66	-13.00	-10.44	-24.10 Peak



## Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

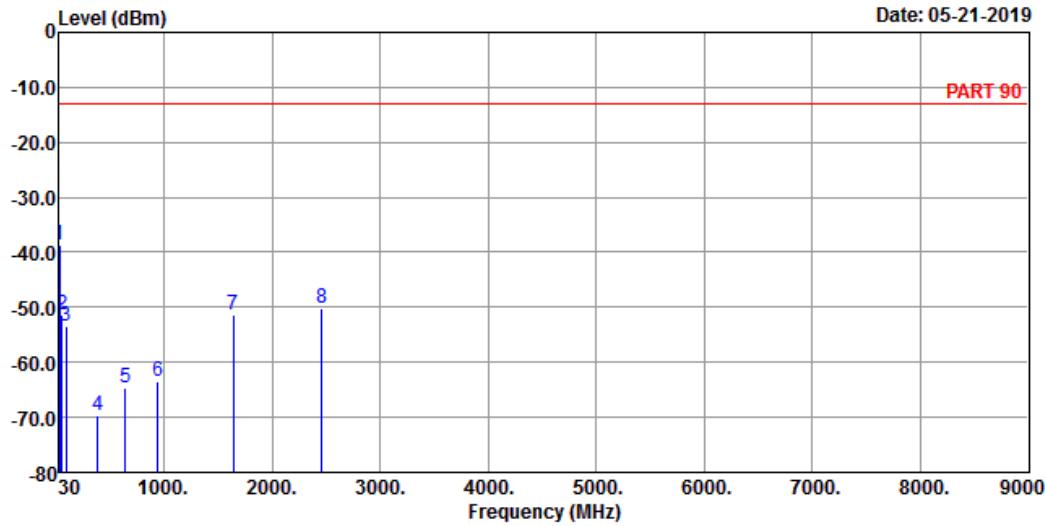

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK\_10M Link\_M-CH

Tested by: Thomas Wei

	Freq	Read Level	Limit Level	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB
1 pp	31.94	-38.67	-38.07	-13.00	-0.60	-25.67 Peak
2	53.28	-51.25	-45.44	-13.00	-5.81	-38.25 Peak
3	95.96	-53.33	-42.55	-13.00	-10.78	-40.33 Peak
4	385.99	-69.56	-63.53	-13.00	-6.03	-56.56 Peak
5	639.16	-64.79	-63.93	-13.00	-0.86	-51.79 Peak
6	943.74	-63.50	-65.15	-13.00	1.65	-50.50 Peak
7	1638.00	-51.36	-36.57	-13.00	-14.79	-38.36 Peak
8	2457.00	-50.21	-39.77	-13.00	-10.44	-37.21 Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---