



H.B. Compliance Solutions

Intentional Radiator Class II Permissive Change Test Report

For the

Microchip Technology Inc.

915 MHz Ultra Low-Power Sub-GHz Transceiver Module

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 15.247 for

Digitally Transmitting Sequence

Prepared for:

Microchip Technology Inc.

2355 W. Chandler Blvd.

Chandler, Arizona 85224

Prepared By:

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

Reviewed By:

Hoosamuddin Bandukwala



Cert # ATL-0062-E

Engineering Statement: The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 15 of the FCC Rules under normal use and maintenance. All results contained herein relate only to the sample tested.

Report Status Sheet

Revision #	Report Date	Reason for Revision
∅	October 18, 2018	Initial Issue
1	November 9, 2018	TCB Comments

Table of Contents

EXECUTIVE SUMMARY	4
1. Testing Summary	4
EQUIPMENT CONFIGURATION	5
1. Overview	5
2. Test Facility	6
3. Description of Test Sample	6
4. Equipment Configuration	6
5. Support Equipment	6
6. Ports and Cabling Information	7
7. Method of Monitoring EUT Operation	7
8. Mode of Operation	7
9. Modifications	7
10. Disposition of EUT	7
Criteria for Intentional Radiators	8
1. RF Power Output	8
2. Radiated Spurious Emissions and Restricted Band	11
3. Emissions at Band Edges	14
4. Test Equipment	17
5. Measurement Uncertainty	18

EXECUTIVE SUMMARY

1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15.247. All tests were conducted using measurement procedure from ANSI C63.10-2013, FCC Public Notice 558074 DTS Guide April 09, 2013 as appropriate.

Test Name	Test Method/Standard	Result	Comments
Peak Output Power	15.247(b)	Pass	
Radiated Spurious Emissions & Restricted Band	15.247(d), 15.209(a), 15.205	Pass	Addition of RF Metal Shield.
Emission At Band Edges	15.247(d), 15.209(a), 15.205	Pass	

Class II Permissive Change

RF Metal Shield installed on the board around the RF circuitry (including Crystal and SAW filter) and the Transceiver Chip.

EQUIPMENT CONFIGURATION

1. Overview

H.B Compliance Solutions was contracted by Microchip Technology Inc. to perform testing on the 915 MHz Ultra Low Power Sub-GHz Transceiver Module under the purchase order number 83006567.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Microchip Technology, Transceiver module.

The tests were based on FCC Part 15 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Microchip Technology should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

Product Name:	915 MHz Ultra Low-Power Sub-GHz Transceiver Module
Model(s) Tested:	MRF89XAM9A
FCC ID:	OA3MRF89XAM9A
Supply Voltage Input:	Primary Power: 3.3 Vdc
Frequency Range:	903 – 927 MHz
No. of Channels:	Single Channel
Necessary Bandwidth	N/A
Type(s) of Modulation:	FSK
Range of Operation Power:	0.011 Watts (conducted)
Emission Designator:	N/A
Channel Spacing(s)	None
Test Item:	Pre-Production
Type of Equipment :	Fixed
Antenna Requirement (§15.203) :	Type of Antenna: PCB Meander Gain of Antenna: -1dBi
Environmental Test Conditions:	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Modification to the EUT:	None
Evaluated By:	Staff at H.B. Compliance Solutions
Test Date(s):	10/02/2018 till 10/16/2018

2. Test Facility

All testing was performed at H.B. Compliance Solutions. This facility is located at 5005 S. Ash Avenue, Suite # A-10, Tempe AZ-85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements from 30MHz to 1GHz were performed in a GTEM chamber (equivalent to an Open Area Test Site). Radiated Emissions Above 1GHz were performed on an Open Area Test Site (OATS). In accordance with §2.948(a)(3), a complete site description is contained at H.B. Compliance Solutions. EUT size approved for FCC testing for GTEM use is 34.1" W x 22.8" H.

Test facility H.B. Compliance Solutions is an ANAB accredited test site. The ANAB certificate number is L2458. The scope of accreditation can be found on ANAB website www.anab.org

3. Description of Test Sample

The Microchip Technology, The MRF89XAM9A is an Ultra-Low-Power Sub-GHz surface mount transceiver module with integrated crystal, internal voltage regulator, matching circuitry and PCB antenna. The MRF89XAM9A module operates in the 902-928MHz ISM frequency band. The module interfaces to many Microchip PIC microcontrollers through a 4-wire SPO interface. The operating voltage is 3.3VDC typical.

4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 1	915 MHz Ultra Low-Power Sub-GHz Transceiver Module	MRF89XAM9A	BUR122829197

Table 1. Equipment Configuration

5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
#2	DC Power Supply	Hewlett Packard	E3610A	KR83021468
# 3	Laptop Computer	IBM	Thinkpad T 60	L3-4L6D7
# 4	Microcontroller Board	Microchip	Explorer 16/32	BUR180114137

Table 2. Support Equipment

6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
#3	Power	2 wire	1	2	N	DC Power
# 4	Serial	DB-9	1	2	N	Laptop Computer

Table 3. Ports and Cabling Information

7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

8. Mode of Operation

The EUT will be configured to transmit at maximum power level. Customer provide a Test software on a computer which communicated with the module via a serial port which sent all the required test commands. Test command allowed to cycle through test various test modes which allowed to select the lower, middle and upper band of the device. These commands allowed the selection of each channel and its mode from modulated to CW mode. These settings were created for testing purpose only.

9. Modifications

9.1 Modifications to EUT

No modifications were made to the EUT

9.2 Modifications to Test Standard

No Modifications were made to the test standard.

10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Microchip Technology upon completion of testing & certification

Criteria for Intentional Radiators

1. RF Power Output

Test Requirement(s):	§15.247(b)(3)	Test Engineer(s):	Hoosam B.
Test Results:	Pass	Test Date(s):	10/02/2018

Test Procedures: As required by 47 CFR 15.247(b)(3), RF Power output measurements were made at the RF output terminals of the EUT. DTS Procedure 9.2.2.2 was used for Average measurements

Customer provided a test mode to control the EUT RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer capable of making power measurements. Measurements were made at the low, mid, and high channels of the entire frequency band.


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Specification Limit
902.9	8.92	0.007	1W
915	10.27	0.011	1W
926.5	9.74	0.009	1W

Table 1. RF Power Output, Test Results


Test Setup:




Figure 1. RF Conducted Power Test Setup

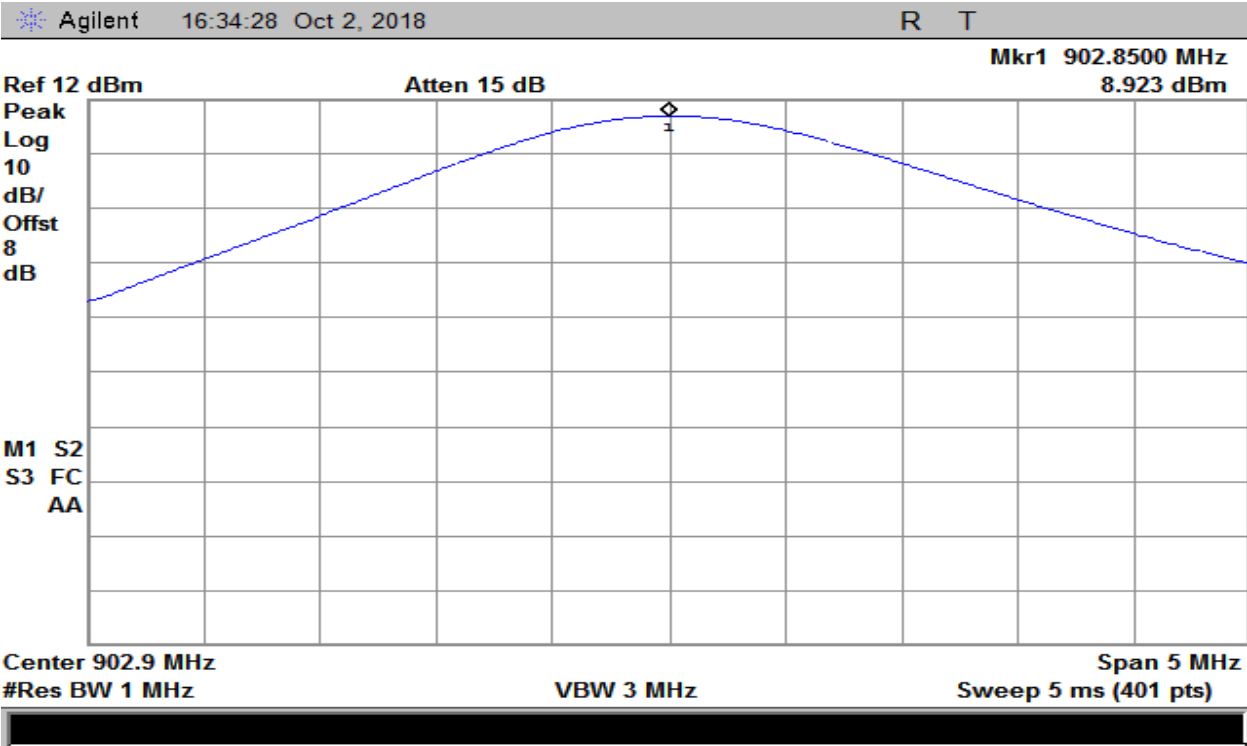

Plot 1 – Output Power – Lowest Channel

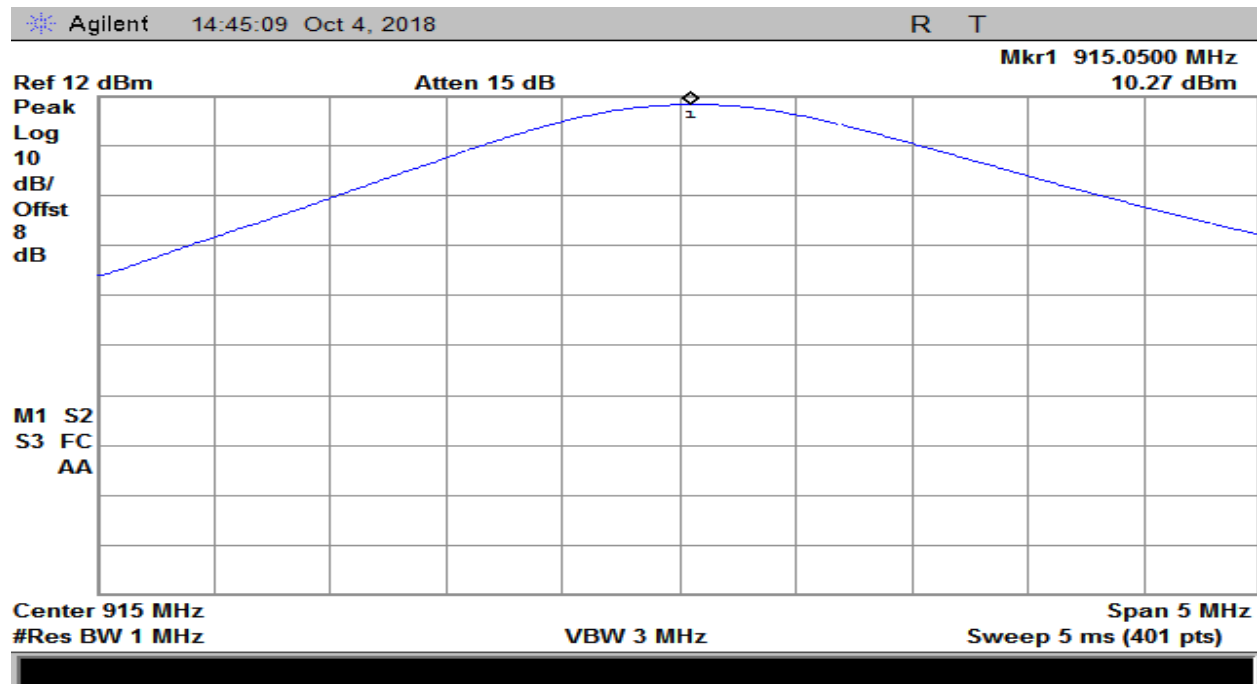

Plot 2– Output Power – Mid Channel

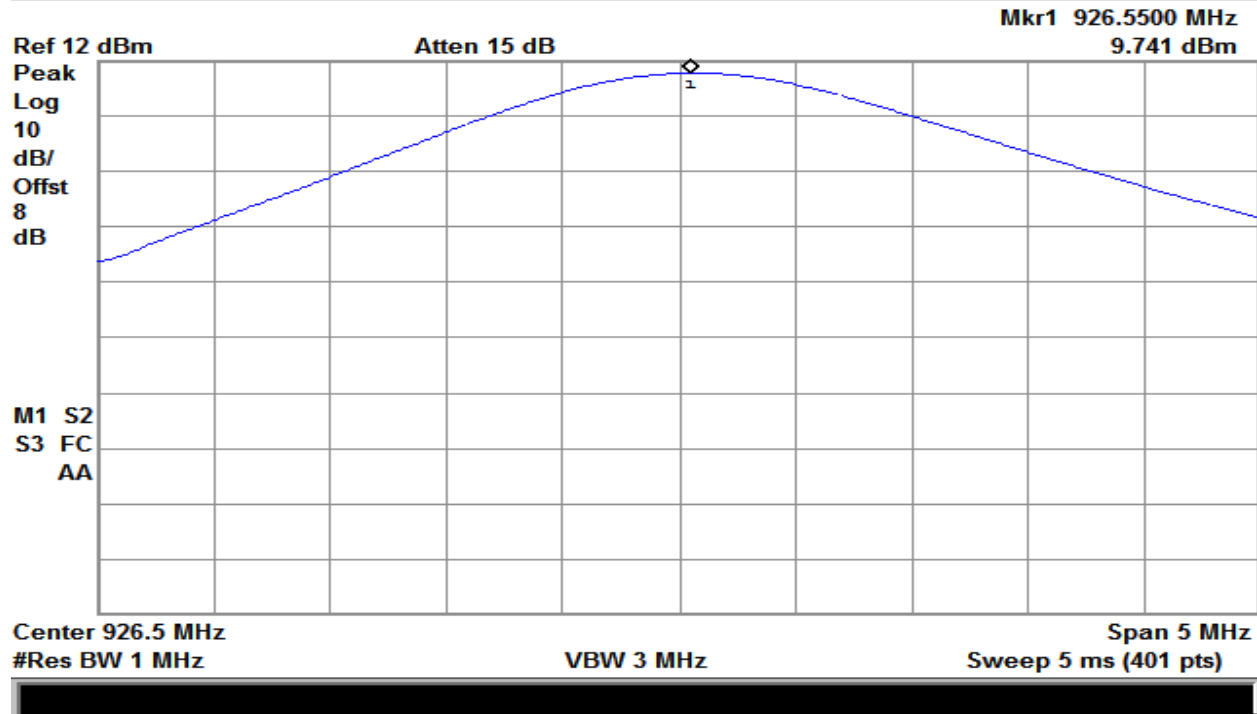

Plot 3 – Output Power – Highest Channel

2. Radiated Spurious Emissions and Restricted Band

Test Requirement(s):	§15.247(d), 15.209(a), 15.205	Test Engineer(s):	Jerry Mejak
Test Results:	Pass	Test Date(s):	10/09/2018

Test Procedures: As required by 47 CFR 15.247, Radiated spurious measurements were made in accordance with the procedures of the ANSI C63.10-2013.

The EUT was placed on a non-reflective table inside a 3 meter semi-anechoic room. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to the 10th harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was rotated throughout the X-axis, Y-axis and Z-axis. Worst case is X-axis

Detector Setting	Resolution Bandwidth	Video Bandwidth	Span
Peak	1MHz	1MHz	As necessary
Average	1MHz	10Hz	0 Hz

Table 2. Analyzer Settings

Test Procedures:

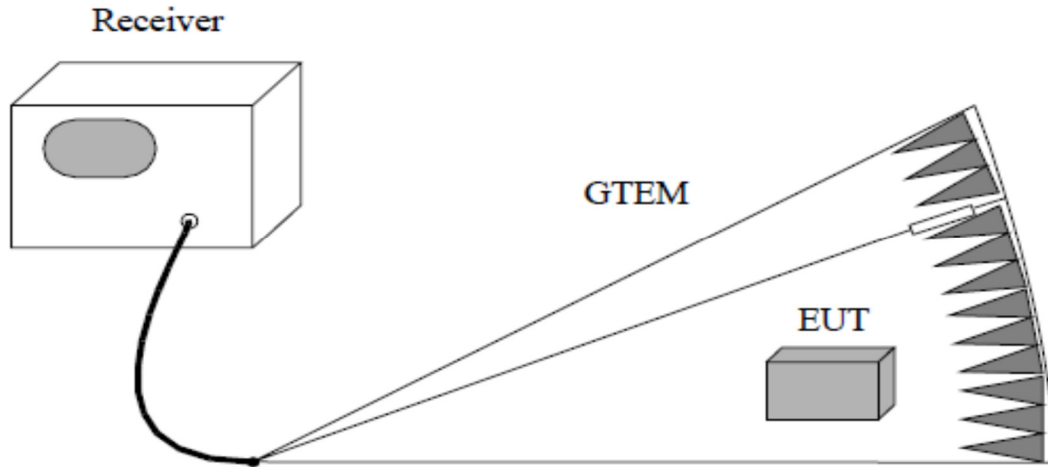


Figure 2. Radiated Emissions Test Setup (30MHz – 1GHz)

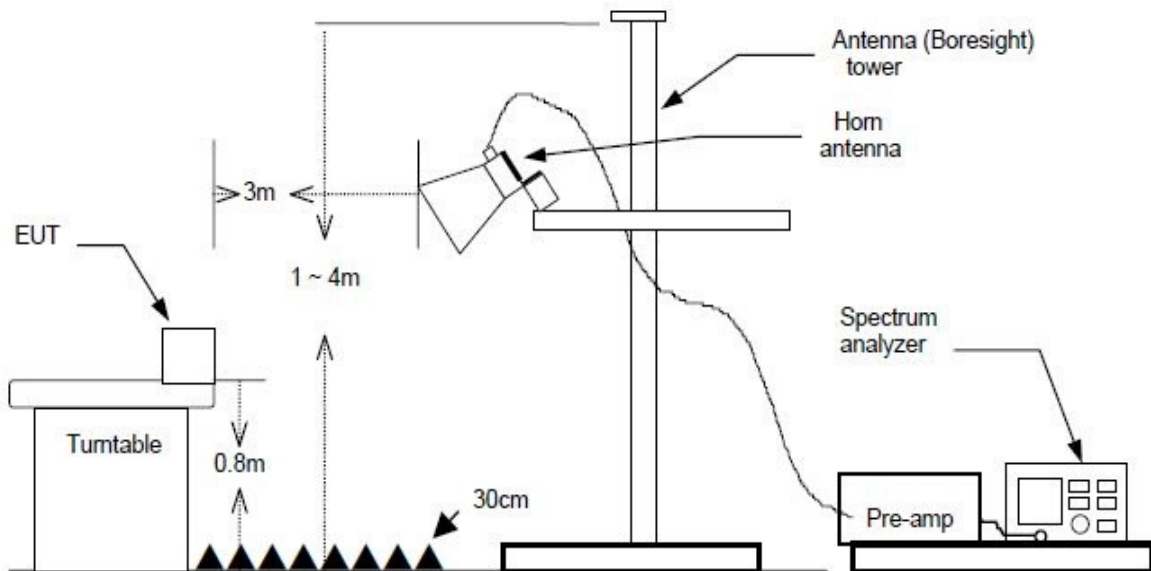


Figure 3. Radiated Emission Above 1GHz Test Setup

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1805.6	40.5	74.0	-	54.0
2706.9	N.F.	74.0	-	54.0

Table 3 - Spurious Radiated Emission Data – Lowest Channel

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1830	39.67	74.0	-	54.0
2745	N.F.	74.0	-	54.0

Table 4 – Spurious Radiated Emission Data – Mid Channel

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1853	34.5	74.0	-	54.0
2779.5	32.33	74.0	-	54.0

Table 5 – Spurious Radiated Emission Data – Highest Channel

NOTE 1: There were no detectable emissions above the 3th harmonic.

Emissions marked as “N.F” is system noise floor and no detectable emission were found from the EUT.

3. Emissions at Band Edges

Test Requirement(s):	§15.247(d), 15.209(a), 15.205	Test Engineer(s):	Hoosam B.
Test Results:	Pass	Test Date(s):	10/16/2018


Test Procedures: As required by 47 CFR 15.247, Band edge radiated emissions measurements were made at the RF antenna output terminals of the EUT.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.


The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The EUT was set up at maximum power, first on the lowest operating channel, then on the highest operating channel of the transmit band.

Frequency (MHz)	Measured Level (dB)	Detector	Limit
902.0	-32.6	Peak	-20dBc
928.0	-29.23	Peak	-20dBc


Table 6 – Band Edge Emissions Summary – Worst Case

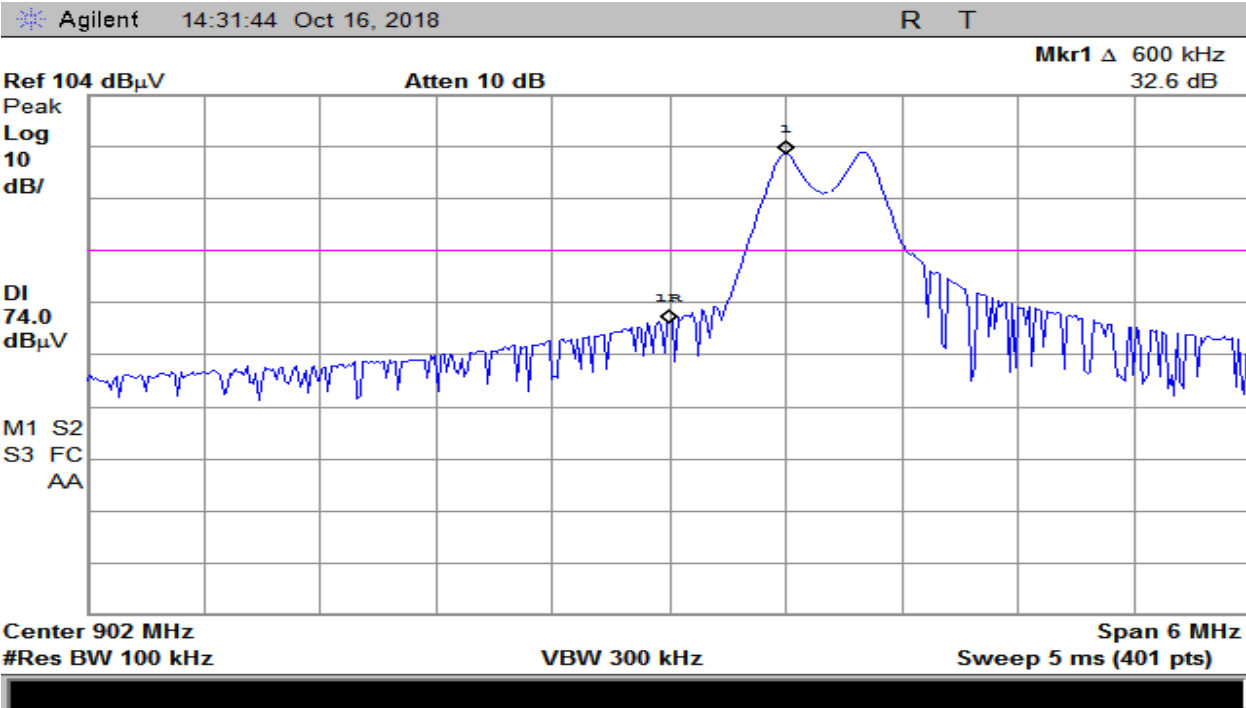


Plot 4 – Lowest Channel (Band Edge) - 50kbps Data Rate

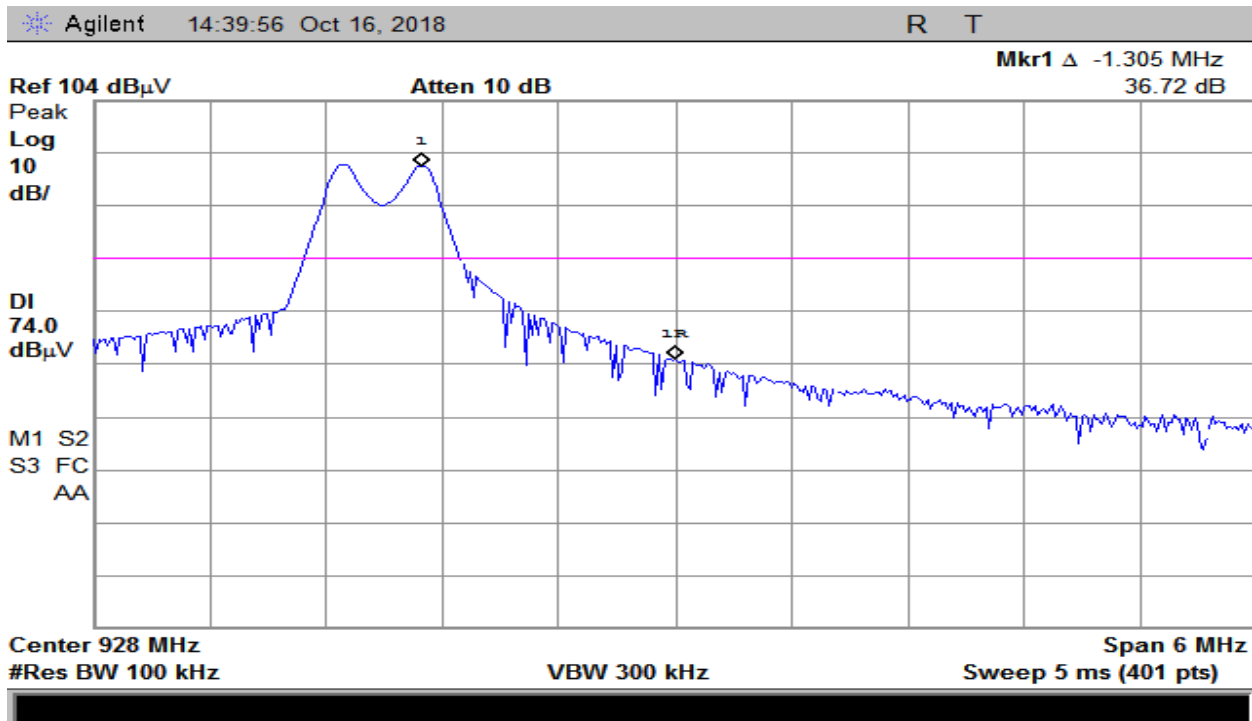

Plot 5 – Highest Channel (Band Edge) – 50kbps Data Rate

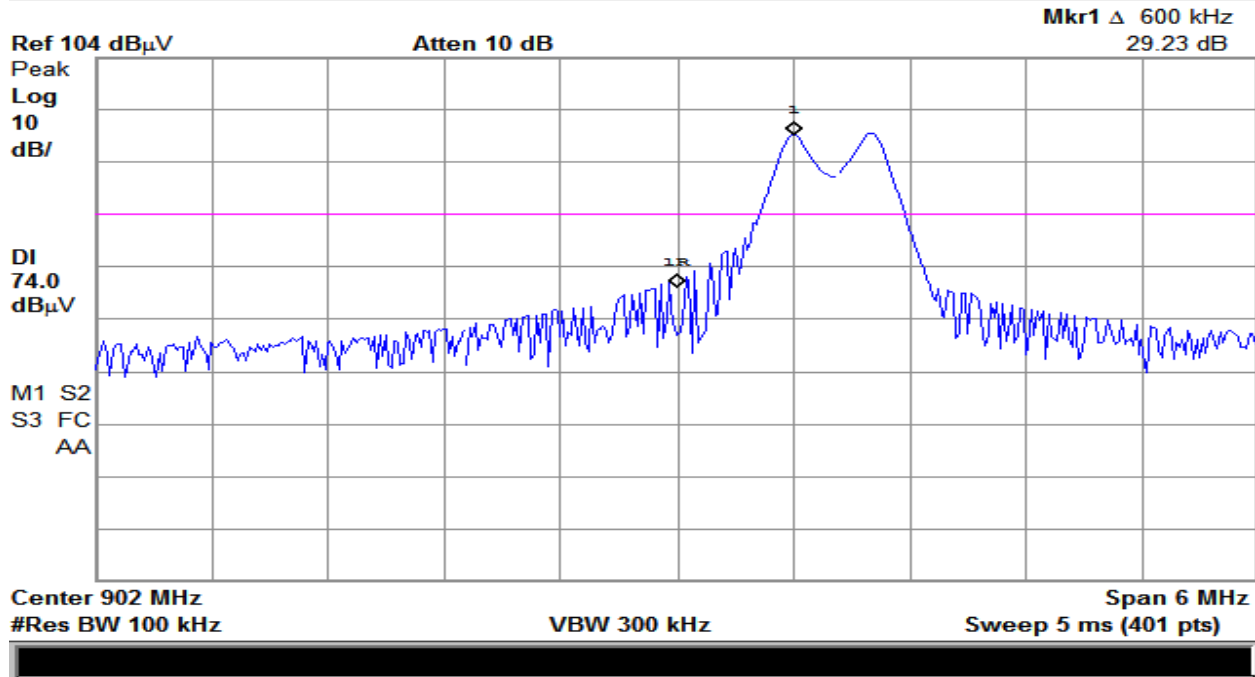

Plot 6 – Lowest Channel (Band Edge)- 2kbps Data Rate

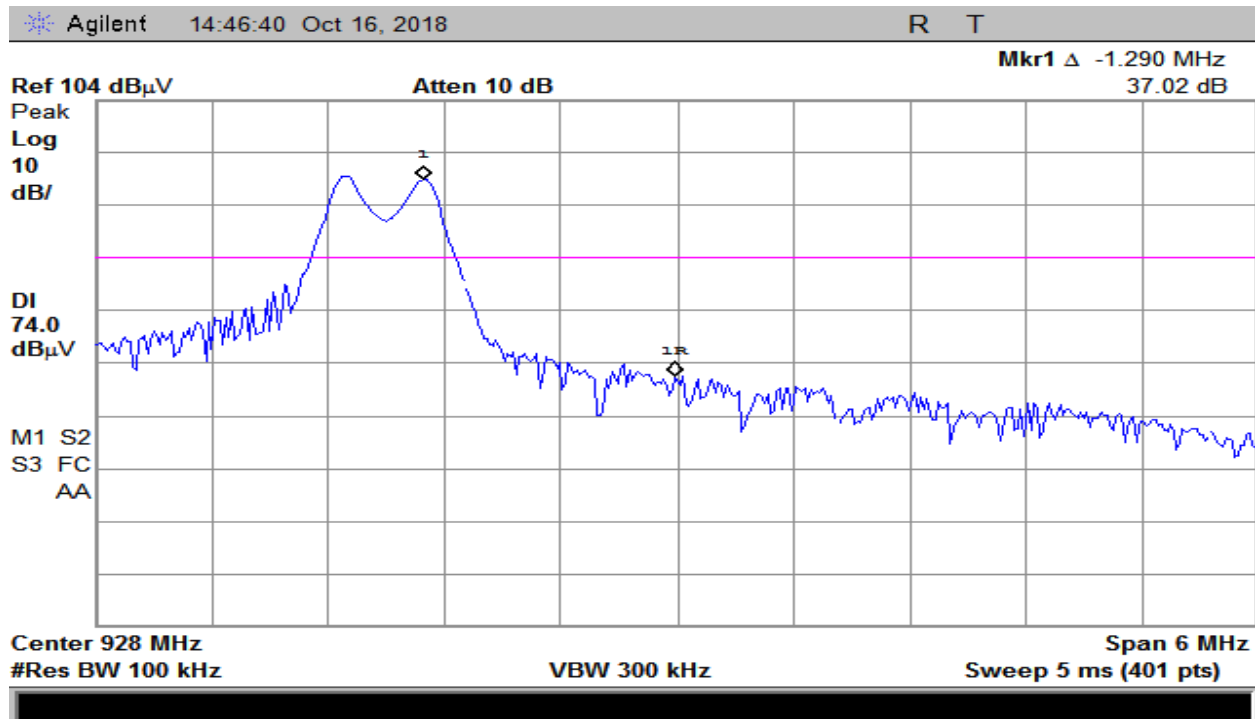

Plot 7 – Highest Channel (Band Edge) – 2kbps Data Rate

4. Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E4402B	US41192757	Mar/19/18	Mar/19/19
Power Supply	Hewlett Packard	E3610A	KR83021468	Verified	
Temperature/Humidity Meter	Control Company	4800	31874/H2048MCR	Oct/19/17	Oct/19/19
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Jan/30/18	Jan/20/19
High Pass Filter	Mini-Circuits	VHF-3100+	1023	Verified	
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
EMI Receiver	Hewlett Packard	8568B	2314A02642	Aug/08/18	Aug/08/19
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
Signal Generator	R&S	SMY02	1062.5502.12	NCR	None
Attenuator 10dB	Huber+Suhner	6810.17.A	747300	Verified	
Antenna	EMCO	GTEM-5417	1063	11-May-16	11-May-19
Horn Antenna	Com-Power	AHA-118	711150	May/10/16	May/10/19

Table 7 – Test Equipment List

***Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

5. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The following measurement uncertainty values have been calculated as show in the table below:

Measured Parameter	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions (AC Power)	dBuV or dBuA	150kHz – 30MHz	± 4.3dB
Radiated Emission below 30MHz	dBuV/m	9kHz-30MHz	± 2.96dB
Radiated Emissions below 1GHz	dBuV/m	30 – 1000MHz	± 5.6dB
Radiated Emissions above 1GHz	dBuV/m	1 – 26.5GHz	± 4.1dB

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

END OF TEST REPORT