



H.B. Compliance Solutions

Intentional Radiator Class II Permissive Change Test Report

For the

Microchip Technology Inc.

915 MHz Ultra Low-Power Sub GHz Transceiver Module

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 15.249

Prepared for:

Microchip Technology Inc.

2355 W. Chandler Blvd.

Chandler, Arizona 85244

Prepared By:

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

Reviewed By:

A handwritten signature in black ink, appearing to read 'Hoosamuddin Bandukwala'.

Hoosamuddin Bandukwala



Cert # ATL-0062-E

Engineering Statement: The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 15 of the FCC Rules under normal use and maintenance. All results contained herein relate only to the sample tested.

Report Status Sheet

Revision #	Report Date	Reason for Revision
∅	October 16, 2018	Initial Issue
1	November 9, 2018	TCB Comments

Table of Contents

EXECUTIVE SUMMARY	4
1. Testing Summary.....	4
EQUIPMENT CONFIGURATION.....	5
1. Overview	5
2. Test Facility.....	6
3. Description of Test Sample	6
4. Equipment Configuration	6
5. Support Equipment	6
6. Ports and Cabling Information.....	7
7. Method of Monitoring EUT Operation.....	7
8. Mode of Operation.....	7
9. Modifications	7
10. Disposition of EUT	7
Criteria for Un-Intentional Radiators	8
1. Radiated Emissions.....	8
Emissions Tests Calculations.....	9
Criteria for Intentional Radiators	11
1. Radiated Fundamental Emissions.....	11
2. Radiated Spurious Emissions	13
3. Emissions at Band Edges.....	15
4. Test Equipment	17
5. Measurement Uncertainty.....	18

EXECUTIVE SUMMARY

1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15.249. All tests were conducted using measurement procedure from ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz to 40GHz as appropriate.

Test Name	Test Method/Standard	Result	Comments
Unintentional Radiated Emissions	15.109	Pass	
Radiated Fundamental Emissions	15.249(a)	Pass	
Radiated Spurious Emissions	15.249(a)(d)(e), 15.209(a), 15.205, 15.35(C)	Pass	Addition of RF Metal Shield.
Emissions at Band Edges & Restricted Band	15.249, 15.209(a), 15.205	Pass	

Class II Permissive Change

RF Metal Shield installed on the board around the RF circuitry (including Crystal and SAW filter) and the Transceiver Chip.

EQUIPMENT CONFIGURATION

1. Overview

H.B Compliance Solutions was contracted by Microchip Technology Inc. to perform testing on the 915 MHz Ultra Low Power Sub-GHz Transceiver Module under the purchase order number 83006567.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Microchip Technology, Transceiver module.

The tests were based on FCC Part 15 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Microchip Technology should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

Product Name:	915 MHz Ultra Low-Power Sub GHz Transceiver Module
Model(s) Tested:	MRF89XAM9A
FCC ID:	OA3MRF89XAM9A
Supply Voltage Input:	Primary Power: 3.3 Vdc
Frequency Range:	903-927MHz
No. of Channels:	Single Channel
Type(s) of Modulation:	OOK
Range of Operation Power:	0.02uW (Radiated)
Emission Designator:	N/A
Channel Spacing(s)	None
Test Item:	Pre-Production
Type of Equipment :	Fixed
Antenna Requirement (§15.203) :	Type of Antenna: PCB Meander Gain of Antenna: -1.0dBi
Environmental Test Conditions:	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Modification to the EUT:	None
Evaluated By:	Staff at H.B Compliance Solutions
Test Date(s):	10/02/2018 till 10/16/2018

2. Test Facility

All testing was performed at H.B. Compliance Solutions. This facility is located at 5005 S. Ash Avenue, Suite # A-10, Tempe AZ-85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements from 30MHz to 1GHz were performed in a GTEM chamber (equivalent to an Open Area Test Site). Radiated Emissions Above 1GHz were performed on an Open Area Test Site (OATS). In accordance with §2.948(a)(3), a complete site description is contained at H.B. Compliance Solutions. EUT size approved for FCC testing for GTEM use is 34.1" W x 22.8" H.

Test facility H.B. Compliance Solutions is an ANAB accredited test site. The ANAB certificate number is L2458. The scope of accreditation can be found on ANAB website www.anab.org

3. Description of Test Sample

The Microchip Technology, The MRF89XAM9A is an Ultra-Low-Power Sub-GHz surface mount transceiver module with integrated crystal, internal voltage regulator, matching circuitry and PCB antenna. The MRF89XAM9A module operates in the 902-928MHz ISM frequency band. The module interfaces to many Microchip PIC microcontrollers through a 4-wire SPO interface. The operating voltage is 3.3VDC typical.

4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 1	915 MHz Ultra Low-Power Sub-GHz Transceiver Module	MRF89XAM9A	BUR122829197

Table 1. Equipment Configuration

5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
#2	DC Power Supply	Hewlett Packard	E3610A	KR83021468
# 3	Laptop Computer	IBM	Thinkpad T 60	L3-4L6D7
# 4	Microcontroller Board	Microchip	Explorer 16/32	BUR180114137

Table 2. Support Equipment

6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
#3	Power	2 wire	1	2	N	DC Power
# 4	Serial	DB-9	1	2	N	Laptop Computer

Table 3. Ports and Cabling Information

7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

8. Mode of Operation

The EUT will be configured to transmit at maximum power level. Customer provide a Test software on a computer which communicated with the module via a serial port which sent all the required test commands. Test command allowed to cycle through test various test modes which allowed to select the lower, middle and upper band of the device. These commands allowed the selection of each channel and its mode from modulated to CW mode. These settings were created for testing purpose only.

9. Modifications

9.1 Modifications to EUT

No modifications were made to the EUT

9.2 Modifications to Test Standard

No Modifications were made to the test standard.

10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Microchip Technology upon completion of testing & certification

Criteria for Un-Intentional Radiators

1. Radiated Emissions

Test Requirement(s):	§15.109	Test Engineer(s):	Jerry Mejak
Test Results:	Pass	Test Date(s):	10/02/2018

Test Procedures:

The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by varying table azimuth, antenna height, and manipulating cables.

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.

Tests were made with the antenna positioned in both the horizontal and vertical polarization planes. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 3 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
30 MHz to 1 GHz	120 kHz	120 kHz	N/A
1 GHz to 11 GHz	1MHz	N/A	1MHz
Measurements were made using the bandwidths and detectors specified. The video filter was at least as wide as the IF bandwidth of the measuring receiver.			

Table 4. Radiated Emissions – Measurement Bandwidth

Emissions Tests Calculations

In the case of indoor measurements, radiated emissions measurements are made by the manipulation of correction factors using TILE software. This is done automatically by the software during the final measurement process.

In both cases, the level of the Field Strength of the interfering signal is calculated by adding the Antenna Factor, Cable Factor and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + (CF - AG)$$

Where: FS = Field Strength

RA = Receiver (indicated) Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

This laboratory uses an approach of combining the CF and AG using an end-to-end measurement of the entire cabling system, including the test cable, any in-line amplifiers, attenuators, or transient protection networks, all measured in-situ.


For a sample calculation, assume a receiver reading of 52.5 dBuV is obtained. With an antenna factor of 7.4 and a combined cable factor (CF + AG) of -27.9:

$$FS = 52.5 + 7.4 + (-27.9) = 32 \text{ dBuV/m}$$

$$FS = 32 \text{ dBuV/m}$$

If desired, this can be converted into its corresponding level in uV/m:

$$FS = 10^{((32 \text{ dBuV/m})/20)} = 39.8 \text{ uV/m}$$

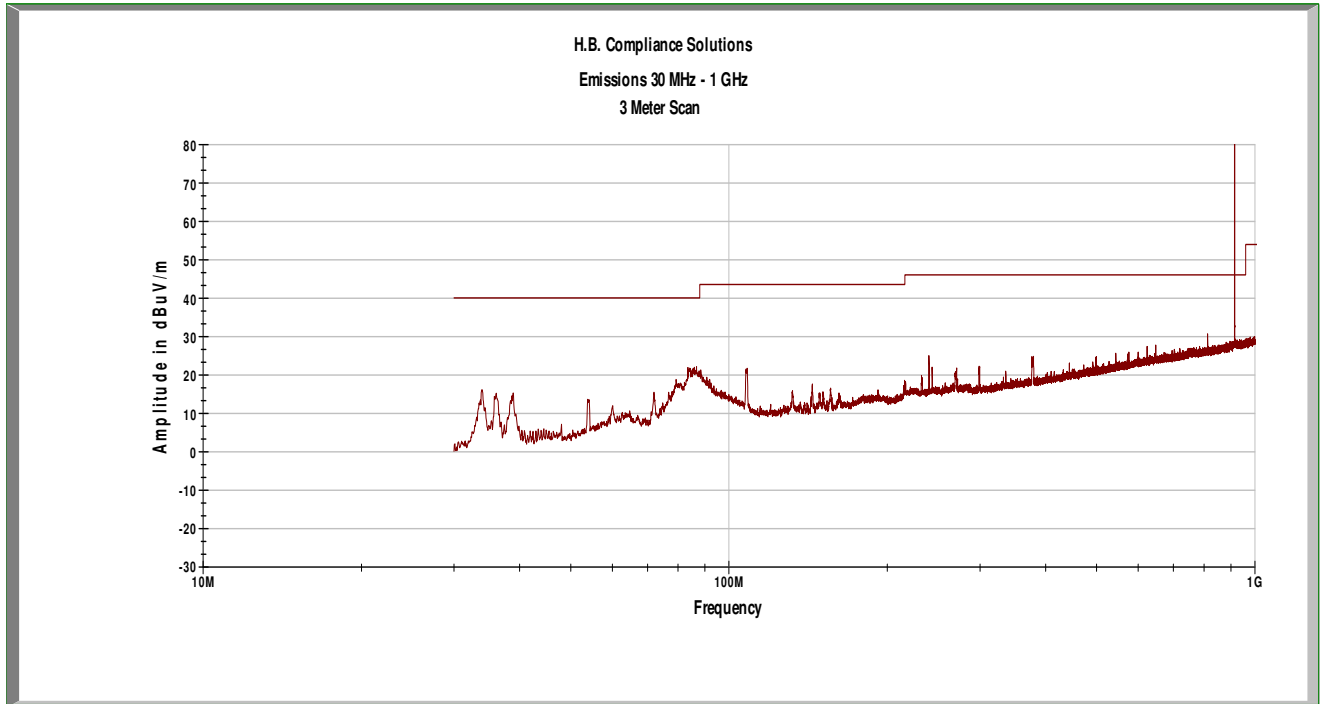

Plot 1 – Radiated Emissions – 30MHz to 1GHz

Frequency (MHz)	Measured Level	Limit (dBuV)	Margin (dB)
38.5	15.3	40	-24.7
85.8	21.9	40	-18.1
239.9	24.9	46	-21.1

Table 5. Final Measurement Results for Radiated Emissions

Note: Peak at 915MHz is from the Intentional Radiator which is excluded from this test

Criteria for Intentional Radiators

1. Radiated Fundamental Emissions

Test Requirement(s):	§15.249(a)	Test Engineer(s):	Jerry M.
Test Results:	Pass	Test Date(s):	10/09/2018

Test Procedures: As required by 47 CFR 15.249, Radiated emission measurements were made in accordance with the procedures of the ANSI C63.4 - 2014.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT

Frequency Range	Detector Setting	Resolution Bandwidth	Video Bandwidth	Span
30MHz – 1000 MHz	Quasi Peak	120kHz	As Specified in §15.35(c)	Zero
1000 MHz – 5GHz	Peak	1MHz	1MHz	As necessary
1000 MHz – 5GHz	Average	1MHz	As Specified in §15.35(c)	As necessary

Table 6 - Analyzer Settings

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical

Frequency (MHz)	Peak Measurement @ 3m (dBuV/m)	Antenna Polarity (H/V)	Average Amplitude (dBuV/m)	FCC Average Limit (dBuV/m)	Margin (dB)	Comment
903.0	57	V	N/A	94	-37	Fundamental
915.0	60.0	V	N/A	94	-34	Fundamental
927.0	58.5	V	N/A	94	-35.3	Fundamental

Table 7 – Fundamental Field Strength

Remark:

To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-Axis. Worst case is X-axis.

2. Radiated Spurious Emissions

Test Requirement(s):	§15.249(a)(b)(e), 15.209(a), 15.205, 15.35	Test Engineer(s):	Jerry M.
Test Results:	Pass	Test Date(s):	10/09/2018

Test Procedures: As required by 47 CFR 15.231, Radiated emission measurements were made in accordance with the procedures of the ANSI C63.4 - 2014.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to the 10th harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-Axis. Worst case is X-axis.

Frequency Range	Detector Setting	Resolution Bandwidth	Video Bandwidth	Span
30MHz – 1000 MHz	Quasi Peak	120kHz	As Specified in §15.35(c)	Zero
1000 MHz – 5GHz	Peak	1MHz	1MHz	As necessary
1000 MHz – 5GHz	Average	1MHz	As Specified in §15.35(c)	As necessary

Table 8 - Analyzer Settings

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical

Frequency (MHz)	Peak Measurement @ 3m (dBuV/m)	Antenna Polarity (H/V)	Average Amplitude (dBuV/m)	FCC Average Limit (dBuV/m)	FCC Peak Limit (dBuV/m)	Average Margin (dB)	Peak Margin (dB)	Comment
1805.6	36.0*	V	N/A	54	74	-18	-38.0	Harmonic

Table 9 - Radiated Spurious Emission Data – 30MHz – 10GHz (Lowest Channel)

Frequency (MHz)	Peak Measurement @ 3m (dBuV/m)	Antenna Polarity (H/V)	Average Amplitude (dBuV/m)	FCC Average Limit (dBuV/m)	FCC Peak Limit (dBuV/m)	Average Margin (dB)	Peak Margin (dB)	Comment
1830	32.5*	V	N/A	54	74	-21.5	-41.5	Harmonic

Table 10 - Radiated Spurious Emission Data – 30MHz – 10GHz (Mid Channel)

Frequency (MHz)	Peak Measurement @ 3m (dBuV/m)	Antenna Polarity (H/V)	Average Amplitude (dBuV/m)	FCC Average Limit (dBuV/m)	FCC Peak Limit (dBuV/m)	Average Margin (dB)	Peak Margin (dB)	Comment
1853.6	33.17*	V	N/A	54	74	-20.83	-40.83	Harmonic

Table 11 - Radiated Spurious Emission Data – 30MHz – 10GHz (Highest Channel)

Note: Emissions marked as “*” is system noise floor and no detectable emission were found from the EUT.

3. Emissions at Band Edges

Test Requirement(s):	§15.249(d), 15.209(a), 15.205	Test Engineer(s):	Hoosam B.
Test Results:	Pass	Test Date(s):	11/09/2018


Test Procedures: As required by 47 CFR 15.249, Band edge radiated emissions measurements were made at the RF antenna output terminals of the EUT.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.


The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The EUT was set up at maximum power, first on the lowest operating channel, then on the highest operating channel of the transmit band.

Frequency (MHz)	Measured Level (dBuV)	Detector	Limit (dBuV)
902.0	44.76	Peak	46.0
928.0	33.95	Peak	46.0

Table 12 – Band Edge Emissions Summary

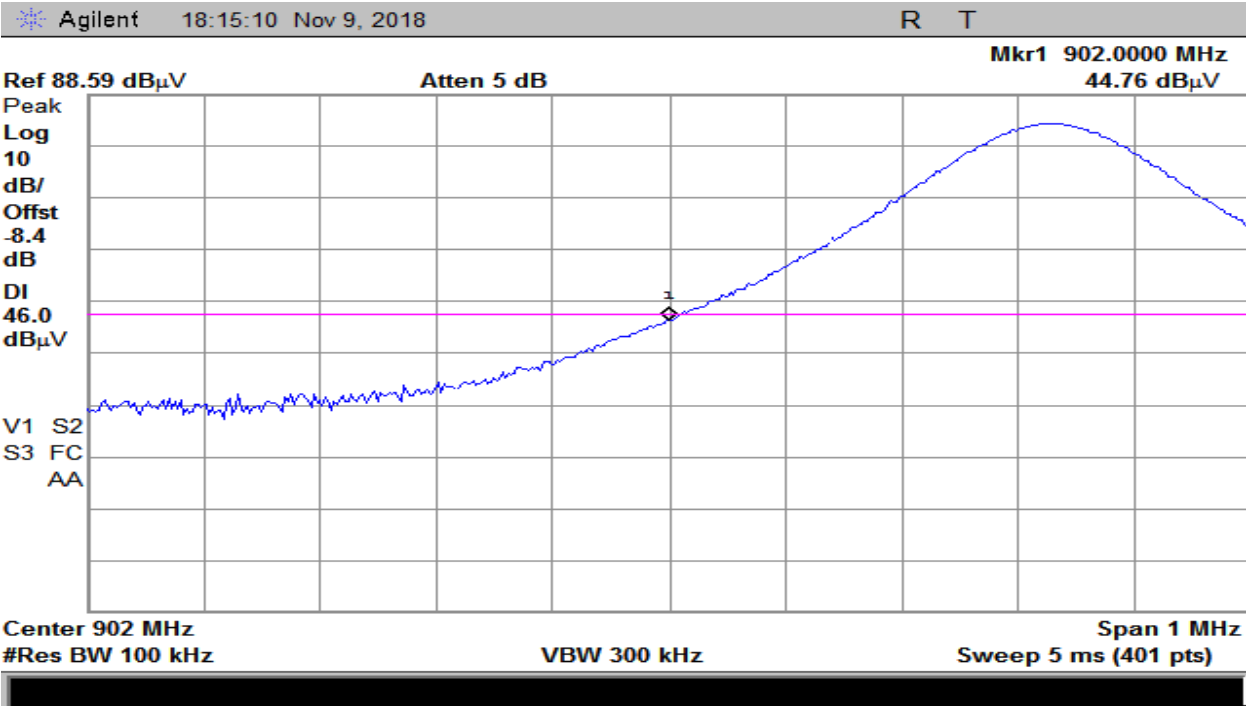

Plot 2 – Lowest Channel (Band Edge)

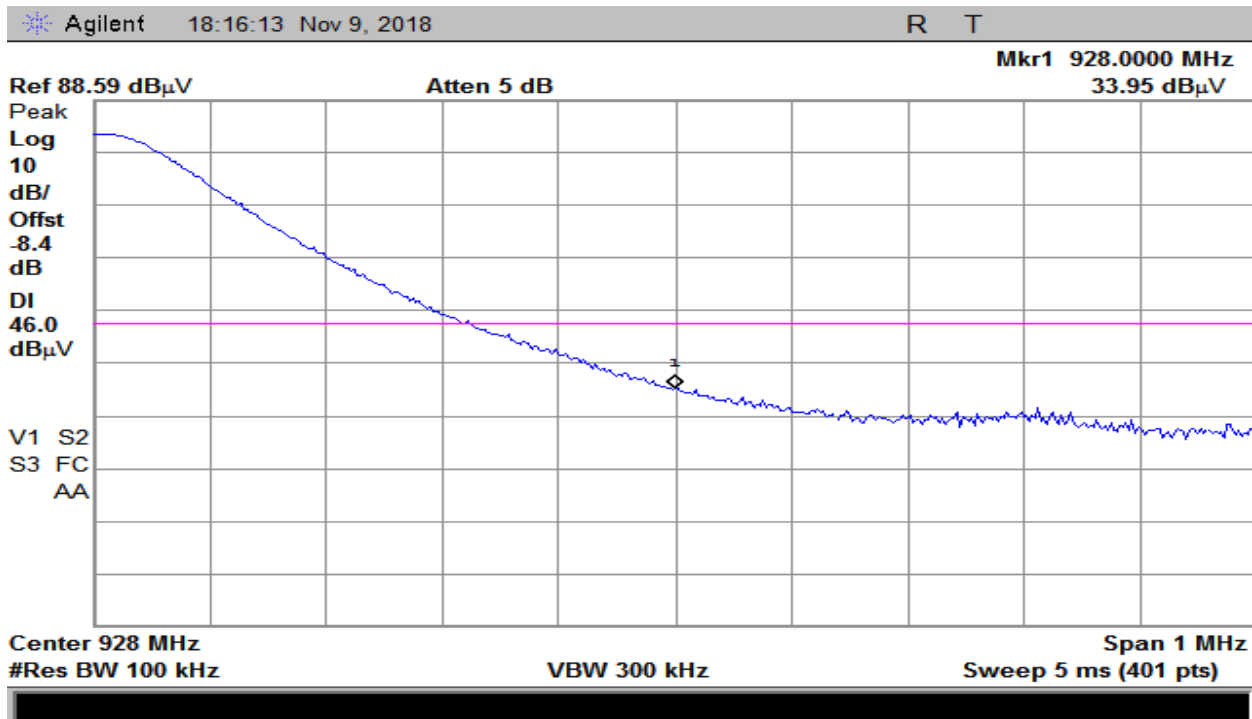

Plot 3 – Highest Channel (Band Edge)

4. Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E4402B	US41192757	Mar/19/18	Mar/19/19
Power Supply	Hewlett Packard	E3610A	KR83021468	Verified	
Temperature/Humidity Meter	Control Company	4800	31874/H2048MCR	Oct/19/17	Oct/19/19
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Jan/30/18	Jan/20/19
High Pass Filter	Mini-Circuits	VHF-3100+	1023	Verified	
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
EMI Receiver	Hewlett Packard	8568B	2314A02642	Aug/08/18	Aug/08/19
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
Signal Generator	R&S	SMY02	1062.5502.12	NCR	None
Attenuator 10dB	Huber+Suhner	6810.17.A	747300	Verified	
Antenna	EMCO	GTEM-5417	1063	11-May-16	11-May-19
Horn Antenna	Com-Power	AHA-118	711150	May/10/16	May/10/19

Table 13 – Test Equipment List

***Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

5. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The following measurement uncertainty values have been calculated as show in the table below:

Measured Parameter	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions (AC Power)	dBuV or dBuA	150kHz – 30MHz	± 4.3dB
Radiated Emission below 30MHz	dBuV/m	9kHz-30MHz	± 2.96dB
Radiated Emissions below 1GHz	dBuV/m	30 – 1000MHz	± 5.6dB
Radiated Emissions above 1GHz	dBuV/m	1 – 26.5GHz	± 4.1dB

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

END OF TEST REPORT