FCC PART 15 SUBPART C TEST REPORT

for

2.4 GHz IEEE Std. 802.11 b/g Wireless LAN Module

Model No.: RN1723

FCC ID: OA3RN1723

of

Applicant: Microchip Technology Inc. Address: 2355 West Chandler Blvd. Chandler, Arizona, United States 85224-6199

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01



Report No.: W6D21501-14761-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: <u>wts@wts-lab.com</u>



TABLE OF CONTENTS

1	GE	NERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	3
	1.2.	1 Location	3
	1.2.	.2 Details of accreditation status	3
	1.3	DETAILS OF APPROVAL HOLDER	3
	1.4	APPLICATION DETAILS	4
	1.5	GENERAL INFORMATION OF TEST ITEM	4
	1.6	TEST STANDARDS	5
2	TE	CHNICAL TEST	6
	2.1	SUMMARY OF TEST RESULTS	6
	2.2	Test environment	6
	2.3	Test Equipment List	7
	2.4	General Test Procedure	10
3	TE	ST RESULTS (ENCLOSURE)	12
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	13
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	
	3.3	RF Exposure Compliance Requirements	
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	
	3.5	Spurious Emissions (TX)	
	3.6	RADIATED EMISSION ON THE BAND EDGE	
	3.7	MINIMUM 6 DB BANDWIDTH	
	3.8	PEAK POWER SPECTRAL DENSITY	
	3.9	RADIATED EMISSION FROM RECEIVER PART	
	3.10	Power Line Conducted Emission	
	5.10	I OWER LINE CONDUCTED LIMISSION	



<u>1</u> General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g.

This report is related to FCC Part 15 C (DSSS and OFDM device).

Tester:

January 27, 2015

Rick Chen

Rick Chen.

Date

WTS-Lab. Name

Signature

Technical responsibility for area of testing:

January 27, 2015

Kevin Wang

Name

Kevin Wang

Date

WTS

Signature



1.2 Testing laboratory

1.2.1 Location
OATS
No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)
3 meter semi-anechoic chamber
No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)
TEL:886-2-6613-0228
FAX:886-2-2791-5046

Company Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C. Tel : 886-2-66068877 Fax : 886-2-66068875 **1.2.2 Details of accreditation status**

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name:	./
Accredited number:	./
Street:	./
Town:	./
Country:	./
Telephone:	./
Fax:	./

1.3 Details of approval holder

Name:	Microchip Technology Inc.
Street:	2355 West Chandler Blvd.
Town:	Chandler, Arizona, 85224-6199
Country:	United States
Telephone:	(480) 792-7200
Fax:	(480) 899-9210



1.4 Application details

Date of receipt of test item:	January 21, 2015
Date of test:	from January 22, 2015 to January 26, 2015

1.5 General information of Test item

Type of test item:	2.4 GHz IEEE Std. 802.11 b/g Wireless LAN Module
Model Number:	RN1723
Brand Name:	Microchip
Multi-listing model number:	./.
Photos:	see Appendix
Technical data	
Frequency band:	2.4 GHz – 2.4835 GHz
11b, 11g	
Frequency (ch 1 or A):	2.412 GHz
Frequency (ch 6 or B):	2.437 GHz
Frequency (ch 11 or C):	2.462 GHz
Number of Channels:	11
Operation modes:	duplex
Modulation Type:	DSSS / OFDM
Fixed point-to-point operation:	\Box Yes / \boxtimes No
Type of Antenna:	
Antenna 1: Dipole antenna ; antenna Antenna 2: Dipole antenna; antenna Antenna 3: PCB antenna ; antenna Antenna 4: Wired antenna ; antenna Antenna 5: Chip antenna; antenna g	a gain: 1 dBi gain: 0 dBi a gain: 0 dBi
Power supply:	7 Vdc (from host)
Emission designator:	11b: DSSS: 16M0G1D
	11g: OFDM: 16M5W7D
Host device:	none



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Classification :	
Fixed Device	
Mobile Device (Human Body distance > 20 cm)	
Portable Device (Human Body distance < 20 cm)	
Modular Radio Device	\boxtimes

Transmitter

<u>Unom</u>

Mode A (802.11b)

Power (ch 1 or A):	Conducted: 17.77 dBm
Power (ch 6 or B):	Conducted: 17.96 dBm
Power (ch 11 or C):	Conducted: 18.27 dBm

Mode B (802.11g)

Power (ch 1 or A):	
Power (ch 6 or B):	
Power (ch 11 or C):	

Conducted: 17.09 dBm Conducted: 16.47 dBm Conducted: 16.87 dBm

Manufacturer: (if applicable)

Name:	./.
Street:	./.
Town:	./.
Country:	./.

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART B / SUBPART C § 15.247 (2013-10)



2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	×
or	
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	

2.2 Test environment

Temperature:	23 °C
Relative humidity content:	20 75 %
Air pressure:	86 103 kPa
Power supply:	7 Vdc (from host)

Extreme conditions parameters: ./.



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

2.3 Test Equipment List

No.	Test equipment	Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2010/9/2	2011/9/1
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO- LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2010/3/2	2011/3/1
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2010/9/8	2011/9/7
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2010/5/8	2011/5/7
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test	Use NCR
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Functi	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2010/7/21	2011/7/20
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2010/10/21	2011/10/20
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2010/9/6	2011/9/5
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	Functi	on Test
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2010/8/10	2011/8/9
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2010/9/14	2011/9/13
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2010/9/2	2011/9/1
ETSTW-RE 006	Attenuator 10dB	50HF-010-5N-1	None	STEP	2010/3/5	2011/3/4
ETSTW-RE 010	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2010/9/6	2011/9/5
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2010/10/4	2011/10/3
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Functi	on Test
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2010/8/20	2011/8/19
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	2010/7/22	2011/7/21
ETSTW-RE 028	Log-Periodic Dipole Array Antenna	3148	34429	EMCO	2010/4/14	2011/4/13
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2010/4/14	2011/4/13
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2010/3/2	2011/3/1
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2010/10/4	2011/10/3
ETSTW-RE 033	WaveRunner 6000A Serise Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	Functi	on Test
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2010/10/4	2011/10/3
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2011/1/6	2012/1/5
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2010/5/11	2011/5/10
ETSTW-RE 047	PSA SERIES SPECTRUM ANALYZER	E4445A	MY46181369	Agilent	Pre-test	Use NCR
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2010/8/30	2011/8/29
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2010/4/13	2011/4/12



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2010/6/3	2011/6/2
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2009/3/6	2011/3/6
ETSTW-RE 061	Amplifier Module	CHC 1	None	ETS	2010/9/27	2011/9/26
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2010/11/30	2011/11/29
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Functi	on Test
ETSTW-RE 065	Amplifier	AMF-6F- 18002650-25-10P	941608	MITEQ	2010/4/13	2011/4/12
ETSTW-RE 066	Highpass Filter	H1G013G1	206015	MICROWAVE CIRCUITS, INC.	2010/3/5	2011/3/4
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2010/10/7	2011/10/6
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	2011/1/6	2012/1/5
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	2011/1/6	2012/1/5
ETSTW-RE 081	Highpass Filter	H03G13G1	4260-02 DC0428	MICROWAVE CIRCUITS, INC.	2010/3/5	2011/3/4
ETSTW-RE 096	SIGNAL GENERATOR	SMIQ 03B	102274	R&S	2010/5/31	2011/5/30
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 105	2.4GHz Notch Filter	NO124411	39555	MICROWAVE CIRCUITS, INC.	2010/3/25	2011/3/24
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2010/3/25	2011/3/24
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2010/10/7	2011/10/6
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2011/1/6	2012/1/5
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2011/1/6	2012/1/5
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880 .5-1875.5/1884.5- 32/5SS	3	WI	2011/1/6	2012/1/5
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2011/1/6	2012/1/5
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2010/9/20	2011/9/19
ETSTW-Cable 002	Microwave Cable	SUCOFLEX 104 (S_Cable 7)	238093	HUBER+SUHNER	2010/9/27	2011/9/26
ETSTW-Cable 003	Microwave Cable	SUCOFLEX 104 (S_Cable 11)	209953	HUBER+SUHNER	2010/9/27	2011/9/26
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2010/3/5	2011/3/4
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	2010/8/19	2011/8/18
ETSTW-Cable 012	BNC Cable	BNC Cable 2	None	JYE BAO CO.,LTD.	2010/8/19	2011/8/18
ETSTW-Cable 013	Microwave Cable	SUCOFLEX 104 (S_Cable 5)	232345	HUBER+SUHNER	2010/3/5	2011/3/4
ETSTW-Cable 022	N TYPE Cable	OATS Cable 3	0002	JYE BAO CO.,LTD.	2010/3/5	2011/3/4
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2010/9/13	2011/9/12
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2010/9/13	2011/9/12
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2010/11/30	2011/11/29
		SUCOFLEX 104				



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2010/11/30	2011/11/29
WTSTW-SW 001	EMI TEST SOFTWARE	Harmonics-1000	None	EMC PARTNER	HARCS Version 4.16 Firmware Version 2.18	
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 003	EMS TEST SOFTWARE	i2	None	AUDIX	Version 3.2007-8-17b	
WTSTW-SW 005	GSM Fading Level Correction	GSMFadLevCor	None	R&S	Versio	on 1.66



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of $dB\mu V$) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example: Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS 33 $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m}@3m$

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: 930600.



When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows: Average = Peak + Duty Factor Duty Factor = 20 log (dwell time/T) T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB



3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	X	×	
Equivalent radiated Power	15.247(b)(3)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	X	×	
operating	15.209			
Band Edge Measurement	15.247(c)	×	X	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	X	
Peak Power Spectral Density	15.247(d)	×	X	
Radiated Emission from Receiver Part	15.109			
Power Line Conducted Emission	15.207			




3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.


The power was measured with modulation (declared by the applicant).

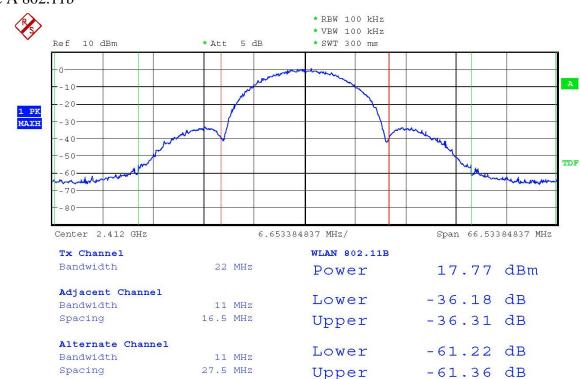


Mode A 802.11b

MAX OUTPUT POWER 802.11b CH1 Date: 26.JAN.2015 15:24:42



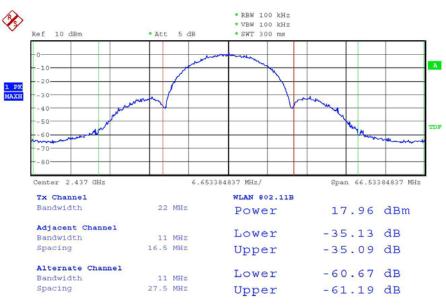


MAX OUTPUT POWER 802.11b CH6 Date: 26.JAN.2015 15:23:43

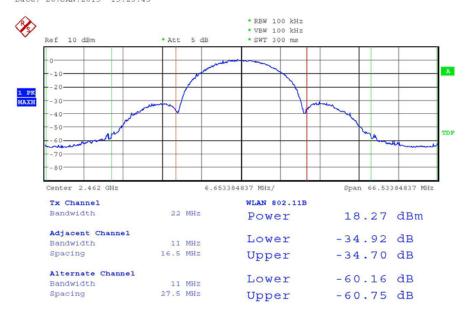

MAX OUTPUT POWER 802.11b CH11 Date: 26.JAN.2015 15:22:34



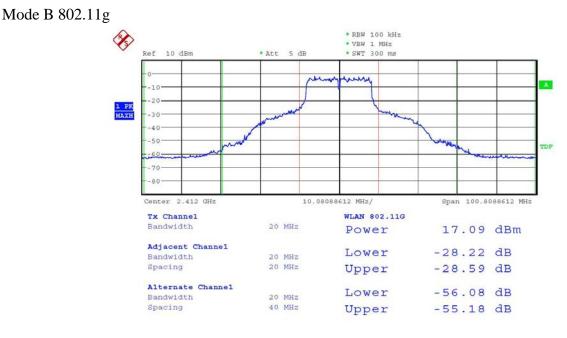


Date: 26.JAN.2015 15:11:58 Ø • RBW 100 kHz • VBW 1 MHz 10 dBr · ALL 5 dB • SWT 300 mg In man 20 1 PK MAXH -30 40 -50 60 -70 80 10.08088612 MHz/ Span 100.8088612 MHz Center 2.437 GHz Tx Channel WLAN 802.11G 20 MHz Bandwidth Power 16.47 dBm Adjacent Channel -29.19 dB Lower 20 MHz Bandwidth Spacing 20 MHz Upper -29.17 dB Alternate Channel Lower -56.87 dB Bandwidth 20 MHz Spacing 40 MHz -57.04 dB Upper

MAX OUTPUT POWER 802.11g CH6 Date: 26.JAN.2015 15:18:38

MAX OUTPUT POWER 802.11g CH1



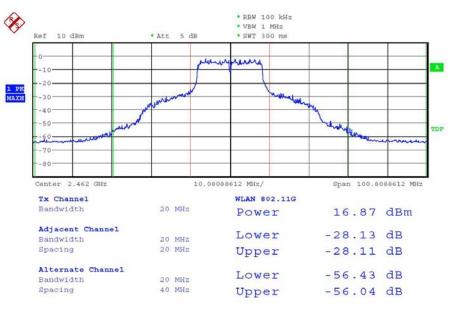

MAX OUTPUT POWER 802.11g CH11 Date: 26.JAN.2015 15:20:22

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 - 2483.5	30
5725 - 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider 15.247 (b)(4)

Test equipment used: ETSTW-RE 055



3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

$$\begin{split} EIRP &= max. \ conducted \ output \ power + antenna \ gain \\ EIRP &= 18.27 \ dBm + 2.2 \ dBi \\ &= 20.47 \ dBm \end{split}$$

Limit: EIRP = +36 dBm for Antenna gain < 6 dBi

Test equipment used: ETSTW-RE 055

3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain

Item	Unit	Value	Remarks
Р	mW	67.14	Peak value
D	dB		
AG	dBi	2.2	
G		1.66	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.022	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure						
Frequency (MHz)	Power Density (mW/cm ²)					
1500 - 100.000	1.0					



3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35 Radiated emission measurements were performed from 30 MHz to 26500 MHz. For radiated emission tests, the analyzer setting was as followings:

Frequency ≤ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength
(MHz)	(microvolts/meter)	(dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.



3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements). Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044

Note: No duty cycle correction was added to the reading of EUT.



Antonno 1

Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Antenna 1										
Model:		RN1723		Date:			2015/1/			
Mode:)2.11b CH1	1		erature:		21.1		Engineer:	Rick
Polarization:	Horizontal			Humid	ity:	1	48	%	1	
Frequency	Reading		Facto	r		Lir	nit	Margin	Table	Ant.
(MHz)	(dBuV)	Detector	(dB)		t (dBuV/m)		V/m)	(dB)	Degree	High
. ,	, ,		. ,				,	. ,	(Deg.)	(cm)
167.9760	14.64	peak	15.64		30.28	43.		-13.22	140	150
983.1662	7.16	peak	27.83	3	34.99	54.	.00	-19.01	130	150
									r	
Frequency	Read	ding	Factor	Resu	ult @3m	Limi	t @3m	Marg	in Table	Ant.
	(dBi		(dB)	(dB	uV/m)	(dB	uV/m)	5	Degree	High
(MHz)	Peak	Áve.	Corr.	Pea	k Áve.	Pea	k Áve	e. (dB		(cm)
4824.0000	46.25		-4.94	41.31		74.00	54.0	0 -32.6	69 260	150
7236.0000	49.80		-2.37	47.43		74.00	54.0	0 -26.5	57 210	150
9648.0000	31.22		12.83	44.05		74.00	54.0	0 -29.9	260	150
12060.0000	30.55		15.92	46.47		74.00	54.0	0 -27.5	53 110	150
							•		·	
Polarization:	Vertical									
_			_						Table	Ant.
Frequency	Reading	Detecto	r Fac		Result	Lin		Margin	Degree	High
(MHz)	(dBuV)		' (dE	3) (d	BuV/m)	(dBu\	V/m)	(dB)	(Deg.)	(cm)
134.4288	16.33	peak	15.0)1	31.34	43.	50	-12.16	130	150
611.4230	4.97	peak	22.8		27.83	46.		-18.17	210	150
011.4230	4.77	рсак	22.0		27.03	40.	00	-10.17	210	130
E	Duul		E	D. I	C1	1.1	<u>_</u>	N 4	. .	A . I
Frequency	Read	0	Factor	Result		Limit	-	Margir		Ant.
(N 41 1-)	(dBu		(dB)	(dBu)	,	•	V/m)	(-10)	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak		· · /	(Deg.)	(cm)
4824.0000	46.44		-4.94	41.50		74.00	54.00			150
7236.0000	47.69		-2.37	45.32		74.00	54.00			150
9648.0000	30.78		12.83	43.61		74.00	54.00			150
12060.0000	30.76		15.92	46.68		74.00	54.00	-27.32	2 260	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Mode: Polarization:	80 Horizontal)2.11b CH6)							
Frequency (MHz)	Reading (dBuV)	Detector	Facto (dB)	Resul	t (dBuV/m)	Lin (dBu ^v		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
124.6894	15.96	peak	14.32		30.28	43.	50	-13.22	140	150
991.5832	8.37	peak	27.85		36.22	54.	00	-17.78	330	150
	-					r		1		1
Frequency	Rea		Factor		ult @3m		t@3m	Margi		Ant.
	(dB	,	(dB)		uV/m)	•	uV/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Pea	k Ave.	Peal		· · /	(Deg.)	(cm)
4874.0000	46.08		-4.86	41.22		74.00	54.0	-32.78	3 160	150
7311.0000	47.67		-2.76	44.91		74.00	54.00	0 -29.0	9 210	150
9748.0000	31.03		12.80	43.83		74.00	54.00	0 -30.1 [°]	7 260	150
			1/ 10	4/ 01		74.00	E 4 0		<u>1 110</u>	100
12185.0000	29.61		16.40	46.01		74.00	54.00	0 -27.9	9 210	150
12185.0000 Polarization:	Vertical		16.40	46.01		/4.00	54.00	J -27.9	9 210	150
		Detecto	Fac	or	Result BuV/m)	Lim (dBu\	nit	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
Polarization: Frequency	Vertical Reading		r Faci	or (d	Result	Lim	iit //m)	Margin	Table Degree	Ant. High
Polarization: Frequency (MHz)	Vertical Reading (dBuV)	Detecto	r Faci (dE	or) (d	Result BuV/m)	Lim (dBu\	nit //m) 50	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
Polarization: Frequency (MHz) 135.5110 983.1662	Vertical Reading (dBuV) 15.97 8.10	Detector peak peak	r Faci (dE 15.1 27.8	or (d) (d 33	Result BuV/m) 31.07 35.93	Lim (dBu\ 43.! 54.(nit //m) 50 00	Margin (dB) -12.43 -18.07	Table Degree (Deg.) 300 260	Ant. High (cm) 150 150
Polarization: Frequency (MHz) 135.5110	Vertical Reading (dBuV) 15.97 8.10 Read	Detector peak peak	r Faci (dE 15. 27.8 Factor	or (d) (d 33 Result	Result BuV/m) 31.07 35.93 @3m	Lim (dBu\ 43.9 54.0 Limit	nit //m) 50 00 @3m	Margin (dB) -12.43	Table Degree (Deg.) 300 260 Table	Ant. High (cm) 150 150 Ant.
Polarization: Frequency (MHz) 135.5110 983.1662 Frequency	Vertical Reading (dBuV) 15.97 8.10 Read (dBu	Detector peak peak ing V)	r Faci (dE 15. ⁻ 27.8 Factor (dB)	or (d) (d 33 Result (dBu	Result BuV/m) <u>31.07</u> 35.93 @3m V/m)	Lim (dBu\ 43.! 54.(Limit (dBu	nit //m) 50 00 @3m V/m)	Margin (dB) -12.43 -18.07 Margir	Table Degree (Deg.) 300 260 Table Degree	Ant. High (cm) 150 150 Ant. High
Polarization: Frequency (MHz) 135.5110 983.1662	Vertical Reading (dBuV) 15.97 8.10 Read	Detector peak peak	r Faci (dE 15. 27.8 Factor	or (d) (d 33 Result (dBu Peak	Result BuV/m) 31.07 35.93 @3m	Lim (dBu\ 43.! 54.(54.(Limit (dBu Peak	nit //m) 50 00 @3m V/m) Ave.	Margin (dB) -12.43 -18.07 Margin (dB)	Table Degree (Deg.) 300 260 Table Degree (Deg.)	Ant. High (cm) 150 150 Ant.
Polarization: Frequency (MHz) 135.5110 983.1662 Frequency	Vertical Reading (dBuV) 15.97 8.10 Read (dBu	Detector peak peak ing V)	r Faci (dE 15. ⁻ 27.8 Factor (dB)	or (d) (d 33 Result (dBu	Result BuV/m) <u>31.07</u> 35.93 @3m V/m)	Lim (dBu\ 43.! 54.(Limit (dBu	nit //m) 50 00 @3m V/m)	Margin (dB) -12.43 -18.07 Margir	Table Degree (Deg.) 300 260 Table Degree (Deg.)	Ant. High (cm) 150 150 Ant. High
Polarization: Frequency (MHz) 135.5110 983.1662 Frequency (MHz)	Vertical Reading (dBuV) 15.97 8.10 Read (dBu Peak	Detector peak peak ing V) Ave.	r Faci (dE 15. 27.8 Factor (dB) Corr.	or (d) (d 33 Result (dBu Peak	Result BuV/m) 31.07 35.93 @3m V/m) Ave.	Lim (dBu\ 43.! 54.(54.(Limit (dBu Peak	nit //m) 50 00 @3m V/m) Ave.	Margin (dB) -12.43 -18.07 Margin (dB)	Table Degree (Deg.) 300 260 Table Degree (Deg.) 160	Ant. High (cm) 150 150 Ant. High (cm)
Polarization: Frequency (MHz) 135.5110 983.1662 Frequency (MHz) 4874.0000	Vertical Reading (dBuV) 15.97 8.10 Read (dBu Peak 46.56	Detector peak peak ing V) Ave.	r Factor (dB) Corr. -4.86	or (d 0 (d 33 Result (dBu Peak 41.70	Result BuV/m) 31.07 35.93 @3m V/m) Ave. 	Lim (dBu\ 43.! 54.0 Limit (dBu Peak 74.00	nit //m) 50 00 @3m V/m) Ave. 54.00	Margin (dB) -12.43 -18.07 Margir (dB) -32.30	Table Degree (Deg.) 300 260 Table Degree (Deg.) 160 210	Ant. High (cm) 150 150 Ant. High (cm) 150

Mode:

802.11b CH11 Horizontal

Polarization:

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
121.4430	15.68	peak	14.11	29.79	43.50	-13.71	260	150
966.3327	8.42	peak	27.77	36.19	54.00	-17.81	110	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Readiı (dBu\	0	Factor (dB)		t @3m JV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	45.52		-4.89	40.63		74.00	54.00	-33.37	250	150
7386.0000	46.84		-3.09	43.75		74.00	54.00	-30.25	210	150
9848.0000	29.7		13.02	42.72		74.00	54.00	-31.28	250	150
12310.0000	29.64		16.46	46.10		74.00	54.00	-27.90	140	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
169.0580	15.02	peak	15.59	30.61	43.50	-12.89	210	150
998.5972	8.27	peak	27.88	36.15	54.00	-17.85	230	150

Frequency		Reading Factor (dBuV) (dB)			t @3m ıV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	45.60		-4.89	40.71		74.00	54.00	-33.29	290	150
7386.0000	47.73		-3.09	44.64		74.00	54.00	-29.36	210	150
9848.0000	30.00		13.02	43.02		74.00	54.00	-30.98	280	150
12310.0000	29.97		16.46	46.43		74.00	54.00	-27.57	120	150

Mode:

802.11g CH1

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
134.4288	19.72	peak	15.01	34.73	43.50	-8.77	130	150
611.4230	7.90	peak	22.86	30.76	46.00	-15.24	230	150

Frequency	Reading (dBuV)		Factor (dB)		Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.44		-4.94	41.50		74.00	54.00	-32.50	120	150
7236.0000	47.38		-2.37	45.01		74.00	54.00	-28.99	280	150
9648.0000	29.65		12.83	42.48		74.00	54.00	-31.52	260	150
12060.0000	30.37		15.92	46.29		74.00	54.00	-27.71	210	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Polarization:	Vertical	1					T				
Frequency (MHz)	Reading (dBuV)	Detecto	r Fac (dE			Result BuV/m)	Lim (dBu\		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
130.6413	17.74	peak	14.	71	3	32.45	43.5	50	-11.05	140	150
610.0200	6.58	peak	22.8			29.42	46.0		-16.58	150	150
01010200	0100	poun		51	_		1010		10100	100	100
Frequency	Read	ing	Factor	R	esult	@3m	Limit	@3m	Margin	Table	Ant.
	(dBu	V)	(dB)		(dBu∖	//m)	(dBu'	V/m)	_	Degree	High
(MHz)	Peak	Ave.	Corr.	P	eak	Ave.	Peak	Ave.		(Deg.)	(cm)
4824.0000	46.82		-4.94	41.	88		74.00	54.00	-32.12	280	150
7236.0000	47.59		-2.37	45.	22		74.00	54.00	-28.78	210	150
9648.0000	29.79		12.83	42.	62		74.00	54.00	-31.38	100	150
12060.0000	30.86		15.92	46.	78		74.00	54.00	-27.22	260	150
Mode: Polarization:	Horizontal	802.11g CF	16				1				
Frequency	Reading		Fac	tor	R	Result	Lim	it	Margin	Table	Ant.
(MHz)	(dBuV)	Detecto	r (dE			BuV/m)	(dBu∖		(dB)	Degree	High
. ,			`	,			`	,	. ,	(Deg.)	(cm)
166.8937	15.48	peak	15.			81.18	43.5		-12.32	160	150
997.1943	8.89	peak	27.8	87	3	86.76	54.0	00	-17.24	240	150
r	T		1				1				
Frequency	Rea	ding	Factor	r	Resu	lt @3m	Limit	@3m	Margir	n Table	Ant.
	(dB	uV)	(dB)		(dBı	uV/m)	(dBi	uV/m)		Degree	High
(MHz)	Peak	Ave.	Corr.		Peak	Ave.	Peak		· · /	(Deg.)	(cm)
4874.0000	46.17		-4.86	4	1.31		74.00	54.00) -32.69	140	150
7311.0000	48.27		-2.76	4	5.51		74.00	54.00	-28.49	280	150
9848.0000	30.77		13.02	4	3.79		74.00	54.00	-30.21	140	150
12185.0000	29.22		16.40	4	5.62		74.00	54.00	-28.38	280	150
Polarization:	Vertical	1								1	
Frequency	Reading		Fac	tor	R	Result	Lin	nit	Margin	Table	Ant.
(MHz)	(dBuV)	Detector	dE			BuV/m)	(dBu\		(dB)	Degree	High
. ,				-	•	,	,	,		(Deg.)	(cm)
136.5931	16.20	peak	15.1			31.38	43.		-12.12	200	150
612.8256	7.28	peak	22.8	37	3	30.15	46.0	00	-15.85	130	150
	Deed		Fastar		It	@)m	!ma!t	@]	Marair	Tabla	Ant
Frequency	Readi	0	Factor		esult			@3m	Margir		Ant.
	(dBu)	,	(dB)		(dBu∖	,	•	V/m)	(JD)	Degree	High
(MHz)		Ave.	Corr.		eak	Ave.	Peak			(Deg.)	(cm)
4874.0000	45.33		-4.86	40.			74.00	54.00			150
7311.0000	47.18		-2.76	44.			74.00	54.00			150
9748.0000	30.95 30.09		12.80	43.			74.00	54.00			150 150
12185.0000			16.40	46.	40		74.00	54.00			



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Mode: Polarization:	80 Horizontal	02.11g CH	11								
Frequency (MHz)	Reading (dBuV)	Detecto	r Fac (dE			Result BuV/m)	Lin (dBu)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	15.58	peak	14.2	25	2	29.83	43.	50	-13.67	180	150
608.6173	8.84	peak	22.	33	3	31.67	46.	00	-14.33	200	150
											
Frequency	Read		Facto	r		lt @3m		t @3m	Margi	n Table	Ant.
	(dBu	JV)	(dB)		(dBı	uV/m)	(dB	uV/m)		Degree	High
(MHz)	Peak	Ave.	Corr.		Peak	Ave.	Pea		· · ·		(cm)
4924.0000	46.50		-4.89	4	1.61		74.00	54.0	0 -32.3	9 290	150
7386.0000	47.24		-3.09	4	4.15		74.00	54.0	0 -29.8	5 210	150
9848.0000	31.65		13.02	4	4.67		74.00	54.0	0 -29.3	3 270	150
12310.0000	31.57		16.46	4	8.03		74.00	54.0	0 -25.9	7 210	150
Polarization:	Vertical				-						
Frequency (MHz)	Reading (dBuV)	Detecto	r Fac (df			Result BuV/m)	Lin (dBu\		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	18.52	peak	14.	25	3	32.77	43.	50	-10.73	210	150
611.4230	6.85	peak	22.	86	2	29.71	46.	00	-16.29	220	150
Frequency	Readi	ng	Factor	R	esult	@3m	Limit	@3m	Margir	n Table	Ant.
- 1 5	(dBu'	0	(dB)		(dBuV		(dBu	V/m)	- 5	Degree	High
(MHz)	Peak	Áve.	Čorr.		Peak	Áve.	Peak	,	(dB)	(Deg.)	(cm)
4924.0000	44.56		-4.89	39.			74.00	54.00	. ,		150
7386.0000	47.75		-3.09	44.			74.00	54.00			150
9848.0000	31.75		13.02	44.			74.00	54.00			150
12310.0000	31.84		16.46	48			74.00	54.00			150
Antenna 2	00	2 116 CU1			•						

Mode:

802.11b CH1

Polarization:	Horizontal
	TIONZONIU

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.0661	15.67	peak	14.21	29.88	43.50	-13.62	150	150
608.6173	7.46	peak	22.83	30.29	46.00	-15.71	260	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Reading (dBuV)		Factor (dB)		t @3m ıV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.74		-4.94	41.80		74.00	54.00	-32.20	160	150
7236.0000	48.18		-2.37	45.81		74.00	54.00	-28.19	220	150
9648.0000	30.05		12.83	42.88		74.00	54.00	-31.12	100	150
12060.0000	30.71		15.92	46.63		74.00	54.00	-27.37	270	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.8115	17.73	peak	15.75	33.48	43.50	-10.02	260	150
610.0200	6.29	peak	22.84	29.13	46.00	-16.87	300	150

Frequency		Reading Fac (dBuV) (d			Result @3m (dBuV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.09		-2.94	43.15		74.00	54.00	-30.85	120	150
7236.0000	48.25		-0.37	47.88		74.00	54.00	-26.12	280	150
9648.0000	30.72		12.83	43.55		74.00	54.00	-30.45	130	150
12060.0000	31.49		15.92	47.41		74.00	54.00	-26.59	280	150

Mode:

802.11b CH6

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
167.9760	15.18	peak	15.64	30.82	43.50	-12.68	180	150
610.0200	8.04	peak	22.84	30.88	46.00	-15.12	290	150

Frequency	Reading		Factor	Resul	Result @3m		Limit @3m		Table	Ant.
	(dBuV)		(dB)	(dBuV/m)		(dBuV/m)			Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.34		-4.86	41.48		74.00	54.00	-32.52	130	150
7311.0000	48.88		-2.76	46.12		74.00	54.00	-27.88	290	150
9748.0000	30.82		12.80	43.62		74.00	54.00	-30.38	100	150
12185.0000	31.73		16.40	48.13		74.00	54.00	-25.87	260	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
135.5110	16.02	peak	15.10	31.12	43.50	-12.38	150	150
610.0200	6.48	peak	22.84	29.32	46.00	-16.68	220	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Read	ding	Factor	Resul	t @3m	Limit @3m		Margin	Table	Ant.
	(dBi	JV)	(dB)	(dBu	ıV/m)	//m) (dBuV/m)		-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.75		-4.86	41.89		74.00	54.00	-32.11	120	150
7311.0000	48.21		-2.76	45.45		74.00	54.00	-28.55	250	150
9748.0000	29.88		12.80	42.68		74.00	54.00	-31.32	170	150
12185.0000	30.76		16.40	47.16		74.00	54.00	-26.84	90	150

Mode:

802.11b CH11 Horizontal

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	16.43	peak	14.25	30.68	43.50	-12.82	180	150
610.0200	7.56	peak	22.84	30.40	46.00	-15.60	140	150

Frequency	Reading (dBuV)		Factor (dB)		t @3m ıV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4924.0000	46.10		-4.89	41.21		74.00	54.00	-32.79	270	150
7386.0000	47.58		-3.09	44.49		74.00	54.00	-29.51	280	150
9848.0000	30.15		13.02	43.17		74.00	54.00	-30.83	160	150
12310.0000	32.1		16.46	48.56		74.00	54.00	-25.44	220	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
133.8877	15.18	peak	14.97	30.15	43.50	-13.35	210	150
611.4230	7.69	peak	22.86	30.55	46.00	-15.45	230	150

Frequency	Read (dBi	0	Factor (dB)		t @3m ıV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	45.04		-4.89	40.15		74.00	54.00	-33.85	280	150
7386.0000	47.12		-3.09	44.03		74.00	54.00	-29.97	100	150
9848.0000	31.57		13.02	44.59		74.00	54.00	-29.41	130	150
12350.2000	32.65		16.48	49.13		74.00	54.00	-24.87	220	150

Mode:

802.11g CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.8117	15.35	peak	15.75	31.10	43.50	-12.40	180	150
612.8256	7.22	peak	22.87	30.09	46.00	-15.91	290	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Readii (dBu\	0	Factor (dB)		t @3m ıV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.05		-4.94	41.11		74.00	54.00	-32.89	280	150
7236.0000	49.72		-2.37	47.35		74.00	54.00	-26.65	120	150
9648.0000	30.09		12.83	42.92		74.00	54.00	-31.08	290	150
12060.0000	31.26		15.92	47.18		74.00	54.00	-26.82	120	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
168.5170	15.23	peak	15.62	30.85	43.50	-12.65	230	150
610.0200	6.82	peak	22.84	29.66	46.00	-16.34	210	150

Frequency	Read (dBi	0	Factor (dB)		Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	45.16		-4.94	40.22		74.00	54.00	-33.78	230	150
7230.4610	47.96		-2.34	45.62		74.00	54.00	-28.38	140	150
9648.0000	29.84		12.83	42.67		74.00	54.00	-31.33	130	150
12060.0000	30.12		15.92	46.04		74.00	54.00	-27.96	290	150

Mode:

802.11g CH6

Polarization:	Horizontal	0						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
167.9760	17.84	peak	15.64	33.48	43.50	-10.02	140	150
610.0200	7.05	peak	22.84	29.89	46.00	-16.11	220	150

Frequency	Readi	•	Factor (dB)		t @3m		@3m	Margin	Table	Ant.
(```	(dBuV) Peak Ave		``	ıV/m)	(dBu	,	(.=)	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.20		-4.86	41.34		74.00	54.00	-32.66	130	150
7311.0000	47.35		-2.76	44.59		74.00	54.00	-29.41	280	150
9748.0000	30.01		12.80	42.81		74.00	54.00	-31.19	260	150
12185.0000	30.39		16.40	46.79		74.00	54.00	-27.21	210	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
131.1824	16.45	peak	14.76	31.21	43.50	-12.29	240	150
610.0200	7.27	peak	22.84	30.11	46.00	-15.89	230	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Read	ding	Factor	Resul	t @3m	Limit @3m		Margin	Table	Ant.
	(dBi	JV)	(dB)	(dBu	ıV/m)	(dBuV/m)		-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.20		-4.86	41.34		74.00	54.00	-32.66	130	150
7311.0000	47.35		-2.76	44.59		74.00	54.00	-29.41	280	150
9748.0000	30.01		12.80	42.81		74.00	54.00	-31.19	260	150
12185.0000	30.39		16.40	46.79		74.00	54.00	-27.21	210	150

Mode:

802.11g CH11 Horizontal

Polarization:	Horizontal	0						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.8937	13.33	peak	15.70	29.03	43.50	-14.47	140	150
612.8256	8.09	peak	22.87	30.96	46.00	-15.04	110	150

Frequency		Reading (dBuV)			t @3m ıV/m)	Limit (dBu	@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Peak Áve.		Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4924.0000	45.97		-4.89	41.08		74.00	54.00	-32.92	310	150
7386.0000	46.93		-3.09	43.84		74.00	54.00	-30.16	220	150
9848.0000	30.23		13.02	43.25		74.00	54.00	-30.75	220	150
12310.0000	32.39		16.46	48.85		74.00	54.00	-25.15	260	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
134.9698	17.33	peak	15.05	32.38	43.50	-11.12	180	150
612.8256	6.84	peak	22.87	29.71	46.00	-16.29	230	150

Frequency	Read (dBu	0	Factor (dB)		t @3m ıV/m)	Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	45.99		-4.89	41.10		74.00	54.00	-32.90	300	150
7386.0000	48.24		-3.09	45.15		74.00	54.00	-28.85	110	150
9748.0000	29.86		12.80	42.66		74.00	54.00	-31.34	280	150
12310.0000	31.13		16.46	47.59		74.00	54.00	-26.41	110	150

Antenna 3

Mode:

802.11b CH1

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	15.71	peak	14.25	29.96	43.50	-13.54	250	150
964.9298	8.49	peak	27.77	36.26	54.00	-17.74	140	150

Worldwide Testing Services(Taiwan) Co., Ltd.



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency		Reading (dBuV)			t @3m ıV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.77		-4.94	41.83		74.00	54.00	-32.17	150	150
7236.0000	49.12		-2.37	46.75		74.00	54.00	-27.25	230	150
9648.0000	30.17		12.83	43.00		74.00	54.00	-31.00	110	150
12060.0000	30.64		15.92	46.56		74.00	54.00	-27.44	230	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
130.6413	17.58	peak	14.71	32.29	43.50	-11.21	210	150
612.8256	6.57	peak	22.87	29.44	46.00	-16.56	120	150

Frequency	Read (dBi	0	Factor (dB)		t @3m IV/m)	Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.27		-4.94	41.33		74.00	54.00	-32.67	130	150
7236.0000	47.29		-2.37	44.92		74.00	54.00	-29.08	280	150
9648.0000	29.75		12.83	42.58		74.00	54.00	-31.42	140	150
12060.0000	31.22		15.92	47.14		74.00	54.00	-26.86	230	150

Mode:

802.11b CH6 Horizontal

Polarization:

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
124.1483	15.49	peak	14.28	29.77	43.50	-13.73	140	150
610.0200	6.73	peak	22.84	29.57	46.00	-16.43	240	150

Frequency	Readi	ng	Factor	Resul	t @3m	Limit @3m		Margin	Table	Ant.
	(dBu\	(dBuV)		(dBu	(dBuV/m)		(dBuV/m)		Degree	High
(MHz)	Peak			Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.38			41.52		74.00	54.00	-32.48	150	150
7311.0000	47.52			44.76		74.00	54.00	-29.24	230	150
9748.0000	30.60		12.80	43.40		74.00	54.00	-30.60	300	150
12185.0000	29.85			46.25		74.00	54.00	-27.75	260	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
130.6413	16.99	peak	14.71	31.70	43.50	-11.80	210	150
608.6173	7.37	peak	22.83	30.20	46.00	-15.80	200	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Read	ding	Factor	Resul	Result @3m		Limit @3m		Table	Ant.
	(dBi	uV)	(dB)	(dBu	ıV/m)	(dBu	V/m)	-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	47.38		-4.86	42.52		74.00	54.00	-31.48	160	150
7311.0000	47.98		-2.76	45.22		74.00	54.00	-28.78	240	150
9748.0000	31.46		12.80	44.26		74.00	54.00	-29.74	260	150
12185.0000	31.1		16.40	47.5		74.00	54.00	-26.50	280	150

Mode:

802.11b CH11 Horizontal

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.3528	17.92	peak	15.73	33.65	43.50	-9.85	290	150
995.7916	8.56	peak	27.87	36.43	54.00	-17.57	140	150

Frequency		Reading (dBuV)			t @3m ıV/m)	Limit (dBu	@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Peak Áve.		Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4924.0000	46.22		-4.89	41.33		74.00	54.00	-32.67	280	150
7386.0000	47.88		-3.09	44.79		74.00	54.00	-29.21	210	150
9848.0000	31.23		13.02	44.25		74.00	54.00	-29.75	140	150
12310.0000	31.71			48.17		74.00	54.00	-25.83	220	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
135.5110	17.66	peak	15.10	32.76	43.50	-10.74	240	150
610.0200	7.34	peak	22.84	30.18	46.00	-15.82	180	150

Frequency	Read (dBi	0	Factor (dB)		t @3m ıV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	46.04		-4.89	41.15		74.00	54.00	-32.85	310	150
7386.0000	47.79		-3.09	44.70		74.00	54.00	-29.30	250	150
9848.0000	30.57		13.02	43.59		74.00	54.00	-30.41	110	150
12310.0000	30.06		16.46	46.52		74.00	54.00	-27.48	210	150

Mode:

802.11g CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.8937	14.12	peak	15.70	29.82	43.50	-13.68	200	150
611.4230	8.01	peak	22.86	30.87	46.00	-15.13	270	150



Frequency		Reading (dBuV)			t @3m ıV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Peak Áve.		Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.72		-4.94	41.78		74.00	54.00	-32.22	290	150
7236.0000	48.19		-2.37	45.82		74.00	54.00	-28.18	210	150
9648.0000	31.43		12.83	44.26		74.00	54.00	-29.74	110	150
12060.0000	30.83		15.92	46.75		74.00	54.00	-27.25	250	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
134.9698	16.84	peak	15.05	31.89	43.50	-11.61	210	150
608.6173	6.48	peak	22.83	29.31	46.00	-16.69	210	150

Frequency	Read (dBi	0	Factor (dB)		t @3m V/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4824.0000	46.06		-4.94	41.12		74.00	54.00	-32.88	120	150
7236.0000	47.38		-2.37	45.01		74.00	54.00	-28.99	210	150
9648.0000	29.91		12.83	42.74		74.00	54.00	-31.26	180	150
12060.0000	30.72		15.92	46.64		74.00	54.00	-27.36	220	150

Mode:

802.11g CH6

Polarization:	Horizontal	02.119 CHO						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
167.9760	17.45	peak	15.64	33.09	43.50	-10.41	180	150
611.4230	6.14	peak	22.86	29.00	46.00	-17.00	260	150

Frequency		Reading (dBuV)			t @3m V/m)	Limit (dBu	@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	(dB) Corr.	Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4874.0000	45.99		-4.86	41.13		74.00	54.00	-32.87	160	150
7311.0000	47.68		-2.76	44.92		74.00	54.00	-29.08	280	150
9748.0000	30.75		12.80	43.55		74.00	54.00	-30.45	300	150
12185.0000	29.83		16.40	46.23		74.00	54.00	-27.77	220	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
130.6413	15.68	peak	14.71	30.39	43.50	-13.11	260	150
608.6173	7.14	peak	22.83	29.97	46.00	-16.03	280	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Read	ding	Factor	Resul	Result @3m		Limit @3m		Table	Ant.
	(dBi	uV)	(dB)	(dBuV/m)		(dBuV/m)		_	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	· /		Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.12		-4.86	41.26		74.00	54.00	-32.74	270	150
7311.0000	48.09		-2.76	45.33		74.00	54.00	-28.67	210	150
9748.0000	30.99		12.80	43.79		74.00	54.00	-30.21	200	150
12185.0000	31.14		16.40	47.54		74.00	54.00	-26.46	150	150

Mode:

802.11g CH11 Horizontal

Polarization:	Horizontal	0						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.0661	15.79	peak	14.21	30.00	43.50	-13.50	230	150
612.8256	6.82	peak	22.87	29.69	46.00	-16.31	290	150

Frequency	Readiı (dBu\	0	Factor (dB)		t @3m ıV/m)	Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Peak Áve.		Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4924.0000	46.08		-4.89	41.19		74.00	54.00	-32.81	140	150
7386.0000	47.43		-3.09	44.34		74.00	54.00	-29.66	250	150
9848.0000	30.39		13.02	43.41		74.00	54.00	-30.59	230	150
12185.0000	29.50		16.40	45.9		74.00	54.00	-28.10	140	150

Polarization: Vertical

PUIAITZALIUIT.	Vertical							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
130.1002	16.88	peak	14.67	31.55	43.50	-11.95	100	150
611.4230	7.64	peak	22.86	30.50	46.00	-15.50	170	150

Frequency	Read (dBu	0	Factor (dB)	r Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	45.82		-4.89	40.93		74.00	54.00	-33.07	270	150
7386.0000	47.18		-3.09	44.09		74.00	54.00	-29.91	210	150
9748.0000	31.28		12.80	44.08		74.00	54.00	-29.92	250	150
12310.0000	30.77		16.46	47.23		74.00	54.00	-26.77	120	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Antenna 4

Mode: 802.11b CH1

Vertical

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.0661	17.09	peak	14.21	31.30	43.50	-12.20	210	150
610.0200	5.52	peak	22.84	28.36	46.00	-17.64	170	150

Frequency	Readiı (dBu\	0	Factor (dB)		t @3m ıV/m)	Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Peak Áve.		Peak	Ave.	Peak	Áve.	(dB)	(Deg.)	(cm)
4817.6350	48.90		-4.95	43.95		74.00	54.00	-30.05	120	150
7236.0000	47.64		-2.37	45.27		74.00	54.00	-28.73	250	150
9648.0000	29.83		12.83	42.66		74.00	54.00	-31.34	300	150
12060.0000	31.85			47.77		74.00	54.00	-26.23	220	150

Polarization:

Table Ant. Frequency Reading Result Limit Margin Factor Detector Degree High (MHz) (dBuV) (dB) (dBuV/m) (dBuV/m) (dB) (Deg.) (cm) 132.8054 16.71 14.88 31.59 43.50 -11.91 270 150 peak 610.0200 8.58 22.84 31.42 46.00 -14.58 110 150 peak

Frequency	Read (dBi	0	Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4817.6350	50.51		-4.95	45.56		74.00	54.00	-28.44	260	150
7236.0000	48.15		-2.37	45.78		74.00	54.00	-28.22	220	150
9648.0000	31.04		12.83	43.87		74.00	54.00	-30.13	110	150
12060.0000	31.36		15.92	47.28		74.00	54.00	-26.72	220	150

Mode:

802.11b CH6 Horizontal

Polarization:	Horizontal							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
167.9760	16.66	peak	15.64	32.30	43.50	-11.20	170	150
608.6173	6.94	peak	22.83	29.77	46.00	-16.23	210	150

Frequency	Readi	ng	Factor	Result @3m		Limit @3m		Margin	Table	Ant.
	(dBu\	/)	(dB)	(dBuV/m)		(dBuV/m)		_	Degree	High
(MHz)	Peak	Peak Áve.		Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4873.7480	48.22		-4.86	43.36		74.00	54.00	-30.64	100	150
7302.6050	49.08		-2.72	46.36		74.00	54.00	-27.64	210	150
9748.0000	31.11		12.80	43.91		74.00	54.00	-30.09	240	150
12185.0000	31.86		16.40	48.26		74.00	54.00	-25.74	110	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Polarization:	Vertical	-					1				
Frequency	Reading	Detecto	r Fac			Result	Lin		Margin	Table Degree	Ant. High
(MHz)	(dBuV)	2010010	' (dE	3)	(dł	3uV/m)	(dBu∖	//m)	(dB)	(Deg.)	(cm)
133.3466	16.02	peak	14.9	93	3	30.95	43.	50	-12.55	260	150
610.0200	7.33	peak	22.8	84		30.17	46.0	00	-15.83	140	150
		. T		_		-					I -
Frequency	Read	0	Factor			@3m	Limit	-	Margin		Ant.
(NALL=)	(dBu	,	(dB)		(dBu∖	,	(dBu	,	(JD)	Degree	High
(MHz) 4873.7480	Peak 49.42	Ave.	Corr. -4.86	Р 44.5	eak	Ave.	Peak 74.00	Ave. 54.00	(dB) -29.44	(Deg.) 110	(cm) 150
7311.0000	49.42		-4.00	44.3			74.00	54.00		270	150
9748.0000	31.1			-2.70 45. 12.80 43			74.00	54.00		130	150
12185.0000	31.28		16.40	47.6			74.00	54.00		200	150
12100.0000	01.20		10.10	17.0			7 1.00	01.00	20.02	200	100
Mode: Polarization:	8 Horizontal	02.11b CH	11				1				
Frequency	Reading		Fact	or	Ę	Result	Lin	hit	Margin	Table	Ant.
(MHz)	(dBuV)	Detector	dB			BuV/m)	(dBu\		(dB)	Degree	High
· · ·	. ,		,	,	`	,	•	,	. ,	(Deg.)	(cm)
123.0661	16.20	peak	14.2			30.41	43.		-13.09	210	150
612.8256	6.43	peak	22.8	37	2	29.30	46.0	00	-16.70	130	150
	_				_						
Frequency	Rea	0	Factor	r		lt @3m		t@3m	Margi		Ant.
(1 41 1-)	(dB	,	(dB)		(dBuV/m) Peak Ave.		•	uV/m)	(dD)	Degree	High
(MHz) 4924.0000	Peak 46.32	Ave.	Corr. -4.89		<u>реак</u> 1.43	Ave.	Pea 74.00	k Ave 54.0	· · /	(Deg.) 7 120	(cm) 150
7386.0000	40.32		-4.09		1.43 5.84		74.00	54.0			150
9848.0000	30.57		13.02		3.59		74.00	54.0			150
12310.0000	31.35		16.46		7.81		74.00	54.0			150
12310.0000	51.55		10.40	1 7	7.01		74.00	54.0	20.1	210	100
Polarization:	Vertical	1					T.			· · · · · · · · · · · · · · · · · · ·	
Frequency	Reading		Fac	tor	F	Result	Lin	nit	Margin	Table	Ant.
(MHz)	(dBuV)	Detecto	r (dE			BuV/m)	(dBu)		(dB)	Degree	High
(10112)	(ubuv)		(01	-)	(ui	Baving	(ubu	//////	(uD)	(Deg.)	(cm)
130.6413	16.01	peak	14.	71		30.72	43.	50	-12.78	170	150
610.0200	7.58	peak	22.8	84	3	30.42	46.0	00	-15.58	80	150
										1	
Frequency	Read	0	Factor			@3m		@3m	Margir		Ant.
<i>/</i>	(dBu		(dB)			//m)	•	V/m)	· · - ·	Degree	High
(MHz)	Peak	Ave.	Corr.		eak	Ave.	Peak		, ,	(Deg.)	(cm)
4921.8440	49.90		-4.89	45.0			74.00	54.00			150
7386.0000	48.09		-3.09	45.0			74.00	54.00			150
9848.0000	30.9		13.02	43.9			74.00	54.00			150
12310.0000	31.49		16.46	47.9	70		74.00	54.00	-26.05	100	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Mode: Polarization:	8 Horizontal	802.11g CH1						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
121.4430	15.78	peak	14.11	29.89	43.50	-13.61	170	150
610.0200	5.68	peak	22.84	28.52	46.00	-17.48	270	150
		· -	· · · · · · · · · · · · · · · · · · ·		· · ·			·

Frequency	Reading (dBuV)		Factor (dB)		t @3m ıV/m)	Limit (dBu	@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Äve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	47.31		-4.94	42.37		74.00	54.00	-31.63	160	150
7236.0000	48.45		-2.37	46.08		74.00	54.00	-27.92	270	150
9648.0000	32.04		12.83	44.87		74.00	54.00	-29.13	260	150
12060.0000	30.72		15.92	46.64		74.00	54.00	-27.36	240	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
132.2644	16.20	peak	14.84	31.04	43.50	-12.46	230	150
611.4230	8.00	peak	22.86	30.86	46.00	-15.14	110	150

Frequency	Reading (dBuV)		Factor (dB)		t @3m ıV/m)	Limit @3m (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	48.00		-4.94	43.06		74.00	54.00	-30.94	110	150
7236.0000	46.59		-2.37	44.22		74.00	54.00	-29.78	250	150
9648.0000	31.14		12.83	43.97		74.00	54.00	-30.03	160	150
12060.0000	30.88		15.92	46.8		74.00	54.00	-27.20	200	150

Mode:

802.11g CH6

Polarization: Horiz

contal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	15.72	peak	14.25	29.97	43.50	-13.53	280	150
612.8256	6.62	peak	22.87	29.49	46.00	-16.51	260	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Reading (dBuV)		Factor (dB)		t @3m IV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Åve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.84		-4.86	41.98		74.00	54.00	-32.02	60	150
7311.0000	48.91		-2.76	46.15		74.00	54.00	-27.85	240	150
9748.0000	30.85		12.80	43.65		74.00	54.00	-30.35	130	150
12185.0000	30.21		16.40	46.61		74.00	54.00	-27.39	250	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
136.5931	17.09	peak	15.18	32.27	43.50	-11.23	230	150
612.8256	7.99	peak	22.87	30.86	46.00	-15.14	240	150

Frequency	Reading (dBuV)		Factor (dB)		t @3m IV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Åve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	46.96		-4.86	42.10		74.00	54.00	-31.90	150	150
7311.0000	48.28		-2.76	45.52		74.00	54.00	-28.48	130	150
9748.0000	31.01		12.80	43.81		74.00	54.00	-30.19	120	150
12185.0000	31.10		16.40	47.50		74.00	54.00	-26.50	250	150

Mode:

802.11g CH11

Polarization:	Horizontal	52.11g 0111						
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
123.6072	15.87	peak	14.25	30.12	43.50	-13.38	220	150
611.4230	6.69	peak	22.86	29.55	46.00	-16.45	290	150

Frequency	Reading (dBuV)		Factor (dB)		t @3m V/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Áve.	Peak	Áve.	(dB)	(Deg.)	(cm)
4924.0000	46.94		-4.89	42.05		74.00	54.00	-31.95	170	150
7386.0000	47.94		-3.09	44.85		74.00	54.00	-29.15	260	150
9848.0000	31.22		13.02	44.24		74.00	54.00	-29.76	160	150
12310.0000	30.97		16.46	47.43		74.00	54.00	-26.57	250	150

Polarization:

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
129.5591	17.10	peak	14.63	31.73	43.50	-11.77	240	150
608.6173	7.25	peak	22.83	30.08	46.00	-15.92	70	150

Vertical



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Frequency	Reading (dBuV)		Factor (dB)		t @3m IV/m)	Limit (dBu	@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4921.8440	50.53		-4.89	45.64		74.00	54.00	-28.36	240	150
7386.0000	48.80		-3.09	45.71		74.00	54.00	-28.29	110	150
9848.0000	30.25		13.02	43.27		74.00	54.00	-30.73	170	150
12310.0000	30.87		16.46	47.33		74.00	54.00	-26.67	250	150

Antenna 5

Mode:

802.11b CH1

Polarization:	Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
275.1102	15.76	peak	15.30	31.06	46.00	-14.94	130	150
612.8256	6.83	peak	22.87	29.70	46.00	-16.30	140	150

Frequency	Reading (dBuV)		Factor (dB)		t @3m ıV/m)		Limit @3m (dBuV/m)		Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	46.57		-4.15	42.42		74.00	54.00	-31.58	130	150
7236.0000	47.04		-1.41	45.63		74.00	54.00	-28.37	250	150
9648.0000	25.06		19.39	44.45		74.00	54.00	-29.55	130	150
12060.0000	23.41		21.97	45.38		74.00	54.00	-28.62	250	150

Polarization:	Vertical	

	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
ſ	130.6413	16.77	peak	14.71	31.48	43.50	-12.02	210	150
	608.6173	8.02	peak	22.83	30.85	46.00	-15.15	210	150

Frequency	Read (dBi	0	Factor (dB)		t @3m IV/m)		@3m V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	47.08		-4.15	42.93		74.00	54.00	-31.07	110	150
7236.0000	47.11		-1.41	45.70		74.00	54.00	-28.30	230	150
9648.0000	24.51		19.39	43.9		74.00	54.00	-30.10	130	150
12060.0000	22.63		21.97	44.60		74.00	54.00	-29.40	250	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Mode: 802.11b CH6 Polarization: Horizontal Frequency Reading Factor Limit Margin Result (dBuV/m) Detector (dB) (dBuV) (dBuV/m) (MHz) (dB) 165.8117 14.12 15.75 29.87 43.50 -13.63 peak 7.28 612.8256 22.87 30.15 -15.85 46.00 peak Factor Result @3m Limit @3m Frequency Reading Margin (dBuV) (dB) (dBuV/m) (dBuV/m) Peak Ave. Corr. Peak Ave. Peak Ave. (dB)(MHz) 4874.0000 74.00 45.19 ----4.00 41.19 ---54.00 -32.81 7311.0000 -1.88 45.15 47.03 74.00 54.00 -28.85 ------9748.0000 24.19 19.37 43.56 74.00 54.00 -30.44 ------12185.0000 22.94 22.28 45.22 74.00 -28.78 ------54.00 Vertical

Polarization:

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
132.2646	16.38	peak	14.84	31.22	43.50	-12.28	280	150
610.0200	7.79	peak	22.84	30.63	46.00	-15.37	210	150

Frequency	Read	ding	Factor	Resul	t @3m	Limit	@3m	Margin	Table	Ant.
	(dBu	JV)	(dB)	(dBu	ıV/m)	(dBu	V/m)	-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	47.49		-4.00	43.49		74.00	54.00	-30.51	250	150
7311.0000	46.01		-1.88	44.13		74.00	54.00	-29.87	130	150
9748.0000	24.29		19.37	43.66		74.00	54.00	-30.34	220	150
12185.0000	23.12		22.28	45.40		74.00	54.00	-28.60	160	150

Mode:

802.11b CH11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.3528	12.11	peak	15.73	27.84	43.50	-15.66	140	150
608.6173	6.99	peak	22.83	29.82	46.00	-16.18	140	150

Frequency	Readir	0	Factor		t @3m		@3m	Margin	Table	Ant.
(MHz)	(dBu∖ Peak	,	(dB) Corr.	(dBL Peak	JV/m)	(dBu Peak	V/m) Ave.	(dB)	Degree	High (cm)
· · · /		Ave.	-		Ave.			· · /	(Deg.)	(cm)
4924.0000	46.15		-3.91	42.24		74.00	54.00	-31.76	150	150
7386.0000	47.09		-2.09	45.00		74.00	54.00	-29.00	260	150
9848.0000	24.30		19.63	43.93		74.00	54.00	-30.07	230	150
12310.0000	23.00		22.25	45.25		74.00	54.00	-28.75	250	150

Table

Degree

(Deg.)

110

300

Table

Degree

(Deq.)

210

260

230

250

Ant.

High

(cm)

150

150

Ant.

High

(cm)

150

150

150

150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Image: Constraint of the second sec	Polarization:	Vertical	1			1		-			T	
612.8256 6.80 peak 22.87 29.67 46.00 -16.33 310 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table (Deg.) Ant. 4924.0000 45.25 -3.91 41.34 74.00 54.00 -32.66 100 150 9848.0000 24.87 2.09 43.53 74.00 54.00 -30.47 260 150 9848.0000 23.75 22.25 46.00 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -28.00 230 150 Mode: 802.11g CH1 Peak 15.18 30.89 46.00 -15.22 220 150 271.8636 15.71 peak 12.8 GBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m)	. ,	0	Detecto	r							Degree	High
Frequency Reading Factor Result @3m Limit @3m Margin Table Ant. 4924.0000 45.25 -3.91 41.34 74.00 54.00 -32.66 100 150 786.0000 45.62 -2.99 43.53 74.00 54.00 -32.66 100 150 786.0000 24.87 19.63 44.50 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -29.50 230 150 Mode: 802.11g CH1 Polarization: Horizontal Limit Margin Table Ant. High (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) 150 150 150	130.6413	16.19	peak	14	.71		30.90	43.	50	-12.60	230	150
Frequency Reading Factor Result @3m Limit @3m Margin Table Ant. 4924.0000 45.25 -3.91 41.34 74.00 54.00 -32.66 100 150 786.0000 45.62 -2.09 43.53 74.00 54.00 -32.66 100 150 786.0000 24.87 19.63 44.50 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -29.50 230 150 Mode: 802.11g CH1 Polarization: Horizontal Limit Margin Table Ant. High (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) 150 150 150	612.8256	6.80	peak	22	.87		29.67	46.	00	-16.33	310	150
Image: first state (dBuV) (dB (dBuV/m) (dBuV/m) (dBuV/m) (dBUV/m) (dB (dB) (dB) (dBuV/m) (dB)			1 1									
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	Frequency		0		R					Margir		Ant. High
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	(MHz)	•	,	• •	F	•		•	,	(dB)		(cm)
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	· · · · ·	45.25		-3.91	41.	34		74.00	54.00			150
9848.0000 24.87 19.63 44.50 74.00 54.00 -29.50 250 150 12310.0000 23.75 22.25 46.00 74.00 54.00 -28.00 230 150 Mode: 802.11g CH1 Polarization: Horizontal Exercised of the participation of the particip					_				1			150
12310.0000 23.75 22.25 46.00 74.00 54.00 -28.00 230 150 Mode: 802.11g CH1 Polarization: Horizontal Frequency Reading Detector Factor Result Limit Margin Table Degree High 271.8636 15.71 peak 15.18 30.89 46.00 -15.11 130 150 612.8256 7.91 peak 22.87 30.78 46.00 -15.22 220 150 Frequency Reading Factor Result @3m Limit @3m Margin Table Ant. (BUV) (dBUV) (dB) (dBU/m) (dBUV/m) Edword Degree High (MHz) Peak Ave. Corr. Peak Ave. 10 150 7236.0000 46.42 -1.41 45.01 74.00 54.00 -31.45 110 150 9648.0000					_							
Mode: 802.11g CH1 Polarization: Horizontal Frequency (MHz) Reading (dBuV) Detector Factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Table Degree (Deg.) Ant. High (cm) 271.8636 15.71 peak 15.18 30.89 46.00 -15.11 130 150 612.8256 7.91 peak 22.87 30.78 46.00 -15.22 220 150 Frequency (MHz) Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table (Deg.) Ant. Degree 4824.0000 46.70 -4.15 42.55 74.00 54.00 -31.45 110 150 7236.0000 23.92 19.39 43.31 74.00 54.00 -30.69 130 150 9648.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertica					_							
Frequency (MHz) Reading (dBuV) Detector Factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dBuV/m) Degree (Deg.) High (cm) 271.8636 15.71 peak 15.18 30.89 46.00 -15.11 130 150 612.8256 7.91 peak 22.87 30.78 46.00 -15.22 220 150 Frequency Reading (dBuV) Factor Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree High (dBuV/m) Ant. 4824.0000 46.70 -4.15 42.55 74.00 54.00 -31.45 110 150 7236.0000 46.42 -1.41 45.01 74.00 54.00 -30.69 130 150 12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28	Polarization:	Horizontal	802.TTg Cl								Table	Ant.
(MH2) (dBuV) (dB) (dBuV/m) (dBuV/m) (dB) (dBuV/m) (dB) (dB) (dBuV/m) (dB) (dB) (dB) (dBuV/m) (dB) (dB) <t< td=""><td></td><td></td><td>Detecto</td><td>nr</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>			Detecto	nr								
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	(MHZ)	(aBuv)		(0	B)	(d	Buv/m)	(aBu	v/m)	(aB)		•
612.8256 7.91 peak 22.87 30.78 46.00 -15.22 220 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree Ant. High (cm) 4824.0000 46.70 -4.15 42.55 74.00 54.00 -31.45 110 150 7236.0000 46.42 -1.41 45.01 74.00 54.00 -31.45 110 150 9648.0000 23.92 19.39 43.31 74.00 54.00 -30.69 130 150 12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertical	271 8636	15 71	peak	15	18		30.89	46	00	-15 11	-	
Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree (dB) Ant. High (cm) 4824.0000 46.70 -4.15 42.55 74.00 54.00 -31.45 110 150 7236.0000 46.42 -1.41 45.01 74.00 54.00 -31.45 110 150 9648.0000 23.92 19.39 43.31 74.00 54.00 -28.99 210 150 12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertical 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertical factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Table Degree (Deg.) Ant. 132.8057 16.47 peak 22.87 29.61												
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	01210200		pourt									
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	Frequency	Rea	adina	Fact	or	Resu	ılt @3m	Limi	t@3m	Margin	Table	Ant
(MHz) Peak Áve. Corr. Peak Áve. Peak Áve. (dB) (Deg.) (cm) 4824.0000 46.70 -4.15 42.55 74.00 54.00 -31.45 110 150 7236.0000 46.42 -1.41 45.01 74.00 54.00 -28.99 210 150 9648.0000 23.92 19.39 43.31 74.00 54.00 -30.69 130 150 12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertical	rioquonoy		0							Margin		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	(MHz)	•	,			•	,	•		(dB)		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$												
$\begin{array}{c c c c c c c c c c c c c c c c c c c $												
12060.0000 22.75 21.97 44.72 74.00 54.00 -29.28 240 150 Polarization: Vertical Frequency (MHz) Reading (dBuV) Detector Factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Table Degree (Deg.) Ant. High (cm) 132.8057 16.47 peak 14.88 31.35 43.50 -12.15 200 150 612.8256 6.74 peak 22.87 29.61 46.00 -16.39 180 150 Frequency (MHz) Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree Ant. Degree Frequency (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (Deg.) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07												
Polarization: Vertical Frequency (MHz) Reading (dBuV) Detector Factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Table Degree (Deg.) Ant. High (cm) 132.8057 16.47 peak 14.88 31.35 43.50 -12.15 200 150 612.8256 6.74 peak 22.87 29.61 46.00 -16.39 180 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree High (dBuV/m) Ant. MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -30.39 250 150												
Frequency (MHz) Reading (dBuV) Detector Factor (dB) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Degree (Deg.) High (cm) 132.8057 16.47 peak 14.88 31.35 43.50 -12.15 200 150 612.8256 6.74 peak 22.87 29.61 46.00 -16.39 180 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree Ant. (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (Deg.) (cm) (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (Deg.) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 <td></td> <td></td> <td></td> <td></td> <td>, , ,</td> <td>1.72</td> <td>1</td> <td>1</td> <td>1 0 1.00</td> <td>, 27.20</td> <td></td> <td>·</td>					, , ,	1.72	1	1	1 0 1.00	, 27.20		·
132.8057 16.47 peak 14.88 31.35 43.50 -12.15 200 150 612.8256 6.74 peak 22.87 29.61 46.00 -16.39 180 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree Ant. High (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -30.39 250 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150			Detecto	nr i							Degree	High
612.8256 6.74 peak 22.87 29.61 46.00 -16.39 180 150 Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree High (dB) Ant. (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (dB) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -28.93 210 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150	132.8057	16.47	peak	14	.88		31.35	43.5	50	-12.15		· ·
Frequency Reading (dBuV) Factor (dB) Result @3m (dBuV/m) Limit @3m (dBuV/m) Margin (dBuV/m) Table Degree (dB) Ant. High (cm) (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (dBuV/m) Degree High 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -28.93 210 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150												
(MHz) (dBuV) (dB) (dBuV/m) (dBuV/m) (dBuV/m) Degree High (MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (Deg.) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -28.93 210 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150	01210200	0171	pour		107	-	27101	1010		10107	100	100
(MHz) Peak Ave. Corr. Peak Ave. Peak Ave. (dB) (Deg.) (cm) 4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -28.93 210 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150	Frequency		0				-			Margin		
4824.0000 47.15 -4.15 43.00 74.00 54.00 -31.00 190 150 7236.0000 46.48 -1.41 45.07 74.00 54.00 -28.93 210 150 9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150	(MHz)		,			•	,	•	'	(dB)	0	-
7236.000046.481.4145.0774.0054.00-28.932101509648.000024.2219.3943.6174.0054.00-30.39250150												
9648.0000 24.22 19.39 43.61 74.00 54.00 -30.39 250 150												
					_							
	12060.0000	23.46		21.97	_			74.00	54.00	-28.57	160	150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Mode: Polarization:	{ Horizontal	302.11g CH	16								
Frequency (MHz)	Reading (dBuV)	Detector	Fact (dB			esult BuV/m)	Limi (dBuV		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.8937	15.48	peak	15.7	0	3	1.18	43.5	0	-12.32	310	150
611.4230	6.36	peak	22.8		2	9.22	46.0	0	-16.78	210	150
Frequency	Read (dB	0	Factor (dB)			lt @3m JV/m)	-	@3m iV/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.		Peak		Peak	,	. (dB)	(Deg.)	(cm)
4874.0000	46.24		-4.00	Δ	2.24		74.00	54.00	· · ·	240	150
7311.0000	46.05		-4.00		<u>2.24</u> 4.17		74.00	54.00		280	150
9748.0000	24.8		19.37		4.17		74.00	54.00		130	150
12185.0000	23.27		22.28		5.55		74.00	54.00		250	150
Polarization:	Vertical					1		1			1
Frequency	Reading		Fact	or		Result	Lim	i+	Margin	Table	Ant.
(MHz)	(dBuV)	Detector	dB			BuV/m)	(dBuV	-	(dB)	Degree	High
	(ubuv)				(ut	Suvinij	(ubuv	/111)	、 <i>,</i>	(Deg.)	(cm)
134.4290	16.99	peak	15.0	1	3	32.00	43.5	50	-11.50	140	150
608.6173	7.19	peak	22.8	3	3	80.02	46.0	00	-15.98	160	150
Frequency	Readi	na	Factor	R	esult	@3m	Limit	@3m	Margin	Table	Ant.
rioquonoj	(dBu\	0	(dB)		(dBu∖		(dBu		margin	Degree	High
(MHz)	•	Ave.	Corr.		eak ?	Ave.	Peak	Ave.	(dB)	(Deq.)	(cm)
4874.0000	46.53		-4.00	42.	53		74.00	54.00		300	150
7311.0000	45.77		-1.88	43.	89		74.00	54.00		290	150
9748.0000	25.16		19.37	44.	53		74.00	54.00	-29.47	130	150
12185.0000	23.33		22.28	45.	61		74.00	54.00	-28.39	250	150
Node: Polarization:	80 Horizontal)2.11g CH1	1							1	
Frequency (MHz)	Reading (dBuV)	Detector	Fact (dB			Result BuV/m)	Lim (dBu\		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
263.7475	15.58	peak	14.8	7	3	30.45	46.0)0	-15.55	230	150
611.4230	7.46	peak	22.8			30.32	46.0		-15.68	100	150
Frequency	Read (dBu	0	Factor (dB)			lt @3m uV/m)		:@3m uV/m)	Margii	n Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.		Peak	,	Peak		e. (dB)	(Deg.)	(cm)
4924.0000	45.79		-3.91	4	1.88		74.00	54.00			150
7386.0000	45.64		-2.09		3.55		74.00	54.00			150
9848.0000	24.68		19.63		4.31		74.00	54.00			150
12310.0000	23.08		22.25		5.33		74.00	54.00			150



Registration number: W6D21501-14761-C-1 FCC ID: OA3RN1723

Polarization:	Vertical									
Frequency (MHz)	Reading (dBuV)	Detecto	or Fac (dE		Result dBuV/m)	Lin (dBu\	-	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
132.2646	17.50	peak	14.8	84	32.34	43.	50	-11.16	270	150
992.9860	8.71	peak	27.	86	36.57	54.	00	-17.43	300	150
	•			1						
Frequency	Read (dBu	0	Factor (dB)		lt @3m uV/m)	-	@3m IV/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	46.62		-3.91	42.71		74.00	54.00	-31.29	170	150
7386.0000	47.22		-2.09	45.13		74.00	54.00	-28.87	250	150
9848.0000	25.38		19.63	45.01		74.00	54.00	-28.99	140	150
12310.0000	24.96		22.25	47.21		74.00	54.00	-26.79	250	150

Note 1. Correction Factor = Antenna factor + Cable loss - Preamplifier

2. The formula of measured value as: Test Result = Reading + Correction Factor

3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average

4. All not in the table noted test results are more than 20 dB below the relevant limits.

5. See the attached diagram as appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044



3.6 Radiated Emission on the band edge


According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

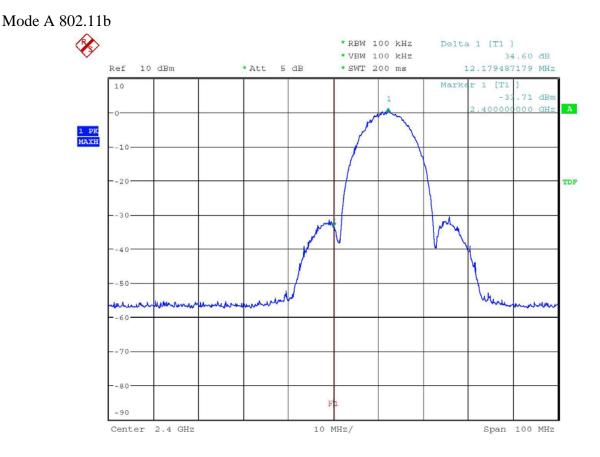


BANDEDGE 802.11b CH1 Date: 26.JAN.2015 15:32:48



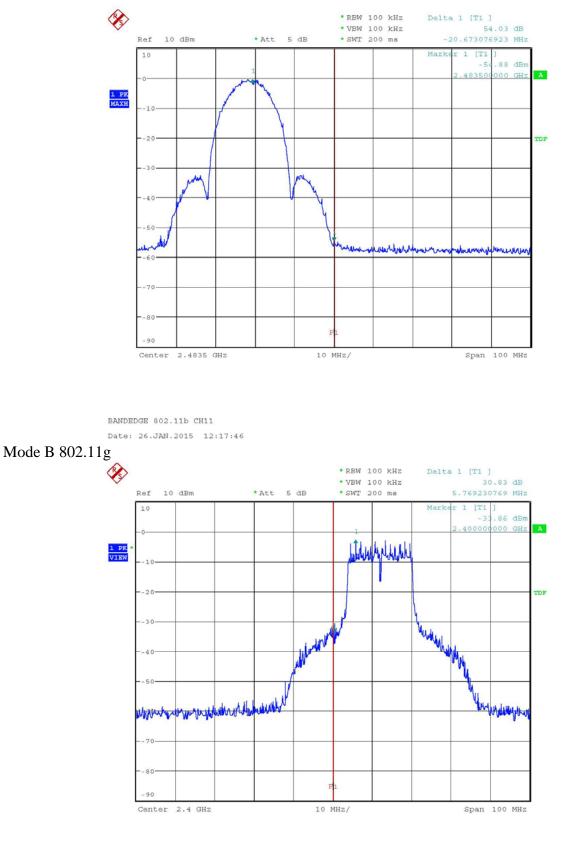

BANDEDGE 802.11g CH1 Date: 26.JAN.2015 12:14:52



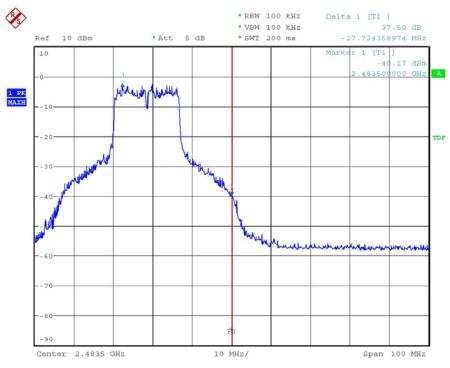

BANDEDGE 802.11g CH11 Date: 26.JAN.2015 12:16:40

Limit:

Frequency Range / MHz	Limit
902 –928	
2400 - 2483.5	- 20 dB
5725 - 5850	


Test equipment used: ETSTW-RE 055



3.7 Minimum 6 dB Bandwidth


The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

Mode A 802.11b

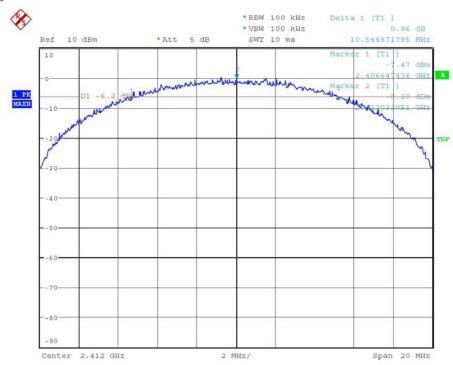


6DB BANDWIDTH 802.11b CH1 Date: 26.JAN.2015 12:44:41



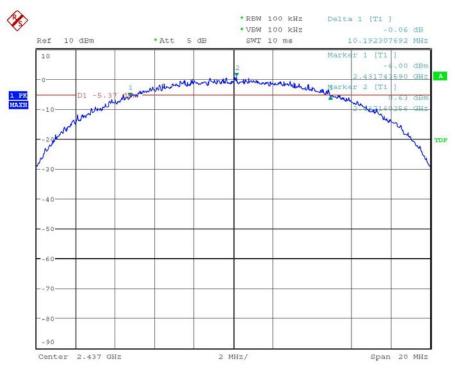


⁶DB BANDWIDTH 802.11b CH6 Date: 26.JAN.2015 12:42:22

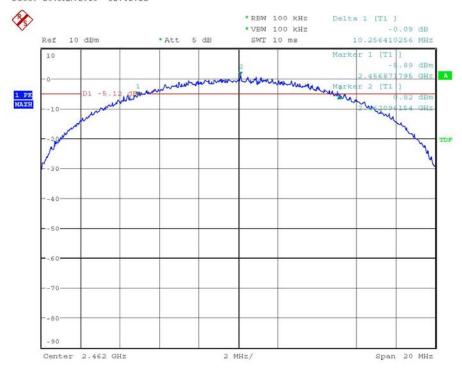


6DB BANDWIDTH 802.11b CH11 Date: 26.JAN.2015 12:38:27



Mode B 802.11g

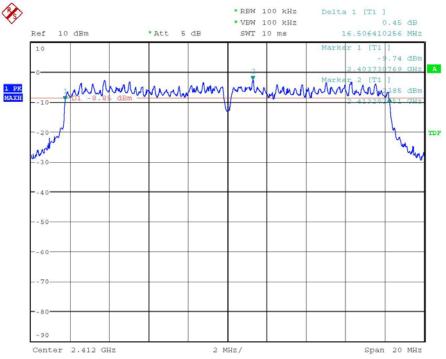


⁶DB BANDWIDTH 802.11g CH1

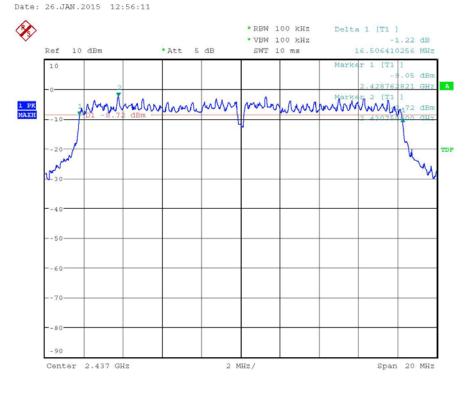

6DB BANDWIDTH 802.11g CH6 Date: 26.JAN.2015 12:54:29



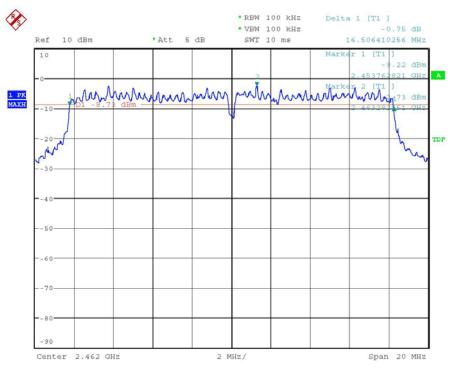

6DB BANDWIDTH 802.11g CH11 Date: 26.JAN.2015 13:01:01

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055




3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.


The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Mode A 802.11b

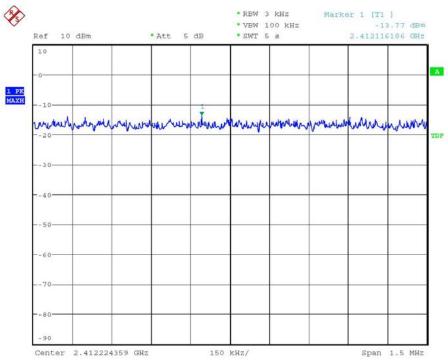


POWER DENSITY 802.11b CH1 Date: 26.JAN.2015 13:15:51



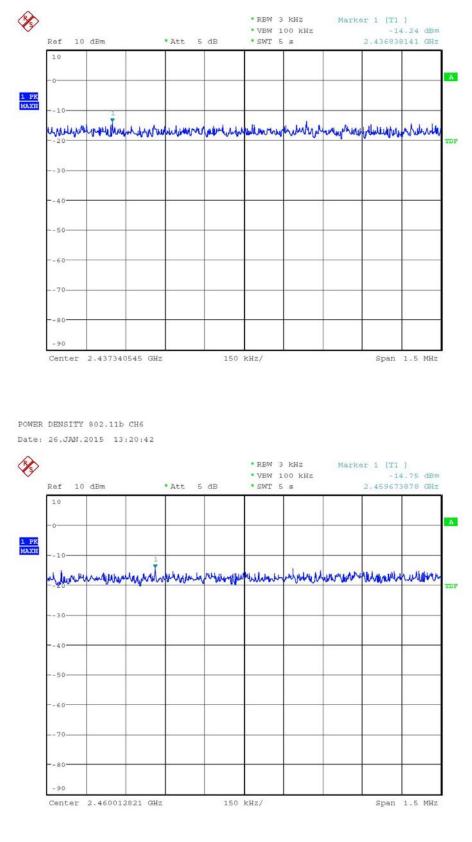


POWER DENSITY 802.11b CH11 Date: 26.JAN.2015 13:22:15



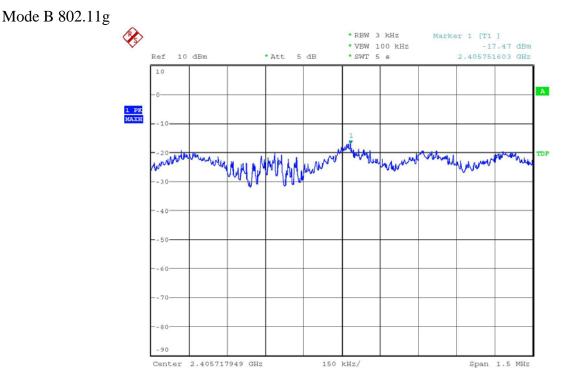


POWER DENSITY 802.11g CH1 Date: 26.JAN.2015 13:12:37

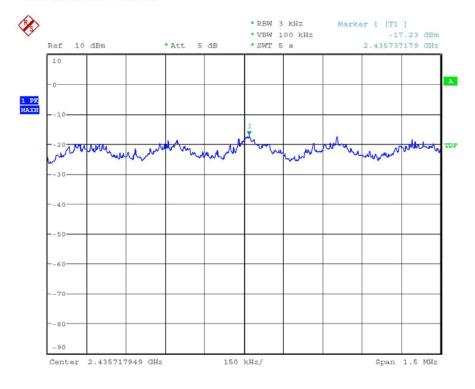

POWER DENSITY 802.11g CH6 Date: 26.JAN.2015 13:10:53



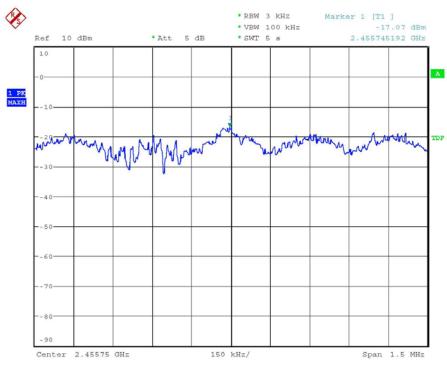

POWER DENSITY 802.11g CH11 Date: 26.JAN.2015 13:06:17

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055



3.9 Radiated Emission from Receiver Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission	Field Strength	Field Strength
(MHz)	(microvolts/meter)	(dBmicrovolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044

Note: The test results are listed in the separated test report no. W6D21501-14761-P-15B.



3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Erecuency	Level (dBµV)				
Frequency	quasi-peak	average			
150 kHz	lower limit line	Lower limit line			

Model: Mode:	RN1	1723	Date: Temper	rature:		°C		Engineer:
Polarization:	Ν		Humi	dity:		%		
Frequency		ding uV)	Factor (dB)		esult BuV)		nit uV)	Margin
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)

Polarization:	L1							
Frequency		ding uV)	Factor (dB)		esult BuV)		mit uV)	Margin
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)

Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor

2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss

3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average

4. All not in the table noted test results are more than 20 dB below the relevant limits.

5. This test is not required.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)			
	Quasi Peak	Average		
0.15-0.5	66 to 56	56 to 46		
0.5-5	56	46		
5-30	60	50		

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006



Appendix

Measurement diagrams


Spurious Emissions radiated



Spurious Emissions radiated-Antenna 1 802.11b


Channel 1 Antenna Polarization H

92.0 dBuV/m

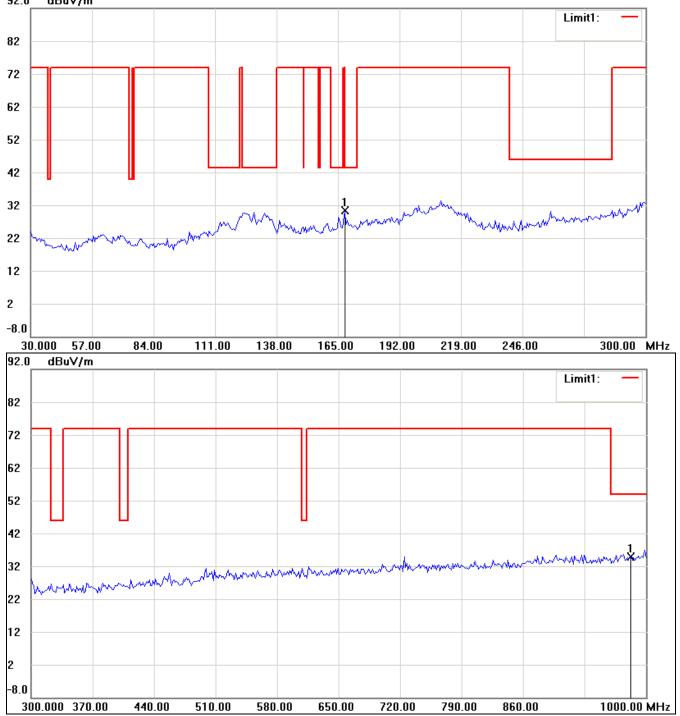


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



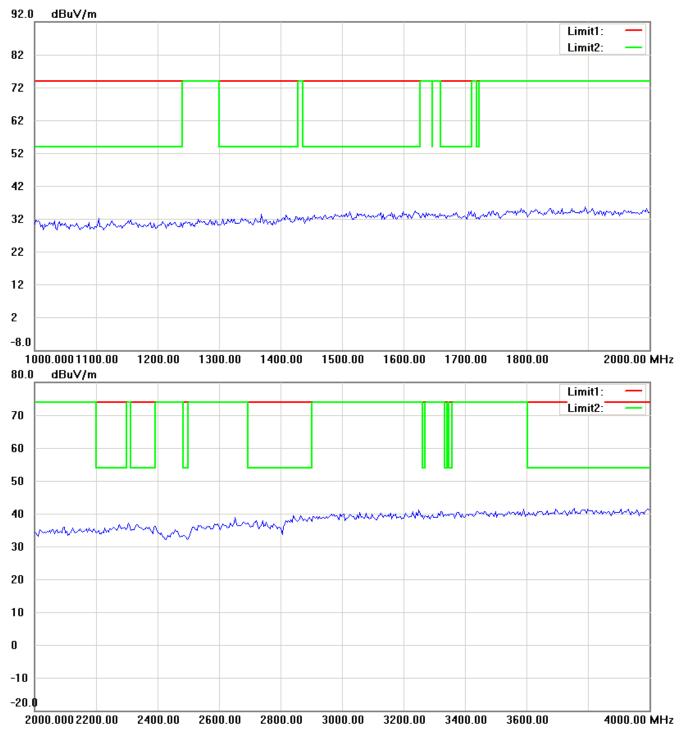


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



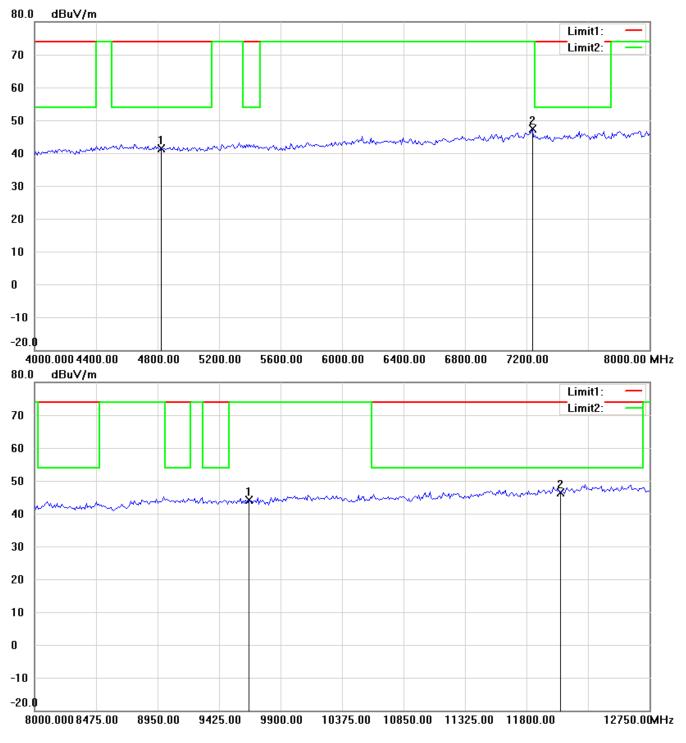


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



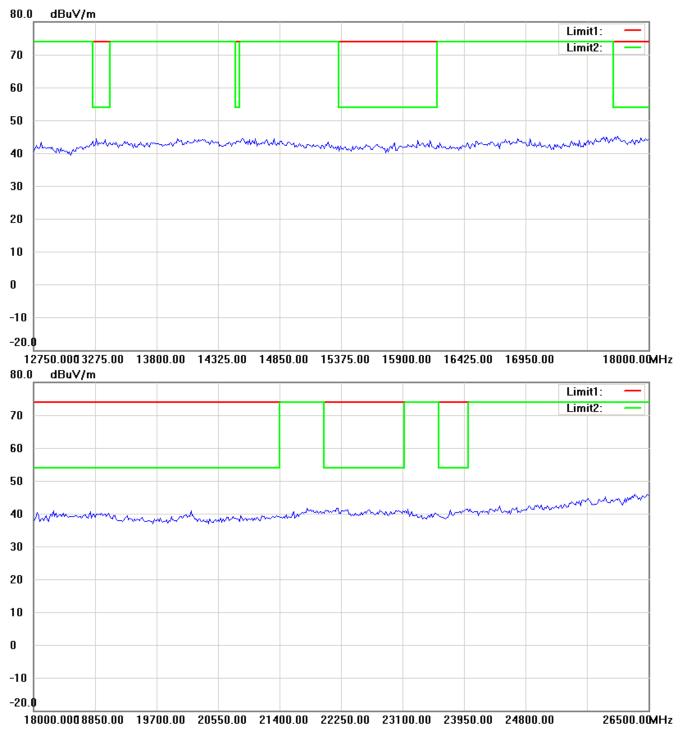


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



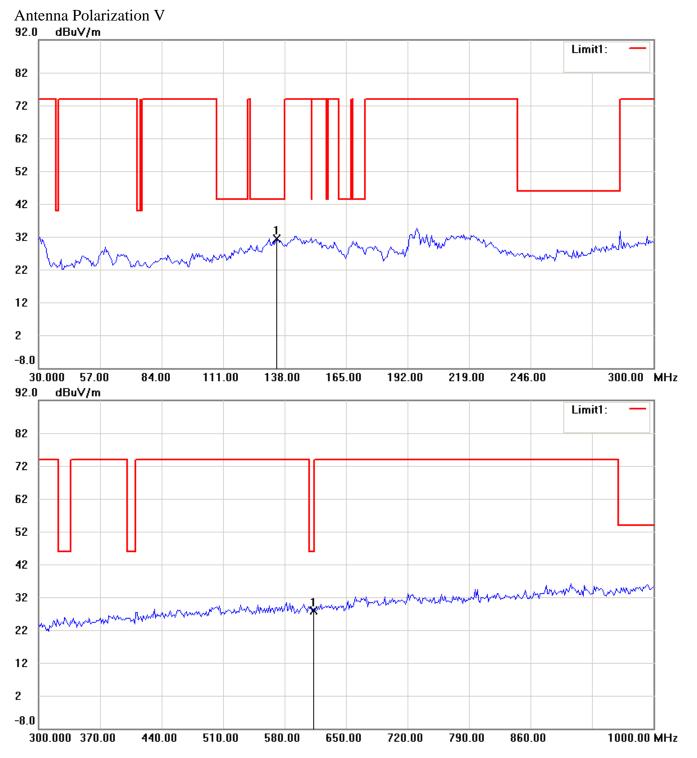


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



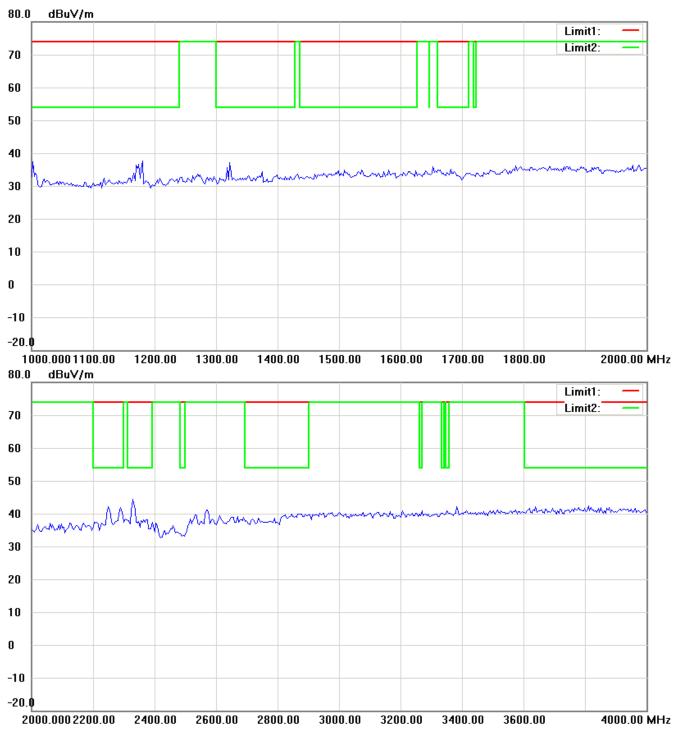


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



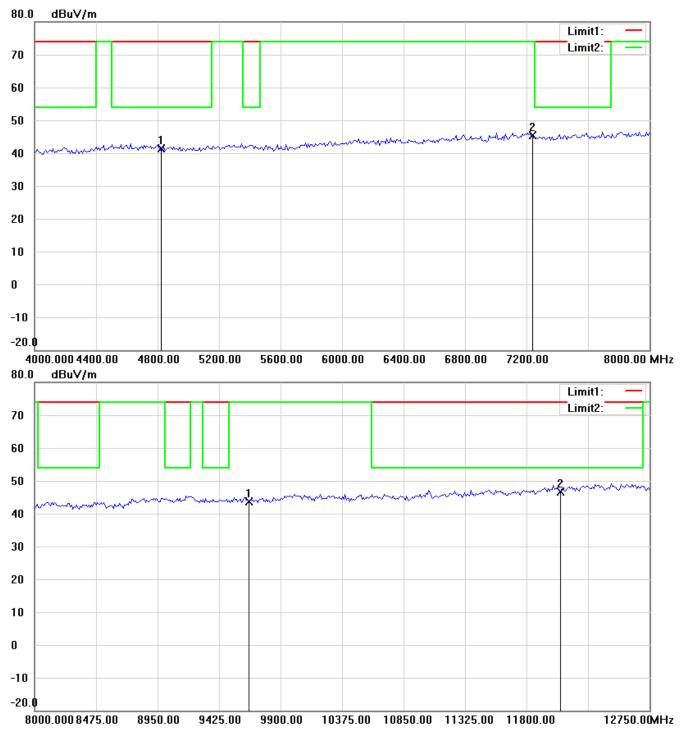

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




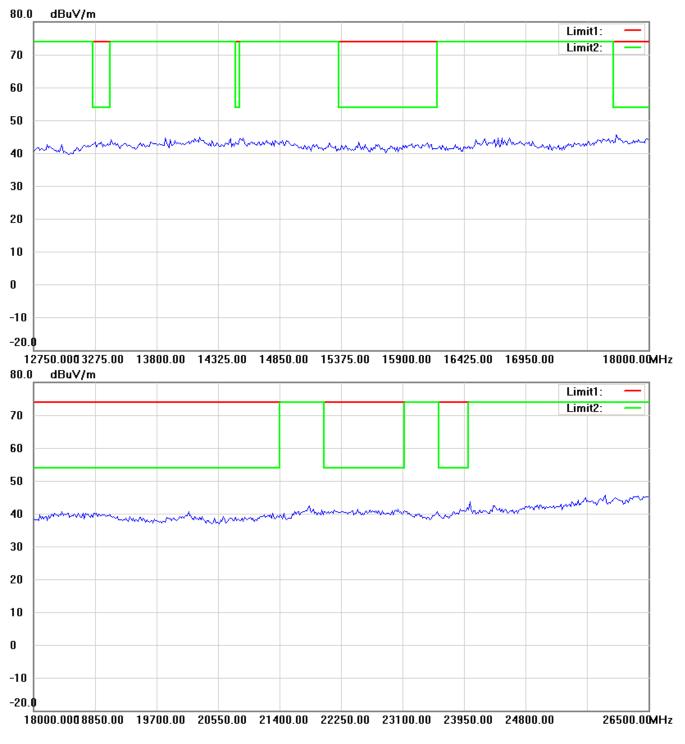

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 6

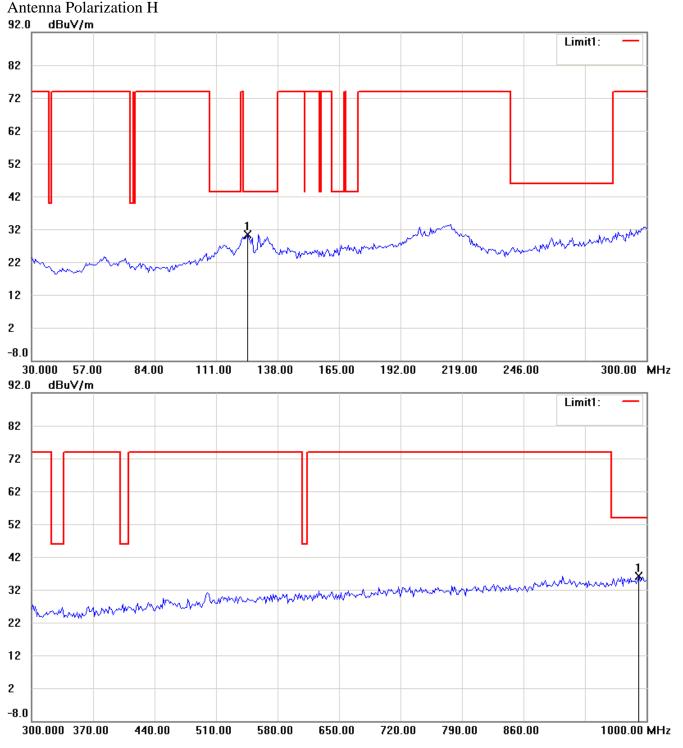


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



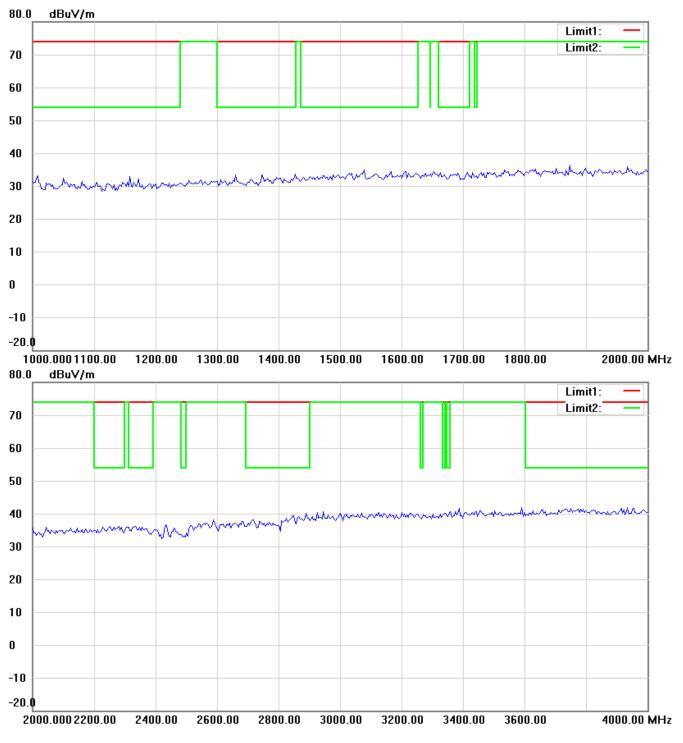


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



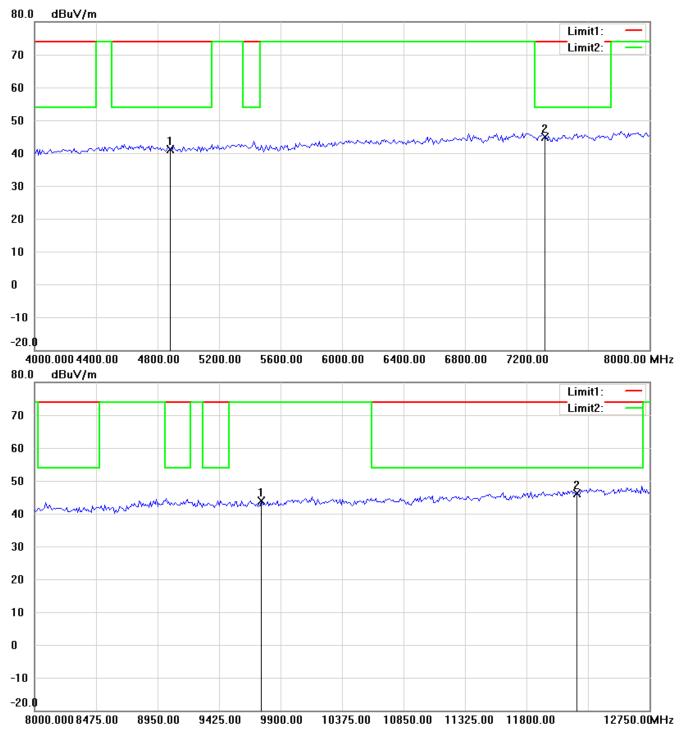


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



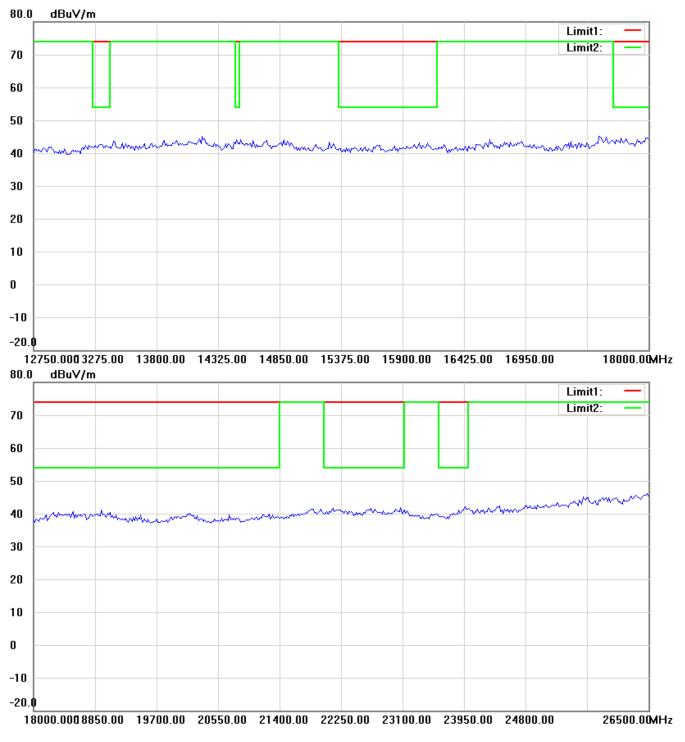


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



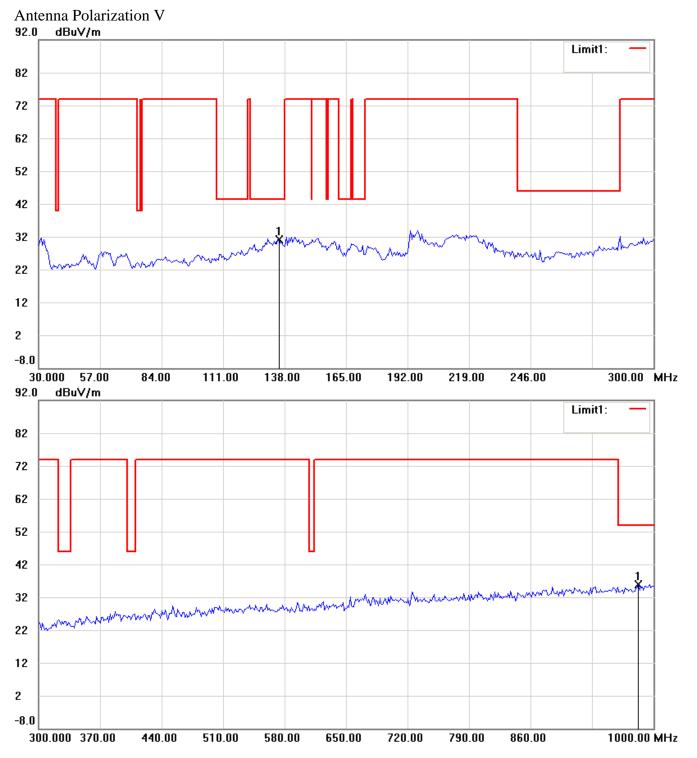


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



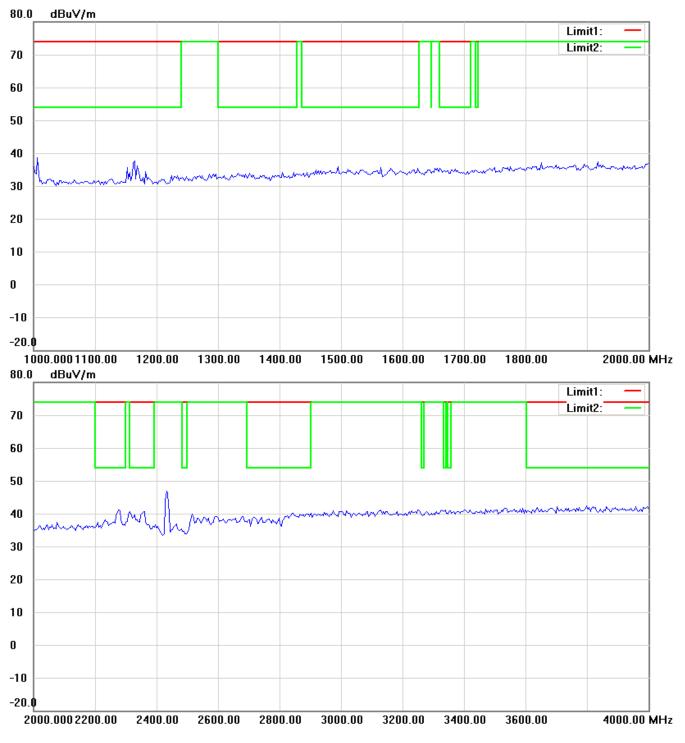


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



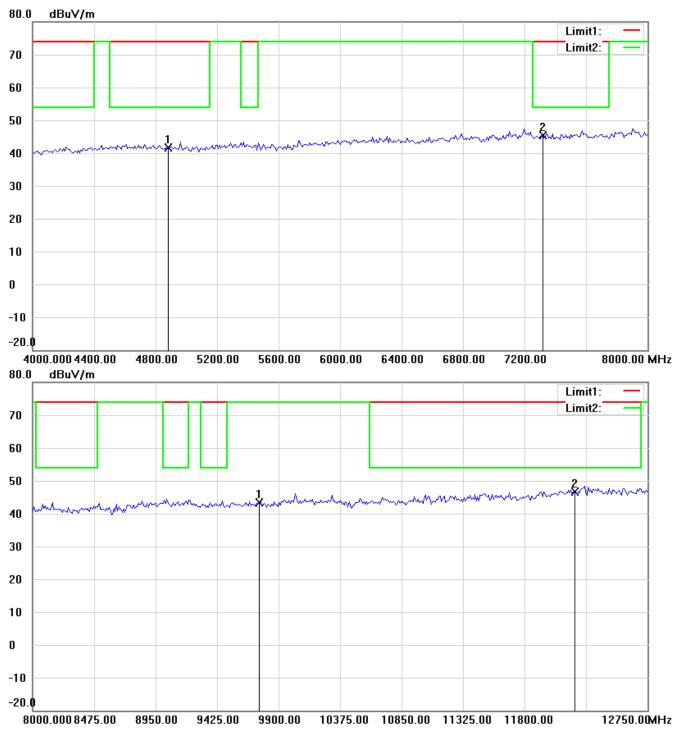

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




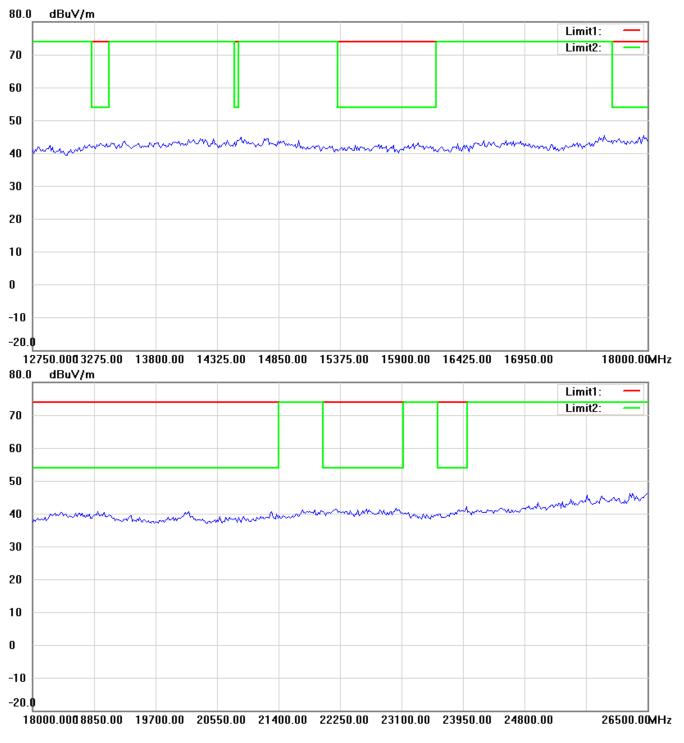

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 11 Antenna Polarization H

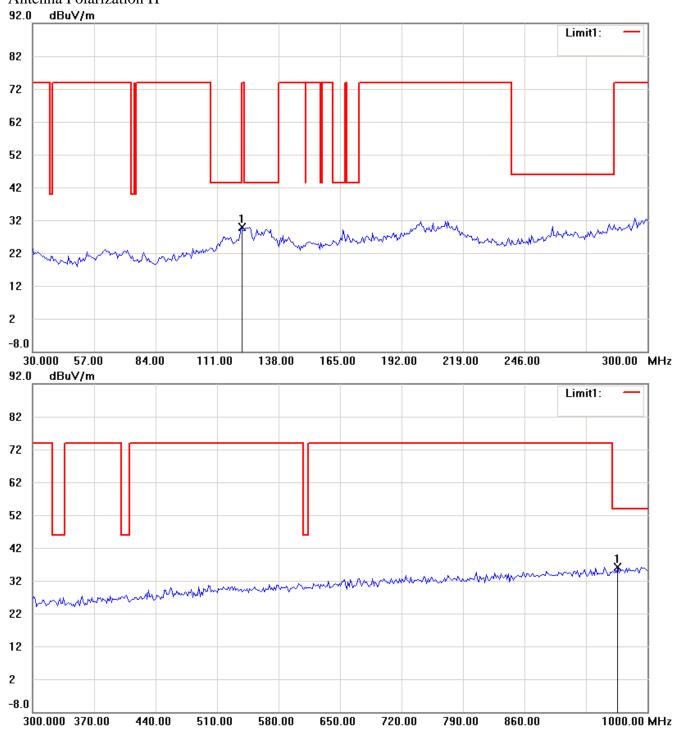


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



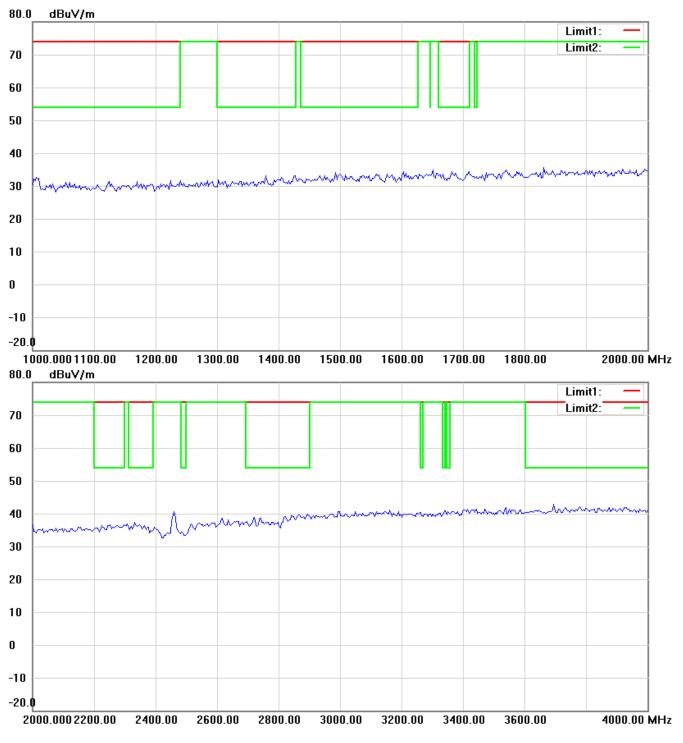


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



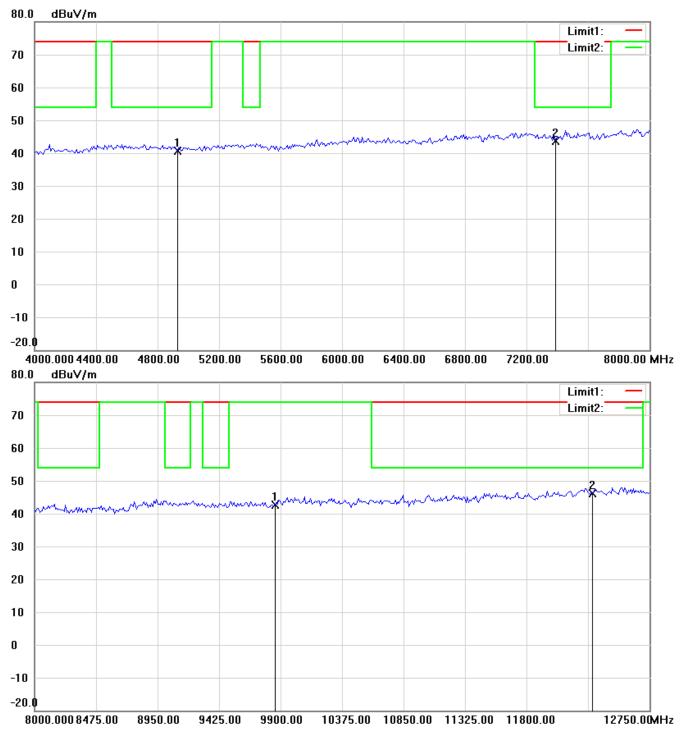


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



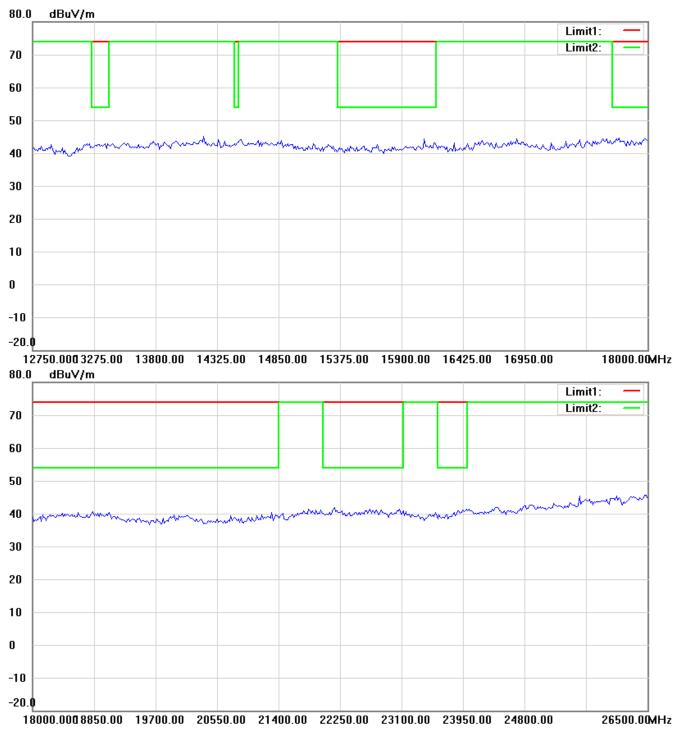


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



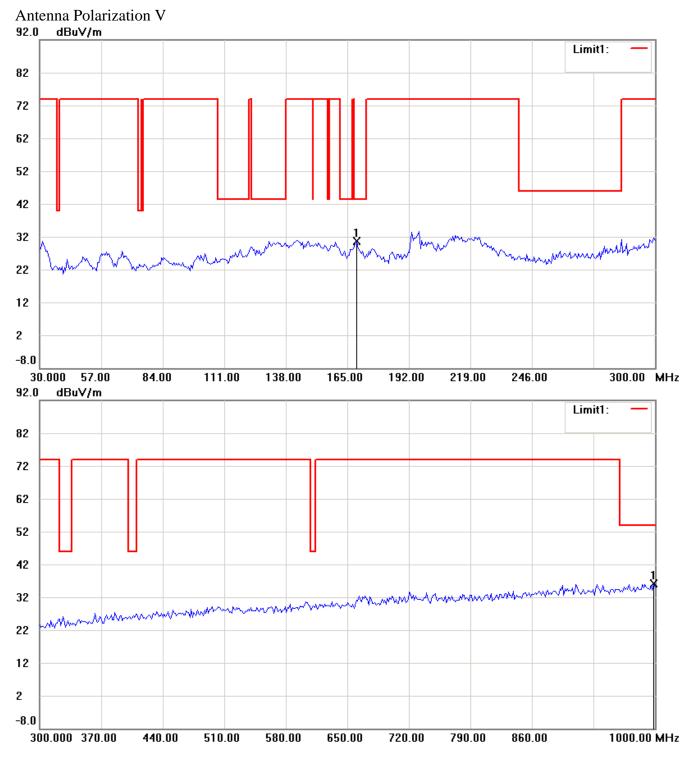


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



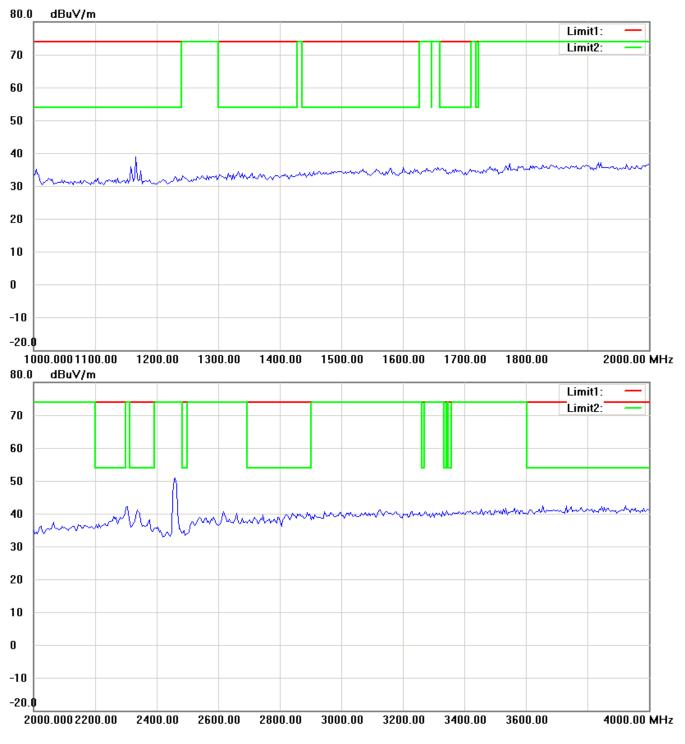


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



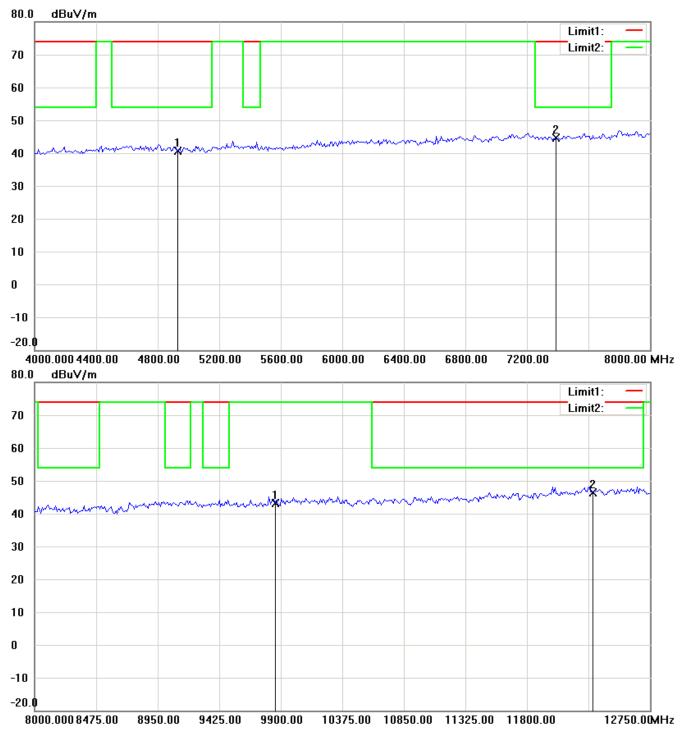


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



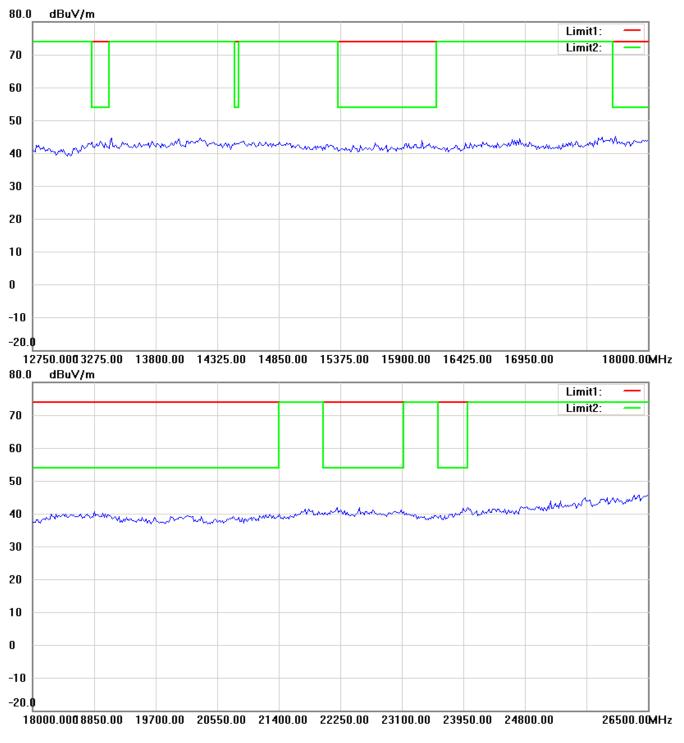


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



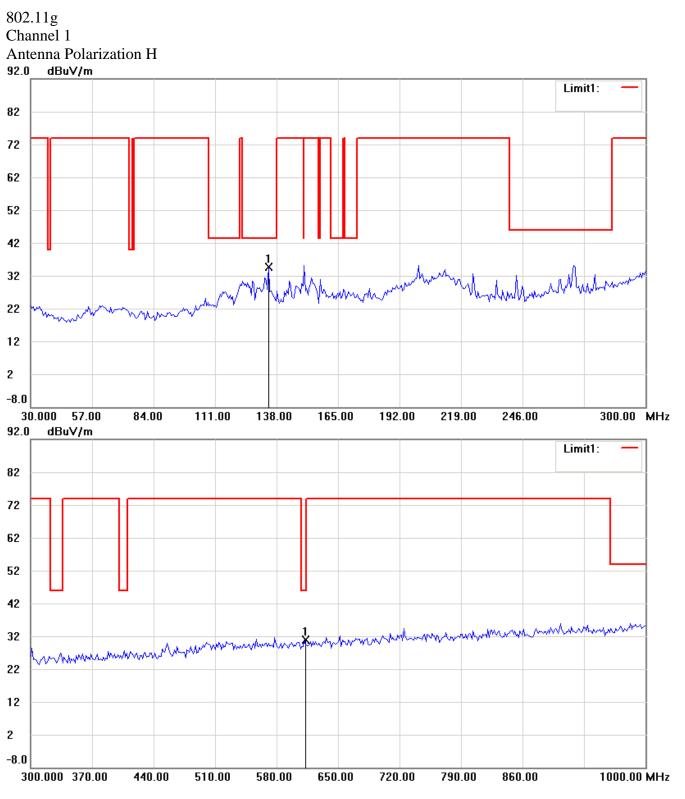


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



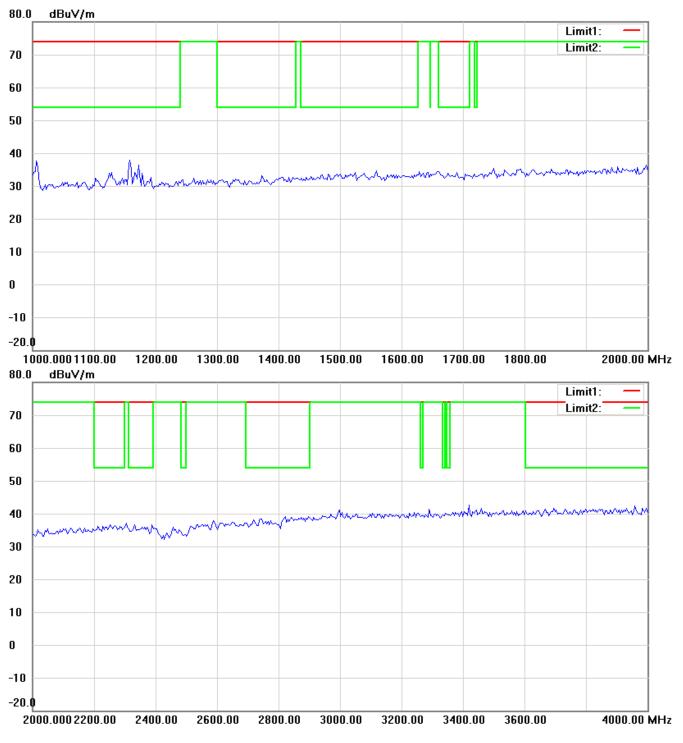


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



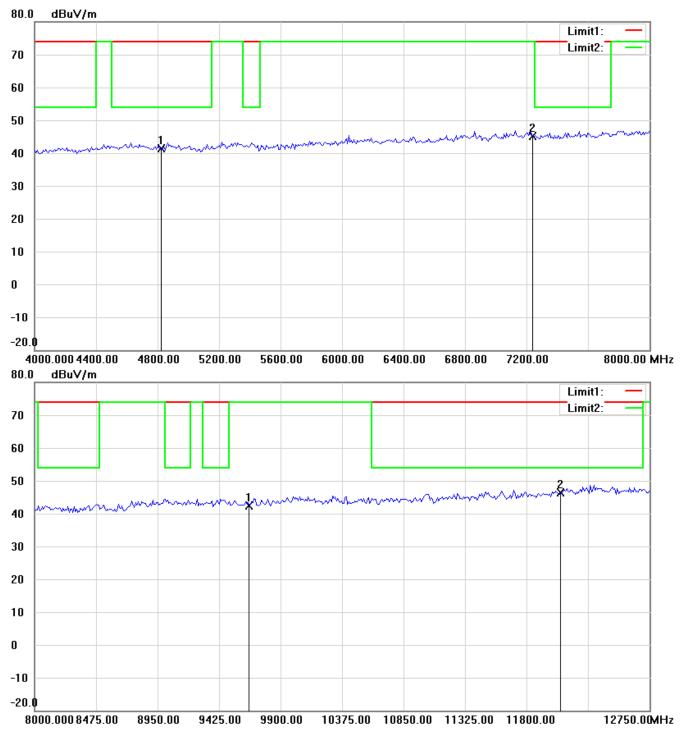


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



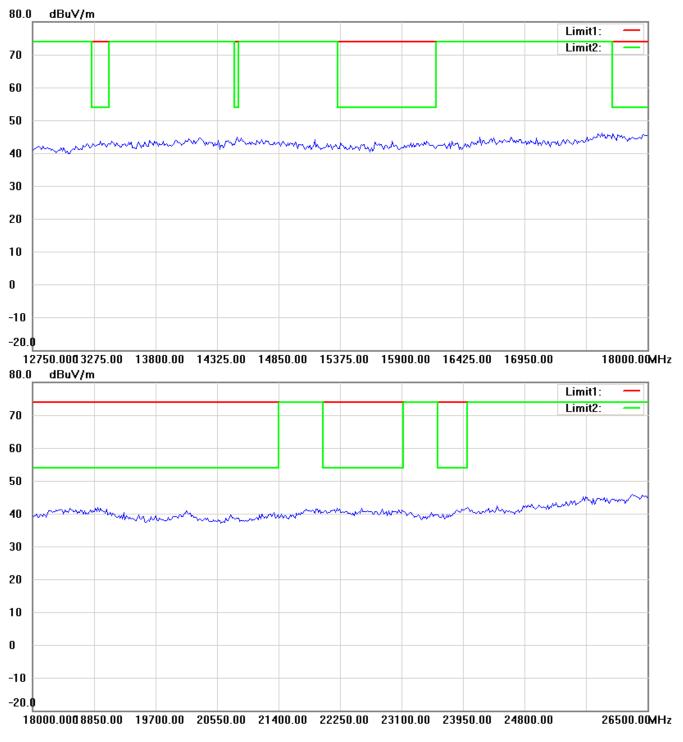


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



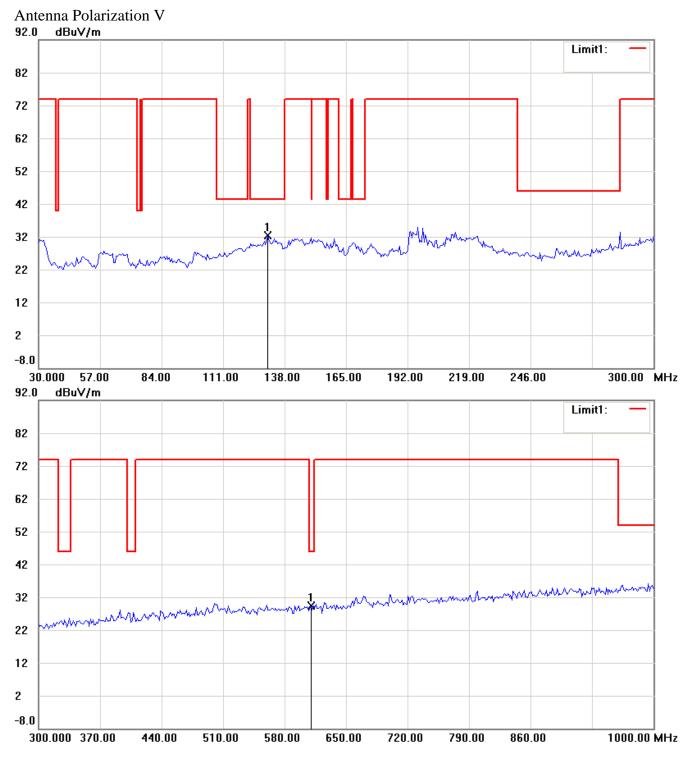


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



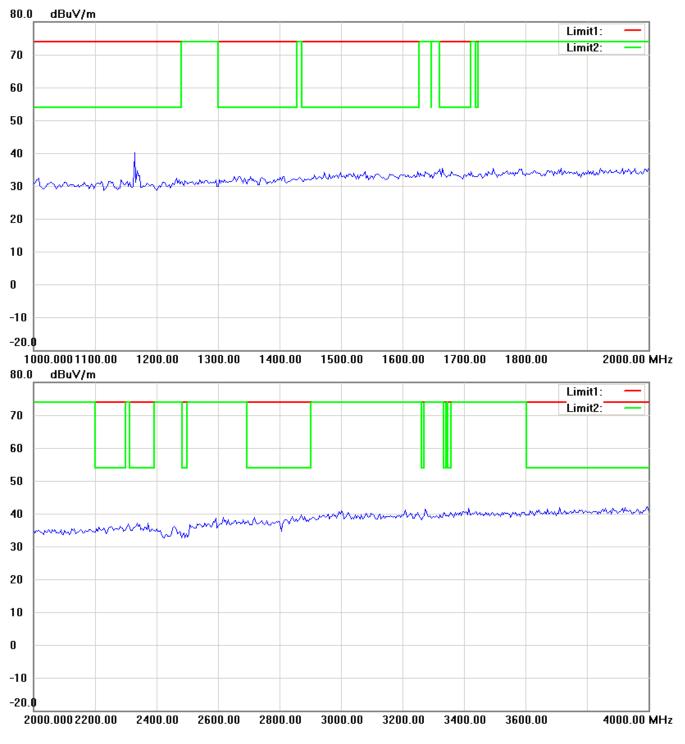


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



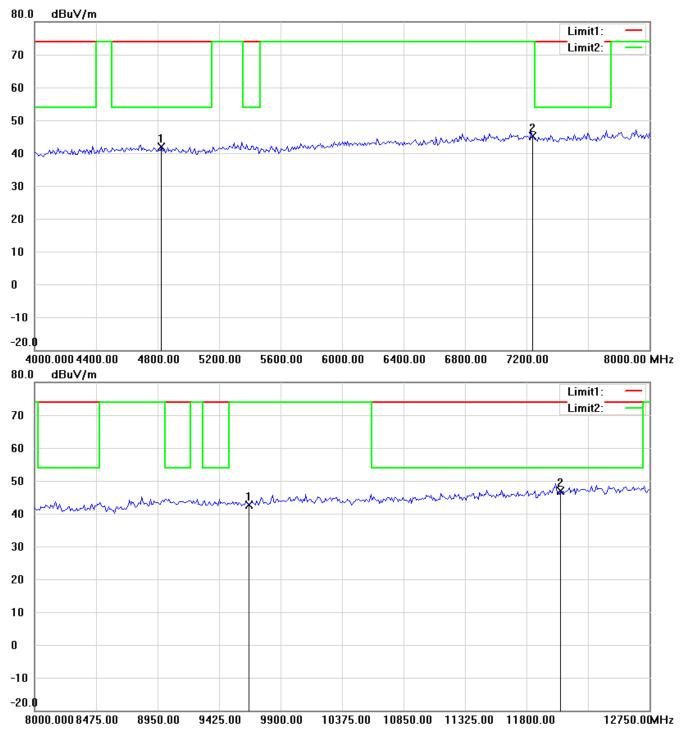


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



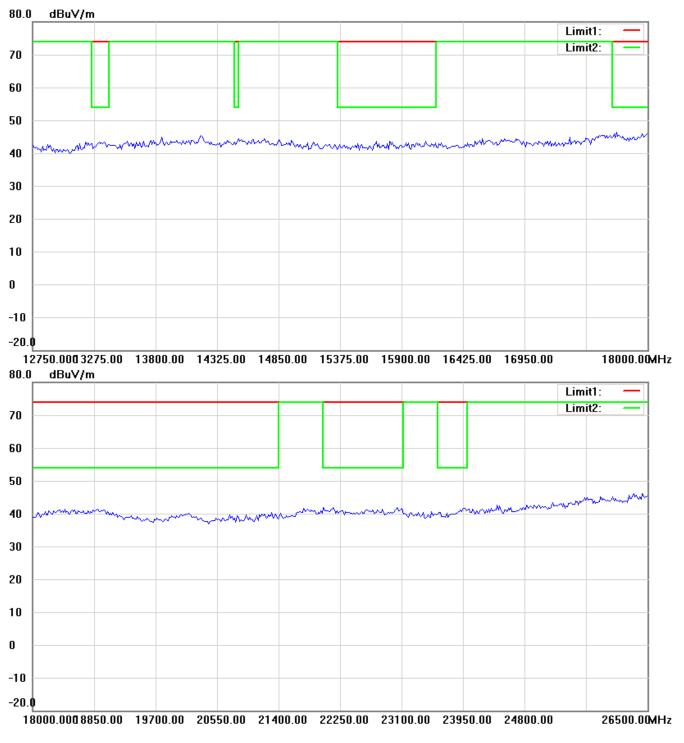


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



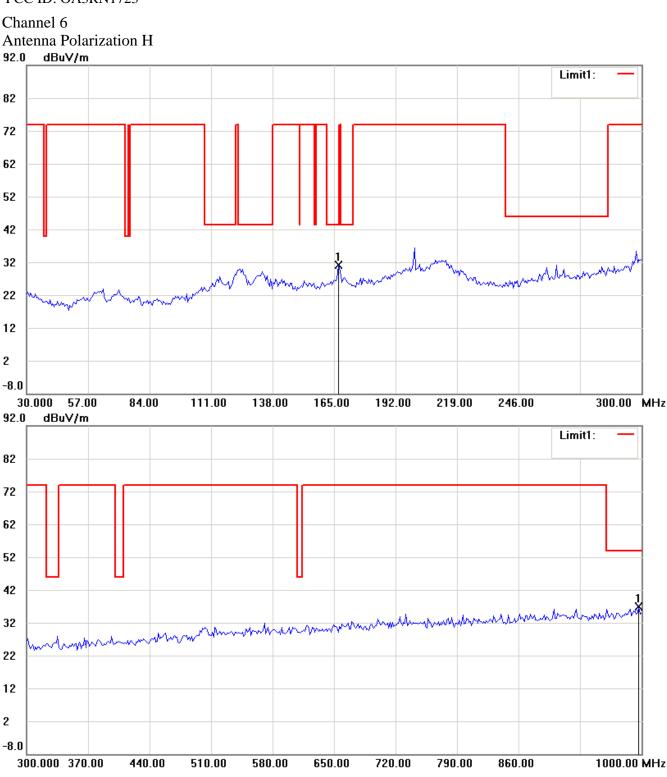


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



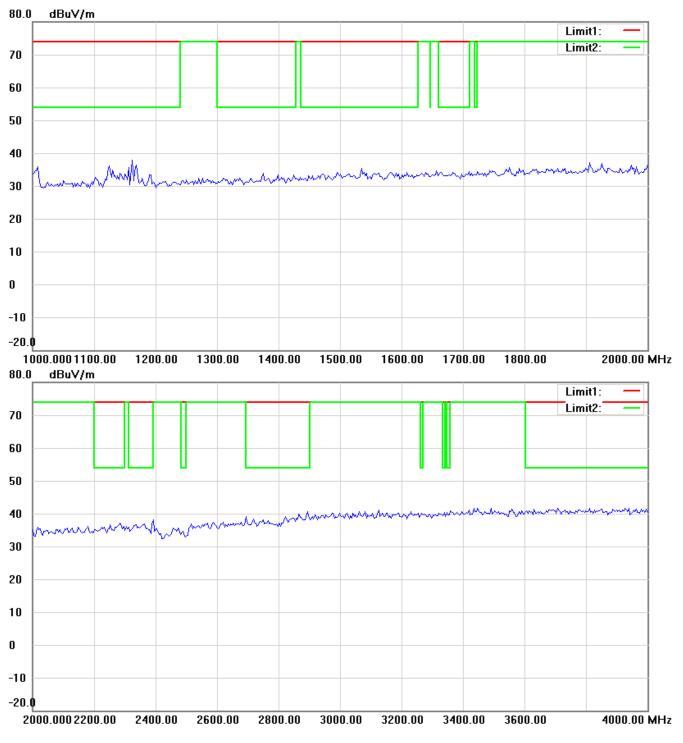


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



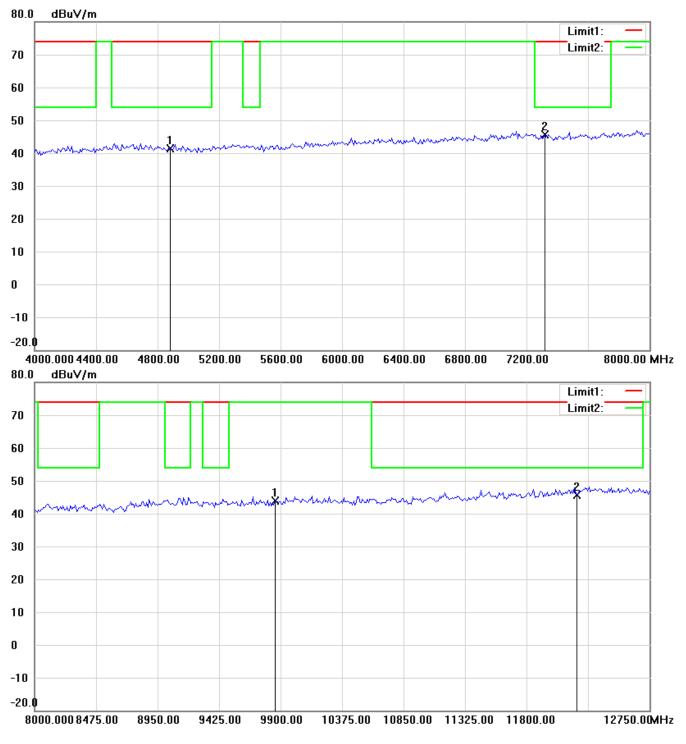


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



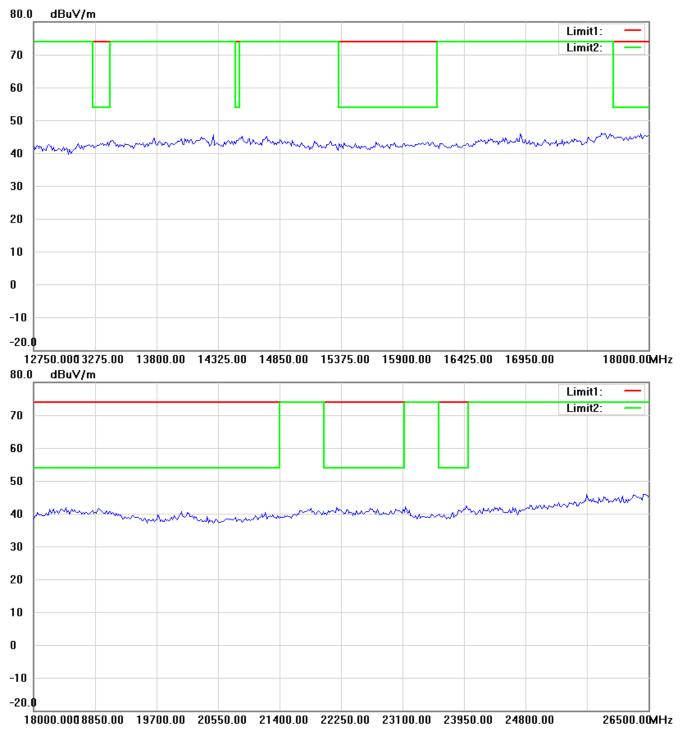


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



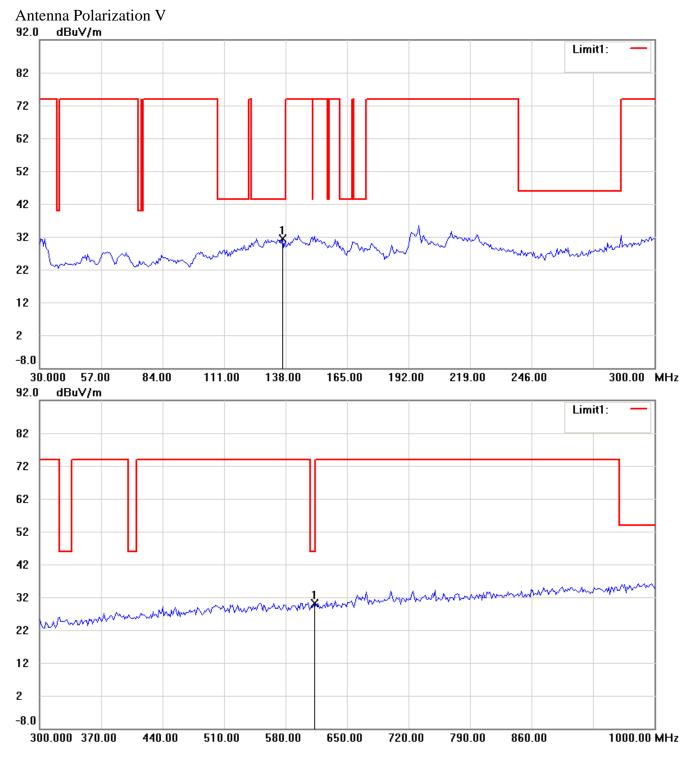


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



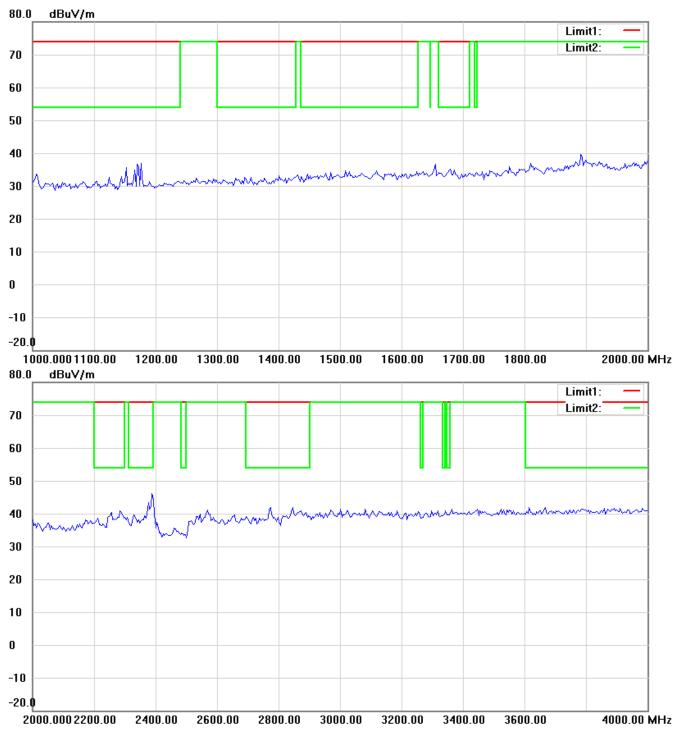


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



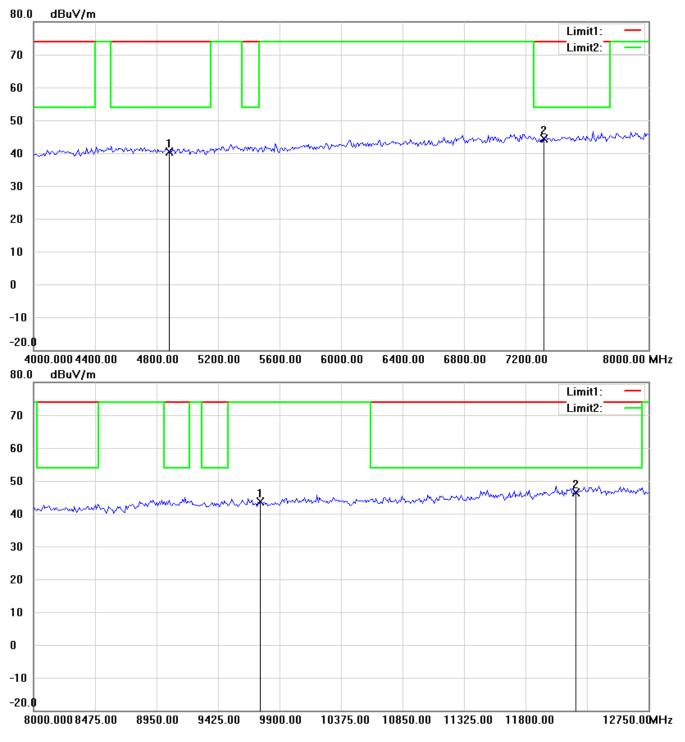

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




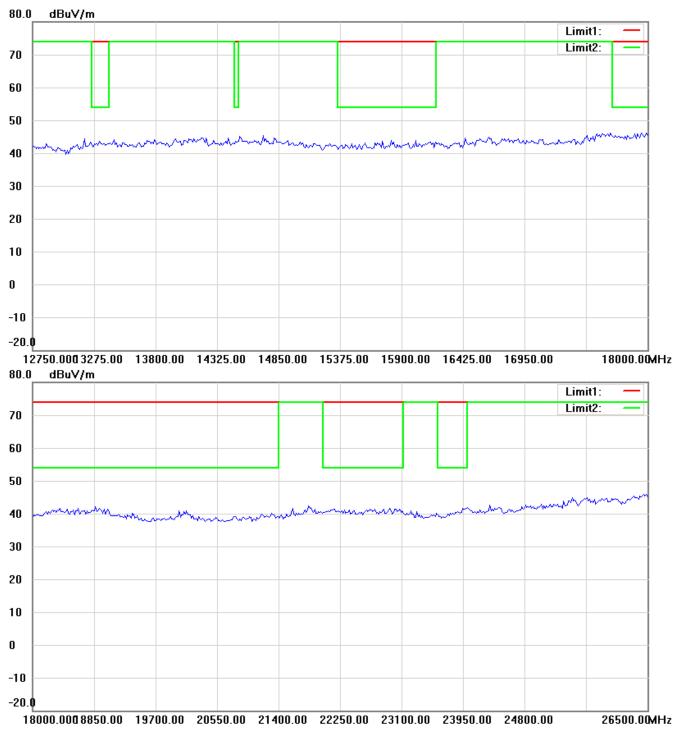

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 11 Antenna Polarization H

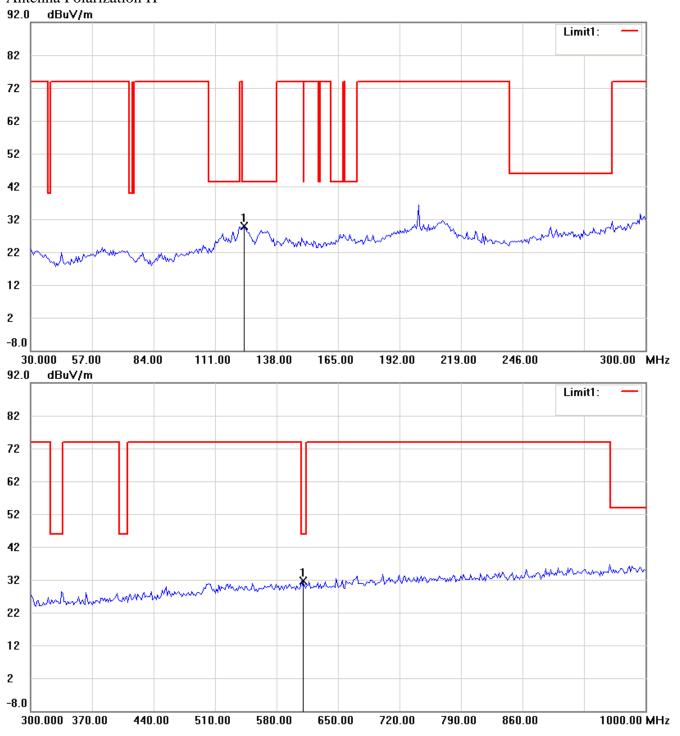


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



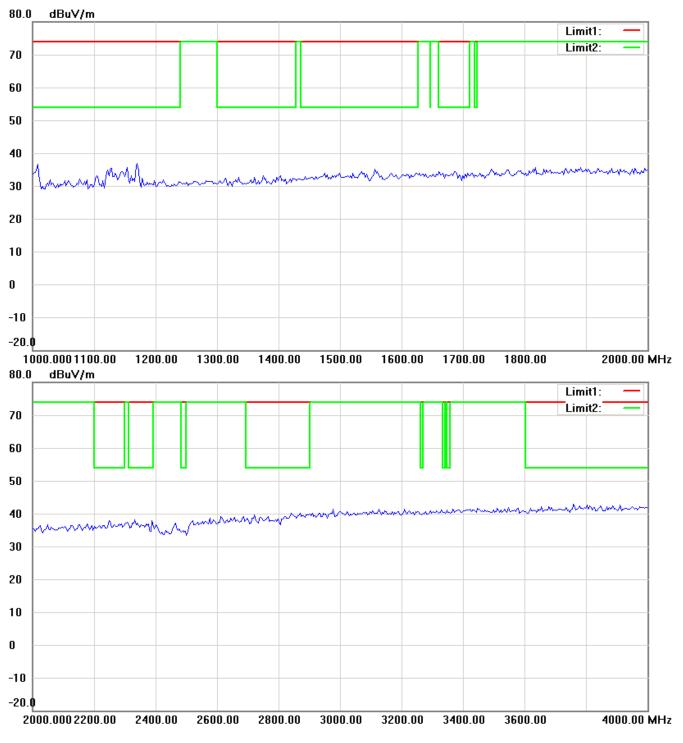


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



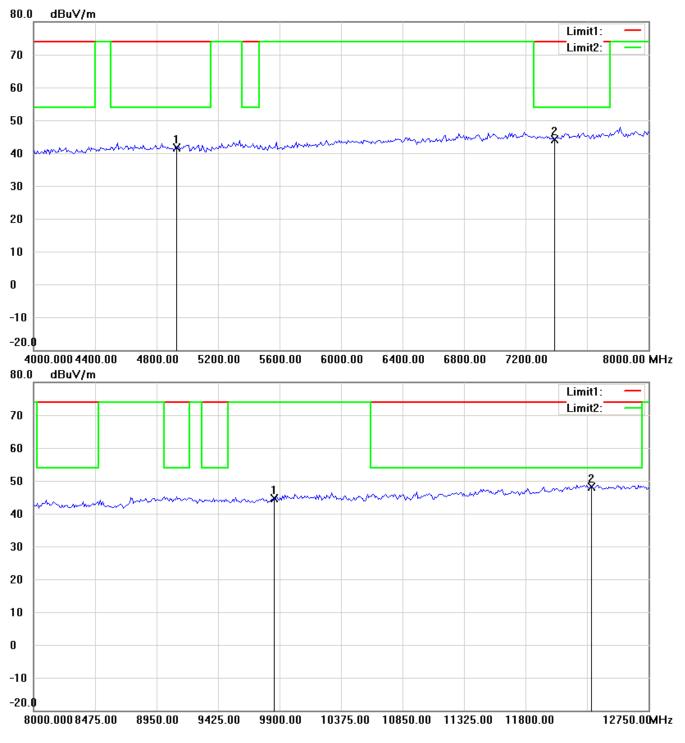


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



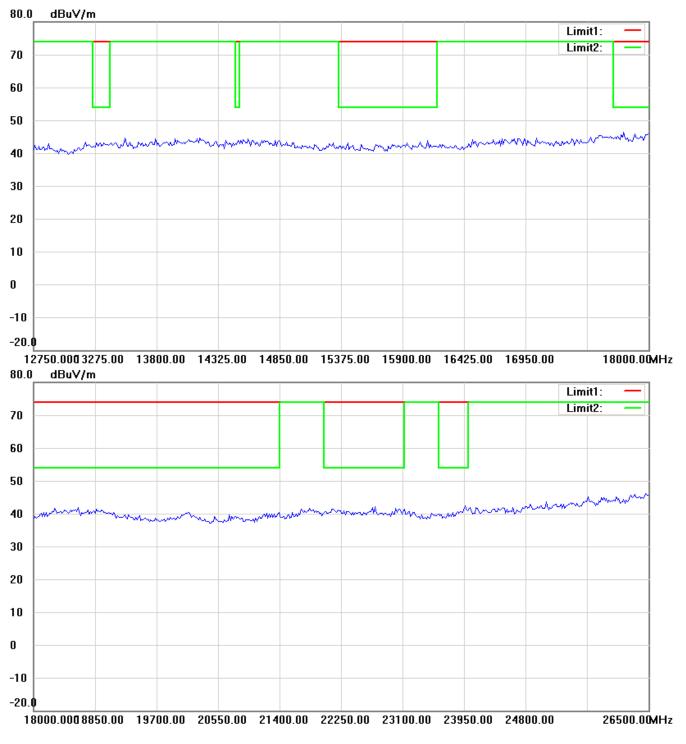


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



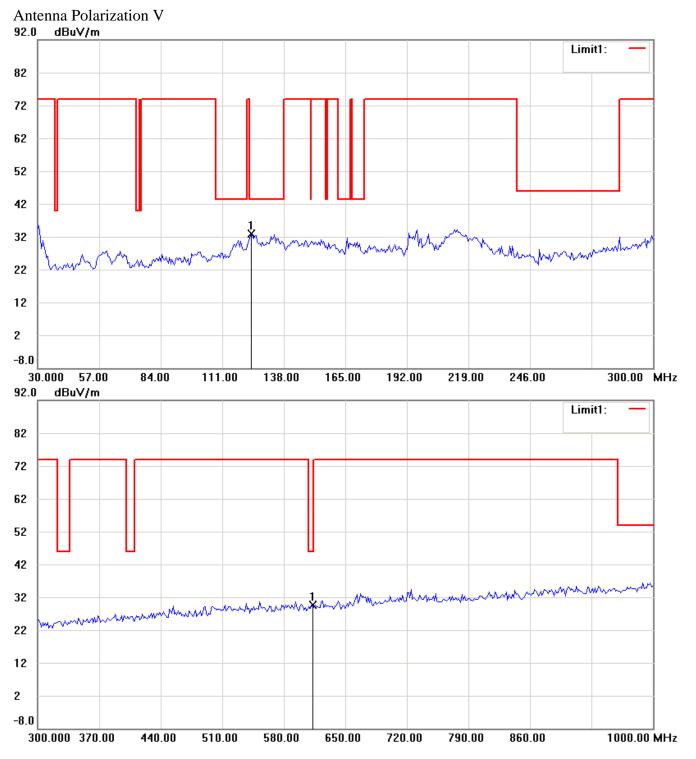


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



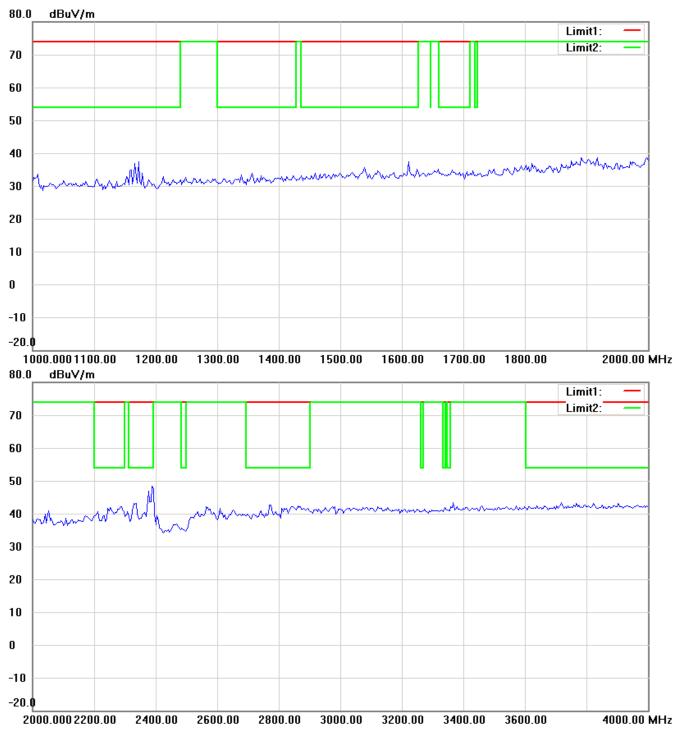


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



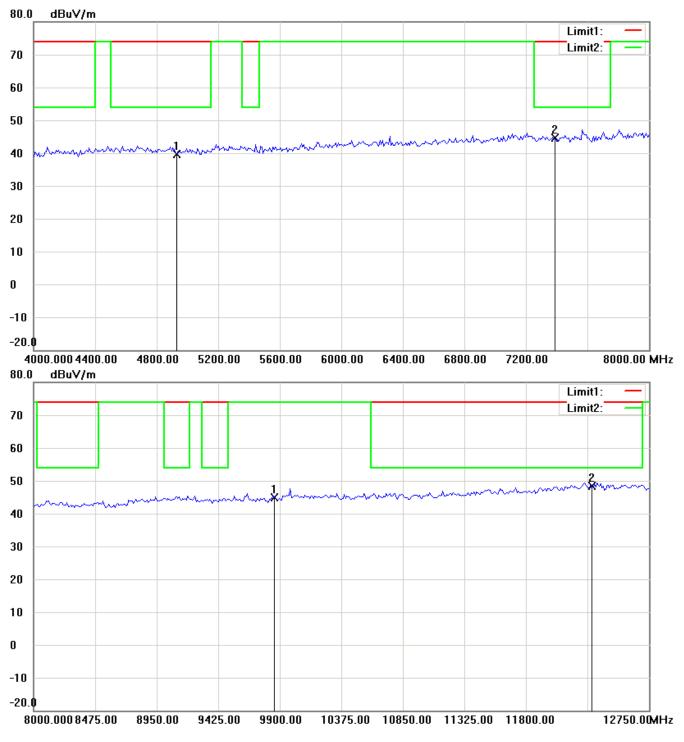

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



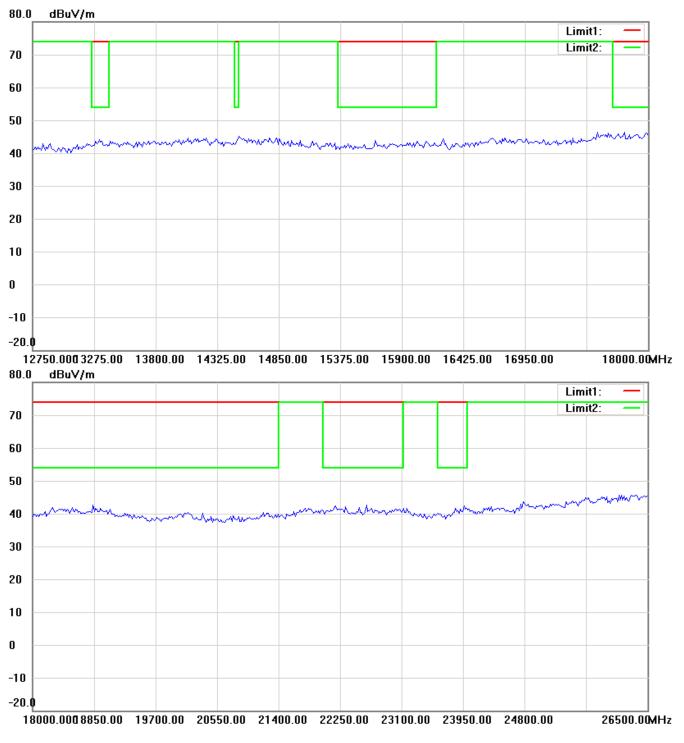


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Spurious Emissions radiated-Antenna 2 802.11b

Channel 1 Antenna Polarization H 92.0 dBuV/m

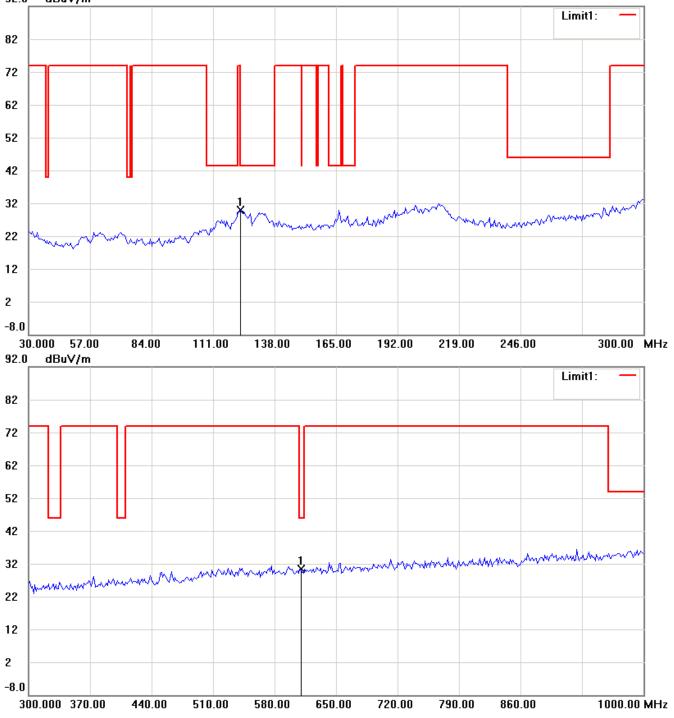


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



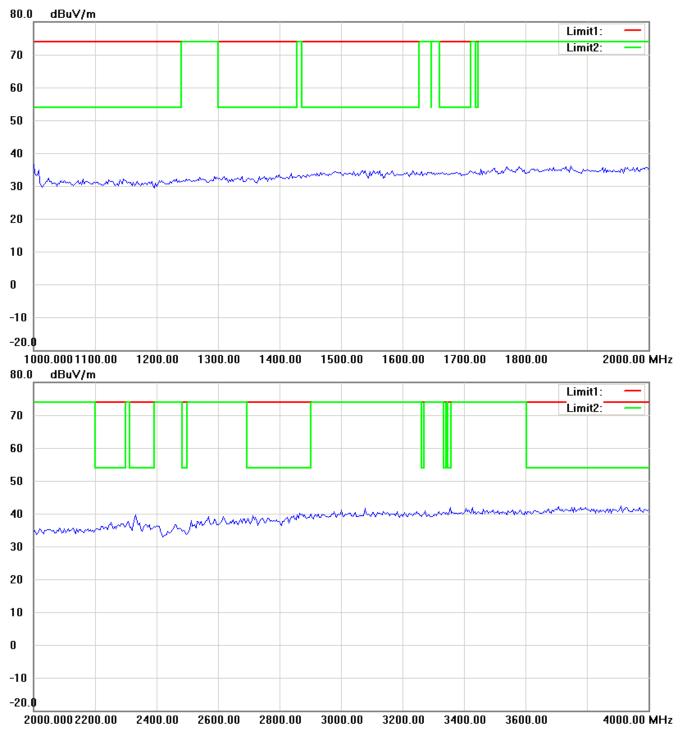


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



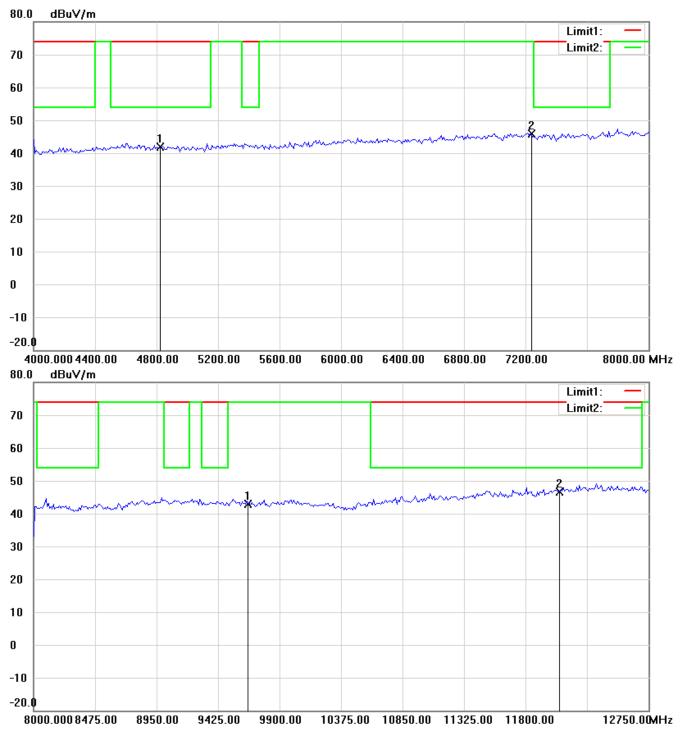


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



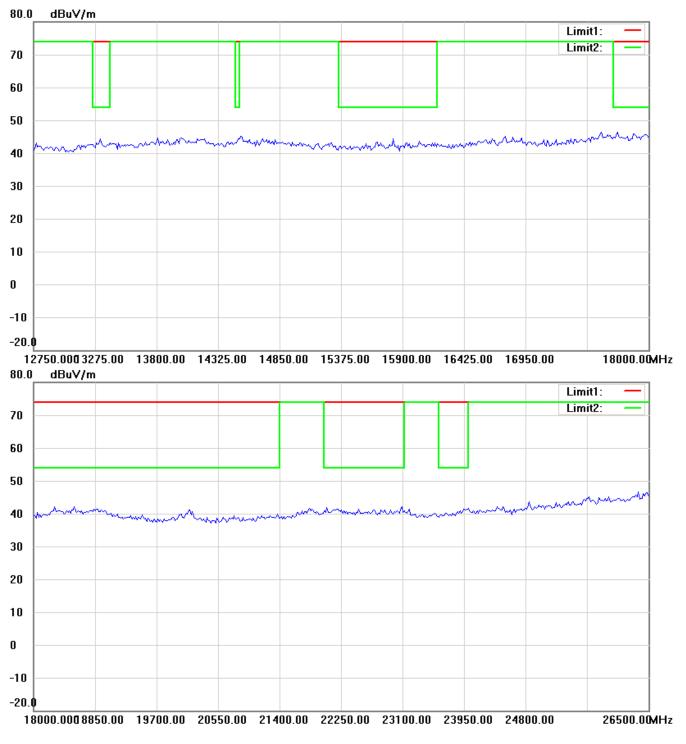


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



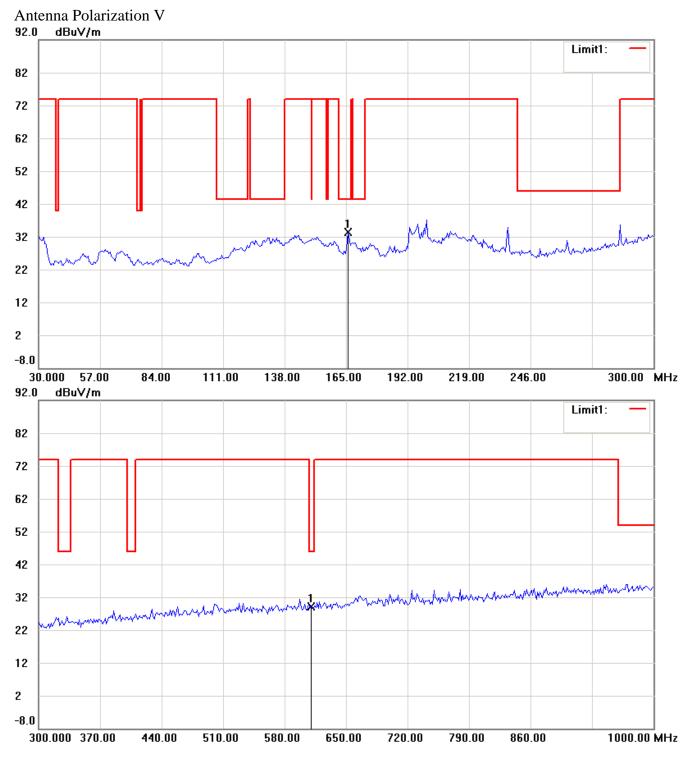


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



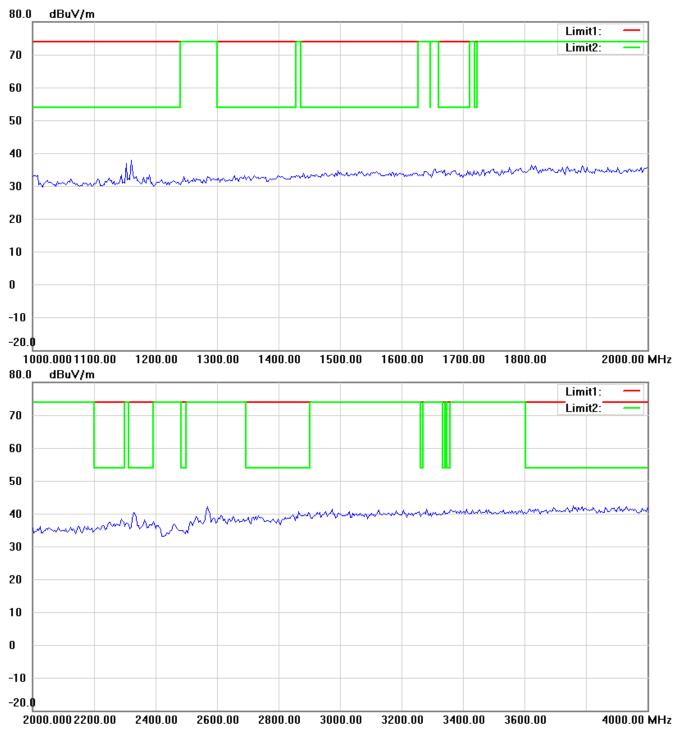


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



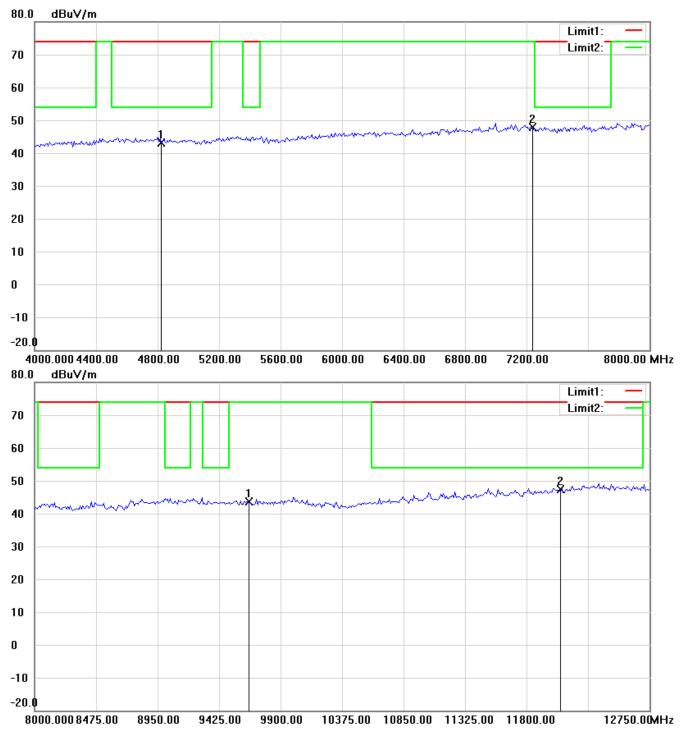


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




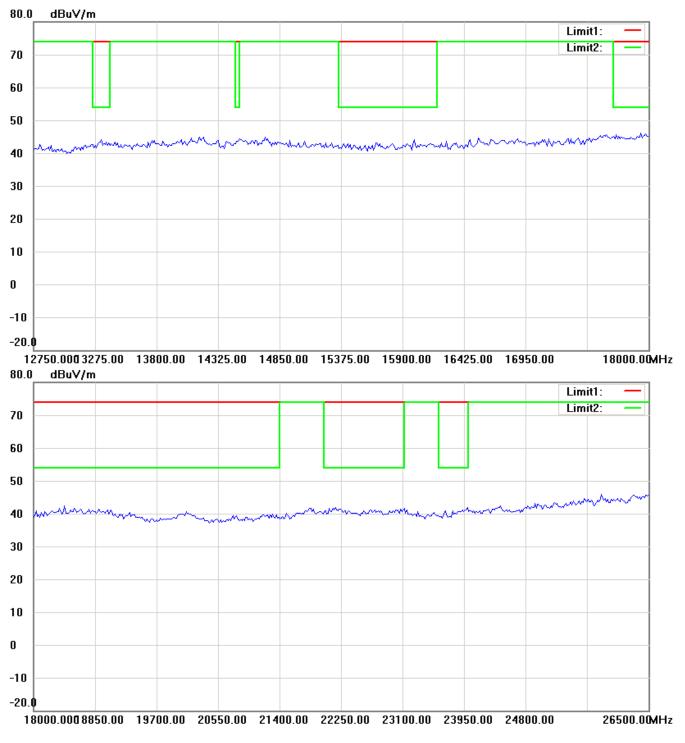

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






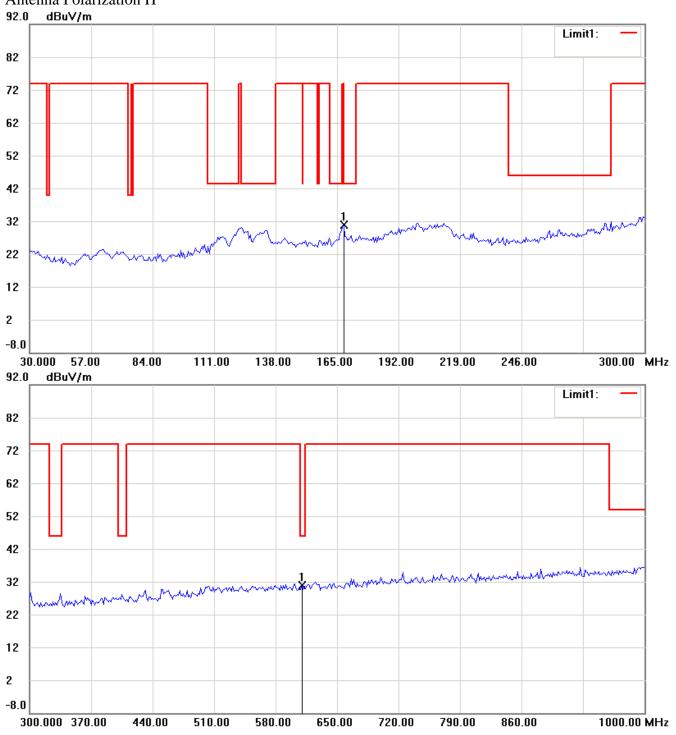


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



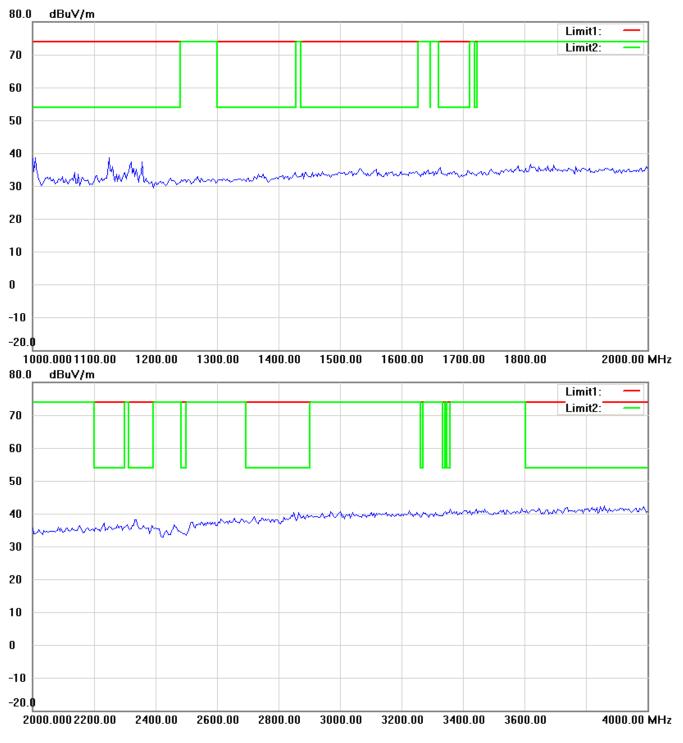


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



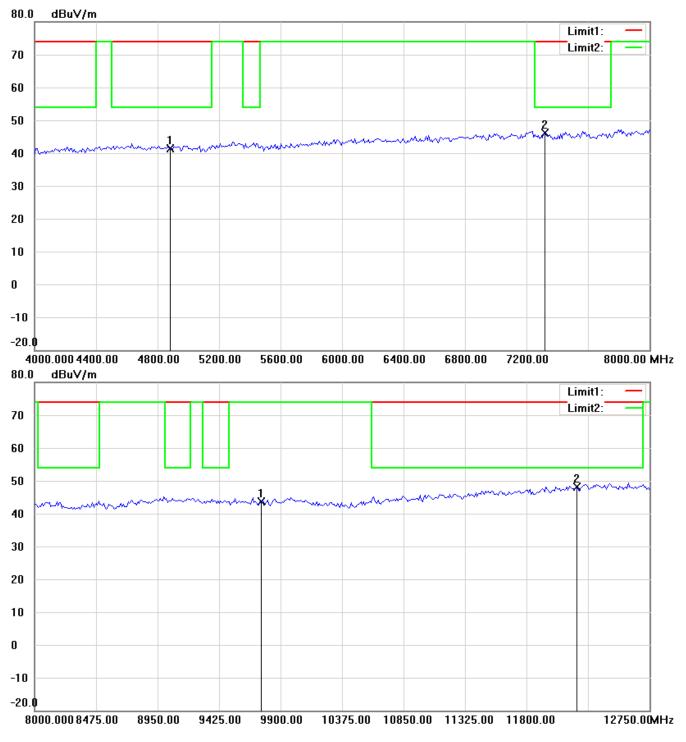


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



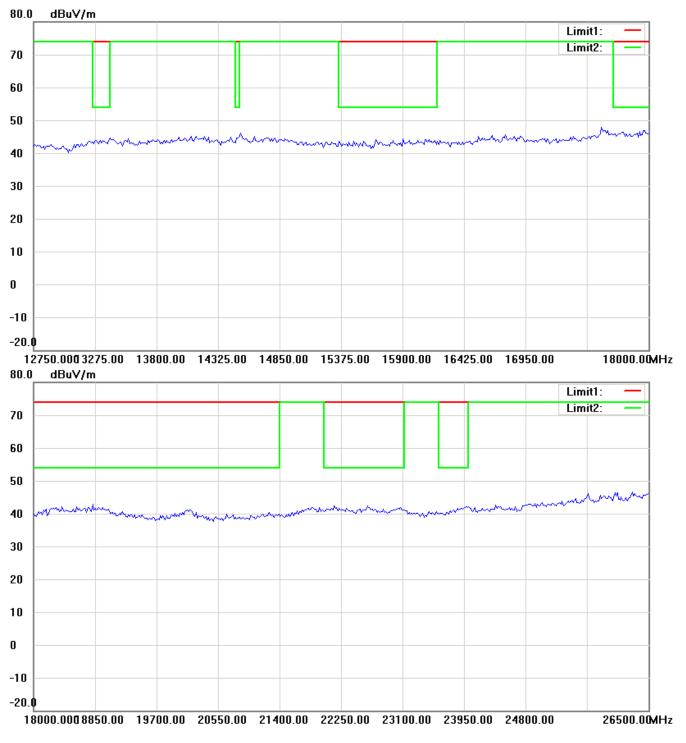


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



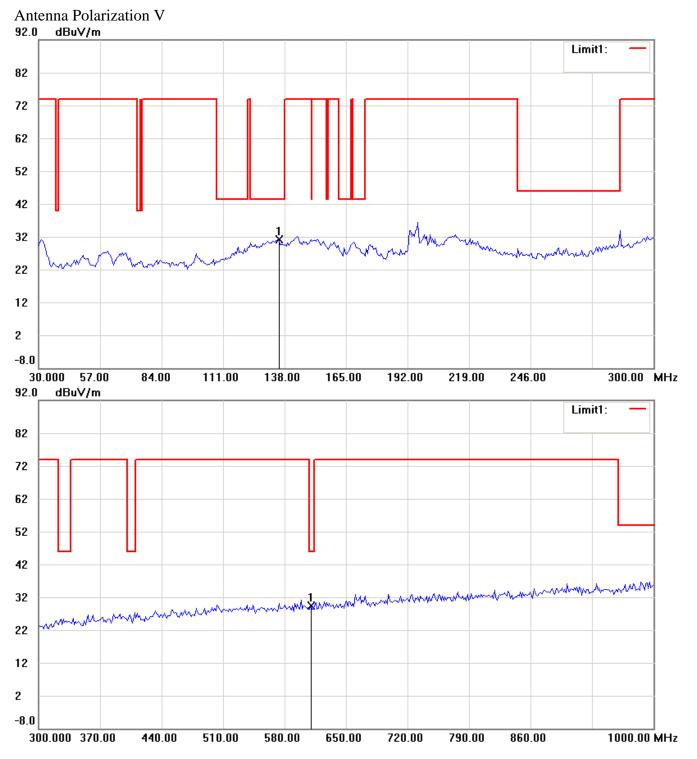


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



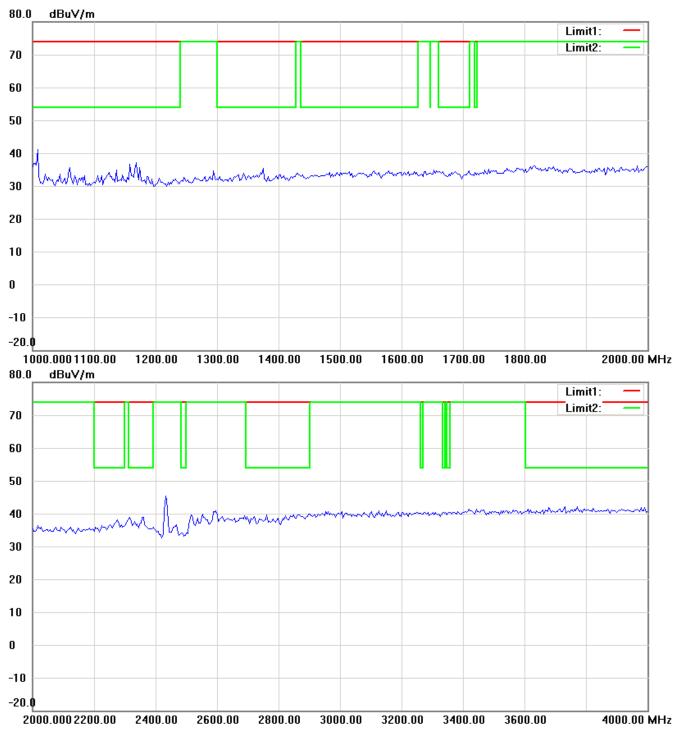


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



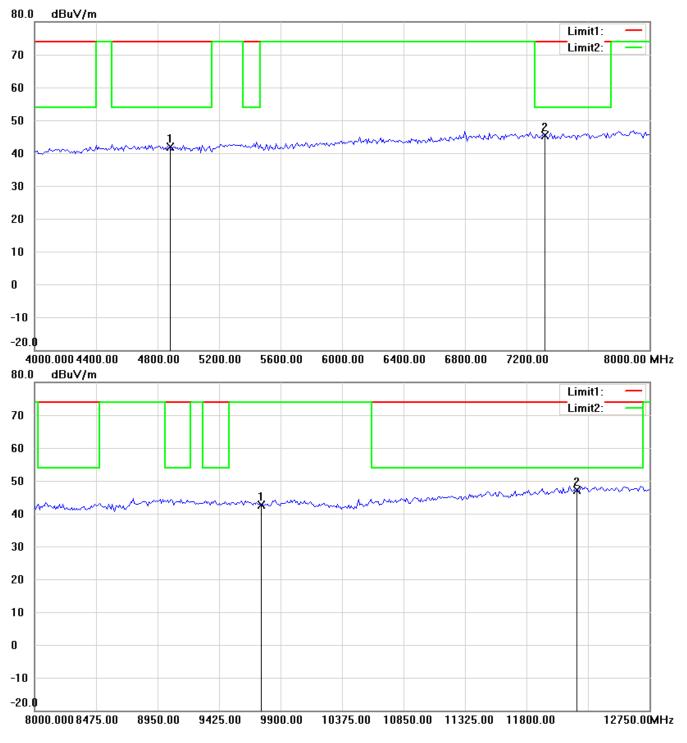

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




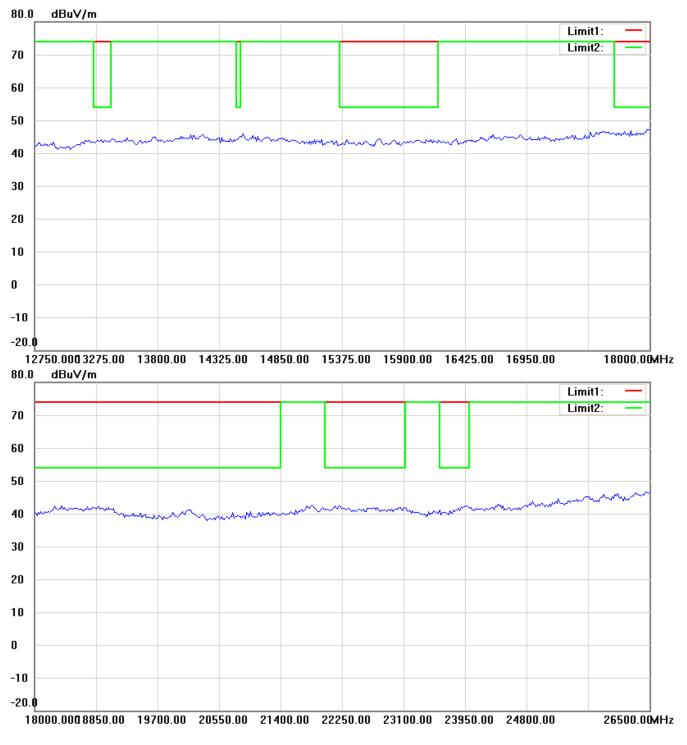

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 11 Antenna Polarization H

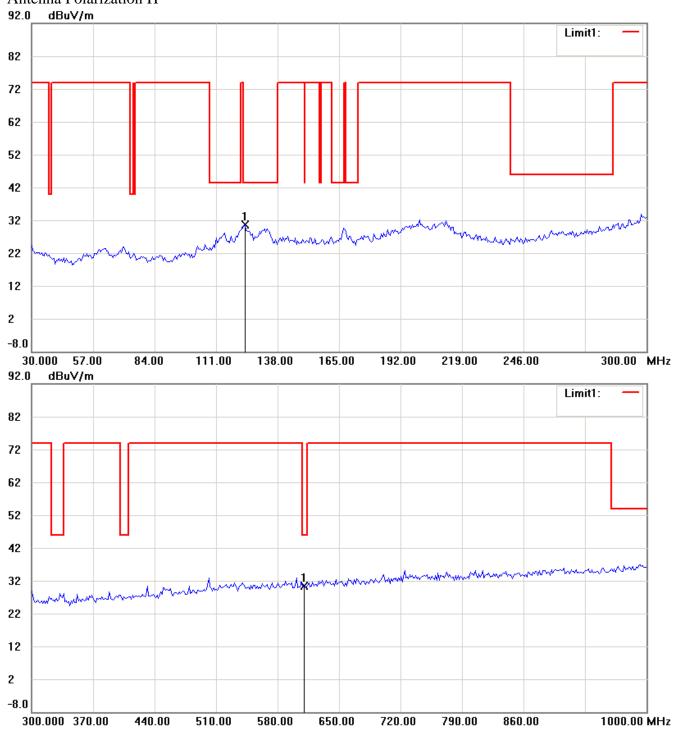


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



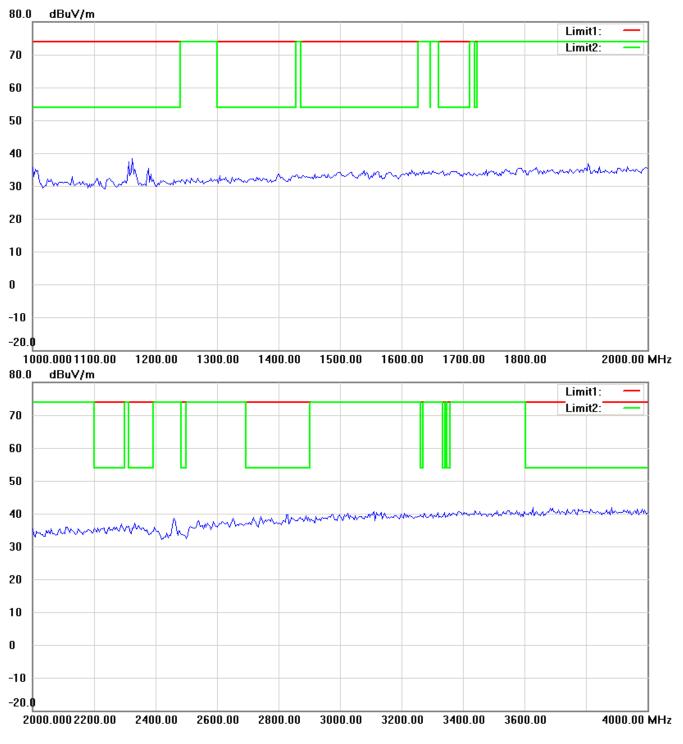


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



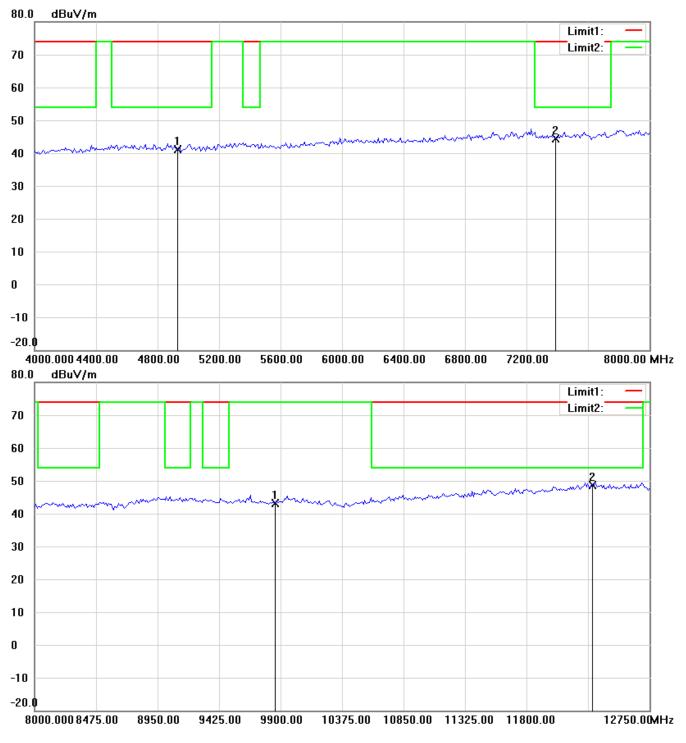


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



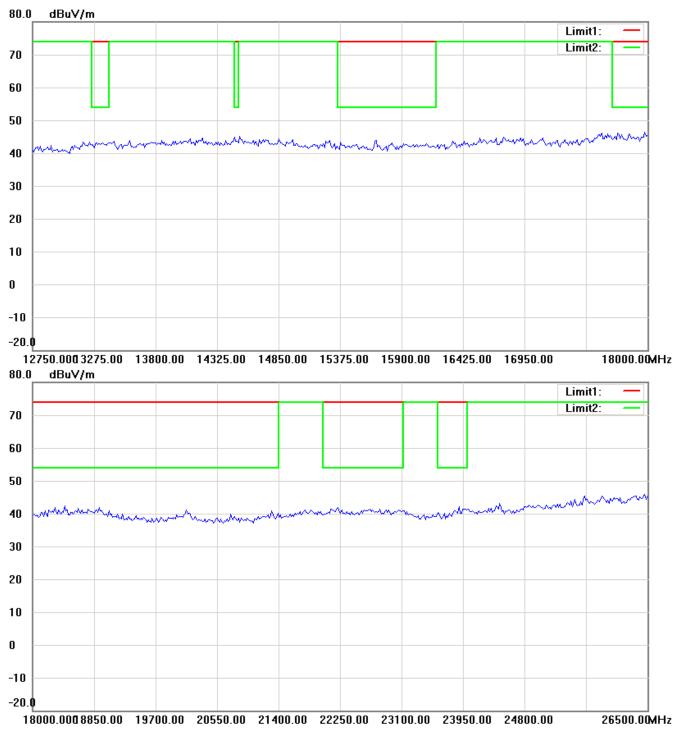


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



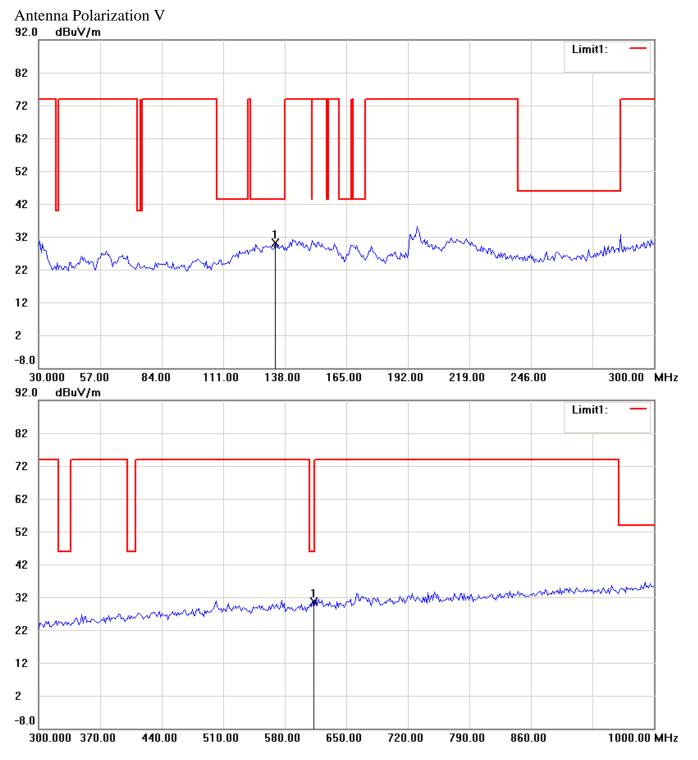


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



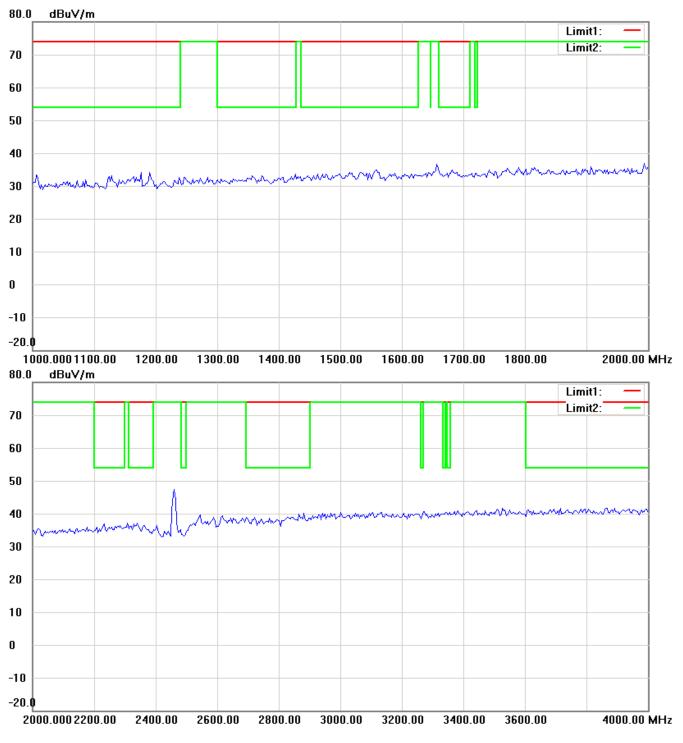


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



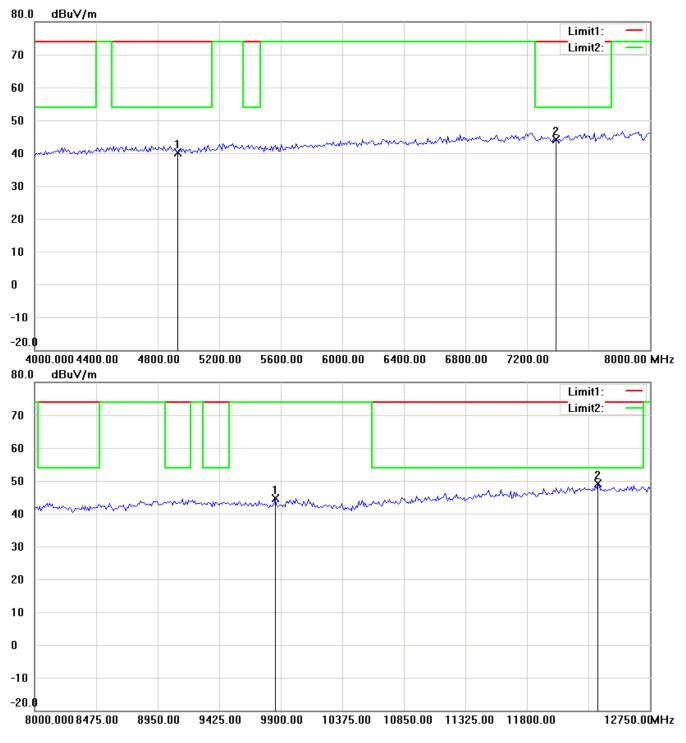


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



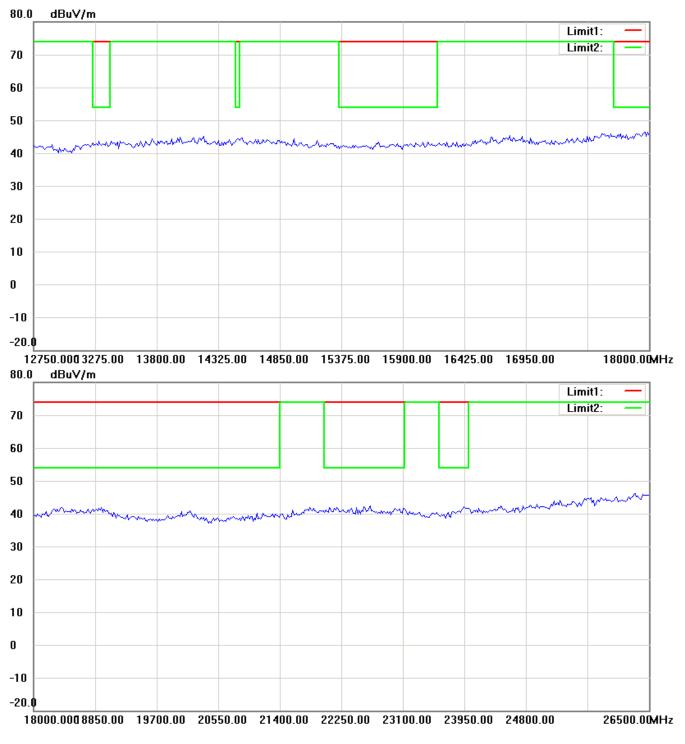


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



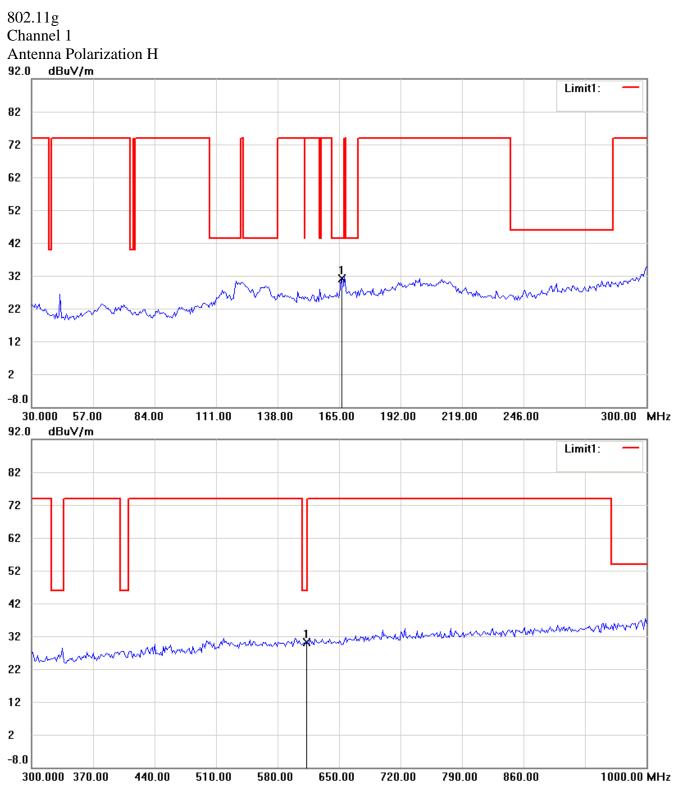


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



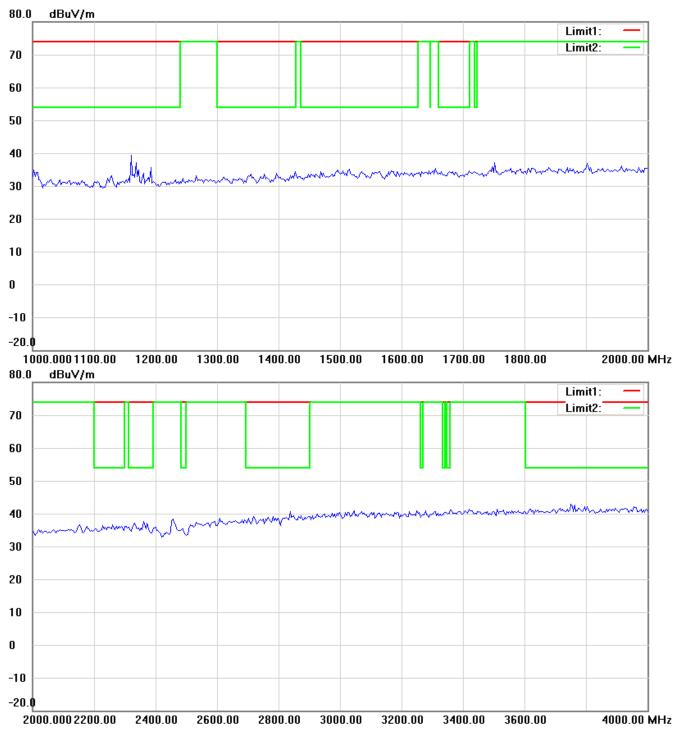


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



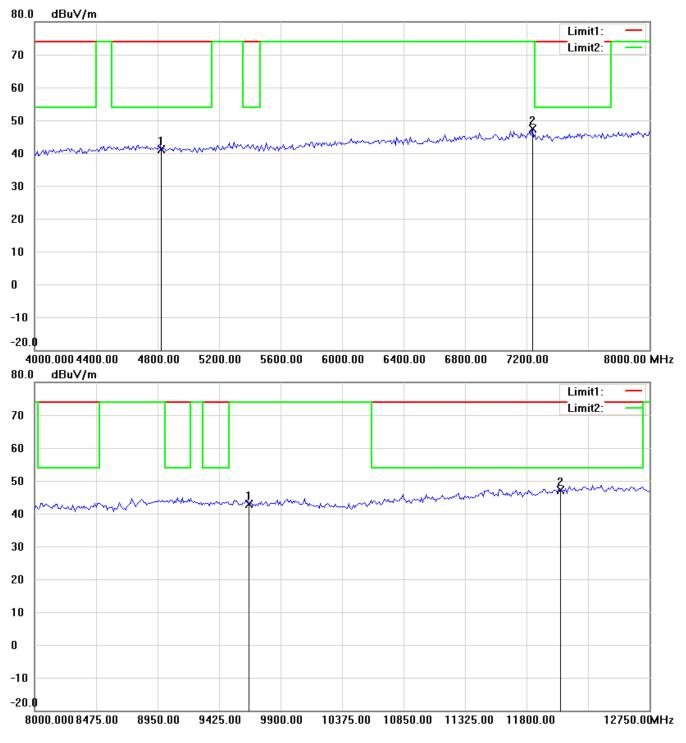


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



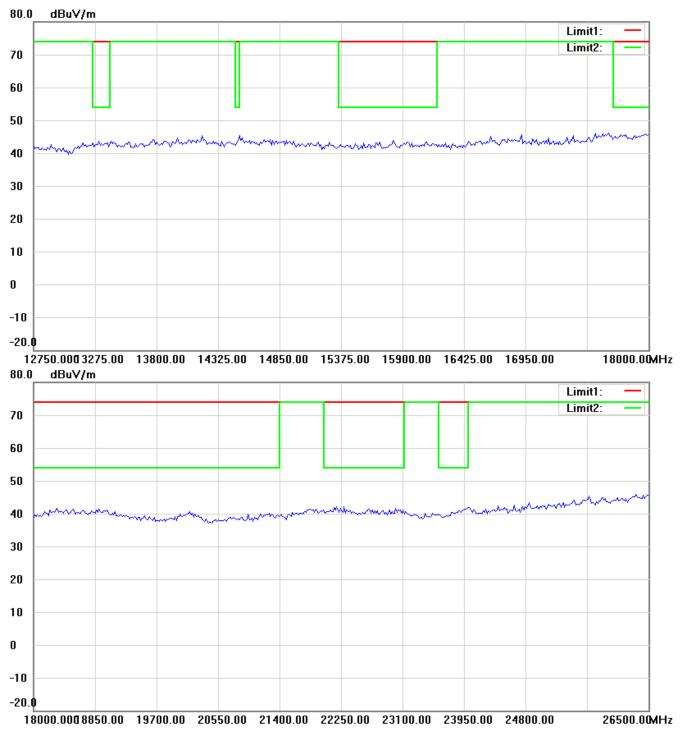


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



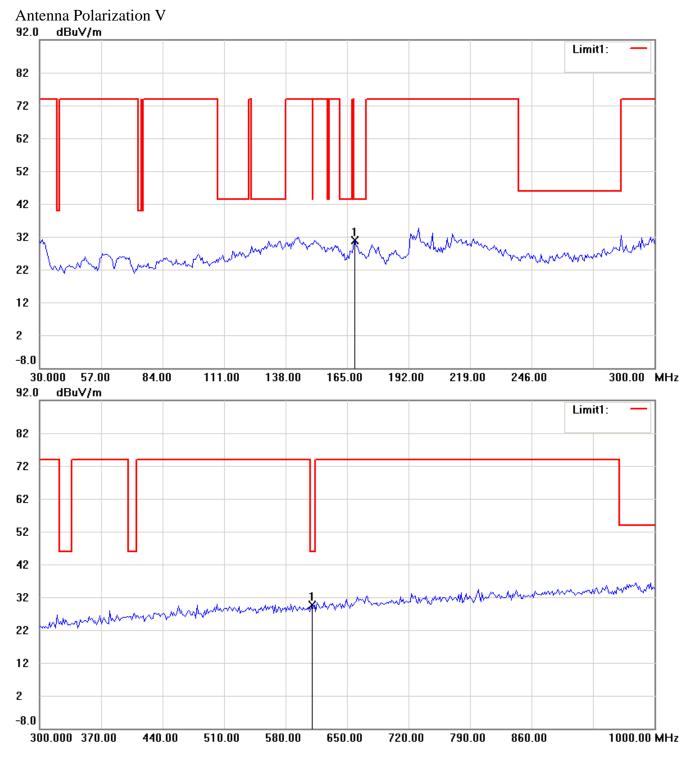


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



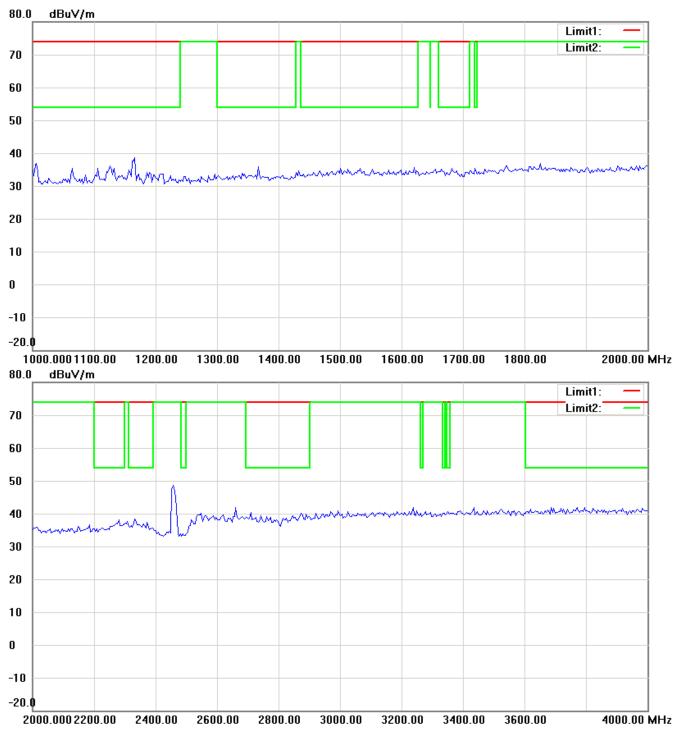


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



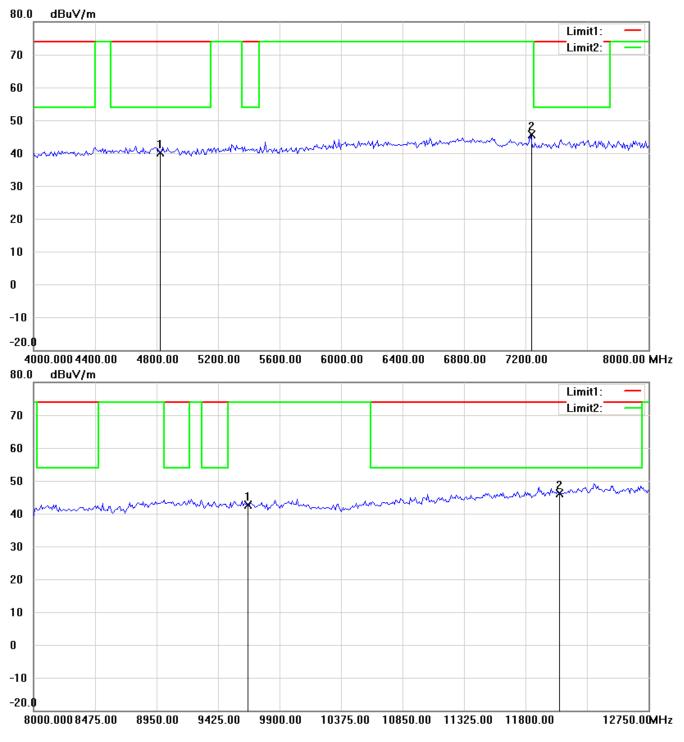


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




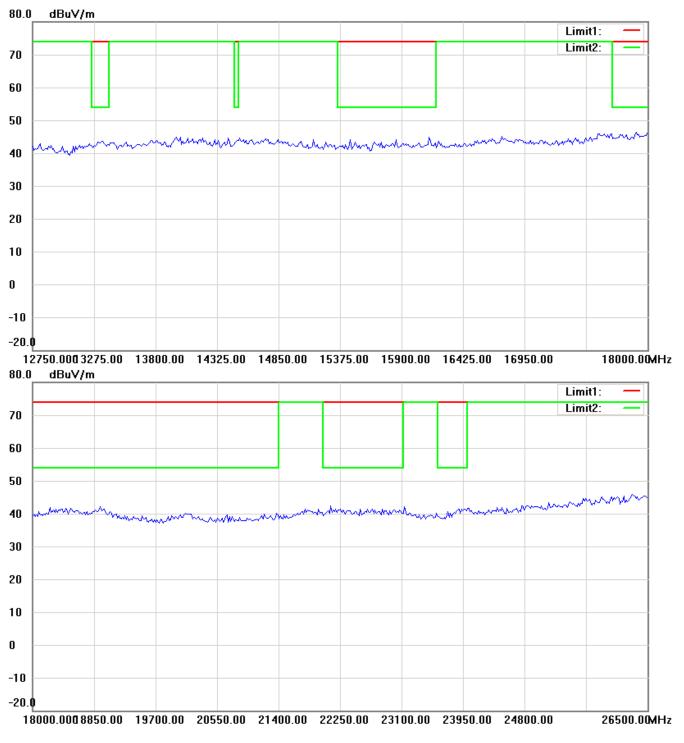

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






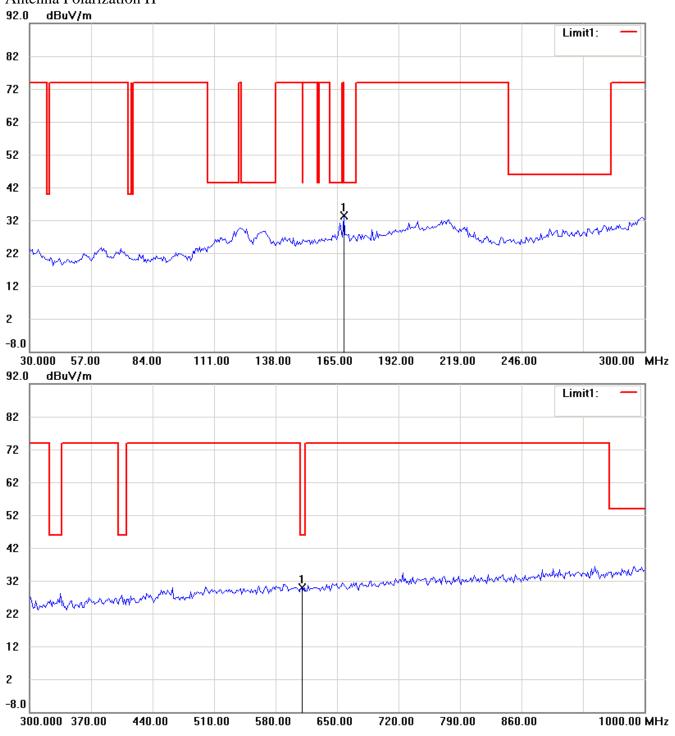


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



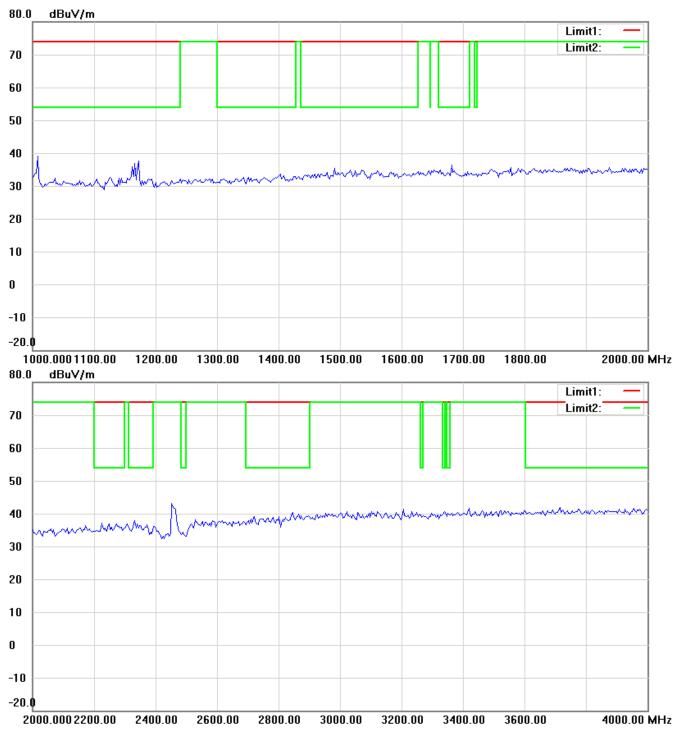


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



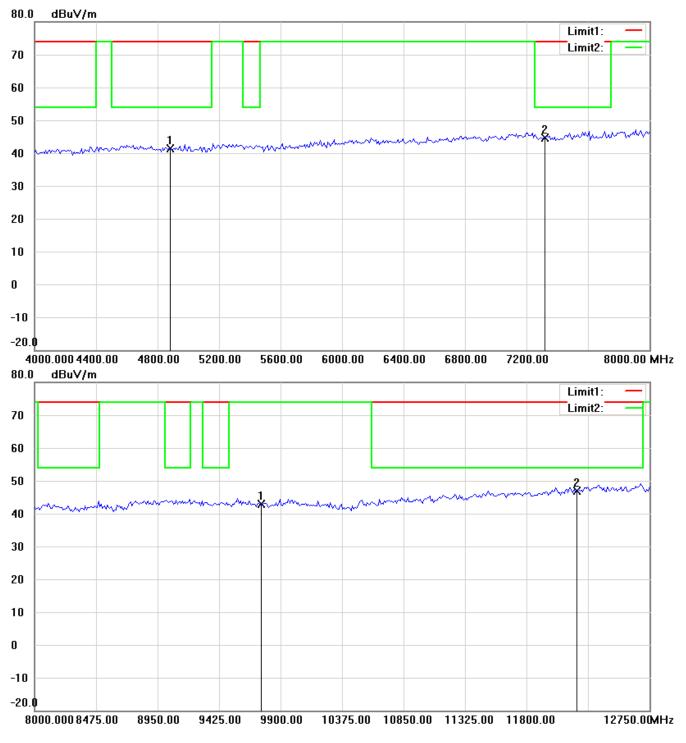


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



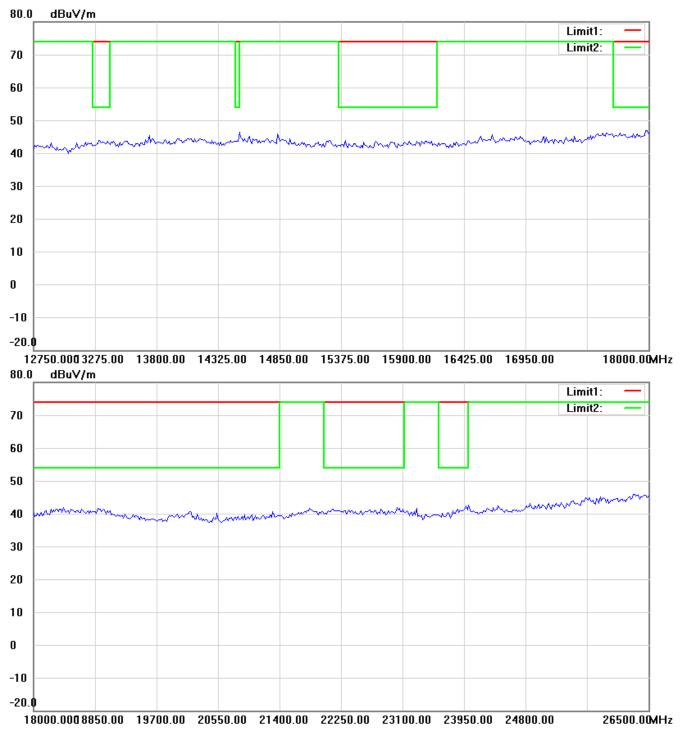


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



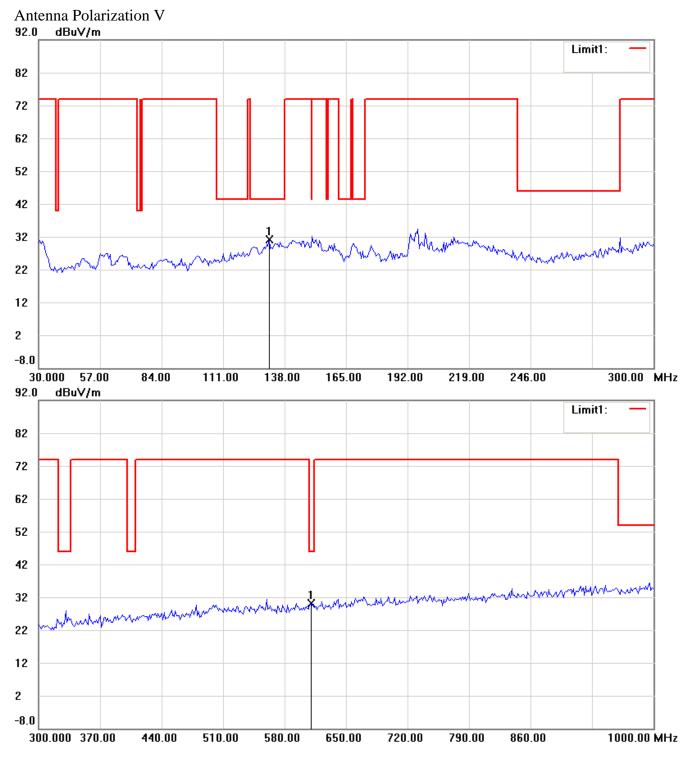


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



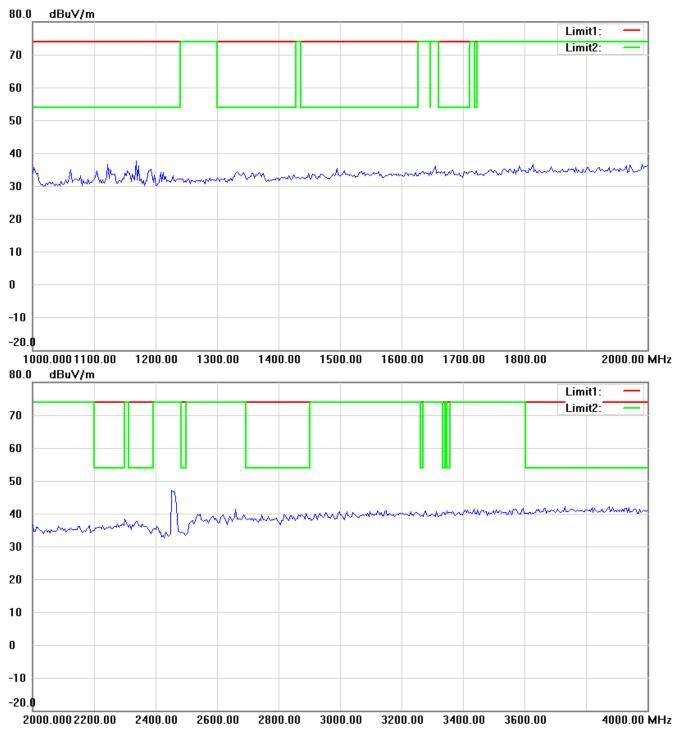


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



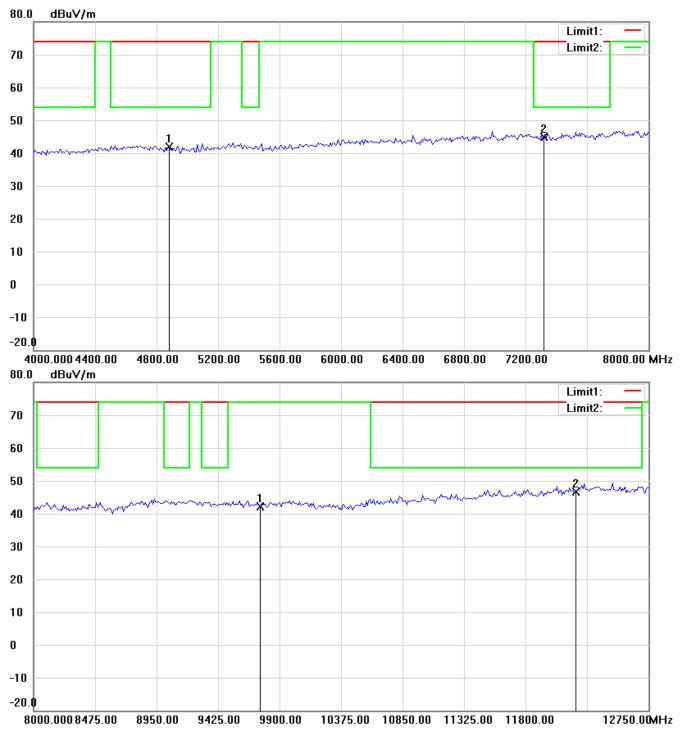

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




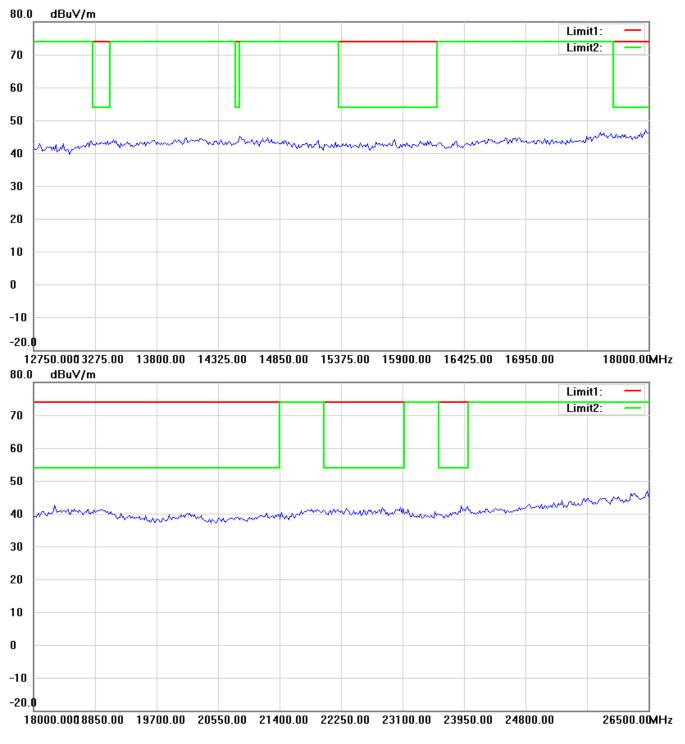

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 11 Antenna Polarization H

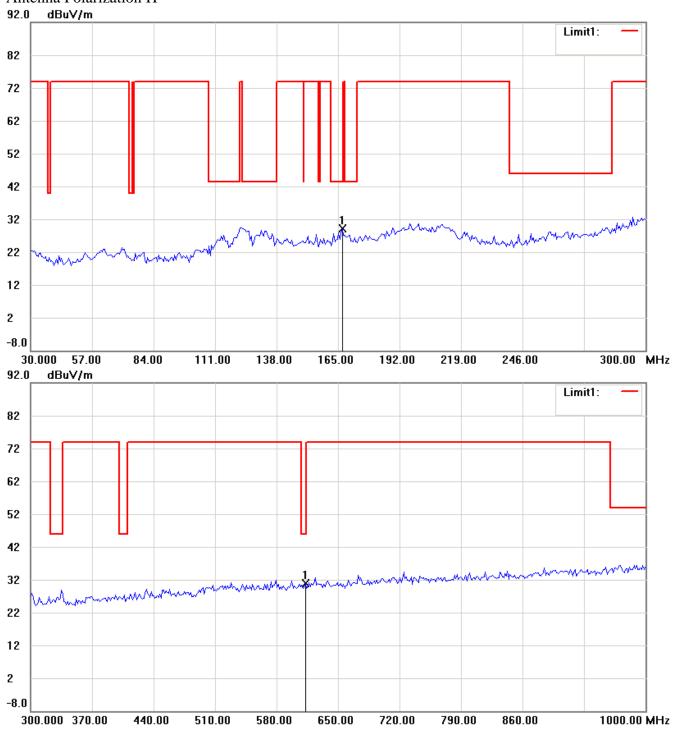


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



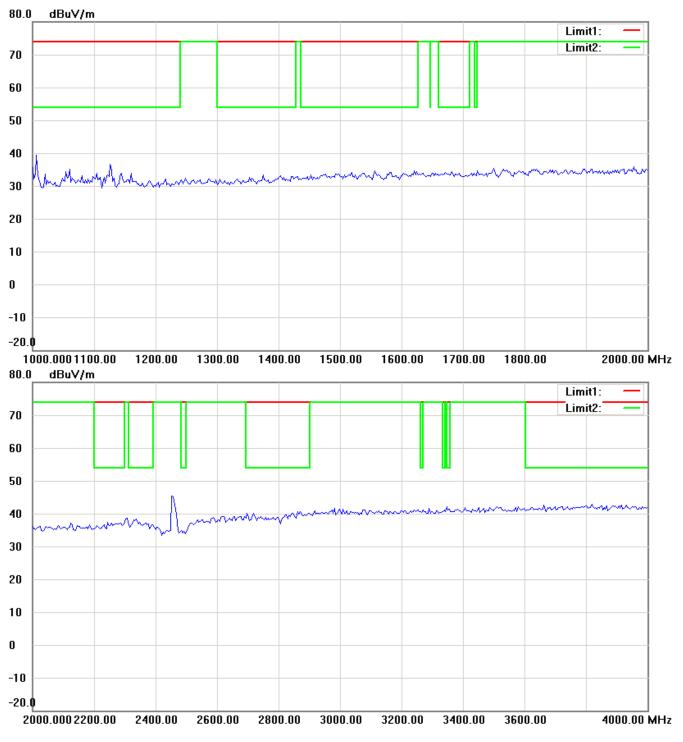


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



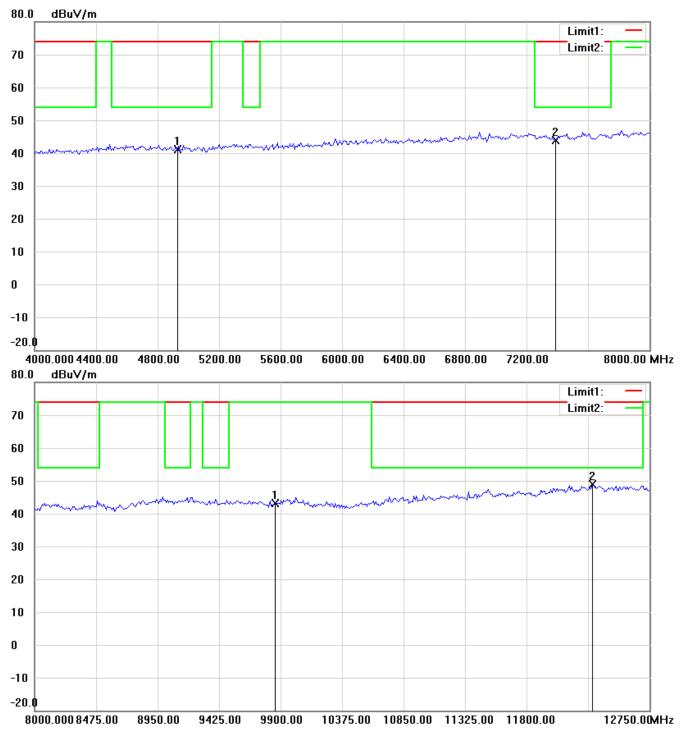


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



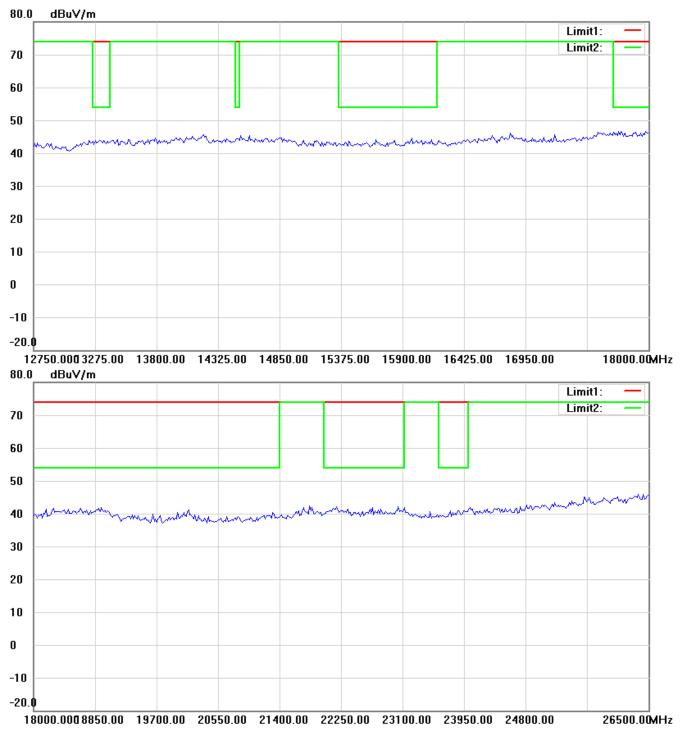


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



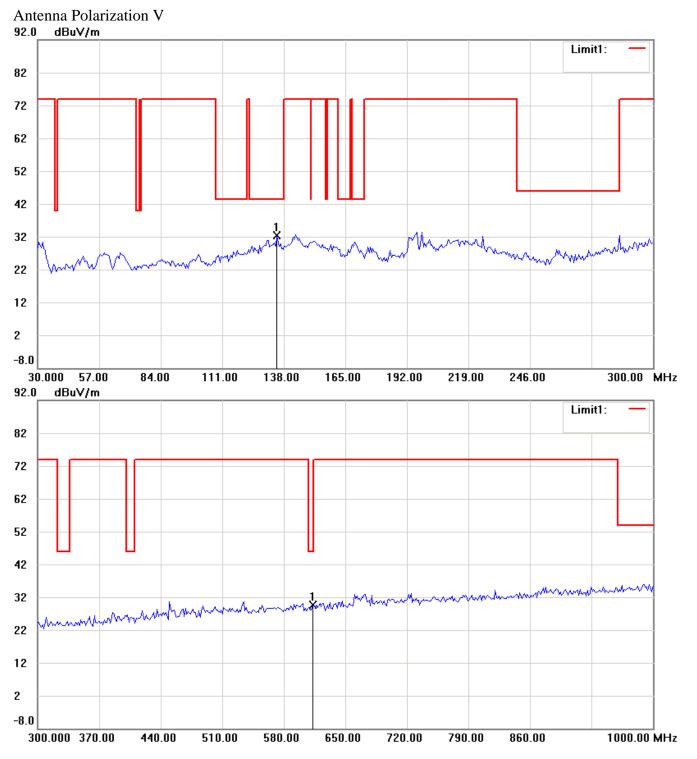


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



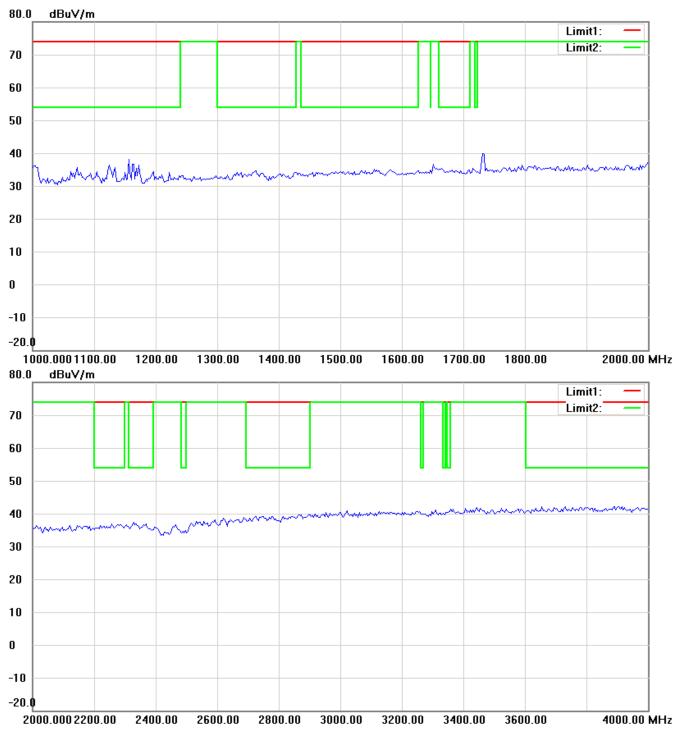


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



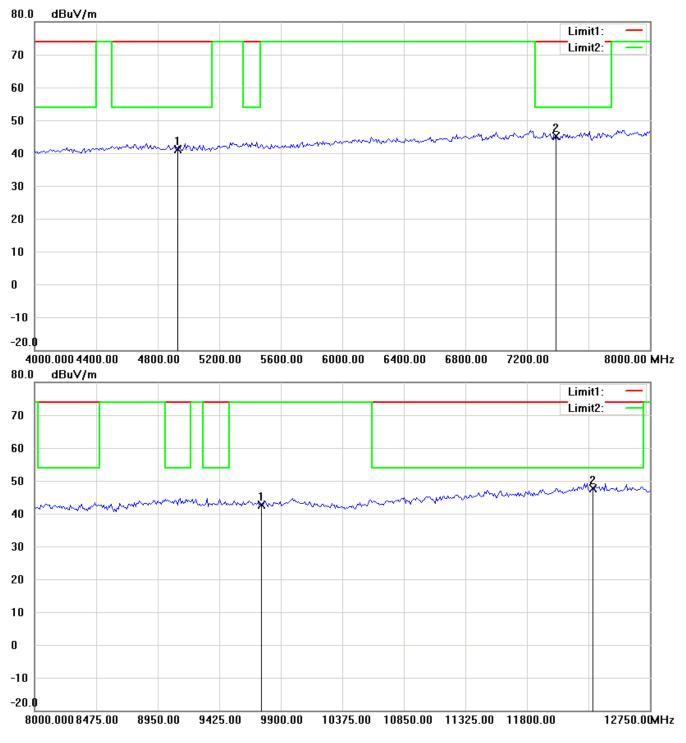

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



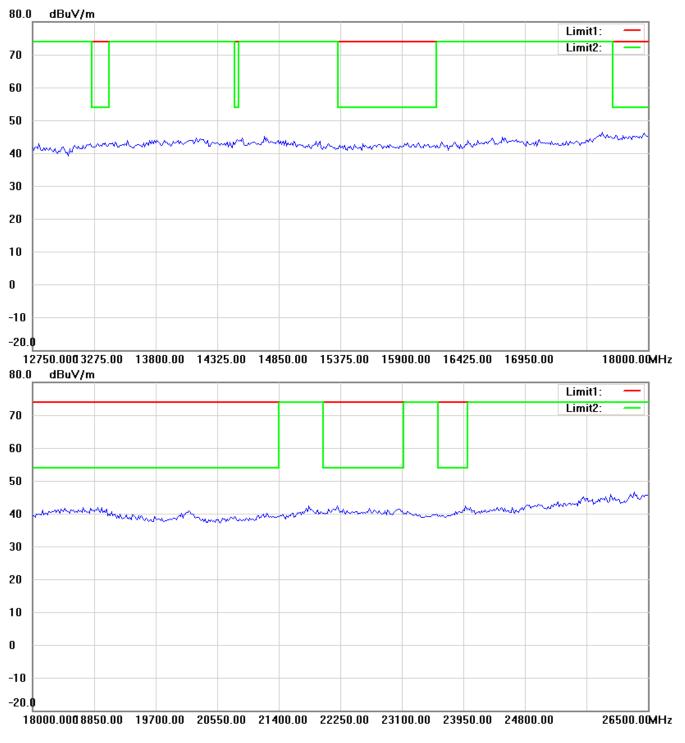


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Spurious Emissions radiated-Antenna 3 802.11b

Channel 1 Antenna Polarization H

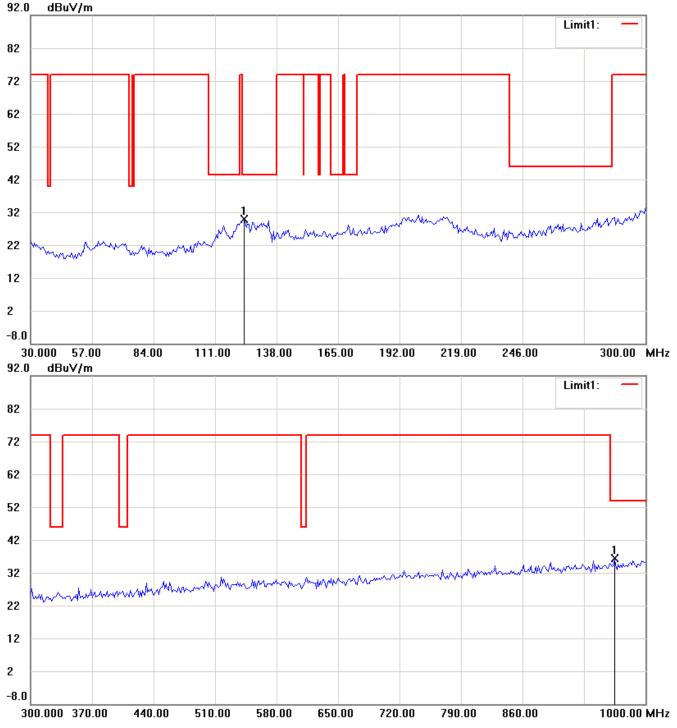


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



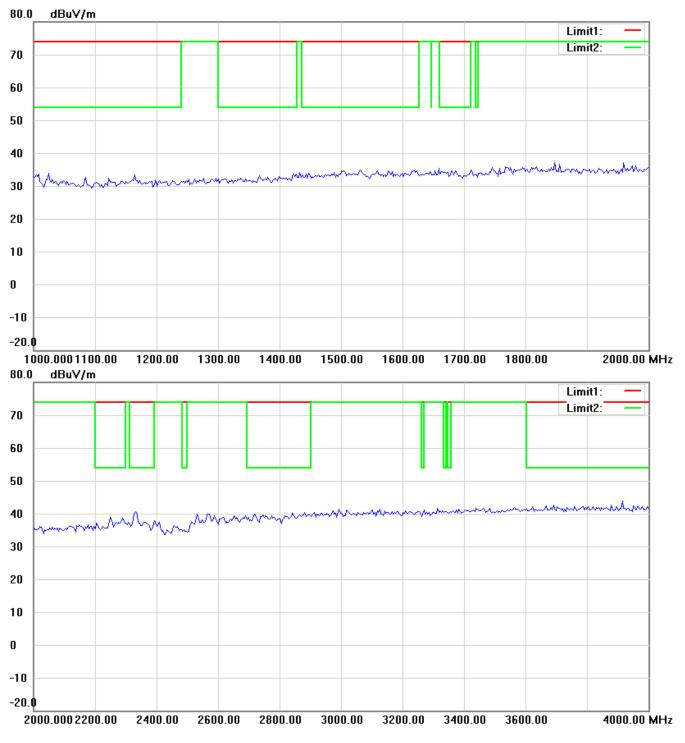


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



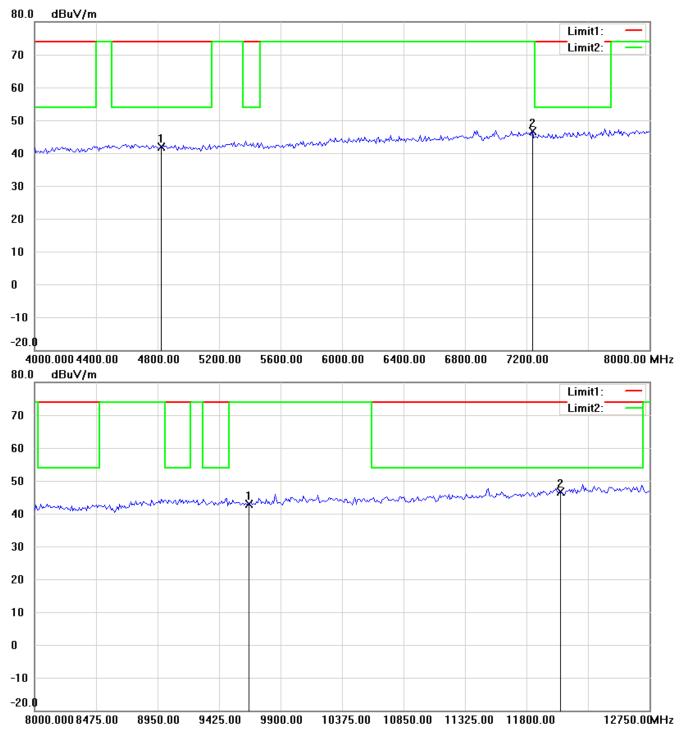


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



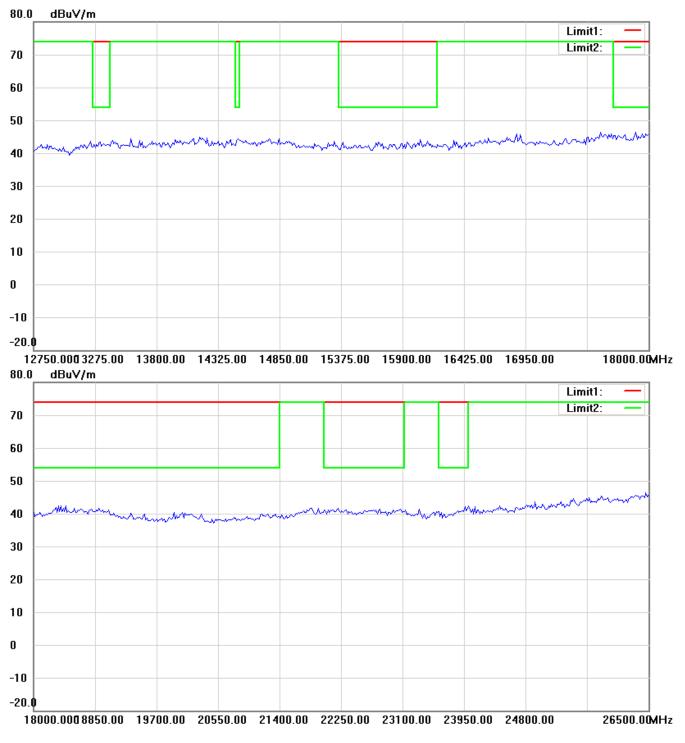


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



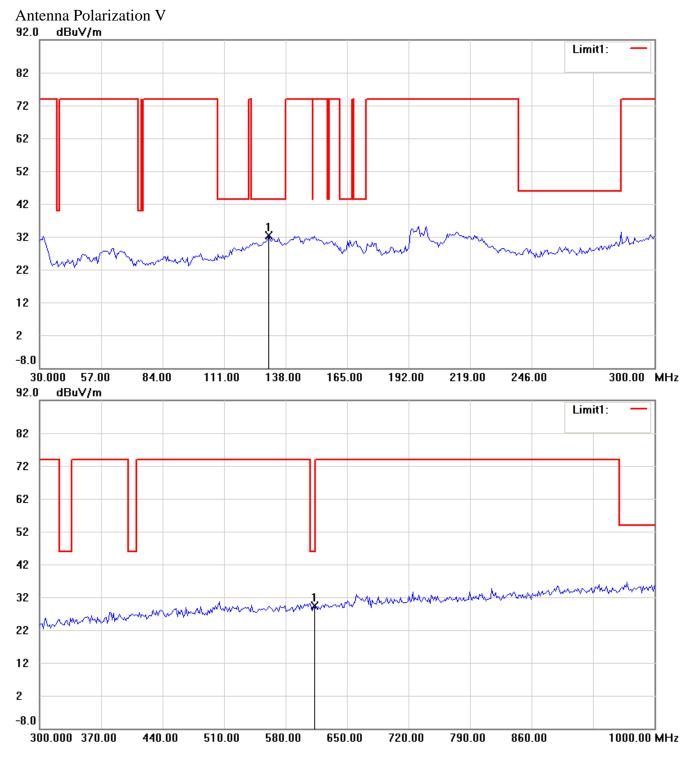


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



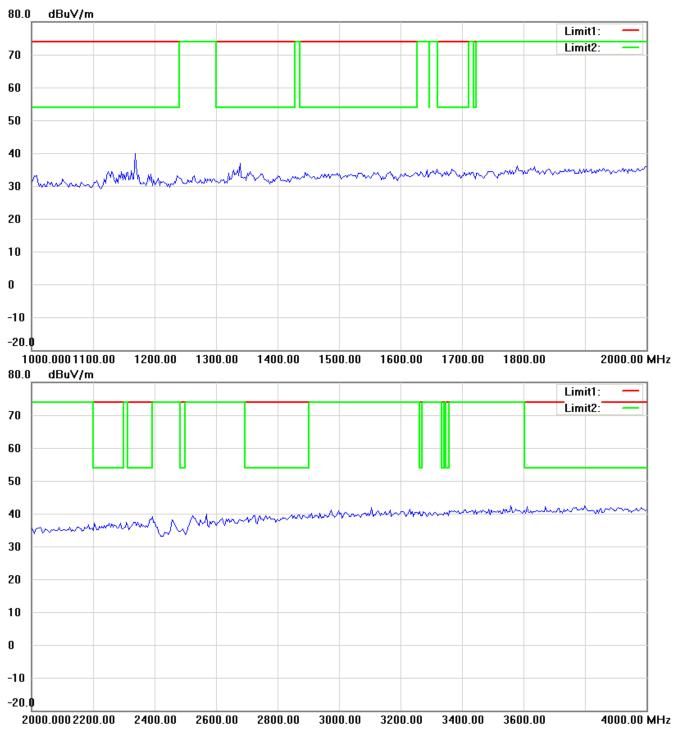


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



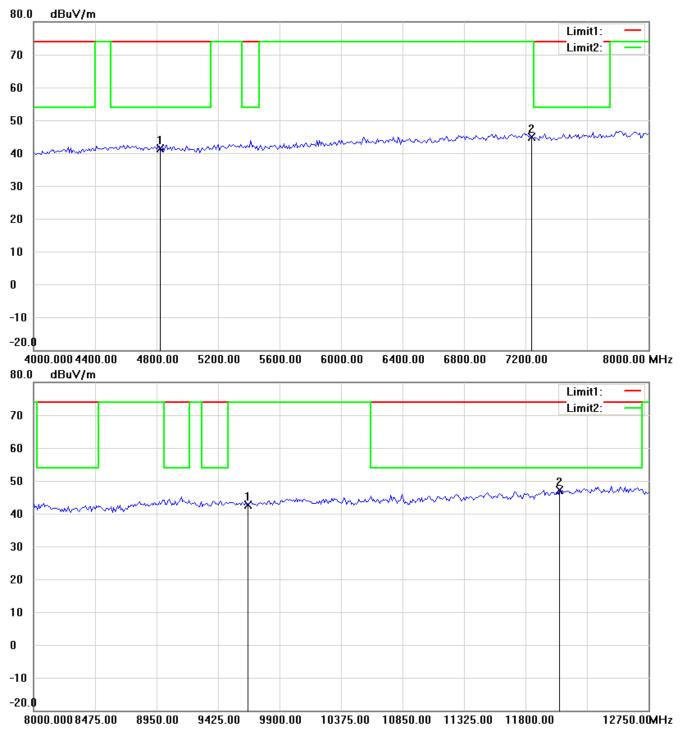


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




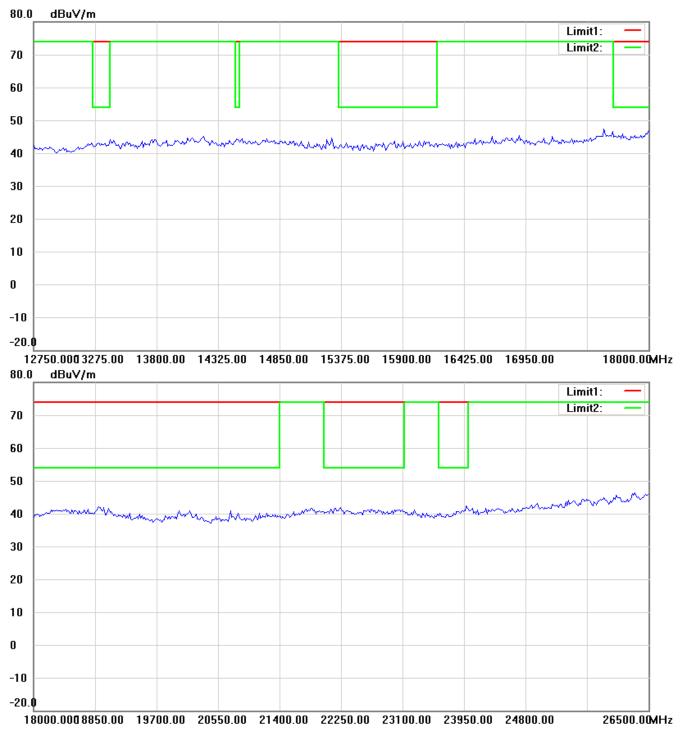

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






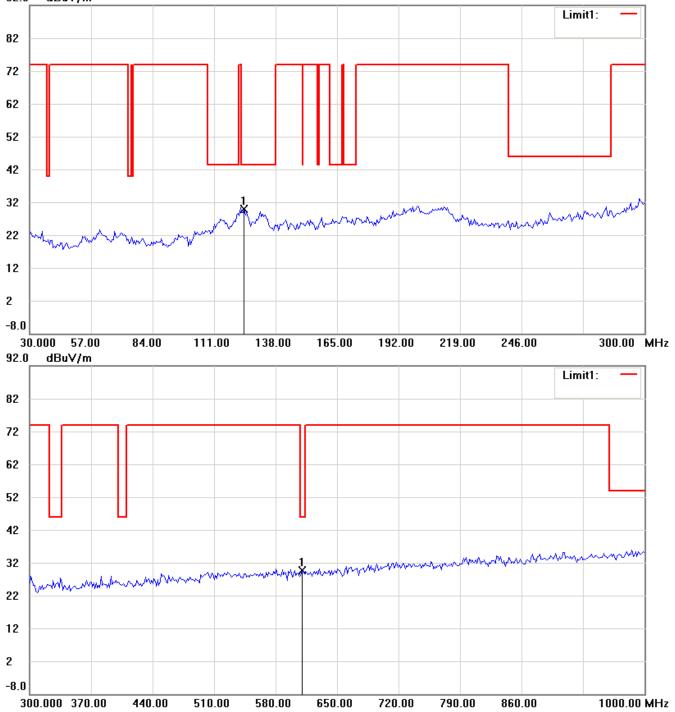


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



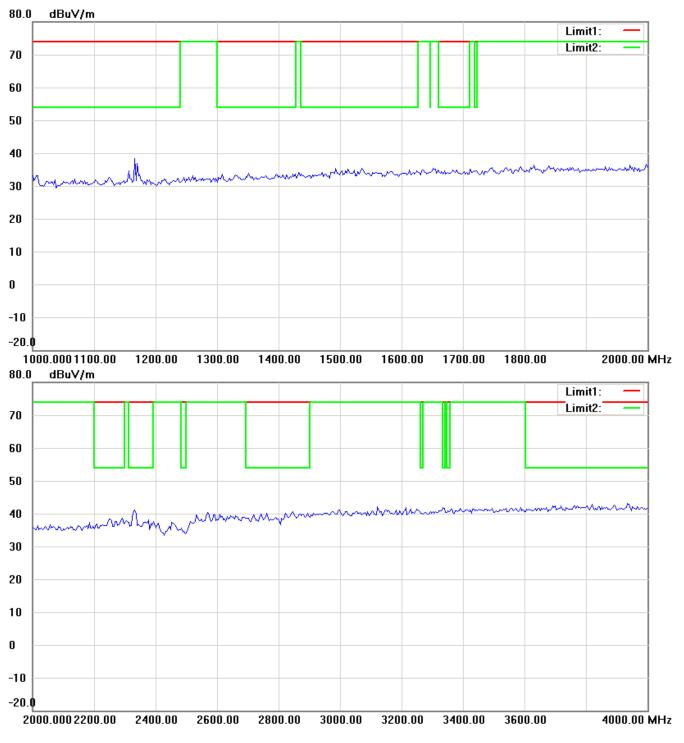


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



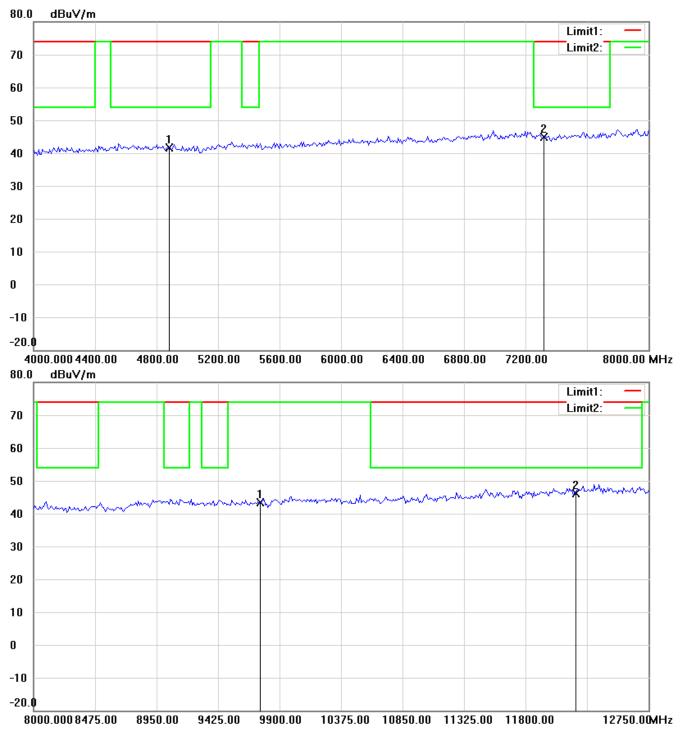


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



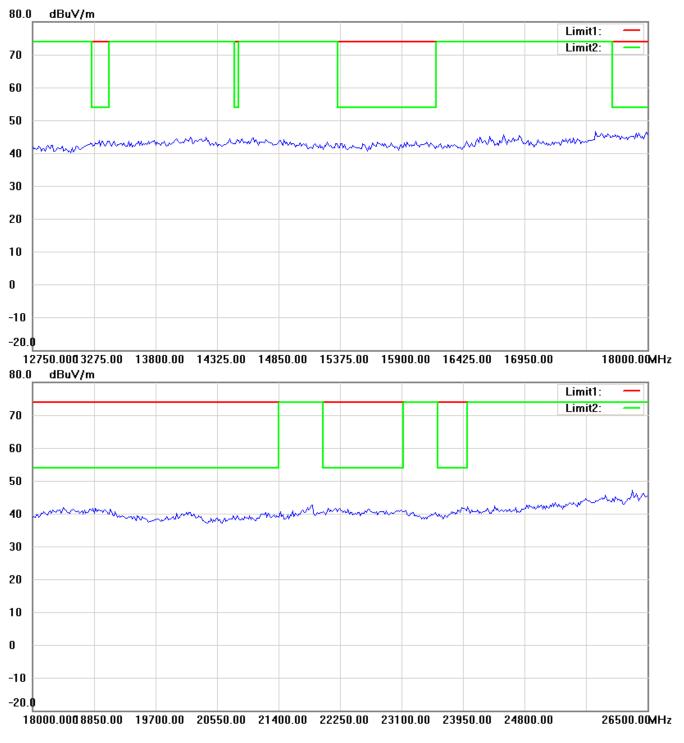


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



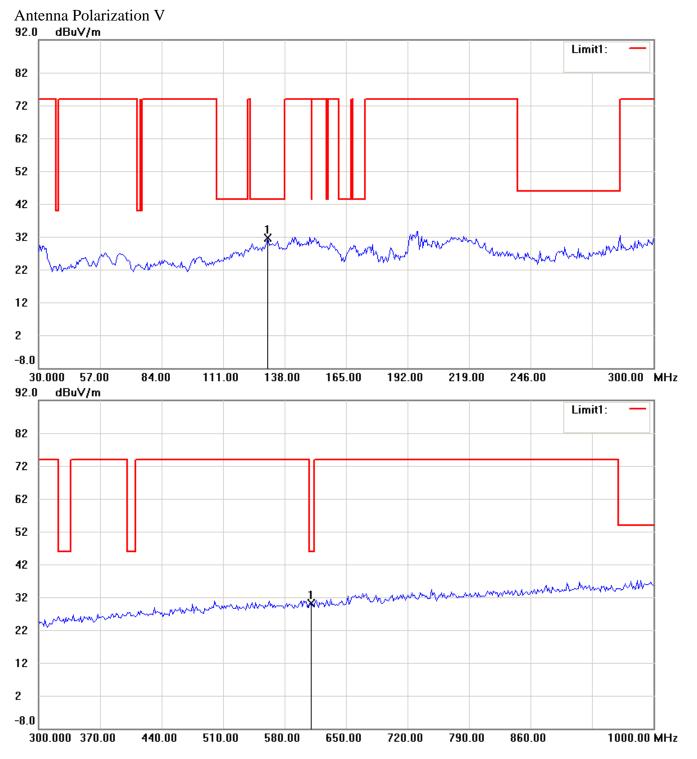


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



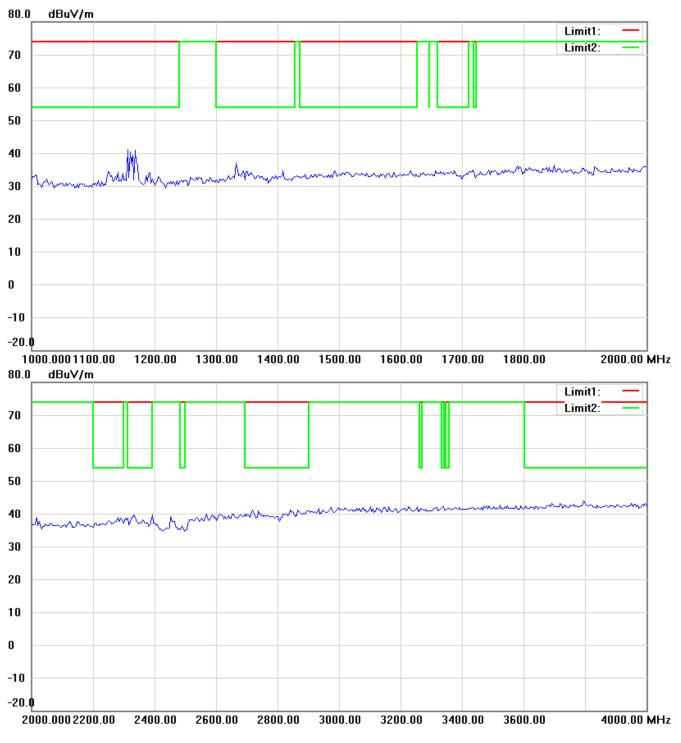


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



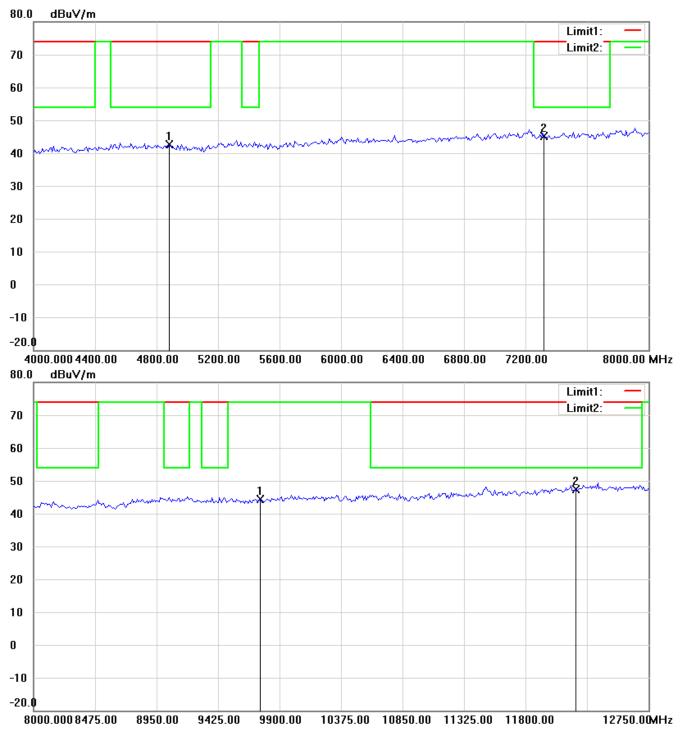

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




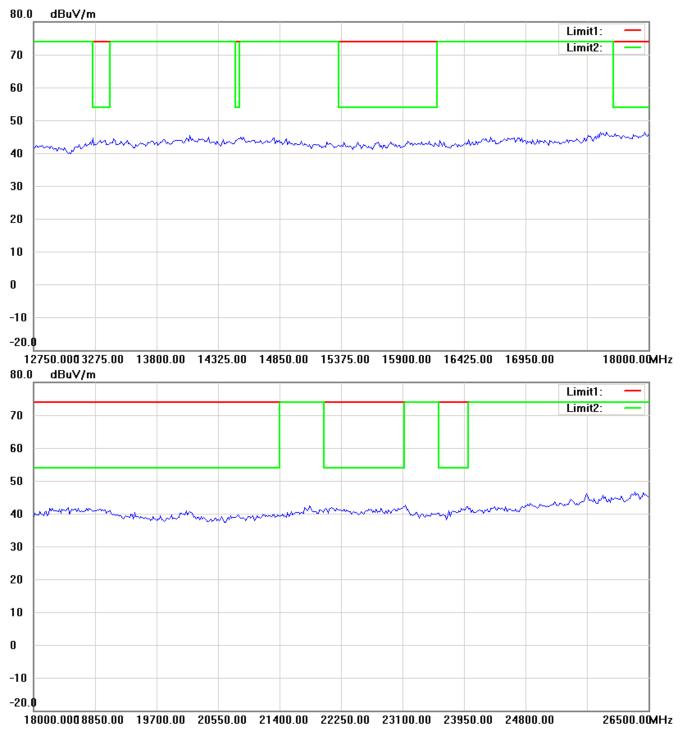

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






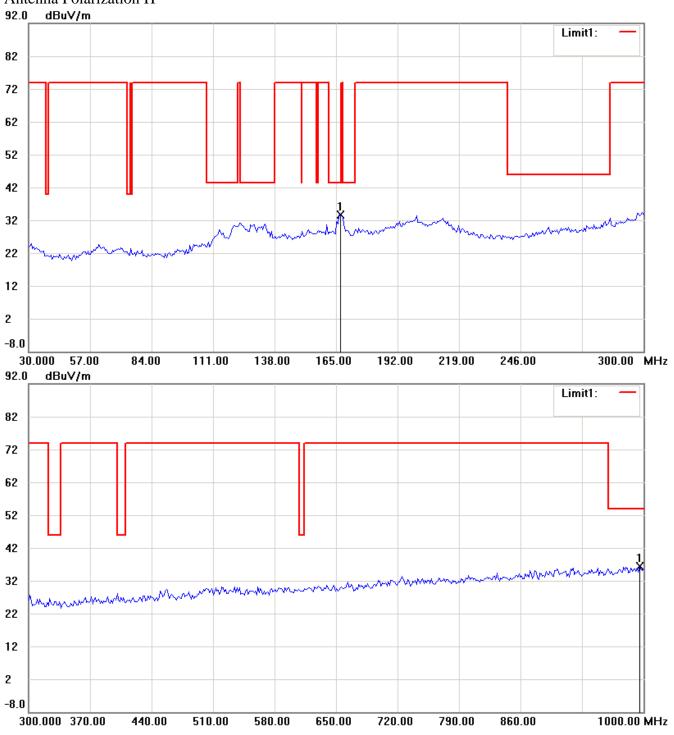


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



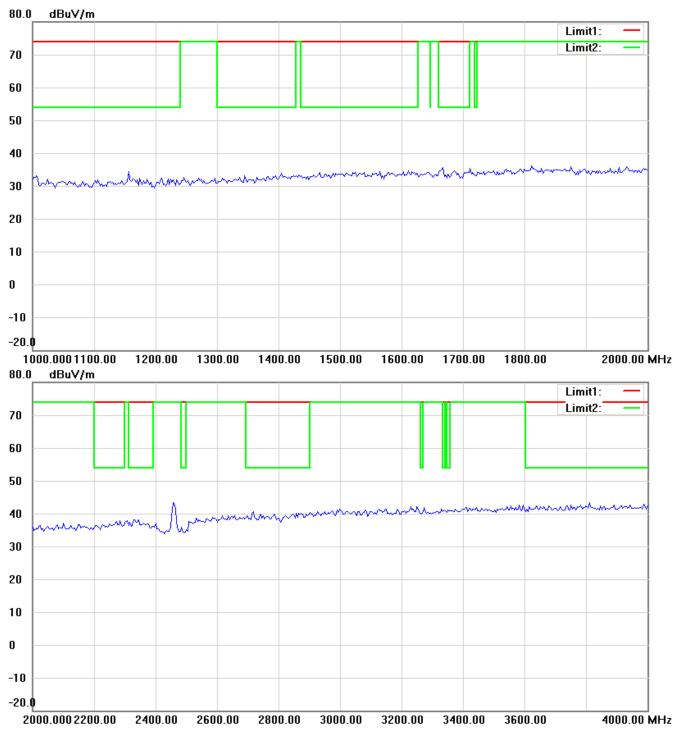


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



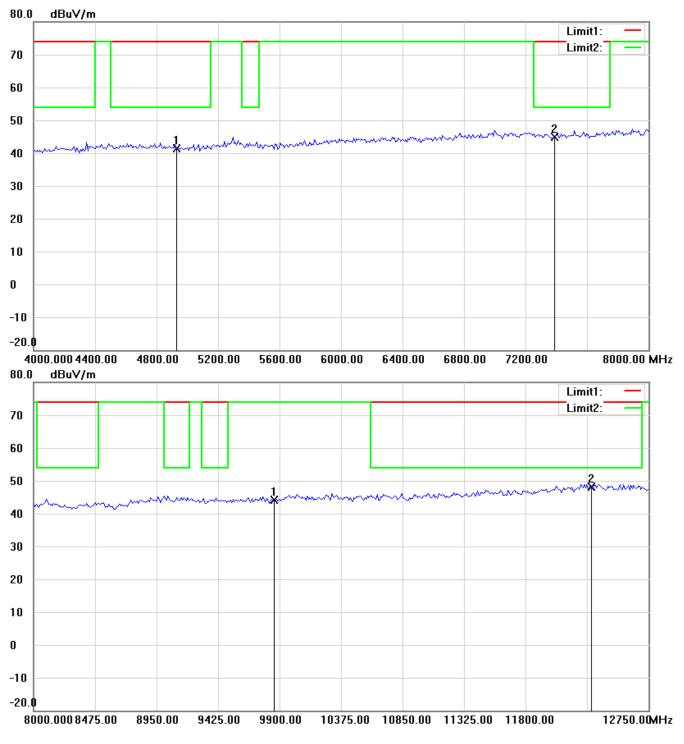


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



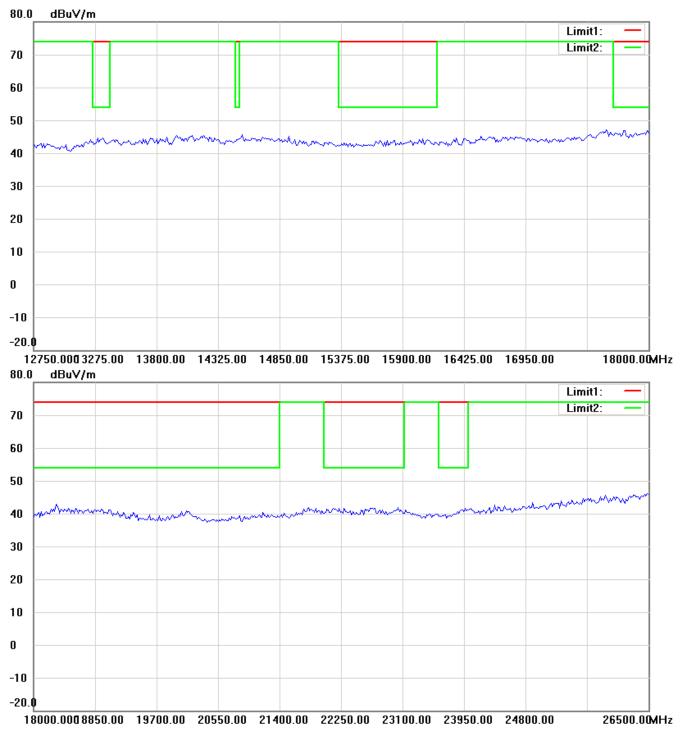


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



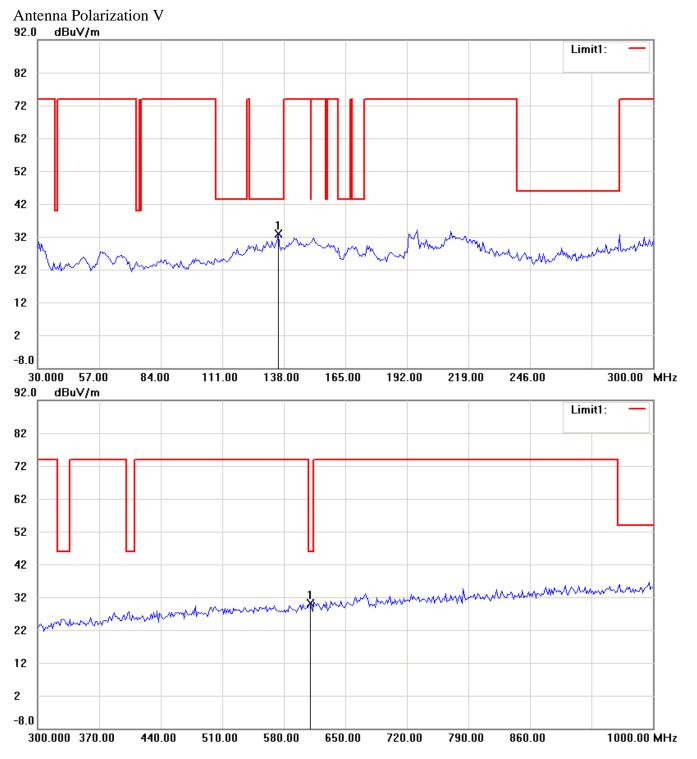


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



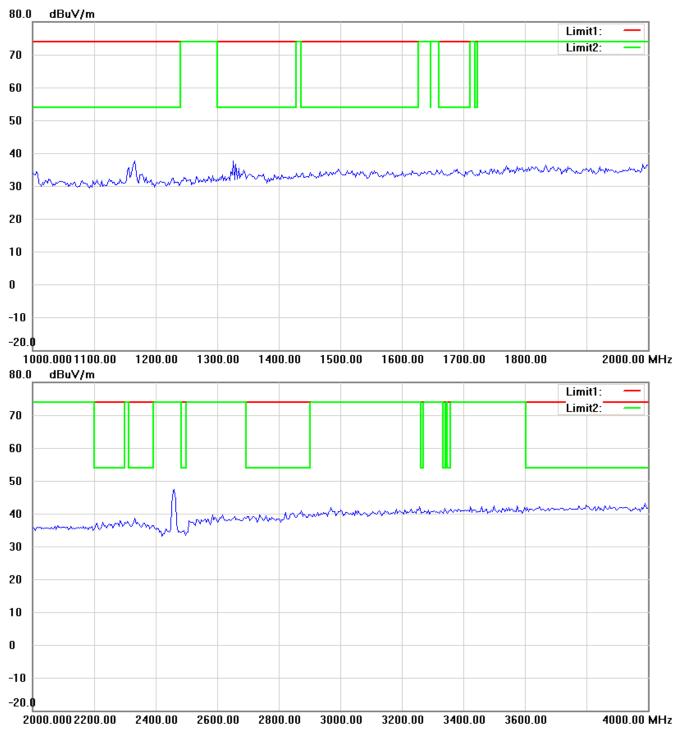


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



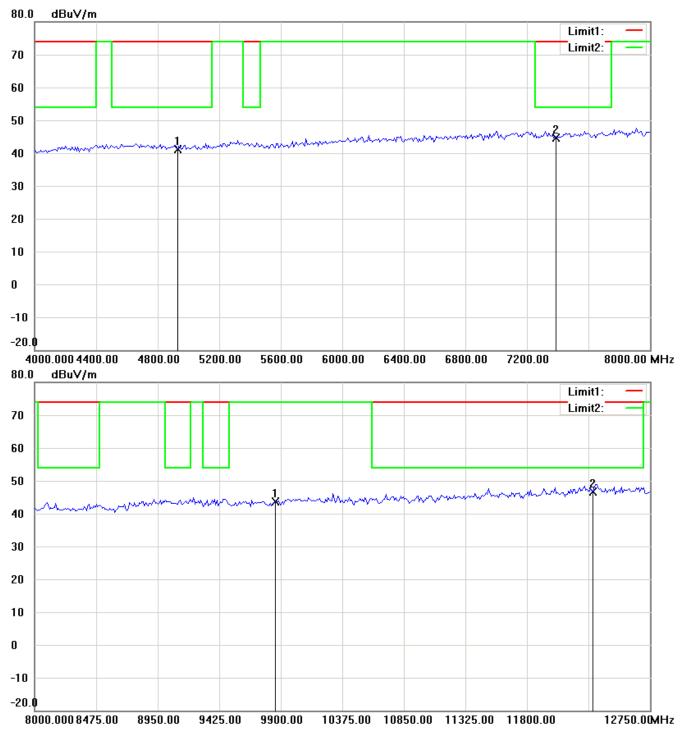


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



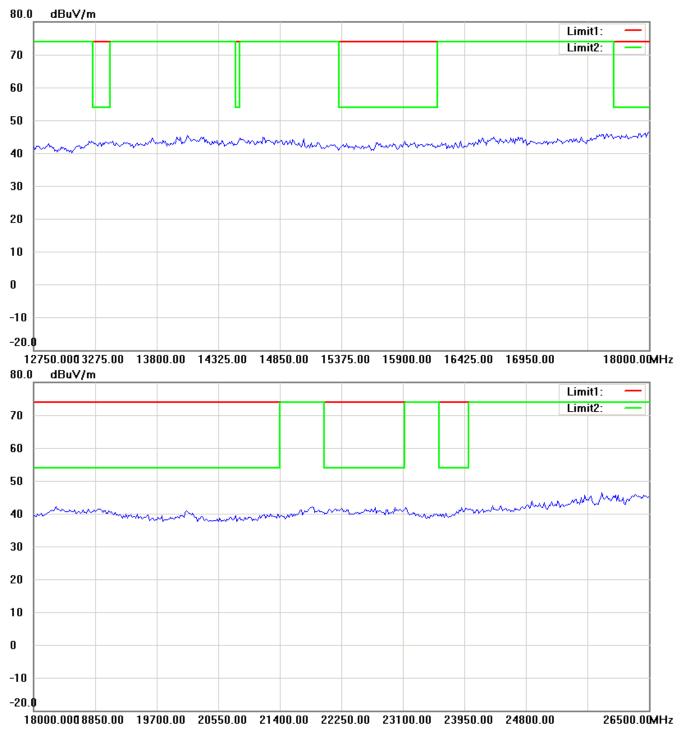


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



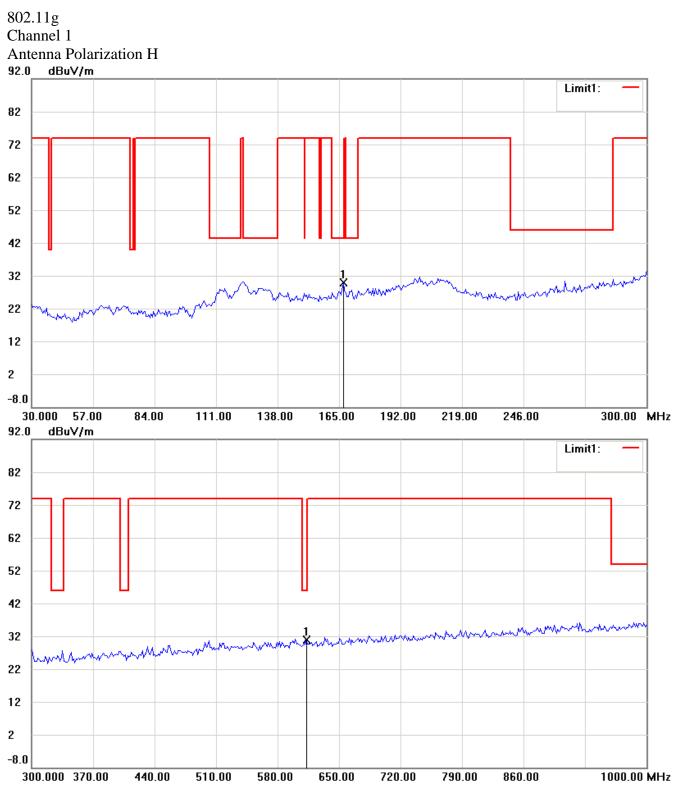


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



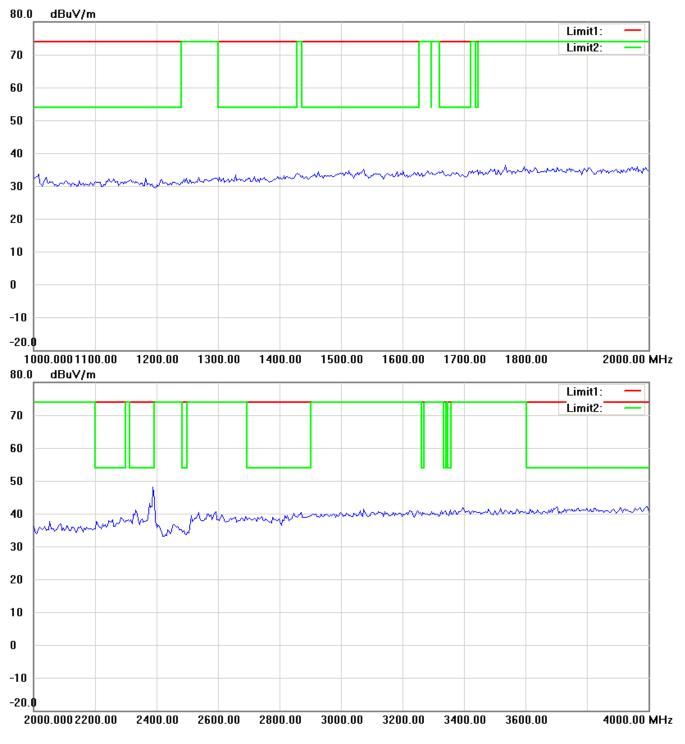


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



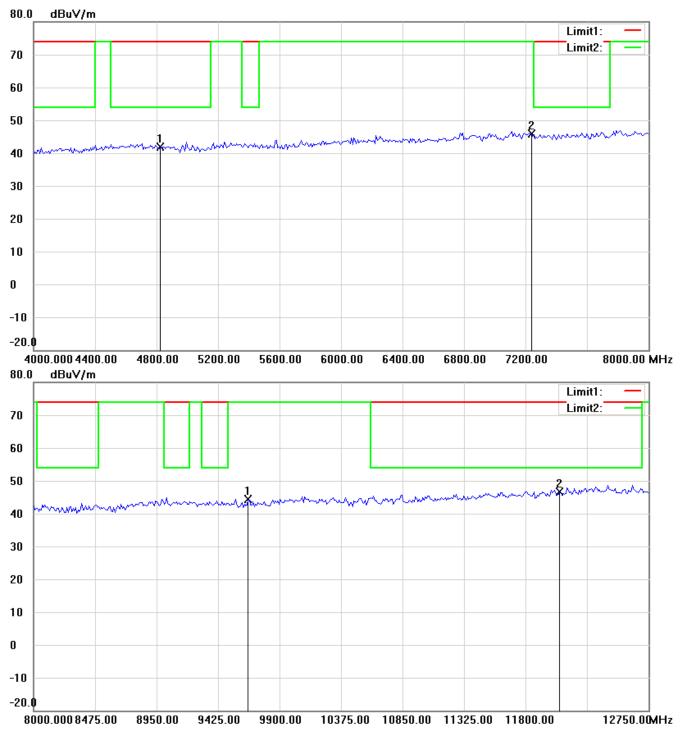


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



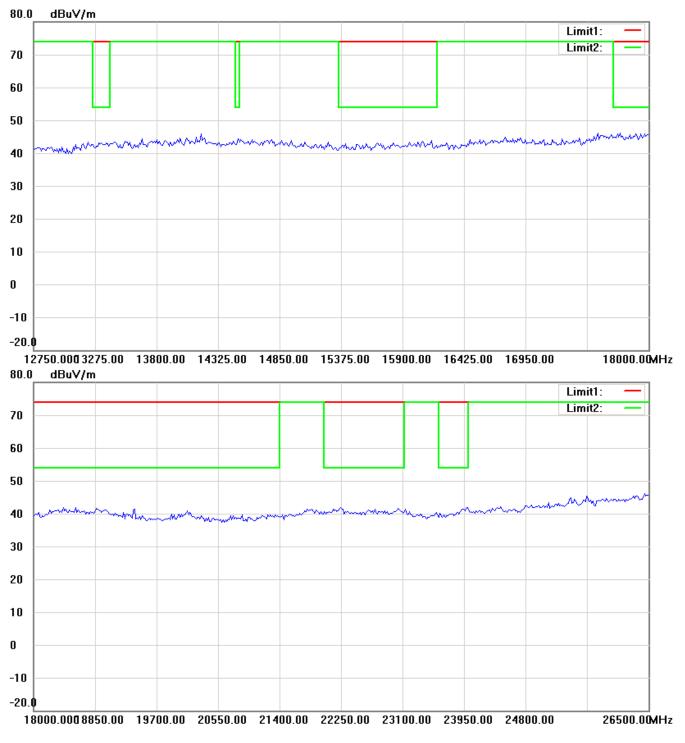


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



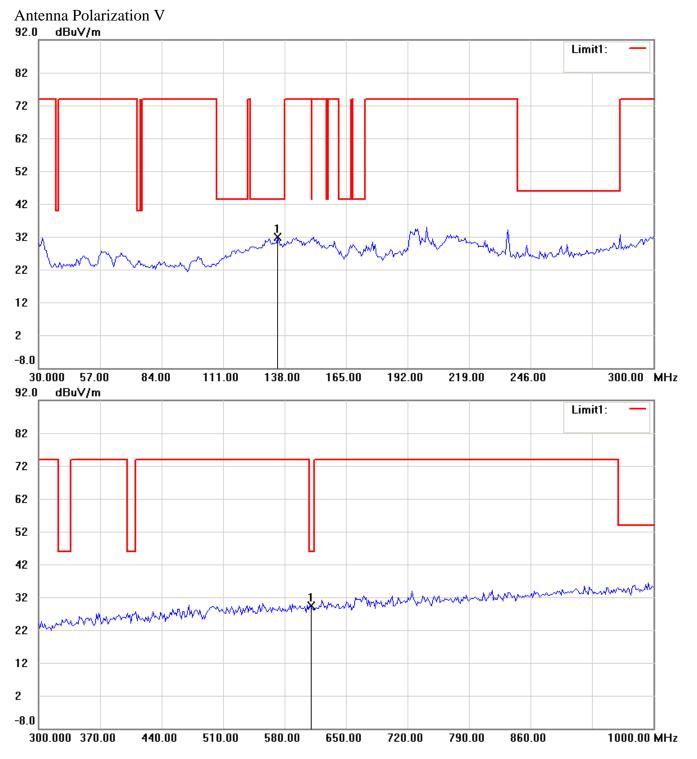


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



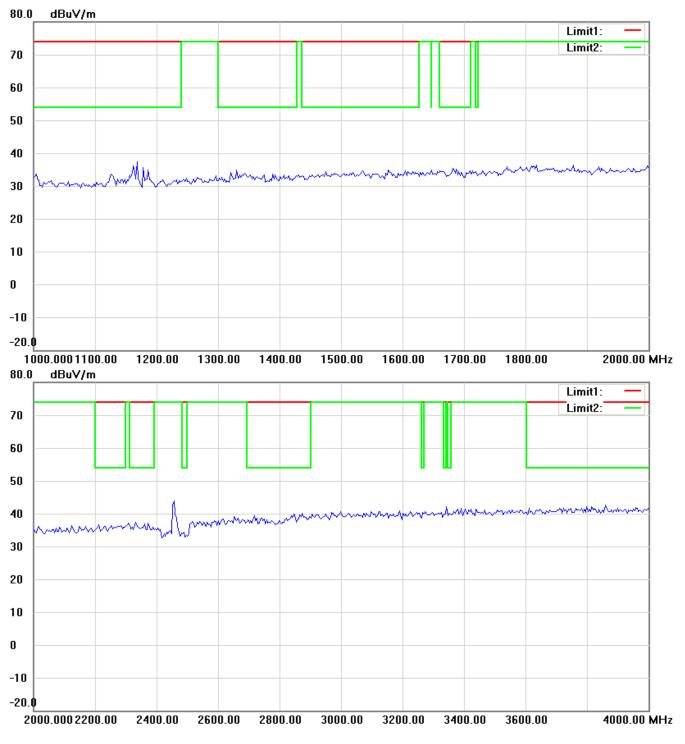


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



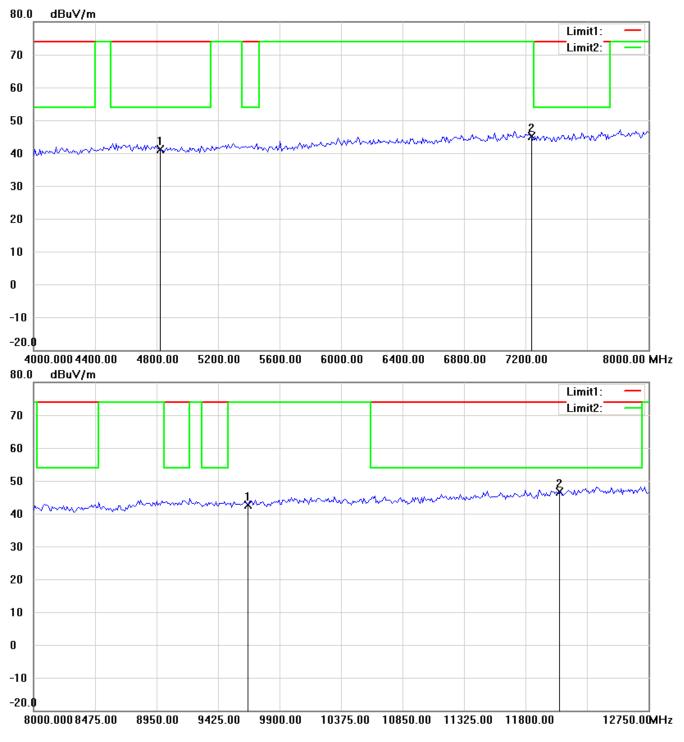

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




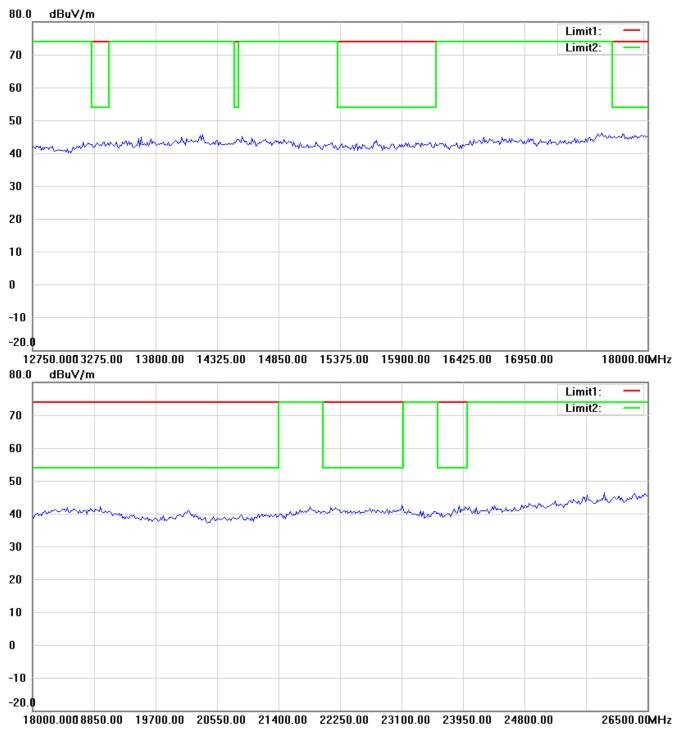

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






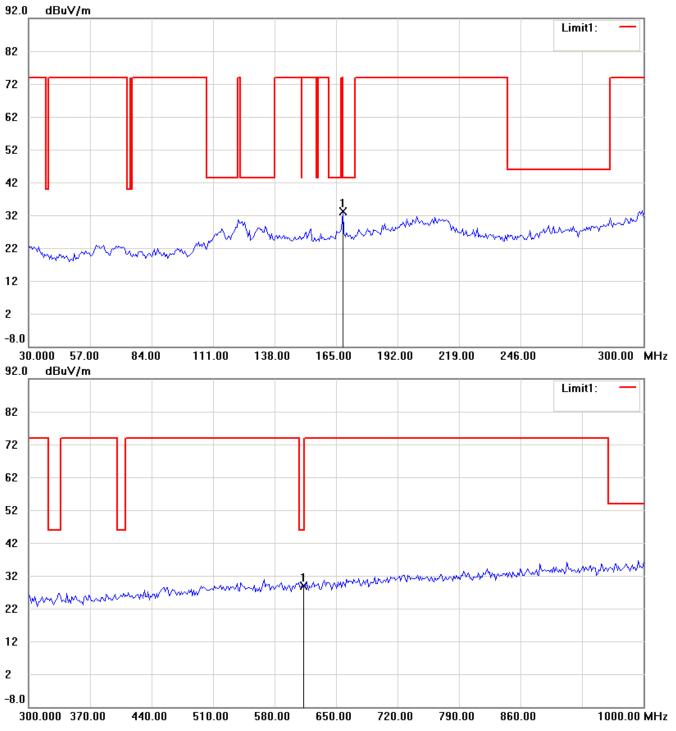


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



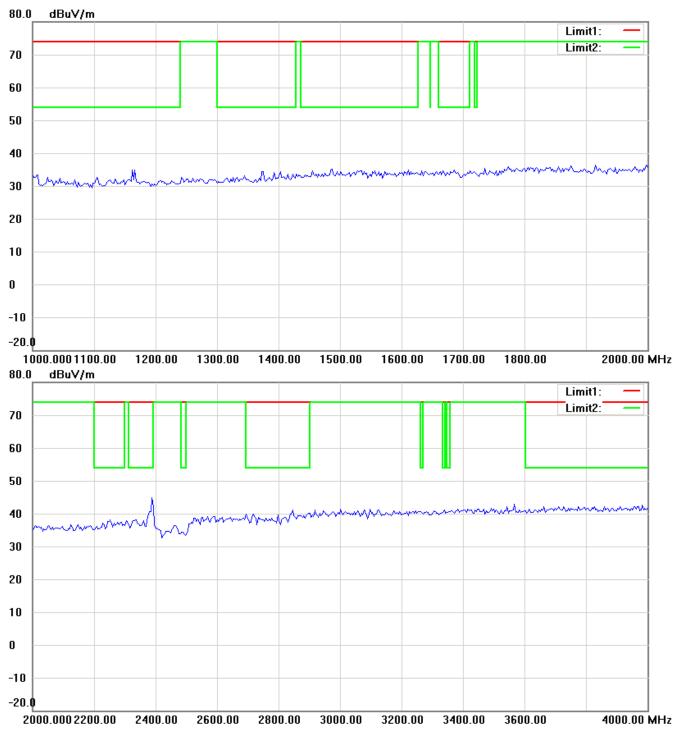


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



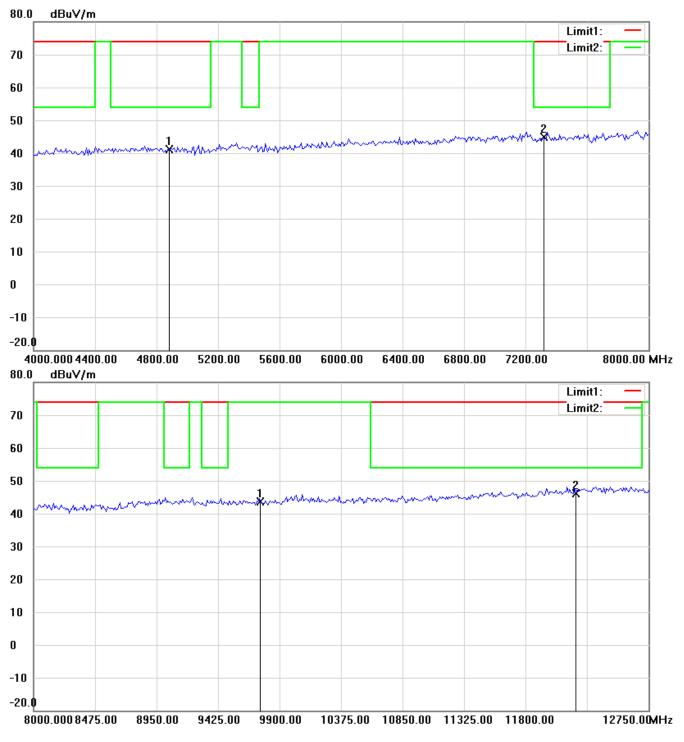


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



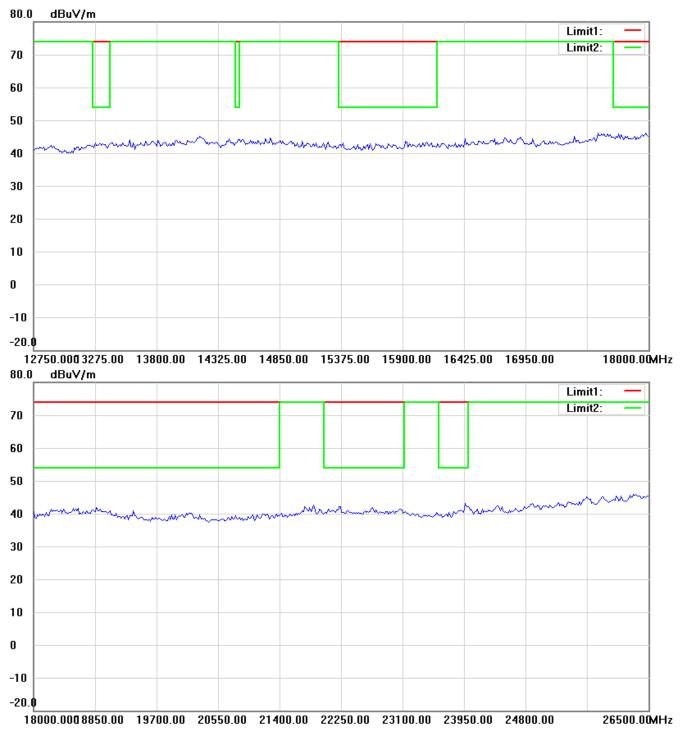


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



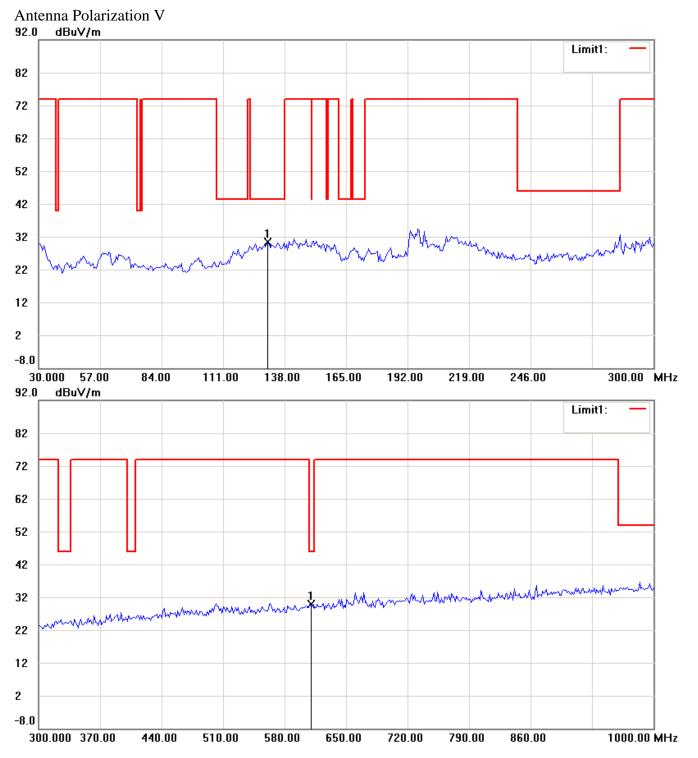


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



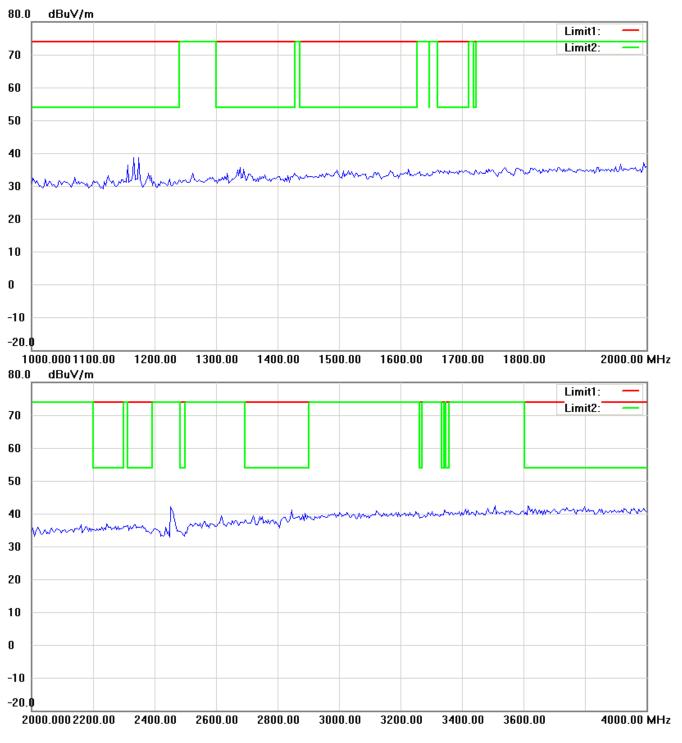


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



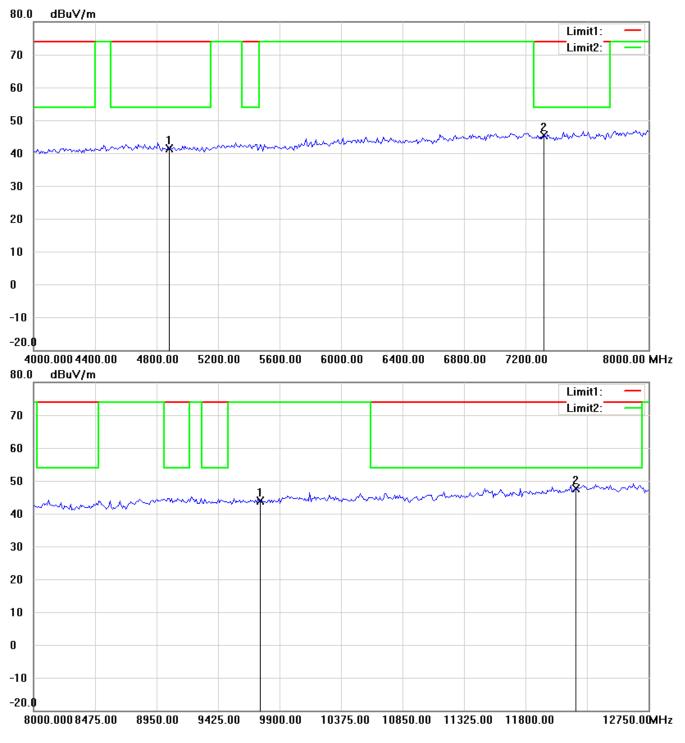


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




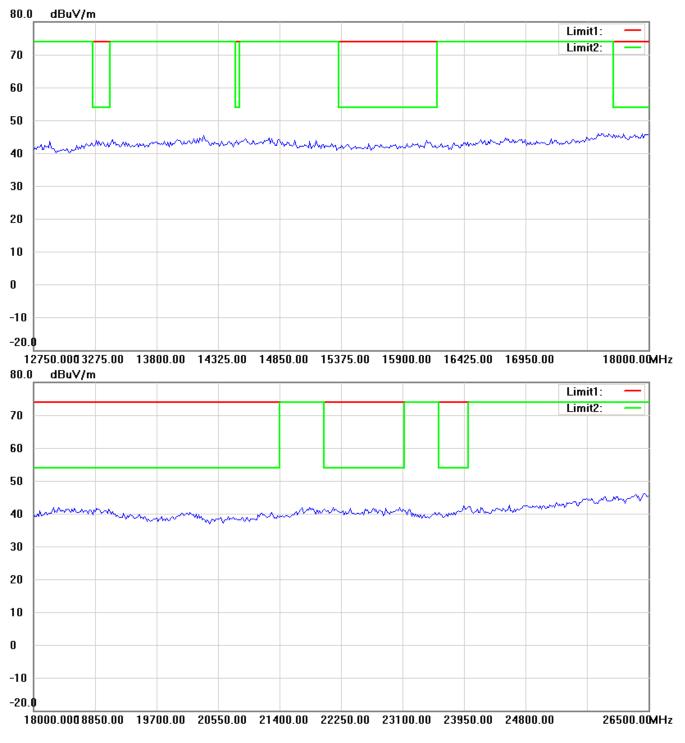

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






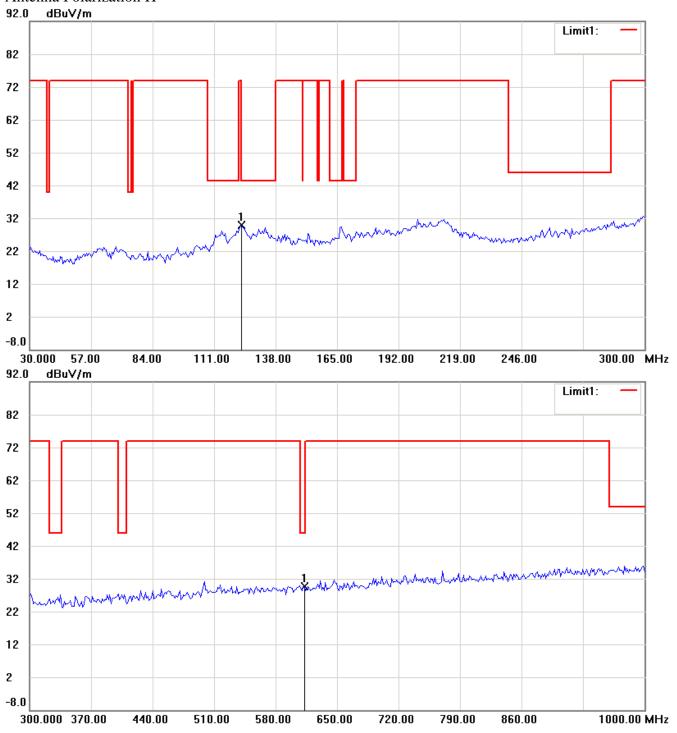


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



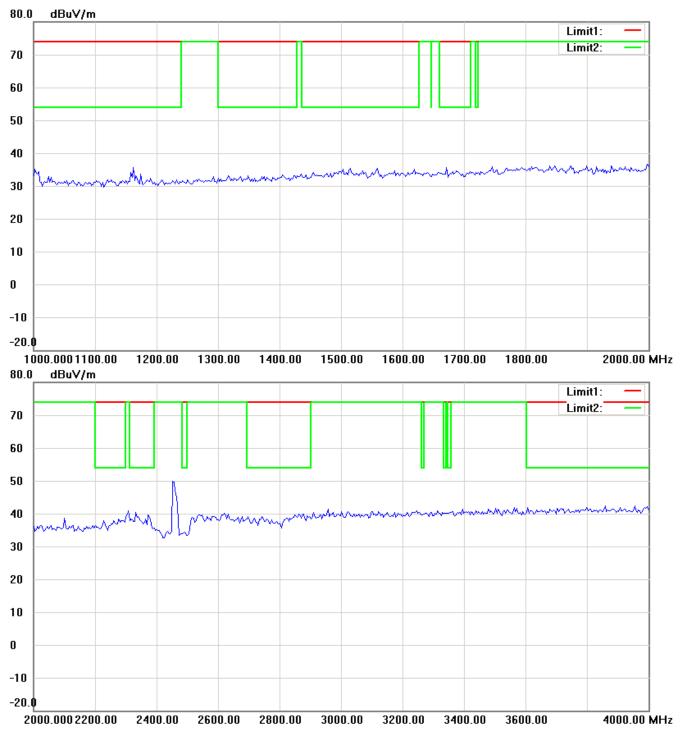


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



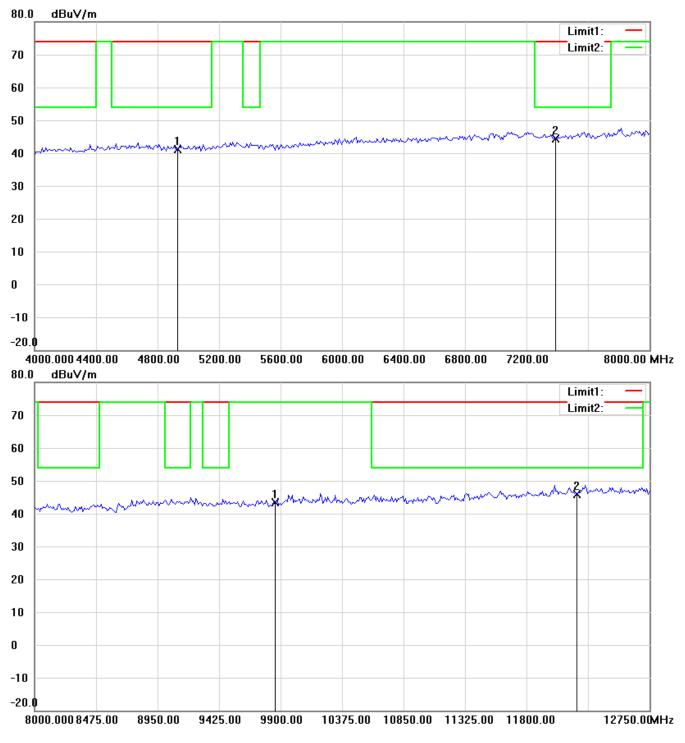


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



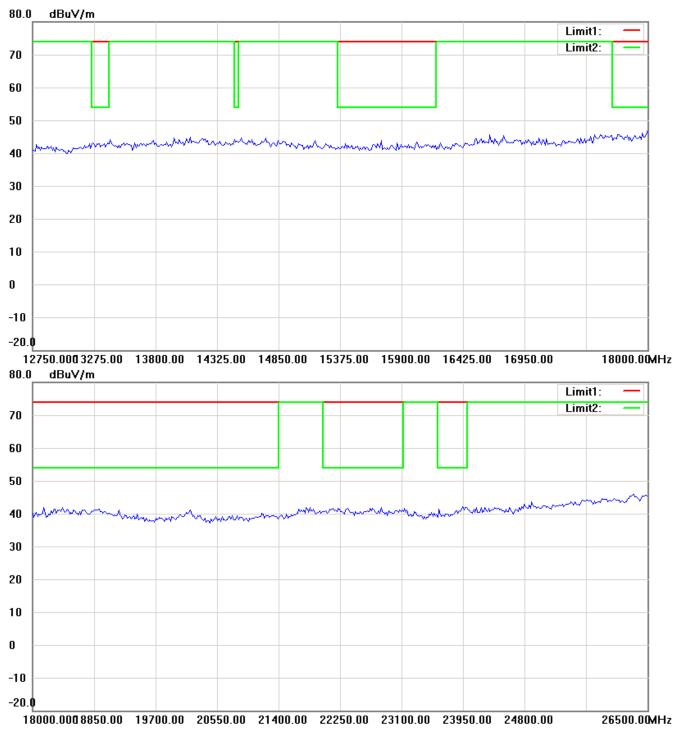


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



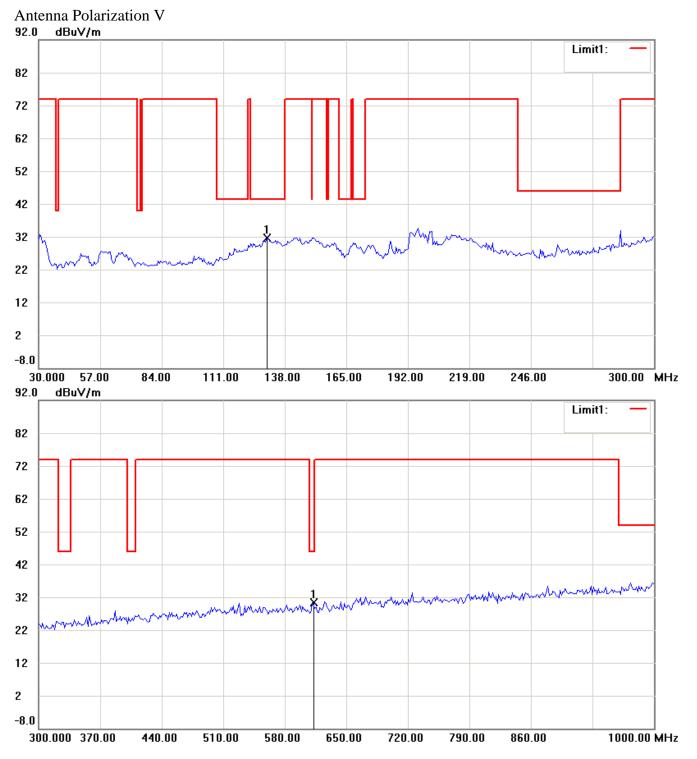


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



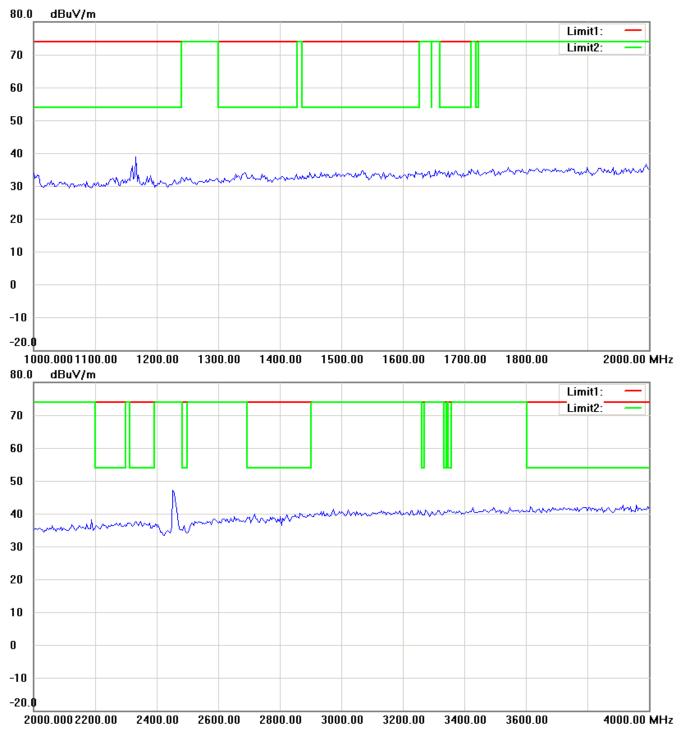


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



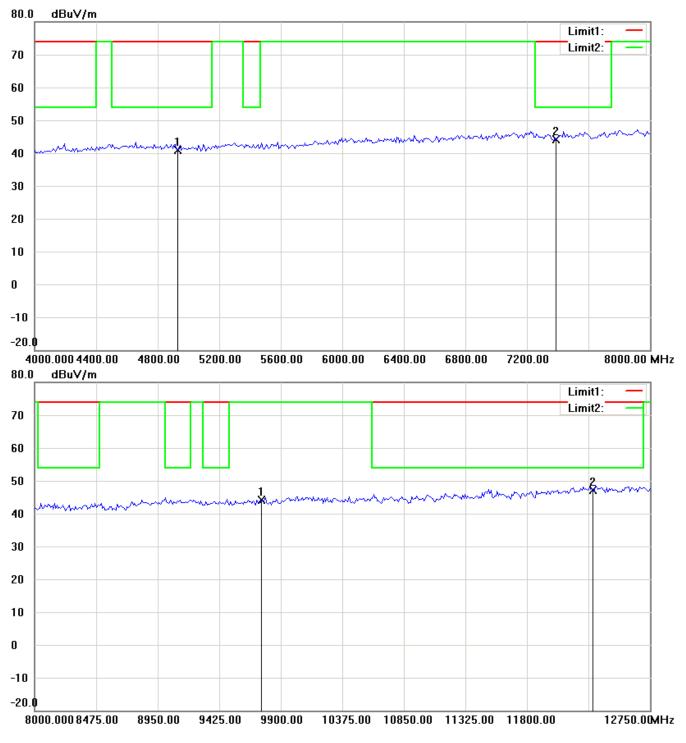

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



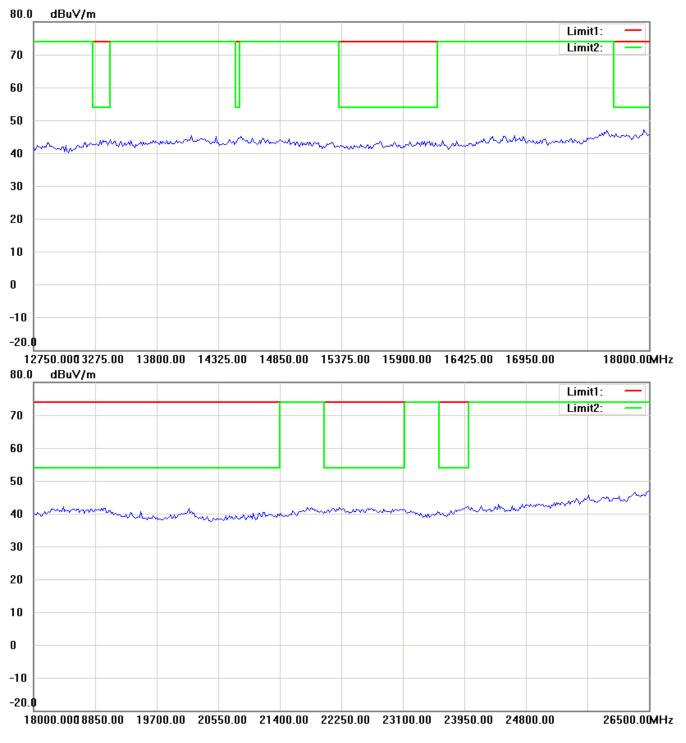


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Spurious Emissions radiated-Antenna 4 802.11b

Channel 1 Antenna Polarization H 92.0 dBuV/m

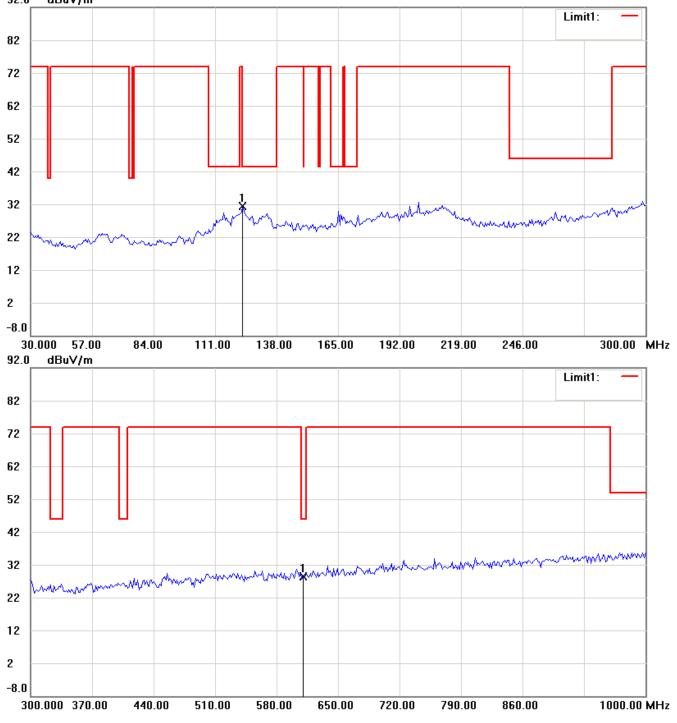


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



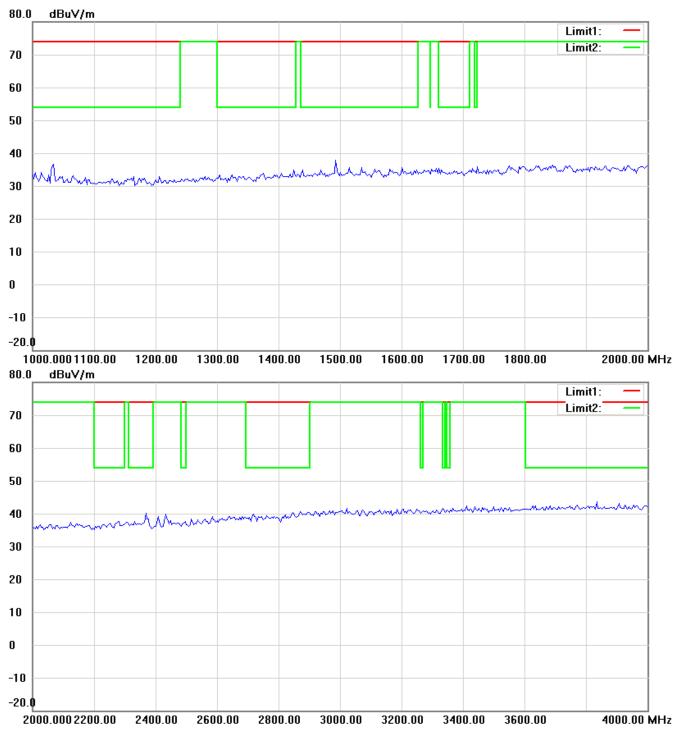


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



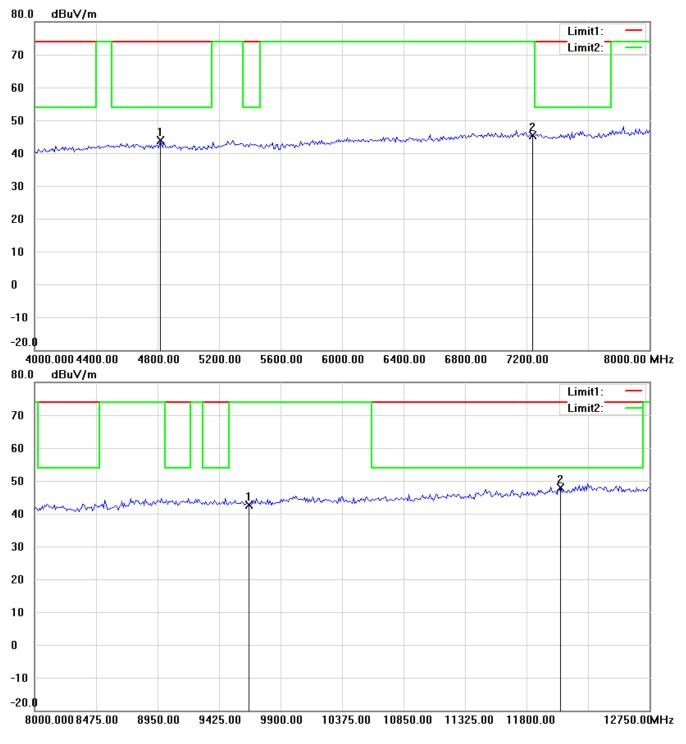


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



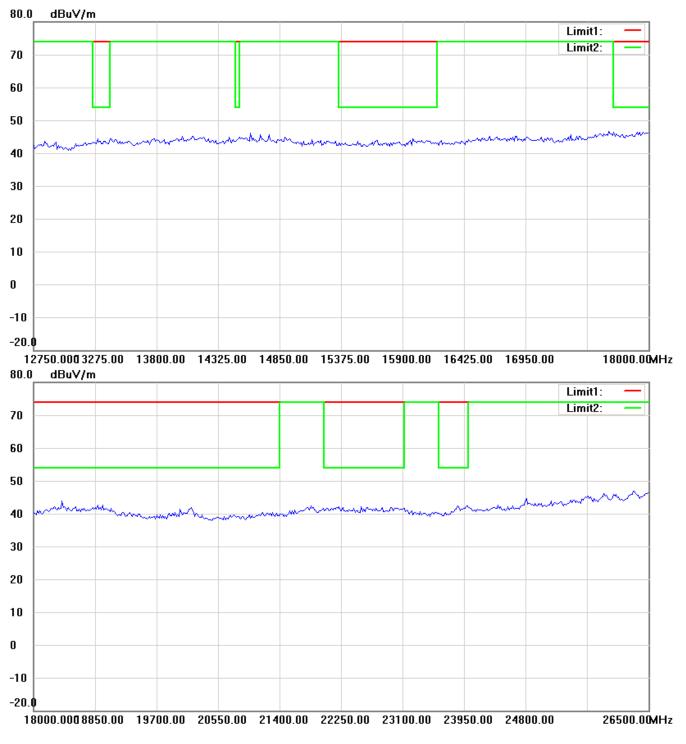


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



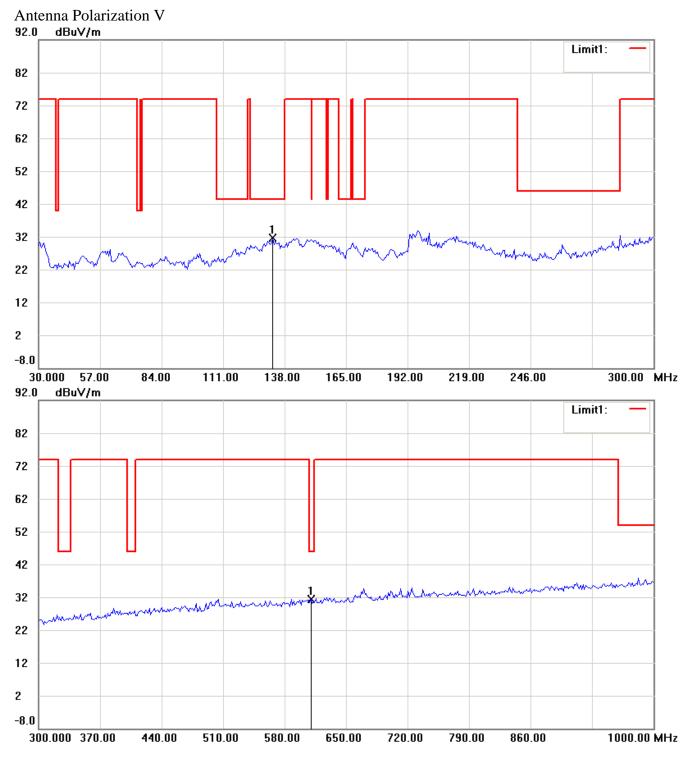


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



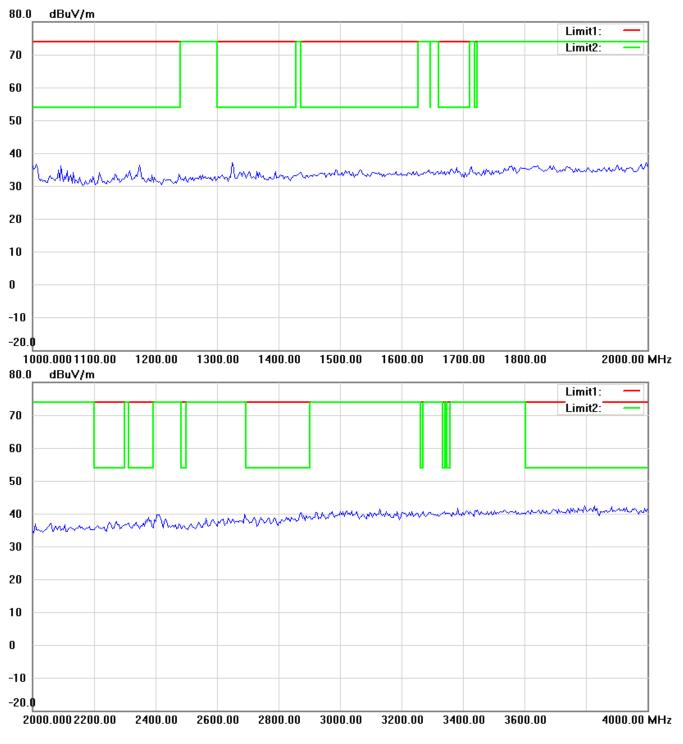


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



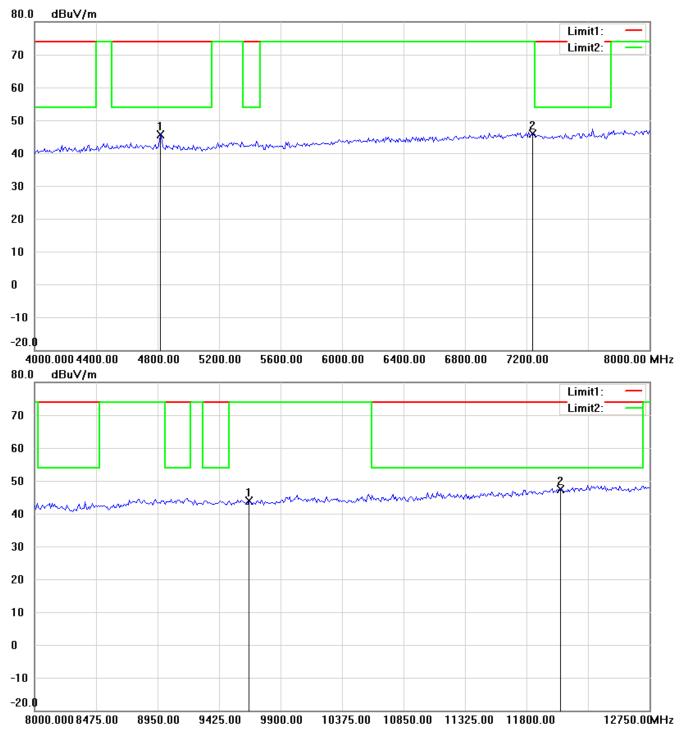


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



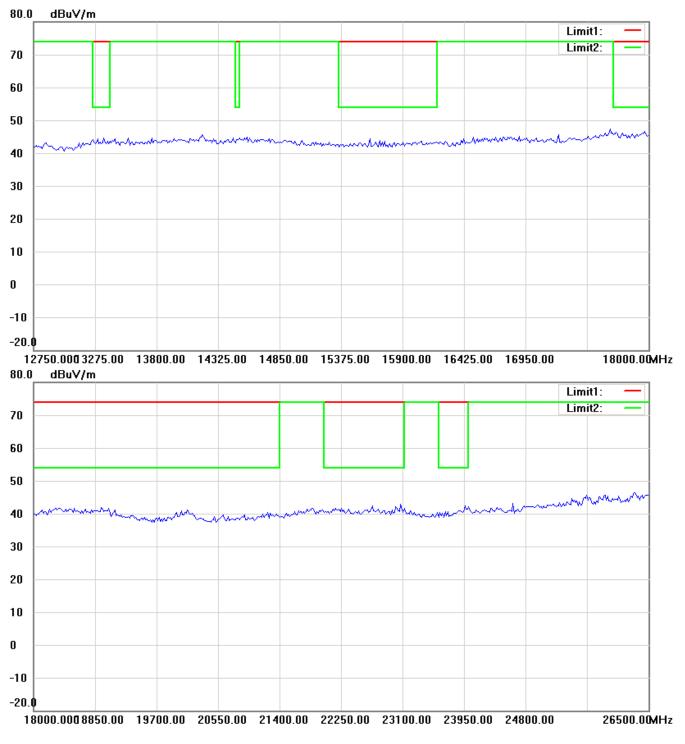


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



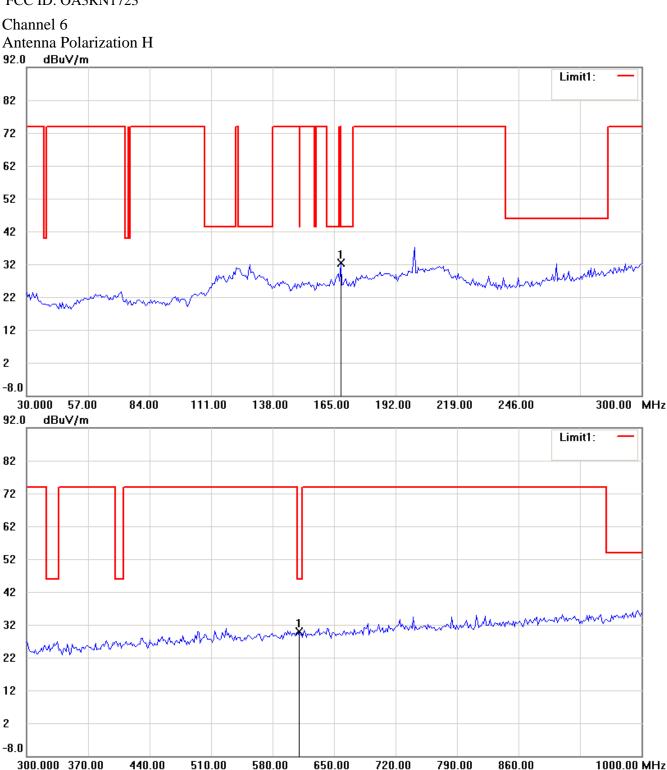


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



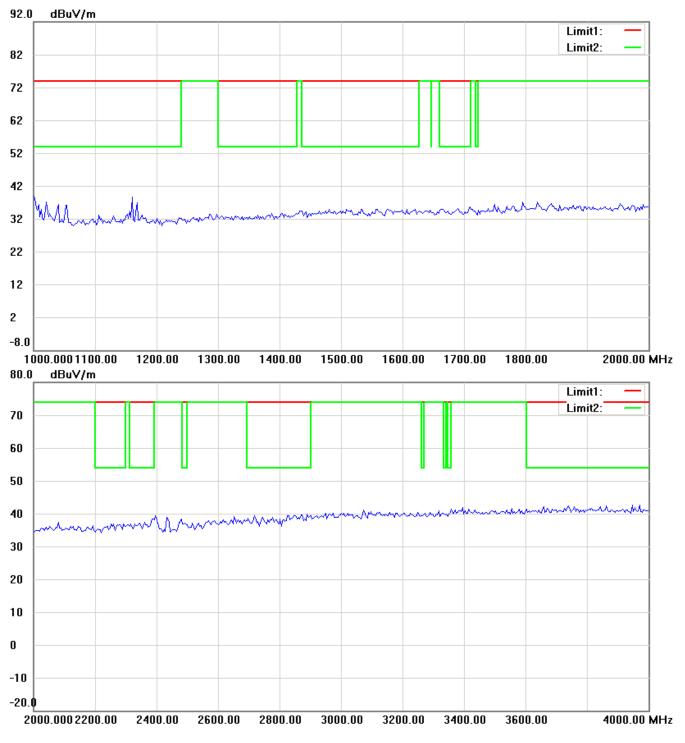


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



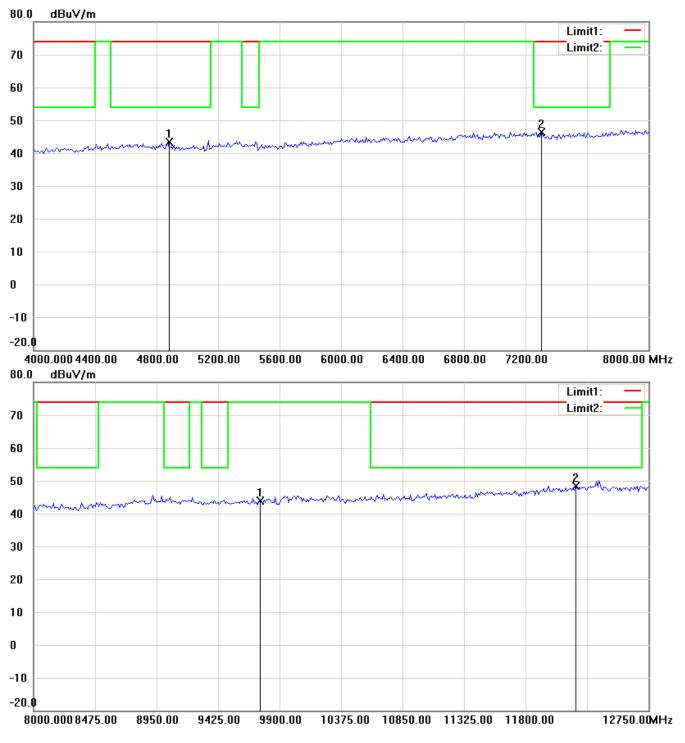


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



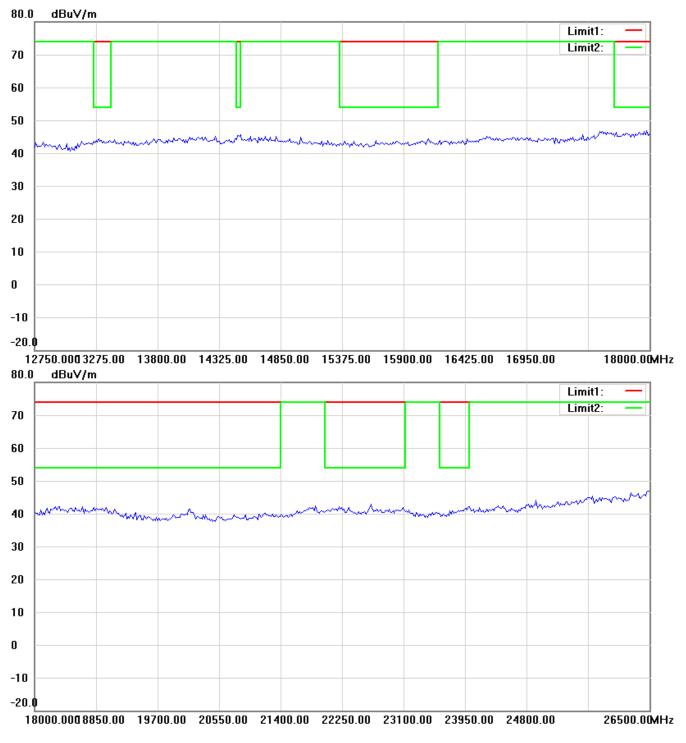


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



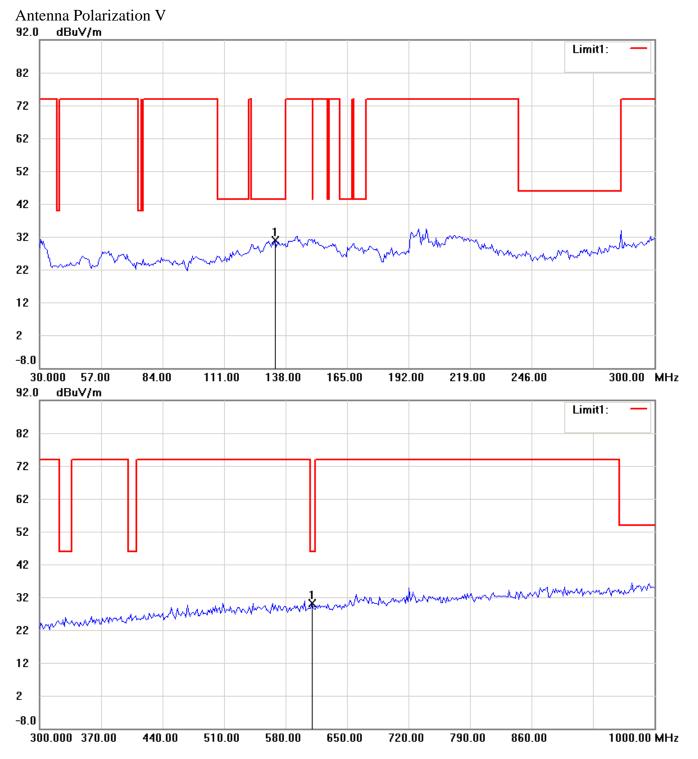


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



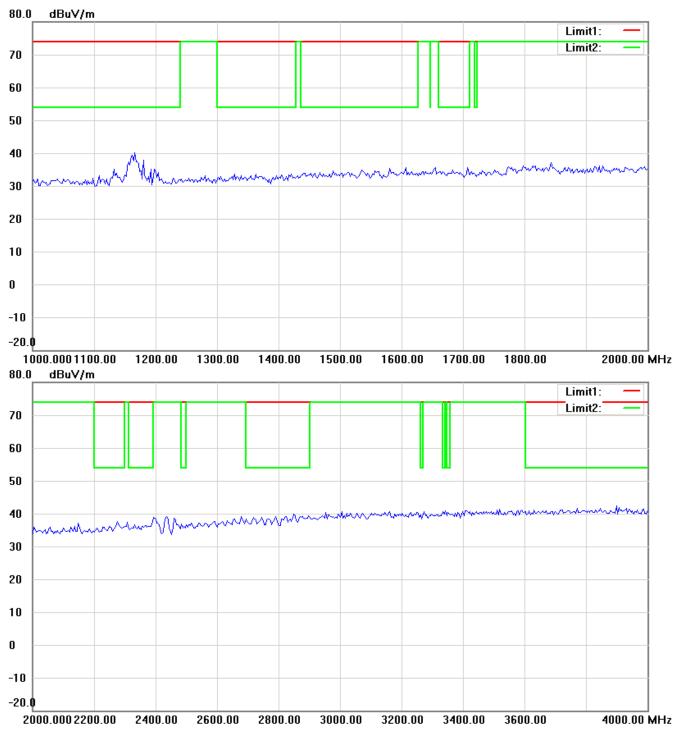


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



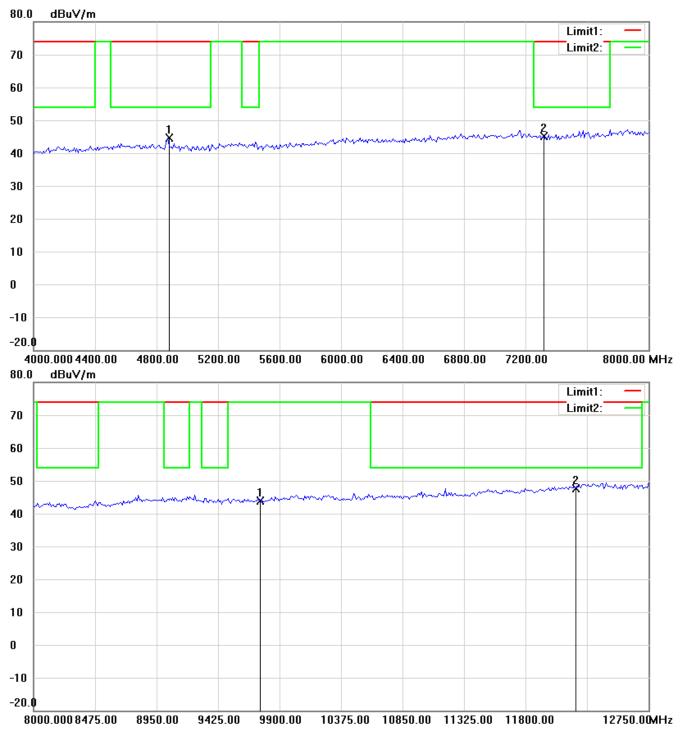


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




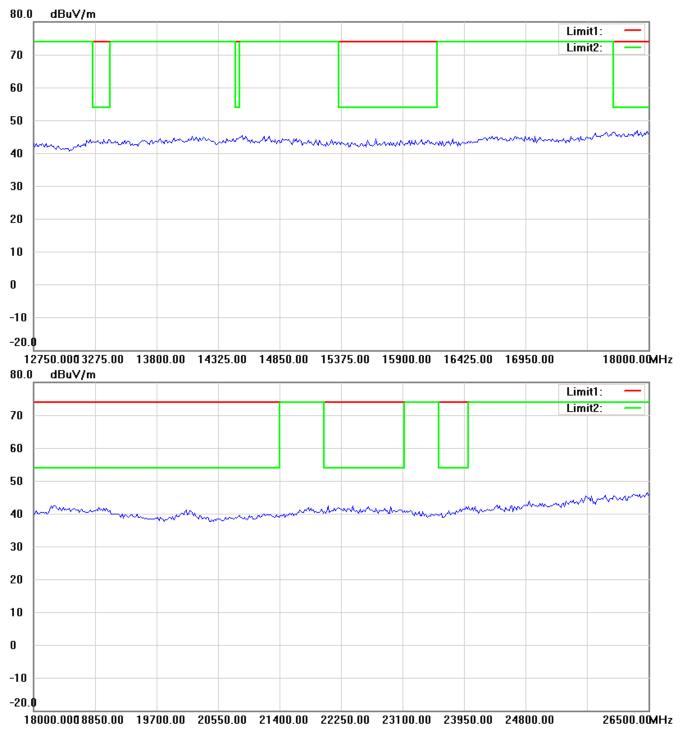

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






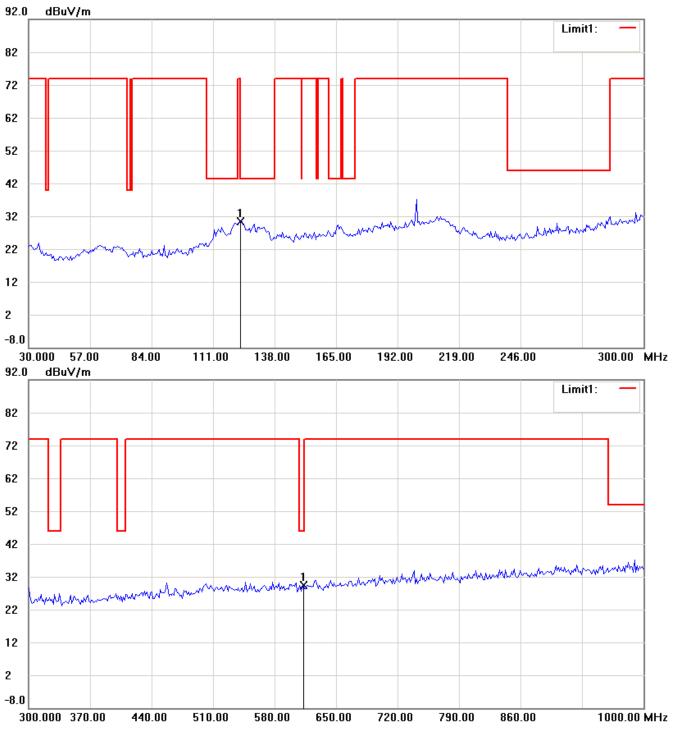


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



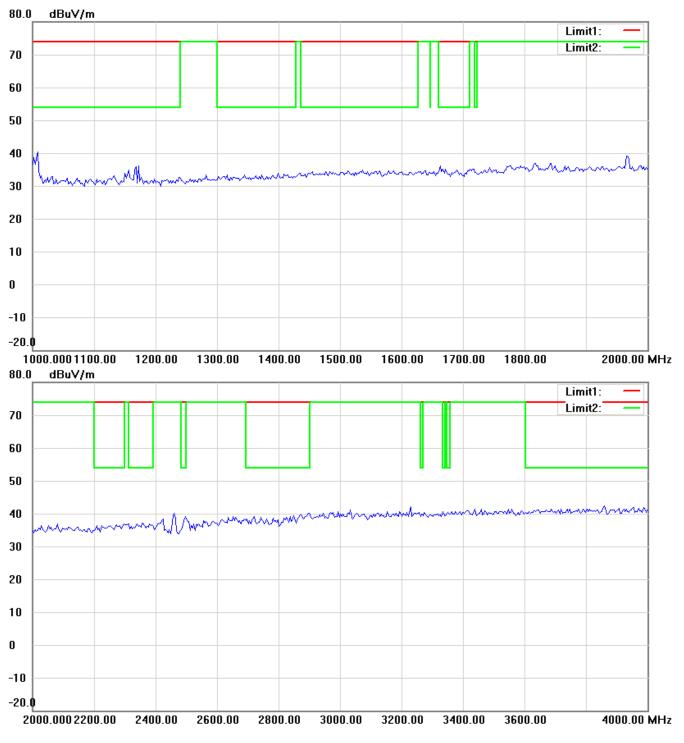


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



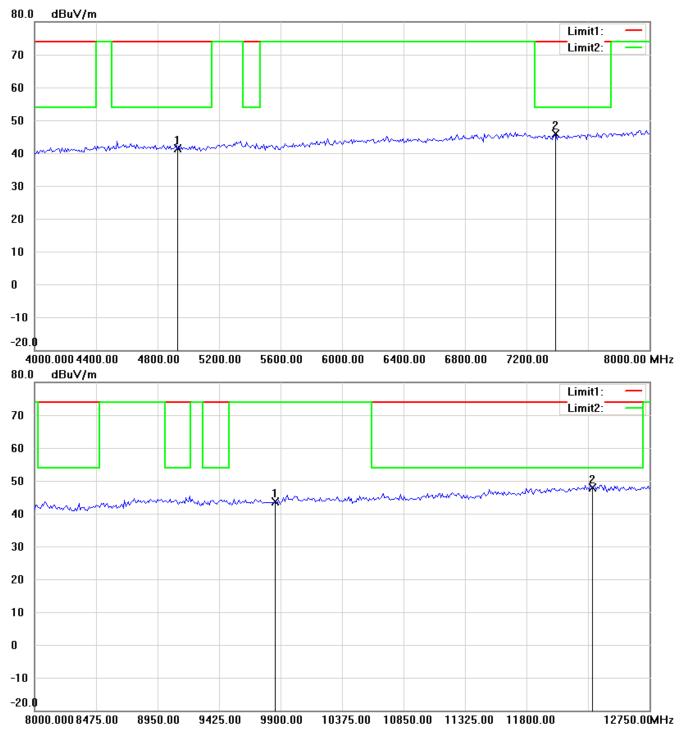


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



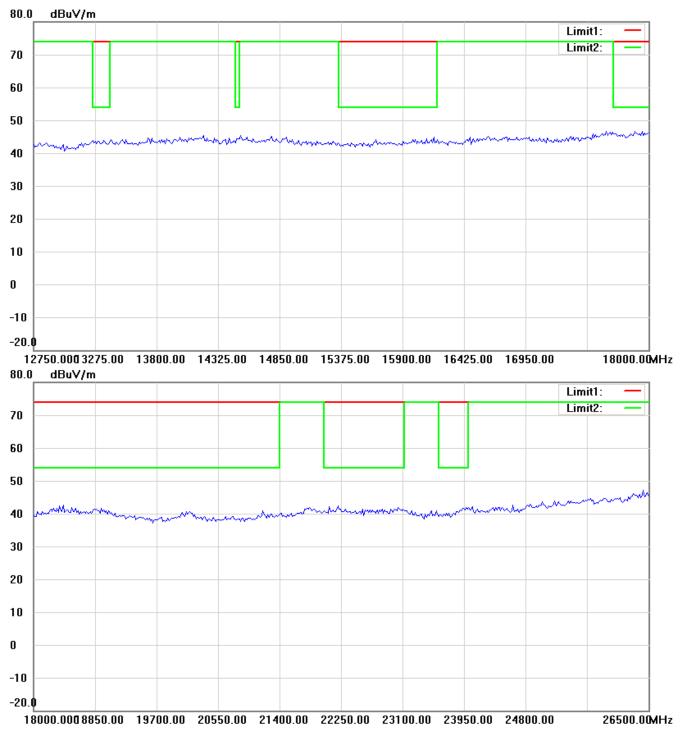


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



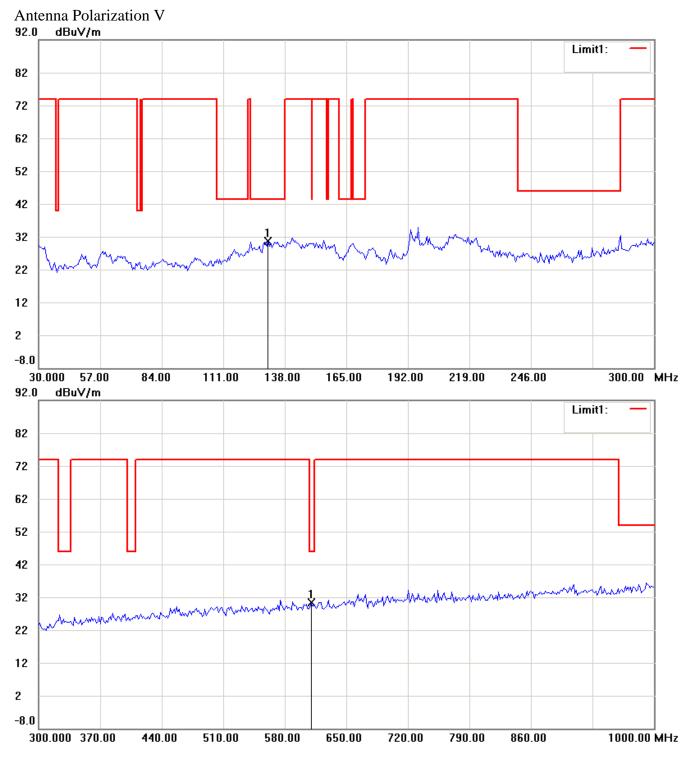


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



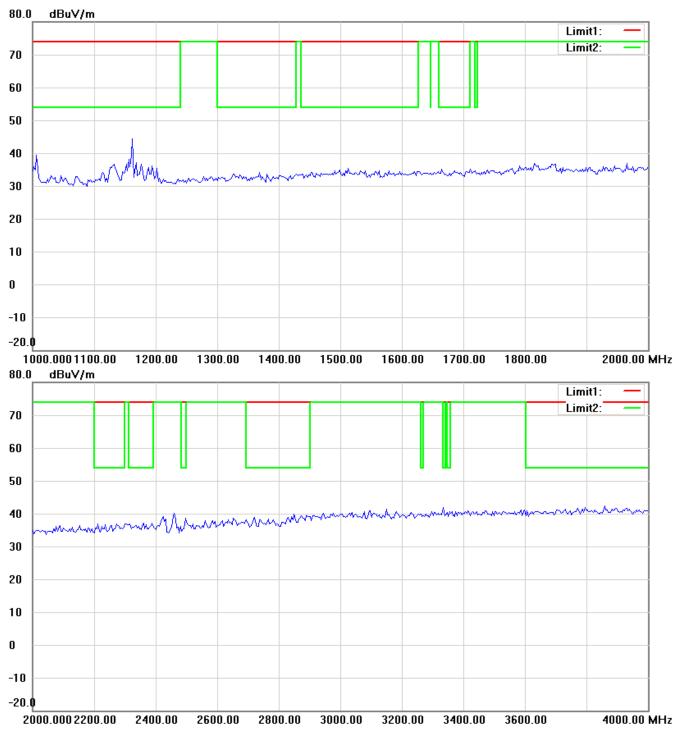


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



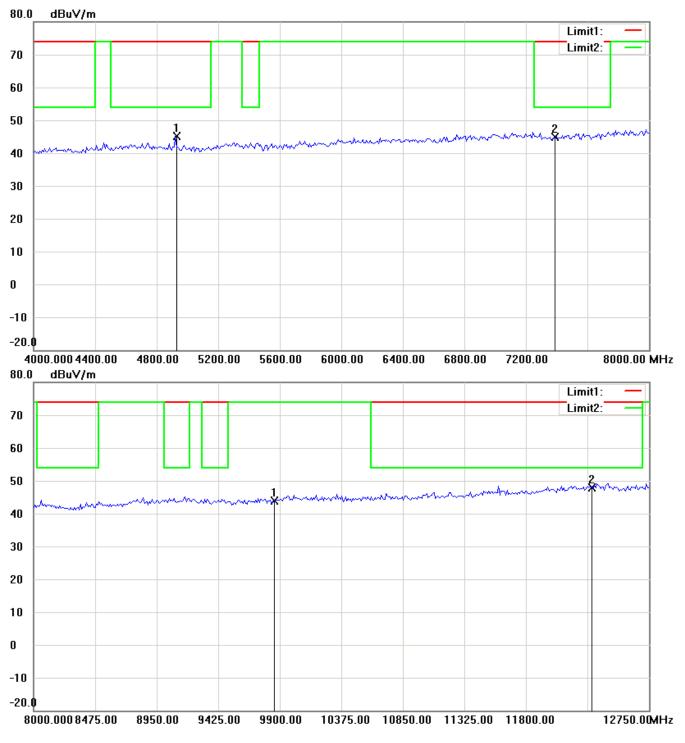


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



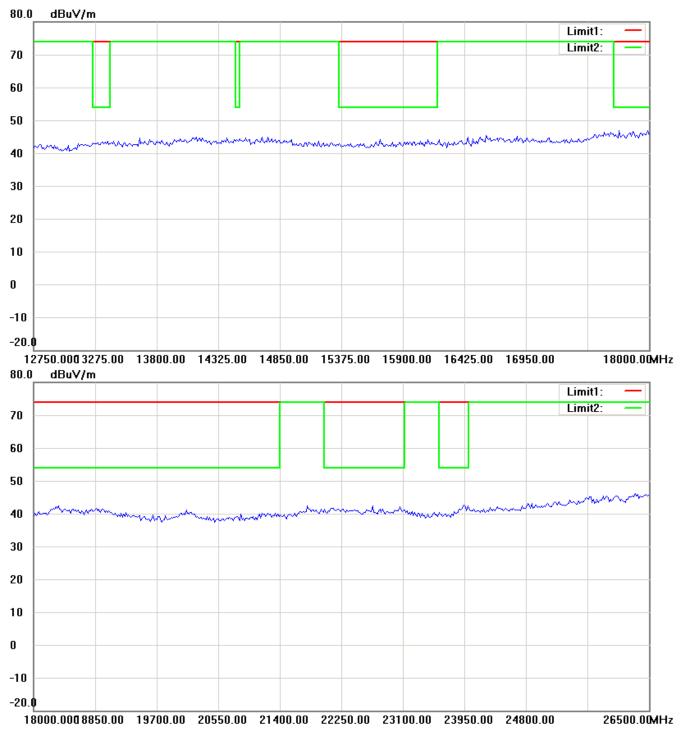


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



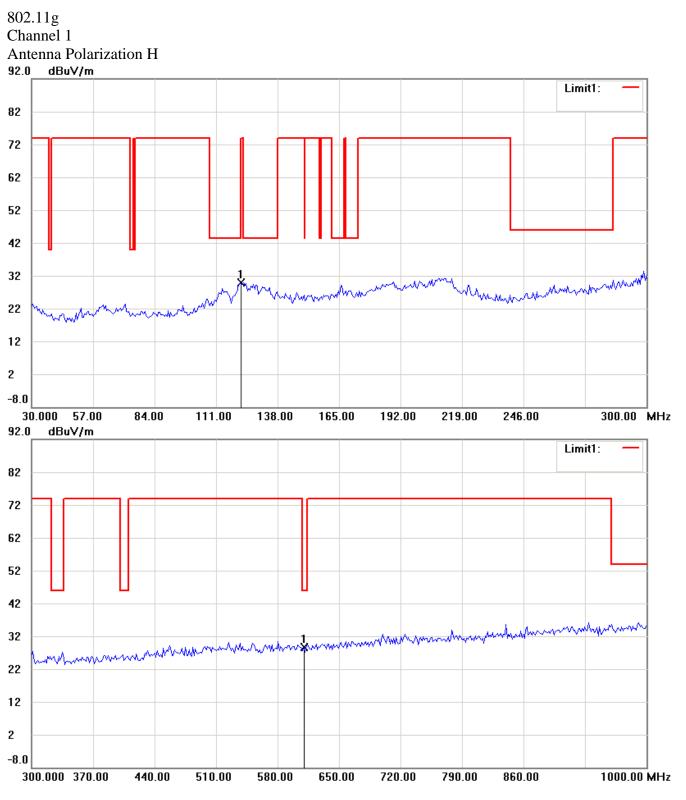


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



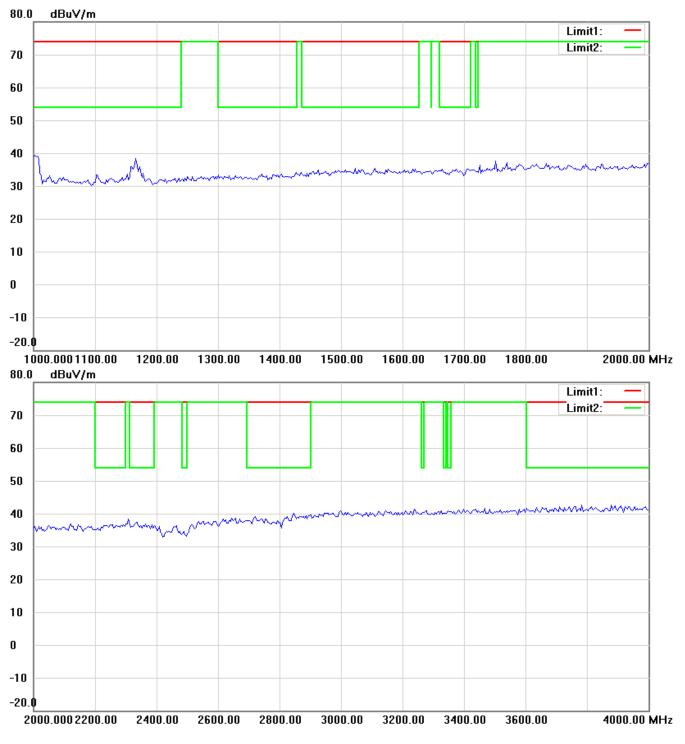


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



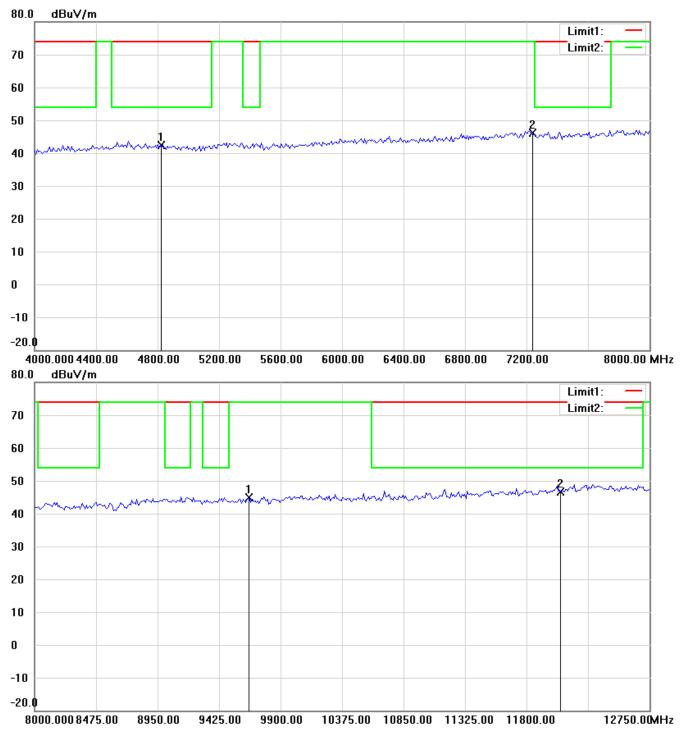


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



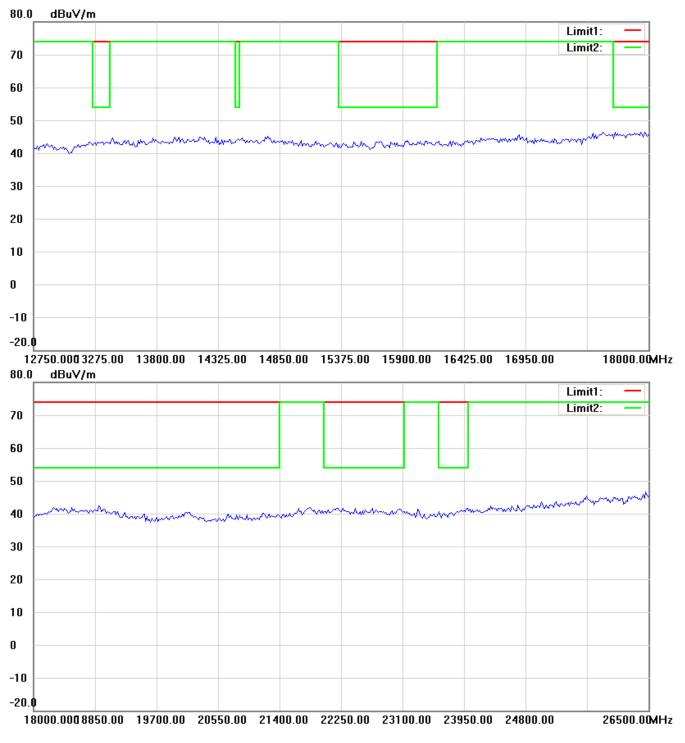


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



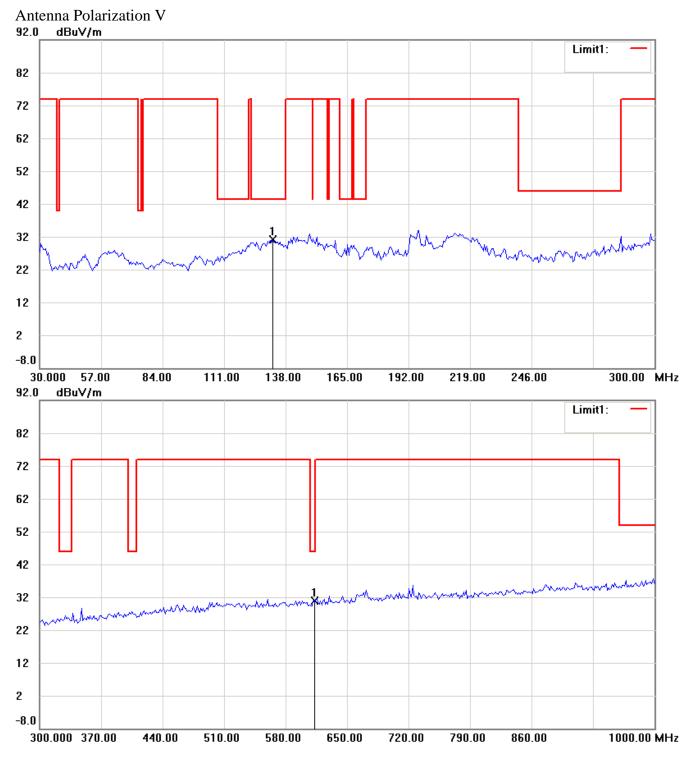


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



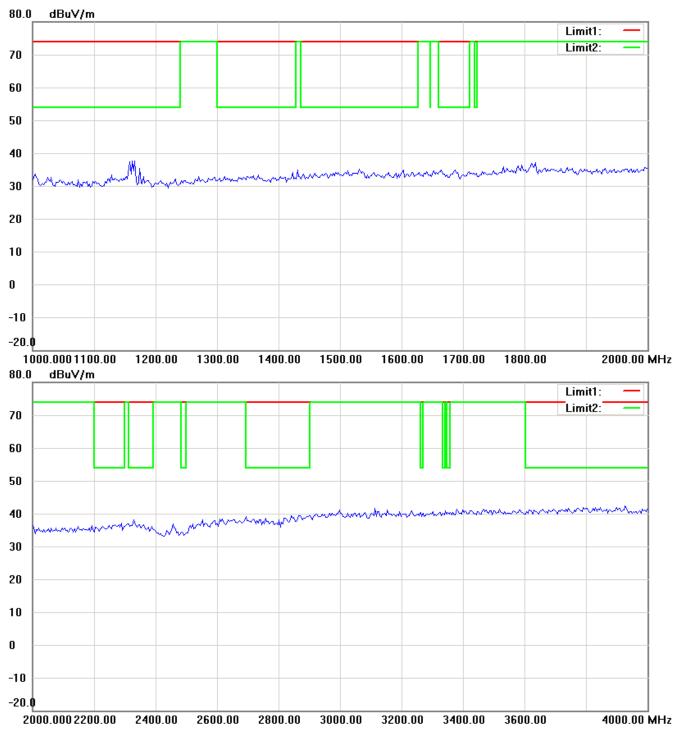


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



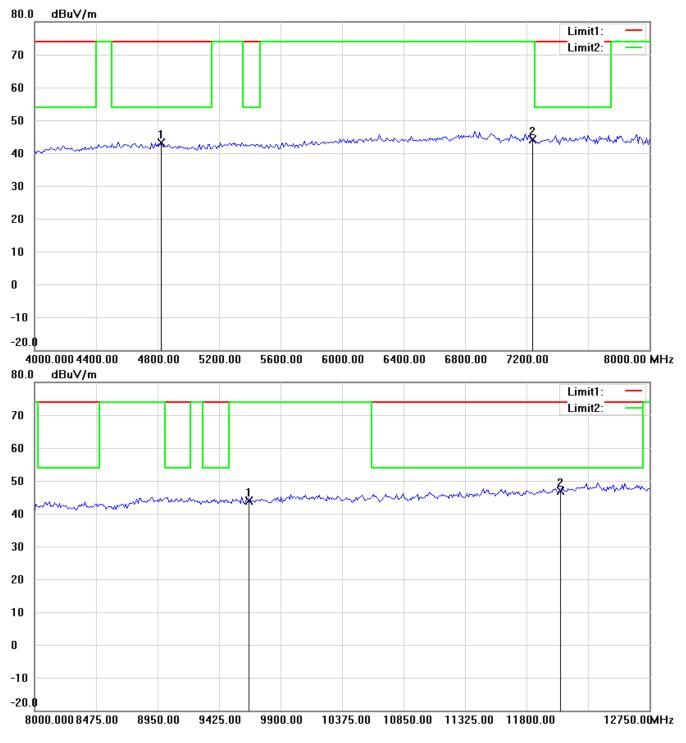


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




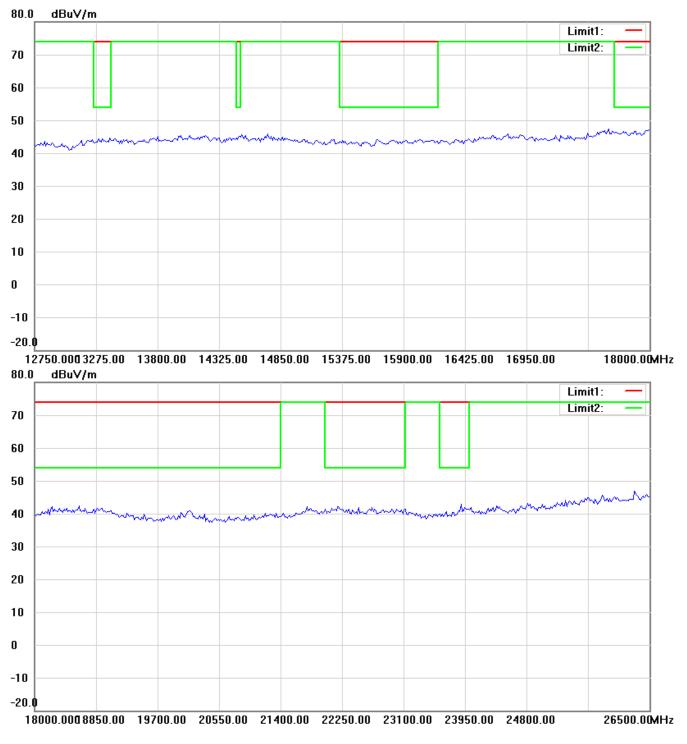

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



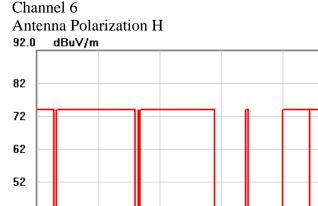

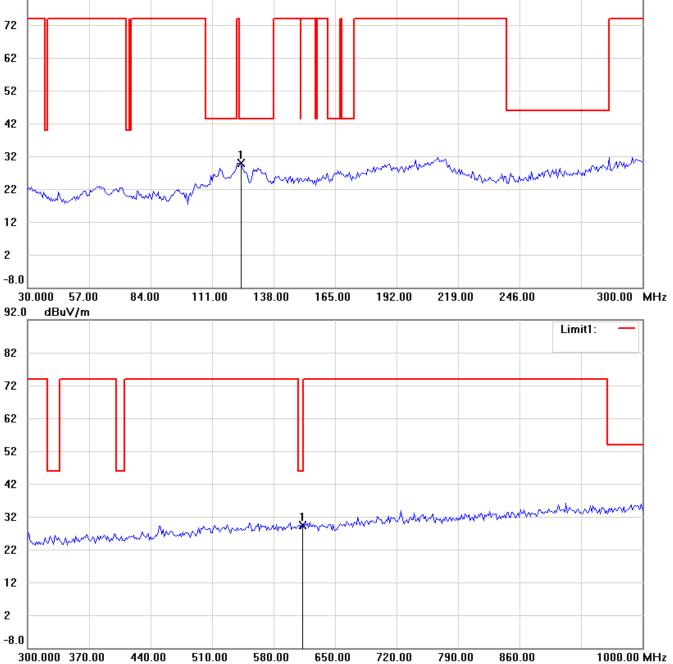


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.


Limit1:



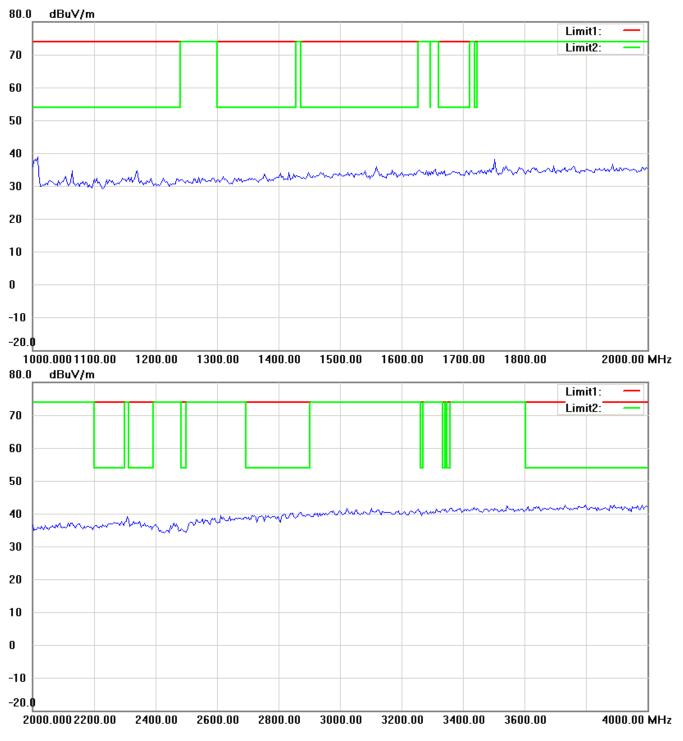


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



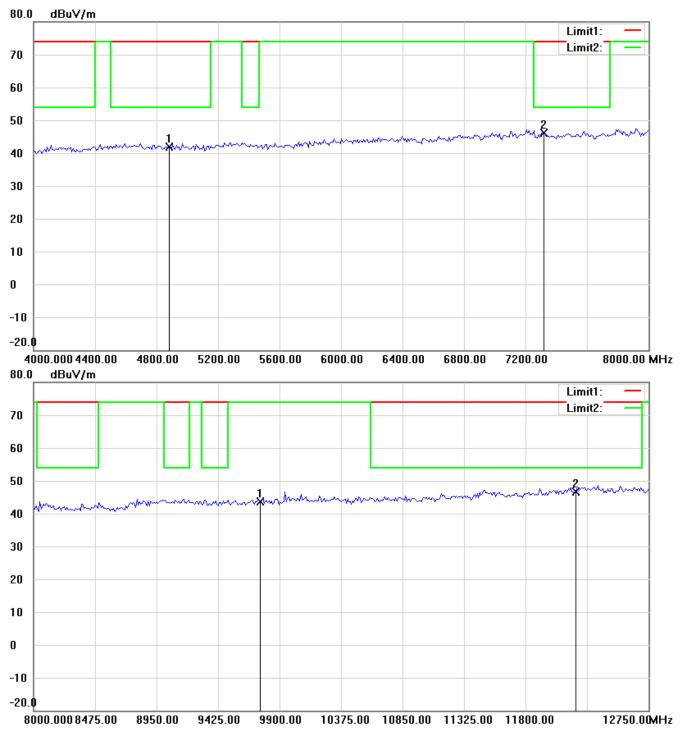


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



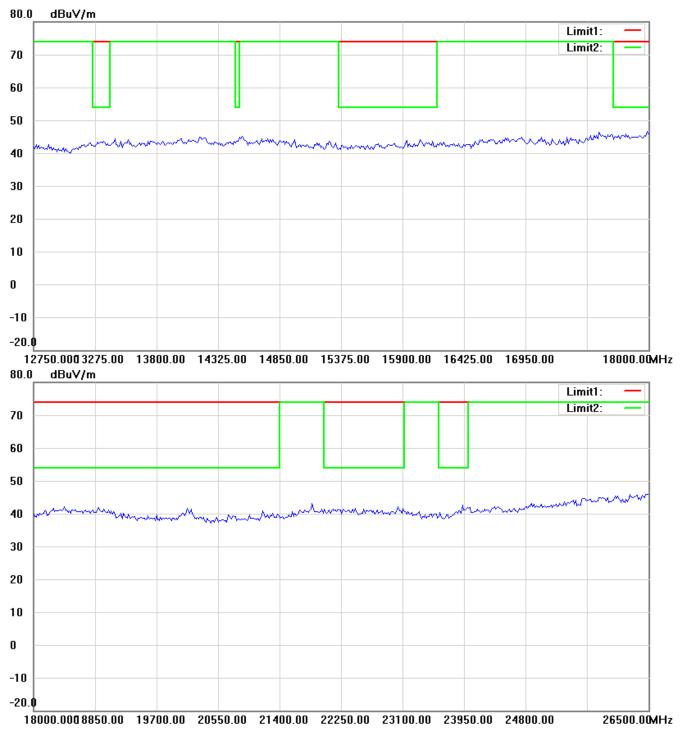


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



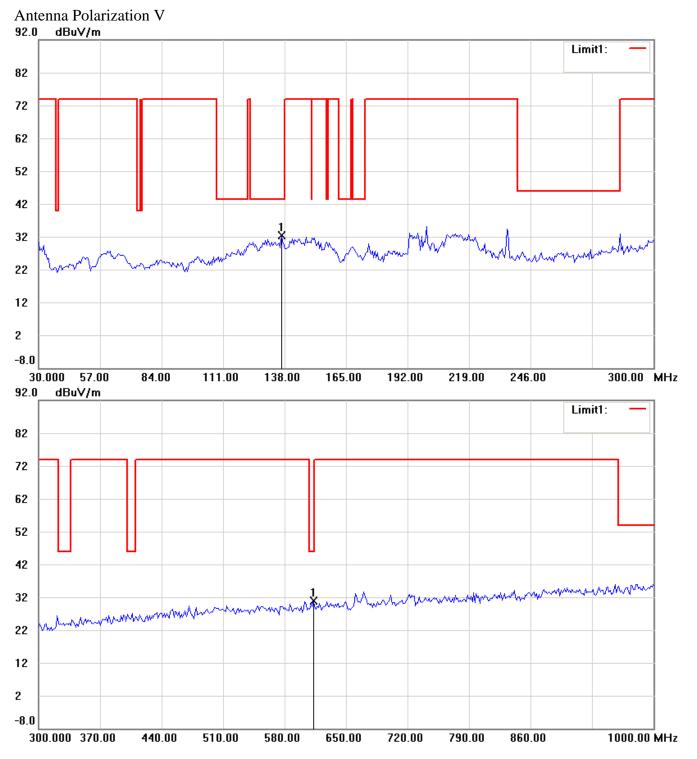


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



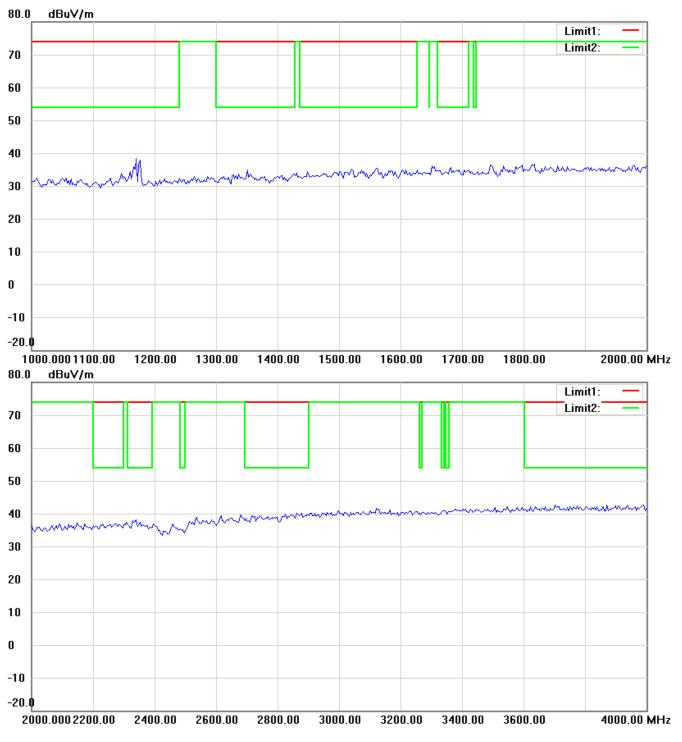


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



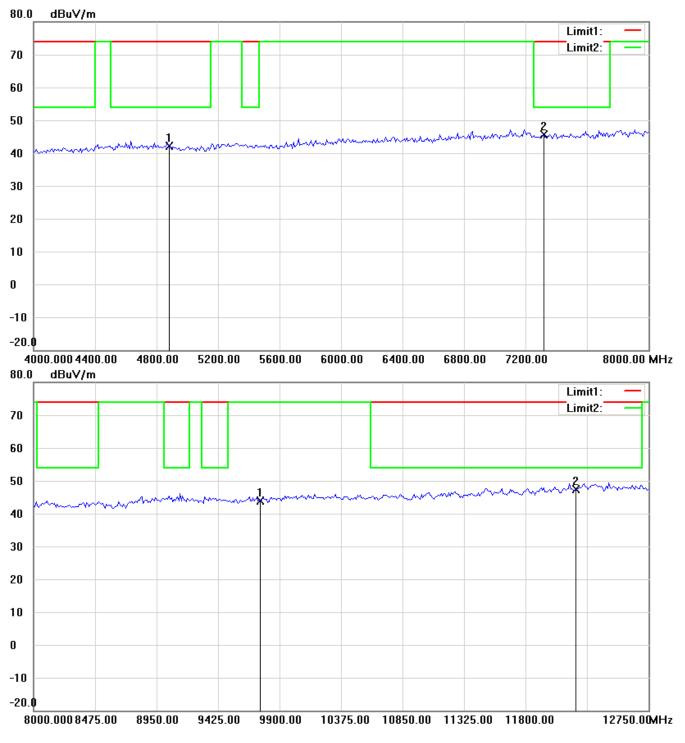

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




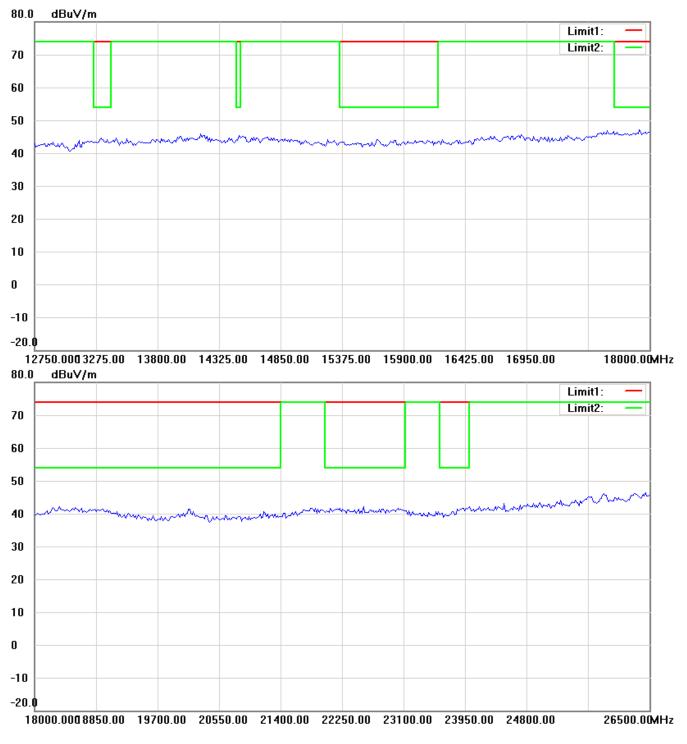

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Channel 11 Antenna Polarization H

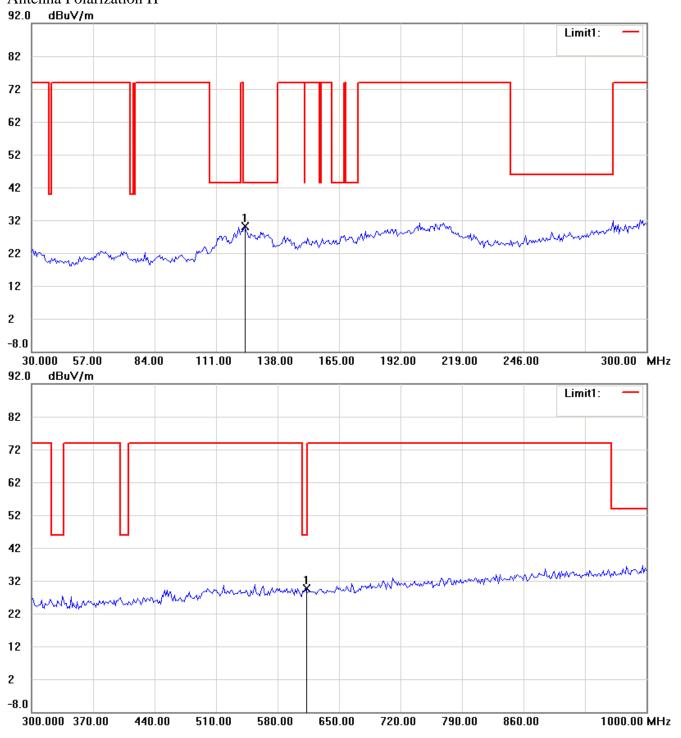


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



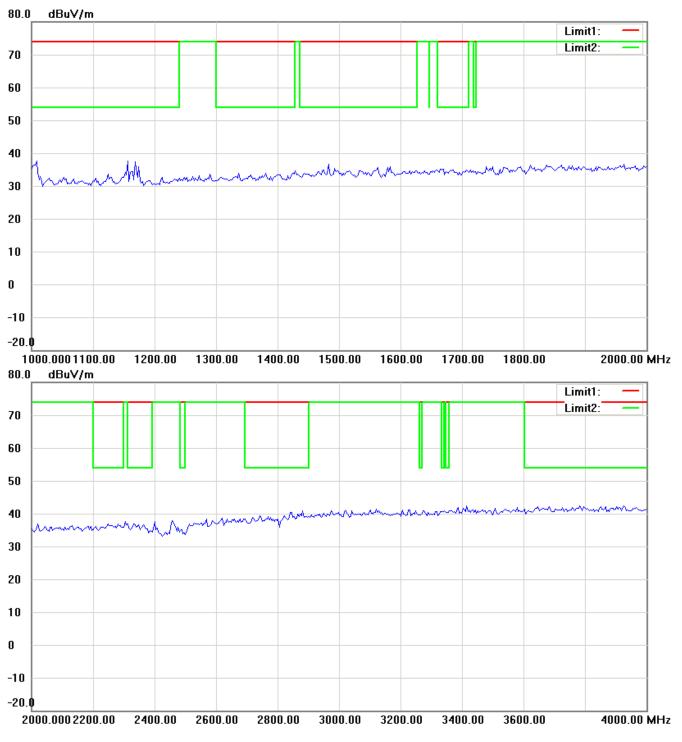


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



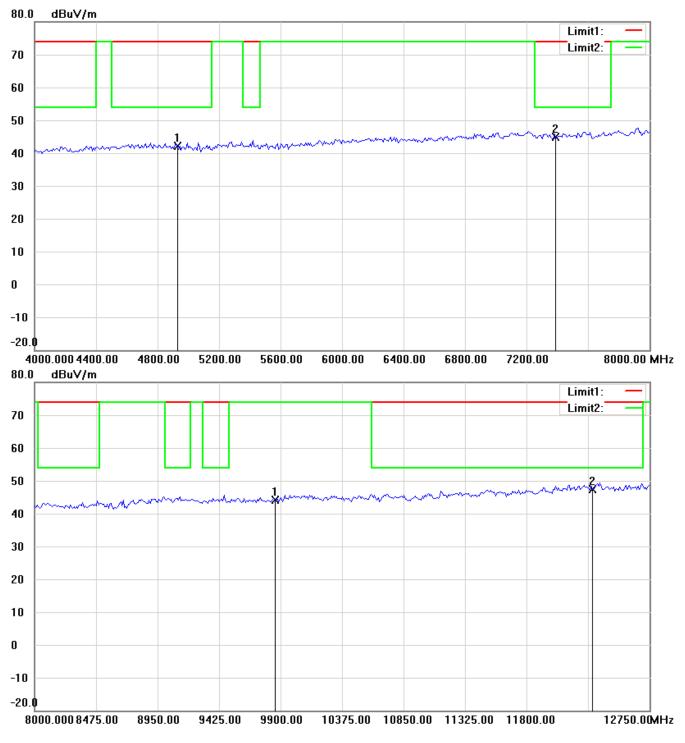


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



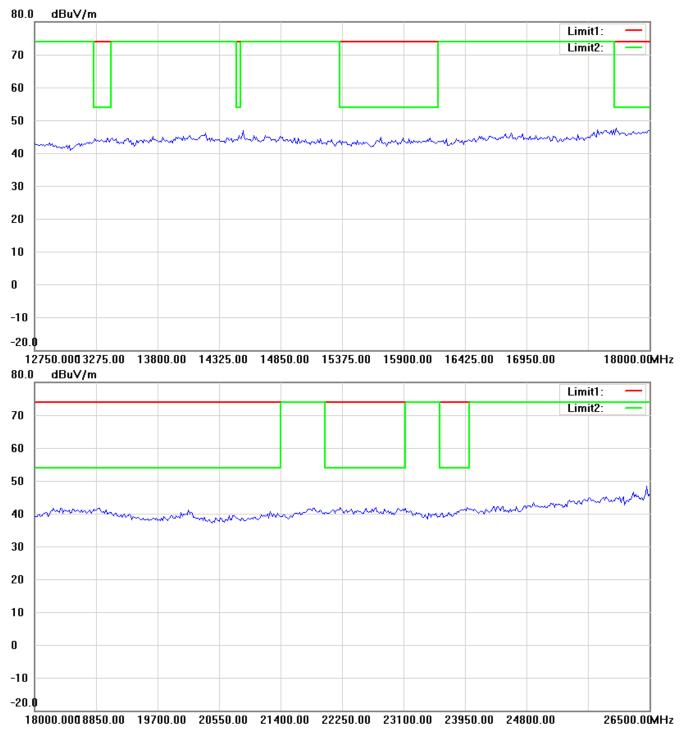


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



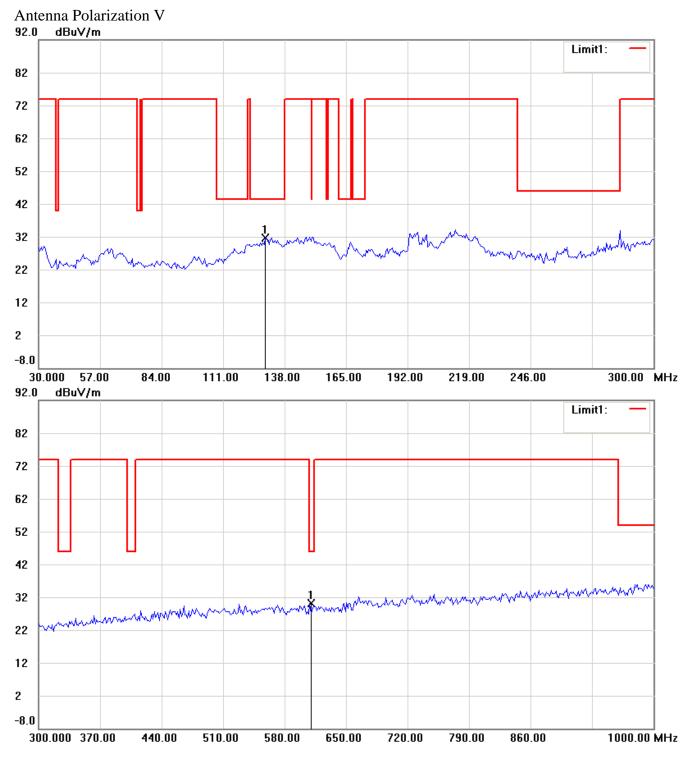


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



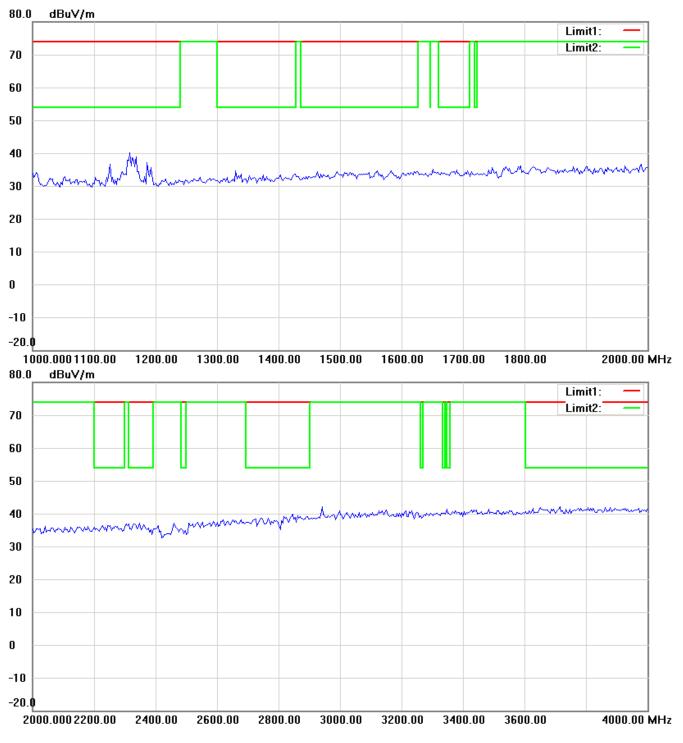


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



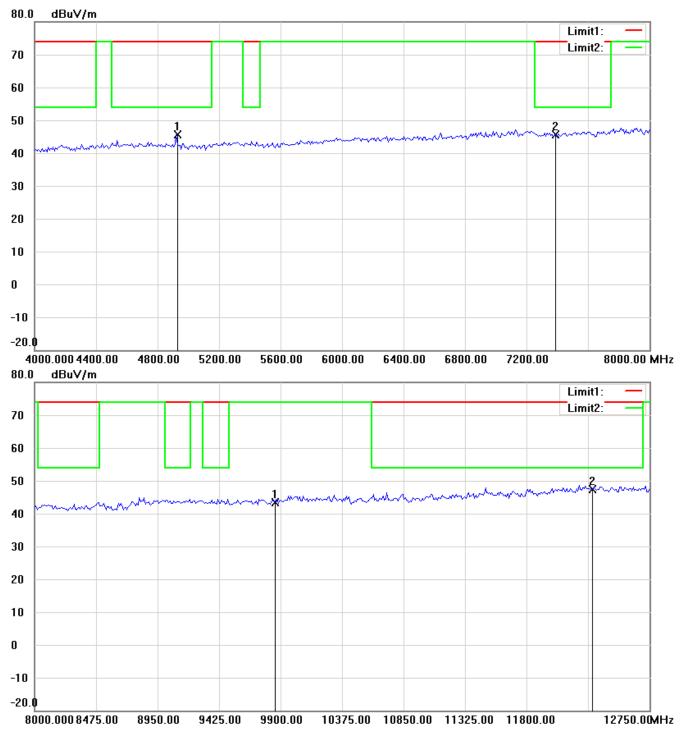

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



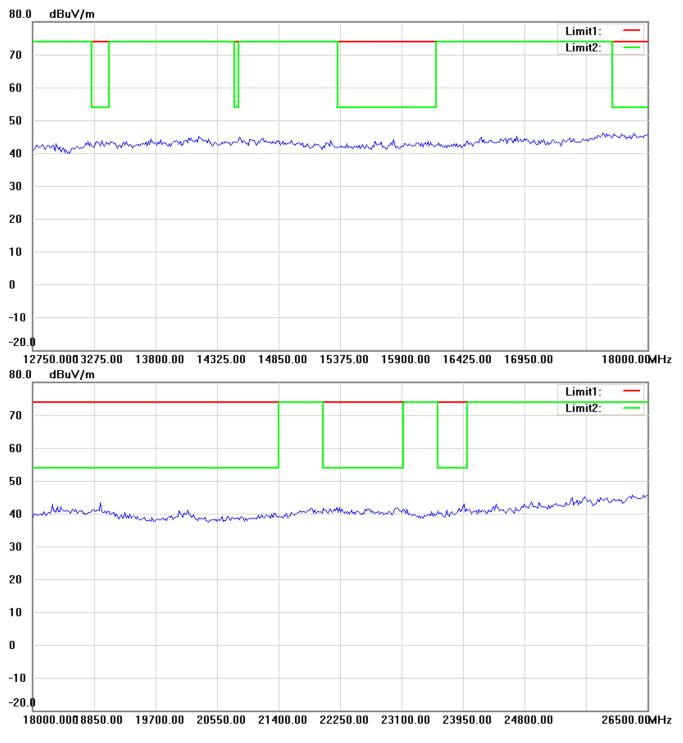


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Spurious Emissions radiated-Antenna 5 802.11b

Channel 1 Antenna Polarization H 92.0 dBuV/m

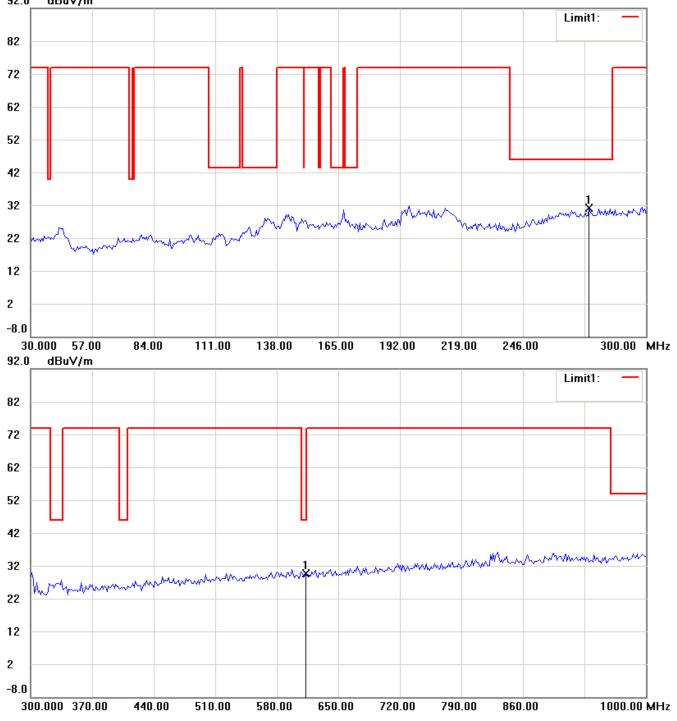


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



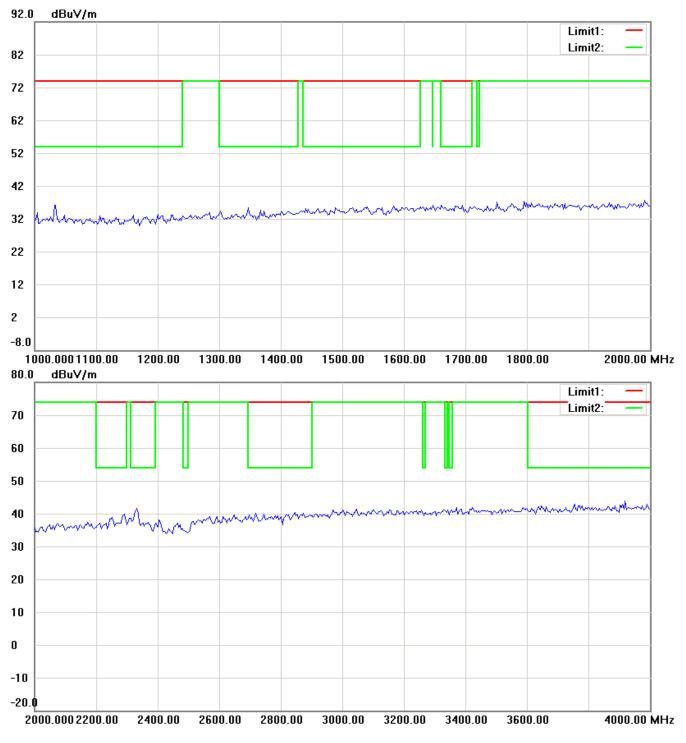


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



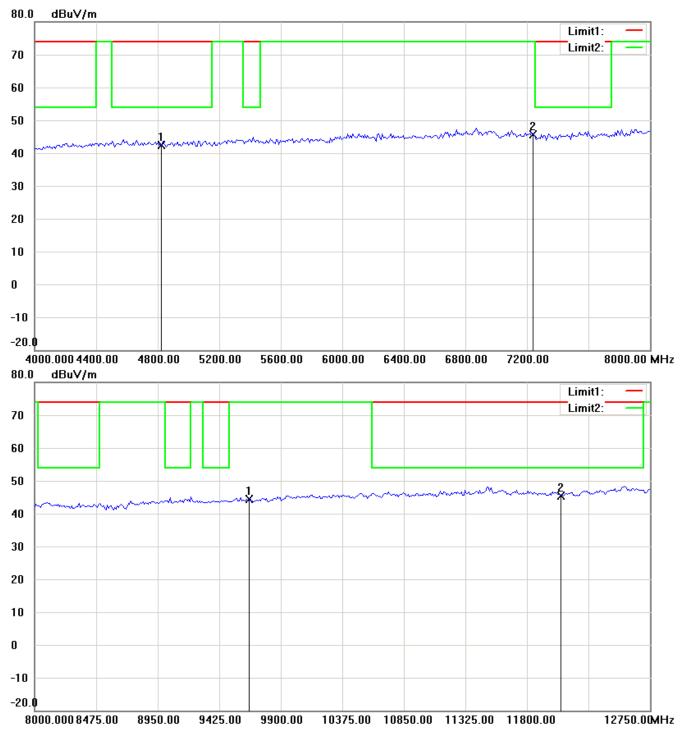


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



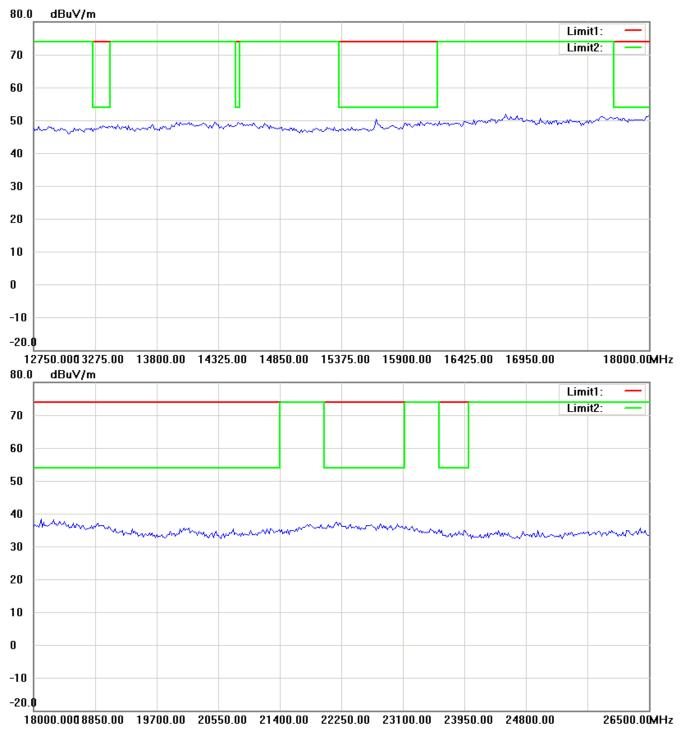


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



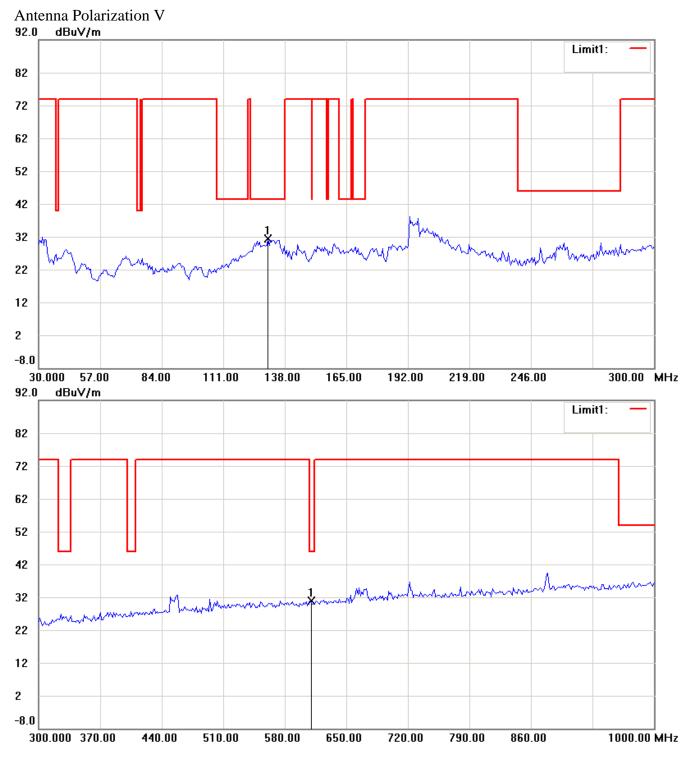


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



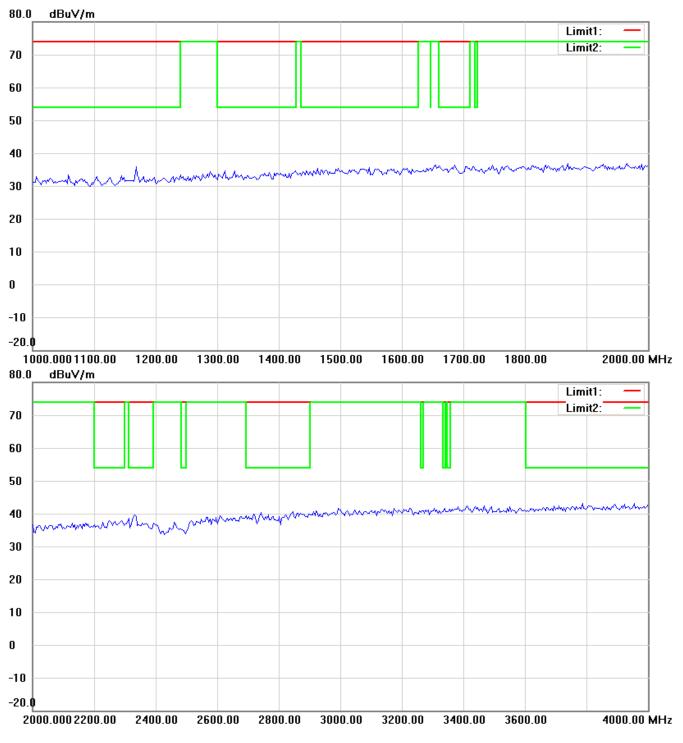


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



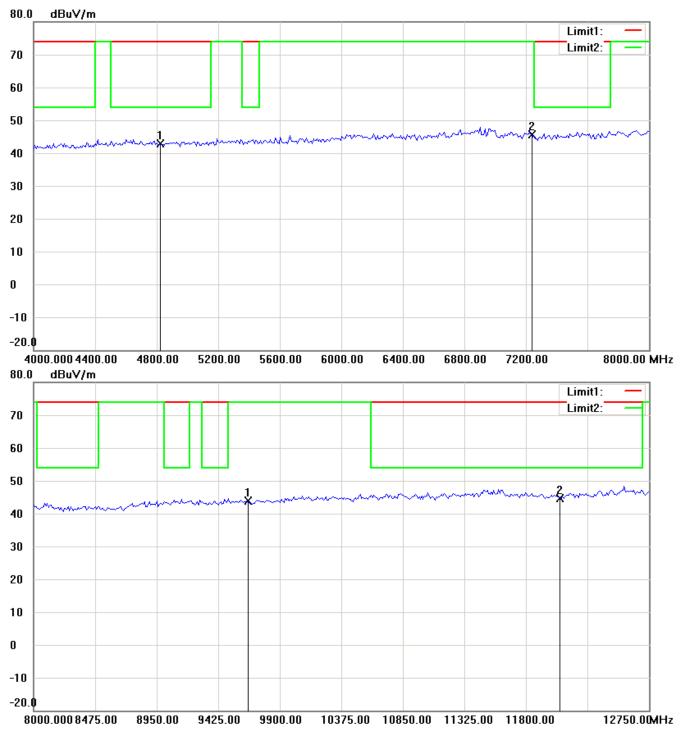


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




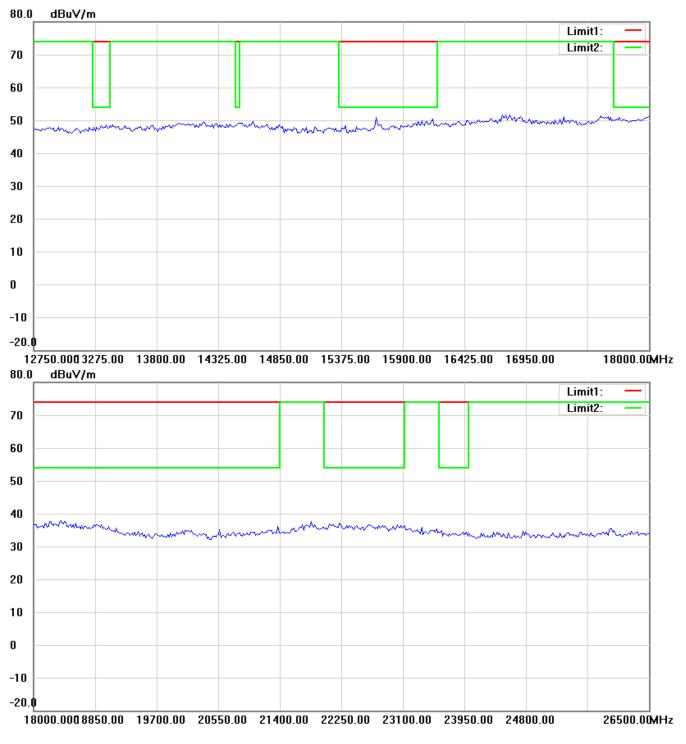

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.






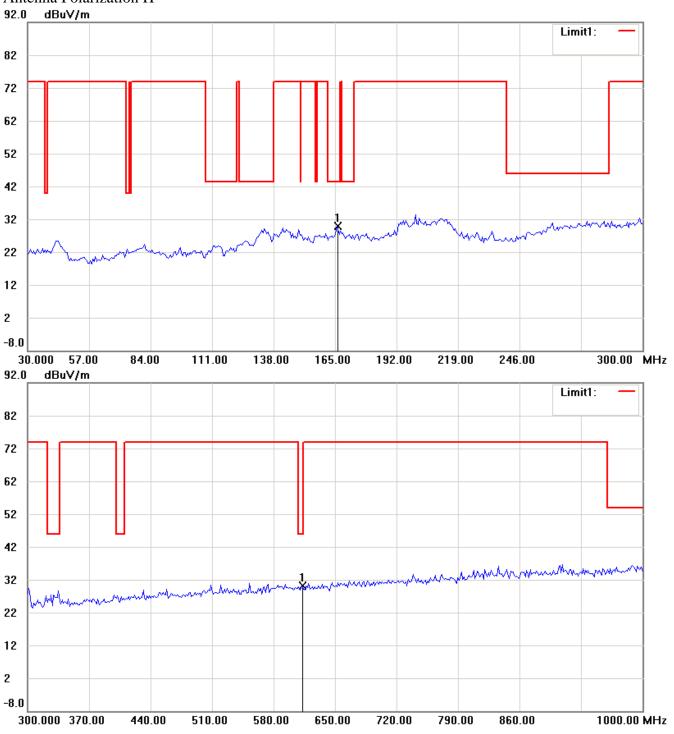


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



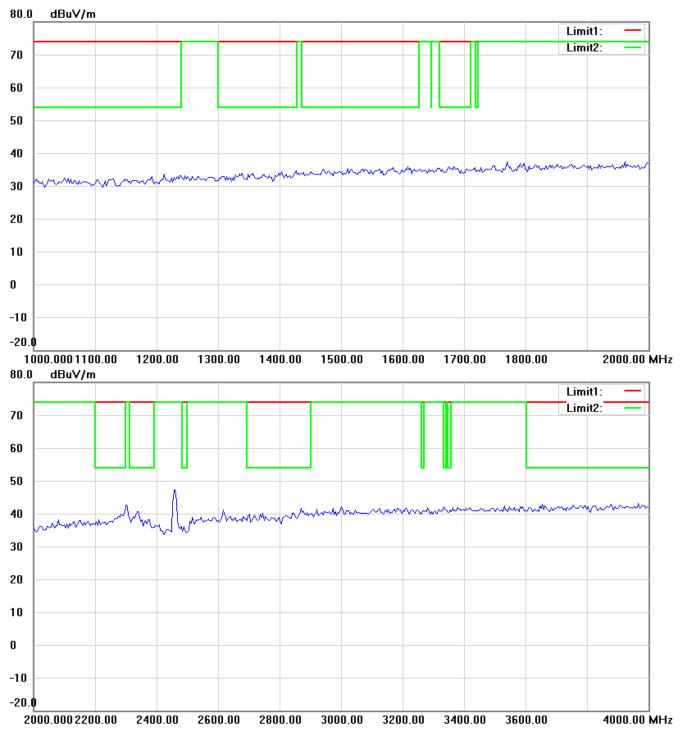


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



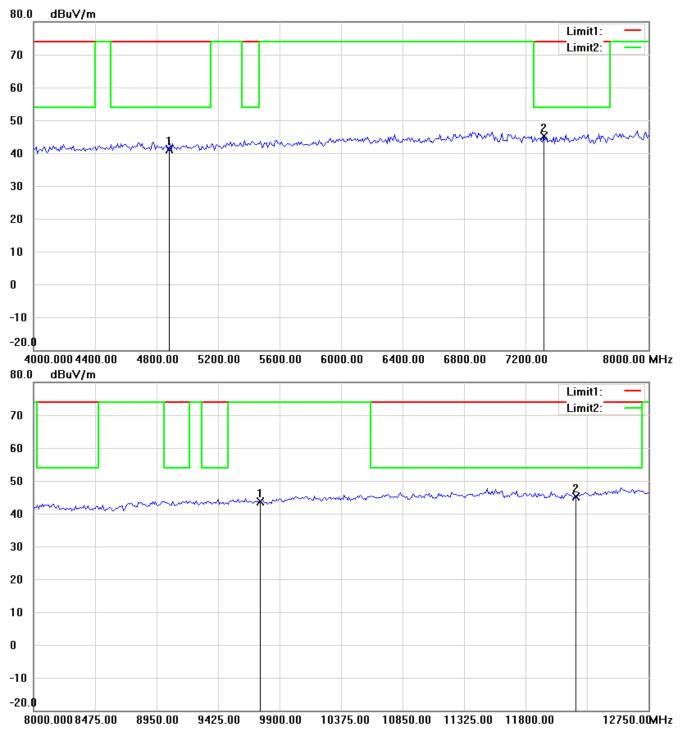


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



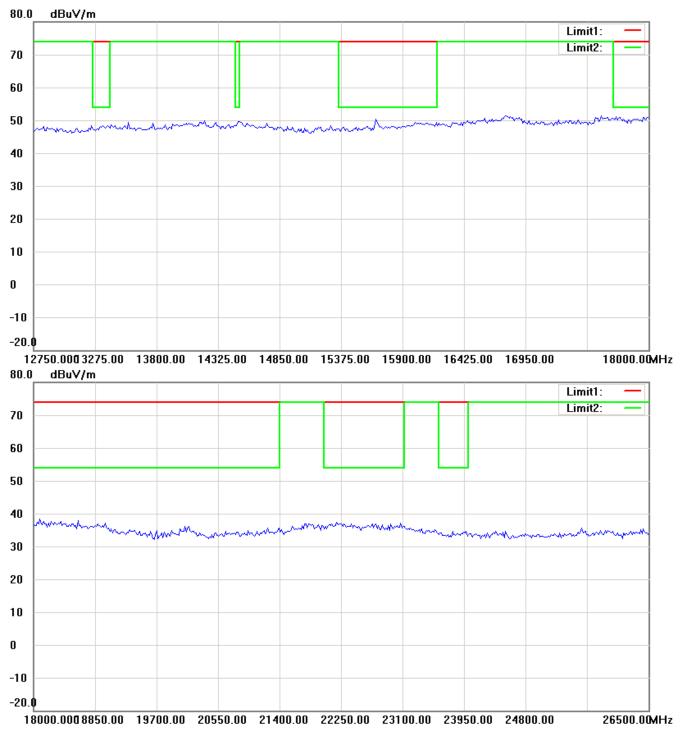


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



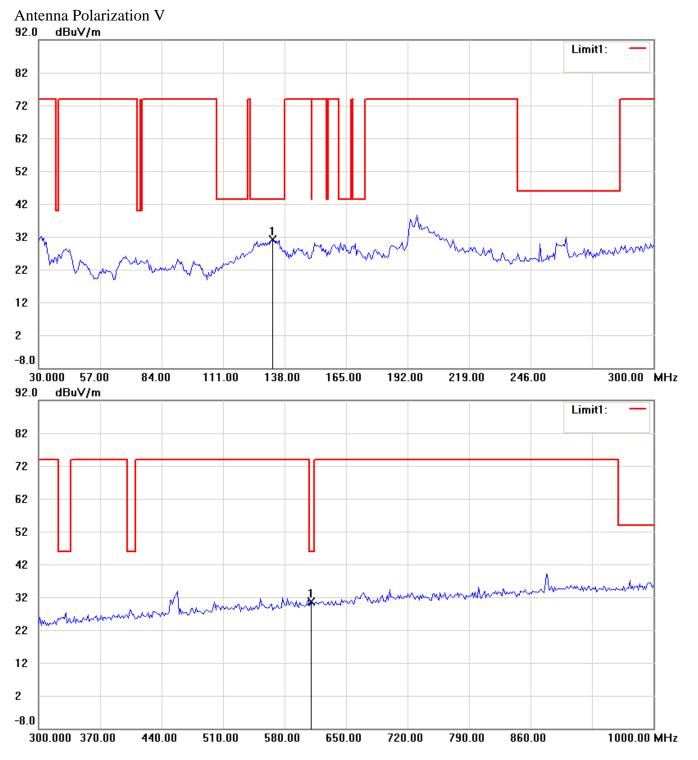


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



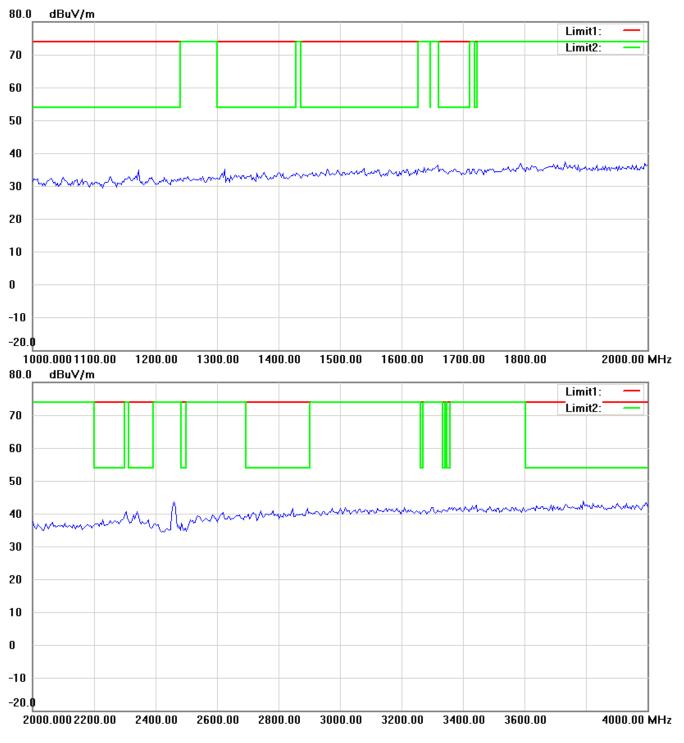


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



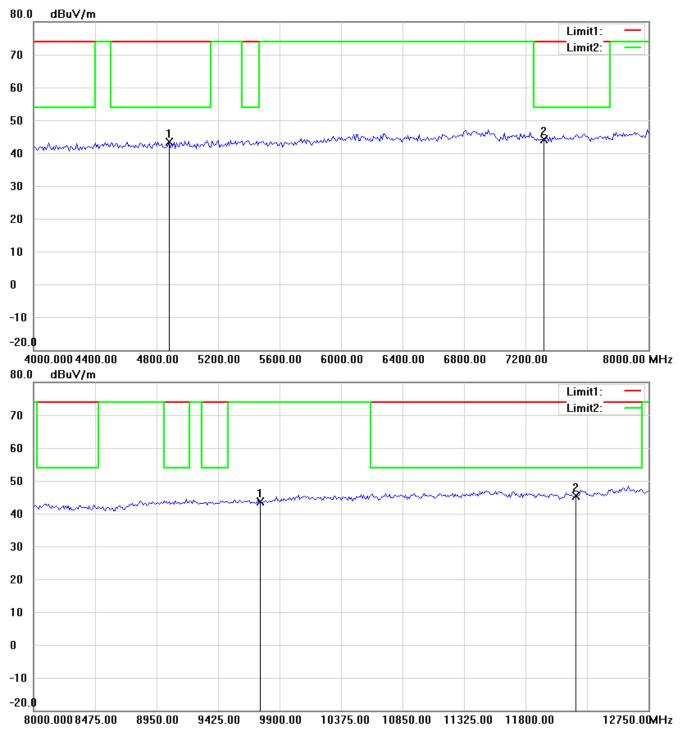


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




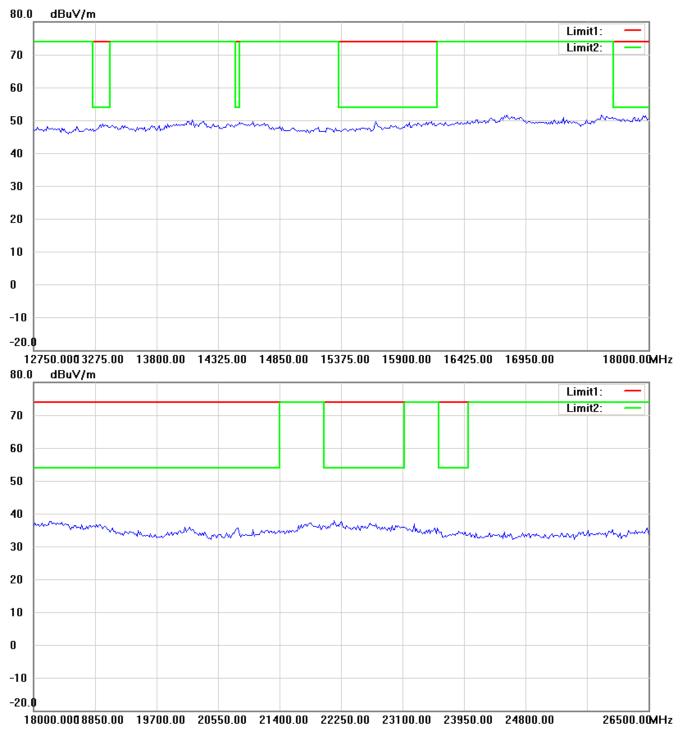

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



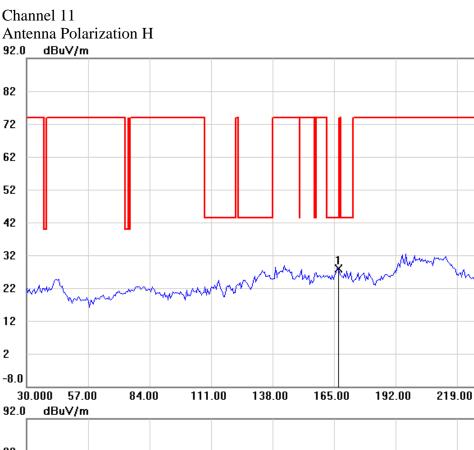

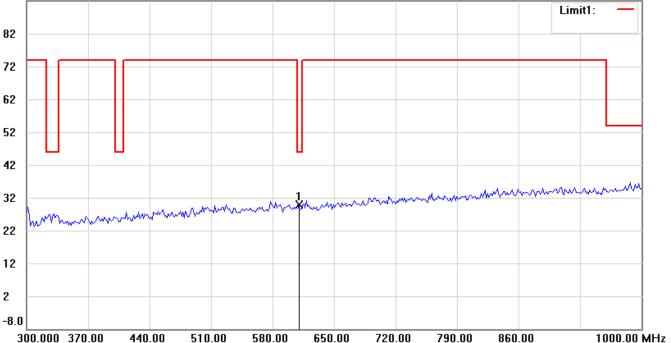

Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.


Limit1:

300.00 MHz

Mpm MMmmmm


246.00



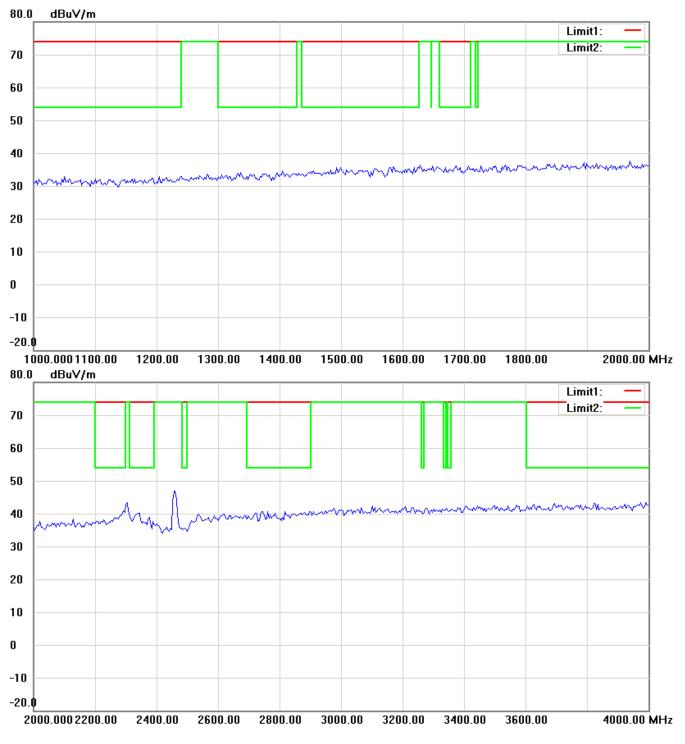


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



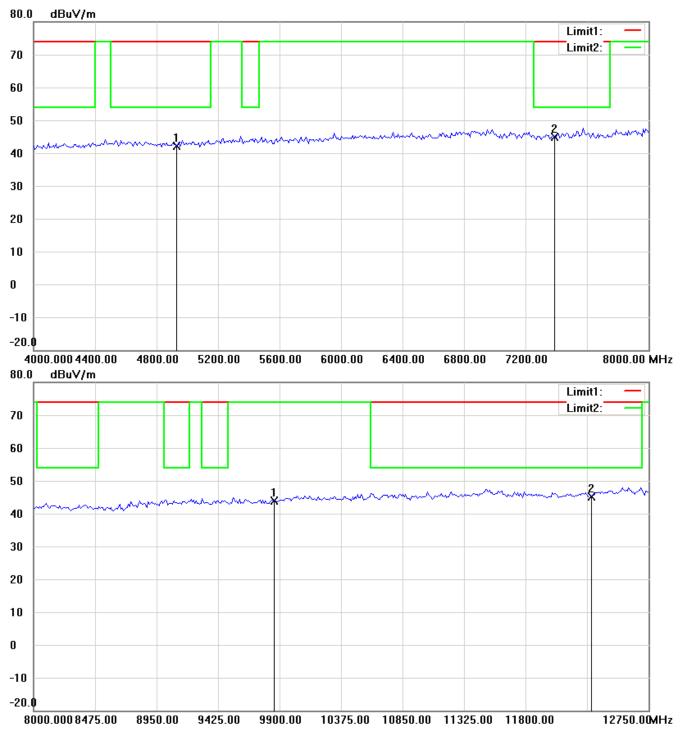


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



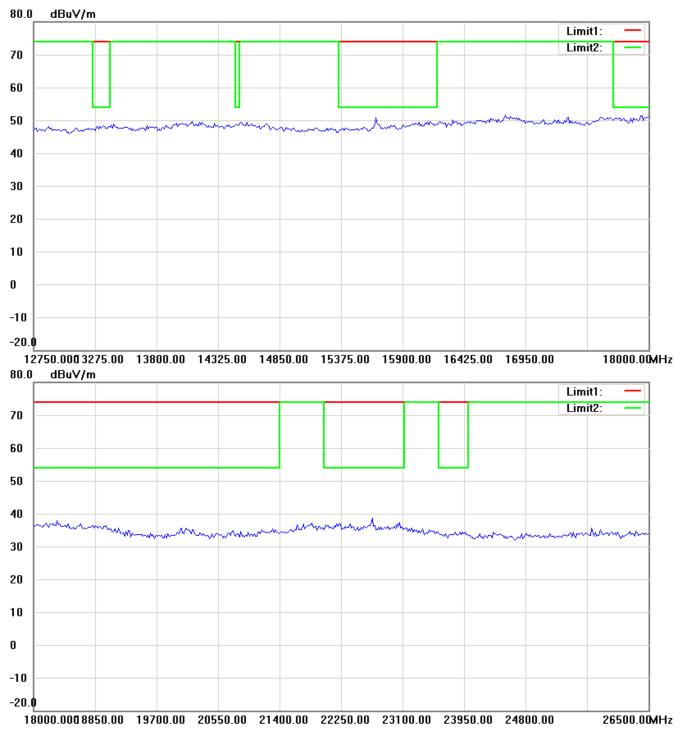


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



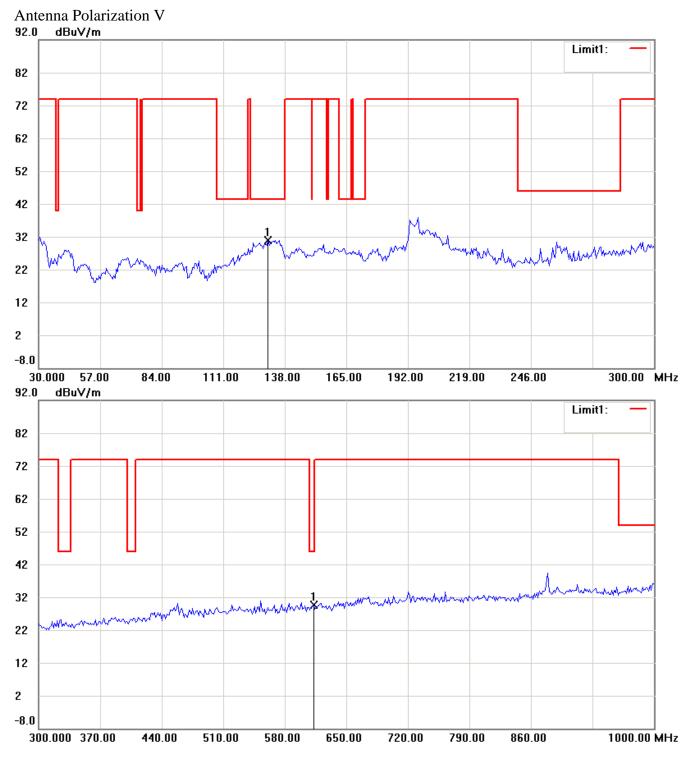


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



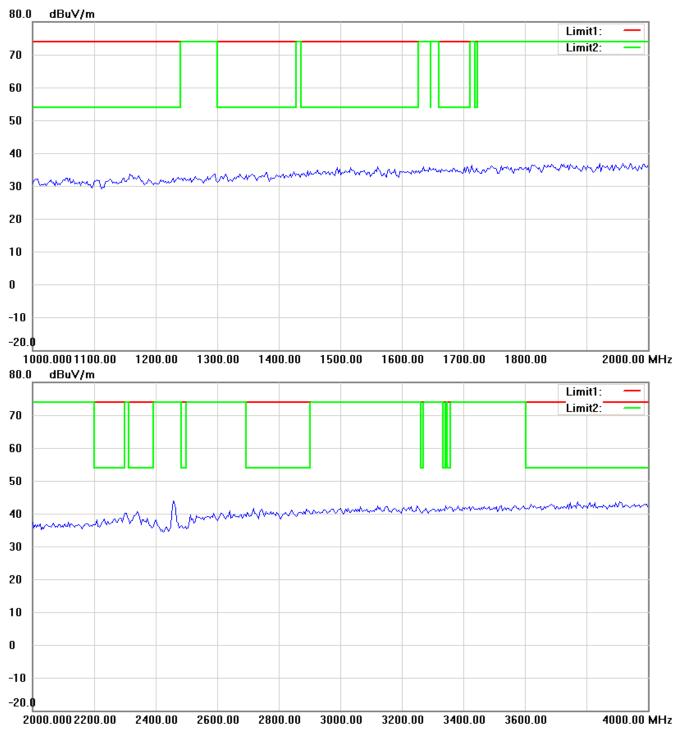


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



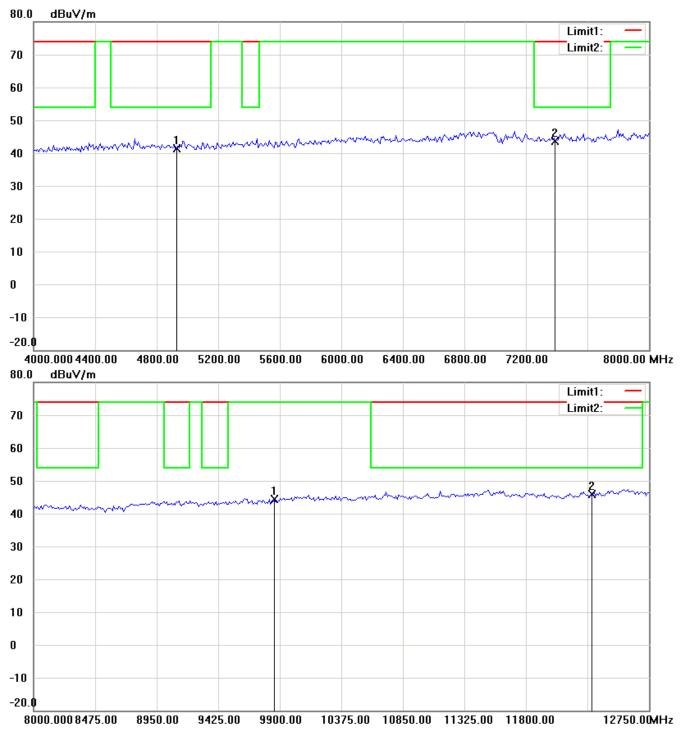


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



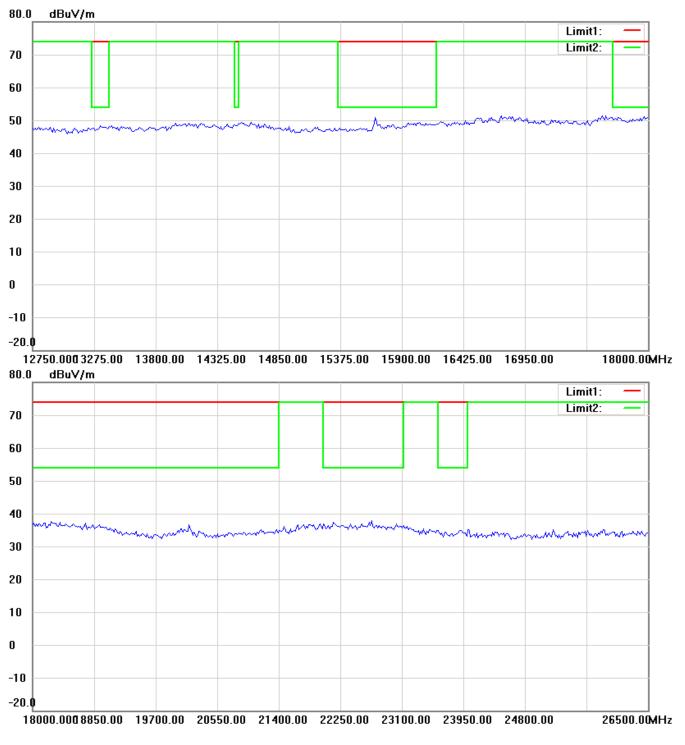


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



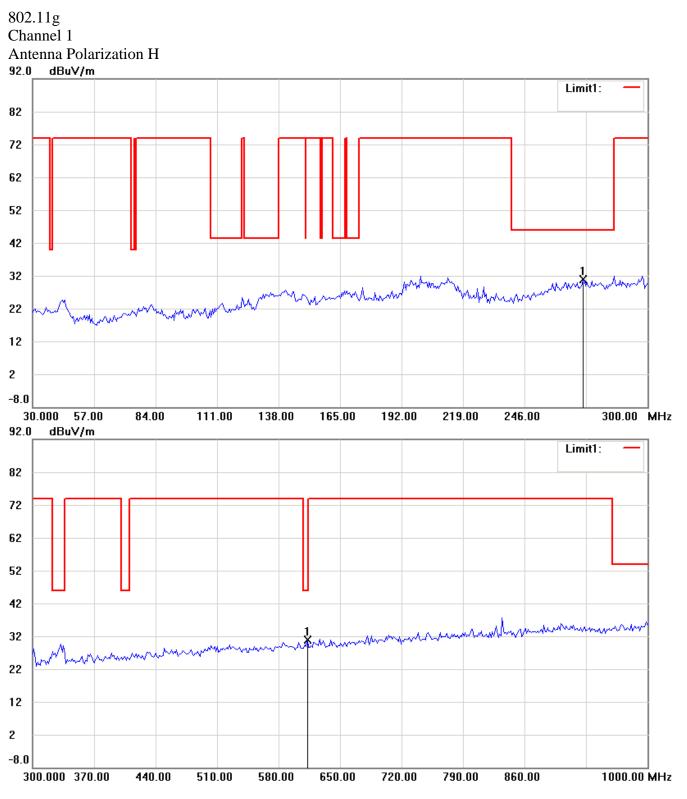


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



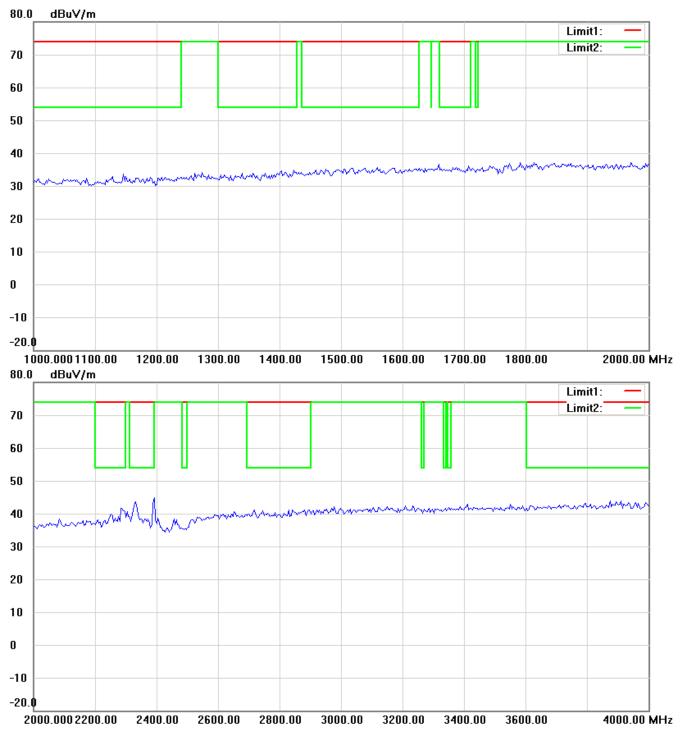


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



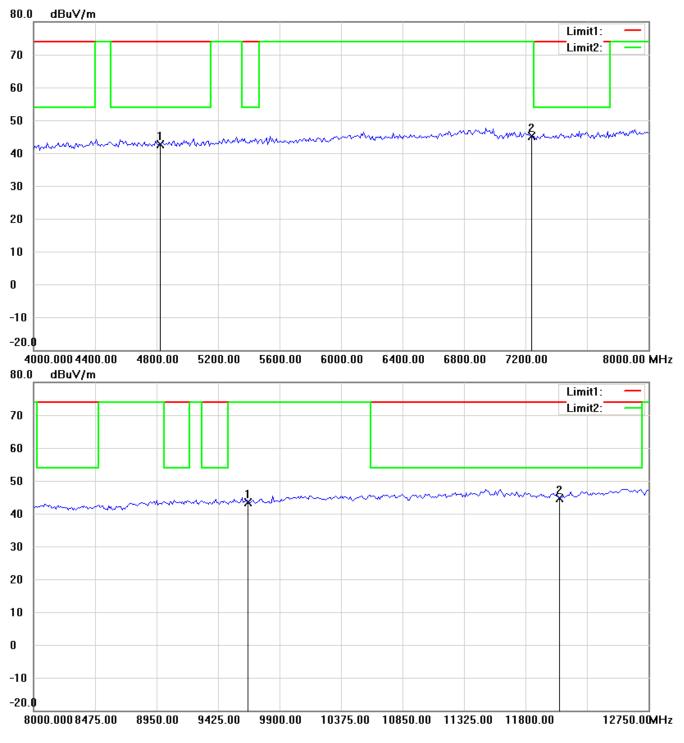


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



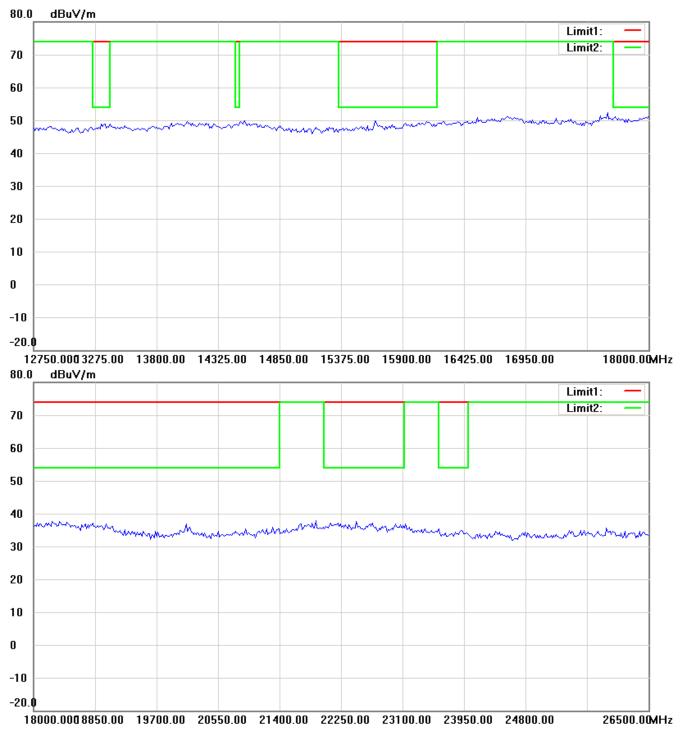


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



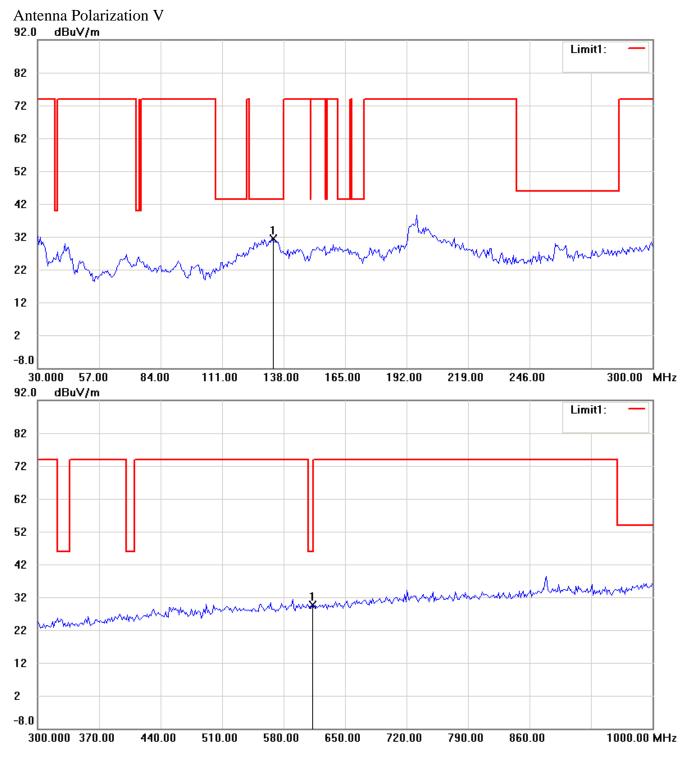


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



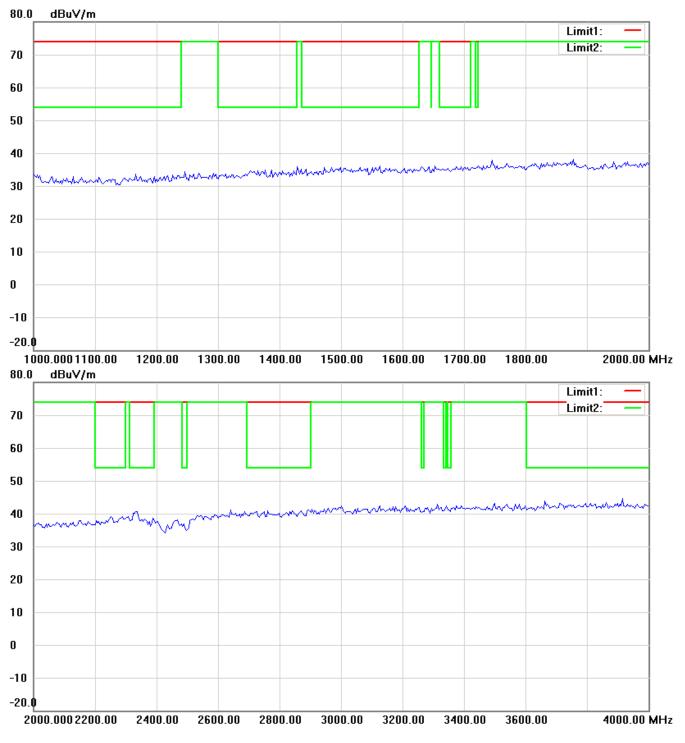


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



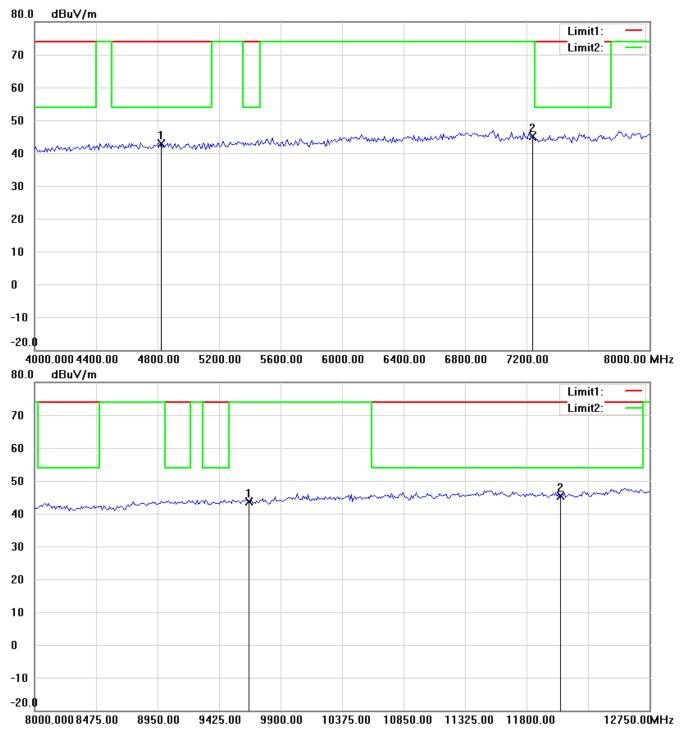


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



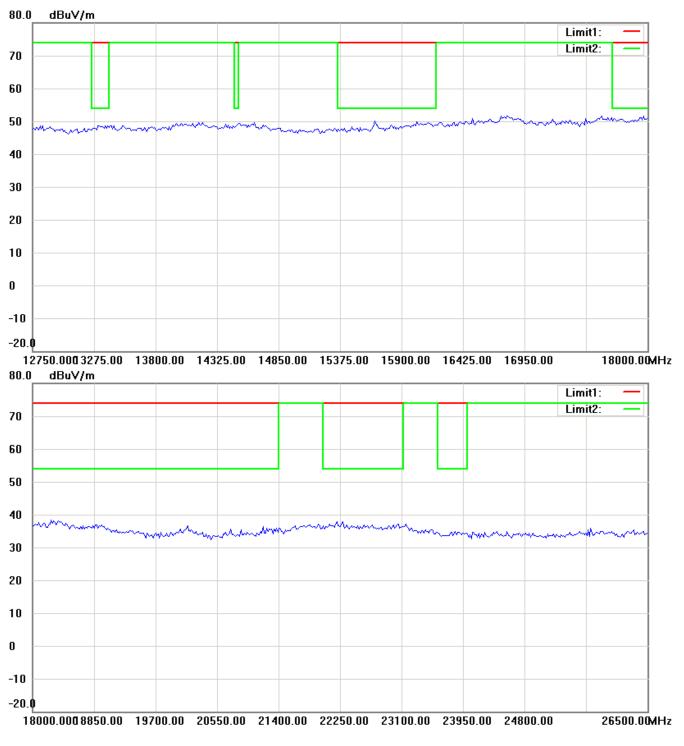


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



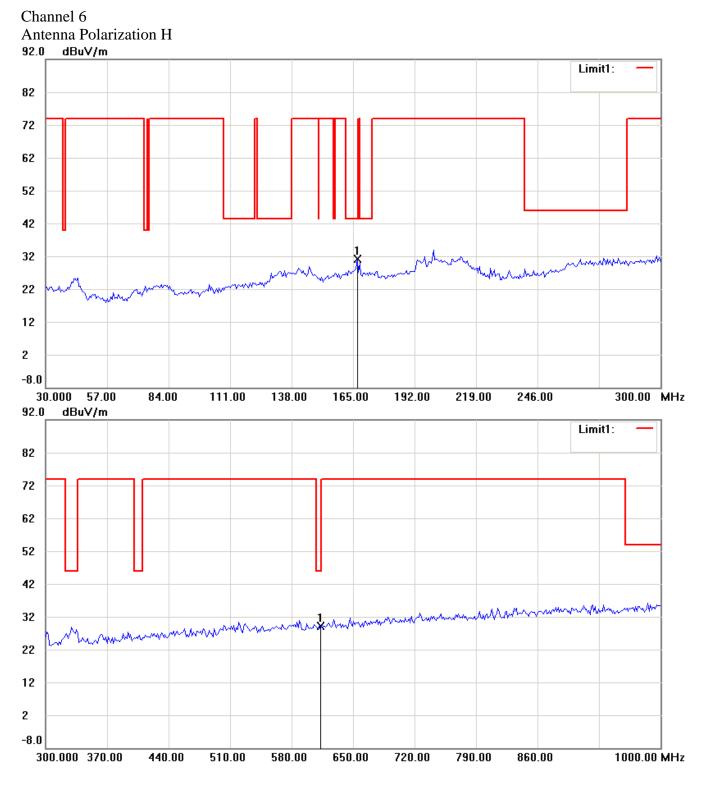


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



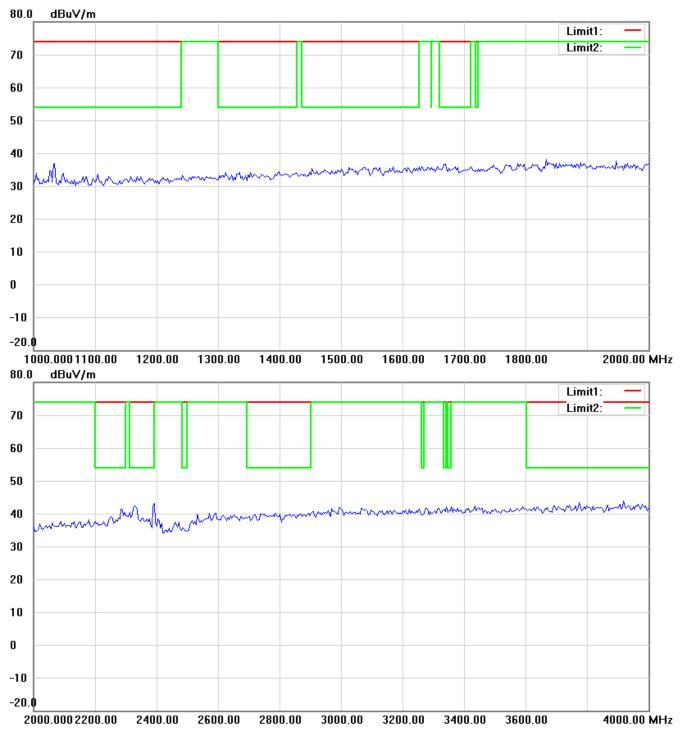


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



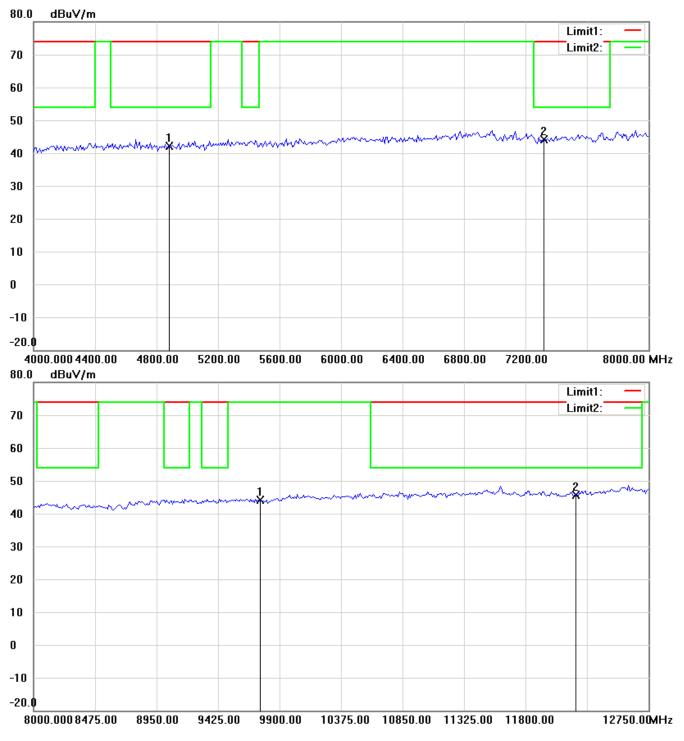


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



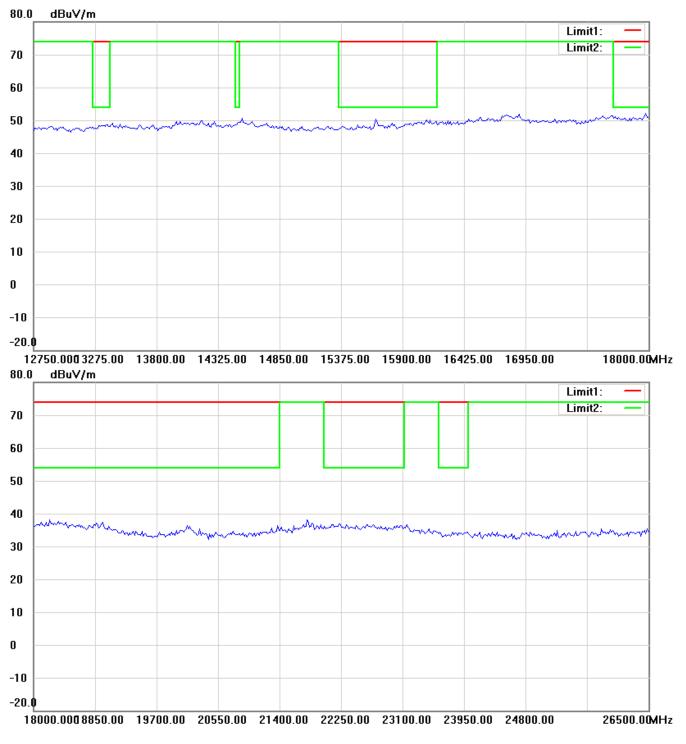


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



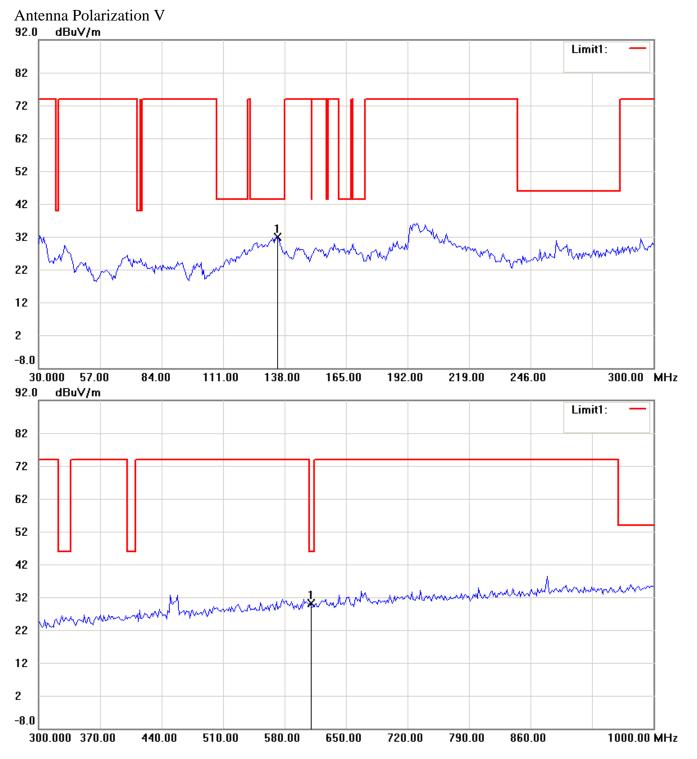


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



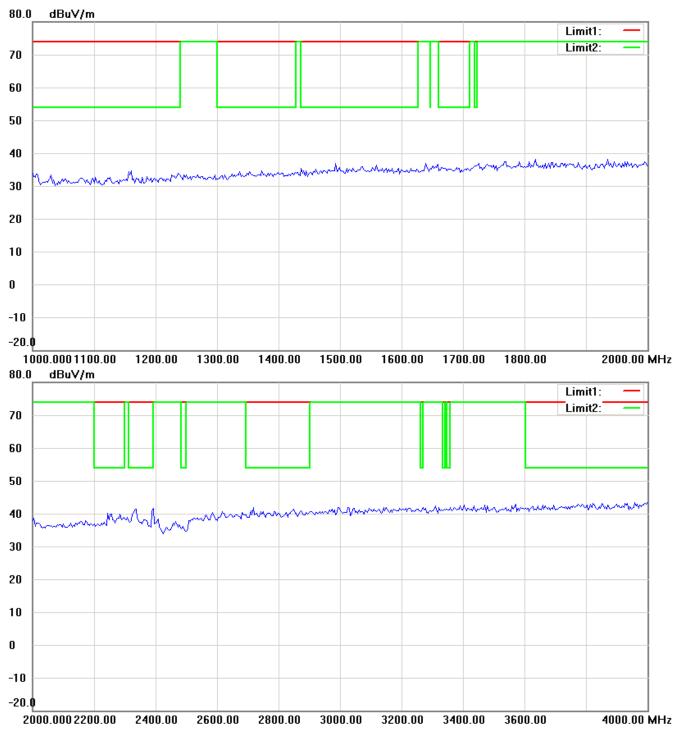


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



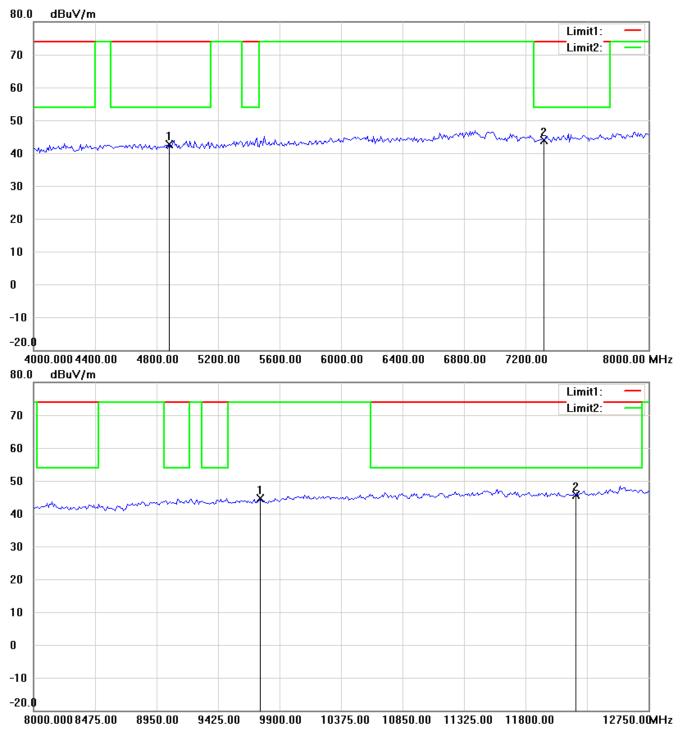


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



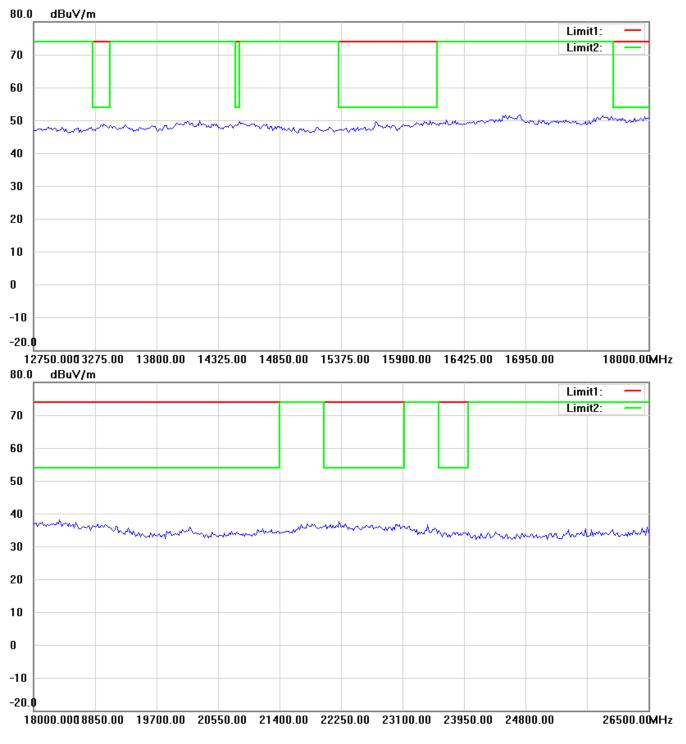


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



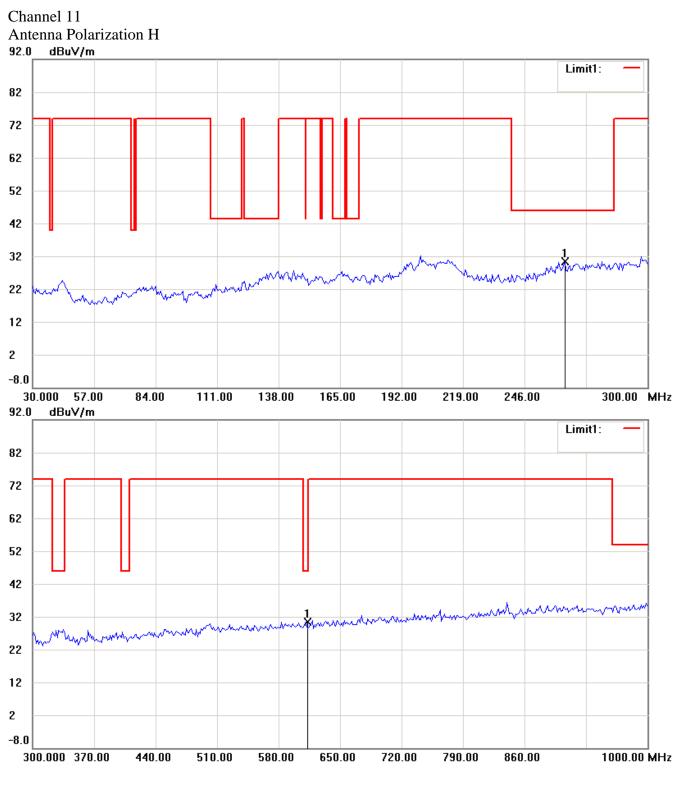


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



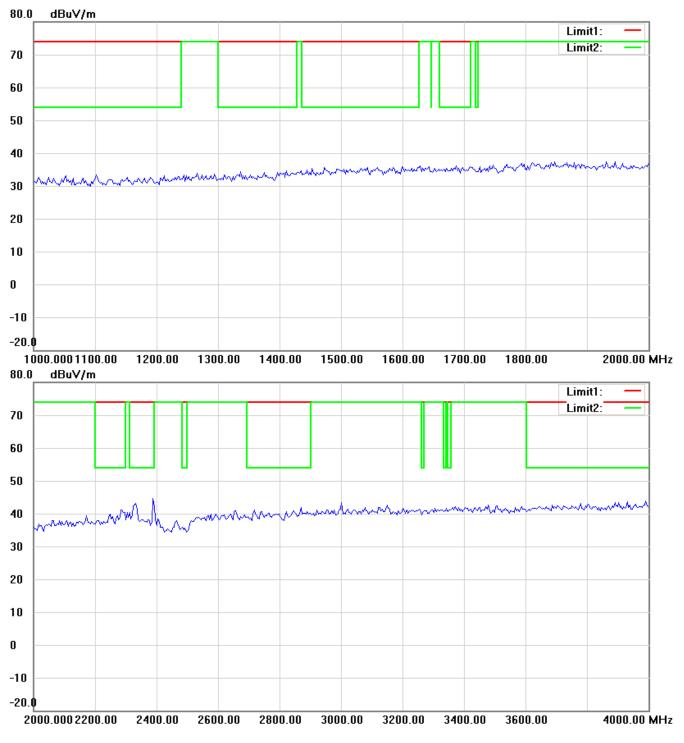


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



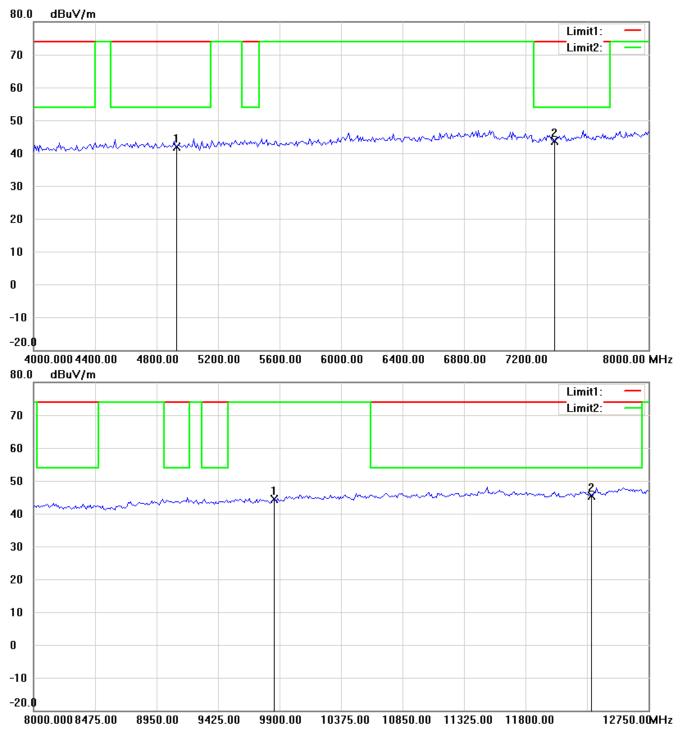


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



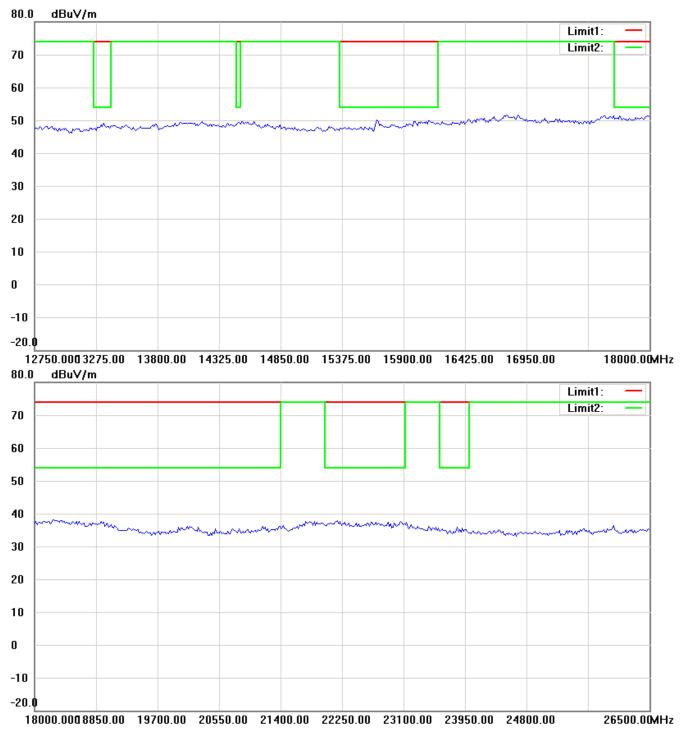


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



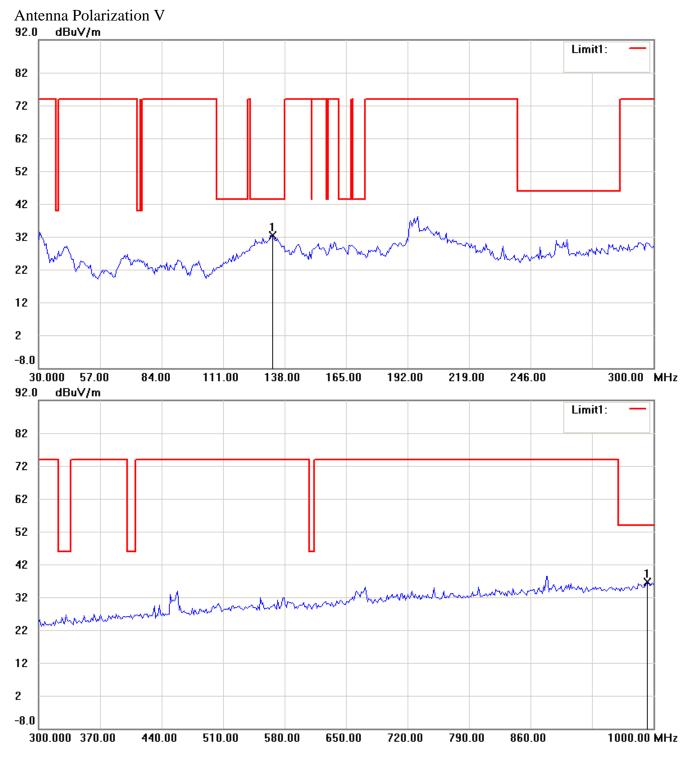


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



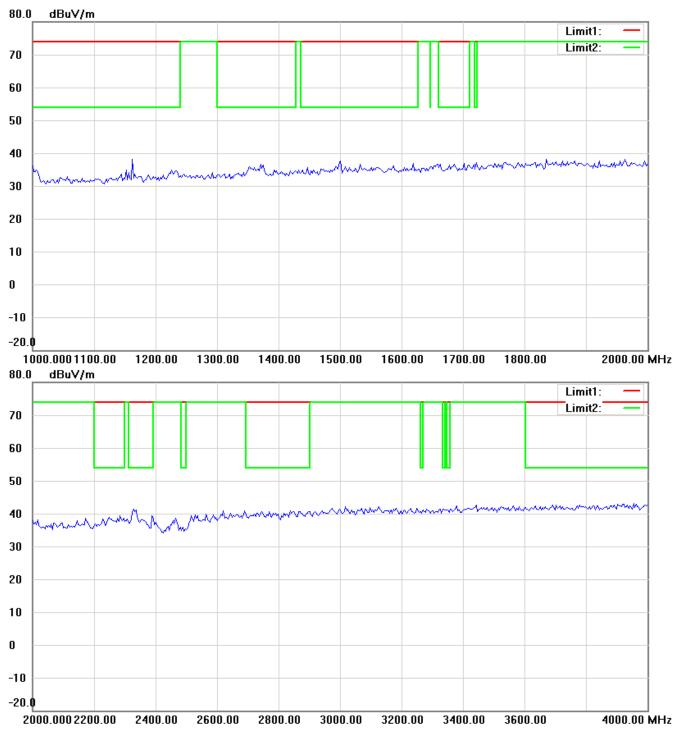


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



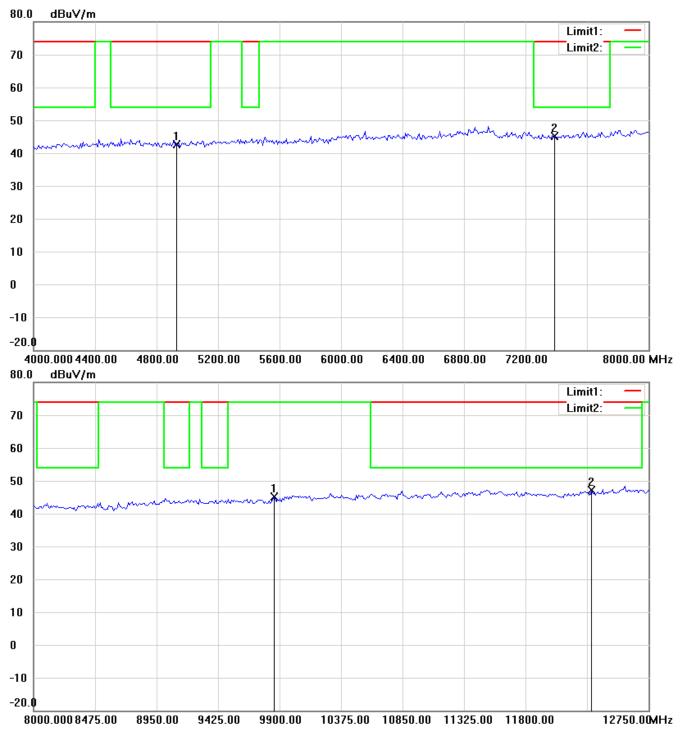

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



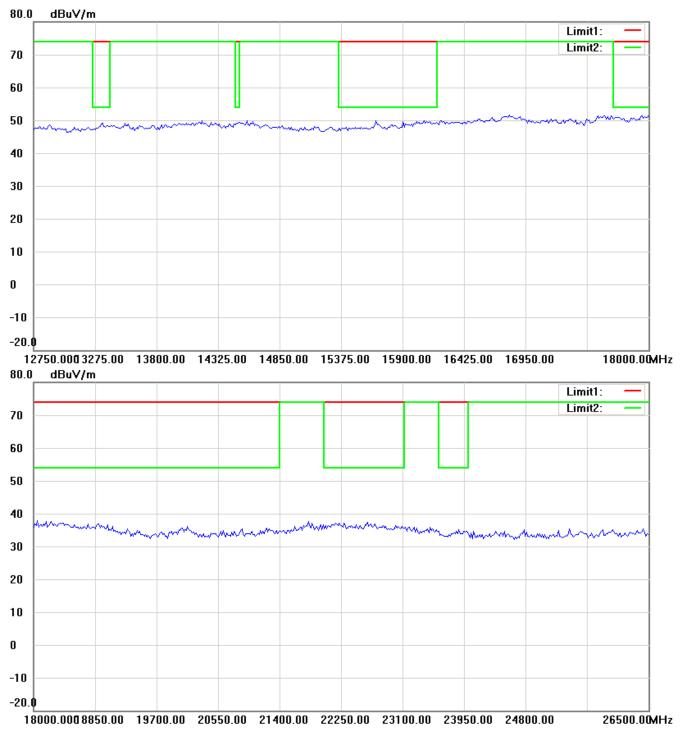

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.