



Report No.: RZA2012-1703



TEST REPORT

Product Name walkie-talkie

Model CD-UV55

FCC ID OA8CDUV55

Client Quanzhou Chierda Electronic Telecom Co.,Ltd

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

Product Name	walkie-talkie	Model	CD-UV55
FCC ID	OA8CDUV55	Report No.	RZA2012-1703
Client	Quanzhou Chierda Electronic Telecom Co.,Ltd		
Manufacturer	Quanzhou Chierda Electronic Telecom Co.,Ltd		
Reference Standard(s)	<p>ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-1:2006 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear. (frequency range of 300 MHz to 3 GHz)</p> <p>IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body. (frequency rang of 30MHz to 6GHz)</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: March 29th, 2012</p>		
Comment	The test result only responds to the measured sample.		

Approved by

杨伟中

Yang Weizhong

Revised by

凌敏宝

Ling Minbao

Performed by

王路

Wang Lu

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 3 of 71

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	4
1.3. Applicant Information	5
1.4. Manufacturer Information	5
1.5. Information of EUT	6
1.6. Test Date	6
2. Operational Conditions during Test	7
3. SAR Measurements System Configuration	7
3.1. SAR Measurement Set-up	7
3.2. DASY5 E-field Probe System	8
3.2.1. ET3DV6 Probe Specification	8
3.2.2. E-field Probe Calibration	9
3.3. Other Test Equipment	10
3.3.1. Device Holder for Transmitters	10
3.3.2. Phantom	10
3.4. Scanning procedure	11
3.5. Data Storage and Evaluation	12
3.5.1. Data Storage	12
3.5.2. Data Evaluation by SEMCAD	12
3.6. System check	15
3.7. Equivalent Tissues	16
4. Laboratory Environment	16
5. Characteristics of the Test	17
5.1. Applicable Limit Regulations	17
5.2. Applicable Measurement Standards	17
6. Conducted Output Power Measurement	18
6.1. Conducted Power Results	18
7. Test Results	19
7.1. Dielectric Performance	19
7.2. System Check Results	19
7.3. Summary of Measurement Results	20
7.4. Conclusion	21
8. Measurement Uncertainty	22
9. Main Test Instruments	23
ANNEX A: Test Layout	24
ANNEX B: System Check Results	25
ANNEX C: Graph Results	26
ANNEX D: Probe Calibration Certificate	46
ANNEX E: D450V3 Dipole Calibration Certificate	55
ANNEX F: DAE4 Calibration Certificate	64
ANNEX G: The EUT Appearances and Test Configuration	69

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Yang Weizhong
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 5 of 71

1.3. Applicant Information

Company: Quanzhou Chierda Elecronic Telecom Co.,Ltd

Address: NO.8,Zi,an Road,jiangnan high-tech industrial zone,licheng district,quanzhou,
Fujian, China

City: Quanzhou

Postal Code: 362000

Country: China

Telephone: 86-595-28828859

Fax: 86-595-28828820

1.4. Manufacturer Information

Company: Quanzhou Chierda Elecronic Telecom Co.,Ltd

Address: NO.8,Zi,an Road,jiangnan high-tech industrial zone,licheng district,quanzhou,
Fujian, China

City: Quanzhou

Postal Code: 362000

Country: China

Telephone: 86-595-28828859

Fax: 86-595-28828820

1.5. Information of EUT

General information

Device type :	portable device
Working mode:	Co-channel or Dis-channel simplex
Device operating configurations :	
Operating mode(s):	400.000 – 470.000MHz
Test Modulation:	FM
Operating frequency range(s)	transmitter frequency range
UHF	400.000MHz ~ 470.000MHz
Test channel	400.000MHz – 438.050MHz –470.000MHz
Dimension:	120(L) x62(W)x 41(T)mm
Operating voltage:	7.4V
Antenna type:	External antenna

Equipment Under Test (EUT) is a TWO-WAY RADIO with external antenna. SAR is tested for 400.000 - 470.000 MHz only.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed on March 22, 2012.

2. Operational Conditions during Test

The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by UHF (400.000MHz, 438.050MHz, and 470.000MHz) systems UHF, Battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

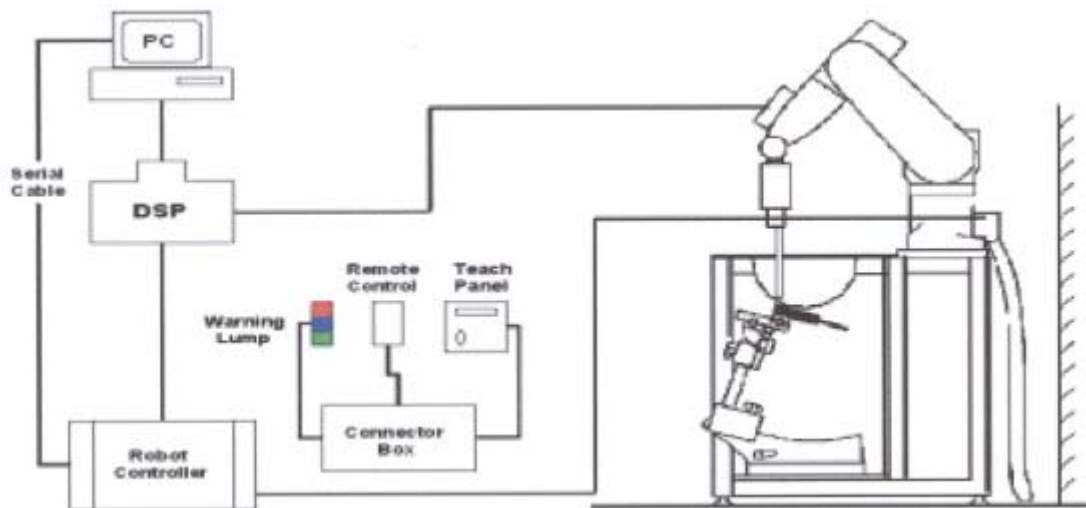


Figure 1. SAR Lab Test Measurement Set-up

3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 3 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1750 MHz, 1950MHz and 2450 MHz. (accuracy±8%) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 2.5 GHz; Linearity: ±0.2 dB (30 MHz to 2.5 GHz)

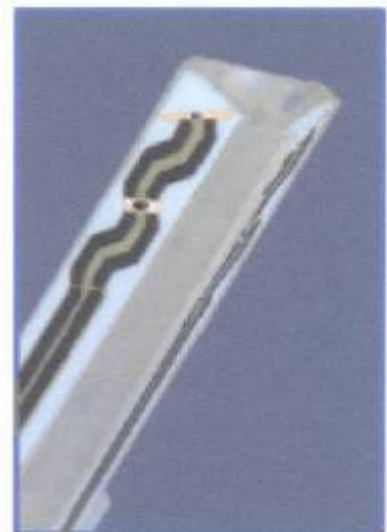


Figure 2 ET3DV6 E-field Probe

Directivity	±0.2 dB in brain tissue (rotation around probe axis) ±0.4 dB in brain tissue (rotation around probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: ±0.2dB
Surface Detection	±0.2 mm repeatability in air and clear liquids over diffuse reflecting surface (ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

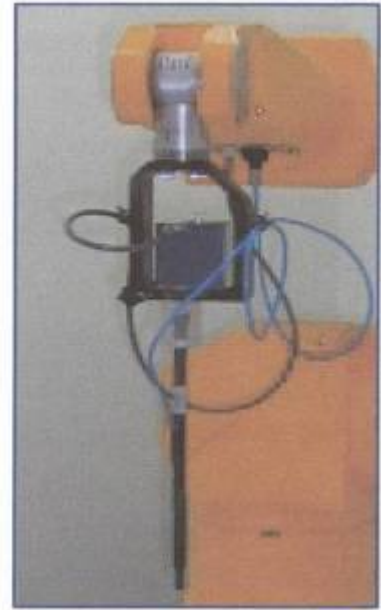


Figure 3 ET3DV6 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy was evaluated and found to be better than ± 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
ΔT = Temperature increase due to RF exposure.
Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material. The amount of dielectric material

has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

3.3.2. Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness 2 ± 0.2 mm

Filling Volume Approx. 30 liters

Dimensions 190×600×400 mm (H×L×W)

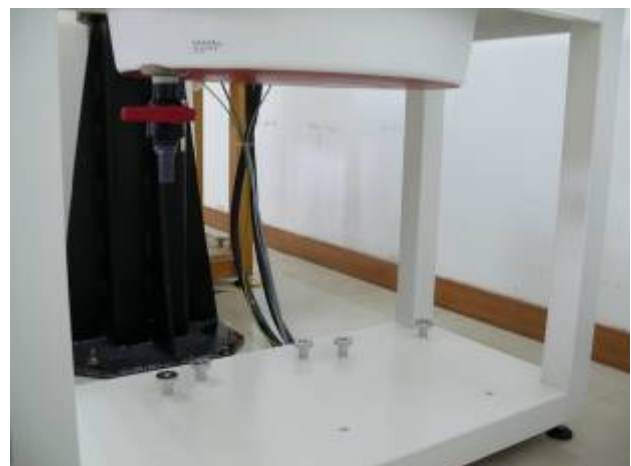


Figure 5. Generic Twin Phantom

3.4. Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.
- The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the

evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA5". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a_{i0} , a_{i1} , a_{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 13 of 71

Device parameters: - Frequency f
- Crest factor cf

Media parameters: - Conductivity σ
- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 398 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 7.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

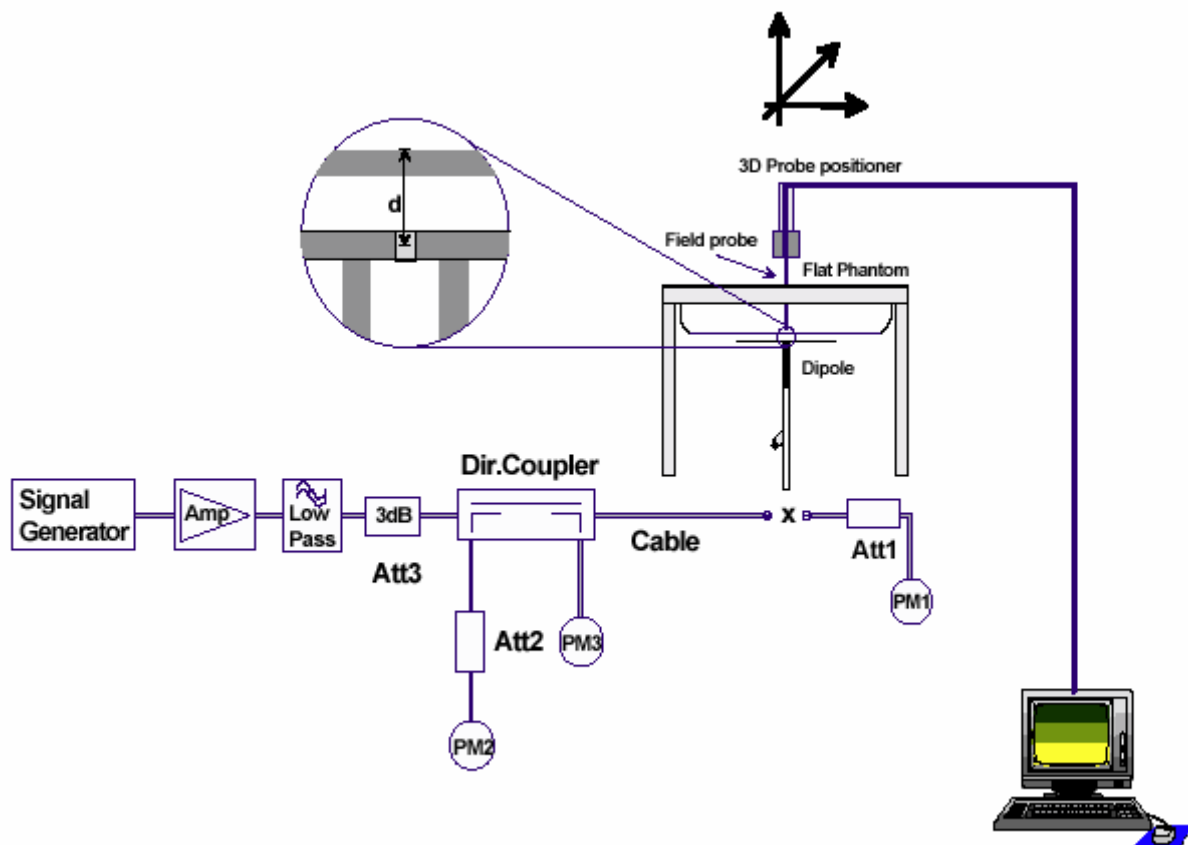


Figure 6. System Check Set-up

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 16 of 71

3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 1 and Table 2 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

Table 1: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 450MHz
Water	38.56
Sugar	56.32
Salt	3.95
Preventol	0.10
Cellulose	1.07
Dielectric Parameters Target Value	f=450MHz $\epsilon=43.5$ $\sigma=0.87$

Table 2: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)450MHz
Water	51.16
Sugar	46.78
Salt	1.49
Preventol	0.10
Cellulose	0.47
Dielectric Parameters Target Value	f=450MHz $\epsilon=56.7$ $\sigma=0.94$

4. Laboratory Environment

Table 3: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

5. Characteristics of the Test

5.1. Applicable Limit Regulations

ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

5.2. Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-1: 2006 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz)

6. Conducted Output Power Measurement

6.1. Conducted Power Results

Table 4: Conducted Power Measurement Results

UHF Narrow Band	Conducted Power		
	400.000MHz	438.050MHz	470.000MHz
Before test (dBm)	33.55	36.07	35.03
After test (dBm)	33.54	36.06	35.02
UHF Wide Band	Conducted Power		
	400.000MHz	438.050MHz	470.000MHz
Before test (dBm)	33.57	36.06	34.95
After test (dBm)	33.58	36.07	34.96

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 19 of 71

7. Test Results

7.1. Dielectric Performance

Table 5: Dielectric Performance of Head Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp ℃
		ϵ_r	$\sigma(\text{s/m})$	
450MHz (head)	Target value ±5% window	43.50 41.33 — 45.68	0.87 0.83 — 0.91	/
	Measurement value 2012-03-22	44.93	0.85	21.8

Table 6: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp ℃
		ϵ_r	$\sigma(\text{s/m})$	
450MHz (body)	Target value ±5% window	56.70 53.87 — 59.54	0.94 0.89 — 0.99	/
	Measurement value 2012-03-22	57.02	0.94	21.9

7.2. System Check Results

Table 7: System Check

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	ϵ_r	$\sigma(\text{s/m})$	℃
450MHz	Recommended value ±10% window	1.25 1.13 — 1.38	1.87 1.68 — 2.06	44.2	0.86	/
	Measurement value 2012-03-22	1.32	2.02	44.93	0.85	21.9

Note: 1. The graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 398 mW is used as feeding power to the calibrated dipole.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 20 of 71

7.3. Summary of Measurement Results

Table 8: SAR Values (UHF)

Frequency	Channel	1 g Average		Power Drift (dB)	Graph Results
		Limits 8.0 W/kg		± 0.21	
		Duty cycle		Power	
		100%	50%	Drift(dB)	
The EUT display towards phantom, Distance 15mm (Face Held)					
470.000 MHz	3	4.530	2.265	-0.111	Figure 8
438.050 MHz	2	5.710	2.855	-0.094	Figure 10
400.000 MHz	1	4.930	2.465	0.097	Figure 12
Worst case of wide for narrow, Distance 15mm (Face Held)					
438.050 MHz	2	5.810	2.905	-0.033	Figure 14
The EUT display towards ground with belt clip, Distance 0mm (Body-Worn)					
470.000 MHz	3	4.430	2.215	-0.109	Figure 16
438.050 MHz	2	5.520	2.760	-0.060	Figure 18
400.000 MHz	1	3.310	1.655	-0.091	Figure 20
Worst case of wide for narrow, Distance 0mm (Body-Worn)					
438.050 MHz	2	5.260	2.630	-0.070	Figure 22
Worst case position of speech transfer with earphone, Distance 0mm (Body-Worn)					
438.050 MHz	2	4.970	2.485	-0.078	Figure 24
Worst case position of speech transfer with MicroPhone, Distance 0mm (Body-Worn)					
438.050 MHz	2	4.730	2.365	-0.053	Figure 26

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 21 of 71

Table 9: SAR Values are scaled for the power drift

Frequency	Channel	1 g Average		Power Drift (dB)	+ Power Drift 10^(dB/10)	SAR 1g(W/kg) (include +power drift)	
		Limits 8.0 W/kg		± 0.21			
		Duty cycle		Power Drift(dB)		Duty cycle	
		100%	50%			100%	50%
The EUT display towards phantom, Distance 15mm (Face Held)							
470.000 MHz	3	4.530	2.265	-0.111	0.975	4.416	2.208
438.050 MHz	2	5.710	2.855	-0.094	0.979	5.588	2.794
400.000 MHz	1	4.930	2.465	0.097	1.023	5.041	2.521
Worst case of wide for narrow, Distance 15mm (Face Held)							
438.050 MHz	2	5.810	2.905	-0.033	0.992	5.766	2.883
The EUT display towards ground with belt clip, Distance 0mm (Body-Worn)							
470.000 MHz	3	4.430	2.215	-0.109	0.975	4.320	2.160
438.050 MHz	2	5.520	2.760	-0.060	0.986	5.444	2.722
400.000 MHz	1	3.310	1.655	-0.091	0.979	3.241	1.621
Worst case of wide for narrow, Distance 0mm (Body-Worn)							
438.050 MHz	2	5.260	2.630	-0.070	0.984	5.176	2.588
Worst case position of speech transfer with earphone, Distance 0mm (Body-Worn)							
438.050 MHz	2	4.970	2.485	-0.078	0.982	4.882	2.441
Worst case position of speech transfer with MicroPhone, Distance 0mm (Body-Worn)							
438.050 MHz	2	4.730	2.365	-0.053	0.988	4.673	2.336

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The Exposure category about EUT: controlled environment / Occupational, so the SAR limit is 8.0 W/kg averaged over any 1 gram of tissue.

7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is 2.883 W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

[illegible]

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 23 of 71

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.64	1.8	∞
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.64	3.2	∞
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0	

9. Main Test Instruments

Table 10: List of Main Instruments


No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2011	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2012	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2012	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2011	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	E-field Probe	ET3DV6	1531	January 20, 2012	One year
08	DAE	DAE4	905	June 24, 2011	One year
09	Validation Kit 450MHz	D450V3	1065	November 9, 2011	One year

*****END OF REPORT BODY*****

ANNEX A: Test Layout



Picture 1: Specific Absorption Rate Test Layout

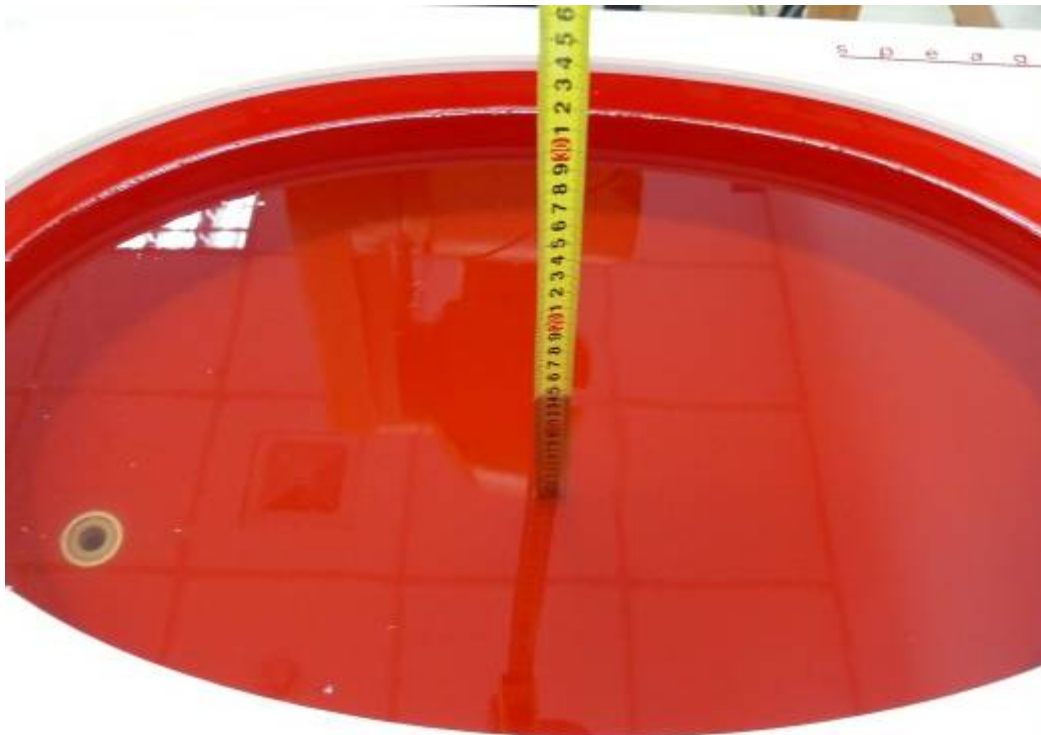

Picture 2: Liquid depth in the Flat Phantom (450 MHz)

ANNEX B: System Check Results

System Performance Check at 450 MHz

DUT: Dipole450 MHz; Type: D450V3; Serial: 1065

Date/Time: 03/22/2012 7:15:21 AM

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.854 \text{ mho/m}$; $\epsilon_r = 44.93$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1531; ConvF(6.82, 6.82, 6.82);
- Electronics: DAE4 Sn905;

d=15mm, Pin=398mW/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.15 mW/g

d=15mm, Pin=398mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.1 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.02 mW/g; SAR(10 g) = 1.32 mW/g

Maximum value of SAR (measured) = 2.15 mW/g

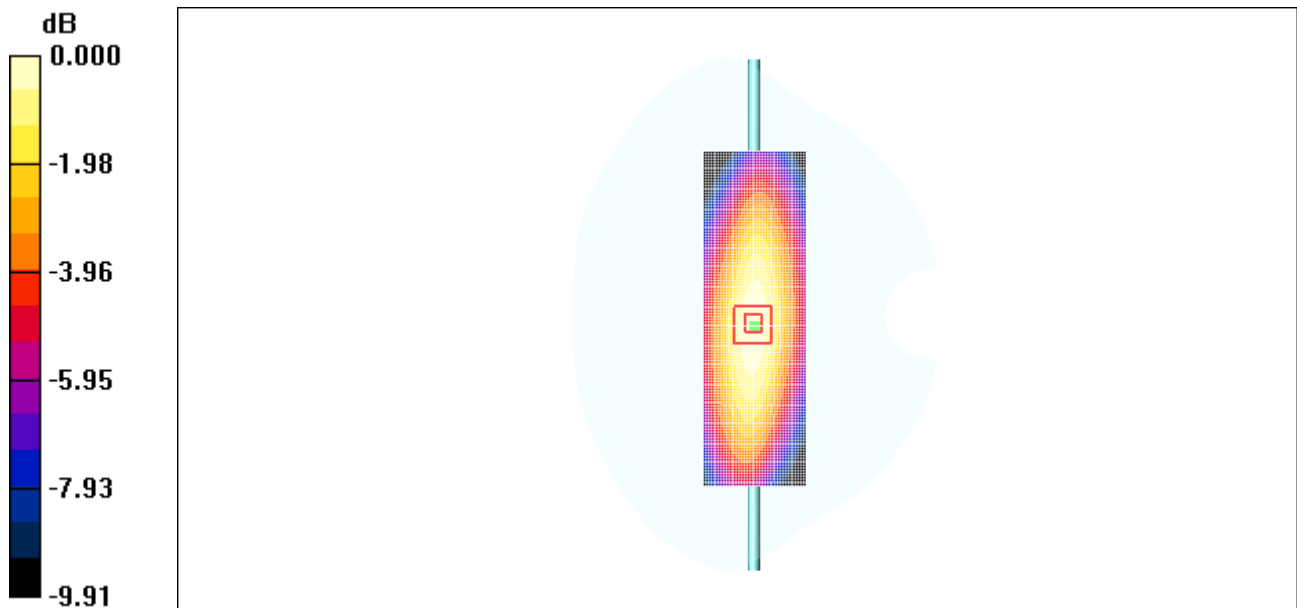


Figure 7 System Performance Check 450MHz 398mW

ANNEX C: Graph Results

Face Held, Front Towards Phantom, distance 15 mm, High

Date/Time: 03/22/2012 9:30:26 AM

Communication System: PTT450; Frequency: 470.000 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 470$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(6.82, 6.82, 6.82); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom High/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.01 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.3 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 4.53 mW/g

Maximum value of SAR (measured) = 4.77 mW/g

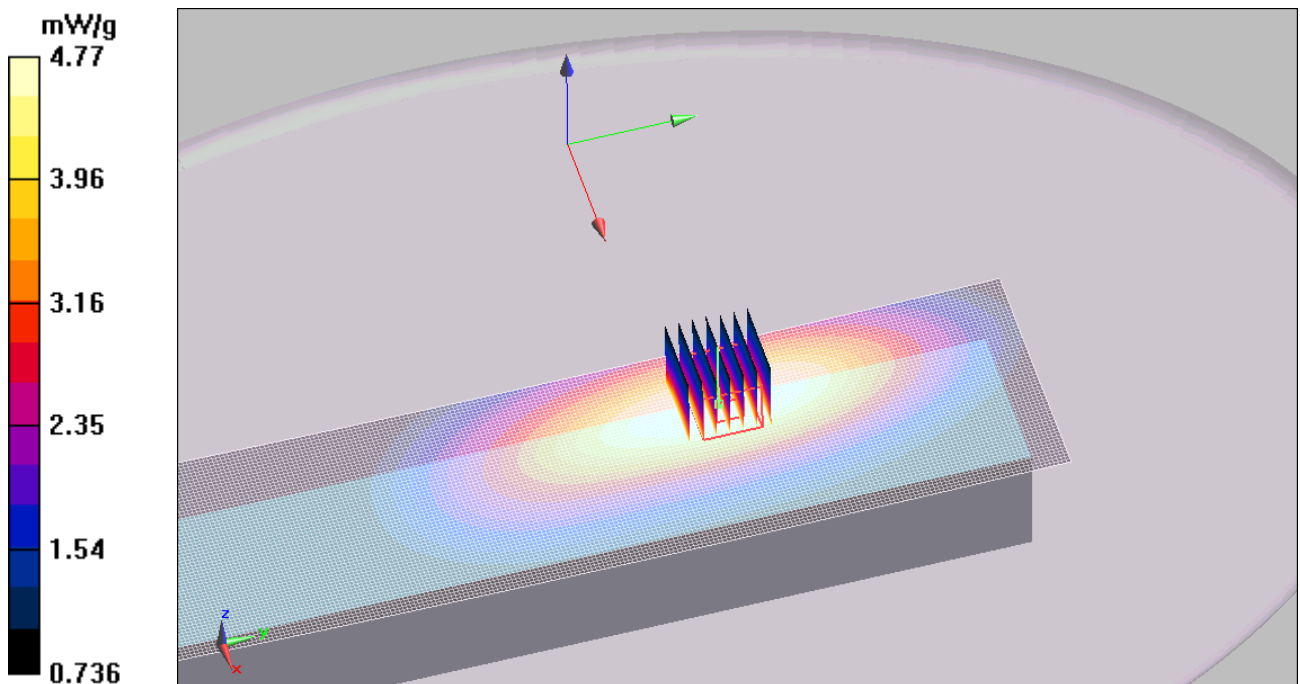


Figure 8 Face Held, Towards Phantom, distance 15mm, 470.000 MHz

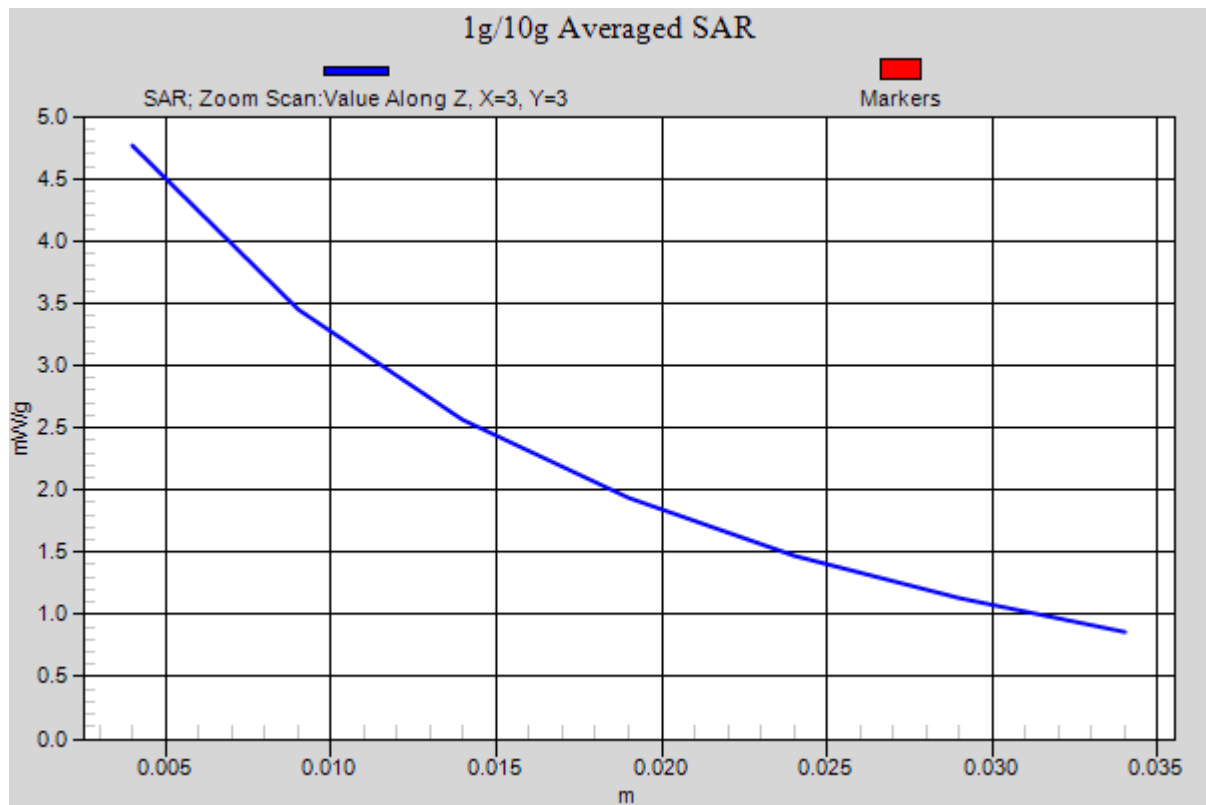


Figure 9 Z-Scan at power reference point (Face Held, Towards Phantom, distance 15mm, 470.000 MHz)

Face Held, Front Towards Phantom, distance 15 mm, Middle

Date/Time: 03/22/2012 10:02:35 AM

Communication System: PTT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.842$ mho/m; $\epsilon_r = 45.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(6.82, 6.82, 6.82); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 6.21 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.3 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 7.87 W/kg

SAR(1 g) = 5.71 mW/g

Maximum value of SAR (measured) = 6 mW/g

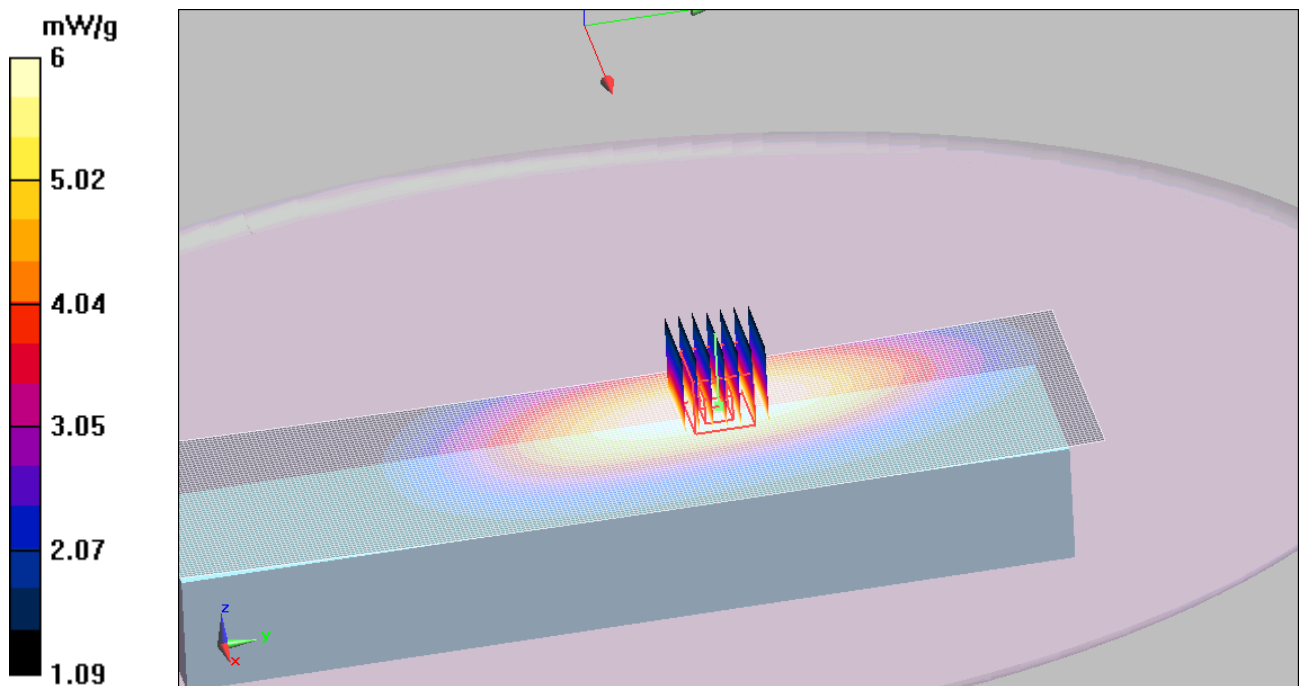


Figure 10 Face Held, Front Towards Phantom, distance 15 mm, 438.05MHz

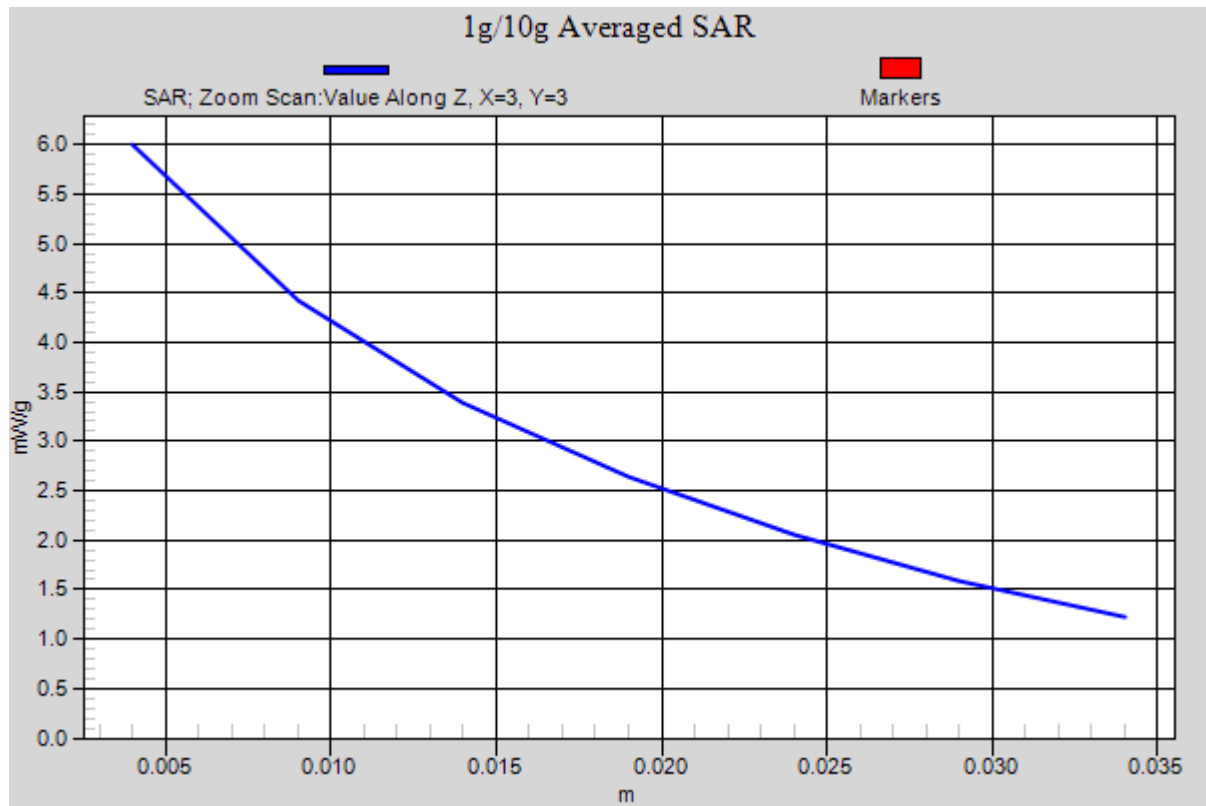


Figure 11 Z-Scan at power reference point (Face Held, Front Towards Phantom, distance 15 mm, 438.05MHz)

Face Held, Front Towards Phantom, distance 15 mm, Low

Date/Time: 03/22/2012 10:30:00 AM

Communication System: PTT450; Frequency: 400.000 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 400.000\text{ MHz}$; $\sigma = 0.833\text{ mho/m}$; $\epsilon_r = 45.7$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature: $22.3\text{ }^\circ\text{C}$ Liquid Temperature: $21.5\text{ }^\circ\text{C}$

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(6.82, 6.82, 6.82); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Low/Area Scan (61x231x1): Measurement grid: $dx=15\text{ mm}$, $dy=15\text{ mm}$

Maximum value of SAR (interpolated) = 5.43 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 79 V/m ; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 6.83 W/kg

SAR(1 g) = 4.93 mW/g

Maximum value of SAR (measured) = 5.17 mW/g

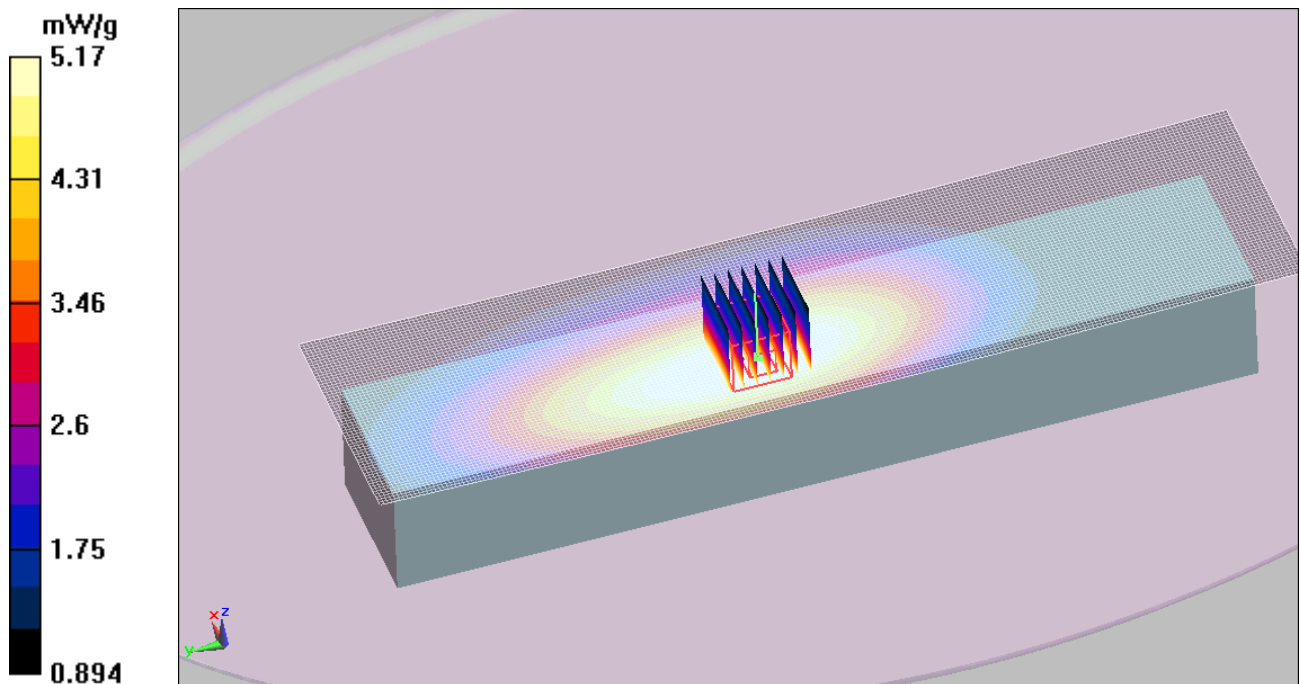


Figure 12 Face Held, Front Towards Phantom, distance 15 mm, 400.000 MHz

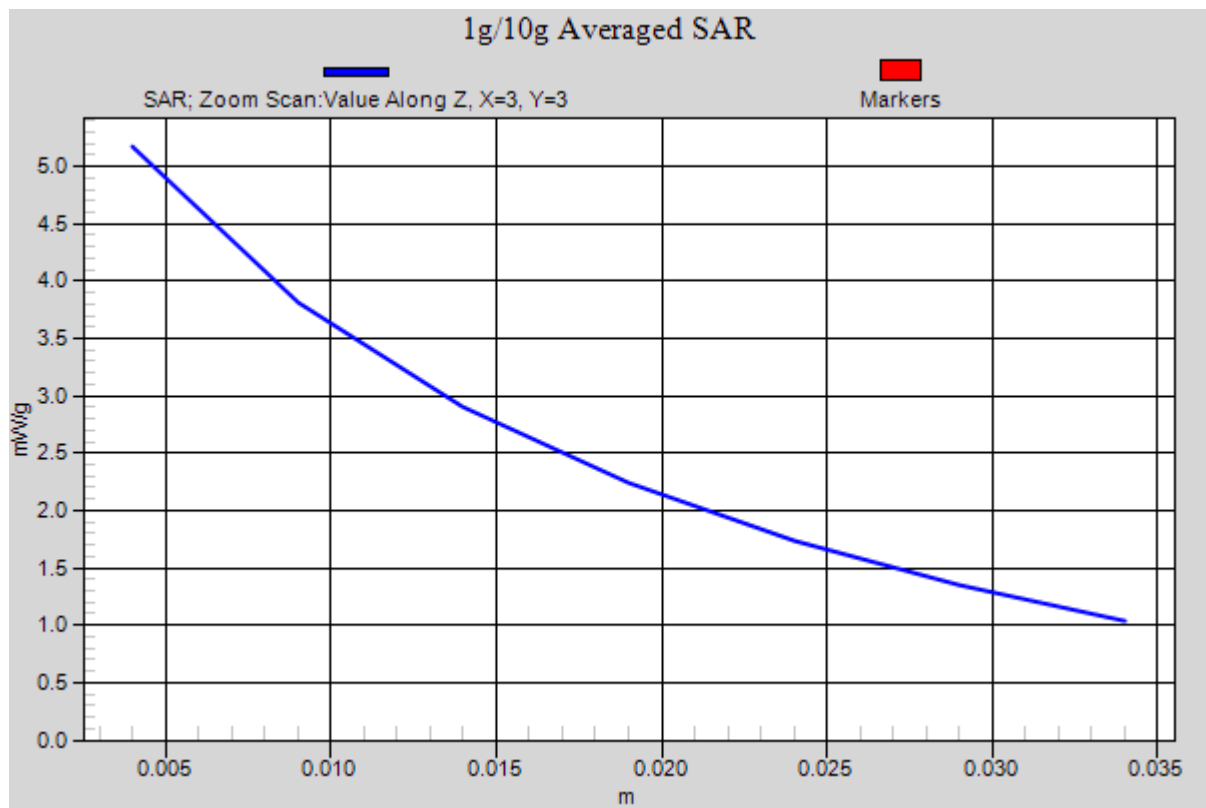


Figure 13 Z-Scan at power reference point (Face Held, Front Towards Phantom, distance 15 mm, 400.000MHz)

Face Held, Front Towards Phantom(Narrow), distance 15 mm, Middle

Date/Time: 03/22/2012 10:58:33 AM

Communication System: PPT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.842$ mho/m; $\epsilon_r = 45.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(6.82, 6.82, 6.82); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 6.38 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.3 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 8.03 W/kg

SAR(1 g) = 5.81 mW/g

Maximum value of SAR (measured) = 6.09 mW/g

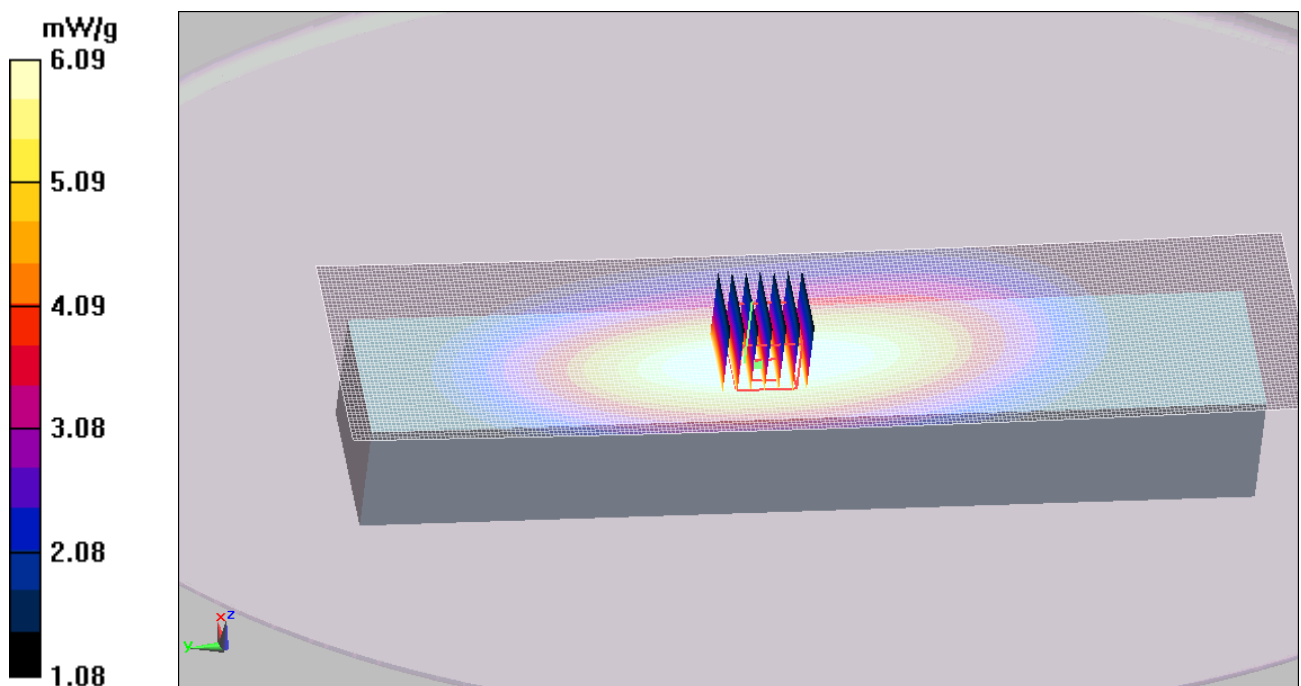


Figure 14 Face Held, Front Towards Phantom(Narrow), distance 15 mm, 438.05 MHz

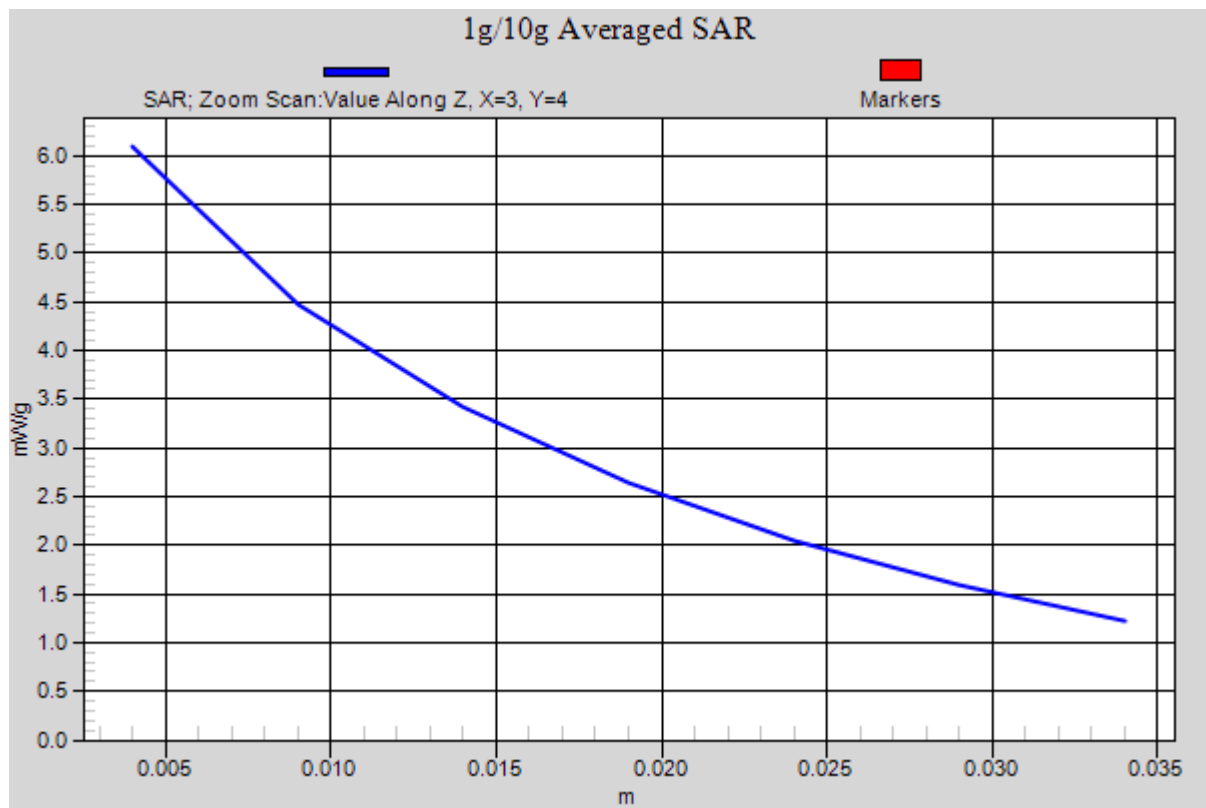


Figure 15 Z-Scan at power reference point [Face Held, Front Towards Phantom(Narrow), distance 15 mm, 438.05MHz]

Body-Worn, Front Towards Ground, Belt clip attach Phantom High

Date/Time: 03/22/2012 1:44:05 PM

Communication System: PTT450; Frequency: 470.000 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 470$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 56.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom High/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 5.12 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 70.7 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 6.54 W/kg

SAR(1 g) = 4.43 mW/g

Maximum value of SAR (measured) = 4.66 mW/g

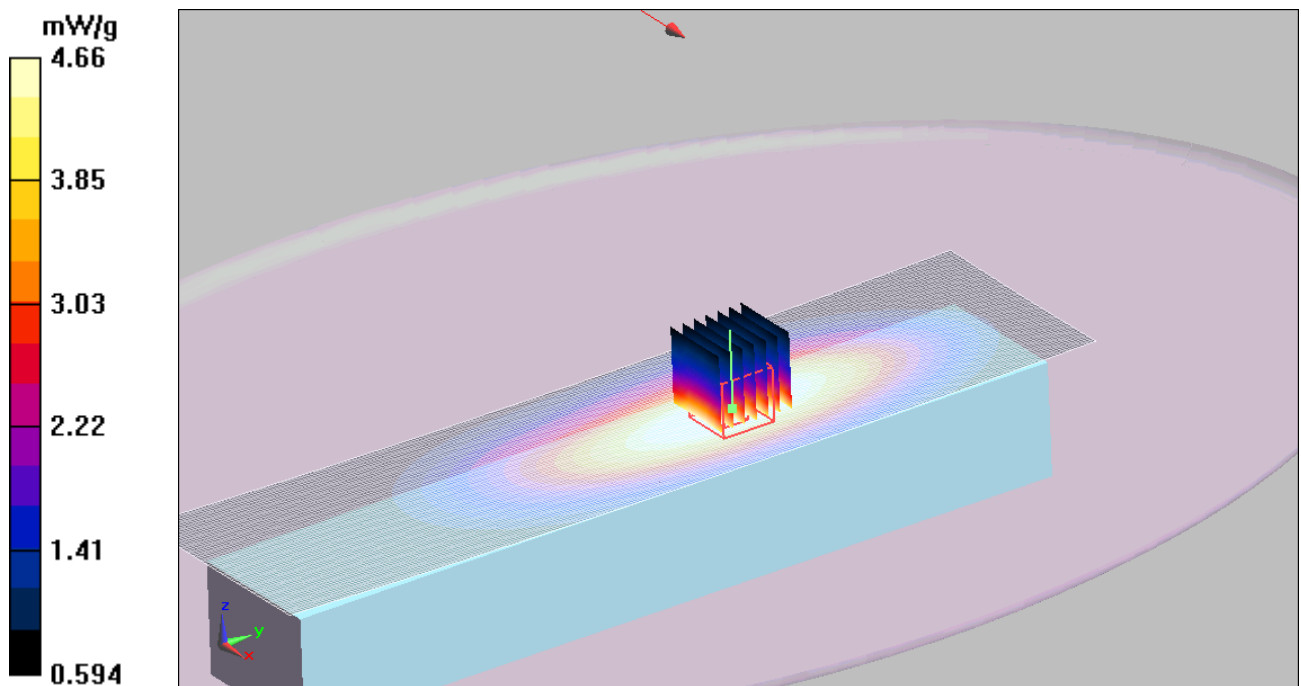


Figure 16 Body-Worn, Front Towards Ground, Belt clip attach Phantom 470.000MHz

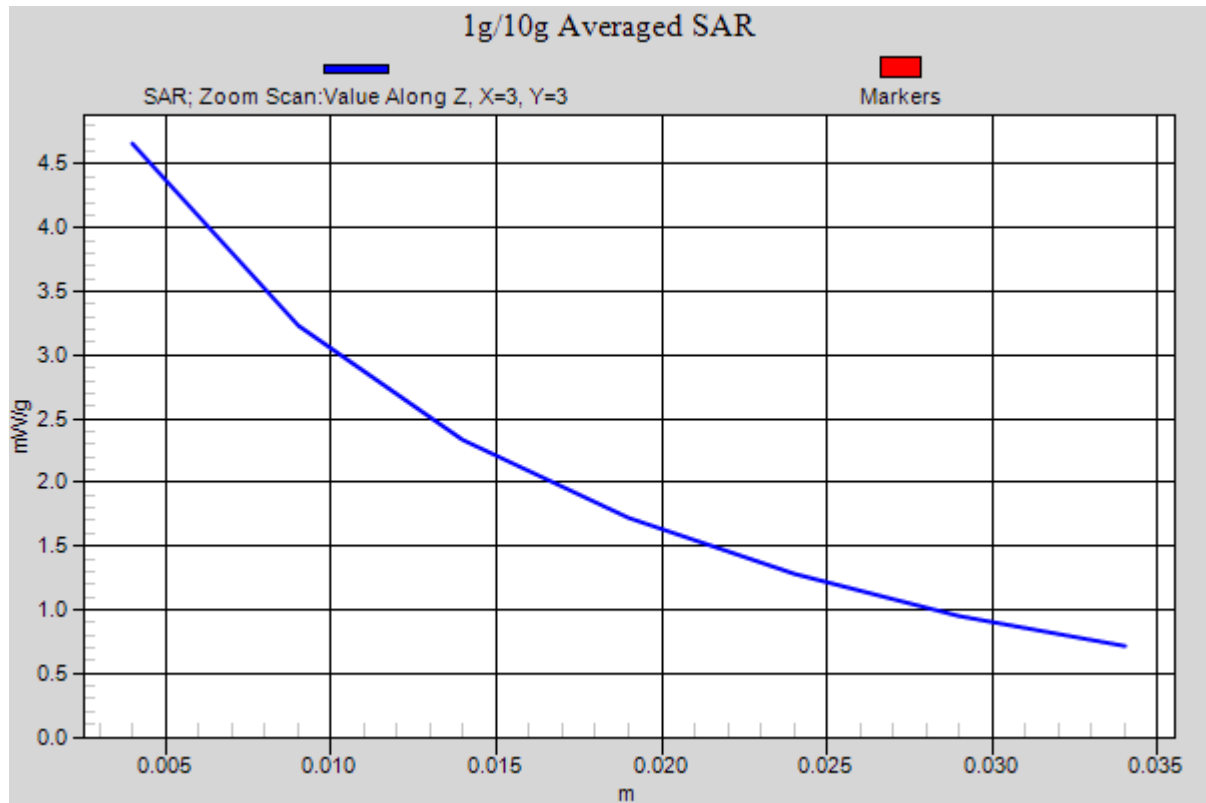


Figure 17 Z-Scan at power reference point (Body-Worn, Front Towards Ground, Belt clip attach Phantom 470.000MHz)

Body-Worn, Front Towards Ground, Belt clip attach Phantom Middle

Date/Time: 03/22/2012 2:10:13 PM

Communication System: PTT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 6.06 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.2 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 8.12 W/kg

SAR(1 g) = 5.52 mW/g

Maximum value of SAR (measured) = 5.8 mW/g

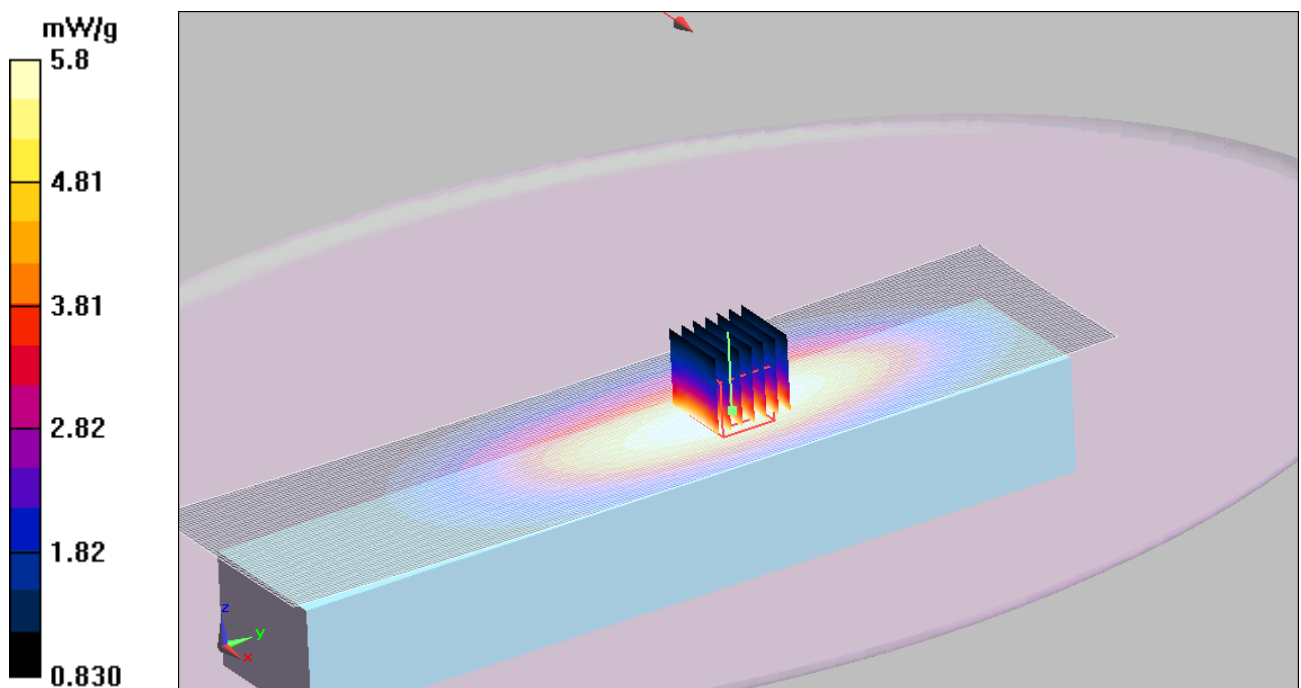


Figure 18 Body-Worn, Front Towards Ground, Belt clip attach Phantom 438.05MHz

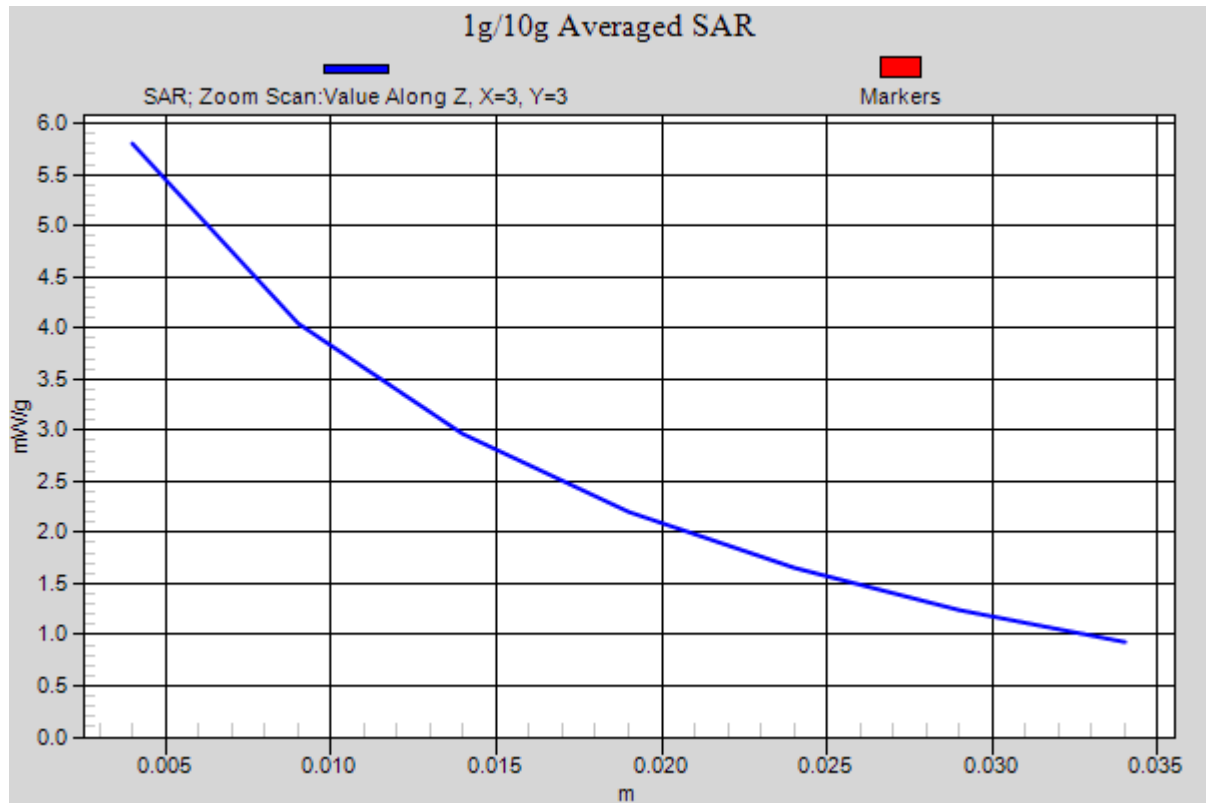


Figure 19 Z-Scan at power reference point (Body-Worn, Front Towards Ground, Belt clip attach Phantom 438.05MHz)

Body-Worn, Front Towards Ground, Belt clip attach Phantom Low

Date/Time: 03/22/2012 2:40:59 PM

Communication System: PTT450; Frequency: 400.000 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 400.000$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 57.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Low/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.9 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 69.6 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 4.82 W/kg

SAR(1 g) = 3.31 mW/g

Maximum value of SAR (measured) = 3.48 mW/g

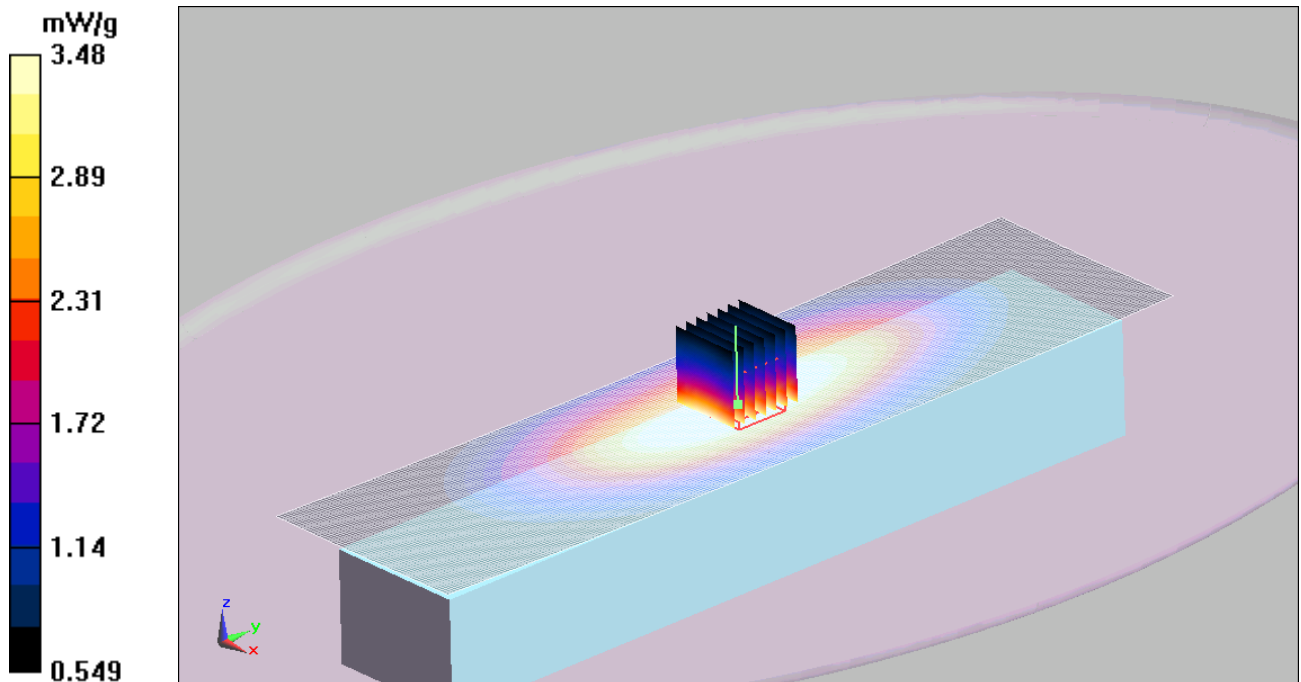


Figure 20 Body-Worn, Front Towards Ground, Belt clip attach Phantom 400.000MHz

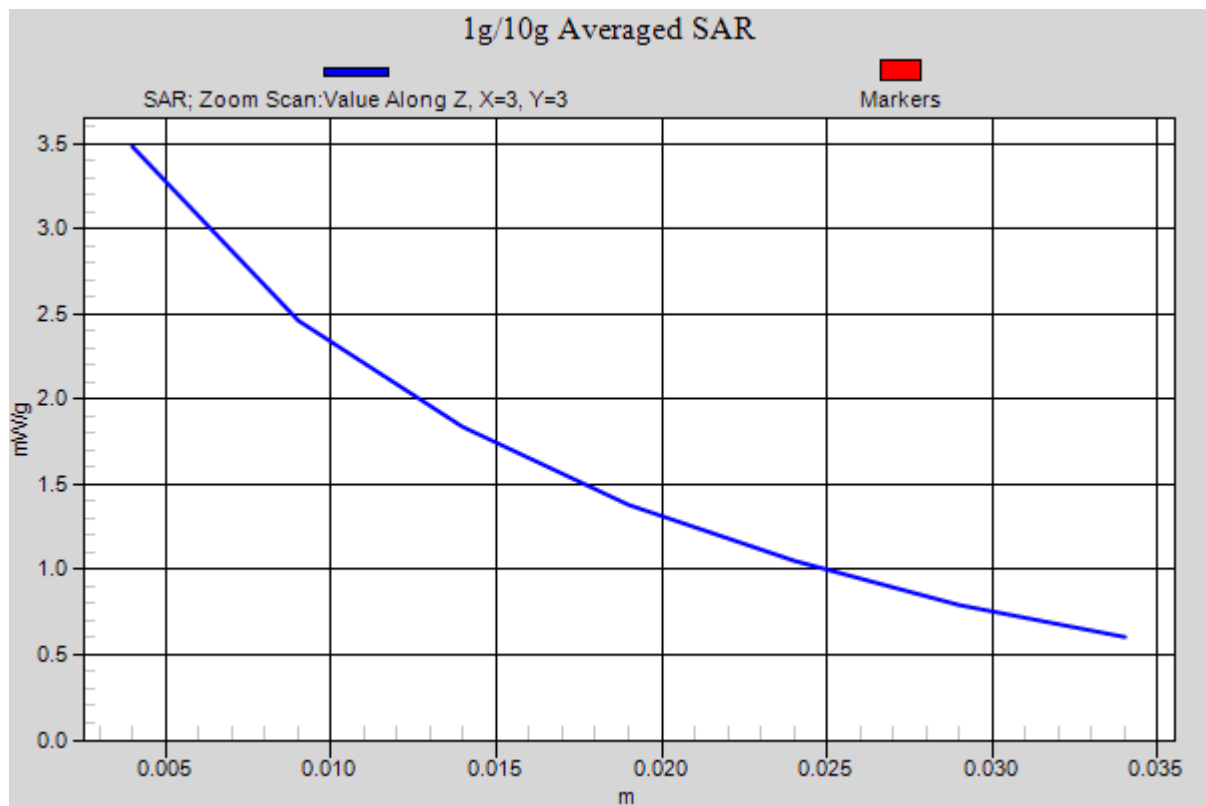


Figure 21 Z-Scan at power reference point (Body-Worn, Front Towards Ground, Belt clip attach Phantom 400.000MHz)

Body-Worn, Front Towards Ground, Belt clip attach Phantom(Narrow) Middle

Date/Time: 03/22/2012 3:10:56 PM

Communication System: PTT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.75 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 74 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 7.63 W/kg

SAR(1 g) = 5.26 mW/g

Maximum value of SAR (measured) = 5.52 mW/g

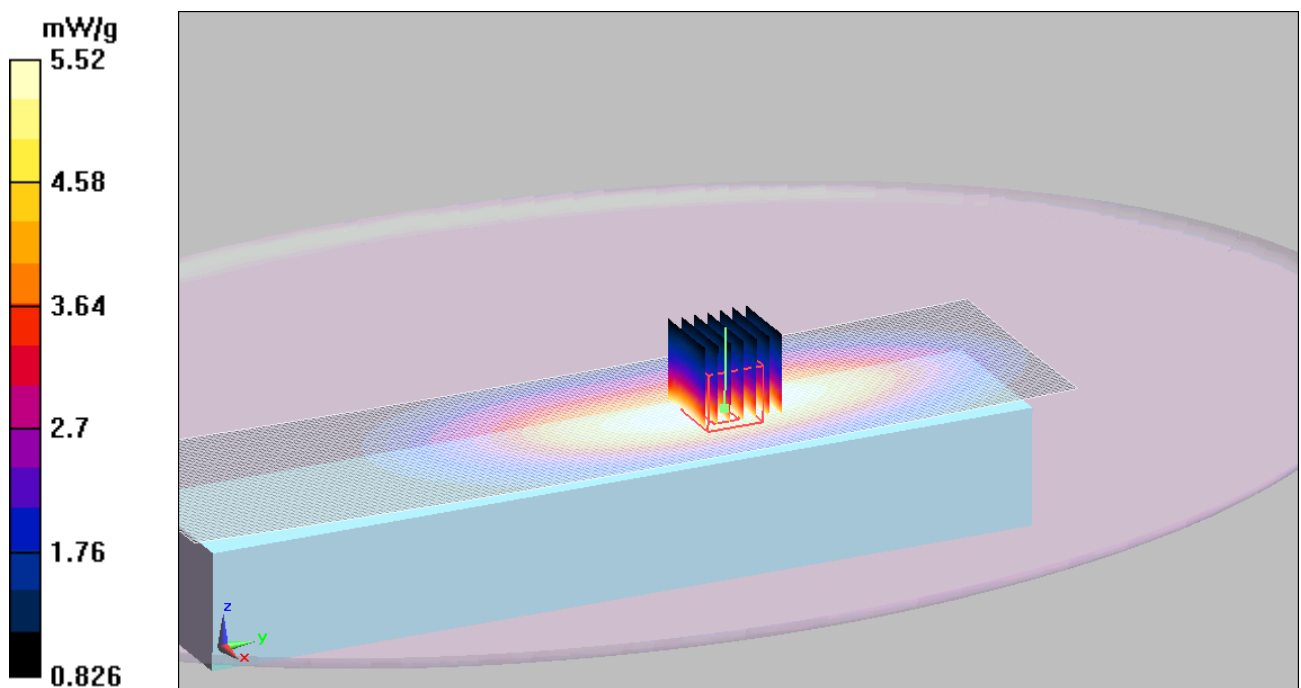


Figure 22 Body-Worn, Front Towards Ground, Belt clip attach Phantom(Narrow) 438.05MHz

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 41 of 71

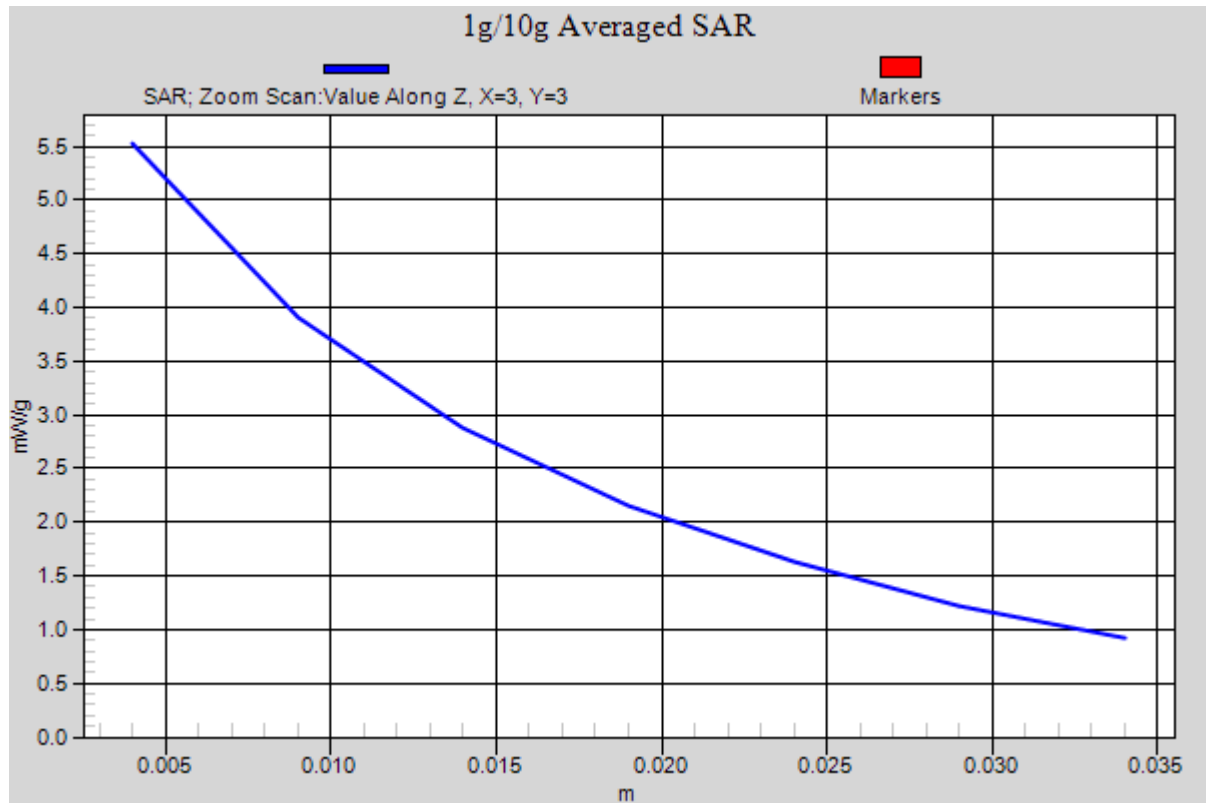


Figure 23 Z-Scan at power reference point [Body-Worn, Front Towards Ground, Belt clip attach Phantom(Narrow) 438.05MHz]

Body-Worn with Earphone, Front Towards Ground, Belt clip attach Phantom Middle

Date/Time: 03/22/2012 3:36:33 PM

Communication System: PTT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.74 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.3 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 7.35 W/kg

SAR(1 g) = 4.97 mW/g

Maximum value of SAR (measured) = 5.23 mW/g

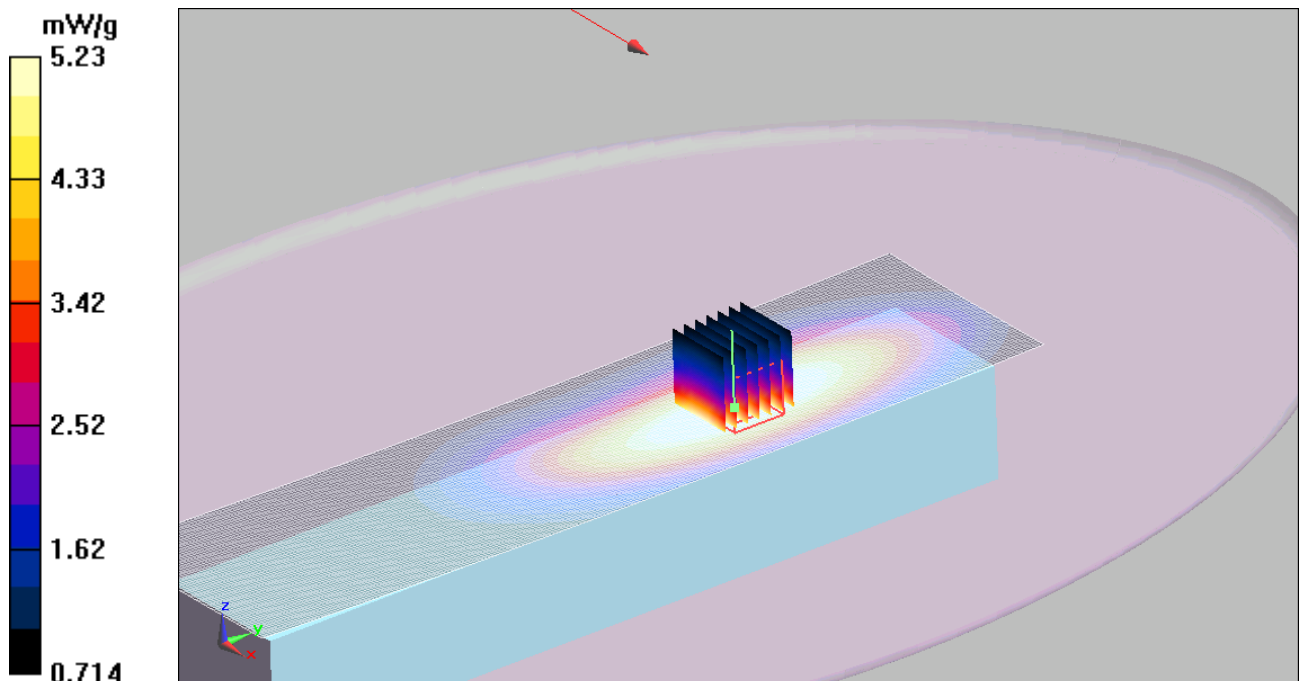


Figure 24 Body-Worn with Earphone, Front Towards Ground, Belt clip attach Phantom
438.05MHz

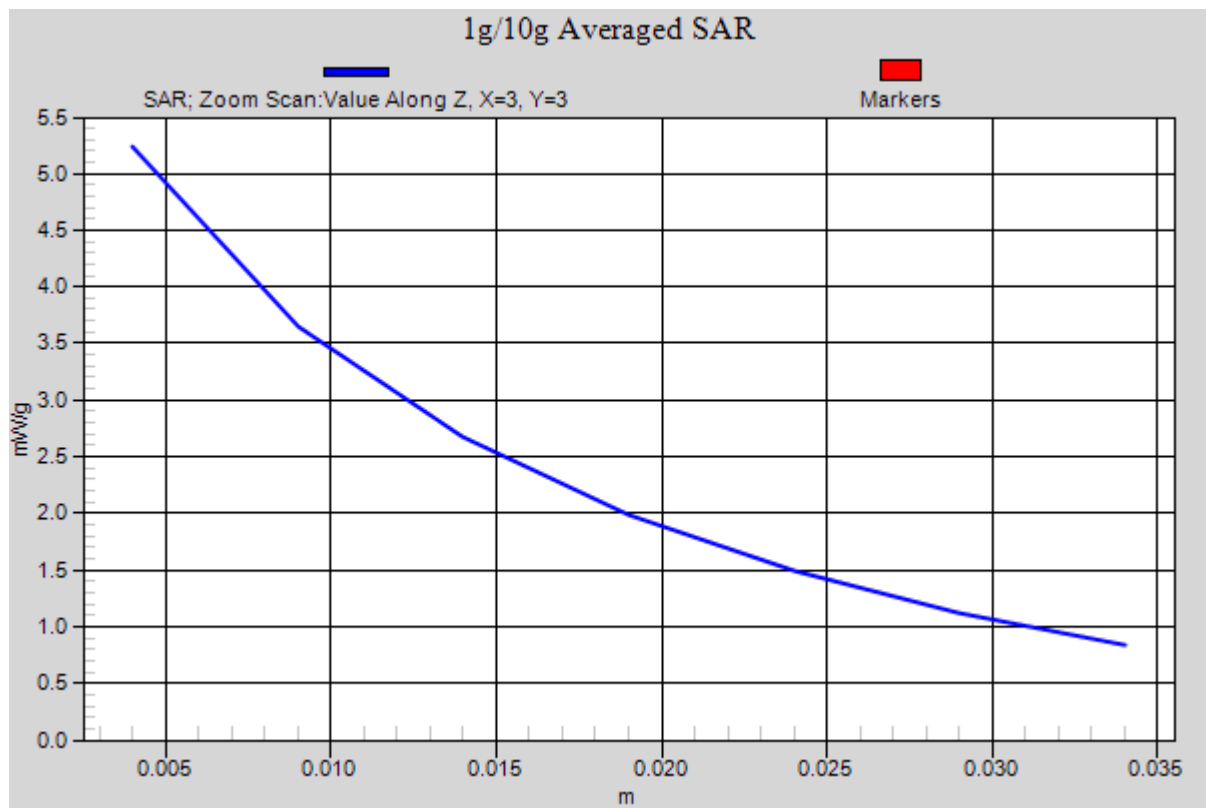


Figure 25 Z-Scan at power reference point (Body-Worn with Earphone, Front Towards Ground, Belt clip attach Phantom 438.05MHz)

Body-Worn with Microphone, Front Towards Ground, Belt clip attach Phantom Middle

Date/Time: 03/22/2012 4:15:08 PM

Communication System: PTT450; Frequency: 438.05 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 438.05$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: ET3DV6 - SN1531; ConvF(7.34, 7.34, 7.34); Calibrated: 1/20/2012

Electronics: DAE4 Sn905; Calibrated: 6/24/2011

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x231x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.17 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.8 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 4.73 mW/g

Maximum value of SAR (measured) = 4.96 mW/g

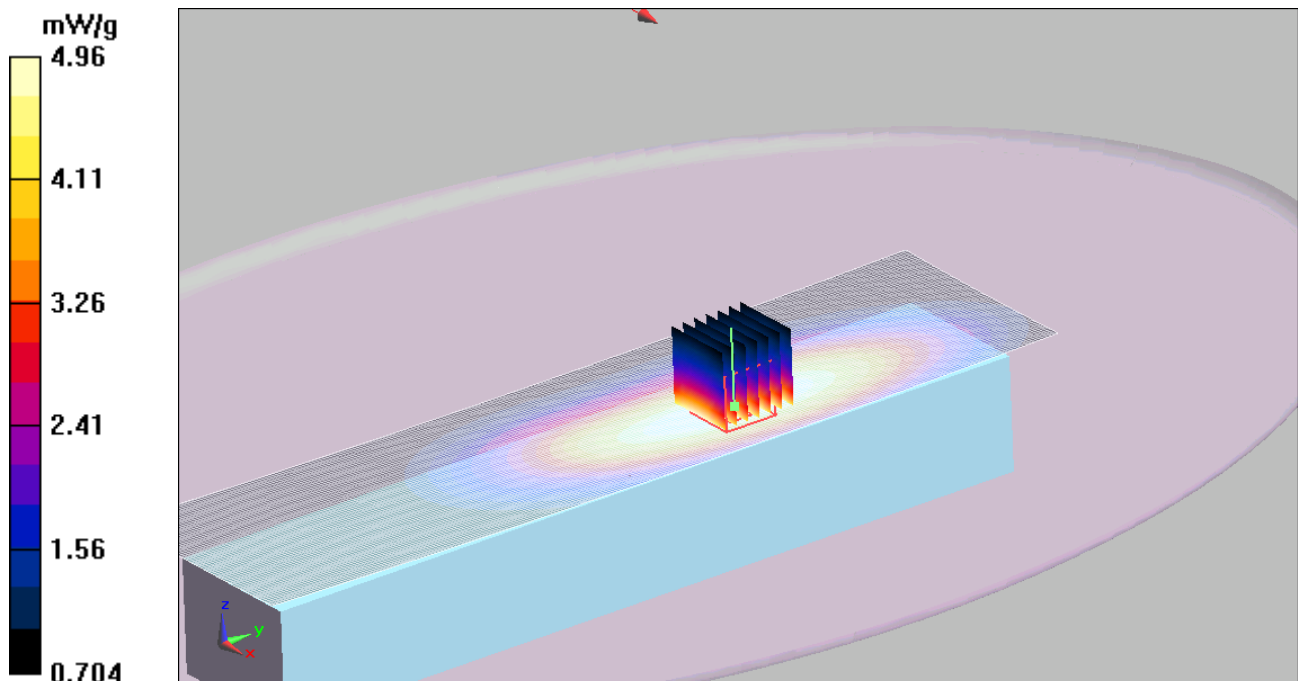


Figure 26 Body-Worn with Microphone, Front Towards Ground, Belt clip attach Phantom
438.05MHz

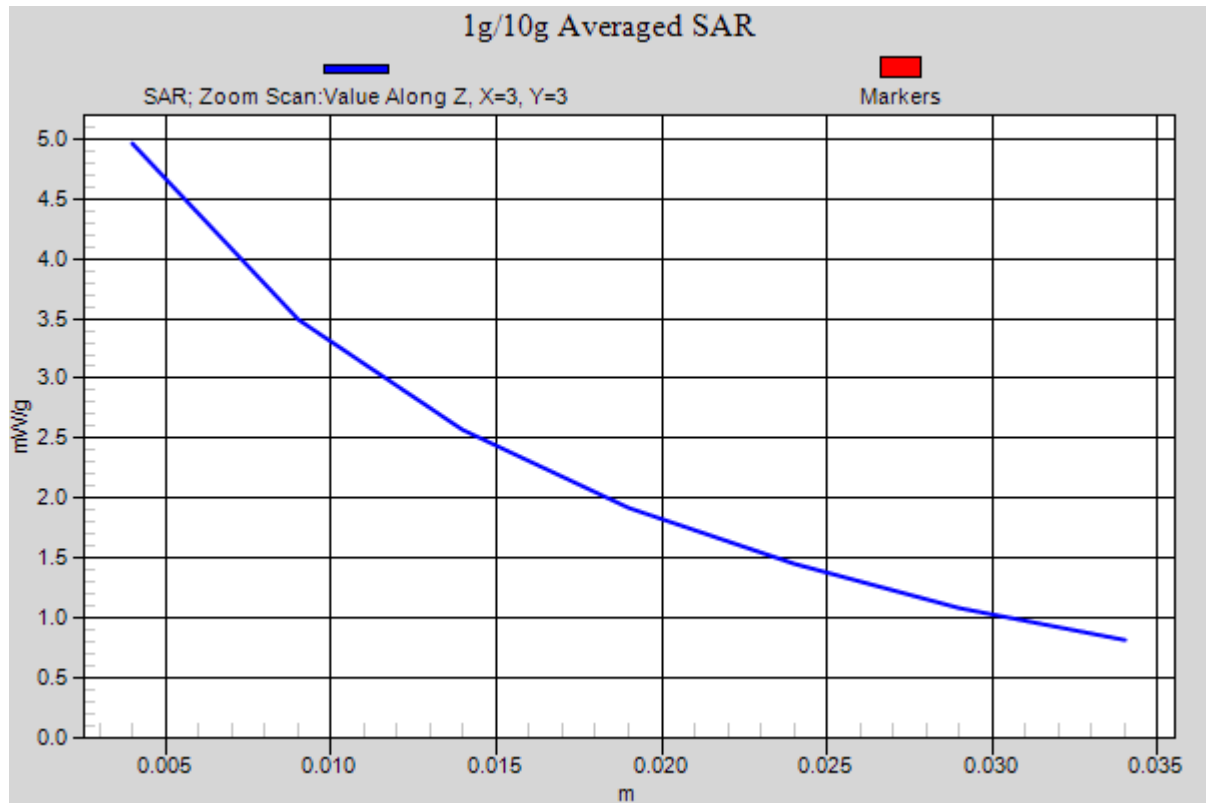


Figure 27 Z-Scan at power reference point (Body-Worn with Microphone, Front Towards Ground, Belt clip attach Phantom 438.05MHz)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 46 of 71

ANNEX D: Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client ATL (Auden)

Certificate No: ET3-1531_Jan12

CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1531

Calibration procedure(s) QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes

Calibration date: January 20, 2012

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-11 (No. 217-00789)	Apr-12
Power sensor E4412A	MY41495277	1-Apr-11 (No. 217-00788)	Apr-12
Power sensor E4412A	MY41488087	1-Apr-11 (No. 217-00788)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Apr-11 (No. 217-00865)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Apr-11 (No. 217-00787)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Apr-11 (No. 217-00866)	Apr-12
Reference Probe ES3DV2	SN: 3013	2-Apr-11 (No. ES3-3013_Jan09)	Apr-12
DAE4	SN: 660	9-Apr-11 (No. DAE4-660_Sep08)	Apr-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Apr-12
Network Analyzer HP 8753E	US37380585	18-Oct-01 (in house check Oct-08)	In house check: Apr-12

Calibrated by: Name: Katja Pokovic Function: Technical Manager Signature: [Signature]

Approved by: Name: Niels Kuster Quality Manager Signature: [Signature]

Issued: January 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1531_Jan12

Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1531

January 20, 2012

Probe ET3DV6

SN:1531

Manufactured:	July 15, 2000
Last calibrated:	January 29, 2011
Recalibrated:	January 20, 2012

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 49 of 71

ET3DV6 SN:1531

January 20, 2012

DASY - Parameters of Probe: ET3DV6 SN:1531

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.45 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	91 mV
NormY	1.47 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	92 mV
NormZ	1.63 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	94 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.7	6.2
SAR _{be} [%]	With Correction Algorithm	0.9	0.6

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.3	6.0
SAR _{be} [%]	With Correction Algorithm	0.9	0.7

Sensor Offset

Probe Tip to Sensor Center 2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter; uncertainty not required.

ET3DV6 SN:1531

January 20, 2012

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

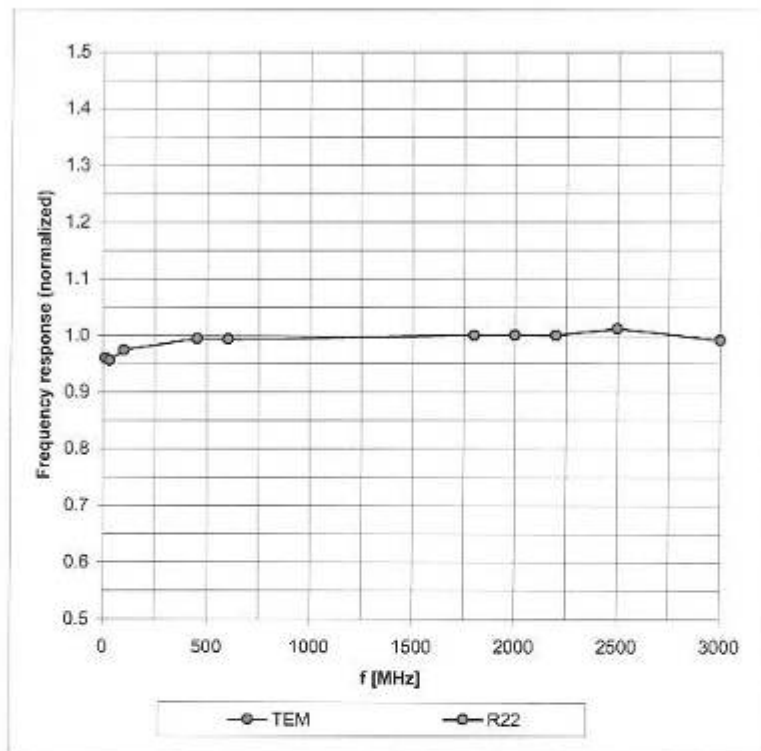

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.
Test Report


Report No. RZA2012-1703

Page 51 of 71

ET3DV6 SN:1531

January 20, 2012

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

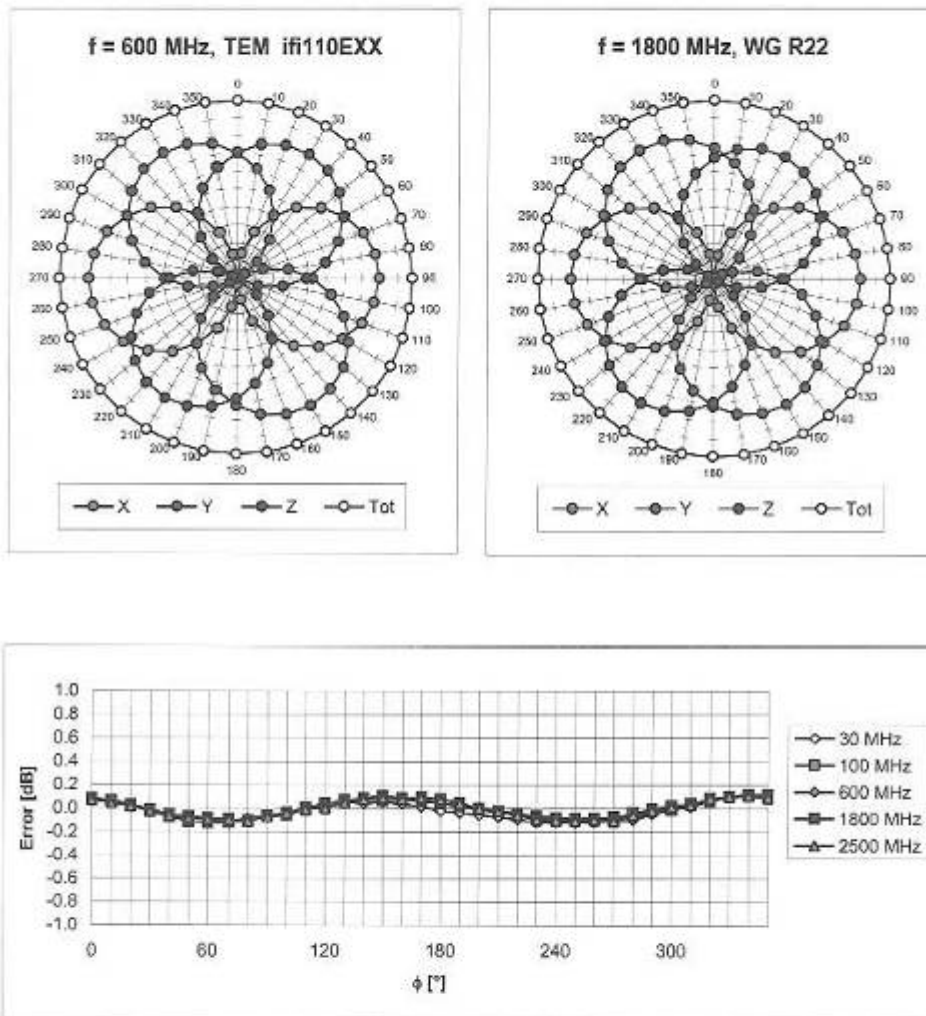


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1531

January 20, 2012

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

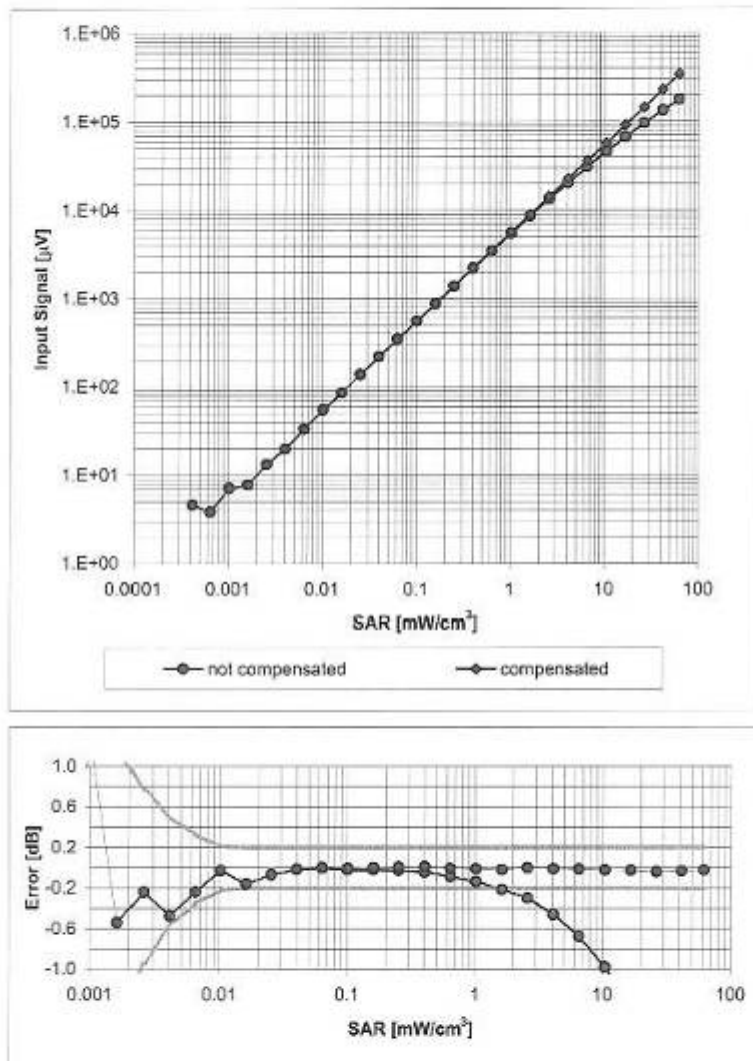

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No. RZA2012-1703

Page 53 of 71

ET3DV6 SN:1531

January 20, 2012

Conversion Factor Assessment

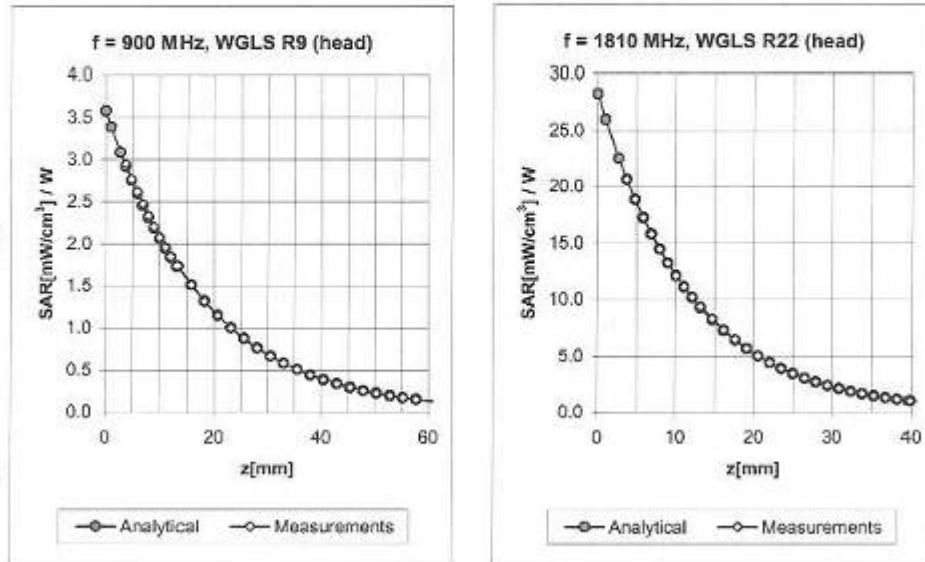

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.39	1.91	6.82 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.47	2.21	5.99 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.56	2.51	5.01 ± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.82	2.10	4.82 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.99	1.72	4.45 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.30	1.94	7.34 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.40	2.52	5.83 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.85	2.09	4.70 ± 11.0% (k=2)
2000	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.99	1.78	4.58 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.99	1.21	4.06 ± 11.0% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1531

January 20, 2012

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

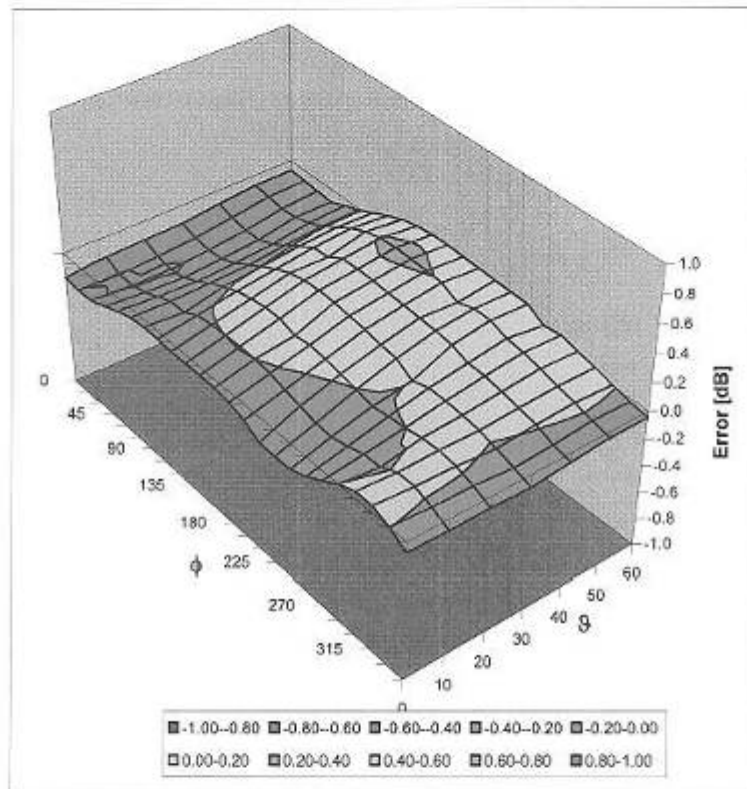

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2012-1703

Page 55 of 71

ANNEX E: D450V3 Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client TA (Auden)

Certificate No: D450V3-1065_Nov 11

CALIBRATION CERTIFICATE

Object D450V3 - SN: 1065

Calibration procedure(s) QA CAL-15.v5
Calibration Procedure for dipole validation kits below 800 MHz

Calibration date: November 09, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Apr-10 (No. 217-01030)	Apr-11
Power sensor E4412A	MY41495277	31-Apr-10 (No. 217-01030)	Apr-11
Power sensor E4412A	MY41498087	31-Apr-10 (No. 217-01030)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Apr-10 (No. 217-01026)	Apr-11
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Apr-10 (No. 217-01028)	Apr-11
Type-N mismatch combination	SN: 5047.2 / 06327	31-Apr-10 (No. 217-01029)	Apr-11
Reference Probe ET3DV6 (LF)	SN: 1507	31-Apr-10 (No. ET3-1507_Jul09)	Apr-11
DAE4	SN: 654	31-Apr-10 (No. DAE4-654_May09)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 56 of 71

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 57 of 71

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	44.2 \pm 6 %	0.86 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g \pm 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g \pm 17.6 % (k=2)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 58 of 71

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.77 mW / g
SAR normalized	normalized to 1W	4.37 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.51 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.18 mW / g
SAR normalized	normalized to 1W	2.94 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.03 mW / g ± 17.6 % (k=2)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2012-1703

Page 59 of 71

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$59.2 \Omega - 4.9 j\Omega$
Return Loss	- 20.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$56.5 \Omega - 7.9 j\Omega$
Return Loss	- 20.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.354 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DASY5 Validation Report for Head TSL

Date/Time: 09.11.2011 10:36:58

Test Laboratory: The name of your organization

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1065

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 03.07.2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 04.05.2011
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=398mW /d=15mm /Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.99 mW/g


Pin=398mW /d=15mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.3 V/m; Power Drift = -0.00664 dB

Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2.01 mW/g

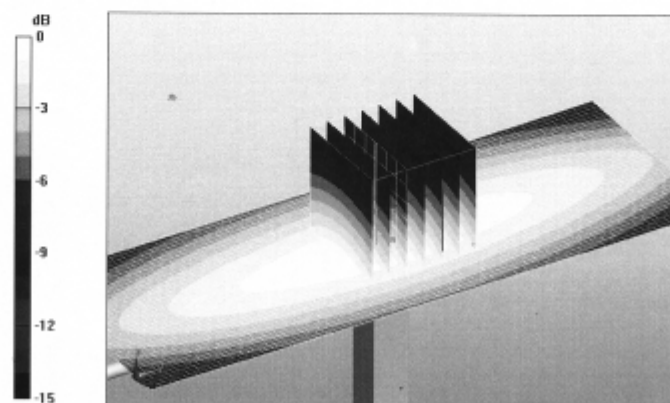

0 dB = 2.01mW/g