



TEST REPORT

For Bluetooth-EDR

Report No. : **CHTEW22100048** **Report Verification:** 

Project No. : **SHT2209084903EW**

FCC ID : **OA8EB121**

Applicant's name : **Quanzhou Chierda Electronic Telecom Co., Ltd.**

Address : No.8, Zian Road, Jiangnan High-tech Industrial Zone, Quanzhou, Fujian, China

Product Name : **Bluetooth headset**

Trade Mark : Chierda

Model No. : EB121

Listed Model(s) : EB122, EB123

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample : Sep.30, 2022

Date of testing : Sep.30, 2022-Oct.17, 2022

Date of issue : Oct.18, 2022

Result : **PASS**

Compiled by
(position+printedname+signature)....: File administrators Fanghui Zhu

Fanghui Zhu

Supervised by
(position+printedname+signature)....: Project Engineer Weiyang.Xiang

Weiyang.Xiang

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Test sample information	8
4.5.	Support unit used in test configuration and system	8
4.6.	Testing environmental condition	8
4.7.	Statement of the measurement uncertainty	8
4.8.	Equipment Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	10
5.1.	Antenna Requirement	10
5.2.	AC Conducted Emission	11
5.3.	Peak Output Power	13
5.4.	20 dB Bandwidth	14
5.5.	99% Occupied Bandwidth	15
5.6.	Carrier Frequencies Separation	16
5.7.	Hopping Channel Number	17
5.8.	Dwell Time	18
5.9.	Duty Cycle Correction Factor (DCCF)	19
5.10.	Pseudorandom Frequency Hopping Sequence	20
5.11.	Conducted Band edge and Spurious Emission	21
5.12.	Radiated Band edge Emission	22
5.13.	Radiated Spurious Emission	24
6.	TEST SETUP PHOTOS	31
7.	EXTERNAL AND INTERNAL PHOTOS	32
8.	APPENDIX REPORT	32

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2022-10-18	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247 (c)	PASS	Xiaoxiao Li
5.2	AC Conducted Emission	15.207	N/A	N/A
5.3	Peak Output Power	15.247 (b)(1)	PASS	Xiaoxiao Li
5.4	20 dB Bandwidth	15.247 (a)(1)	PASS	Xiaoxiao Li
5.5	99% Occupied Bandwidth	-	PASS ^{*1}	Xiaoxiao Li
5.6	Carrier Frequency Separation	15.247 (a)(1)	PASS	Xiaoxiao Li
5.7	Hopping Channel Number	15.247 (a)(1)	PASS	Xiaoxiao Li
5.8	Dwell Time	15.247 (a)(1)	PASS	Xiaoxiao Li
5.9	Duty Cycle Correction Factor	-	PASS ^{*1}	Xiaoxiao Li
5.10	Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Xiaoxiao Li
5.11	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Xiaoxiao Li
5.12	Radiated Band Edge Emission	15.205/15.209	PASS	Quanhai Deng
5.13	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Quanhai Deng

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Quanzhou Chierda Electronic Telecom Co.,Ltd.
Address:	No.8,Zian Road,Jiangnan High-tech Industrial Zone,Quanzhou,Fujian,China
Manufacturer:	Quanzhou Chierda Electronic Telecom Co.,Ltd.
Address:	No.8,Zian Road,Jiangnan High-tech Industrial Zone,Quanzhou,Fujian,China

3.2. Product Description

Main unit information:	
Product Name:	Bluetooth headset
Trade Mark:	Chierda
Model No.:	EB121
Listed Model(s):	EB122, EB123
Power supply:	DC 3.7V from Battery
Hardware version:	ver1.1
Software version:	ver1.1
Accessory unit information:	
Battery information:	3.7V d.c., 180mAh

3.3. Radio Specification Description

Bluetooth version:	V5.3
Support function ^{*2} :	EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	2.71 dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates and recorded the RF output power in the clause 5.3

Note:

- 1) The manufacturer declare that the maximum power value of the product is set as a default value in the enter test mode software.
- 2) All the test data for each data rate were verified, found GFSK Modulation which is worse case mode

4.3. Test mode

For RF test items:			
The engineering test program was provided and enabled to make EUT continuous transmitting.			
Test Item	Modulation / Data Rate		
	GFSK 1Mbps	$\pi/4$ DQPSK 2Mbps	8DPSK 3Mbps
Conducted test item	✓	✓	✓
Radiated test item	✓	-	-
Remark: – For radiated test item, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests. – The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.			

4.4. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT22090849004
EMI test items	YPHT22090849004

Note:

RF Conducted test items: Peak Output Power, 20 dB Bandwidth, 99% Occupied Bandwidth, Carrier Frequency Separation, Hopping Channel Number, Dwell Time, Duty Cycle Correction Factor, Pseudorandom Frequency Hopping Sequence ,Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.5. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ YES			
Item	Equipment	Trade Name	Model No.
1	Adapter	HUAWEI	HW-050200C01

4.6. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.7. Statement of the measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.21 dB
Radiated Emission (30MHz~1000MHz)	4.54 dB
Radiated Emissions (1GHz~25GHz)	5.10 dB
Peak Output Power	1.07dB
Power Spectral Density	1.07dB
Conducted Spurious Emission	1.07dB
20dB Bandwidth	0.002%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.8. Equipment Used during the Test

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2023/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2022/08/30	2023/08/29
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2024/04/05
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2024/04/05
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2021/11/05	2022/11/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2022/02/25	2023/02/24
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2018/09/27	2023/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2022/08/25	2023/08/24
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/04/27	2023/04/26
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2021/11/05	2022/11/04
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2022/02/28	2023/02/27
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2022/08/25	2023/08/24
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2022/08/25	2023/08/24
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2022/08/25	2023/08/24
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2022/08/25	2023/08/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

The antenna type is a ceramic antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

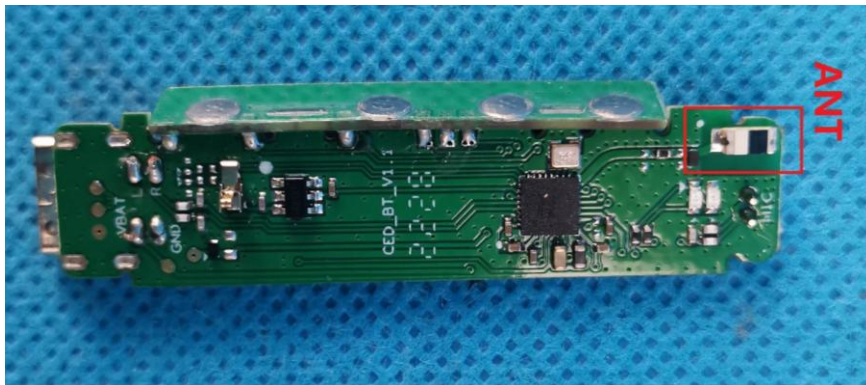

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

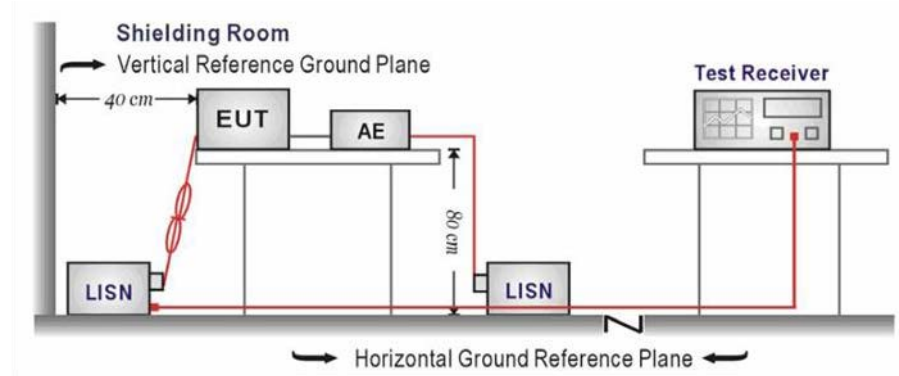

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE


Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

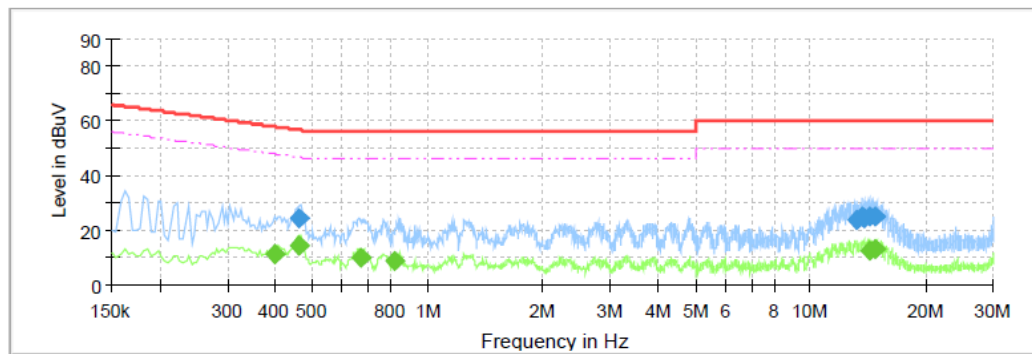


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.399500	---	11.04	47.86	36.82	L1	10.1
0.459500	---	14.15	46.70	32.55	L1	10.1
0.459500	24.23	---	56.70	32.47	L1	10.1
0.667500	---	10.11	46.00	35.89	L1	10.1
0.819500	---	8.68	46.00	37.32	L1	10.1
13.175500	23.94	---	60.00	36.06	L1	10.5
13.635500	25.05	---	60.00	34.95	L1	10.5
13.855500	24.09	---	60.00	35.91	L1	10.5
14.223500	25.16	---	60.00	34.84	L1	10.5
14.231500	---	12.58	50.00	37.42	L1	10.5
14.735500	---	13.20	50.00	36.80	L1	10.5
14.799500	24.95	---	60.00	35.05	L1	10.5

Test Line:

N

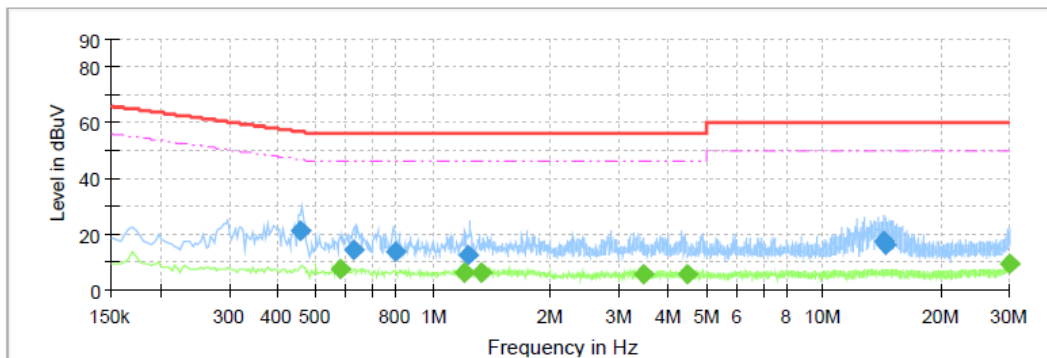

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.455500	21.42	---	56.77	35.36	N	10.1
0.579500	---	7.69	46.00	38.31	N	10.1
0.627500	14.46	---	56.00	41.54	N	10.1
0.799500	13.69	---	56.00	42.31	N	10.1
1.199500	---	6.46	46.00	39.54	N	10.1
1.227500	12.79	---	56.00	43.21	N	10.1
1.327500	---	6.36	46.00	39.64	N	10.1
3.464500	---	5.50	46.00	40.50	N	10.1
4.475500	---	5.47	46.00	40.53	N	10.2
14.275500	17.32	---	60.00	42.68	N	10.4
14.379500	16.05	---	60.00	43.95	N	10.4
29.835500	---	9.19	50.00	40.81	N	10.8

5.3. Peak Output Power


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

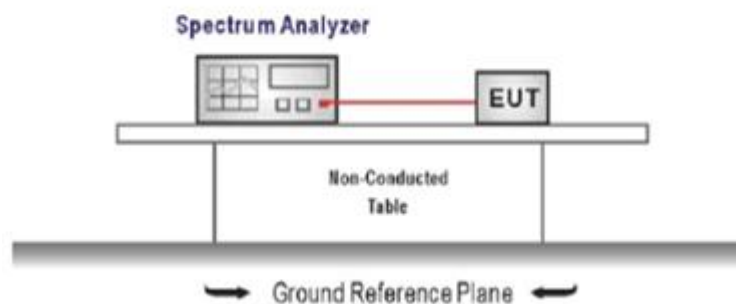

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST DATA


Please refer to appendix A on the appendix report

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

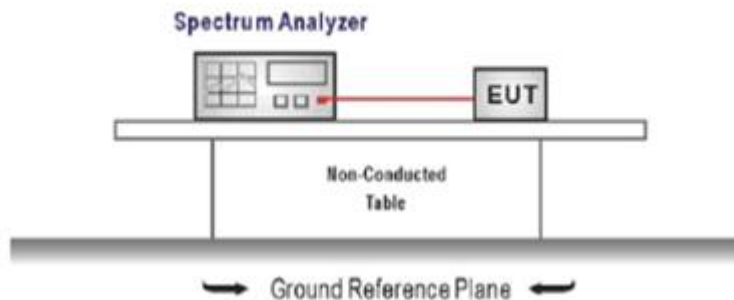

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Please refer to appendix B on the appendix report

5.5. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

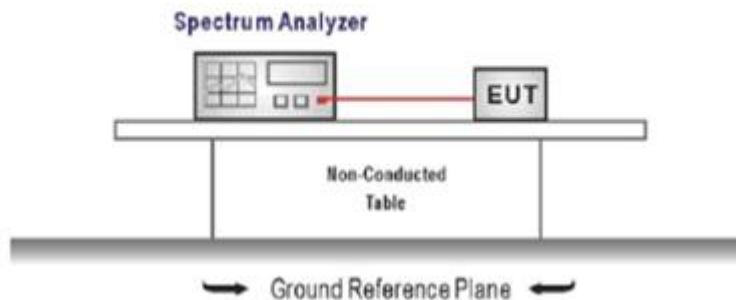

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Please refer to appendix C on the appendix report


5.6. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

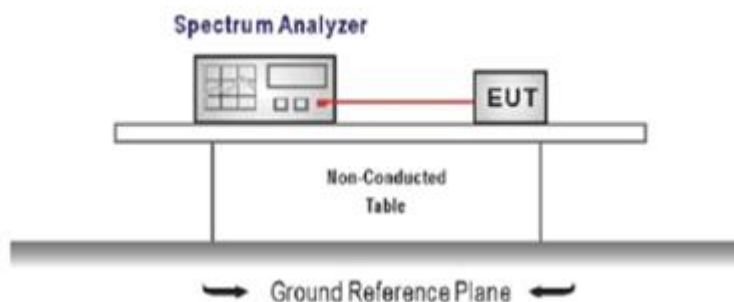

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq$ 1% of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE

Please refer to the clause 4.3

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA

Please refer to appendix D on the appendix report


5.7. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

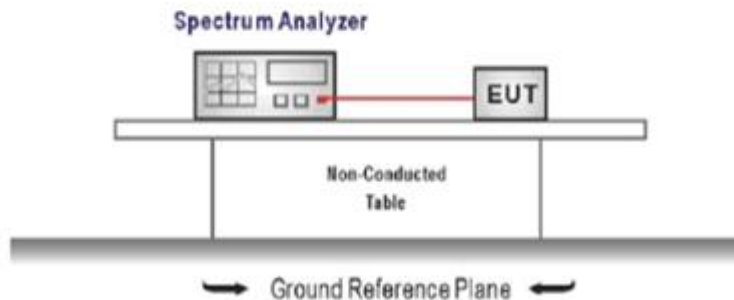

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW $\geq$ 1% of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE

Please refer to the clause 4.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

TEST DATA


Please refer to appendix E on the appendix report

5.8. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

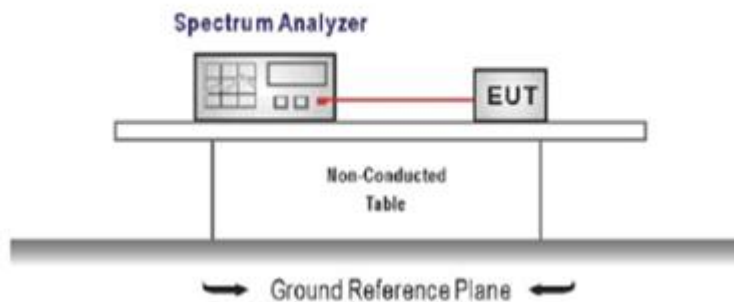

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE

Please refer to the clause 4.3

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA


Please refer to appendix F on the appendix report

5.9. Duty Cycle Correction Factor (DCCF)

LIMIT

N/A

TEST CONFIGURATION

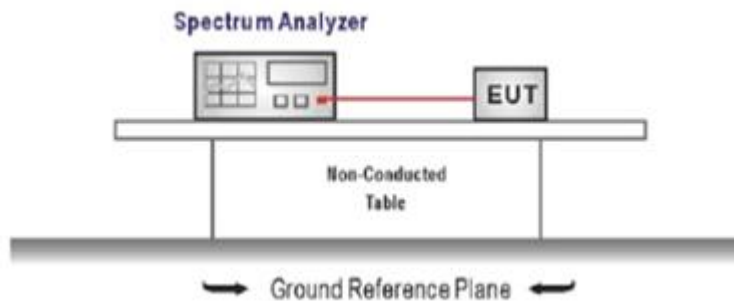

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Please refer to the clause 4.3

TEST DATA

Please refer to appendix G on the appendix report

5.10. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

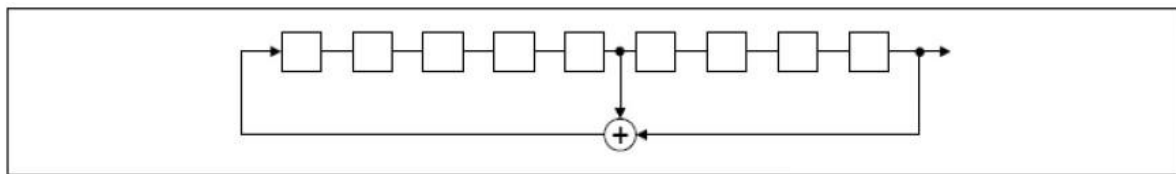

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

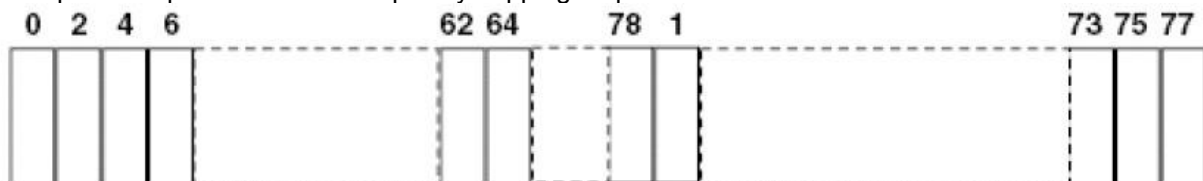

Each frequency used equally on the average by each transmitter.


The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

5.11. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

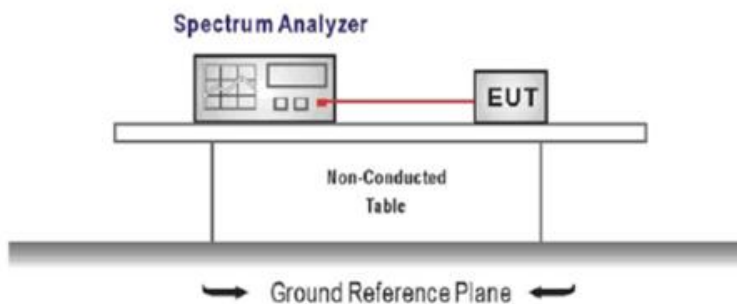

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Please refer to appendix H on the appendix report


5.12. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

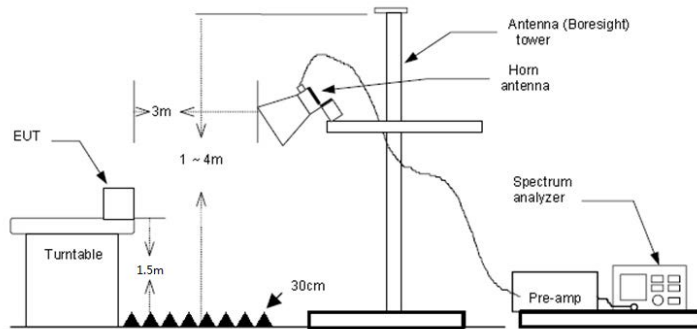

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF)
 Averager level = Peak level + DCCF

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level- Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Test channel:		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	42.13	27.96	3.89	37.56	36.42	74.00	-37.58	Peak
2	2381.59	50.45	27.74	3.98	37.47	44.70	74.00	-29.30	Peak
3	2390.03	47.09	27.72	3.99	37.45	41.35	74.00	-32.65	Peak

Test channel:		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	42.87	27.96	3.89	37.56	37.16	74.00	-36.84	Peak
2	2329.66	47.72	27.88	3.92	37.54	41.98	74.00	-32.02	Peak
3	2390.03	42.71	27.72	3.99	37.45	36.97	74.00	-37.03	Peak

Test channel:		CH78			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	59.07	27.43	4.03	37.26	53.27	74.00	-20.73	Peak
2	2500.00	51.96	27.40	4.04	37.26	46.14	74.00	-27.86	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBμV/m]	DCCF [dB]	Level [dBμV/m]	Limit [dBμV/m]	Over Limit [dB]	Polarity		
1	2483.50	53.27	-24.82	28.45	54.00	-25.55	Horizontal		
2	2500.00	46.14	-24.82	21.32	54.00	-32.68	Horizontal		

Test channel:		CH78			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	53.58	27.43	4.03	37.26	47.78	74.00	-26.22	Peak
2	2500.00	46.85	27.40	4.04	37.26	41.03	74.00	-32.97	Peak

5.13. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

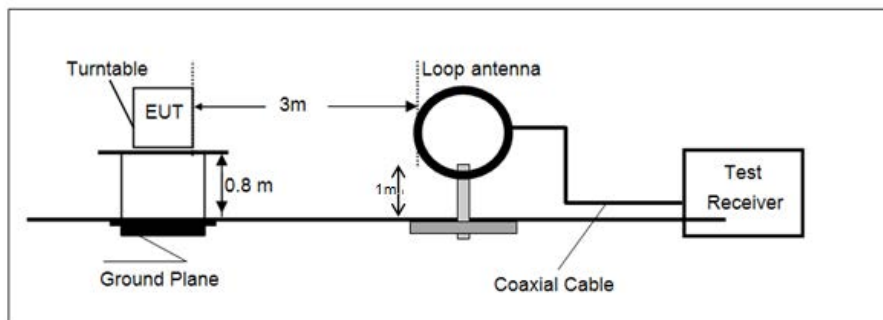

- 30 MHz ~ 1 GHz

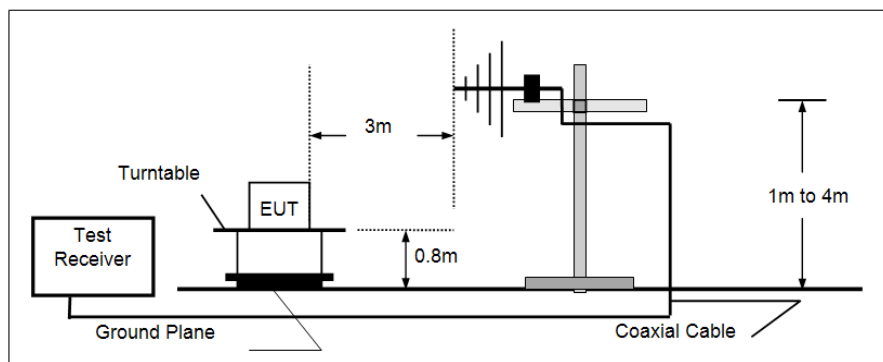

- Above 1 GHz

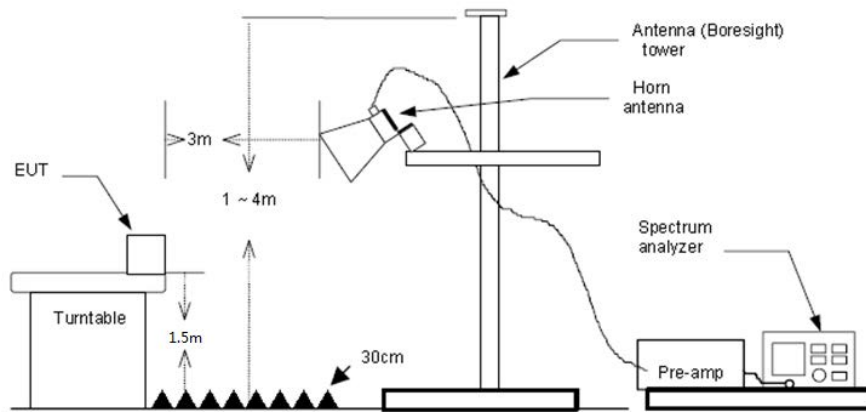

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF)

Averager level = Peak level + DCCF

TEST MODE

Please refer to the clause 4.3

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level- Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

For 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH39 which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

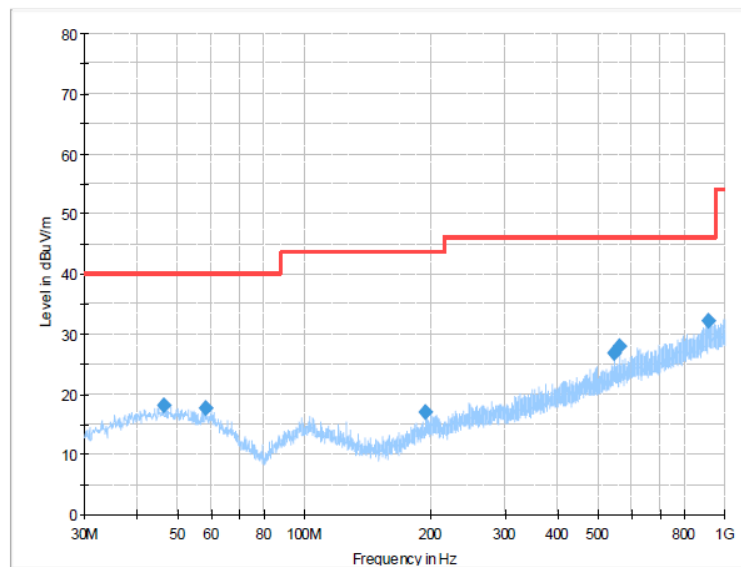


Serif;

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.368750	18.00	40.00	22.00	300.0	H	212.0	-9.3
58.372500	17.57	40.00	22.43	300.0	H	358.0	-9.9
193.808750	16.95	43.50	26.55	300.0	H	255.0	-11.0
544.948750	26.83	46.00	19.17	100.0	H	350.0	-0.6
563.742500	27.89	46.00	18.11	100.0	H	95.0	-0.1
911.972500	32.17	46.00	13.83	300.0	H	183.0	6.7

Polarization:

Vertical

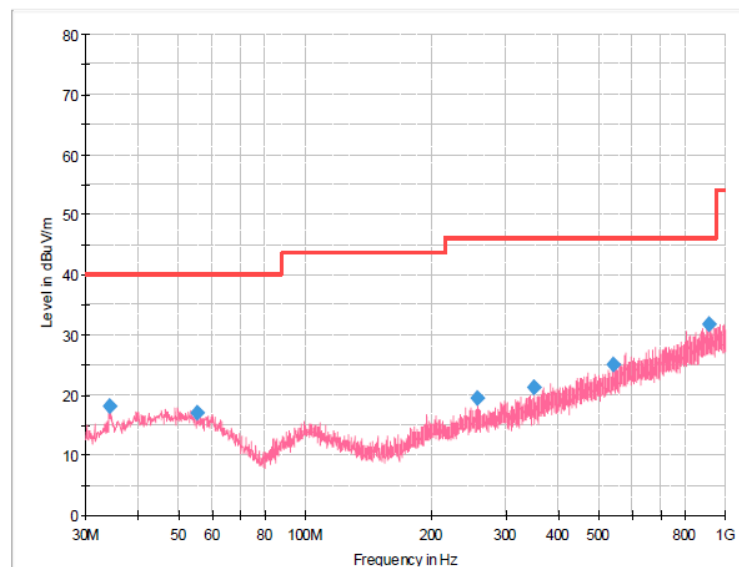

Serif;

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.365000	18.03	40.00	21.97	100.0	V	210.0	-11.3
55.462500	16.95	40.00	23.05	100.0	V	355.0	-9.6
257.465000	19.42	46.00	26.58	100.0	V	61.0	-8.9
349.978750	21.26	46.00	24.74	100.0	V	90.0	-5.9
542.523750	24.99	46.00	21.01	100.0	V	210.0	-0.6
915.731250	31.67	46.00	14.33	100.0	V	191.0	6.7

For 1 GHz ~ 25 GHz



Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2127.07	49.16	27.43	3.71	37.31	42.99	74.00	-31.01	Peak
2	2505.38	48.52	27.40	4.06	37.25	42.73	74.00	-31.27	Peak
3	7209.02	42.00	36.48	7.23	34.01	51.70	74.00	-22.30	Peak
4	9611.66	43.88	39.25	8.60	37.01	54.72	74.00	-19.28	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBμV/m]	DCCF [dB]	Level [dBμV/m]	Limit [dBμV/m]	Over Limit [dB]	Polarity		
1	2127.07	42.99	-24.82	18.17	54.00	-35.83	Horizontal		
2	2505.38	42.73	-24.82	17.91	54.00	-36.09	Horizontal		
3	7209.02	51.70	-24.82	26.88	54.00	-27.12	Horizontal		
4	9611.66	54.72	-24.82	29.90	54.00	-24.10	Horizontal		
Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1995.76	48.94	26.08	3.61	37.06	41.57	74.00	-32.43	Peak
2	2664.36	47.56	27.79	4.23	37.02	42.56	74.00	-31.44	Peak
3	5762.24	45.58	31.92	6.63	34.86	49.27	74.00	-24.73	Peak
4	9611.66	40.20	39.25	8.60	37.01	51.04	74.00	-22.96	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBμV/m]	DCCF [dB]	Level [dBμV/m]	Limit [dBμV/m]	Over Limit [dB]	Polarity		
1	1995.76	41.57	-24.82	16.75	54.00	-37.25	Vertical		
2	2664.36	42.56	-24.82	17.74	54.00	-36.26	Vertical		
3	5762.24	49.27	-24.82	24.45	54.00	-29.55	Vertical		
4	9611.66	51.04	-24.82	26.22	54.00	-27.78	Vertical		


Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2127.07	49.16	27.43	3.71	37.31	42.99	74.00	-31.01	Peak
2	2505.38	48.52	27.40	4.06	37.25	42.73	74.00	-31.27	Peak
3	7319.96	41.35	36.44	7.30	34.10	50.99	74.00	-23.01	Peak
4	9784.47	43.92	39.60	8.44	36.17	55.79	74.00	-18.21	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBuV/m]	DCCF [dB]	Level [dBuV/m]	Limit [dBuV/m]	Over Limit [dB]	Polarity		
1	2127.07	42.99	-24.82	18.17	54.00	-35.83	Horizontal		
2	2505.38	42.73	-24.82	17.91	54.00	-36.09	Horizontal		
3	7319.96	50.99	-24.82	26.17	54.00	-27.83	Horizontal		
4	9784.47	55.79	-24.82	30.97	54.00	-23.03	Horizontal		
Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1995.76	48.94	26.08	3.61	37.06	41.57	74.00	-32.43	Peak
2	2664.36	47.56	27.79	4.23	37.02	42.56	74.00	-31.44	Peak
3	5762.24	46.34	31.92	6.63	34.86	50.03	74.00	-23.97	Peak
4	9784.47	41.13	39.60	8.44	36.17	53.00	74.00	-21.00	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBuV/m]	DCCF [dB]	Level [dBuV/m]	Limit [dBuV/m]	Over Limit [dB]	Polarity		
1	1995.76	41.57	-24.82	16.75	54.00	-37.25	Vertical		
2	2664.36	42.56	-24.82	17.74	54.00	-36.26	Vertical		
3	5762.24	50.03	-24.82	25.21	54.00	-28.79	Vertical		
4	9784.47	53.00	-24.82	28.18	54.00	-25.82	Vertical		

Test channel		CH78			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2127.07	49.16	27.43	3.71	37.31	42.99	74.00	-31.01	Peak
2	2505.38	48.52	27.40	4.06	37.25	42.73	74.00	-31.27	Peak
3	7451.57	40.95	36.60	7.34	33.97	50.92	74.00	-23.08	Peak
4	9935.05	45.02	39.57	8.72	37.33	55.98	74.00	-18.02	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBuV/m]	DCCF [dB]	Level [dBuV/m]	Limit [dBuV/m]	Over Limit [dB]	Polarity		
1	2127.07	42.99	-24.82	18.17	54.00	-35.83	Horizontal		
2	2505.38	42.73	-24.82	17.91	54.00	-36.09	Horizontal		
3	7451.57	50.92	-24.82	26.10	54.00	-27.90	Horizontal		
4	9935.05	55.98	-24.82	31.16	54.00	-22.84	Horizontal		
Test channel		CH78			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1995.76	48.94	26.08	3.61	37.06	41.57	74.00	-32.43	Peak
2	2664.36	47.56	27.79	4.23	37.02	42.56	74.00	-31.44	Peak
3	5762.24	45.89	31.92	6.63	34.86	49.58	74.00	-24.42	Peak
4	9935.05	41.02	39.57	8.72	37.33	51.98	74.00	-22.02	Peak
Spurious Emission of Average									
No.	Freq. [MHz]	PK level [dBuV/m]	DCCF [dB]	Level [dBuV/m]	Limit [dBuV/m]	Over Limit [dB]	Polarity		
1	1995.76	41.57	-24.82	16.75	54.00	-37.25	Vertical		
2	2664.36	42.56	-24.82	17.74	54.00	-36.26	Vertical		
3	5762.24	49.58	-24.82	24.76	54.00	-29.24	Vertical		
4	9935.05	51.98	-24.82	27.16	54.00	-26.84	Vertical		

6. TEST SETUP PHOTOS

Radiated Emission

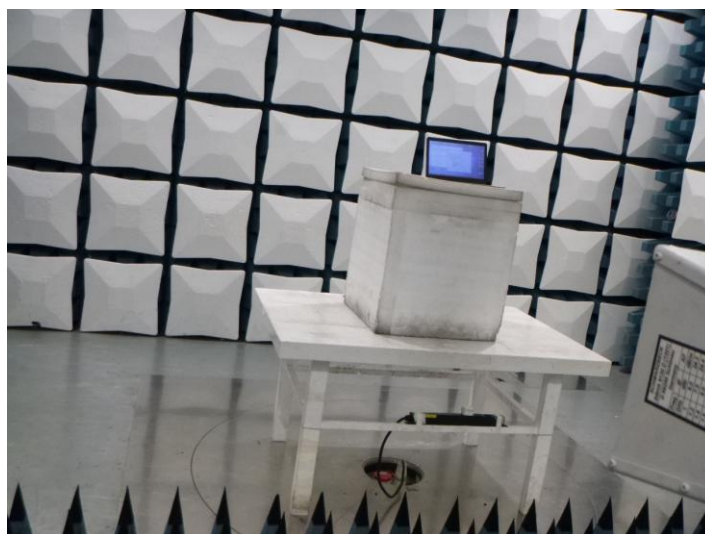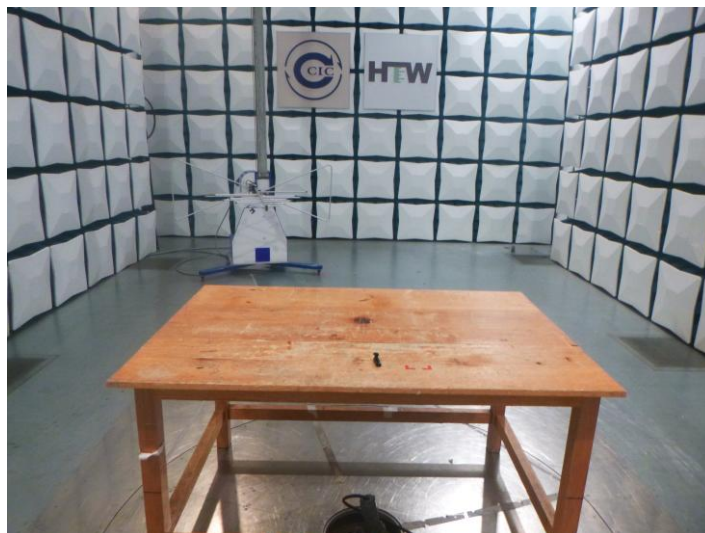

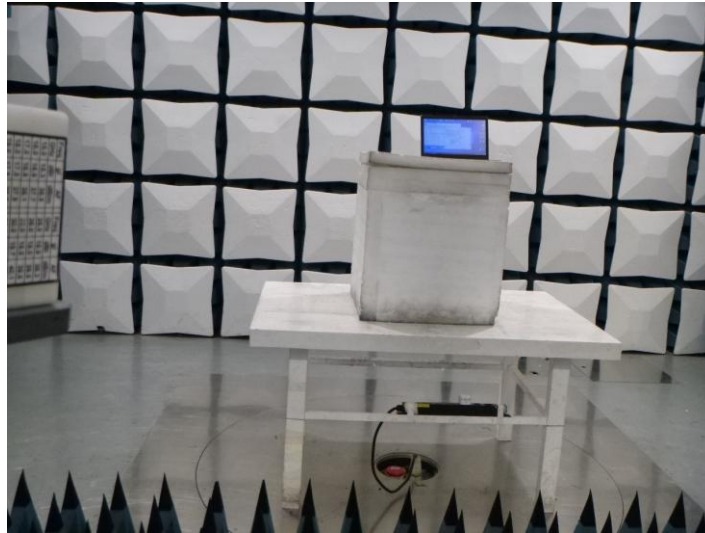

AC Conducted Emission



7. EXTERNAL AND INTERNAL PHOTOS

Refer to the test report No.: CHTEW22100047

8. APPENDIX REPORT




APPENDIX REPORT

Project No.	SHT2209084902EW	Radio Specification	Bluetooth EDR
Test sample No.	YPHT22090849003	Model No.	EB121
Start test date	2022-10-11	Finish date	2022-10-12
Temperature	24.9℃	Humidity	28%
Test Engineer	Xiaoxiao Li	Auditor	Xiaodong Zhuo

Appendix clause	Test item	Result
A	Peak Output Power	PASS
B	20 dB Bandwidth	PASS
C	99% Occupied Bandwidth	PASS
D	Carrier Frequencies Separation	PASS
E	Hopping Channel Number	PASS
F	Dwell Time	PASS
G	Duty Cycle Correction Factor (DCCF)	PASS
H	Band edge and Spurious Emissions(coducted)	PASS

Appendix A: Peak Output Power


Modulation type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.01	1.93	≤ 30.00	Pass
	39	2.53	2.48		
	78	2.56	2.54		
$\pi/4$ DQPSK	00	2.62	1.79	≤ 21.00	Pass
	39	3.15	2.54		
	78	3.35	2.84		
8DPSK	00	3.07	2.23	≤ 21.00	Pass
	39	2.96	2.03		
	78	2.70	1.94		

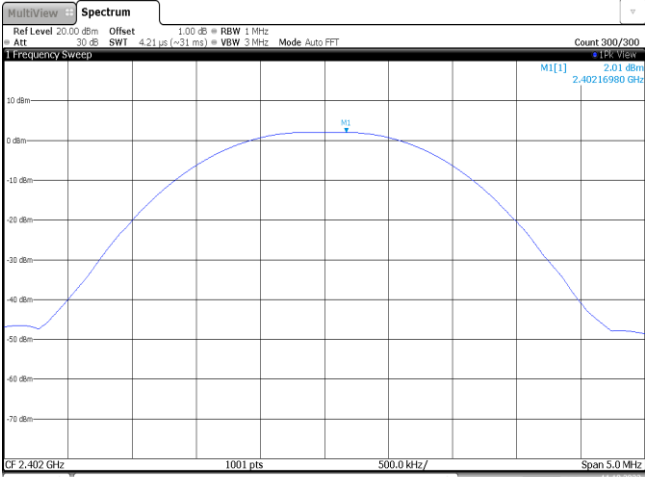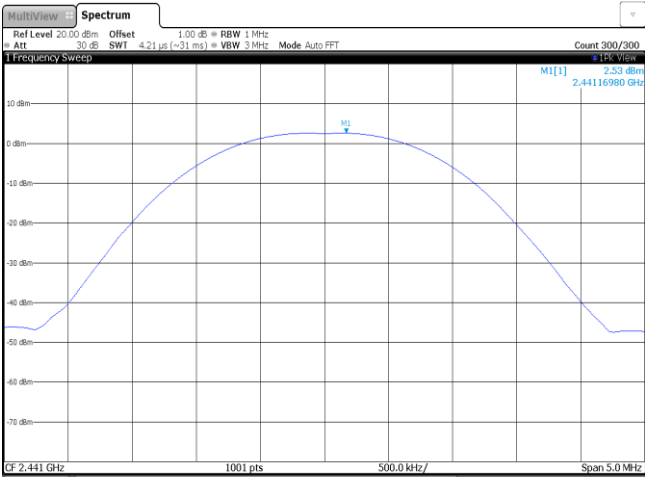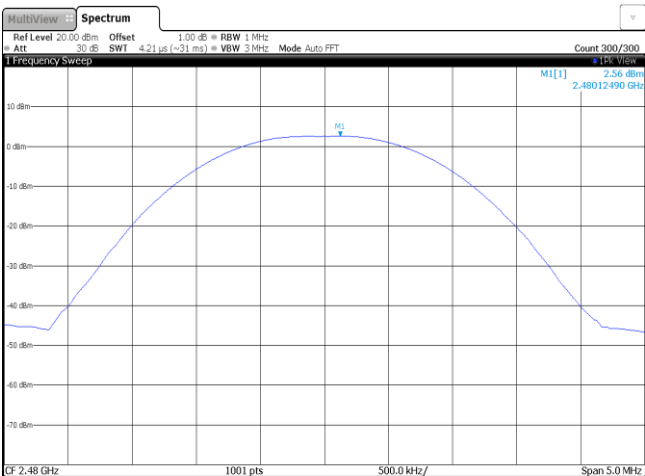Modulation Type:	GFSK
CH00	 Ref Level 20.00 dBm Offset 30 dB SWI 4.21 us (~31 ms) VBW 3 MHz Mode Auto FFT Count 300/300 M1[1] 2.01 dBm 2.40216980 GHz CF 2.402 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 11 OCT 2022 15:07:38
CH39	 Ref Level 20.00 dBm Offset 30 dB SWI 4.21 us (~31 ms) VBW 3 MHz Mode Auto FFT Count 300/300 M1[1] 2.53 dBm 2.44116980 GHz CF 2.441 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 11 OCT 2022 15:01:06
CH78	 Ref Level 20.00 dBm Offset 30 dB SWI 4.21 us (~31 ms) VBW 3 MHz Mode Auto FFT Count 300/300 M1[1] 2.56 dBm 2.48012490 GHz CF 2.48 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 11 OCT 2022 15:03:44


Modulation Type:

$\pi/4$ DQPSK


CH00

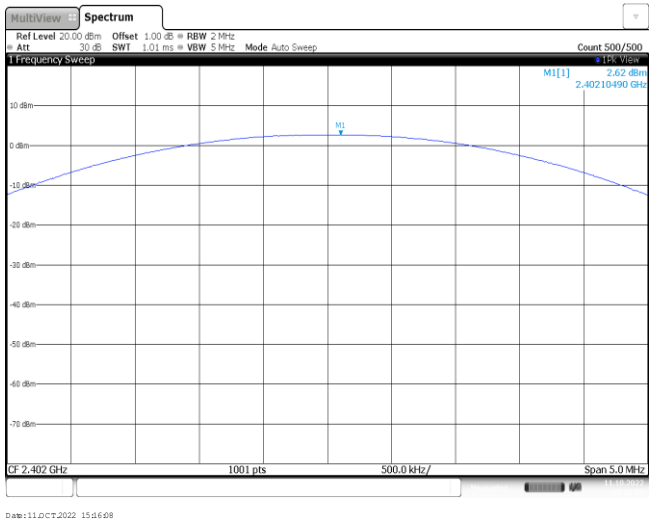

CH39

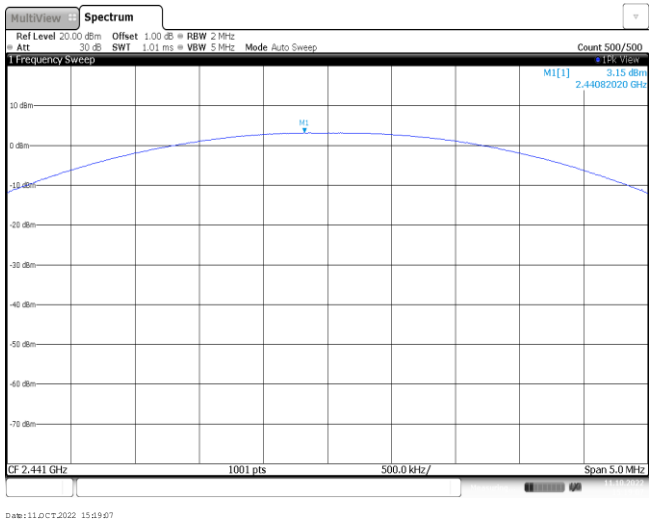


CH78

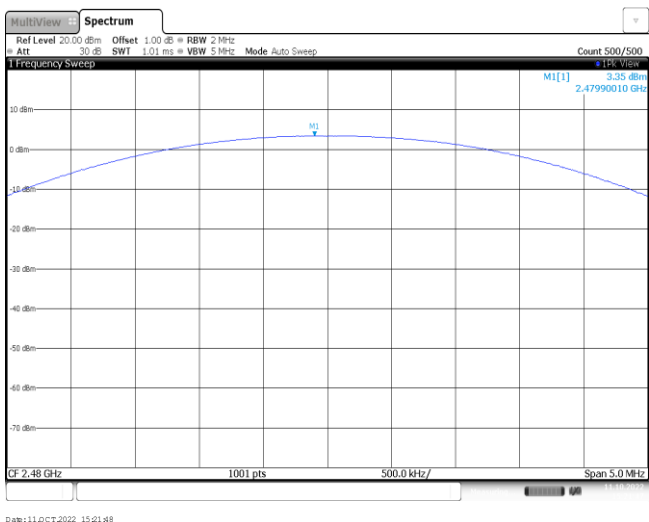


Modulation Type:

8DPSK


CH00

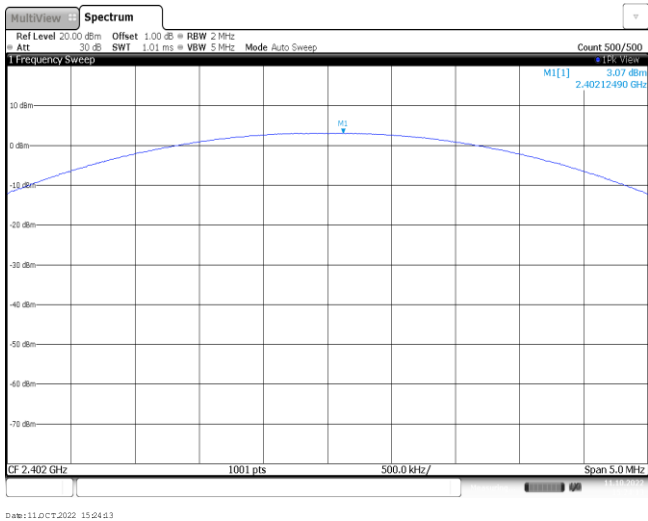

CH39

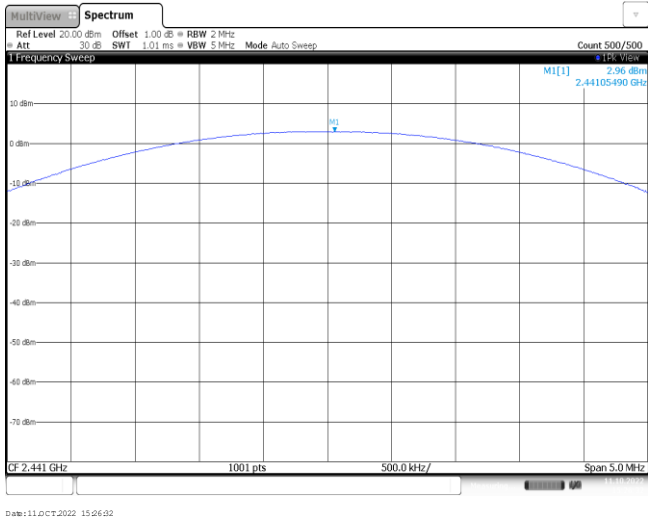

CH78

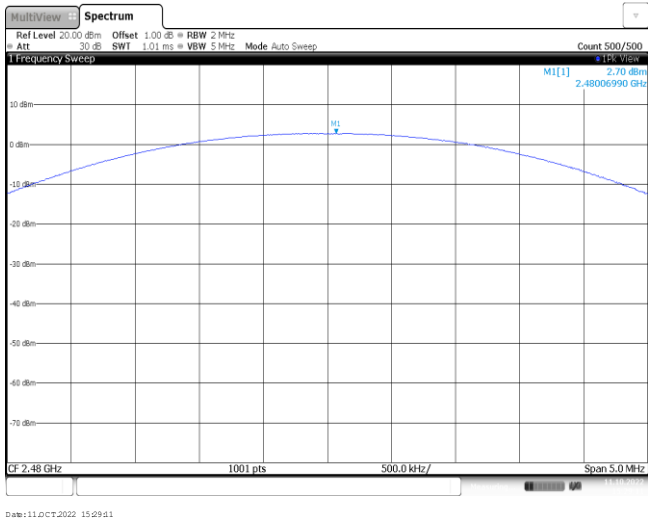


Appendix B : 20 dB Bandwidth

Modulation type	Channel	20 dB Bandwidth (kHz)	Limit (kHz)	Result
GFSK	00	922.50	-	Pass
	39	922.50		
	78	925.00		
$\pi/4$ DQPSK	00	1327.50	-	Pass
	39	1322.50		
	78	1327.50		
8DPSK	00	1320.00	-	Pass
	39	1327.50		
	78	1330.00		


Modulation Type:

GFSK


CH00

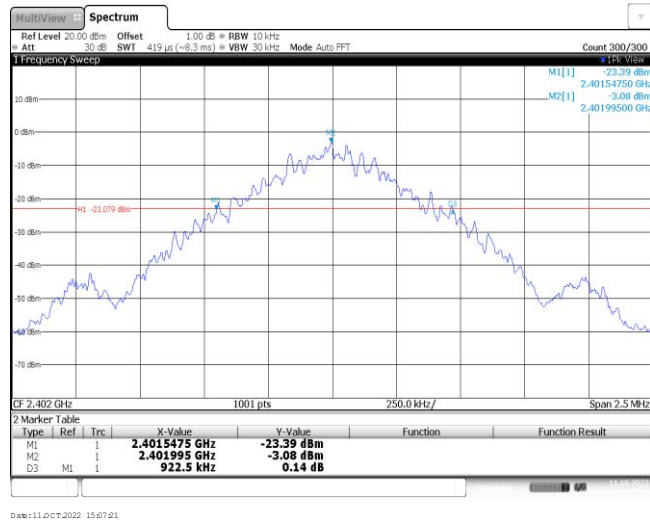

CH39

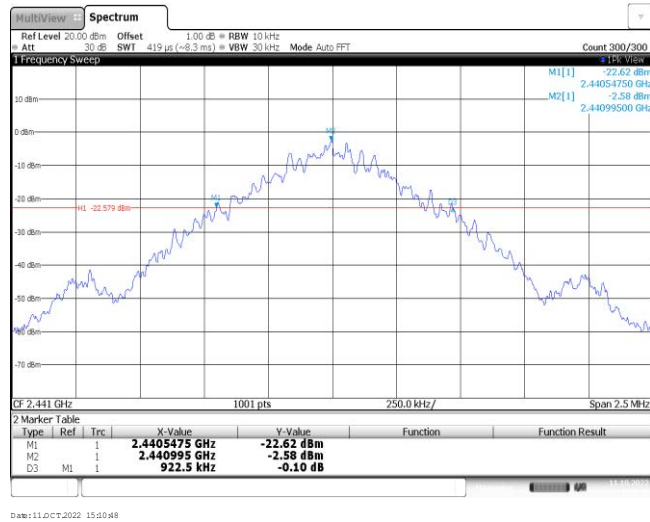


CH78

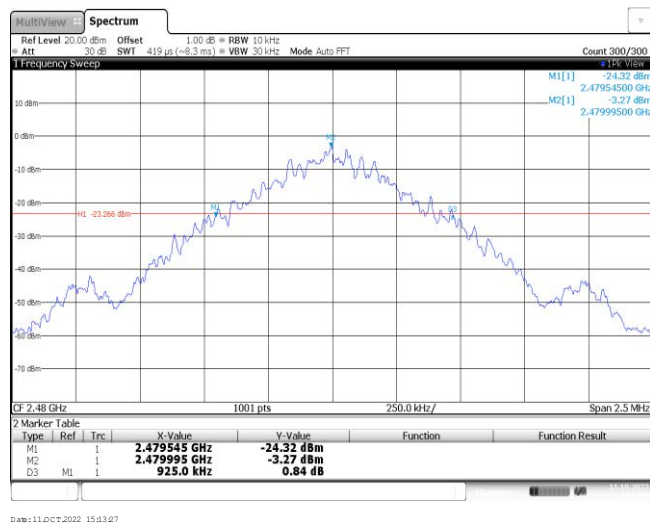


Modulation Type:

 $\pi/4$ DQPSK


CH00

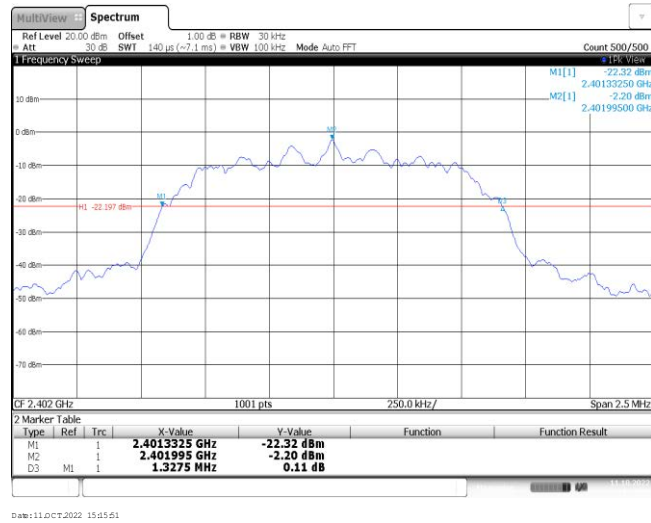

CH39

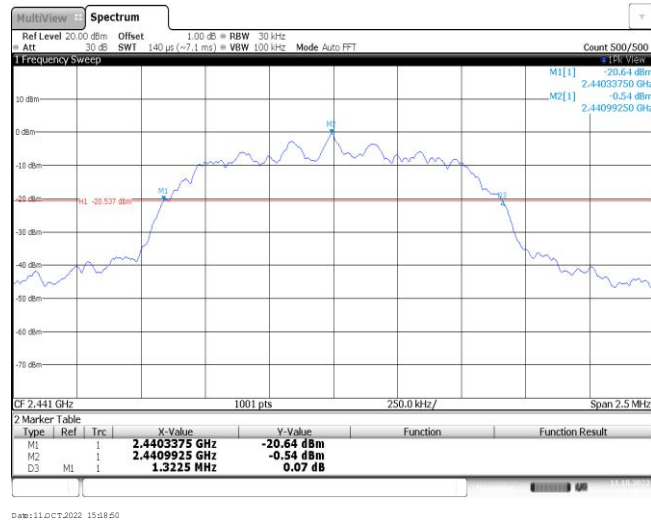


CH78

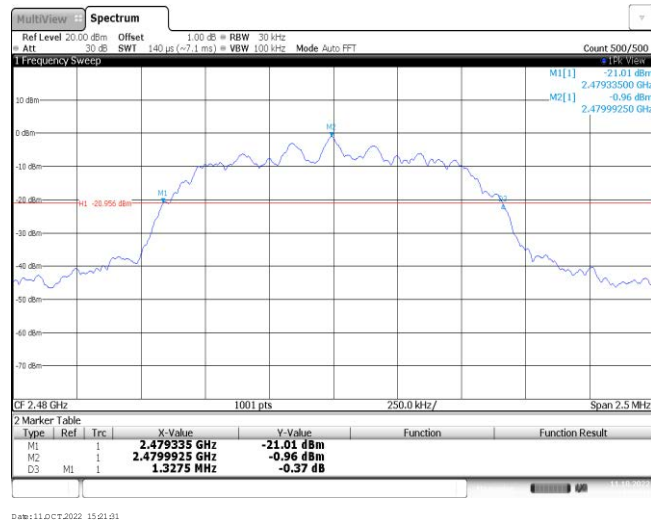


Modulation Type:

8DPSK


CH00

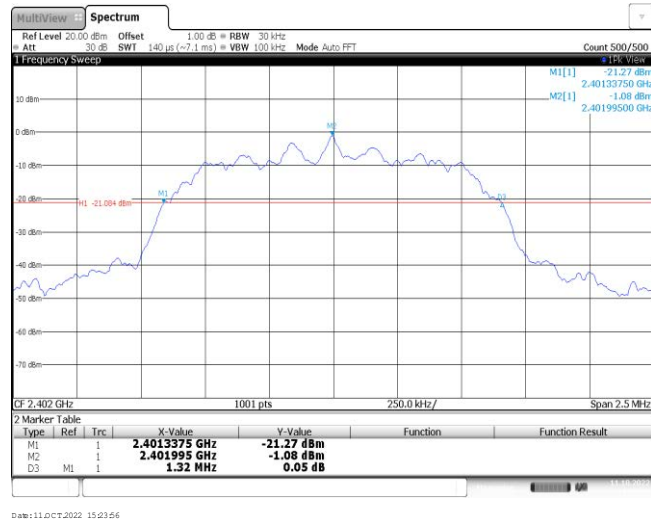

CH39

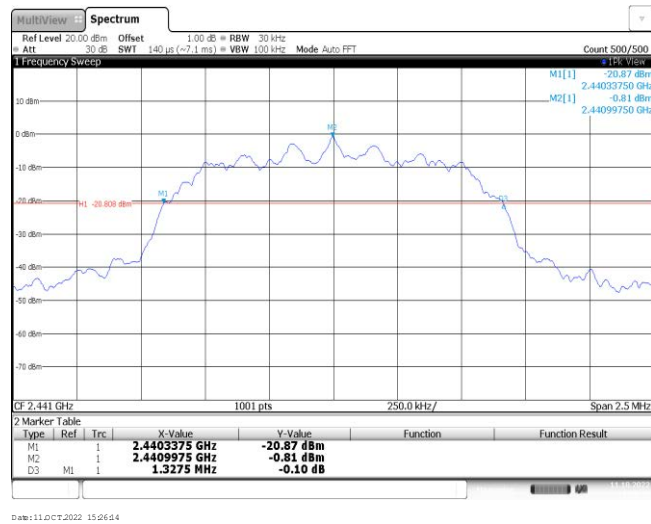

CH78

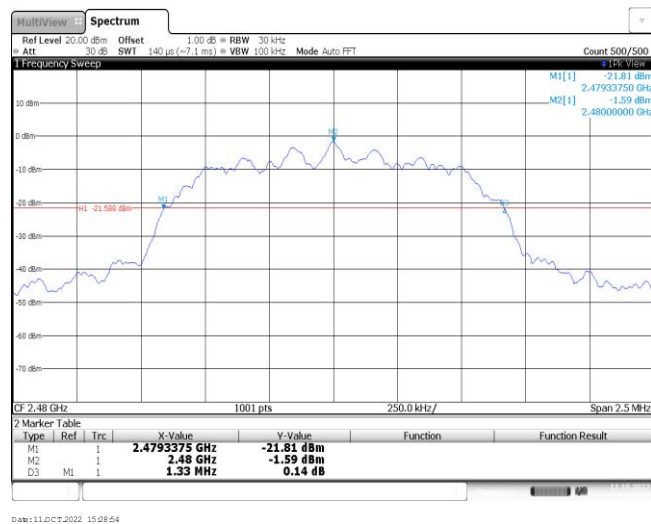

Appendix C: 99% Occupied Bandwidth

Modulation type	Channel	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.89	-	Pass
	39	0.90		
	78	0.90		
$\pi/4$ DQPSK	00	1.19	-	Pass
	39	1.19		
	78	1.19		
8DPSK	00	1.18	-	Pass
	39	1.19		
	78	1.19		


Modulation Type:

GFSK


CH00



CH39

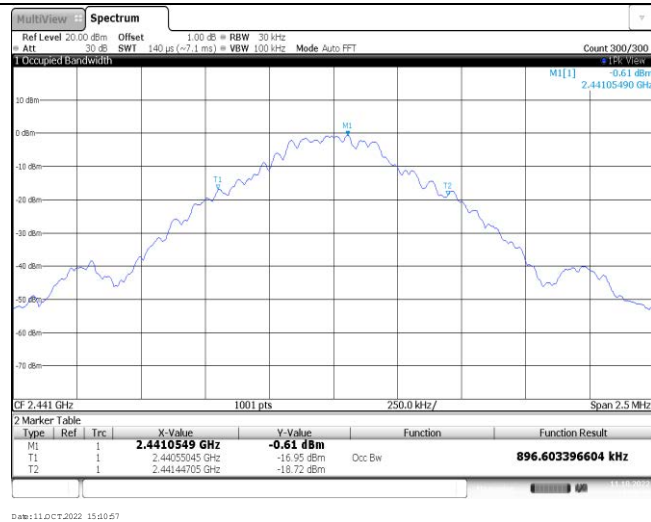

CH78

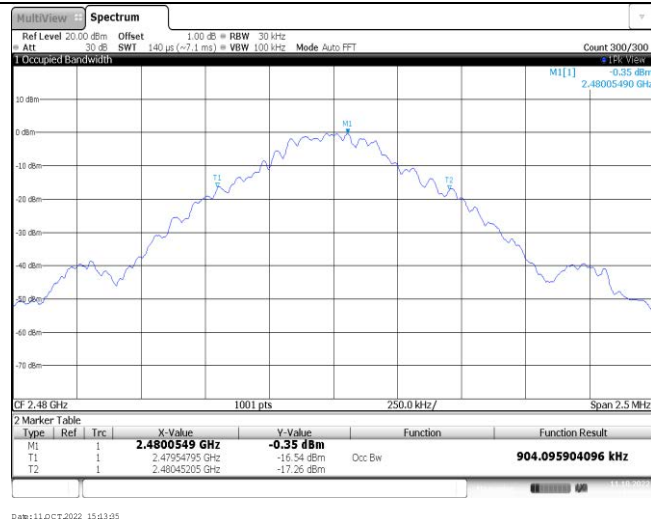


Modulation Type:

π /4DQPSK

CH00



CH39

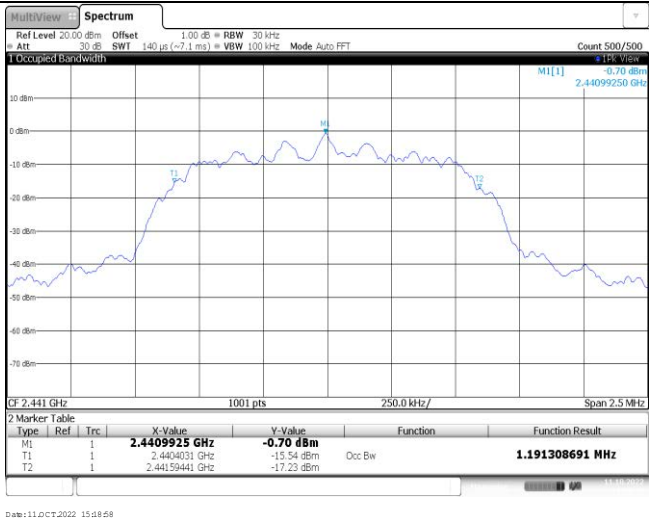

CH78



Modulation Type:


8DPSK

CH00



Date: 11/01/2022 15:24:04

CH39

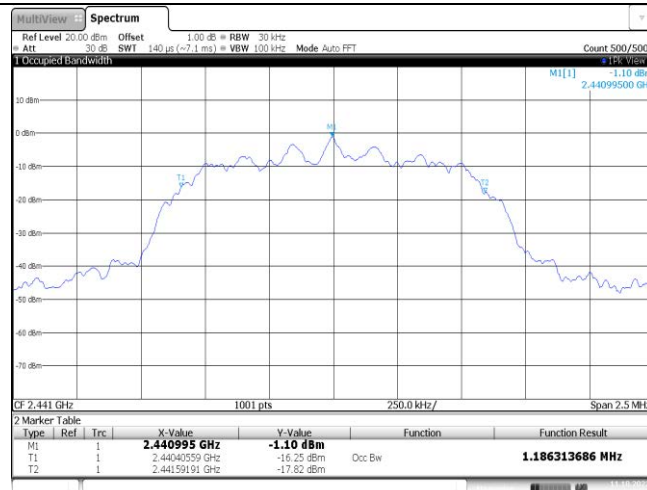

Date: 11/01/2022 15:26:23

CH78



Date: 11/01/2022 15:29:02

Appendix D: Carrier Frequencies Separation

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz) *	Result
GFSK	39	1.00	≥925.00	Pass
π/4DQPSK	39	1.00	≥885.00	Pass
8DPSK	39	1.00	≥886.67	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the appendix B.

π/4DQPSK limit = 2/3 * The maximum 20 dB Bandwidth for π/4DQPSK modulation on the appendix B.



8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the appendix B

Appendix report page: 15 of 41


Appendix E: Hopping Channel Number

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4DQPSK	79		
8DPSK	79		

GFSK

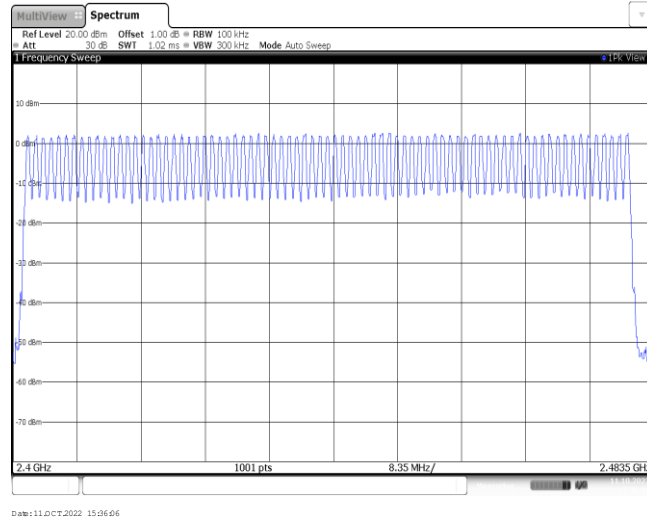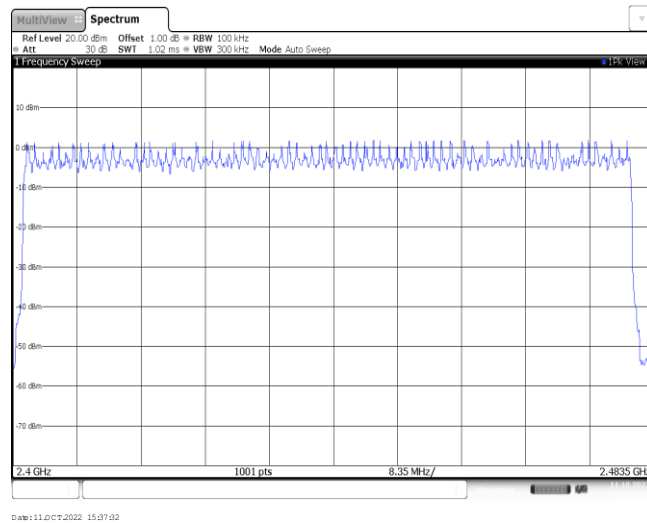 $\pi/4$ DQPSK

8DPSK

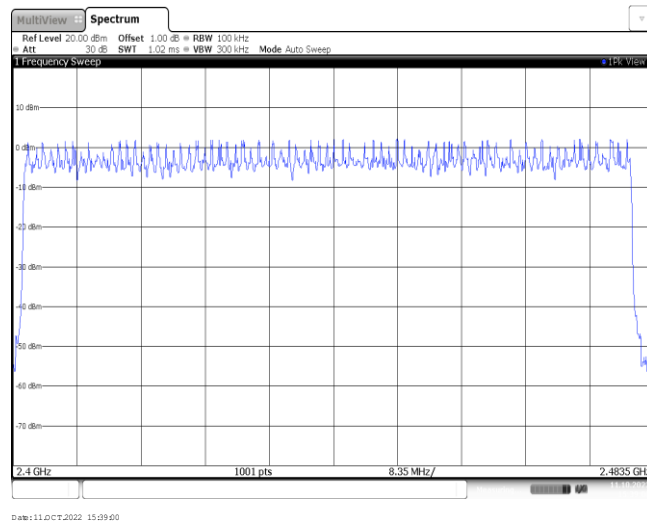


Appendix F: Dwell Time

Modulation type	Packet	Burst Width [ms]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.38	317	0.12	≤ 0.40	Pass
	DH3	1.64	157	0.26		
	DH5	2.89	99	0.29		
$\pi/4$ DQPSK	2DH1	0.39	316	0.12	≤ 0.40	Pass
	2DH3	1.64	162	0.27		
	2DH5	2.89	102	0.30		
8DPSK	3DH1	0.39	320	0.13	≤ 0.40	Pass
	3DH3	1.64	166	0.27		
	3DH5	2.89	106	0.31		


Modulation Type:

GFSK


DH1
Burst width



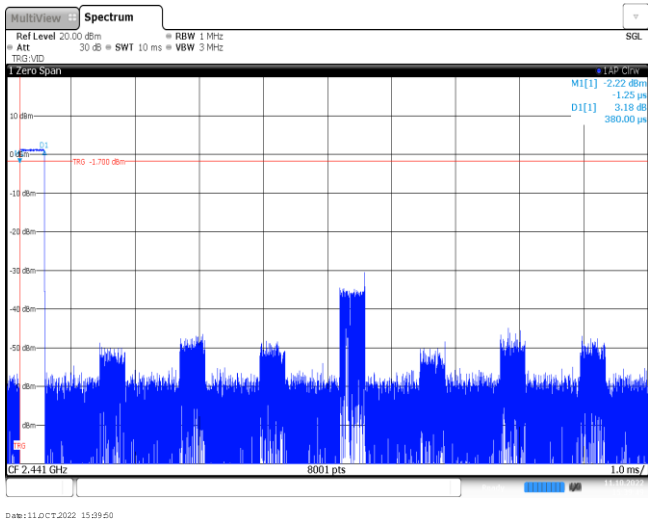


DH1
Burst number



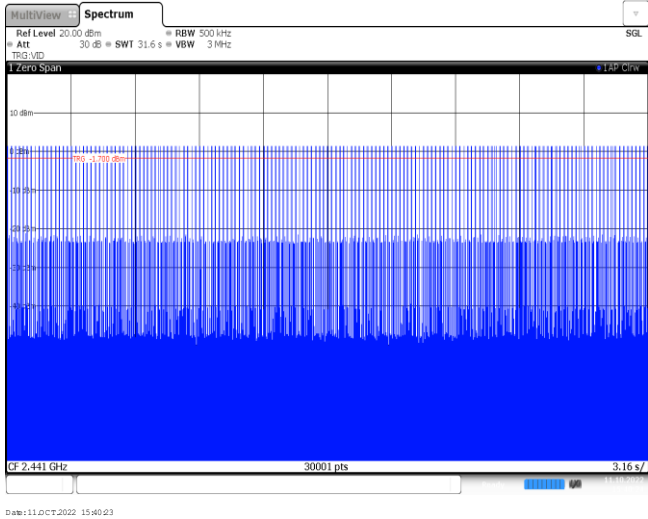


DH3
Burst width



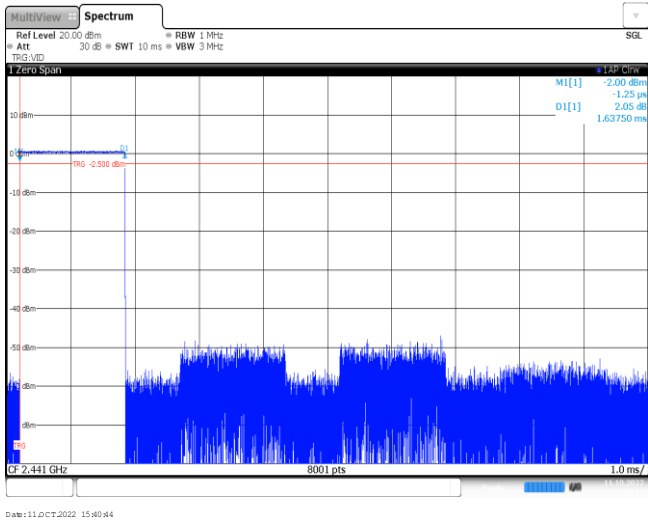


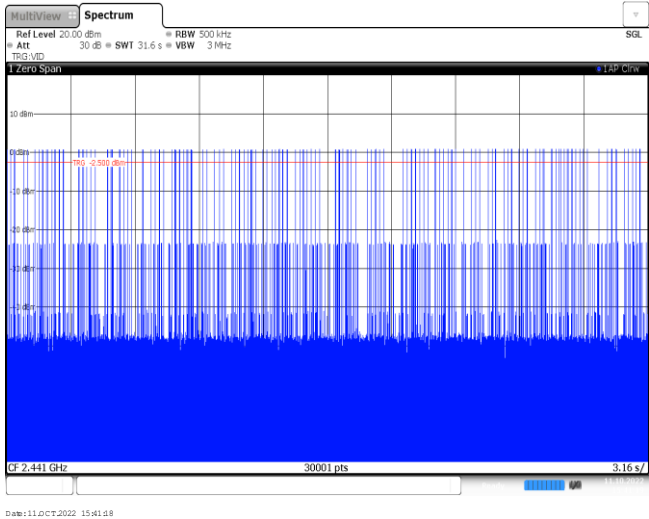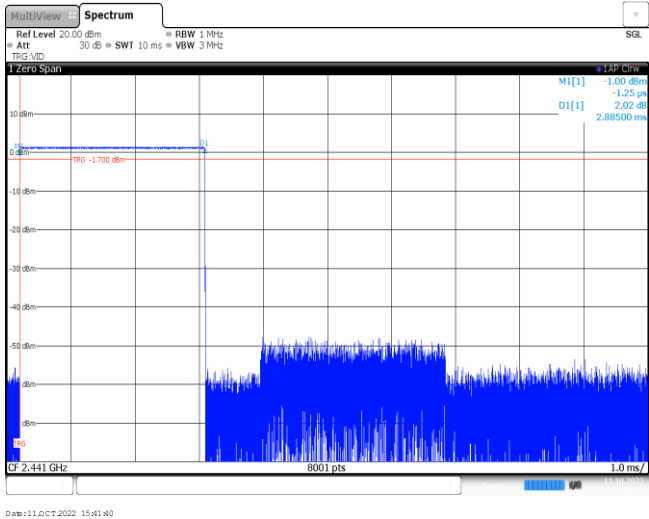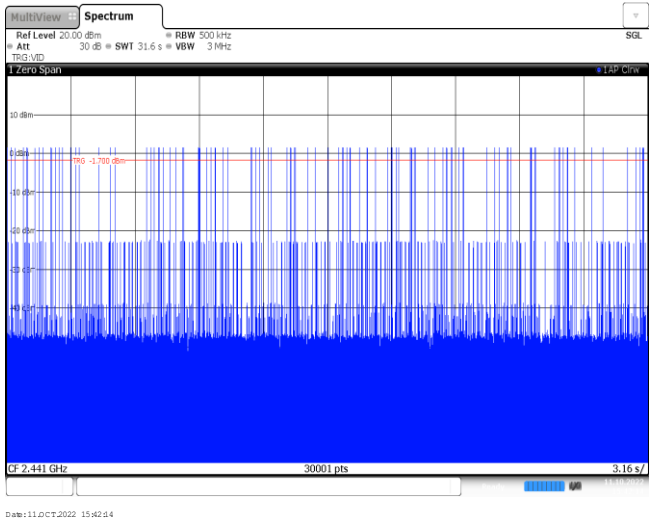DH3 Burst number	
DH5 Burst width	
DH5 Burst number	

Modulation Type: $\pi/4$ DQPSK	
2DH1 Burst width	
2DH1 Burst number	
2DH3 Burst width	

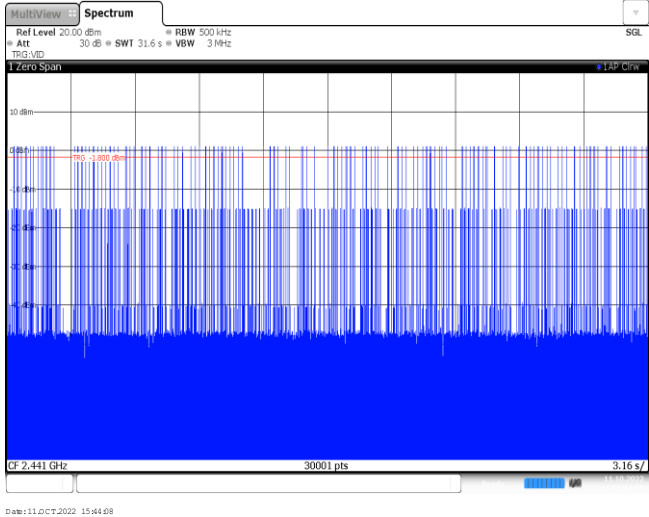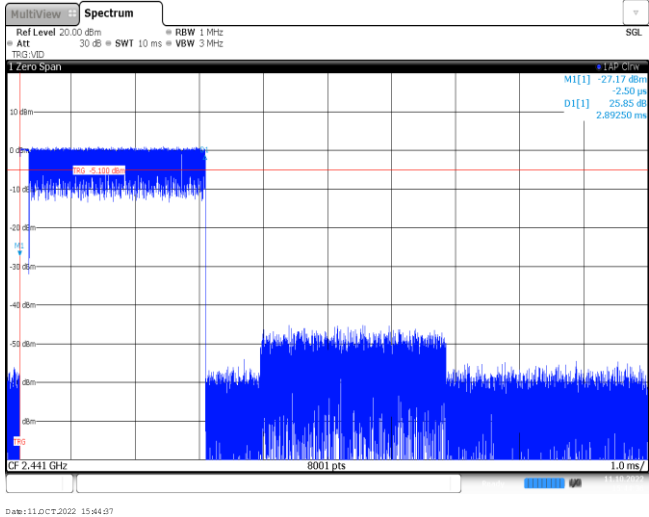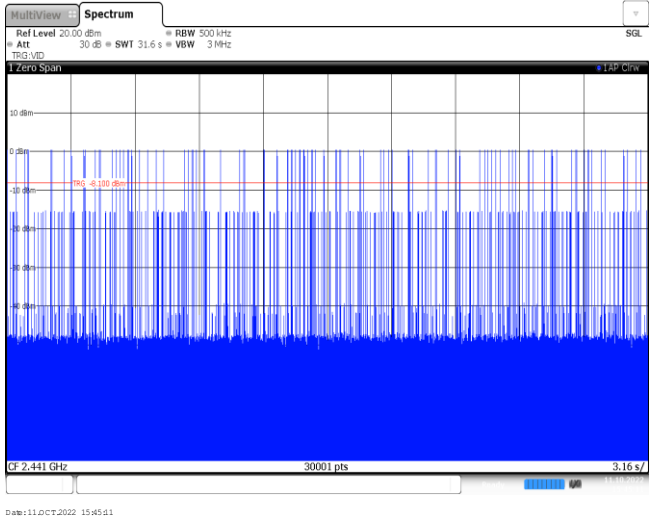2DH3 Burst number	
2DH5 Burst width	
2DH5 Burst number	


Modulation Type:		8DPSK
3DH1 Burst width		
3DH1 Burst number		
3DH3 Burst width		

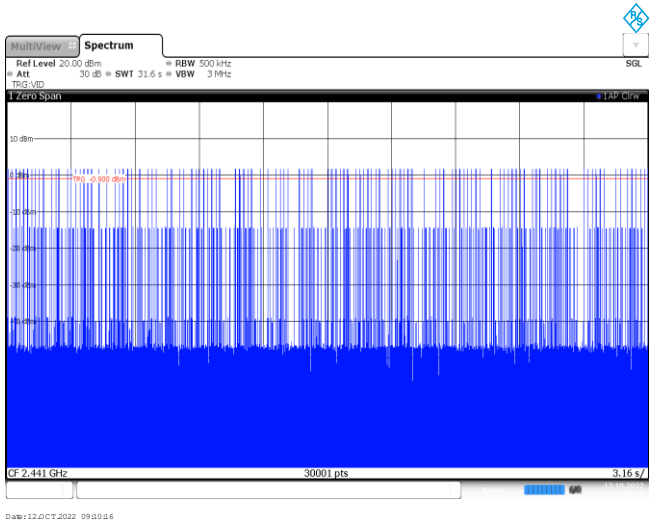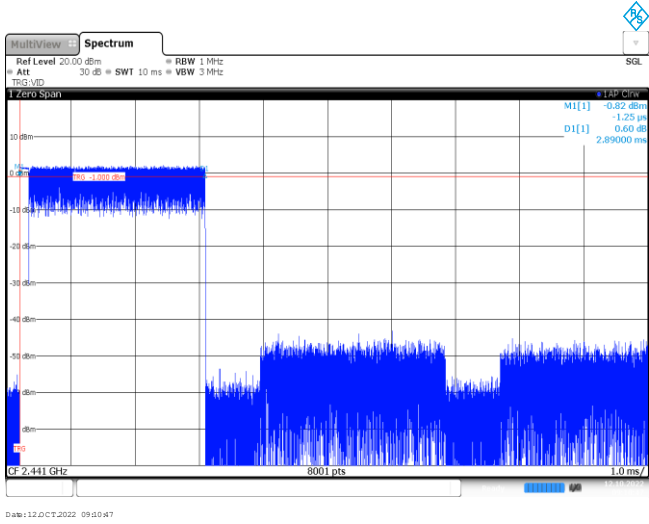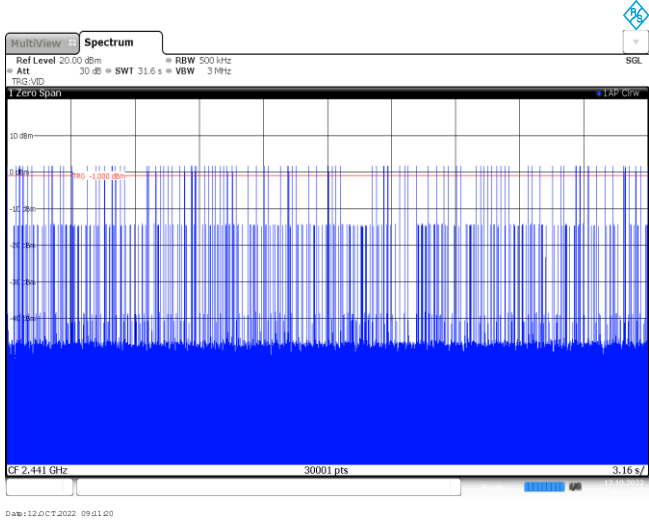3DH3 Burst number	 The spectrum plot shows a signal centered at 2.441 GHz with a span of 30001 pts. The y-axis represents power in dBm, ranging from -100 to 10. The x-axis represents frequency in MHz, ranging from 2.435 to 2.447. The signal is characterized by a dense, noisy burst. The plot includes a reference level of 20.00 dBm, an attenuation of 30 dB, a resolution bandwidth (RBW) of 500 kHz, a sweep time (SWT) of 31.6 s, and a video bandwidth (VBW) of 3 MHz. The date is 12/01/2022 09:10:16.
3DH5 Burst width	 The spectrum plot shows a signal centered at 2.441 GHz with a span of 8001 pts. The y-axis represents power in dBm, ranging from -100 to 10. The x-axis represents frequency in MHz, ranging from 2.435 to 2.447. The signal is characterized by a dense, noisy burst. The plot includes a reference level of 20.00 dBm, an attenuation of 30 dB, a resolution bandwidth (RBW) of 1 MHz, a sweep time (SWT) of 10 ms, and a video bandwidth (VBW) of 3 MHz. The date is 12/01/2022 09:10:17.
3DH5 Burst number	 The spectrum plot shows a signal centered at 2.441 GHz with a span of 30001 pts. The y-axis represents power in dBm, ranging from -100 to 10. The x-axis represents frequency in MHz, ranging from 2.435 to 2.447. The signal is characterized by a dense, noisy burst. The plot includes a reference level of 20.00 dBm, an attenuation of 30 dB, a resolution bandwidth (RBW) of 500 kHz, a sweep time (SWT) of 31.6 s, and a video bandwidth (VBW) of 3 MHz. The date is 12/01/2022 09:11:20.


Appendix G: Duty Cycle Correction Factor (DCCF)

DCCF Calculate Formula					
DCCF=20 * Log(duty cycle) = 20 * Log($T_{\text{on time}} / T_{\text{period}}$)					
Modulation type	Test Frequency (MHz)	$T_{\text{on time}}$ for single burst [ms]	T_{period} [ms]	Burst Quantity	DCCF [dB]
GFSK	2441	2.87	100	2	-24.82
$\pi/4$ DQPSK	2441	2.88	100	2	-24.79
8DPSK	2441	2.88	100	3	-21.27


GFSK

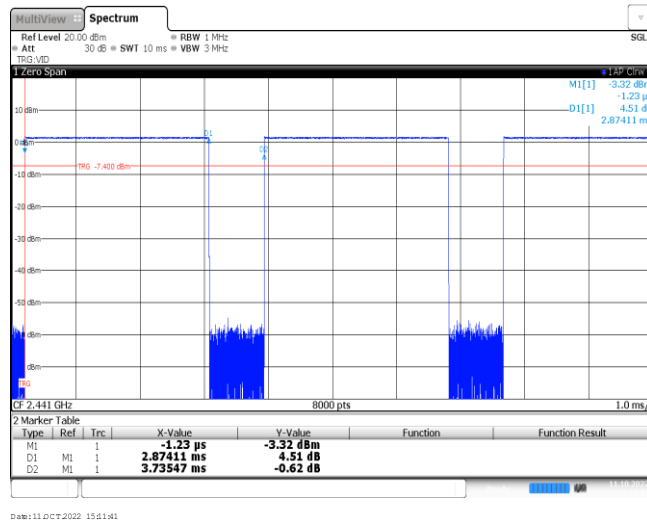


Ton time for single burst

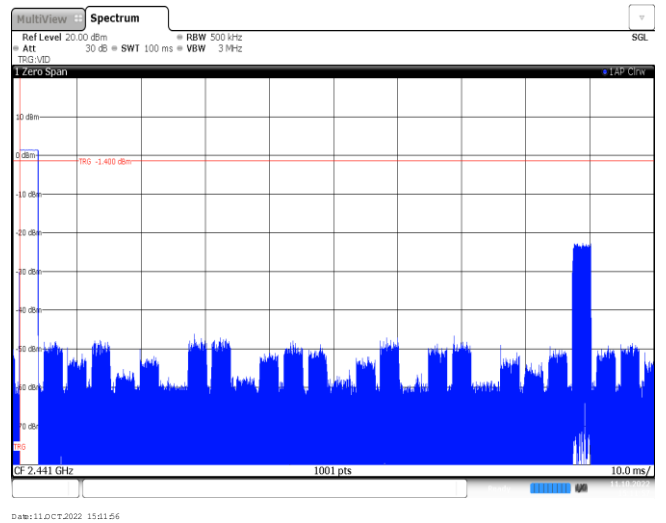

Burst Quantity

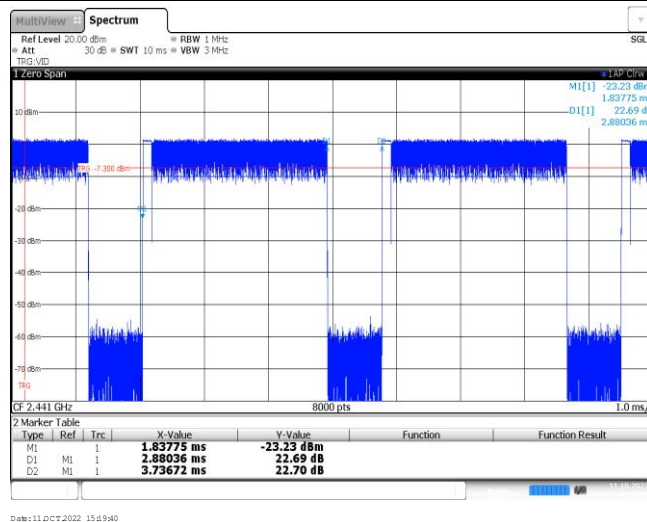
 $\pi/4$ DQPSK

Ton time for single burst

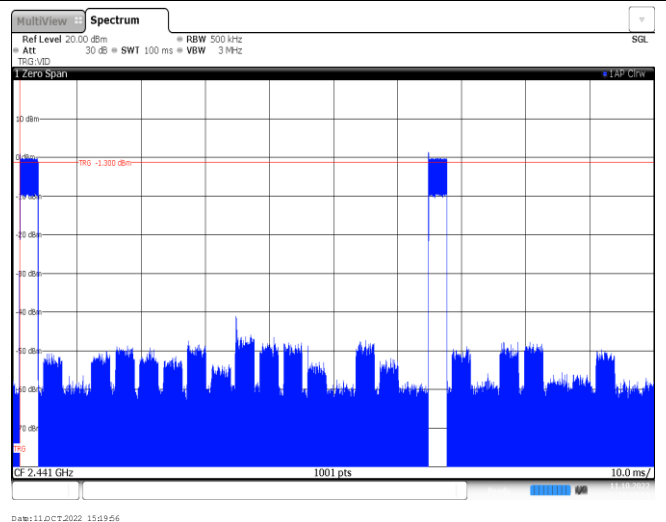


Burst Quantity

8DPSK

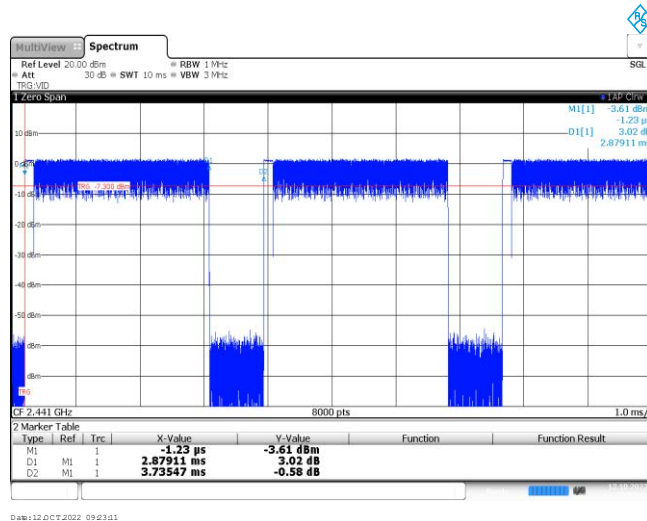

Ton time for single burst

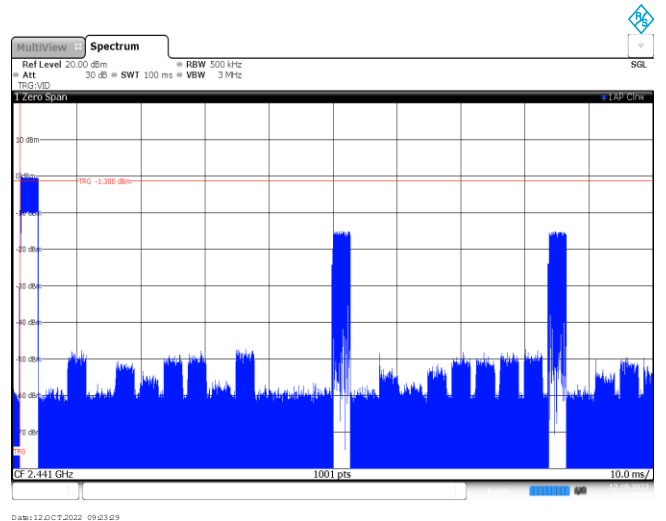


Burst Quantity

Appendix H: Band edge and Spurious Emissions (conducted)


Test Item:	Band edge	Modulation type:	GFSK																																										
CH00 No hopping mode	MultiViewSpectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SW 1.05 ms VBW 300 kHz Mode Auto Sweep Count 300/300 Frequency Sweep 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm 2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz M1[1] 1.98 dBm M2[1] 2.4020100 GHz M2[1] -48.18 dBm M2[1] 2.4000000 GHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40201 GHz</td><td>1.98 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-48.18 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-64.79 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-64.79 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399965 GHz</td><td>-48.42 dBm</td><td></td><td></td></tr></table> Date: 11.OCT.2022 15:08:04			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40201 GHz	1.98 dBm			M2	1		2.4 GHz	-48.18 dBm			M3	1		2.39 GHz	-64.79 dBm			M4	1		2.31 GHz	-64.79 dBm			M5	1		2.399965 GHz	-48.42 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.40201 GHz	1.98 dBm																																									
M2	1		2.4 GHz	-48.18 dBm																																									
M3	1		2.39 GHz	-64.79 dBm																																									
M4	1		2.31 GHz	-64.79 dBm																																									
M5	1		2.399965 GHz	-48.42 dBm																																									
CH00 Hopping mode	MultiViewSpectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SW 1.05 ms VBW 300 kHz Mode Auto Sweep Count 500/500 Frequency Sweep 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm 2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz M1[1] 1.48 dBm M2[1] 2.4048580 GHz M2[1] -54.51 dBm M2[1] 2.4000000 GHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.404858 GHz</td><td>1.48 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-54.51 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-55.20 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-62.35 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.3974 GHz</td><td>-52.24 dBm</td><td></td><td></td></tr></table> Date: 11.OCT.2022 15:06:01			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.404858 GHz	1.48 dBm			M2	1		2.4 GHz	-54.51 dBm			M3	1		2.39 GHz	-55.20 dBm			M4	1		2.31 GHz	-62.35 dBm			M5	1		2.3974 GHz	-52.24 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.404858 GHz	1.48 dBm																																									
M2	1		2.4 GHz	-54.51 dBm																																									
M3	1		2.39 GHz	-55.20 dBm																																									
M4	1		2.31 GHz	-62.35 dBm																																									
M5	1		2.3974 GHz	-52.24 dBm																																									
CH78 No hopping mode	MultiViewSpectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SW 1.02 ms VBW 300 kHz Mode Auto Sweep Count 300/300 Frequency Sweep 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm 2.478 GHz 1001 pts 2.2 MHz/ 2.5 GHz M1[1] 2.48 dBm M2[1] 2.4799890 GHz M2[1] -57.30 dBm M2[1] 2.4835000 GHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.479989 GHz</td><td>2.48 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-57.30 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-53.39 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.49791 GHz</td><td>-51.94 dBm</td><td></td><td></td></tr></table> Date: 11.OCT.2022 15:04:20			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.479989 GHz	2.48 dBm			M2	1		2.4835 GHz	-57.30 dBm			M3	1		2.5 GHz	-53.39 dBm			M4	1		2.49791 GHz	-51.94 dBm									
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.479989 GHz	2.48 dBm																																									
M2	1		2.4835 GHz	-57.30 dBm																																									
M3	1		2.5 GHz	-53.39 dBm																																									
M4	1		2.49791 GHz	-51.94 dBm																																									




CH78
Hopping mode

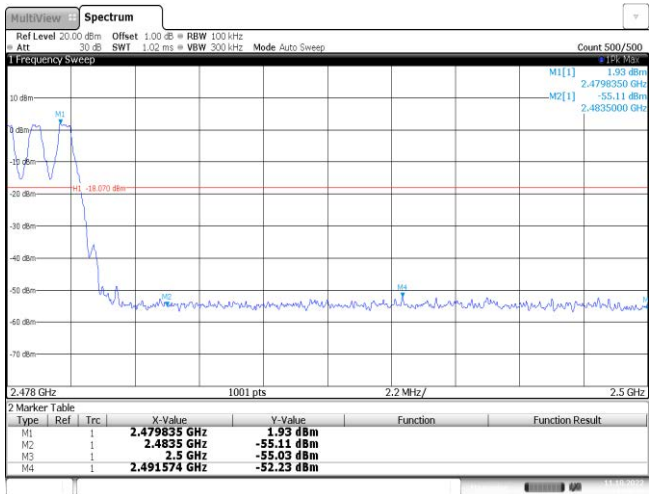


Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
CH00 No hopping mode	</		

CH78
Hopping mode



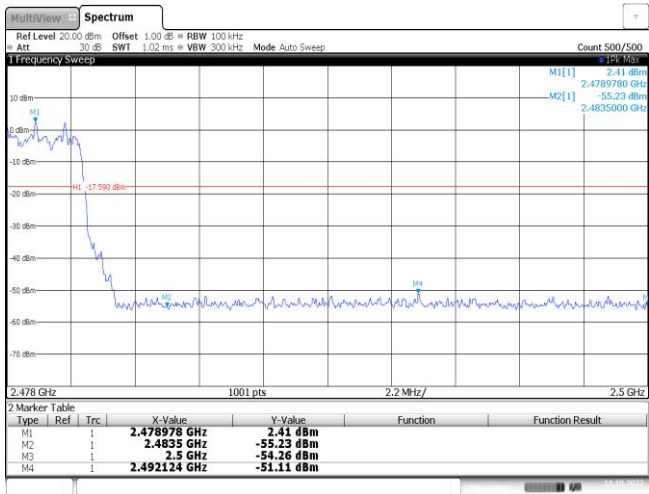


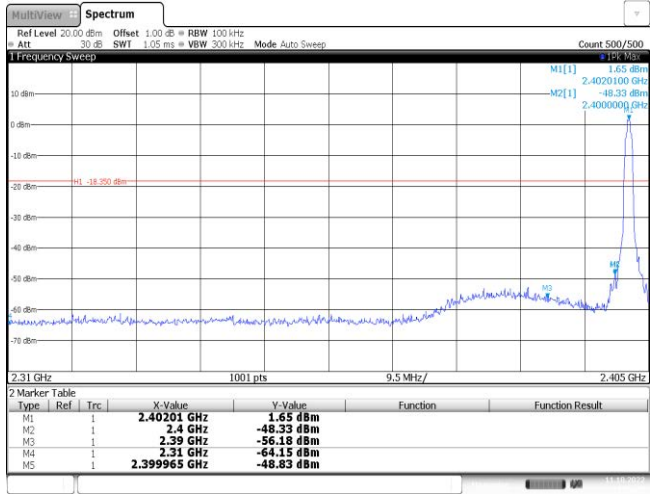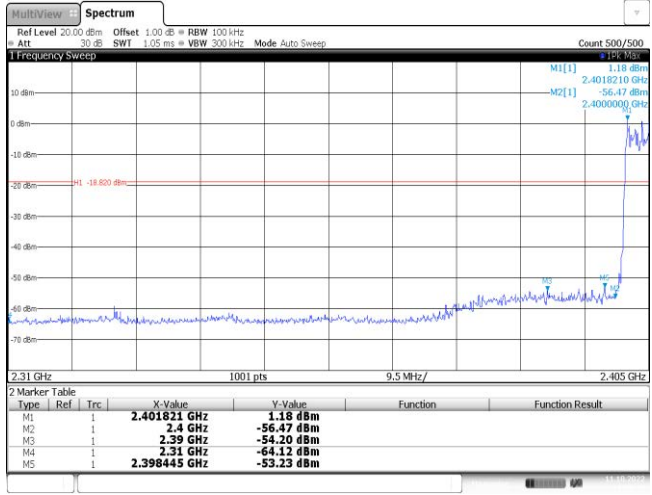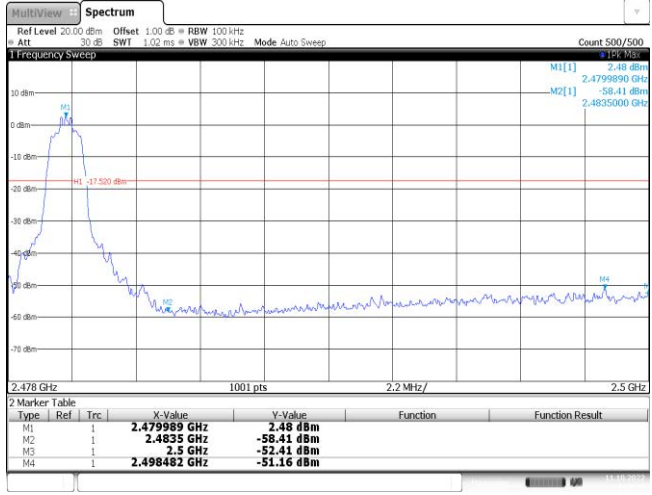Test Item:	Band edge	Modulation type:	8DPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			


CH78
Hoppig mode

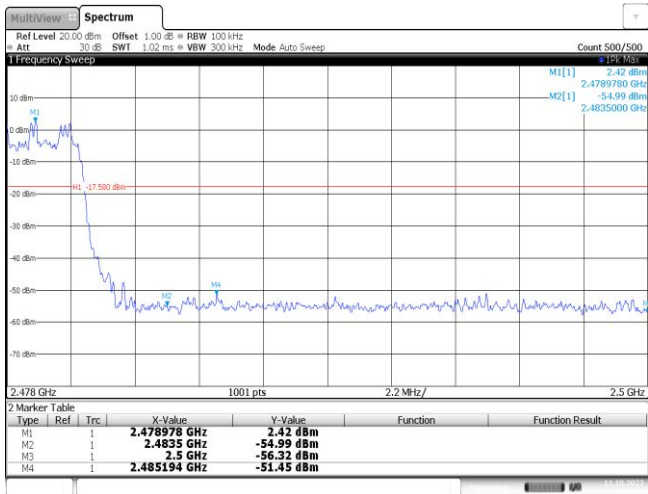


Date: 11 OCT 2022 15:09:27

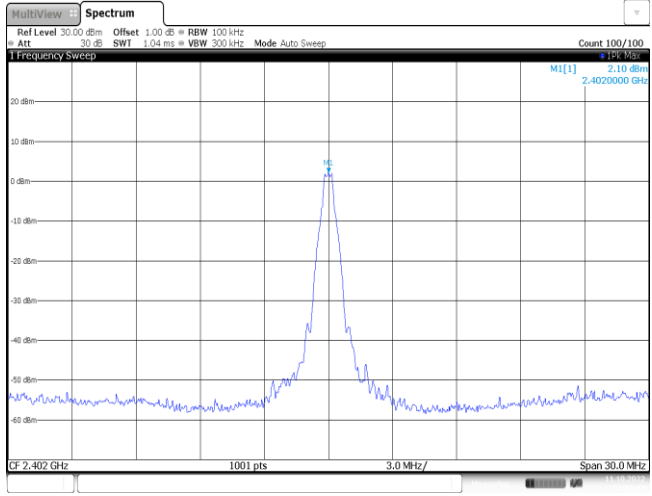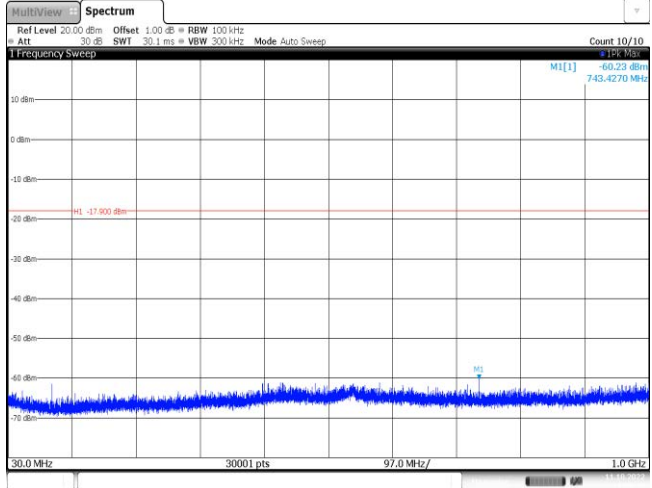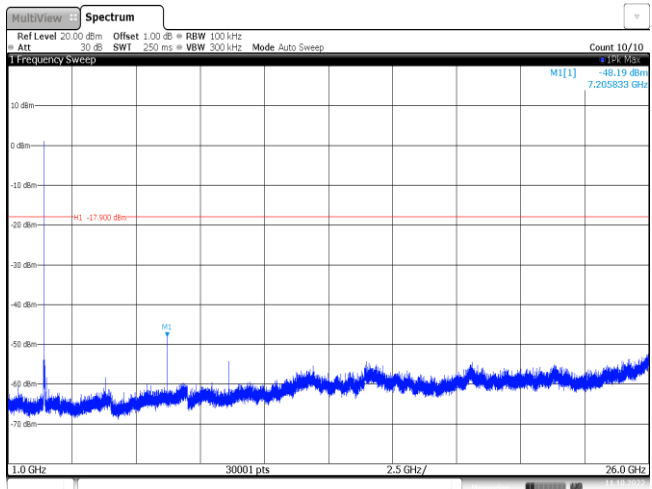Test Item:	Spurious Emission	Modulation type:	GFSK
CH00 Reference level	 The spectrum plot shows a single sharp peak at 2.402 GHz. The y-axis represents power in dBm, ranging from -60 to 20. The x-axis represents frequency in MHz, ranging from 2.400 to 2.404. The peak is labeled with a value of 2.10 dBm. The plot is titled 'Spectrum' and includes parameters: Ref Level 30.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWI 1.04 ms, VBW 300 kHz, Mode Auto Sweep, Count 100/100. The x-axis is labeled 'Frequency Sweep' and 'CF 2.402 GHz'. The y-axis is labeled 'dBm'.		
CH00 30MHz~1000MHz	 The spectrum plot shows a flat noise floor across the frequency range from 30.0 MHz to 1.0 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in MHz, ranging from 30.0 to 1.0. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWI 30.1 ms, VBW 300 kHz, Mode Auto Sweep, Count 10/10. The x-axis is labeled 'Frequency Sweep' and '30.0 MHz'. The y-axis is labeled 'dBm'. A red line indicates a level of -17.900 dBm.		
CH00 1GHz~26GHz	 The spectrum plot shows a flat noise floor across the frequency range from 1.0 GHz to 26.0 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, ranging from 1.0 to 26.0. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWI 250 ms, VBW 300 kHz, Mode Auto Sweep, Count 10/10. The x-axis is labeled 'Frequency Sweep' and '1.0 GHz'. The y-axis is labeled 'dBm'. A red line indicates a level of -17.900 dBm.		


CH39
Reference level

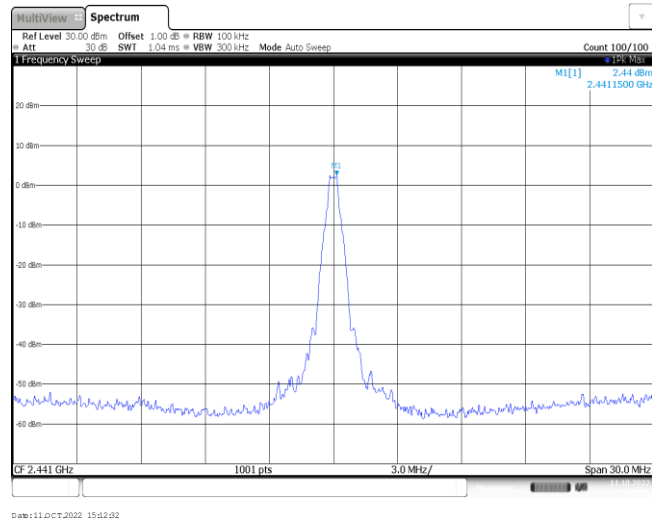


CH39
30MHz~1000MHz

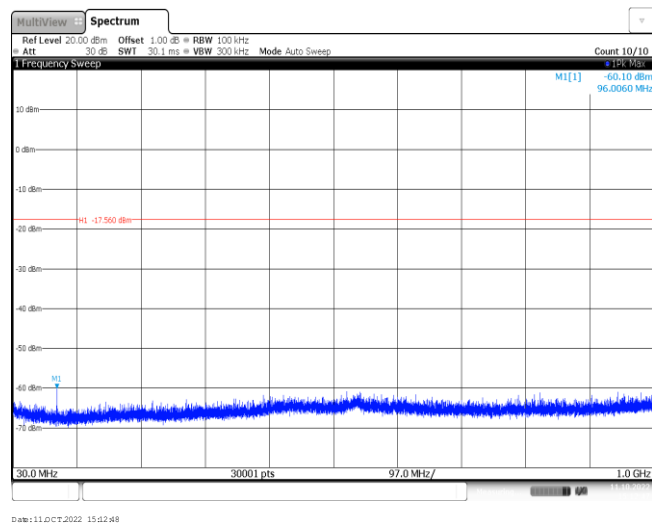


CH39
1GHz~26GHz

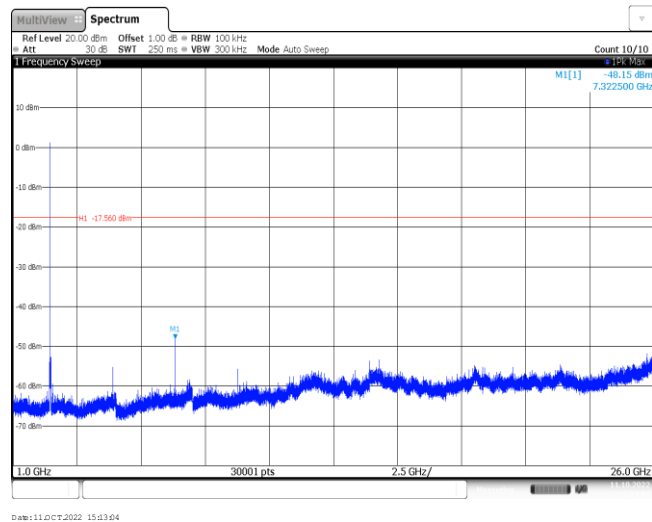


CH78
Reference level



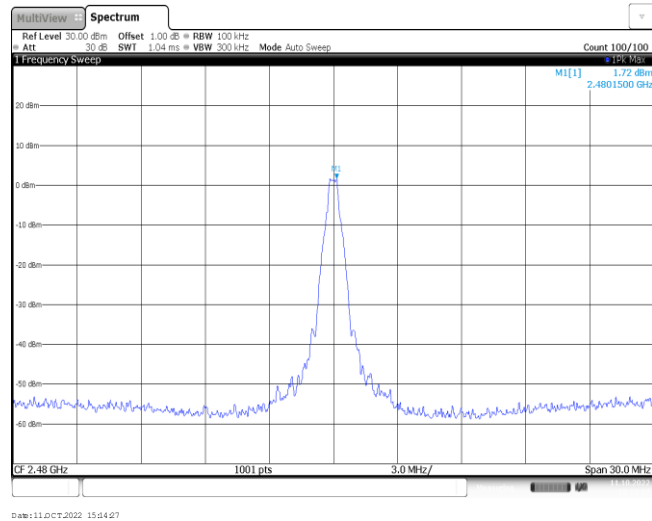


CH78
30MHz~1000MHz

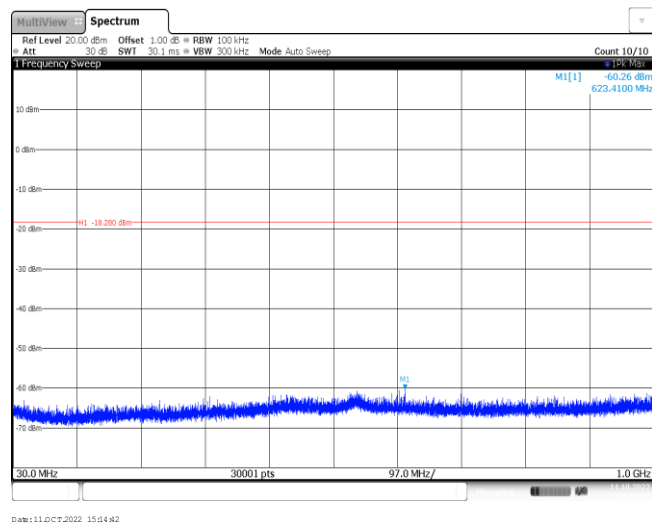


CH78
1GHz~26GHz

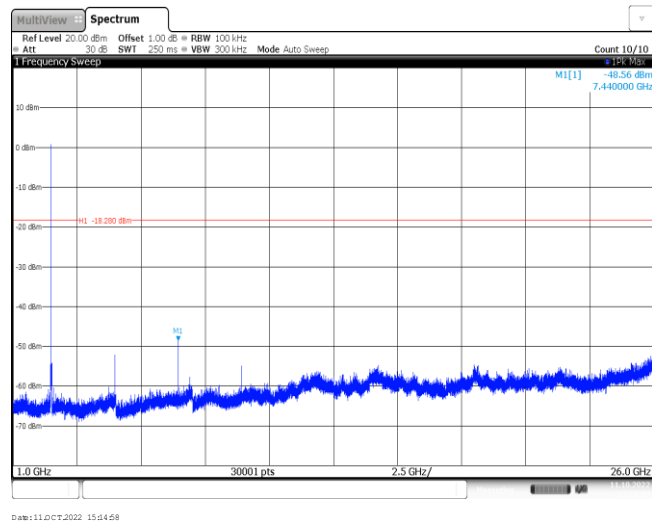


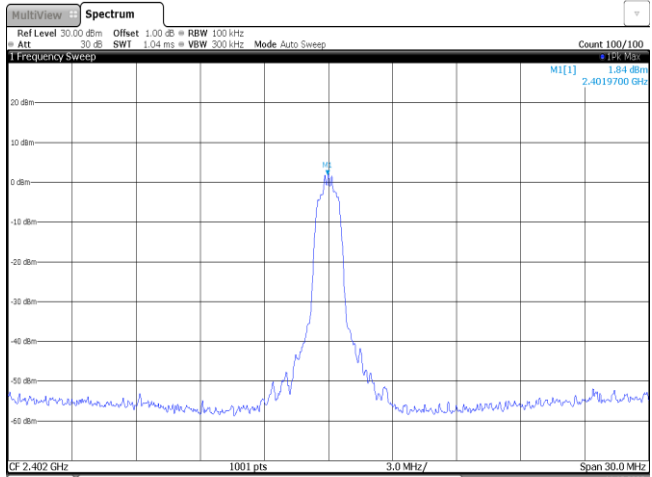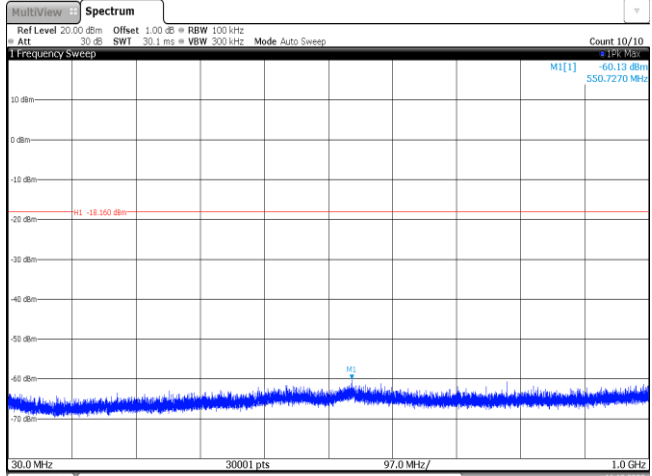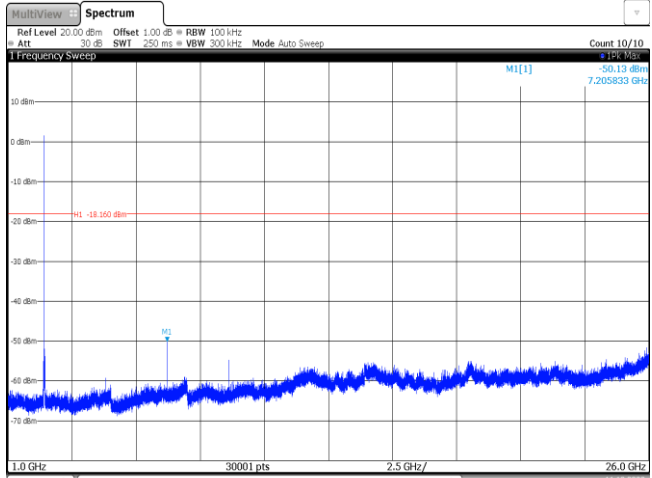Test Item:	Spurious Emission	Modulation type:	$\pi/4$ DQPSK
CH00 Reference level	 CH00 Reference level		
CH00 30MHz~1000MHz	 CH00 30MHz~1000MHz		
CH00 1GHz~26GHz	 CH00 1GHz~26GHz		


CH39
Reference level

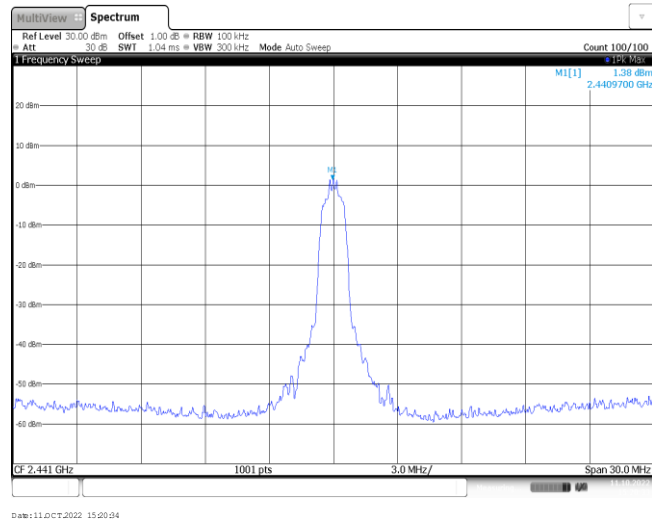


CH39
30MHz~1000MHz

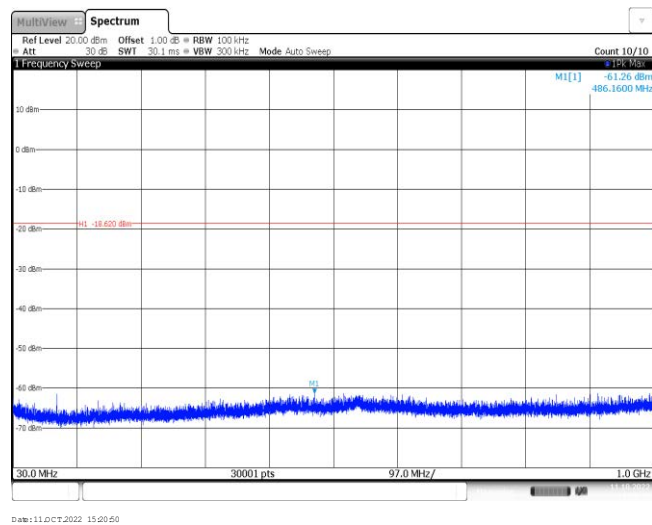


CH39
1GHz~26GHz

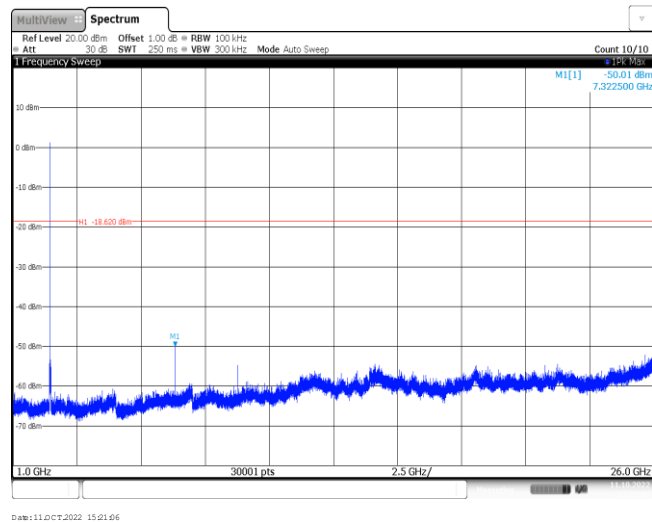


CH78
Reference level



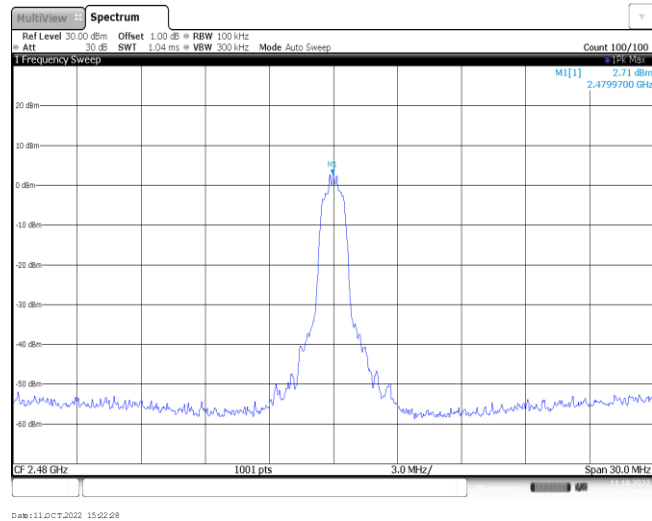


CH78
30MHz~1000MHz

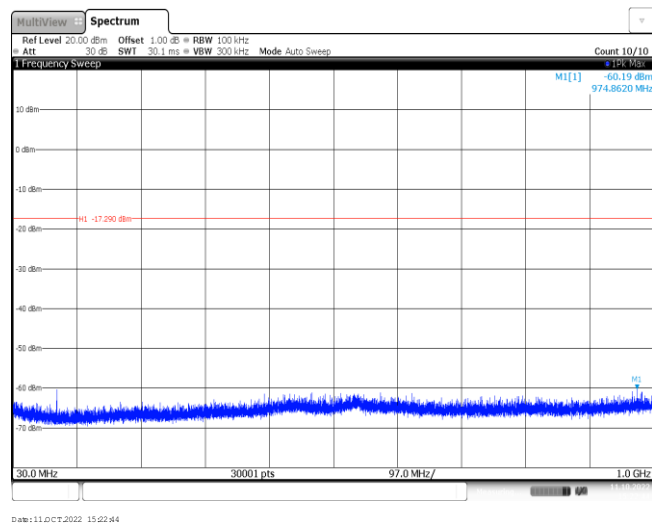


CH78
1GHz~26GHz

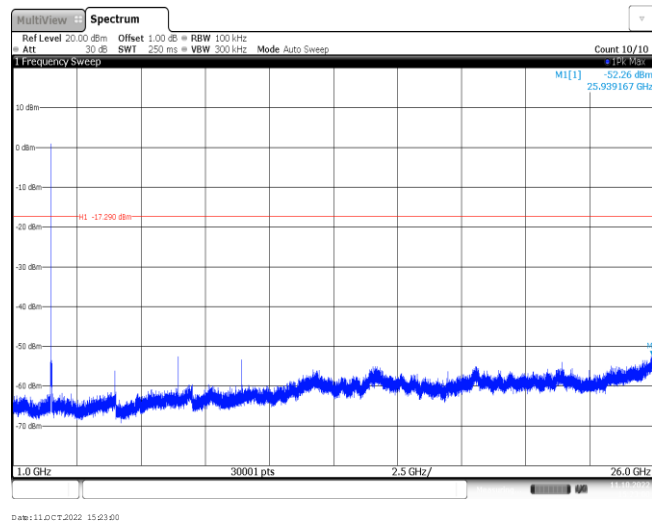


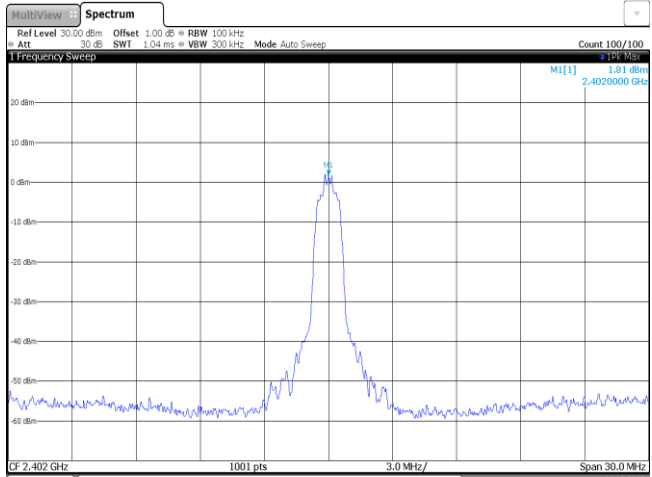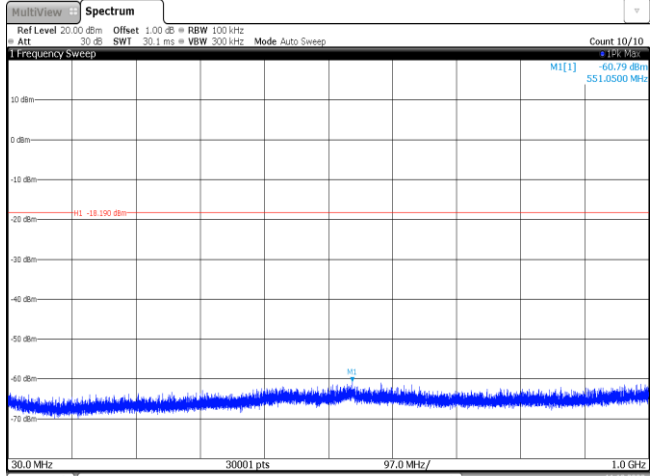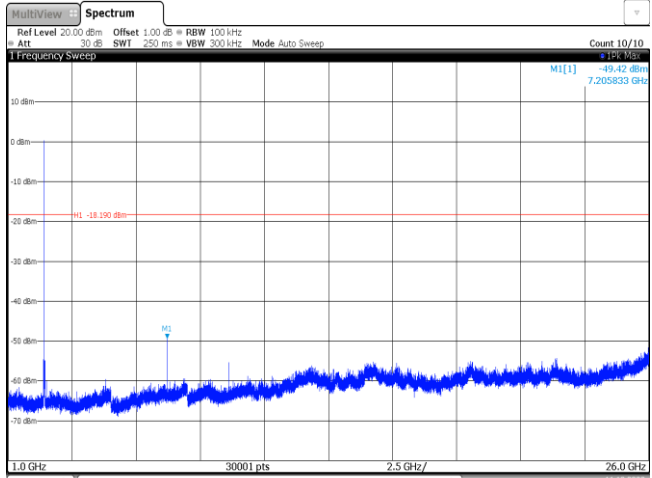Test Item:	Spurious Emission	Modulation type:	8DPSK
CH00 Reference level	 Ref Level 30.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] 1.81 dBm 2.402000 GHz CF 2.402 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 11.OCT.2022 15:24:51		
CH00 30MHz~1000MHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -60.79 dBm 551.0500 MHz M1 -18.100 dBm 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 11.OCT.2022 15:25:07		
CH00 1GHz~26GHz	 Ref Level 20.00 dBm Offset 1.00 dB BW 100 kHz Att 30 dB SWI 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -49.42 dBm 7.205833 GHz M1 -18.100 dBm 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 11.OCT.2022 15:25:23		


CH39
Reference level



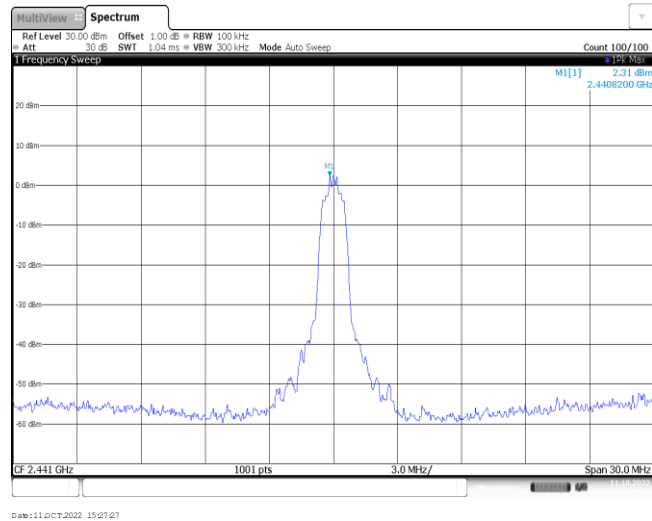


CH39
30MHz~1000MHz

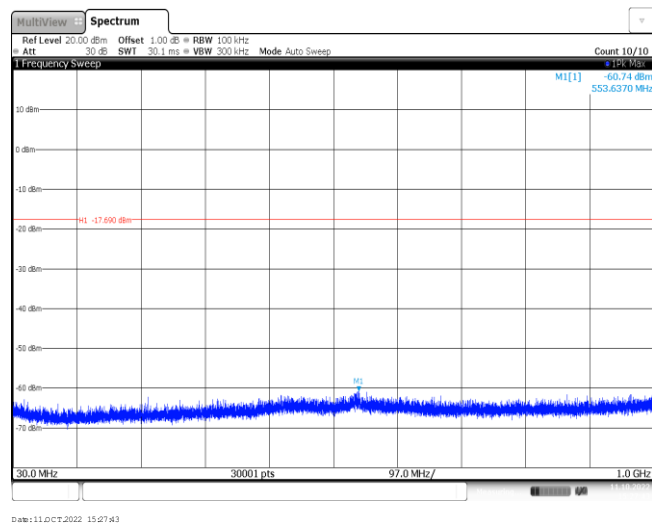

CH39
1GHz~26GHz

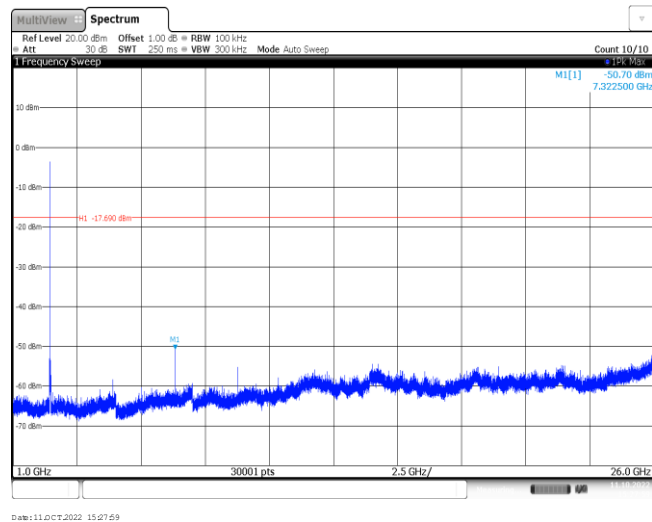

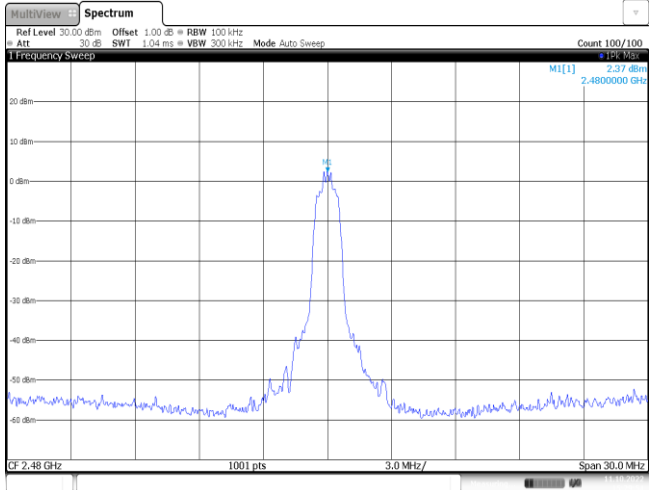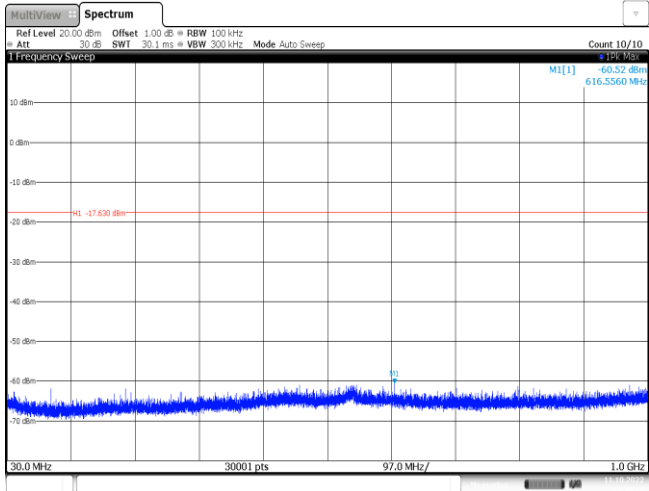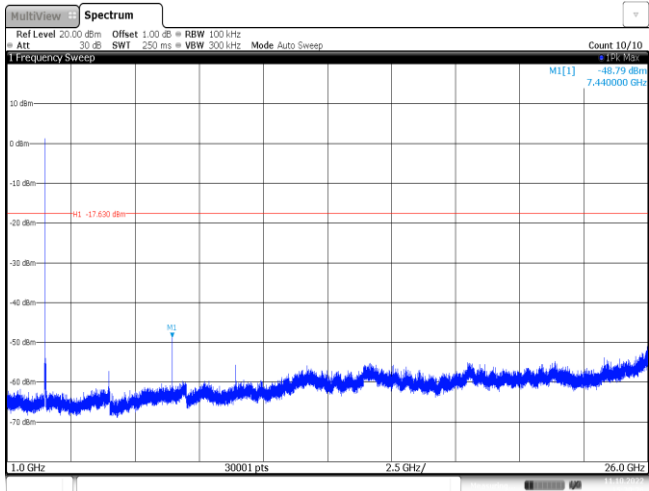CH78 Reference level	 The spectrum plot for CH78 Reference level shows a frequency sweep from 2.48 GHz to 2.480000 GHz. The y-axis represents power in dBm, ranging from -60 dBm to 20 dBm. A single sharp peak is visible at 2.48 GHz, reaching approximately 0 dBm. The plot includes a grid and various measurement parameters such as Ref Level, Offset, and Span.
CH78 30MHz~1000MHz	 The spectrum plot for CH78 30MHz~1000MHz shows a frequency sweep from 30.0 MHz to 1.0 GHz. The y-axis represents power in dBm, ranging from -70 dBm to 10 dBm. The plot shows a noisy baseline with no significant peaks. A red horizontal line is drawn at -17.630 dBm. The plot includes a grid and various measurement parameters.
CH78 1GHz~26GHz	 The spectrum plot for CH78 1GHz~26GHz shows a frequency sweep from 1.0 GHz to 26.0 GHz. The y-axis represents power in dBm, ranging from -70 dBm to 10 dBm. The plot shows a noisy baseline with no significant peaks. A red horizontal line is drawn at -17.630 dBm. The plot includes a grid and various measurement parameters.

-----End of Report-----