


Applicant:	CUSTOM S.p.A Via Berettine 2/B – 43010 Fontevivo – Parma - Italy Phone: 0521 680111		
Trademark:			
Test item:	Printer MP RANGER USB TH FI BLACK IT		
Identification / Type No.:	MP350		
FCC ID:	OAH-5040120		
Order content:	Full tests according to the following standard:		
Test specification:	FCC Part 15, Subpart C (15.247)		
Date of receipt:	22/02/2022		
Internal storage No.:	A003216149-003		
Testing period:	From 30/03/2022 to 31/03/2022		
Place of testing:	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese – Milano – Italy		
Testing laboratory:	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese – Milano – Italy		
Test result:	PASS		
Tested by:	Francesco Lombardi	Authorized by:	Roberto Radice
Date:	16/06/2022	Date:	16/06/2022
Position:	Sachverständige(r)/Expert	Position:	Sachverständige(r)/Expert
Condition of the test item at delivery:	Test item complete and undamaged		
<p>The test results reported in this test report shall refer only to the samples tested. This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory. TRI refuses any responsibility about information supplied by the customer contained in this test report. TRI is not responsible for the sampling phase.</p>			





TÜVRheinland®



LAB N° 1356 L

The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.

As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.

Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.

Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards. At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards. Evaluation conditions deviating from these are documented separately in the respective chapters.

0. Table of Contents

0. Table of Contents	3
1. General description of test item(s)	4
2. Equipment using during test.....	6
3. Radio module identification	8
4. Channel list Bluetooth Low Energy	11
5. Applied reference standards	12
6. Operating modes.....	13
7. EUT configuration.....	13
8. Climatic conditions.....	14
9. Statement of the measurement uncertainty	15
10. Measurement uncertainty	15
11. Example for interpretation of measuring results	16
12. Result summary section	17
13. Change history.....	17
14. Emission Test	18
15. List of test equipment.....	85

1. General description of test item(s)

Description	Printer MP RANGER USB TH FI BLACK IT
Model	MP350
Serial number	ESB1026121280071
Part number	911MM010100P33
Manufacturer	CUSTOM S.p.A
Country of manufacturer	Italy
Trademark	
Power supply	DC Power
Supply voltage	Internal Battery (Technology: Lithium-ion)
Battery model name	INR18650-2S1P
Battery voltage-capacity	7.2V 2.6Ah 18.72Wh
Battery cycle	750
Battery life (print)	720 minutes x 300 tickets
Manufacturer (Battery)	Shenzhen Hypercell Co.,LTD
Equipment type	Intentional radiator
Hardware version	St145-c

Software version	1.22
Dimensions	149(L) x 53(H) x 122(P) mm
Weight	475gr (with battery included)
Printing width	76.2 mm and 80 mm
Operating temperature	From -10°C to +50°C
Operating humidity (RH)	Form 10% to 95%
EUT standing	Portable
Test sample obtaining:	<input checked="" type="checkbox"/> Sampling by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

2. Equipment using during test

Equipment under test

No.	Product type	Manufacturer	Model	Comments
1	Printer MP RANGER USB TH FI BLACK IT	CUSTOM S.p.A.	MP350	---

Auxiliary Equipment / Peripherals

Nr.	Product type	Manufacturer	Model	Comments
1	Laboratory PC	DELL	---	- used to enable wireless communication (Bluetooth Low Energy, Bluetooth Enhanced Data Rate & Wi-Fi) on EUT, via software Printerset.
				- used ESP_RF_test_tool_v1.1.0, for setting the radio module in the following radio communications: BLE, BT EDR & Wi-Fi
2	Cradle 1 slot P-Ranger	CUSTOM S.p.A	---	- used to charge battery
3	Switching power adapter	CUSTOM S.p.A	POWER SUPPLY FOR CRADLE 4 SLOTS P-RANGER	- use to power supply cradle




Input/Output ports

No.	Name	Type	Cable length	Cable shielded	Comments
1	Enclosure port	Plastic	---	---	closed by snaps
2	AC power port	---	---	---	port not present
3	DC power port	Internal battery	---	---	Battery model: INR18650-2S1P
4	Signal control port	---	---	---	port not present
5	Wired network port	---	---	---	port not present

EUT modification


None


3. Radio module identification

BLE module & Antenna technical data	
Module manufacturer	 ESPRESSIF
Radio type	Transceiver
Chip radio	ESP32-PICO-D4
Type of equipment	<input type="checkbox"/> stand-alone equipment <input checked="" type="checkbox"/> combined equipment <input type="checkbox"/> multi-radio equipment
ETS Category	Bluetooth Low Energy
Bluetooth Channel / Frequency	2402 - 2480MHz
Number of channels	40
Channel bandwidth	1MHz
Channel separation	2MHz
Modulation type	<input type="checkbox"/> Frequency hopping (FHSS) equipment (Bluetooth classic) <input checked="" type="checkbox"/> Wideband data transmission (non-FHSS equipment) (BLE)
Modulation	GFSK
Sensitivity	-97 dBm
Transmit operating mode	<input checked="" type="checkbox"/> single antenna <input type="checkbox"/> multiple antennas, no beamforming <input type="checkbox"/> multiple antennas, with beamforming
With regard adaptivity, the type of equipment	<input type="checkbox"/> non-adaptive equipment <input type="checkbox"/> adaptive equipment <input checked="" type="checkbox"/> Equipment that can operate in both an adaptive and non-adaptive mode;



Spectrum access mechanism	<input type="checkbox"/> LBT (Listen Before Talk) Technique <input type="checkbox"/> DAA (Detect And Avoid) Technique <input checked="" type="checkbox"/> Duty cycle
Environmental equipment	<input checked="" type="checkbox"/> Test only in normal conditions <input type="checkbox"/> Test in normal conditions and extreme conditions
Equipment that support a geo-location capability	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

Antenna	Description:	AMCA31-2R450G-S1F-T3
	Peak Gain:	0.5 dBi
	Type:	<input type="checkbox"/> External antenna <input checked="" type="checkbox"/> Dedicated antenna <input type="checkbox"/> Integral antenna
	Frequency	2450 MHz
	Impedance	50 Ω
	Manufacturer	

Antenna	Description:	Chip-Antenna WE-MCA
	Peak Gain:	0.5 dBi
	Type:	<input type="checkbox"/> External antenna <input checked="" type="checkbox"/> Dedicated antenna <input type="checkbox"/> Integral antenna
	Frequency	2400 - 2500 MHz
	Impedance	50 Ω
	Manufacturer	

Note: The test has been performed with Antenna AMCA31-2R450G-S1F-T3, manufacturer Abracon.

4. Channel list Bluetooth Low Energy

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

5. Applied reference standards

47 CFR Part 15	Radio Frequency Device - General	
Title 47 Part 15 Subpart C	Radio Frequency Device – Intentional Radiators	
Title 47 Part 15 Subpart C § 15.203	Radio frequency devices – Intentional Radiators Antenna requirement	
Title 47 Part 15 Subpart C § 15.205	Radio frequency devices – Intentional Radiators Restricted bands of operation	
Title 47 Part 15 Subpart C § 15.209	Radio frequency devices – Intentional Radiators Radiated Emissions Limits	
Title 47 Part 15 Subpart C § 15.247	Radio Frequency Devices – Intentional Radiators Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz	
558074 D01 DTS Meas Guidance v05r02 - April 02,2019	Guidance for performing compliance measurements on digital transmission systems (DTS) operating under §15.247	
ANSI C63.4	2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices

6. Operating modes

No.	Description
1	Continuous BLE Modulation RF Transmission (duty cycle >98%) at maximum power, at Low channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: BLE TX Power Level: 8 Channel: 0/2402MHz Date Rate: LE_1010
2	Continuous BLE Modulation RF Transmission (duty cycle >98%) at maximum power, at Middle channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: BLE TX Power Level: 8 Channel: 21/2444MHz Date Rate: LE_1010
3	Continuous BLE Modulation RF Transmission (duty cycle >98%) at maximum power, at High channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: BLE TX Power Level: 8 Channel: 39/2480MHz Date Rate: LE_1010

7. EUT configuration

The test setup was made in accordance with mentioned FF standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").

Details of test setup or adjustments are (particularly) shown inside the photo documentation.

As far as not mentioned otherwise these statements are valid for all following tests.

8. Climatic conditions

Ambient Temperature	10 – 40 °C
Relative Humidity	10 – 90 %
Air pressure	Not specified

Note: According to ANSI C63.4

9. Statement of the measurement uncertainty


The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device

10. Measurement uncertainty

Test Method	Uncertainty (95%)	Coverage factor k
RF Radiated emissions – range (30 – 1000) MHz	4,9 dB	2,0
RF Radiated emissions – range (1 – 8) GHz	5,1 dB	2,0
RF Radiated emissions – range (8 – 40) GHz	5,4 dB	2,0
TX Carrier Power – Conducted (1GHz – 8GHz)	1,5 dB	2,0
Occupied Bandwidth (OBW)	514.4 x 1.00E-9	2,0
Power Spectral Density (0 – 3.6) GHz	3,7 mW	2,0
TX Conducted Spurious Emissions (9KHz – 1GHz)	0.92 dB	2,0
TX Conducted Spurious Emissions (1 – 8)	1,5 dB	2,0
TX Conducted Spurious Emissions (8 – 40) GHz	2,4 dB	2,0
Measurement of Normalised Site Attenuation and VSWR	6,0 dB	2,0

11. Example for interpretation of measuring results

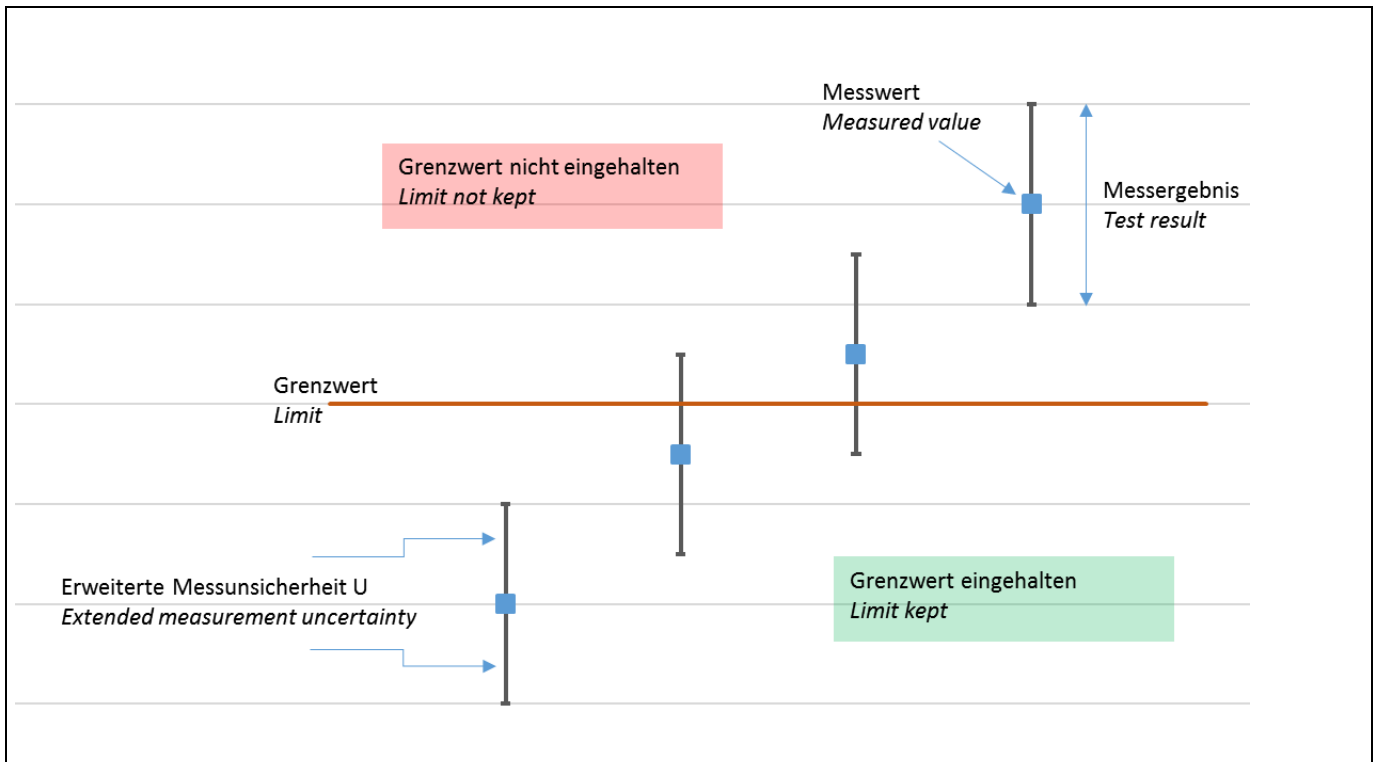

Example for interpretation of measuring results

<i>Measured value</i>	<i>Limit</i>	<i>Extended measurement uncertainty (k=2)</i>	<i>Test result</i>
48.9 dBµV @ 16.5 MHz	50 dBµV	2.2 dB	46.7 dBµV – 51.1 dBµV

Decision rule :

Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.

Where statements of conformity are made in this report, the following decision rules are applied:

PASS – Results within limits/specifications

FAIL – Results exceed limits/specifications

12. Result summary section

Requirement – Test case	Operating modes	Result
Radiated emissions (9KHz – 26GHz)	1, 2, 3	PASS
Restricted bands of operation	1, 2, 3	PASS
Antenna requirements	---	PASS
Maximum Conducted Peak Output Power	1, 2, 3	PASS
6db Bandwidth	1, 2, 3	PASS
Out-of-band emissions	1, 2, 3	PASS
Band Edge	1, 2, 3	PASS
Power spectral density	1, 2, 3	PASS
Additional provisions to the general radiated emission limitations	---	PASS

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

13. Change history

Test report number	List of revisions	Date
IT22SOGO 001	First edition	16/06/2022

14. Emission Test

Radiated emission test (9KHz – 26GHz)	
Test date	From 30/03/2022 to 31/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.205; §15.209; §15.247
Test method	Par. 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02 (and par. 11.12.1 Radiated emission measurements of ANSI C63.10)
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 2, 3
Tested terminals	Enclosure
Result	PASS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 Db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 Db instead of 20 Db. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.


Remark: In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:

$$\text{Limit 3m(dB}\mu\text{V/m)} = \text{Limit 300m(dB}\mu\text{V/m)} + 40\text{Log}(300\text{m}/3\text{m}) \text{ (Below 30MHz)}$$

$$\text{Limit 3m(dB}\mu\text{V/m)} = \text{Limit 300m(dB}\mu\text{V/m)} + 40\text{Log}(30\text{m}/3\text{m}) \text{ (Below 30MHz)}$$

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 9KHz – 30MHz
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum

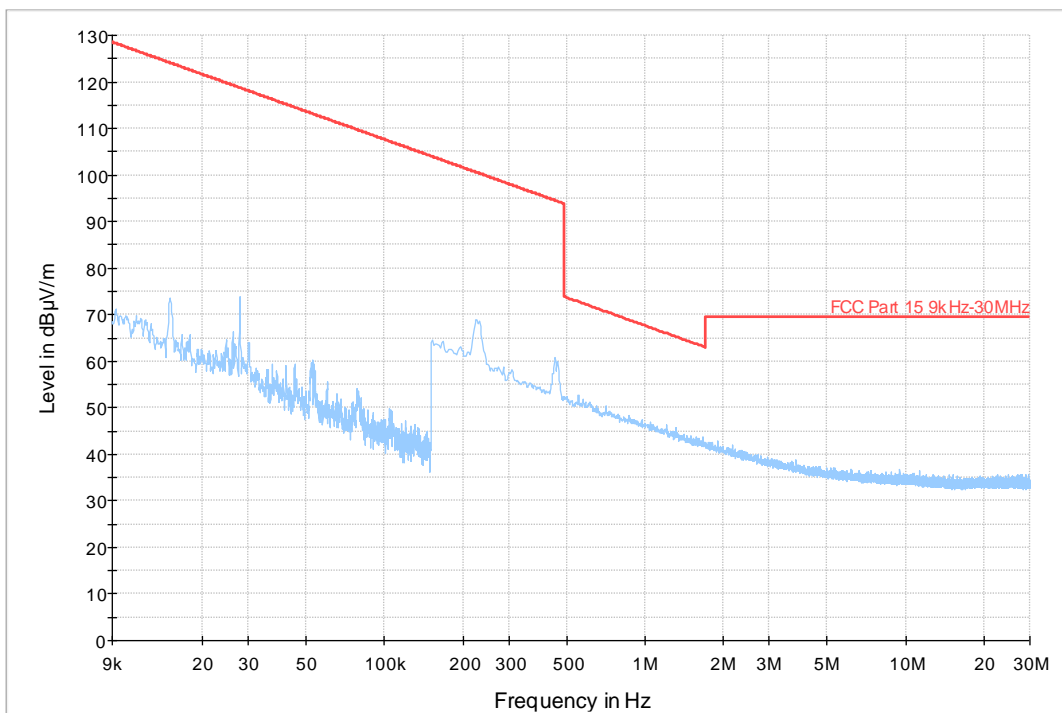





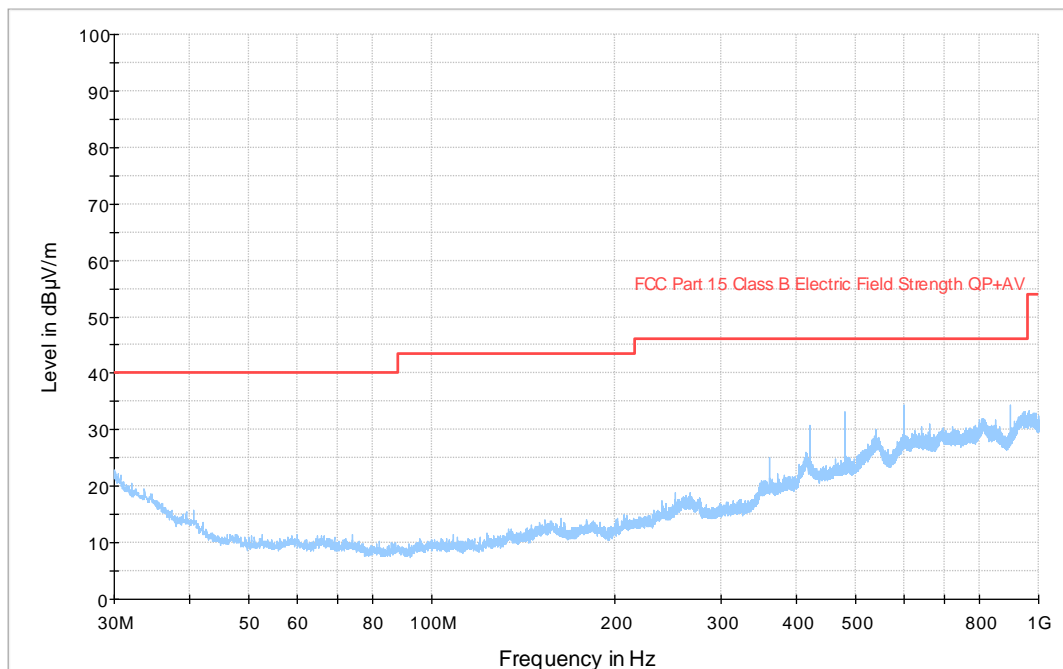

— Preview Result 1-PK+
 — FCC Part 15 9kHz-30MHz
 ◆ Final_Result QPK
 ◆ Final_Result A\

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Vertical
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum



- | | | | |
|---|----------------------|---|--|
|  | Preview Result 1-PK+ |  | Critical_Freqs AVG |
|  | Critical_Freqs PK+ |  | FCC Part 15 Class B Electric Field Strength QP |
|  | Final_Result QPK |  | Final_Result AVG |

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

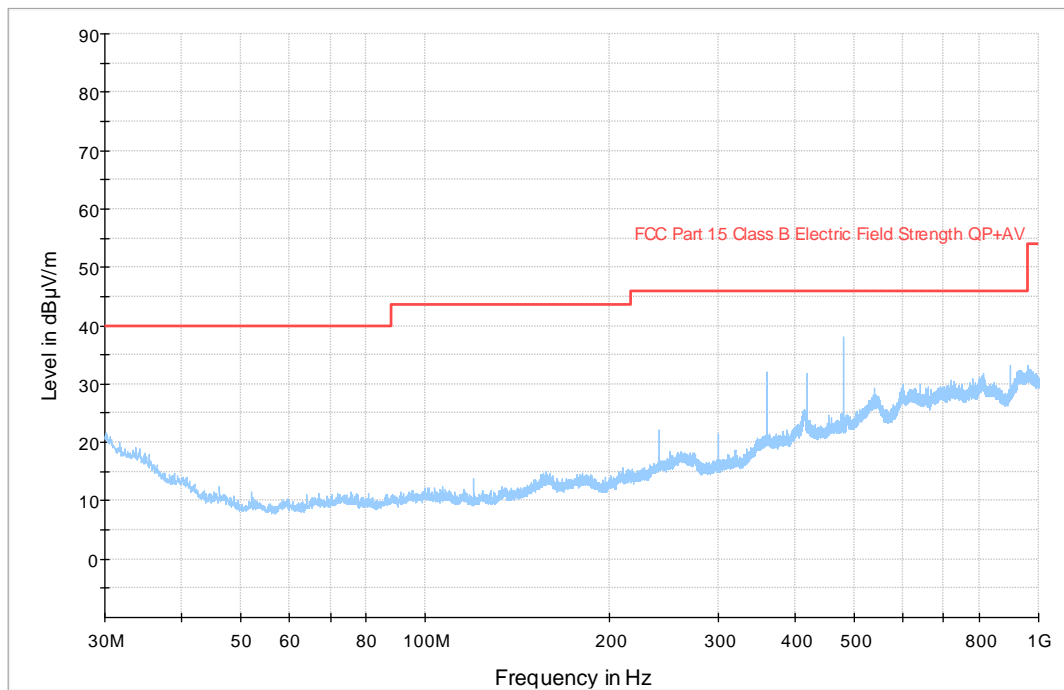


Preview Result 1-PK+
Final_Result QPK

FCC Part 15 Class B Electric Field Strength QP
Final_Result AVG

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

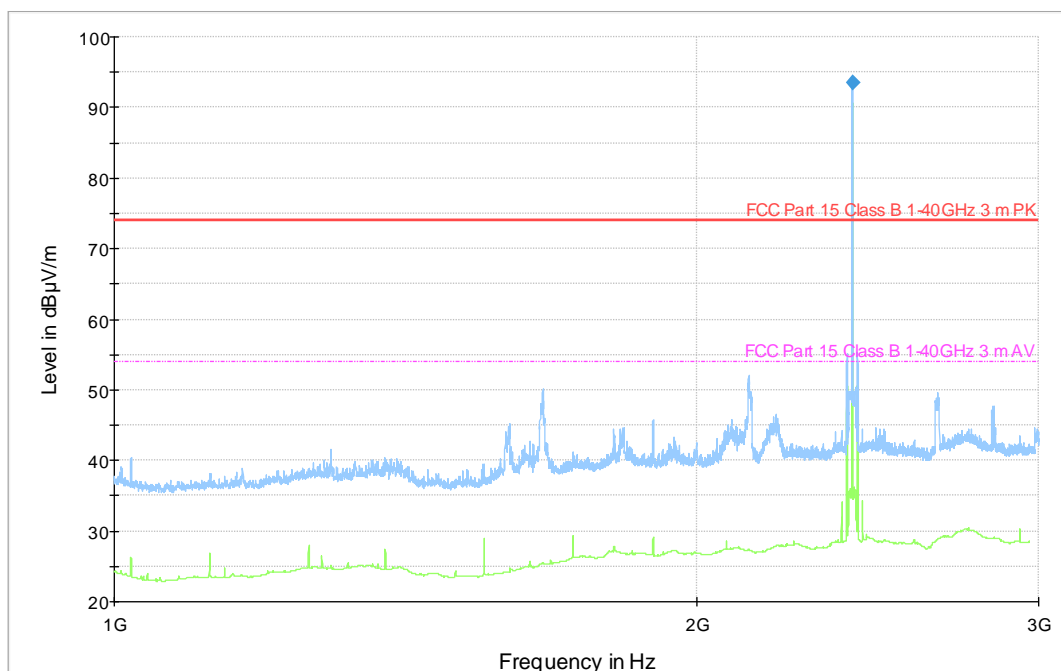

- Preview Result 2-AVG
- FCC Part 15 Class B 1-40GHz 3 m PK
- ◆ Final_Result PK+
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result AVG

Final Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2402.000000	93.45	---	---	1000.0	1000.000	150.0	V	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*



Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

Full Spectrum

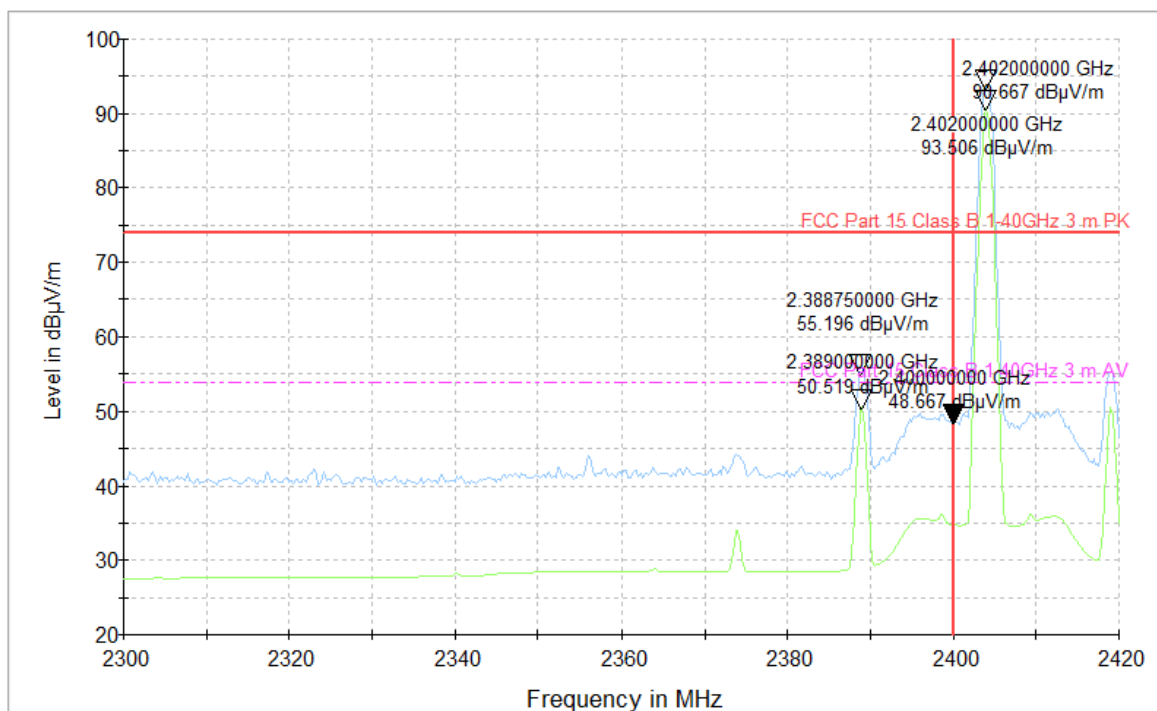

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 18 2400MHz ISM Band
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*

Fundamental Level


Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2402.000000	103.45	---	-13.23	3.28	93.50
2402.000000	---	100,62	-13.23	3.28	90.67

Harmonic Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2388.750000	65.17	---	-13.21	3.23	55.19
2389.000000	---	60.5	-13.21	3.23	50.52

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

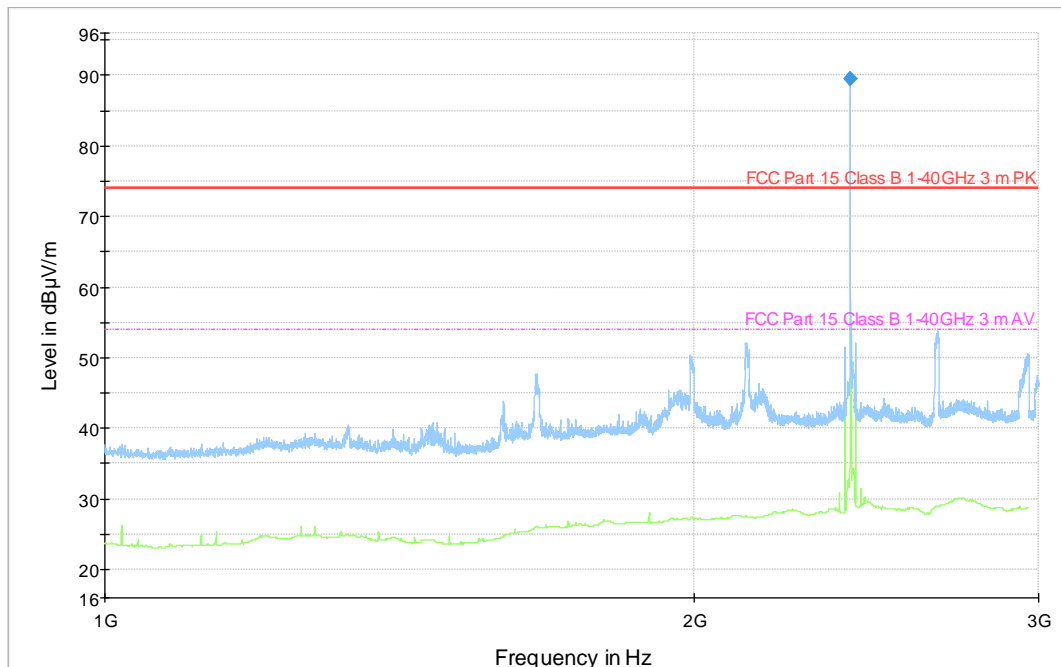

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2402.000000	89.45	---	---	1000.0	1000.000	150.0	H	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

Full Spectrum

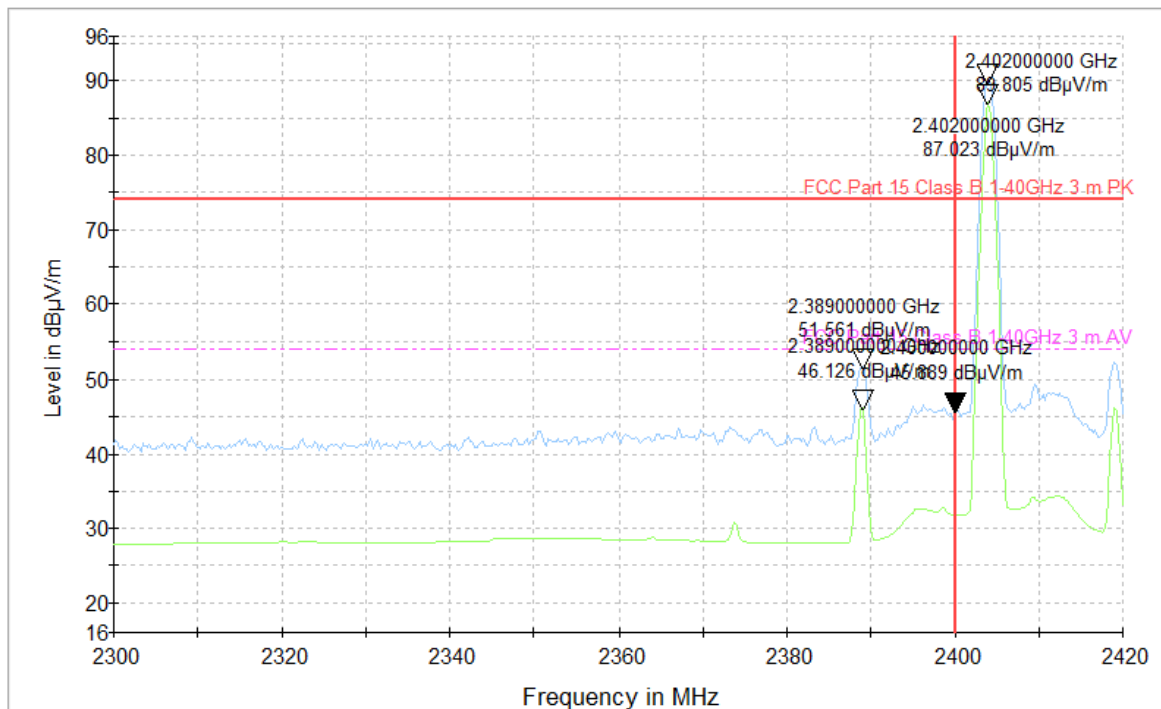

- Preview Result 2-AVG
- FCC Part 18 2400MHz ISM Band
- - - - - FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- ◆ Final_Result PK+

. Peaks out of limits are due to BLE carrier (exclusion band).
 Fundamental frequency not related to limit.


Fundamental Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2402.000000	99.75	---	-13.23	3.28	89.80
2402.000000	---	96.97	-13.23	3.28	87.02

Harmonic Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2389.000000	61.54	---	-13.21	3.23	51.56
2389.000000	---	56.11	-13.21	3.23	46.13

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 3GHz -18GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

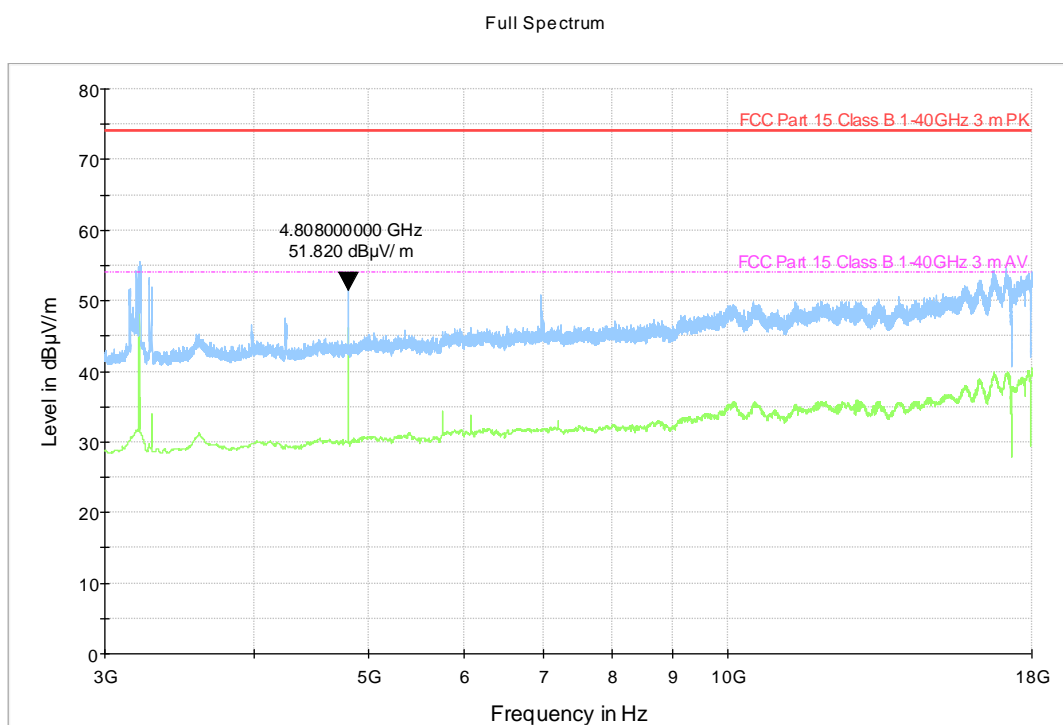


- Preview Result 2-AVG
- FCC Part 15 Class B 1-40GHz 3 m PK
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4808.000000	51.82	74.00	22.18	1000.0	1000.000	150.0	V	0.0

Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 3GHz -18GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

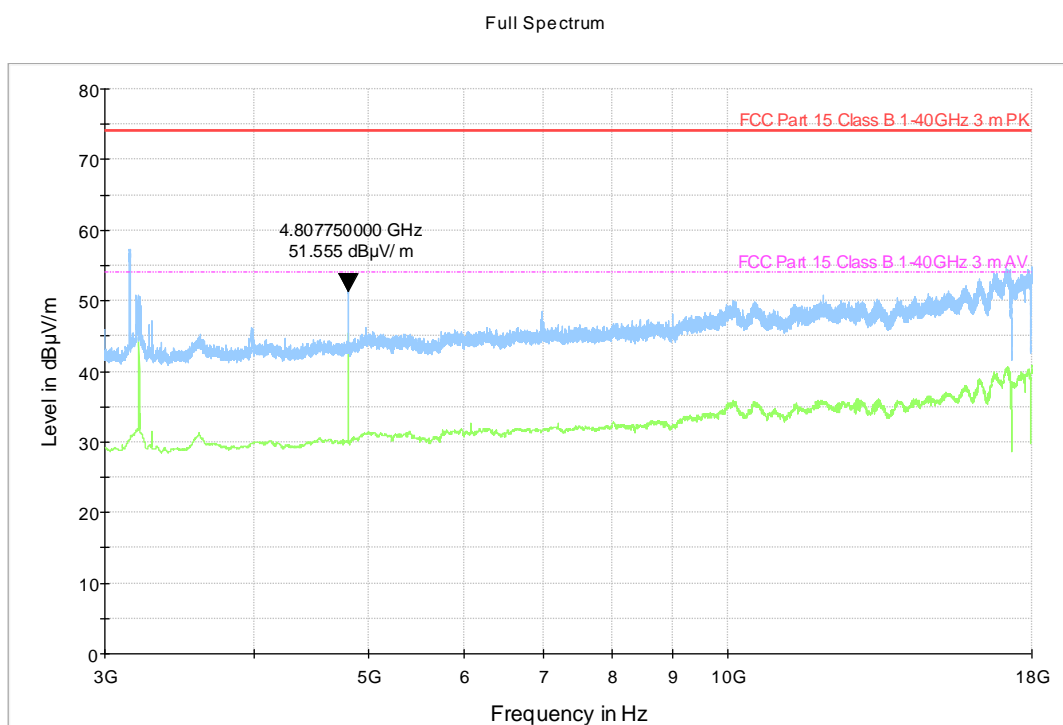


- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4808.000000	51.55	74.00	22.45	1000.0	1000.000	150.0	H	0.0


Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

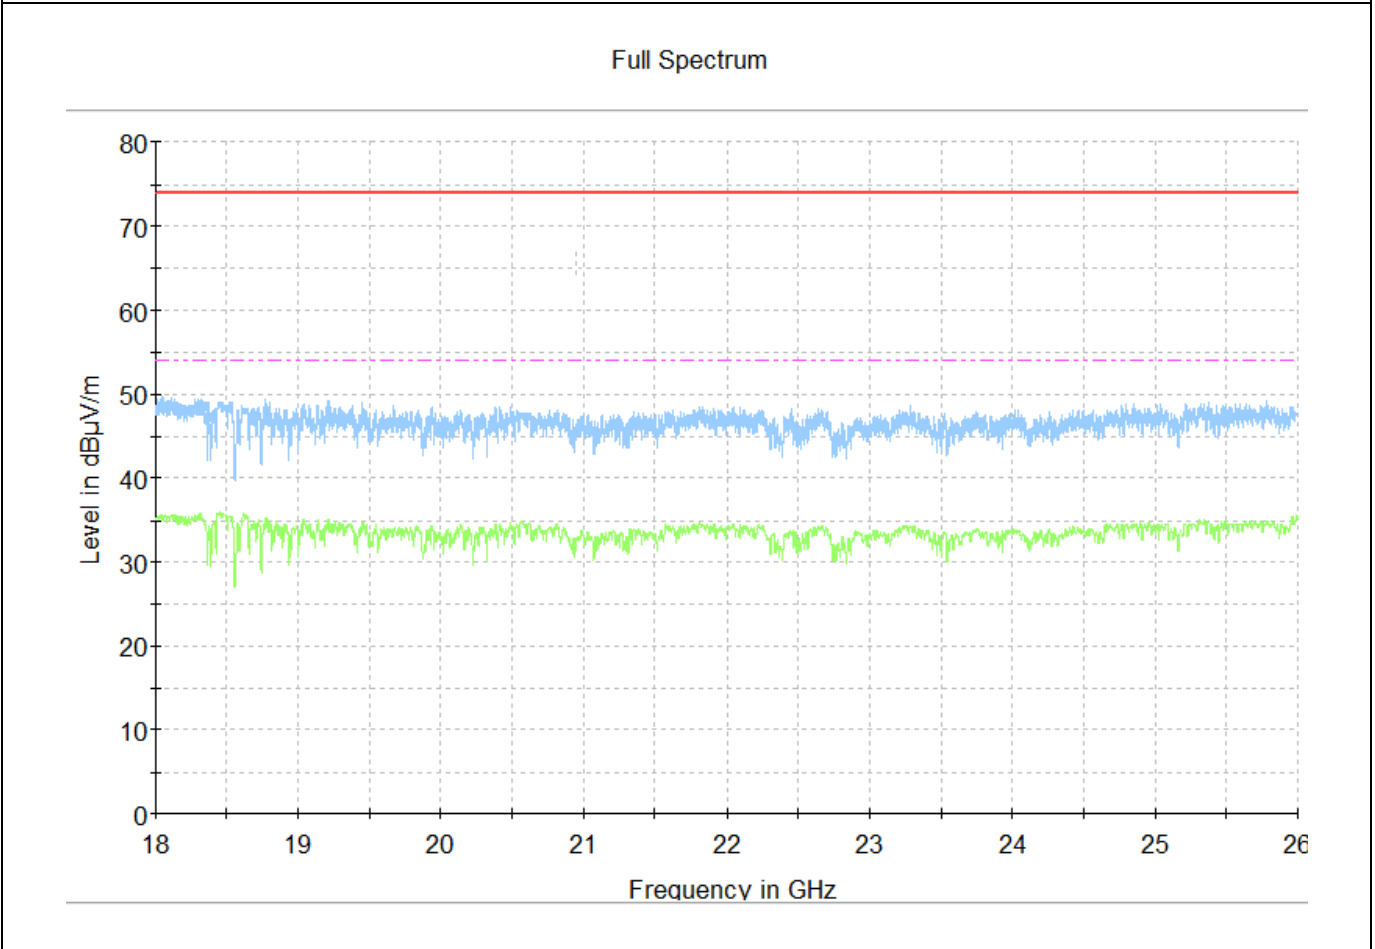




Graphical presentation of radiated emission
Operating mode: 1 (Channel 0 – Frequency 2402)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

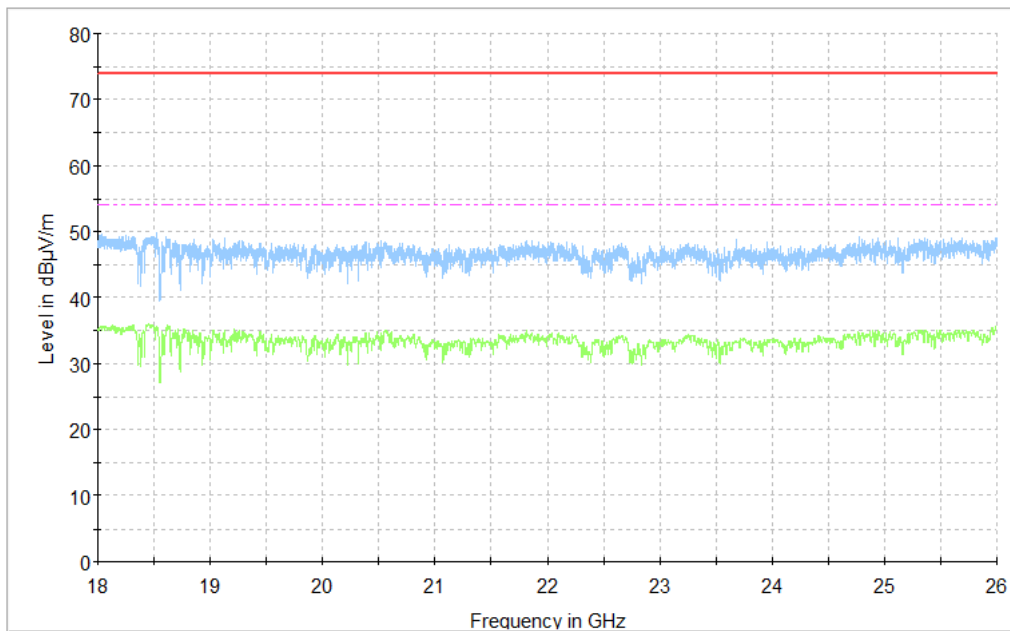

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 9KHz – 30MHz
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum

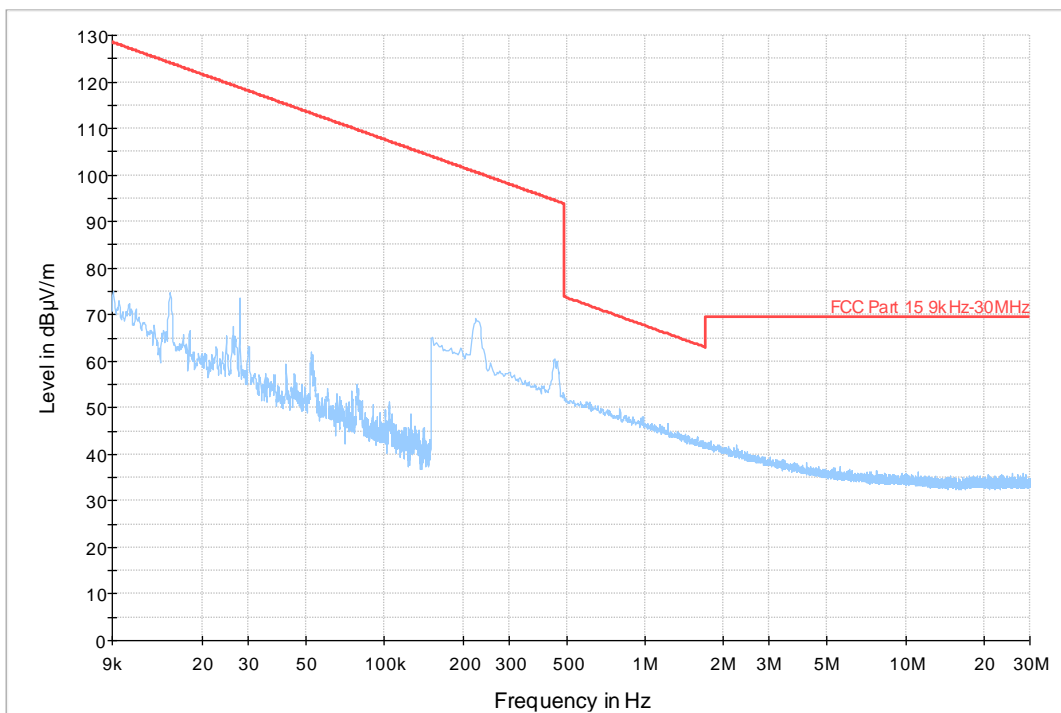





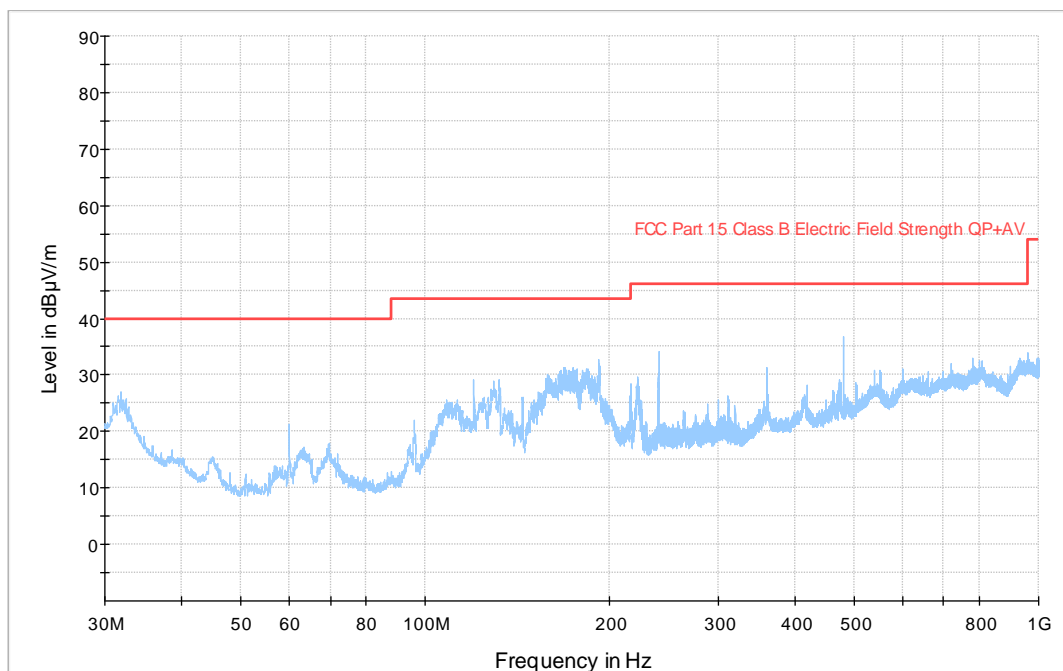

— Preview Result 1-PK+
 — FCC Part 15 9kHz-30MHz
 ◆ Final_Result QPK
 ◆ Final_Result A\

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Vertical
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum



- | | |
|--|--|
|  Preview Result 1-PK+ |  Critical_Freqs AVG |
|  Critical_Freqs PK+ |  FCC Part 15 Class B Electric Field Strength QP |
|  Final_Result QPK |  Final_Result AVG |

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum

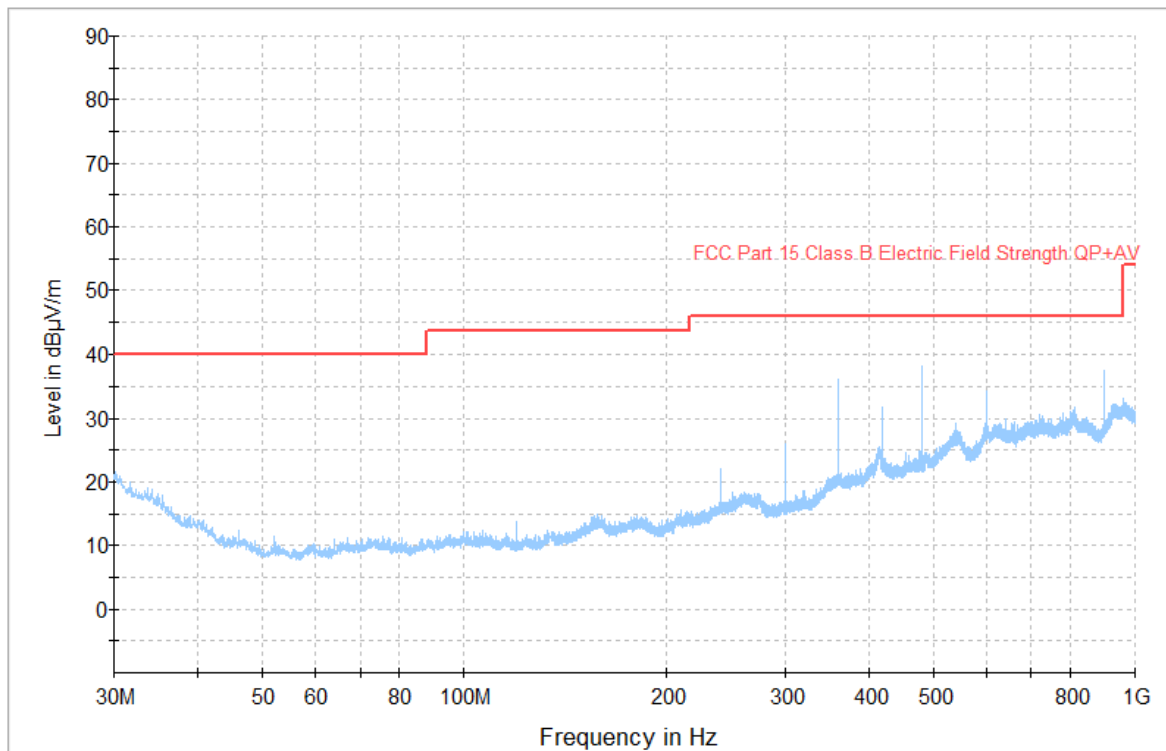

— Preview Result 1-PK+
◆ Final_Result QPK

— FCC Part 15 Class B Electric Field Strength QP
◆ Final_Result AVG

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

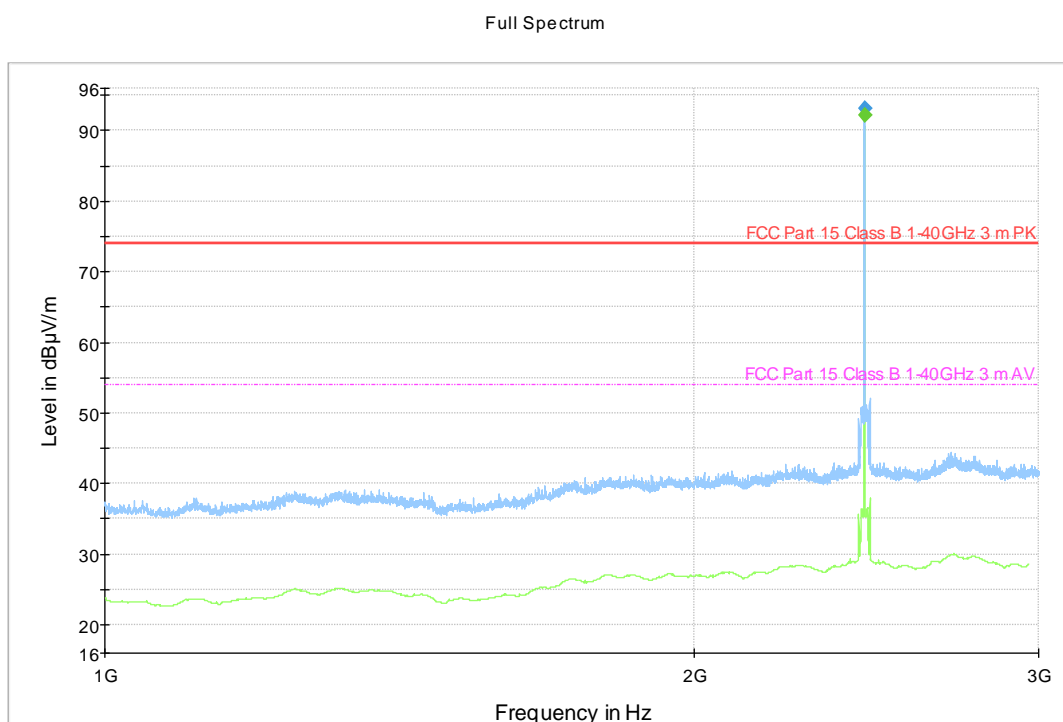

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2444.000000	---	92.17	---	---	1000.0	1000.000	150.0	V	0.0
2444.000000	93.11	---	---	---	1000.0	1000.000	150.0	V	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*



Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

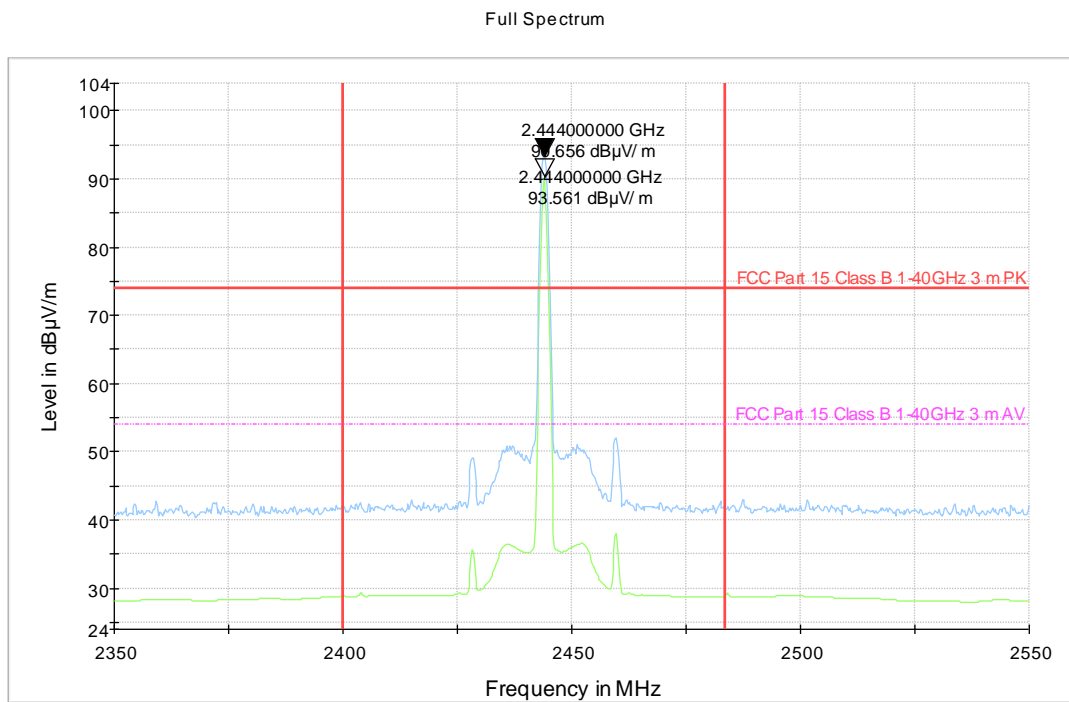


- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 2400MHz
- FCC Part 15 2483.5MHz
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Fundamental Level

Frequency (MHz)	Reading value (dBµV/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dBµV/m)
	Peak	Average			
2444.000000	106.36	---	-13.11	3.31	96.65
2444.000000	---	103.36	-13.11	3.31	93.56

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

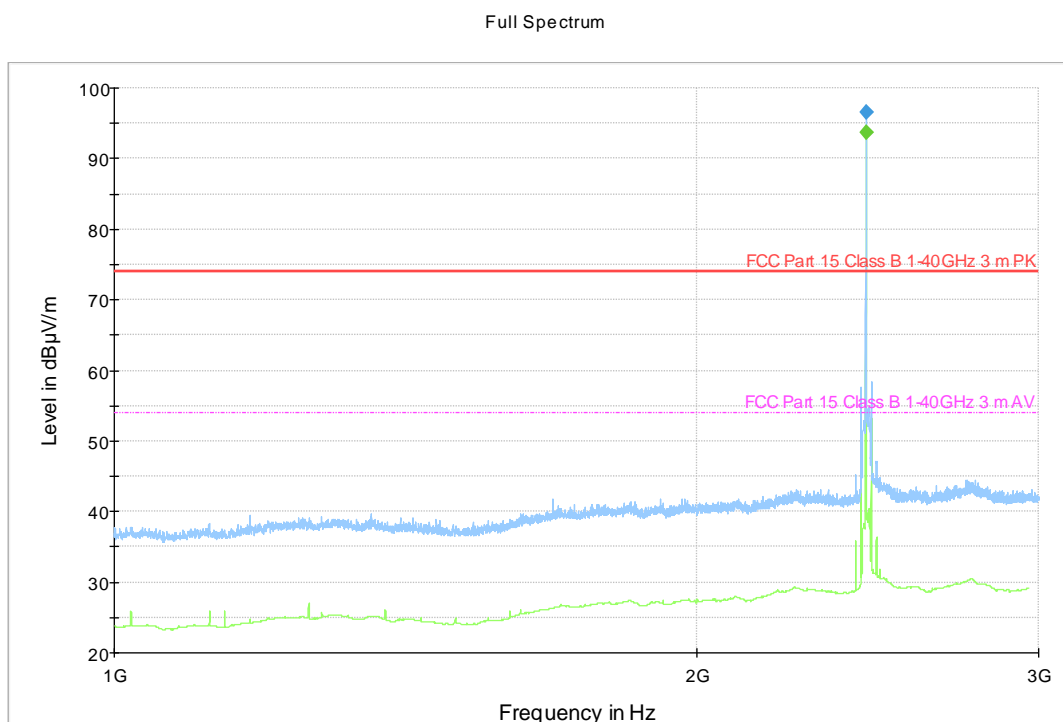

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2444.000000	---	93.61	---	---	1000.0	1000.000	150.0	H	0.0
2444.000000	96.53	---	---	---	1000.0	1000.000	150.0	H	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*



Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

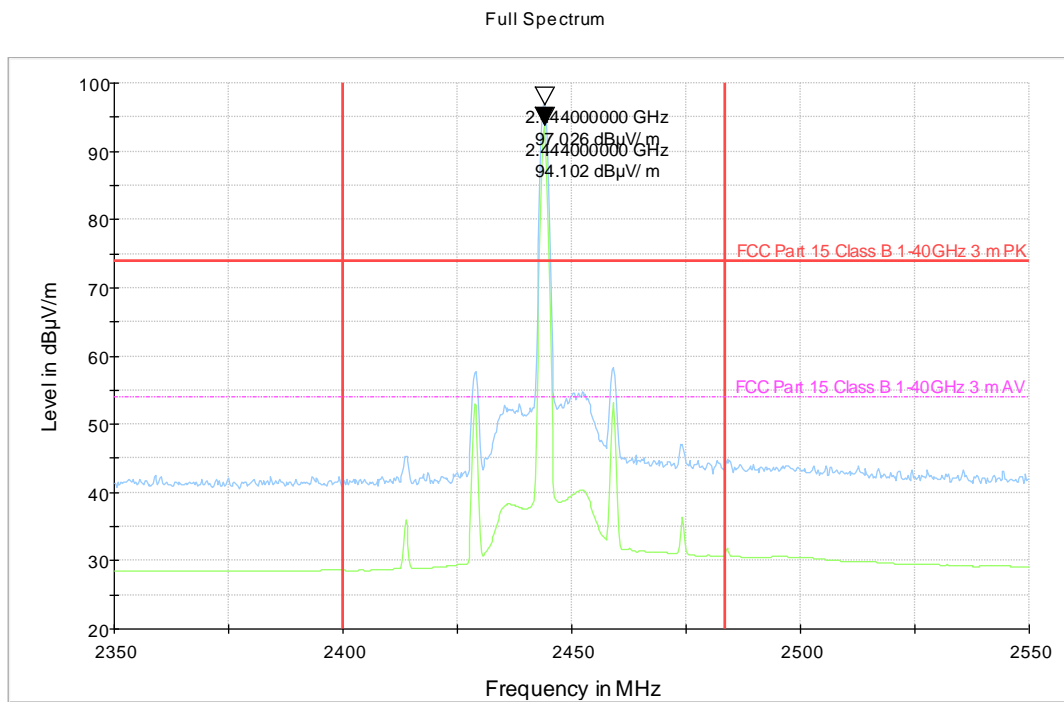


- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 2400MHz
- FCC Part 15 2483.5MHz
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Fundamental Level

Frequency (MHz)	Reading value (dBµV/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dBµV/m)
	Peak	Average			
2444.000000	106.82	---	-13.11	3.31	97.02
2444.000000	---	103.90	-13.11	3.31	94.10

Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 3GHz -18GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

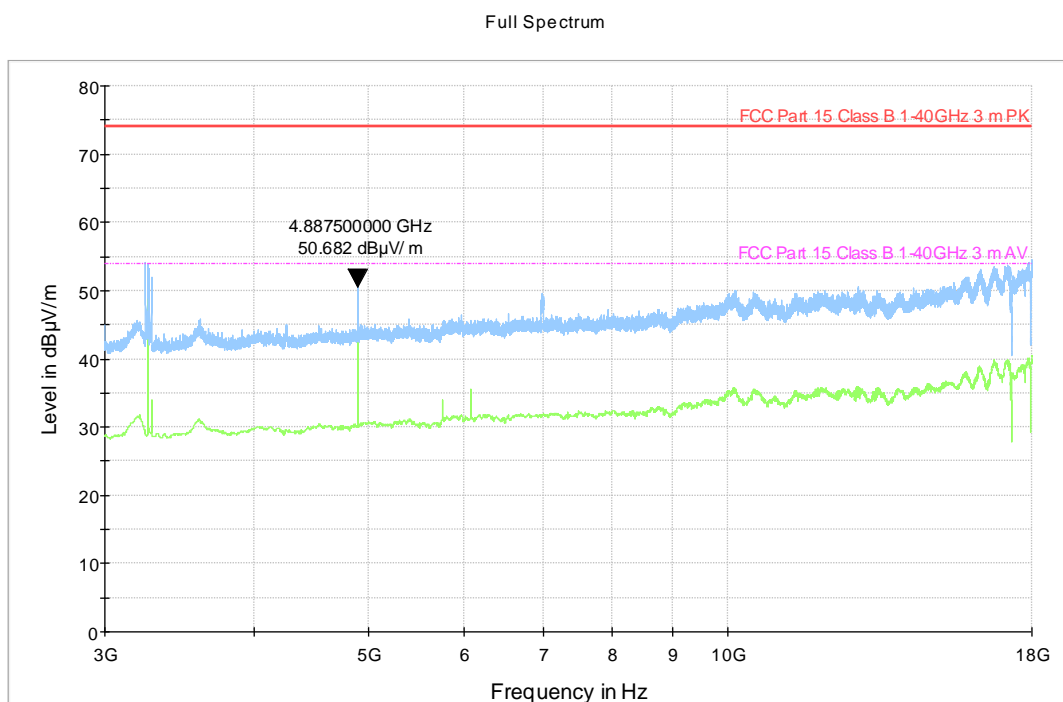


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs AVG
- * Critical_Freqs PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4887.500000	50.68	74.00	23.32	1000.0	1000.000	150.0	V	0.0

Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 3GHz -18GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

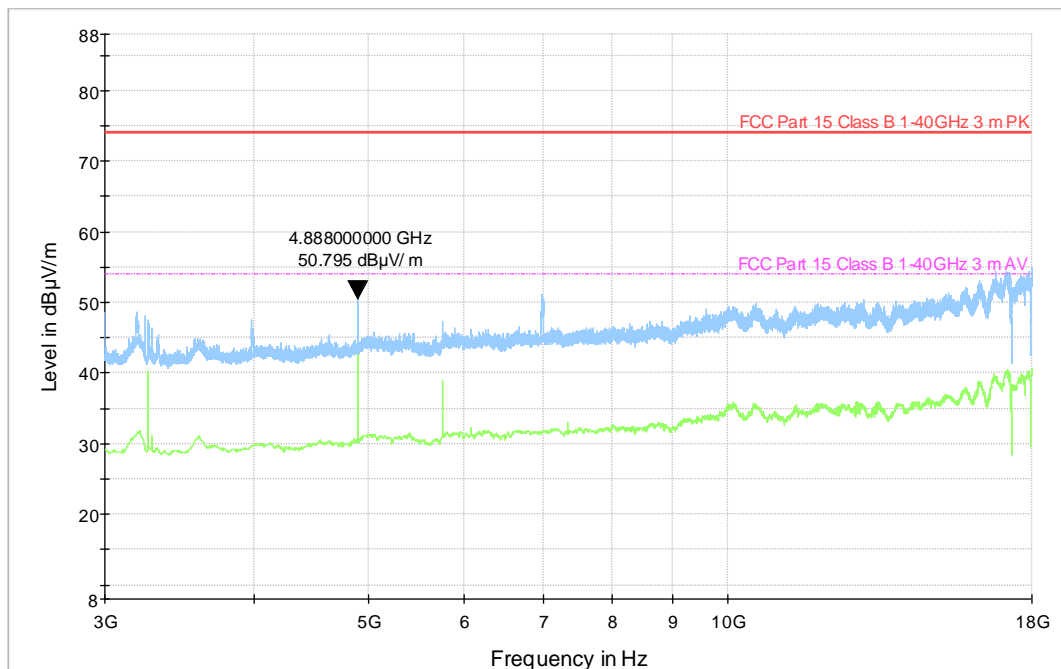


— Preview Result 2-AVG — Preview Result 1-PK+
— FCC Part 15 Class B 1-40GHz 3 m PK — FCC Part 15 Class B 1-40GHz 3 m AV
◆ Final_Result PK+ ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4888.000000	50.68	74.00	23.21	1000.0	1000.000	150.0	H	0.0


Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

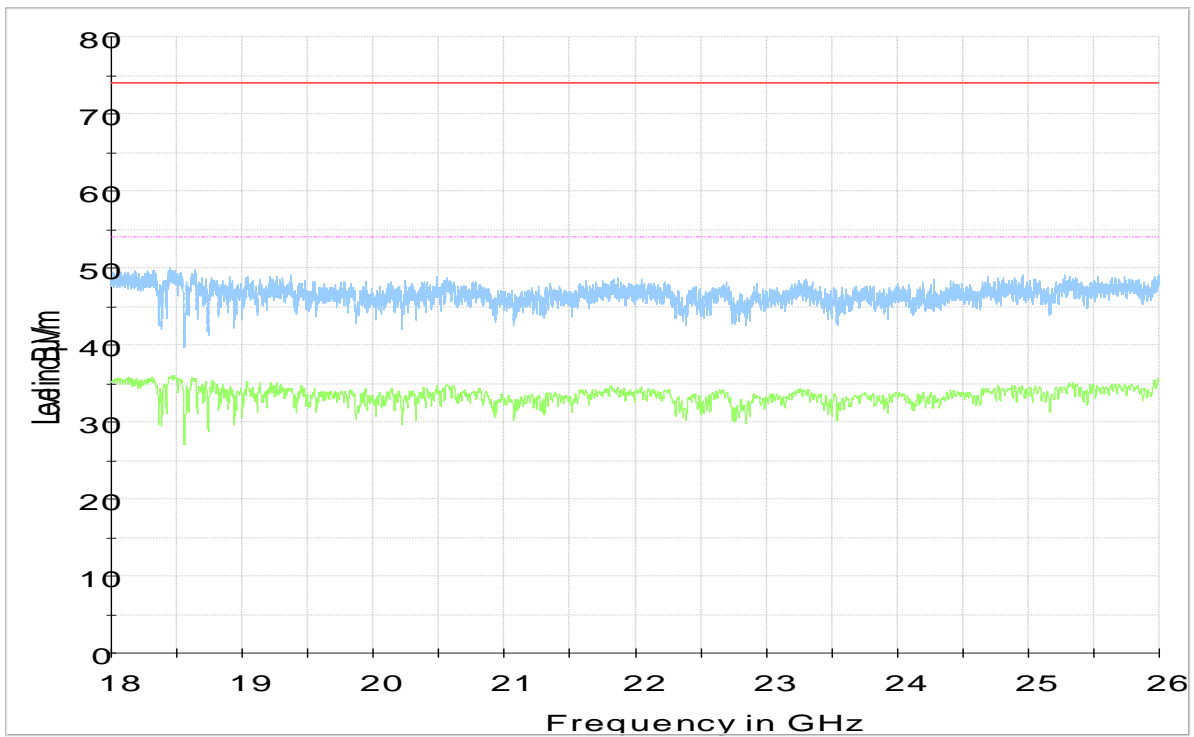


Graphical presentation of radiated emission
Operating mode: 2 (Channel 21 – Frequency 2444)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

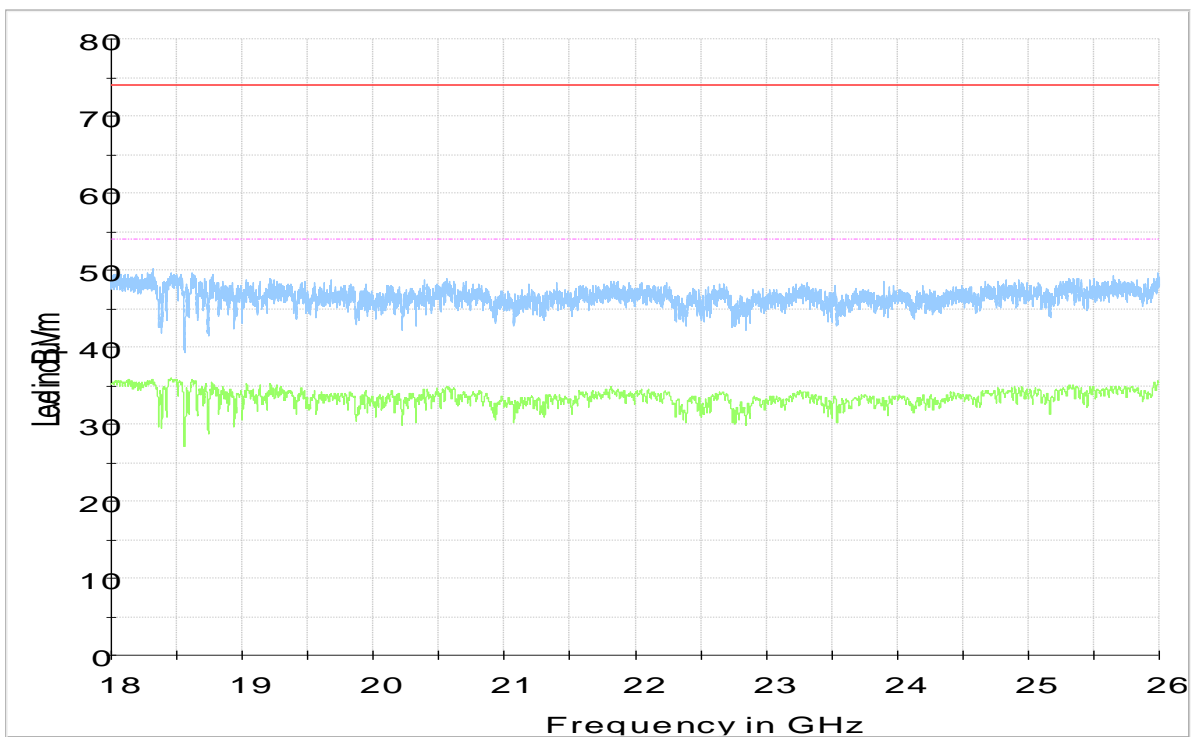

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 9KHz – 30MHz
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum

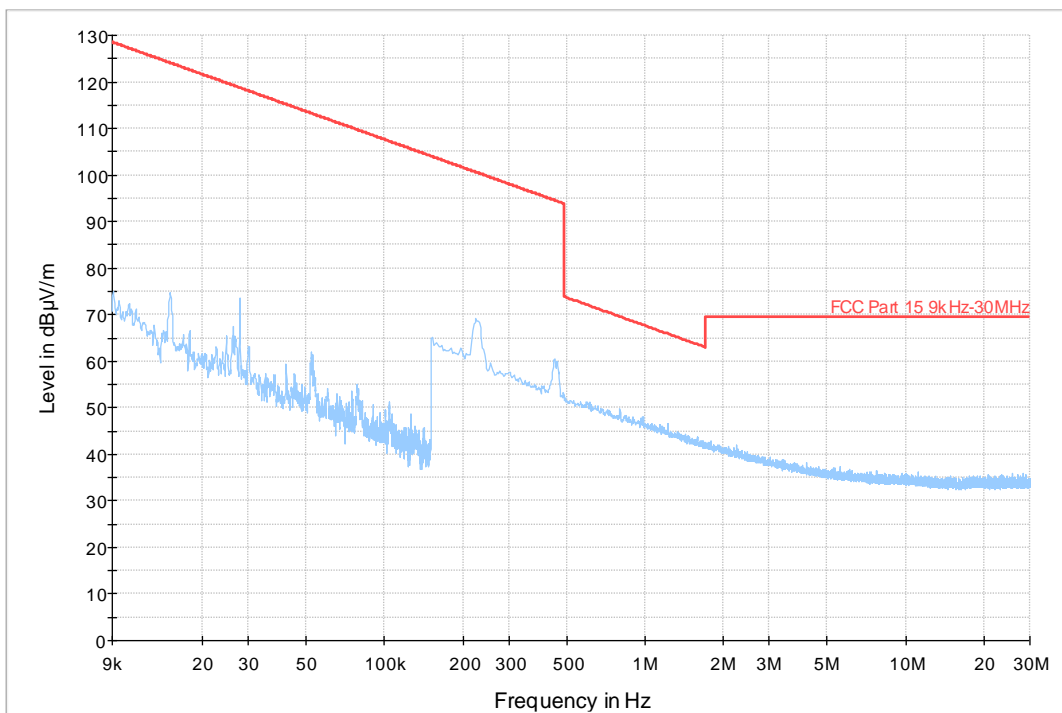





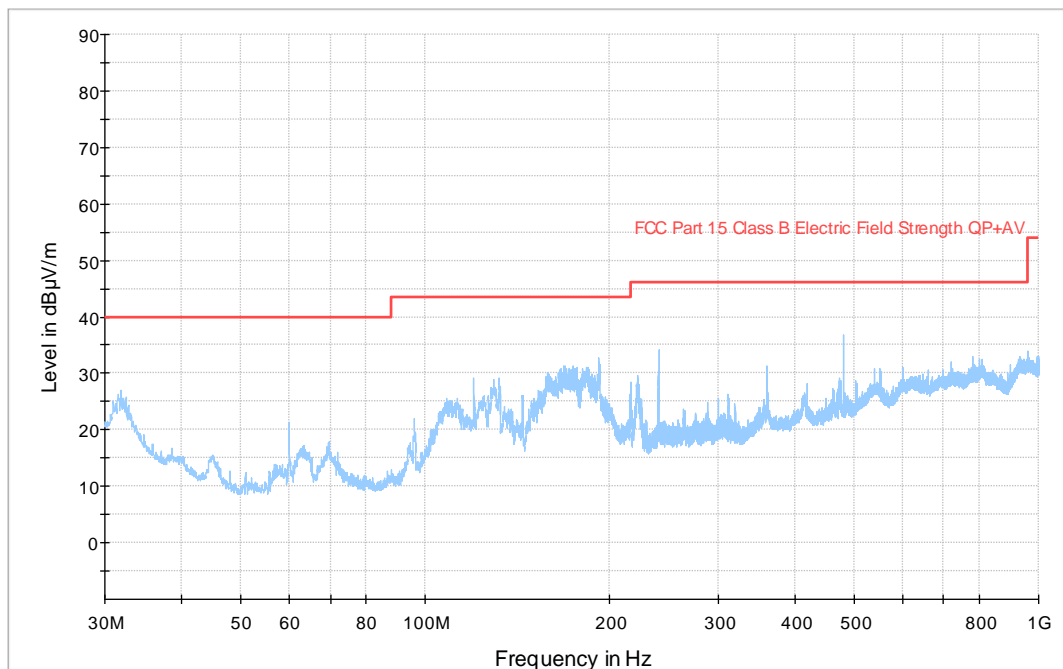

— Preview Result 1-PK+
 — FCC Part 15 9kHz-30MHz
 ◆ Final_Result QPK
 ◆ Final_Result A\

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Vertical
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum



- | | | | |
|---|----------------------|---|--|
|  | Preview Result 1-PK+ |  | Critical_Freqs AVG |
|  | Critical_Freqs PK+ |  | FCC Part 15 Class B Electric Field Strength QP |
|  | Final_Result QPK |  | Final_Result AVG |

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 30MHz – 1GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace)
Axis: Y (worst case)
Measurement distance: 3m


Full Spectrum

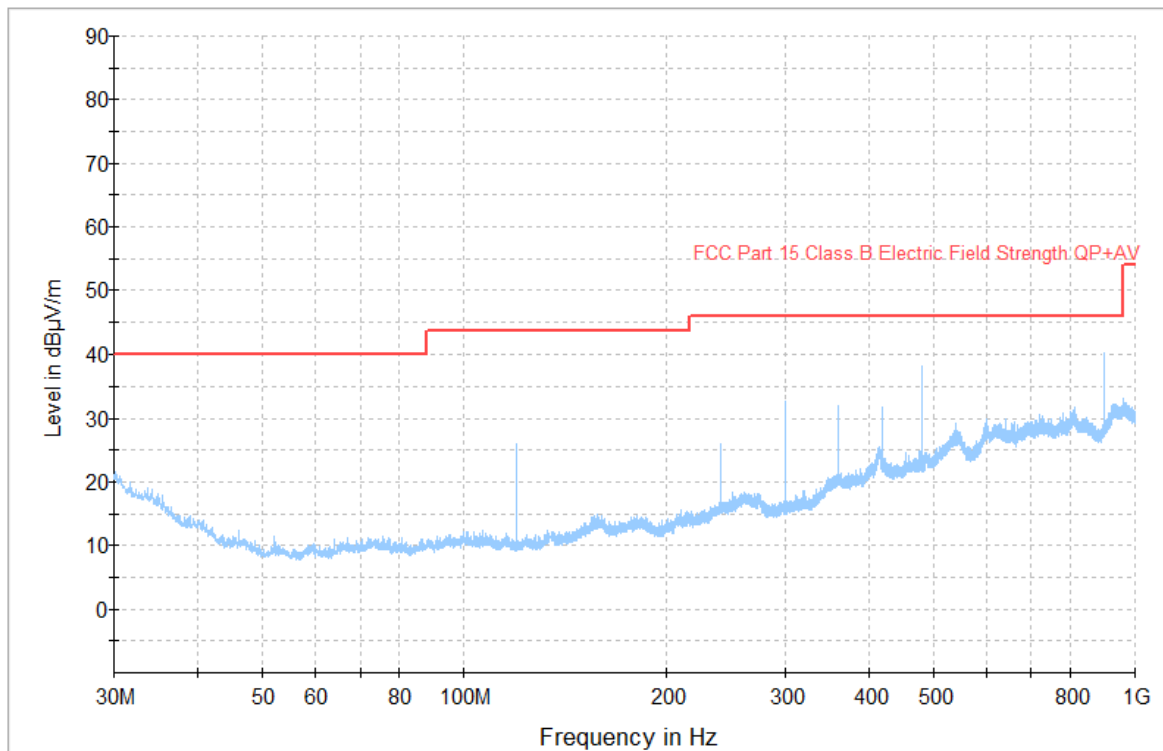

—◆— Preview Result 1-PK+
◆ Final_Result QPK

—◆— FCC Part 15 Class B Electric Field Strength QP
◆ Final_Result AVG

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

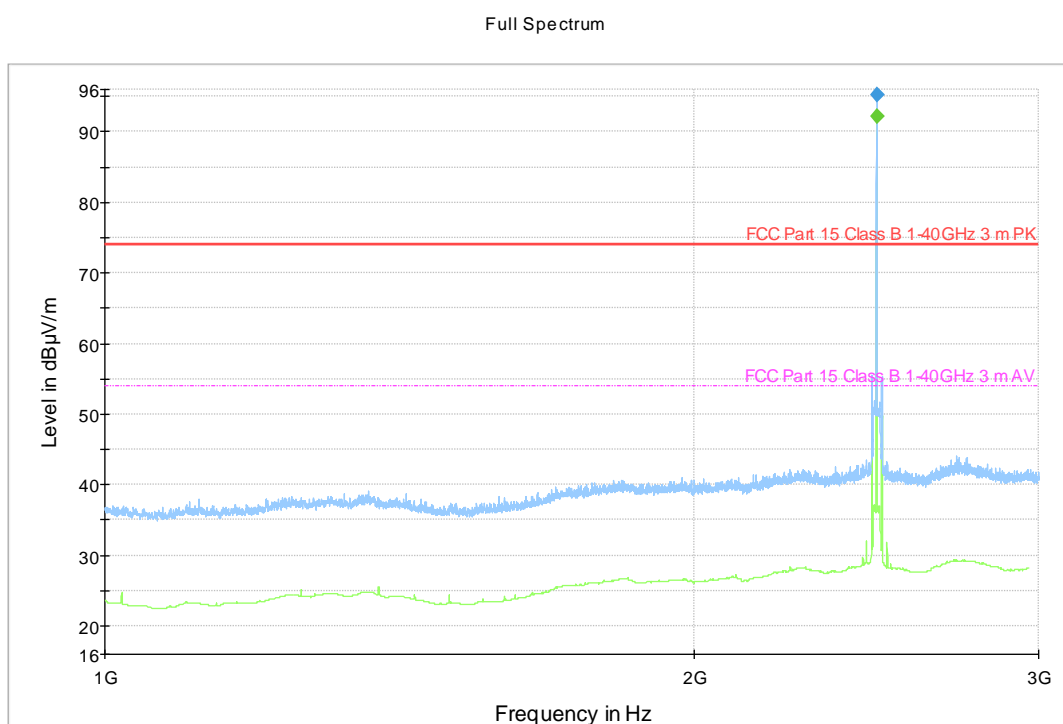


— Preview Result 2-AVG — Preview Result 1-PK+
— FCC Part 15 Class B 1-40GHz 3 m PK — FCC Part 15 Class B 1-40GHz 3 m AV
◆ Final_Result PK+ ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2480.000000	---	92.28	---	---	1000.0	1000.000	150.0	V	0.0
2480.000000	95.25	---	---	---	1000.0	1000.000	150.0	V	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
 Fundamental frequency not related to limit.*

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

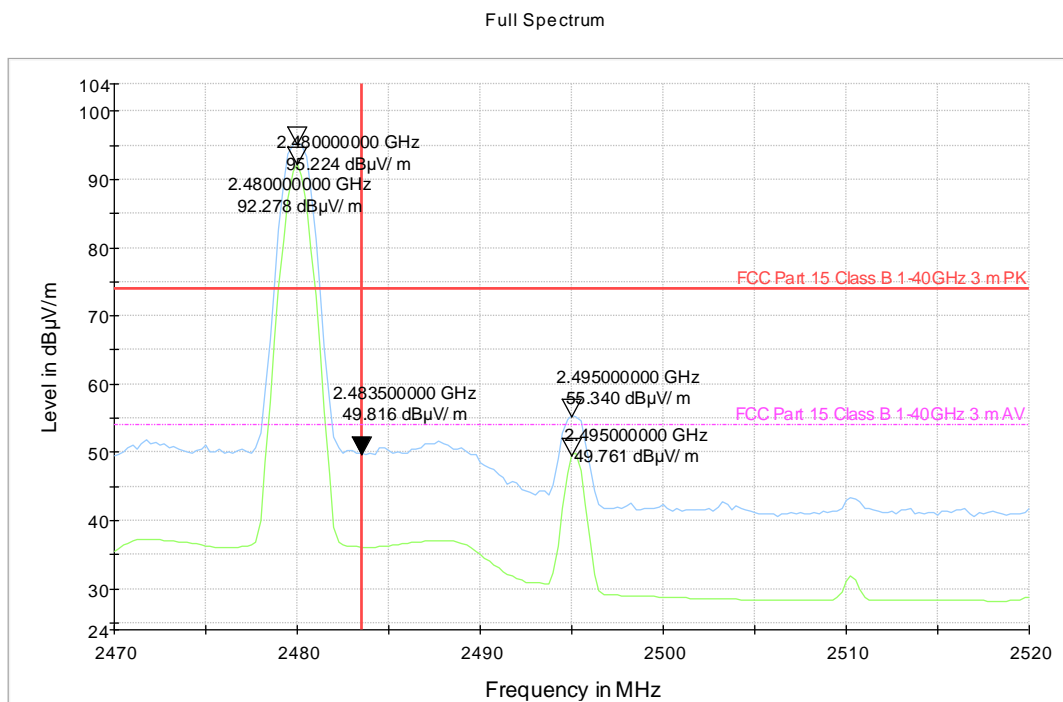

- | | |
|---|---|
| — Preview Result 2-AVG | — Preview Result 1-PK+ |
| — FCC Part 15 2483.5MHz | — FCC Part 15 Class B 1-40GHz 3 m PK |
| — FCC Part 15 Class B 1-40GHz 3 m AV | ◆ Final_Result PK+ |
| ◆ Final_Result AVG | |

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*


Fundamental Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2480.000000	104.89	---	-13.02	3.35	95.22
2480.000000	---	101.95	-13.02	3.35	92.28

Harmonic Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2495.000000	64.95	---	-12.98	3.37	55.34
2495.000000	---	59.37	-12.98	3.37	49.76

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 1GHz – 3GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

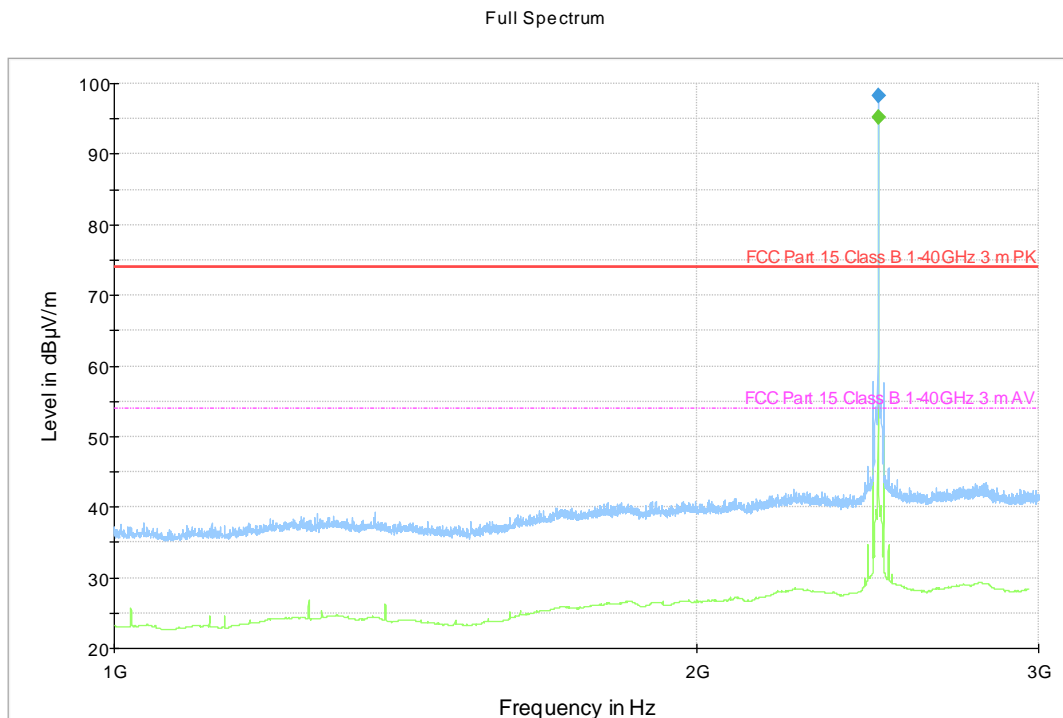

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2480.000000	---	95.32	---	---	1000.0	1000.000	150.0	H	0.0
2480.000000	98.29	---	---	---	1000.0	1000.000	150.0	H	0.0

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency: Restricted band of operations near fundamental
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Measurement distance: 3m

Full Spectrum

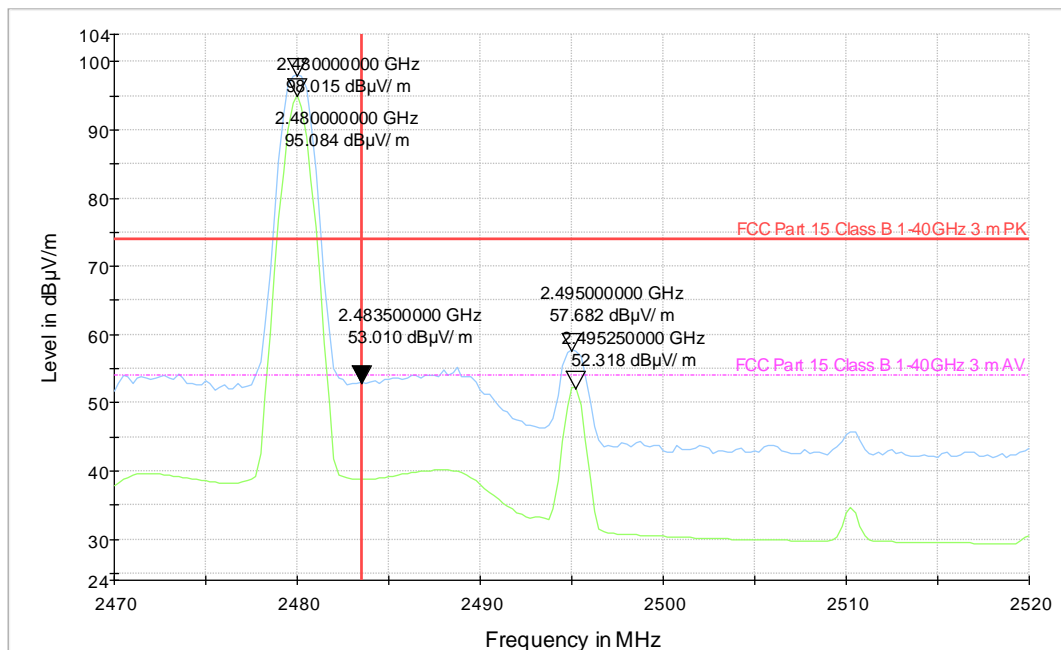

- | | |
|---|---|
| — Preview Result 2-AVG | — Preview Result 1-PK+ |
| — FCC Part 15 2483.5MHz | — FCC Part 15 Class B 1-40GHz 3 m PK |
| — FCC Part 15 Class B 1-40GHz 3 m AV | ◆ Final_Result PK+ |
| ◆ Final_Result AVG | |

*Peaks out of limits are due to BLE carrier (exclusion band).
Fundamental frequency not related to limit.*

Fundamental Level


Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2480.000000	107.68	---	-13.02	3.35	98.01
2480.000000	---	104.75	-13.02	3.35	95.08

Harmonic Level

Frequency (MHz)	Reading value (dB μ V/m)		Antenna Factor with pre-Amplifier (dB3/m)	Cable Loss (dB)	Correct reading (dB μ V/m)
	Peak	Average			
2495.000000	67.29	---	-12.98	3.37	57.68
2495.250000	---	61.92	-12.98	3.37	52.31

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 3GHz -18GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

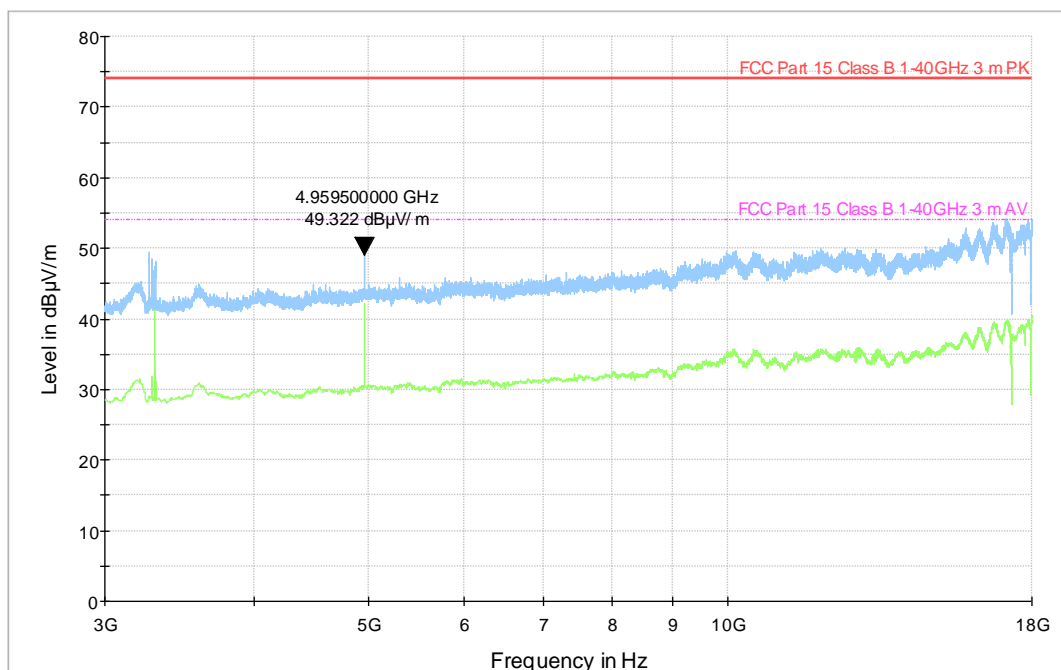


- Preview Result 2-AVG
- FCC Part 15 Class B 1-40GHz 3 m PK
- Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4959.500000	49.32	74.00	30.68	1000.0	1000.000	150.0	V	0.0

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 3GHz -18GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

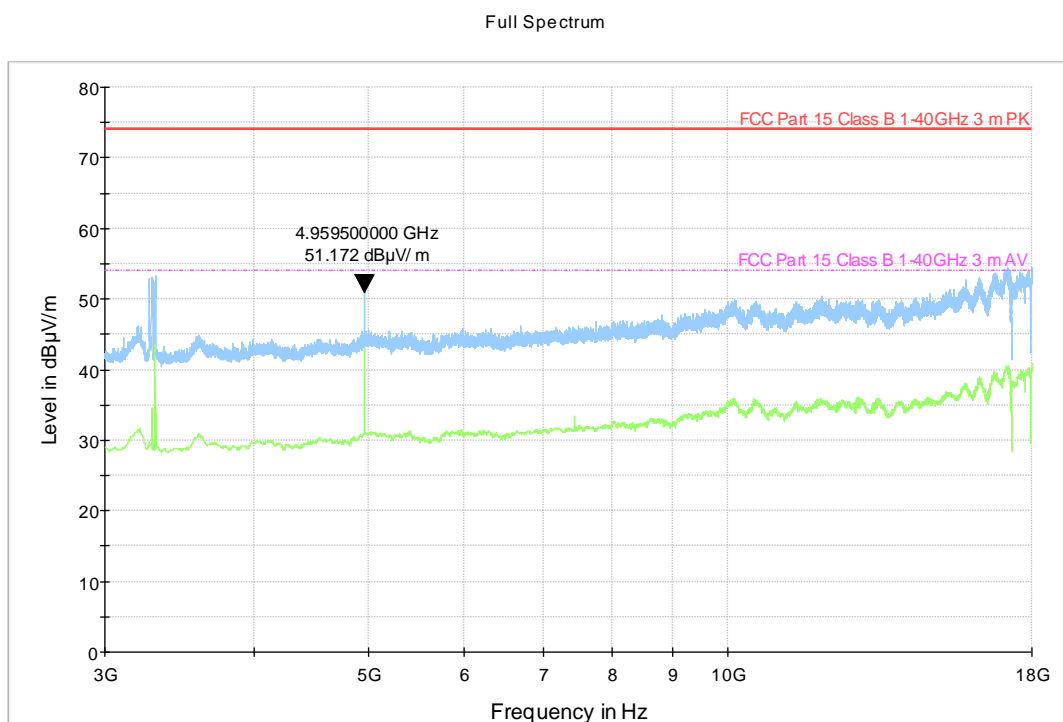


- Preview Result 2-AVG
 — Preview Result 1-PK+
- FCC Part 15 Class B 1-40GHz 3 m PK
 — FCC Part 15 Class B 1-40GHz 3 m AV
- ◆ Final_Result PK+
 ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4959.500000	51.17	74.00	22.83	1000.0	1000.000	150.0	H	0.0


Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Vertical
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

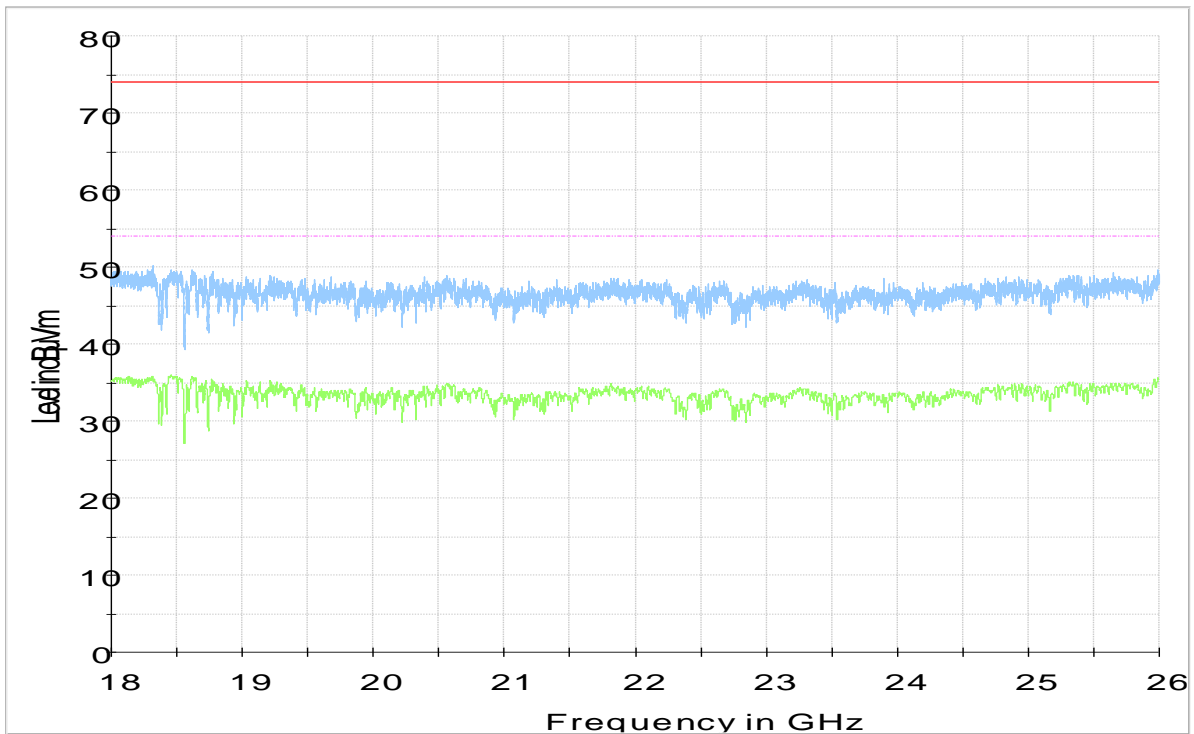

Graphical presentation of radiated emission
Operating mode: 3 (Channel 39 – Frequency 2480)
Frequency scan: 18GHz – 26GHz
Antenna polarization: Horizontal
Trace: Peak (blue trace); Average (green trace)
Axis: Y (worst case)
Measurement distance: 3m

Full Spectrum

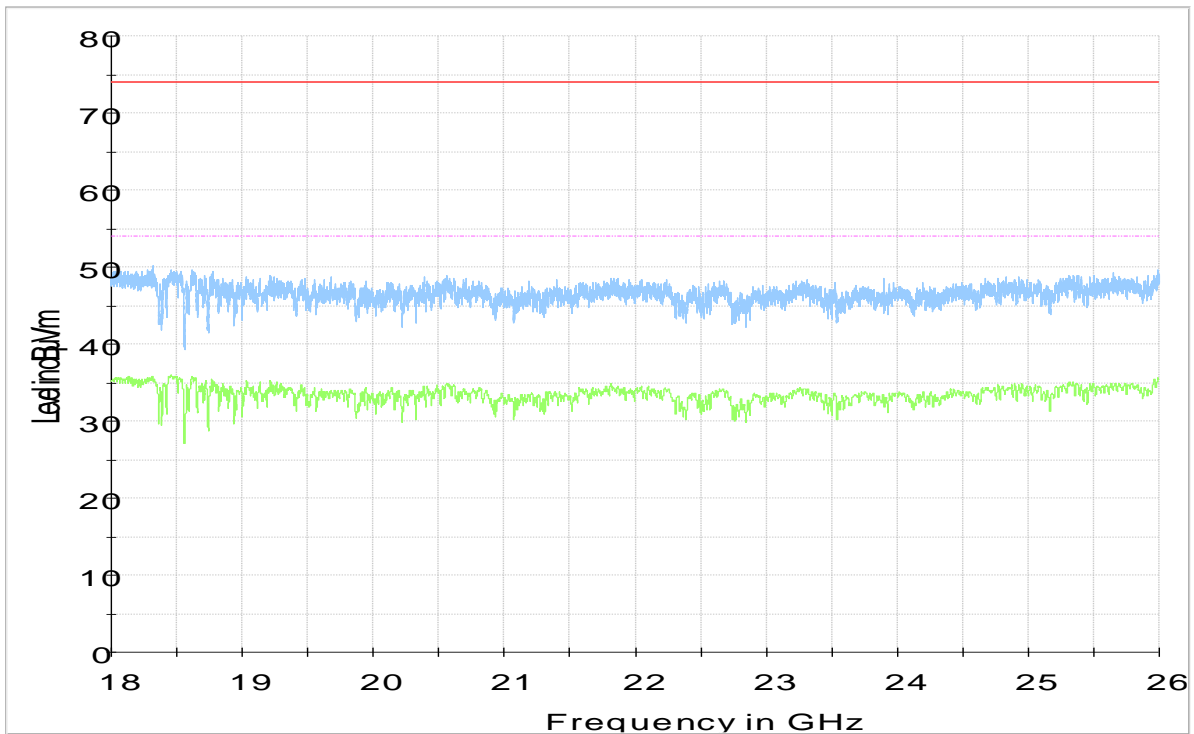



TÜVRheinland®



LAB N° 1356 L

Antenna requirements	
Test date	31/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.203
Test method	§ 5.8 of ANSI C63.10
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	---
Tested terminals	Antenna connector
Result	PASS

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Antenna specifications	
N° of authorized antenna types	2
Antenna type	SMD Antenna
Maximum total gain	0.5 dBi
External power amplifiers	Not present

Maximum Conducted Peak Output Power	
Test date	30/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.3.2.2 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.9.1.1 of ANSI C63.10)
Temperature	20,5°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 2, 3
Tested terminals	Antenna connector
Result	PASS




- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
 - (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
 - (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: since it was not possible to put in an antenna connector, test was carried out in a radiated manner According to Par. 2.3 of KDB 412172 D01 Determining ERP and EIRP v01r01

Graphical presentation of maximum conducted peak output power

Operation mode: 1 (Channel 0 – Frequency 2402)

Test conditions			Frequency (MHz)	Channel	Conducted Output Power (Eirp)		Antenna Gain (dBi)	Limits (W)		Result
Temperature	Voltage	Modulation			dBm	mW		Conducted	Radiated	
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2402	0	-2,25	0,60	0.5	1	4	PASS

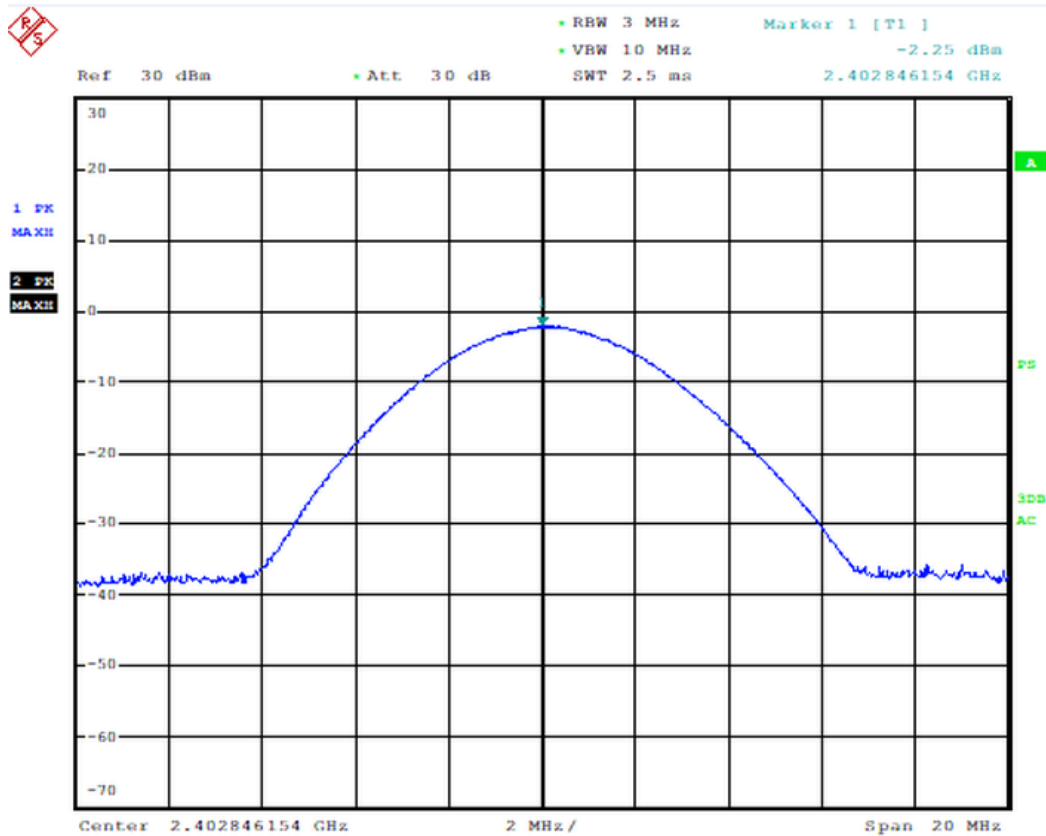




Graphical presentation of maximum conducted peak output power

Operation mode: 2 (Channel 21 – Frequency 2444)

Test conditions			Frequency (MHz)	Channel	Conducted Output Power (Eirp)		Antenna Gain (dBi)	Limits (W)		Result
Temperature	Voltage	Modulation			dBm	mW		Conducted	Radiated	
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2444	21	-2,37	0,58	0.5	1	4	PASS

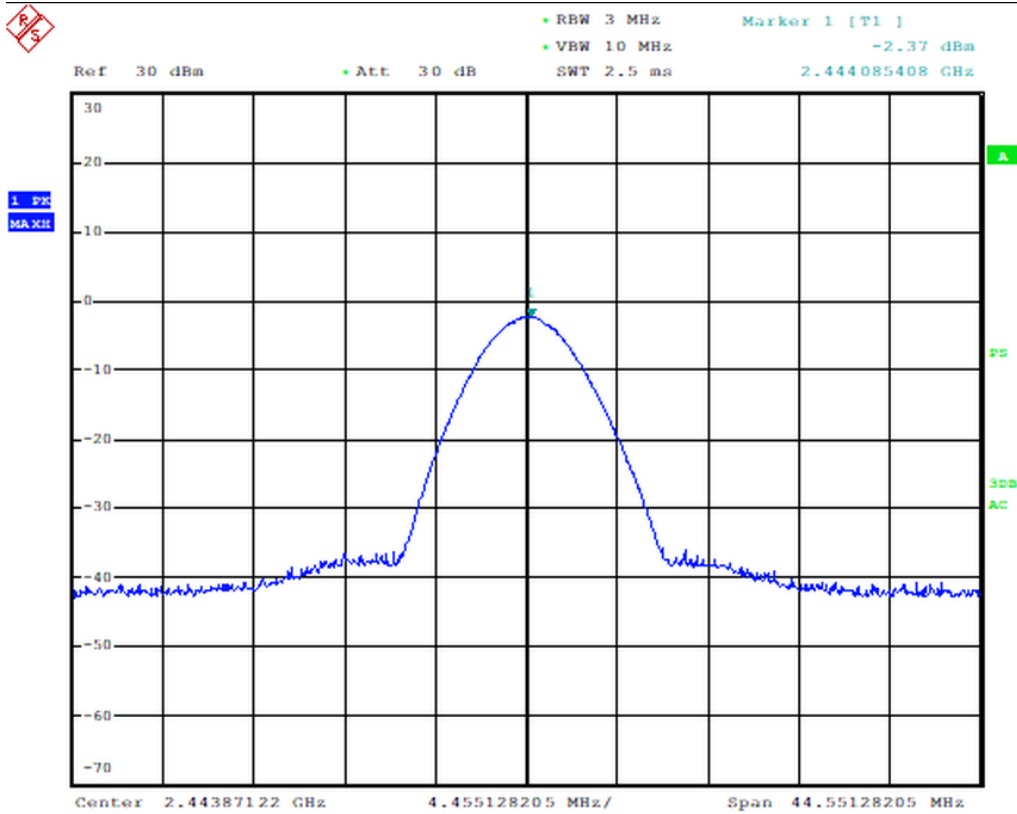




Graphical presentation of maximum conducted peak output power

Operation mode: 3 (Channel 39 – Frequency 2480)

Test conditions			Frequency (MHz)	Channel	Conducted Output Power (Eirp)		Antenna Gain (dBi)	Limits (W)		Result
Temperature	Voltage	Modulation			dBm	mW		Conducted	Radiated	
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2480	39	-2,69	0,53	0.5	1	4	PASS

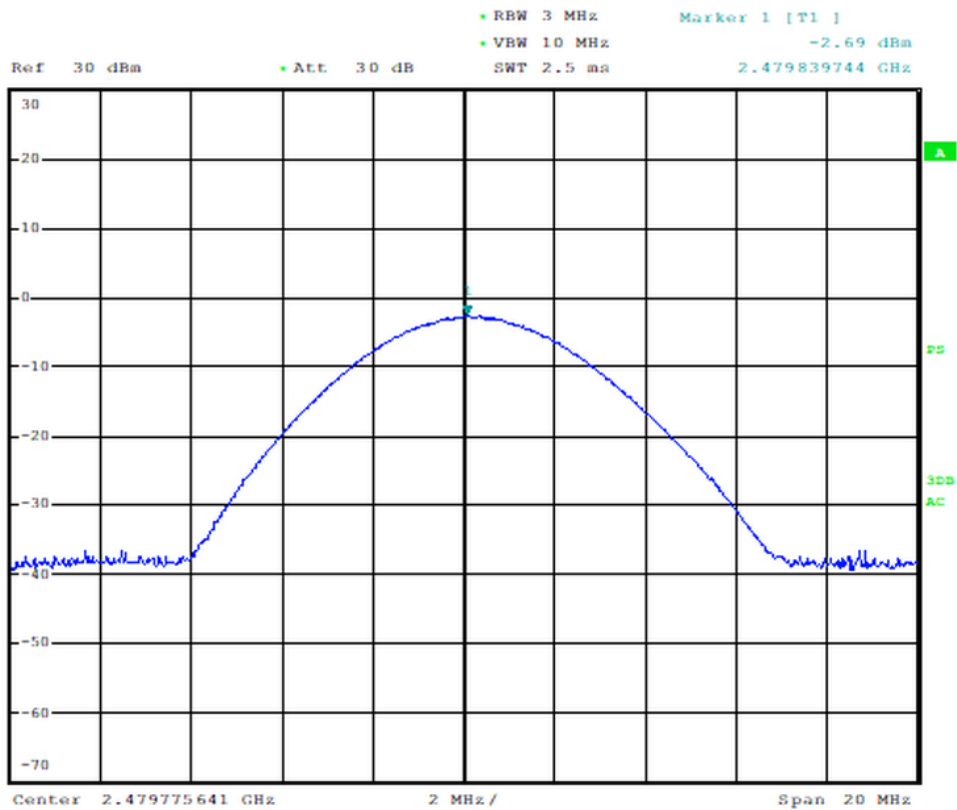




6dB Bandwidth	
Test date	30/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.2 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.8.1 Option 1 of ANSI C63.10)
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 2, 3
Tested terminals	Antenna connector
Result	PASS
Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483,5 MHz, and 5725-5850 MHz bands, The minimum 6 dB bandwidth shall be at least 500 kHz.	

Graphical presentation of 6dB Bandwidth measurement

Operation mode: 1 (Channel 0 – Frequency 2402)


Test conditions			Frequency (MHz)	Channel	6dB Bandwidth (KHz)	Result
Temperature	Voltage	Modulation				
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2402	0	625,00	PASS

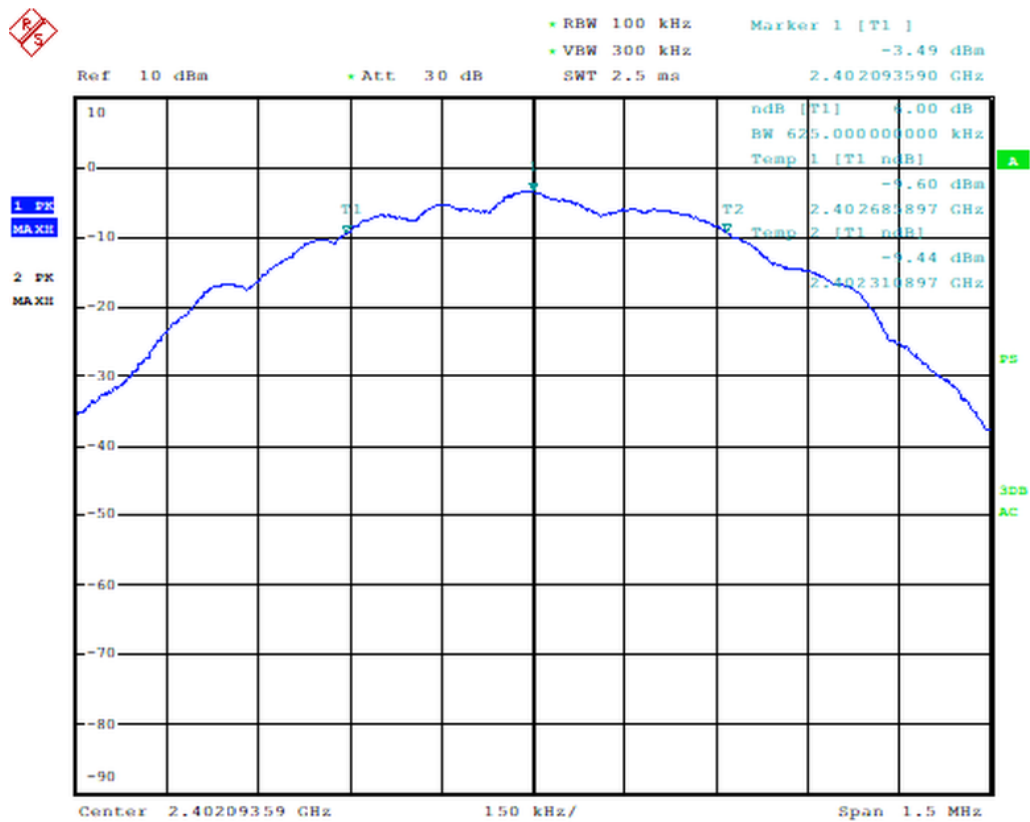

Graphical presentation of 6dB Bandwidth measurement

Operation mode: 2 (Channel 21 – Frequency 2444)

Test conditions			Frequency (MHz)	Channel	6dB Bandwidth (KHz)	Result
Temperature	Voltage	Modulation				
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2444	21	629,80	PASS

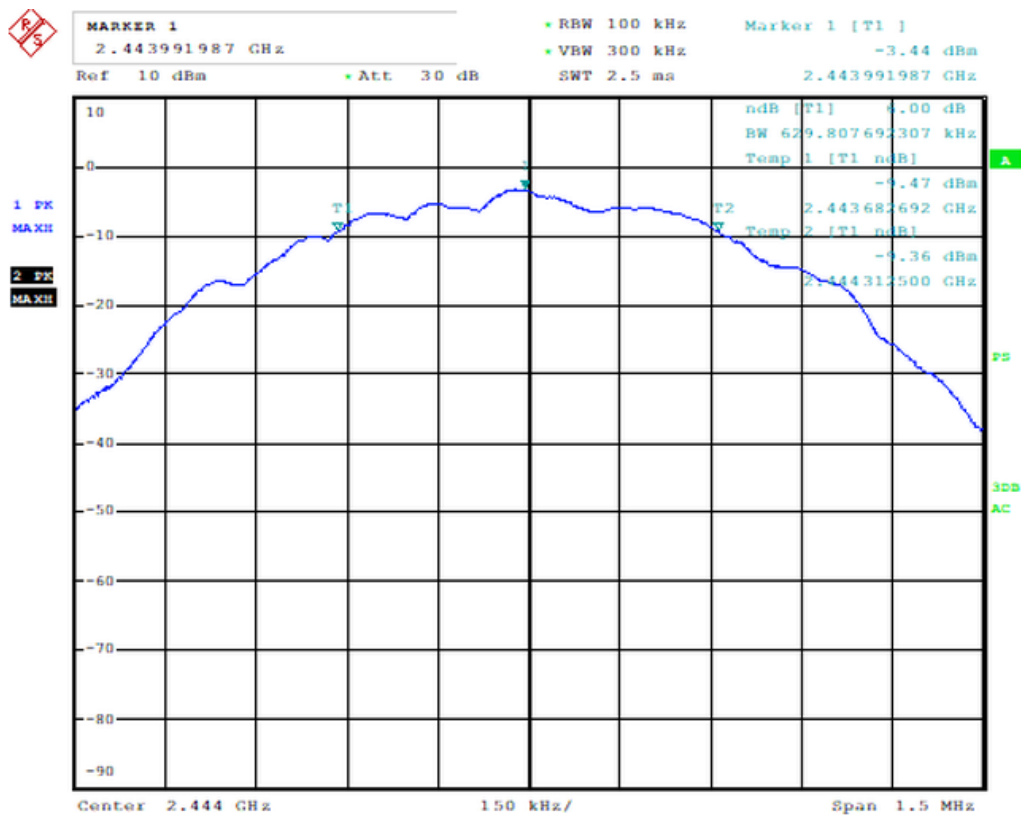




Graphical presentation of 6dB Bandwidth measurement

Operation mode: 3 (Channel 39 – Frequency 2480)

Test conditions			Frequency (MHz)	Channel	6dB Bandwidth (KHz)	Result
Temperature	Voltage	Modulation				
Tnom +20.5°C	5Vdc (internal battery)	GFSK	2480	39	625,00	PASS

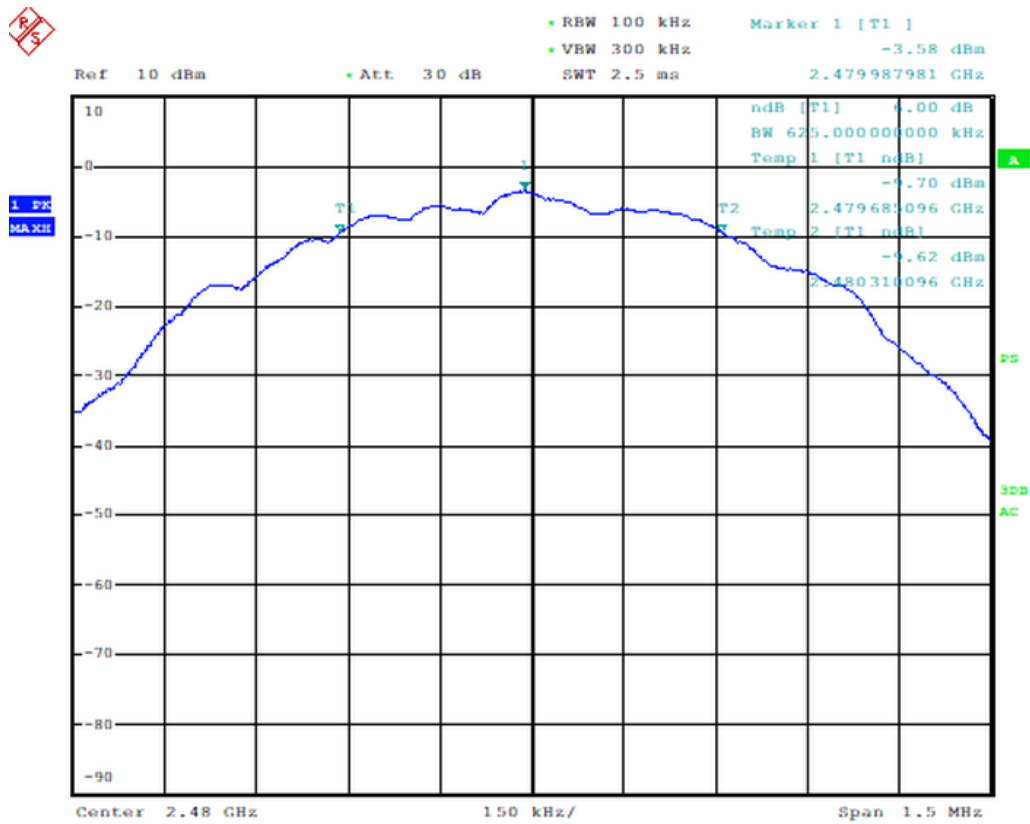




Out-of-band-emissions	
Test date	30/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.5 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.11 of ANSI C63.10)
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 2, 3
Tested terminals	Antenna connector
Result	PASS
<p>(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	


Graphical presentation of RF radiated spurious emissions at the transmitter antenna terminal

Operation mode: 1 (Channel 0 – Frequency 2402)


Fundamental

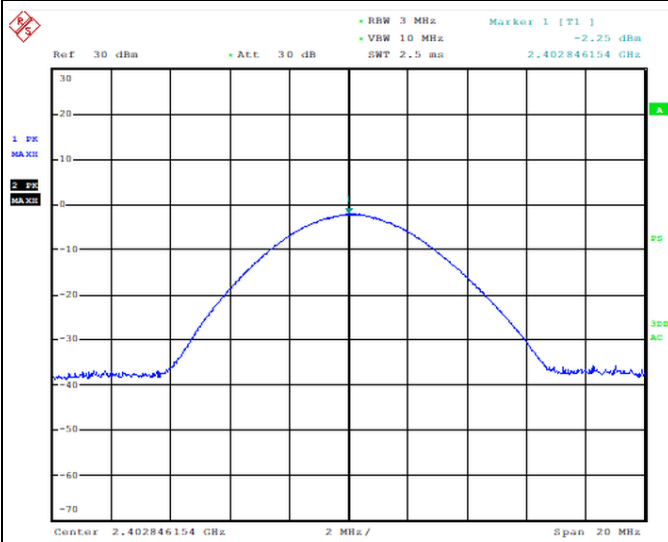


Frequency range: 30MHz – 1GHz

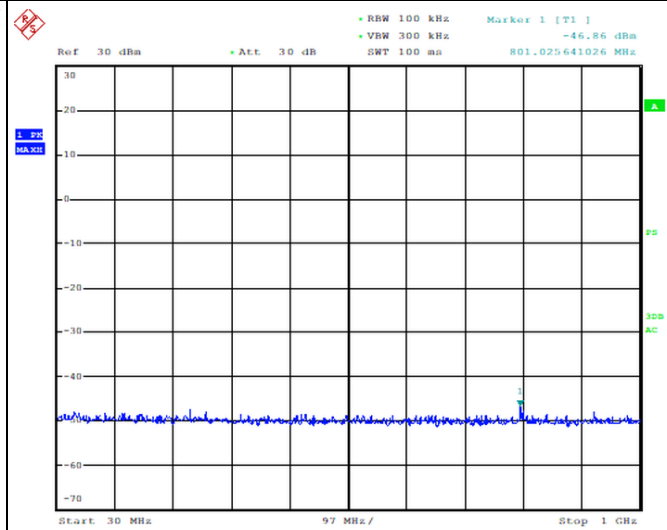


Frequency range: 1GHz – 3GHz

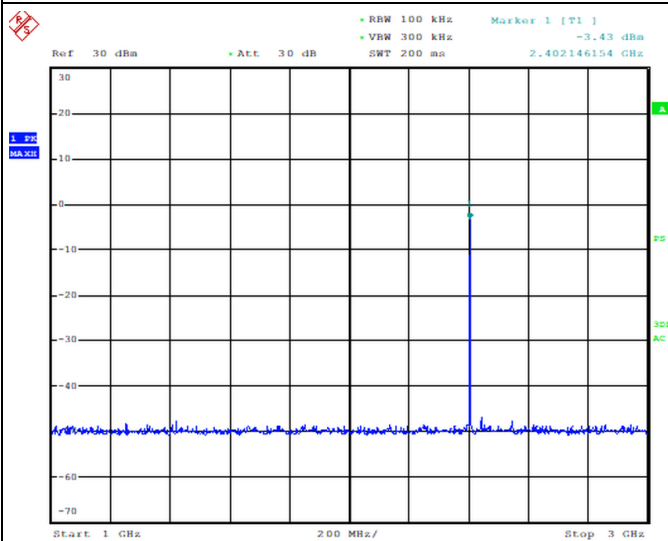

Frequency range: 3GHz – 10GHz

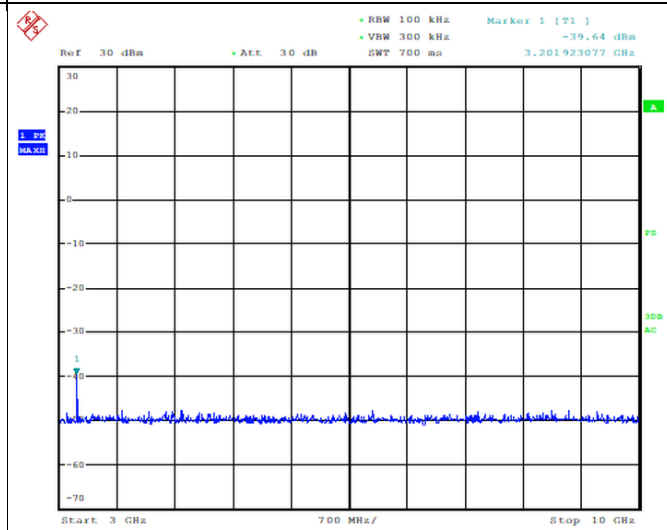

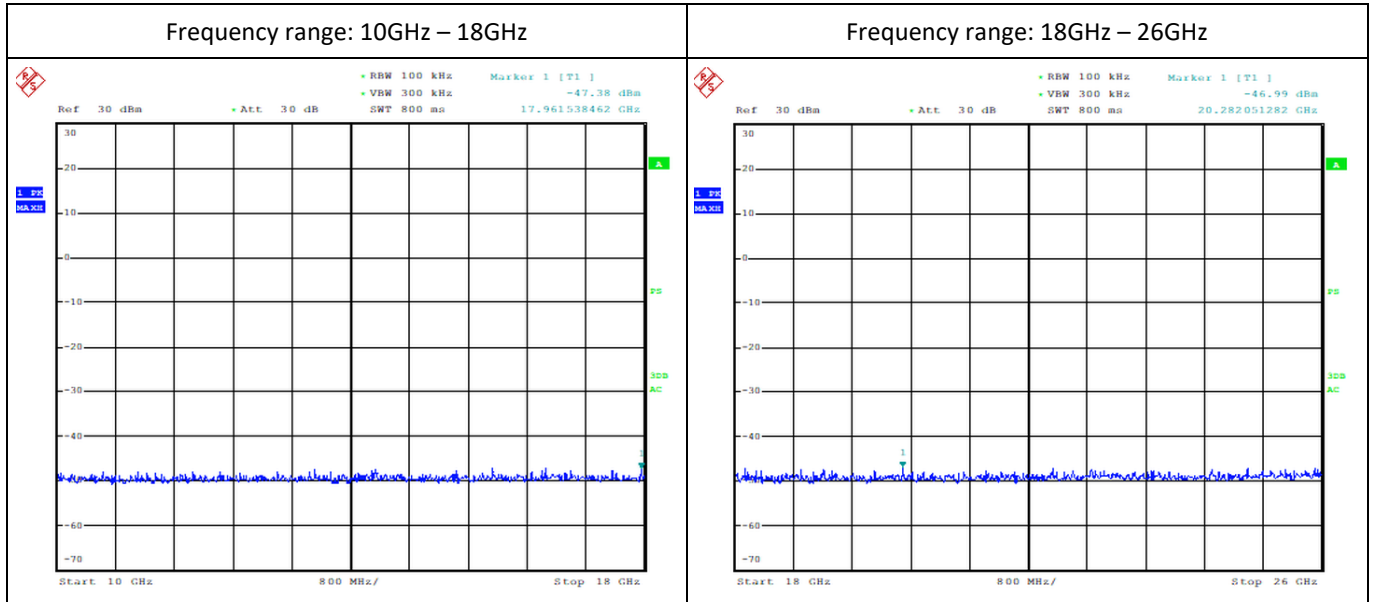


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power – 20dB (dBm)	Margin	Result
3201.92	-39.64	-2.25	37.39	-22.5	17.14	PASS




Graphical presentation of RF radiated spurious emissions at the transmitter antenna terminal

Operation mode: 2 (Channel 21 – Frequency 2444)


Fundamental

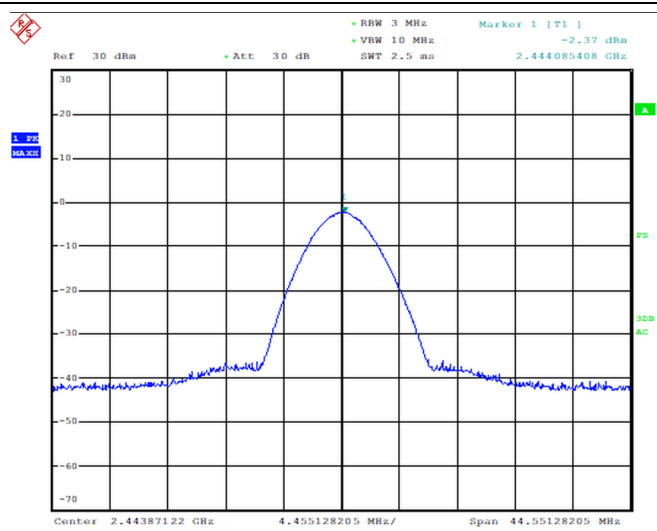


Frequency range: 30MHz – 1GHz

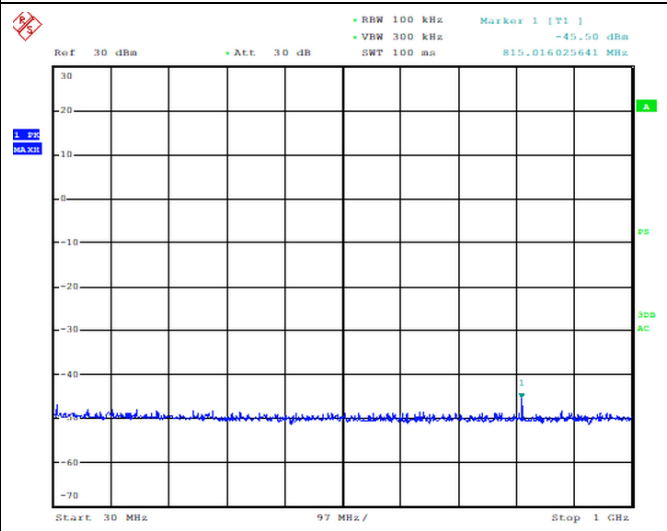


Frequency range: 1GHz – 3GHz

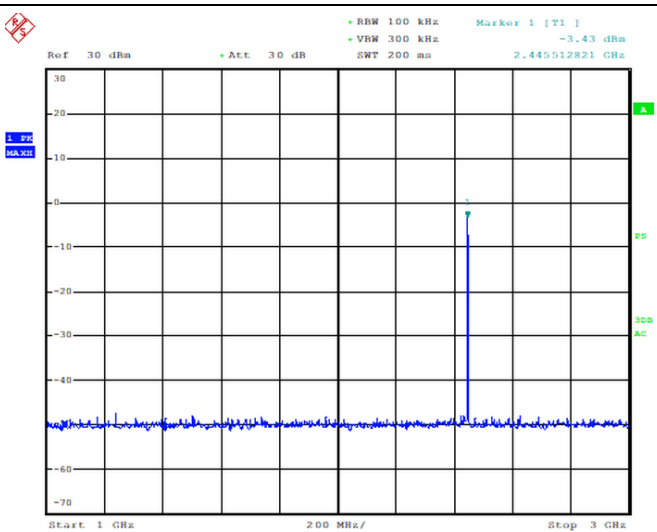

Frequency range: 3GHz – 10GHz

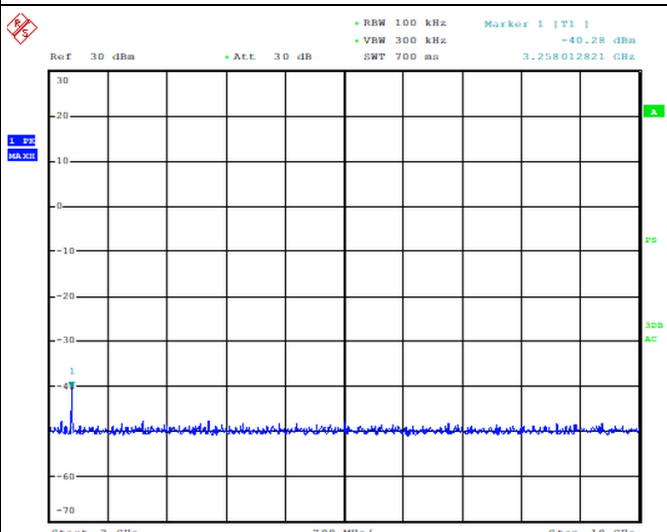


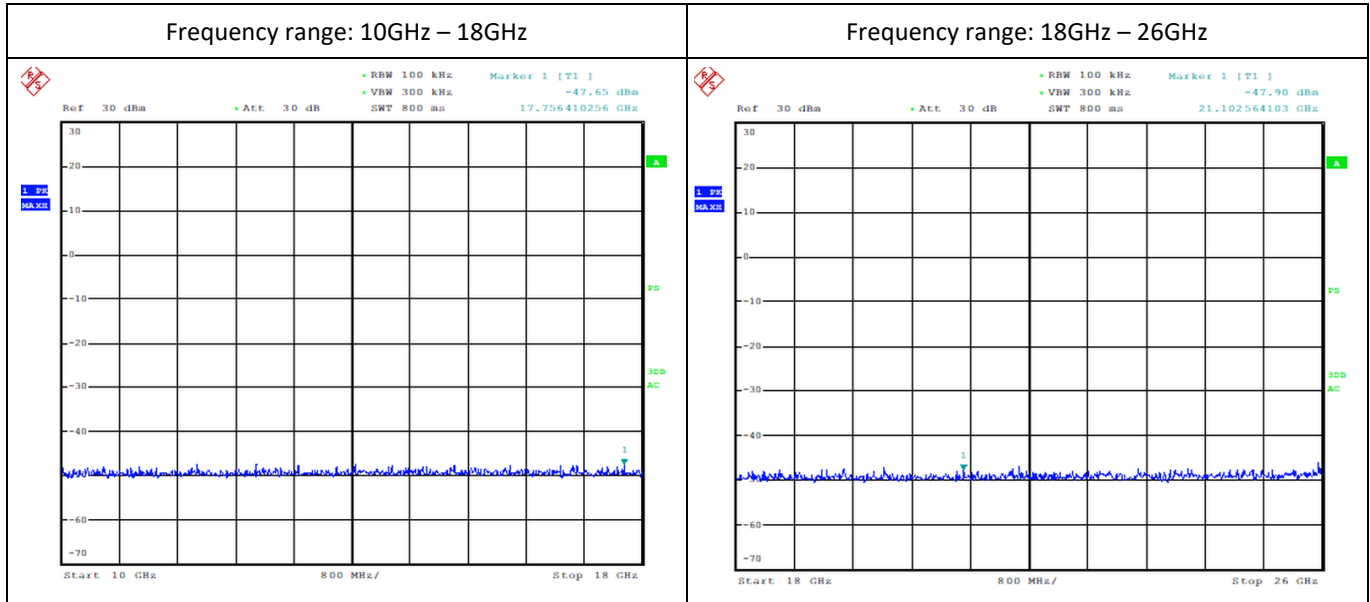


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power – 20dB (dBm)	Margin	Result
3258.01	-40.28	-2.37	37.91	-22.37	17.91	PASS

Graphical presentation of RF radiated spurious emissions at the transmitter antenna terminal

Operation mode: 3 (Channel 39 – Frequency 2480)

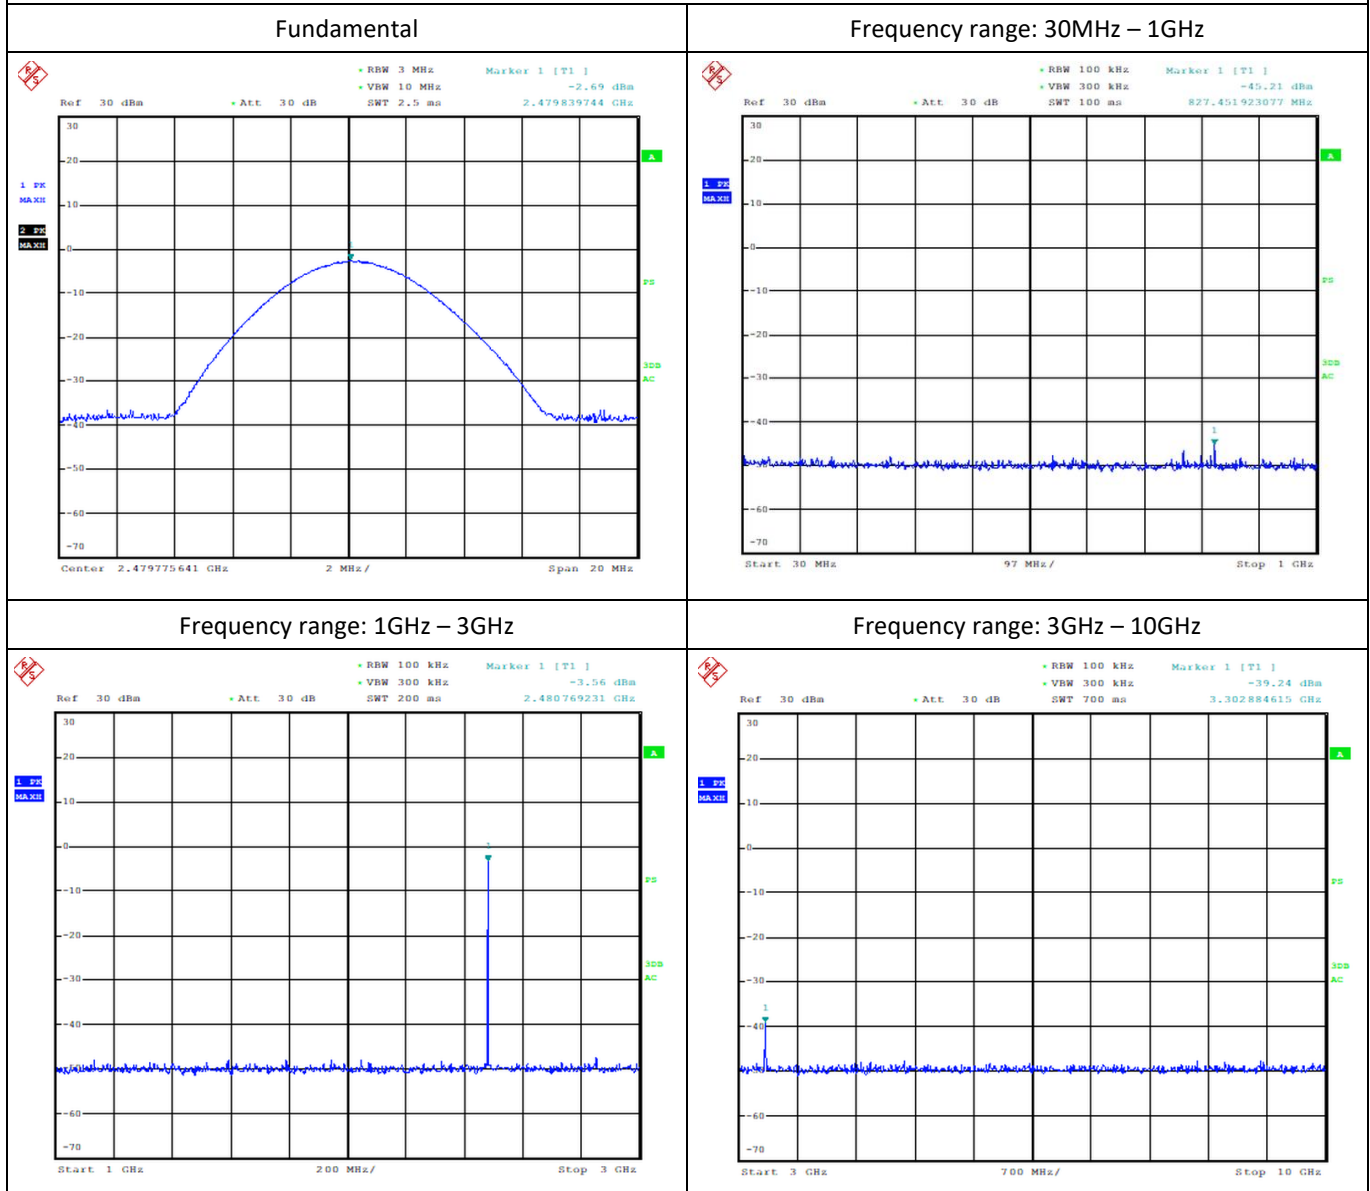

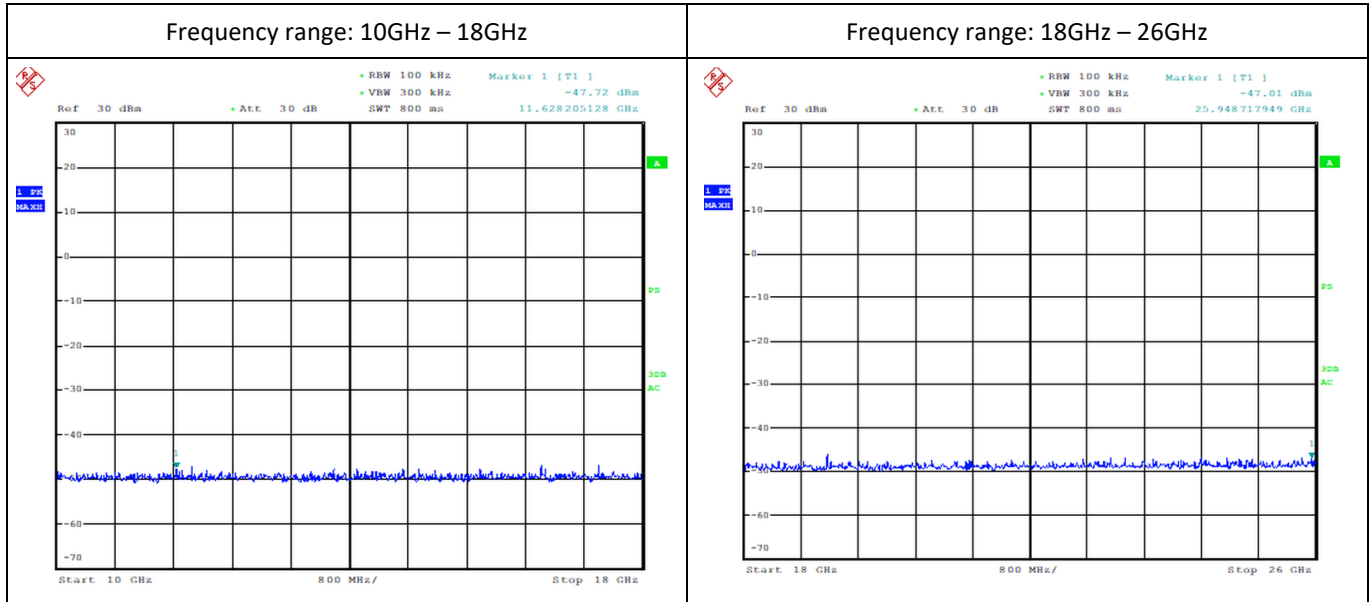

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power – 20dB (dBm)	Margin	Result
3302.88	-39.24	-2.69	36.55	-22.69	16.55	PASS



TÜVRheinland®



LAB N° 1356 L


Band Edge	
Test date	30/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.7.2 (Marker-Delta method) of KDB 558074 D01 15.247 Meas Guidance v05r02 (and par. 6.10.4 of ANSI C63.10)
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 3
Tested terminals	Antenna connector
Result	PASS

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Graphical presentation of Lower Band-Edge


Operation mode: 1 (Channel 0 – Frequency 2402)

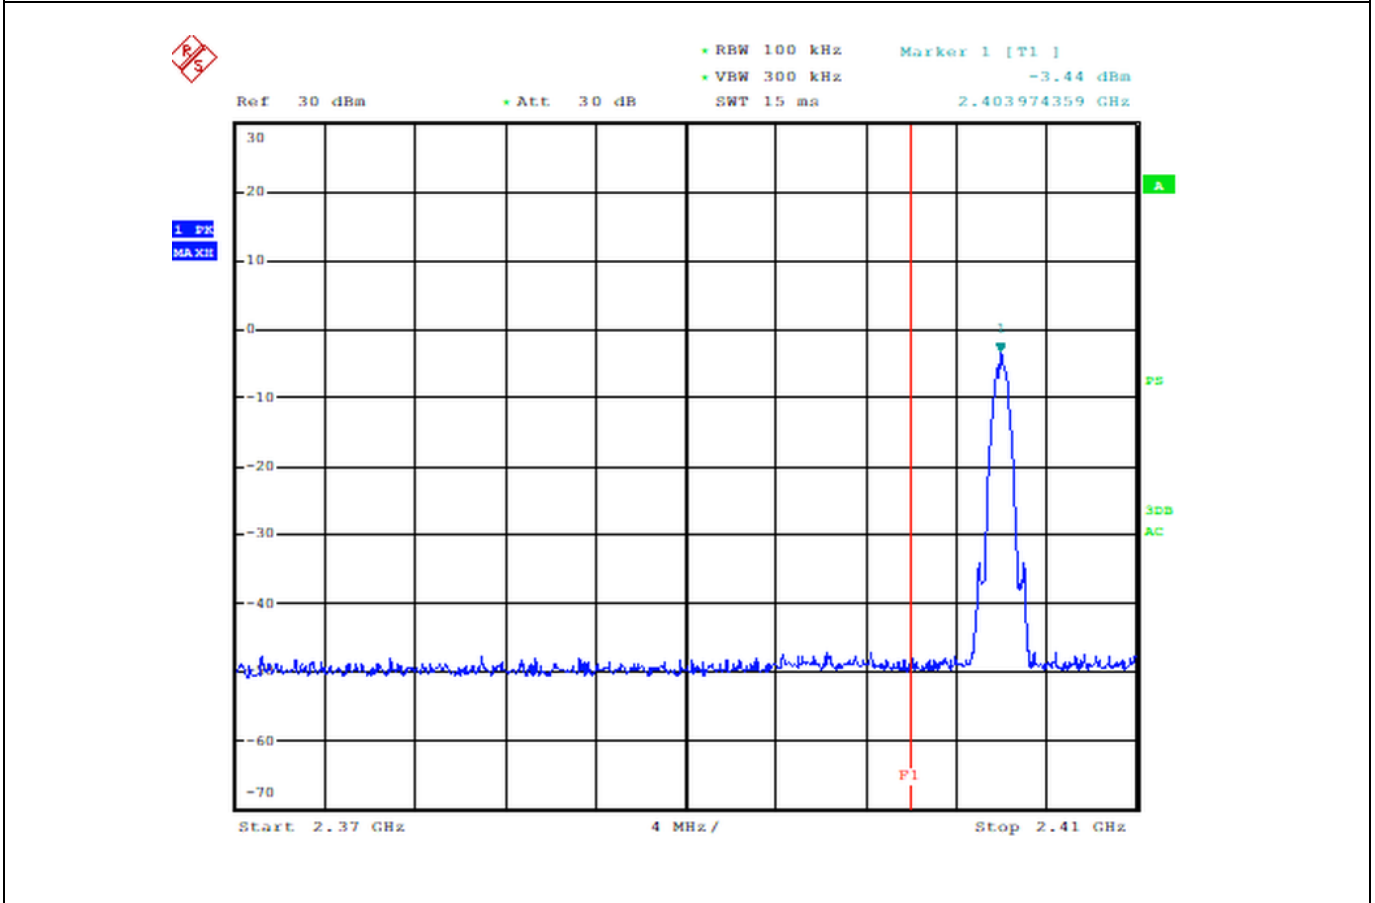



Graphical presentation of Upper Band-Edge

Operation mode: 3 (Channel 39 – Frequency 2480)

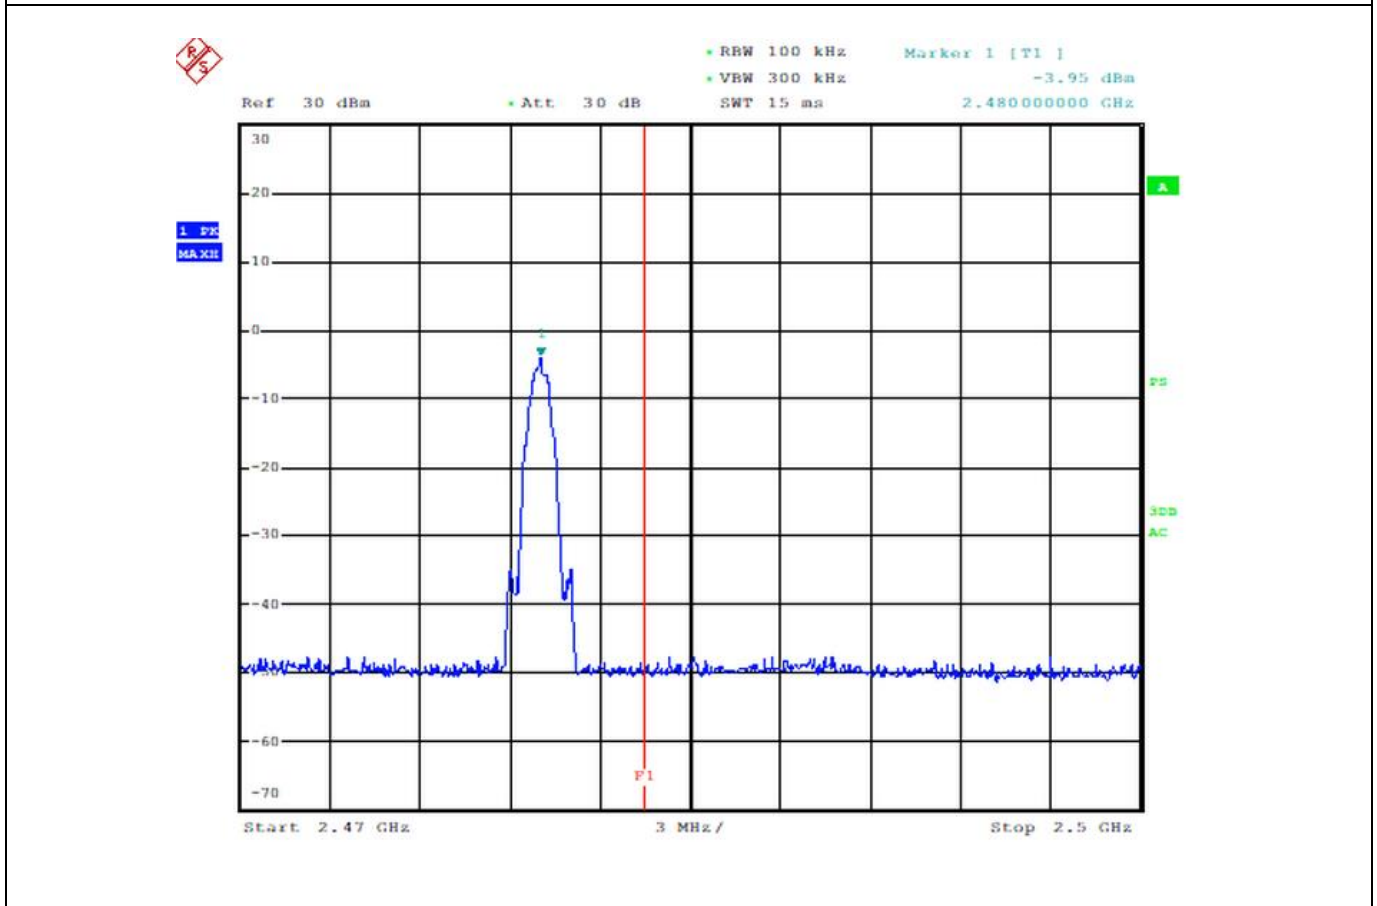



TÜVRheinland®



LAB N° 1356 L

Power spectral density	
Test date	30/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.4 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.10.2 Method PK PSD of ANSI C63.10)
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	1, 2, 3
Tested terminals	Antenna connector
Result	PASS




Graphical presentation of spectral density measurement

Operation mode: 1 (Channel 0 – Frequency 2402)

Channel	Frequency (MHz)	Conducted Power Spectral Density	Limit (dBm)	Result
		Measured (dBm)		
0	2402	-4.07	8	PASS




Ref 29 dBm • Att: 30 dB • RBW 3 kHz Marker 1 [T1] -4.07 dBm
 • VBW 10 kHz SWT 170 ms 2.403990385 GHz

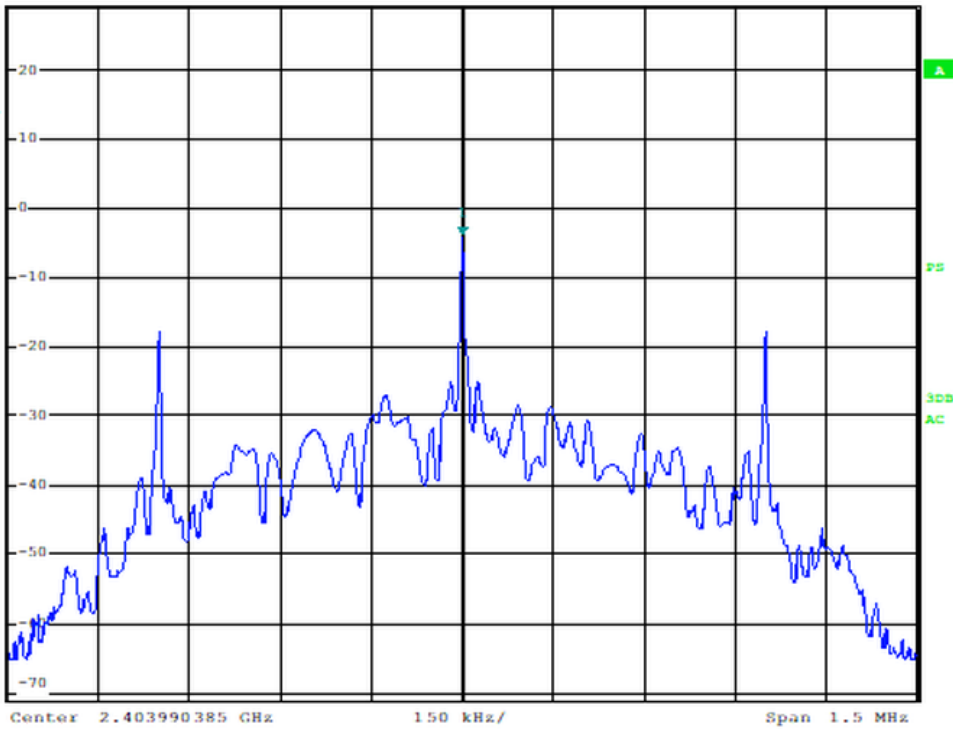

Graphical presentation of spectral density measurement

Operation mode: 2 (Channel 21 – Frequency 2444)


Channel	Frequency (MHz)	Conducted Power Spectral Density	Limit (dBm)	Result
		Measured (dBm)		
21	2444	-4.84	8	PASS

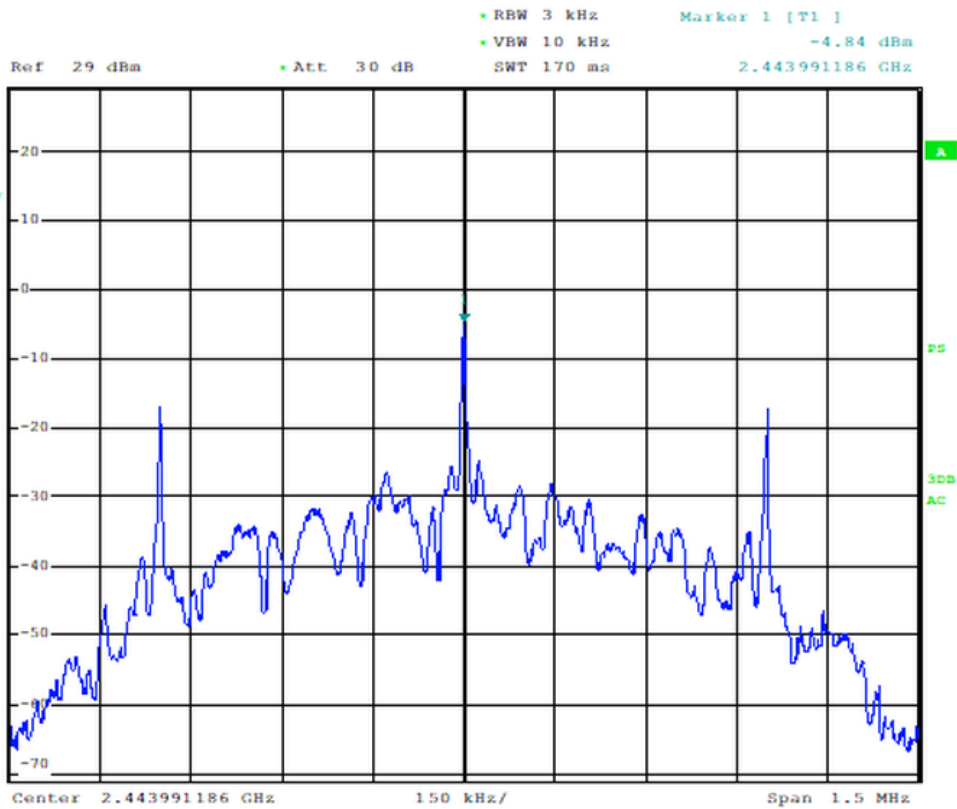

Graphical presentation of spectral density measurement

Operation mode: 3 (Channel 39 – Frequency 2480)

Channel	Frequency (MHz)	Conducted Power Spectral Density	Limit (dBm)	Result
		Measured (dBm)		
39	2480	-4.84	8	PASS

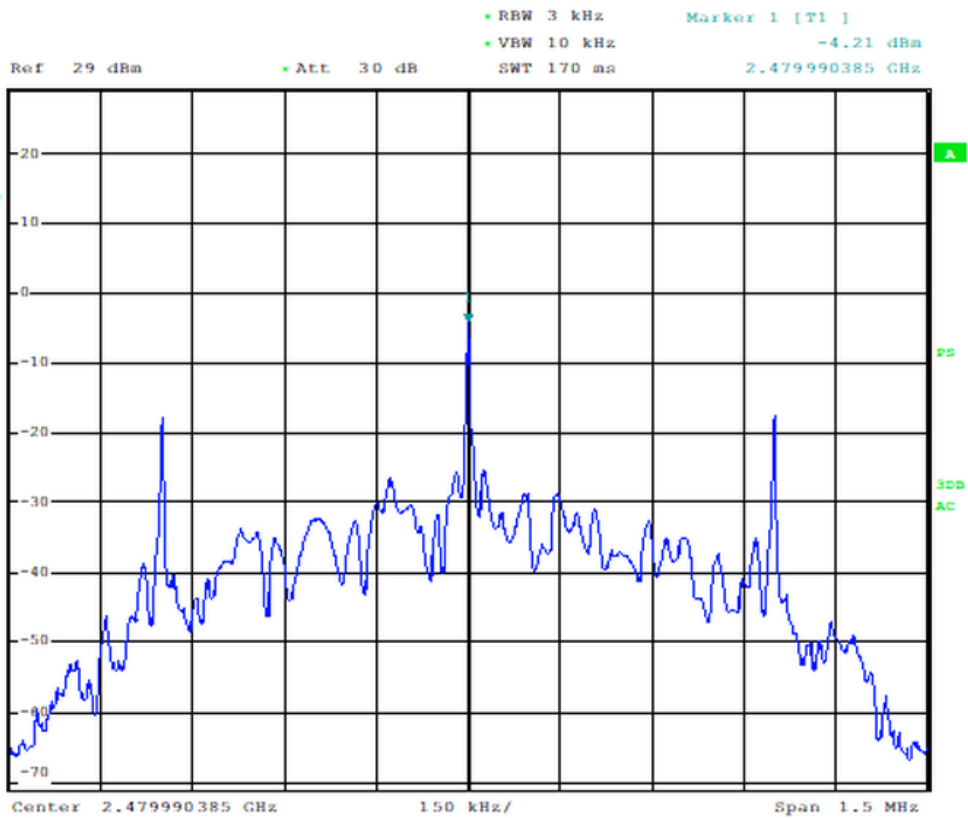

Additional provisions to the general radiated emission limitations	
Test date	31/03/2022
Applied Standard	Title 47 Part 15 Subpart C §15.215
Test method	---
Temperature	23,1°
Humidity	54%
Tested by	Francesco Lombardi
Model	MP350
Internal Storage No.	1 (Storage no. A003216149-003)
Operating mode	---
Tested terminals	Antenna connector
Result	PASS



<p>A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.</p>	
<p>(B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.</p>	<p>VERDICT</p>
<p>(C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p>	<p>PASS</p>

15. List of test equipment

Equipment	Type	Inventory no.	Manufacturer	Last calibration date	Calibration due date
Test stand: Radiated emissions (9KHz – 26GHz)					
Semi-anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2020	05/2022
Loop Antenna	EMCO	6512	2782356	07/2020	07/2023
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	05/2020	05/2023
Preamplified Horn Antenna	3117-PA	2782349	ETS Lindgren	08/2020	08/2023
Preamplified Horn Antenna	3160-09	2782350	ETS Lindgren	09/2020	09/2023
Highpass Filter	WHKX10-2520-2800-180	2782704	Wainwright Instruments	12/2021	12/2022
EMI Receiver	ESW44	2782867	Rohde&Schwarz	06/2021	06/2022
Software EMC32	10.60.15	---	Rohde&Schwarz	---	---
Test stand: Maximum Conducted Peak Output Power					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022
Test stand: 6db Bandwidth					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022
Test stand: Out-of-band emissions					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022
Test stand: Band Edge					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022
Test stand: Power spectral density					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022

--- END OF TEST REPORT ---