

TABLE OF CONTENTS LIST

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS
PAGE 4.....AUDIO FREQUENCY RESPONSE GRAPH
PAGE 5.....MODULATION LIMITING GRAPH 300Hz
PAGE 6.....MODULATION LIMITING GRAPH 1000Hz
PAGE 7.....MODULATION LIMITING GRAPH 3000Hz
PAGE 8.....AUDIO LOW PASS FILTER GRAPH
PAGE 9.....OCCUPIED BANDWIDTH
PAGE 10.....OCCUPIED BANDWIDTH PLOT
PAGE 11.....OCCUPIED BANDWIDTH PLOT - CW
PAGE 12.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 13.....UNWANTED RADIATION
PAGE 14.....METHOD OF MEASURING SPURIOUS EMISSIONS
PAGE 15.....FREQUENCY STABILITY
PAGE 16.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF LABEL LOCATION
EXHIBIT 3.....BLOCK DIAGRAM
EXHIBIT 4.....SCHEMATIC
EXHIBIT 5.....USERS MANUAL
EXHIBIT 6A.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 6B.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT 7A.....INTERNAL PHOTO - COMPONENT VIEW - 1
EXHIBIT 7B.....INTERNAL PHOTO - COPPER VIEW - 1
EXHIBIT 8A.....INTERNAL PHOTO - COMPONENT VIEW - 2
EXHIBIT 8B.....INTERNAL PHOTO - COPPER VIEW - 2
EXHIBIT 9.....ALIGNMENT PROCEDURE
EXHIBIT 10.....TEST SET UP PHOTO
EXHIBIT 11.....CIRCUIT DESCRIPTION

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: TABLE OF CONTENTS LIST

GENERAL INFORMATION REQUIRED
FOR CERTIFICATION

2.1033(c)(1)(2) J COMMUNICATIONS CO., LTD. will manufacture the
FCCID: OAJGMRS1500XTM GMRS CHANNELS
TRANSCEIVER in quantity, for use under FCC RULES
PART 95.

J COMMUNICATIONS CO., LTD.
124-4 OJEON-DONG, UIWANG-CITY
KYUNGKI-DO, KOREA

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 5.

2.1033(c) (4) Type of Emission: 10K2F3E
95.631

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 1.75K \\ B_n &= 2(3.0) + 2(2.10) = 10.2K \end{aligned}$$

95.633 Authorized Bandwidth 20.0 kHz
2.1033(c)(5) Frequency Range: 462.5625 - 462.7250 MHz
95.621

2.10311c)(6)(7) The Maximum Output Power Rating:
High: 2.0 Watts ERP

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY

$$\text{INPUT POWER: } (6.0V)(0.8A) = 4.8 \text{ Watts}$$

2.1033(c)(9) Tune-up procedure.
The tune-up procedure is included in Exhibit # 9.

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 1 of 16

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 4 of this report. The block diagrams are included as EXHIBIT 3 of this report.

2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 6a-8b.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

95.639 Power Output shall not exceed 5.0 Watts of carrier power. There can be no provisions for increasing the power or varying the power. RF power output.

95.649

2.1046(a) RF power output.

RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The carrier power shall not exceed 5.0 WATTS.

MEASURED POWER OUTPUT = 2 WATTS ERP

R.F. POWER OUTPUT
TEST SET UP

HP
Spectrum
Analyzer

TRANSMITTER
UNDER TEST WITH
INTERNAL ANTENNA

<-- 3.0 meters-->

SIGNAL
GENERATOR DIPOLE
ANTENNA

Tuned, Calibrated
Antenna which may
be raised from 1
to 4 meters above
ground and changed
in polarization

Equipment placed 80 cm above ground
on a rotatable platform.

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 2 of 16

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See page 4 of report.

2.1047(b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See pages 5-7 of report.

95.637

Post Limiter Filter Each GMRS transmitter, except a mobile station transmitter with a power of 2.5 Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1 kHz. See page 8 of report.


APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 3 of 16

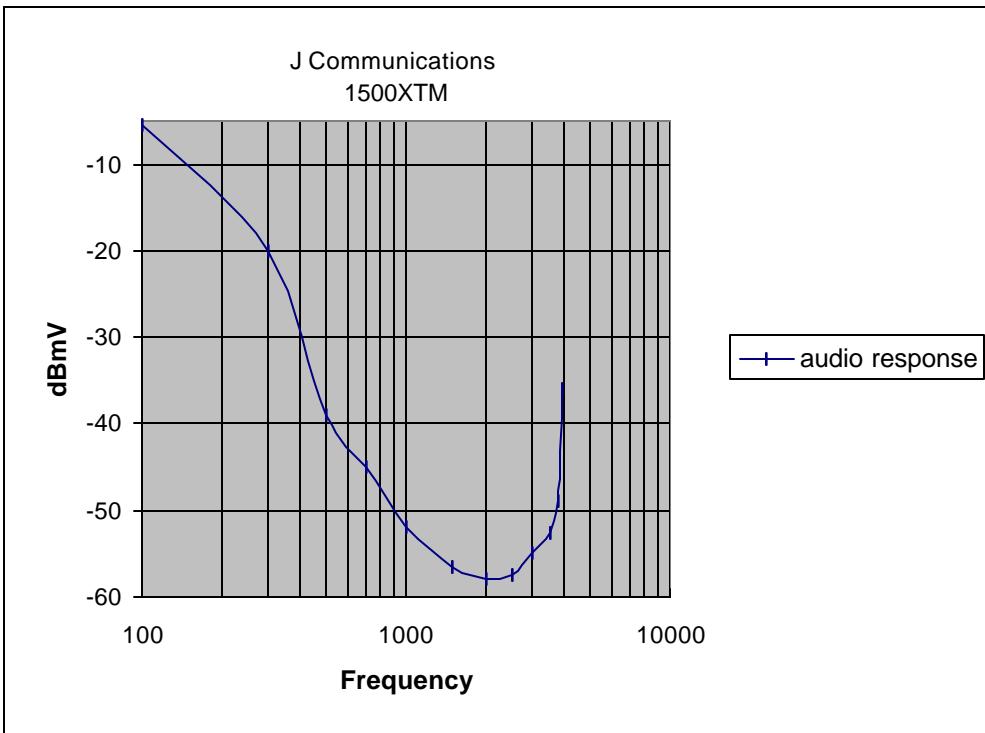

APPLICANT: J COMMUNICATIONS CO., LTD.


FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc


PAGE #: Page 4 of 16

Modulation Limiting
J Communications
1500XTM

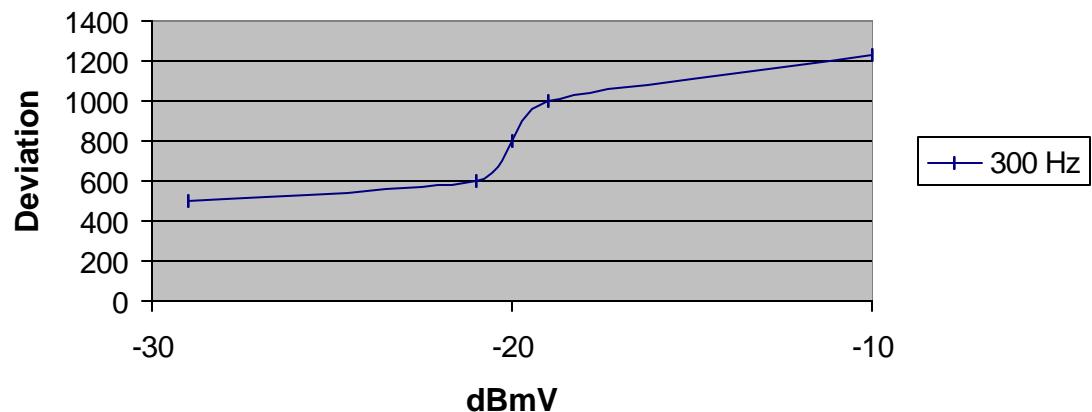


APPLICANT: J COMMUNICATIONS CO., LTD.
FCC ID: OAJGMRS1500XTM
DATE: DECEMBER 12, 2001
REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc
PAGE #: Page 5 of 16

Modulation Limiting
J Communications
1500XTM

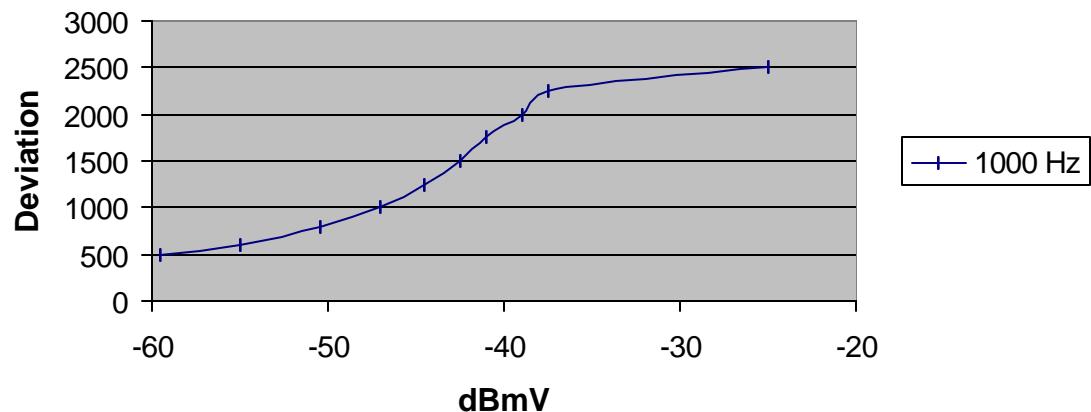

APPLICANT: J COMMUNICATIONS CO., LTD.
FCC ID: OAJGMRS1500XTM
DATE: DECEMBER 12, 2001
REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc
PAGE #: Page 6 of 16


Modulation Limiting
J Communications
1500XTM

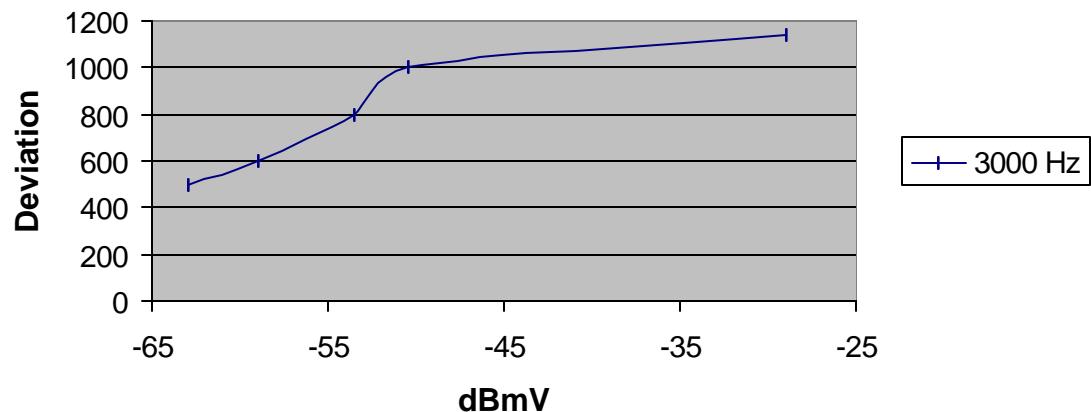

APPLICANT: J COMMUNICATIONS CO., LTD.
FCC ID: OAJGMRS1500XTM
DATE: DECEMBER 12, 2001
REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc
PAGE #: Page 7 of 16

Audio Lowpass Filter

Model : GMRS-1500XTM (#3)
Date : 01 . 11 . 2001
Test By : H. S. Moon

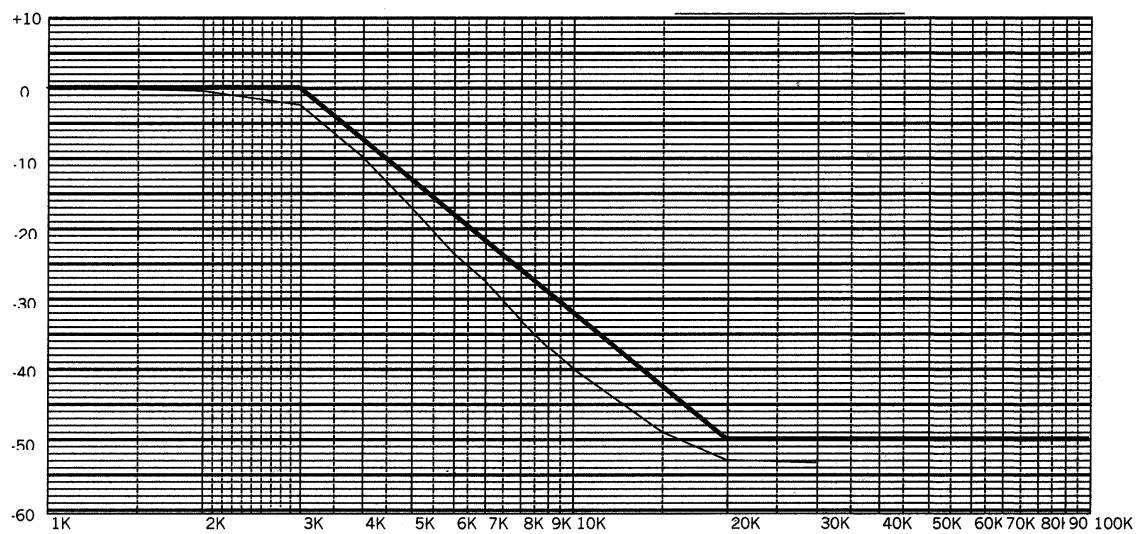

J COMMUNICATIONS

FCC ID : OAJGMRS1500XTM

JOB : 1224AK1

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 8 of 16


2.1049

Occupied bandwidth:

95.635(b)(1)(3)(7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43+\log_{10}(T)$ on any frequency removed from the center of the authorized bandwidth by more than 250%. For plots see pages 9 and 10 of report.

Occupied BW Test Equipment Setup

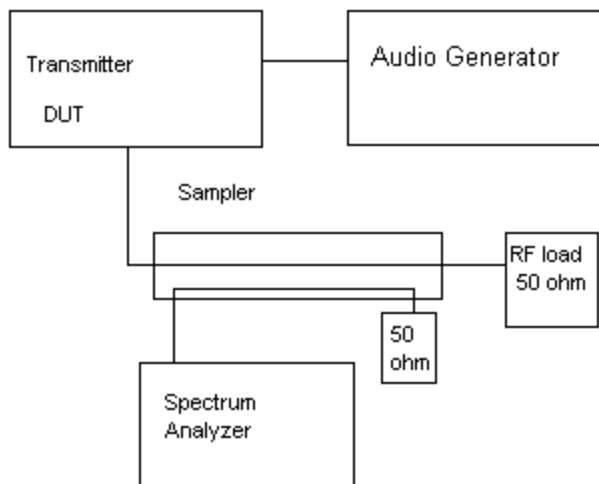

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001


REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 9 of 16

J COMMUNICATIONS
FCC ID : OAJGMRS1500XTM

OCCUPIED BANDWIDTH PLOT

MKR 462.5627 MHz
58.60 dB μ V

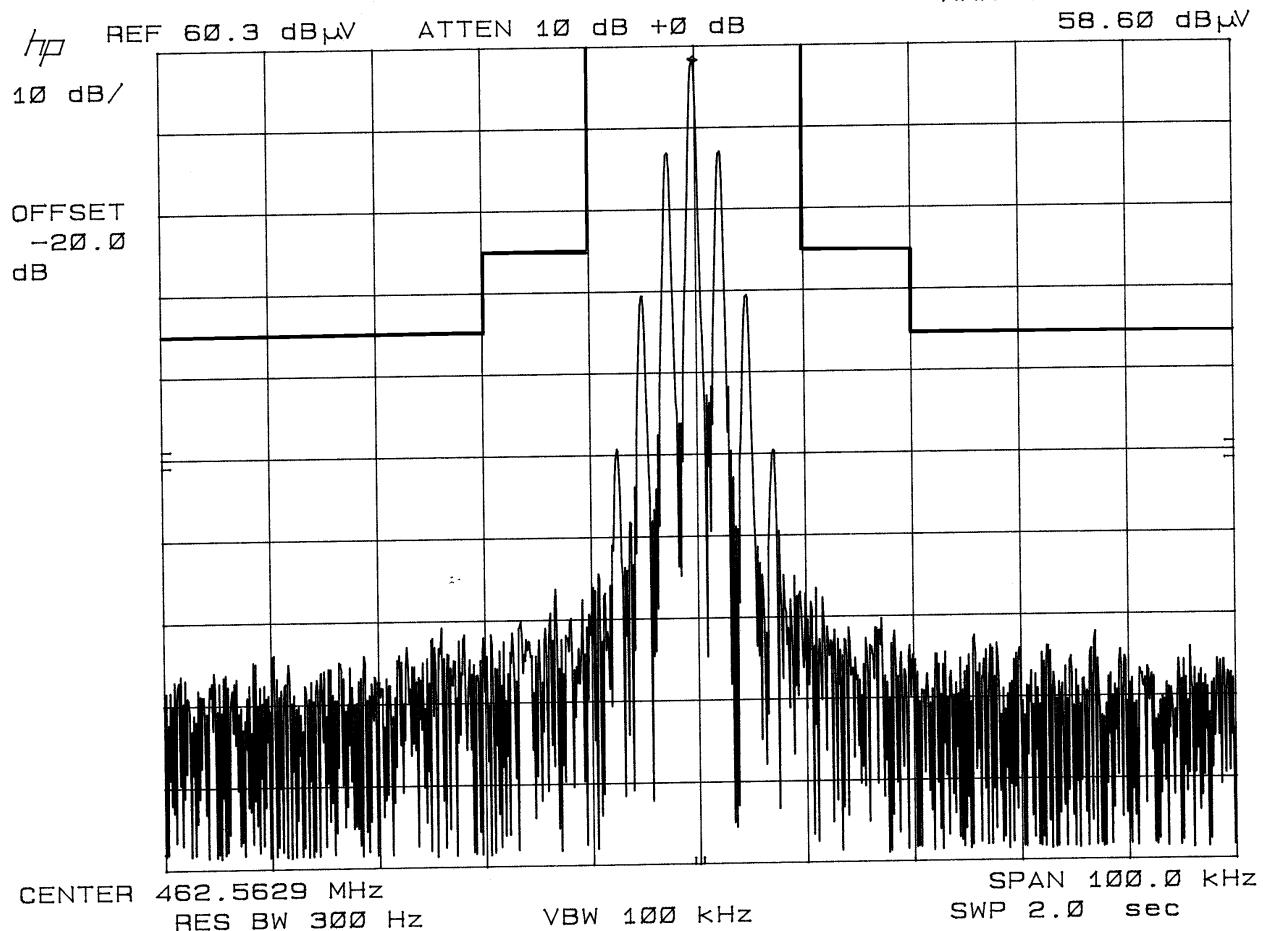

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001


REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 10 of 16

J COMMUNICATIONS
FCC ID : OAJGMRS1500XTM

OCCUPIED BANDWIDTH PLOT CW

MKR 462.5627 MHz
60.20 dB μ V

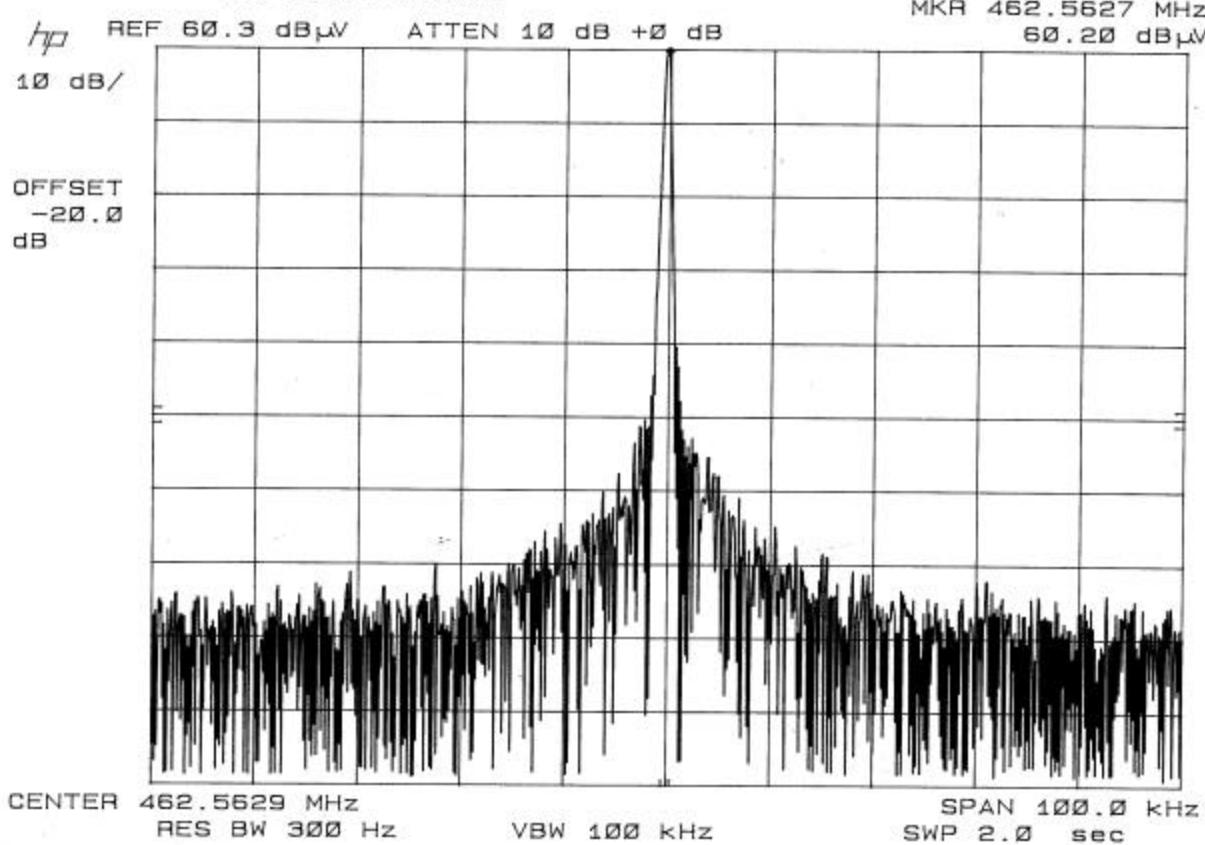

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc


PAGE #: Page 11 of 16

2.1051

Spurious emissions at antenna terminals (conducted):

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

Spurious Emissions at
Antenna Terminals

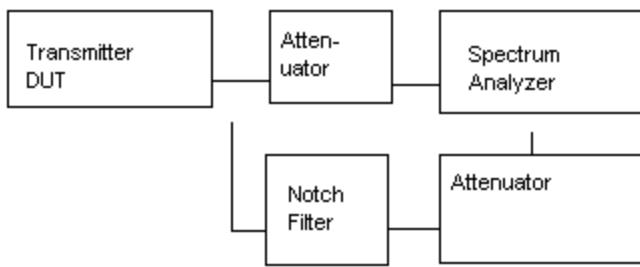

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: NOT REQUIRED FOR THIS DEVICE; IT HAS A FIXED ANTENNA.

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 12 of 16

2.1053
95.635(b)(7)

UNWANTED RADIATION:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-1992.

REQUIREMENTS: HIGH POWER: $43 + 10\log(2.0) = 46.01$ dB

TEST DATA:

Emission Frequency	ATTN dBc	Margin dB
MHz		
462.60	00.00	00.00
925.40	77.41	31.40
1,388.00	81.07	35.06
1,851.00	82.50	36.49
2,776.00	93.50	47.49
3,238.00	84.66	38.65
3,701.00	76.68	30.67
4,164.00	56.43	10.42
4,626.00	78.67	32.66

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: J COMMUNICATIONS CO., LTD.


FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 13 of 16

Method of Measuring Radiated Spurious Emissions

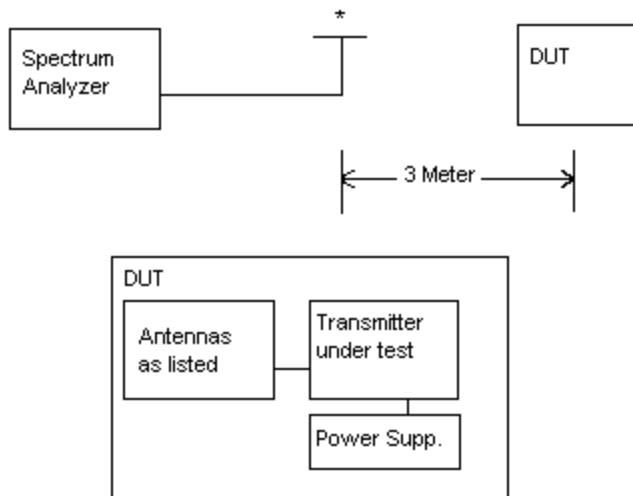

Equipment placed 80cm above ground
on a rotatable platform.

* Appropriate antenna raised from 1 to 4 m.

APPLICANT: J COMMUNICATIONS CO., LTD.
FCC ID: OAJGMRS1500XTM
DATE: DECEMBER 12, 2001
REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc
PAGE #: Page 14 of 16

2.1055
95.621(b)

Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 6.0 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.587 096

<u>TEMPERATURE_C</u>	<u>FREQUENCY_MHz</u>	<u>PPM</u>
REFERENCE	462.587 096	
-30C	462.585 573	-3.29
-20C	462.587 023	-0.16
-10C	462.588 185	2.35
0C	462.588 508	3.05
10C	462.588 228	2.45
20C	462.587 777	1.47
30C	462.587 346	0.54
40C	462.587 163	0.14
50C	462.587 263	0.36

BATT. %	BATT. DATA	VOLTS	BATT. PPM
-15%	462.587 079	5.1	-0.04
+15%	462.587 119	6.9	0.05

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -3.29 to 3.05 ppm. The maximum frequency variation with voltage was 0.05 ppm.

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 15 of 16

TEST EQUIPMENT LIST

- 1._X_Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 8/31/01 Due 8/31/02
- 2._ Biconnical Antenna: Eaton Model 94455-1, S/N 1057,
Cal. 10/1/01 Due 10/1/02
- 3._ Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
Cal. 4/26/01 Due 4/26/03
- 4._ Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
Char. 3/15/00 Due 3/15/01
- 5._ Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
Char. 3/15/00 Due 3/15/01
- 6._X_ Log-Periodic Antenna: Electro-Metrics Model LPA-25, S/N 1122
Char. 2/10/01 Due 3/10/02
- 7._X_ Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319 Cal. 4/27/99 Due 4/27/00
- 8._ 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
No Cal Required
- 9._ Horn 40-60GHz: ATM Part #19-443-6R No Cal Required
- 10._ Line Impedance Stabilization Network: Electro-Metrics Model
EM-7820, w/NEMA Adapter S/N 2682 Cal. 3/16/01 Due 3/16/02
- 11._X_Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
Char. 1/27/01 Due 1/27/02
- 12._X_Frequency Counter: HP Model 5385A, S/N 3242A07460
Char. 11/20/00 Due 11/20/01
- 13._ Peak Power Meter: HP Model 8900C, S/N 2131A00545
Char. 1/26/01 Due 1/26/02
- 14._X_Open Area Test Site #1-3meters Cal. 12/22/99
- 15._ Signal Generator: HP 8640B, S/N 2308A21464
Cal. 11/15/01 Due 11/15/02
- 16._ Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Char. 6/10/00 Due 6/10/01
- 17._ Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Char. 11/24/00 Due 11/24/01
- 18._ AC Voltmeter: HP Model 400FL, S/N 2213A14499
Cal. 10/9/01 Due 10/09/02
- 19._X_Digital Multimeter: Fluke Model 77, S/N 43850817
Cal. 11/16/00 Due 11/16/01
- 20._ Oscilloscope: Tektronix Model 2230, S/N 300572
Char. 2/1/01 Due 2/1/02

APPLICANT: J COMMUNICATIONS CO., LTD.

FCC ID: OAJGMRS1500XTM

DATE: DECEMBER 12, 2001

REPORT #: T:\J\Jcom_OAJ\1224AK1\1224AK1TestReport.doc

PAGE #: Page 16 of 16