

# CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6–10, D-66117 Saarbrücken, Telephone +49 (0) 681 598 - 0 , Fax +49 (0) 681 598 – 9075

Test report No.: 2-4679/07-01-02-A

This test report consists of 48 pages

Page 1 of 48

Recognized by the  
Federal Communications Commission and Industry Canada  
Anechoic chamber registration No.: 90462 (FCC)  
Anechoic chamber registration No.: 3463 (IC)  
TCB ID: DE0001



Accredited by the  
German Accreditation Council  
DAR-Registration Number  
DAT-P-176/94-D1



Test report No.: 2-4679/07-01-02-A

Applicant : A.D.C.

Automotive Distance Control Systems GmbH

Type : ARS 3-A

Test standards : FCC Part 15 (06/2005) / RSS210 Issue 7

FCC ID : OAYARS3-A

IC ID : 4135A-ARS3-A

## Table of contents

<b>1</b>	<b>General information</b>	<b>3</b>
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
1.5	Test item (EUT)	5
1.6	Technical data	5
1.6.1	Operation conditions	5
1.6.2	Test Report Cover Sheet / Performance Test Data	6
1.6.3	RF Technical Brief Cover Sheet acc. to RSS-102	7
(c)	RF Evaluation	7
	Declaration of RF Exposure Compliance	7
1.7	Test standards	8
<b>2</b>	<b>Technical test</b>	<b>9</b>
2.1	Summary of test results	9
2.2	Test environment	9
2.3	Measurement and test set-up	9
2.4	Test equipment utilized and test set-up	10
2.4.1	Test set-up for the measurement in the frequency range 12 GHz to 40 GHz	10
2.4.2	Test set-up for the measurement in the frequency range 40 GHz to 231 GHz	11
2.4.3	Test set-up for the measurement in the frequency range up to 12 GHz	12
2.5	Test results	13
2.5.1	Test results overview	13
2.5.2	Remarks on methods of measurements	13
2.5.3	Test results in details	16
2.5.4	Not-In-motion Mode	23
<b>3</b>	<b>Plots, graphs and data sheets</b>	<b>25</b>
<b>4</b>	<b>Photographs</b>	<b>40</b>
4.1	Photographs of the test set-up	40
4.2	Photographs of the EUT	43

# CETECOM ICT Services GmbH


## 1 General information

### 1.1 Notes


The test results of this test report relate exclusively to the test item specified in 1.5. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item .

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

*Tester :*

Date	Name	Signature
2007-10-17	Manfred Paschwitz	

*Technical responsibility for area of testing:*

Date	Name	Signature
2007-10-17	Harro Ames	

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 4 of 48

## 1.2 Testing laboratory

CETECOM ICT Services GmbH  
Untertürkheimerstraße 6–10  
D-66117 Saarbrücken  
Germany

CETECOM ICT Services GmbH  
P.O. Box 65 01 55  
D-66140 Saarbrücken  
Germany

Telephone : + 49 (0) 681 598–0  
Fax : + 49 (0) 681 598–9075  
e-mail : [info@ict.cetecom.de](mailto:info@ict.cetecom.de)  
Internet : <http://www.cetecom-ict.de>

### Accredited testing laboratory

Accredited by : Regulierungsbehörde für Telekommunikation und Post (RegTP)  
Listed by : Federal Communications Commission (FCC)  
Industry Canada (IC)

Authority	Identification/Registration No.
RegTP	DAT-P-176/94-D1
FCC	90462
IC	3463

Testing location, if different from CETECOM ICT Services GmbH: (Not applicable)

## 1.3 Details of applicant

Name : A.D.C. Automotive Distance Control Systems GmbH  
Street : Kemptenerstr. 99  
Town : 88131 Lindau  
Country : Germany  
Telephone : +49 (0) 8382 9699 0  
Fax : +49 (0) 8382 9699 50

### Contact person

Name : Mr. Volker Buss  
Telephone : +49 (0) 8382 9699 82  
Fax : +49 (0) 8382 9699 50  
e-mail : [volker.buss@contiautomotive.com](mailto:volker.buss@contiautomotive.com)

## 1.4 Application details

Date of receipt of application: 2007-06-22  
Date of receipt of test item : 2007-06-25  
Date of test : 2007-07-03 to 2007-07-13

## 1.5 Test item (EUT)

Description of test item	: 76 GHz millimeter-wave radar sensor
Type identification	: ARS 3-A
S/N	: ARS 3-A B4-160
Manufacturer	: A.D.C. Automotive Distance Control Systems GmbH Kemptenerstr. 99 88131 Lindau Germany

## 1.6 Technical data

TX frequency range	: 76.000 – 77.000 GHz
TX frequency range EUT	: 76.375 GHz – 76.598 GHz
Channel	: 1
Modulation	: FMCW (chirp)
EIRP (measured)	: 91.2 mW (19.6 dBm) Peak / Peak = Average
Peak Power Density	: 0.081 $\mu$ W/cm <sup>2</sup> (Peak) @ 3m
not-in-motion-mode	: 0.2nW/cm <sup>2</sup> @ 3m
Antenna	: integrated antennas (mechanical scanning)
Designation of emission	: 223MF0N
Transmission time per cycle	: 66 ms
Intermission time per cycle	: 0 ms
Duty factor	: 100 %
Extreme power supply U DC	: 10.8 – 15.6 V
Nominal power supply U DC	: 13.2 V

### 1.6.1 Operation conditions

The sample was set in operating and in “not-in-motion”-mode via CAN-bus and a notebook with special software to simulate a moving or standing car.

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 6 of 48


## 1.6.2 Test Report Cover Sheet / Performance Test Data

Equipment Model Number:	ARS 3-A
Certification Number:	2024B-271395
Manufacturer:	A.D.C. Automotive Distance Control Systems GmbH Kemptenerstr. 99 88131 Lindau Germany +49 (0) 8382 9699 0 +49 (0) 8382 9699 50
Tested to Radio Standards Specification (RSS) No:	RSS210 Issue 7
Open Area Test Site Industry Canada Number:	3463/A-1
Frequency Range (or fixed frequency):	76.375 GHz – 76.598 GHz
EIRP	91.2 mW (19.6 dBm) Peak / Peak = Average
Peak Power Density:	0.081 $\mu\text{W}/\text{cm}^2$ (Peak) @ 3m
not-in-motion-mode:	0.2nW/cm <sup>2</sup> @ 3m
Occupied Bandwidth (99% BW):	223 MHz
Type of Modulation:	FMCW (chirp)
Emission Designator (TRC-43):	223MF0N
Transmitter Spurious (worst case):	< 500 $\mu\text{V}/\text{m}$ @ 3m
Receiver Spurious (worst case):	Not applicable
Antenna Type:	integrated antennas (mechanical scanning)

### ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature:



Date: 2007-10-17

Test engineer: Harro Ames

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 7 of 48

## 1.6.3 RF Technical Brief Cover Sheet acc. to RSS-102

1. COMPANY NUMBER: 4135A
2. MODEL NUMBER: ARS 3-A
3. MANUFACTURER: 4135A  
A.D.C. Automotive Distance Control Systems GmbH  
Kemptenerstr. 99  
88131 Lindau  
Germany
4. TYPE OF EVALUATION: RF Evaluation


### (c) RF Evaluation

- Evaluated against exposure limits: General Public Use X  
Controlled Use
- Duty cycle used in evaluation: 100 %
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: 0.20 m
- RF value: 0.018 mW/cm<sup>2</sup> Measured

### Declaration of RF Exposure Compliance

ATTESTATION: I attest that the information provided above is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Signature:



Date: 2007-10-17

Test engineer: Harro Ames

Company: CETECOM ICT Services GmbH

## 1.7 Test standards

Code of Federal Regulations (CFR 47)  
Federal Communications Commission (FCC)

FCC Part 15            Radio Frequency Devices (06/2005)  
                          Section 15.253  
                          Operation within the band 76.0 to 77.0 GHz.

Section 15.209  
Radiation emission limits, general requirements

Section 15.205  
Restricted bands of operation.

Industry Canada  
Radio Standards Specification

RSS – 102            Radio Frequency Exposure Compliance of Radio communication Apparatus  
                          (All Frequency Bands) Issue 2

RSS - 210            Low Power Licence-Exempt Radio communication Devices for Cat I  
                          equipment  
                          Annex 13  
                          Vehicle -Mounted Field Disturbance Sensors  
                          RSS210 Issue 7



## 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification (s) were ascertained in the course of the performed tests.

The deviations as specified in 2.5 were ascertained in the course of the performed tests.

This test report :

describes the first test

describes an additional test

is a verification of documents

is only valid with the test report no.

### 2.2 Test environment

The environmental conditions are documented especially for each test.


### 2.3 Measurement and test set-up

The measurement and test set-up is defined in the technical specification FCC part 15 Section 15.253 and IC RSS 210.

## 2.4 Test equipment utilized and test set-up

### 2.4.1 Test set-up for the measurement in the frequency range 12 GHz to 40 GHz

Spurious radiation (EIRP; PEP)

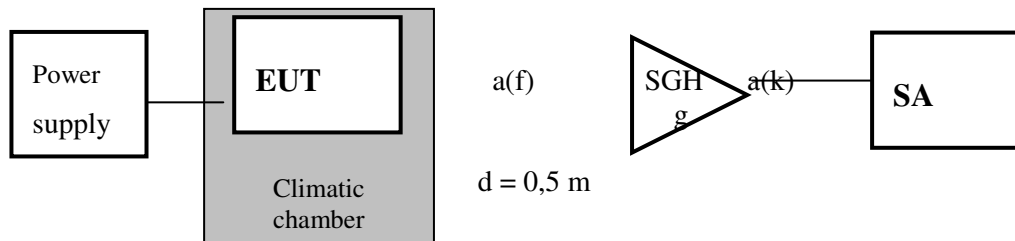

Frequency f (GHz)	Measurement distance (m)	a(sys) [dB]	a(f) [dB]at lowest freq.	a(k) [dB]	g [dBi]
12.4 ... 18.0	0.5	34.8	51.6	1.7	18.4
18.0 ... 27.0	0.5	38.2	54.4	2.2	18.4
27.0 ... 40.0	0.5	36.6	55.1	2.8	21.3

Calculation of system attenuation = free space attenuation + cable loss - antenna gain

$$a(\text{sys}) = a(f) + a(k) - g$$


Test equipment	Manufacturer	Type	S/No. - Cetecom No.
Spectrum Analyser	HP	HP 8565E	3738A00773
SGH 12.4.. 18.0 GHz	narda	638	01005
SGH 18 ... 27 GHz	narda	638	01005
Power supply	HP	HP 6032A	2848A07227
Climatic chamber	Vötsch	VUK 04/500	522/32678
RF-cable	HP	5061-5359	P36303

### Measurement uncertainty

Test parameter	Measurement uncertainty
Input power (DC)	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
eirp	±1.0 dB

## 2.4.2 Test set-up for the measurement in the frequency range 40 GHz to 231 GHz

Spurious radiation (EIRP; PEP) and radiated power density (EIRP; PEP)

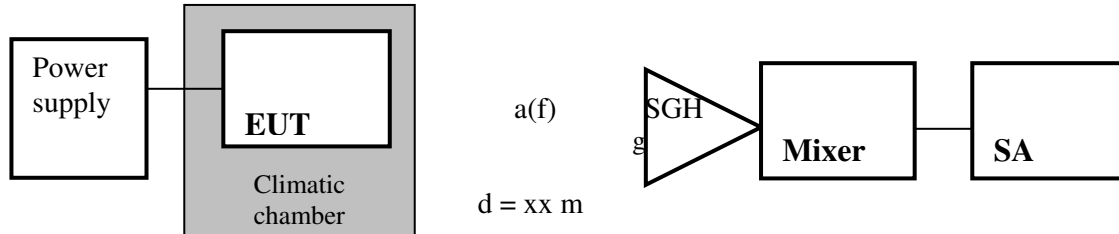

Frequency f (GHz)	Measurement distance xx(m)	a(sys) [dB]	a(f) [dB]at lowest freq.	g [dBi]
40.0 ... 60.0	0.5	40.1	58.5	18.4
50.0 ... 75.0	0.5	36.5	60.0	23.5
75.0 ... 110.0	0.20	35.3	58.0	22.7
76.5	3.0	56.6	79.6	23.0
110.0 ... 140.0	0.125	31.4	55.2	23.8
140.0 ... 170.0	0.125	37.4	57.4	20.0
170.0 ... 231.0	0.125	40.4	59.1	18.7

Calculation of system attenuation = free space attenuation - antenna gain

$$a(\text{sys}) = a(f) - g$$


Test equipment	Manufacturer	Type	S/No. – Cetecom No.
Spectrum Analyser	HP	8565E	3738A00773
Spectrum Analyser	R&S	FSU	1166.1660.50
SGH 40 60 GHz	Flann	2424	300001200g
Mixer 40 60 GHz	HP	11970U	300000781a
SGH 50 75 GHz	HP	2524	300001983
Mixer 50 75 GHz	HP	11970V	300000781m
SGH 75 110 GHz	HP	COR 60.90	300000814
Mixer 75 110 GHz	HP	11970W	300000781c
SGH 110 140 GHz	Thomson	COR 90-140	300000799
Mixer 110 140 GHz	Tektronix	WM 780 F	B010129
SGH 140 170 GHz	Thomson	2924	300001999
Mixer 140 170 GHz	Tektronix	WM780 D	B010186
SGH 170 250 GHz	Thomson	3024	300002000
Mixer 170 250 GHz	Tektronix	WM780 J	B010241
Power supply	HP	HP 6032A	2848A07227
Climatic chamber	Vötsch	VUK 04/500	522/32678
RF-cable	HP	5061-5359	P36303

### Measurement uncertainty

Test parameter	Measurement uncertainty
Input power (DC)	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
eirp up to 110 GHz	±1.5 dB
eirp up to 350 GHz	±2.5 dB

## 2.4.3 Test set-up for the measurement in the frequency range up to 12 GHz

Spurious radiation

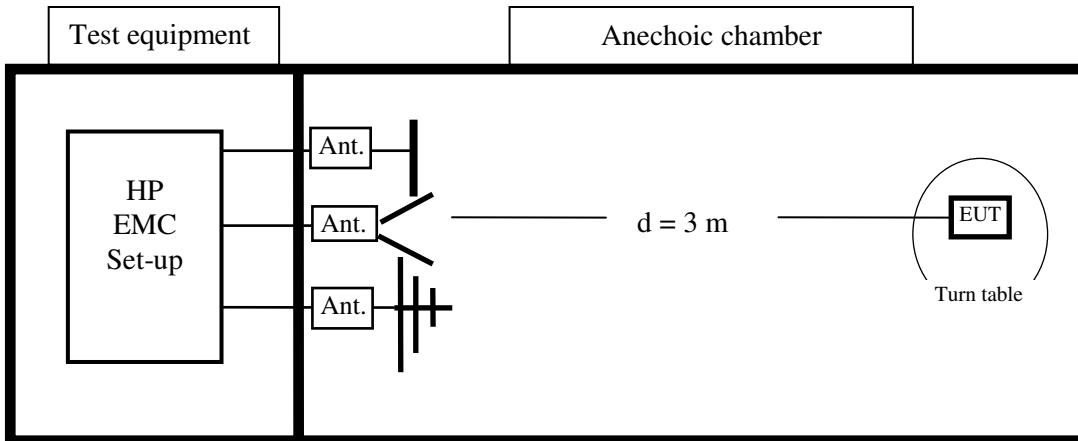

Test equipment	Manufacturer	Type	S/No. – Cetecom No.
Spectrum analyser	HP	HP 85660B	2478A05306
Analyser display	HP	HP 85662A	2816A16541
Quasi peak adapter	HP	HP 85650A	2811A01131
RF-preselector	HP	HP 85685A	2833A00768
Biconical antenna	Emco	3104	3758
Log.-per.-antenna	Emco	3146	2304
Double ridge horn	Emco	3115	3007
Relay switch	R&S	RSU	375 339/002
High pass filter	FSY Microwave	HM 985955	001
Amplifier	Tron-Tech	P42-GA29	B2302
Power supply	HP	HP 6038A	2848A07027
RF-cable	HP	5061-5359	P36303

### Measurement uncertainties

Test parameter	Uncertainty
Input power (DC)	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
RF-power	±1.5 dB

## 2.5 Test results

### 2.5.1 Test results overview

This test was performed :

in addition to the test report no.

Verification of EUT :

EUT is in accordance with the technical description

EUT is not in accordance with the technical description

The equipment is compliant to FCC requirement

### 2.5.2 Remarks on methods of measurements

The Radar head is positioned in a non-conductive fixture and can be rotated and tilted in all angles.

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 231 GHz in a semi-anechoic chamber, a fully-anechoic chamber and in our lab. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths (RBW) over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

#### 1. Measurements of the EIRP and power density (PD) at fundamental frequency

The measurements are carried out according to FCC guideline "Millimetre Wave Test Procedure" with a spectrum analyser (SA), harmonic mixer with appropriate frequency range and a rectangular standard gain horn antenna (SGH) with matching wave guide dimensions. The conversion loss of the external mixer is taken into account in the SA power level reading automatically.

The radiated power measurements are performed with resolution bandwidth filter (RBW) of 1.0 MHz and a video filter of 1 MHz. This filter setting is sufficiently broad enough to receive the peak envelope power (PEP) of the EUT.

The distance for fundamental power measurement generally is 3.0 m. The SA level scale shows the dimension dBm. With a SGH and a measured antenna aperture area the power density can be calculated from the equation:

$$\begin{aligned} \text{Power density} &= \text{EIRP} / \text{Antenna aperture area} \quad [\text{mW/cm}^2] \\ \text{pd} &= \text{eirp} - a \quad [\text{dB(mW/cm}^2)] \end{aligned}$$

## 2. Measurements of frequency stability

In order to measure the frequency stability of the EUT under normal and extreme test conditions, it is necessary to use a smaller RBW filter (here 100 kHz or 300 kHz) so that the spectral lines of the modulated signal are displayed correctly in frequency domain. This setting allows to read the occupied bandwidth and the peak frequency deviation value directly.

Frequency measurements are performed under normal test conditions (normal power supply voltage and normal temperature).

Then the test is repeated with extreme test conditions. For extreme test conditions the EUT is placed in a climatic chamber where the front door is made of stable polystyrene. The EUT can radiate through the front door without any additional path losses. The climatic chamber together with the EUT is cooled down to -20 °C for 1 hour. Then frequency and power density measurements are carried out with power supply set to minimum and maximum values.

The climatic chamber together with the EUT is warmed up at a rate of + 1°C/minute. During warming-up time the frequency stability and the EIRP is monitored constantly. After 2 hours the temperature stability at 55 °C is reached. Then frequency and power density measurements are carried out with minimum and maximum power supply.

## 3. Measurements of field strength and power density at spurious frequencies

Spurious frequencies are produced by transmitter and receiver when the EUT is active (vehicle is moving). When the EUT is in Not-in-motion-mode, the emissions of the TX has to be reduced more than 25 dB. According to FCC requirements 15.209 and 15.253, spurious emissions have to be investigated as maximum field strength values in the frequency range from 9 kHz to 40 GHz, and as maximum power density in the frequency range > 40 GHz up to 231 GHz. Where possible, the measurement distance shall be 3 m.

In the low frequency range (9 kHz to 30 MHz), the receiving antenna is an active loop antenna which is positioned at 3 m distance in a shielded, anechoic chamber (see page 8). In case of required measuring distances > 3 m, a distance correction factor is used to calculate the received field strength.

Spurious field strength measurements in the frequency range 30 MHz to 12 GHz are carried out in a shielded semi-anechoic test chamber. The measurement distance is 3 m.

In the frequency range 12 GHz to 40 GHz, spurious field strength measurements are performed in a shielded fully anechoic chamber with rectangular SGH's. The measurement distances are indicated underneath each plot, and a calculation for field strength is added, where all relevant factors like cable losses, antenna factors, etc are taken into account.



# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 16 of 48

## 2.5.3 Test results in details

Equipment under test (EUT) : ARS 3-A  
Ambient temperature : 23 °C  
Relative humidity : 35 %

TRANSMITTER PARAMETERS

SECTION 15.253

FUNDAMENTAL FREQUENCY

SECTION 15.253 b (2)

76.000 GHz to 77.000 GHz

Operation : Vehicle in-motion-mode  
Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS T = 23.0 °C	TRANSMITTER POWER DENSITY		
EUT operating: TX on and RX on	Frequency f [GHz]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]	See plot on page
U DC = 10.0 V	76.486 500	0.082	
U DC = 11.0 V	76.486 500	0.082	
U DC = 12.0 V	76.486 500	0.082	25
U DC = 13.0 V	76.486 500	0.082	
U DC = 14.0 V	76.486 500	0.082	
U DC = 15.0 V	76.486 500	0.082	
U DC = 16.0 V	76.486 500	0.082	

REFERENCE OF TEST EQUIPMENT USED : see test set-up on page 10

LIMITS:

SECTION 15.253 b (2)

Frequency range [GHz] vehicle in motion	Measurement distance [m]	Power density pd [dBmW/cm <sup>2</sup> ]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]
76.0 to 77.0	3.0	-12.2	60

Verdict : Power Density limit is kept



# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 17 of 48

Equipment under test (EUT) : ARS 3-A  
Ambient temperature : 23 °C  
Relative humidity : 35 %

TRANSMITTER PARAMETERS

SECTION 15.253

FUNDAMENTAL FREQUENCY

SECTION 15.253 b (2)

76.000 GHz to 77.000 GHz

Operation : Vehicle in-motion-mode  
Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS T = - 20.0 ° C	TRANSMITTER POWER DENSITY	
EUT operating: TX on and RX on	Frequency f [GHz]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]
U DC = 10.0 V	76.486 000	0.083
U DC = 11.0 V	76.486 000	0.083
U DC = 12.0 V	76.486 000	0.083
U DC = 13.0 V	76.486 000	0.083
U DC = 14.0 V	76.486 000	0.083
U DC = 15.0 V	76.486 000	0.083
U DC = 16.0 V	76.486 000	0.083

REFERENCE OF TEST EQUIPMENT USED : see test set-up on page 10

LIMITS:

SECTION 15.253 b (2)

Frequency range [GHz] vehicle in motion	Measurement distance [m]	Power density pd [dBmW/cm <sup>2</sup> ]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]
76.0 to 77.0	3.0	-12.2	60

Verdict : Power Density limit is kept

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 18 of 48

Equipment under test (EUT) : ARS 3-A  
Ambient temperature : 23 °C  
Relative humidity : 35 %

TRANSMITTER PARAMETERS

SECTION 15.253

FUNDAMENTAL FREQUENCY

SECTION 15.253 b (2)

76.000 GHz to 77.000 GHz

Operation : Vehicle in-motion-mode  
Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS T = + 55.0 ° C	TRANSMITTER POWER DENSITY	
EUT operating: TX on and RX on	Frequency f [GHz]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]
U DC = 10.0 V	76.487 000	0.081
U DC = 11.0 V	76.487 000	0.081
U DC = 12.0 V	76.487 000	0.081
U DC = 13.0 V	76.487 000	0.081
U DC = 14.0 V	76.487 000	0.081
U DC = 15.0 V	76.487 000	0.081
U DC = 16.0 V	76.487 000	0.081

REFERENCE OF TEST EQUIPMENT USED : see test set-up on page 10

LIMITS:

SECTION 15.253 b (2)

Frequency range [GHz] vehicle in motion	Measurement distance [m]	Power density pd [dBmW/cm <sup>2</sup> ]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]
76.0 to 77.0	3.0	-12.2	60

Verdict : Power Density limit is kept

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 19 of 48

Equipment under test (EUT) : ARS 3-A  
Ambient temperature : 23 °C  
Relative humidity : 35 %

TRANSMITTER PARAMETERS

SECTION 15.253

FUNDAMENTAL FREQUENCY

SECTION 15.253 b (2)

Frequency over temperature

Occupied frequency range:

TEST CONDITIONS T = -20° TO +55°C 12V DC	TRANSMITTER POWER DENSITY AND FREQUENCY		
EUT operating:	Frequency f [GHz]	Power Density PD [ $\mu\text{W}/\text{cm}^2$ ]	
T = -20°	76.486 000	0.083	
T = -10°	76.486 000	0.083	
T = 0°	76.486 500	0.082	
T = +10°	76.486 500	0.082	
T = +20°	76.486 500	0.082	38 / 39
T = +30°	76.486 500	0.082	
T = +40°	76.486 500	0.082	
T = +50°	76.487 000	0.081	
T = +55°	76.487 000	0.081	

Verdict : Frequency tolerance limits are kept

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 20 of 48

EUT : ARS 3-A  
 Ambient temperature : 23 °C  
 Relative humidity : 35 %

## TRANSMITTER PARAMETERS

SECTION 15.253

## SPURIOUS EMISSIONS

SECTION 15.209

In the frequency range 9 kHz to 12 GHz

Operation : Vehicle in-motion-mode  
 Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS	TRANSMITTER SPURIOUS FIELD STRENGTH			
Frequency range [MHz]	Spurious frequencies [MHz]	S A e [dB $\mu$ V/m]	E [ $\mu$ V/m]	See plot on page
0.009 – 30.000 (h + v) horizontal and vertical plane	Noise	< limit	< limit	26
30.000 – 1.0 GHz (h + v) horizontal and vertical plane	Noise	< limit	< limit	27
1.0 – 4.0 GHz (h + v) horizontal and vertical plane	Noise	< limit	< limit	28
4.0 – 12.0 GHz (h + v) horizontal and vertical plane	Noise	< limit	< limit	29

REFERENCE OF TEST EQUIPMENT USED : see test set-up on pages 11

LIMITS: SECTION 15.253 / 15.205 / 15.209

Frequency range (MHz)	Measurement distance [m]	Field strength e [dB $\mu$ V/m] @ 3 m	Field strength E [ $\mu$ V/m]
0.009 – 0.490	300	88.5 ... 53.8	2400/F(kHz)
0.490 – 1.705	30	53.8 ... 43.0	24000/F(kHz)
1.705 – 30.0	30	49.5	30
30.0 – 88.0	3	40.0	100
88.0 – 216.0	3	43.5	150
216.0 – 960.0	3	46.0	200
960.0 MHz – 40.0 GHz	3	54.0	500

Verdict : Field strength limits are kept

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 21 of 48

EUT : ARS 3-A  
 Ambient temperature : 23 °C  
 Relative humidity : 35 %

## TRANSMITTER PARAMETERS

SECTION 15.253

## SPURIOUS EMISSIONS

SECTION 15.209

In the frequency range 12 GHz to 40 GHz

Operation : Vehicle in-motion-mode  
 Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS	TRANSMITTER SPURIOUS FIELD STRENGTH			
Frequency range [GHz]	Spurious frequencies [GHz]	S A e [dBμV/m]	E [μV/m]	See plot on page
12.0 – 18.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	30
18.0 – 27.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	31
27.0 – 40.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	32

REFERENCE OF TEST EQUIPMENT USED : see test set-up on page 9

LIMITS: SECTION 15.253 / 15.205 / 15.209

Frequency range (MHz)	Measurement distance [m]	Field strength e [dBμV/m] @ 3 m	Field strength E [μV/m]
0.009 – 0.490	300	88.5 ... 53.8	2400/F(kHz)
0.490 – 1.705	30	53.8 ... 43.0	24000/F(kHz)
1.705 – 30.0	30	49.5	30
30.0 – 88.0	3	40.0	100
88.0 – 216.0	3	43.5	150
216.0 – 960.0	3	46.0	200
960.0 MHz – 40.0 GHz	3	54.0	500

Verdict : Field strength limits are kept

# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 22 of 48

EUT : ARS 3-A  
 Ambient temperature : 23 °C  
 Relative humidity : 35 %

## TRANSMITTER PARAMETERS

SECTION 15.253

## SPURIOUS EMISSIONS

SECTION 15.253 c (2) + (3)

In the frequency range 40 GHz to 231 GHz

Operation : Vehicle in-motion-mode  
 Antenna assembly: integrated antennas (mechanical scanning)

TEST CONDITIONS	TRANSMITTER SPURIOUS POWER DENSITY			
	Frequency range [GHz]	Spurious frequencies [GHz]	S A pd [dBm/cm <sup>2</sup> ]	PD [pW/cm <sup>2</sup> ]
40.0 – 50.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	33
50.0 – 75.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	34
75.0 - 110.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	35
110.0 - 170.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	36
170.0 - 231.0 (h + v) horizontal and vertical plane	Noise	< limit	< limit	37

REFERENCE OF TEST EQUIPMENT USED : see test set-up on page 10

## LIMITS:

SECTION 15.253 / 15.205 / 15.209

Frequency range (MHz)	Measurement distance [m]	pd [dBmW/cm <sup>2</sup> ]	Power density PD [pW/cm <sup>2</sup> ]
40.0 GHz - 200 GHz	3.0	-62.2	600
200 GHz - 231 GHz	3.0	-60.0	1000

Verdict : Power density limits are kept

EUT : ARS 3-A  
Ambient temperature : 23 °C  
Relative humidity : 38 %

## 2.5.4 Not-In-motion Mode

Section 15.253 (b) (1)

To show compliance with the requirements of Part 15.253 (b) (1) – Not-In-Motion mode, we tested with a can-bus interface on a laptop with special software to simulate moving or not-moving of the car.

### Description of the test:

We placed the antenna 20 cm in front of the radar equipment with vertical polarisation to obtain max. power.  
We started the simulation on the PC.

Here we switched the simulation to TX/RX Off mode (not in motion simulation).

The maximum power density in not-in-motion-mode is  $0.2 \text{ nW/cm}^2$  (see next plot).


# CETECOM ICT Services GmbH

Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 24 of 48

Plot: not-in-motion-mode

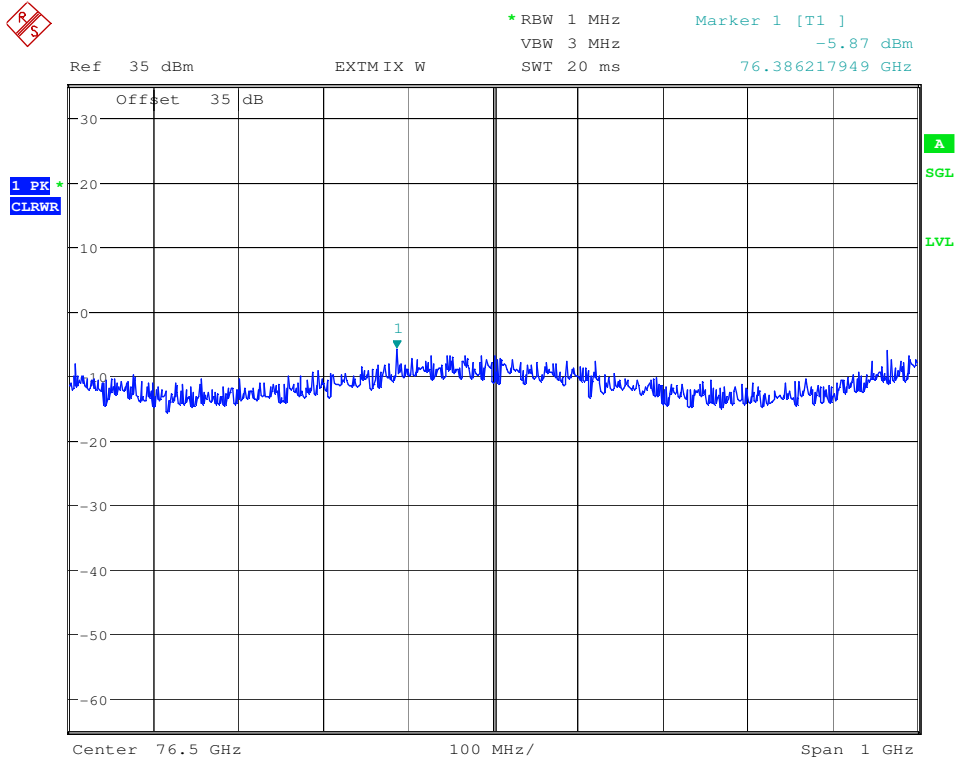

Date: 11.JUL.2007 09:29:19

Measurement distance  $d = 0.20 \text{ m}$

Calculation of system attenuation = free space attenuation - antenna gain  
 $a(\text{sys}) = 55.7 \text{ dB} - 20.5 \text{ dB}$   
 $= 35.2 \text{ dB}$

The  $a(\text{sys})$  is calculated in the Analyser reading.

Output power =  $257 \mu\text{W} (-5.9 \text{ dBm})$

Calculation :

Power density =  $\text{EIRP (mW)} / 4 \cdot \pi \cdot 300\text{cm} \cdot 300\text{cm}$   
 $= 257 \mu\text{W} (-5.9 \text{ dBm}) / 1130973.4 \text{ cm}^2$

Peak Power density =  $0.2 \text{ nW/cm}^2$

LIMITS:

SECTION 15.253 (B) (1)


Frequency range [GHz]	Measurement distance [m]	Not-in-motion [dBm/cm <sup>2</sup> ] [nW/cm <sup>2</sup> ]
76.0 - 77.0	3.0	-37 200

Verdict : pass



### 3 Plots, graphs and data sheets

Plot no.: 1

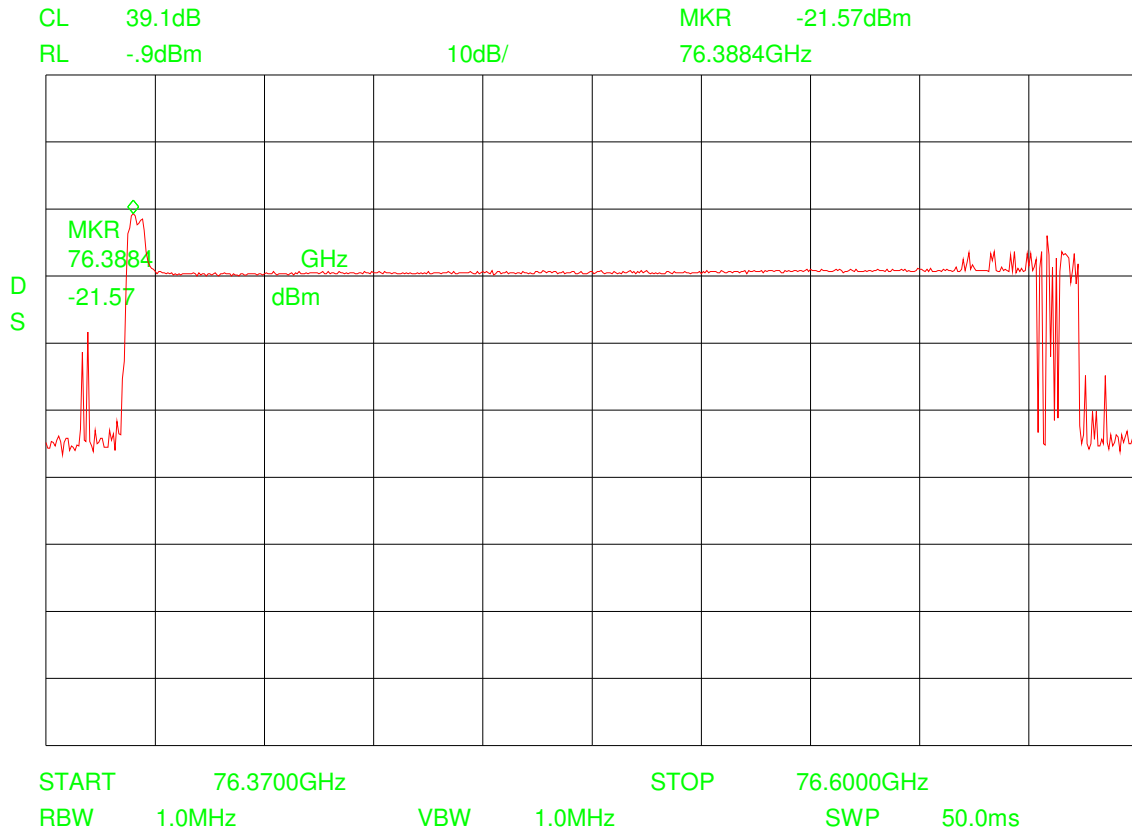

Measurement distance  $d = 0.5 \text{ m}$

Calculation of system attenuation = free space attenuation – antenna gain  
 $a(\text{sys}) = 64.2 \text{ dB} - 23.0 \text{ dB}$   
 $= 41.2 \text{ dB}$

Calculation :

Output power  $= -21.6 \text{ dBm} + 41.2 \text{ dB} = 19.6 \text{ dBm} = 91.2 \text{ mW}$

Power density  $= \text{EIRP (mW)} / 4 * \text{Pi} * 300\text{cm} * 300\text{cm}$   
 $= 91.2 \text{ mW (19.6 dBm)} / 1130973.4 \text{ cm}^2$


Peak Power density  $= 0.081 \mu\text{W/cm}^2$

Limit  $= 60 \mu\text{W/cm}^2 \text{ at } 3.0 \text{ m}$

Verdict : <span style="margin-left: 100px;">pass</span>
---

Plot no.: 2

Radiated emissions 9 kHz to 30 MHz

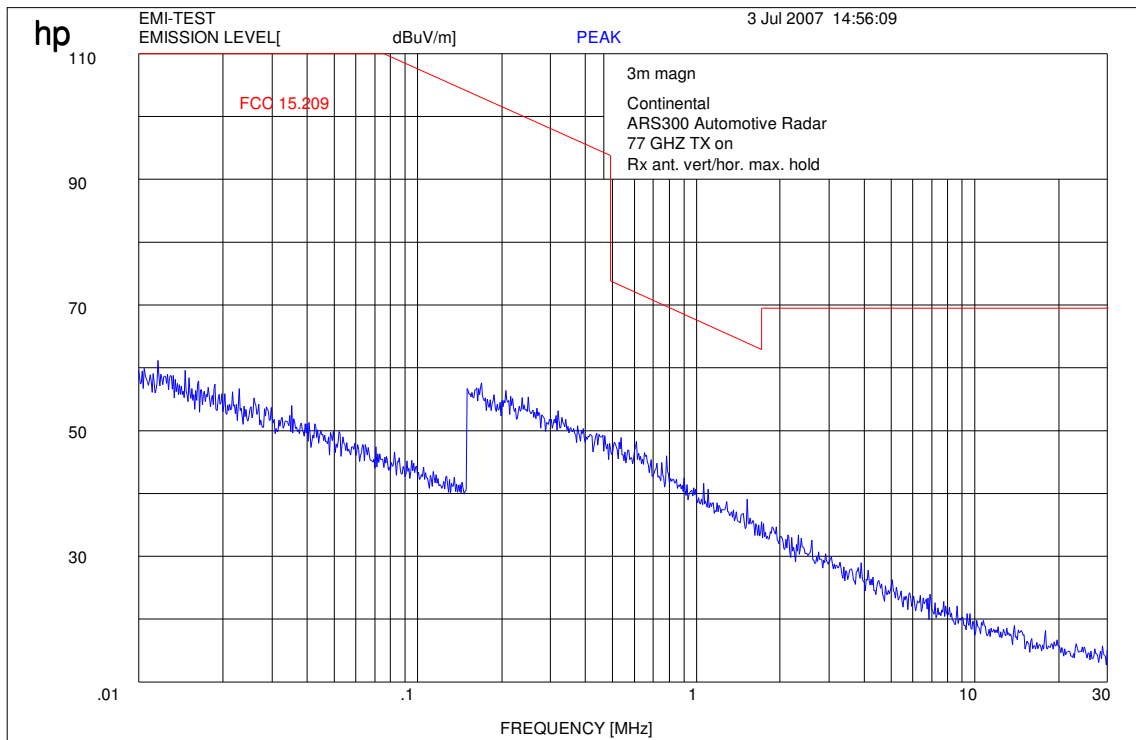

Settings:

RBW/VBW : 200 Hz up to 150 kHz,  
9 kHz up to 30 MHz,


The correction is calculated by the measuring system.

Verdict : pass

# CETECOM ICT Services GmbH

Plot no.: 3

Radiated emissions 30 MHz to 1 GHz

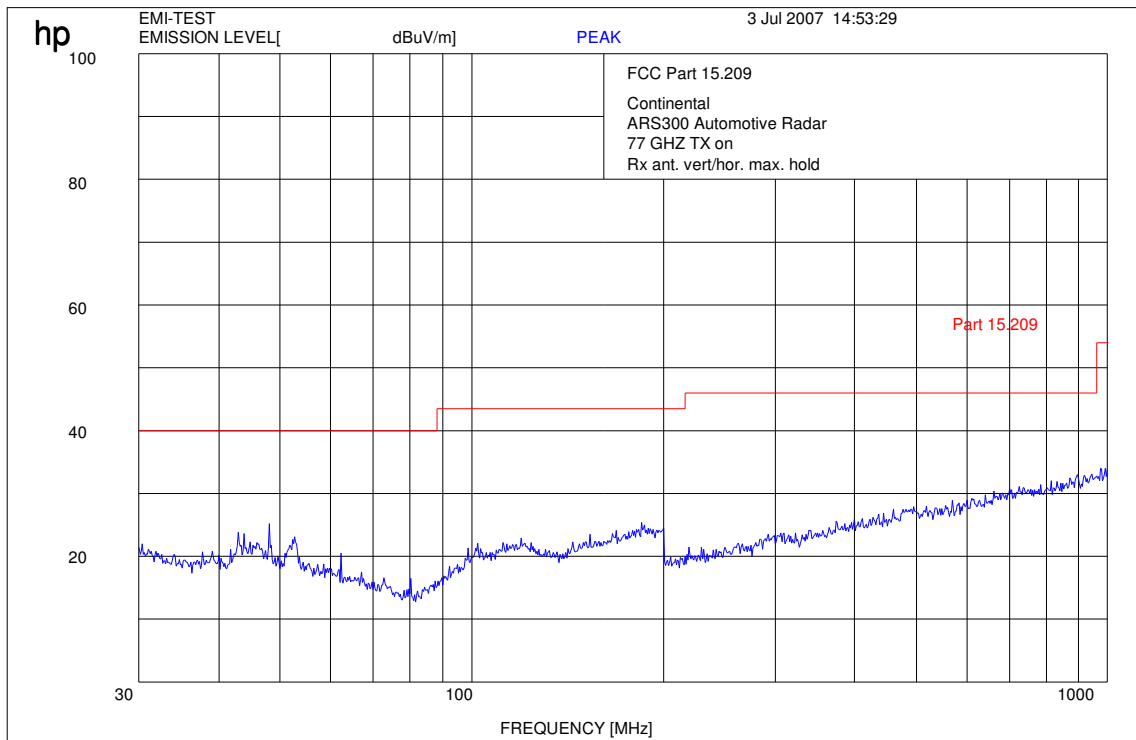

Settings:

RBW/VBW : 120 kHz up to 1 GHz ,

The correction is calculated by the measuring system.

Verdict : pass

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 28 of 48

Plot no.: 4

Radiated emissions 1 GHz to 4 GHz

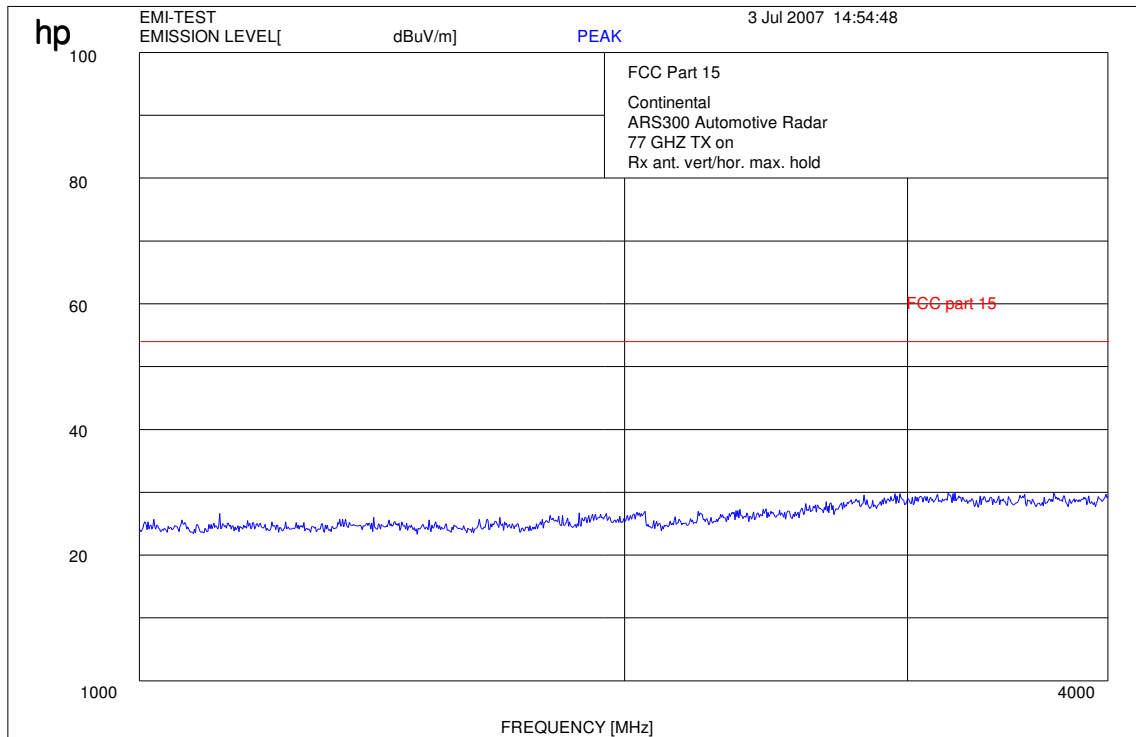

Settings:

RBW/VBW : 1 MHz above 1 GHz

The correction is calculated by the measuring system.

Verdict : pass

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 29 of 48

Plot no.: 5

Radiated emissions 4 GHz to 12 GHz

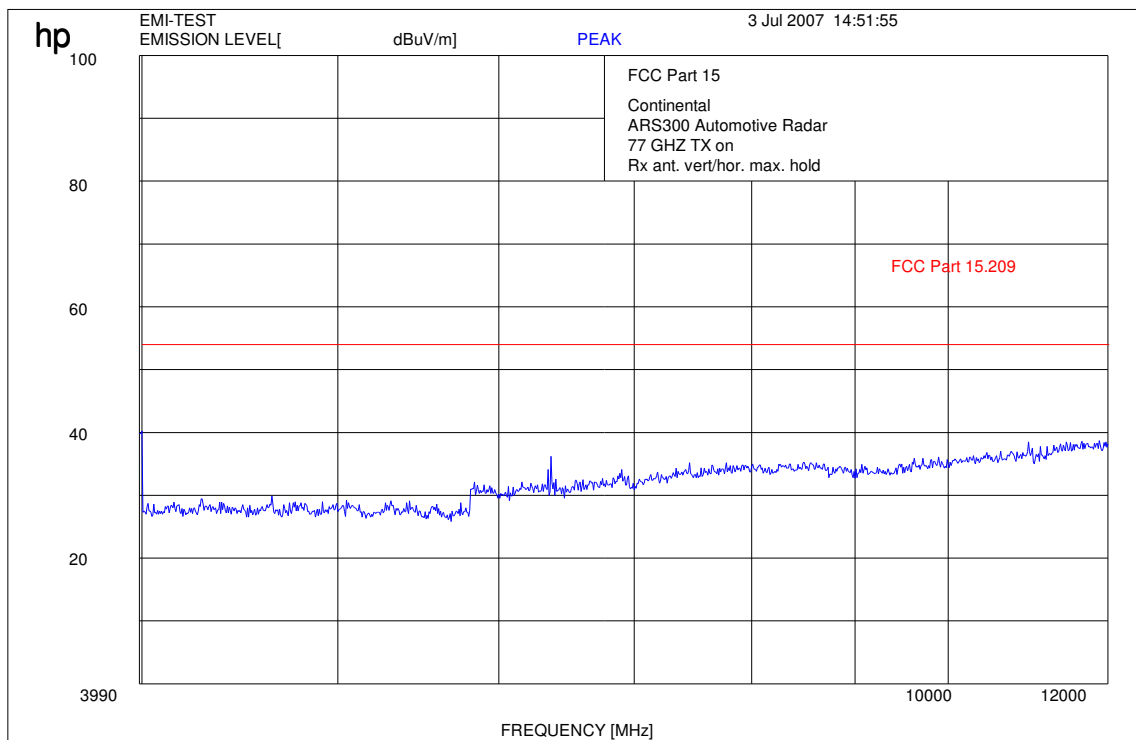

Settings:

RBW/VBW : 1 MHz above 1 GHz


The correction is calculated by the measuring system.

Verdict : pass

# CETECOM ICT Services GmbH

Plot no.: 6

Radiated emissions 12 GHz to 18 GHz

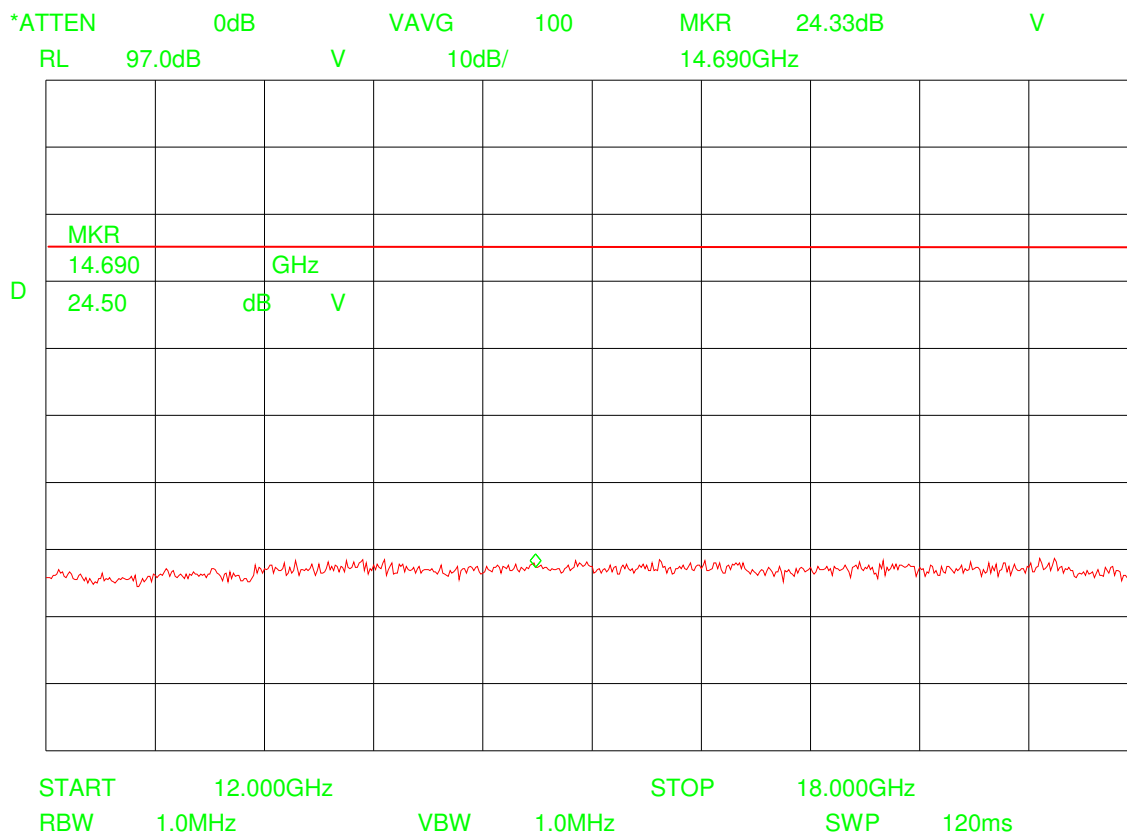

Measurement distance d = 0.5 m

Calculation :

Distance correction 3.0m => 0.5m = 15.5 dB

Limit at 3.0m = 54.0 dB $\mu$ V/m

Limit at 0.5m = 54.0 dB $\mu$ V/m + 15.5 dB = 69.5 dB $\mu$ V/m

Field strength = 24.5 dB $\mu$ V/m at 0.5m

Verdict : pass
----------------

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 31 of 48

Plot no.: 7

Radiated emissions 18 GHz to 27 GHz

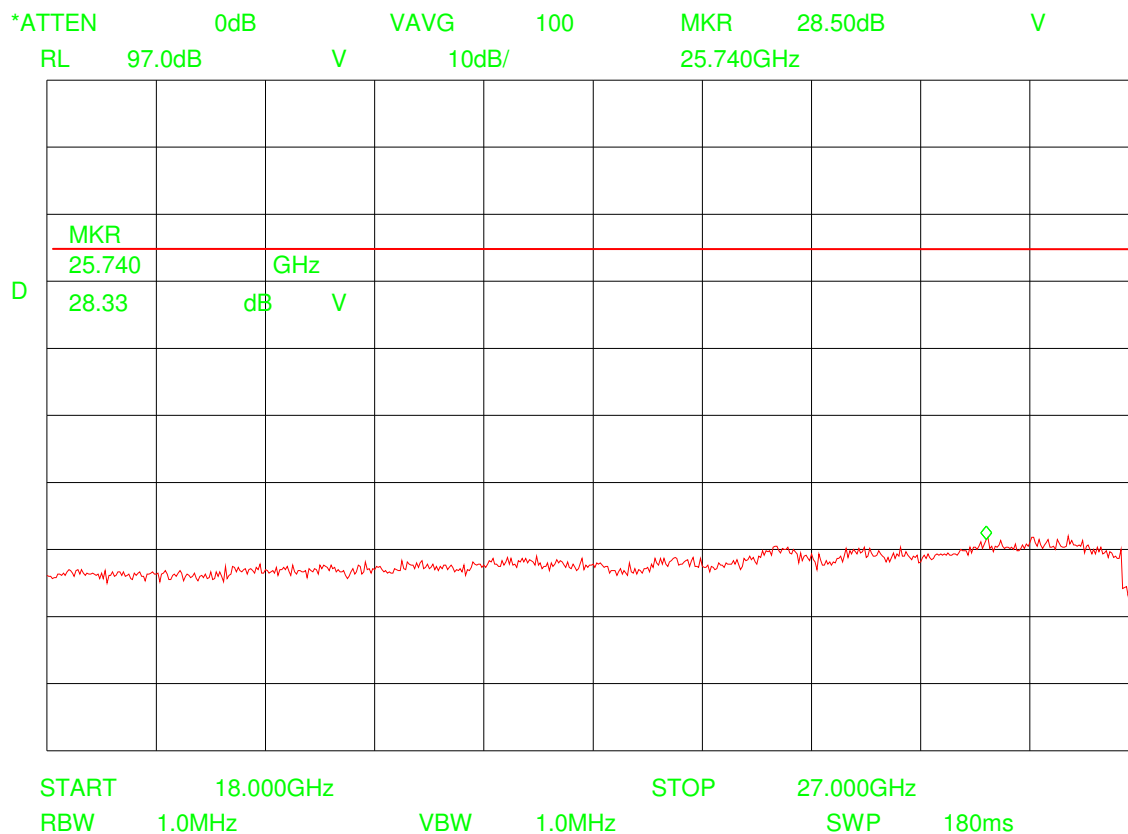

Measurement distance d = 0.5 m

Calculation :

Distance correction 3.0m => 0.5m = 15.5 dB

Limit at 3.0m = 54.0 dB $\mu$ V/m

Limit at 0.5m = 54.0 dB $\mu$ V/m + 15.5 dB = 69.5 dB $\mu$ V/m

Field strength = 28.3 dB $\mu$ V/m at 0.5m

Verdict : pass
----------------

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 32 of 48

Plot no.: 8

Radiated emissions 27 GHz to 40 GHz

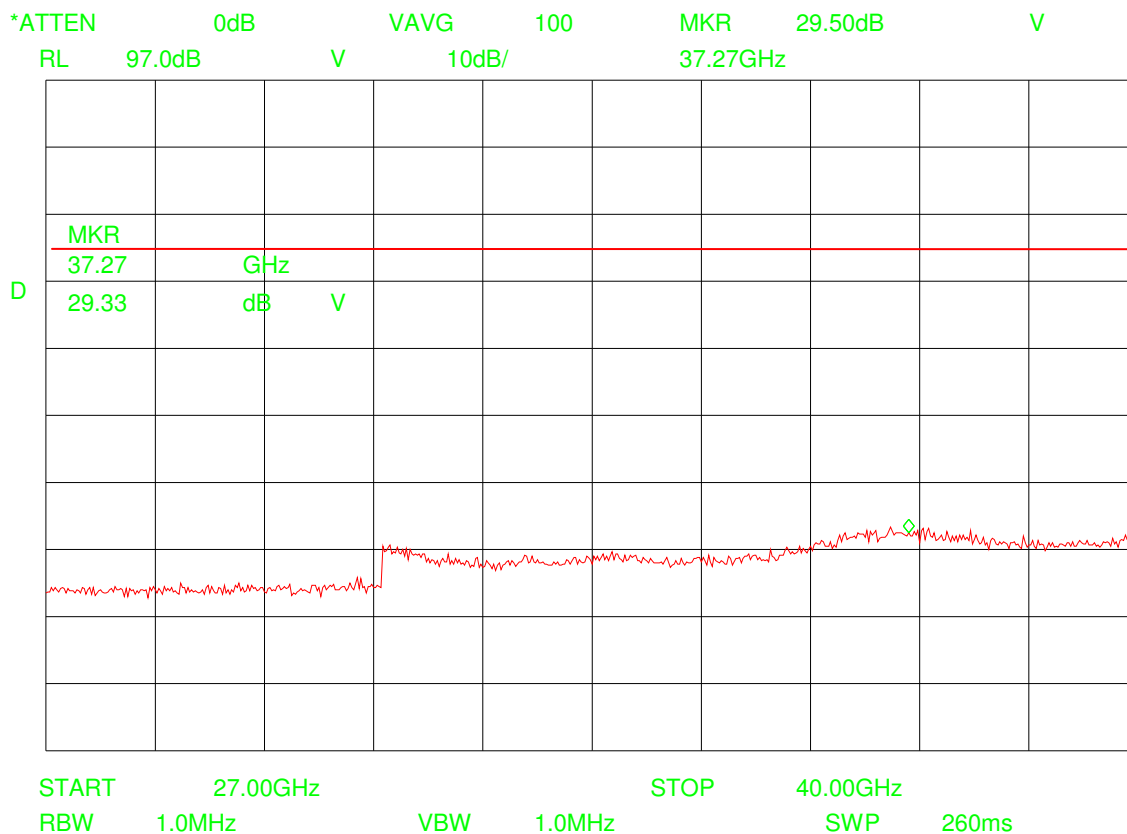

Measurement distance d = 0.5 m

Calculation :

Distance correction 3.0m => 0.5m = 15.5 dB

Limit at 3.0m = 54.0 dB $\mu$ V/m

Limit at 0.5m = 54.0 dB $\mu$ V/m + 15.5 dB = 69.5 dB $\mu$ V/m


Field strength = 29.3 dB $\mu$ V/m at 0.5m

Verdict : pass



Plot no.: 9

## Radiated emissions 40 GHz to 50 GHz

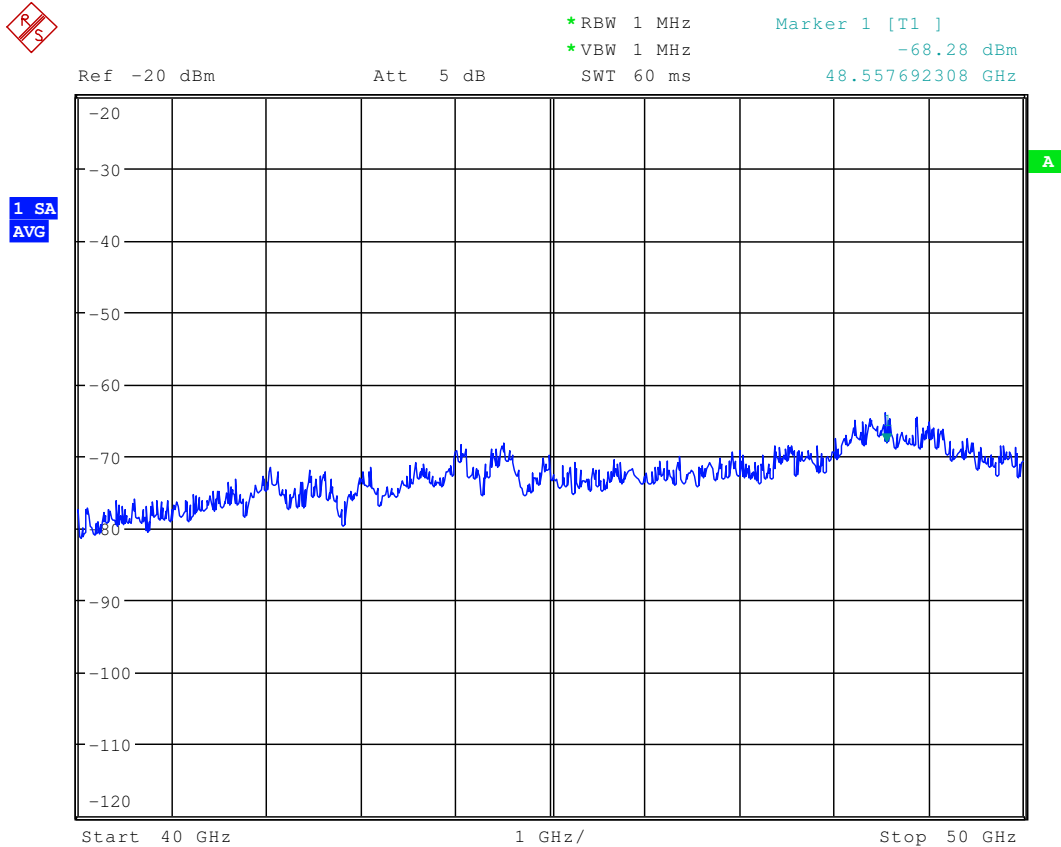

Measurement distance d = 0.5 m

Calculation of system attenuation = free space attenuation – antenna gain

a(sys) = 58.5 dB - 18.4 dB  
 = 40.1 dB

Output power = -68.3 dBm + 40.1 dB = -28.2 dBm

Calculation :

Power density = EIRP (mW) /  $4 \cdot \pi \cdot 300\text{cm} \cdot 300\text{cm}$

Maximum spurious =  $1.51 \mu\text{W} (-28.2 \text{ dBm}) / 1130973.4 \text{ cm}^2$   
 =  $1.34 \text{ pW/cm}^2$

Limit at 3m =  $600 \text{ pW/cm}^2$

Verdict : pass

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 34 of 48

Plot no.: 10

Radiated emissions 50 GHz to 75 GHz

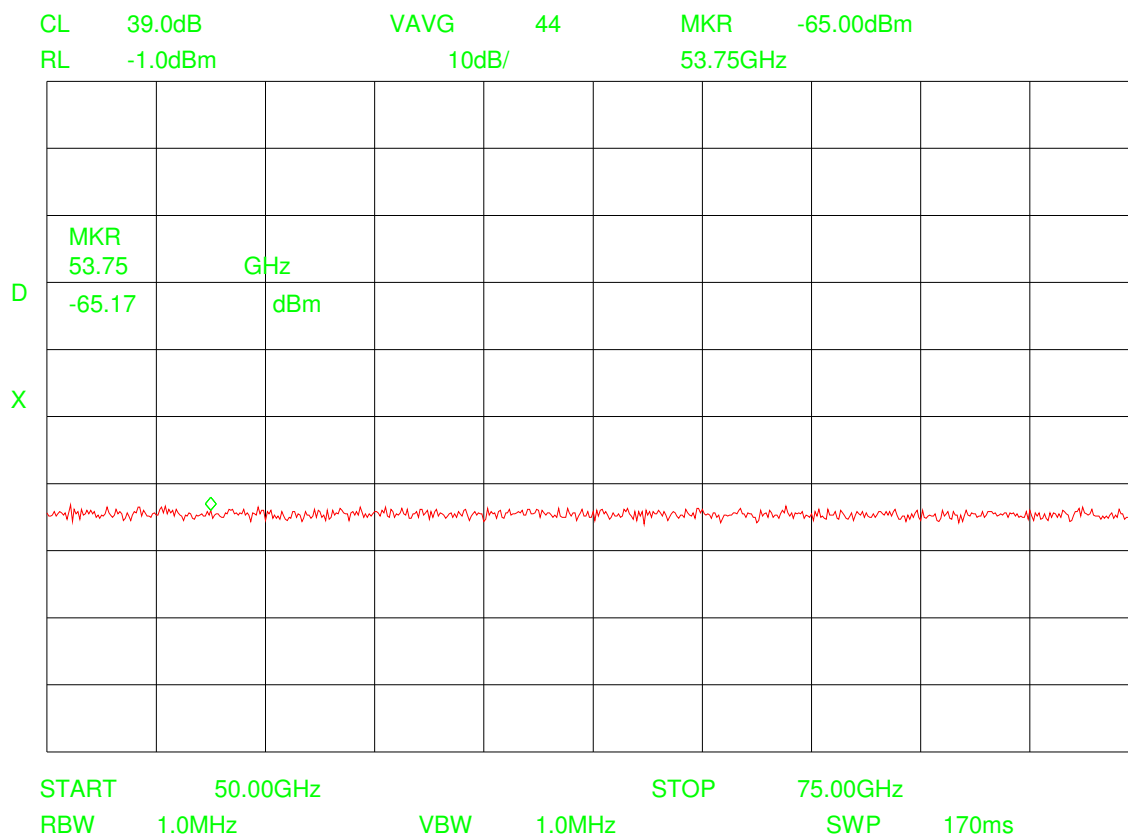

Measurement distance d = 0.5 m

Calculation of system attenuation = free space attenuation – antenna gain

a(sys) = 60.0 dB - 23.5 dB  
 = 36.5 dB

Output power = -65.2 dBm + 36.5 dB = -28.7 dBm

Calculation :

Power density = EIRP (mW) /  $4 \cdot \pi \cdot 300\text{cm} \cdot 300\text{cm}$

Maximum spurious = 1.35  $\mu\text{W}$  (-28.7 dBm) / 1130973.4  $\text{cm}^2$


= 1.19  $\text{pW}/\text{cm}^2$

Limit at 3m = 600  $\text{pW}/\text{cm}^2$

Verdict :	pass
-----------	------

Plot no.: 11

Radiated emissions 75 GHz to 110 GHz

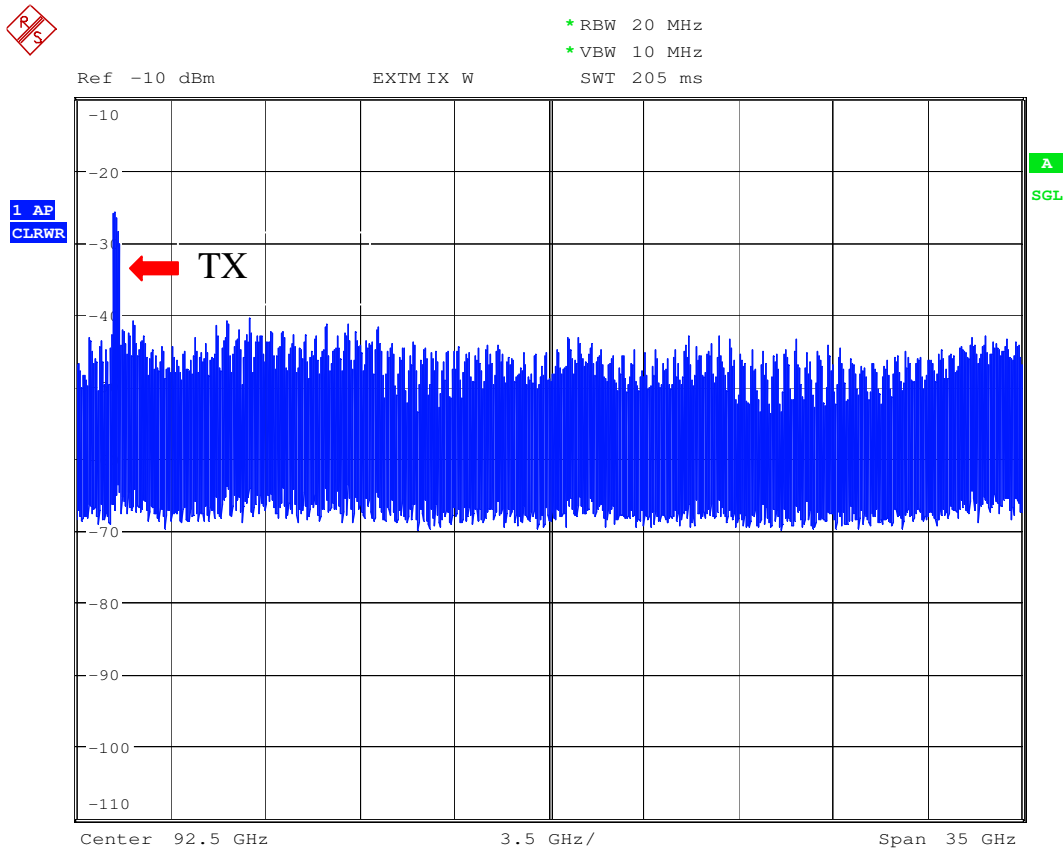

Date: 4.JUL.2007 13:47:24

Measurement distance d = 0.25 m

Calculation of system attenuation = free space attenuation - antenna gain

a(sys) = 58.0 dB - 22.7 dB  
= 35.3 dB

Output power = -41.7 dBm + 35.3 dB = -6.4 dBm

Calculation :

Power density = EIRP (mW) /  $4 \cdot \pi \cdot 300\text{cm} \cdot 300\text{cm}$


Maximum spurious = 0.23 mW (-6.4 dBm) /  $1130973.4 \text{ cm}^2$   
= 203 pW /  $\text{cm}^2$

Limit at 3m = 600 pW/ $\text{cm}^2$

Verdict :	pass
-----------	------

Plot no.: 12

Radiated emissions 110 GHz to 170 GHz

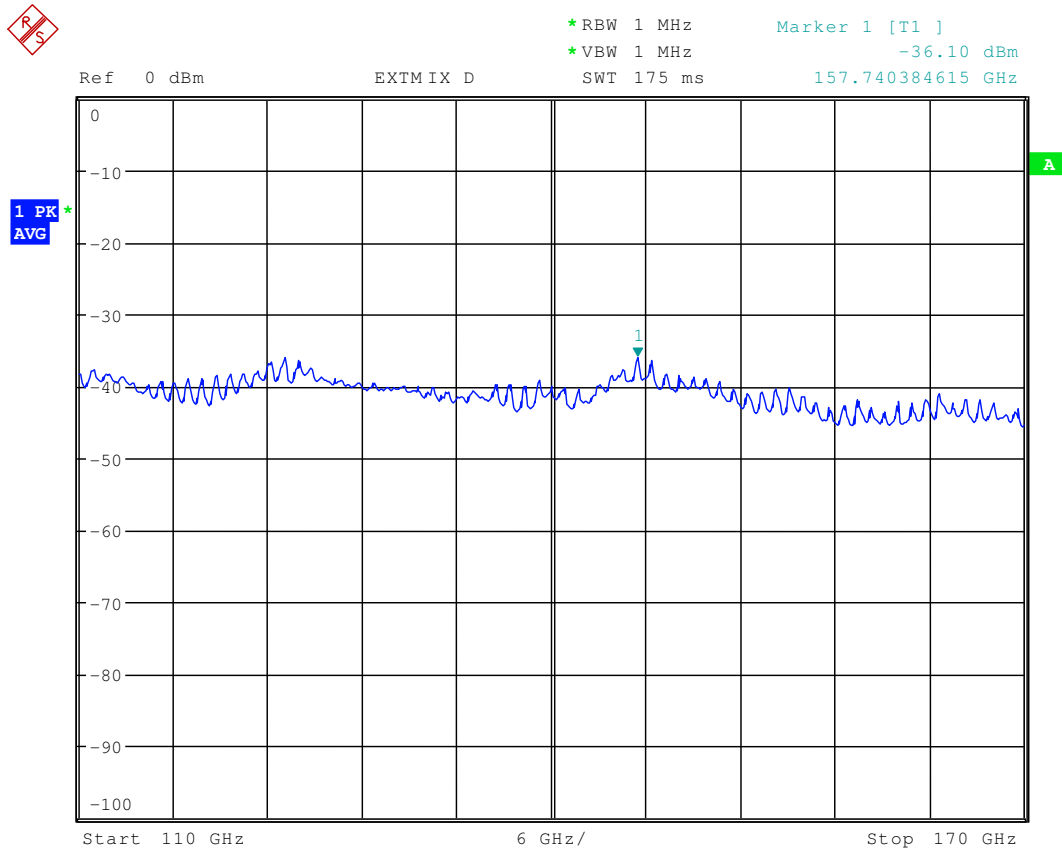

Measurement distance d = 0.125 m  
 Calculation of system attenuation = free space attenuation – antenna gain  
 a(sys) = 55.2 dB - 23.8 dB  
 = 31.4 dB

Output power = -36.1 dBm + 31.4 dB = -4.7 dBm

Calculation :

Power density = EIRP (mW) / 4\*Pi\*300cm\*300cm


Maximum spurious = 0.34 mW (-4.7 dBm) / 1130973.4 cm<sup>2</sup>  
 = 300 pW /cm<sup>2</sup>

Limit at 3m = 600pW/cm<sup>2</sup>

Verdict :	pass
-----------	------

Plot no.: 13

Radiated emissions 170 GHz to 231 GHz

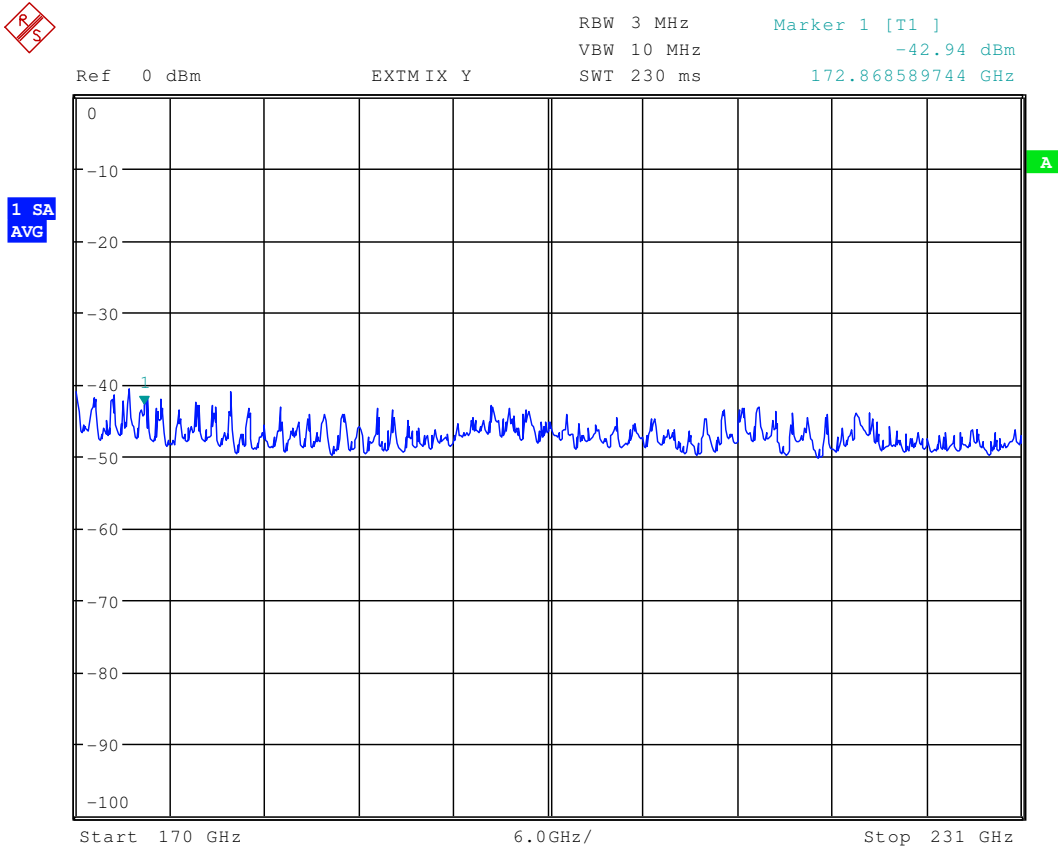

Measurement distance d = 0.125 m

Calculation of system attenuation = free space attenuation – antenna gain  
 a(sys) = 59.1dB - 18.7 dB  
 = 40.4 dB

Output power = -42.9 dBm + 40.4 dB = -2.5 dBm

Calculation :

Power density = EIRP (mW) /  $4 \cdot \pi \cdot 300\text{cm} \cdot 300\text{cm}$

Maximum spurious = 0.6 mW (-2.5 dBm) /  $1130973.4 \text{ cm}^2$   
 = 497 pW /  $\text{cm}^2$

Limit at 3m up to 200 GHz = 600pW/ $\text{cm}^2$

Limit at 3m above 200 GHz = 1000pW/ $\text{cm}^2$

Verdict :	pass
-----------	------

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 38 of 48

Plot no.: 14

Occupied frequency range:

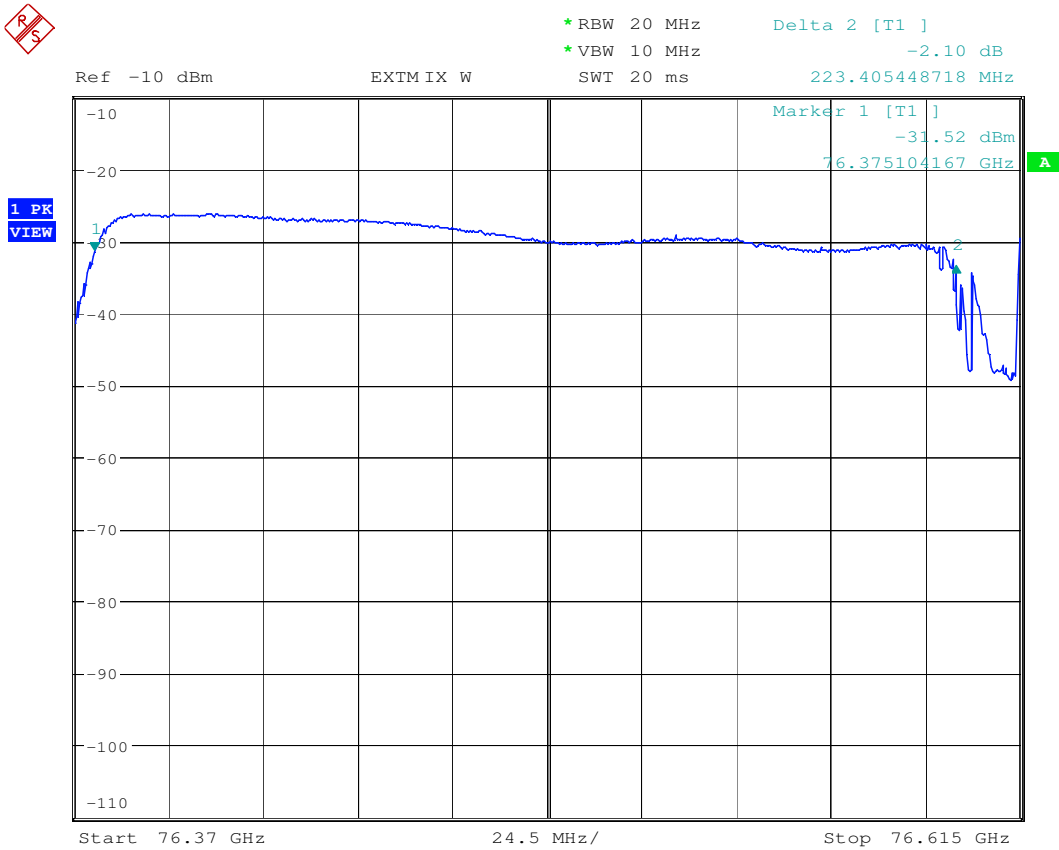

Date: 4.JUL.2007 13:50:27

Occupied frequency range: 223.4 MHz

Verdict : pass

# CETECOM ICT Services GmbH


Test report No.: 2-4679/07-01-02-A

Date : 2007-07-13

Page 39 of 48

Plot no.: 15

Occupied frequency range:

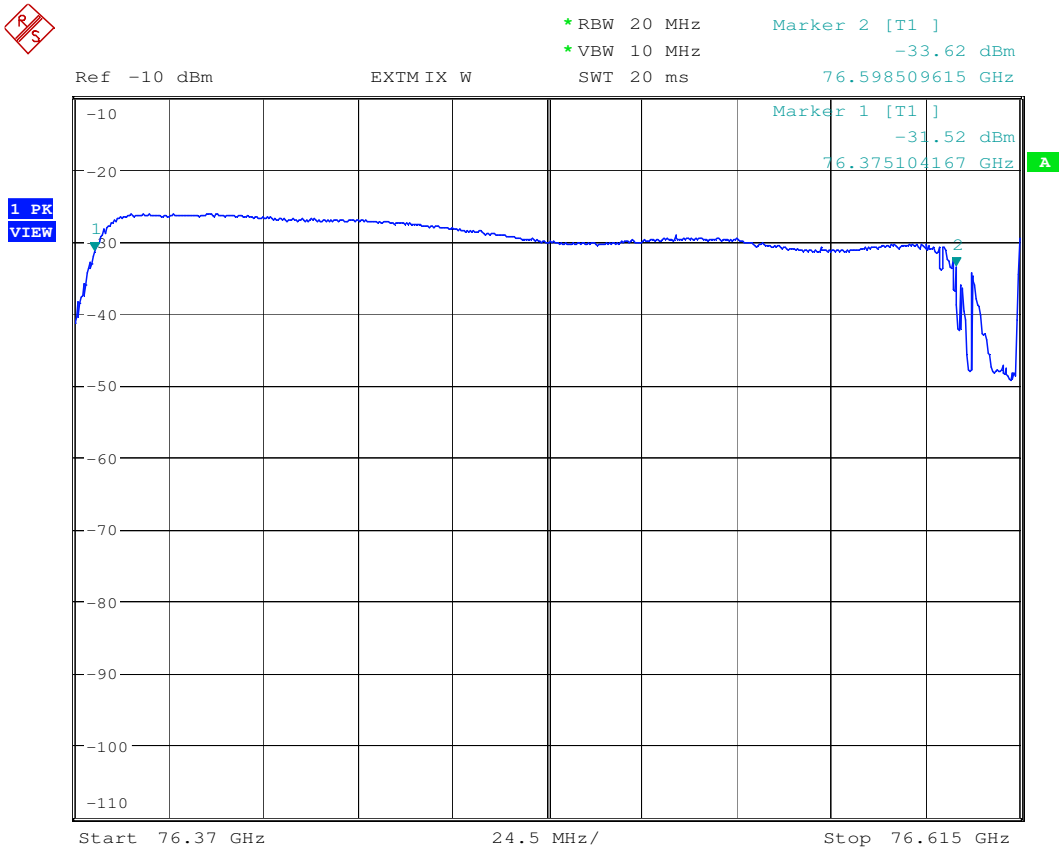

Date: 4.JUL.2007 13:50:47

The occupied frequency range is between 76.375 GHz and 76.598 GHz.

Calculated middle frequency is 76.486 500 GHz.

Verdict :      pass