

**DATE: 23 January 2007**

**I.T.L. (PRODUCT TESTING) LTD.**  
**FCC EMC/Radio Test Report**  
**for**  
**Hi-G-Tek Ltd.**

**Equipment under test:**

**AVL Reader**

**IG-AV2-43-916 Version B01**

Written by:




D. Shidowsky, Documentation

Approved by:



E. Pitt, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

## Measurement/Technical Report for Hi-G-Tek Ltd.

### Equipment under test:

**AVL Reader**

**FCC ID: OB6-IGAV243916**

**DATE: 23 January 2007**

This report concerns:      Original Grant       Class II change

Class B verification       Class A verification       Class I change

Equipment type:      Radio Transmitter

Request Issue of Grant:

Immediately upon completion of review

Limits used:

CISPR 22       Part 15

Measurement procedure used is ANSI C63.4-2003.

Application for Certification

Applicant for this device:

prepared by:

(different from "prepared by")

Ishaiahou Raz

Yossi Hershko

ITL (Product Testing) Ltd.

Hi-G-Tek Ltd.

1 Batsheva St. P.O.B. 87

16 Hacharoshet St.

Lod 71100

Or Yehuda 60375

Israel

Israel

Tel: +972-8-915-3100

Tel: +972-3-533-9359

Fax: +972-8-915-3101

Fax: +972-3-533-8225

Email: sraz@itl.co.il

Email: yossih@higtek.com

# TABLE OF CONTENTS

<b>1. GENERAL INFORMATION -----</b>	<b>4</b>
1.1 Administrative Information.....	4
1.2 List of Accreditations .....	5
1.3 Product Description .....	6
1.4 Test Methodology .....	8
1.5 Test Facility .....	8
1.6 Measurement Uncertainty .....	8
<b>2. SYSTEM TEST CONFIGURATION-----</b>	<b>9</b>
2.1 Justification.....	9
2.2 EUT Exercise Software .....	9
2.3 Special Accessories .....	9
2.4 Equipment Modifications .....	9
2.5 Configuration of Tested System .....	9
<b>3. BLOCK DIAGRAM-----</b>	<b>10</b>
3.1 Schematic Block/Connection Diagram.....	10
3.2 Theory of Operation .....	10
<b>4. FIELD STRENGTH OF FUNDAMENTAL-----</b>	<b>11</b>
4.1 Test Specification .....	11
4.2 Test Procedure .....	11
4.3 Measured Data .....	11
4.4 Test Instrumentation Used, Field Strength of Fundamental .....	15
<b>5. RADIATED MEASUREMENT PHOTOS -----</b>	<b>16</b>
<b>6. SPURIOUS RADIATED EMISSION 9KHZ-1000 MHZ-----</b>	<b>17</b>
6.1 Measured Data .....	17
6.2 Test Instrumentation Used, Radiated Measurements.....	18
6.3 Field Strength Calculation .....	19
<b>7. SPURIOUS RADIATED EMISSION ABOVE 1 GHZ-----</b>	<b>20</b>
7.1 Spurious Radiated Emission Above 1 GHz.....	20
7.2 Test Data.....	21
7.3 Test Instrumentation Used, Spurious Radiated Measurements Above 1 GHz .....	26
<b>8. APPENDIX A - CORRECTION FACTORS -----</b>	<b>27</b>
8.1 Correction factors for CABLE .....	27
8.2 Correction factors for CABLE .....	28
8.3 Correction factors for CABLE .....	29
8.4 Correction factors for LOG PERIODIC ANTENNA .....	30
8.5 Correction factors for LOG PERIODIC ANTENNA .....	31
8.6 Correction factors for BICONICAL ANTENNA.....	32
8.7 Correction factors for ACTIVE LOOP ANTENNA .....	33
<b>9. APPENDIX B - CORRESPONDENCE-----</b>	<b>34</b>



## 1. General Information

### 1.1 Administrative Information

Manufacturer:	Hi-G-Tek Ltd.
Manufacturer's Address:	16 Hacharoshet St. Or-Yehuda 60375 Israel Tel: +972-3-533-9359 Fax: +972-3-533-9225
Manufacturer's Representative:	Yossi Hershko Arkady Genin
Equipment Under Test (E.U.T.):	AVL Reader
Equipment Model No.:	IG-AV2-43-916 Version B01
Equipment Serial No.:	Sample From Production
Date of Receipt of E.U.T.:	26.12.06
Start of Test:	26.12.06
End of Test:	26.12.06
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subparts B, C



## 1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

### 1.3 Product Description

See details in ITL test report no. E67380.01.

Description of change:

**\* RADIO Changes**

**1.3.1 Change (1): Ext. antenna (900MHz, magnet mount) replacement**

Current antenna model **ASF-3061** (manufactured by PANORAMA) is obsolete, manufacturer offers antenna model **ASOG-910B** as a replacement for the ASF-3061 model.

\* Note: Both antennas are  $\frac{1}{4}\lambda$  type, no significant modifications are expected.



Ver. A01	
HF Antenna	
Manufacturer	Panorama Antennas
Type	Magnet Mount ,quarter wave antenna for900MHz
Model No.	ASF-3061



Ver. B01	
HF Antenna	
Manufacturer	Panorama Antennas
Type	Magnet Mount ,quarter wave antenna for900MHz
Model No.	ASOG-910B

**\* NON-RADIO Changes**

**1.3.2 Change (2): Microprocessor's Resonator replacement**

A replacement of 4MHz ceramic resonator with a 6MHz ceramic resonator in order to improve  $\mu$ P capabilities .

Ver. A01	
Resonator – 4MHz	
Manufacturer	MURATA
Type	4MHz Ceramic resonator, small cap chip type ,
Model No.	CSTCR4M00G55B
Ref. mark	Y1

Ver. B01	
Resonator – 6MHz	
Manufacturer	MURATA
Type	6MHz Ceramic resonator, small cap chip type ,
Model No.	CSTCR6M00G15B
Ref. mark	Y1

**1.3.3 Change (3): Memory extension**

Optional upgrading of the memory size: 64MB EEPROM memory chip instead of current 32KB EEPROM chip.

\* Note: PCB will continue to support the original 32MB as well.

Rev. A01	
Memo. chip – 32MB	
Manufacturer	MICROCHIP
Type	256k-bit (32MB) Serial Electrically Erasable PROM TSSOP8 package
Model No.	25AA256T-I/ST
Ref. mark	U3

Rev. B01 Memo.	
chip – 64MB	
Manufacturer	ST Microelectronics
Type	512k-bit (64MB) Serial Electrically Erasable PROM TSSOP8 package
Model No.	M95512WDW6TP
Ref. mark	U3

### **1.3.4 Change (4): SMT resistor replacement**

A replacement of 20ohm SMT resistor (charging current limiter) with a 39.2ohm SMT resistor, in order to restrict charging current.

Ver. A01	
20ohm SMT resistor	
Manufacturer	BOURNS
Type	SMT resistor,20 ohm "1206" sized , 0.25W
Model No.	CR1206FX20R0ELF
Ref. mark	R70

Ver. B01	
39.2ohm SMT resistor	
Manufacturer	BOURNS
Type	SMT resistor,39.2 ohm "1206" sized , 0.25W
Model No.	CR1206FX39R2ELF
Ref. mark	R70

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing December 12, 2003).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

### **1.6 Measurement Uncertainty**

#### Radiated Emission

The Open Site complies with the  $\pm 4$  dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

## 2. System Test Configuration

### 2.1 ***Justification***

See ITL test report E67380.01.

Field Strength of Fundamental and spurious Radiated Emission in the frequency range 9 kHz to 9.2 GHz were re-tested in accordance with correspondence with Timco. See Appendix B Correspondence.

### 2.2 ***EUT Exercise Software***

See ITL test report E67380.01.

### 2.3 ***Special Accessories***


See ITL test report E67380.01.

### 2.4 ***Equipment Modifications***

See ITL test report E67380.01.

### 2.5 ***Configuration of Tested System***

The configuration of the tested system is described below.



**Figure 1. Configuration of Tested System**

### 3. Block Diagram

#### 3.1 *Schematic Block/Connection Diagram*

See ITL test report E67380.01.

#### 3.2 *Theory of Operation*

See ITL test report E67380.01.

## 4. Field Strength of Fundamental

### 4.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(a)

### 4.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (916.500MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

### 4.3 Measured Data

JUDGEMENT: Passed by 0.68 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(a) specification requirements.

The details of the highest emissions are given in *Figure 2*.

TEST PERSONNEL:

Tester Signature: *Pitt* Date: 23.01.07

Typed/Printed Name: E. Pitt



## Field Strength of Fundamental

E.U.T Description      AVL Reader  
Model Number            IG-AV2-43-916 Version B01  
Serial Number:           Sample From Production

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (*) (dB $\mu$ V/m)	Specification (dB $\mu$ V/m)	Margin (dB)
916.53	H	80.55	94.0	-13.45
916.53	V	93.32	94.0	-0.68

**Figure 2. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

\* "Peak Amp." includes "Correction Factors."

"Correction Factors" = Antenna Correction Factor + Cable Loss.

## Field Strength of Fundamental

E.U.T Description      AVL Reader  
 Model Number            IG-AV2-43-916 Version B01  
 Serial Number:            Sample From Production

Specification: F.C.C., Part 15, Subpart C 15.249(a)


Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak

10:46:06 DEC 26, 2006

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 916.525 MHz  
 B0.55 dB $\mu$ V/m

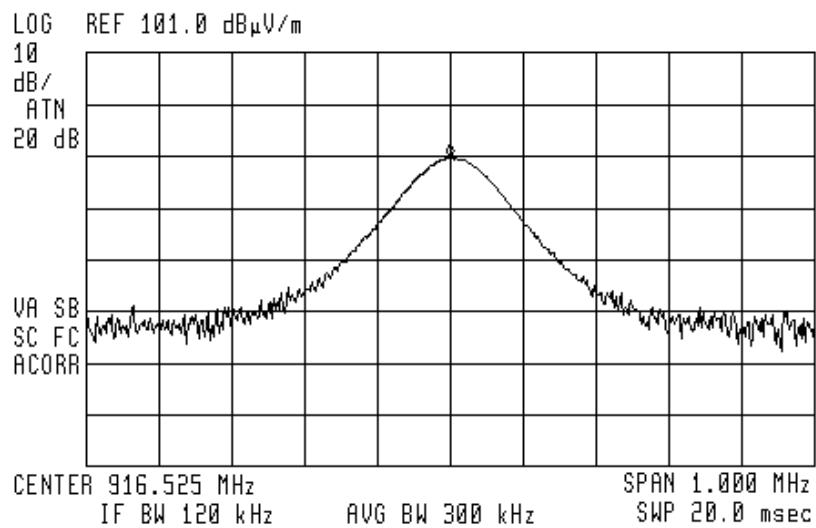

**Figure 3. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL  
 Detector: Peak**

## Field Strength of Fundamental

E.U.T Description: AVL Reader  
 Model Number: IG-AV2-43-916 Version B01  
 Serial Number: Sample From Production

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detector: Peak

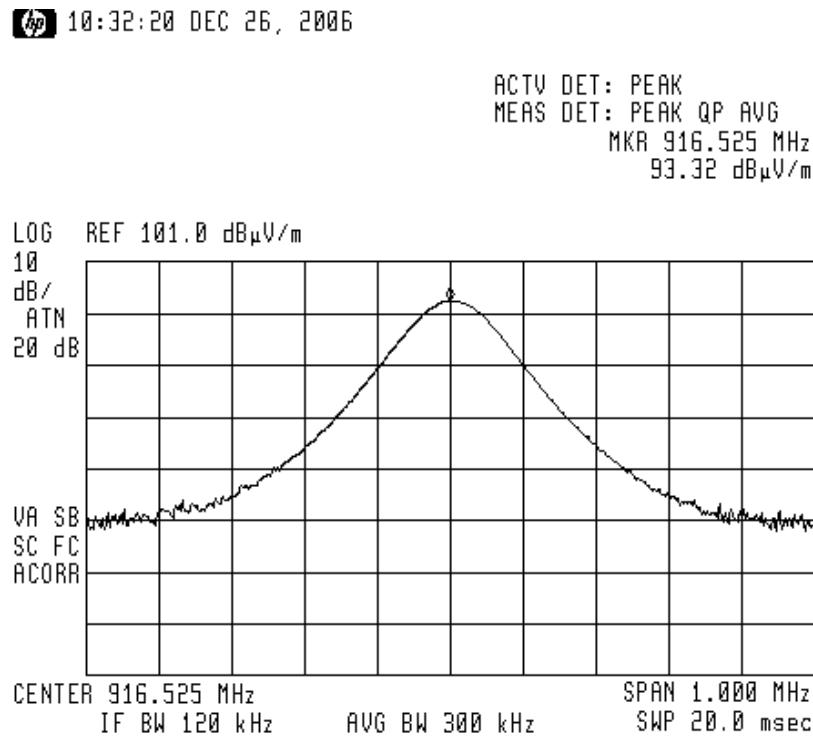


Figure 4. Field Strength of Fundamental. Antenna Polarization: VERTICAL.  
Detector: Peak

#### 4.4 ***Test Instrumentation Used, Field Strength of Fundamental***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 22, 2006	1 year
RF Section	HP	85420E	3705A00248	November 22, 2006	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 30, 2006	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A

## 5. Radiated Measurement Photo



**Figure 5. Radiated Emission Test**

## 6. Spurious Radiated Emission 9kHz-1000 MHz

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The frequency range 9kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

During this test the E.U.T. was operated in continuous transmission to enable better detection of signals.

### 6.1 Measured Data

JUDGEMENT: Passed

The signals in the band 9 kHz – 1000 MHz were 20dB below the specification limit.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 23.01.07

Typed/Printed Name: E. Pitt

## 6.2 **Test Instrumentation Used, Radiated Measurements**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 22, 2006	1 year
RF Section	HP	85420E	3705A00248	November 22, 2006	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 19, 2006	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 30, 2006	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 16, 2006	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A



### 6.3 ***Field Strength Calculation***

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB $\mu$ v/m]  
RA: Receiver Amplitude [dB $\mu$ v]  
AF: Receiving Antenna Correction Factor [dB/m]  
CF: Cable Attenuation Factor [dB]

## 7. Spurious Radiated Emission Above 1 GHz

### 7.1 *Spurious Radiated Emission Above 1 GHz*

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.

The frequency range 1 –9.2 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emission levels were compared to the requirement of Section 15.249.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The test distance was 3 meters.

In the frequency range 2.9-9.2 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.).

## 7.2 **Test Data**

JUDGEMENT: Passed by 3.1 dB

The margin between the emission level and the specification limit is 3.1 dB in the worst case at the frequency of 2749.56 MHz, horizontal and vertical polarizations.

All other signals not included in the result tables are at least 20dB below the specification limit.

The EUT met the requirements of the F.C.C. Part 15, Subpart C Section 15.249, specification.

The details of the highest emissions are given in *Figure 6* to *Figure 9*.

TEST PERSONNEL:

Tester Signature: *E. Pitt* Date: 23.01.07

Typed/Printed Name: E. Pitt



# Spurious Radiated Emission Above 1 GHz

E.U.T Description      AVL Reader  
Model Number            IG-AV2-43-916 Version B01  
Serial Number:           Sample From Production

Specification: F.C.C., Part 15, Subpart C, 15.249

Antenna Polarization: Horizontal              Frequency range: 1.0 GHz to 9.2 GHz  
Test Distance: 3 meters                      Detector: Peak, Average

Signal Number	Frequency (MHz)	Peak dBuV/m	Pk Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	1833.041555	62.1	-11.9	50.1	-3.9	38.4
2	2749.562335	69.7	-4.3	57.1	3.1	44.6

**Figure 6. Spurious Radiated Emission. Antenna Polarization: HORIZONTAL  
Detector: Peak, Average**

Pk Delta/ Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak” and “Average” include correction factor.

“Correction Factor” = Antenna Factor + Cable Loss


# Spurious Radiated Emission Above 1 GHz

E.U.T Description AVL Reader  
Model Number IG-AV2-43-916 Version B01  
Serial Number: Sample From Production

Specification: F.C.C., Part 15, Subpart C, 15.249

Antenna Polarization: Horizontal  
Test Distance: 3 meters

Frequency range: 1.0 GHz to 9.2 GHz  
Detector: Peak, Average

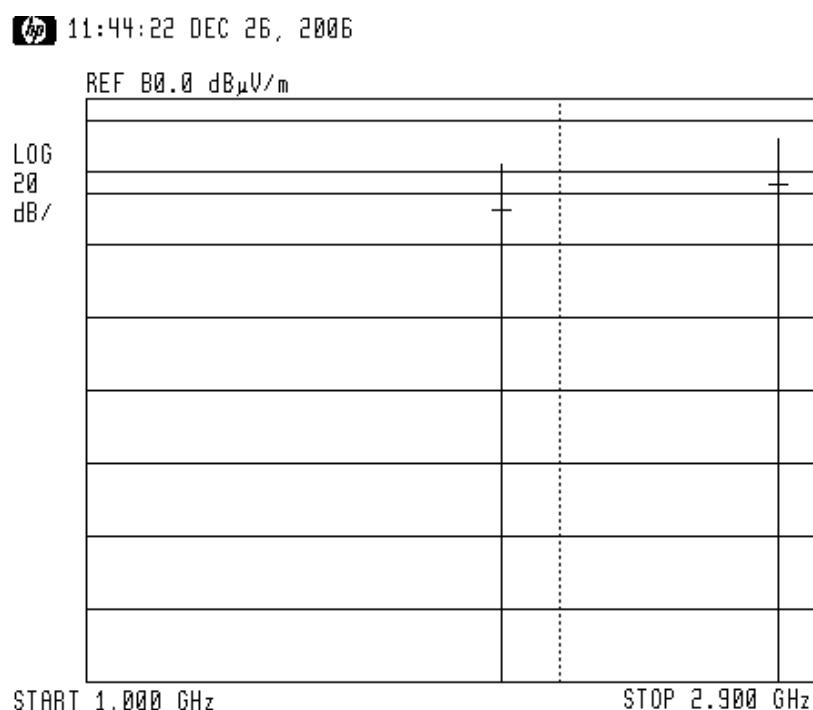

**Figure 7. Spurious Radiated Emission. Antenna Polarization: HORIZONTAL  
Detector: Peak, Average**

### Notes:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB  $\mu$ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Average detection is designated by the first dash mark (from the top) of each vertical line.



## Spurious Radiated Emission Above 1 GHz

E.U.T Description AVL Reader  
Model Number IG-AV2-43-916 Version B01  
Serial Number: Sample From Production

Specification: F.C.C., Part 15, Subpart C, 15.249

Antenna Polarization: Vertical      Frequency range: 1.0 GHz to 9.2 GHz  
Test Distance: 3 meters      Detector: Peak, Average

Signal Number	Frequency (MHz)	Peak dBuV/m	Pk L 1 (dB)	Delta dB	Avg dBuV/m	Av L 2 (dB)	Delta (dB)	Corr (dB)
1	1833.041400	62.5	-11.5	50.2	-3.8	38.4		
2	2749.562335	69.7	-4.3	57.1	3.1	44.6		

**Figure 8. Spurious Radiated Emission. Antenna Polarization: VERTICAL. Detector: Peak, Average**

Pk Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak” and “Average” include correction factor.

“Correction Factor” = Antenna Factor + Cable Loss


# Spurious Radiated Emission Above 1 GHz

E.U.T Description      AVL Reader  
Model Number            IG-AV2-43-916 Version B01  
Serial Number:           Sample From Production

Specification: F.C.C., Part 15, Subpart C, 15.249

Antenna Polarization: Vertical  
Test Distance: 3 meters

Frequency range: 1.0 GHz to 9.2 GHz  
Detector: Peak, Average

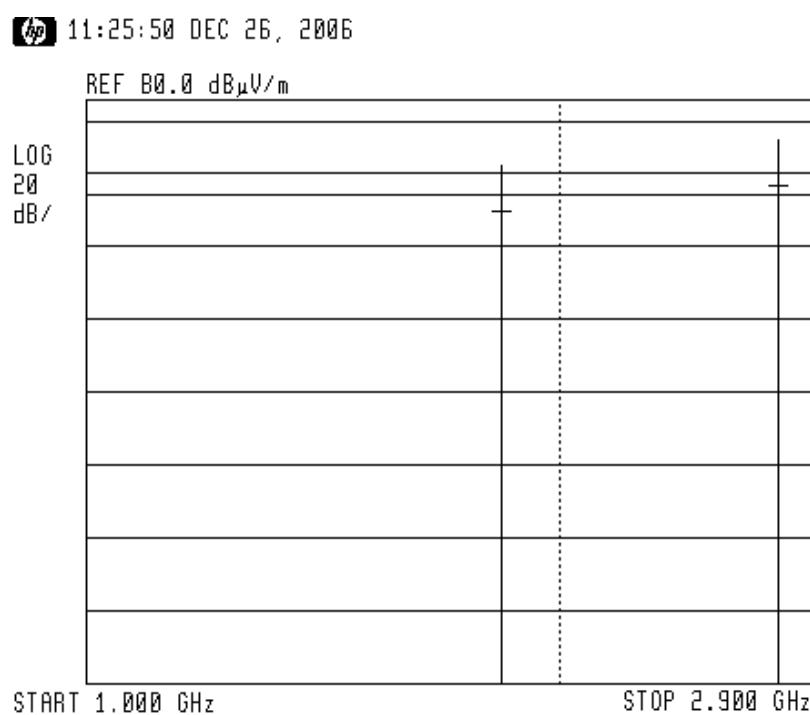

**Figure 9. Spurious Radiated Emission. Antenna Polarization: VERTICAL.  
Detector: Peak, Average**

Notes:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB  $\mu$ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Average detection is designated by the first dash mark (from the top) of each vertical line.

### 7.3 **Test Instrumentation Used, Spurious Radiated Measurements Above 1 GHz**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3906A00276	November 22, 2006	1 year
RF Section	HP	85420E	3705A00248	November 22, 2006	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 24,2005	2 year
Spectrum Analyzer	HP	8592L	3926A01204	November 21, 2006	1 year

## 8. APPENDIX A - CORRECTION FACTORS

**8.1 Correction factors for CABLE  
from EMI receiver  
to test antenna  
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.5	1200.0	7.5
20.0	0.7	1400.0	8.2
30.0	1.0	1600.0	9.0
40.0	1.2	1800.0	9.6
50.0	1.3	2000.0	10.7
60.0	1.5	2300.0	11.1
70.0	1.6	2600.0	11.8
80.0	1.7	2900.0	12.8
90.0	1.8		
100.0	1.9		
150.0	2.4		
200.0	2.7		
250.0	3.0		
300.0	3.3		
350.0	3.7		
400.0	4.0		
450.0	4.3		
500.0	4.7		
600.0	4.9		
700.0	5.4		
800.0	5.8		
900.0	6.3		
1000.0	6.7		

### NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

## 8.2 Correction factors for

## CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY CORRECTION FACTOR	
(GHz)	(dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

### NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

### 8.3 Correction factors for

### CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

#### NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

#### 8.4 Correction factors for

#### LOG PERIODIC ANTENNA

Type LPD 2010/A  
at 3 and 10 meter ranges.

##### Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	11.4
400.0	14.5
500.0	15.2
600.0	17.3
700.0	19.0
850.0	20.1
1000.0	22.2

##### Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.2
400.0	14.4
500.0	15.2
600.0	17.2
700.0	19.0
850.0	20.1
1000.0	22.1

##### NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

## 8.5 Correction factors for

## LOG PERIODIC ANTENNA

Type SAS-200/511  
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

### NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**8.6      Correction factors for**
**BICONICAL ANTENNA  
Type BCD-235/B,  
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

**NOTES:**

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**8.7 Correction factors for ACTIVE LOOP ANTENNA**  
**Model 6502**  
**S/N 9506-2950**

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2

## 9. APPENDIX B - CORRESPONDENCE

Date: 30.11.2006

From: EMC

To: 'FAQ@timcoengr.com'

Subject: FCC Approval for Changes in AVL Reader- Hi-G-Tek

Hi,

1. This inquiry concerns 2 products that were approved for FCC ID via Timco , FCC ID # OB6-IGAV143916; OB6-IGAV243916.
2. Attached is the customer information concerning changes in the radio (antenna replacement) and non-radio parts of the products.
3. We suggest using Permissive Change Class II and testing as follows:
  - a. Field strength of Fundamental for 916MHz only.
  - b. Spurious radiated emission 9kHz-9.2GHz
4. Please comment/verify.

Regards

Shaike Raz

EMC Laboratory Manager  
EMC Laboratory

ITL (Product Testing) Ltd.

Kfar Bin Nun

Israel

Tel: +972-8-979-7799

Fax: +972-8-979-7702

Email: [sraz@itl.co.il](mailto:sraz@itl.co.il)/[emc@itl.co.il](mailto:emc@itl.co.il)

<http://www.itl.co.il>

This e-mail message may contain privileged or confidential information. If you are not the intended recipient, you may not disclose, use, disseminate, distribute, copy or rely upon this message or attachment in any way. If you received this e-mail message in error, please return by forwarding the message and its attachments to the sender.



Date: 30.11.2006

From: sid [sid@timco.cc]

To: Yossi Hershko , Hi-G-Tek Ltd.; Emc

Subject: RE: Request for changes application - AVL Reader

4 Dec 2006

Shaike,

In order to approve a new antenna you must file a class II change with radiation data on the new antenna.

Regards,

Sid

-----Original Message-----

**From:** Yossi Hershko , Hi-G-Tek Ltd. [mailto:[yossih@higtek.com](mailto:yossih@higtek.com)]

**Sent:** Wednesday, November 29, 2006 3:43 AM

**To:** Emc

**Cc:** Shmuel Hazon; [yoni@higtek.com](mailto:yoni@higtek.com)

**Subject:** Request for changes application - AVL Reader

Shaike Shalom,

Attached hereby is an application for product's changes concerning AVL Reader 916Mhz, the application applies on both AVL Reader 916 models ;  
IGAV143916, IGAV243916.

Please advise further actions needed to proceed.

Best Regards,

Yossi Hershko

Product Engineer

HI-G-TEK Ltd

16 hacharoshet St.

Or-Yehuda 60375

ISRAEL

Tel. +972-3-5339359 Ext. 228

Fax. +972-3-5339225

Cell. +972-52-3786480

[www.higtek.com](http://www.higtek.com)

\*\*\* eSafe scanned this email for malicious content \*\*\*

\*\*\* IMPORTANT: Do not open attachments from unrecognized senders \*\*\*