


Prüfbericht - Nr.:		15051385 001		Seite 1 von 47	
<i>Test Report No.:</i>		<i>Page 1 of 47</i>			
Auftraggeber:		Novacomm Technologies Inc.			
<i>Client:</i>		902A, #560 shengxia Rd. ZJ InnoPark, Shanghai, China			
Gegenstand der Prüfung:		Bluetooth Module			
<i>Test Item:</i>					
Bezeichnung:		NVC-MDCS45		Serien-Nr.:	
<i>Identification:</i>				<i>Serial No.:</i> Engineering sample	
Wareneingangs-Nr.:		153190462		Eingangsdatum:	
<i>Receipt No.:</i>				<i>Date of Receipt:</i> 2012-03-28	
Prüfart:		TÜV Rheinland (Shanghai) Co., Ltd.			
<i>Testing Location:</i>		Building 177, No. 777 Guangzhong Road West, Shanghai 200072, P.R. China			
Prüfgrundlage:		FCC 47 CFR Part 15, Subpart C, Section 15.247 (October 1, 2009)			
<i>Test Specification:</i>		ANSI C63.4-2003 Public Notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (March 30, 2000)			
Prüfresultat:		Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).			
<i>Test Result:</i>		<i>The test item passed the test specification(s).</i>			
Prüflaboratorium:		TÜV Rheinland (Shanghai) Co., Ltd.			
<i>Testing Laboratory:</i>		10-15/F, Huatsing Building, No.88, Lane 777, Guangzhong Road West, Shanghai 200072, P.R. China			
geprüft/ tested by:			kontrolliert/ reviewed by:		
2012-06-11 Shi Li / Inspector 			2012-06-11 René Charton / Reviewer 		
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
Sonstiges / Other Aspects:					
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 2 von 47

Page 2 of 47

TEST SUMMARY

3.2.1 VOLTAGE REQUIREMENTS, FCC 15.31(E)

RESULT: PASS

3.2.2 ANTENNA REQUIREMENTS, FCC 15.203, FCC 15.204

RESULT: PASS

5.1.1 CONDUCTED OUTPUT POWER, FCC 15.247(B)(1)

RESULT: PASS

5.1.2 CARRIER FREQUENCY SEPARATION, FCC 15.247(A)(1)

RESULT: PASS

5.1.3 20dB BANDWIDTH, FCC 15.247(A)(1)**5.1.5 NUMBER OF HOPPING FREQUENCIES, FCC 15.247(A)(1)(III)**

RESULT: PASS

5.1.6 AVERAGE TIME OF OCCUPANCY, FCC 15.247(A)(1)(III)

RESULT: PASS

5.1.7 CONDUCTED SPURIOUS EMISSION, FCC 15.247(D)

RESULT: PASS

5.1.8 BAND EDGE COMPLIANCE OF RF CONDUCTED EMISSION, FCC 15.247(D)

RESULT: PASS

6.1.1 BAND EDGE RADIATED EMISSION, FCC 15.205, FCC 15.209, FCC 15.247(D)

RESULT: PASS

6.1.2 RADIATED SPURIOUS EMISSION OF TRANSMITTER, FCC 15.205, FCC 15.209, FCC 15.247(D),

RESULT: PASS

6.2.1 RADIATED SPURIOUS EMISSION OF RECEIVER, FCC 15.109

RESULT: PASS

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 3 von 47

Page 3 of 47

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	MEASUREMENT UNCERTAINTY	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	SYSTEM DETAILS	7
3.2.1	<i>Voltage Requirements, FCC 15.31(e)</i>	<i>7</i>
3.2.2	<i>Antenna Requirements, FCC 15.203, FCC 15.204</i>	<i>8</i>
3.3	INDEPENDENT OPERATION MODES	8
3.4	CLOCK FREQUENCIES	8
3.5	NOISE SUPPRESSING PARTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	TEST METHODOLOGY	9
4.2	PHYSICAL CONFIGURATION FOR TESTING	9
4.3	TEST OPERATION AND TEST SOFTWARE	9
4.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
5.	TEST RESULTS OF CONDUCTED MEASUREMENTS AT ANTENNA PORT	10
5.1	TRANSMITTER PARAMETERS	10
5.1.1	<i>Conducted Output Power, FCC 15.247(b)(1)</i>	<i>10</i>
5.1.2	<i>Carrier Frequency Separation, FCC 15.247(a)(1)</i>	<i>12</i>
5.1.3	<i>20dB Bandwidth, FCC 15.247(a)(1)</i>	<i>15</i>
5.1.4	<i>Number of Hopping Frequencies, FCC 15.247(a)(1)(iii)</i>	<i>19</i>
5.1.5	<i>Average Time of Occupancy, FCC 15.247(a)(1)(iii)</i>	<i>22</i>
5.1.6	<i>Conducted Spurious Emission, FCC 15.247(d)</i>	<i>28</i>
5.1.7	<i>Band Edge Compliance of RF Conducted Emission, FCC 15.247(d)</i>	<i>34</i>
6.	TEST RESULTS OF RADIATED MEASUREMENTS	37
6.1	TRANSMITTER PARAMETERS	37
6.1.1	<i>Band Edge Radiated Emission, FCC 15.205, FCC 15.209, FCC 15.247(d)</i>	<i>37</i>
6.1.2	<i>Radiated Spurious Emission of Transmitter, FCC 15.205, FCC 15.209, FCC 15.247(d)</i>	<i>41</i>
6.2	RECEIVER PARAMETERS	43
6.2.1	<i>Radiated Spurious Emission of Receiver, FCC 15.109</i>	<i>43</i>

Prüfbericht - Nr.: 15051385 001*Test Report No.:***Seite 4 von 47***Page 4 of 47*

7.	PHOTOGRAPHS OF THE TEST SETUP.....	44
8.	LIST OF FIGURES	46
9.	LIST OF FIGURES	46
10.	LIST OF PHOTOGRAPHS.....	47

Prüfbericht - Nr.: 15051385 001*Test Report No.:***Seite 5 von 47***Page 5 of 47*

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report.

2. Test Sites

2.1 Test Facilities

Lab.1:TÜV Rheinland (Shanghai) Co., Ltd.
10-15/F, Huatsing Building, No.88, Lane 777, West Guangzhong Road, Zhabei District
Shanghai 200072, P.R. China

Lab.2: Quietek Technology (Suzhou)Co.,Ltd.
No.99 Hongye Rd.,Suzhou Industrial Park Loufeng Hi-Tech Development
Zone.,Suzhou,China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 657274.

Prüfbericht - Nr.: 15051385 001
Test Report No.:
Seite 6 von 47
Page 6 of 47

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment
Lab.1:

Equipment	Model	Serial no.	Cal. due date
Spectrum analyzer	FSP30	100192	21.05.2013

Lab.2:

Equipment	Model	Serial no.	Cal. due date
Spectrum analyzer	Agilent	N9010A	18.04.2013
EMI Test Receiver	R&S	ESCI	18.04.2013
Bilog Antenna	Teseq Gmbh	CBL6112D	18.10.2012
Broad-band Horn Antenna	Schwarzbeck	BBHA9120 D	11.06.2013
Preamplifier	Preamplifier	AP-180C	03.05.2013
Coaxial cable	Huber+Suhner	SUCOFLEX 106	02.03.2013
Temperature/Humidity Meter	Zhicheng	ZC1-2	10.01.2013

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Radiated Emission	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Bluetooth Module: A Single Chip Radio and baseband IC for Bluetooth 2.4GHz system including enhanced data rates (EDR) to 3Mbps;

3.2 System Details

Radio standard:	Bluetooth
Specified output power:	18dBm
Antenna gain:	1dBi
Antenna type:	Internal antenna
Antenna mounting type:	Printed
Antenna cable length:	N/A
Frequency range:	2402 – 2480MHz
Number of channels:	79
Channel spacing:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK or 8DPSK

Rated voltage:	3.3V
Protection class:	III

Test voltage:	3.3V
---------------	------

3.2.1 Voltage Requirements, FCC 15.31(e)

RESULT:**PASS**

All the tests were performed using DC 3.3V. Hence it complies with the power supply requirements.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 8 von 47

Page 8 of 47

3.2.2 Antenna Requirements, FCC 15.203, FCC 15.204

RESULT:**PASS**

The EUT has an internal antenna which is not user accessible. Hence it complies with the requirements.

3.3 Independent Operation Modes

The EUT was tested on a stand-alone basis (only attached to the test jig) and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4:2003. Testing was performed at the lowest operating frequency (2402MHz), at the operating frequency in the middle of the specified frequency band (2441MHz) and at the highest operating frequency (2480MHz) with different modulation types.

The basic operation modes are:

- A. EUT transmits (TX mode), with full power, at lowest channel (2402MHz), a continuous modulated signal streaming with 50% duty cycle.
- B. EUT transmits (TX mode), with full power, at middle channel (2441MHz), a continuous modulated signal streaming with 50% duty cycle.
- C. EUT transmits (TX mode), with full power, at highest channel (2480MHz), a continuous modulated signal streaming with 50% duty cycle.
- D. EUT receives (RX mode), at lowest channel (2441MHz), continuously.
- E. EUT receives (RX mode), at middle channel (2441MHz), continuously.
- F. EUT receives (RX mode), at highest channel (2441MHz), continuously.
- G. EUT transmits on pseudo-random sequence on all channels (hopping mode).

3.4 Clock Frequencies

The highest clock frequency generated by the EUT is 26 MHz.

3.5 Noise Suppressing Parts

Refer to schematics and internal photos.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 9 von 47

Page 9 of 47

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209 and Public Notice DA 00-705.

The test methods, which have been used, are based on ANSI C63.4-2003 .

For details, see under each test item.

4.2 Physical Configuration for Testing

The EUT was designed to get into related working mode with the control of a laptop computer through SPI transform USB interface.

Notes:

Two test samples were available. One for antennas conducted measurements and the other one for radiated measurements.

For antenna conducted measurements, the antenna was replaced by a 50Ω antenna connector.

For more details, refer to section: Photographs of the Test Set-Up.

4.3 Test Operation and Test Software

Software used for testing:CSR Tool for 2.4 Version supplied by Client.

This software was running on the laptop computer connected to the EUT by USB. It was used to enable the test operation modes listed in section 3.3 as appropriate.

4.4 Special Accessories and Auxiliary Equipment

The EUT work with a designed board supply DC 3.3V and transform SPI to USB.

4.5 Countermeasures to achieve EMC Compliance

No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 10 von 47

Page 10 of 47

5. Test Results of Conducted Measurements at Antenna Port

5.1 Transmitter Parameters

5.1.1 Conducted Output Power, FCC 15.247(b)(1)

RESULT:
PASS

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels, the maximum peak output power shall be 1W (30dBm). For other hopping systems operating in the 2400-2483.5MHz band, the maximum peak output power shall be 0.125W (21dBm).

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The analyzer resolution bandwidth was set to 3MHz and the video bandwidth to 10MHz. The final measurement takes into account the loss generated by all the involved cables.

Table 3: Conducted Output Power, Mode A (2402MHz)

Data Rate [Mbps]	Reading [dBm]	Correction Factor [dB]	RBW [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
1	18.51	0.69	3	18.51	21	2.49
2	16.19	0.69	3	16.19	21	4.81
3	16.34	0.69	3	16.34	21	4.66

Notes: Cable loss was included in reading as offset.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 11 von 47

Page 11 of 47

Table 4: Conducted Output Power, Mode B (2441MHz)

Data Rate [Mbps]	Reading [dBm]	Correction Factor [dB]	RBW [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
1	18.12	0.69	3	18.12	21	2.88
2	15.80	0.69	3	15.80	21	5.2
3	16.02	0.69	3	16.02	21	4.98

Notes: Cable loss was included in reading as offset.

Table 5: Conducted Output Power, Mode C (2480MHz)

Data Rate [Mbps]	Reading [dBm]	Correction Factor [dB]	RBW [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
1	17.98	0.69	3	17.98	21	3.02
2	16.20	0.69	3	16.20	21	4.80
3	16.12	0.69	3	16.12	21	4.88

Notes: Cable loss was included in reading as offset.

Remark:

The above results show that the worst case output power is found at the data rate of 1Mbps. Therefore, all the other measurements for the evaluation of the radio properties of the EUT have been performed using this data rate.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 12 von 47

Page 12 of 47

5.1.2 Carrier Frequency Separation, FCC 15.247(a)(1)**RESULT:****PASS**

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 30kHz and the video bandwidth to 100kHz. The Delta Marker function was used to determine the separation between the peaks of two adjacent channels.

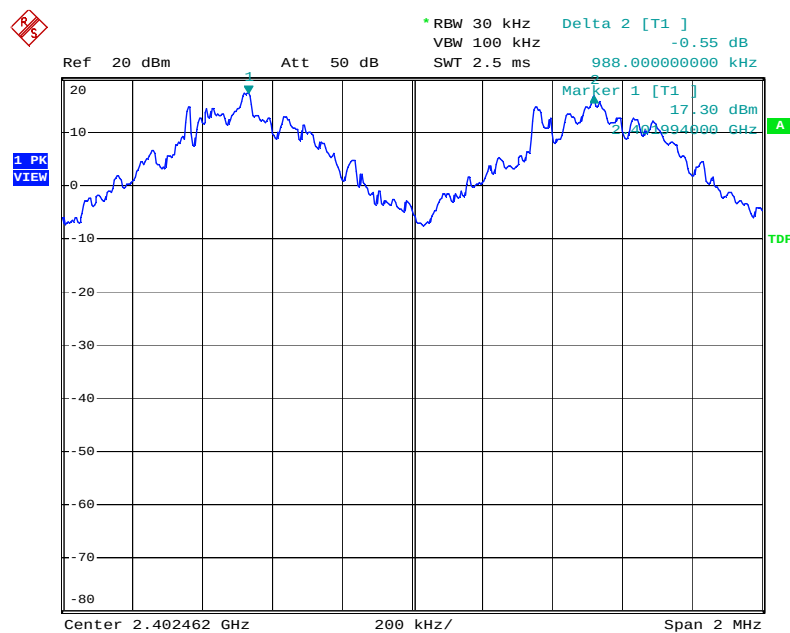
Prüfbericht - Nr.: 15051385 001
 Test Report No.:

 Seite 13 von 47
 Page 13 of 47

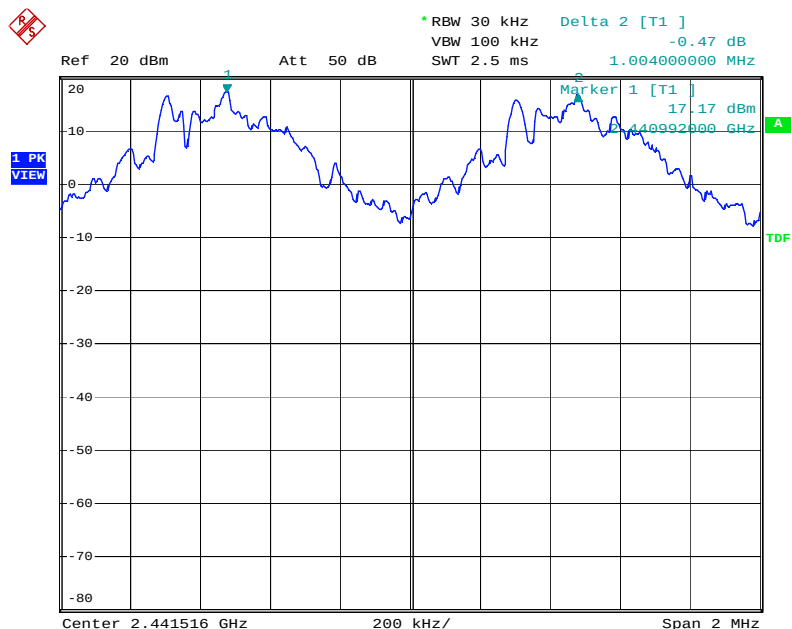
Table 6: Carrier Frequency Separation

Channel	Channel Separation [kHz]	Limit [kHz]	20dB Bandwidth [kHz](EDR)	20dB Bandwidth [kHz](GFSK)
Low	998	842.7	1264	864
Middle	1004	840.0	1260	872
High	1000	842.7	1264	868

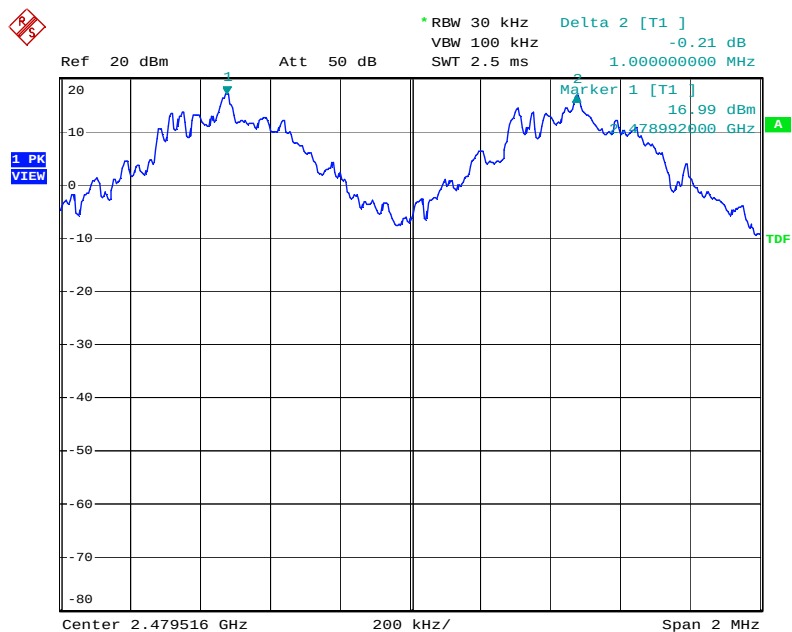
Notes: Limit = 20dB bandwidth * 2/3 since it is greater than 25kHz and the output power is less than 125mW.

Figure 1: Carrier Frequency Separation-Low Channel


Date: 24.APR.2012 13:36:04

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 14 von 47
Page 14 of 47**Figure 2: Carrier Frequency Separation-Middle Channel**

Date: 24.APR.2012 13:39:35

Figure 3: Carrier Frequency Separation-High Channel

Date: 24.APR.2012 13:42:23

Prüfbericht - Nr.: 15051385 001*Test Report No.:***Seite 15 von 47***Page 15 of 47***5.1.3 20dB Bandwidth, FCC 15.247(a)(1)**

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

For frequency hopping systems operating in the 2400-2483.5MHz band, no bandwidth limit is specified. Test data is provided for reference.

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

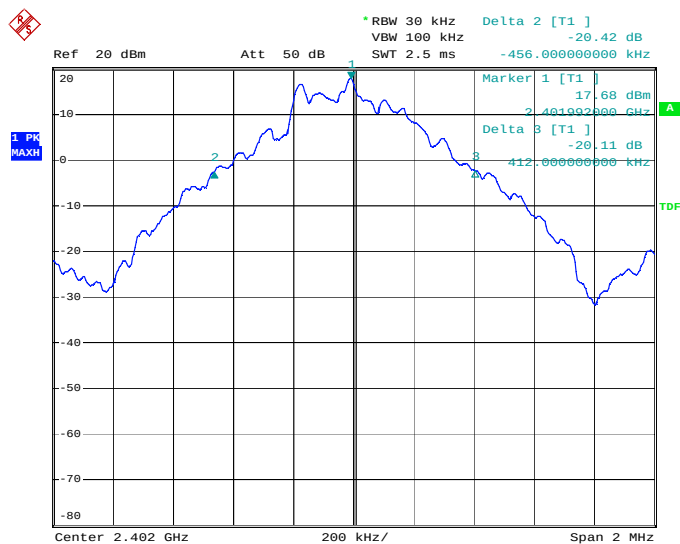
A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 30kHz, the video bandwidth to 100kHz and the span to 2MHz.

Prüfbericht - Nr.: 15051385 001
 Test Report No.:

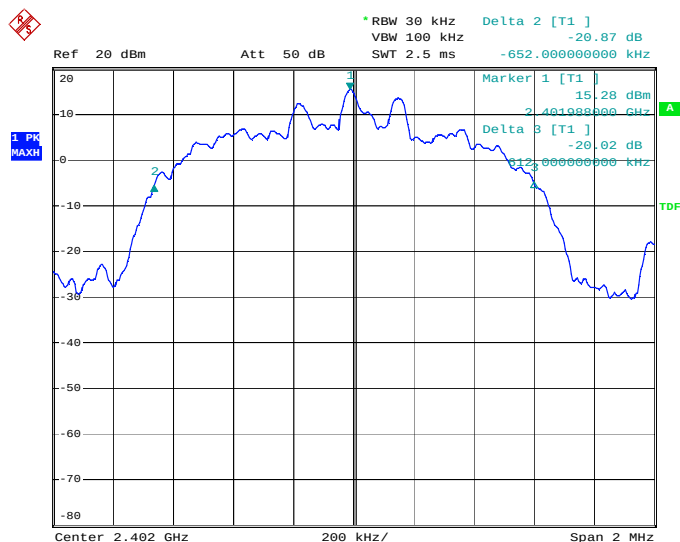
 Seite 16 von 47
 Page 16 of 47

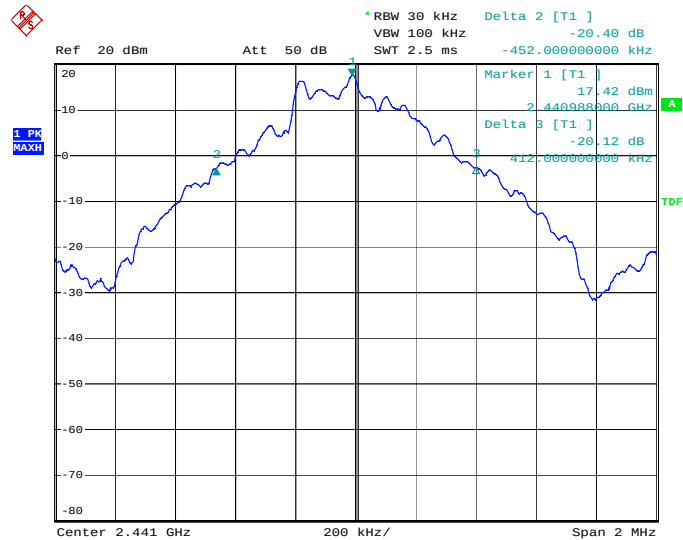
Table 7: 20dB Bandwidth

Operating Frequency [MHz]	20dB Bandwidth [kHz](EDR)	20dB Bandwidth [kHz](GFSK)
2402	1264	864
2441	1260	872
2480	1264	868

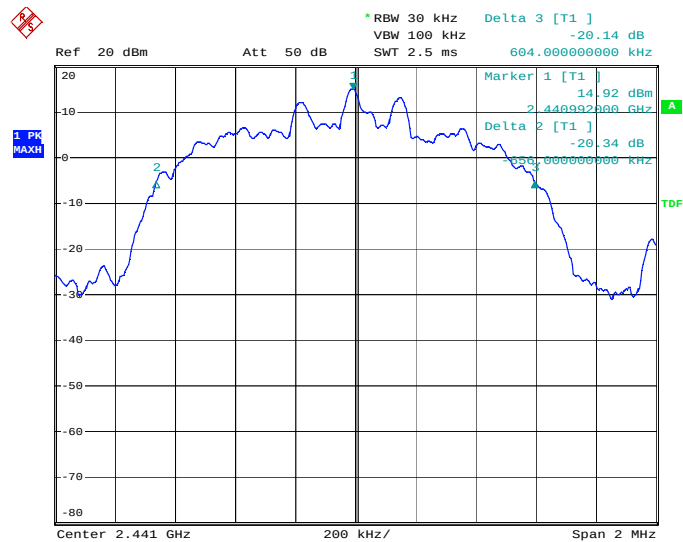
Figure 4: 20dB Bandwidth, Mode A (2402MHz)


Date: 24.APR.2012 13:59:01

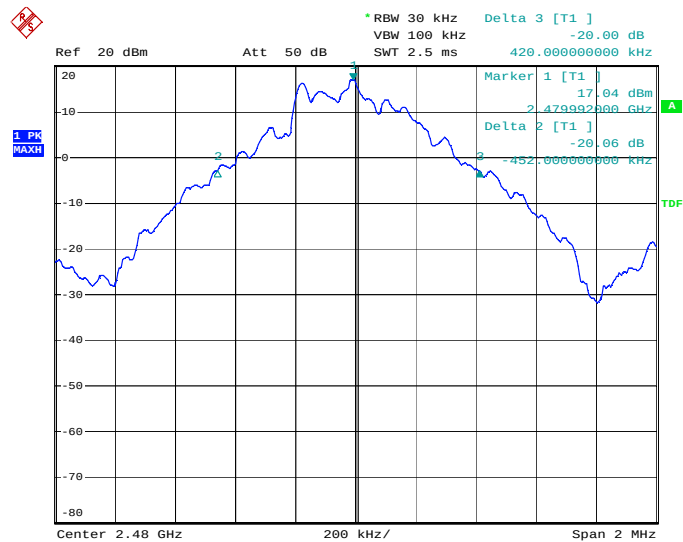


Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 17 von 47
Page 17 of 47**Figure 5: 20dB Bandwidth, Mode B (2441MHz)**

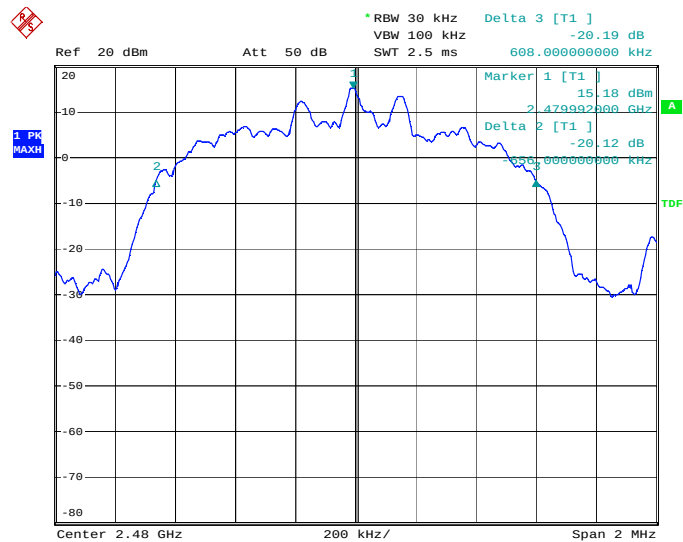
Date: 24.APR.2012 14:00:45



Date: 24.APR.2012 14:06:03

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 18 von 47
Page 18 of 47**Figure 6: 20dB Bandwidth, Mode C (2480MHz)**

Date: 24.APR.2012 14:02:28



Date: 24.APR.2012 14:07:22

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 19 von 47

Page 19 of 47

5.1.4 Number of Hopping Frequencies, FCC 15.247(a)(1)(iii)**RESULT:****PASS**

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

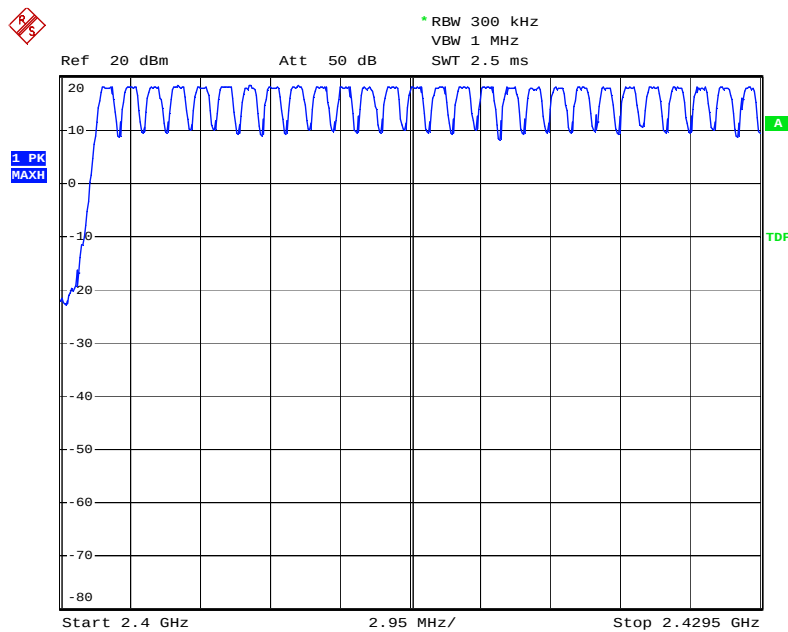
Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

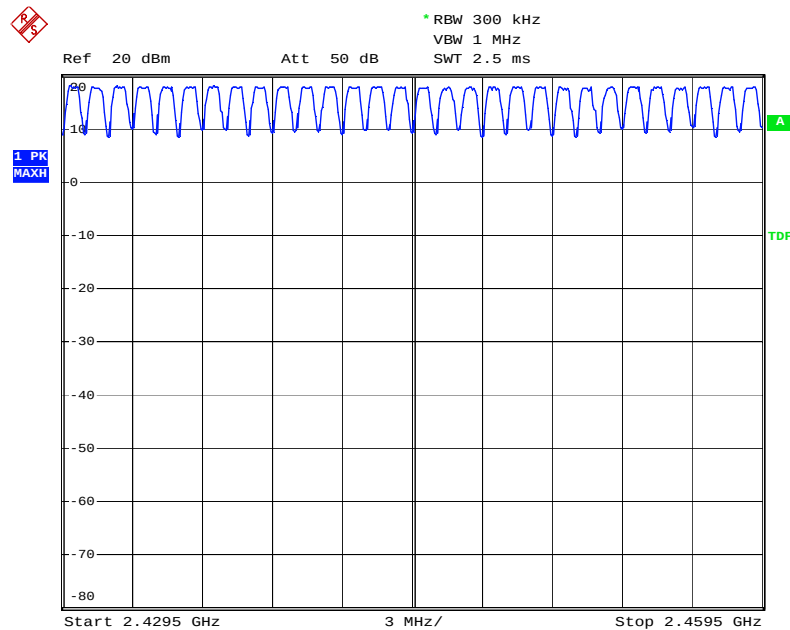
A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 300kHz and video bandwidth was set to 1MHz. The spectrum was broken in three plots to show all the hopping frequencies.

Prüfbericht - Nr.: 15051385 001
Test Report No.:
Seite 20 von 47
Page 20 of 47
Table 8: Number of Hopping Frequencies

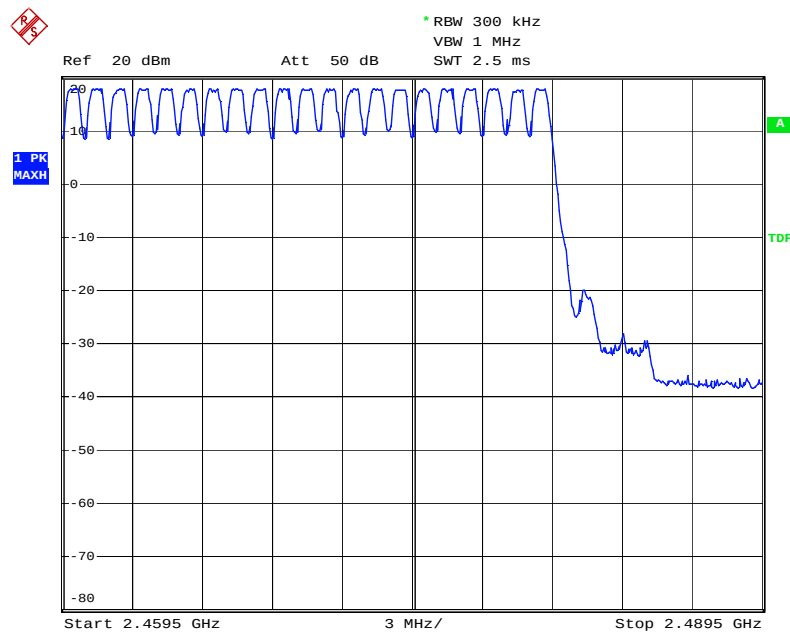
Number of Hopping Frequencies	Limit
79	15

Figure 7: Hopping Frequencies up to 2429.5MHz, Mode G (Hopping)


Date: 24.APR.2012 14:10:57

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 21 von 47
Page 21 of 47**Figure 8: Hopping Frequencies up to 2459.5MHz, Mode G (Hopping)**

Date: 24.APR.2012 14:12:39

Figure 9: Hopping Frequencies up to 2489.5MHz, Mode G (Hopping)

Date: 24.APR.2012 14:13:56

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 22 von 47

Page 22 of 47

5.1.5 Average Time of Occupancy, FCC 15.247(a)(1)(iii)**RESULT:****PASS**

Date of testing: 2012-4-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth and video bandwidth were set to 1MHz. The average time of occupancy was obtained by measuring first the dwell time of a single packet with the Delta Marker function using a zero span centered on a hopping channel and by counting then the number of hops per channel in a 31.6s period (0.4s times the number of hopping channels).

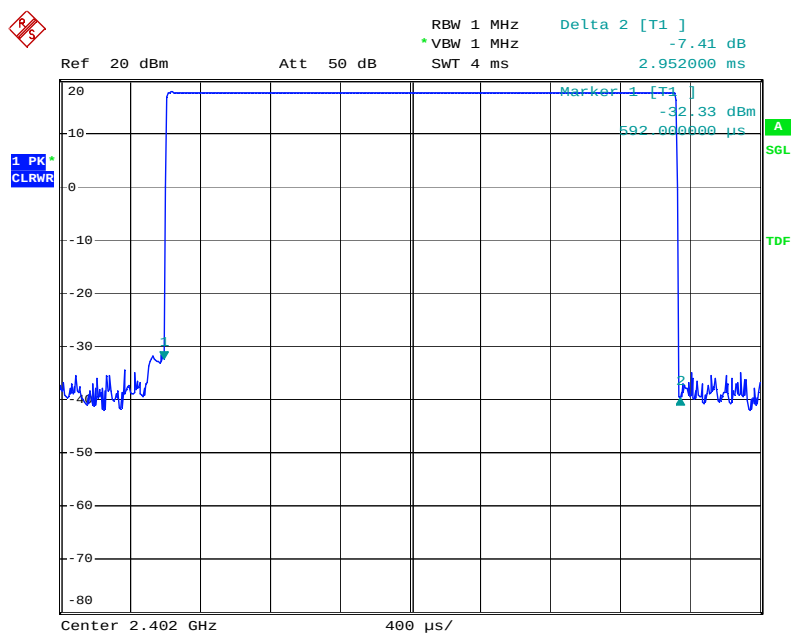
Prüfbericht - Nr.: 15051385 001
 Test Report No.:

 Seite 23 von 47
 Page 23 of 47

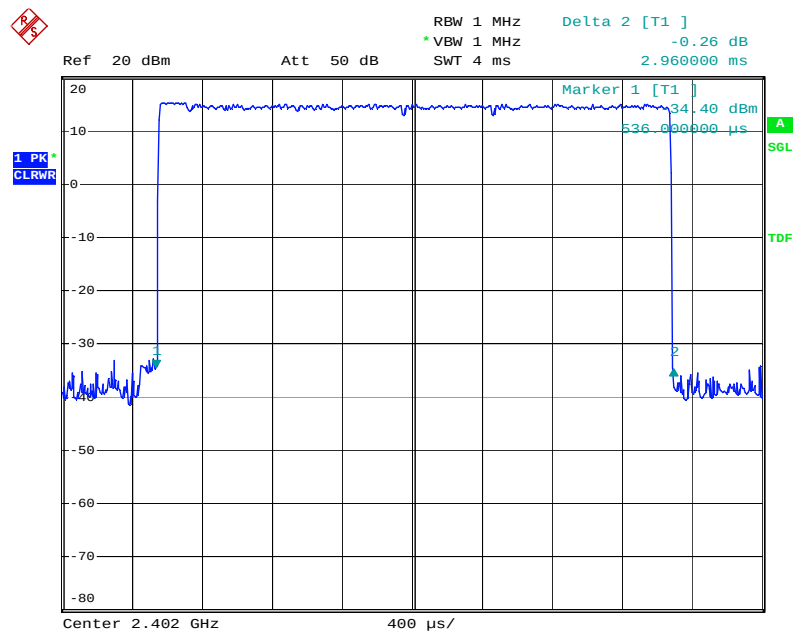
Table 9: Average Time of Occupancy

Channel	Packet Type	Packet Duration [ms]	Number of Hops per Channel in a 31.6s Period	Average Time of Occupancy [ms]	Limit [ms]
Low	DH5	2.952	106.81	315.3	400
	2-DH5	2.960	106.81	316.2	400
	3-DH5	2.968	106.81	317.0	400
Mid	DH5	2.960	106.81	316.2	400
	2-DH5	2.968	106.81	317.0	400
	3-DH5	2.968	106.81	317.0	400
High	DH5	2.960	106.81	316.2	400
	2-DH5	2.968	106.81	317.0	400
	3-DH5	2.968	106.81	317.0	400

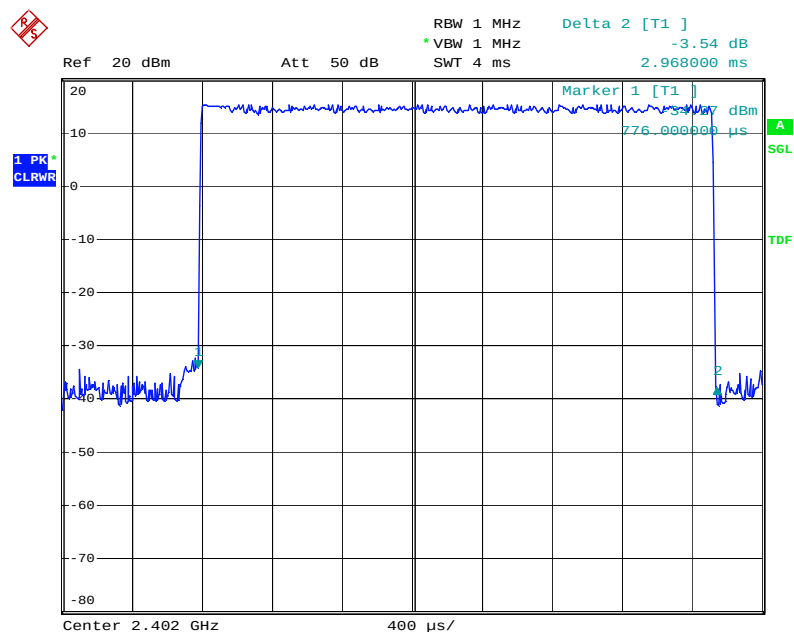
Notes: Average time of occupancy = Packet duration * Number of hops per channel in a 31.6s period

Figure 10: Dwell Time, Mode G (Hopping), DH5, Low channel


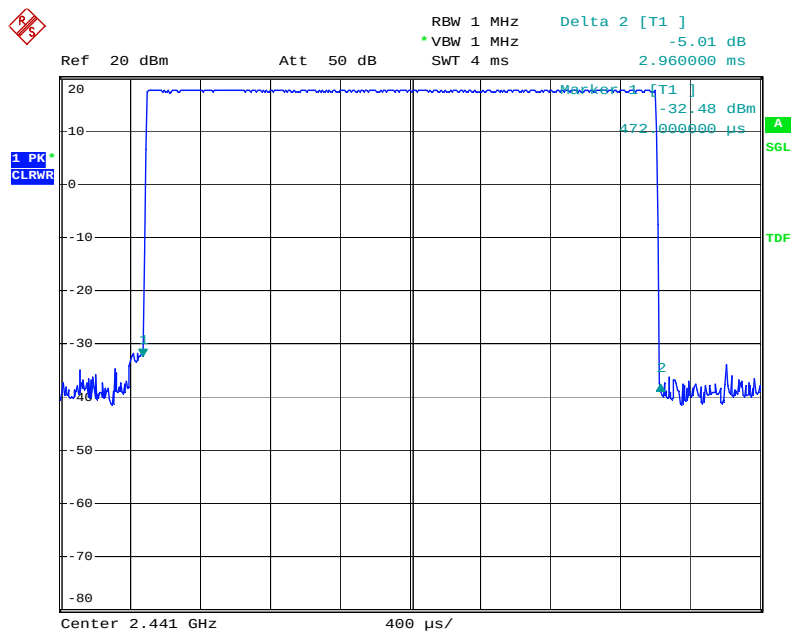
Date: 24.APR.2012 14:34:50

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 24 von 47
Page 24 of 47**Figure 11: Dwell Time, Mode G (Hopping), 2-DH5, Low channel**

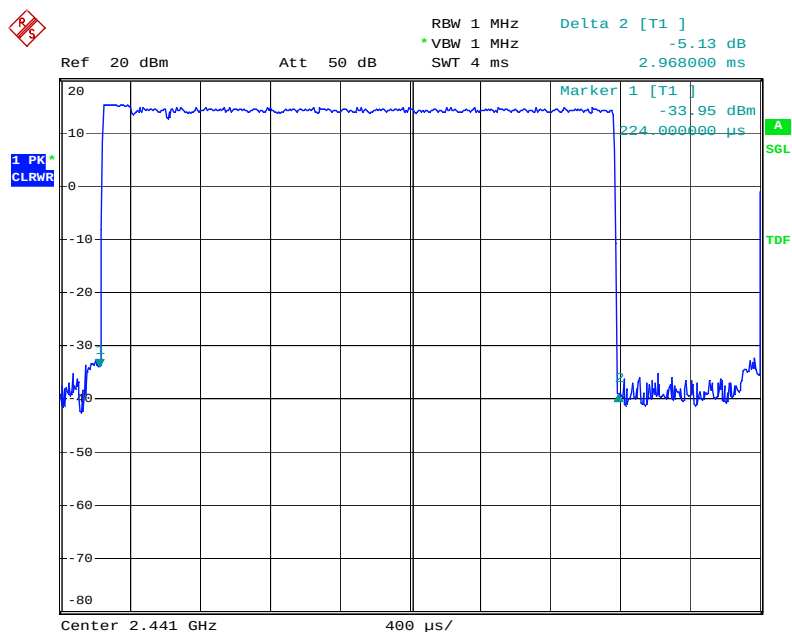
Date: 24.APR.2012 14:53:39

Figure 12: Dwell Time, Mode G (Hopping), 3-DH5, Low channel

Date: 24.APR.2012 14:47:04

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 25 von 47
Page 25 of 47**Figure 13: Dwell Time, Mode G(Hopping), DH5, Mid channel**

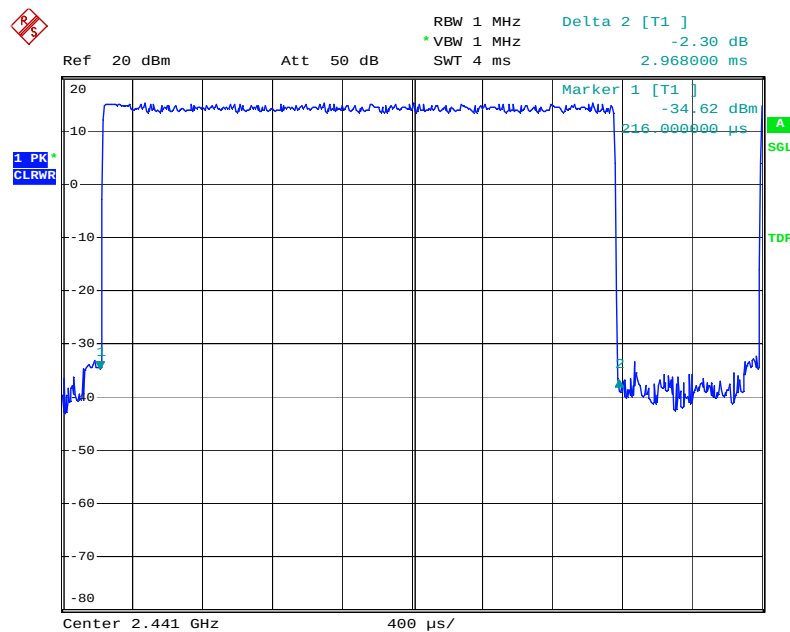
Date: 24.APR.2012 14:33:43

Figure 14: Dwell Time, Mode G (Hopping), 2-DH5, Mid channel

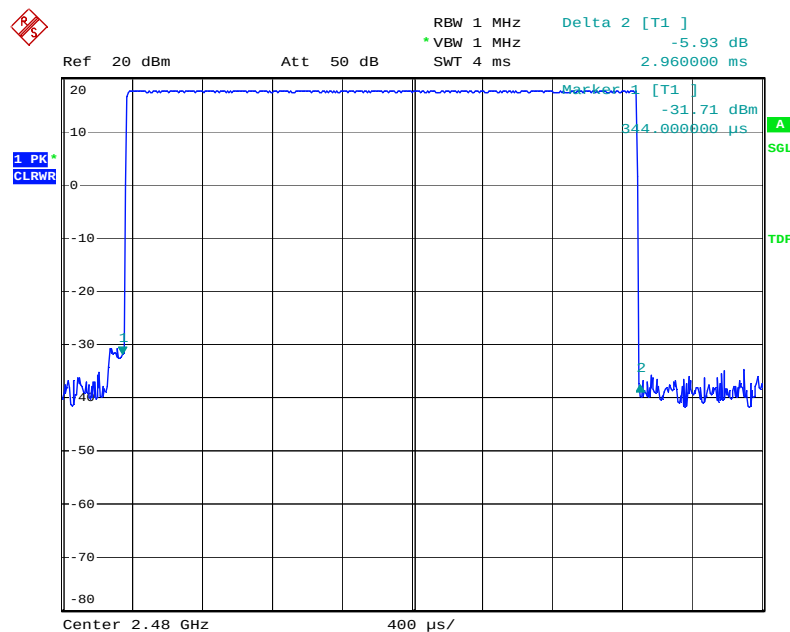
Date: 24.APR.2012 14:54:30

Prüfbericht - Nr.: 15051385 001
 Test Report No.:

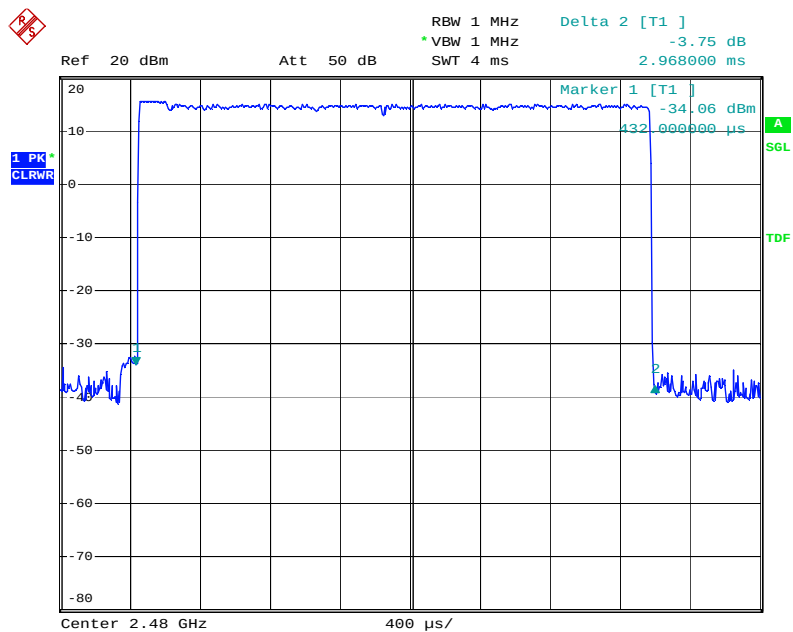
 Seite 26 von 47
 Page 26 of 47

Figure 15: Dwell Time, Mode G (Hopping), 3-DH5, Mid channel


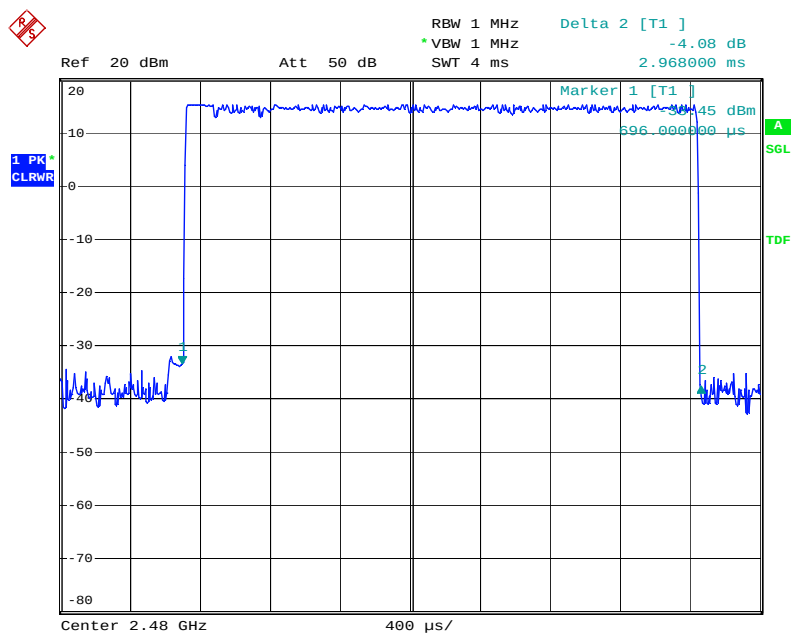
Date: 24.APR.2012 14:48:08

Figure 16: Dwell Time, Mode G(Hopping), DH5, High channel


Date: 24.APR.2012 14:32:41

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 27 von 47
Page 27 of 47**Figure 17: Dwell Time, Mode G (Hopping), 2-DH5, High channel**

Date: 24.APR.2012 14:55:16

Figure 18: Dwell Time, Mode G (Hopping), 3- DH5, High channel

Date: 24.APR.2012 14:49:20

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 28 von 47

Page 28 of 47

5.1.6 Conducted Spurious Emission, FCC 15.247(d)**RESULT:****PASS**

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

In any 100kHz bandwidth outside the frequency band, the RF power shall be at least 20dB below that of the maximum in-band 100kHz emission.

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 100kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30MHz to 25GHz (10th harmonics).

The final measurement takes into account the loss generated by all the involved cables.

Prüfbericht - Nr.: 15051385 001
 Test Report No.:

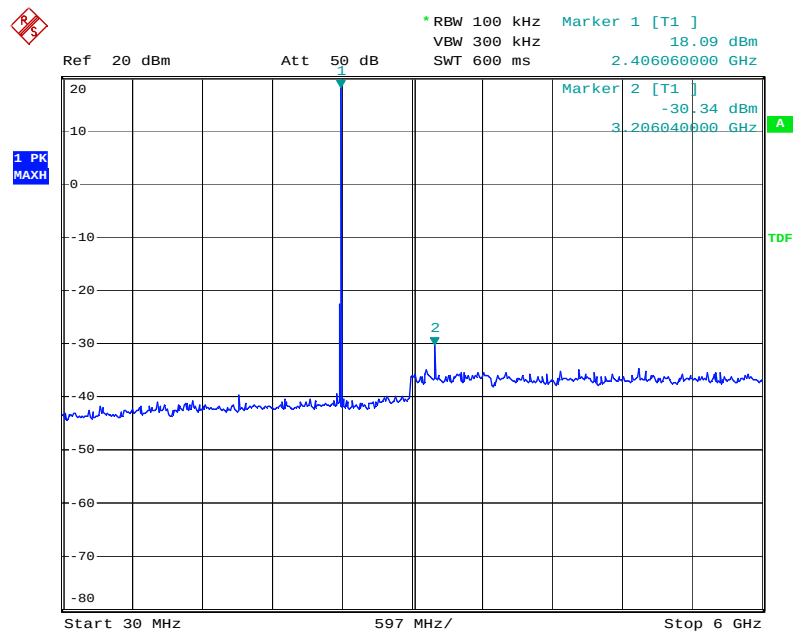
 Seite 29 von 47
 Page 29 of 47

Table 10: Conducted Spurious Emission, Mode A (2402MHz)

Frequency [MHz]	Reading [dBm]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
3206.04	-30.34	-30.34	-1.91	28.43
24316	-18.39	-18.39	-1.91	16.48
2406.06	18.09	18.09	NA	NA

Notes: Cable loss was included in reading as offset.

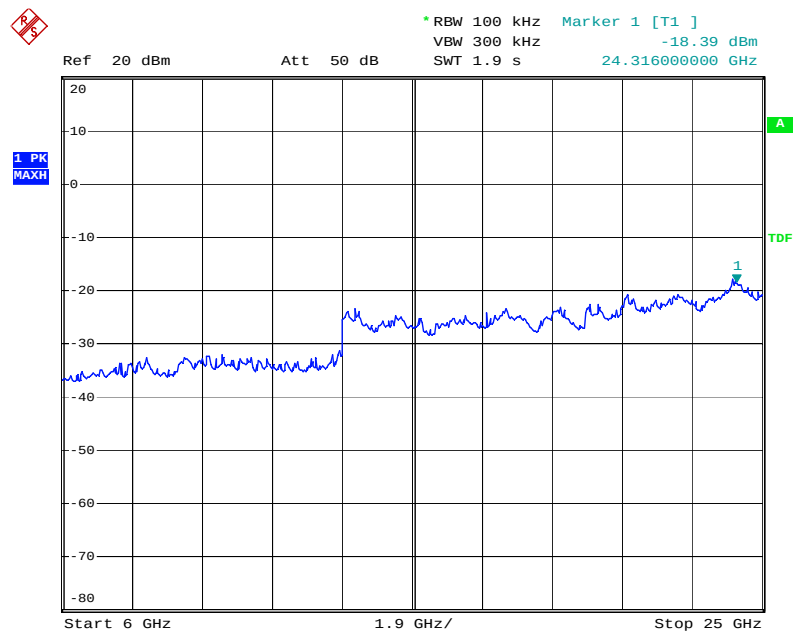
Limit = Reading of fundamental + Correction factor – 20dB

Figure 19: Conducted Spurious Emission, 30MHz – 6GHz, Mode A (2402MHz)


Date: 24.APR.2012 15:03:56

Prüfbericht - Nr.: 15051385 001
 Test Report No.:

 Seite 30 von 47
 Page 30 of 47

Figure 20: Conducted Spurious Emission, 6 – 25GHz, Mode A (2402MHz)


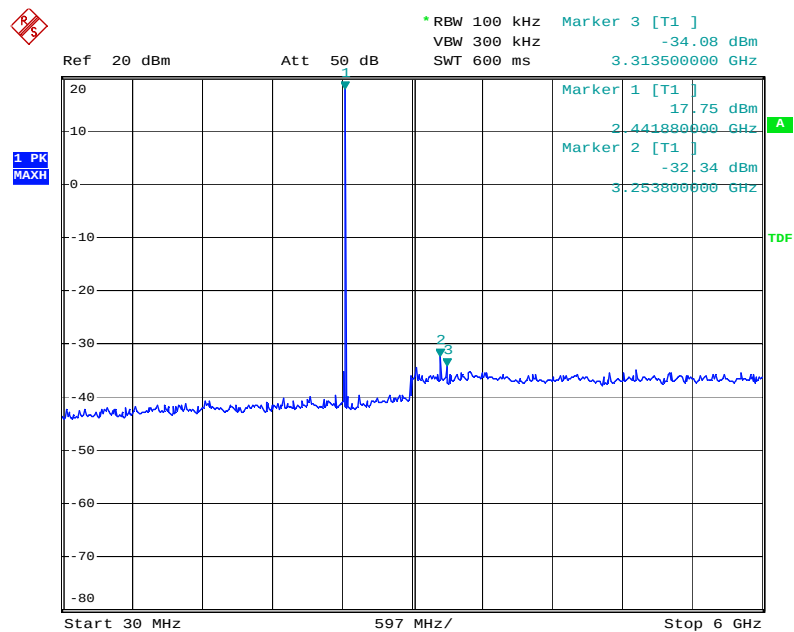
Date: 24.APR.2012 15:05:11

Table 11: Conducted Spurious Emission, Mode B (2441MHz)

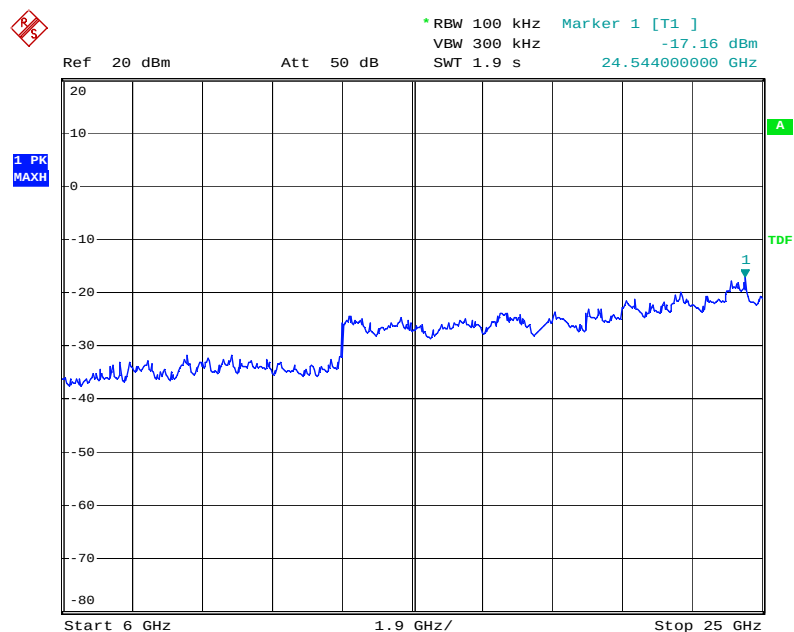
Frequency [MHz]	Reading [dBm]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
3313.5	-34.08	-34.08	-2.25	31.83
3253.8	-32.34	-32.34	-2.25	30.09
24544	-17.16	-17.16	-2.25	14.91
2441.88	17.75	17.75	NA	N/A

Notes: Cable loss was included in reading as offset.

Limit = Reading of fundamental + Correction factor – 20dB

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 31 von 47
Page 31 of 47**Figure 21: Conducted Spurious Emission, 30MHz – 6GHz, Mode B (2441MHz)**

Date: 24.APR.2012 15:07:02

Figure 22: Conducted Spurious Emission, 6 – 25GHz, Mode B (2441MHz)

Date: 24.APR.2012 15:07:58

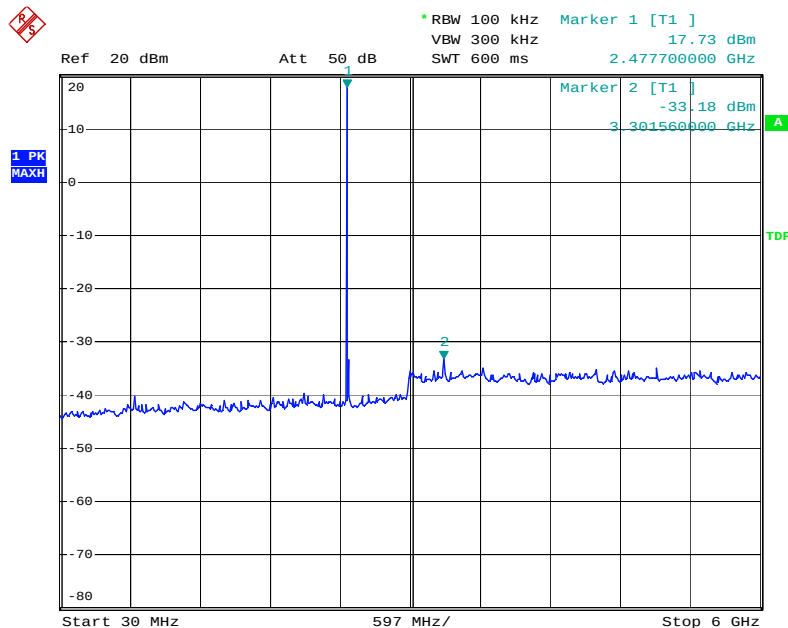
Prüfbericht - Nr.: 15051385 001
 Test Report No.:

 Seite 32 von 47
 Page 32 of 47

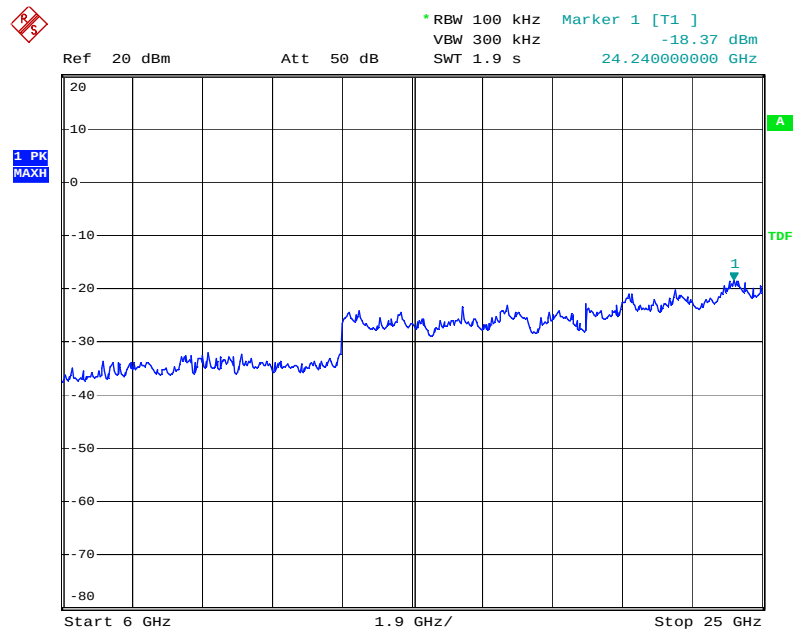
Table 12: Conducted Spurious Emission, Mode C (2480MHz)

Frequency [MHz]	Reading [dBm]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
3301.56	-33.18	-33.18	-2.27	30.91
24240	-18.37	-18.37	-2.27	16.10
2477.7	17.73	17.73	N/A	N/A

Notes: Cable loss was included in reading as offset.
 Limit = Reading of fundamental + Correction factor – 20dB

Figure 23: Conducted Spurious Emission, 30MHz – 6GHz, Mode C (2480MHz)


Date: 24.APR.2012 15:09:21

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 33 von 47
Page 33 of 47**Figure 24: Conducted Spurious Emission, 6 – 25GHz, Mode C (2480MHz)**

Date: 24.APR.2012 15:10:03

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 34 von 47

Page 34 of 47

**5.1.7 Band Edge Compliance of RF Conducted Emission, FCC
15.247(d)****RESULT:****PASS**

Date of testing: 2012-04-24

Ambient temperature: 20°C

Relative humidity: 39.6%

Atmospheric pressure: 101.5hPa

Requirements:

In any 100kHz bandwidth outside the frequency band, the RF power shall be at least 20dB below that of the maximum in-band 100kHz emission.

Test procedure:

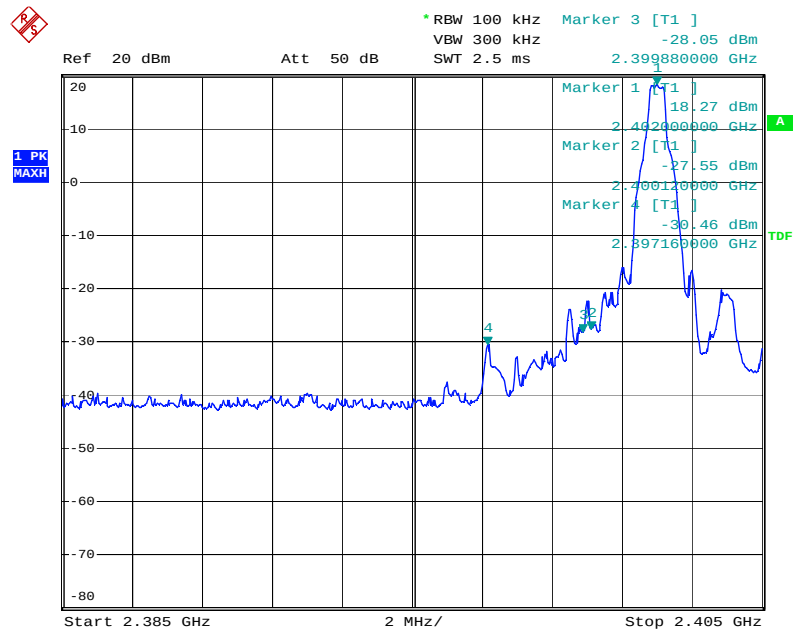
ANSI C63.4-2003 and Public Notice DA 00-705.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 100kHz and video bandwidth was set to 300kHz. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

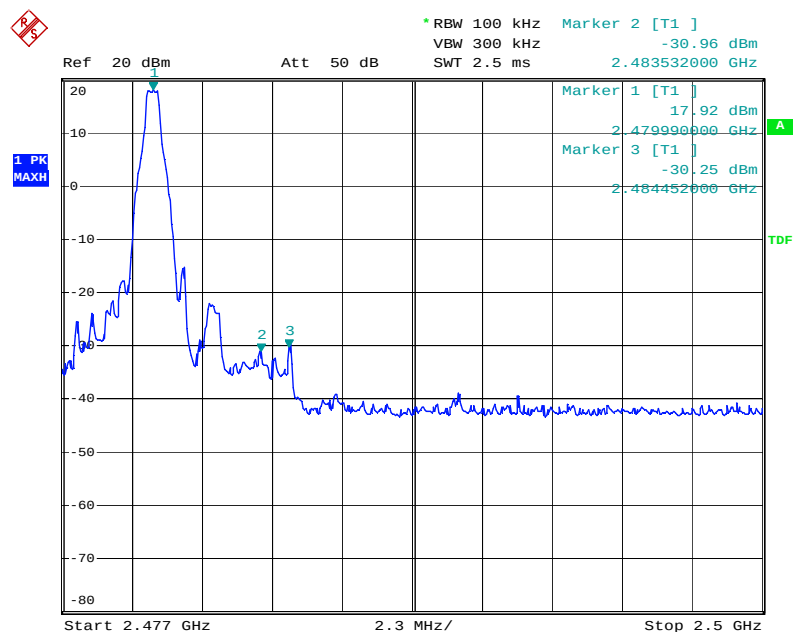
The final measurement takes into account the loss generated by all the involved cables.

Prüfbericht - Nr.: 15051385 001
 Test Report No.:

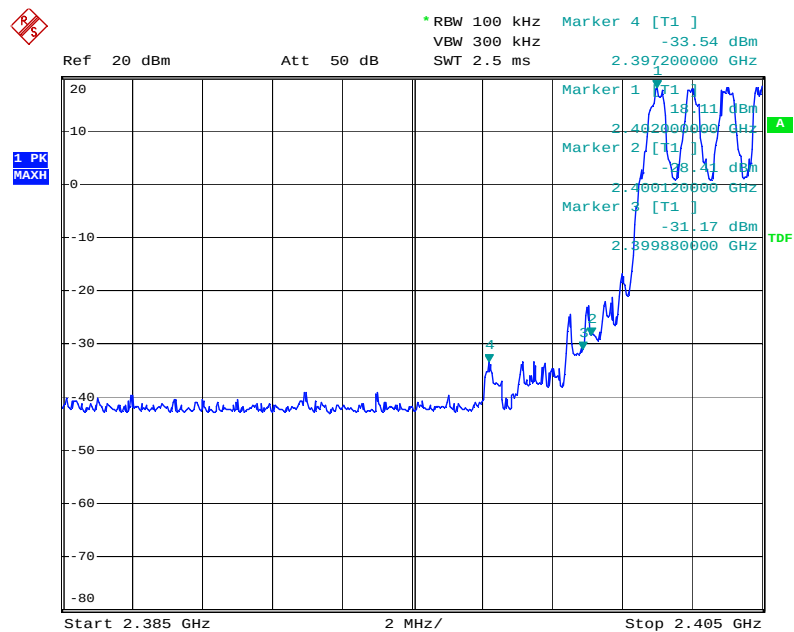
 Seite 35 von 47
 Page 35 of 47

Figure 25: Lower Band Edge Conducted, Hopping Disenabled


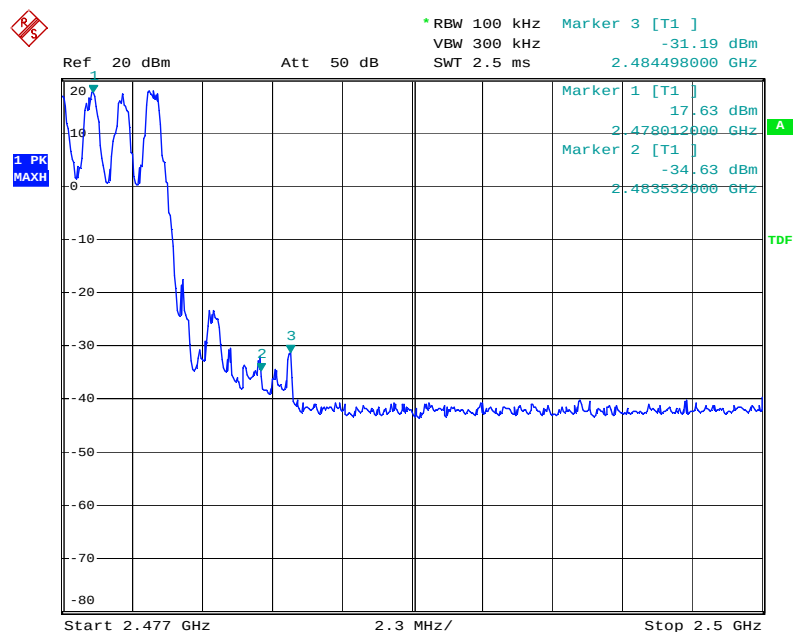
Date: 24.APR.2012 15:12:47

Figure 26: Upper Band Edge Conducted, Hopping Disenabled


Date: 24.APR.2012 15:14:13

Prüfbericht - Nr.: 15051385 001
Test Report No.:Seite 36 von 47
Page 36 of 47**Figure 27: Lower Band Edge Conducted, Hopping Enabled**

Date: 24.APR.2012 15:17:22

Figure 28: Upper Band Edge Conducted, Hopping Enabled

Date: 24.APR.2012 15:15:56

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 37 von 47

Page 37 of 47

6. Test Results of Radiated Measurements

6.1 Transmitter Parameters

6.1.1 Band Edge Radiated Emission, FCC 15.205, FCC 15.209, FCC 15.247(d)

RESULT:**Pass**

Date of testing: 2012-06-02

Ambient temperature: 23.5°C

Relative humidity: 45%

Atmospheric pressure: 101.5hPa

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) ,and must comply with the radiated emission limits specified in FCC 15.209(a) .

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9 and Public Notice DA 00-705.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarization. The rotation through the three orthogonal axes is normally not needed for equipment that is not hand-held or body-worn. The EUT was pretested in floor-standing condition and in the table position and the worst case condition was table position which was used for the final measurements.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings: Peak: RBW & VBW = 1MHz, Average: RBW = 1MHz, VBW = 10Hz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 38 von 47

Page 38 of 47

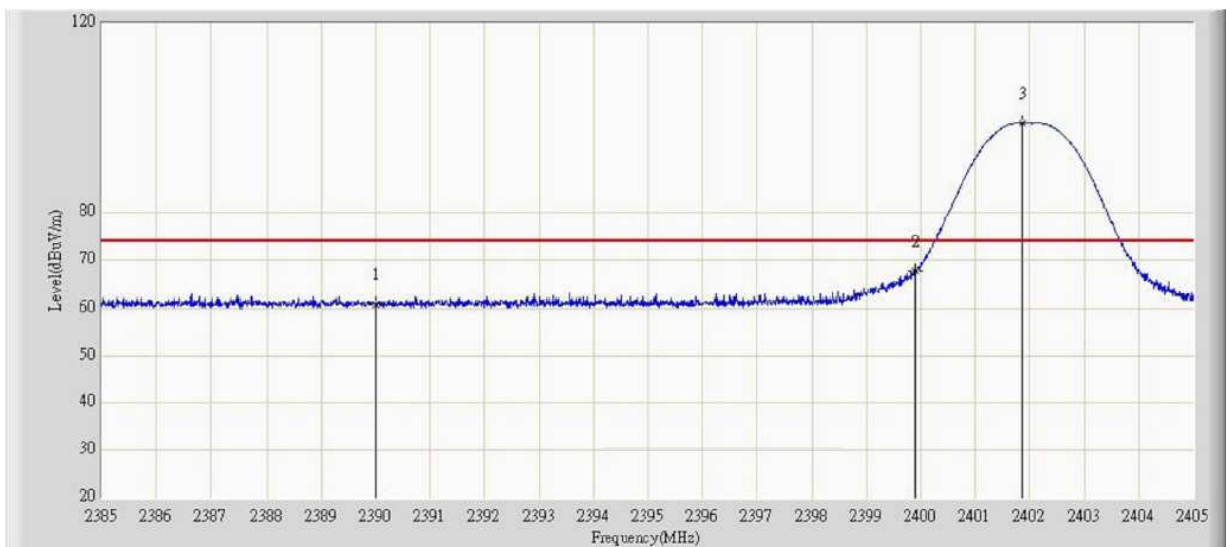
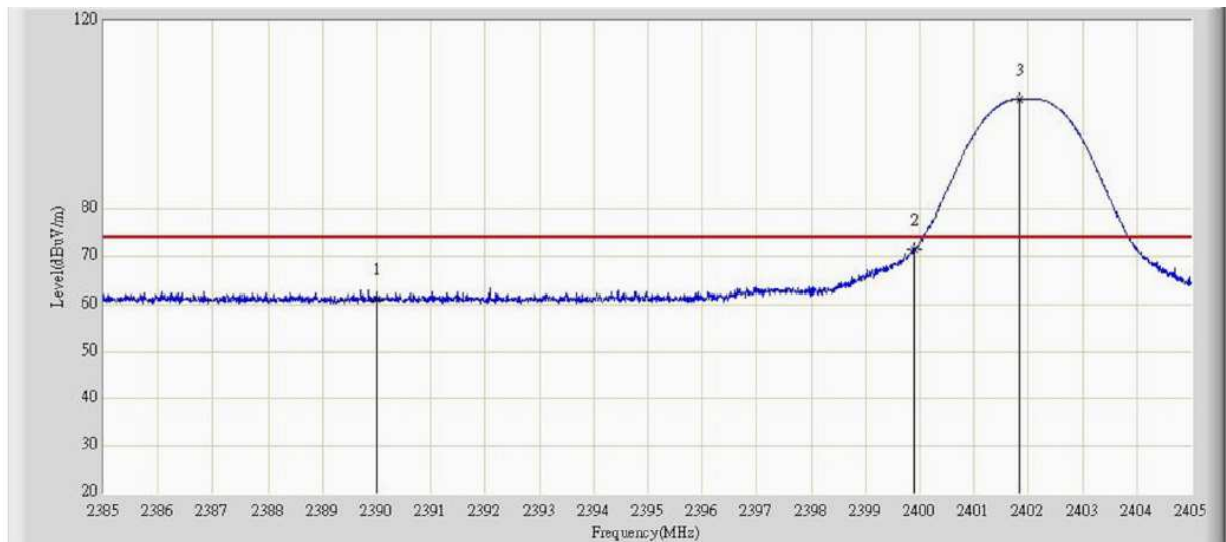
Table 13: Band Edge Radiated Emission

Operating Frequency [MHz]	EUT / Antenna Orient.	Average Value [dB μ V/m]	Peak Value [dB μ V/m]	Average Limit [dB μ V/m]	Peak Limit [dB μ V/m]	Average Margin [dB]	Peak Margin [dB]
2390.000	X/H	No peak found	60.963	54	74	N/A	13.037
2399.890	X/H	No peak found	71.468	54	74	N/A	2.532
2390.000	X/V	No peak found	60.822	54	74	N/A	13.178
2399.898	X/V	No peak found	67.580	54	74	N/A	6.420
2483.450	X/H	No peak found	69.967	54	74	N/A	4.033
2484.900	X/H	No peak found	66.803	54	74	N/A	7.197
2483.450	X/V	No peak found	65.667	54	74	N/A	8.333
2484.900	X/V	No peak found	63.475	54	74	N/A	10.525

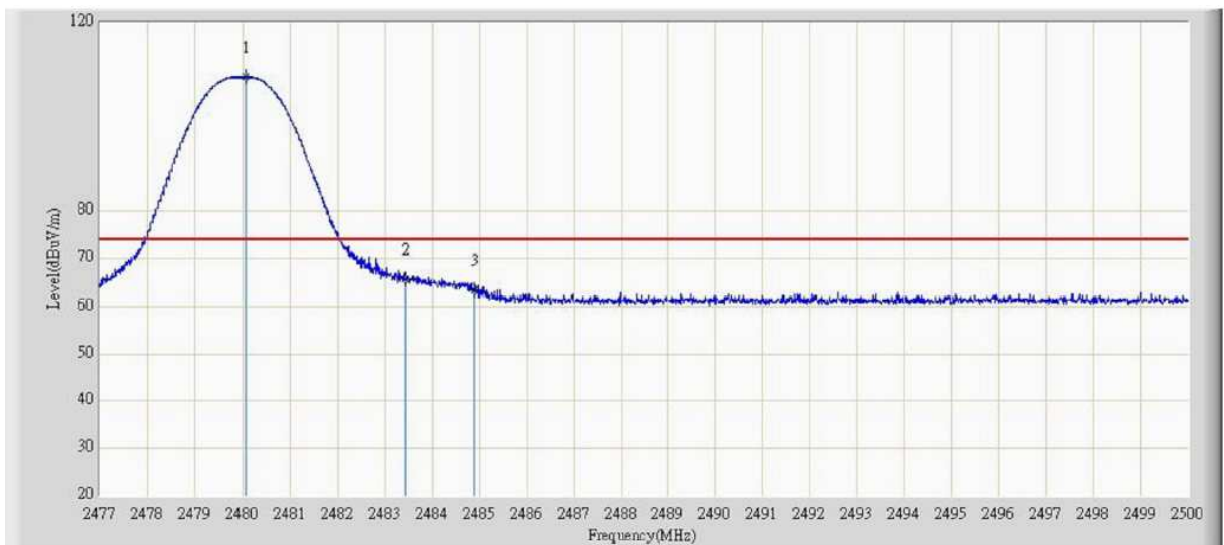
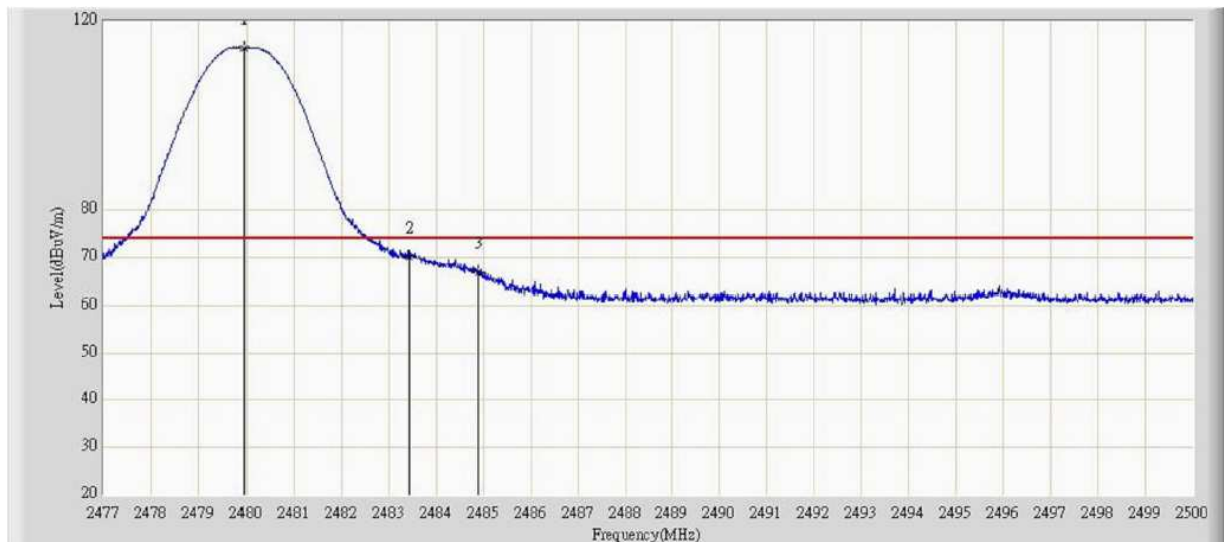
Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

 Average limit in dB μ V/m is calculated as follows: Average limit = 20 x log(500 μ V/m).

 Peak limit in dB μ V/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 29: Band Edge Radiated Emission, Spectral Diagram, Mode A (2402MHz)

Note: The upper diagram shows the vertical peak value and the lower diagram shows the horizontal value.

Figure 30: Band Edge Radiated Emission, Spectral Diagram, Mode C (2480MHz)

Note: The upper diagram shows the vertical peak value and the lower diagram shows the horizontal value.

Prüfbericht - Nr.: 15051385 001

Test Report No.:

Seite 41 von 47

Page 41 of 47

6.1.2 Radiated Spurious Emission of Transmitter, FCC 15.205, FCC 15.209, FCC 15.247(d)**RESULT:****PASS**

Date of testing:	2012-06-02
Ambient temperature:	23.5°C
Relative humidity:	45%
Atmospheric pressure:	101.5hPa
Frequency range:	30MHz – 25GHz
Measurement distance:	3m
Kind of test site:	Semi Anechoic Chamber

Requirements:

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) ,must comply with the radiated emission limits specified in FCC 15.209(a) .

Test procedure:

ANSI C63.4-2003 and Public Notice DA 00-705.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The EUT was pretested in floor-standing condition and in the table position and the worst case condition was table position which was used for the final measurements. The rotation through the three orthogonal axes is normally not needed for equipment that is not hand-held or body-worn.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, measurements were performed using the following settings: Peak: RBW & VBW = 1MHz, Average: RBW = 1MHz, VBW = 10Hz.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Prüfbericht - Nr.: 15051385 001
Test Report No.:
Seite 42 von 47
Page 42 of 47
Table 14: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
4808.000	X/H	34.212	48.702	54	74	19.788	25.298
4808.000	X/V	36.595	58.181	54	74	17.405	15.819
7205.000	X/H	41.320	58.400	54	74	12.680	15.600
7205.000	X/V	41.042	56.046	54	74	12.958	17.954

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Table 15: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2441MHz)

Freq. [MHz]	EUT / Antenna Orientation	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
4884.500	X/H	33.187	52.654	54	74	20.813	21.346
4884.500	X/V	27.600	43.382	54	74	26.400	30.618
7324.000	X/H	39.398	54.204	54	74	14.602	19.796
7324.000	X/V	38.660	54.063	54	74	15.340	19.937

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Table 16: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2441MHz)

Freq. [MHz]	EUT / Antenna Orientation	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
4961.000	X/H	29.088	42.645	54	74	24.912	31.355
4961.000	X/V	31.412	49.201	54	74	22.588	24.799
7443.000	X/H	41.535	55.674	54	74	12.465	18.326
7443.000	X/V	40.467	55.206	54	74	13.533	18.794

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Prüfbericht - Nr.: 15051385 001
Test Report No.:**Seite 43 von 47**
Page 43 of 47

6.2 Receiver Parameters

6.2.1 Radiated Spurious Emission of Receiver, FCC 15.109

RESULT:**PASS**

Date of testing:	2012-06-02
Ambient temperature:	23.5°C
Relative humidity:	45%
Atmospheric pressure:	101.5hPa
Frequency range:	30MHz – 12.5GHz
Measurement distance:	3m
Kind of test site:	Semi Anechoic Chamber

Requirements:

The emissions from the unintentional radiator shall not exceed the field strength specified in 15.109(a).

Test procedure:

ANSI C63.4-2003.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The EUT was pretested in floor-standing condition and in the table position and the worst case condition was table position which was used for the final measurements. The rotation through the three orthogonal axes is normally not needed for equipment that is not hand-held or body-worn.

The spectrum was examined from 30MHz to the 5th harmonic of the highest fundamental operation frequency (12.5GHz). Final radiated emission measurements were made at 3m distance.

Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, measurements were performed using the following settings: Peak: RBW & VBW = 1MHz, Average: RBW = 1MHz, VBW = 10Hz.

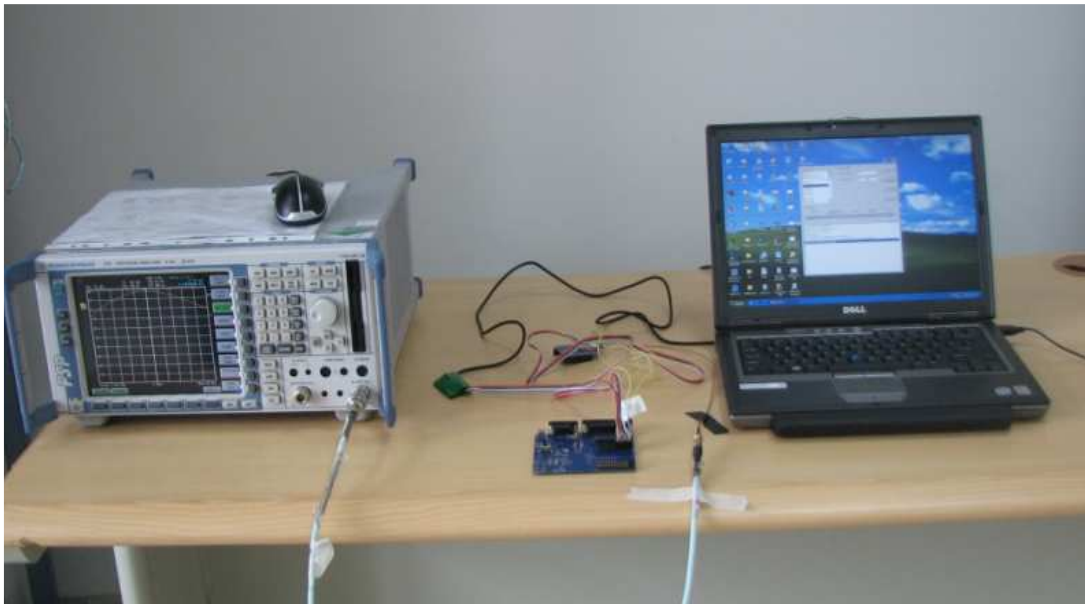
The highest emission amplitudes relative to the appropriate limit were recorded in this report. No spurious emission was found in the range 30MHz – 12500MHz.

Prüfbericht - Nr.: 15051385 001
Test Report No.:

Seite 44 von 47
Page 44 of 47

7. Photographs of the Test Setup

Photograph 1: Set-up for Conducted Emission at Antenna Port



Photograph 2: Set-up for Radiated Emission, 30MHz-1000MHz



Prüfbericht - Nr.: 15051385 001
Test Report No.:

Seite 45 von 47
Page 45 of 47

Photograph 3: Set-up for Radiated Emission, 1G-18GHz



8. List of Figures

Table 1: List of Test and Measurement Equipment	6
Table 2: Emission Measurement Uncertainty	6
Table 3: Conducted Output Power, Mode A (2402MHz)	10
Table 4: Conducted Output Power, Mode B (2441MHz)	11
Table 5: Conducted Output Power, Mode C (2480MHz)	11
Table 6: Carrier Frequency Separation	13
Table 7: 20dB Bandwidth	16
Table 9: Number of Hopping Frequencies	20
Table 10: Average Time of Occupancy	23
Table 10: Conducted Spurious Emission, Mode A (2402MHz)	29
Table 11: Conducted Spurious Emission, Mode B (2441MHz)	30
Table 12: Conducted Spurious Emission, Mode C (2480MHz)	32
Table 13: Band Edge Radiated Emission	38
Table 14: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)	42
Table 15: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2441MHz)	42
Table 16: Radiated Emission, Average and Peak Data, 1 – 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2480MHz)	42

9. List of Figures

Figure 1: Carrier Frequency Separation-Low Channel	13
Figure 2: Carrier Frequency Separation-Middle Channel	14
Figure 3: Carrier Frequency Separation-High Channel	14
Figure 4: 20dB Bandwidth, Mode A (2402MHz)	16
Figure 5: 20dB Bandwidth, Mode B (2441MHz)	17
Figure 6: 20dB Bandwidth, Mode C (2480MHz)	18
Figure 7: Hopping Frequencies up to 2429.5MHz, Mode G (Hopping)	20
Figure 8: Hopping Frequencies up to 2459.5MHz, Mode G (Hopping)	21
Figure 9: Hopping Frequencies up to 2489.5MHz, Mode G (Hopping)	21
Figure 10: Dwell Time, Mode G (Hopping), DH5, Low channel	23
Figure 11: Dwell Time, Mode G (Hopping), 2-DH5, Low channel	24
Figure 12: Dwell Time, Mode G (Hopping), 3-DH5, Low channel	24
Figure 13: Dwell Time, Mode G (Hopping), DH5, Mid channel	25
Figure 14: Dwell Time, Mode G (Hopping), 2-DH5, Mid channel	25
Figure 15: Dwell Time, Mode G (Hopping), 3-DH5, Mid channel	26
Figure 16: Dwell Time, Mode G (Hopping), DH5, High channel	26
Figure 17: Dwell Time, Mode G (Hopping), 2-DH5, High channel	27
Figure 18: Dwell Time, Mode G (Hopping), 3-DH5, High channel	27
Figure 19: Conducted Spurious Emission, 30MHz – 6GHz, Mode A (2402MHz)	29
Figure 20: Conducted Spurious Emission, 6 – 25GHz, Mode A (2402MHz)	30
Figure 21: Conducted Spurious Emission, 30MHz – 6GHz, Mode B (2441MHz)	31
Figure 22: Conducted Spurious Emission, 6 – 25GHz, Mode B (2441MHz)	31
Figure 23: Conducted Spurious Emission, 30MHz – 6GHz, Mode C (2480MHz)	32
Figure 24: Conducted Spurious Emission, 6 – 25GHz, Mode C (2480MHz)	33
Figure 25: Lower Band Edge Conducted, Hopping Disabled	35
Figure 26: Upper Band Edge Conducted, Hopping Disabled	35
Figure 27: Lower Band Edge Conducted, Hopping Enabled	36
Figure 28: Upper Band Edge Conducted, Hopping Enabled	36
Figure 29: Band Edge Radiated Emission, Spectral Diagram, Mode A (2402MHz)	39

Prüfbericht - Nr.: 15051385 001
*Test Report No.:***Seite 47 von 47**
Page 47 of 47

Figure 30: Band Edge Radiated Emission, Spectral Diagram, Mode C (2480MHz).....40

10. List of Photographs

Photograph 1: Set-up for Conducted Emission at Antenna Port.....44
Photograph 2: Set-up for Radiated Emission, 30M-1GHz44
Photograph 3: Set-up for Radiated Emission, 1G-18GHz45