

1.0 PURPOSE

This test report applies to the Iolan Systems, Inc. (ISI) LA-WIW-PROXKEY-M badge reader. This wall-mount module is designed for identification purposes. Access to a facility or identity established when a badge is held close to the reader.



Figure 1

The purpose of this electromagnetic compatibility (EMC) Test Report is to give the FCC information on the radiated emission profile of the badge reader as required for *47 CFR Ch. I (10-1-97 Edition) Part 15-Radio Frequency Devices, Subpart C-Intentional Radiators and Subpart B-Unintentional Radiators*. For sake of brevity, this standard will be referred to as FCC Part 15.

The badge reader emits a weak RF field to activate the badge. Obviously, it is a Subpart C device. Since the badge reader contains a microcontroller and is part of a distributed network, it is a computer peripheral and is subject to Subpart B levels also.

FCC Part 15 testing is performed using the techniques and practices described in the “*American National Standard for Methods of Measurement of Radio Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHZ*”, ANSIC63.4-1992. The target emissions levels are set using criterion set in FCC Part 15.

The badge reader is powered by a DC voltage via it's controller, no conducted emissions testing was necessary. The heart of the device is a MIFARE® Micro Module MF CM200 hybrid. Manufacturer's data sheet is available at:

<http://www-us.semiconductors.com/identification/mfcm200.stm.html>

2.0 EQUIPMENT

2.1 ISI Supplied Equipment

All tests described below were carried out on a system comprised of standard production units. The equipment defined below was available solely for the purposes of EMC testing during the test program.

Description	Serial Number
Door Controller Unit, LATCK2WI4I2Y	LA150201
Badge Reader, LAWIWPROXKEYM	LA140102
Mifare Badges	N/A

2.2 EMCA Test Equipment

Name and Model Number	Serial Number	Calibrated	Next Calibration
Hewlett-Packard HP8546A Receiver	3520A00237 3448A00238	13 Oct. 1998	13 Oct. 1999
EMCO Passive Monopole 3303 Antenna 10KHz-30MHz	9903-304	22 Mar.1999	22 Mar.2000
EMCO Biconilog 3142 Antenna 30MHz-1GHz	9803-1251	27 Mar. 1998	27 Sept. 1999

Transformer/Adapter U.S. 110Vac to European 220Vac	N/A	N/A	N/A
3M Semi-anechoic Chamber and Associated H/W (turntable, antenna mast, etc.)	N/A	N/A	N/A
EMCO 2075 Minimast	9707-2061	N/A	N/A
EMCO 2090 Multi-Device Controller	9704-1231	N/A	N/A
Pentium-based PC system	N/A	N/A	N/A
EMCA Radiated Emissions S/W Ver. 7.33	N/A	N/A	N/A

3.0 PROCEDURE and RESULTS

3.1 Equipment Configuration

The dates of the testing were April 9 & 12, 1999. Testing was done in the semi-anechoic chamber and the 10m Open Area Test Site (OATS). At both sites, the badge reader was placed on a wooden (non-conductive) table, 80cm high. The table was placed on a turntable. The badge reader controller was located on the ground plane beneath the wooden table on the turntable.

Testing was performed with/without a badge in close to the badge reader.

When a badge was used, it was mounted in a non-conductive holder in close proximity to the badge reader. Testing was performed to determine the exact position and orientation of the badge that maximized emissions.

The equipment was arranged in the manner recommended in Fig 9(c) *Test Configuration Tabletop Equipment Radiated Emissions* of ANSI C63.4-1992.



Figure 2

Figure 2 shows the test setup. When actual testing began, the power/data cable was wrapped non-inductively not coiled as seen in the photograph. Note the controller is sitting on the turntable.

Figure 3 shows the badge in it's holder held up the badge reader.

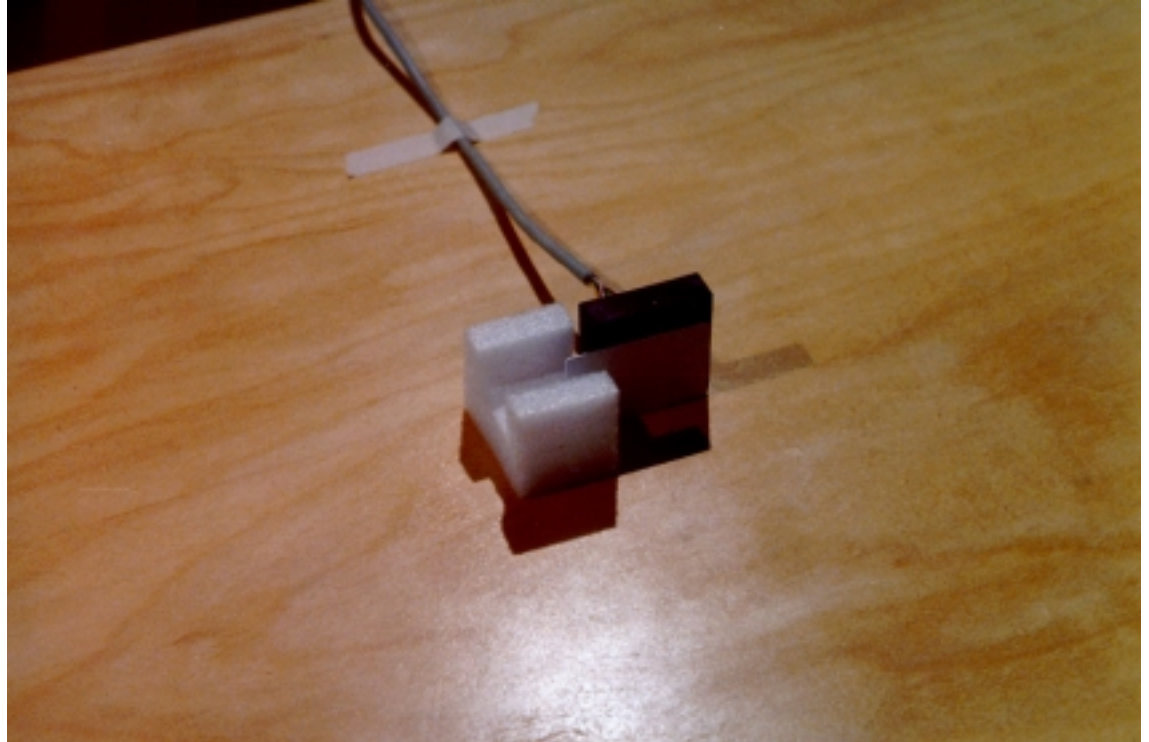


Figure 3

3.2 Environment

The temperature/humidity in the semianechoic chamber was as follows:

Temperature	20°C
Humidity	30%

The temperature/humidity on the OATS was as follows:

Temperature	24°C
Relative Humidity	54

3.3 Radiated Emissions

3.3.1 Preliminary Scan

It was found that the badge had no discernible affect on the emissions on the emissions levels of the badge reader.

Figure 4 shows the frequency range and the limit line approved by Thomas W. Phillips of the FCC's Office of Engineering and Technology. Setting limits for this was complicated by the fact it is an intentional radiator incorporating a Class A digital device.

During testing, the limit line was adjusted. The data from 30MHz-1000MHz was taken at a distance of 3m. This required raising the limit line by 10.45dBuV. On the OATS, data was taken at a distance of 5m. The limit was raised 6.02dBuV.

The test was computer driven/monitored. For prescans, the antenna was set at 1m, the turn table was rotated in 90° increments. The antenna was then raised to a height of 2m and the turntable was rotated in 90° increments. This was repeated for 3 and 4m. Initial sweeps were done with the antenna in vertical then horizontal polarity. The maximum peak value for each frequency was stored in computer memory and graphed.

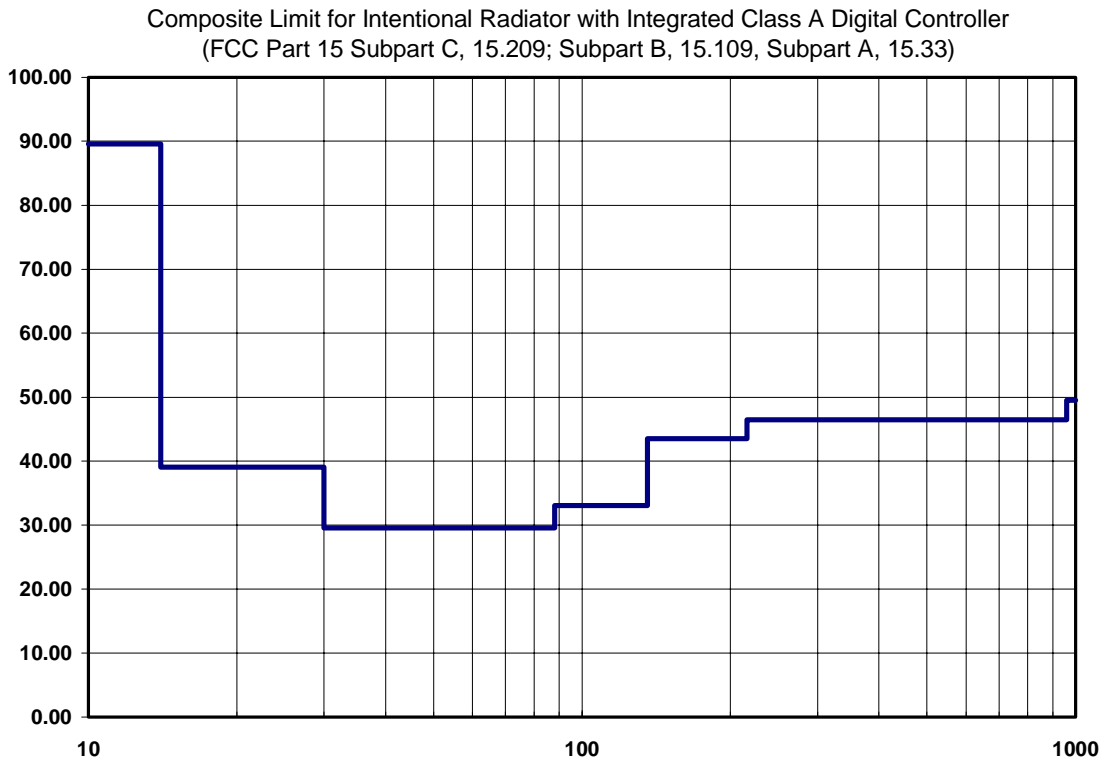


Figure 4

All initial scanning was done in the semi-anechoic chamber. During the initial scans, the exact frequencies emitted by the EUT were identified. Initial scans used the Peak Detector. Any frequencies within 10dBuV of the limit line were identified. All radiated emissions measurements below 30MHz were made with a calibrated monopole (rod) antenna (EMCO 3303). Above 30MHz, emissions measurements were made with the bilog antenna (EMCO 3142).

Figure 5 shows the initial scan made with the monopole antenna. This was necessary for identifying the frequencies the badge reader radiated at below 30MHz. It is understood the FCC **does not** recognize semi-anechoic data below 30MHz. However, in order to distinguish between ambient noise at the OATS and the emissions from the EUT, this step was necessary.

Note the badge reader transmissions were well within the limits below 30MHz. This bode well for the quasi-peak measurements made on the OATS.

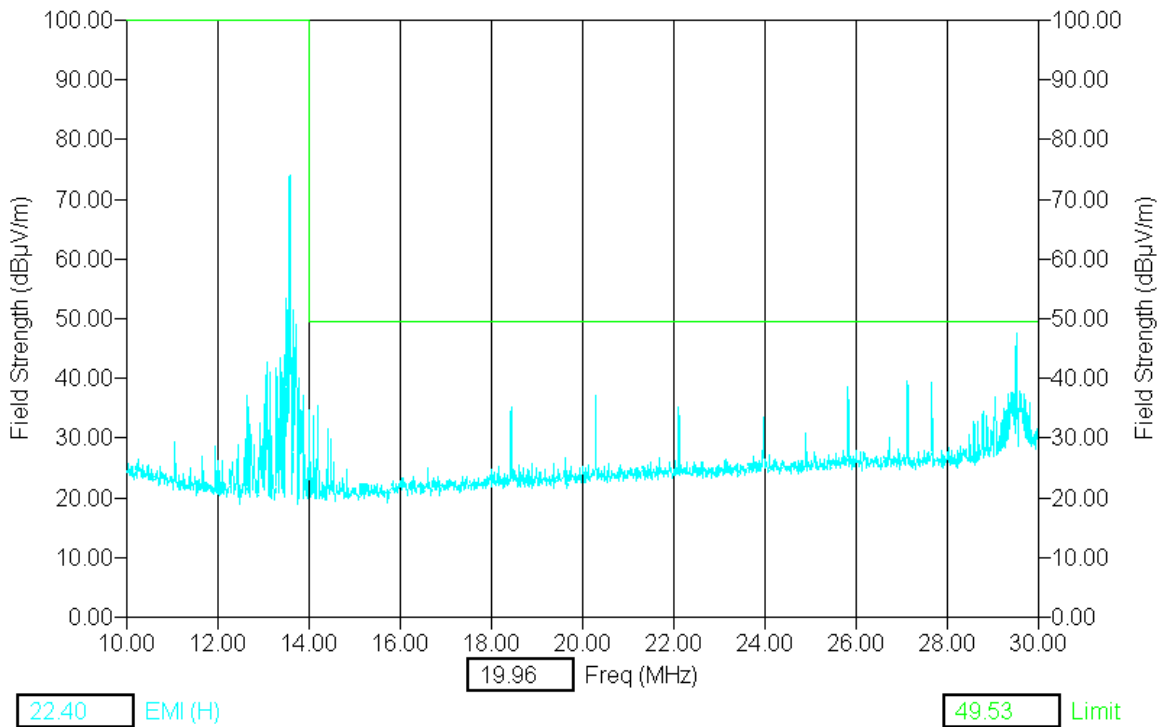


Figure 5

The next scan covered a frequency range of 30MHz to 1000MHz. This data was taken with the biconilog antenna in both vertical and horizontal polarities. Figure 6 shows the vertical peak data.

Figure 7 shows the horizontal/vertical peak data. Please note all emissions (measured in peak mode) from 30MHz–1000MHz, are below the Quasi-Peak limit line.

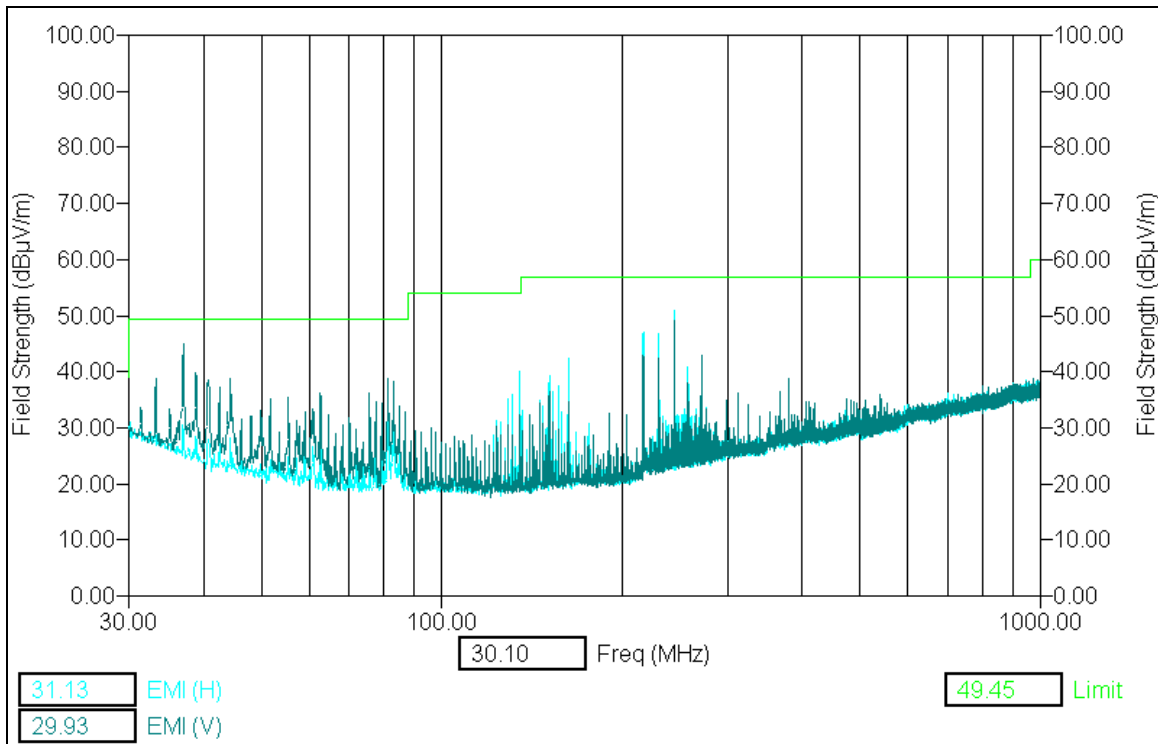


Figure 7

3.3.2 Final Scan

Final scans were run differently from the prescans. Peaks within 10dBuv of the limit were identified by the test S/W. These are the frequencies to be investigated using the quasi-peak detector.

Once a frequency has been identified, testing begins. The antenna is set initially at a height of 2m. The operating EUT is rotated/scanned continuously for 360°. The turntable rotates back to the angular position of maximum emissions. The antenna was then raised to a height of 4m. Scanning continued while the antenna height was adjusted. Once the scan was complete, the antenna was returned to the height of maximum emissions and the quasi-peak measurement completed.

For the frequency range of 30MHz-1000MHz, the following quasi-peak data collected:

Freq. (MHz)	Polarity	Q.P. Trace	Cable Transducer	(QP) EMI (dBuV/m)	Ttbl Angle (deg)	Twr Ht (cm)	Limit (dBuV/m)	(QP) Margin (db)
36.89	V	26.48	-0.09	42.04	166.00	100.00	49.45	-7.41
38.73	V	24.53	-0.06	39.30	145.00	100.00	49.45	-10.15
217.00	H	34.92	0.73	47.45	76.00	145.00	56.85	-9.40
230.56	H	34.94	0.71	47.96	254.00	109.00	56.85	-8.89
244.12	H	40.32	0.76	53.88	247.00	118.00	56.85	-2.97
244.12	V	36.13	0.76	49.69	181.00	165.00	56.85	-7.16

Note the final column. All the Margin values are negative. **This means the device emissions are within the limits set for 30MHz-1000MHz.** Since the semianechoic chamber data taken from 30MHz-1000MHz is acceptable to the FCC, no further effort in this frequency range was required.

The hardware was moved outside for OATS testing. Figure 8 depicts the test setup. The antenna was set at a distance of 5m from the EUT. Because of the high ambient RF background at the OATS, investigations were limited to the operating frequency of the badge reader EUT. The results were:

Freq. (MHz)	Polarity	Q.P. Trace	Cable Transducer	(QP) EMI (dBuV/m)	Ttbl Angle (deg)	Twr Ht (cm)	Limit (dBuV/m)	(QP) Margin (db)
13.56	V	56.81	0.32	79.47	275	300.00	96.02	-16.55

The margin value of the 13.56 MHz transmit frequency was well within the established limits.



Figure 8

3.4 Frequency Stability Data (CFR47 Part 15.225(c))

3.4.1 Power Variation

The base frequency of the badge reader was recorded as read off the receiver display. The supply was delivering +5.0Vdc to the badge reader. The supply was raised to 5.75Vdc. The transmit frequency of the badge reader was recorded.

The supply voltage was then turned down to 4.25Vdc and the same data recorded.

The base frequency of the EUT was recorded as 13.56113MHz. **Varying the supply voltage had no effect.**

3.4.2 Temperature

The EUT temperature was raised to 50°C and the transmit frequency recorded. The temperature of the badge reader was lowered to -20°C and the frequency recorded.

The base frequency was still at 13.56113MHz at both temperature extremes.

4.0 Conclusion

Based on the data obtained it is the opinion of this test facility the EUT tested is compliant to CFR47 Part 15. The test results should be submitted to the FCC for their review and opinion.

Test Performed By: _____

**Orlando Perez
EMC Technician**

Approved By: _____

**Michael E. Hill
Manager Test Facility**