

## **Certification Test Report**

**FCC ID: ODB-POSMINI20**  
**IC: 11016A-POSMINI20**

**FCC Rule Part: 15.247**  
**IC Radio Standards Specification: RSS-210**

**ACS Report Number: 13-2026.W06.1A**

**Manufacturer: ValidFill, LLC**  
**Model: PS000SA004**

**Test Begin Date: May 10, 2013**  
**Test End Date: February 18, 2014**

**Report Issue Date: April 2, 2014**



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACCLASS, ANSI, or any agency of the Federal Government.

**Project Manager:**

A handwritten signature in blue ink, appearing to read "Thierry Jean-Charles".

**Thierry Jean-Charles**  
**EMC Engineer**  
**Advanced Compliance Solutions, Inc.**

**Reviewed by:**

A handwritten signature in blue ink, appearing to read "Kirby Munroe".

**Kirby Munroe**  
**Director, Wireless Certifications**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 32 pages**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose .....	3
1.2	Manufacturer Information .....	3
1.3	Product description .....	3
1.4	Test Methodology and Considerations .....	3
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
2.1	Location .....	4
2.2	Laboratory Accreditations/Recognitions/Certifications .....	4
2.3	Radiated & Conducted Emissions Test Site Description .....	5
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>7</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>8</b>
<b>5</b>	<b>EQUIPMENT UNDER TEST AND SUPPORT EQUIPMENT.....</b>	<b>9</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>10</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>11</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	11
7.2	Power Line Conducted Emissions – FCC: Section 15.207; IC: RSS-Gen 7.2.4.....	11
7.3	Peak Output Power - FCC Section 15.247(b)(2); IC: RSS-210 A8.4(1) .....	14
7.4	Channel Usage Requirements.....	16
7.5	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d); IC: RSS-210 A8.5 .....	23
<b>8</b>	<b>CONCLUSION.....</b>	<b>31</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

### 1.2 Manufacturer Information

ValidFill, LLC  
6222 Tower Lane, Suite B-7  
Sarasota, FL 34240

### 1.3 Product description

The ValidFill model PS000SA004 also referred to as POS Mini 2.0 is a RFID Cup Programming Station. It is used to program RFID enabled beverage containers with additional refills, or new refill program information. The unit includes a Sear RFID reader operating in the 900 MHz ISM band.

#### Technical Parameters

Band of Operation: 902.75 - 927.25 MHz  
Number of Channels: 50  
Mode of Operation: FHSS  
Antenna Type/Gain: PCB Loop Antenna, 0.55 dBi  
Operating Voltage: 12VDC

Model Number: PS000SA004

Test Sample Serial Number(s): M14041300533 (Reader)

Test Sample Condition: The samples were in good conditions with no observable physical damage.

### 1.4 Test Methodology and Considerations

The PS000SA004 was evaluated for radiated, power line and RF conducted emissions.

The RF conducted measurements were taken directly from the reader RF port through suitable attenuation.

The radiated emissions measurements were performed up to the 10<sup>th</sup> harmonic. The unit was set to continuously transmit on the hopping channel.

The power line conducted emissions evaluations were performed with the 900 MHz radio in the hopping mode.

The unit was also evaluated for compliance to the unintentional emissions requirements in accordance with the Class B limits. The equipment was modified with ferrite materials in order to meet the unintentional emissions requirements. The modifications are listed below:

- 1.) Ferrite on USB Cable: FAIR-RITE 0431164951 (1 Pass) - 1 in. from overmold.
- 2.) Ferrite on LED twisted pair Power Cables: FAIR-RITE 0431164951 (1 Pass)
- 3.) Ferrite on Power Input Cable: FAIR-RITE 0431164281 (2 passes)
- 4.) Ferrite on Switch power Cable: FAIR-RITE 0431164281 (2 Passes)
- 5.) Ferrite on Display Cable: FAIR-RITE 0431164951 (1 Pass)

The results are documented separately in a Verification test report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089  
Industry Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

**2.3 Radiated & Conducted Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

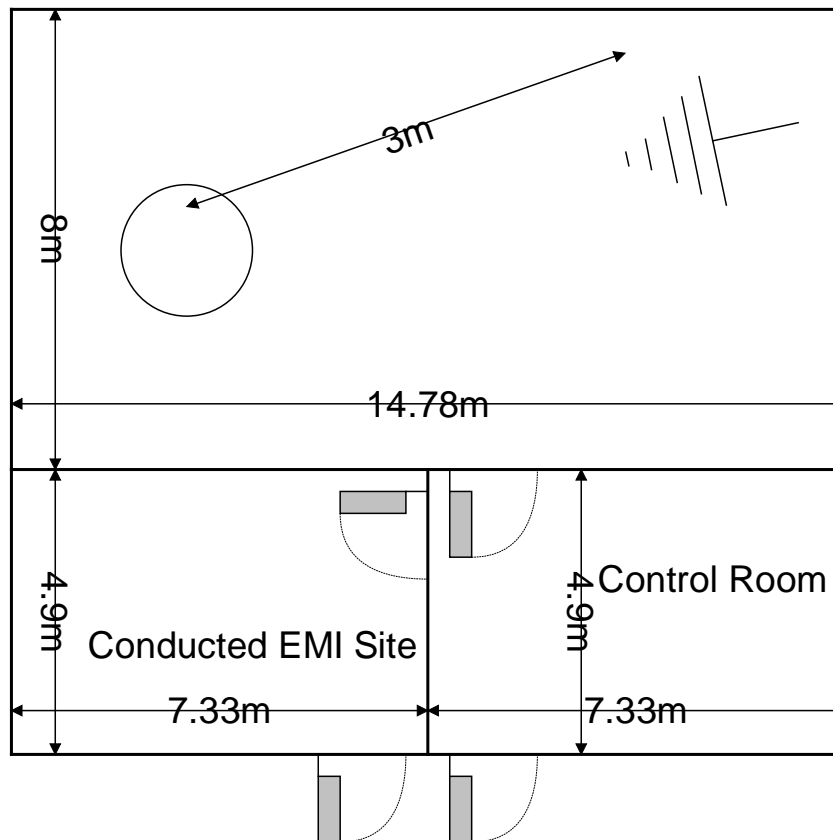


**Figure 2.3.1-1: Semi-Anechoic Chamber Test Site**

**2.3.2 Conducted Emissions Test Site Description**

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m<sup>3</sup>. As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

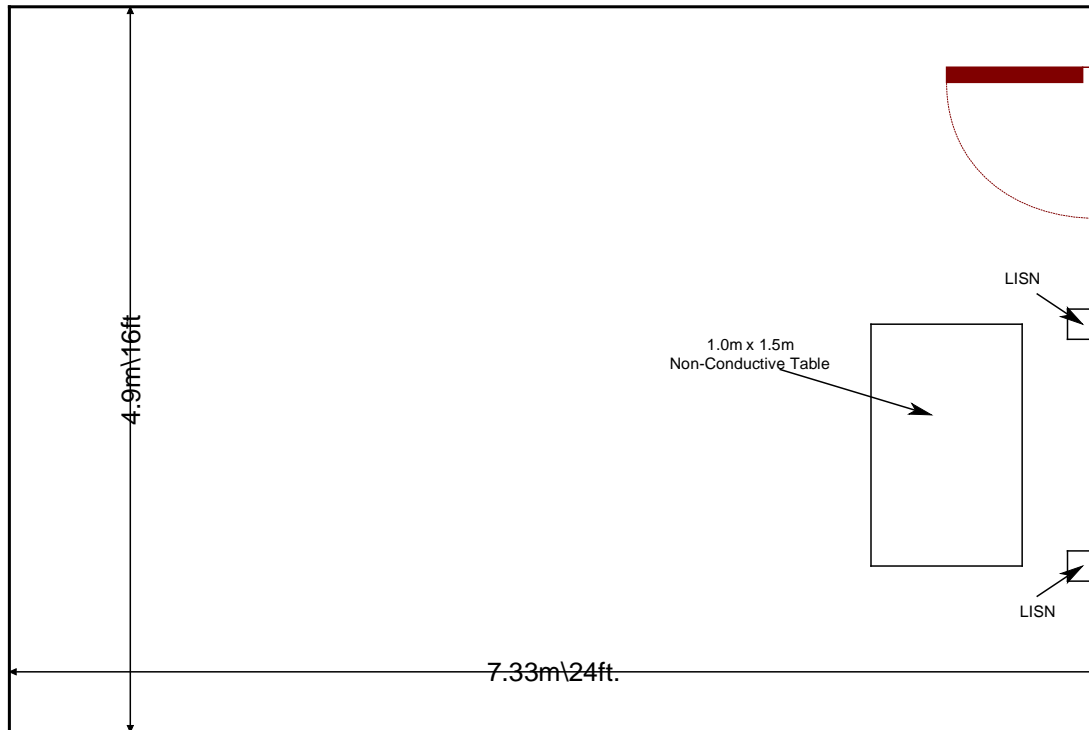

**Figure 2.3.2-1: AC Mains Conducted EMI Site**

**3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
523	Agilent	E7405	Spectrum Analyzers	MY45103293	1/8/2013	1/8/2015
524	Chase	CBL6111	Antennas	1138	1/7/2013	1/7/2015
2006	EMCO	3115	Antennas	2573	4/24/2013	4/24/2015
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	12/31/2012	12/31/2013
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	12/31/2013	12/31/2014
2022	EMCO	LISN3825/2R	LISN	1095	8/19/2011	8/19/2013
2022	EMCO	LISN3825/2R	LISN	1095	9/9/2013	9/9/2015
2037	ACS Boca	Chamber EMI Cable Set	Cable Set	2037	1/1/2013	1/1/2014
2037	ACS Boca	Chamber EMI Cable Set	Cable Set	2037	1/1/2014	1/1/2015
2044	QMI	N/A	Cables	2044	12/31/2012	12/31/2013
2044	QMI	N/A	Cables	2044	12/31/2013	12/31/2014
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	12/31/2012	12/31/2013
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	1/1/2014	1/1/2015
2064	CIR Q-TEL	FHT/22-10K-13/50-3A/3A	Filter	9	12/31/2012	12/31/2013
2064	CIR Q-TEL	FHT/22-10K-13/50-3A/3A	Filter	9	1/1/2014	1/1/2015
2071	Trilithic, Inc.	4HC1400-1-KK	Filter	9643263	12/31/2012	12/31/2013
2071	Trilithic, Inc.	4HC1400-1-KK	Filter	9643263	1/1/2014	1/1/2015
2075	Hewlett Packard	8495B	Attenuators	2626A11012	12/31/2012	12/31/2013
2075	Hewlett Packard	8495B	Attenuators	2626A11012	1/2/2014	1/2/2015
2076	Hewlett Packard	HP5061-5458	Cables	2076	12/29/2012	12/29/2013
2076	Hewlett Packard	HP5061-5458	Cables	2076	12/31/2013	12/31/2014
2082	Teledyne Storm Products	90-010-048	Cables	2082	5/31/2012	5/31/2013
2082	Teledyne Storm Products	90-010-048	Cables	2082	5/31/2013	5/31/2014
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/20/2012	12/20/2013
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/16/2013	12/16/2014
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
3004	Teseq	CFL 9206A	Attenuators	34720	10/21/2013	10/21/2015

**Notes:**

- **NCR=No Calibration Required**
- **The assets are reported such that the calibration information covers the entire test cycle. The assets were only used during the active period of the cycle.**



## 5 EQUIPMENT UNDER TEST AND SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	ValidFill	PS000SA004	M14041300533
2	AC Adapter	N/A	PS120V3000-D	2710 HB
3	Jump Drive	PQI	SII256MB	D33311
4	Mouse	Dell	M-UAR DEL7	LZ9440C43W5
5	Keyboard	Dell	L100	CN-0RH659-73571-07Z3
6	Ethernet Switch	D-Link	DES-105	QBJP1C1000055
7	AC Adapter	D-Link	FPS005USA-050100	5011
8	Jump Drive	Lexar	JDSP256-00-540C	N/A

Table 5.2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power Cable	1.45 m	No	EUT to AC Adapter
B	Power Cord	1.2 m	No	AC Adapter to AC Mains
C	USB Ext. Cable	3.09 m	No	EUT to Jump Drive
D	USB Cable	2 m	No	EUT to Keyboard
E	USB Cable	1.8 m	No	EUT to Mouse
F	Ethernet Cable	10 m	No	EUT to Ethernet Switch
G	Power cable	1.48 m	No	Ethernet Switch to AC Adapter

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

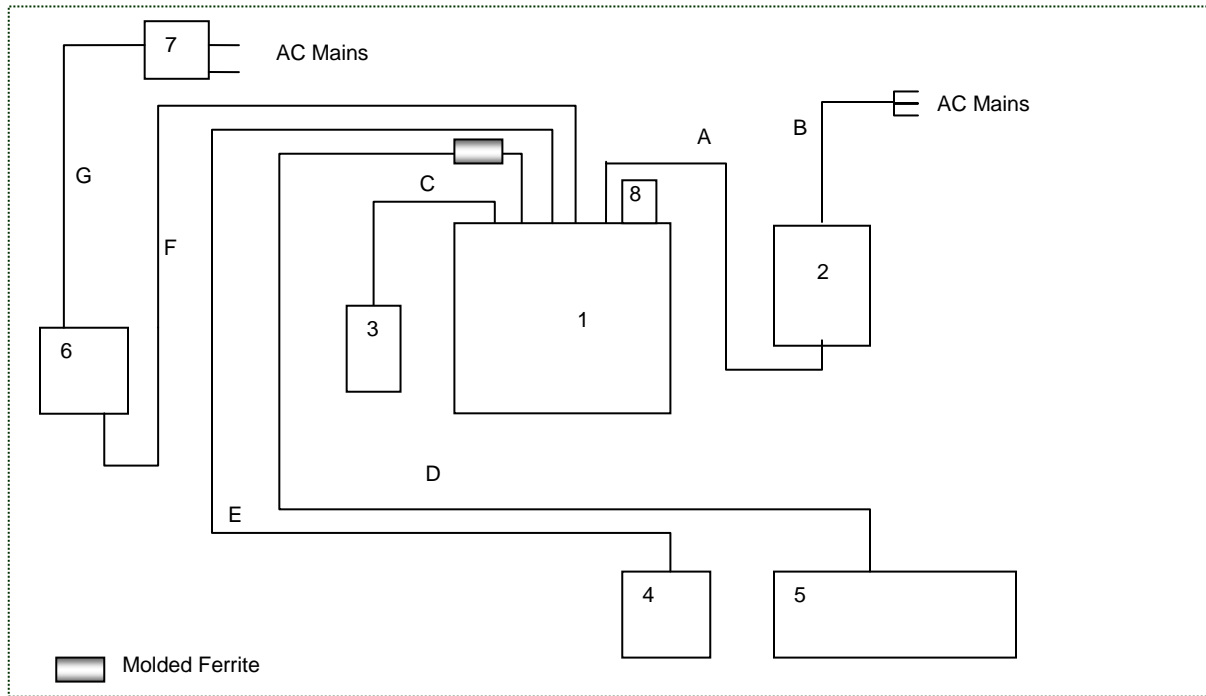


Figure 6-1: Test Set Up

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The model PS000SA004 uses an internal PCB loop antenna which connects directly to the Reader PCB via an MCX connector, thus meeting the requirements of 15.203.

### 7.2 Power Line Conducted Emissions – FCC: Section 15.207; IC: RSS-Gen 7.2.4

#### 7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

#### 7.2.2 Measurement Results

Results are shown below.

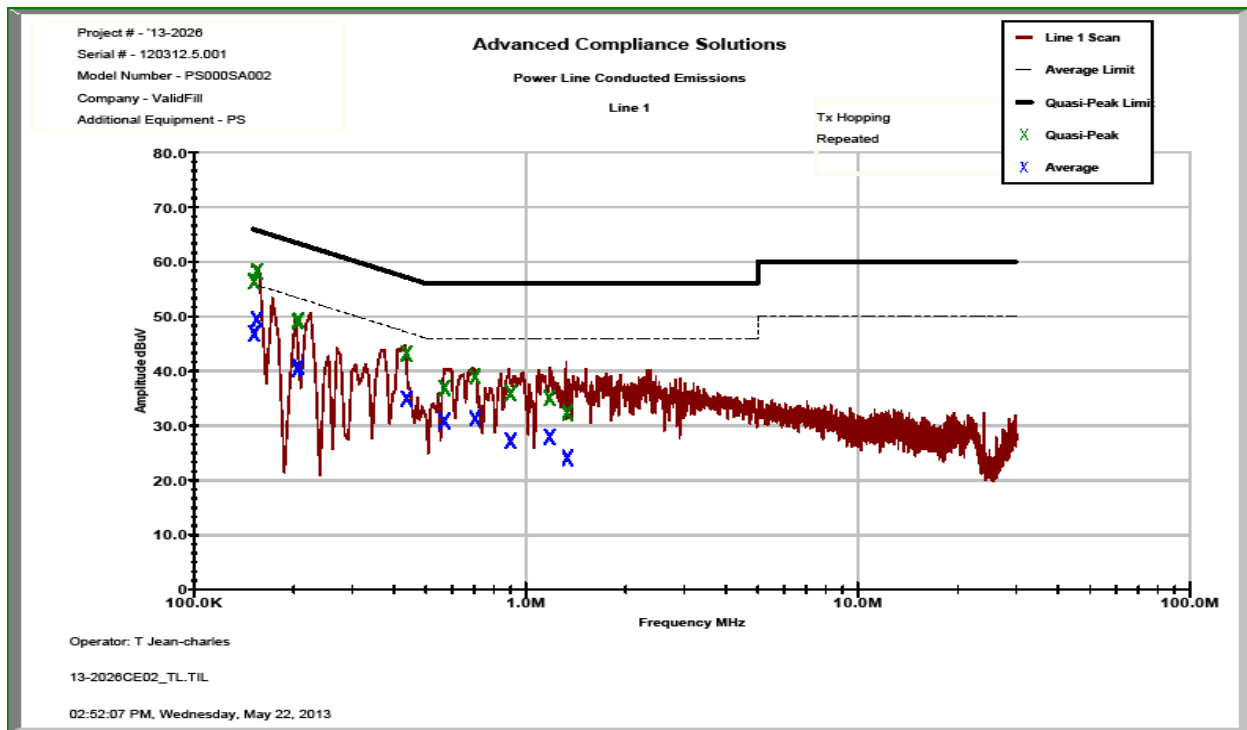


Figure 7.2.2-1: Conducted Emissions Results – Line 1

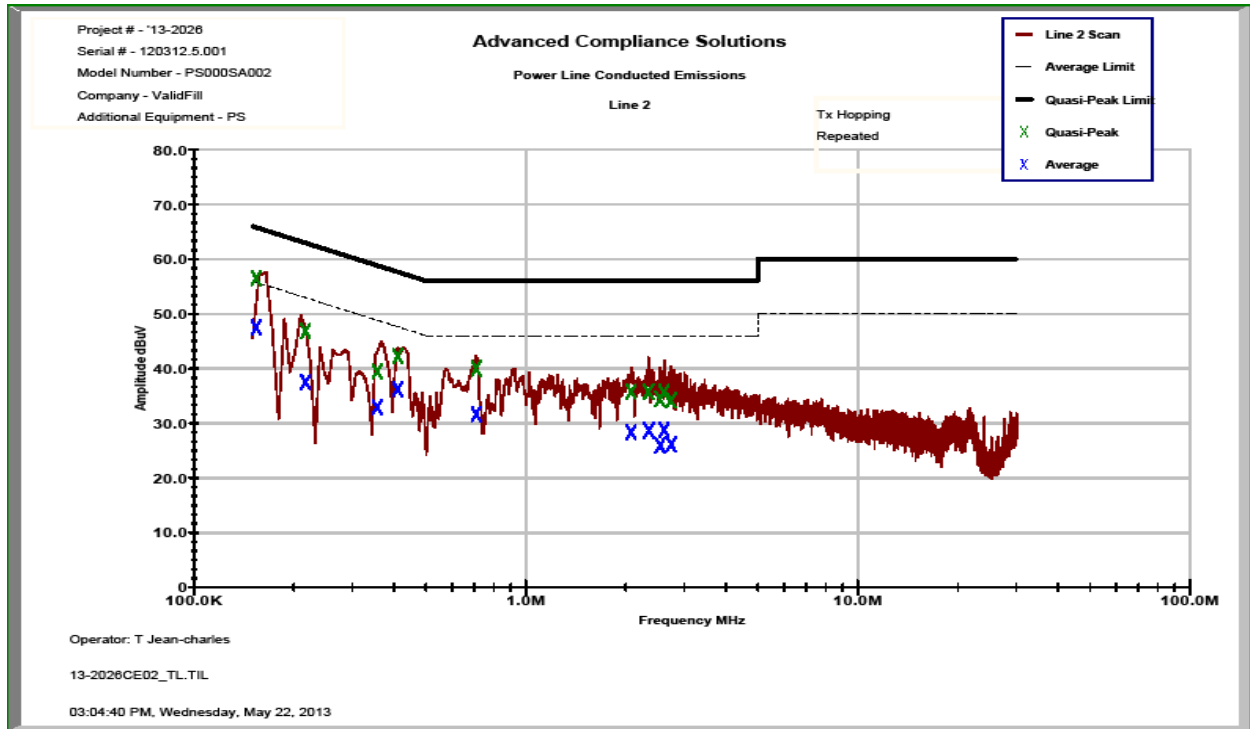


Figure 7.2.2-2: Conducted Emissions Results – Line 2

Table 7.2.2-1: Conducted EMI Results

Line 1    Line 2    Line 3  
 Line 4  
 To Ground    Floating  
 Telecom Port \_\_\_\_\_  
 dBµV    dBµA  
  
 Plot Number: 13-2026CE02  
 Power Supply Description: 12 VDC

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 1</b>									
0.151709	54.944	45.388	1.52	56.46	46.91	65.91	55.91	9.4	9.0
0.154787	56.827	48.028	1.51	58.34	49.54	65.74	55.74	7.4	6.2
0.204787	48.082	39.275	1.08	49.16	40.35	63.41	53.41	14.3	13.1
0.206625	48.169	39.725	1.08	49.24	40.80	63.34	53.34	14.1	12.5
0.436725	42.642	34.41	0.56	43.21	34.97	57.12	47.12	13.9	12.1
0.568713	36.418	30.366	0.49	36.91	30.86	56.00	46.00	19.1	15.1
0.7015	38.494	30.854	0.46	38.95	31.31	56.00	46.00	17.0	14.7
0.899238	35.457	26.735	0.44	35.90	27.17	56.00	46.00	20.1	18.8
1.17707	34.663	27.55	0.42	35.08	27.97	56.00	46.00	20.9	18.0
1.33251	31.964	23.663	0.41	32.37	24.07	56.00	46.00	23.6	21.9
<b>Line 2</b>									
0.154073	55.011	46.042	1.55	56.56	47.59	65.78	55.78	9.2	8.2
0.2168	45.751	36.537	1.09	46.84	37.63	62.94	52.94	16.1	15.3
0.356412	38.817	32.281	0.68	39.50	32.97	58.81	48.81	19.3	15.8
0.410838	41.657	35.615	0.61	42.26	36.22	57.63	47.63	15.4	11.4
0.707888	39.52	31.216	0.48	40.00	31.70	56.00	46.00	16.0	14.3
2.07454	35.336	27.858	0.47	35.81	28.33	56.00	46.00	20.2	17.7
2.34111	35.246	28.198	0.48	35.72	28.68	56.00	46.00	20.3	17.3
2.53305	33.908	25.432	0.49	34.39	25.92	56.00	46.00	21.6	20.1
2.60331	35.143	28.27	0.49	35.64	28.76	56.00	46.00	20.4	17.2
2.73594	33.639	25.613	0.51	34.15	26.12	56.00	46.00	21.9	19.9

\* Note: Results are reported for the EUT configuration leading to the worst case emissions.

**7.3 Peak Output Power - FCC Section 15.247(b)(2); IC: RSS-210 A8.4(1)**

**7.3.1 Measurement Procedure (Conducted Method)**


The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The display values were corrected for cable and external attenuation.

**7.3.2 Measurement Results**

Results are shown below.

**Table 7.3.2-1: RF Output Power**

Frequency (MHz)	Power (dBm)
902.75	20.62
915.25	20.46
927.25	19.33

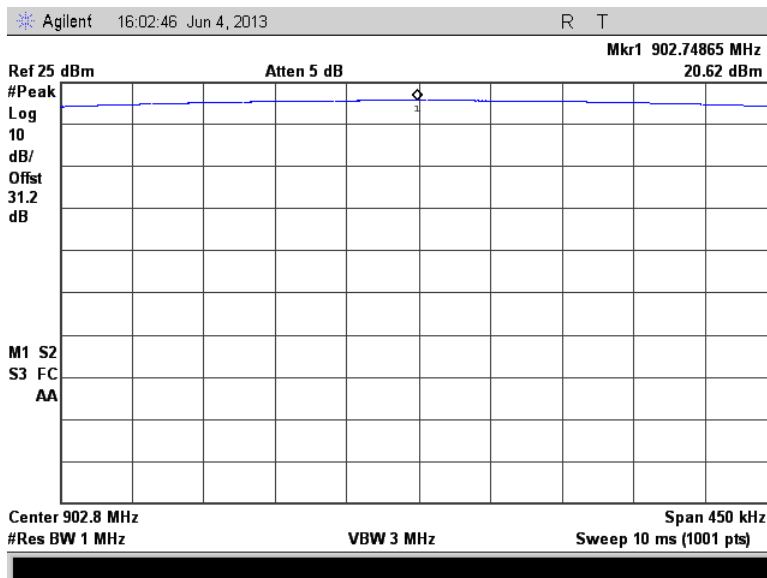

**Figure 7.3.2-1: RF Output Power - Low Channel**

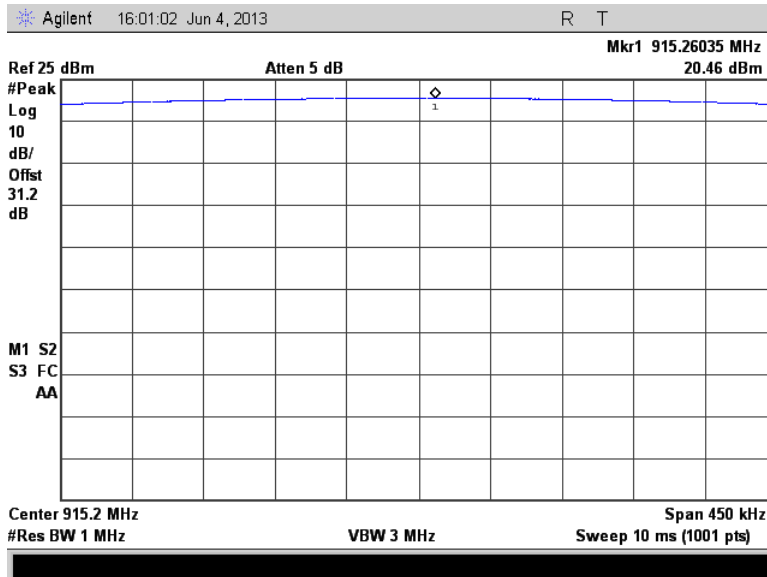


Figure 7.3.2-2: RF Output Power - Middle Channel

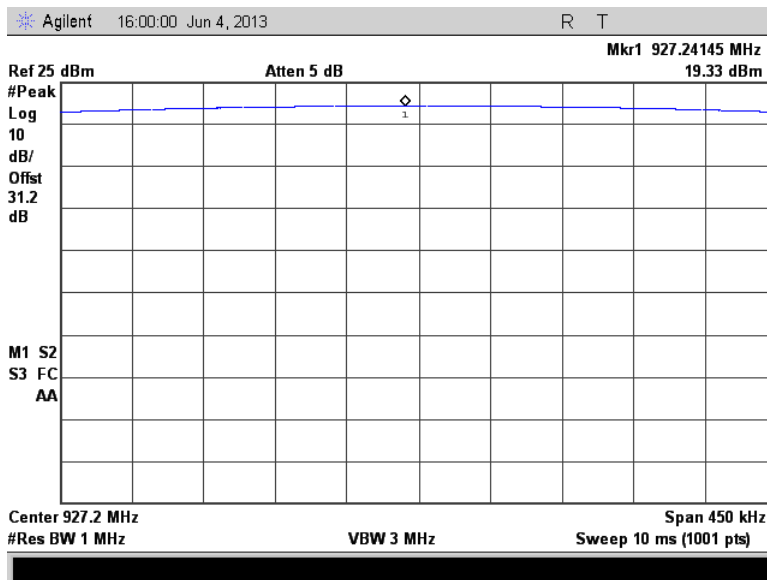


Figure 7.3.2-3: RF Output Power - High Channel

**7.4 Channel Usage Requirements**


**7.4.1 Carrier Frequency Separation – FCC: Section 15.247(a)(1); IC: RSS-210 A8.1(b)**

**7.4.1.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to  $\geq 1\%$  of the span.

**7.4.1.2 Measurement Results**

Results are shown below.

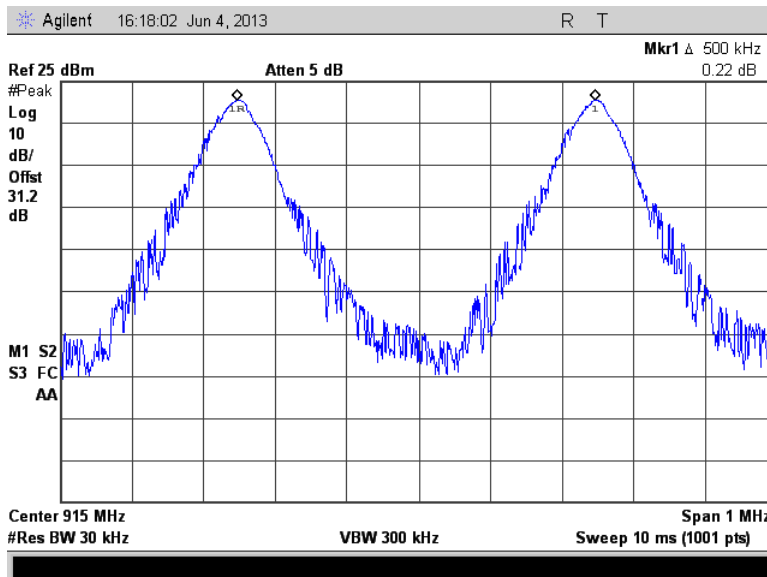

**Figure 7.4.1.2-1: Carrier Frequency Separation**



7.4.2 Number of Hopping Channels – FCC: Section 15.247(a)(1)(i); IC: RSS-210 A8.1(c)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer through suitable attenuation. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The peak detector max hold function was enabled for the measurements.

7.4.2.2 Measurement Results

Results are shown below.

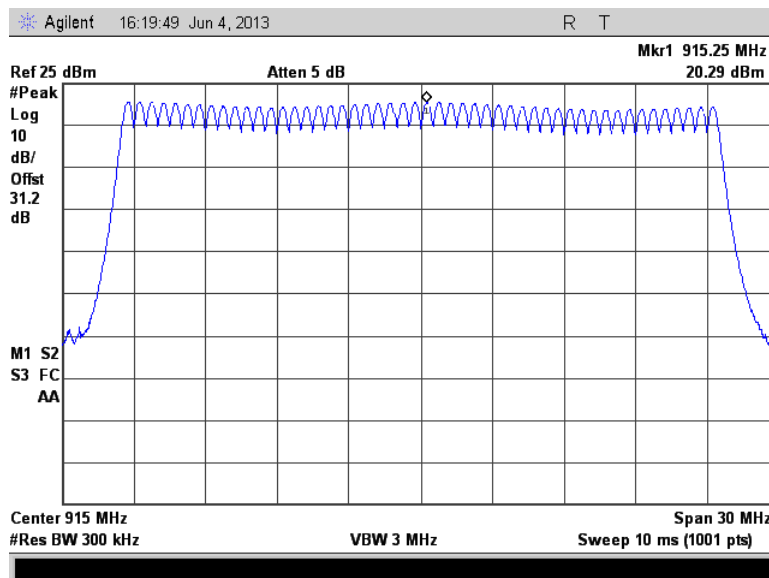


Figure 7.4.2.2-1: Number of Hopping Channels

7.4.3 Channel Dwell Time – FCC: Section 15.247(a)(1)(i); IC: RSS-210 A8.1(c)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to 1 MHz and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

7.4.3.2 Measurement Results

Results are shown below.

Table 7.4.3.2-1 Dwell Time on a 20 Second Cycle

Number of Hops Per Sec. (NHPS)	Number of Hops per Channel Per Sec. (NHPCPS)	Number of hops on a 20s Cycle (NHPC)	Measured Dwell Times (ms)	Dwell Times on a 20s Cycle (ms)	Limit (ms)	Status
2.5	0.05	1	399.6	399.6	400	PASS

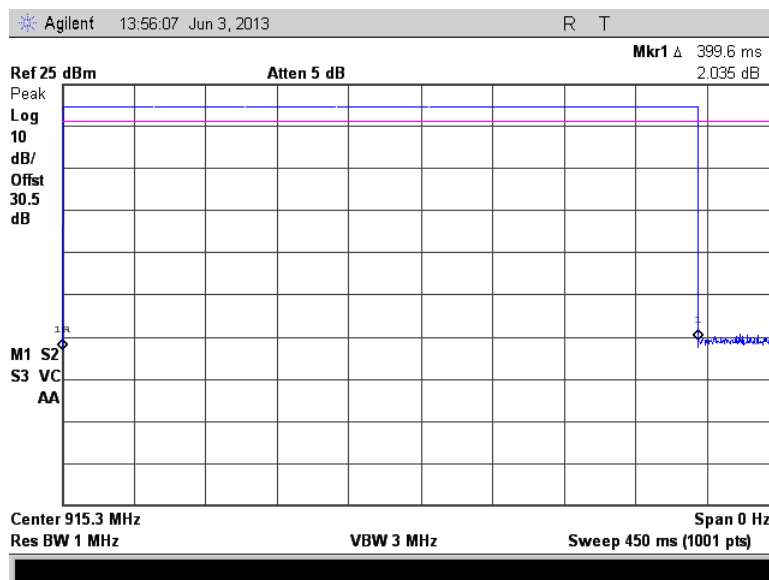


Figure 7.4.3.2-1: Channel Dwell Time

7.4.4 20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i); IC: RSS-210 A8.1(a)

7.4.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 3 times the estimated bandwidth of the emission. The RBW was to  $\geq 1\%$  of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was to 1% of the span. . The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power.

7.4.4.2 Measurement Results

Results are shown below.

Table 7.4.4.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
902.75	85.4	79.5
915.25	85.6	79.5
927.25	86.0	77.7

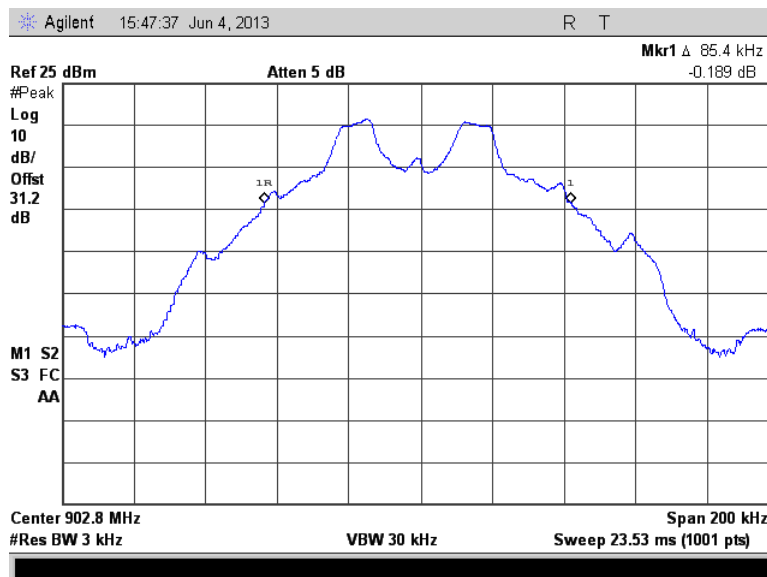


Figure 7.4.4.2-1: 20dB BW Low Channel

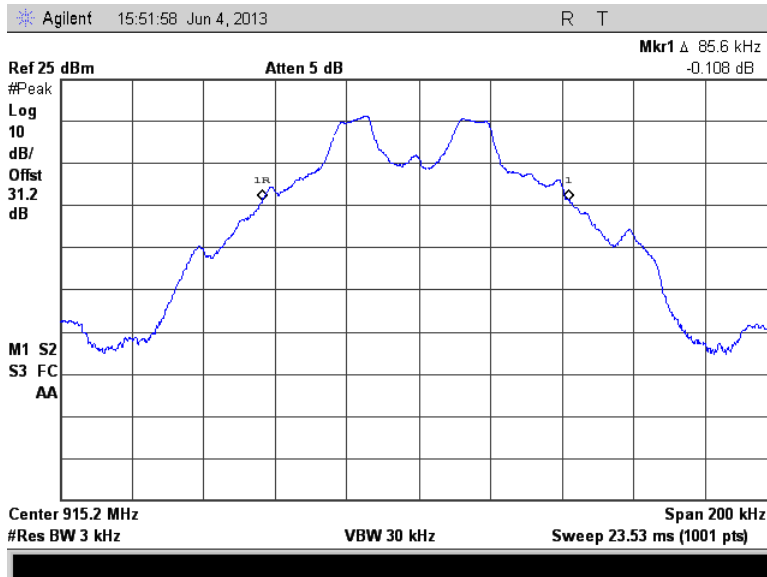


Figure 7.4.4.2-2: 20dB BW Middle Channel

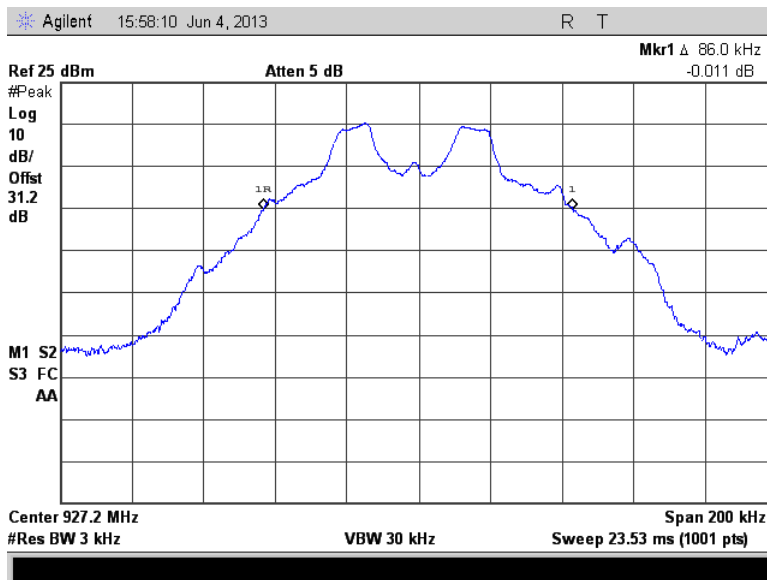


Figure 7.4.4.2-3: 20dB BW High Channel

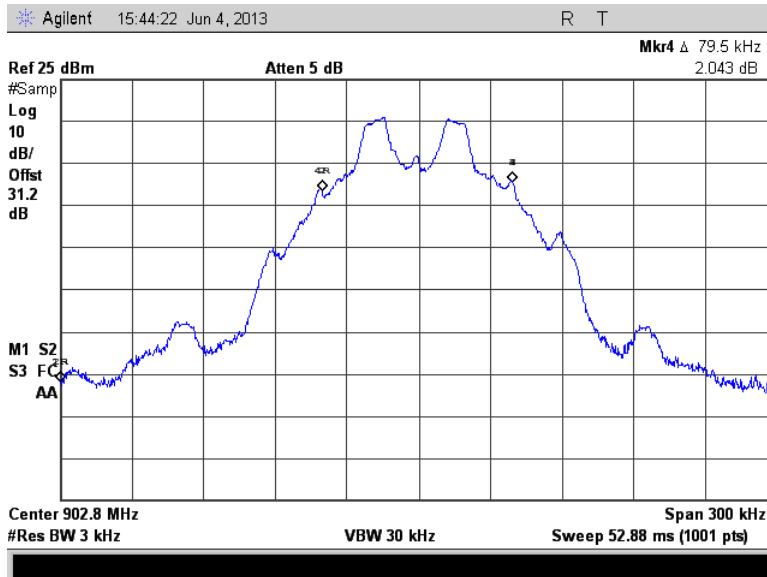


Figure 7.4.4.2-4: 99% OBW Low Channel

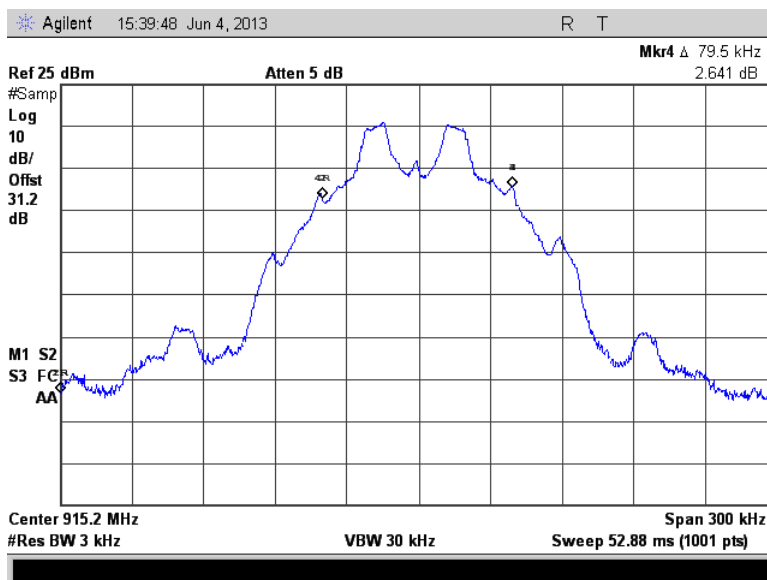


Figure 7.4.4.2-5: 99% OBW Middle Channel

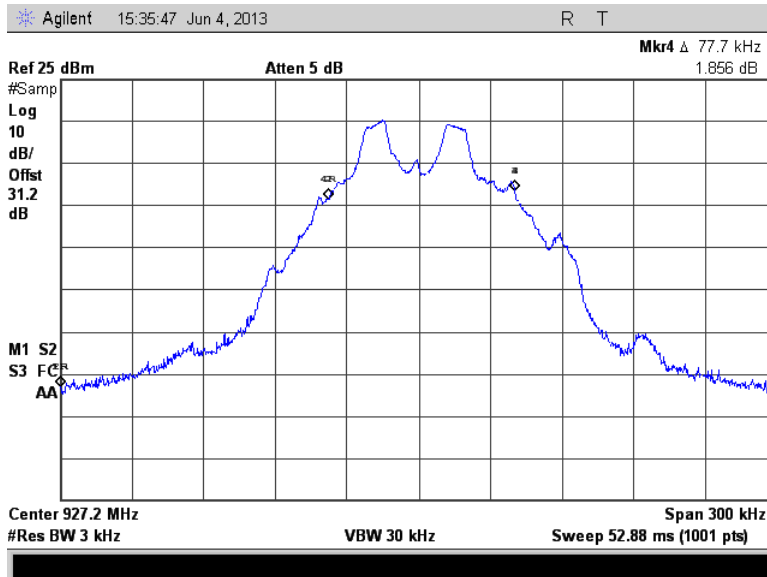


Figure 7.4.4.2-6: 99% OBW High Channel

**7.5 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d); IC: RSS-210 A8.5**


**7.5.1 Band-Edge Compliance of RF Conducted Emissions**

**7.5.1.1 Measurement Procedure**

The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, which is  $\geq$  1% of the span, and the VBW was set to  $\geq$  300 kHz.

**7.5.1.2 Measurement Results**

Results are shown below.

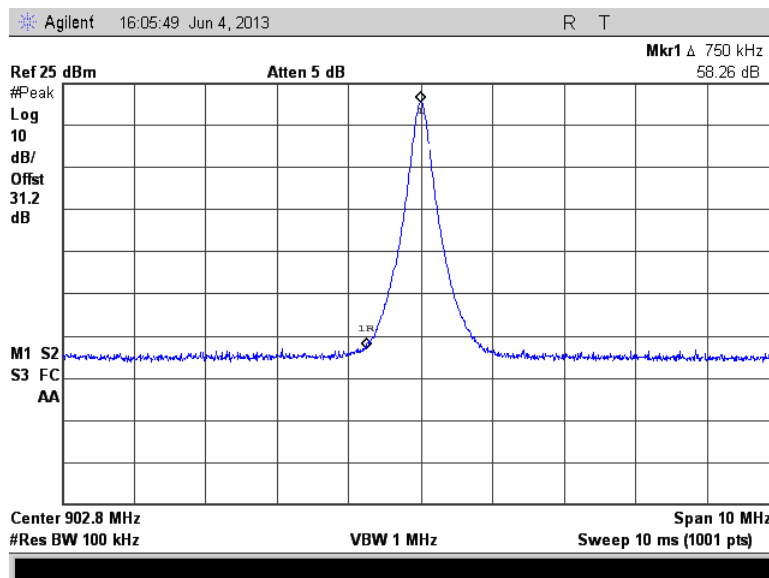

**Figure 7.5.1.2-1: Lower Band-edge – Low Channel**

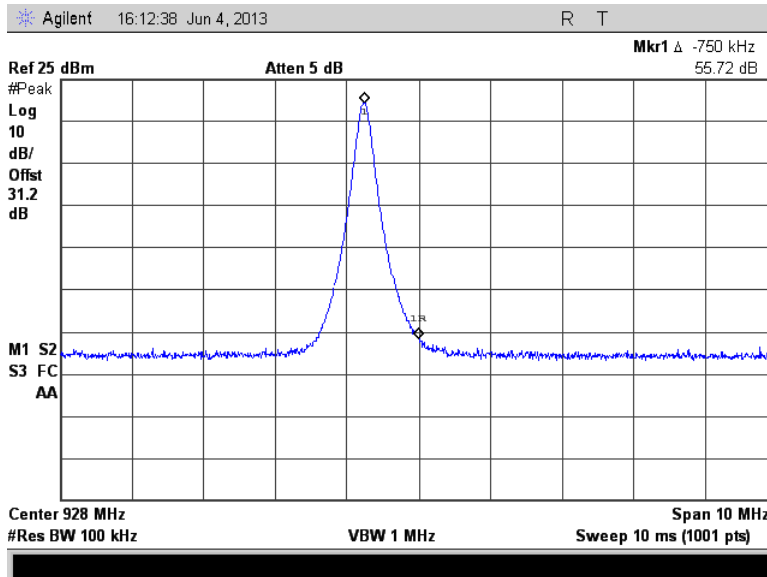


Figure 7.5.1.2-2: Upper Band-edge – High Channel

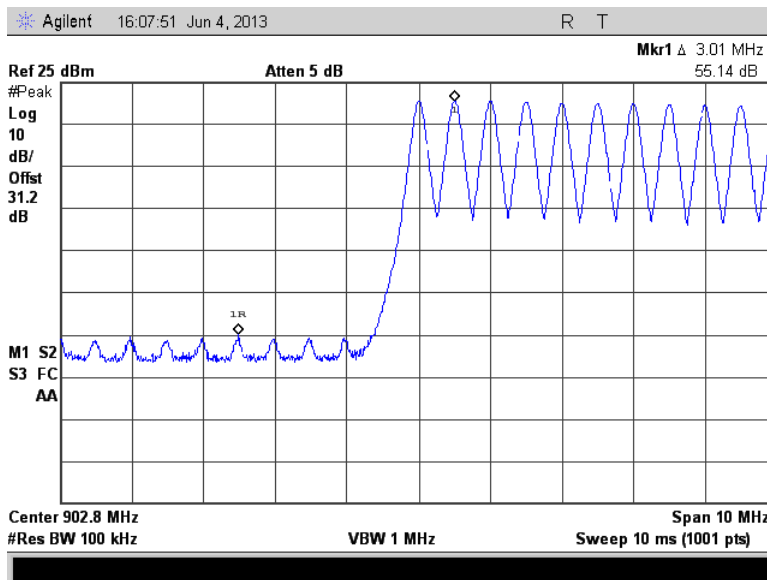


Figure 7.5.1.2-3: Lower Band-edge – Hopping Mode



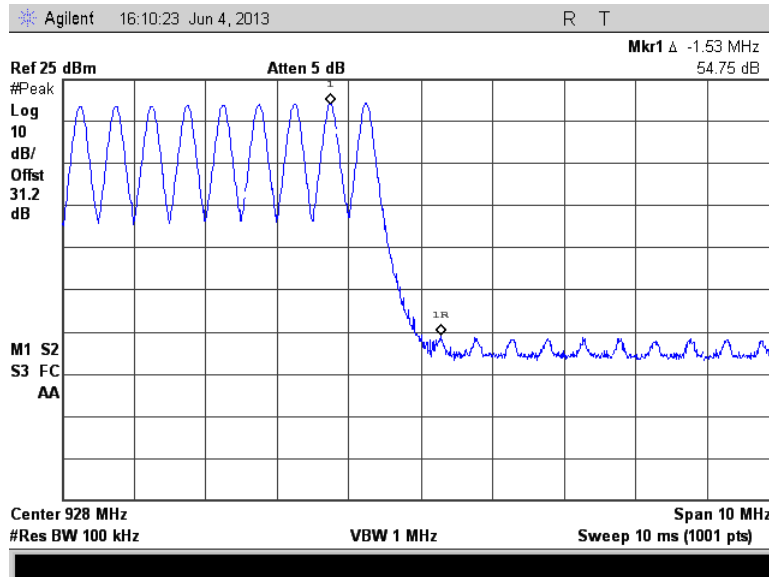


Figure 7.5.1.2-4: Upper Band-edge – Hopping Mode

7.5.2 RF Conducted Spurious Emissions

7.5.2.1 Measurement Procedure

The RF output port of the EUT was connected to the spectrum analyzer input using a 15 dB attenuator. The EUT was investigated for conducted spurious emissions from 30MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz. A peak detector function was used with the trace set to max hold. The levels were corrected for cable and attenuator losses.

7.5.2.2 Measurement Results

Results are shown below.

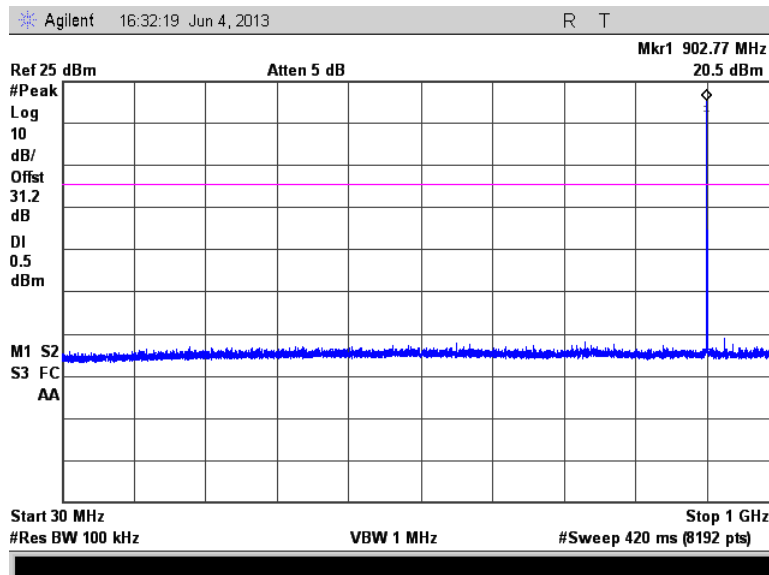


Figure 7.5.2.2-1: 30 MHz – 1 GHz – Low Channel

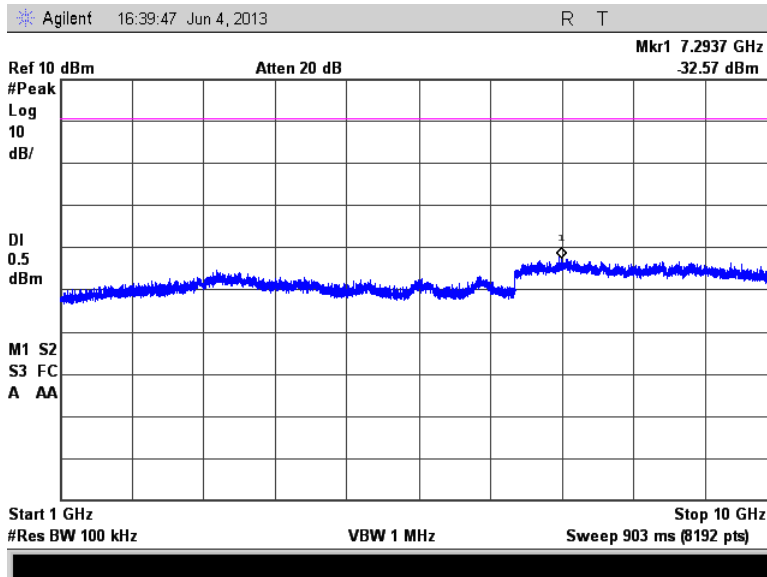


Figure 7.5.2.2-2: 1 GHz –10 GHz – Low Channel

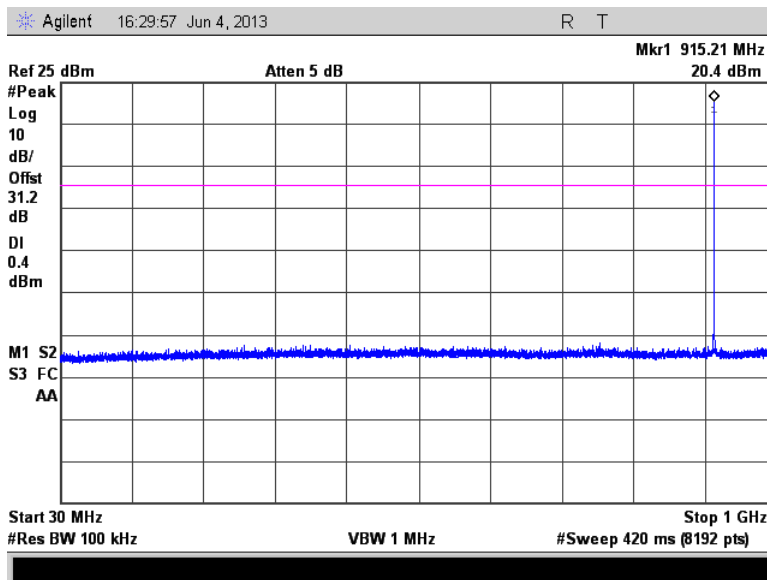


Figure 7.5.2.2-3: 30 MHz – 1 GHz – Middle Channel

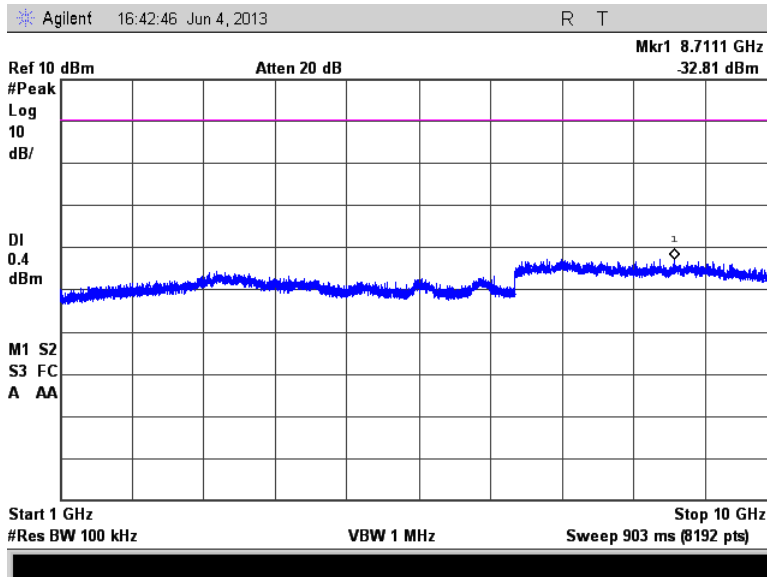


Figure 7.5.2.2-4: 1 GHz - 10 GHz - Middle Channel

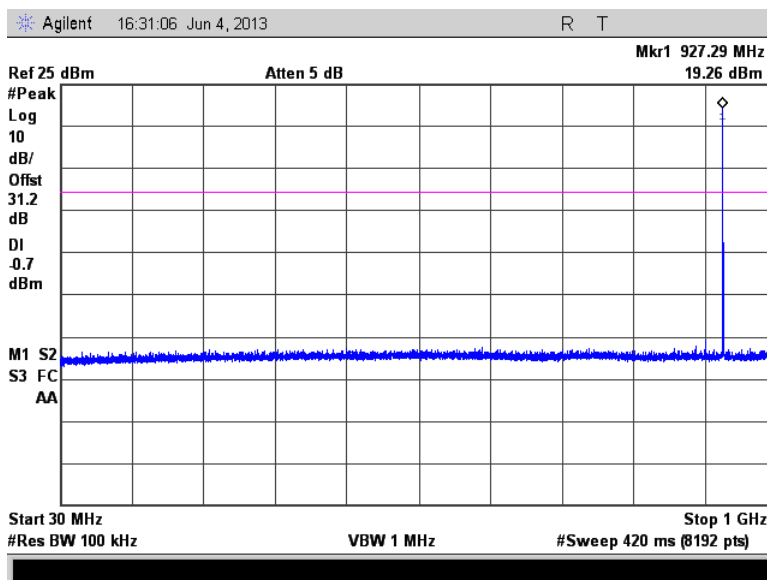


Figure 7.5.2.2-5: 30 MHz - 1 GHz - High Channel

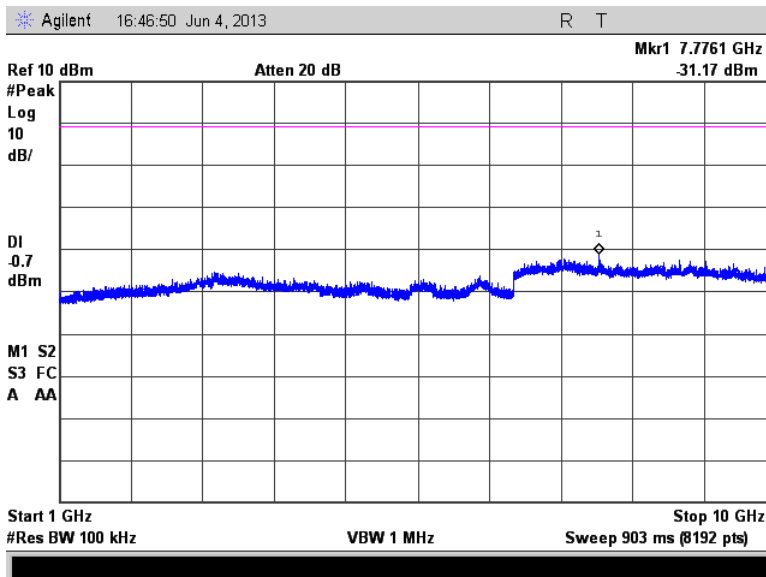


Figure 7.5.2.2-6: 1 GHz –10 GHz – High Channel

**7.5.3 Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; IC: RSS-210 2.2, RSS-Gen 7.2.2, 7.2.5**

**7.5.3.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 30 MHz to 10 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209. The EUT was caused to generate a continuous carrier signal on the hopping channel.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3 MHz respectively.

**7.5.3.2 Measurement Results**

Radiated band-edged and spurious emissions found in the restricted frequency bands of 30MHz to 10 GHz are reported in the tables below.

**Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel = 902.75 MHz</b>										
2708.25	49.61	38.18	H	-7.04	42.57	31.14	74.0	54.0	31.4	22.9
2708.25	49.27	39.25	V	-7.04	42.23	32.21	74.0	54.0	31.8	21.8
3611	49.95	42.48	H	-3.81	46.14	38.67	74.0	54.0	27.9	15.3
3611	50.62	43.59	V	-3.81	46.81	39.78	74.0	54.0	27.2	14.2
4513.75	49.78	42.73	H	-2.03	47.75	40.70	74.0	54.0	26.2	13.3
4513.75	50.11	44.25	V	-2.03	48.08	42.22	74.0	54.0	25.9	11.8
5416.5	45.54	33.05	H	0.43	45.97	33.48	74.0	54.0	28.0	20.5
5416.5	45.16	32.85	V	0.43	45.59	33.28	74.0	54.0	28.4	20.7
<b>Middle Channel = 915.25 MHz</b>										
2745.75	49.57	38.74	H	-6.86	42.71	31.88	74.0	54.0	31.3	22.1
2745.75	50.17	41.41	V	-6.86	43.31	34.55	74.0	54.0	30.7	19.5
3661	50.76	43.64	H	-3.62	47.14	40.02	74.0	54.0	26.9	14.0
3661	50.83	43.05	V	-3.62	47.21	39.43	74.0	54.0	26.8	14.6
4576.25	50.11	43.70	H	-1.85	48.26	41.85	74.0	54.0	25.7	12.1
4576.25	50.93	44.80	V	-1.85	49.08	42.95	74.0	54.0	24.9	11.0
7322	48.58	39.71	H	3.85	52.43	43.56	74.0	54.0	21.6	10.4
7322	49.96	41.78	V	3.85	53.81	45.63	74.0	54.0	20.2	8.4
<b>High Channel = 927.25 MHz</b>										
2781.75	50.02	40.60	H	-6.70	43.32	33.90	74.0	54.0	30.7	20.1
2781.75	50.43	41.66	V	-6.70	43.73	34.96	74.0	54.0	30.3	19.0
3709	50.83	45.32	H	-3.44	47.39	41.88	74.0	54.0	26.6	12.1
3709	51.39	45.60	V	-3.44	47.95	42.16	74.0	54.0	26.0	11.8
4636.25	48.41	40.46	H	-1.68	46.73	38.78	74.0	54.0	27.3	15.2
4636.25	50.61	44.78	V	-1.68	48.93	43.10	74.0	54.0	25.1	10.9
7418	48.93	39.84	H	4.15	53.08	43.99	74.0	54.0	20.9	10.0
7418	51.06	44.39	V	4.15	55.21	48.54	74.0	54.0	18.8	5.5

Note: All emissions above 7.42 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

$CF_T$  = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

$R_U$  = Uncorrected Reading

$R_C$  = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level:  $49.61 + (-7.04) = 42.57 \text{dB}\mu\text{V/m}$

Margin:  $74 \text{dB}\mu\text{V/m} - 42.57 \text{dB}\mu\text{V/m} = 31.4 \text{dB}$

**Example Calculation: Average**

Corrected Level:  $38.18 + (-7.04) = 31.14 \text{dB}\mu\text{V/m}$

Margin:  $54 \text{dB}\mu\text{V/m} - 31.14 \text{dB}\mu\text{V/m} = 22.9 \text{dB}$

## **8 CONCLUSION**

In the opinion of ACS, Inc., the PS000SA004 manufactured by ValidFill, LLC meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

## **END REPORT**