HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 0.955 mW/g, SAR (10g): 0.582 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: 0.13 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 25(1851.25MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

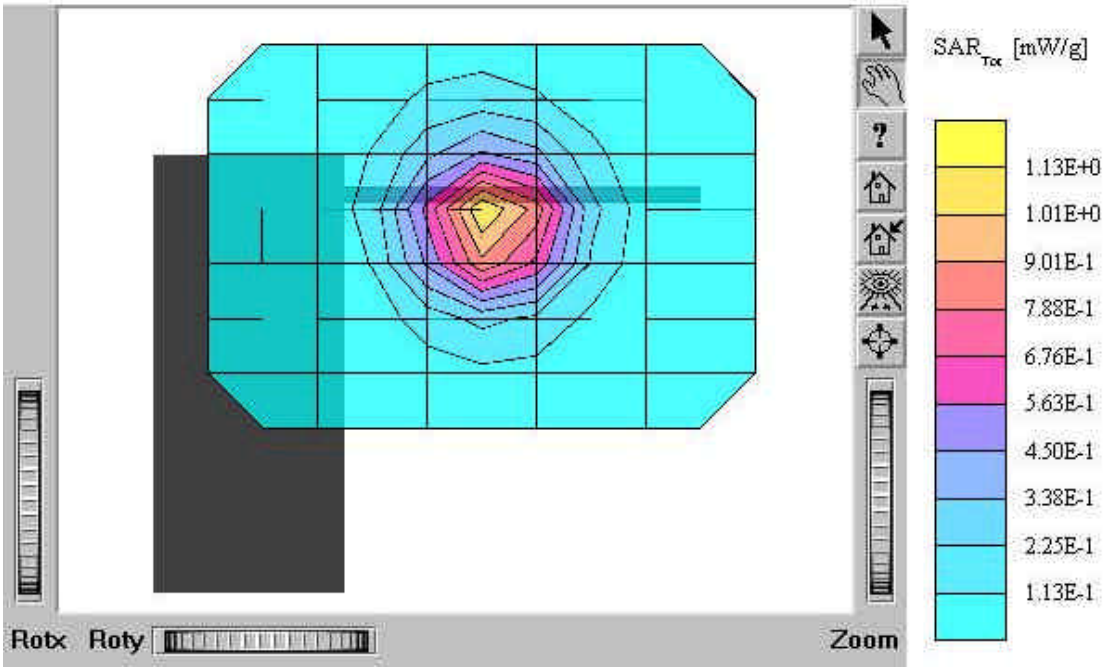

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.12 mW/g, SAR (10g): 0.674 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: 0.17 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 600(1880MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

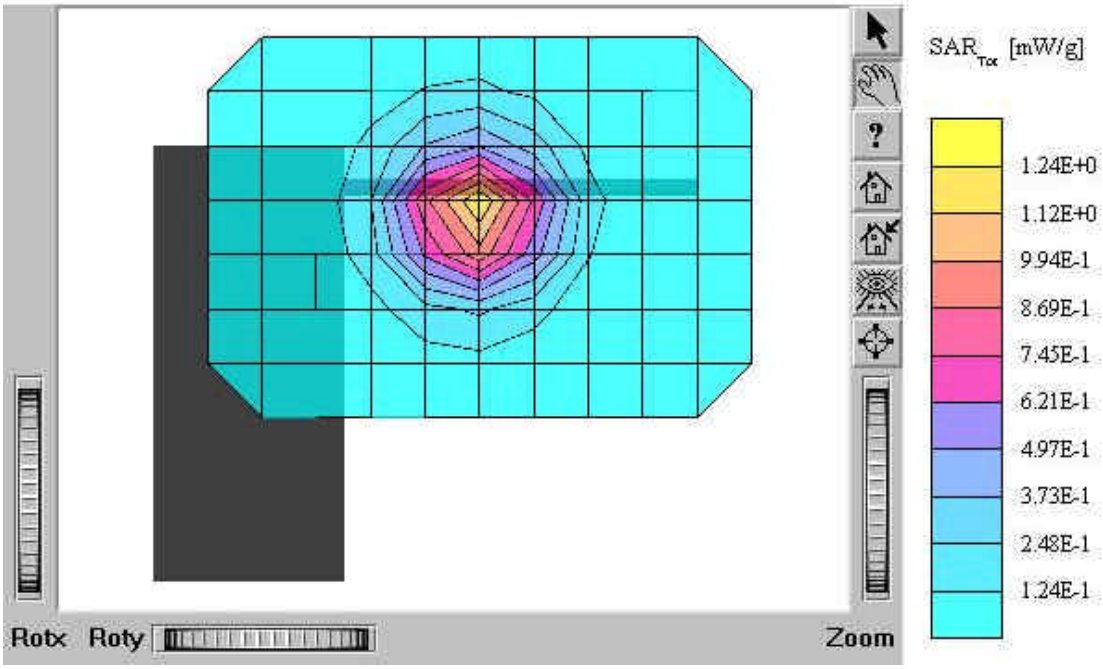

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.04 mW/g, SAR (10g): 0.626 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: 0.00 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 1175(1908.75MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

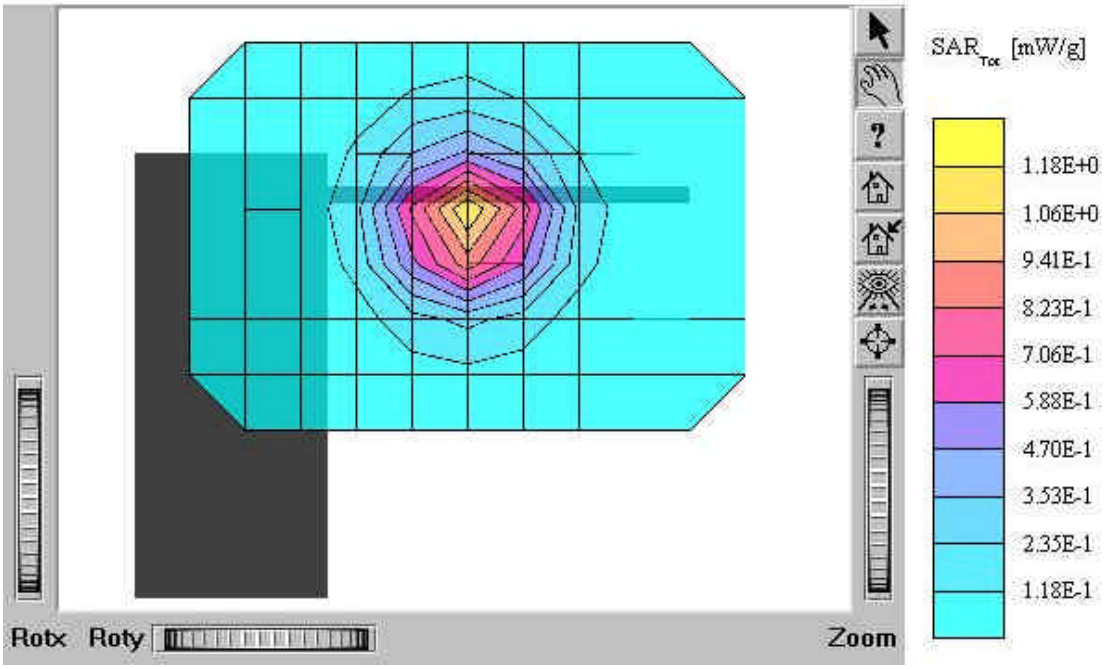

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.07 mW/g, SAR (10g): 0.646 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.10 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900 (With Charger)
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 25(1851.25MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

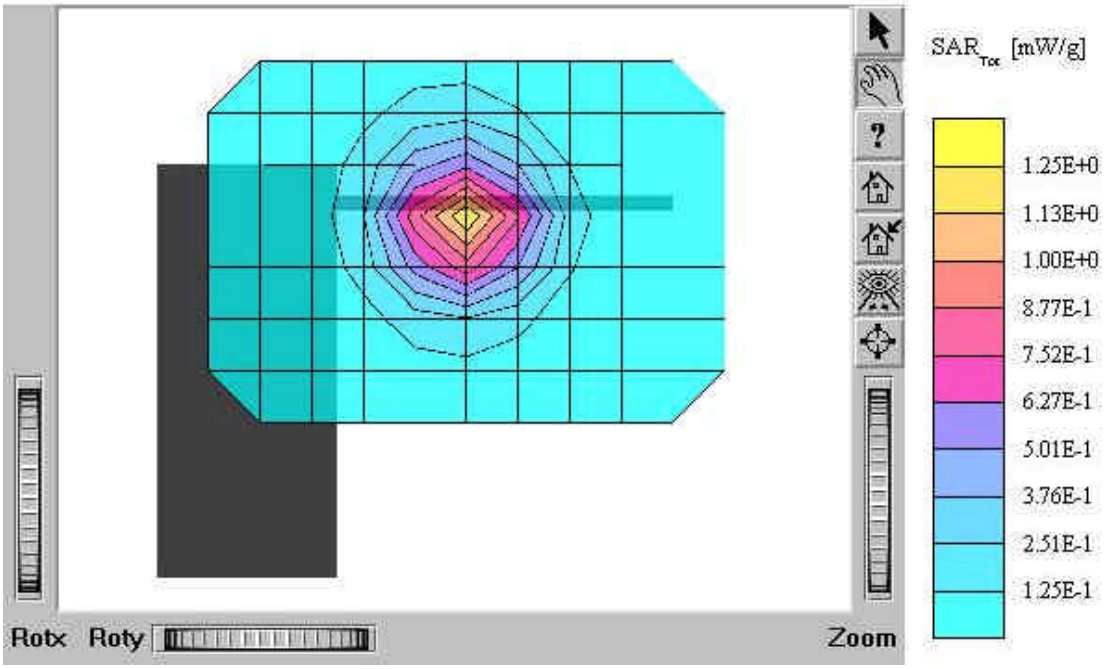

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.13 mW/g, SAR (10g): 0.678 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.01 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900 (With Charger)
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 600(1880MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

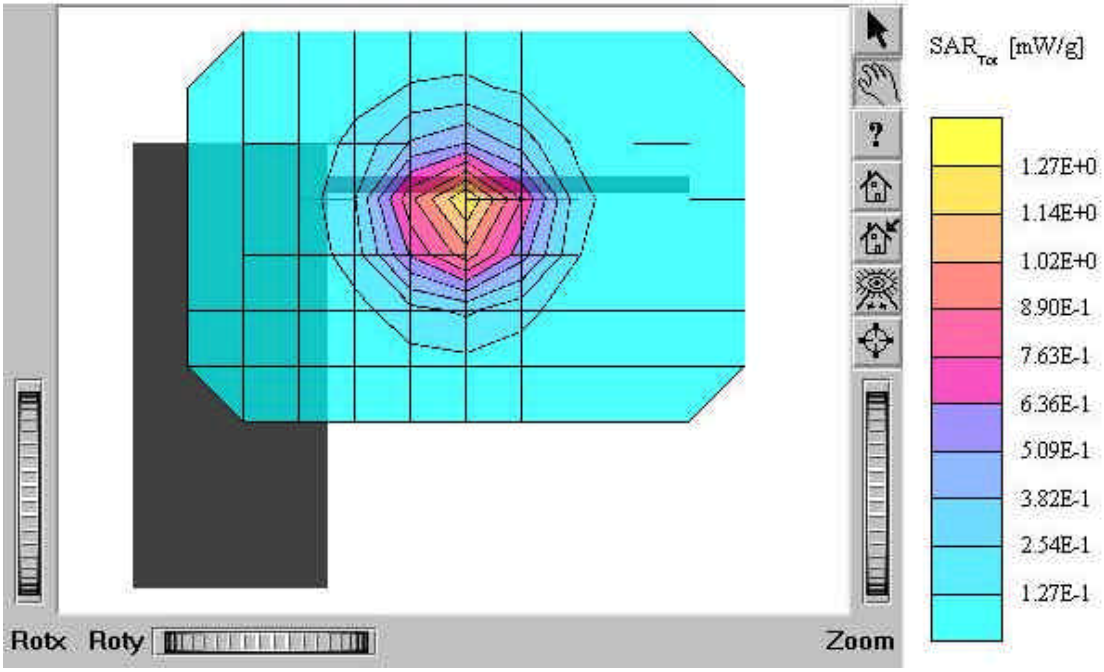

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.04 mW/g, SAR (10g): 0.629 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900 (With Charger)
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 1175(1908.75MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004

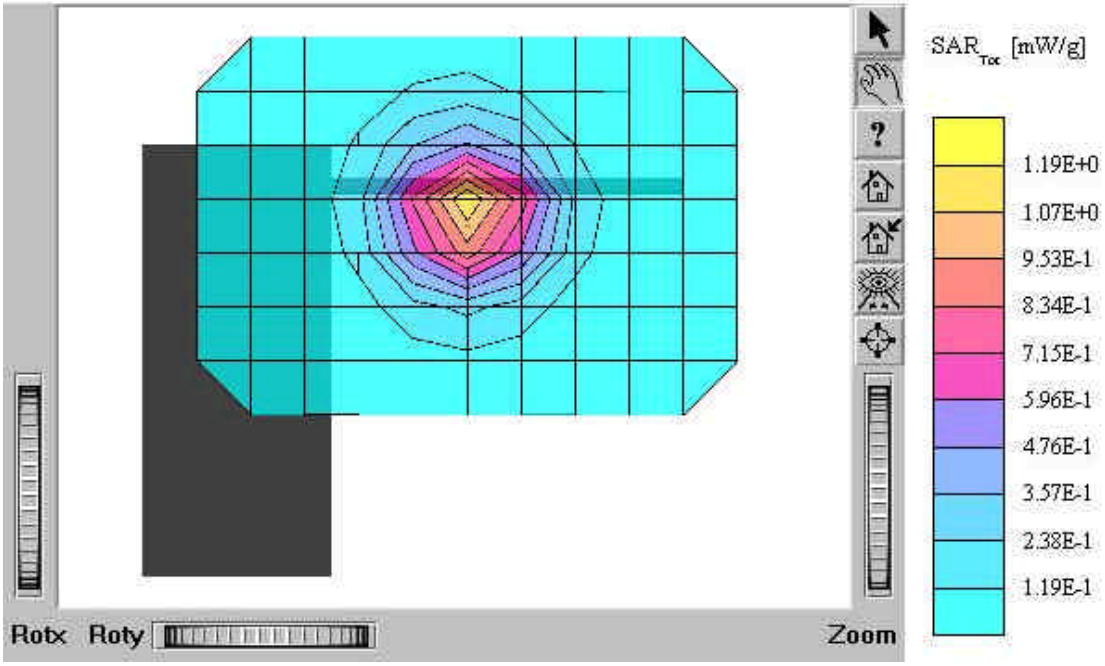

HTT-1900
SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 1.0; Body 1900 MHz: σ = 1.58 mho/m ε_r = 53.3 ρ = 1.00 g/cm^3
Cube 5x5x7: SAR (1g): 1.13 mW/g, SAR (10g): 0.678 mW/g
Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Comment:
FCC ID : ODGHTT-1900 / MODEL : HTT-1900 (With Charger)
Company : Hantel Co., LTD.
Test Position: Body / Antenna: Fixed
Mode: PCS CDMA / Channel : 600(1880MHz)
Conducted Power : 24.0 dBm
Liquid Temperature: 21.7℃
Date Tested : May 29, 2004