

FCC Test Report

Product Name	Z-Wave/IP Gateway
Model No.	SG-101-FCC
FCC ID.	ODMSG101

Applicant	OvisLink Corp.
Address	5F, No.6, Lane 130, Min-Chuan Rd., Hsin-Tien Dist., New Taipei City 231, Taiwan

Date of Receipt	June. 03, 2015
Issue Date	Mar. 14, 2017
Report No.	1730093R-RFUSP15V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.


The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Mar. 14, 2017

Report No.: 1730093R-RFUSP15V00



Product Name	Z-Wave/IP Gateway
Applicant	OvisLink Corp.
Address	5F, No.6, Lane 130, Min-Chuan Rd., Hsin-Tien Dist., New Taipei City 231, Taiwan
Manufacturer	OvisLink Corp.
Model No.	SG-101-FCC
EUT Rated Voltage	AC 100-240V, 50/60Hz
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2015 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Leven Huang)

Tested By :



(Engineer / Bruce Lan)

Approved By :




(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Operation Description	5
1.3. Tested System Details	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software.....	6
1.6. Test Facility	7
1.7. List of Test Equipment	8
2. Conducted Emission	9
2.1. Test Setup.....	9
2.2. Limits	9
2.3. Test Procedure	10
2.4. Uncertainty.....	10
2.5. Test Result of Conducted Emission	11
3. Radiated Emission	13
3.1. Test Setup.....	13
3.2. Limits	15
3.3. Test Procedure.....	16
3.4. Uncertainty.....	16
3.5. Test Result of Radiated Emission	17
4. Band Edge.....	25
4.1. Test Setup.....	25
4.2. Limit.....	25
4.3. Test Procedure.....	25
4.4. Uncertainty.....	25
4.5. Test Result of Band Edge.....	26
5. EMI Reduction Method During Compliance Testing.....	28
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Z-Wave/IP Gateway
Trade Name	
FCC ID.	ODMSG101
Model No.	SG-101-FCC
Frequency Range	908.4MHz & 916MHz
Number of Channels	2
Type of Modulation	FSK
Antenna Type	Monopole Antenna
Channel Control	Auto
USB Cable	Shielded, 1.0m
Power Adapter	MFR: Ktec, M/N: KSAS0050500100VUU Input: AC 100-240V, 50/60Hz, 0.18A Output: DC 5V, 1.0A

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency
Channel 1:	908.4MHz	Channel 2:	916MHz

Note:

1. The EUT is a Z-Wave/IP Gateway with a built-in 908.4MHz & 916MHz Z-Wave transceiver.
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 FLASH	Transcend	JF110	132706-1218	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Non-Shielded, 1.8m

1.4. Configuration of Test System

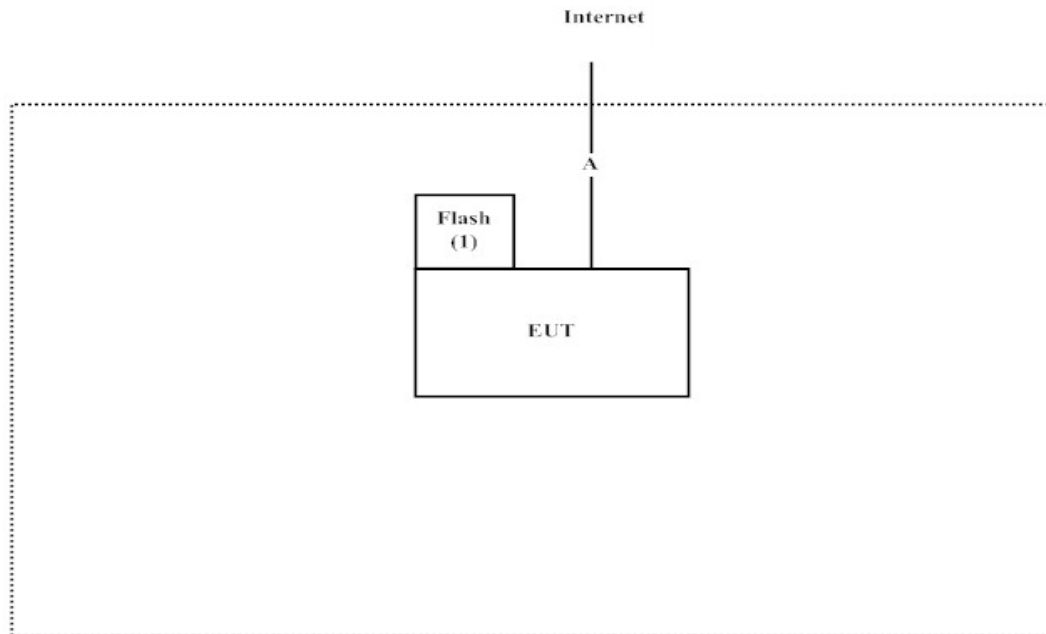

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Provide the AC Power Source, Starts the continuous transmit.
- (3) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW1014

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2016/10/1	2017/9/29
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2016/7/22	2017/7/21
X	Power Meter	Anritsu	ML2495A	6K00003357	2016/6/23	2017/6/22
X	Pulse power sensor	Anritsu	MA2411B	0846193	2016/6/23	2017/6/22
X	EMI Test Receiver	R&S	ESCS 30	100369	2016/10/13	2017/10/12
X	LISN	R&S	ESH3-Z5	836679/017	2017/1/7	2018/1/6
X	LISN	R&S	ENV216	100097	2017/1/7	2018/1/6
X	Coaxial Cable	QTK(Arnist)	RG 400	LC018-RG	2016/6/25	2017/6/24

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSP40	100170	2017/1/5	2018/1/4
	Loop Antenna	Teseq	HLA6121	37133	2016/3/18	2017/3/17
X	Bi-Log Antenna	Schaffner Chase	CBL6112B	2707	2016/6/11	2017/6/10
X	<u>Horn Antenna</u>	ETS-Lindgren	3117	00135205	2016/4/6	2017/4/5
X	<u>Horn Antenna</u>	Schwarzbeck	BBHA9170	9170430	2017/1/11	2018/1/10
X	<u>Pre-Amplifier</u>	QTK	AP/0100A	CHM/0901069	2016/6/23	2017/6/22
X	<u>Pre-Amplifier</u>	EMCI	EMC012630SE	980210	2017/1/26	2018/1/24
X	<u>Pre-Amplifier</u>	NARDA WE	DBL-1840N506	013	2016/9/30	2017/9/29
X	Filter	MicroTRON	BRM50701	019	2016/11/2	2017/11/1
X	Filter	Microwave Circuits	N0257881	36681	2016/12/7	2017/12/6
X	EMI Test Receiver	R&S	ESR26	101385	2016/9/29	2017/9/28
X	Coaxial Cable	QTK(Arnist)	SUCOFLEX 106	L1606-015C	2016/6/23	2017/6/22
X	EMI Test Receiver	R&S	ESCS 30	838251/001	2016/7/21	2017/7/20
X	Coaxial Cable	QTK(Arnist)	RG 214	LC003-RG	2016/6/16	2017/6/15
X	Coaxial signal switch	Anritsu	MP59B	6201415889	2016/6/16	2017/6/15

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuieTek EMI 2.0 V2.1.113.

2. Conducted Emission

2.1. Test Setup

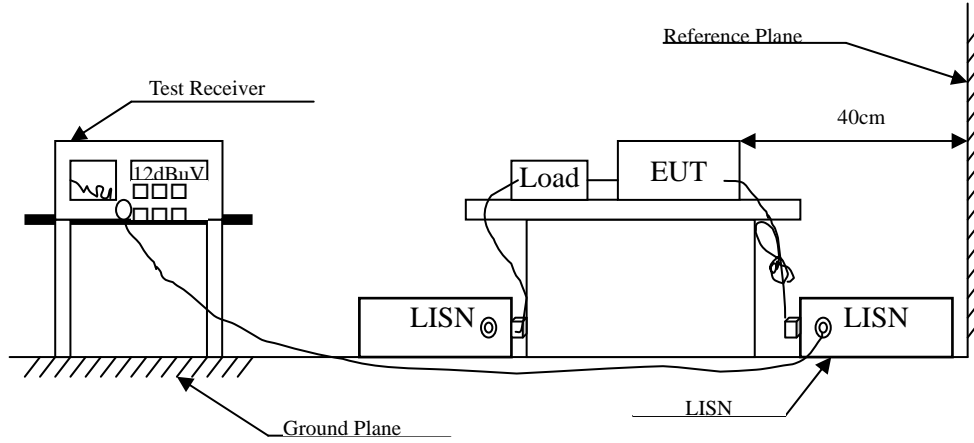

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : Z-Wave/IP Gateway
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.166	9.667	24.300	33.966	-31.577	65.543
0.255	9.663	9.970	19.633	-43.367	63.000
0.377	9.670	12.320	21.990	-37.524	59.514
0.576	9.681	30.470	40.151	-15.849	56.000
0.787	9.692	29.510	39.202	-16.798	56.000
0.900	9.699	23.650	33.349	-22.651	56.000
Average					
0.166	9.667	15.590	25.256	-30.287	55.543
0.255	9.663	2.430	12.093	-40.907	53.000
0.377	9.670	4.430	14.100	-35.414	49.514
0.576	9.681	24.690	34.371	-11.629	46.000
0.787	9.692	7.310	17.002	-28.998	46.000
0.900	9.699	1.690	11.389	-34.611	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Z-Wave/IP Gateway
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 2					
Quasi-Peak					
0.205	9.661	21.130	30.791	-33.638	64.429
0.302	9.666	22.540	32.206	-29.451	61.657
0.509	9.677	22.400	32.077	-23.923	56.000
0.744	9.690	30.310	40.000	-16.000	56.000
0.849	9.696	27.200	36.896	-19.104	56.000
1.271	9.719	28.000	37.719	-18.281	56.000
Average					
0.205	9.661	9.860	19.521	-34.908	54.429
0.302	9.666	17.650	27.316	-24.341	51.657
0.509	9.677	15.750	25.427	-20.573	46.000
0.744	9.690	7.680	17.370	-28.630	46.000
0.849	9.696	4.140	13.836	-32.164	46.000
1.271	9.719	22.150	31.869	-14.131	46.000


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Radiated Emission

3.1. Test Setup


Under 30MHz

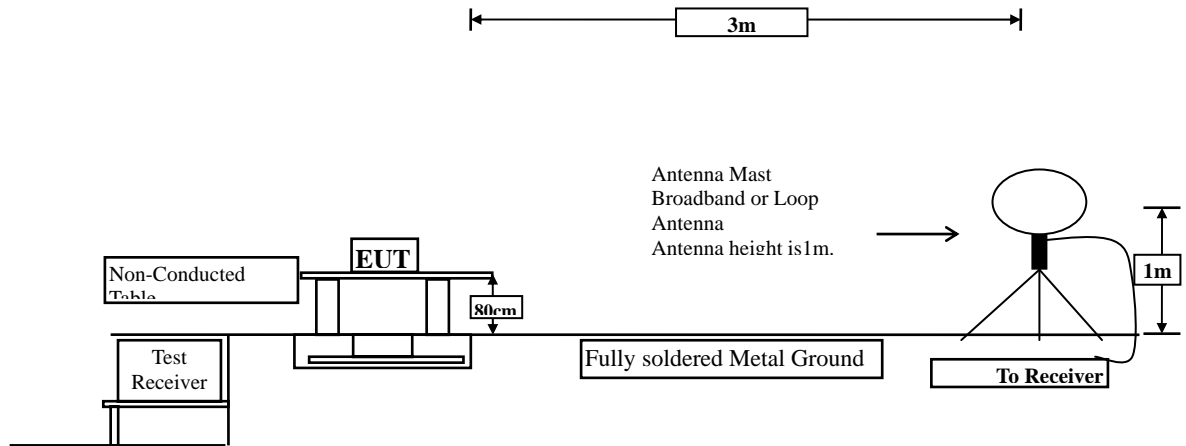

Below 1GHz

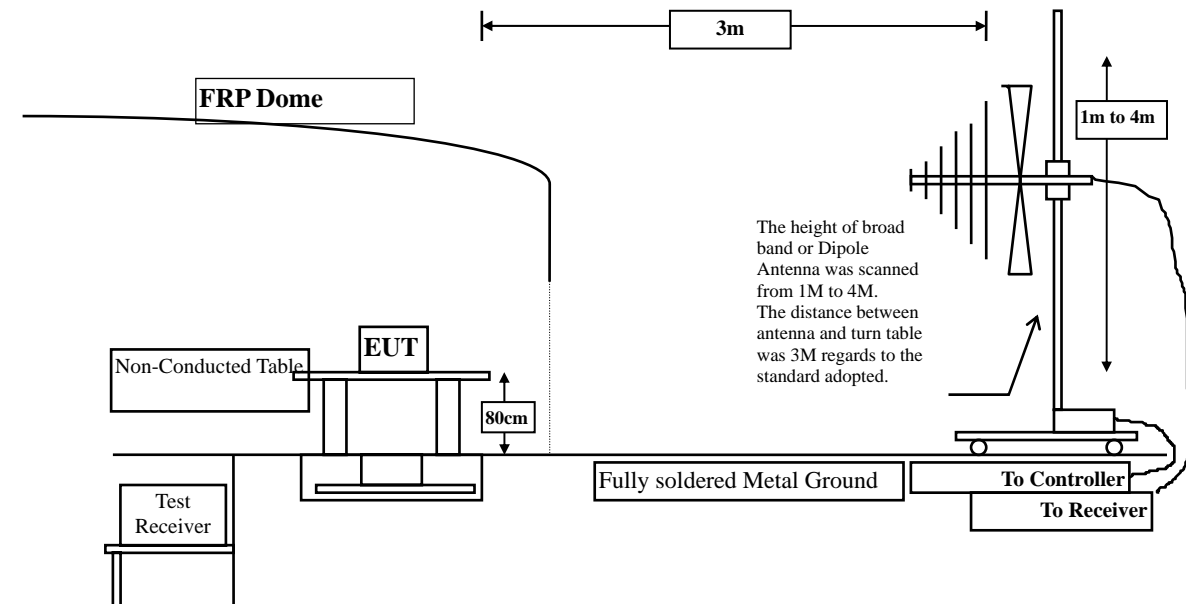

Above 1GHz

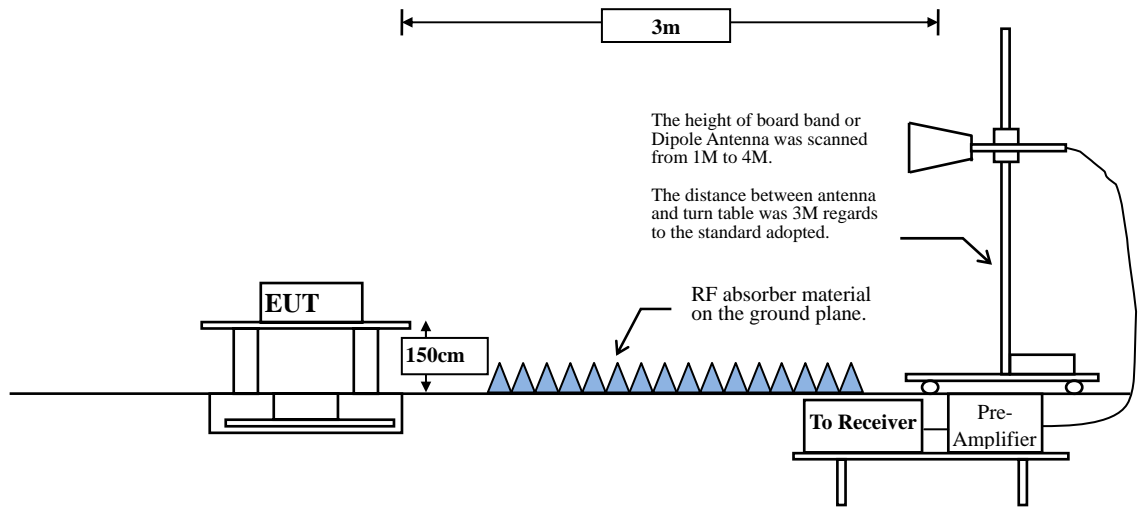

3.2. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

3.5. Test Result of Radiated Emission

Product : Z-Wave/IP Gateway
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (X-axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
908.400	-6.305	97.500	91.195	-2.805	94.000
916.000	-6.236	95.100	88.864	-5.136	94.000
Vertical					
908.400	-5.195	81.100	75.905	-18.095	94.000
916.000	-5.180	81.300	76.120	-17.880	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Z-Wave/IP Gateway
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (Y-axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
908.400	-6.305	95.700	89.395	-4.605	94.000
916.000	-6.236	92.500	86.264	-7.736	94.000
Vertical					
908.400	-5.195	86.400	81.205	-12.795	94.000
916.000	-5.180	86.500	81.320	-12.680	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Z-Wave/IP Gateway
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (Z-asix)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
908.400	-6.305	86.900	80.595	-13.405	94.000
916.000	-6.236	87.800	81.564	-12.436	94.000
Vertical					
908.400	-5.195	92.900	87.705	-6.295	94.000
916.000	-5.180	91.200	86.020	-7.980	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Z-Wave/IP Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
1816.800	-0.548	56.910	56.363	-17.637	74.000
2725.200	-2.122	49.500	47.378	-26.622	74.000
3633.600	-1.292	43.940	42.649	-31.351	74.000
4542.000	0.732	47.900	48.631	-25.369	74.000
5450.400	3.623	41.280	44.902	-29.098	74.000
6358.800	5.741	40.760	46.501	-27.499	74.000
7267.200	9.269	39.980	49.249	-24.751	74.000
8175.600	10.125	39.400	49.525	-24.475	74.000
9084.000	11.661	38.460	50.121	-23.879	74.000
Average Detector:					
1816.800	-0.548	54.040	53.493	-0.507	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Z-Wave/IP Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
1816.800	0.253	49.000	49.254	-24.746	74.000
2725.200	-2.970	46.270	43.299	-30.701	74.000
3633.600	-1.187	43.320	42.134	-31.866	74.000
4542.000	2.357	46.260	48.616	-25.384	74.000
5450.400	3.830	41.060	44.889	-29.111	74.000
6358.800	5.584	40.750	46.334	-27.666	74.000
7267.200	9.790	39.400	49.190	-24.810	74.000
8175.600	11.092	40.150	51.242	-22.758	74.000
9084.000	11.880	39.030	50.910	-23.090	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Z-Wave/IP Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (916MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
1832.000	-1.292	56.900	55.608	-18.392	74.000
2748.000	-1.900	50.880	48.980	-25.020	74.000
3664.000	-1.641	45.300	43.659	-30.341	74.000
4580.000	0.670	44.680	45.351	-28.649	74.000
5496.000	4.424	41.320	45.745	-28.255	74.000
6412.000	5.944	40.570	46.515	-27.485	74.000
7328.000	10.103	39.570	49.673	-24.327	74.000
8244.000	10.591	39.390	49.981	-24.019	74.000
9160.000	11.453	39.390	50.843	-23.157	74.000
Average Detector:					
1832.000	-1.292	54.780	53.488	-0.512	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Z-Wave/IP Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (916MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
1832.000	-0.666	48.280	47.614	-26.386	74.000
2748.000	-2.777	48.460	45.683	-28.317	74.000
3664.000	-1.420	44.170	42.749	-31.251	74.000
4580.000	2.285	43.870	46.155	-27.845	74.000
5496.000	4.419	40.890	45.309	-28.691	74.000
6412.000	6.060	40.570	46.630	-27.370	74.000
7382.000	11.316	39.530	50.846	-23.154	74.000
8244.000	11.499	39.920	51.419	-22.581	74.000
9160.000	11.539	39.620	51.159	-22.841	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Z-Wave/IP Gateway
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)


Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
37.772	-8.242	43.683	35.441	-4.559	40.000
193.221	-22.677	59.620	36.942	-6.558	43.500
239.856	-18.743	53.977	35.235	-10.765	46.000
480.801	-10.813	53.093	42.280	-3.720	46.000
780.817	-6.579	42.817	36.238	-9.762	46.000
961.138	-5.801	46.242	40.441	-13.559	54.000
Vertical					
99.952	-15.187	46.148	30.961	-12.539	43.500
193.221	-13.359	52.710	39.350	-4.150	43.500
480.801	-11.973	47.145	35.172	-10.828	46.000
630.032	-9.646	34.903	25.257	-20.743	46.000
774.599	-8.524	35.167	26.643	-19.357	46.000
961.138	-5.050	35.408	30.358	-23.642	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

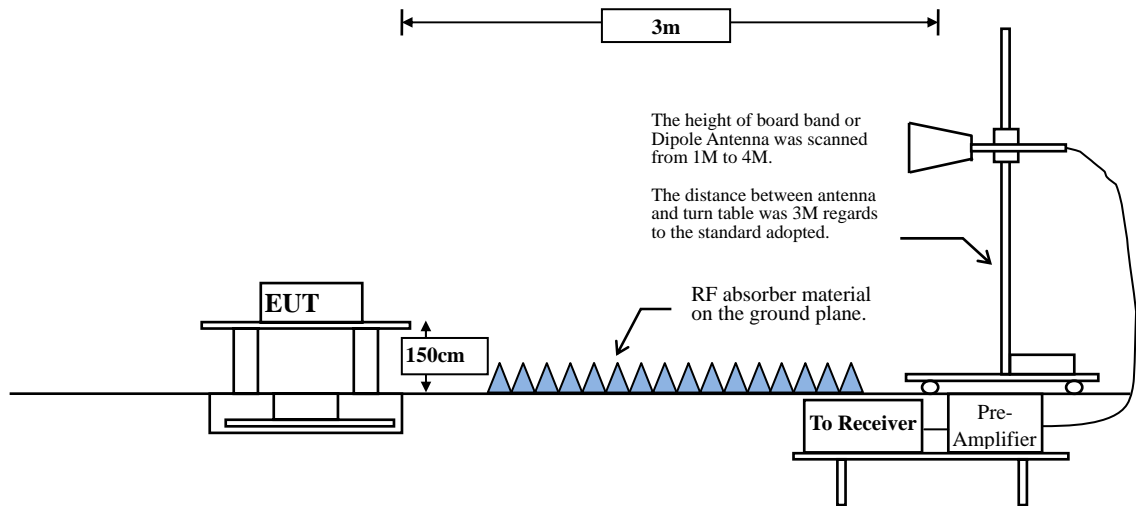

4.2. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz


4.5. Test Result of Band Edge

Product : Z-Wave/IP Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	-6.370	26.600	20.230	46.000	Pass
01(Quasi-Peak)	928.000	-6.122	29.400	23.278	46.000	Pass

Figure Channel 01: Horizontal (Quasi-Peak)

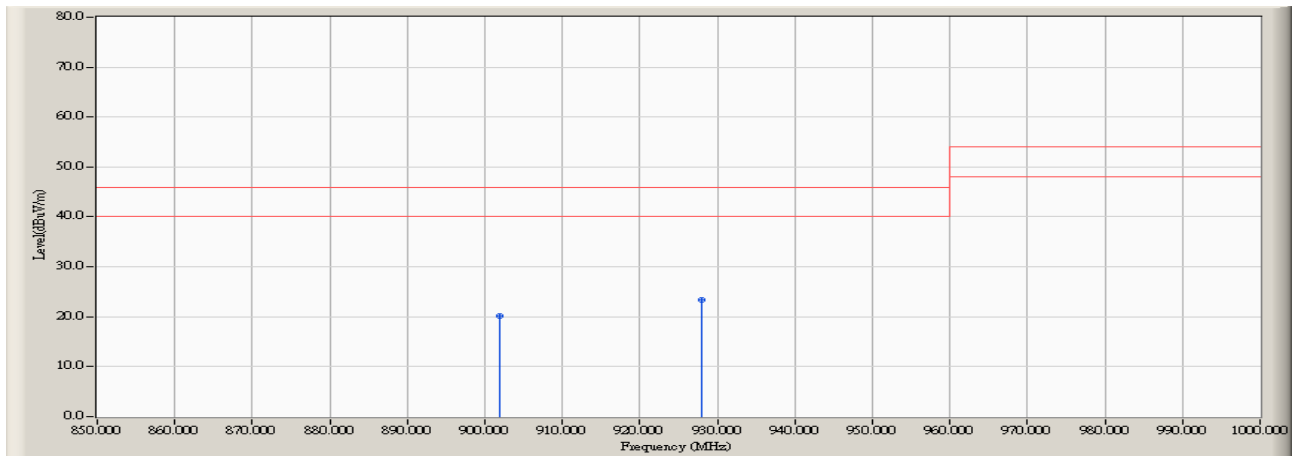

Note:


1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Z-Wave/IP Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Date : 2015/07/07
 Test Mode : Mode 1: Transmit (908.4MHz)

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	-5.220	25.300	20.080	46.000	Pass
01(Quasi-Peak)	928.000	-5.142	26.200	21.058	46.000	Pass

Figure Channel 01: Vertical (Quasi-Peak)

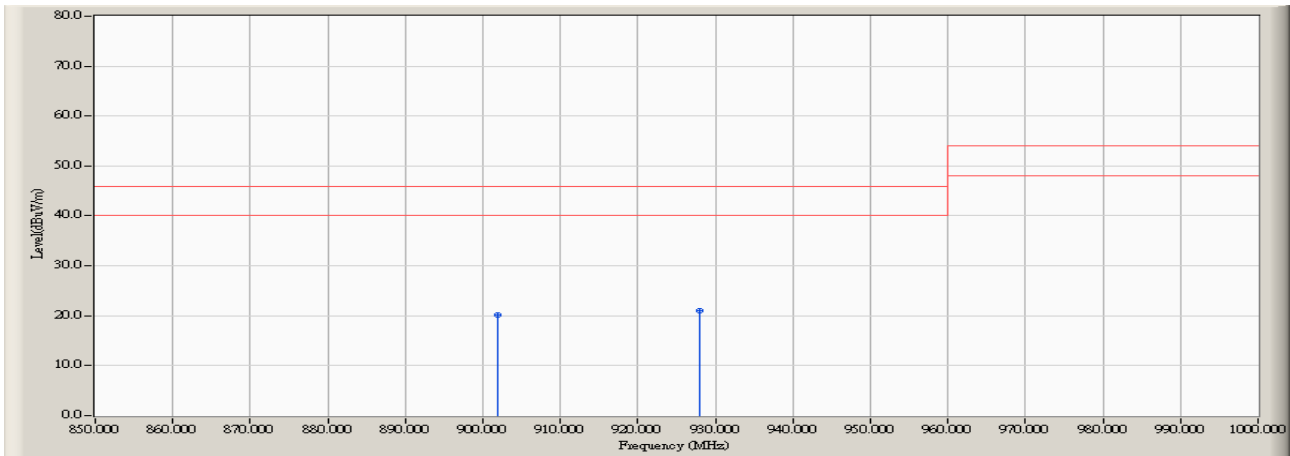

Note:

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.