




# TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A


To: F.C.C. Part 15:1998 Subpart C  
(Intentional Radiators)  
Sections 15.207 and 15.209

**Test Report Serial No:**  
RFI/EMCB1/RP39126B

<p><b>This Test Report Is Issued Under The Authority Of Brian Watson Technical Director:</b></p> 	<p><b>Checked By:</b></p> 
<p><b>Tested By:</b></p> 	<p><b>Release Version No: PDF01</b></p>
<p><b>Issue Date: 22 July 1999</b></p>	<p><b>Test Date: 30 June 1999 to 1 July 1999</b></p>

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.

This report may be copied in full.

<p>Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192</p>	<p>Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ</p>	
--	--	---

**RADIO FREQUENCY INVESTIGATION LTD.**

**TEST REPORT**

**EMC Department**

**S.No: RFI/EMCB1/RP39126B**

**Page 2 of 34**

**Issue Date: 22 July 1999**

**Test Of: John Falck Associates.  
Group 4 Securitas**

**S682 Proximity Reader Device 8000-5233-A**

**To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209**

---

This page has been left intentionally blank.

---

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

**Table of Contents**

1. Client Information .....	4
2. Equipment Under Test (EUT) .....	5
3. Test Specification, Methods And Procedures .....	7
4. Deviations From The Test Specification .....	9
5. Operation Of The EUT During Testing .....	10
6. Summary Of Test Results .....	11
7. Measurements, Examinations And Derived Results .....	12
8. Measurement Uncertainty .....	21
Appendix 1. Test Equipment Used .....	22
Appendix 2. Measurement Methods .....	23
Appendix 3. Test Configuration Drawings .....	27
Appendix 4. Graphical Test Results .....	31
Appendix 5. Photographs of EUT .....	33

---

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## 1. Client Information

<b>Company Name:</b>	John Falck Associates
<b>Address:</b>	36 New Barns Road Ely Cams CB7 4PN
<b>Contact Name:</b>	Mr J Falck

---

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **2. Equipment Under Test (EUT)**

The following information (with the exception of the Date of Receipt) has been supplied by the client:

### **2.1. Identification Of Equipment Under Test (EUT)**

Brand Name:	Group 4 Securitas
Model Name or Number:	8000-5233-A
Unique Type Identification:	S682
Serial Number:	9920002
Country of Manufacture:	UK
FCC ID Number:	0E5S682
Date of Receipt:	30 June 1999

### **2.2. Description Of EUT**

The equipment under test is a proximity reader device for access control. It transmits a pulsed carrier signal at 125 kHz from an integral loop antenna. When an access control tag is brought within range of the reader, it is activated and returns its unique code. This message is decoded in the receiver and output to the host system.

### **2.3. Modifications Incorporated In EUT**

The EUT has not been modified from what is described by the Model Name and Unique Type Identification stated above.

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

#### 2.4. Additional Information Related To Testing

Power Supply Requirement:	+ 12 Volt DC
Intended Operating Environment:	Commercial, Light Industry
Weight:	110 g
Dimensions:	126 mm x 46 mm x 25 mm
Interface Ports:	Weigand Interface 12 V / 0 V Power Input Connections

#### 2.5. Support Equipment

Description	12V DC Power Supply Unit
Brand Name:	Lascar
Model Name or Number:	PSU 20112
Serial Number:	None Stated by Client
Country of Manufacture:	None Stated by Client
FCC ID Number:	None Stated by Client
Cable Length and Type	6 Core Screened (2 used for PSU)
Connected to Port	EUT Power In

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

### **3. Test Specification, Methods And Procedures**

#### **3.1. Test Specification**

<b>Reference:</b>	F.C.C. Part 15 Subpart C. - Intentional Radiators* - Section 15.207 and 15.209
<b>Title:</b>	Code of Federal Regulations, Part 15 (47CFR15), 1997 Radio Frequency Devices: Intentional Radiators.
<b>Comments:</b>	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
<b>Purpose of Test:</b>	To determine whether the equipment complied with the applicable requirements of the specification for the purposes of certification.

\*Sections 15.209 (Radiated Emissions; general requirements). Section 15.207 (Conducted emissions; General Requirements).

#### **3.2. Methods And Procedures**

The methods and procedures used were as detailed in:

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (1992)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16 (1987)

Title: Specification for Radio Interference measuring apparatus and measurement methods.

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **3.3. Definition Of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

---



Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

#### **4. Deviations From The Test Specification**

None.

---

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **5. Operation Of The EUT During Testing**

### **5.1. Operating Conditions**

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a +12 volt DC power supply, which in turn was powered from a 110 volt, 60 Hz, AC mains supply.

### **5.2. Operating Modes**

The EUT was tested in the following operating modes:

- 1). Operate Mode: The EUT was fully operational with a valid tag placed within the field.
- 2). Standby Mode: The EUT was fully operational with no tag in the field.

The reason for choosing this mode was that it was defined by the client as being likely to be the worst case with regards EMC.

### **5.3. Configuration And Peripherals**

The EUT was tested in the following configuration:

The EUT was connected to 3 m of screened twisted pair cable.

The reason for choosing this configuration was that it was defined by the client as being likely to be the worst case with regards EMC.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **6. Summary Of Test Results**

### **6.1. Conducted Emissions**

<b>Range Of Measurements</b>	<b>Specification Reference</b>	<b>Compliance Status</b>
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.207 of C.F.R. 47: 1998	Complied

### **6.2. Radiated Emissions**

<b>Range Of Measurements</b>	<b>Specification Reference</b>	<b>Compliance Status</b>
Magnetic Field Strength 100 kHz to 30 MHz	Section 15.209 of C.F.R. 47: 1998	Complied
Electric Field Strength, 30 MHz to 1000 MHz	Section 15.209 of C.F.R. 47: 1998	Complied

### **6.3. Location Of Tests**

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RG. England.

---

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **7. Measurements, Examinations And Derived Results**

### **7.1. General Comments**

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. The measurement uncertainties stated were calculated in accordance with the requirements of NAMAS Document NIS 81 with a confidence level of 95%. Please refer to Section 8 for details of measurement uncertainties.

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

## **7.2. Test Results For AC Mains Conducted Emissions.**

### **7.2.1. Quasi-Peak Detector Measurements On Live And Neutral Lines**

#### **7.2.2. Standby Mode**

7.2.2.1. Plots of the initial scans can be found in Appendix 4.

7.2.2.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

<b>Frequency (MHz)</b>	<b>Line</b>	<b>Q-P Level (dBmV)</b>	<b>Q-P Limit (dBmV)</b>	<b>Margin (dB)</b>	<b>Result</b>
0.485	Live	14.1	48.0	33.8	Complied
0.485	Neutral	10.7	48.0	37.2	Complied
0.892	Live	27.7	48.0	20.2	Complied
0.892	Neutral	27.6	48.0	20.4	Complied
4.655	Live	27.6	48.0	20.4	Complied
4.655	Neutral	27.3	48.0	20.7	Complied
17.860	Live	38.8	48.0	9.2	Complied
17.860	Neutral	39.2	48.0	8.8	Complied
18.867	Live	43.2	48.0	4.8	Complied
18.870	Neutral	42.3	48.0	5.7	Complied
28.050	Live	38.6	48.0	9.4	Complied
28.050	Neutral	37.8	48.0	10.2	Complied

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **7.3. Test Results For AC Mains Conducted Emissions.**

#### **7.3.1. Operate Mode**

7.3.1.1. Plots of the initial scans can be found in Appendix 4.

7.3.1.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.485	Live	22.7	48.0	25.3	Complied
0.485	Neutral	22.5	48.0	25.5	Complied
0.881	Live	27.8	48.0	20.2	Complied
0.881	Neutral	27.6	48.0	20.4	Complied
4.655	Live	27.7	48.0	20.3	Complied
4.655	Neutral	27.3	48.0	20.6	Complied
17.860	Live	40.3	48.0	7.6	Complied
17.860	Neutral	39.3	48.0	8.6	Complied
18.615	Live	43.8	48.0	4.2	Complied
18.615	Neutral	42.9	48.0	5.1	Complied
28.050	Live	38.4	48.0	9.6	Complied
28.050	Neutral	38.0	48.0	10.0	Complied

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

## **7.4. Test Results For Radiated Magnetic Emissions: 0.1 to 30 MHz**

### **7.4.1. Standby Mode**

7.4.1.1. The client has stated that the fundamental and lowest operating frequency of the device is 125 kHz. Therefore radiated emission preliminary scans were performed from 100 kHz.

7.4.1.2. Plots of the initial scans can be found in Appendix 4.

7.4.1.3. The following table lists frequencies at which emissions were measured using both Average and Peak detectors at a test distance of 3 m. (results incorporate antenna factors and cable losses).

Frequency (MHz)	Ant. Pol.	Av. Level (dBmV/m)	Av. Limit (dBmV/m)	Margin (dB)	Result
0.1263	0°	43.7	105.5	61.8	Complied Note 1
0.1986	90°	93.4	101.6	8.2	Complied Note 1
0.2530	90°	73.6	99.5	25.9	Complied Note 1
0.3768	0°	56.7	96.0	39.3	Complied Note 1

Frequency (MHz)	Ant. Pol.	Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Margin (dB)	Result
0.1263	0°	48.5	125.5	77.0	Complied Note 1
0.1986	90°	97.6	121.6	24.0	Complied Note 1
0.2530	90°	80.6	119.5	38.9	Complied Note 1
0.3768	0°	58.3	116.0	57.7	Complied Note 1

7.4.1.4. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3 m. (results incorporate antenna factors and cable losses).

Frequency (MHz)	Ant. Pol.	Q-P Level (dBmV/m)	Q-P Limit (dBmV/m)	Margin (dB)	Result
0.6296	0°	51.8	71.6	19.8	Complied. Note 1
11.9700	90°	53.5	69.5	16.0	Complied. Note 1

Note 1. Each limit has been calculated at 3m from 300m using the following square of an inverse linear distance extrapolation factor (40dB/decade).

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

**Standby Mode (continued)**

7.4.1.5. Due to the nature of the EUT operation, measurements stated in section 15.35(c) of C.F.R. 47, for EUTs employing pulsed operation, are required. Radiated emission measurements were performed using a Peak detector. As the Peak level complies with the Average limit, the EUT was deemed to meet the requirements.

---



Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

### 7.4.2. Operate Mode

7.4.2.1. The client has stated that the fundamental and lowest operating frequency of the device is 125 kHz. Therefore radiated emission preliminary scans were performed from 100kHz.

7.4.2.2. Plots of the initial scans can be found in Appendix 4.

7.4.2.3. The following table lists frequencies at which emissions were measured using an Average and Peak detector at a test distance of 3m. (results incorporate antenna factors and cable losses).

Frequency (MHz)	Ant. Pol.	Av Level (dBmV/m)	Av Limit (dBmV/m)	Margin (dB)	Result
0.1263	0°	45.1	105.5	60.4	Complied Note 1
0.1986	0°	95.1	101.6	6.5	Complied Note 1
0.2530	90°	72.8	99.5	26.7	Complied Note 1
0.3768	0°	52.6	96.0	43.4	Complied Note 1

Frequency (MHz)	Ant. Pol.	Peak Level (dBmV/m)	Av Limit (dBmV/m)	Margin (dB)	Result
0.1263	0°	45.5	125.5	80.0	Complied Note 1
0.1986	90°	97.7	121.6	23.8	Complied Note 1
0.2530	90°	80.3	119.5	39.2	Complied Note 1
0.3768	0°	58.8	116.0	57.2	Complied Note 1

7.4.2.4. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3 m. (results incorporate antenna factors and cable losses).

Frequency (MHz)	Ant. Pol.	Q-P Level (dBmV/m)	Q-P Limit (dBmV/m)	Margin (dB)	Result
0.6296	90°	53.5	71.6	18.1	Complied. Note 1
11.9700	90°	50.3	69.5	19.2	Complied. Note 1

Note 1. Each limit has been calculated at 3m from 300m using the following square of an inverse linear distance extrapolation factor (40dB/decade).

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **Operate Mode (continued)**

7.4.2.5. Due to the nature of the EUT measurements stated in section 15.35(c) of C.F.R. 47, for EUTs employing pulsed operation, are required. Radiated emission measurements were performed using a Peak detector. As the Peak level complies with the Average limit, the EUT was deemed to meet the requirements.

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **7.5. Test Results For Radiated Emissions.**

### **7.5.1. Electric Field Strength Measurements of Spurious Emissions**

#### **7.5.2. Standby Mode**

7.5.2.1. The client has stated that the highest frequency generated or used in the EUT was 4 MHz. Therefore tests were performed up to 1000 MHz.

7.5.2.2. Plots of the initial scans can be found in Appendix 4.

7.5.2.3. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m. (results incorporate antenna factors and cable losses):

<b>Frequency (MHz)</b>	<b>Ant. Pol.</b>	<b>Q-P Level (dBmV/m)</b>	<b>Q-P Limit (dBmV/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
45.280	Vert.	21.1	40.0	18.9	Complied
55.590	Vert.	18.3	40.0	21.7	Complied
72.570	Vert.	16.9	40.0	23.1	Complied
81.254	Vert.	17.8	40.0	22.2	Complied
105.655	Vert.	21.0	43.5	22.5	Complied
122.761	Vert.	22.2	43.5	21.3	Complied

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### 7.5.3. Operate Mode

7.5.3.1. The client has stated that the highest frequency generated or used in the EUT was 4 MHz. Therefore tests were performed up to 1000 MHz.

7.5.3.2. Plots of the initial scans can be found in Appendix 4.

7.5.3.3. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m. (results incorporate antenna factors and cable losses):

Frequency (MHz)	Ant. Pol.	Q-P Level (dBmV/m)	Q-P Limit (dBmV/m)	Margin (dB)	Result
44.200	Vert.	21.7	40.0	18.3	Complied
46.500	Vert.	20.7	40.0	19.3	Complied
50.700	Vert.	18.4	40.0	21.6	Complied
57.208	Vert.	20.5	40.0	19.5	Complied
105.655	Vert.	20.7	43.5	22.8	Complied
122.900	Horiz.	21.8	43.5	21.7	Complied

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

## **8. Measurement Uncertainty**

8.1. Company Policy, as based on the NAMAS Accreditation Standard, M10, paragraph 12.11 (o), states that Test Reports shall include estimated uncertainty of the calibration or test result (this information need only appear in test reports and test certificates where it is relevant to the validity or application of the test result, where a client's instructions so require or where uncertainty affects compliance to a specification or limit).

8.2. The global uncertainties have been calculated in accordance with NAMAS NIS 81 (Edition 1, May 1994) as follows:

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level</b>	<b>Calculated Uncertainty</b>
Conducted Emissions	450 kHz to 30 MHz	95%	+/- 2.2 dB
Radiated Magnetic Field Emissions	100 kHz to 30 MHz	95%	+/- 2.6 dB
Radiated Electric Field Emissions	30 MHz to 1000 MHz	95%	+/- 4.9 dB

8.3. Measurement uncertainties have been applied in accordance with NAMAS document NIS 81 (edition 1, May 1994), and in the absence of any specification criteria, guidance, or code of practice, compliance has been judged on the basis of shared risk.

8.4. In the case of emissions tests, the measured value of the disturbance from the product sample shall be compared directly with the limits. If the measured value is equal to or less than the limit the product is deemed to pass the test.

8.5. In the case of immunity tests, the equipment is deemed to pass the test if it fulfils the stated performance criteria at the required or a higher severity level. The measurement uncertainty has been taken into account in the calibration procedures stated in the relevant basic standard.

8.6. The methods used to calculate the above uncertainties are in line with those used for calibration laboratories contained in NAMAS document NIS 3003 Edition 8 "The Expression of Uncertainty and Confidence in Measurement" May 1995, which align with international recommendations "Guide to the Expression of Uncertainty in Measurement" ISO/IEC/OIML/BIPM (Prepared by ISO/TAG 4: January 1993).

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

### Appendix 1. Test Equipment Used

Instrument	Manufacturer	Model	RFI No.
L.I.S.N.	R & S	ESH3-Z5	A004
Loop Antenna	R & S	HFH2-Z2	A007
Attenuator	Narda	771-03	A262
Mast Controller	R & S	HCC	A276
Antenna Mast	R & S	HCM	A277
Pulse Limiter	R & S	ESH3-Z2	A287
Test Receiver	R & S	ESVP	M002
Spectrum Monitor	R & S	EZM	M003
Test Receiver	R & S	ESH3	M023
Receiver	R & S	ESBI	M008
Site 9	RFI	9	S209
Site 1	RFI	1	S201
Bilog Antenna	Chase EMC	CBL6112B	A1037
Cable	Rosenberger	UFA210A-1- 1969-704704	C458

**NB** In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

## Appendix 2. Measurement Methods

### A2.1. AC Mains Conducted Emissions: FCC Part 15

A2.1.1. AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.1.2. The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane and with the EUT powered via a 60 Hz AC mains supply.

A2.1.3. Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.1.4. Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

A2.1.5. The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)*
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

\* In some instances an Average detector function may also have been used.

**Test Of: John Falck Associates.  
Group 4 Securitas**

**To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209**

---

## **A2.2. Radiated Emissions, 30 to 1000 MHz**

A2.2.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.2.2. Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.2.3. The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak detector.

A2.2.4. For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.2.5. All measurements on the open area test site were performed using broadband antennas.

A2.2.6. On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

---



**Test Of: John Falck Associates.  
Group 4 Securitas****To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209**

---

A2.2.7. The test equipment settings for radiated emissions measurements were as follows:

<b>Receiver Function</b>	<b>Initial Scan</b>	<b>Final Measurements</b>
Detector Type:	Peak	Quasi-Peak (CISPR)
Mode:	Max Hold	Not applicable
Bandwidth:	100 kHz	120 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Spurious radiated emissions were measured against the limits specified in Section 15.209 of C.F.R. 47 Part 15 Subpart C - Intentional Radiators.

---

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

### **A2.3 Radiated Magnetic Field Strength, 0.1 to 30 MHz**

A2.3.1 An initial 3 metre scan was performed in a screened enclosure in order to minimise the effect of background radiation and to identify any emissions from the EUT.

A2.3.2 Once emissions were identified from the initial scan, then for the actual measurements, the EUT was arranged on the turntable of an open area test site as detailed in the specification.

A2.3.3 Unless otherwise stated, all measurements were performed at a 3 metre measurement distance using the appropriate limits. Where final measurements were performed at a distance other than that specified in section 15.209 of C.F.R. 47, the limit was extrapolated to the specified distance by the two square of the inverse linear extrapolation factor: 40dB/decade.

A2.3.4 At each frequency where a signal was found, the level was maximised by initially rotating the turntable through 360 degrees and then rotating the loop antenna through 90 degrees.

A2.3.5 At this point, any signal found to be between the limit and a level 6 dB below it was further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

A2.3.6 The test equipment settings for radiated magnetic emissions measurements were as follows:

<b>Receiver Function</b>	<b>Initial Scan</b>	<b>Measurement</b>
Detector Type:	Peak	Quasi-Peak (CISPR) , Average or Peak. (Depending on frequency range).
Mode:	Max Hold	Not applicable
Bandwidth:	200 Hz (Frequency <0.15 MHz) 10 kHz (Frequency >0.15 MHz)	200 Hz (Frequency <0.15 MHz) 9 kHz (Frequency >0.15 MHz)
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **Appendix 3. Test Configuration Drawings**

This appendix contains the following drawings:


<b>Drawing Reference Number</b>	<b>Title</b>
DRG\39126ETF04\EMICON	Test configuration for measurement of conducted emissions
DRG\39126ETF04\EMIRAD	Test configuration for measurement of radiated emissions
DRG\39126ETF04\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

DRG\39126ETF04\EMICON

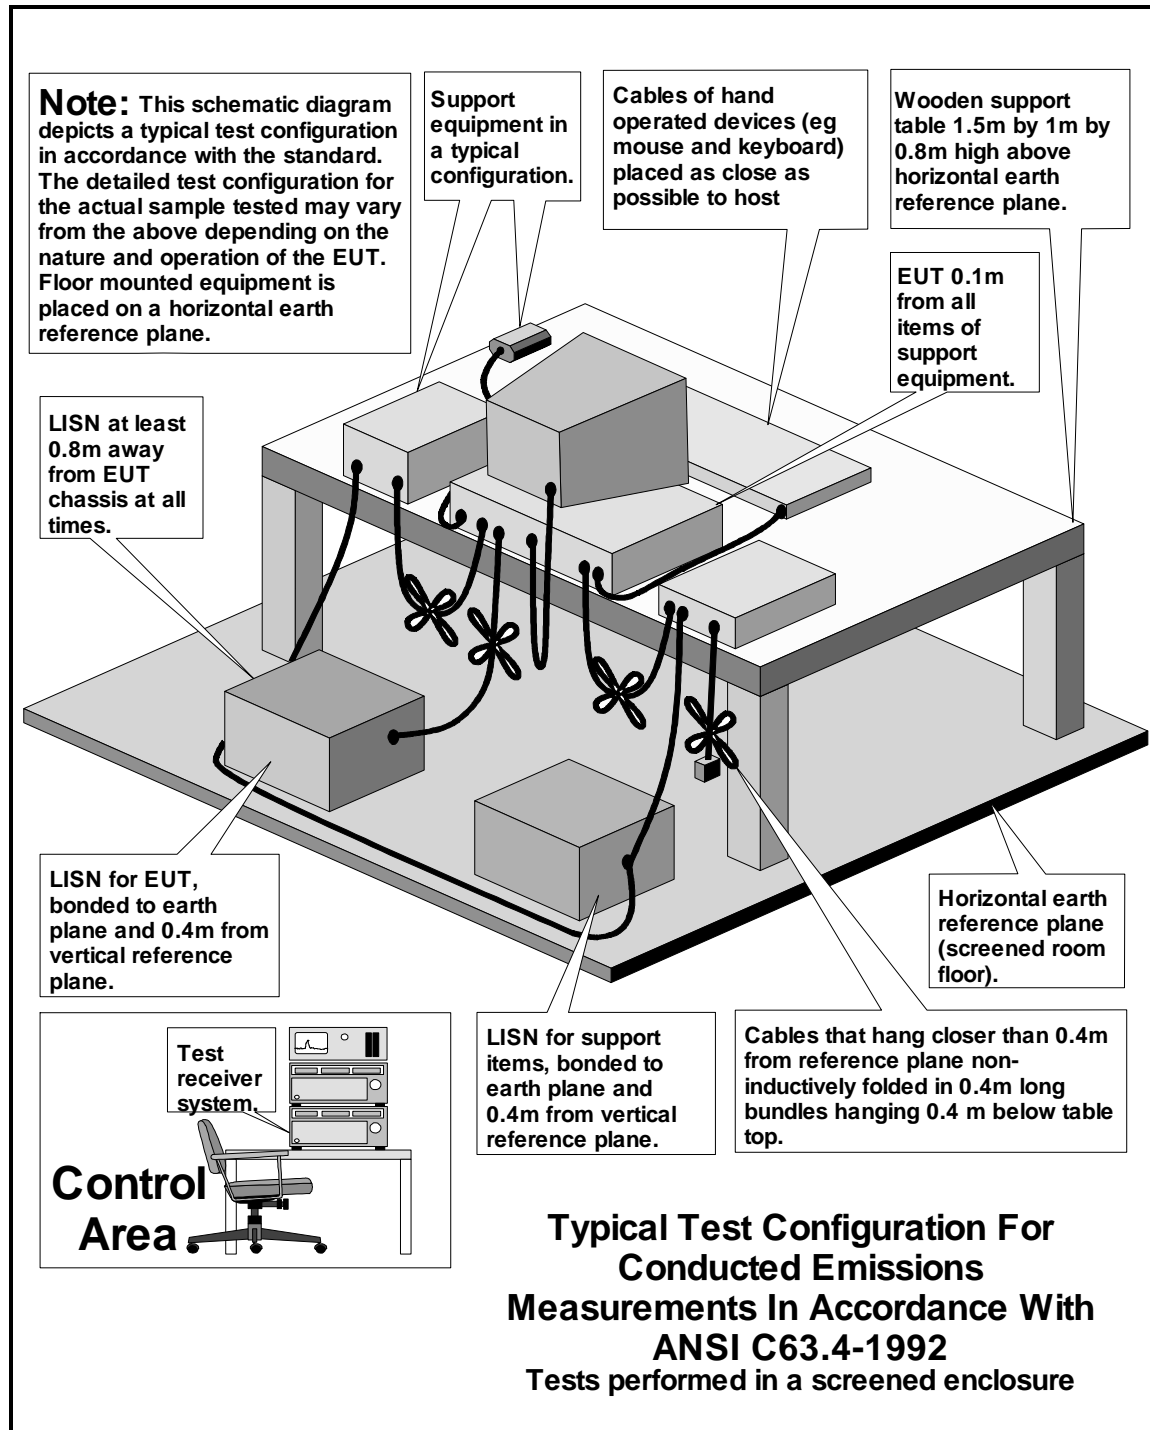


Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

DRG\39126ETF04\EMIRAD

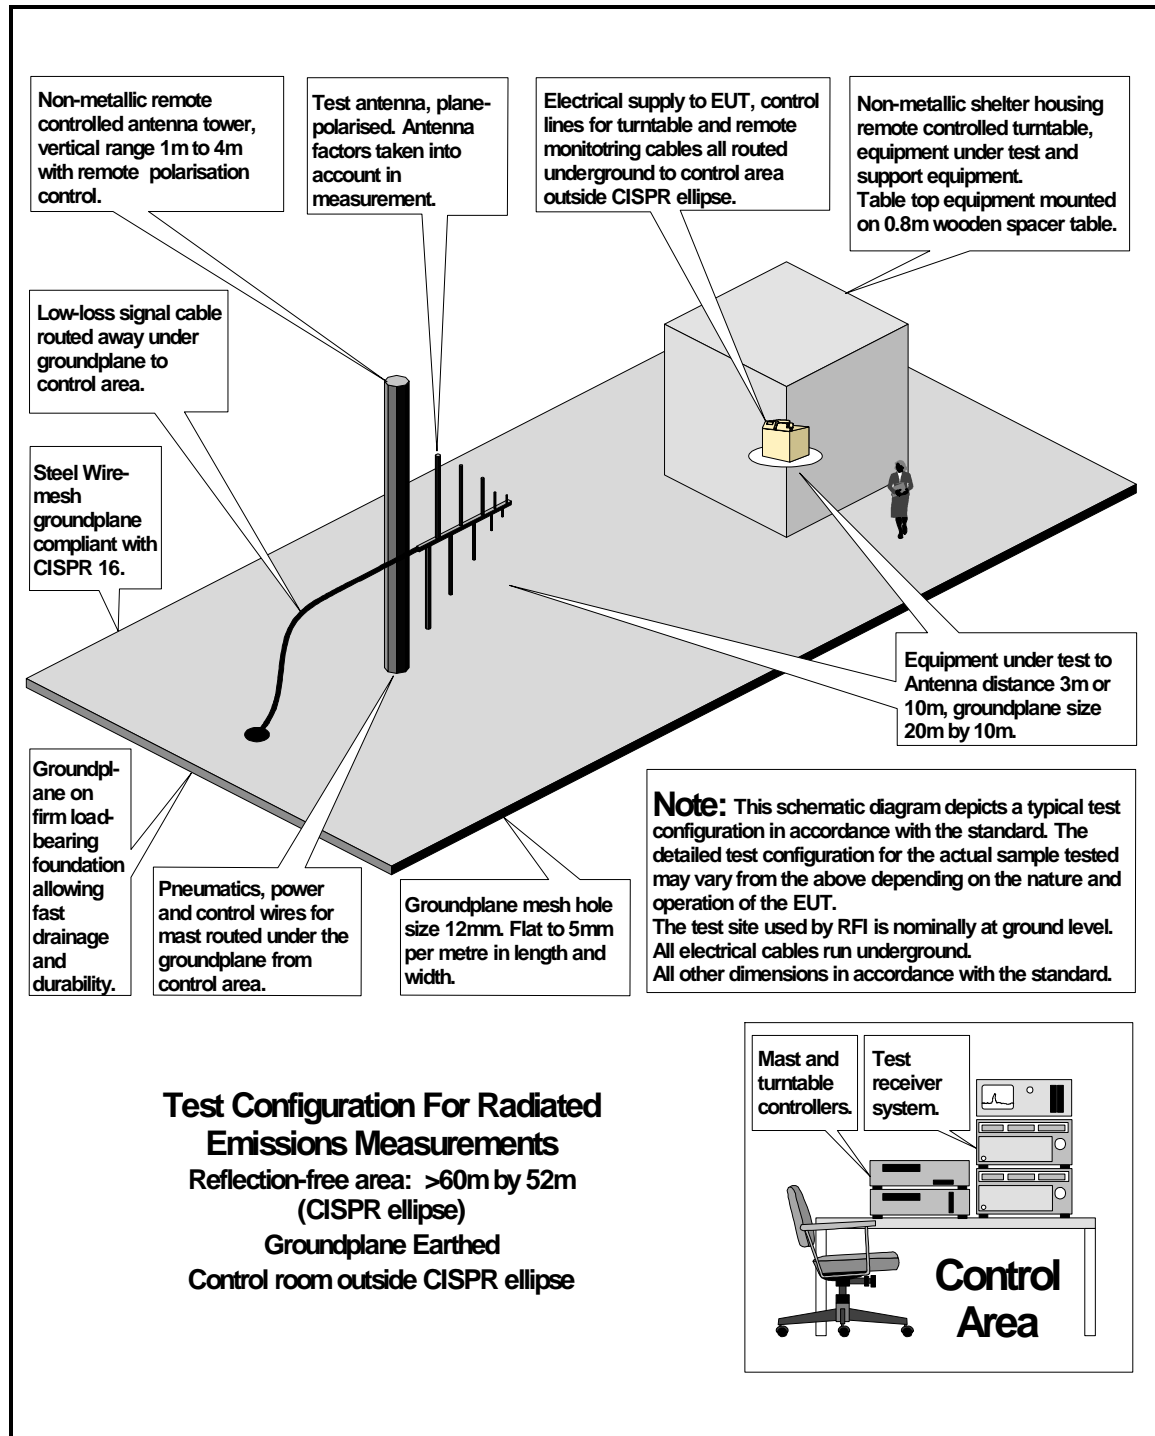


Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

DRG\39126ETF04\001

### Configuration of EUT

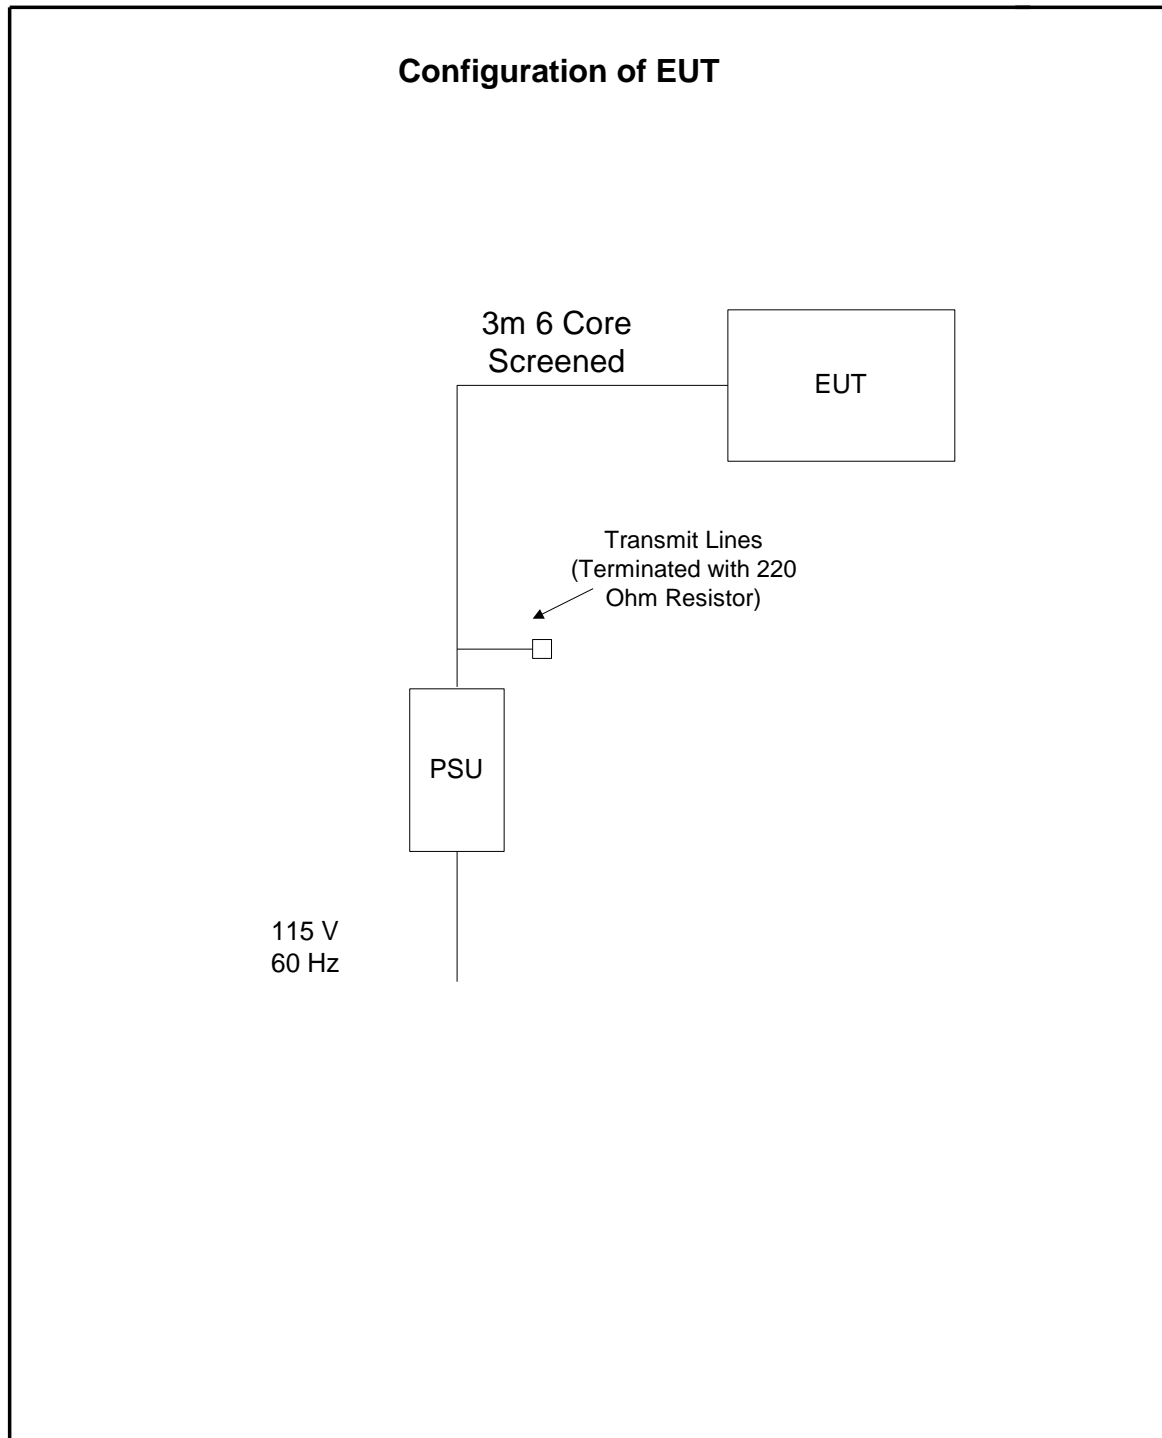

Test Of: John Falck Associates.  
Group 4 Securitas

S682 Proximity Reader Device 8000-5233-A

To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **Appendix 4. Graphical Test Results**

This appendix contains the following graphs:

<b>Graph Reference Number</b>	<b>Title</b>
GPH\39126\JD04\001	Scan of Conducted Emissions: 0.45 to 30 MHz. Standby Mode. Live Line
GPH\39126\JD04\002	Scan of Conducted Emissions: 0.45 to 30 MHz. Standby Mode. Neutral Line
GPH\39126\JD04\003	Scan of Conducted Emissions: 0.45 to 30 MHz. Operate mode. Neutral Line
GPH\39126\JD04\004	Scan of Conducted Emissions: 0.45 to 30 MHz. Operate mode. Live Line
GPH\39126\JD04\005	Scan of Radiated Electric Field: 30 MHz to 1000 MHz. Both Polarisation's. Standby Mode
GPH\39126\JD04\006	Scan of Radiated Electric Field: 30 MHz to 1000 MHz. Both Polarisation's. Operate Mode
GPH\39126\JD04\007	Scan of Radiated Electric Field: 100 kHz to 30MHz. Operate mode
GPH\39126\JD04\008	Scan of Radiated Electric Field: 100 kHz to 30MHz. Operate mode


**These pages are not included in the total number of pages for this report.**

---



Date 01 Jul '99 Time 14:04:06  
 Ref.Lvl 90.00 dBµV  
 Marker 48.31 dBµV  
 17.70 MHz

Res.Bw 9 kHz [imp]  
 TG.Lvl1 Off  
 CF.Stp 2.955 MHz  
 Vid.Bw 100 kHz  
 RF.Att 10 dB  
 Unit [dBµV]

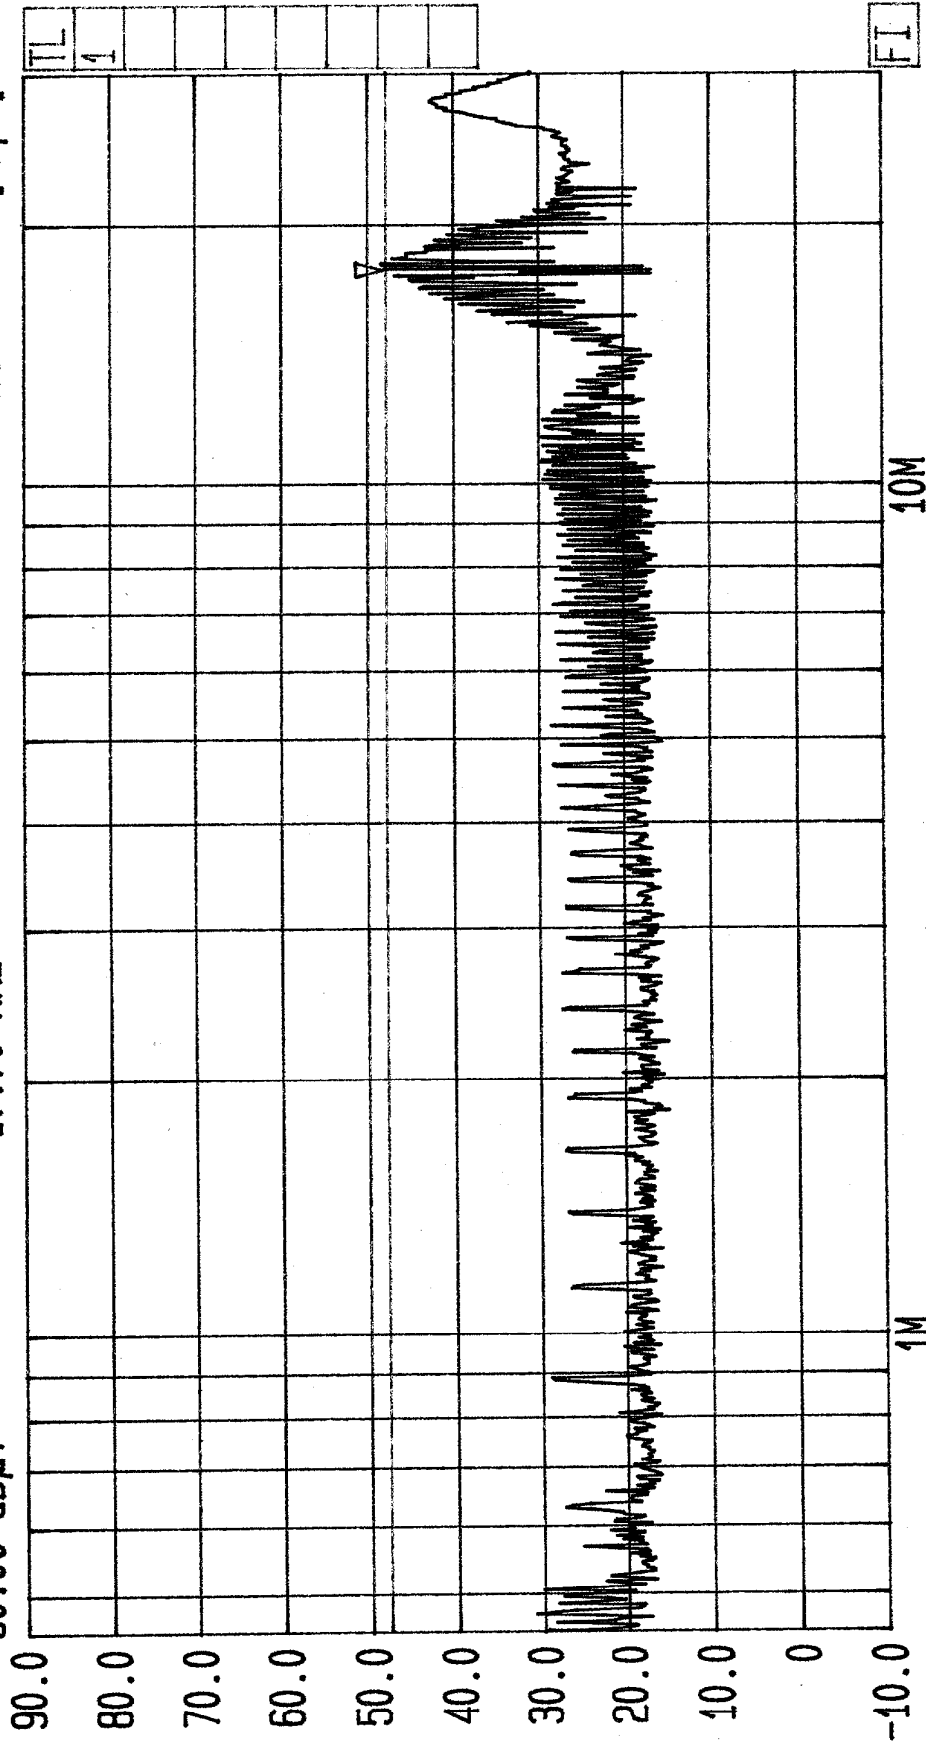

Start 450 kHz  
 Stop 30 MHz  
 Span 29.55 MHz  
 Center 3.67423 MHz  
 Sweep 2.2 s  
 Conducted Tested By RFI For John Falck Assoc. EUT: S682  
 Class B Limit Standby Mode Live Line  
 FCC Part 15 Sub. B  
 GPH: 39126/04/001






Date 01.Jul.'99 Time 14:52:23

Ref.Lvl 90.00 dBµV

Marker 43.03 dBµV  
18.63 MHz

Res.Bw 9 kHz [imp]  
TG.Lvl Off  
CF.Stp 2.955 MHz

Vid.Bw 100 kHz  
RF.Att 10 dB  
Unit [dBµV]

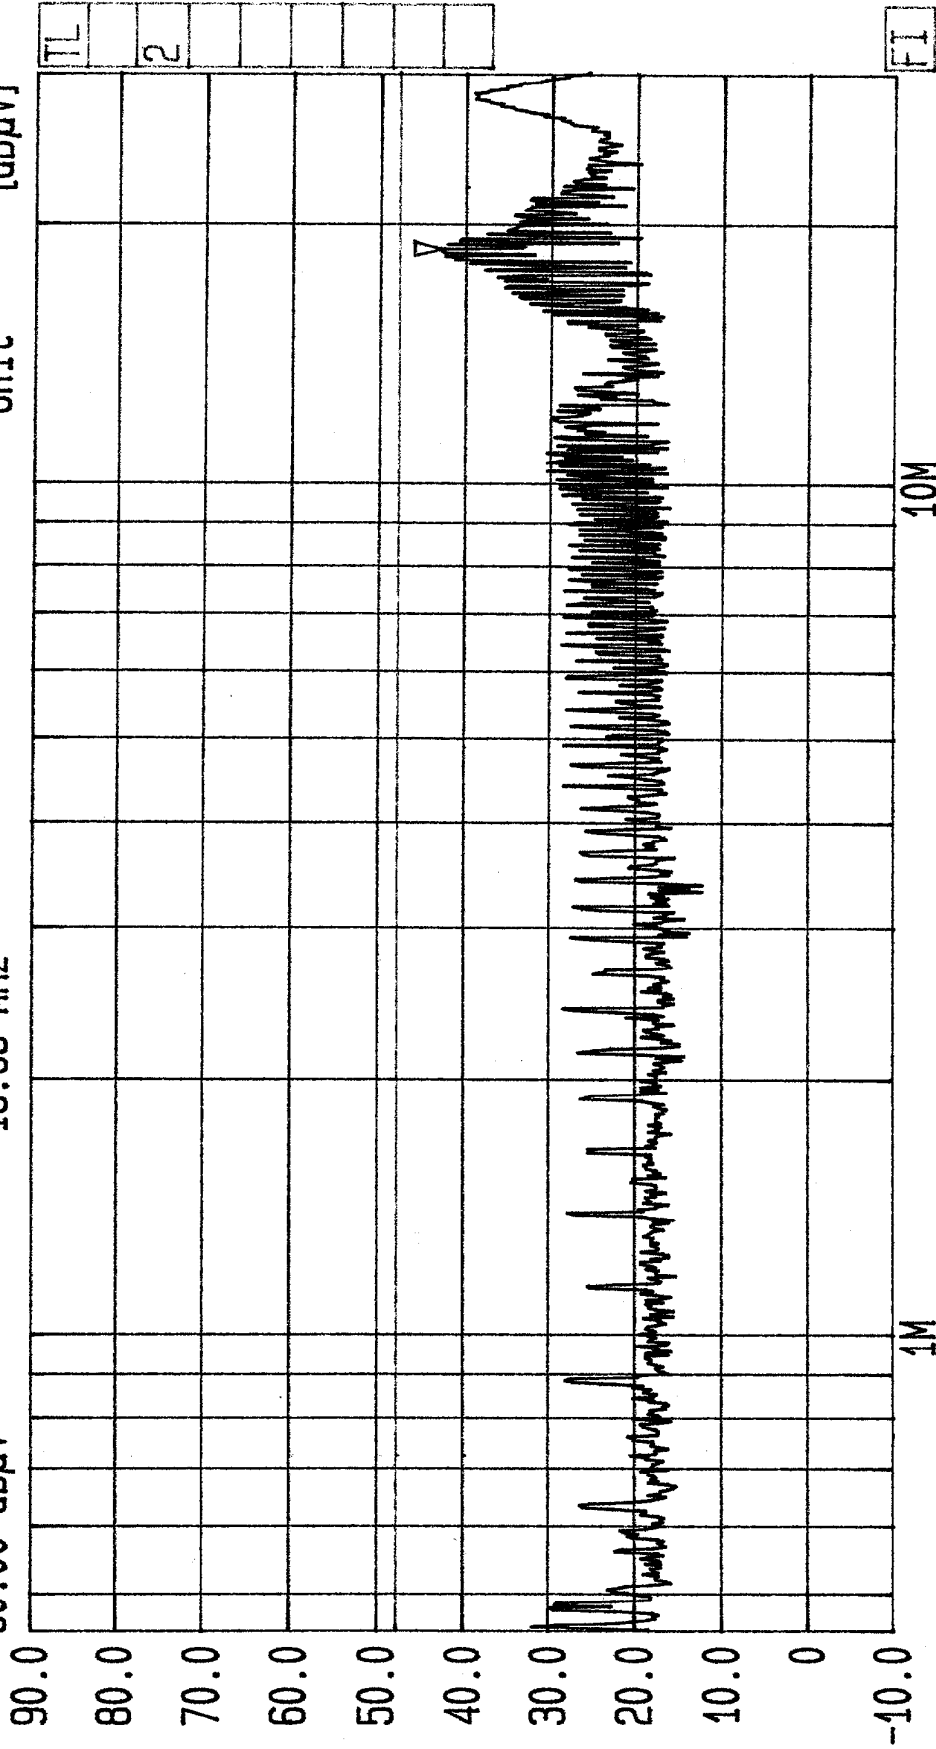


Start 450 kHz  
Span 29.55 MHz  
Center 3.67423 MHz  
Sweep 2.2 s  
Stop 30 MHz

Conducted Tested By RFI For John Falck Assoc. EUT: S682 FCC Part 15 Sub. B  
Class B Limit Standby Mode Neutral Line GPH: 39126/04/002



Date 01.Jul.'99 Time 15:03:34  
 Ref.Lvl 90.00 dBµV  
 Marker 43.23 dBµV  
 18.63 MHz

Res.Bw 9 KHz [imp] 100 KHz  
 TG.Lvl1 Off  
 CF.Stp 2.955 MHz  
 RF.Att 10 dB  
 Unit [dBµV]

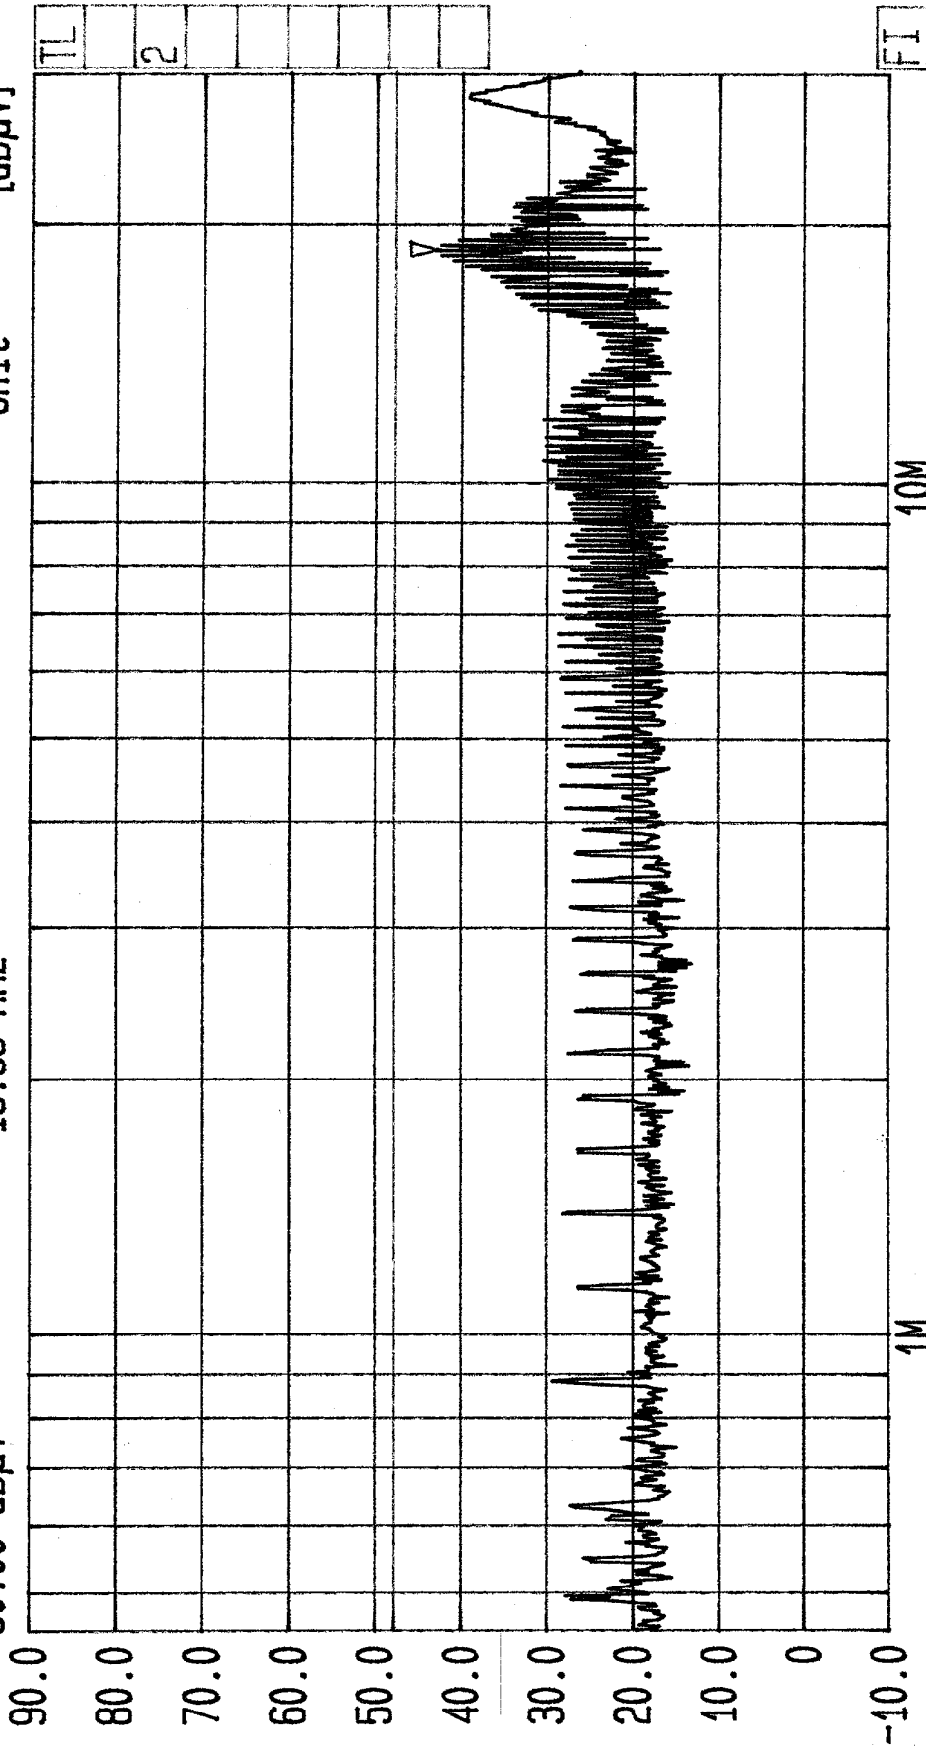


Start 450 kHz Stop 30 MHz  
 Span 29.55 MHz Sweep 2.2 s  
 Center 3.67423 MHz  
 Conducted By RFI For John Falck Assoc. EUT: S682 FCC Part 15 Sub. B  
 Class B Limit Operate Mode Neutral Line GPH: 39126/04/003



Date 01.Jul.'99 Time 15:16:00  
 Ref.Lvl 90.00 dBµV  
 Marker 44.22 dBµV  
 18.69 MHz

Res.Bw 9 kHz [imp] 100 kHz  
 TG.Lvl Off  
 CF.Stp 2.957 MHz  
 RF.Att 10 dB  
 Unit [dBµV]

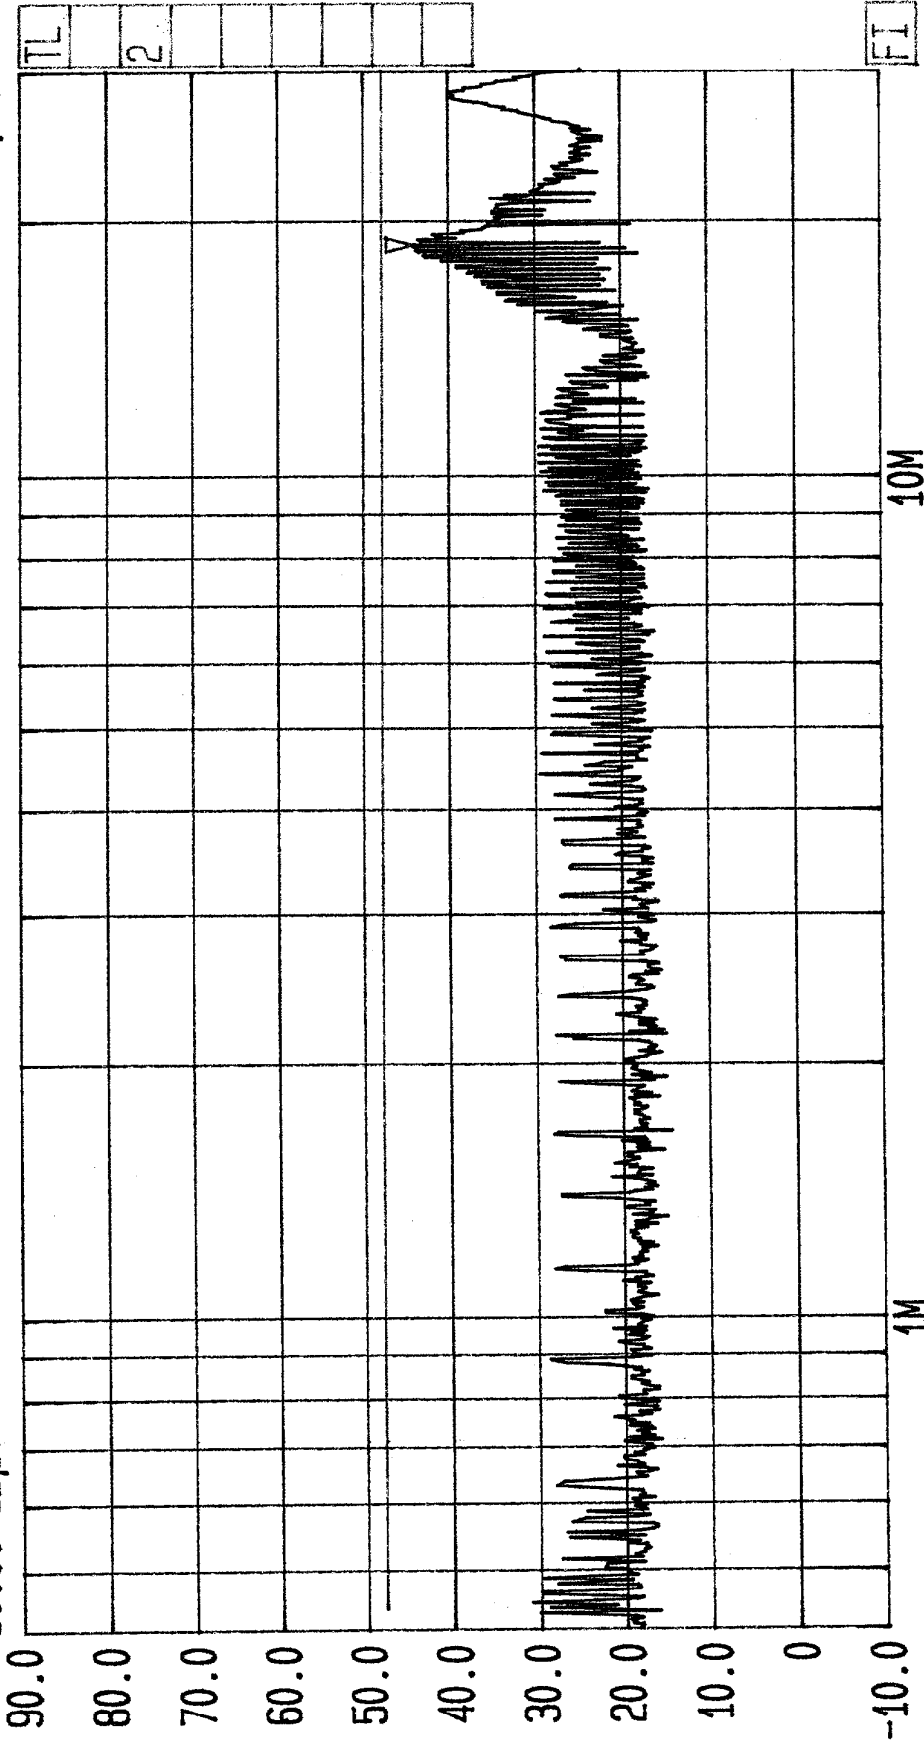


Start 425 kHz Stop 30 MHz  
 Span 29.57 MHz Center 3.57071 MHz Sweep 2.2 s  
 Tested By RFI For John Falck Assoc. EUT: S682 FCC Part 15 Sub. B  
 Operate Mode Live Line GPH: 39126/04/004



Date 01.Jul.'99 Time 15:34:54  
 Ref.Lvl 70.00 dB\* Marker 41.01 dB\*  
 105.1 MHz

Res.Bw 120 kHz [imp] Vid.Bw 100 kHz  
 TG.Lvl Off RF.Att 0 dB  
 CF.Stp 97.000 MHz Unit [dBμV/m]

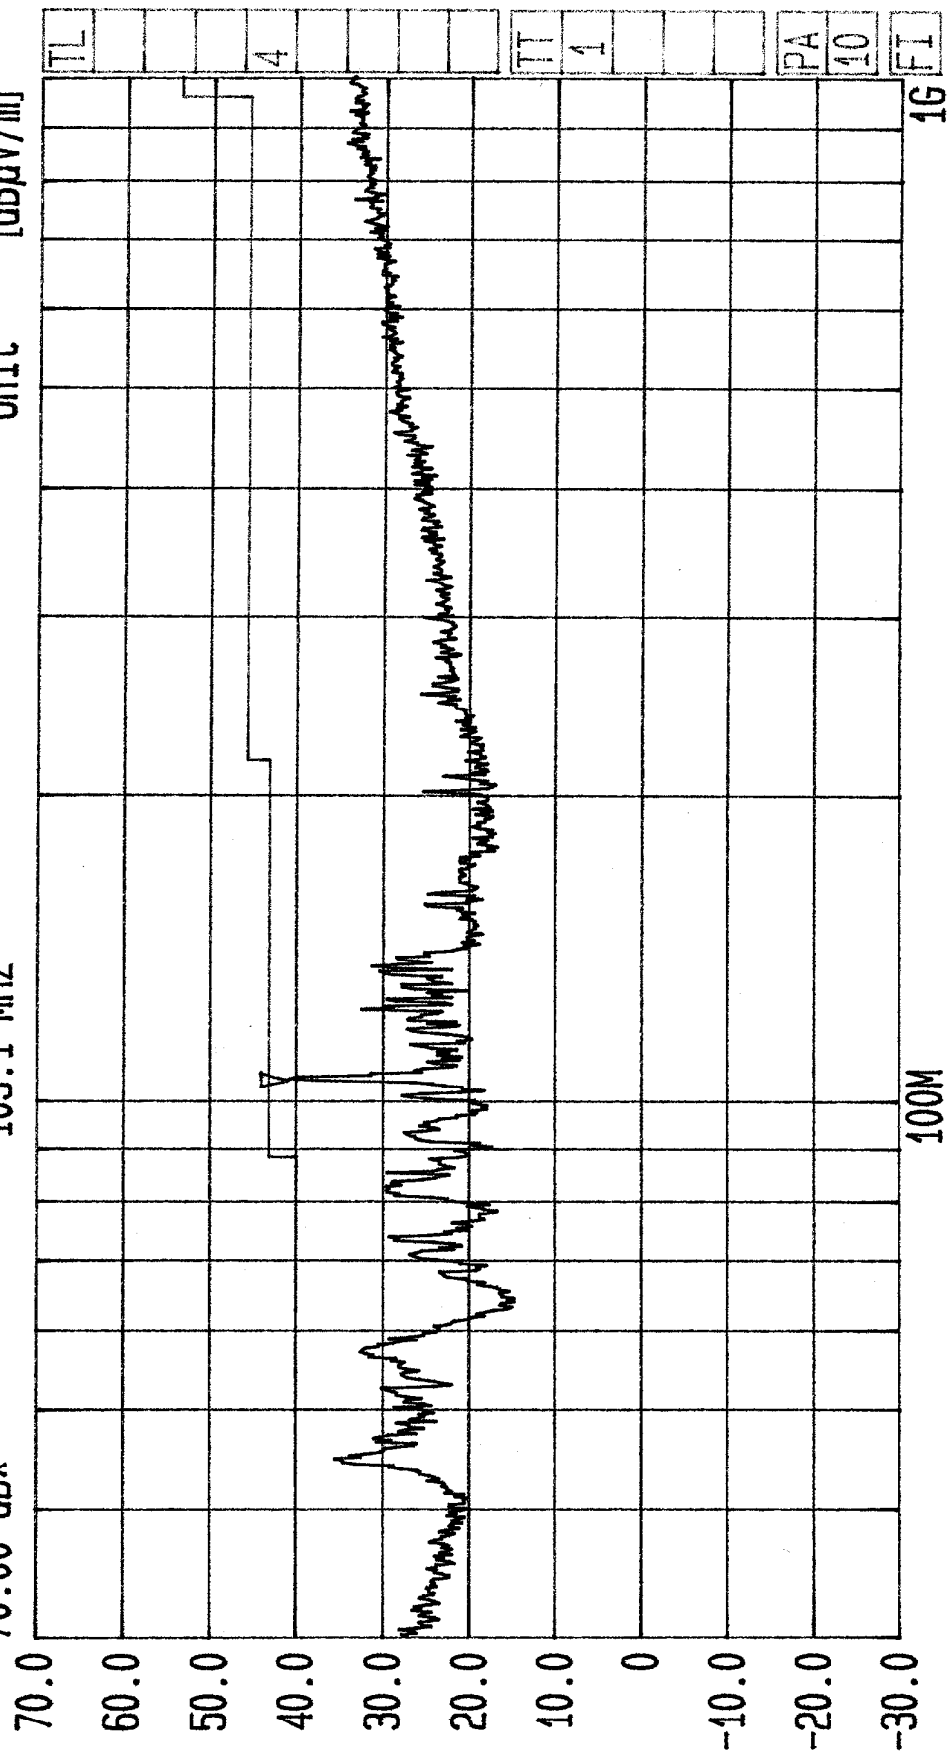


Start 30 MHz Stop 1 GHz  
 Span 970 MHz Sweep 80 ms  
 Center 173.2 MHz  
 Radiated Class B Limit Tested By RFI For John Falck Assoc. EUT: S682 FCC Part 15 Sub. B  
 Standby Mode Neutral Line GPH: 39126/04/005



Date 01.Jul.'99 Time 16:15:06  
 Ref.Lvl 70.00 dB\*  
 Marker 20.39 dB\*  
 122.4 MHz

Res.Bw 120 kHz [imp]  
 TG.Lvl off  
 CF.Stp 97.000 MHz  
 Vid.Bw 100 kHz  
 RF.Att 0 dB  
 Unit [dBμV/m]

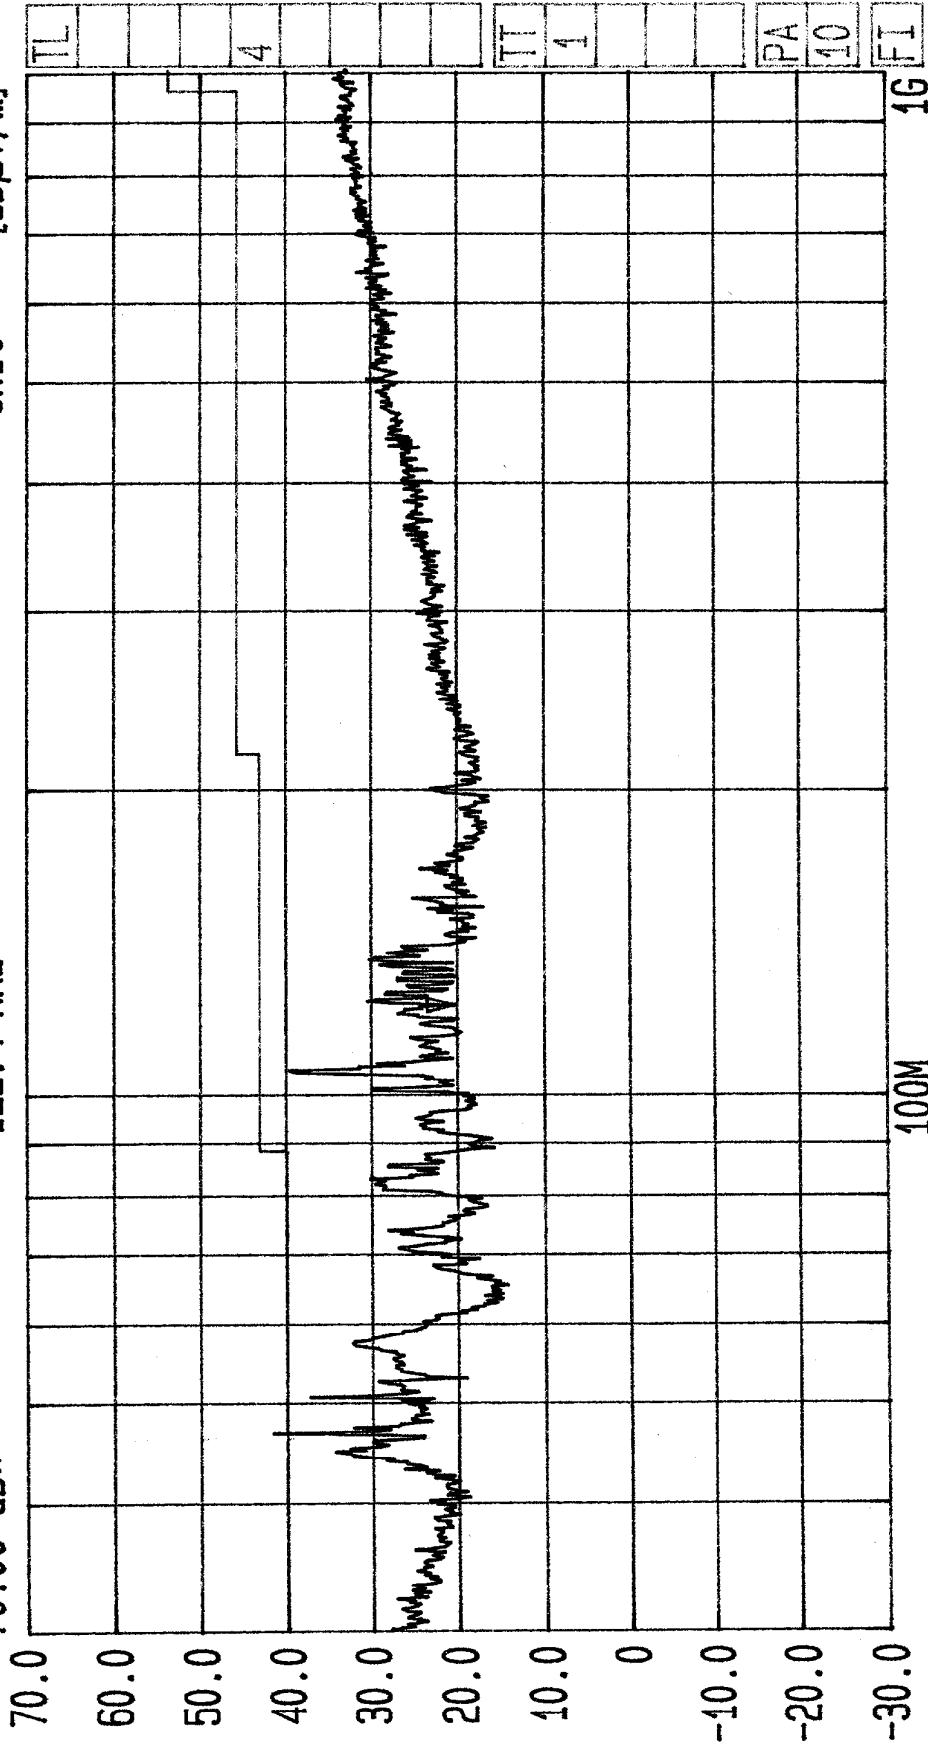


Start 30 MHz  
 Stop 1 GHz  
 Span 970 MHz  
 Sweep 380 ms  
 Center 173.2 MHz  
 EUT: S682  
 FCC Part 15 Sub. B  
 Operate Mode  
 Tested By RFI For John Falck Assoc.  
 GPH: 39126/04/006



Date 01.Jul.'99 Time 16:55:50  
 Ref.Lvl 91.59 dBx  
 Marker 127.2 kHz

Res.Bw 10 kHz [imp]  
 TG.Lvl Off  
 CF.Stp 2.990 MHz  
 Vid.Bw 100 kHz  
 RF.Att 10 dB  
 Unit [dBµV/m]

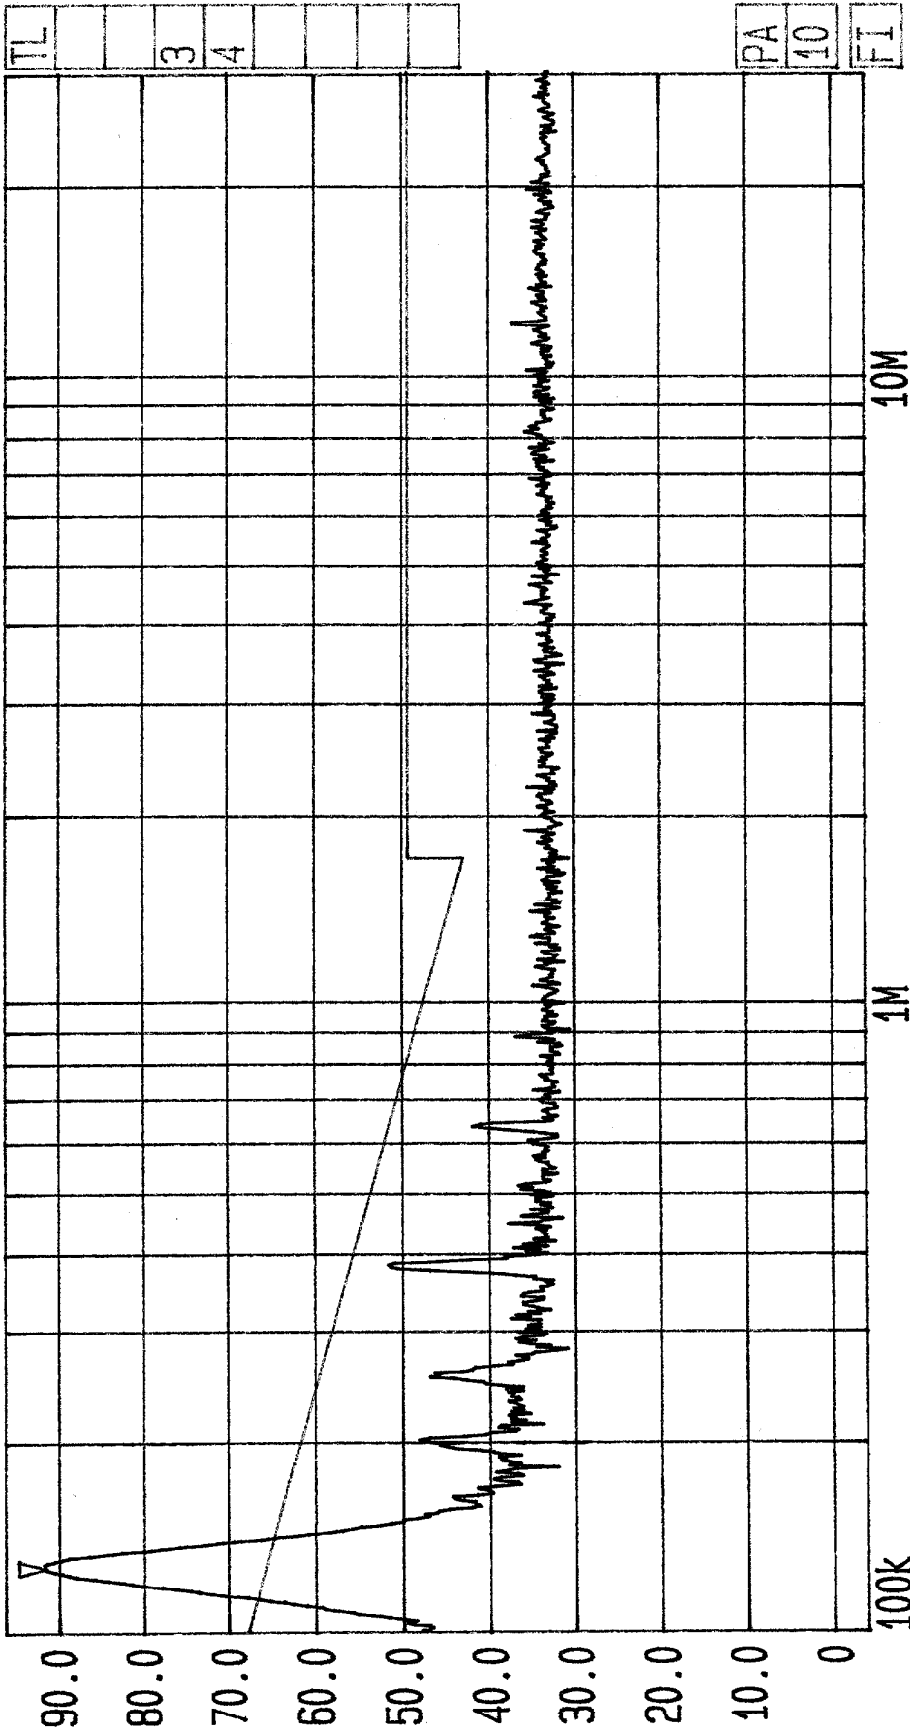


Start 100 kHz  
 Span 29.9 MHz  
 Center 1.73205 MHz  
 Sweep 1.62 s  
 Stop 30 MHz

Radiated Limit. 15.209  
 Tested By RFI For John Falck Assoc. EUT: S682  
 Operate Mode  
 FCC Part 15 Sub. B  
 GPH: 39126/04/007



Date 01.Jul.'99 Time 17:07:36  
 Ref.Lvl 96.00 dBx  
 Marker 91.74 dBx  
 127.2 kHz

Res.Bw 10 kHz [imp] Off  
 TG.Lvl 2.990 MHz  
 CF.Stp 10 dB  
 Vid.Bw 100 kHz  
 RF.Att 10 dB  
 Unit [dBµV/m]

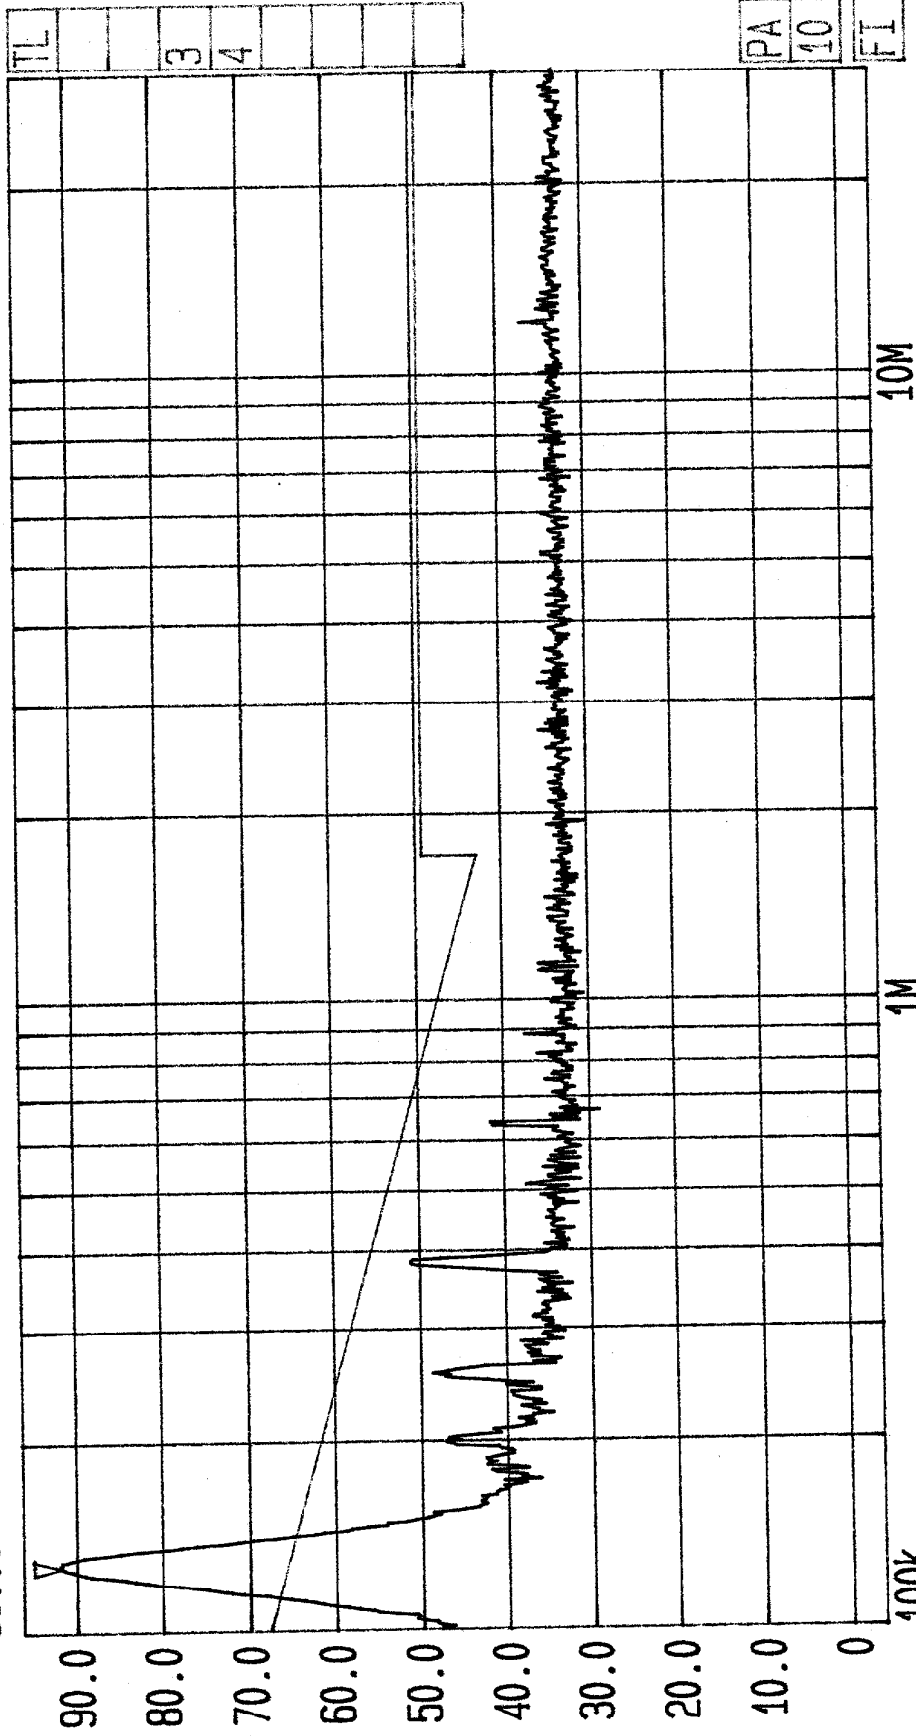

Start 100 kHz  
 Span 29.9 MHz  
 Center 1.73205 MHz  
 Sweep 260 ms  
 Stop 30 MHz  
 Radiated Limit. 15.209  
 Tested By RFI For John Falck Assoc.  
 Standby Mode  
 EUT: S682  
 FCC Part 15 Sub. B  
 GPH: 39126/04/008

**RADIO FREQUENCY INVESTIGATION LTD.**

**TEST REPORT**

**EMC Department**

**S.No: RFI/EMCB1/RP39126B**

**Page 32 of 34**

**Issue Date: 22 July 1999**

**Test Of: John Falck Associates.  
Group 4 Securitas**

**S682 Proximity Reader Device 8000-5233-A**

**To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209**

---

This page has been left intentionally blank.

---



Test Of: John Falck Associates.  
Group 4 Securitas

To: S682 Proximity Reader Device 8000-5233-A  
F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209

---

### **Appendix 5. Photographs of EUT**

This appendix contains the following photographs:

<b>Photo Reference Number</b>	<b>Title</b>
PHT/39126ETF04/001	Side view of conducted emissions.
PHT/39126ETF04/002	Front view of conducted emissions.
PHT/39126ETF04/003	Rear view of radiated emissions.
PHT/39126ETF04/004	Side view of radiated emissions.
PHT/39126ETF04/005	Front view of radiated emissions.

These pages are not included in the total number of pages for this report.

---

**RADIO FREQUENCY INVESTIGATION LTD.**

**TEST REPORT**

**EMC Department**

**S.No: RFI/EMCB1/RP39126B**

**Page 34 of 34**

**Issue Date: 22 July 1999**

**Test Of: John Falck Associates.  
Group 4 Securitas**

**S682 Proximity Reader Device 8000-5233-A**

**To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209**

---

This page has been left intentionally blank.

---

EMC Department

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209)

---

**PHT/39126ETF04/001 Side view of conducted emissions.**




EMC Department

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209)

---

PHT/39126ETF04/002 Front view of conducted emissions.

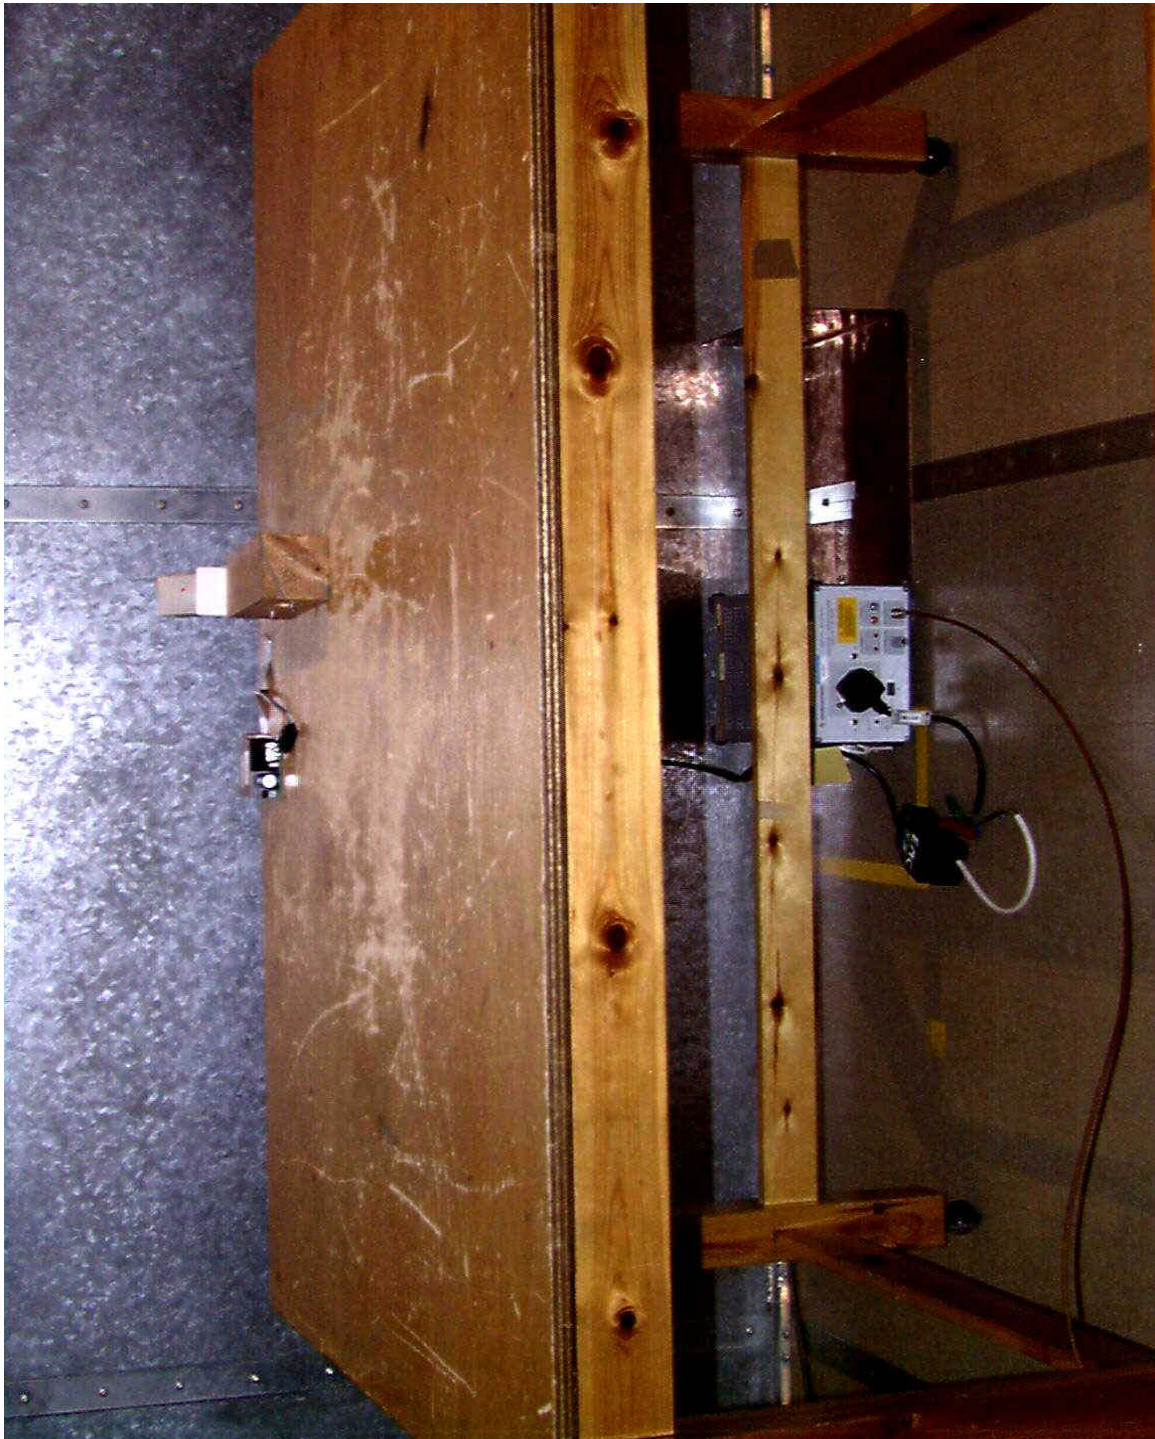

EMC Department

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209)

---

**PHT/39126ETF04/003 Rear view of radiated emissions.**



EMC Department

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209)

---

**PHT/39126ETF04/004 Side view of radiated emissions.**



EMC Department

Test Of: John Falck Associates.  
Group 4 Securitas  
S682 Proximity Reader Device 8000-5233-A  
To: F.C.C. Part 15:1998 Subpart C (Intentional Radiators)  
Section 15.207 and 15.209)

---

**PHT/39126ETF04/005 Front view of radiated emissions.**

