



TEST REPORT NO: RU1091/5370
 COPY NO: 2
 ISSUE NO: 1
 FCC ID: OE5S813E

**REPORT ON THE CERTIFICATION TESTING OF A
 Group 4 Technology Ltd
 S813 Enrolment Reader
 WITH RESPECT TO
 THE FCC RULES CFR 47, PART15.225
 INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 25th November – 4th December 2003

TESTED BY: _____ J Charters
 APPROVED BY: _____ P GREEN
 EMC Product Manager
 DATE: 11th March 2004

Distribution:

- Copy Nos:
1. Group 4 Technology Ltd
 2. TCB :TRL Compliance Services
 3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE



FS 21805



0728

CONTENTS

	PAGE	
CERTIFICATE OF CONFORMITY & COMPLIANCE	3	
APPLICANT'S SUMMARY	4	
EQUIPMENT TEST CONDITIONS	4	
TESTS REQUIRED	5	
TEST RESULTS	6-14	
		ANNEX
PHOTOGRAPHS		A
PHOTOGRAPH No. 1: Test setup		
PHOTOGRAPH No. 2: Transmitter front view		
PHOTOGRAPH No. 3: Transmitter rear view		
PHOTOGRAPH No. 4: Transmitter PCB front		
PHOTOGRAPH No. 5: Transmitter PCB rear		
PHOTOGRAPH No. 6: Finger print reader front		
PHOTOGRAPH No. 7: Finger print reader rear		
PHOTOGRAPH No. 8: PCB 2 front		
PHOTOGRAPH No. 9: PCB 2 rear		
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST		B
BAND OCCUPANCY PLOT		C
SCAN DATA		D
Notes:		
1. Component failure during test	YES	<input type="checkbox"/>
	NO	<input checked="" type="checkbox"/>
2. If Yes, details of failure:		
3. The facilities used for the testing of the product contain in this report are FCC Listed.		
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.		



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: OE5S813E
PURPOSE OF TEST: Certification
TEST SPECIFICATION: FCC RULES CFR 47, PART15.225
TEST RESULT: Compliant to Specification
EQUIPMENT UNDER TEST: S813 Enrolment Reader
EQUIPMENT SERIAL No: 0332332397
ITU: EMISSION CODE: 12K0A1D
EQUIPMENT TYPE: Enrolment Reader
PRODUCT USE: Access control
CARRIER EMISSION: 15.524 μ V/m @ 30 m
ANTENNA TYPE: Integral
ALTERNATIVE ANTENNA: N/A
BAND OF OPERATION: 13.110MHz – 14.010MHz
CHANNEL SPACING: N/A wideband
NUMBER OF CHANNELS: 1
FREQUENCY GENERATION: SAW Resonator [] Crystal [X] Synthesiser []
MODULATION METHOD: Amplitude [] Digital [X] Angle []
POWER SOURCE(s): +12Vdc
TEST DATE(s): 25th November – 4th December 2003
ORDER No(s): R000016004
APPLICANT: Group 4 Technology Ltd
ADDRESS: Challenge House
Northway Lane
Tewkesbury
Gloucester
GL19 4QH
United Kingdom

TESTED BY: _____ J Charters

APPROVED BY: _____ P Green
EMC Product
Manager

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): S813 Enrolment Reader

EQUIPMENT TYPE: Enrolment Reader

SERIAL NUMBER OF EUT: 0332332397

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, PART15.225

TEST RESULT: COMPLIANT Yes
No

APPLICANT'S CATEGORY: MANUFACTURER
IMPORTER
DISTRIBUTOR
TEST HOUSE
AGENT

APPLICANT'S ORDER No(s): R000016004

APPLICANT'S CONTACT PERSON(s): Mr E Porter

E-mail address: Eric.porter@g4tech.co.uk

APPLICANT: Group 4 Technology Ltd

ADDRESS: Challenge House
Northway Lane
Tewkesbury
Gloucester
GL19 4QH
United Kingdom

TEL: 01684 299400

FAX: 01684 290166

MANUFACTURER: Group 4 Technology Ltd

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRL EMC

UKAS ACCREDITATION No: 0728

TEST DATE(s) 25th November – 4th December 2003

TEST REPORT No: RU1091/5370

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.225	Quasi Peak	Yes
	Intentional Emission Field Strength:	15.225	Quasi Peak	Yes
	Intentional Emission Band Occupancy:	15.255	Quasi Peak	Yes
	Intentional Emission ERP (mW):	N/A	-	No
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	Yes
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak	Yes
	Spurious Emissions – Radiated >1000MHz:	N/A	-	No
	Maximum Frequency of Search:	15.33	-	Yes
	Antenna Arrangements Integral:	15.203	-	Yes
	Antenna Arrangements External Connector:	15.204	-	No
	Restricted Bands	15.205	-	Yes
	Extrapolation Factor	15.31(f)	-	Yes

2. Product Use: Access control
3. Emission Designator: 12K0A1D
4. Duty Cycle: <100%
5. Temperatures: Ambient (Tnom) 10°C
6. Supply Voltages: Vnom +12Vdc
- Note: Vnom voltages are as stated above unless otherwise shown on the test report page
7. Equipment Category: Single channel
 Two channel
 Multi-channel
8. Channel spacing: Narrowband
 Wideband

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature = 16°C(<1GHz) 3m measurements <1GHz [X]
 Relative humidity = 49% (<1GHz), 10m measurements <30MHz [X]
 Conditions = Open Area Test Site (OATS) 30m extrapolated from 10m [X]
 Supply voltage = 12Vdc
 Channel number = 1

	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	FIELD STRENGTH (dBµV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)
1.705MHz - 30MHz	27.12	25.9	-	-	25.9	19.08	2.13	30
30MHz - 88MHz	81.4	25.5	0.8	6.9	33.2	-	45.7	100
88MHz - 216MHz	99.7	26.1	0.8	10.2	37.1	-	71.61	150
	108.5	44.6	1.0	11.2	34.4		52.48	
	203.45	31.5	1.4	8.4	41.3		116.15	
216MHz - 960MHz	217.0	35.5	1.5	8.0	45.0	-	177.82	200
	284.8	29.85	1.7	12.55	44.1	-	160.33	200
	311.95	20.6	1.9	13.5	36.0	-	63.09	200
	400.0	23.3	2.1	15.7	41.1	-	113.50	200
	498.25	14.2	2.6	17.3	34.1	-	50.70	200
	556.05	17.7	2.7	18.8	39.2	-	91.20	200
	610.3	21.6	2.9	18.6	43.1	-	142.88	200
	651.0	22.9	3.1	19.1	45.1	-	179.88	200
	678.1	17.9	3.1	19.0	40.0	-	100.00	200
	800.0	17.4	3.6	20.1	41.1	-	113.50	200
813.75	16.2	3.7	20.1	40.0	-	100.00	200	
960MHz - 1GHz								
1GHz - 5GHz								
Limits	1.705MHz to 30MHz			30µV/m @ 30m				
	30MHz to 88MHz			100µV/m @ 3m				
	88MHz to 216MHz			150µV/m @ 3m				
	216MHz to 960MHz			200µV/m @ 3m				
	960MHz to 1GHz			500µV/m @ 3m				
	1GHz to 5GHz			500µV/m @ 3m				

See next page for the notes and test methods:

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 9.5dB from 1m to 3m, as per Part 15.31f
- 4 Extrapolation factor 19.08dB from 10m to 30m, as per Part 15.31f
- 5 Measurements >1GHz @ 1m as per Part 15.31f(1)
- 6 Receiver detector >1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 7 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth
- 8 New batteries used for battery powered products.
- 9 Emissions 20dB's below the limit were not necessarily recorded.
- 10 For emission below 30MHz the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz.
- 11 For emissions below 30 MHz the cable losses are assumed to be negligible.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2001
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m(above 30MHz only).
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	X
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz - 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

TRANSMITTER TESTS

TRANSMITTER INTENTIONAL EMISSION – RADIATED – PART15.225

Ambient temperature	=	12°C(<1GHz),	3m measurements @ fc	[X]
Relative humidity	=	48%(<1GHz),	10m measurements @ fc	[X]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[]
Supply voltage	=	+12Vdc	30m extrapolated from 3m	[X]
Channel number	=	1	30m extrapolated from 10m	[X]

FREQ. (MHz)	MEASUREMENT DISTANCE Meters	MEASUREMENT Rx. READING (dBµV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (µV/m)
13.56	3	51.7	27.88	15.52
13.56	10	42.9	19.08	15.52
Limit value @ fc		10,000(µV/m)		
Band occupancy @ -20dBc		f lower	f higher	
		13.5468MHz	13.5804MHz	

See spectrum analyser plot – Annex C

Notes:

- 1 Results quoted are extrapolated as indicated.
- 2 The 3m-10m extrapolation factor is 8.8dB calculated from the results above. Extrapolation factor 10-30m is 19.08dB using the extrapolation factor of 40dB/decade as per 15.331(f).
- 3 Receiver detector @ fc = Quasi Peak 120kHz bandwidth.
- 4 When battery powered the EUT was powered with new batteries.
- 5 For emission below 30MHz the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz.
- 6 The results quoted are the maximum seen after the supply voltage was varied between 85% and 115%.
- 7 For emission below 30 MHz the cable losses are assumed to be negligible.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2001
- 2 Measuring distances 3m & 10m (to produce extrapolation factor)
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable. Raising and lowering the receiver antenna between 1m & 4m.(above 30MHz only) Horizontal and vertical polarisations, of the receive antenna. EUT orientation in three orthogonal planes. Maximum results recorded

The test equipment used for the Transmitter Intentional Emission – Radiated – PART15.225 tests is shown overleaf.

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	X
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

TRANSMITTER TESTS

TRANSMITTER EMISSIONS – FREQUENCY TOLERANCE Part 15.225 (c)

Ambient temperature = 20°C
Relative humidity = 48%

Fc @ Vnom Tnom = 13.56300MHz

TEMPERATURE	VOLTAGE	FREQUENCY MHz	DEVIATION kHz	LIMIT kHz
-20°C	12.0	13.563200	0.2	±1.356
+50°C	12.0	13.563200	0.2	±1.356

TEMPERATURE	VOLTAGE	FREQUENCY MHz	DEVIATION kHz	LIMIT kHz
+20°C	13.8	13.56230	0.7	±1.356
+20°C	10.2	13.56230	0.7	±1.356

Notes: 1 One hour was allowed for temperature stabilisation.

Test Method:

- 1 EUT was placed inside the environmental chamber and temperature adjusted accordingly.
- 2 The DC power was varied from an external dc power supply.
- 3 Frequency was recorded on the spectrum analyzer.

The test equipment used for the Transmitter Frequency Tolerance – Part 15.225 (c) test was:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
LISN / AMN	ROHDE & SCHWARZ	ESH3-Z5	83746/010	289	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
ENVIRONMENTAL CHAMBER	SHARETREE	TCC 125-815P	CS 203	11	X
POWER SUPPLY	MANSON	EP603	60316619	UH177	X
MULTIMETER	AVO METER	M3004	M3270006	UH41	X
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	X

TRANSMITTER TESTS

TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE Part 15.207

Ambient temperature = 18°C(<1GHz),
 Relative humidity = 48%(<1GHz),
 Conditions = Power Line Laboratory
 Supply voltage = 110V AC
 Supply Frequency = 60Hz

SIGNIFICANT EMISSIONS

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dBµV)	DETECTOR	CONDUCTOR (L or N)	LIMIT (dBµV)
13.56	44.52	QP	L	60.00
13.56	44.90	AV	L	50.00

Notes:

- 1 See attached plot
- 2 Scans were performed on both live and neutral line. Worst case emissions are reported in the table above.
- 3 Emissions 10dB's below the limit were not necessarily recorded.


Test Method: 1 As per Radio – Noise Emissions, ANSI C63.4: 2001

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
LISN / AMN	ROHDE & SCHWARZ	ESH3-Z5	83746/010	289	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

POWER LINE CONDUCTION EMISSIONS

Limit Part 15.207

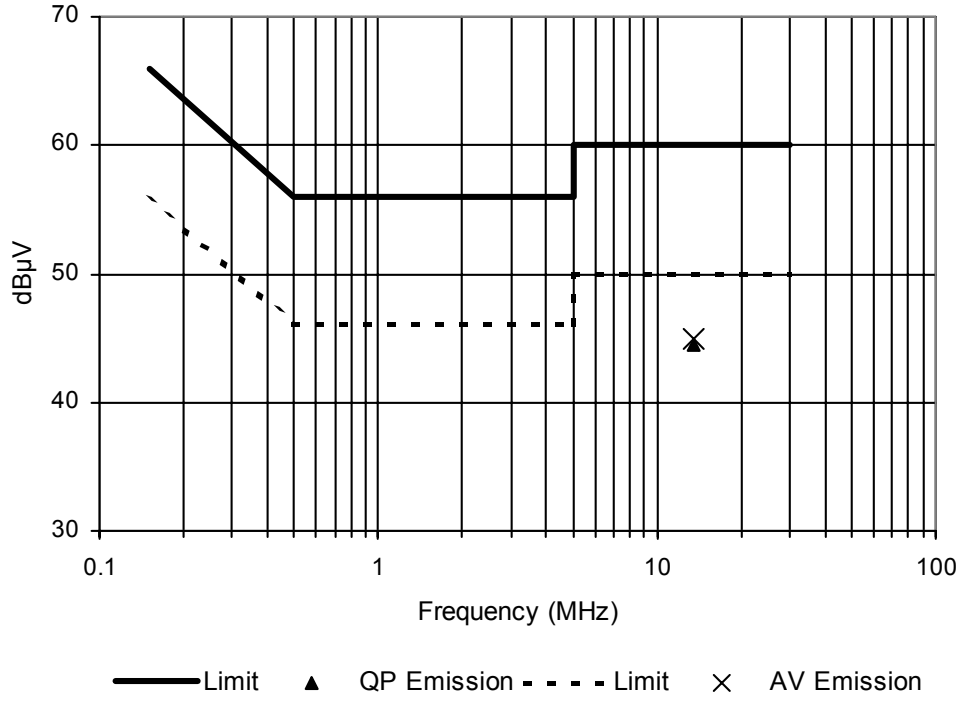

ANNEX A
PHOTOGRAPHS

PHOTOGRAPH No. 1

TEST SETUP





PHOTOGRAPH No. 2

TRANSMITTER FRONT VIEW





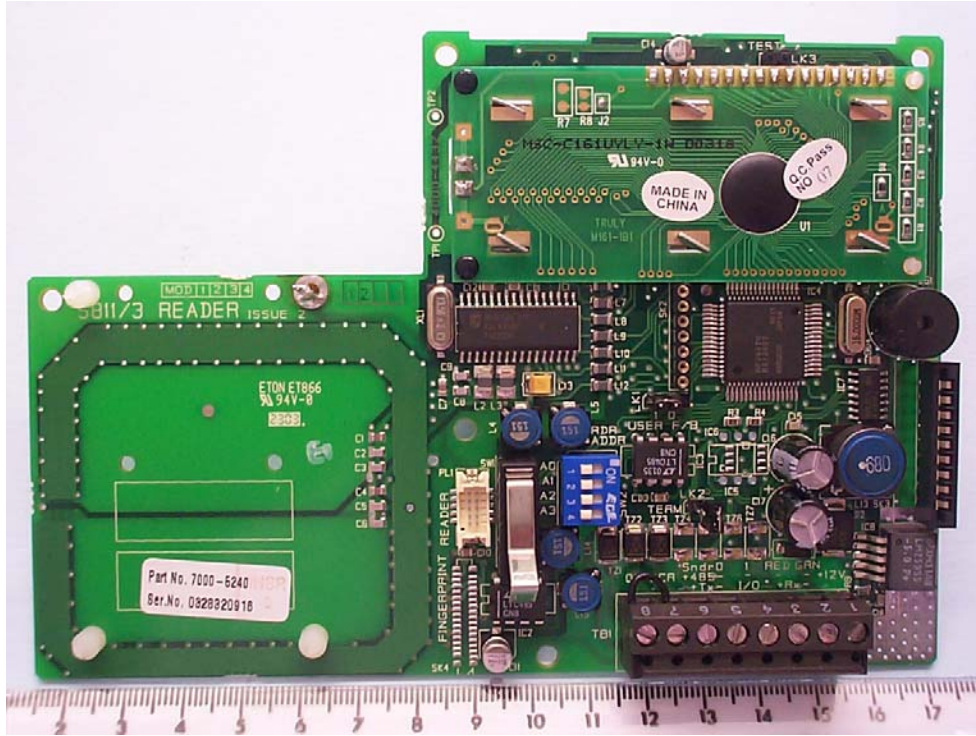

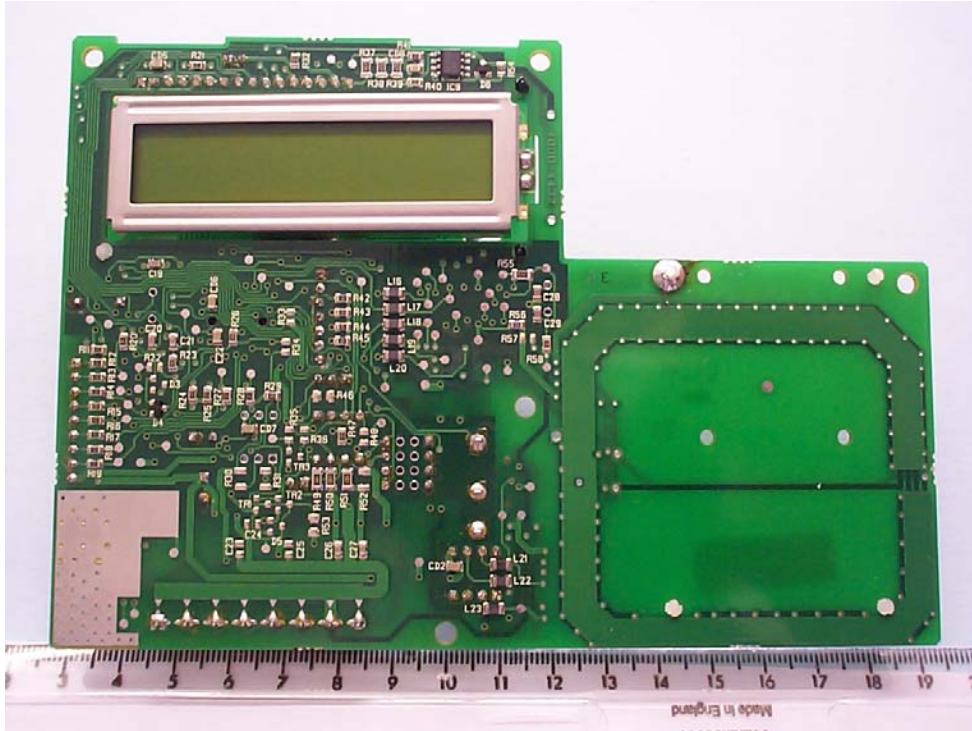


PHOTOGRAPH No. 6


FINGER PRINT READER FRONT




PHOTOGRAPH No. 7

FINGER PRINT READER REAR

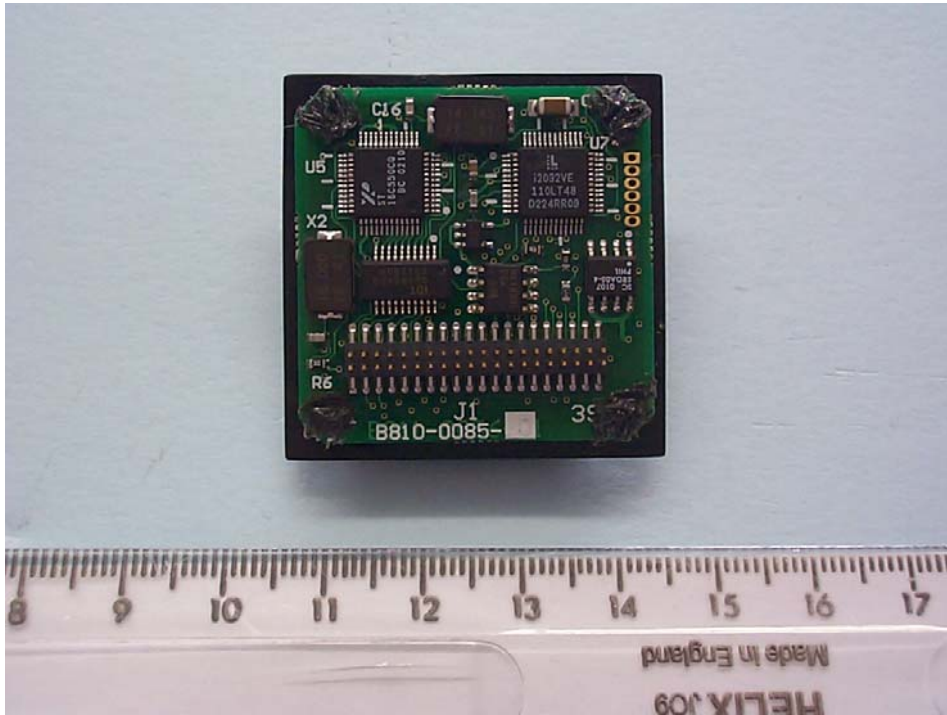

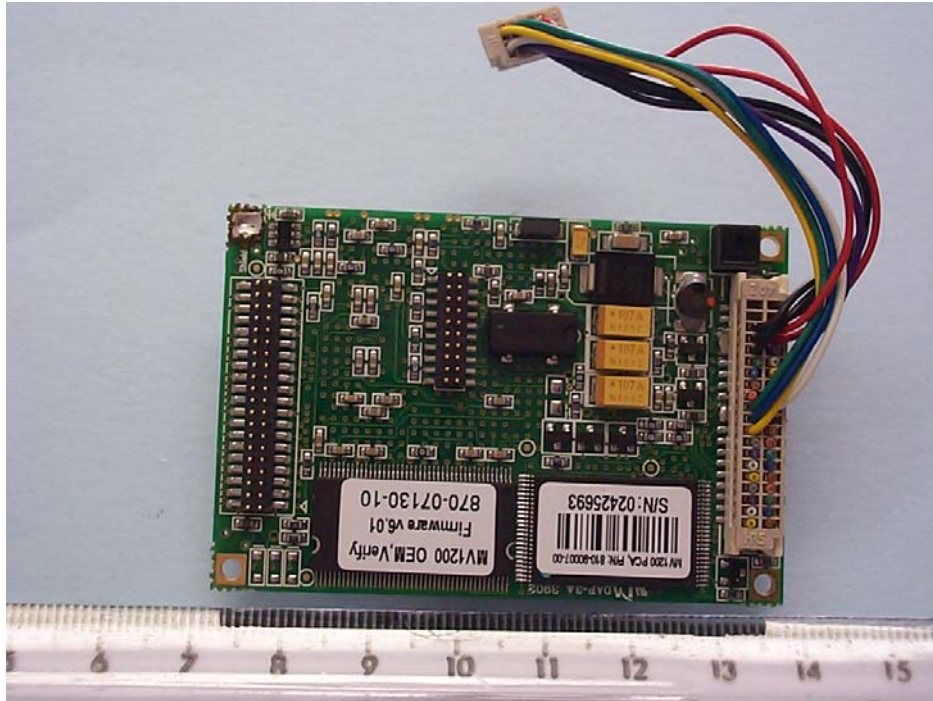

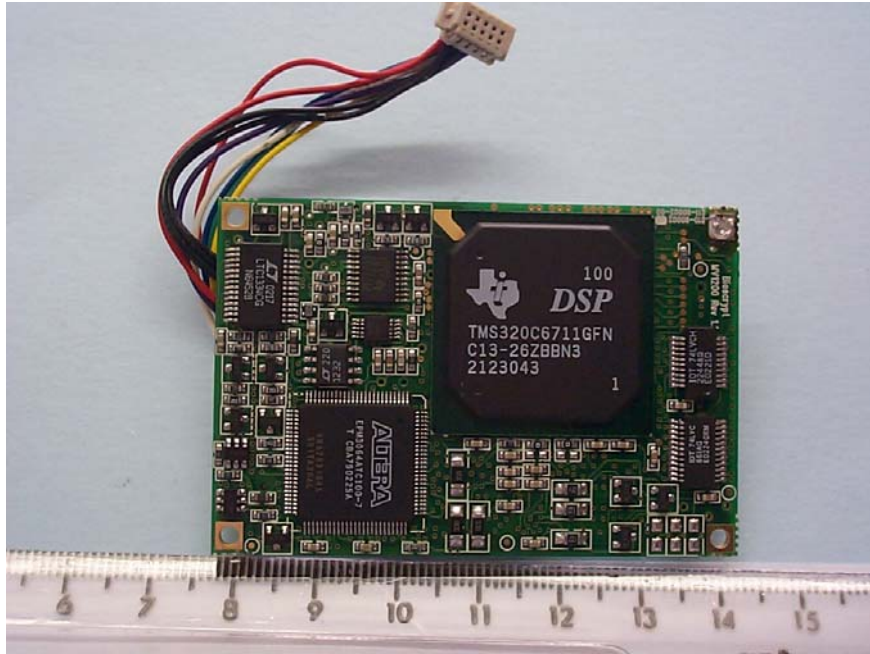


ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	<input checked="" type="checkbox"/>
		-	FEE	<input checked="" type="checkbox"/>
b.	AGENT'S LETTER OF AUTHORISATION	-		<input checked="" type="checkbox"/>
c.	MODEL(s) vs IDENTITY	-		<input checked="" type="checkbox"/>
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		<input type="checkbox"/>
e.	LABELLING	-	PHOTOGRAPHS	<input checked="" type="checkbox"/>
		-	DECLARATION	<input checked="" type="checkbox"/>
		-	DRAWINGS	<input type="checkbox"/>
f.	TECHNICAL DESCRIPTION	-		<input checked="" type="checkbox"/>
g.	BLOCK DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
h.	CIRCUIT DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
i.	COMPONENT LOCATION	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
j.	PCB TRACK LAYOUT	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
k.	BILL OF MATERIALS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		<input checked="" type="checkbox"/>

ANNEX C
BANDWIDTH PLOT

BANDWIDTH PLOT

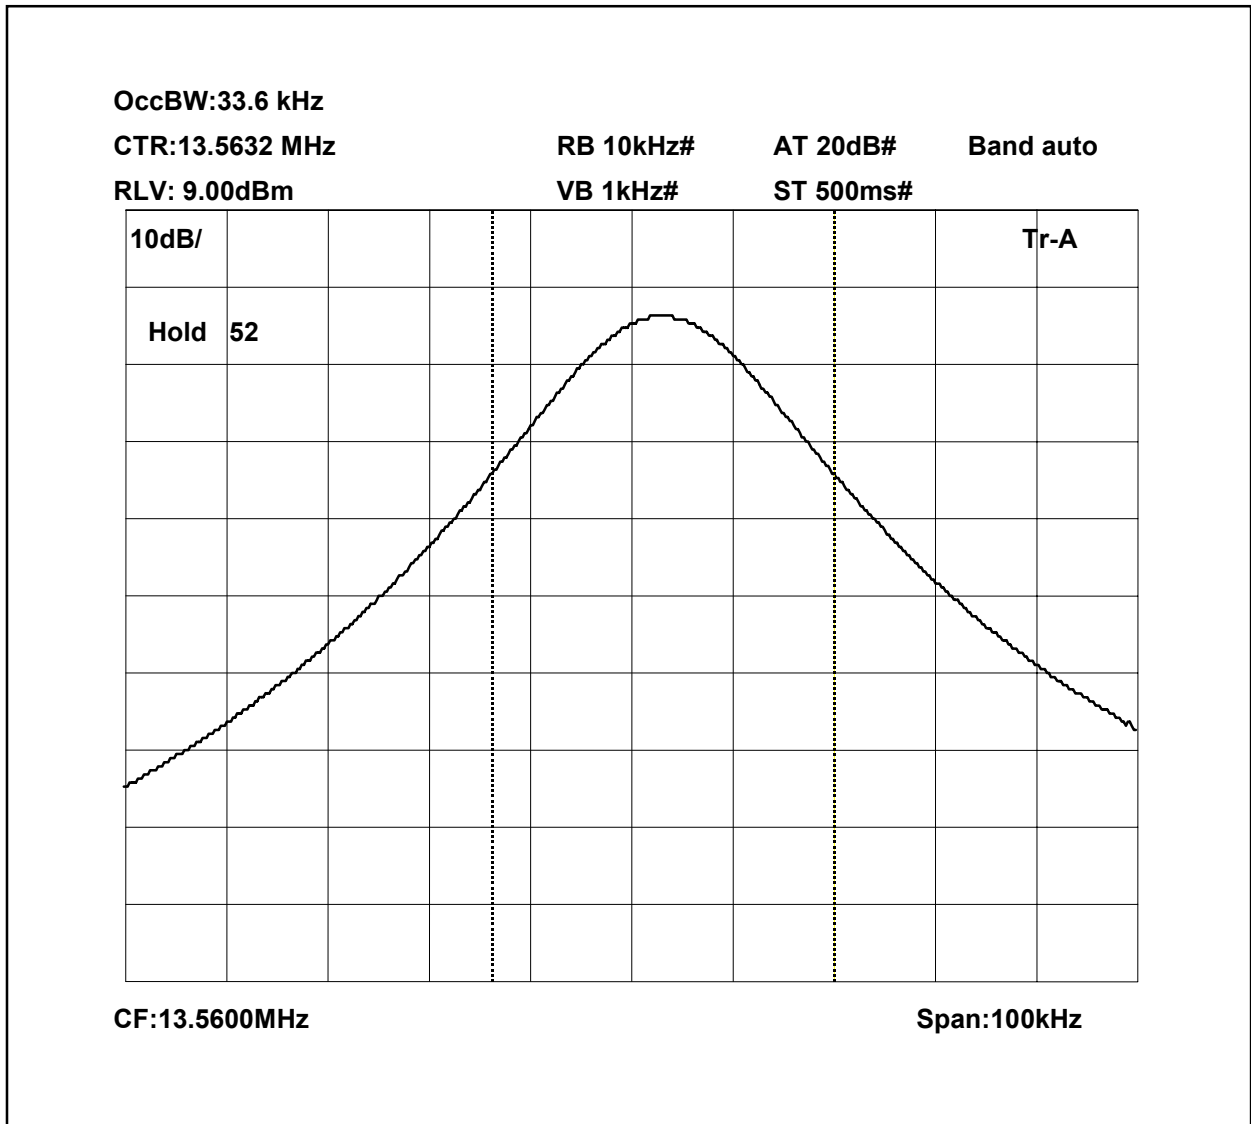

Bandwidth @-20dBC =33.6kHz
 Fl = 13.54680MHz
 Fh = 13.58040MHz

ANNEX D
SCAN DATA


E-Field Radiation

EUT: s813
 Manuf: group 4
 Op Cond: 3m Indoor Prescan
 Operator: J Charters
 Test Spec: CFR47 FCC part 15.109 (Class B)
 Comment: With additional ferrite

Scan Settings			(1 Range) Frequencies		Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON	60dB	

Transducer	No.	Start	Stop	Name
1	15	30MHz	1000MHz	TRLUH72
	21	30MHz	1000MHz	CBL6112B

Final Measurement: Detector: X QP
 Meas Time: 2sec
 Subranges: 50
 Acc Margin: 10 dB

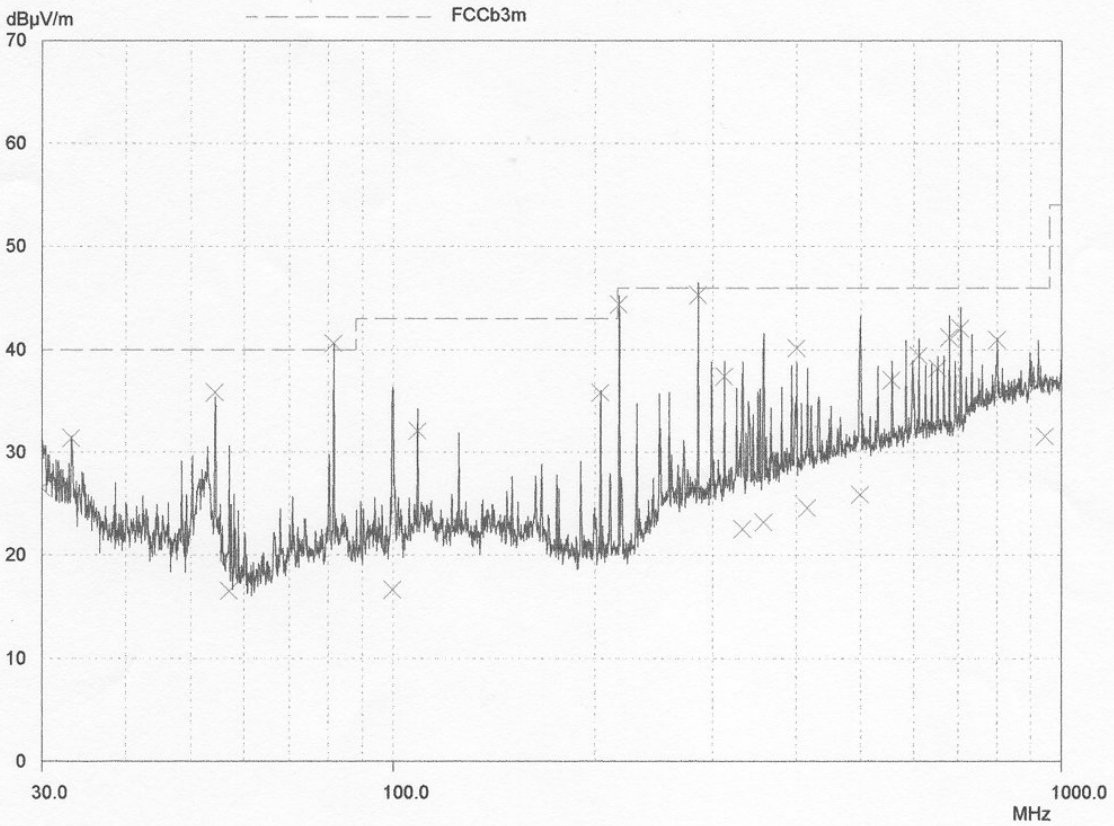

Powerline Conduction

04 Dec 2003 10:29

150kHz - 30MHz

EUT: S813 enrolment reader
Manuf: Group 4
Op Cond: LISN UH5, UH21
Operator: J Charters
Test Spec: EN55022 Class B (or Variant)
Comment: 110Vac power via power brick
live

Scan Settings			(1 Range) Frequencies		Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB	

Transducer	No.	Start	Stop	Name
	1	150kHz	30MHz	UH21

Final Measurement: Detectors: X QP / + AV
Meas Time: 2sec
Subranges: 25
Acc Margin: 20 dB

