



TEST REPORT NO: RU1057/4452  
 COPY NO: -----  
 ISSUE NO: 1  
 FCC ID: OE5S830

**REPORT ON THE CERTIFICATION TESTING OF A  
 GROUP 4 TECHNOLOGY Ltd  
 S830 HID READER  
 WITH RESPECT TO  
 THE FCC RULES CFR 47, PART 15.209  
 INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 28<sup>th</sup> & 29<sup>th</sup> May 2003

TESTED BY: ----- J CHARTERS

APPROVED BY: ----- P GREEN  
 EMC PRODUCT  
 MANAGER

DATE: -----

Distribution:

- Copy Nos:
1. GROUP 4 TECHNOLOGY Ltd
  2. FCC EVALUATION LABORATORIES
  3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE



## CONTENTS

	<b>PAGE</b>	
CERTIFICATE OF CONFORMITY & COMPLIANCE	3	
APPLICANT'S SUMMARY	4	
EQUIPMENT TEST CONDITIONS	5	
TESTS REQUIRED	6	
SAMPLE CALCULATIONS	6	
TEST RESULTS	7-12	
		<b>ANNEX</b>
PHOTOGRAPHS		A
PHOTOGRAPH No. 1: Test setup		
PHOTOGRAPH No. 2: Transmitter front view		
PHOTOGRAPH No. 3: Transmitter rear view		
PHOTOGRAPH No. 4: Transmitter PCB track side		
PHOTOGRAPH No. 5: Transmitter PCB component side		
PHOTOGRAPH No. 6: Antenna PCB track side		
PHOTOGRAPH No. 7: Antenna PCB component side		
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST		B
BAND OCCUPANCY PLOT		C
POWER LINE PLOTS		D
PEAK EMISSIONS SCAN DATA		E
<b>Notes:</b>		
1. Component failure during test	YES	<input type="checkbox"/>
	NO	<input checked="" type="checkbox"/>
2. If Yes, details of failure:		
3. The facilities used for the testing of the product contain in this report are FCC Listed.		
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.		



**CERTIFICATE OF CONFORMITY & COMPLIANCE**

FCC IDENTITY: OE5S830  
PURPOSE OF TEST: Certification  
TEST SPECIFICATION: FCC RULES CFR 47, Part 15.209  
TEST RESULT: Compliant to Specification  
EQUIPMENT UNDER TEST: S830 HID READER  
EQUIPMENT SERIAL No: PCB: 0319295179  
Antenna: 0321300818  
ITU: EMISSION CODE: 17K0A1D  
EQUIPMENT TYPE: S830  
PRODUCT USE: RFID access control  
CARRIER EMISSION: 0.52µV/m  
ANTENNA TYPE: Integral  
ALTERNATIVE ANTENNA: N/A  
BAND OF OPERATION: 0.009kHz – 0.490kHz  
CHANNEL SPACING: N/A (wideband)  
NUMBER OF CHANNELS: 1  
FREQUENCY GENERATION: SAW Resonator [ ] Crystal [X] Synthesiser [ ]  
MODULATION METHOD: Amplitude [X] Digital [ ] Angle [ ]  
POWER SOURCE(s): +12Vdc  
TEST DATE(s): 28<sup>th</sup> & 29<sup>th</sup> May 2003  
ORDER No(s): PRP10069  
APPLICANT: GROUP 4 TECHNOLOGY Ltd  
ADDRESS: Challenge House  
Northway Lane  
Tewkesbury  
GLOUCESTERSHIRE  
GL20 8JG  
UNITED KINGDOM

TESTED BY: ----- J CHARTERS

APPROVED BY: ----- P GREEN  
EMC PRODUCT  
MANAGER

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): S830 HID READER

EQUIPMENT TYPE: S830

SERIAL NUMBER OF EUT: PCB: 0319295179  
ANT: 0321300818

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15.209

TEST RESULT: COMPLIANT Yes   
No

APPLICANT'S CATEGORY: MANUFACTURER   
IMPORTER   
DISTRIBUTOR   
TEST HOUSE   
AGENT

APPLICANT'S ORDER No(s): PRP10069

APPLICANT'S CONTACT PERSON(s): Mr E PORTER

E-mail address: Eric.porter@g4tech.co.uk

APPLICANT: GROUP 4 TECHNOLOGY Ltd

ADDRESS: Challenge House  
Northway Lane  
Tewkesbury  
GLOUCESTERSHIRE  
GL20 8JG  
UNITED KINGDOM

TEL: +44 (0) 1684 833818

FAX: +44 (0) 1684 833858

MANUFACTURER: GROUP 4 TECHNOLOGY Ltd

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRL EMC

UKAS ACCREDITATION No: 0728

TEST DATE(s) 28<sup>th</sup> & 29<sup>th</sup> May 2003

TEST REPORT No: RU1057/4452

### EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.209(a)	Average	Yes
	Intentional Emission Field Strength:	15.209(a)	Average	Yes
	Intentional Emission Band Occupancy:	N/A	Peak	Yes
	Intentional Emission ERP (mW):	N/A	N/A	N/A
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	Yes
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak Average	Yes
	Spurious Emissions – Radiated >1000MHz:	15.209	Average	Yes
	Maximum Frequency of Search:	15.33	N/A	Yes
	Antenna Arrangements Integral:	15.203	N/A	Yes
	Antenna Arrangements External Connector:	15.204	N/A	Yes
	Restricted Bands	15.205	N/A	Yes
	Extrapolation Factor	15.31(f)	N/A	Yes

2. Product Use: RFID access control
3. Emission Designator: 17K0A1D
4. Duty Cycle: <100%
5. Transmitter bit or pulse rate and level: 1200Bps
6. Temperatures: Ambient (Tnom) 18°C
7. Supply Voltages: Vnom +12Vdc
- Note: Vnom voltages are as stated above unless otherwise shown on the test report page
8. Equipment Category: Single channel   
 Two channel   
 Multi-channel
9. Channel spacing: Narrowband   
 Wideband

**TRANSMITTER TESTS**

**TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209**

Ambient temperature = 18°C(<1GHz) 3m measurements <1GHz [X]  
 Relative humidity = 64% (<1GHz), 1m measurements >1GHz [X]  
 Conditions = Open Area Test Site (OATS) 3m extrapolated from 1m [ ]  
 Supply voltage = +12Vdc  
 Channel number = 1

	FREQ. (MHz)	MEAS. Rx. (dBµV/m)	CABLE LOSS (dB)	EXTRAP. FACT. (dB)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)
0.009kHz - 0.490kHz	0.25028 0.37542	22.7 46.4	- -	80 80	0.0014 0.021	9.6 6.4
0.490kHz - 1.705MHz	0.6257	41.3	-	40	1.16	38.4
30MHz - 88MHz						
88MHz - 216MHz						
216MHz - 960MHz						
960MHz - 1GHz						
1GHz - 5GHz						
Limits	9kHz to 490kHz		2400/F (kHz) @ 300m			
	490kHz to 1.705MHz		24000/F (kHz) @ 30m			
	1.705MHz to 30MHz		30µV/m @ 30m			
	30MHz to 88MHz		100µV/m @ 3m			
	88MHz to 216MHz		150µV/m @ 3m			
	216MHz to 960MHz		200µV/m @ 3m			
	960MHz to 1GHz		500µV/m @ 3m			
	1GHz to 5GHz		500µV/m @ 3m			

See next page for notes and test methods.

**Notes:**

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 9.5dB from 1m to 3m, as per Part 15.31f
- 4 Extrapolation factor 80dB from 3m to 300m as per Part 15.31f
- 5 Extrapolation factor 40dB from 3m to 30m as per Part 15.31f
- 6 Measurements >1GHz @ 1m as per Part 15.31f(1)
- 7 Receiver detector 9kHz – 30MHz CISPR, Quasi-Peak, 10kHz bandwidth.  
Apart from the bands 9kHz-90kHz and 110kHz-490kHz where an Average detector is used
- 8 Receiver detector 30MHz-1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 9 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth
- 10 New batteries used for battery powered products.
- 11 Emissions 20dB's below the limit are not recorded.
- 12 For emissions below 30MHz, the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz.
- 13 For emissions below 30MHz the cable losses are assumed to be negligible.

**Test Method:**

- 1 As per Radio – Noise Emissions, ANSI C63.4: 1992
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.(above 30MHz)  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes.  
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	<b>X</b>
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	<b>X</b>
RANGE 1	TRL	3 METRE	N/A	UH06	<b>X</b>
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 – 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	<b>X</b>
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	<b>X</b>



**TRANSMITTER TESTS**

**TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.209 (a)**

Ambient temperature	=	18°C(<1GHz),	3m measurements @ fc	[X]
Relative humidity	=	64%(<1GHz),	10m measurements @ fc	[X]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[ ]
Supply voltage	=	12Vdc	300m extrapolated from 3m	[X]
Channel number	=	1	300m extrapolated from 10m	[X]

FREQ. (kHz)	MEASUREMENT DISTANCE (Metres)	MEASUREMENT Rx. READING (dBµV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (µV/m)
125.14	3	74.6	80.0	0.52
125.14	10	48.6	59.08	0.31
Limit value @ fc		19.2µV/m @ 300m		
Band occupancy @ -30dBc		f lower		f higher
		120.5kHz		131.6kHz

See spectrum analyser plot – Annex C

**Notes:**

- 1 Results quoted are extrapolated as indicated
- 2 Receiver detector @ fc = Average 10kHz bandwidth, measurement time =100ms
- 3 When battery powered the EUT was powered with new batteries
- 4 For emissions below 30MHz the measuring receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20dB's across the measurement range 9kHz to 30MHz
- 5 For emissions below 30MHz the cable losses are assumed to be negligible.
- 6 Peak emissions were found to be within 20dB's of the average emission and are therefore the deemed to comply with 15.35(b). See scan data Annex E

**Test Method:**

- 1 As per Radio – Noise Emissions, ANSI C63.4: 1992
- 2 Measuring distances 3m
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.(above 30MHz only)  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes.  
Maximum results recorded

The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 – 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	
RANGE 1	TRL	3 METRE	N/A	UH06	<b>X</b>
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	<b>X</b>

**TRANSMITTER TESTS**

**TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE Part 15.207**

Ambient temperature = 19°C(<1GHz),  
 Relative humidity = 54%(<1GHz),  
 Conditions = Power Line Laboratory  
 Supply voltage = 110V AC  
 Supply Frequency = 60Hz

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dBµV)	DETECTOR	CONDUCTOR (L or N)	LIMIT (dBµV)
0.15	40.00	Quasi Peak	Live	66.00
0.2	35.43	Quasi Peak	Neutral	63.61
24.16	40.04	Quasi Peak	Live	60.00
24.41	40.12	Quasi Peak	Neutral	60.00
10.39	31.69	Average	Neutral	50.00
10.89	32.90	Average	Neutral	50.00
14.145	33.29	Average	Neutral	50.00
19.4	32.36	Average	Neutral	50.00
24.16	39.45	Average	Neutral	50.00
24.66	39.64	Average	Neutral	50.00

**Notes:** 1 See attached plots Appendix D


**Test Method:** 1 As per Radio – Noise Emissions, ANSI C63.4: 1992

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
LISN / AMN	ROHDE & SCHWARZ	ESH3-Z5	83746/010	289	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	<b>X</b>
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	<b>X</b>
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

# POWER LINE CONDUCTION EMISSIONS

Limit Part 15.207

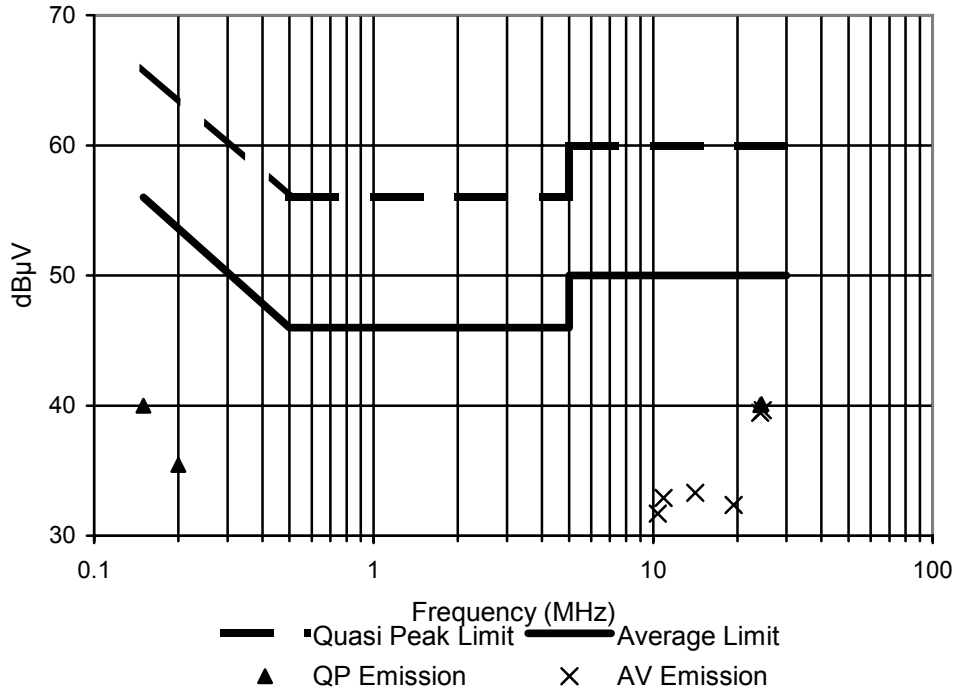

**ANNEX A**  
**PHOTOGRAPHS**



PHOTOGRAPH No. 2

TRANSMITTER FRONT VIEW



PHOTOGRAPH No. 3


**TRANSMITTER REAR VIEW**






PHOTOGRAPH No. 4


TRANSMITTER PCB TRACK SIDE

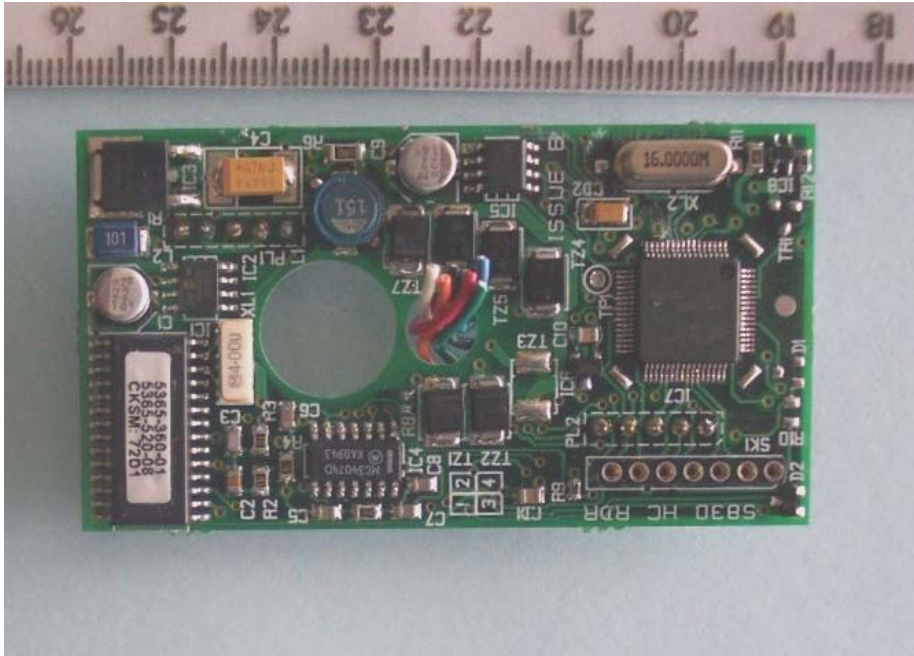


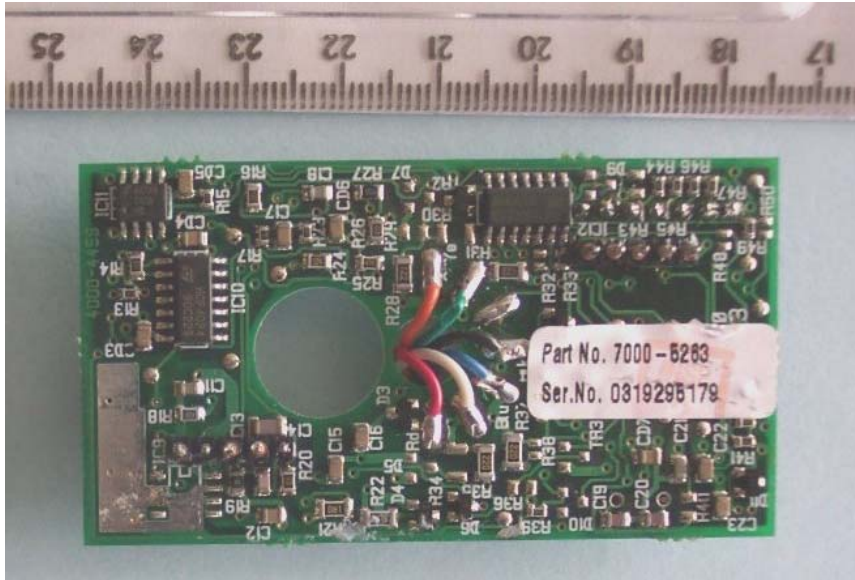

PHOTOGRAPH No. 6

ANTENNA PCB TRACK SIDE

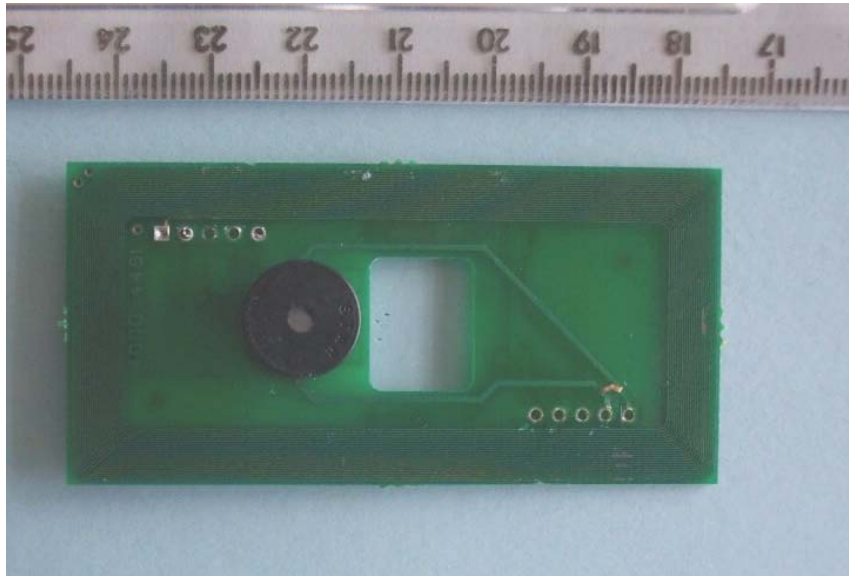

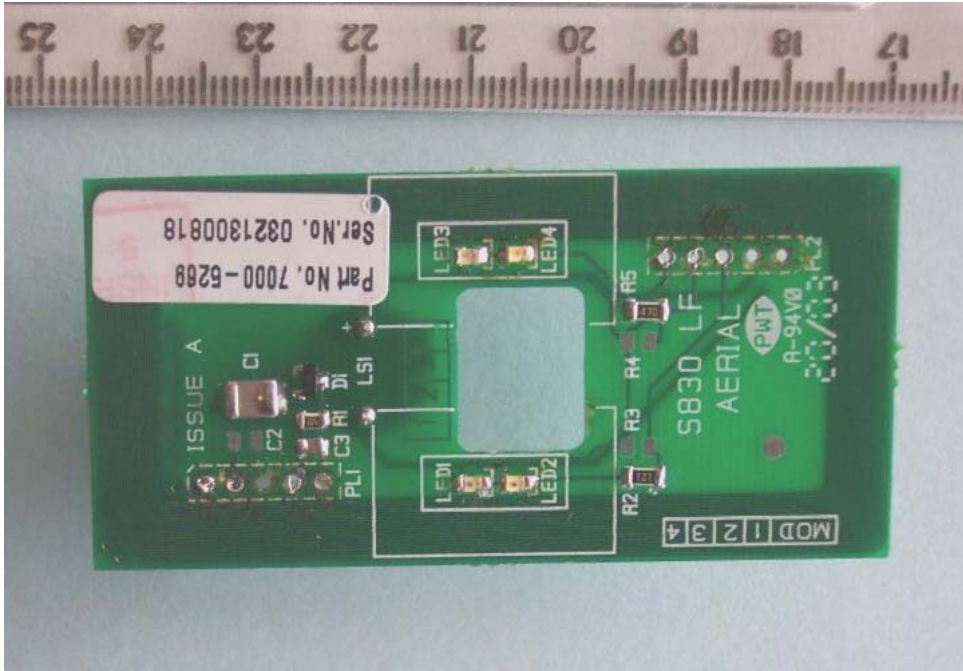

**ANNEX B**  
**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

## APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	<input checked="" type="checkbox"/>
		-	FEE	<input type="checkbox"/>
b.	AGENT'S LETTER OF AUTHORISATION	-		<input checked="" type="checkbox"/>
c.	MODEL(s) vs IDENTITY	-		<input type="checkbox"/>
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		<input type="checkbox"/>
e.	LABELLING	-	PHOTOGRAPHS	<input type="checkbox"/>
		-	DECLARATION	<input checked="" type="checkbox"/>
		-	DRAWINGS	<input type="checkbox"/>
f.	TECHNICAL DESCRIPTION	-		<input checked="" type="checkbox"/>
g.	BLOCK DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
h.	CIRCUIT DIAGRAMS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
i.	COMPONENT LOCATION	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
j.	PCB TRACK LAYOUT	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
k.	BILL OF MATERIALS	-	Tx	<input checked="" type="checkbox"/>
		-	Rx	<input type="checkbox"/>
		-	PSU	<input type="checkbox"/>
		-	AUX	<input type="checkbox"/>
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		<input checked="" type="checkbox"/>

**ANNEX C**  
**BANDWIDTH PLOT**

### BANDWIDTH PLOT

OccBW:11.10 kHz

CTR:126.05 kHz

RLV: 10.00dBm


RB 1kHz#

VB 1kHz

AT 20dB#

ST 200ms#

Band auto

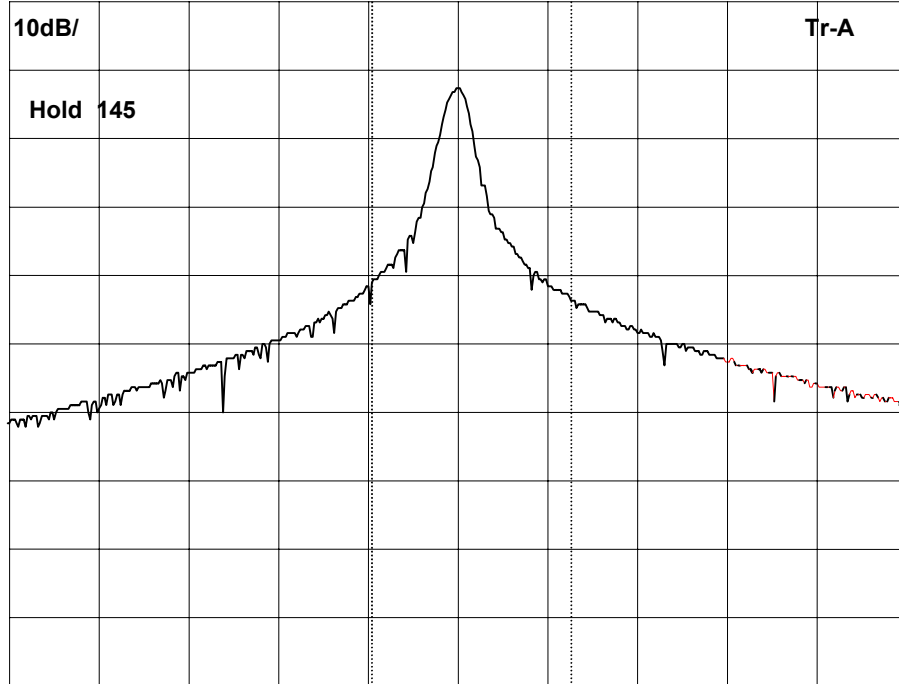

CF:125.30kHz

Span:50.0kHz



**ANNEX D**  
**CONDUCTED EMISSIONS PLOTS**

# Conducted Emissions Live

## Powerline Conduction

29 May 2003 08:54

### 150kHz - 30MHz

EUT: S830 reader  
 Manuf: Group 4  
 Op Cond: LISN UH5, UH21  
 Operator: J Charters  
 Test Spec: FCC part15.207  
 Comment: using 110V dc psu  
 Live


Scan Settings			(1 Range)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB	


Transducer	No.	Start	Stop	Name
	1	150kHz	30MHz	UH21

Final Measurement:	Detectors:	X QP / + AV
	Meas Time:	2sec
	Subranges:	25
	Acc Margin:	20 dB



# Conducted Emissions Neutral

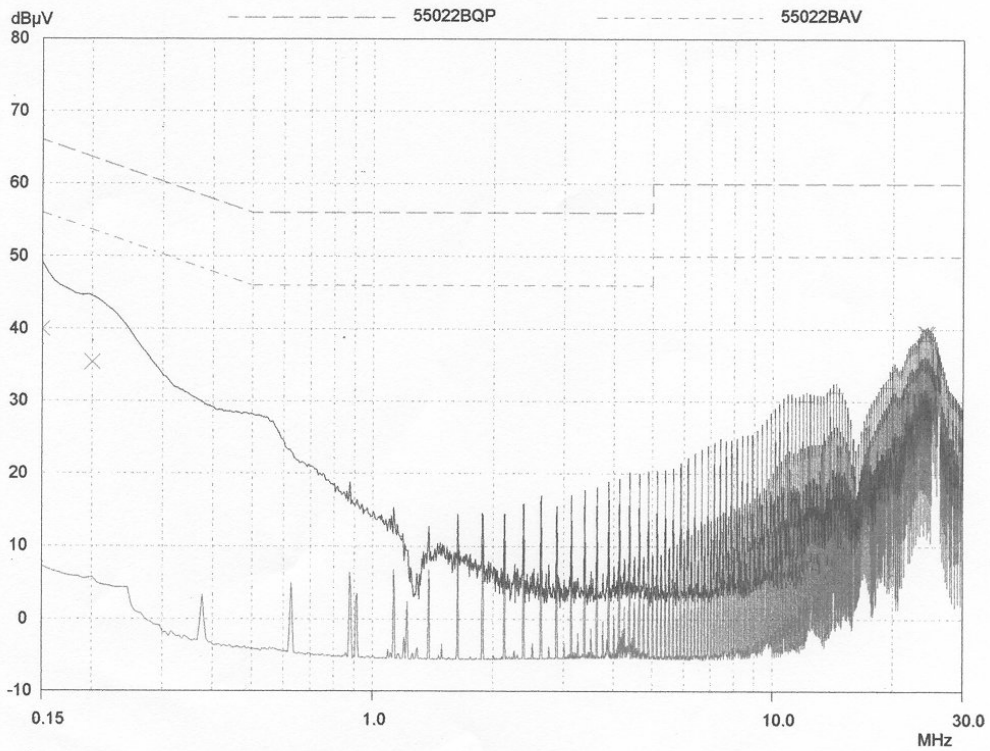

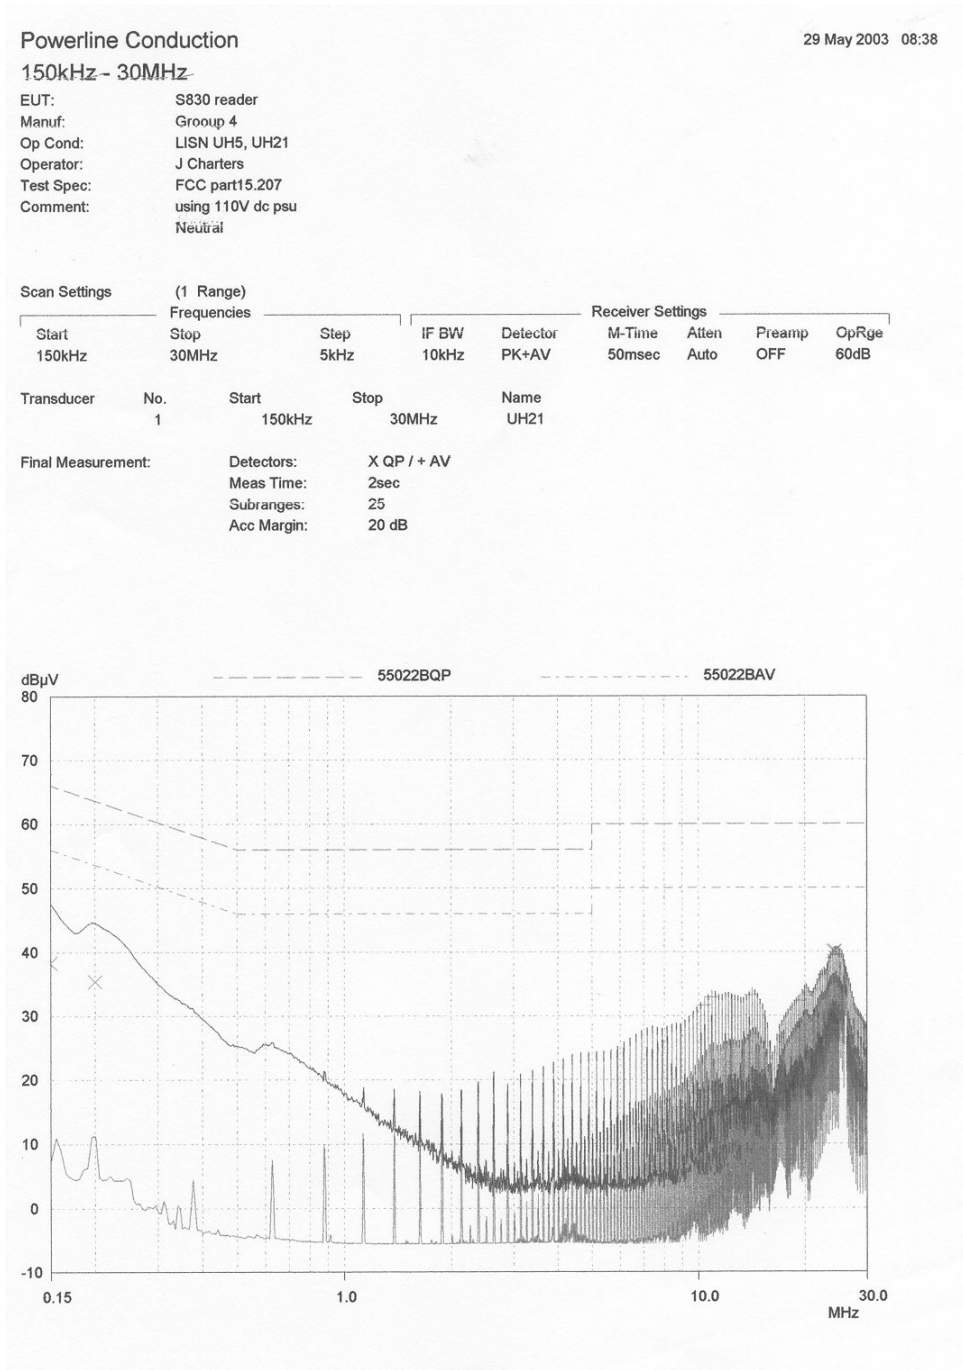**ANNEX E**  
**PEAK EMISSIONS SCANS**

# TRL COMPLIANCE


28 May 2003 08:50

## H FIELD

EUT: S830  
Manuf: Group 4  
Op Cond: Prescan  
Operator: J Chartres  
Test Spec: ETS EN300 330-1  
Comment: TX on

Scan Settings (2 Ranges)			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
9kHz	150kHz	100Hz	200Hz	PK	100msec	Auto	OFF	60dB	
150kHz	30MHz	5kHz	10kHz	PK	20msec	Auto	OFF	60dB	

Prescan Measurement:    Detector:    X PK  
                          Meas Time:    see scan settings  
                          Peaks:        8  
                          Acc Margin:    25 dB

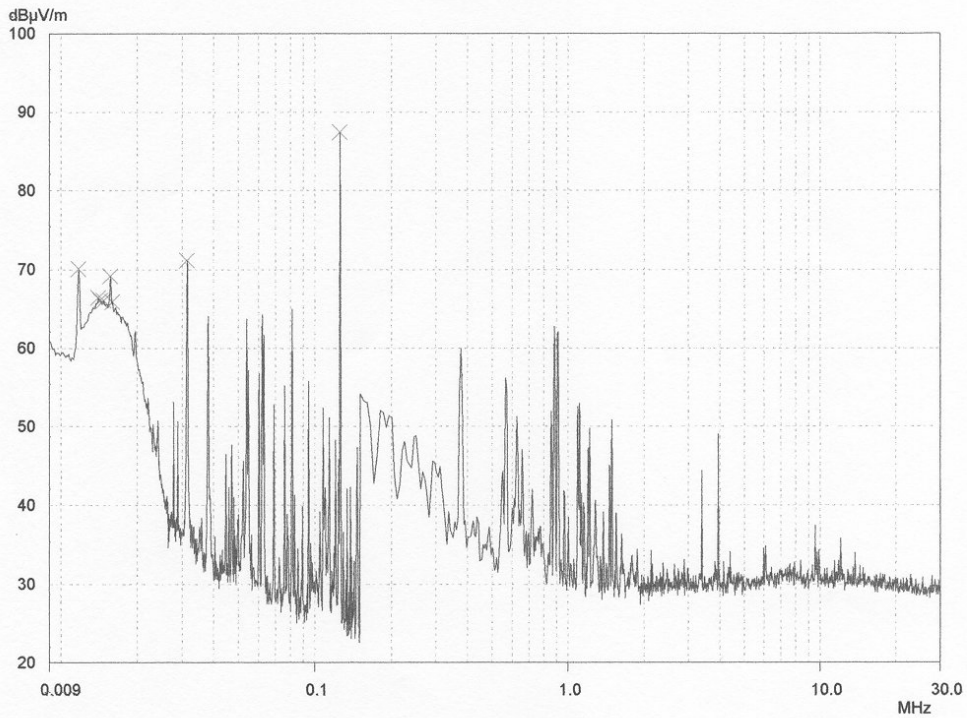

E-Field Radiation

EUT: S830  
 Manuf: Group 4  
 Op Cond: 3m Indoor Prescan  
 Operator: J Charters  
 Test Spec: FCC part 15.209  
 Comment: TX on

Scan Settings				Receiver Settings				
(1 Range)								
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	50kHz	120kHz	PK	1msec	Auto	ON	60dB
30MHz	1000MHz							
Transducer	No.	Start	Stop	Name				
1	15	30MHz	1000MHz	TRLUH72				
	22	30MHz	1000MHz	CBL6112B				
Prescan Measurement:		Detector:	X PK					
		Meas Time:	see scan settings					
		Subranges:	50					
		Acc Margin:	10 dB					

