

Radio Test Report

for

G4S Technology Ltd

on

S874 Mifare Wallplate Card Reader

DOCUMENT NO. TRA-012532-CO007-47-00-A

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com

TRaC Wireless Test Report : TRA-012532-CO007-47-00-A

Applicant : G4S Technology Ltd

Apparatus : S874 Mifare Wallplate Card Reader

Specification(s) : CFR47 Part 15.225

Purpose of Test : Certification

FCCID : 0E5S874A

Authorised by :



:Radio Products Manager

Issue Date : 13th May 2013

Authorised Copy Number : PDF

Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes relating to the assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	10
3.1	Modifications Performed During Assessment	10
Appendix A:	Formal Emission Test Results	11
A1	Transmitter Intentional Emission Radiated	12
A2	Radiated Magnetic Field Emissions	13
A3	Radiated Electric Field Emissions	15
A4	Power Line Conducted Emissions	17
A5	Frequency Stability	19
Appendix B:	Supporting Graphical Data	20
Appendix C:	Additional Test and Sample Details	26
C1	Test samples	27
C2	EUT operating mode during testing	28
C3	EUT Configuration Information	29
C4	List of EUT Ports	30
C5	Details of Equipment Used	31
Appendix D:	Additional Information	32
Appendix E:	Photographs and Figures	33

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: D Winstanley

Report author: D Winstanley

This report must not be reproduced except in full without prior written permission from TRaC Global.

1.2 Tests Requested By

This testing in this report was requested by:

G4S Technology Ltd
Challenge House
International Drive
Tewkesbury
Gloucestershire GL20 8UQ
England, UK

1.3 Manufacturer

Same as above

1.4 Apparatus Assessed

The following apparatus was assessed between 26th February – 8th March 2013:

S874 Mifare Wallplate Card Reader

The above device is an RFID card reader operating at 13.56 MHz

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Spurious Emissions Radiated <1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	ANSI C63.10	Pass
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.225	ANSI C63.10	Pass
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.225	ANSI C63.10	Pass
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	ANSI C63.10	Pass

Abbreviations used in the above table:

CFR	: Code of Federal Regulations	ANSI	: American National Standards Institution
REFE	: Radiated Electric Field Emissions	PLCE	: Power Line Conducted Emissions

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
EUT	: Equipment Under Test	ATS	: Alternative Test Site
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Test Details	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.225
Measurement standard	ANSI C63.10
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20 ⁰ C
Photographs	Appendix F

Frequency (MHz)	Receiver Level (dBµV/m)	Measurement Distance (m)	Specification Distance (m)	Extrapolation Factor (dB)	Field Strength (dBµV/m)	Field Strength (µV/m)
13.56	80.29	1	30	63.61	16.68	6.823
13.56	56.68	3	30	40.00	16.68	6.823
Limit value @ f_c			15848 µV/m at 30m			
Band occupancy @ -20 dBc			f_{lower} (MHz)		f_{higher} (MHz)	
			13.560160256		13.565288462	
			20dB Bandwidth = 5.128kHz			

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector at f_c was Quasi Peak with 10kHz bandwidth
 - 3 When battery powered the EUT was powered with new batteries
 - 4 3-30m extrapolation 40 dB as per 15.31
 - 5 1-3m extrapolation 23.61dB as measured
 - 6 1-30m extrapolation 63.61dB (40 +23.61)

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 3m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable
 - 5 EUT orientation in three orthogonal planes
 - 6 Maximum results recorded

A2 Radiated Magnetic Field Emissions

Preliminary scans were performed using a peak detector. The radiated magnetic field emissions test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10
Frequency range	9kHz to 30MHz
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20°C
Photographs	Appendix F

The worst case radiated emission measurements for spurious emissions are listed below.

Frequency (MHz)	Pk Level (dBuV/m)	Pk Limit (dBuV/m)	Pk Delta (dB)	Result Summary
No Significant emissions detected within 20dB of the limit				

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR part 15 Clause 15.33(a) and 15.33(a)(1). Radiated emission limits 47 CFR part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength (µV/m)	Measurement Distance (m)	Field strength (dBµV/m)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = x \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
 (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A3 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with a measurement bandwidth of 100kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10
Frequency range	30MHz to 1GHz
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20°C
Photographs	Appendix F

The worst case radiated emission measurements for spurious emissions and harmonics are listed below.

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	33.55	6.9	0.5	15.9	-	23.3	-	14.59	100
2.	40.68	11.4	0.3	12.2	-	23.9	-	15.67	100
3.	67.82	24.3	0.4	5.1	-	29.8	-	30.94	100
4.	81.38	22.0	0.6	7.2	-	29.8	-	30.76	100
5.	108.51	15.9	0.8	11.3	-	28.0	-	25.12	150
6.	135.63	18.5	0.8	11.1	-	30.4	-	32.96	150
7.	149.19	16.1	0.8	10.2	-	27.1	-	22.59	150
8.	162.76	21.4	0.8	10.0	-	32.2	-	40.64	150
9.	176.32	19.0	0.8	9.1	-	28.9	-	27.86	150
10.	189.88	19.0	0.8	8.8	-	28.6	-	26.92	150
11	203.44	24.1	0.8	8.9	-	33.8	-	48.87	150
12	217.00	19.7	0.7	8.5	-	28.9	-	27.86	200
13	230.57	19.2	0.6	10.0	-	29.8	-	30.83	200
14	244.14	15.2	0.5	11.5	-	27.3	-	23.04	200
15	257.70	16.8	0.7	12.7	-	30.2	-	32.17	200
16	271.26	13.2	0.9	12.5	-	26.6	-	21.45	200
17	284.82	13.0	1.2	12.8	-	27.0	-	22.39	200
18	596.77	7.3	1.3	18.8	-	27.4	-	23.42	200

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
 Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR part 15 Clause 15.33(a) and 15.33(a)(1). Radiated emission limits 47 CFR part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength (µV/m)	Measurement Distance (m)	Field strength (dBµV/m)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = x \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

Where $x = 40$ for frequencies <30MHz and 20 otherwise

- (b) The levels may have been rounded for display purposes
 (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A4 Power Line Conducted Emissions

Preview power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b). Where applicable, formal measurements of the emissions were performed with an average and quasi peak detector.

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Photographs	Appendix F

Results measured using the average detector compared to the average limit

Ref No.	Frequency (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	13.56	Live	57.14	50	57.14	Note 1

Results measured using the Quasi-peak detector compared to the Quasi-peak limit

Ref No.	Frequency (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	13.56	Live	65.53	60	5.53	Note 1

Results measured using the average detector compared to the average limit

With Dummy Load						
Ref No.	Frequency (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	13.56	Live	49.03	50	57.14	Pass Note 2

Results measured using the Quasi-peak detector compared to the Quasi-peak limit

With Dummy Load						
Ref No.	Frequency (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	13.56	Live	57.96	60	5.53	Pass Note 2

- Notes 1. With antenna connected
 2. Fundamental measured with dummy load connected

Specification limits:

Conducted emission limits (47 CFR Part 15: Clause 15.207):

Conducted disturbance at the mains port shall not exceed the following values:

Frequency range MHz	Limits dB μ V	
	Quasi-peak	Average
0.15 to 0.5	66 to 56 ²	56 to 46 ²
0.5 to 5	56	46
5 to 30	60	50

Notes:
 1. The lower limit shall apply at the transition frequency.
 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes:

- (a) The levels may have been rounded for display purposes
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		

(i) Parameter defined by standard and / or single possible, refer to Appendix C
 (ii) Parameter defined by client and / or single possible, refer to Appendix C
 (iii) Parameter had a negligible effect on emission levels, refer to Appendix C
 (iv) Worst case determined by initial measurement, refer to Appendix C

A5 Frequency Stability

Test Details:	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.225
Measurement standard	ANSI C63.10
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C

Vnom (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (kHz)	Limit = ± 0.01% = ±1.3562kHz
+12.0Vdc	+20 °C	13.56266186	-	-
+12.0Vdc	+55 °C	13.56262019	-0.0417	Pass
+12.0Vdc	-20 °C	13.56284615	0.1843	Pass
Voltage (Vdc) 85% - 115%	Temperature (°C)	Frequency (MHz)	Deviation (kHz)	Limit = ± 0.01% = 1.3562kHz
85% = 10.20	+20 °C	13.56266186	0.0000	Pass
115% = 13.80	+20 °C	13.56264904	-0.0128	Pass

Appendix B:


Supporting Graphical Data

This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

20dB Bandwidth

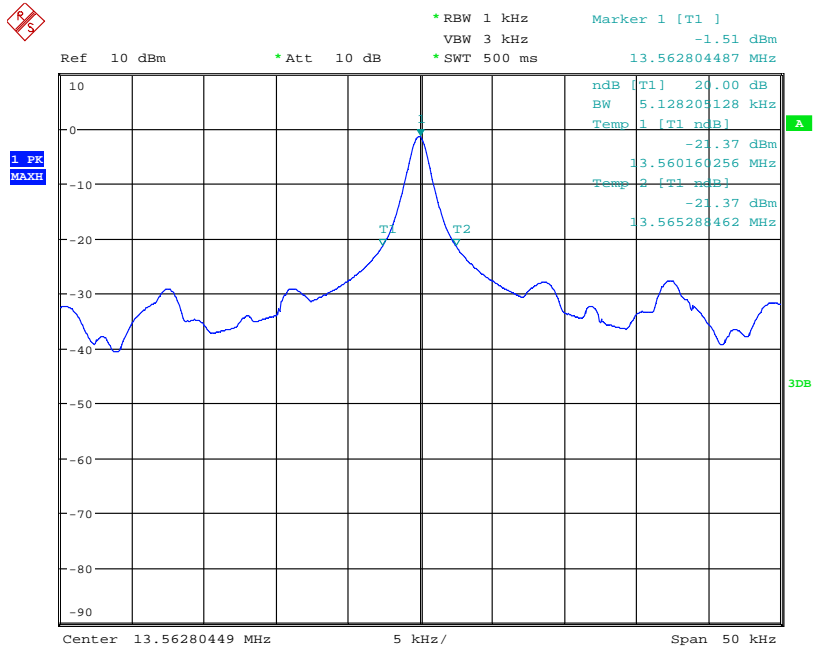


Date: 3.APR.2013 12:53:27

Emissions Mask – Tnom, Vnom

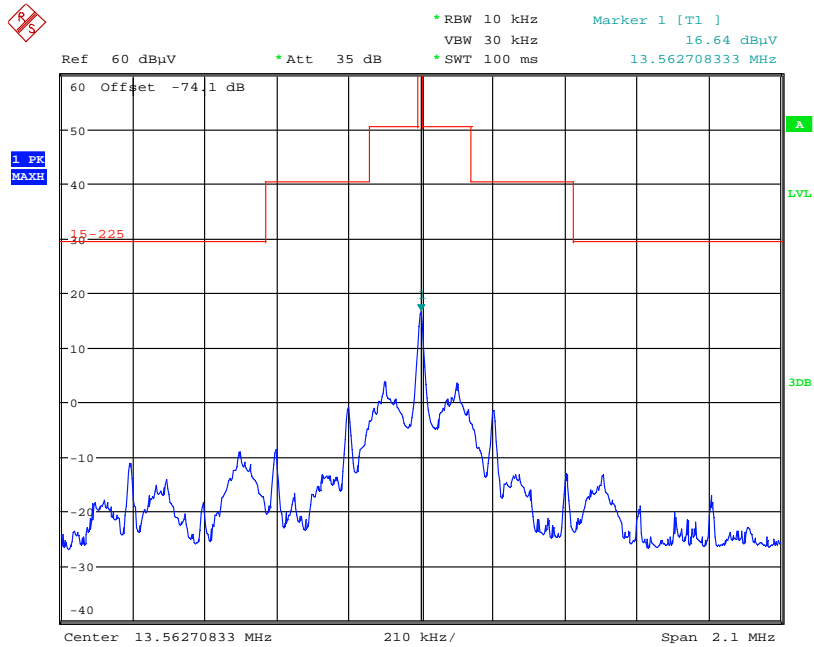


Date: 5.MAR.2013 16:07:14

Emissions Mask – Tnom, Vmin

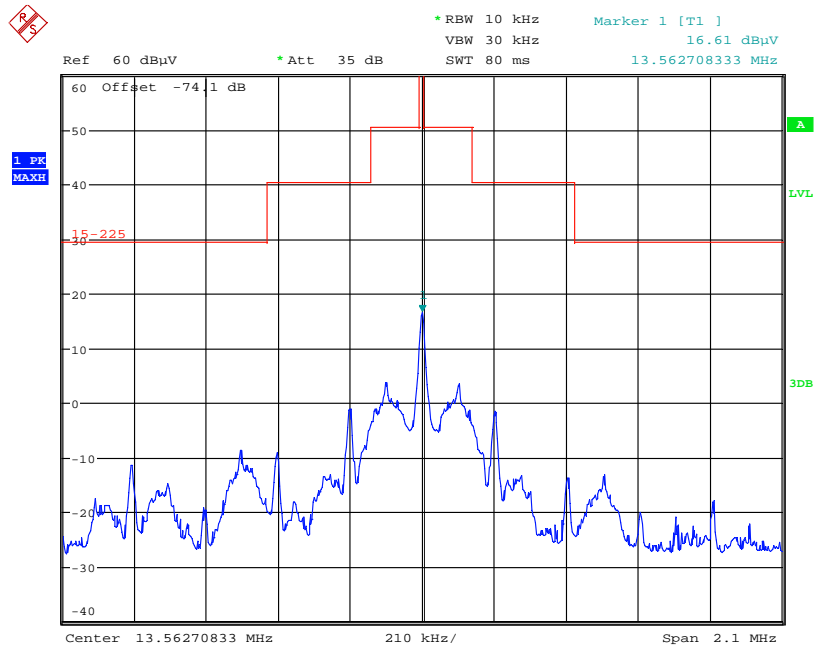


Date: 5.MAR.2013 16:10:55

Emissions Mask – Tnom, Vmax

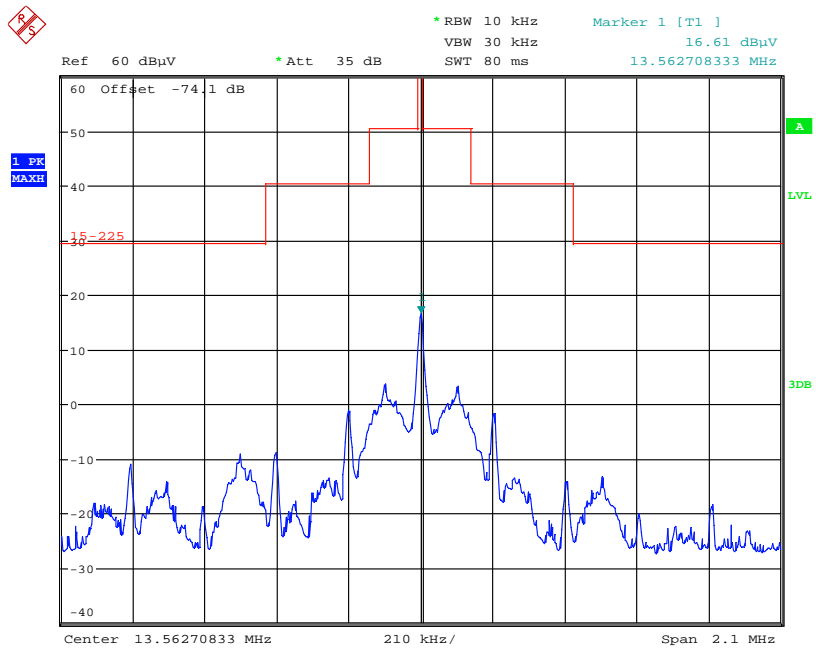


Date: 5.MAR.2013 16:13:03

Emissions Mask – Tmin, Vnom

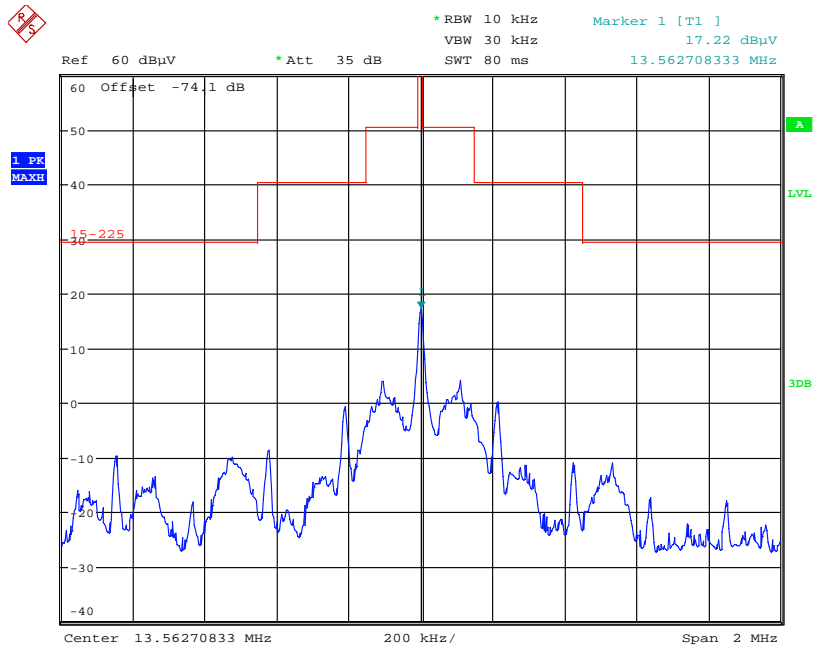


Date: 6.MAR.2013 12:05:40

Emissions Mask – Tmax, Vnom

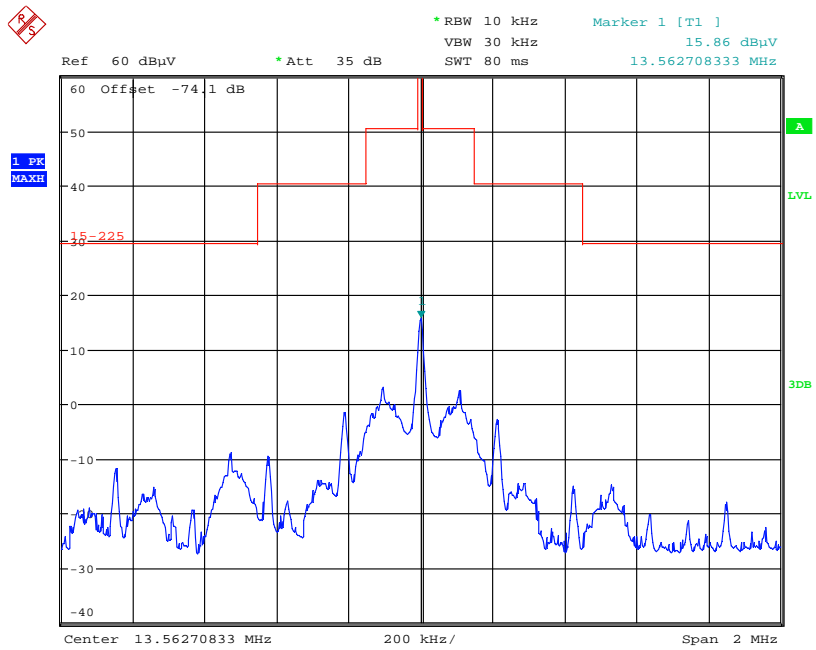


Date: 6.MAR.2013 09:31:52


Radiated H-field scan

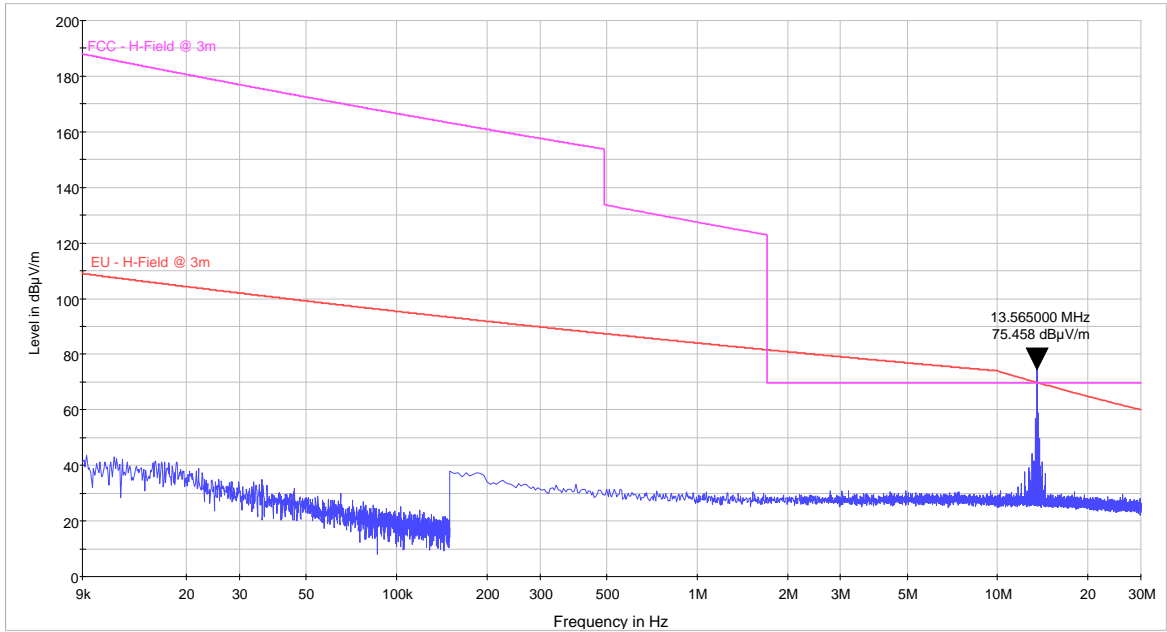

Radiated E-field scan

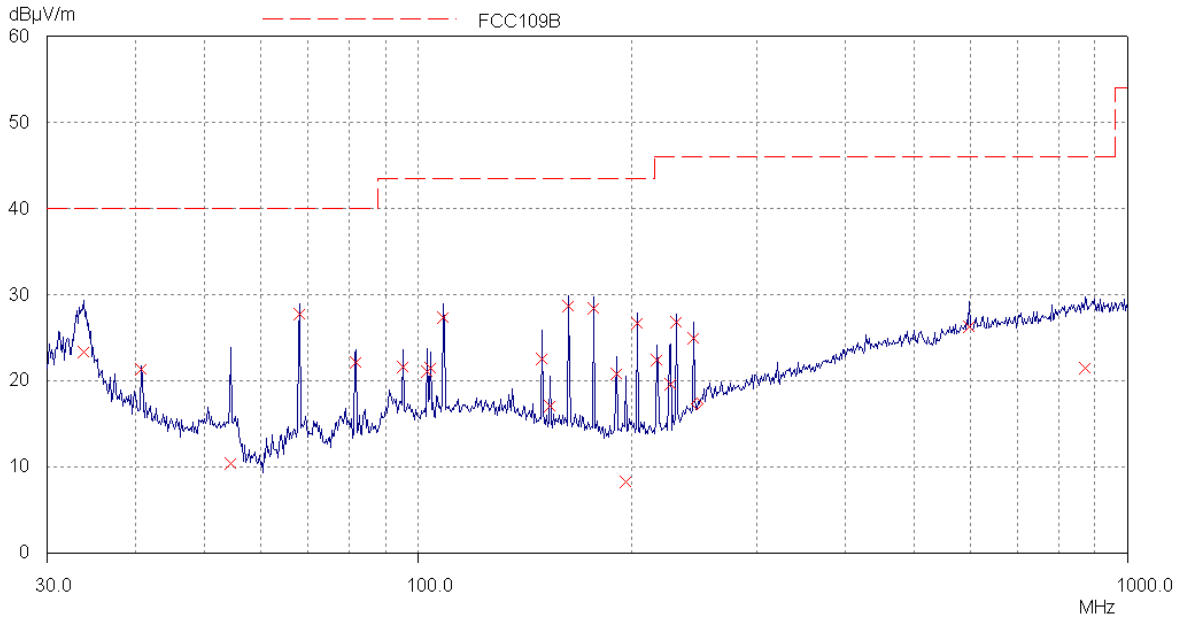

Powerline conducted emissions – Live line

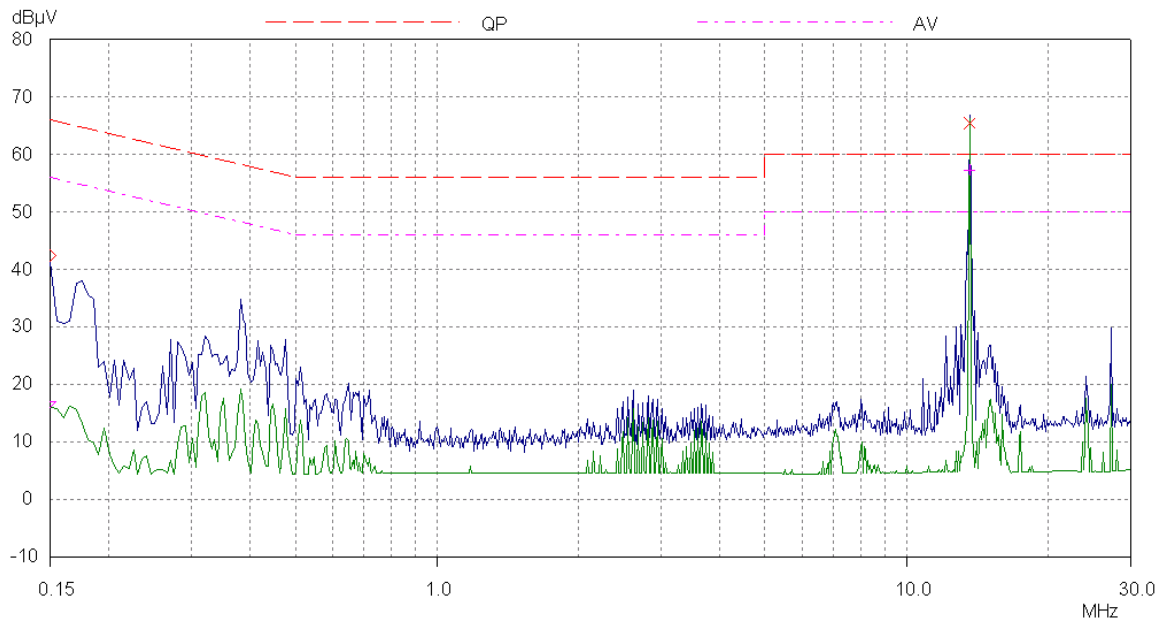

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below)
4. EUT arrangement (see below)

Throughout testing, the following numbering system is used to identify the sample and its modification state:

Sample No: Sxx Mod w

where:

xx = sample number eg. S01
w = modification number eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis
- Setting of any internal switches
- Circuit board jumper settings
- Alternative internal power supplies

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S01	S874 Mifare Wallplate Card Reader	None

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following tables:

Test	Description of Operating Mode
All tests detailed in this report	EUT actively transmitting

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The table below describes the termination of EUT ports:

Sample : S01
Tests : All

Port	Description of Cable Attached	Cable length	Equipment Connected
Power	Multi core Shielded Cable	1m (Exposed)	Control Panel

C5 Details of Equipment Used

TRaC No	Type	Description	Manufacturer	Last Cal	Period	Cal Due
UH003	ESHS10	Receiver	R&S	16/02/2012	12	16/02/2013
UH041	M3004	Multimeter	AVOmeter	16/03/2012	12	16/03/2013
L274	CBL6112B	Bilog	Chase	24/01/2012	24	24/01/2014
UH195	ESH3-Z5.831.5	Lisn	R&S	01/06/2012	12	01/06/2013
UH281	FSU46	Spectrum Analyser	R&S	09/02/2012	12	09/02/2013
UH396	ENV216	Lisn	R&S	12/04/2012	12	12/04/2013
L007	hfh2	Loop Antenna	R&S	04/11/2011	24	04/11/2013
L415	ESVS20	Receiver	R&S	20/08/2012	12	20/08/2013
L426	52 Series II	Temperature Indicator	Fluke	22/03/2012	12	22/03/2013

Appendix D:

Additional Information


No additional information is included within this test report.

Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated tests setup (Over view)
2. Powerline conducted emissions test setup

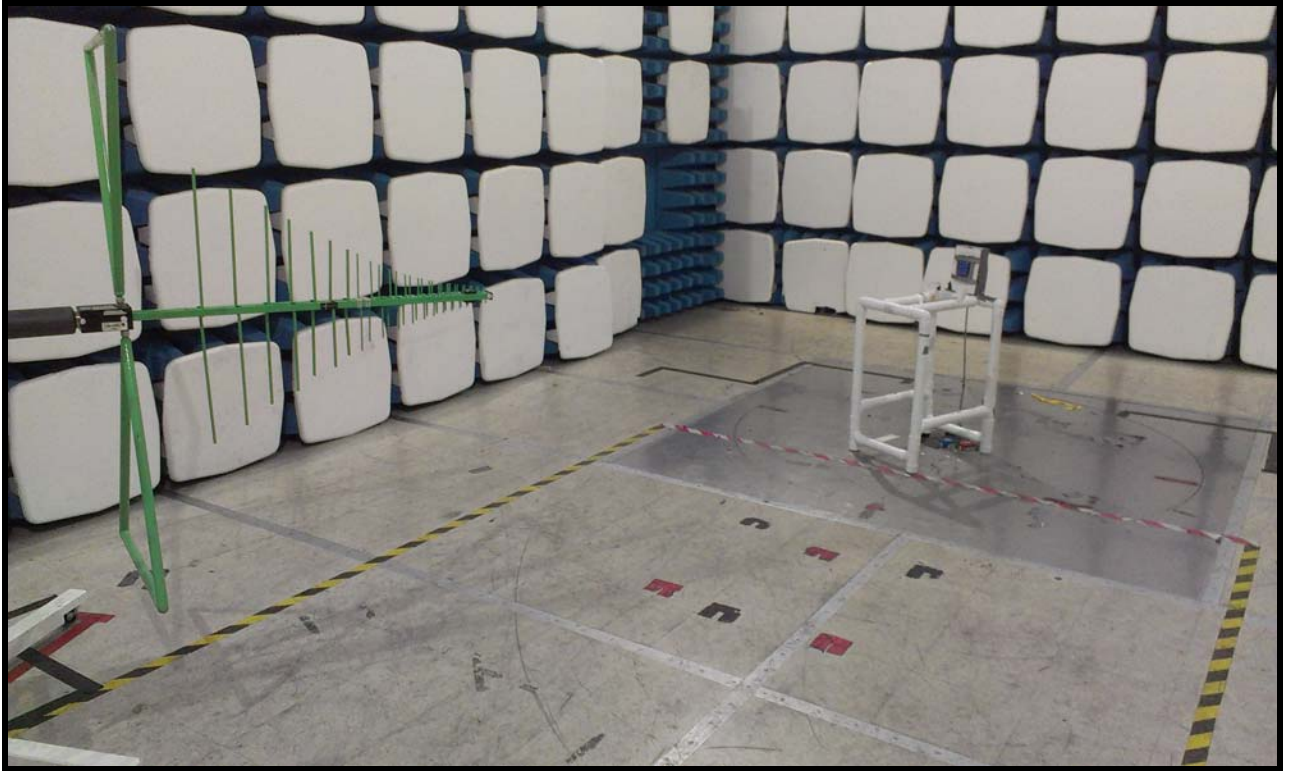

Photograph 1



Photograph 2

