

TEST REPORT

Product Name : B91 Audio RCU
Brand Mark : Telink
Model No. : TLSR9218ARCU48D
Report Number : BLA-EMC-202211-A7302
FCC ID : OEOTLSR9218ARC48D
Date of Sample Receipt : 2022/11/24
Date of Test : 2022/11/24 to 2022/12/7
Date of Issue : 2022/12/7
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Telink Semiconductor (Shanghai) Co., Ltd.
Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict,
Bao'an District, Shenzhen,Guangdong, China
TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sueels

Approved by:

Bluezheng

Date:

2022/12/7



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/12/7	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT.....	8
8	LABORATORY LOCATION.....	8
9	TEST INSTRUMENTS LIST	9
10	CONDUCTED BAND EDGES MEASUREMENT.....	11
10.1	LIMITS	11
10.2	BLOCK DIAGRAM OF TEST SETUP	11
10.3	TEST DATA.....	12
11	ANTENNA REQUIREMENT	13
11.1	CONCLUSION	13
12	RADIATED SPURIOUS EMISSIONS.....	14
12.1	LIMITS	14
12.2	BLOCK DIAGRAM OF TEST SETUP	15
12.3	PROCEDURE	15
12.4	TEST DATA.....	17
13	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	25
13.1	LIMITS	25
13.2	BLOCK DIAGRAM OF TEST SETUP	26
13.3	PROCEDURE	26
13.4	TEST DATA.....	28
14	CONDUCTED SPURIOUS EMISSIONS	32
14.1	LIMITS	32
14.2	BLOCK DIAGRAM OF TEST SETUP	32
14.3	TEST DATA.....	33

15	POWER SPECTRUM DENSITY	34
15.1	LIMITS	34
15.2	BLOCK DIAGRAM OF TEST SETUP	34
15.3	TEST DATA.....	34
16	CONDUCTED PEAK OUTPUT POWER	35
16.1	LIMITS	35
16.2	BLOCK DIAGRAM OF TEST SETUP	35
16.3	TEST DATA.....	36
17	MINIMUM 6DB BANDWIDTH	37
17.1	LIMITS	37
17.2	BLOCK DIAGRAM OF TEST SETUP	37
17.3	TEST DATA.....	37
18	APPENDIX	38
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
	APPENDIX B: PHOTOGRAPHS OF EUT	67

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	N/A
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

Remark:

N/A: Not Applicable

2 GENERAL INFORMATION

Applicant	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Manufacturer	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Factory	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Product Name	B91 Audio RCU
Test Model No.	TLSR9218ARCU48D

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V0001
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Rate data:	1Mbps; 2Mbps
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	2.59dBi

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.0V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation
Remark: Full battery is used during all test except ac conducted emission, BLE1M, BLE2M all have been tested, during the test, BLE1M, BLE2M modulation were all pre-scanned only BLE1M worse case is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyao Subdistrict, Bao'an District,
Shenzhen,Guangdong ,China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01

Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A

BlueAsia


10 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

10.2 BLOCK DIAGRAM OF TEST SETUP

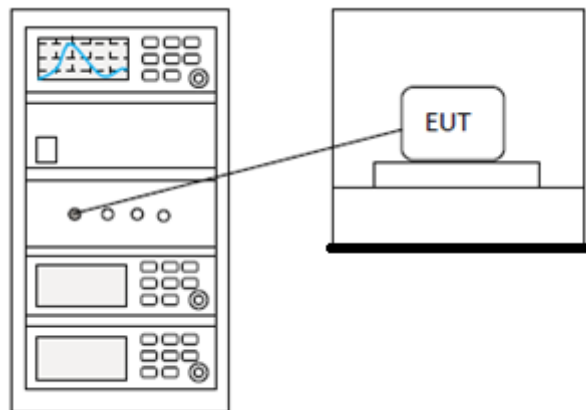

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

11 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


11.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The max peak gain of the antenna is 2.59dBi.

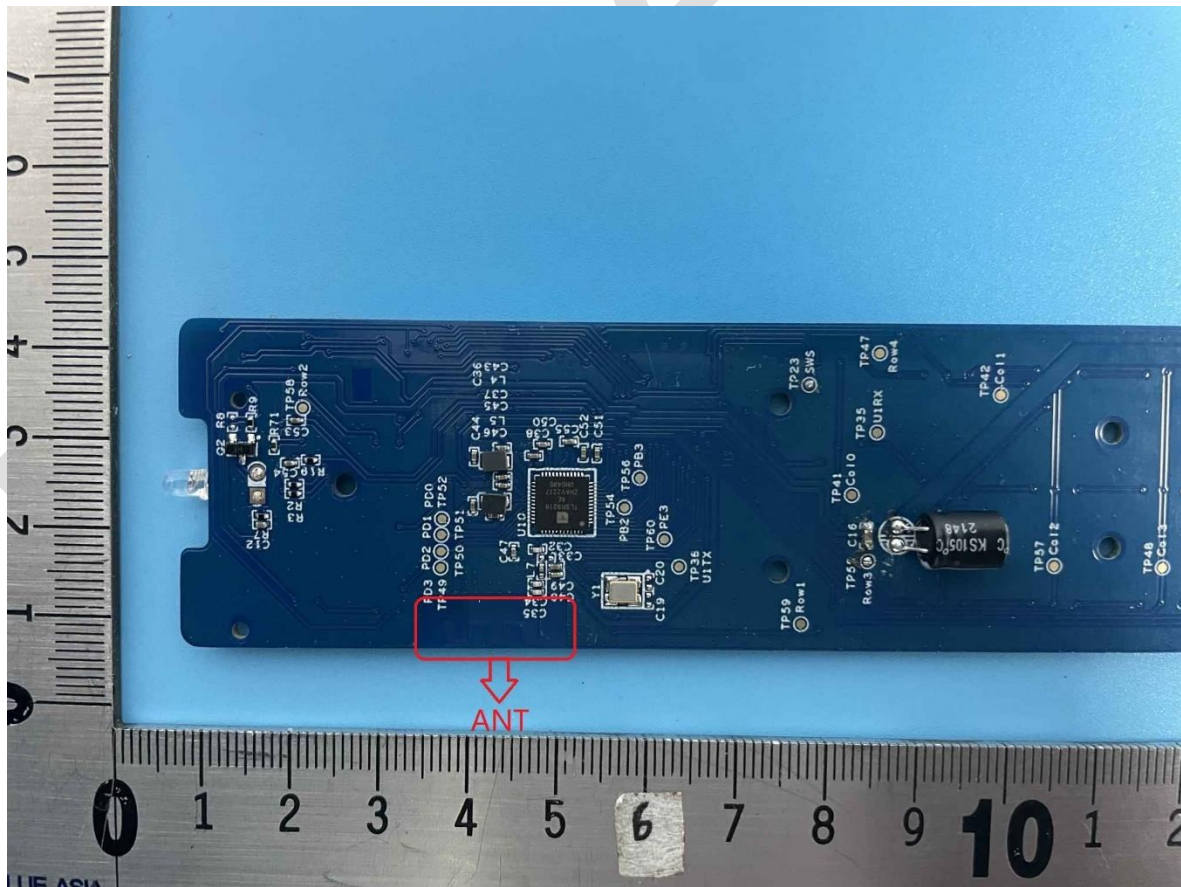

12 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Tester	Jozu
Temperature	25°C
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

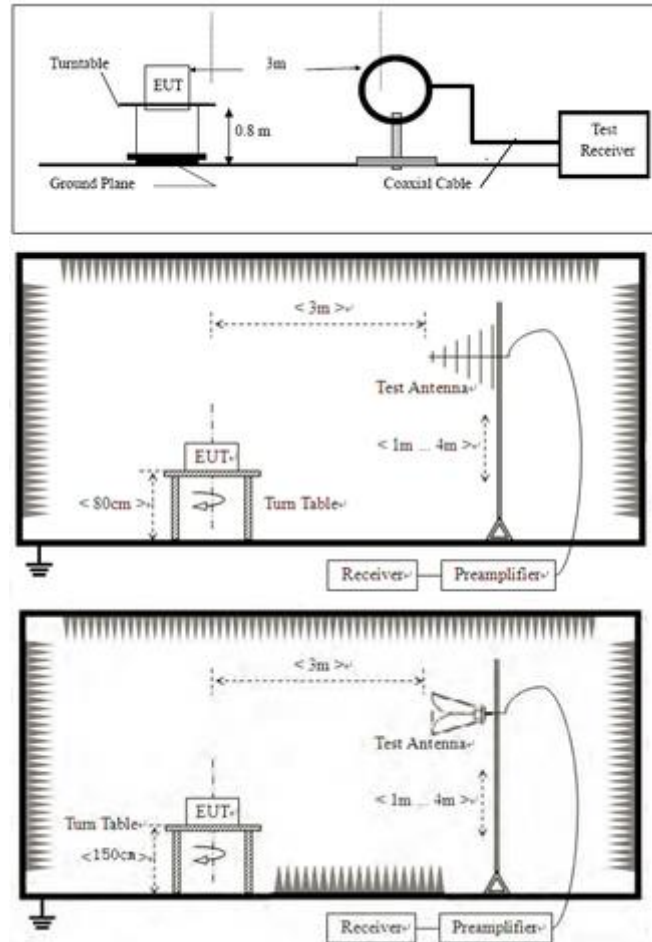

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

12.4 TEST DATA

Remark: During the test, pre-scan the BLE1M, BLE2M, and found the BLE1M which it is worse case.


[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

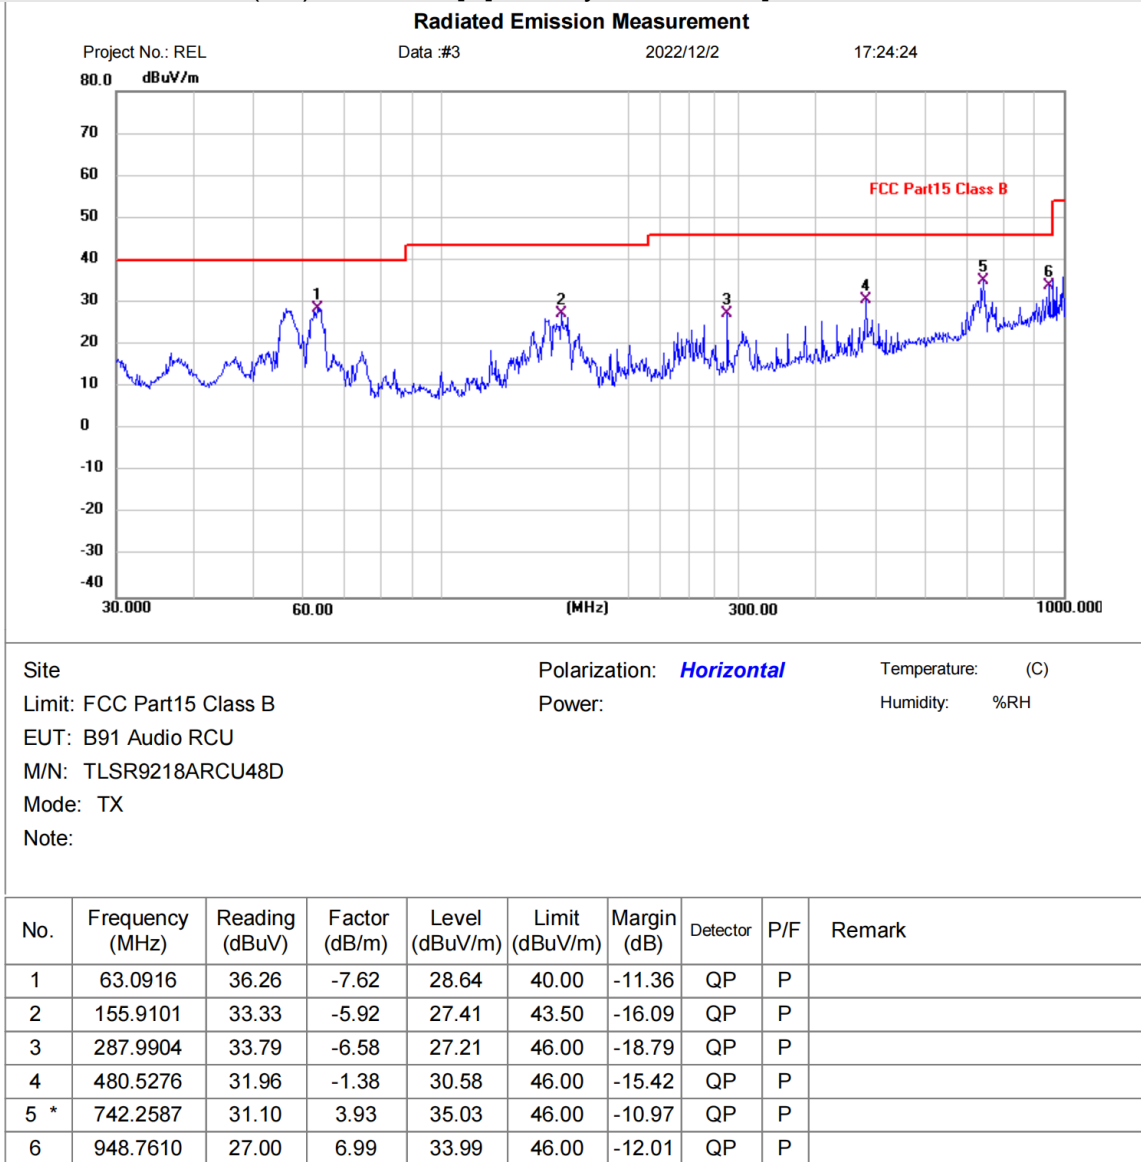

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

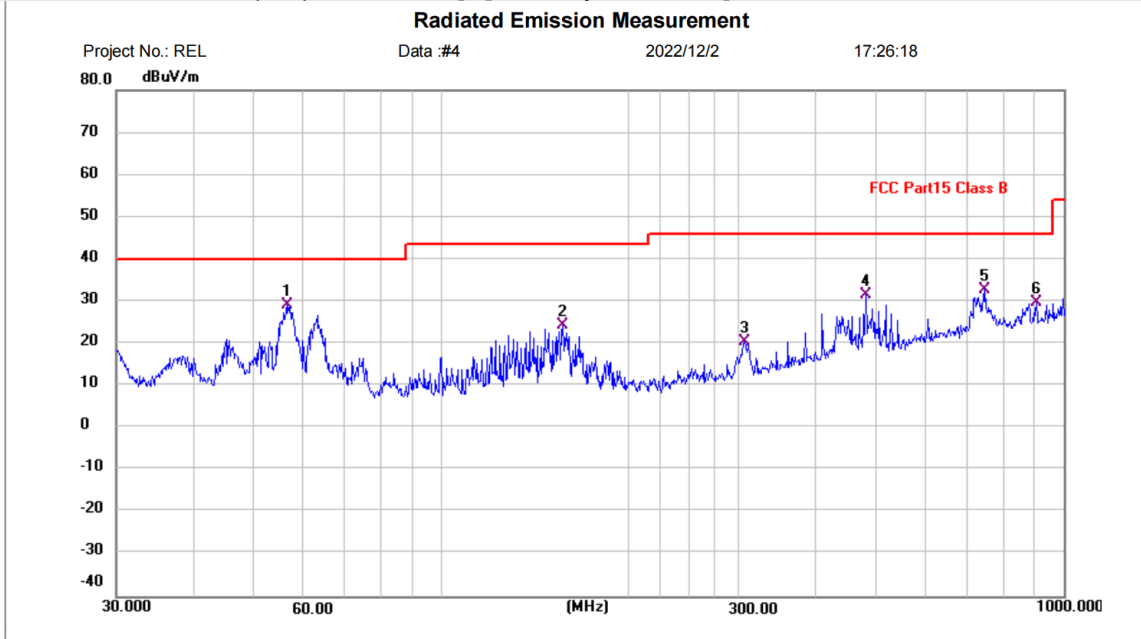


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 Class B Power: Humidity: %RH
 EUT: B91 Audio RCU
 M/N: TLSR9218ARCU48D
 Mode: TX
 Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	56.3948	35.83	-6.72	29.11	40.00	-10.89	QP	P	
2	156.4578	30.20	-5.81	24.39	43.50	-19.11	QP	P	
3	306.7537	25.86	-5.51	20.35	46.00	-25.65	QP	P	
4	480.5276	33.04	-1.38	31.66	46.00	-14.34	QP	P	
5	747.4825	28.83	3.81	32.64	46.00	-13.36	QP	P	
6	903.3094	23.97	5.85	29.82	46.00	-16.18	QP	P	

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

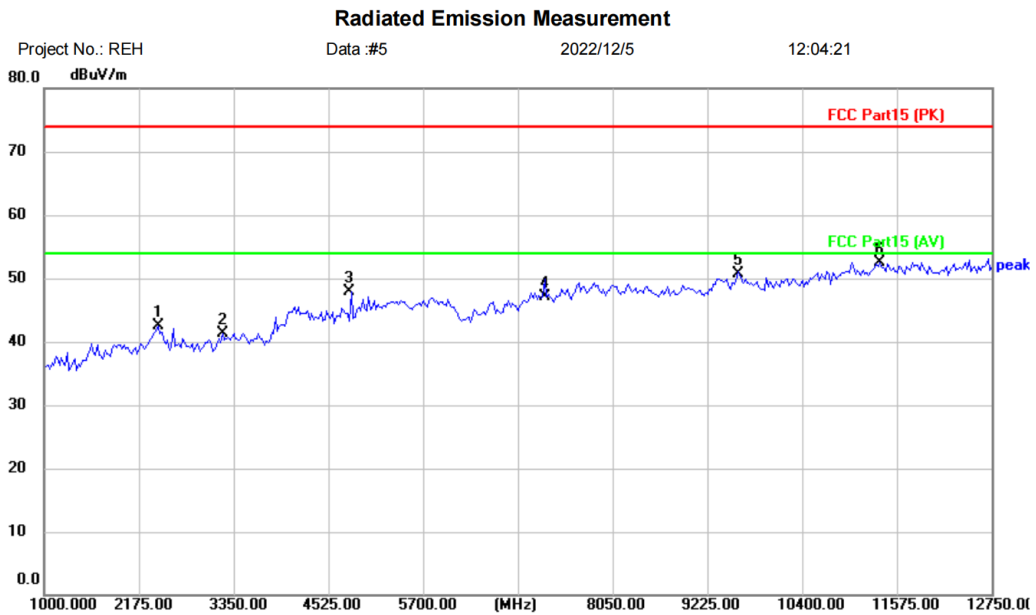


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2410.000	43.67	-1.26	42.41	74.00	-31.59	peak	
2		3209.000	43.83	-2.44	41.39	74.00	-32.61	peak	
3		4804.000	43.78	4.05	47.83	74.00	-26.17	peak	
4		7206.000	39.17	7.93	47.10	74.00	-26.90	peak	
5		9608.000	39.81	10.90	50.71	74.00	-23.29	peak	
6	*	11363.500	38.84	13.62	52.46	74.00	-21.54	peak	

*:Maximum data x:Over limit !:over margin <Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

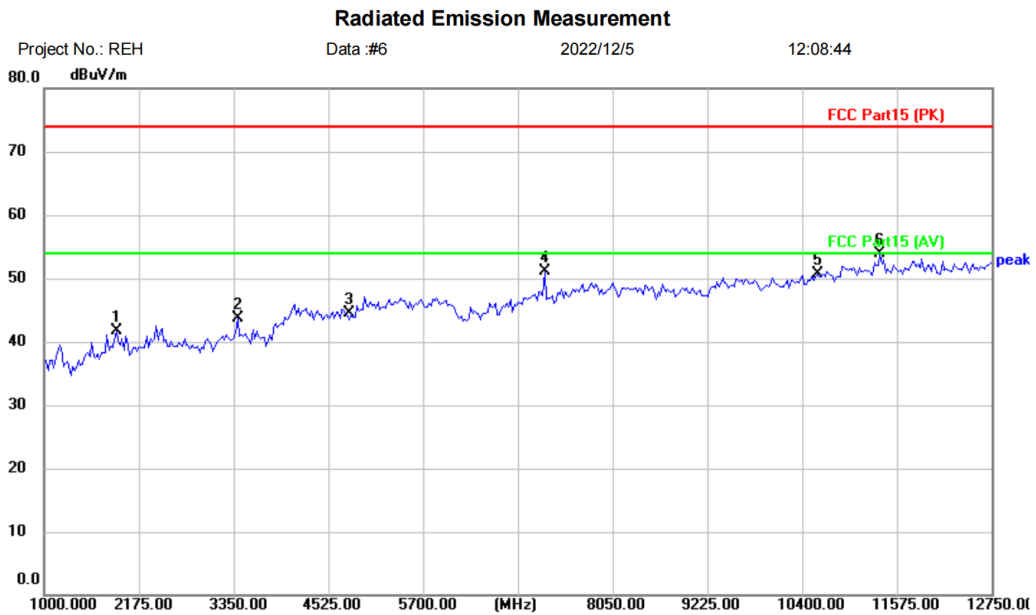

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-L		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1893.000	46.52	-4.80	41.72	74.00	-32.28	peak	
2		3397.000	45.38	-1.77	43.61	74.00	-30.39	peak	
3		4804.000	40.39	4.05	44.44	74.00	-29.56	peak	
4		7204.000	43.24	7.93	51.17	74.00	-22.83	peak	
5		10588.000	37.83	12.82	50.65	74.00	-23.35	peak	
6	*	11363.500	40.22	13.62	53.84	74.00	-20.16	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

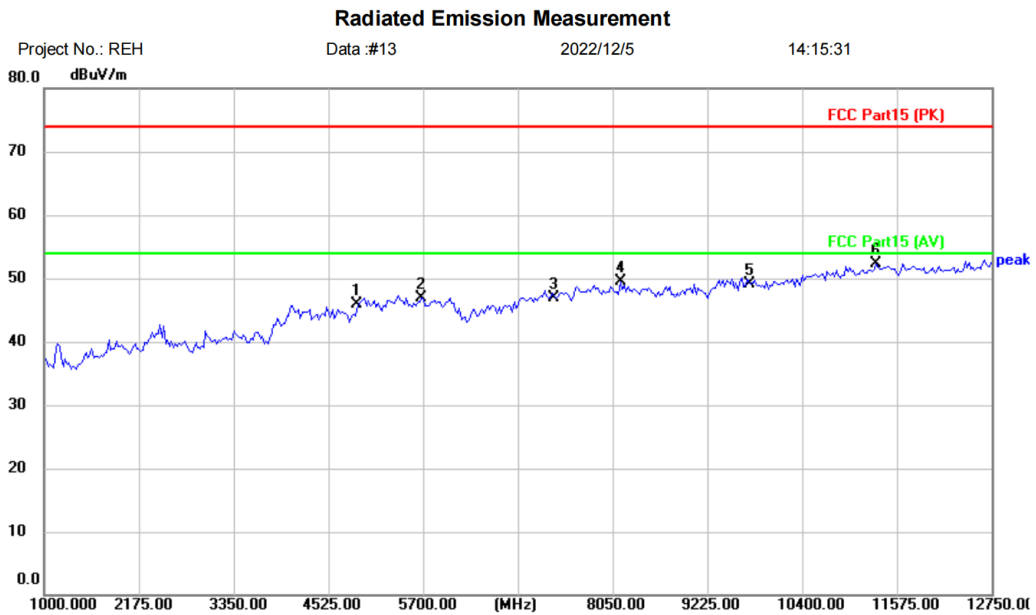

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-M		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	41.55	4.37	45.92	74.00	-28.08	peak	
2		5676.500	40.15	6.79	46.94	74.00	-27.06	peak	
3		7323.000	38.67	8.21	46.88	74.00	-27.12	peak	
4		8144.000	40.54	8.96	49.50	74.00	-24.50	peak	
5		9764.000	37.87	11.30	49.17	74.00	-24.83	peak	
6	*	11316.500	38.69	13.59	52.28	74.00	-21.72	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

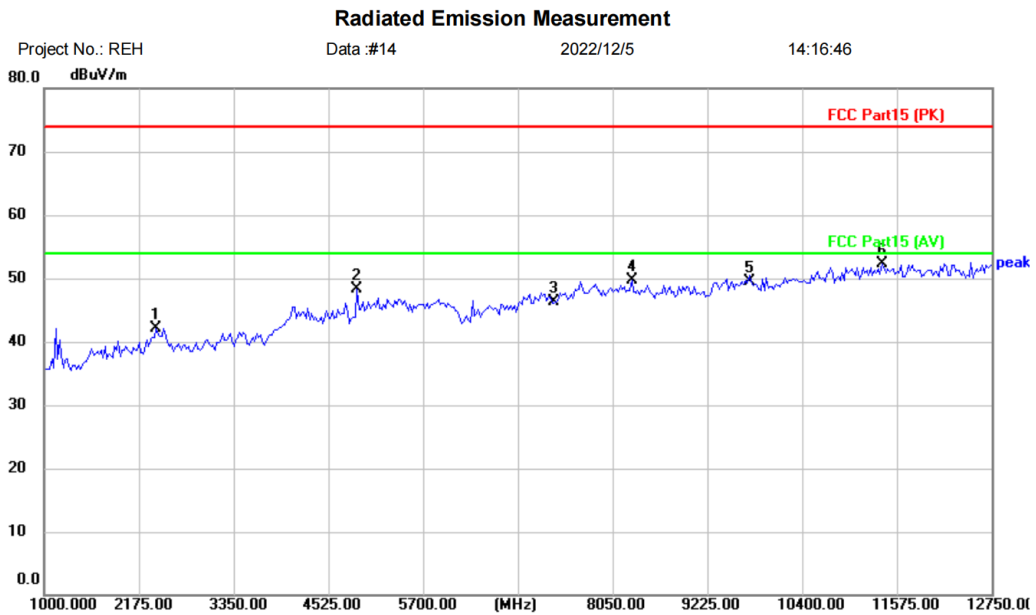

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2386.500	43.20	-1.11	42.09	74.00	-31.91	peak	
2		4877.500	44.02	4.35	48.37	74.00	-25.63	peak	
3		7323.000	38.06	8.21	46.27	74.00	-27.73	peak	
4		8285.000	40.58	9.03	49.61	74.00	-24.39	peak	
5		9764.000	38.16	11.30	49.46	74.00	-24.54	peak	
6	*	11387.000	38.62	13.63	52.25	74.00	-21.75	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]

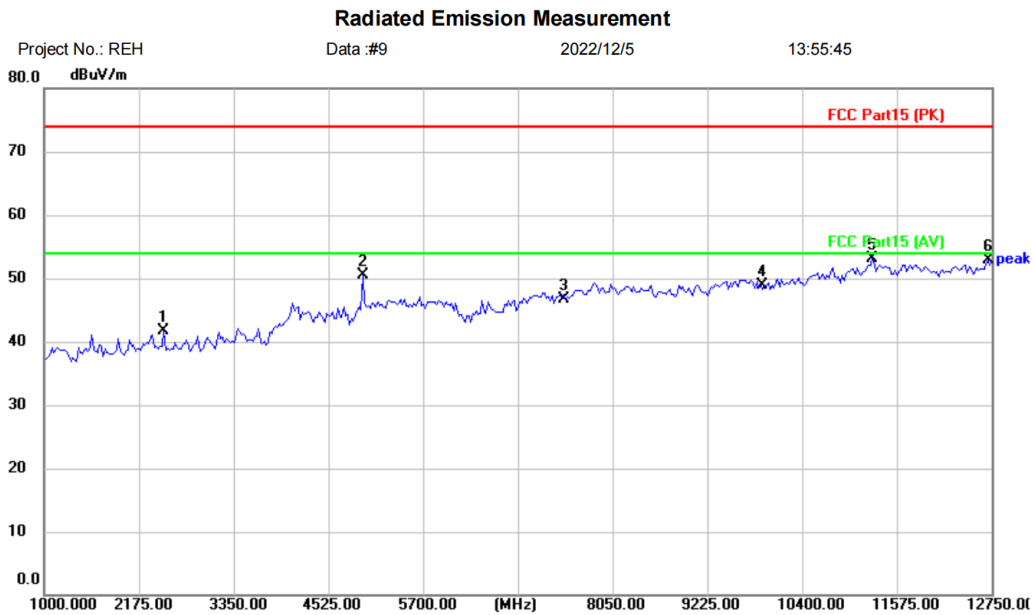

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-H		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2480.500	43.71	-2.05	41.66	74.00	-32.34	peak	
2		4948.000	45.19	5.22	50.41	74.00	-23.59	peak	
3		7440.000	38.18	8.48	46.66	74.00	-27.34	peak	
4		9920.000	37.16	11.69	48.85	74.00	-25.15	peak	
5	*	11269.500	39.63	13.57	53.20	74.00	-20.80	peak	
6		12703.000	38.94	13.87	52.81	74.00	-21.19	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) Above 1G]; [Polarity: Vertical]

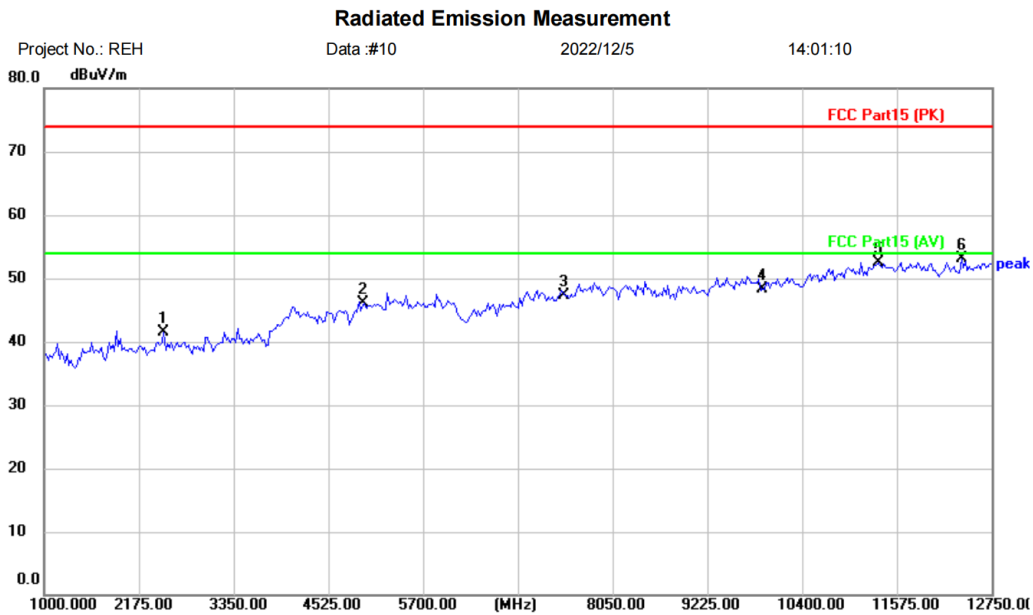

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2480.500	43.52	-2.05	41.47	74.00	-32.53	peak	
2		4960.000	40.72	5.42	46.14	74.00	-27.86	peak	
3		7440.000	38.88	8.48	47.36	74.00	-26.64	peak	
4		9920.000	36.57	11.69	48.26	74.00	-25.74	peak	
5		11340.000	38.97	13.60	52.57	74.00	-21.43	peak	
6	*	12374.000	39.30	13.88	53.18	74.00	-20.82	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

13 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

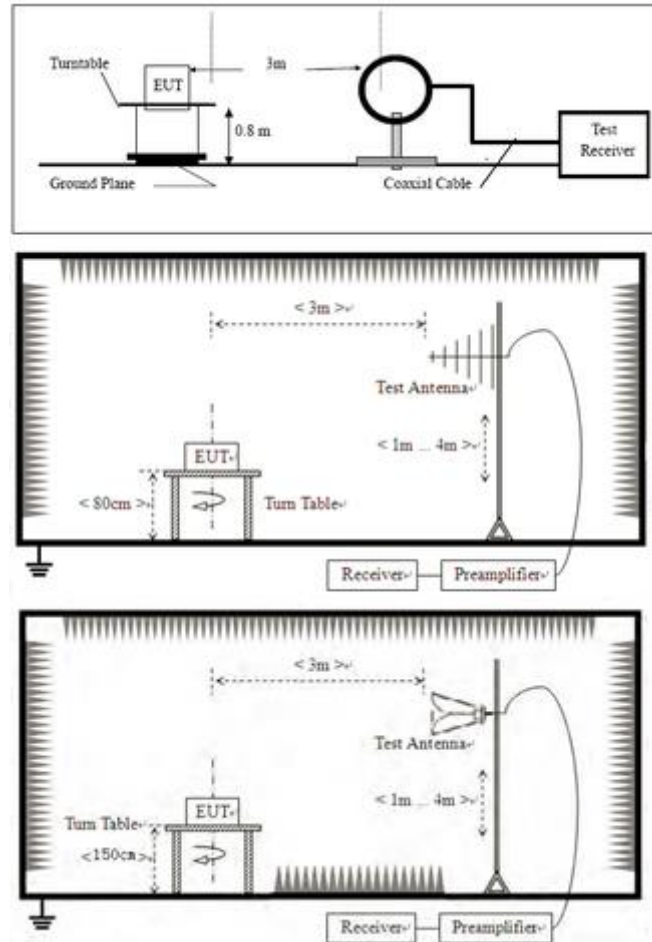

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

13.4 TEST DATA

Remark: During the test, pre-scan the BLE1M, BLE2M, and found the BLE1M which it is worse case.

[TestMode: TX low channel]; [Polarity: Horizontal]

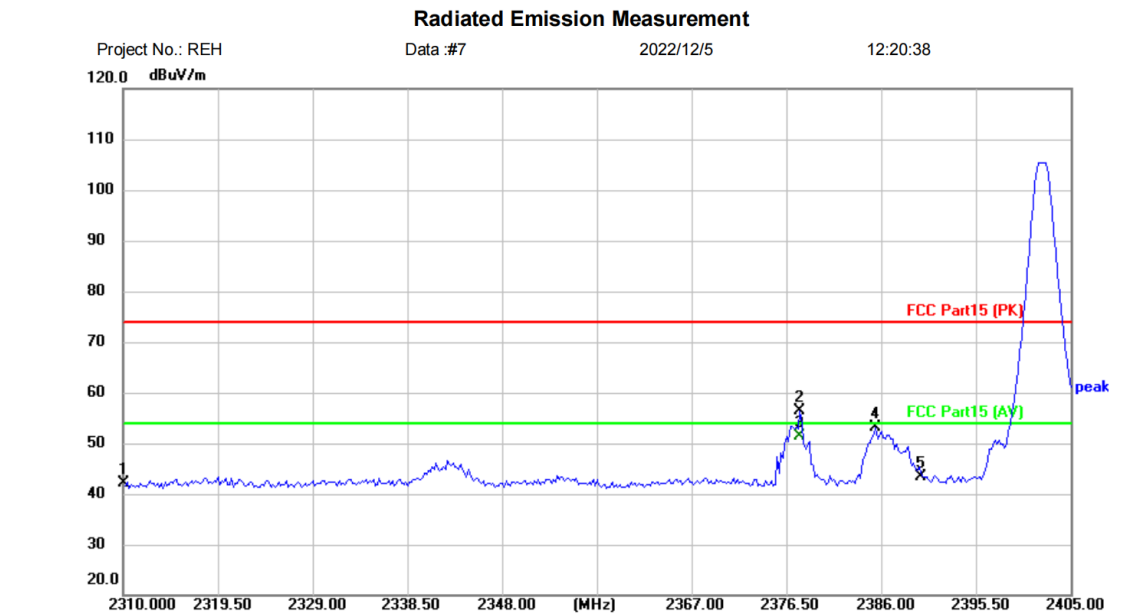


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	46.28	-4.27	42.01	74.00	-31.99	peak	
2		2377.830	60.17	-3.89	56.28	74.00	-17.72	peak	
3	*	2377.830	55.25	-3.89	51.36	54.00	-2.64	AVG	
4		2385.430	56.99	-3.85	53.14	74.00	-20.86	peak	
5		2390.000	47.23	-3.82	43.41	74.00	-30.59	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

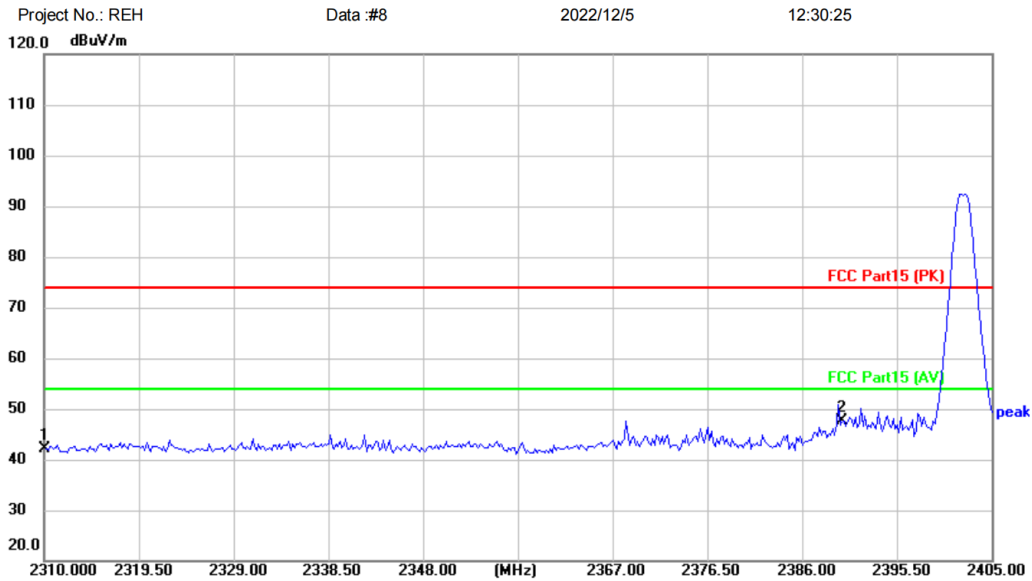


Site: _____ Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: _____ Humidity: %RH
 EUT: B91 Audio RCU
 M/N: TLSR9218ARCU48D
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	46.49	-4.27	42.22	74.00	-31.78	peak	
2	*	2390.000	51.44	-3.82	47.62	74.00	-26.38	peak	

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

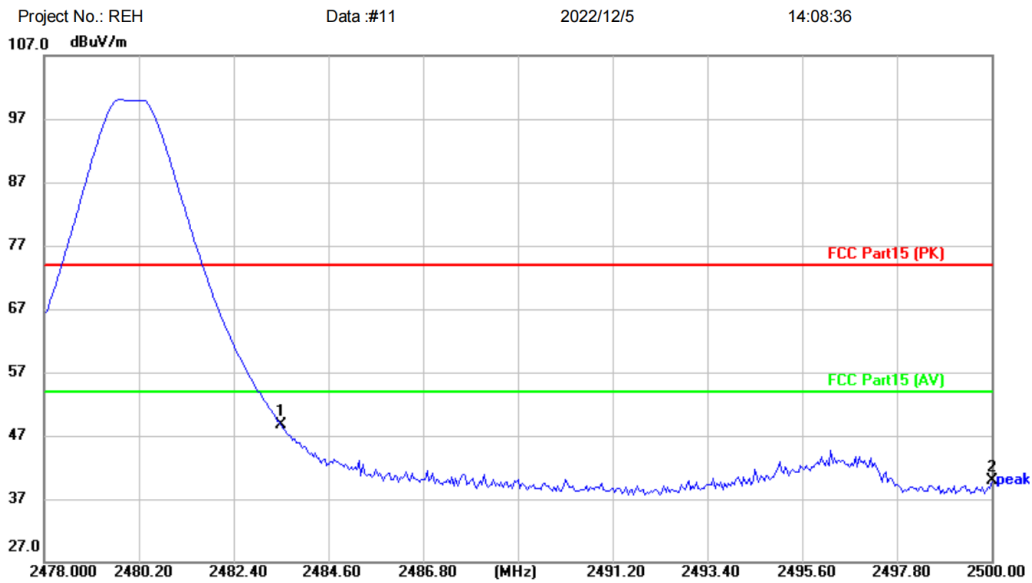


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	52.59	-3.96	48.63	74.00	-25.37	peak	
2		2500.000	43.99	-4.00	39.99	74.00	-34.01	peak	

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement

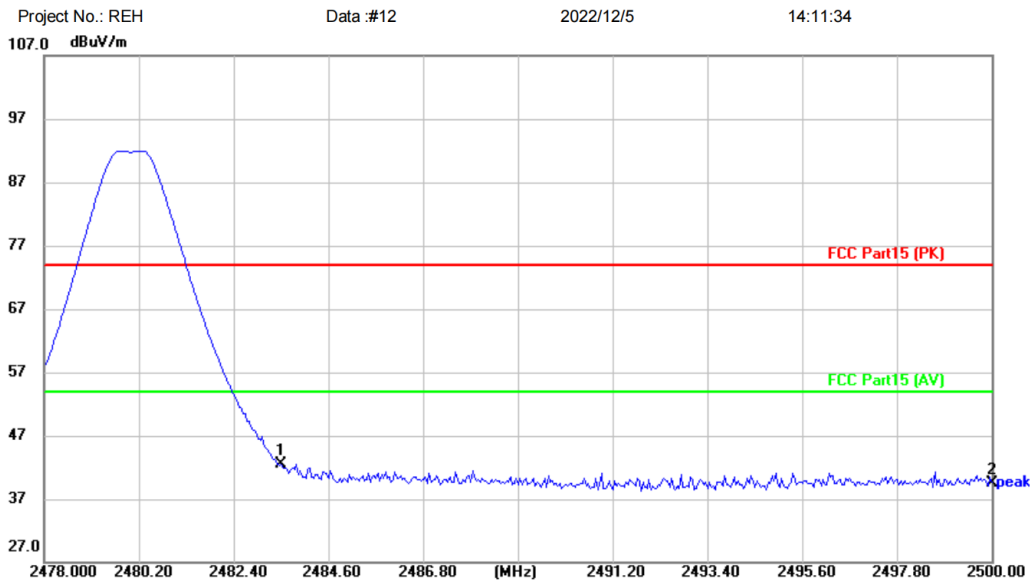

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: B91 Audio RCU		
M/N: TLSR9218ARCU48D		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	46.49	-3.96	42.53	74.00	-31.47	peak	
2		2500.000	43.44	-4.00	39.44	74.00	-34.56	peak	

Test Result: Pass


14 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

14.2 BLOCK DIAGRAM OF TEST SETUP

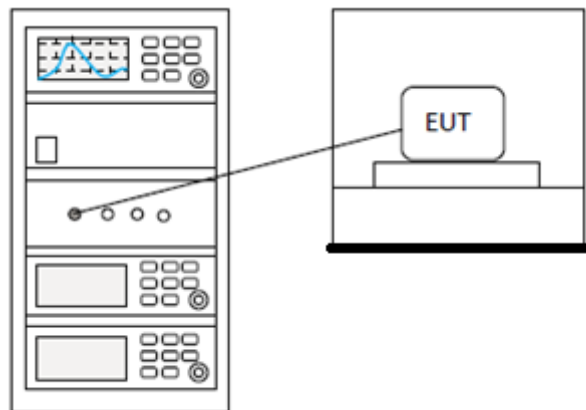

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


15 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

15.2 BLOCK DIAGRAM OF TEST SETUP

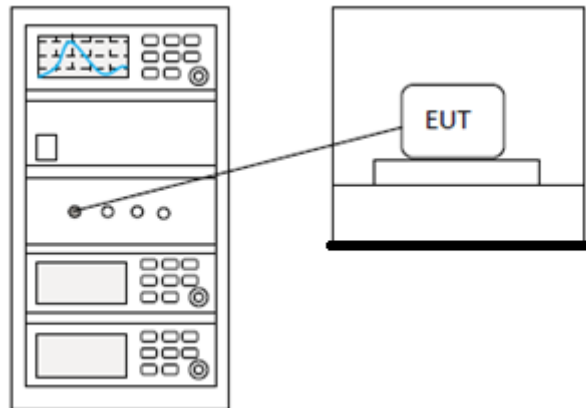

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

16.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

16.2 BLOCK DIAGRAM OF TEST SETUP

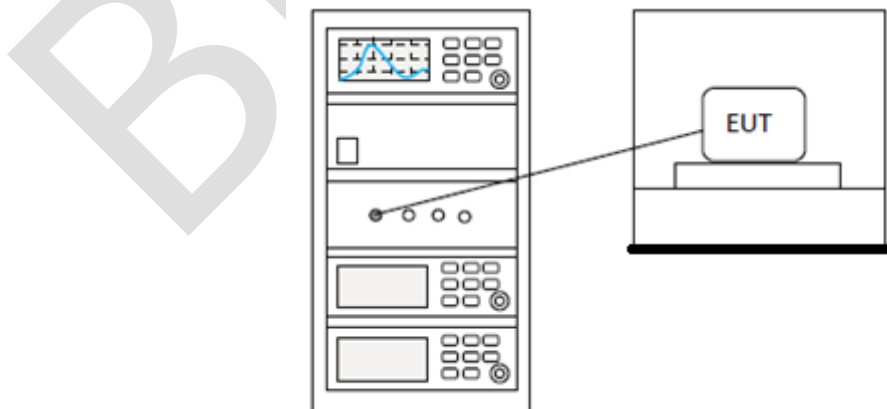

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

17.1 LIMITS

Limit:	≥500 kHz
---------------	----------

17.2 BLOCK DIAGRAM OF TEST SETUP

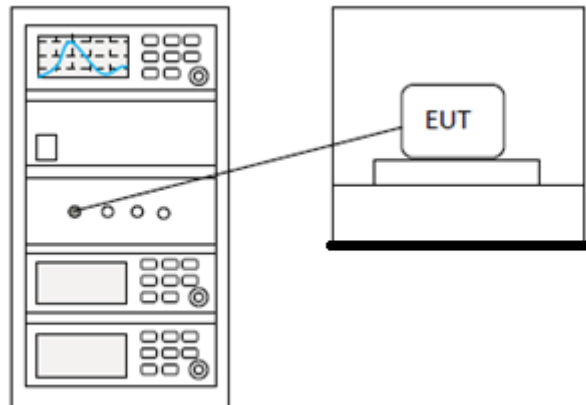

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


18 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	2.503	30	Pass
NVNT	BLE 1M	2442	Ant1	2.449	30	Pass
NVNT	BLE 1M	2480	Ant1	2.877	30	Pass
NVNT	BLE 2M	2402	Ant1	2.493	30	Pass
NVNT	BLE 2M	2442	Ant1	2.452	30	Pass
NVNT	BLE 2M	2480	Ant1	2.849	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

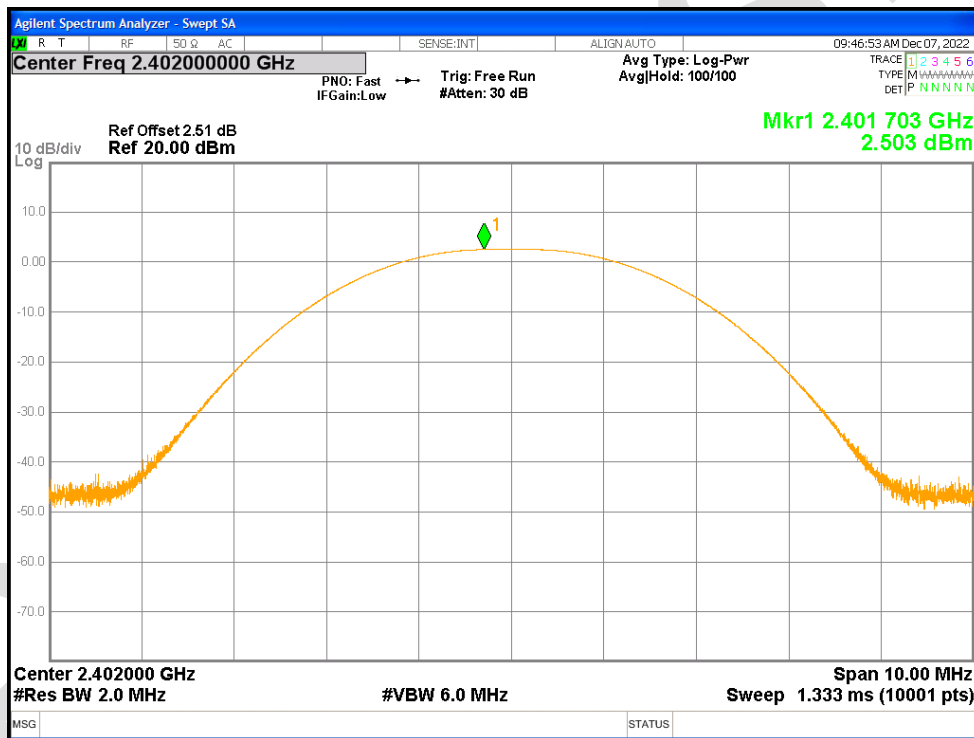


Power NVNT BLE 1M 2442MHz Ant1

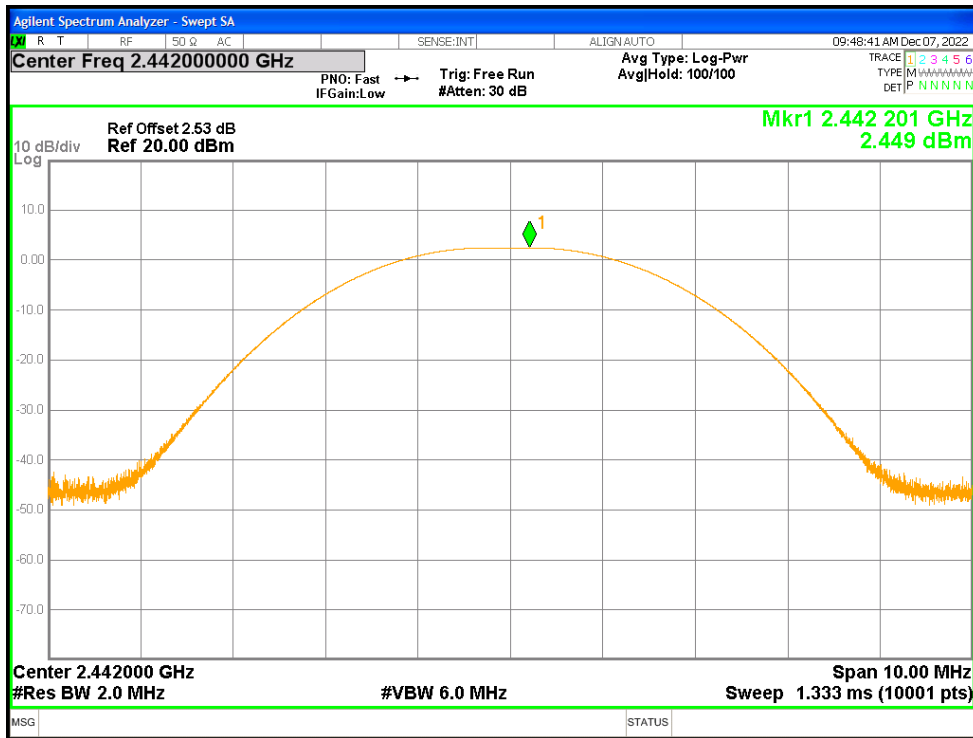


Power NVNT BLE 1M 2480MHz Ant1

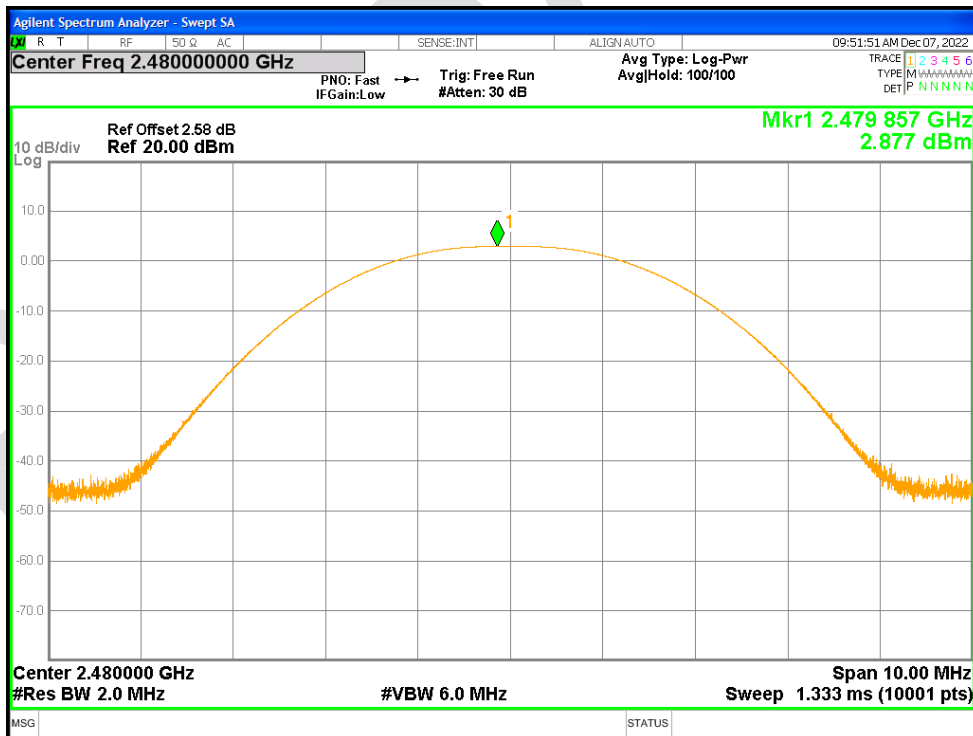


Power NVNT BLE 2M 2402MHz Ant1

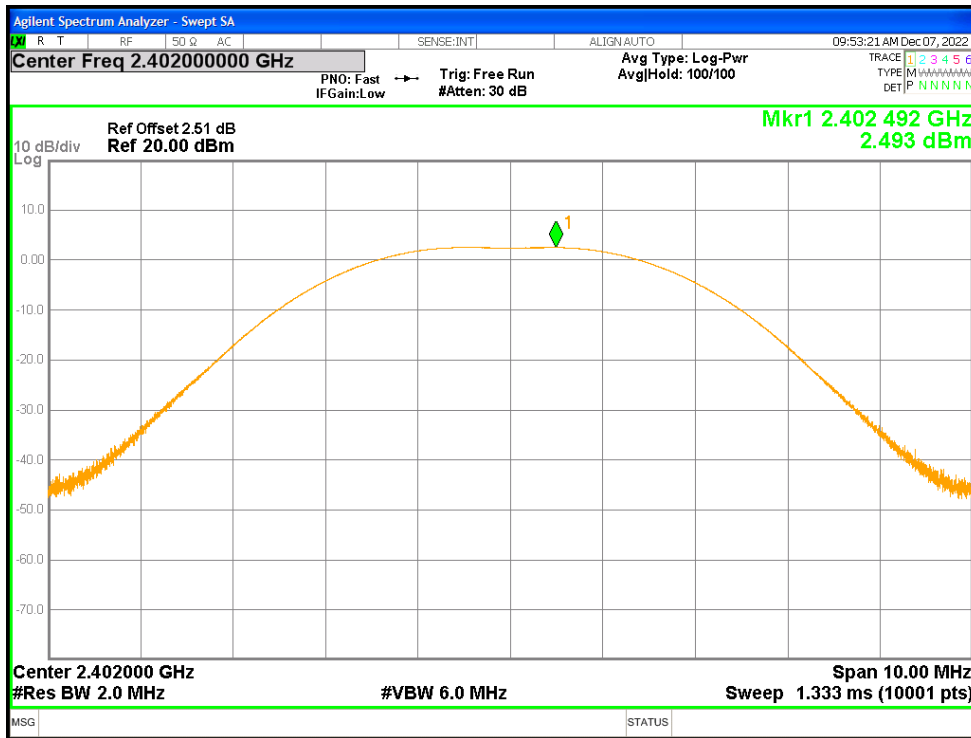

Power NVNT BLE 2M 2442MHz Ant1

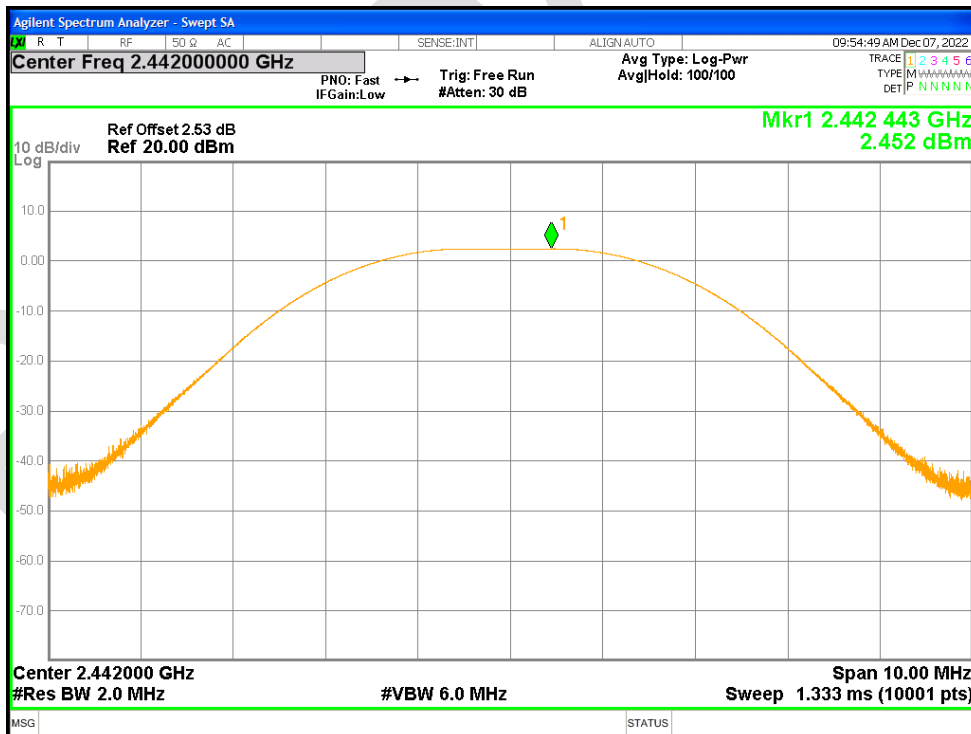


Power NVNT BLE 2M 2480MHz Ant1

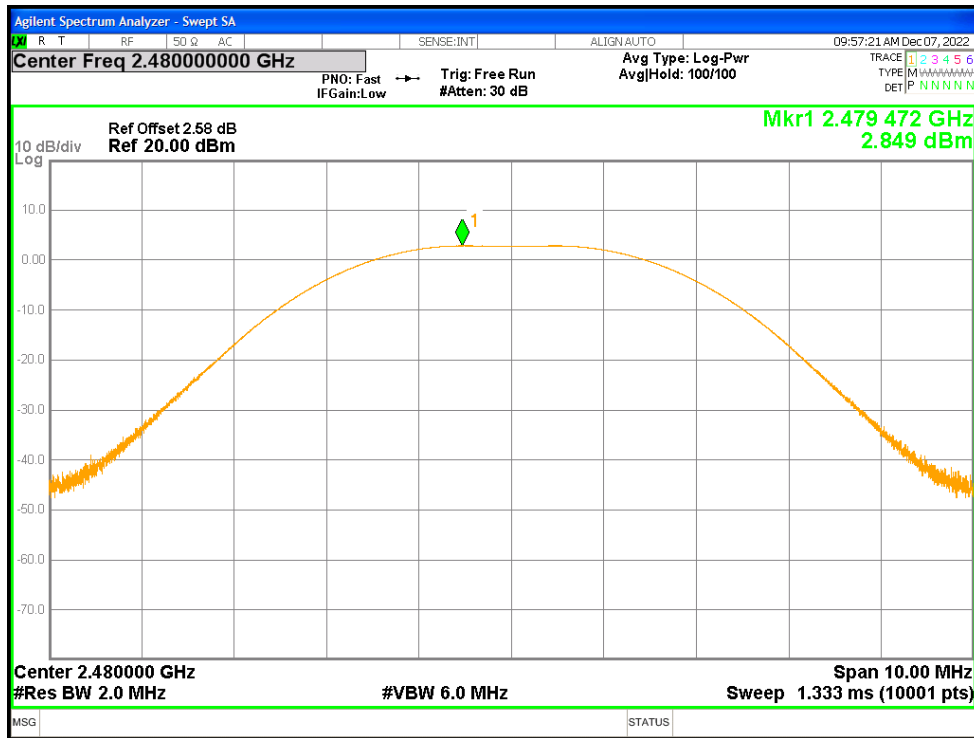


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.662	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.653	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.674	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.333	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.389	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.366	0.5	Pass

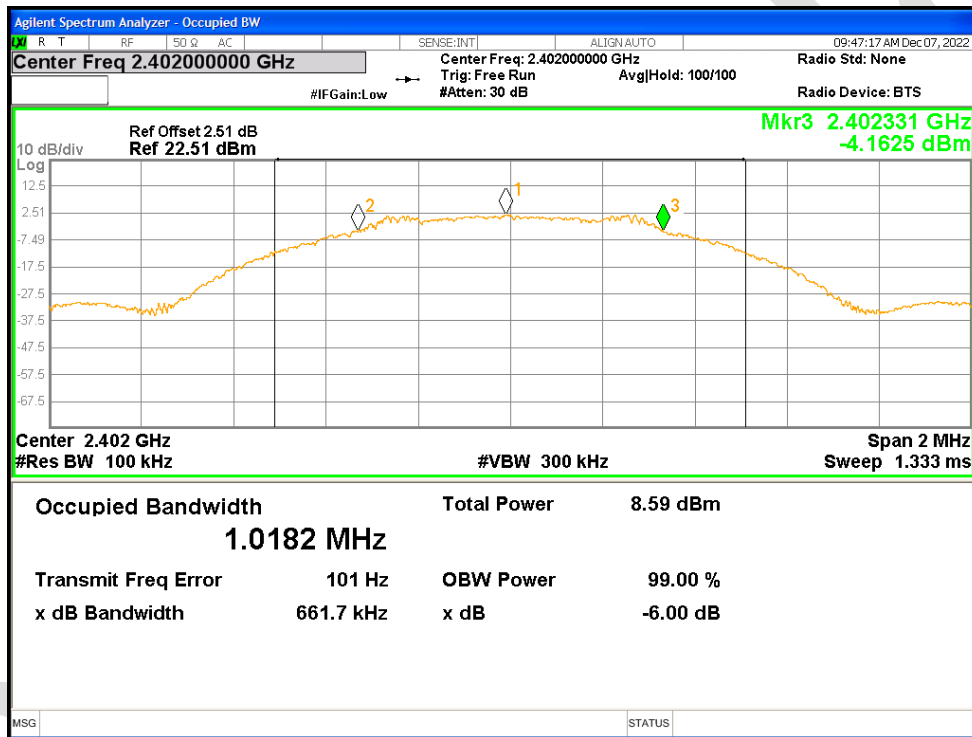-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1


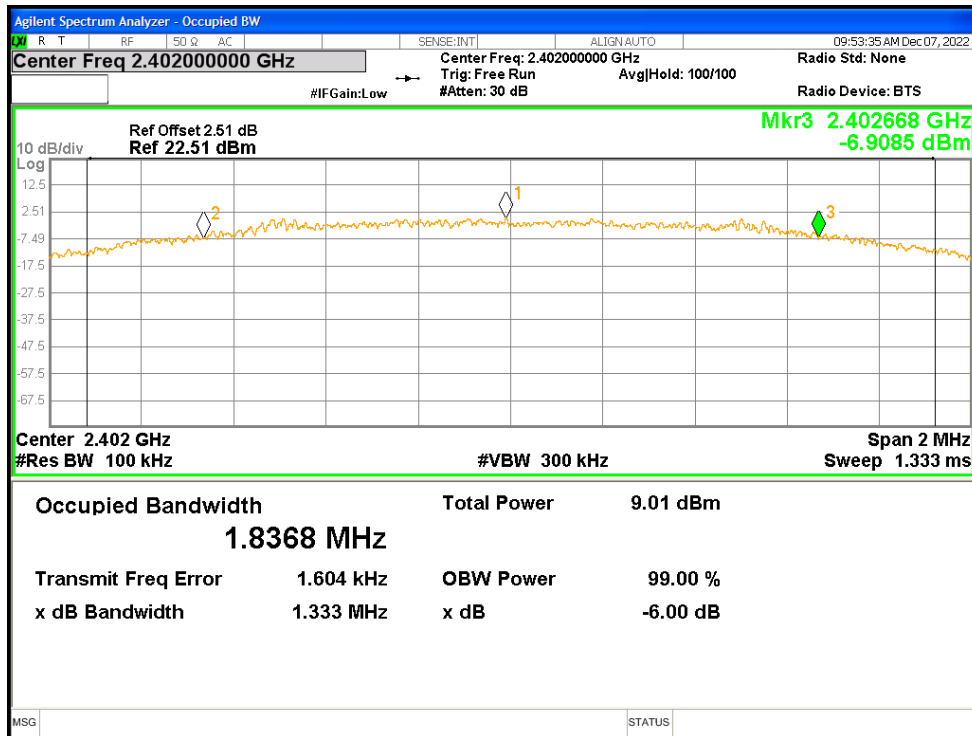
-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

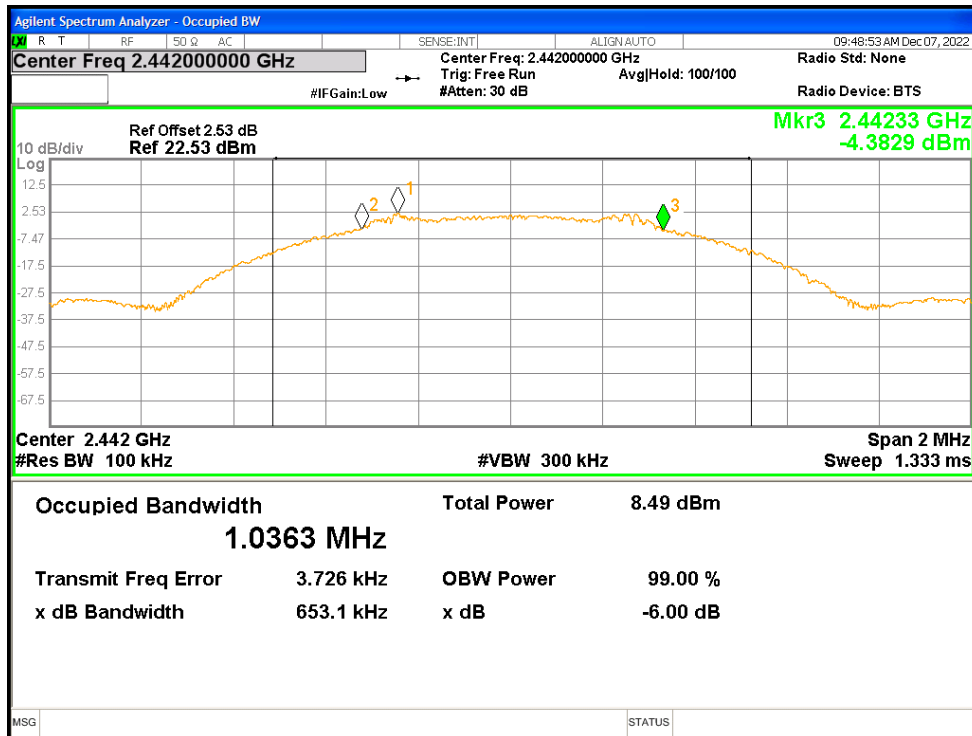


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

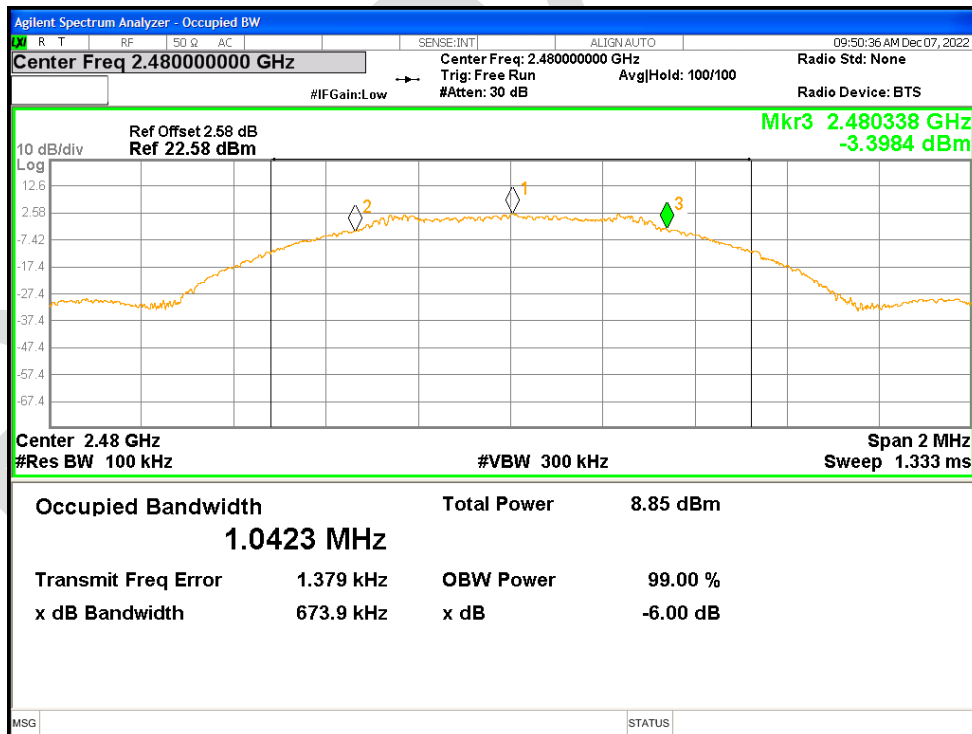


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

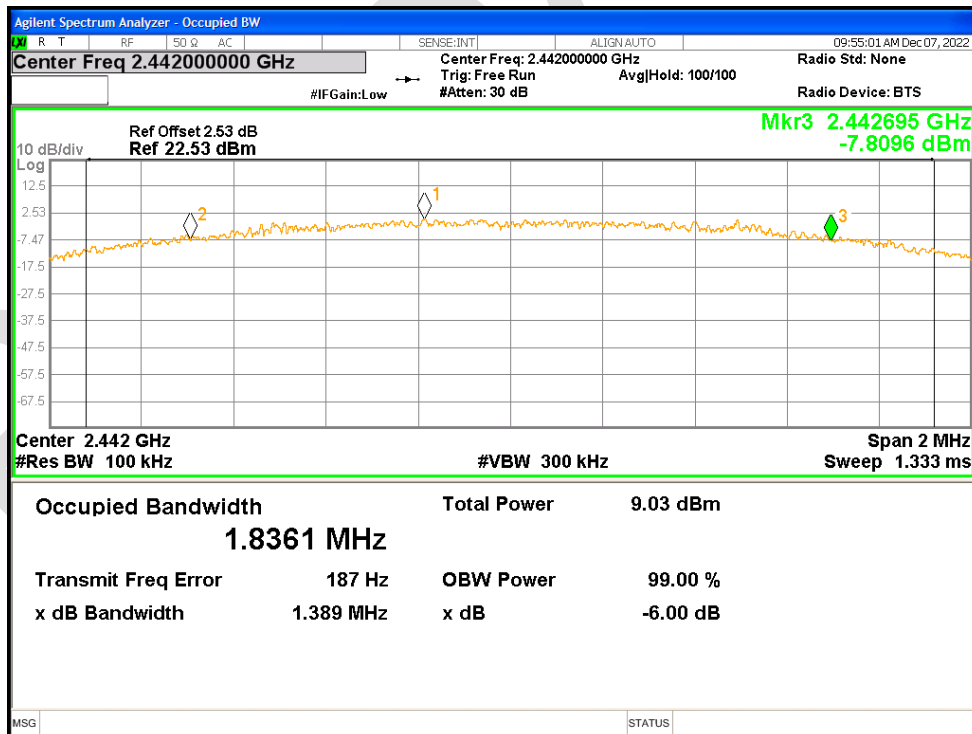


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

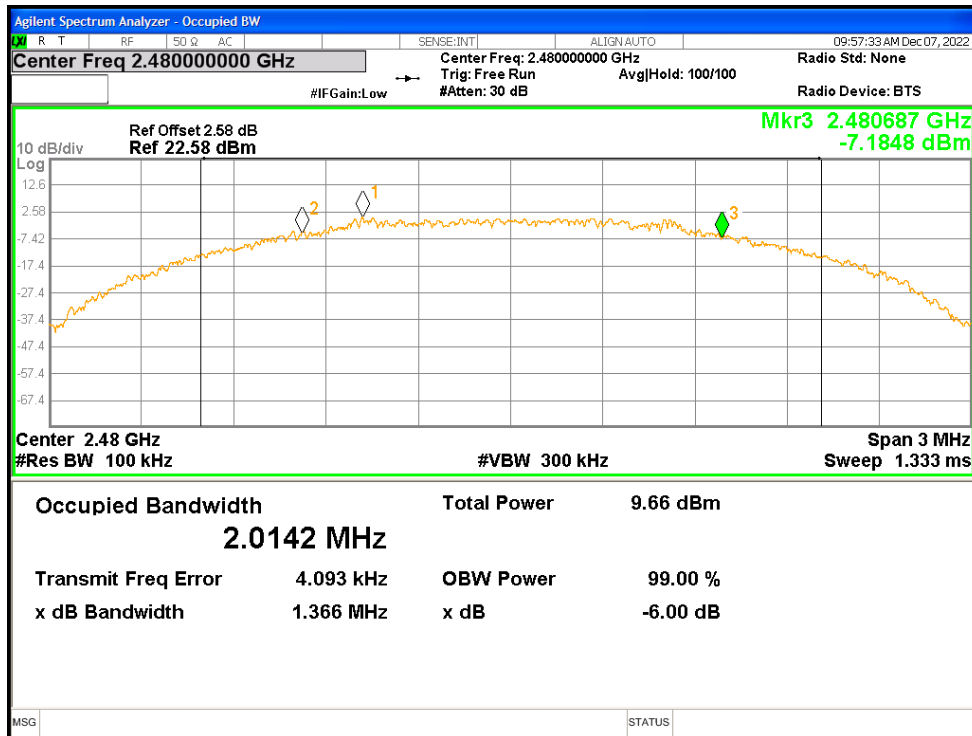


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0231
NVNT	BLE 1M	2442	Ant1	1.0163
NVNT	BLE 1M	2480	Ant1	1.0370
NVNT	BLE 2M	2402	Ant1	2.0396
NVNT	BLE 2M	2442	Ant1	2.0218
NVNT	BLE 2M	2480	Ant1	2.0182


OBW NVNT BLE 1M 2402MHz Ant1

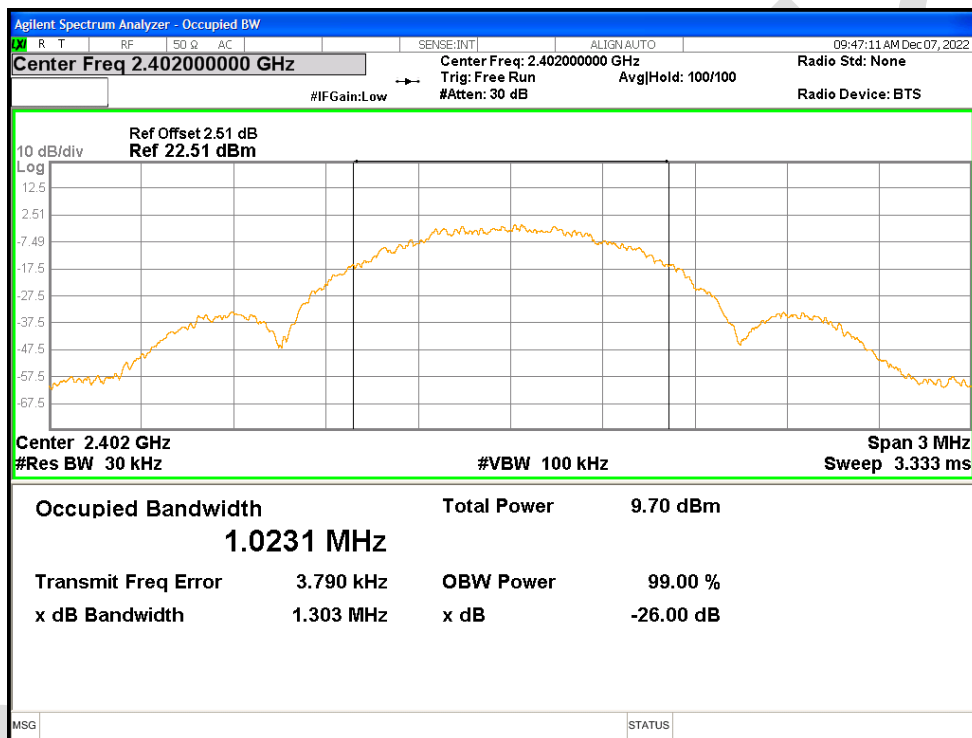


OBW NVNT BLE 1M 2442MHz Ant1

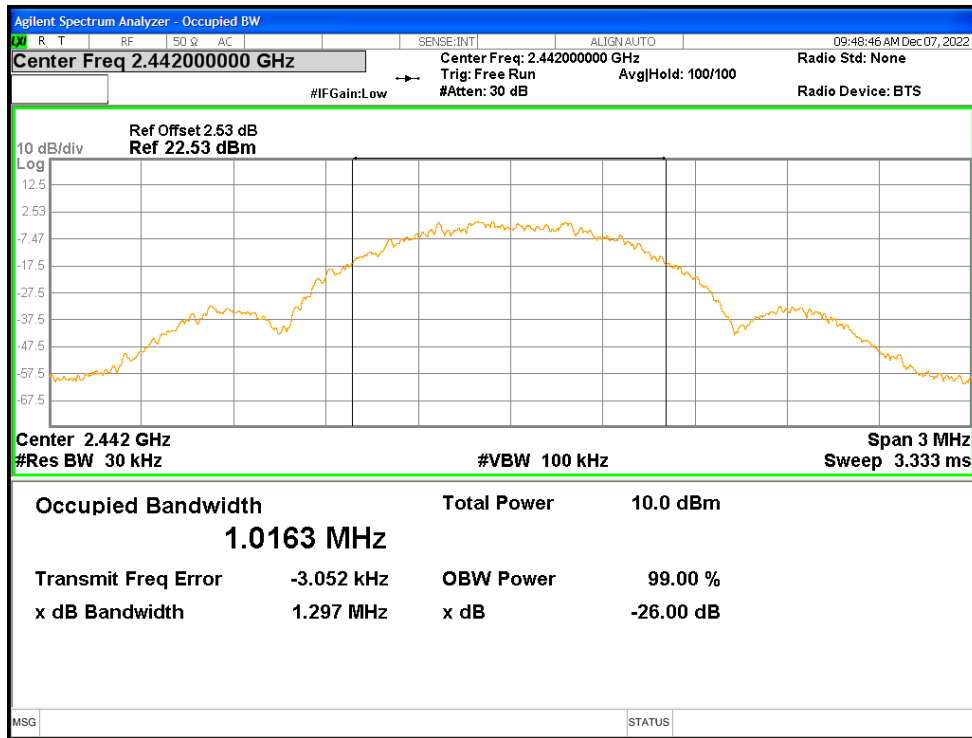


OBW NVNT BLE 1M 2480MHz Ant1

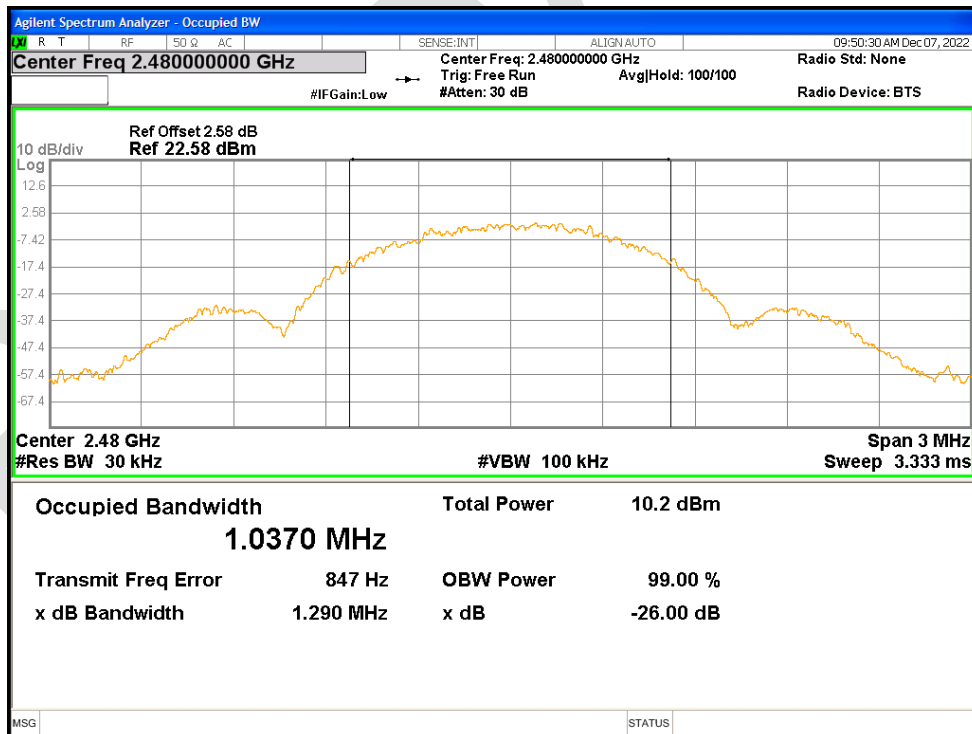


OBW NVNT BLE 2M 2402MHz Ant1

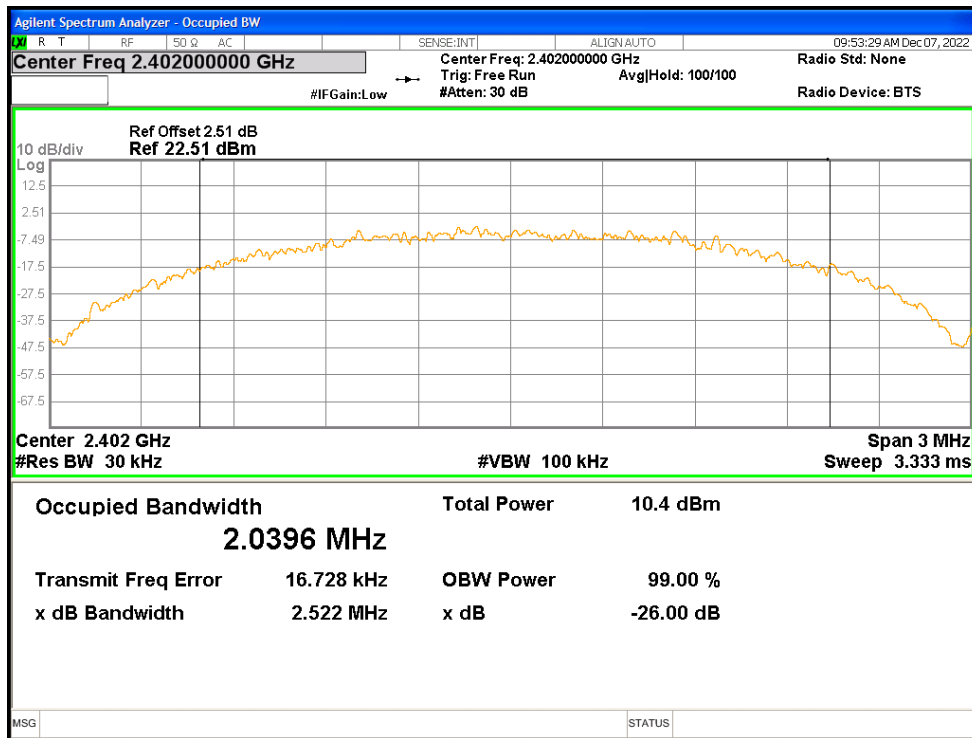

OBW NVNT BLE 2M 2442MHz Ant1

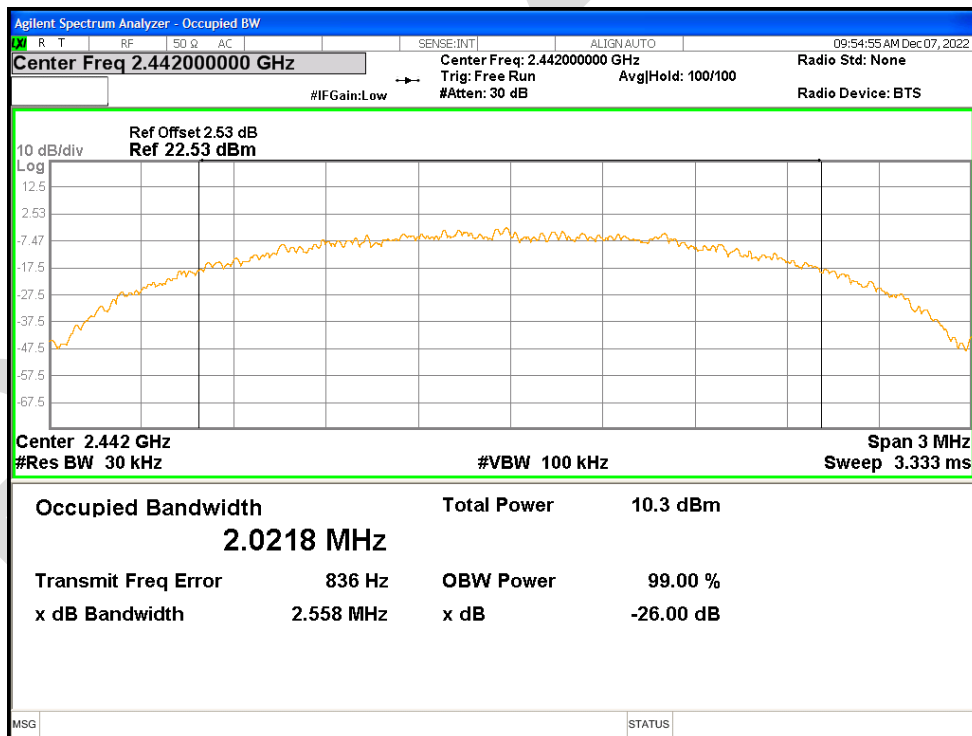


OBW NVNT BLE 2M 2480MHz Ant1

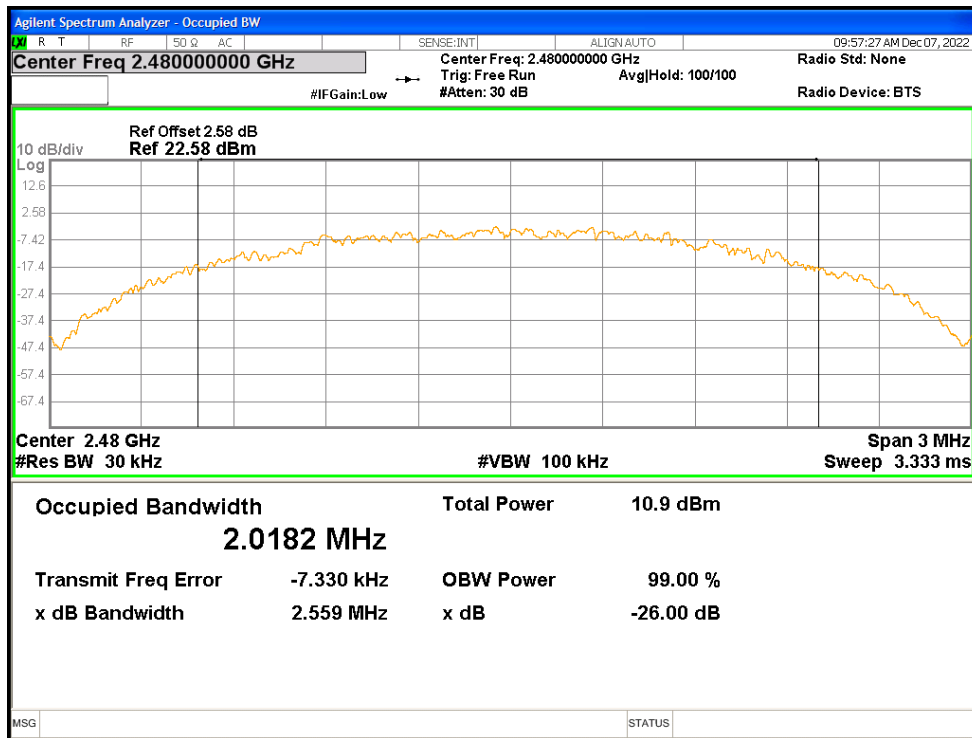


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.783	8	Pass
NVNT	BLE 1M	2442	Ant1	2.318	8	Pass
NVNT	BLE 1M	2480	Ant1	1.996	8	Pass
NVNT	BLE 2M	2402	Ant1	0.344	8	Pass
NVNT	BLE 2M	2442	Ant1	0.921	8	Pass
NVNT	BLE 2M	2480	Ant1	1.101	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

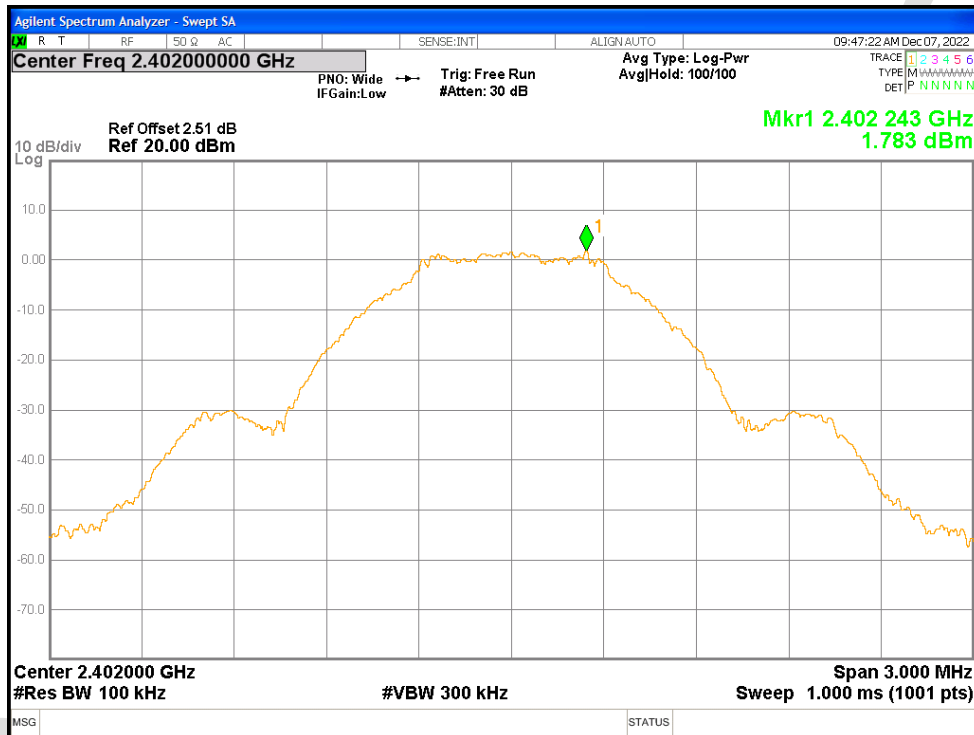


PSD NVNT BLE 1M 2442MHz Ant1

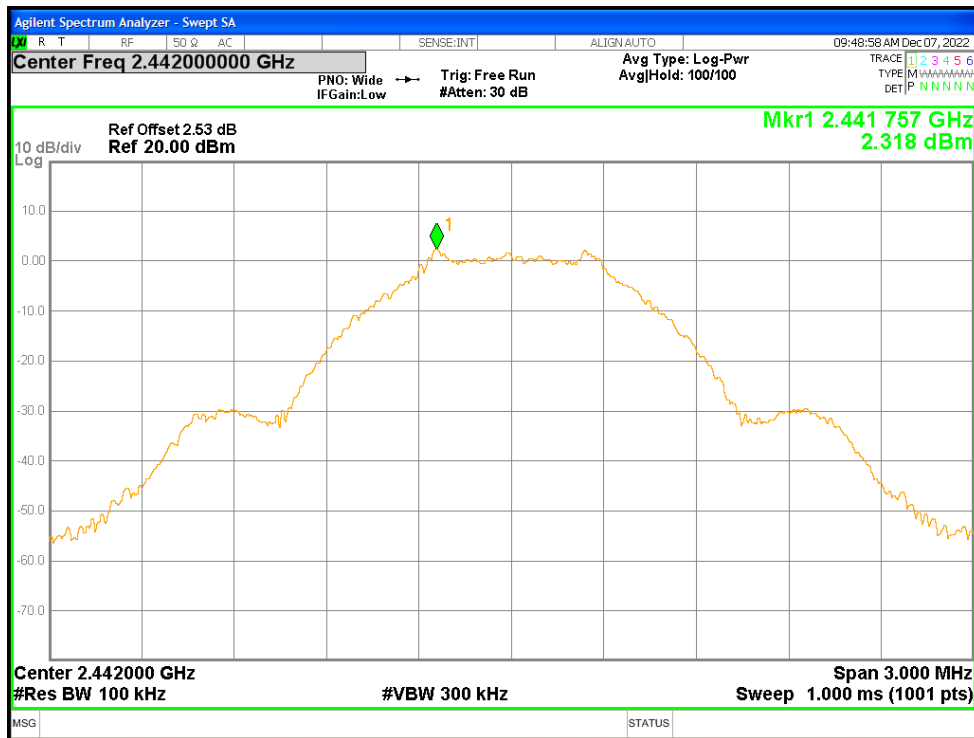


PSD NVNT BLE 1M 2480MHz Ant1

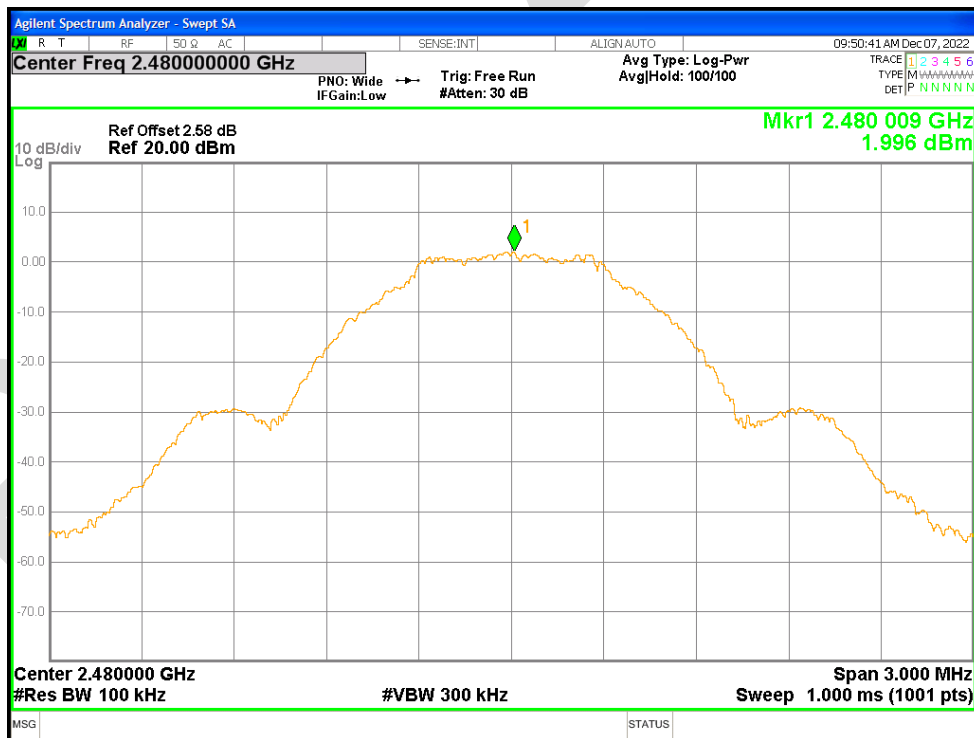


PSD NVNT BLE 2M 2402MHz Ant1

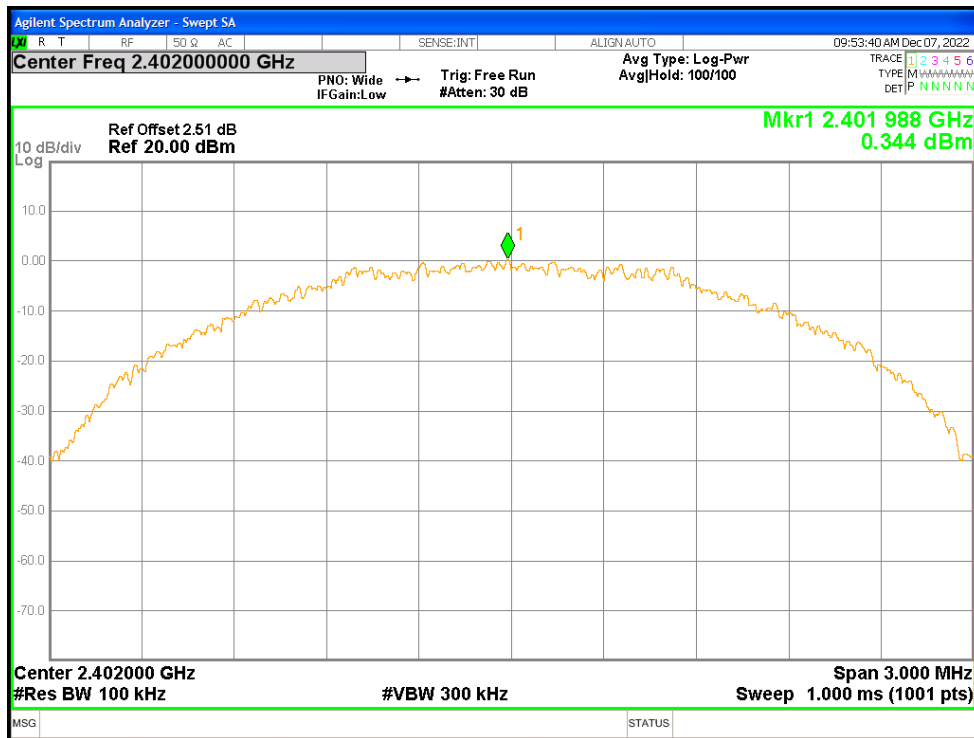

PSD NVNT BLE 2M 2442MHz Ant1

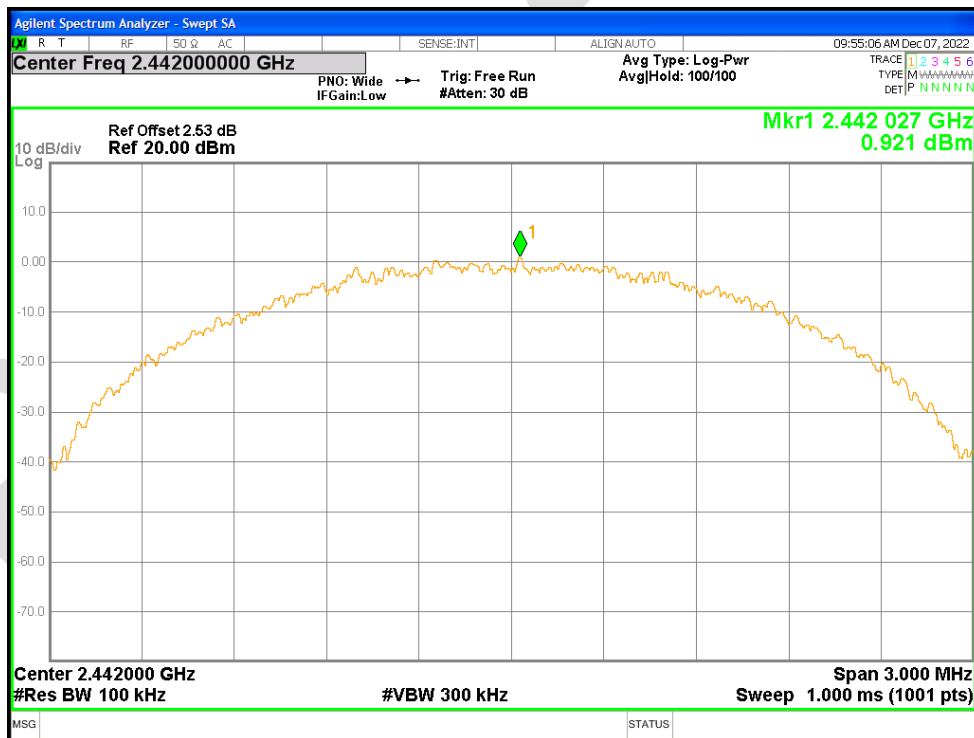


PSD NVNT BLE 2M 2480MHz Ant1

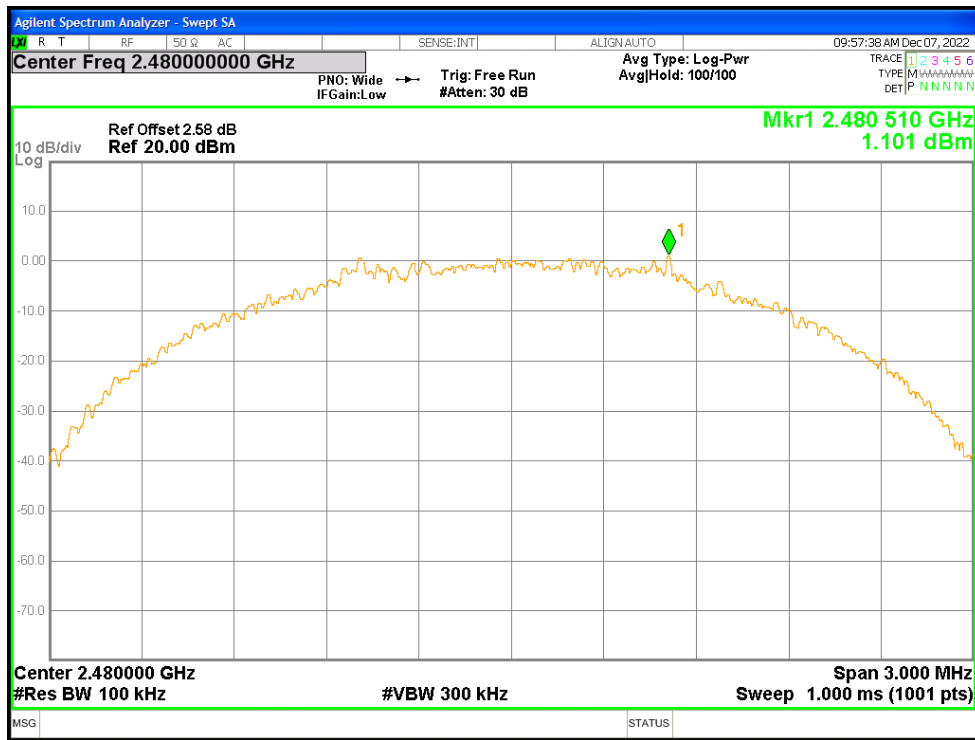


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-57.78	-30	Pass
NVNT	BLE 1M	2480	Ant1	-57.93	-30	Pass
NVNT	BLE 2M	2402	Ant1	-55.85	-30	Pass
NVNT	BLE 2M	2480	Ant1	-57.94	-30	Pass


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

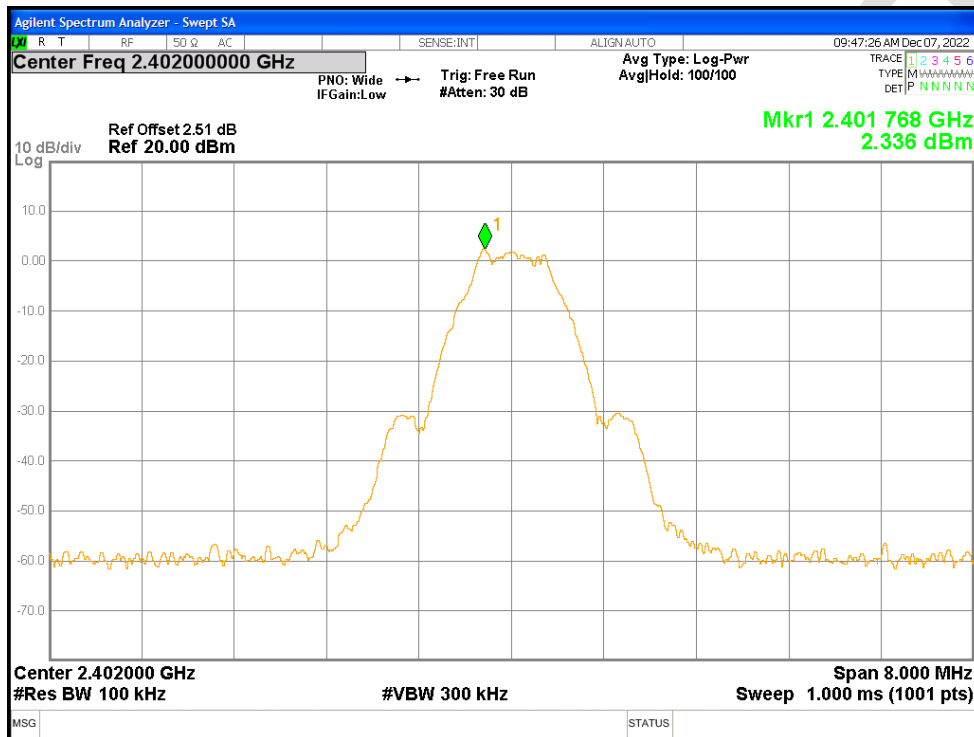


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

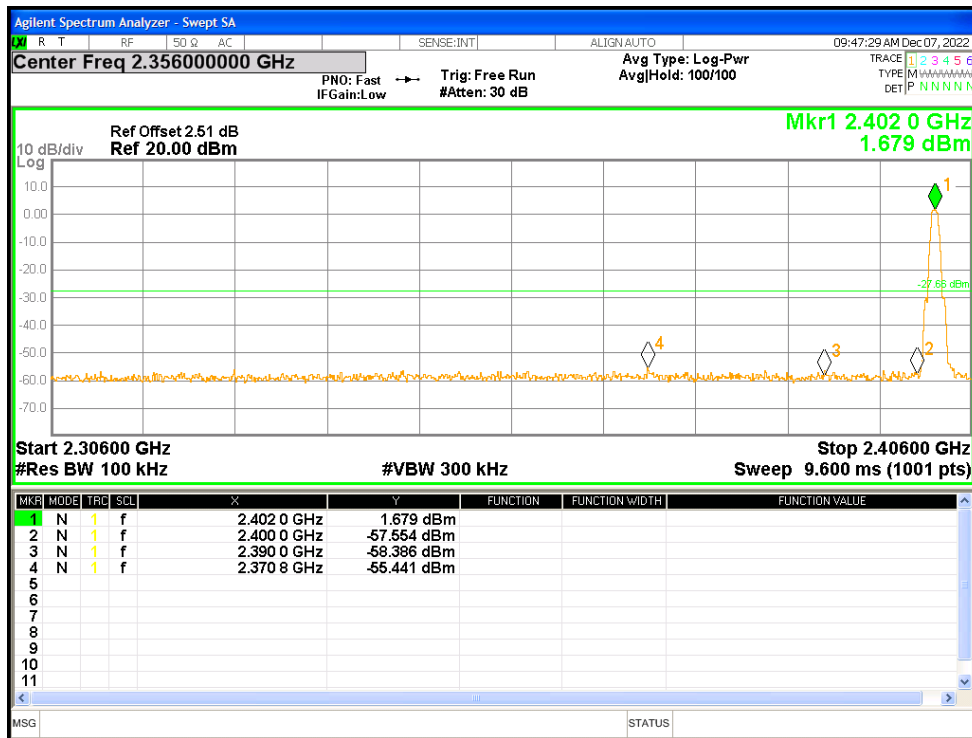


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

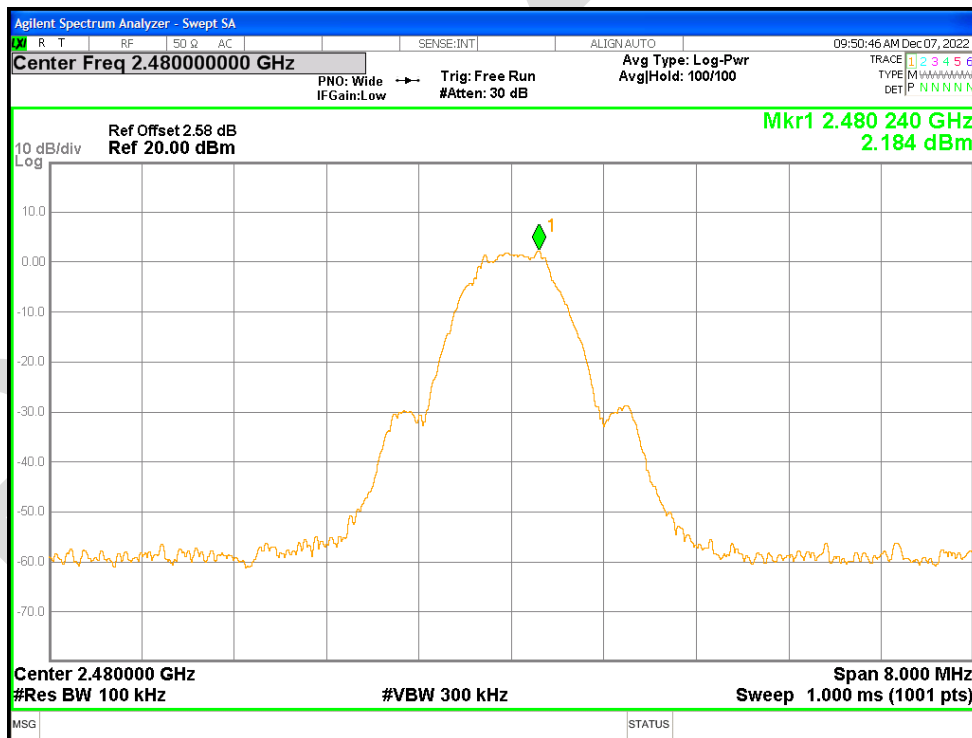


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

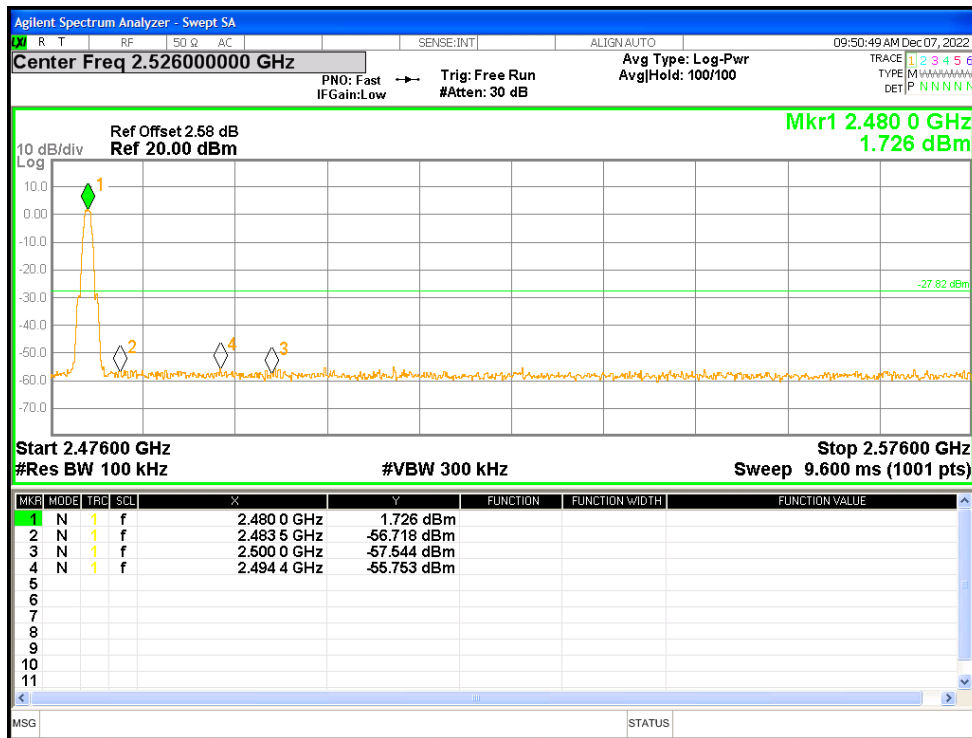


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

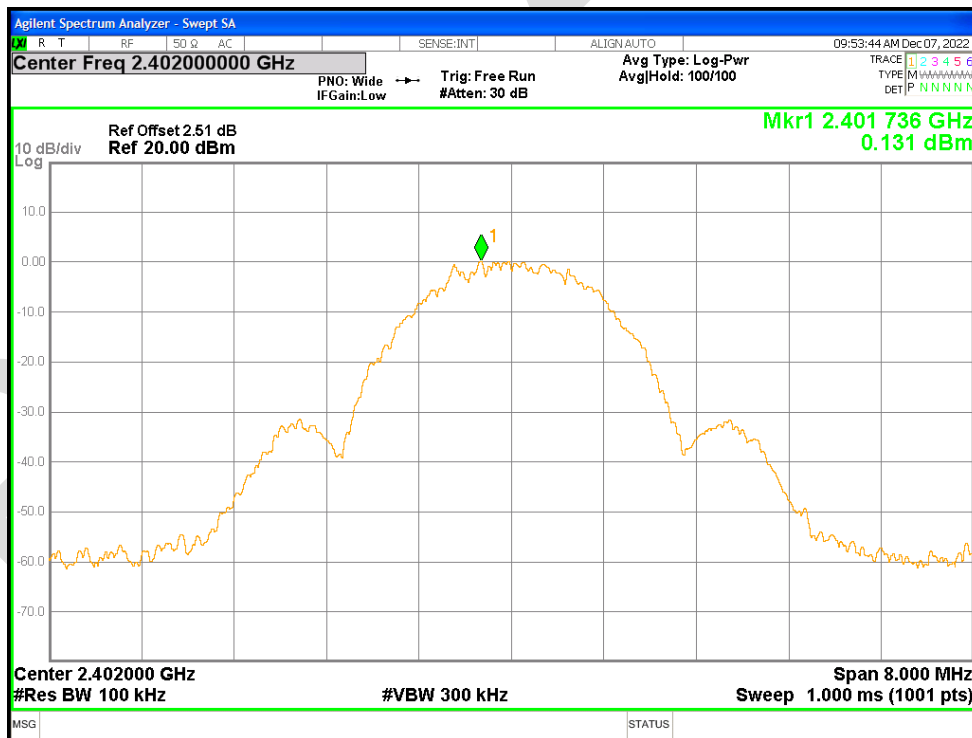


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

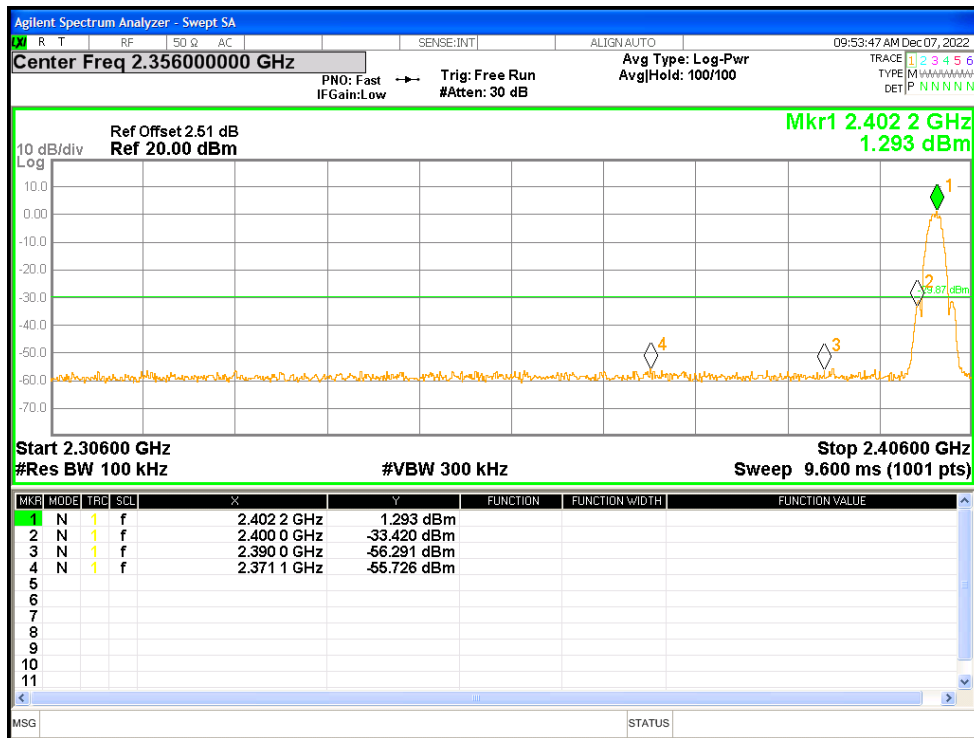

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

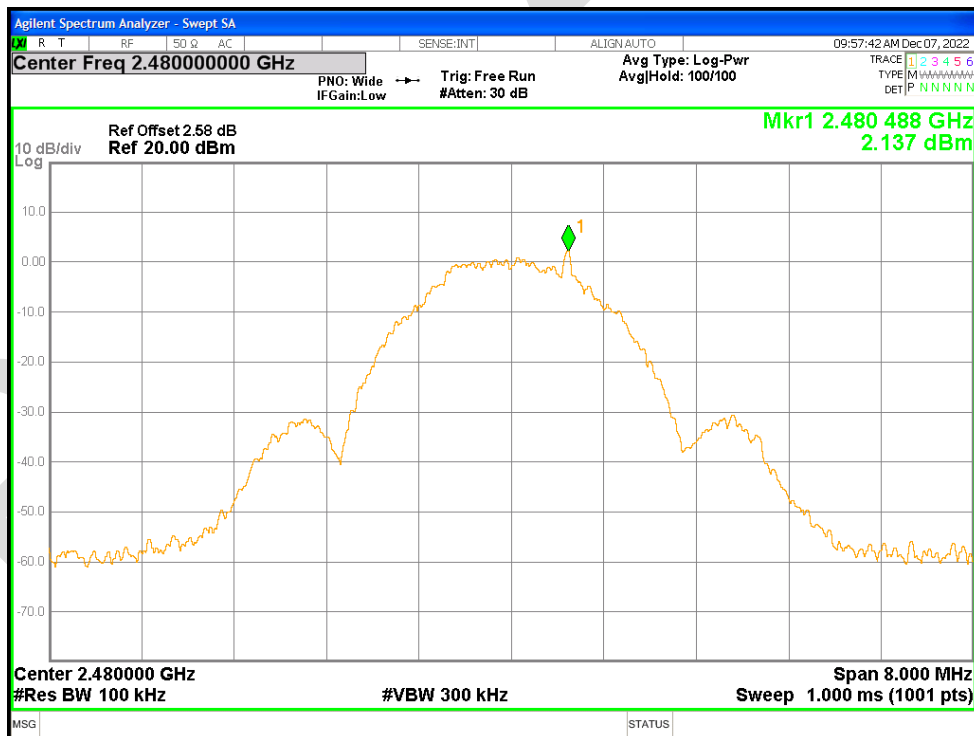


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

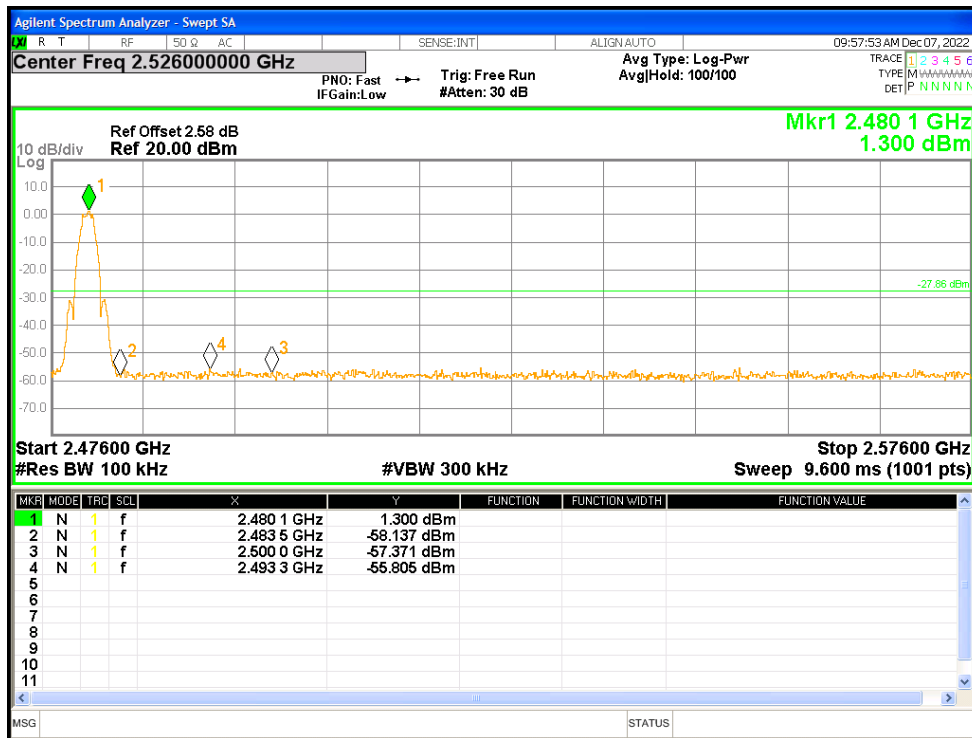


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-46.47	-30	Pass
NVNT	BLE 1M	2442	Ant1	-47.81	-30	Pass
NVNT	BLE 1M	2480	Ant1	-47.38	-30	Pass
NVNT	BLE 2M	2402	Ant1	-46.28	-30	Pass
NVNT	BLE 2M	2442	Ant1	-45.85	-30	Pass
NVNT	BLE 2M	2480	Ant1	-46.84	-30	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

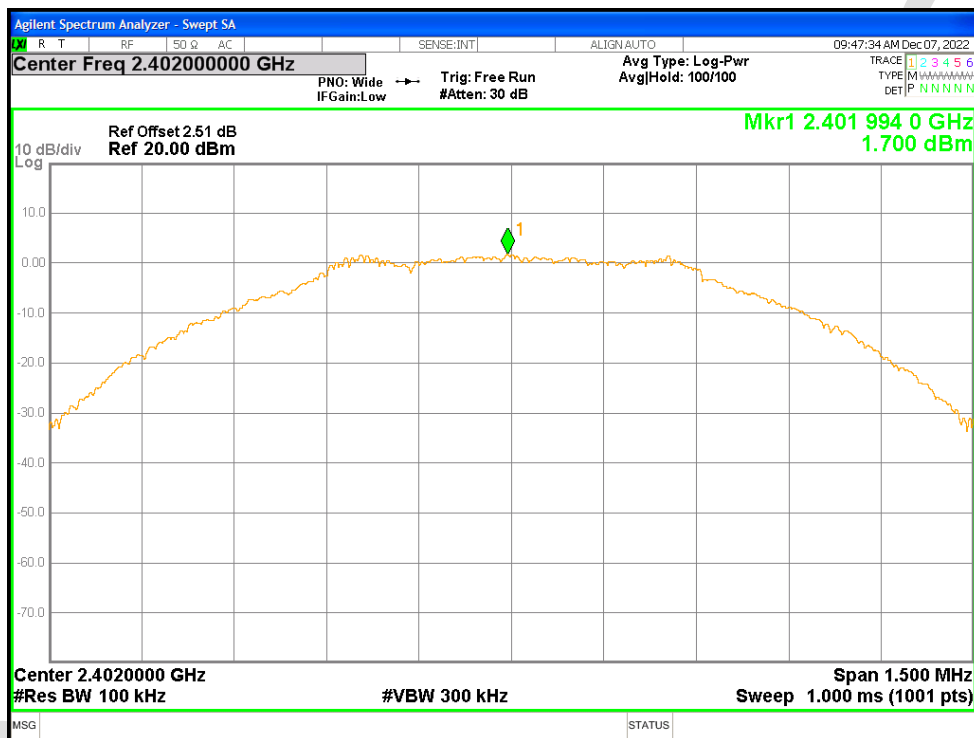


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

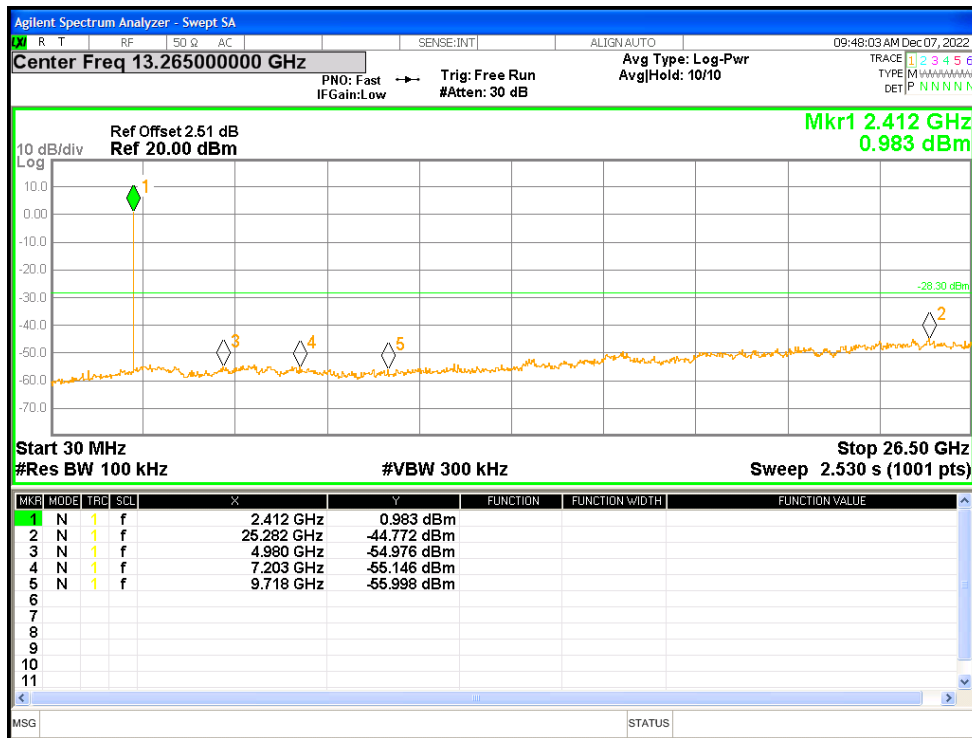


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

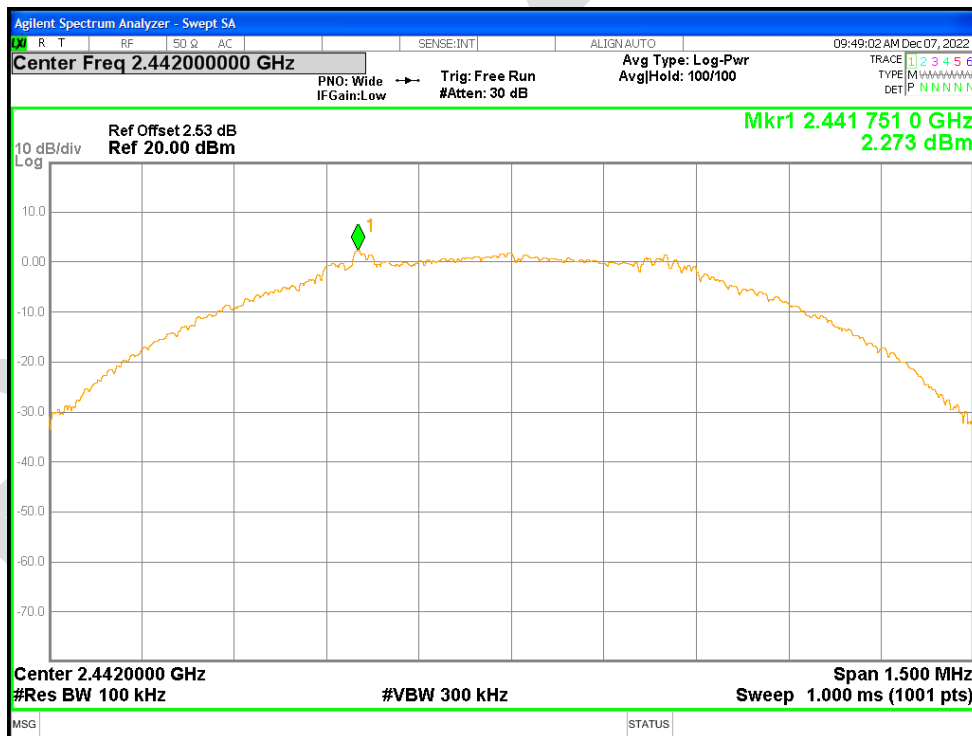


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

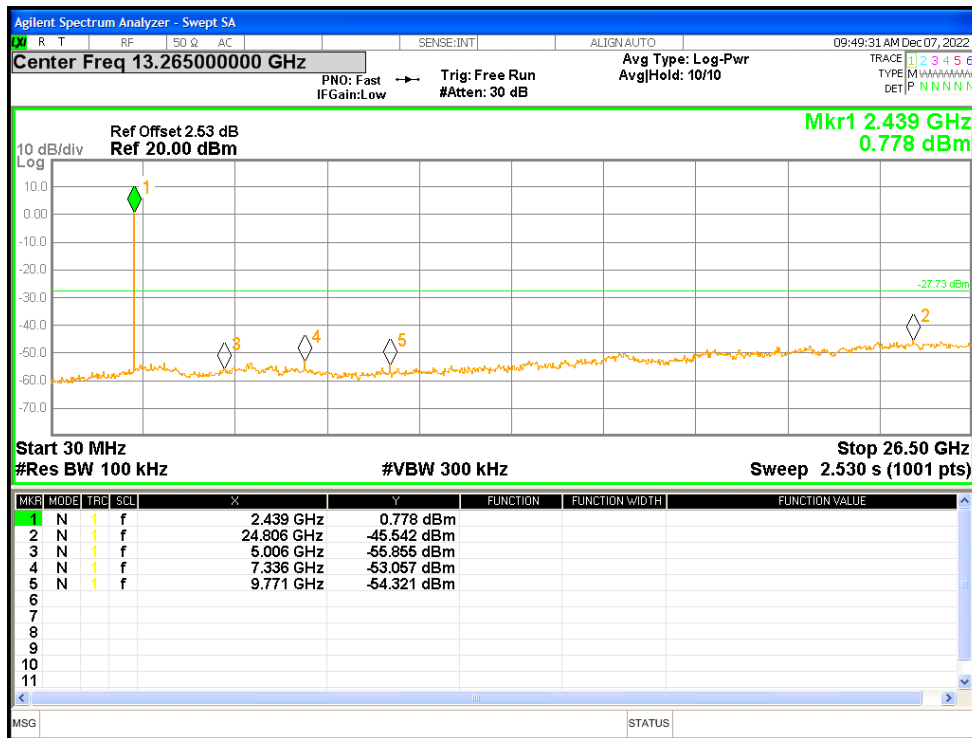


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

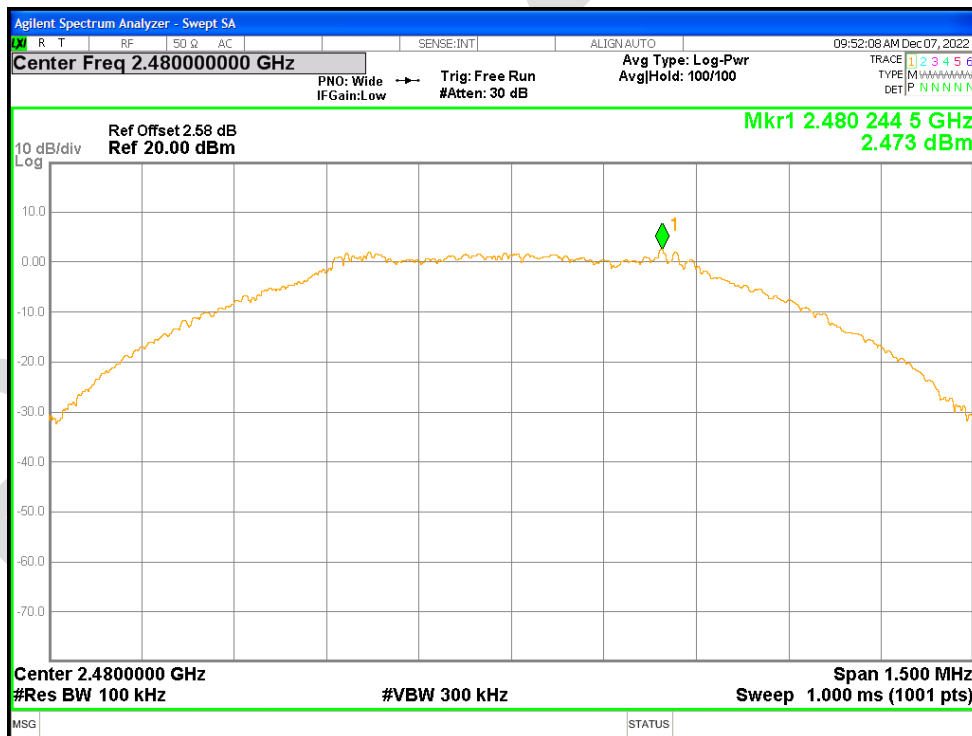


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

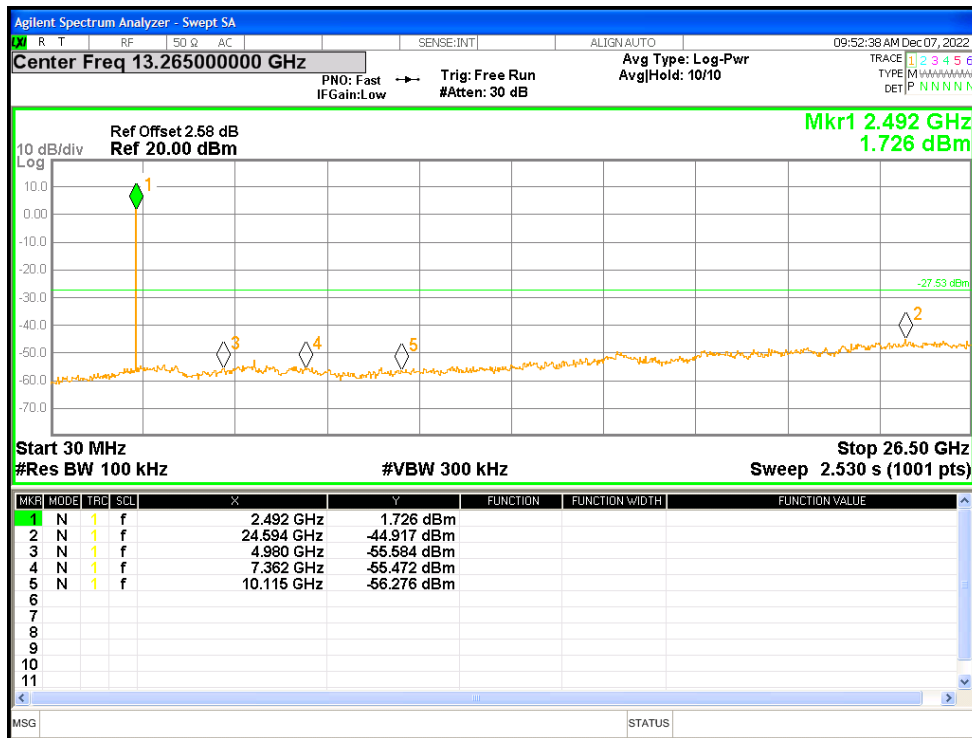


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

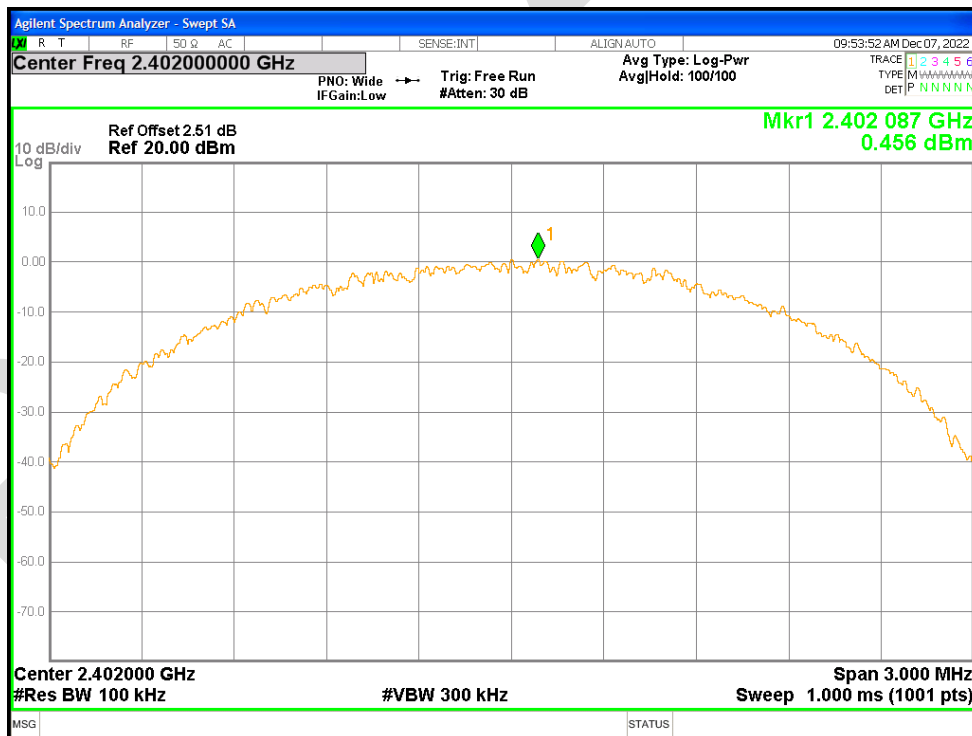


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

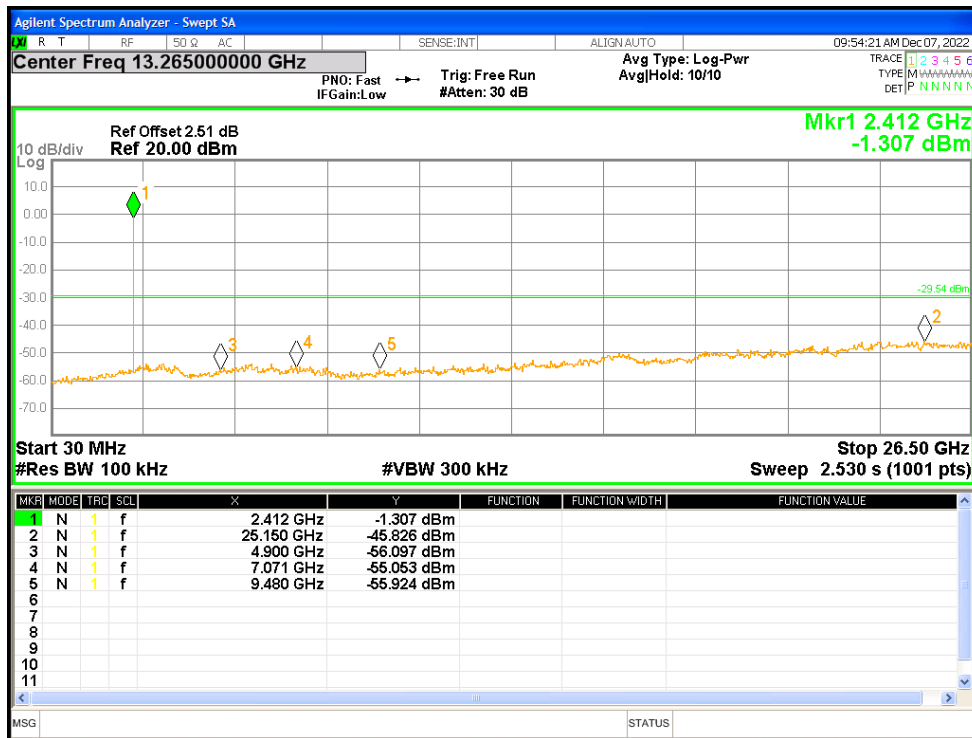


Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref

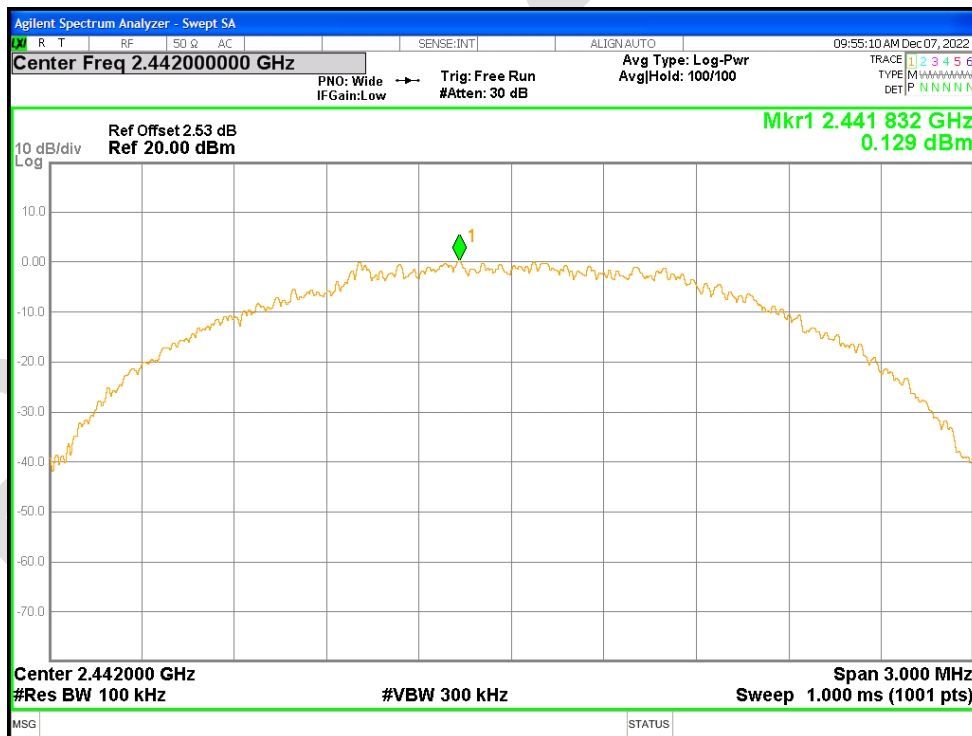


Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Emission

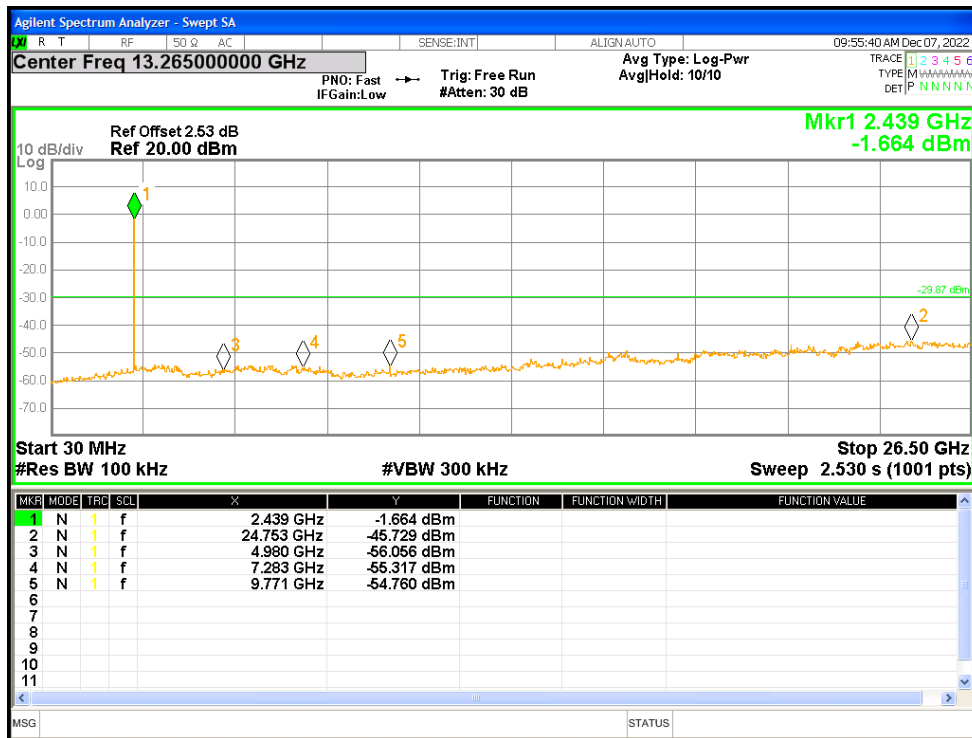

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref


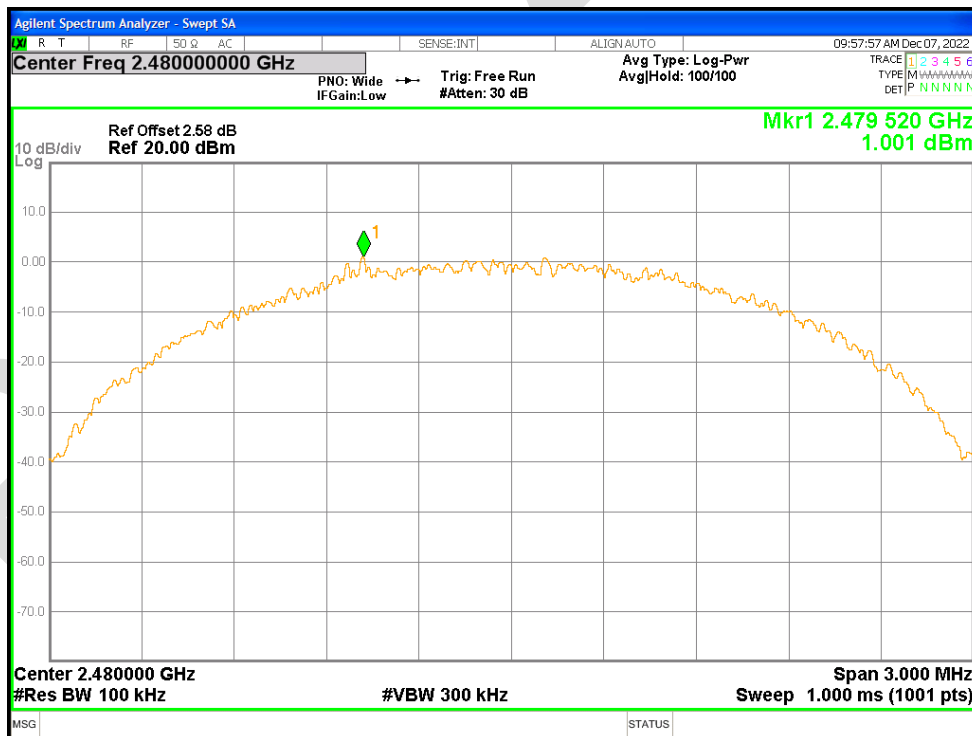


Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

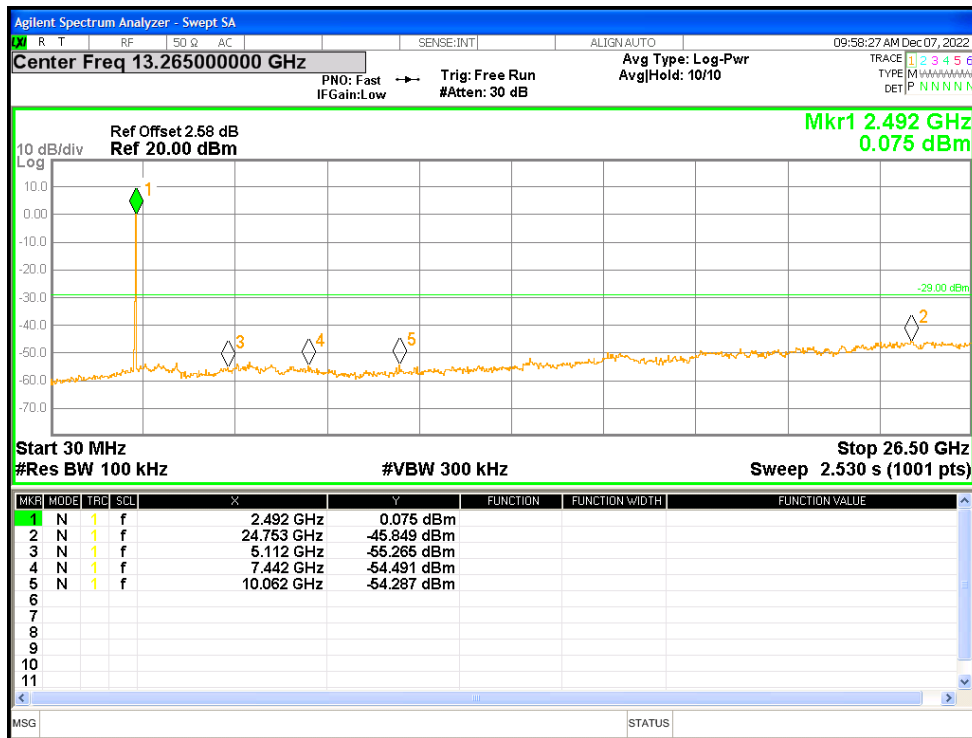

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Spurious Emissions

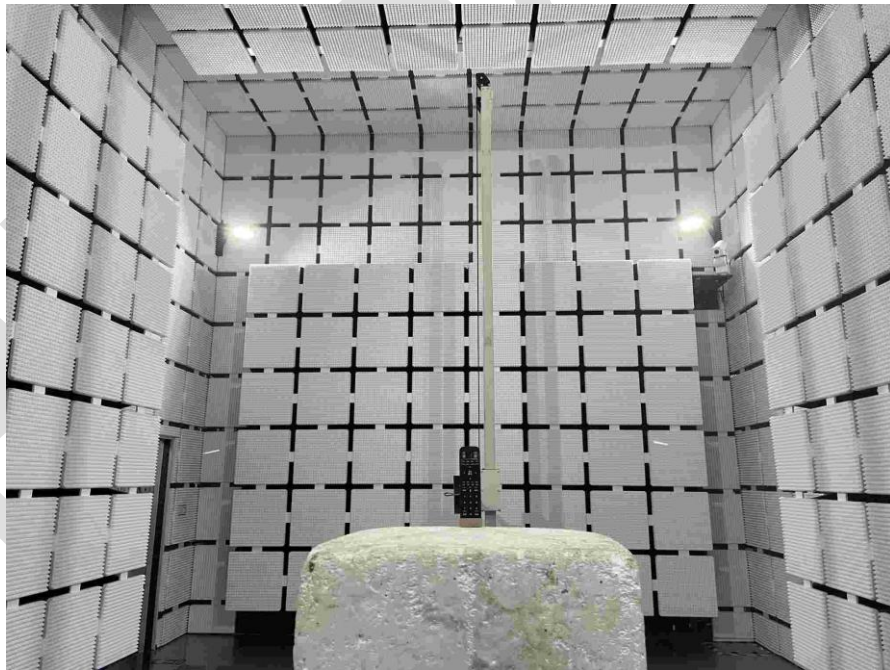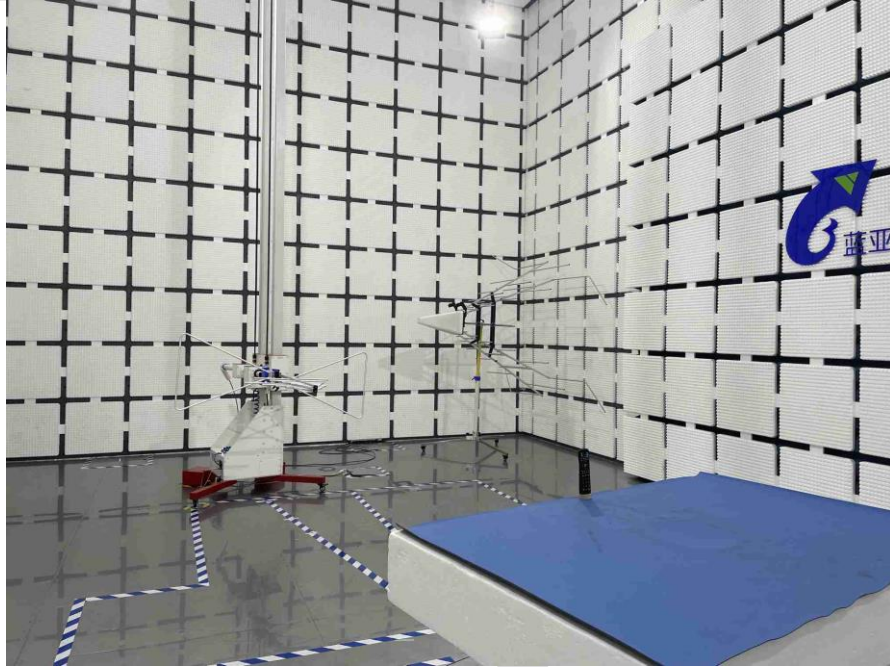

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202211-A7301

---END OF REPORT---

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia